

MEASUREMENT 117


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB,Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1720.000000
Relative Permittivity (real part)	39.024890
Conductivity (S/m)	1.371250
Power Variation (%)	1.374628
Ambient Temperature	21.1
Liquid Temperature	21.2

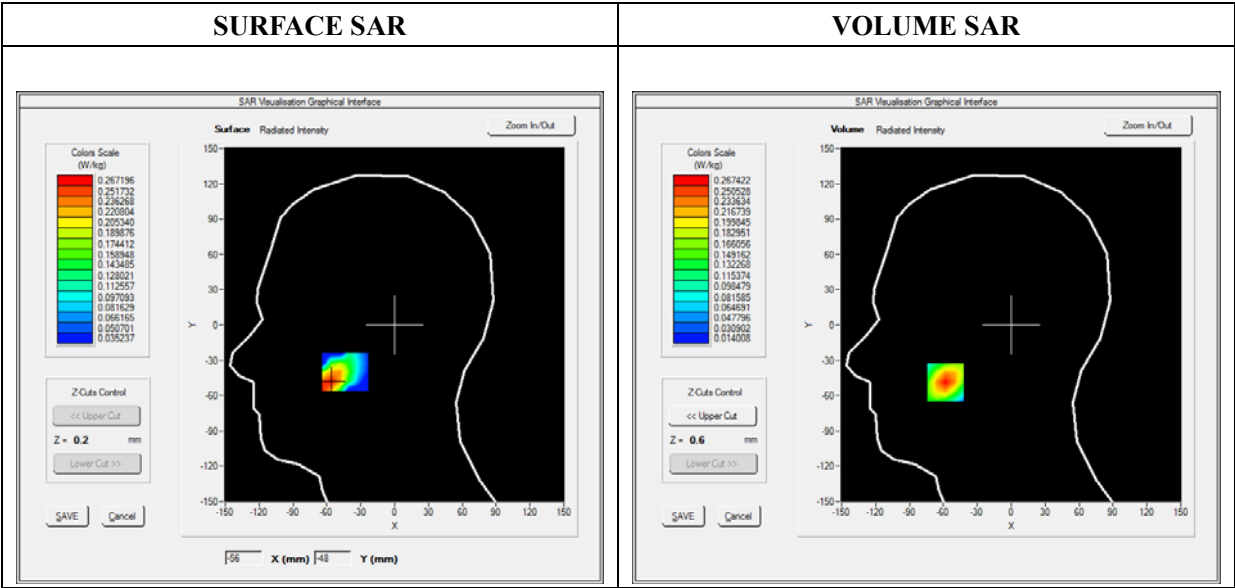

Maximum location: X=-58.00, Y=-49.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.147090
SAR 1g (W/Kg)	0.249267

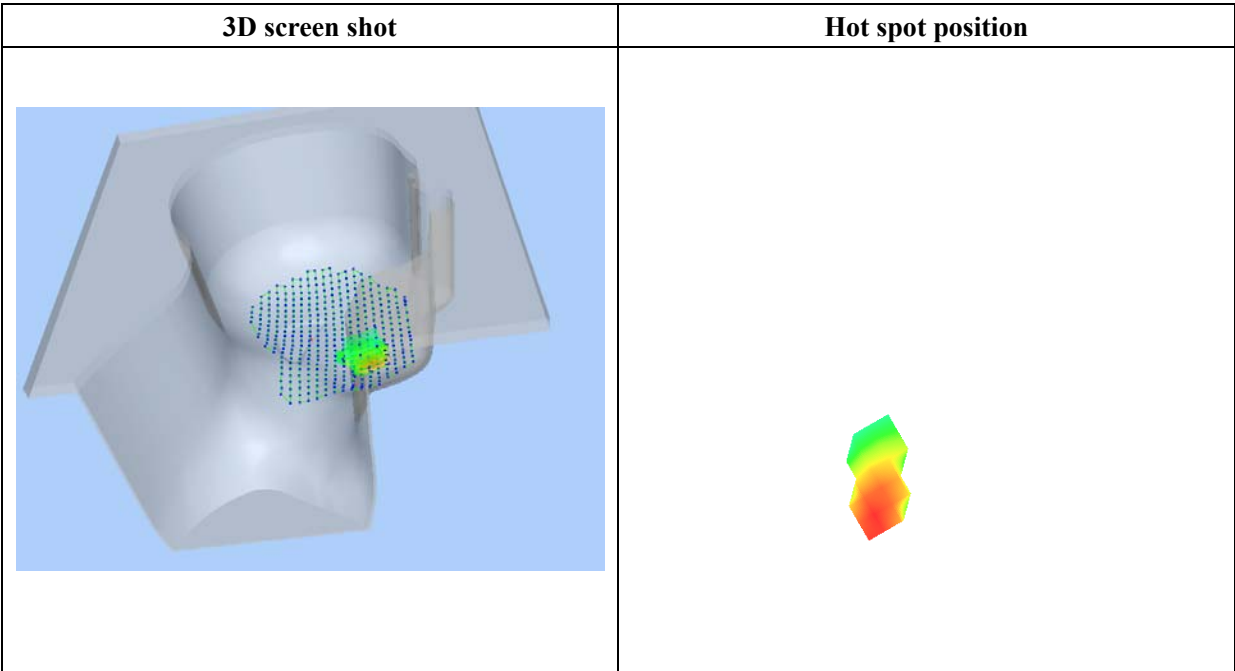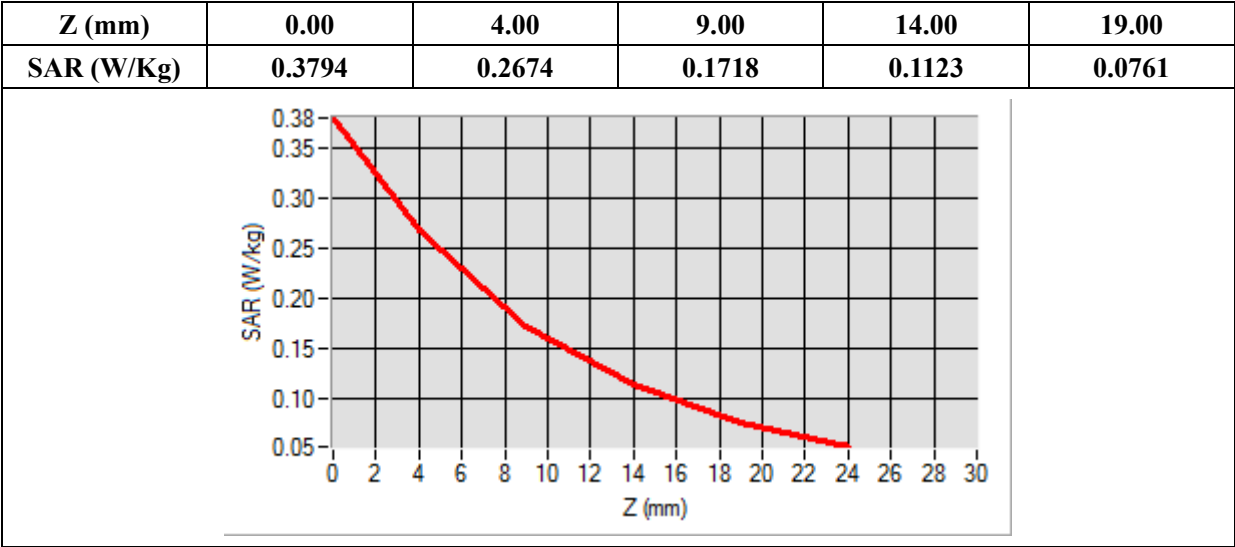

MEASUREMENT 125


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.153660
Conductivity (S/m)	1.740236
Power Variation (%)	3.234772
Ambient Temperature	21.1
Liquid Temperature	21.2

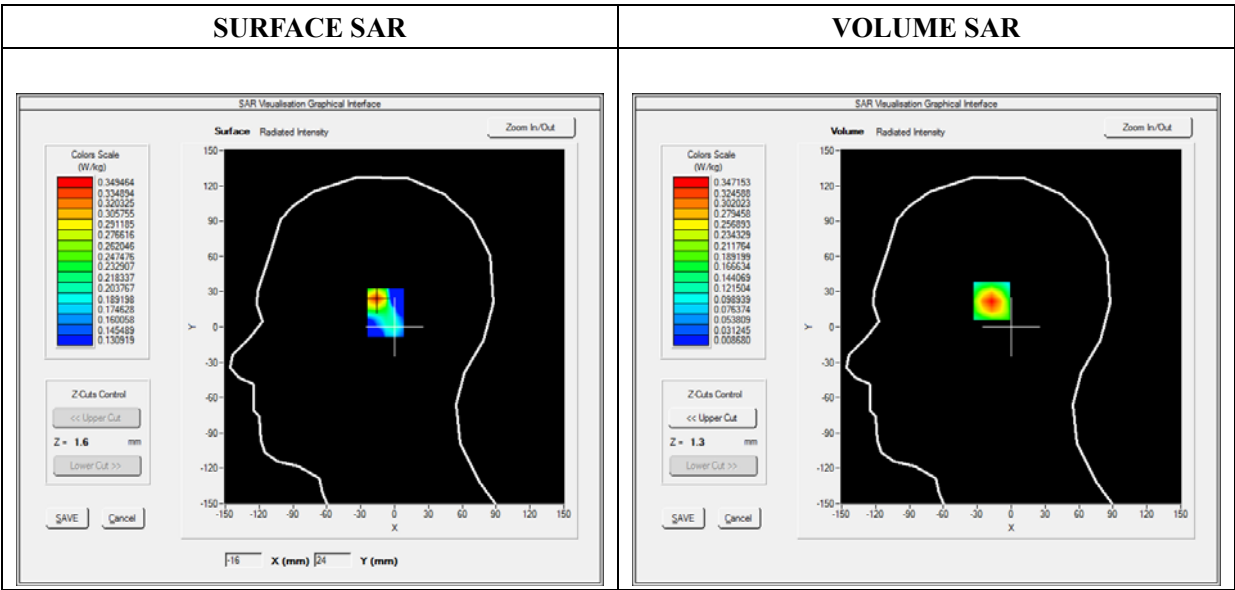

Maximum location: X=-16.00, Y=24.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.159024
SAR 1g (W/Kg)	0.323326

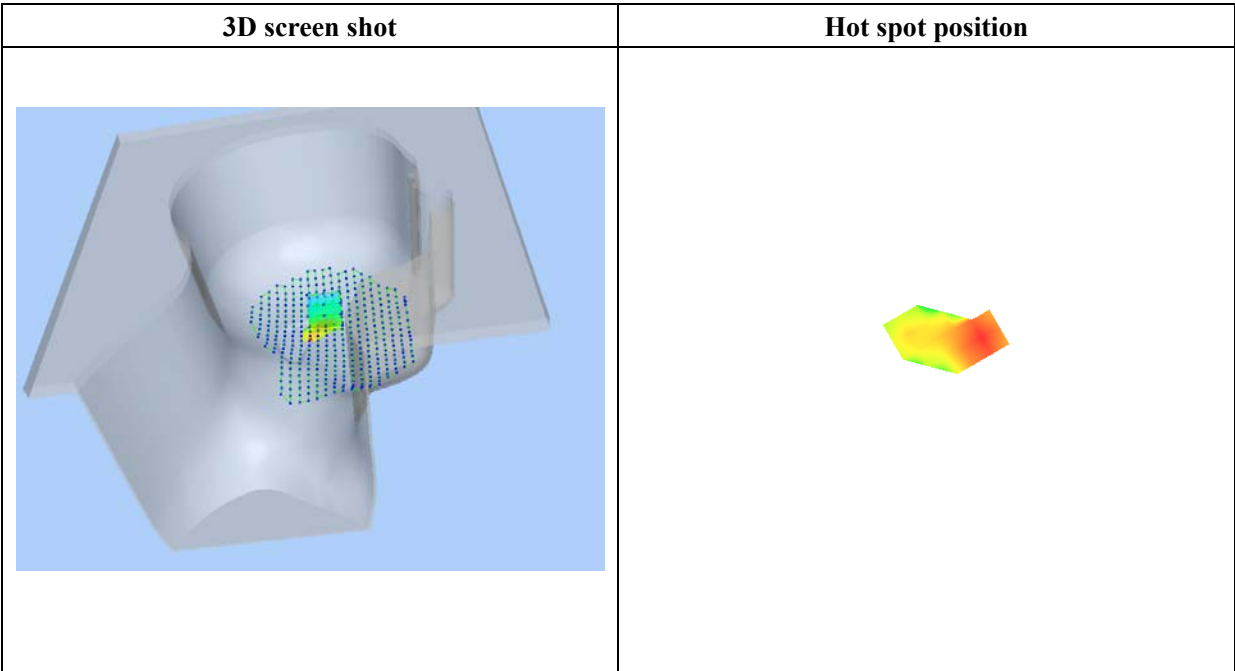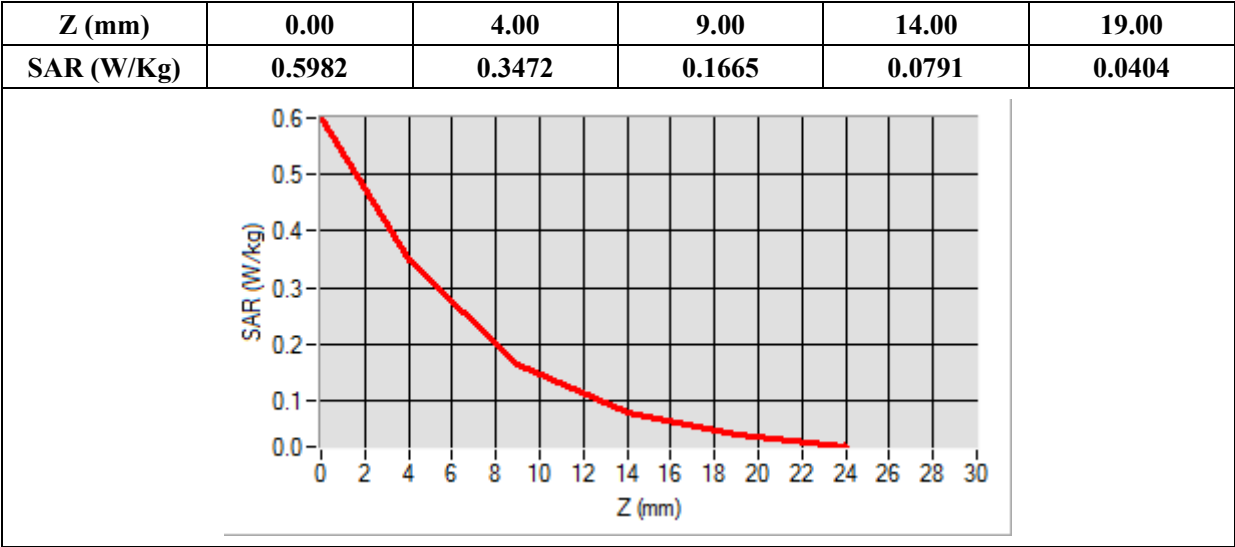

MEASUREMENT 127

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi(5.2GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results

Frequency (MHz)	5180.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3


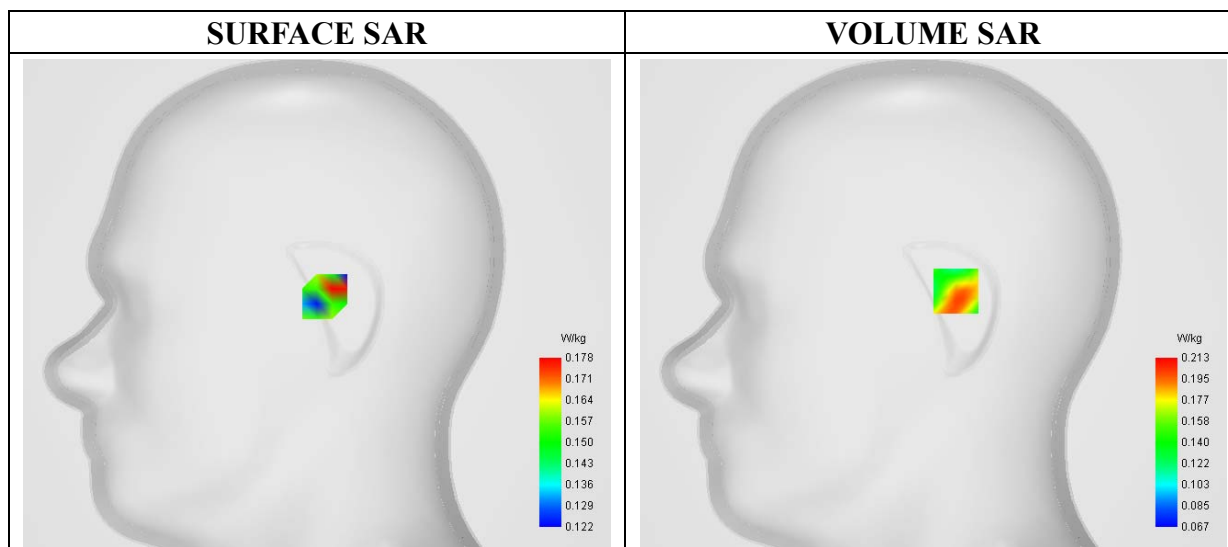


Maximum location: X=12.00, Y=7.00

SAR 10g (W/Kg)	0.148459
----------------	----------

SAR 1g (W/Kg)	0.191021
---------------	----------

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3023	0.2000	0.1488	0.1150	0.1251	0.0909	0.1208	0.0983	0.1073

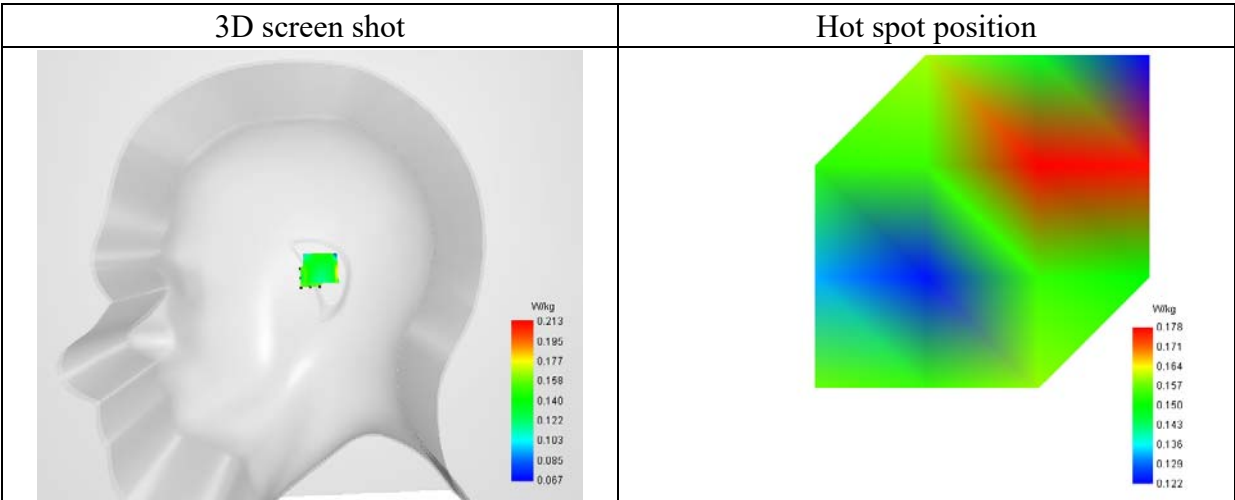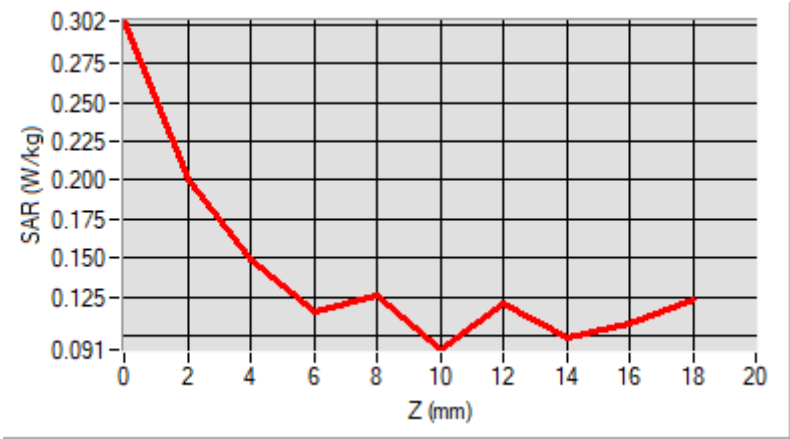

MEASUREMENT 133

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left Head
Device Position	Cheek
Band	WiFi(5.3GHz)_802.11 n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	4.740192
Power Variation (%)	0.463782
Ambient Temperature	22.0
Liquid Temperature	22.3

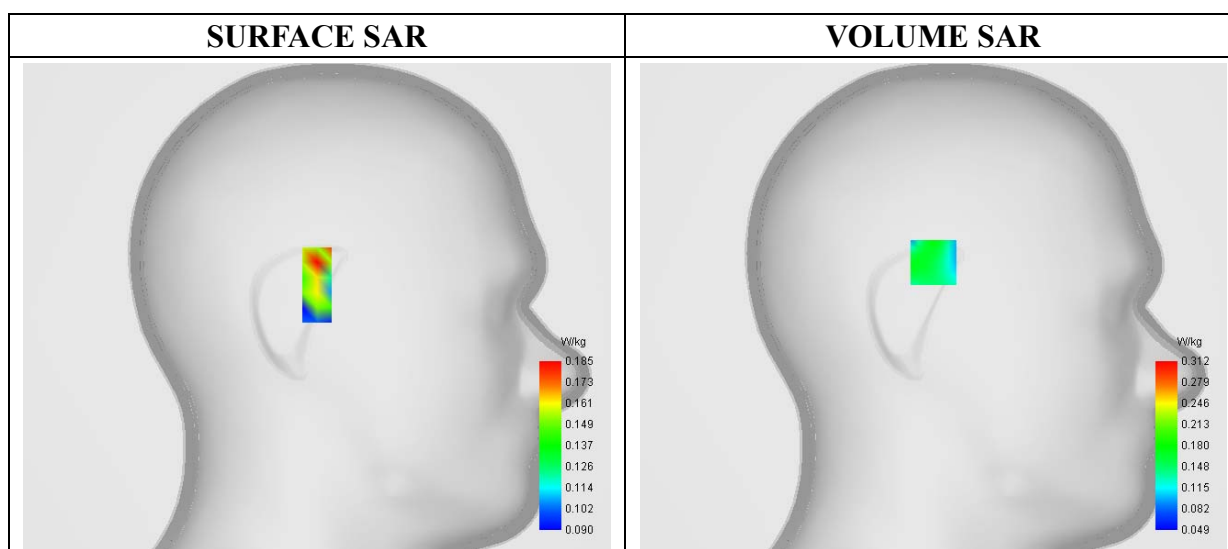

Maximum location: X=0.00, Y=24.00

SAR 10g (W/Kg)	0.150972
SAR 1g (W/Kg)	0.221513

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2873	0.1805	0.1072	0.1456	0.0876	0.1194	0.1260	0.0990	0.0950

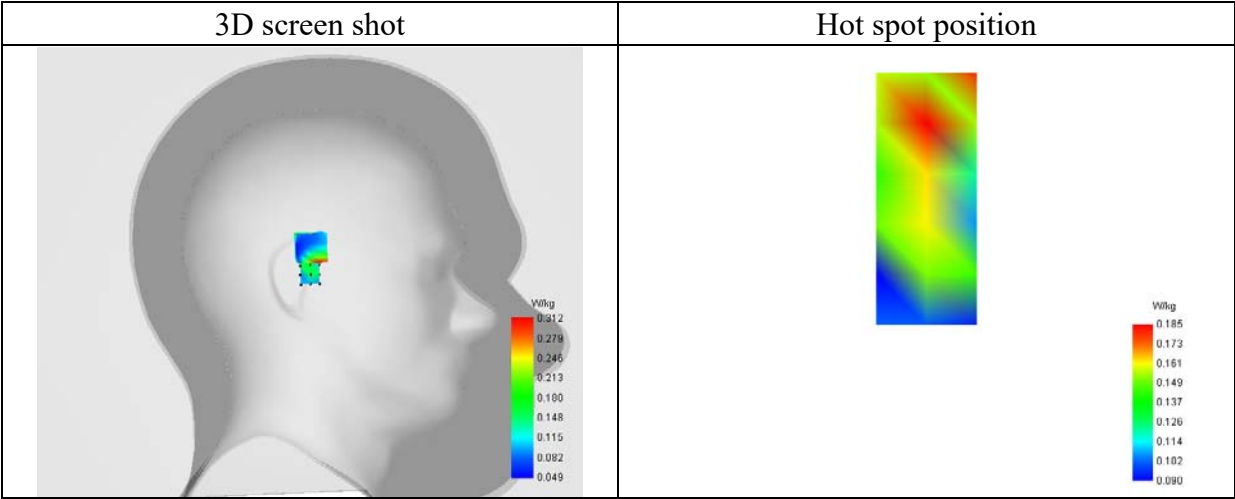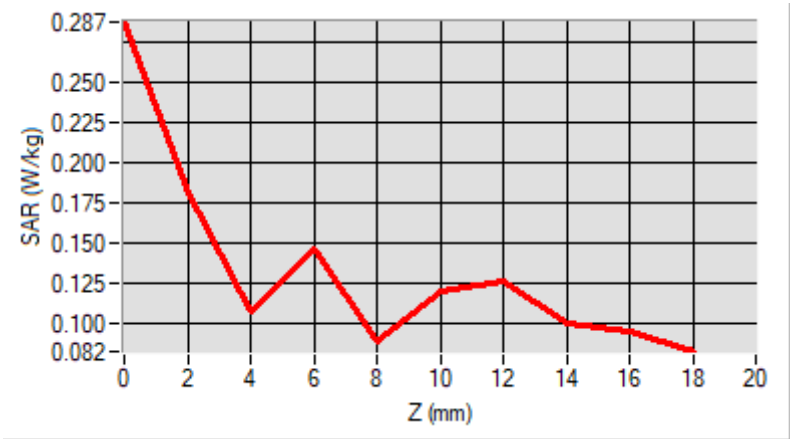

MEASUREMENT 135

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right Head
Device Position	Cheek
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5590.000000
Relative Permittivity (real part)	35.301254
Conductivity (S/m)	5.210512
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

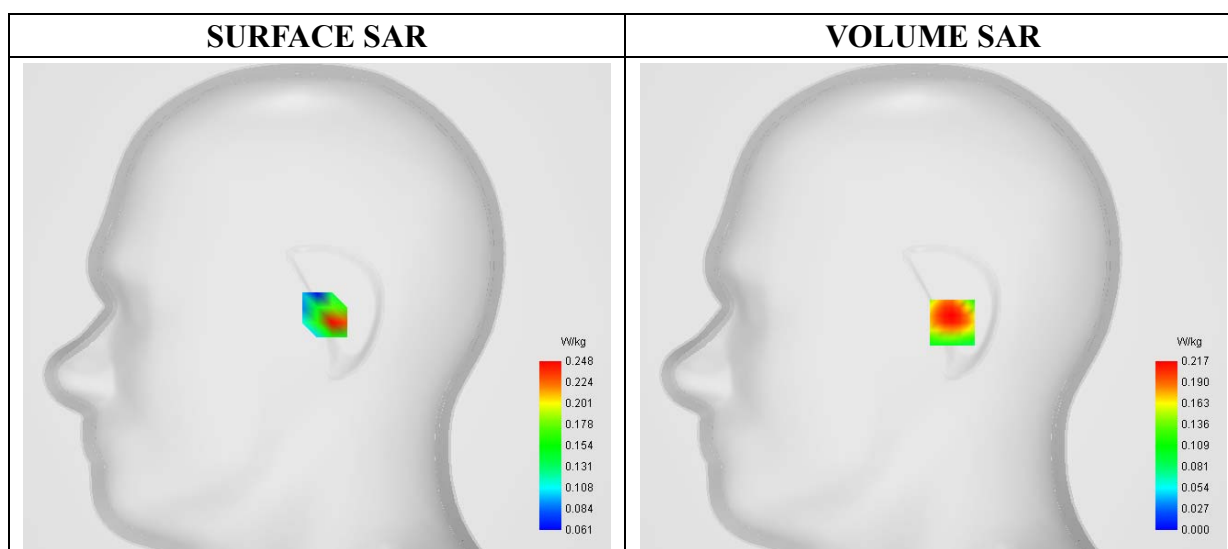

Maximum location: X=10.00, Y=-8.00

SAR 10g (W/Kg)	0.137273
SAR 1g (W/Kg)	0.223616

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.3234	0.2173	0.1384	0.1200	0.0921	0.0865	0.0807	0.0837	0.0913

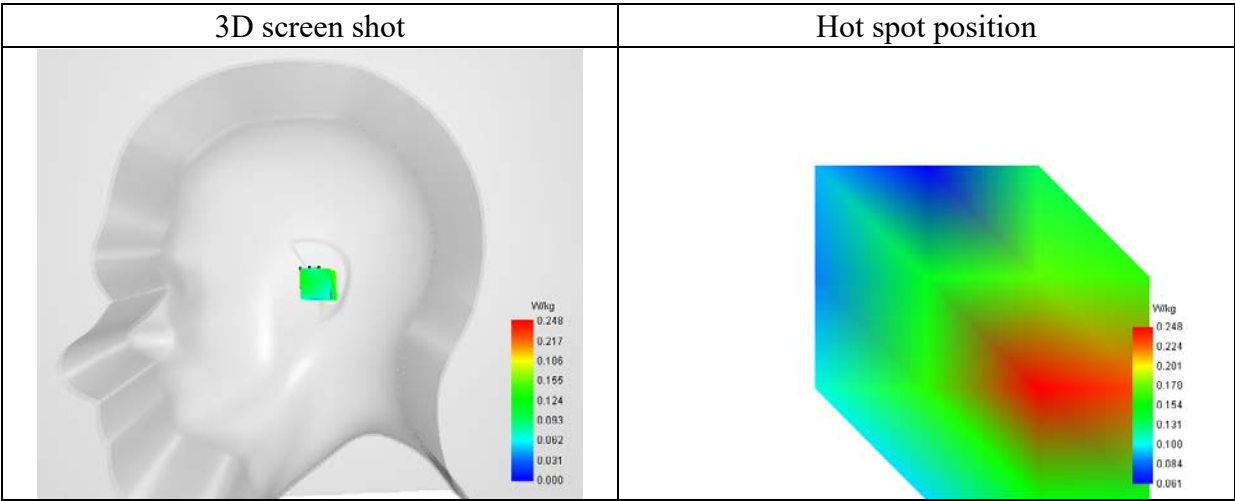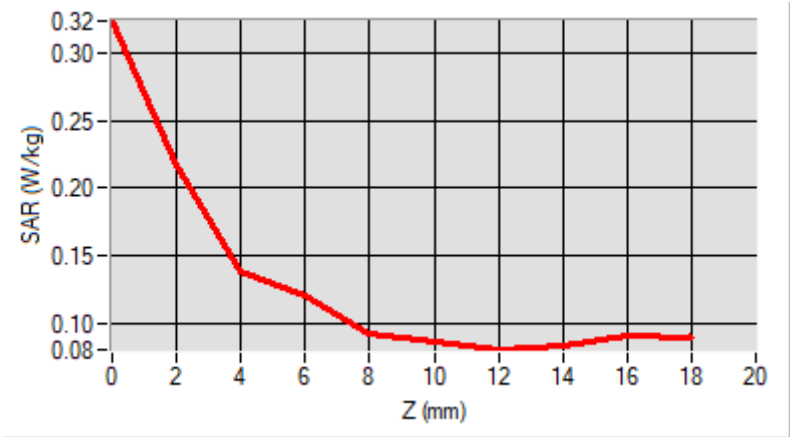

MEASUREMENT 139


Type: Phone measurement (Complete)
Date of measurement: 2020-10-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SN 45/15 EPGO280; ConvF: 5.64; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right Head
Device Position	Cheek
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

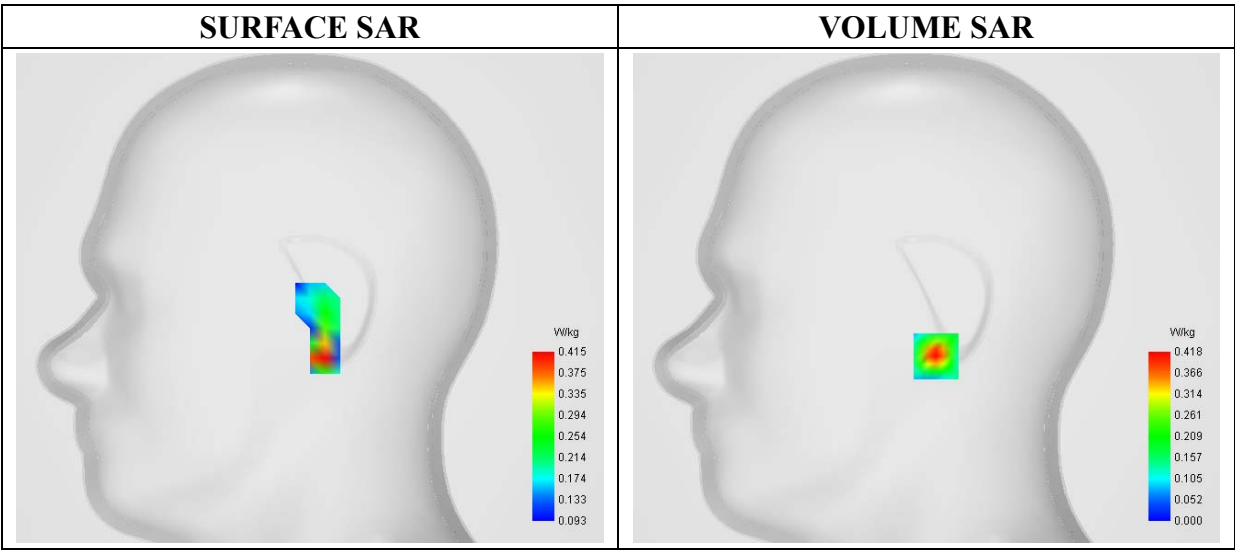

Maximum location: X=5.00, Y=-31.00

SAR 10g (W/Kg)	0.172093
SAR 1g (W/Kg)	0.398953

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.7175	0.4183	0.2337	0.1315	0.0824	0.0620	0.0581	0.0653	0.0814

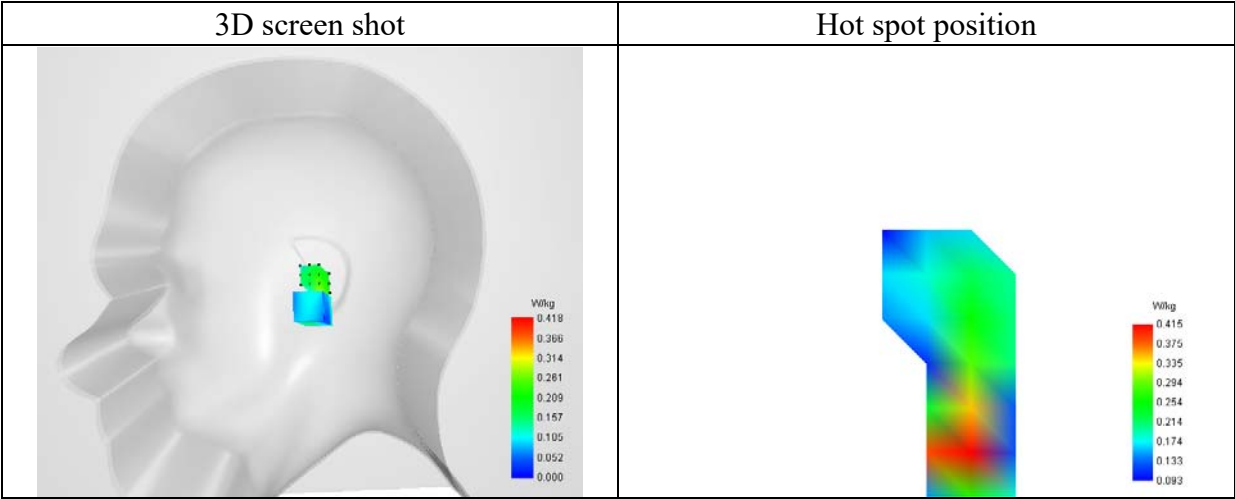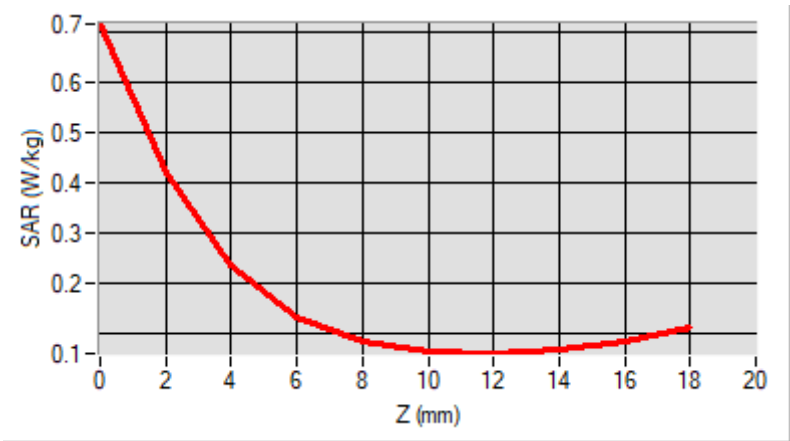

MEASUREMENT 143


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results



Frequency (MHz)	836.599976
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

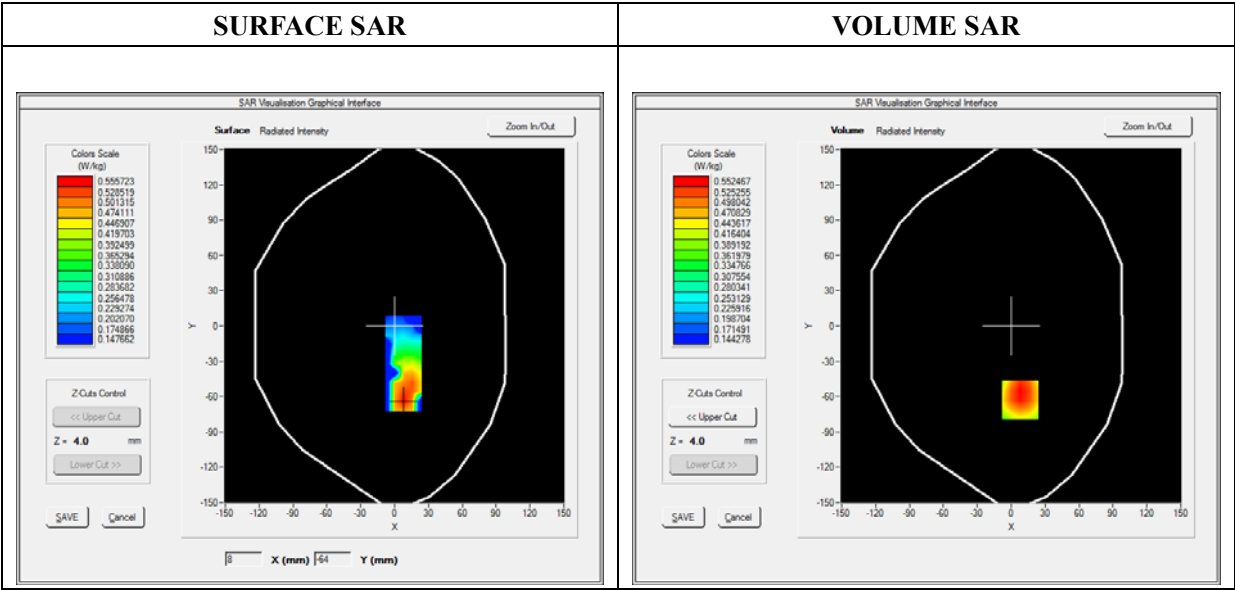

Maximum location: X=2.00, Y=-42.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.234287
SAR 1g (W/Kg)	0.338373

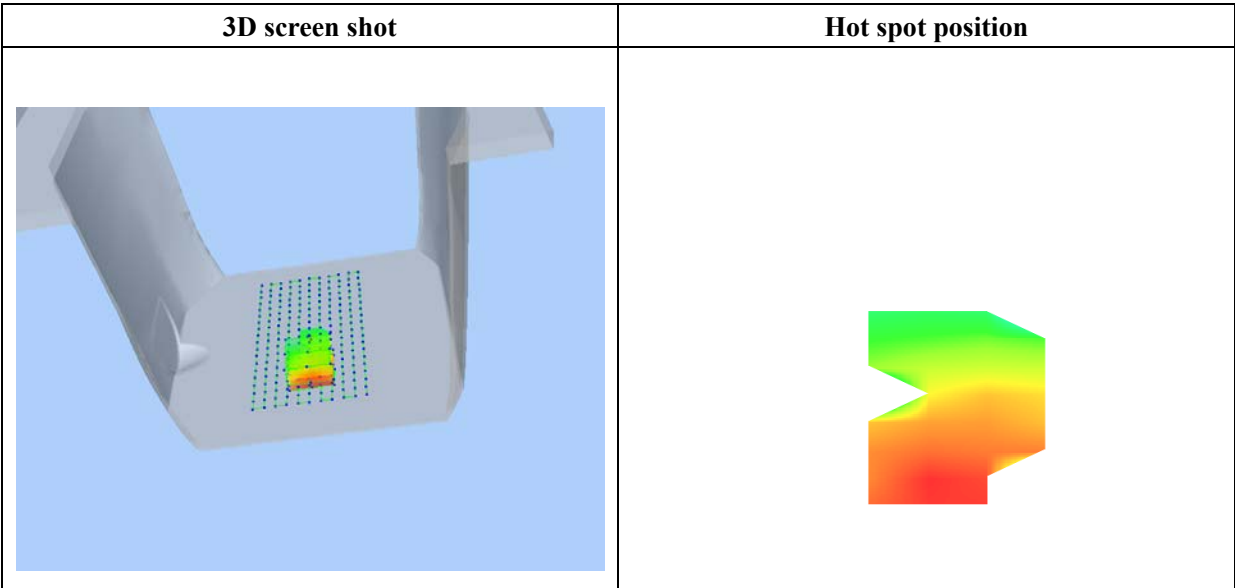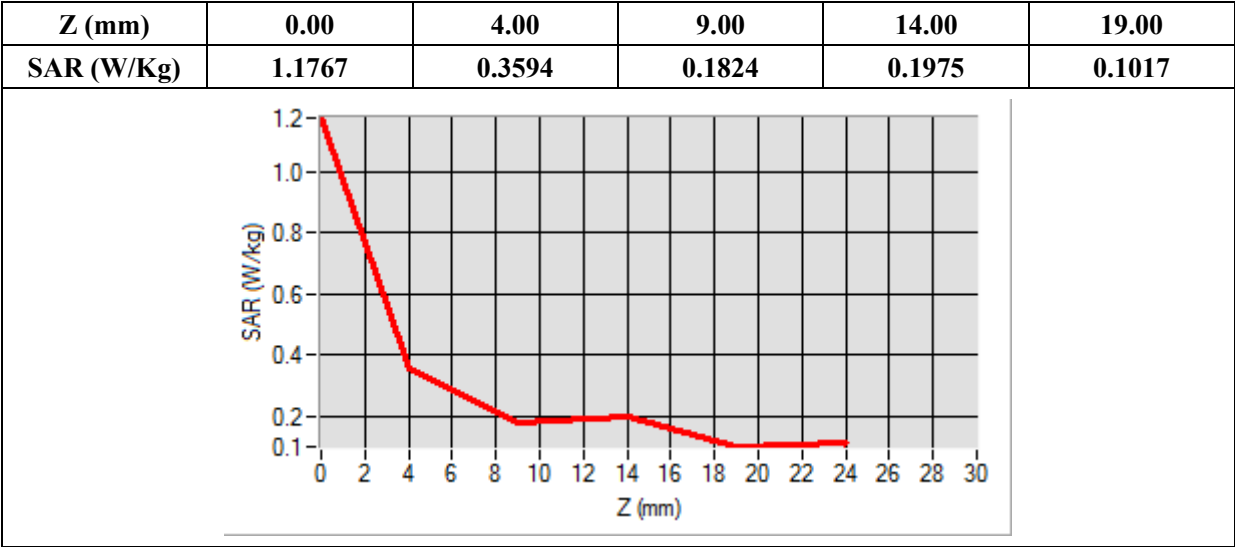

MEASUREMENT 146


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results



Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.474622
Ambient Temperature	21.1
Liquid Temperature	21.3

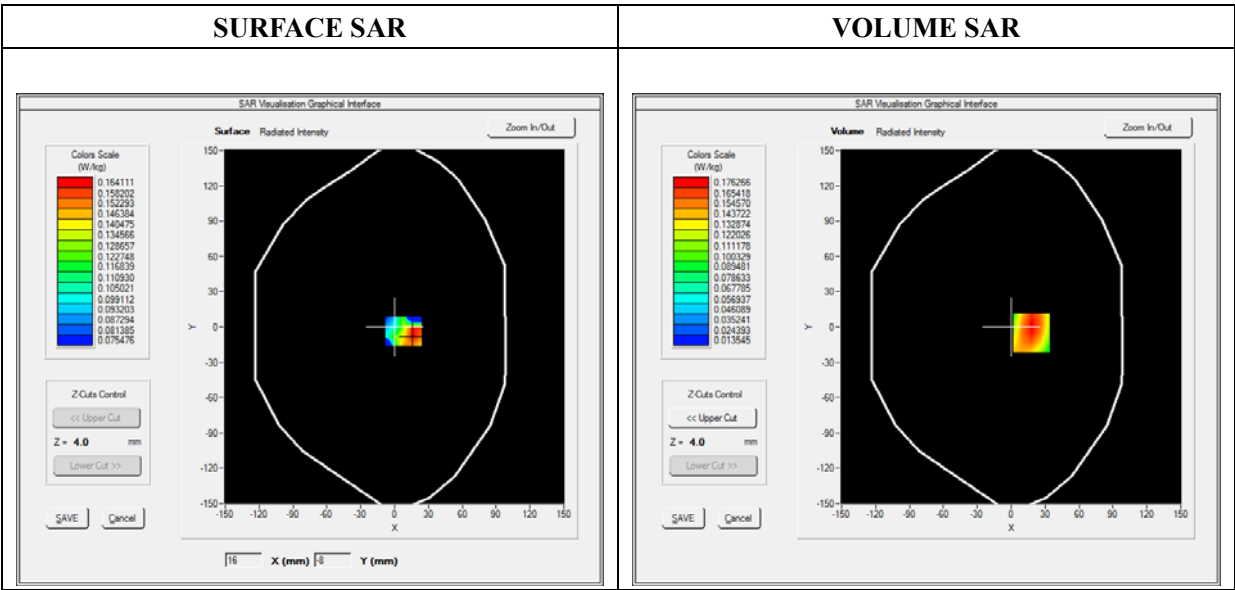

Maximum location: X=18.00, Y=-5.00

SAR Peak: 0.28 W/kg

SAR 10g (W/Kg)	0.097388
SAR 1g (W/Kg)	0.168407

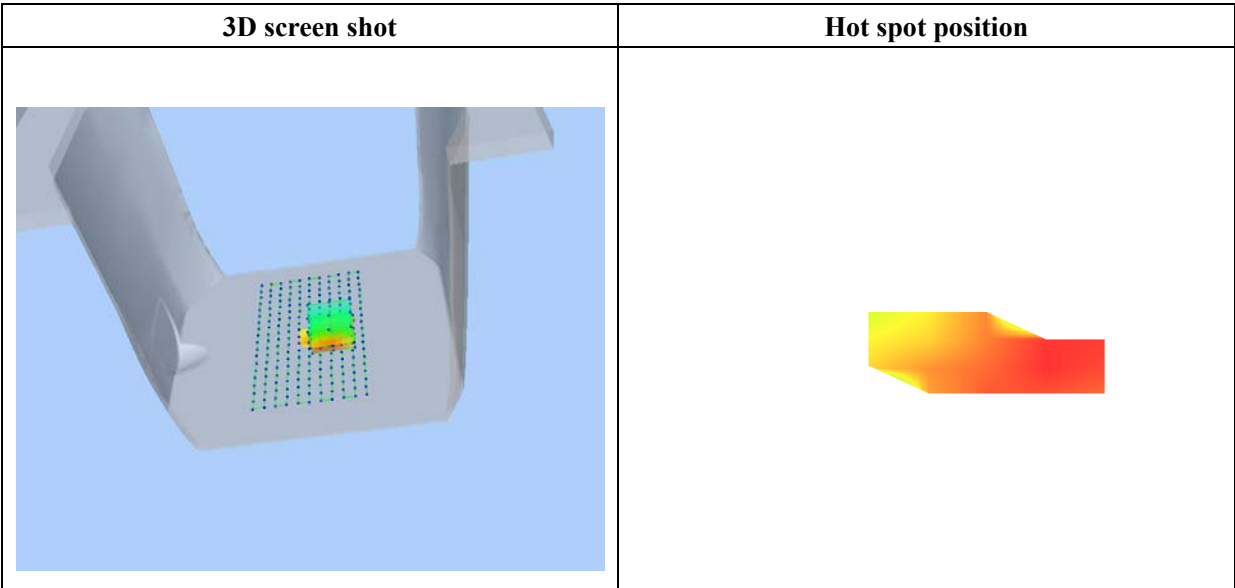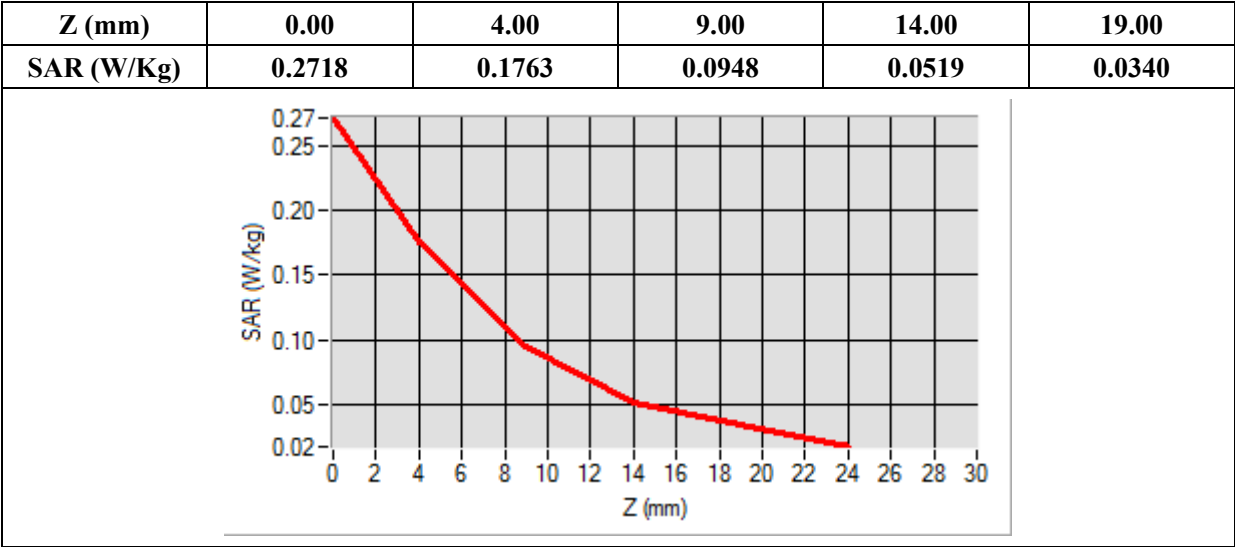

MEASUREMENT 147


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.163283
Ambient Temperature	21.1
Liquid Temperature	21.3

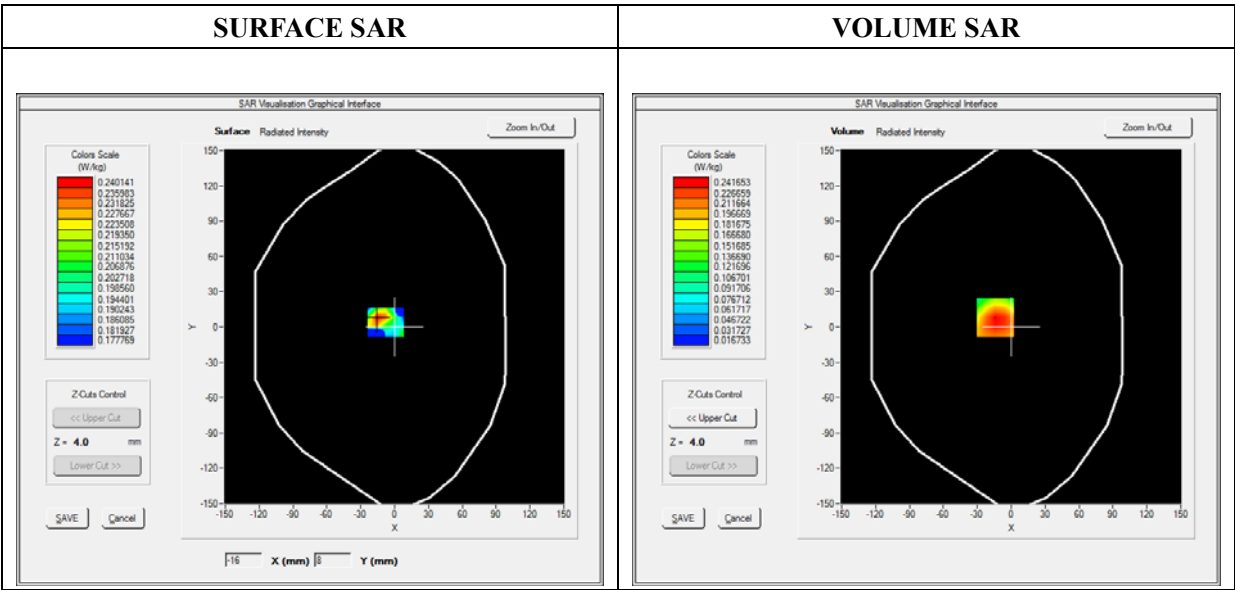

Maximum location: X=-14.00, Y=8.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.135908
SAR 1g (W/Kg)	0.232857

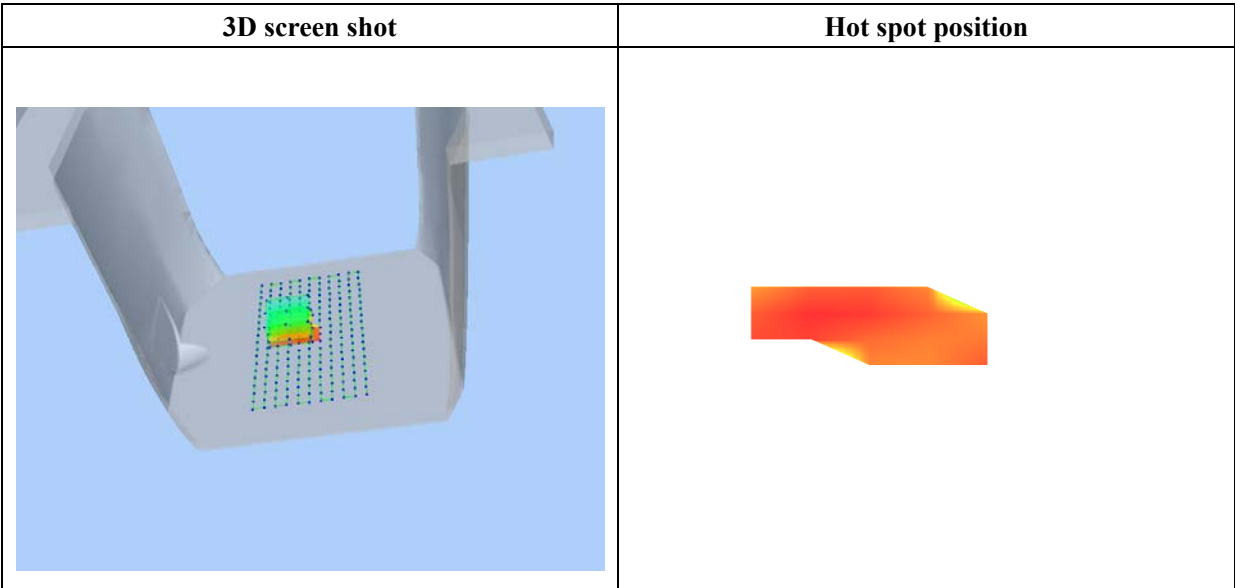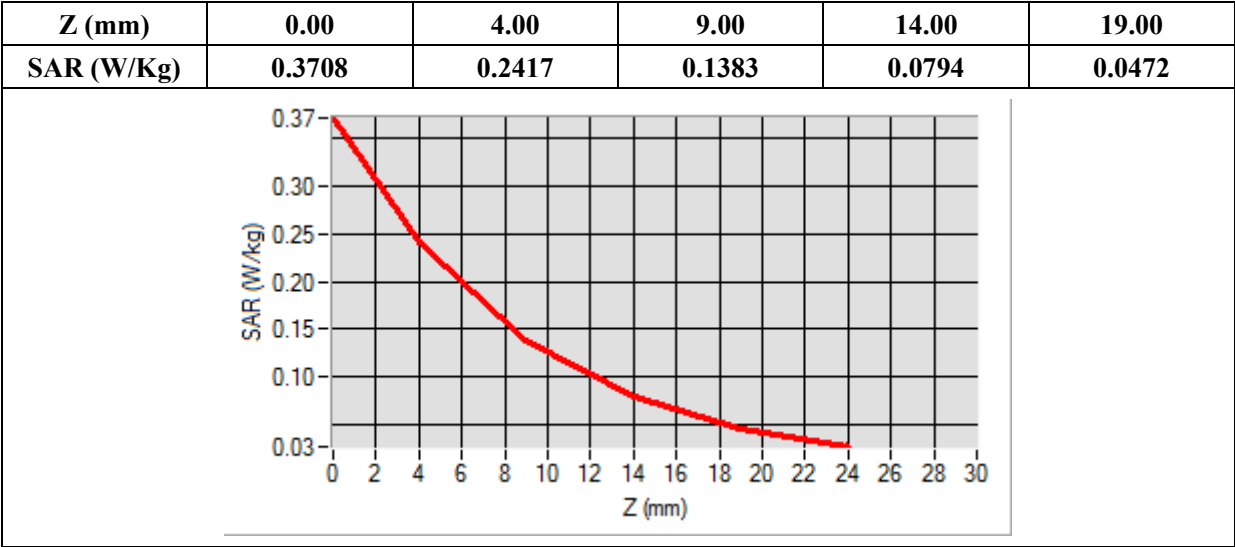

MEASUREMENT 155

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

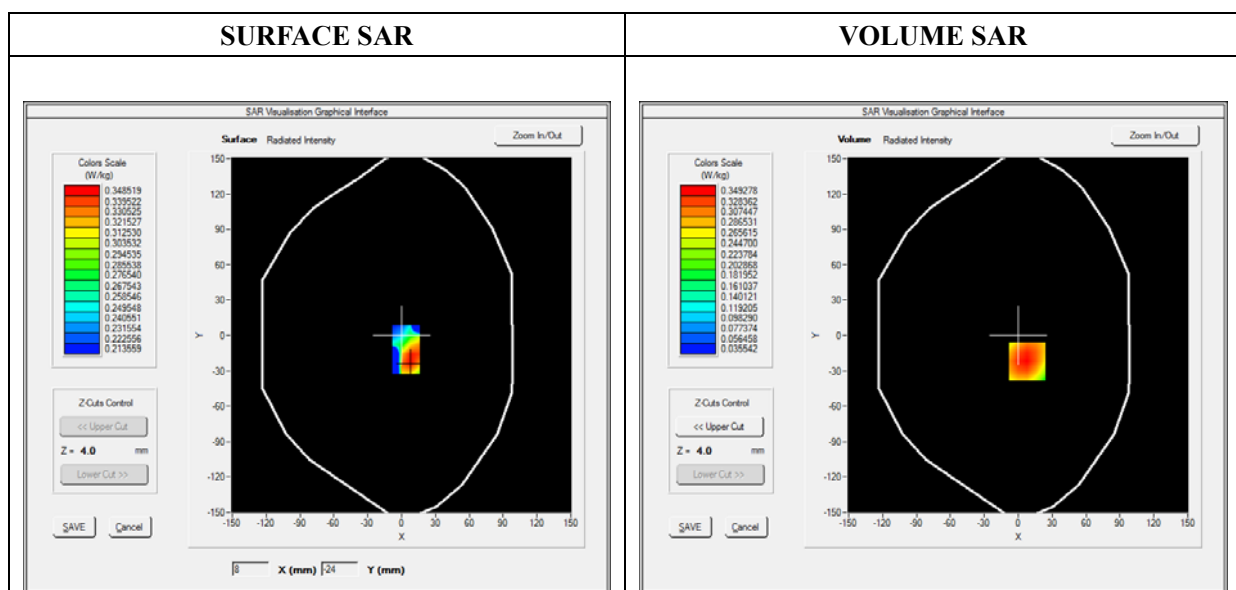



Maximum location: X=8.00, Y=-22.00

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

SAR Peak: 0.50 W/kg

SAR 10g (W/Kg)	0.209026
SAR 1g (W/Kg)	0.334349

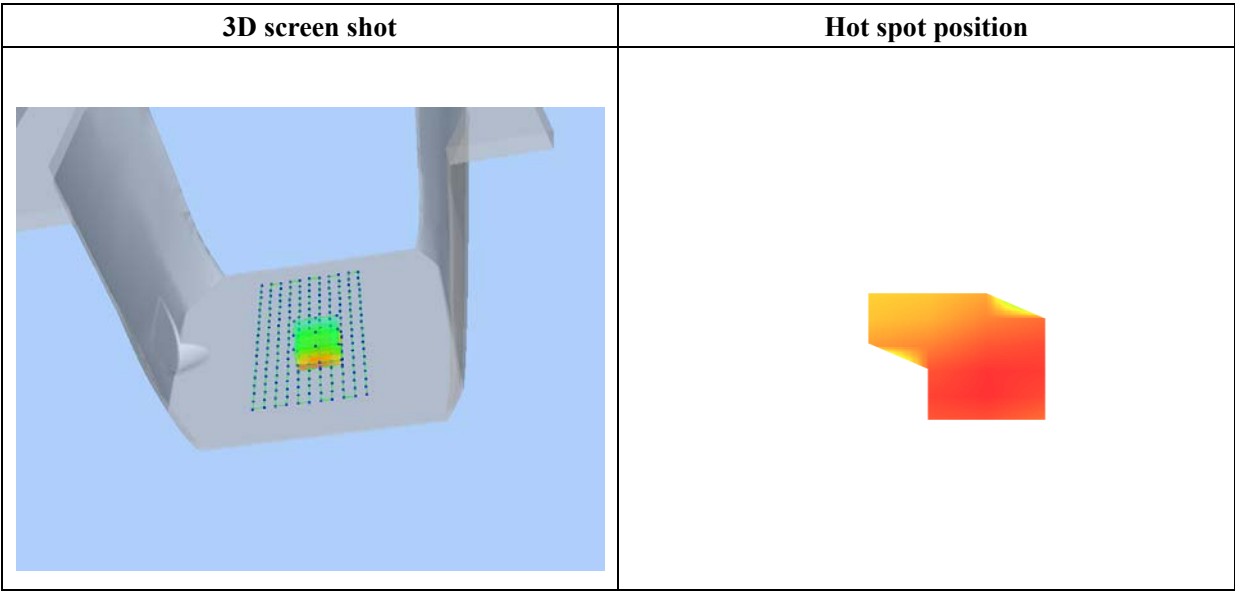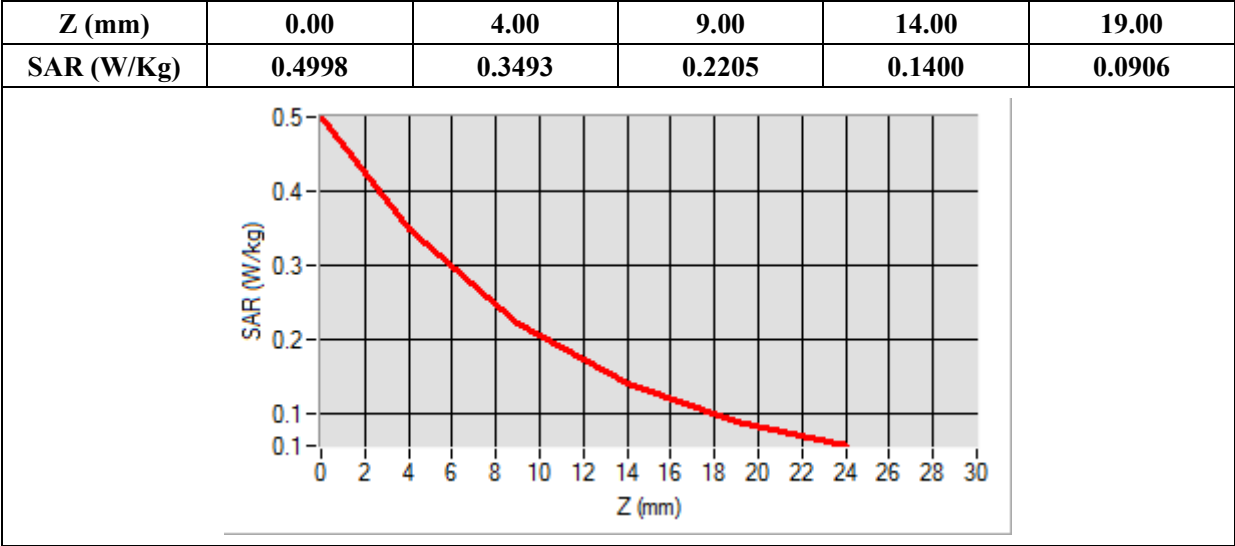

MEASUREMENT 183


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	LTE Band 25
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results



Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

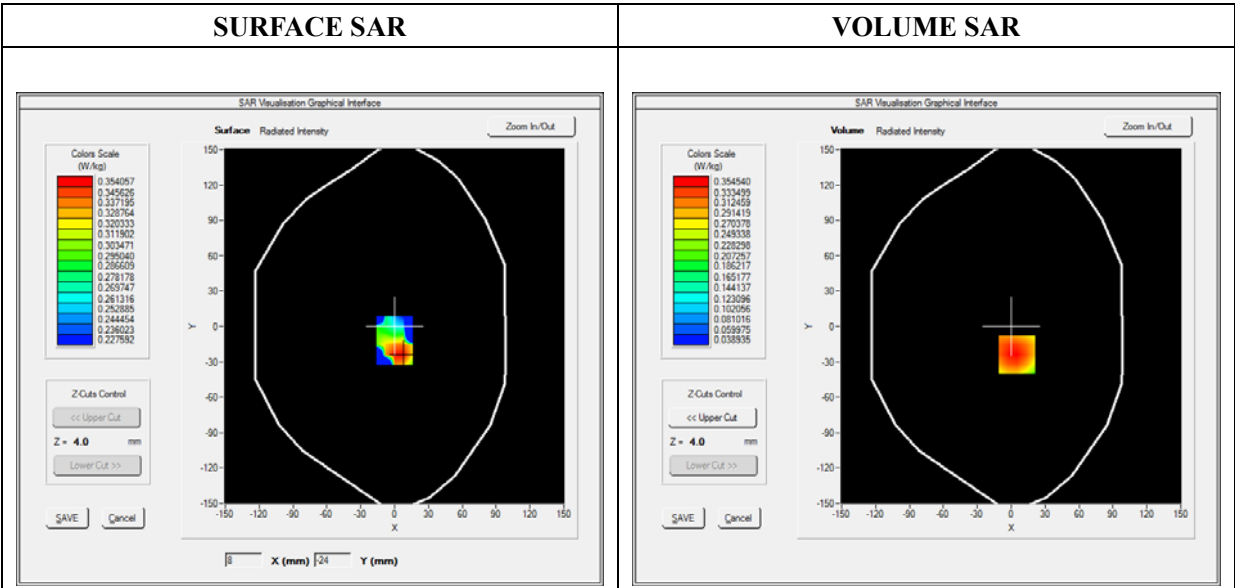

Maximum location: X=5.00, Y=-24.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.214148
SAR 1g (W/Kg)	0.339663

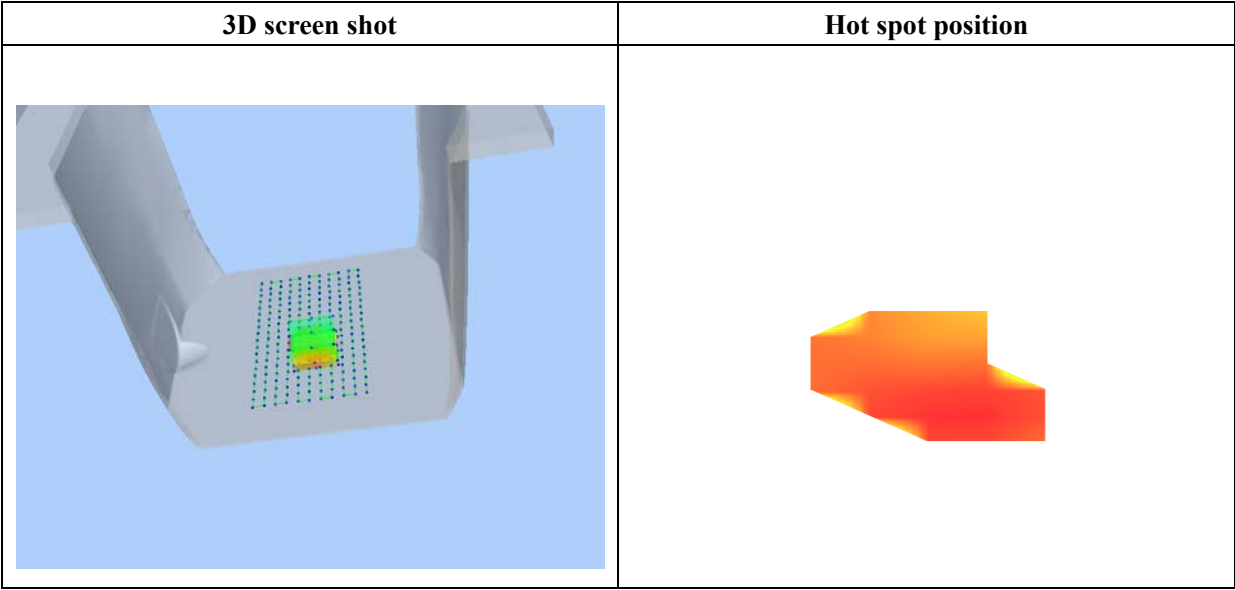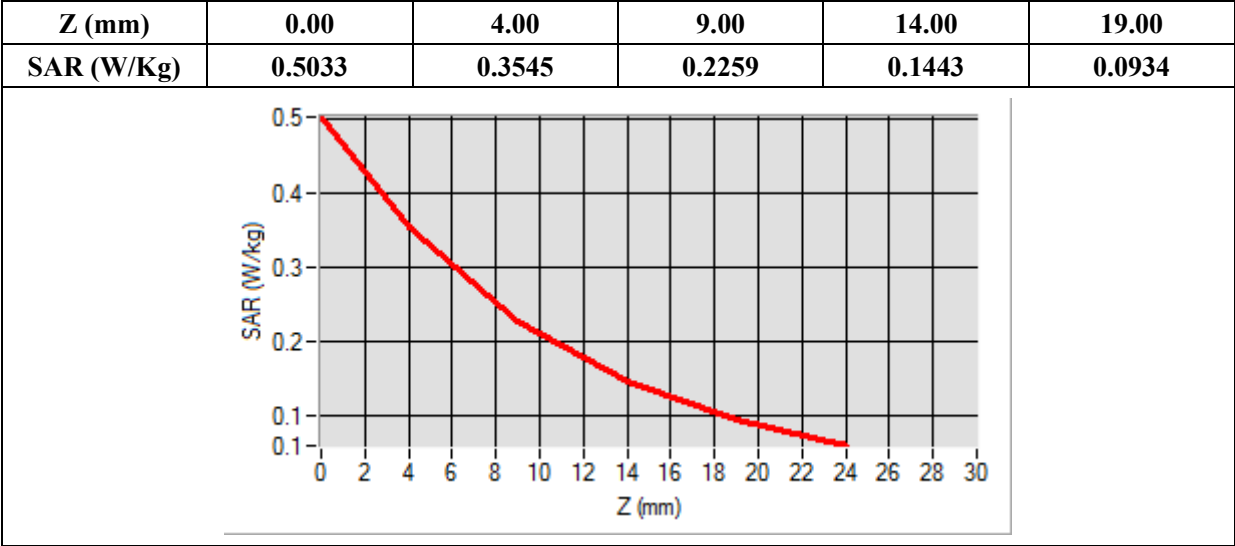

MEASUREMENT 193


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 30
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2310.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

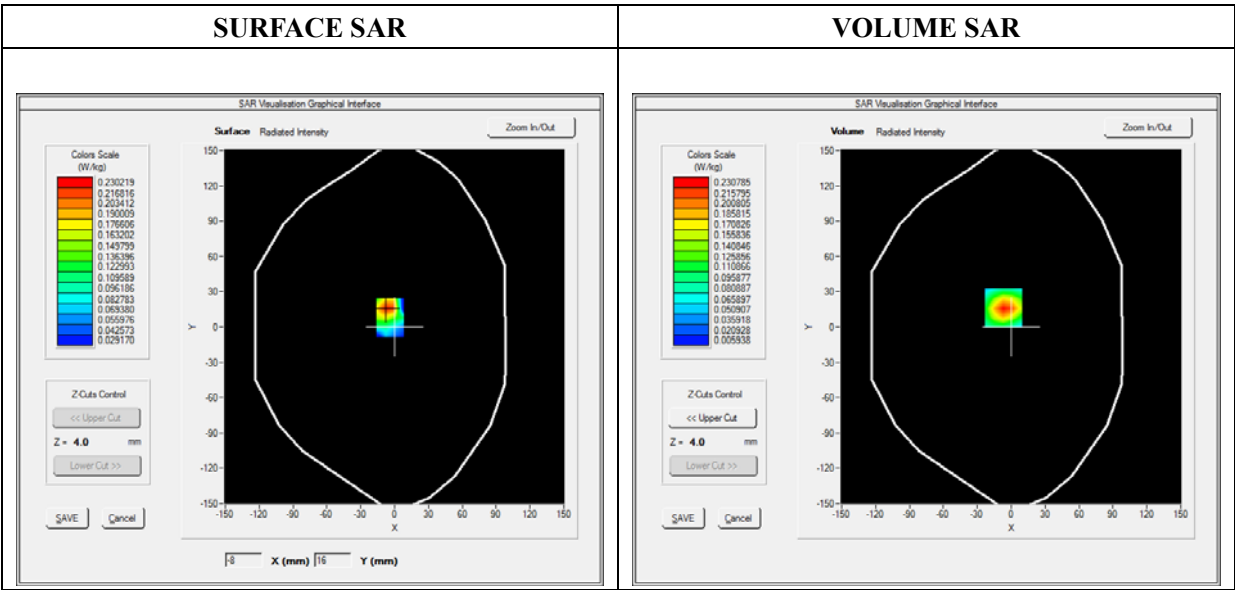

Maximum location: X=-7.00, Y=16.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.107170
SAR 1g (W/Kg)	0.213587

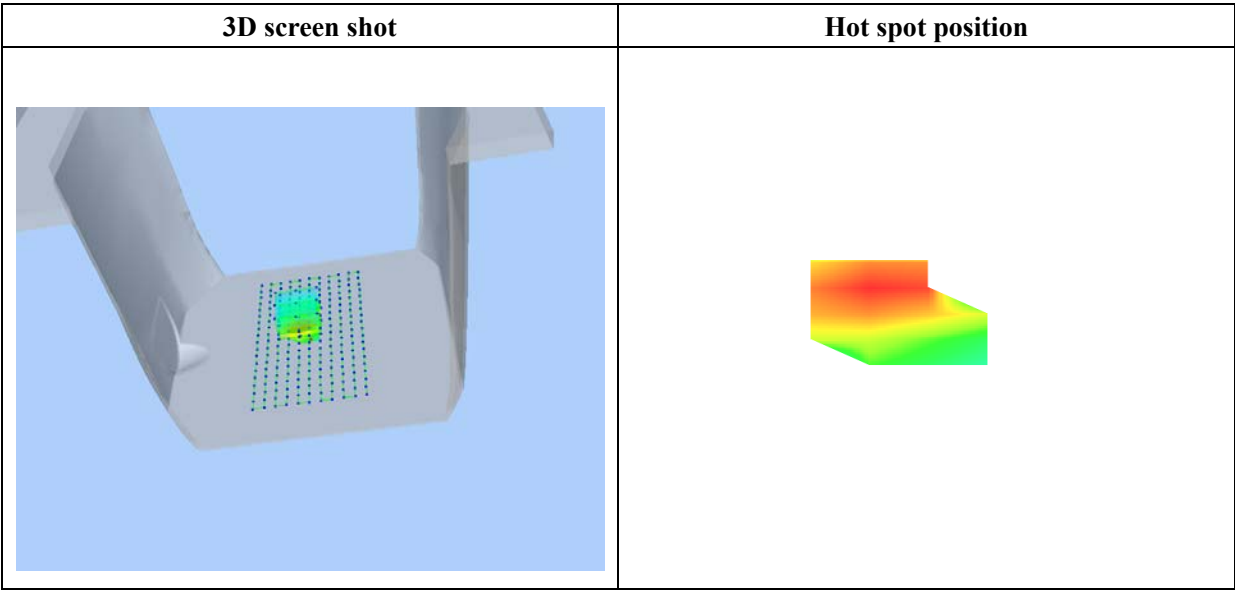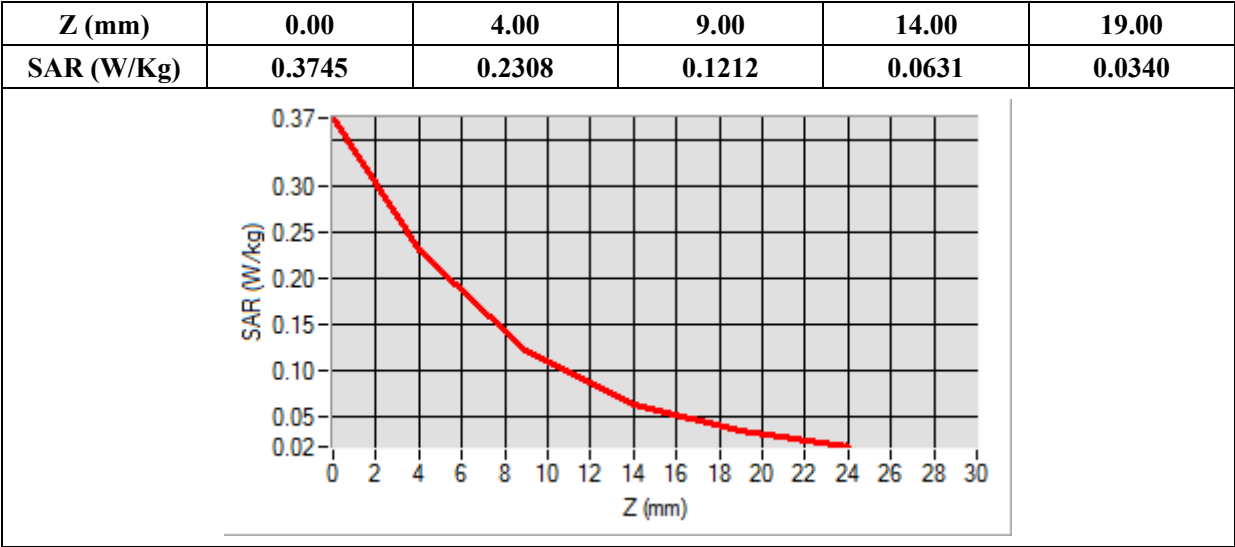

MEASUREMENT 197


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 40
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2350.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

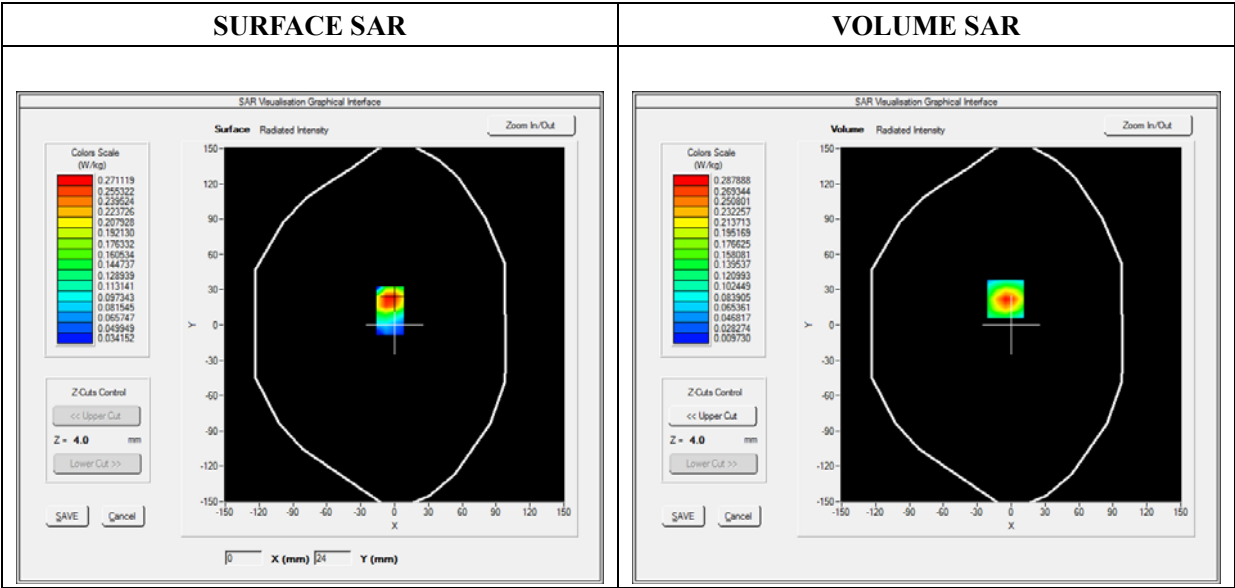

Maximum location: X=-5.00, Y=22.00

SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.132474
SAR 1g (W/Kg)	0.266953

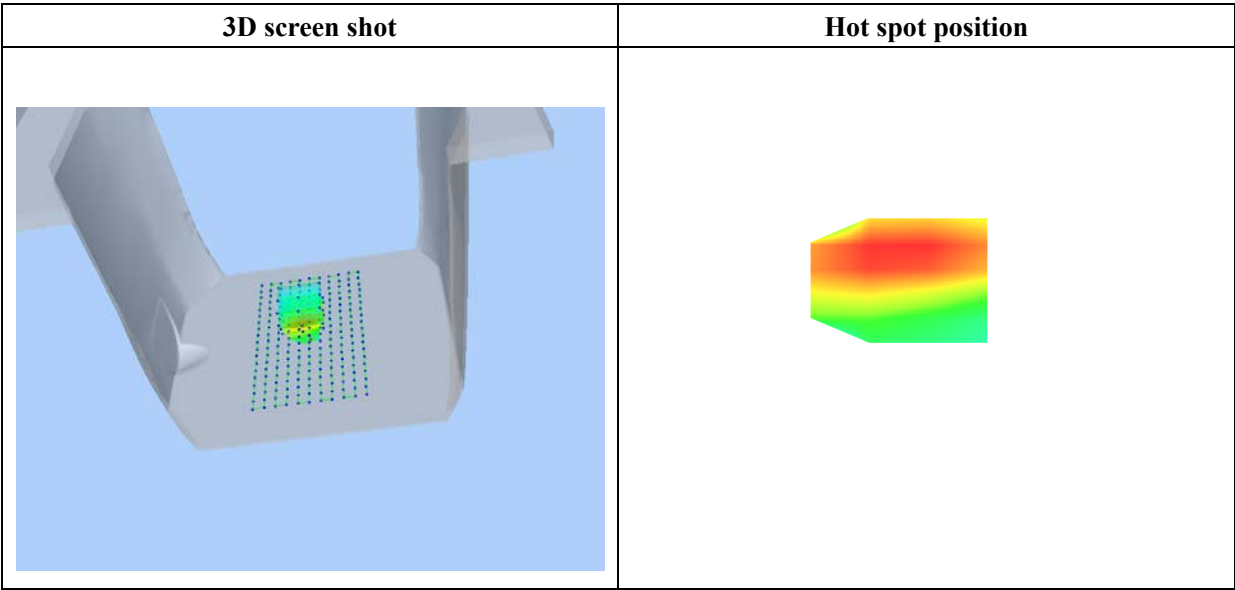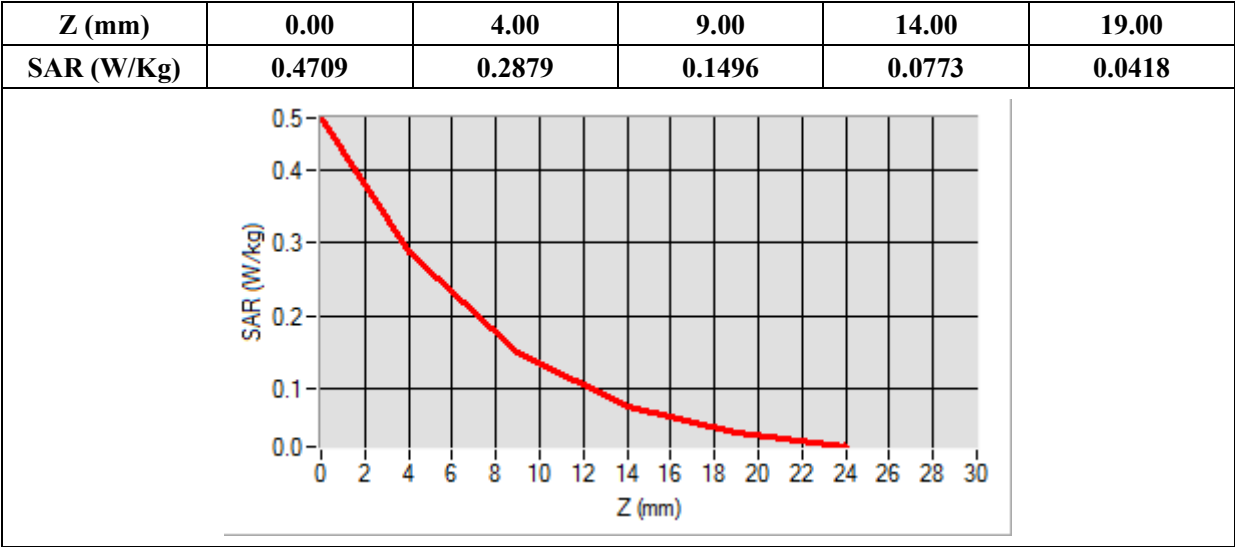

MEASUREMENT 202


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1720.00000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

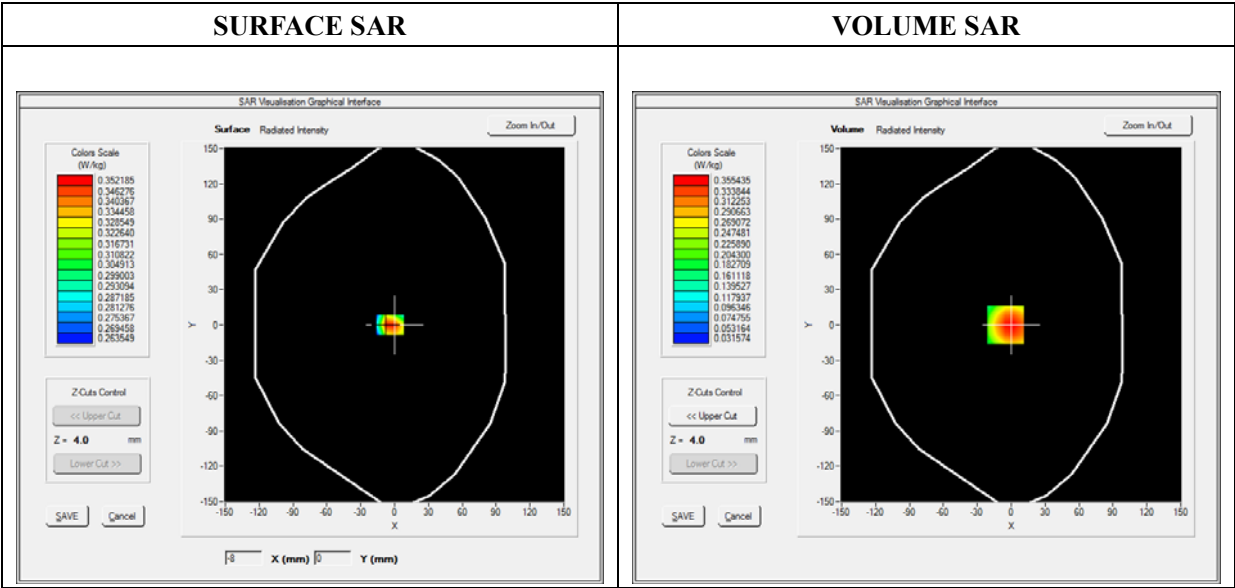

Maximum location: X=-5.00, Y=0.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.211483
SAR 1g (W/Kg)	0.342526

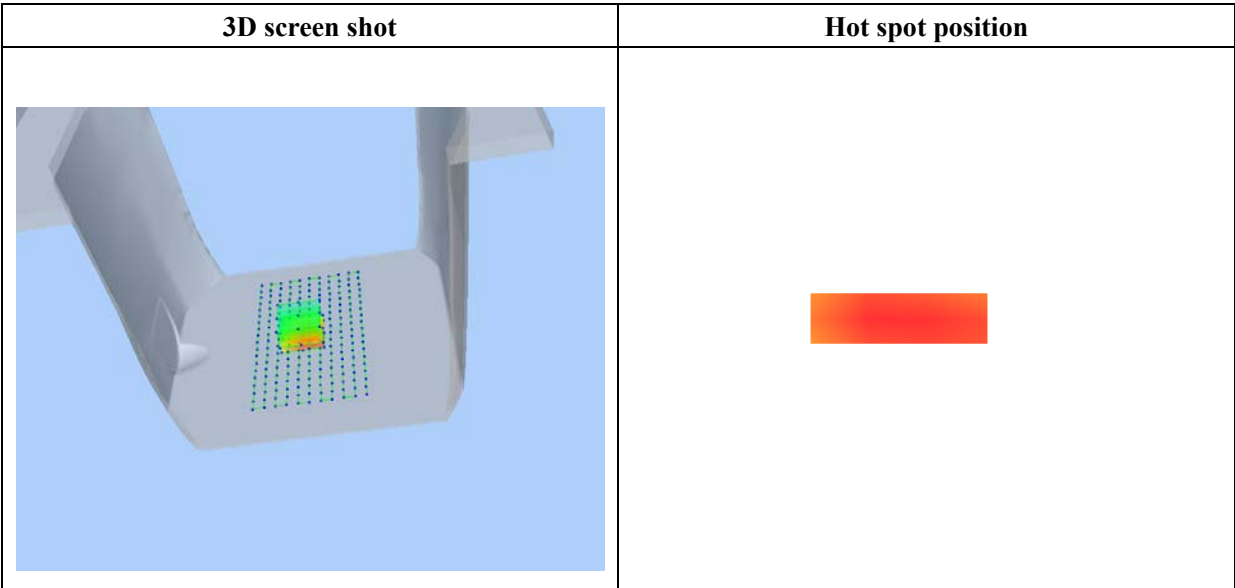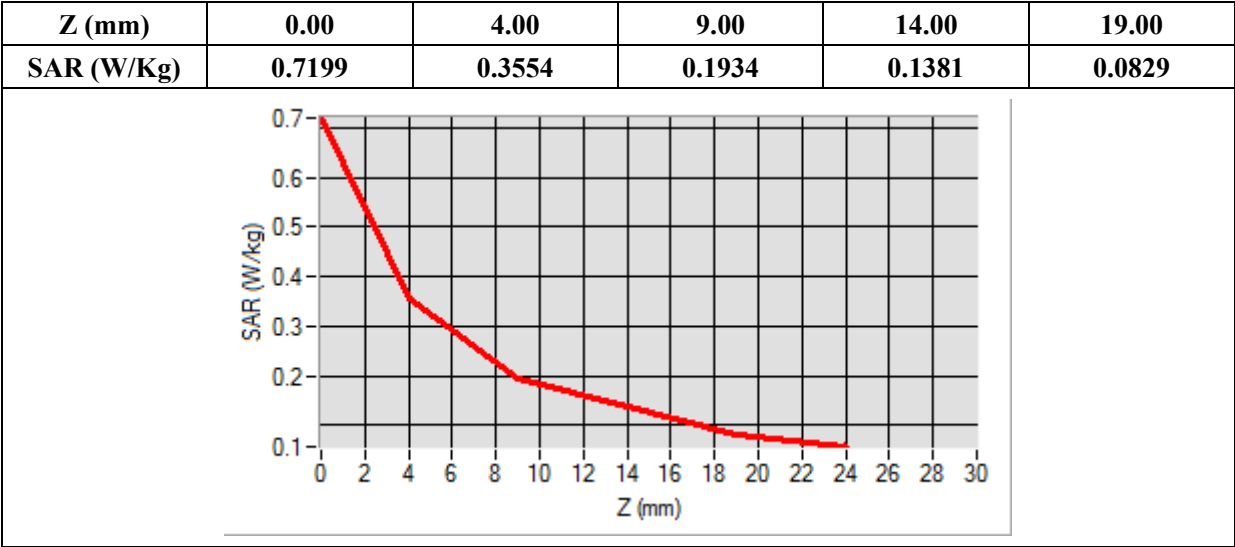

MEASUREMENT 212

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5590.000000
Relative Permittivity (real part)	35.301254
Conductivity (S/m)	5.210512
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

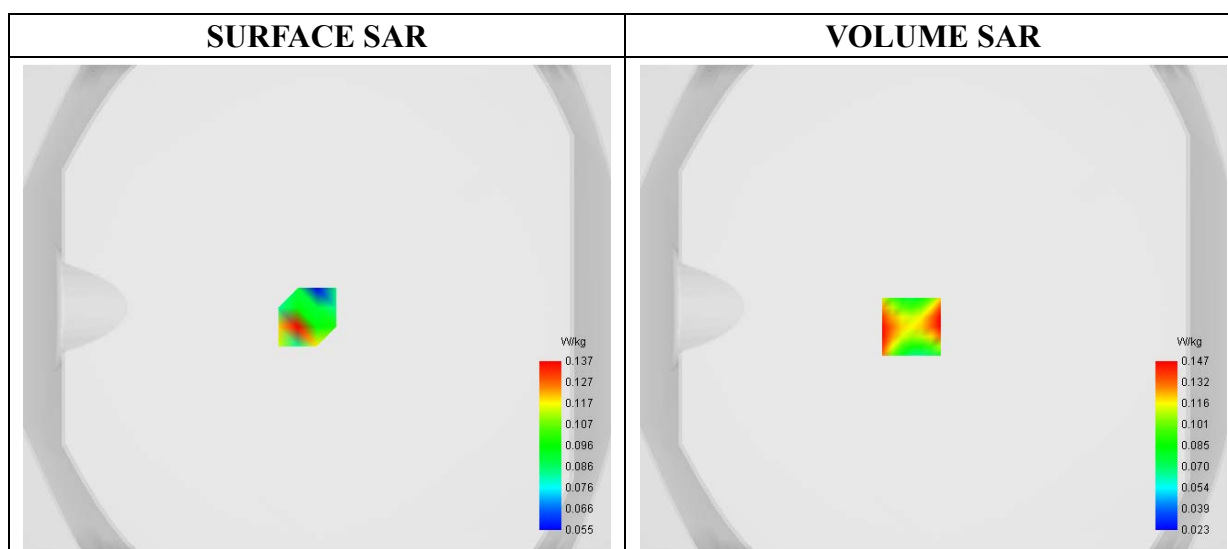

Maximum location: X=-9.00, Y=-8.00

SAR 10g (W/Kg)	0.108589
SAR 1g (W/Kg)	0.141956

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2053	0.1471	0.1146	0.0620	0.0821	0.0413	0.0743	0.0484	0.0790

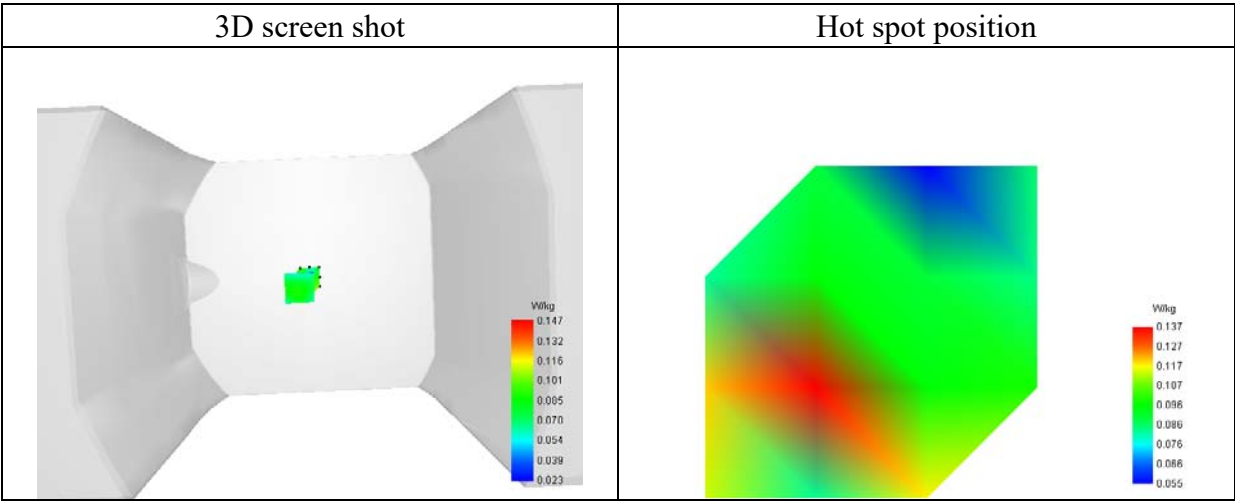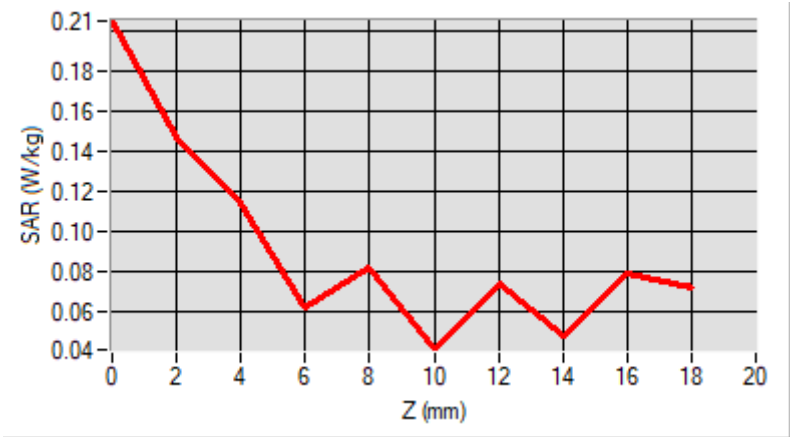

MEASUREMENT 213

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

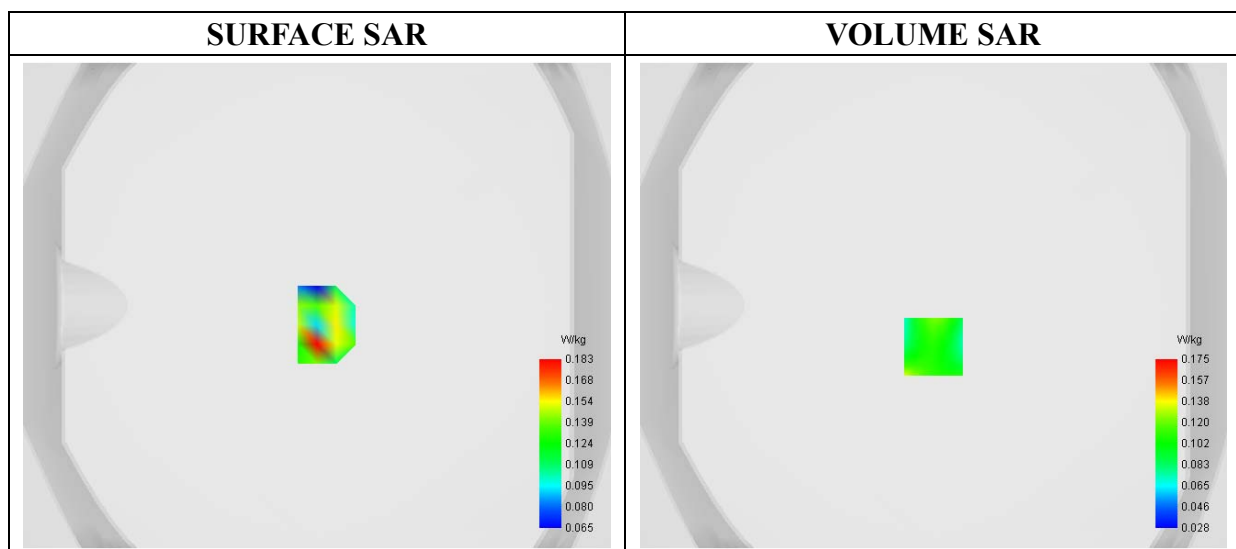

Maximum location: X=0.00, Y=-17.00

SAR 10g (W/Kg)	0.103713
SAR 1g (W/Kg)	0.137379

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2463	0.1352	0.0874	0.0397	0.0914	0.0279	0.1024	0.0535	0.1052

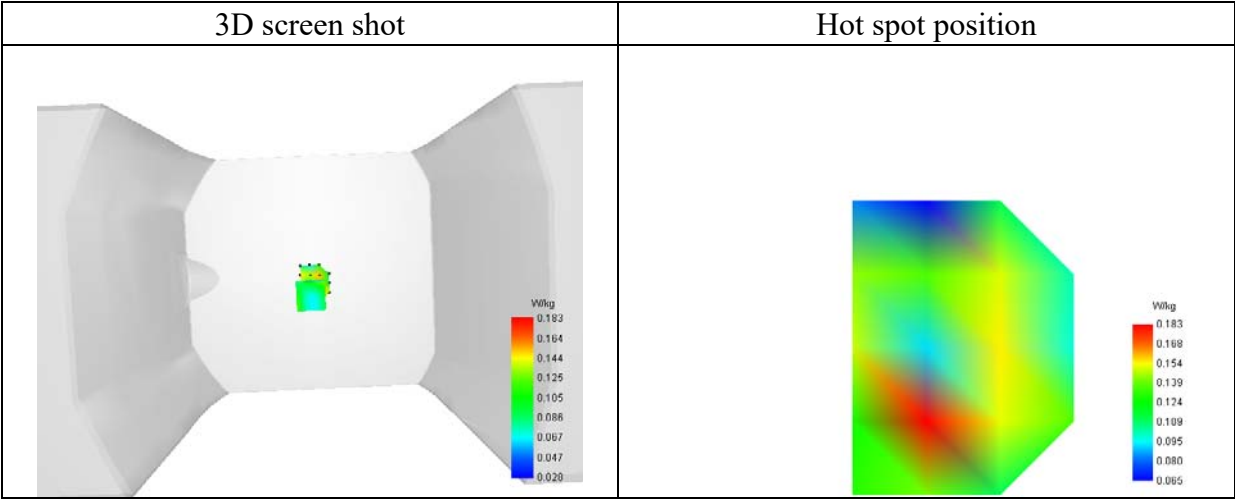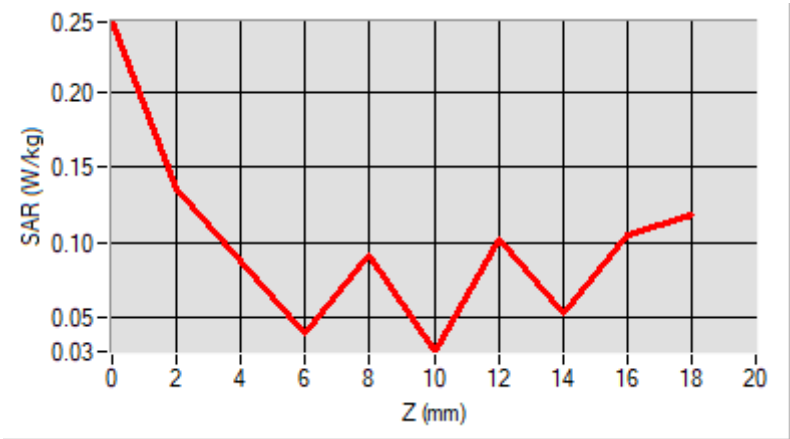

MEASUREMENT 215


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Back
Band	GPRS850_4TX
Channels	Middle
Signal	Duty Cycle: 1:4

B. SAR Measurement Results



Frequency (MHz)	836.599976
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

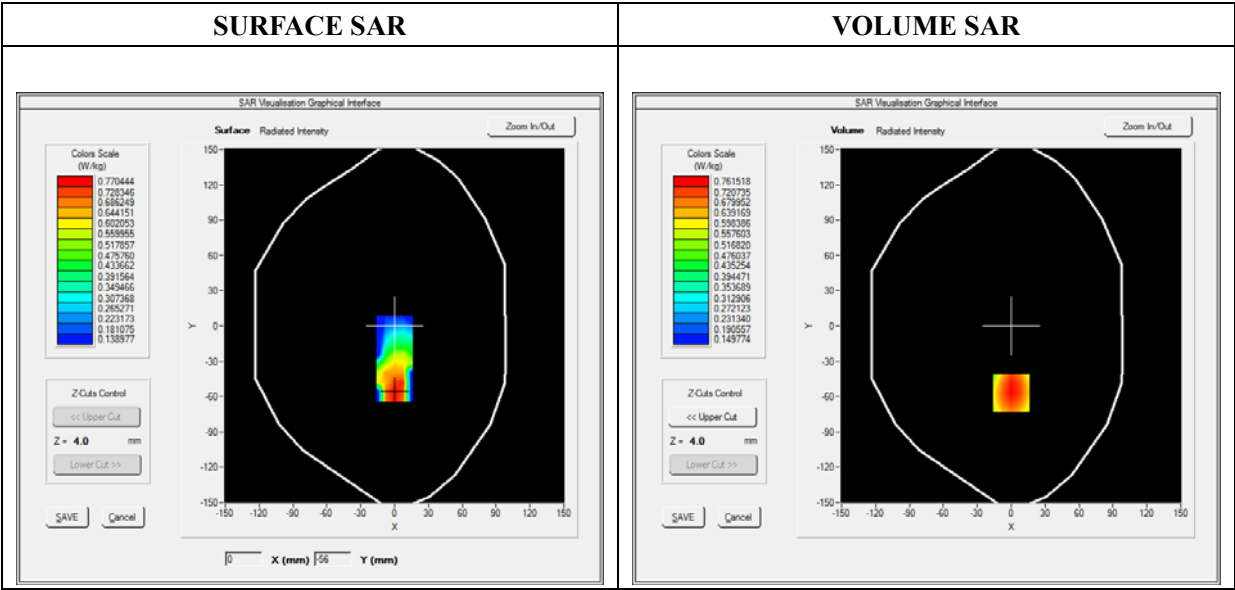

Maximum location: X=0.00, Y=-57.00

SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.513044
SAR 1g (W/Kg)	0.732741

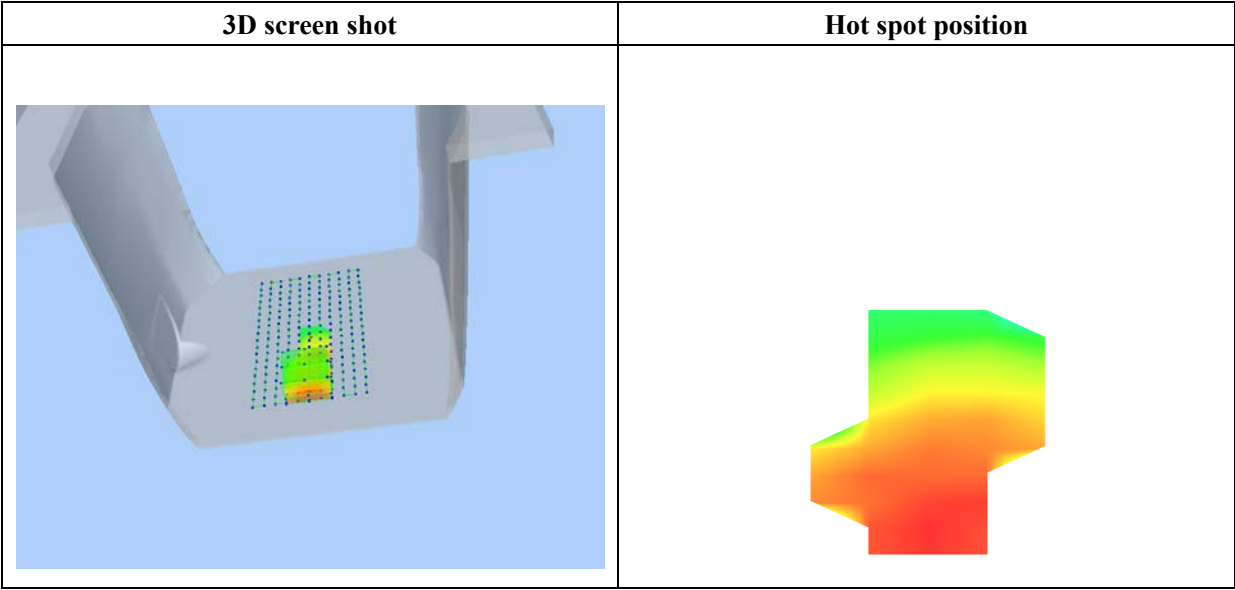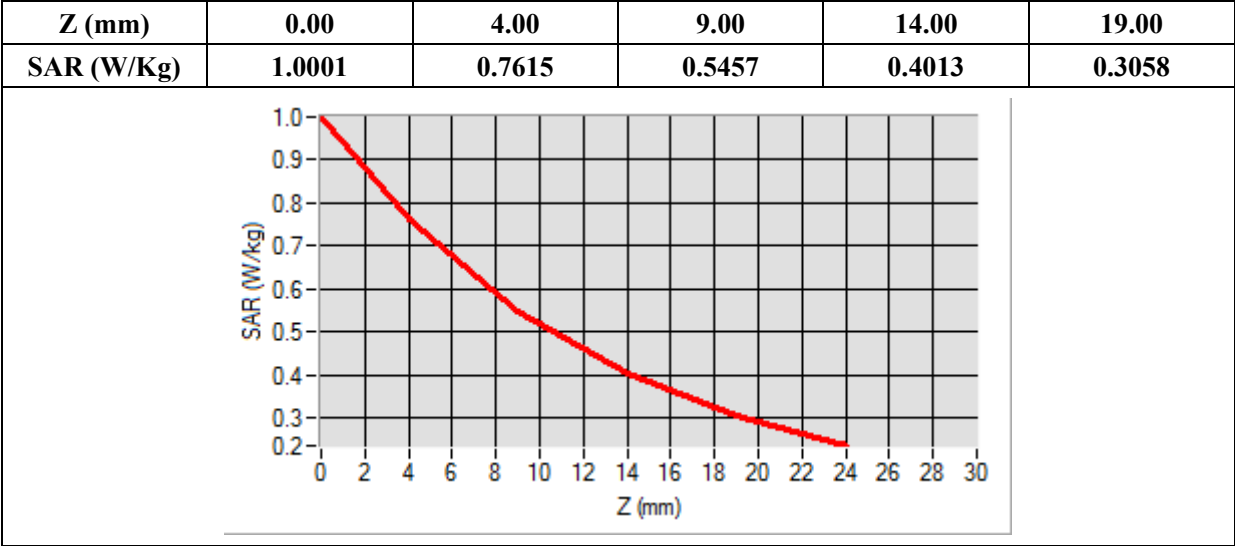

MEASUREMENT 224

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	GPRS1900_4TX
Channels	Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1850.200000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

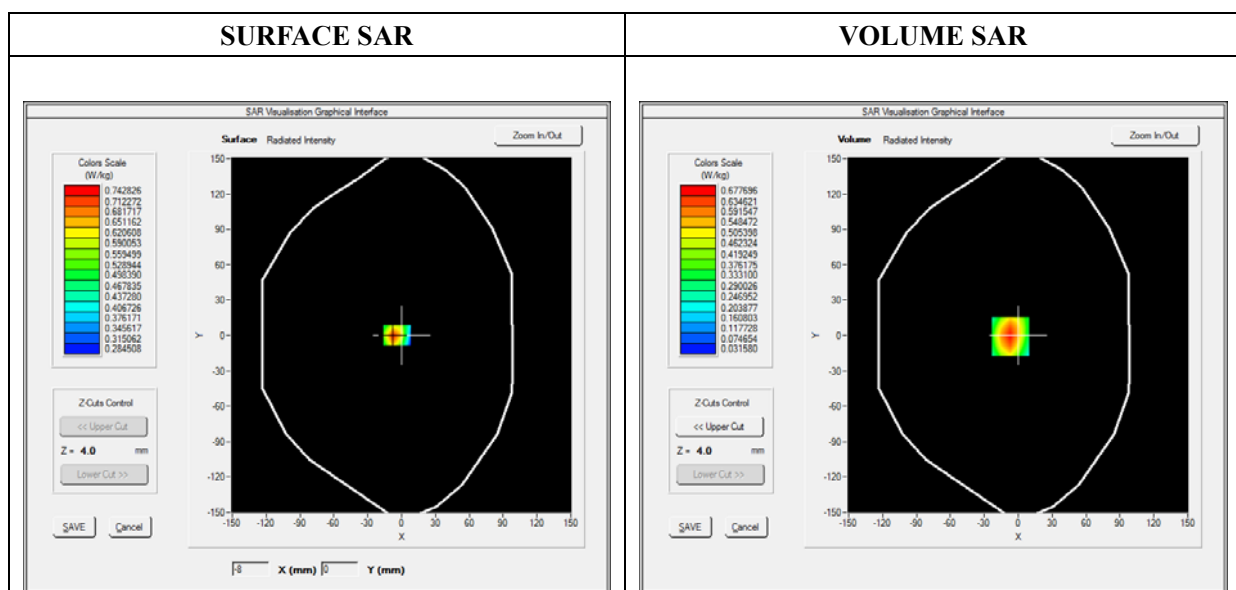



Maximum location: X=-7.00, Y=-1.00

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.345347
SAR 1g (W/Kg)	0.636162

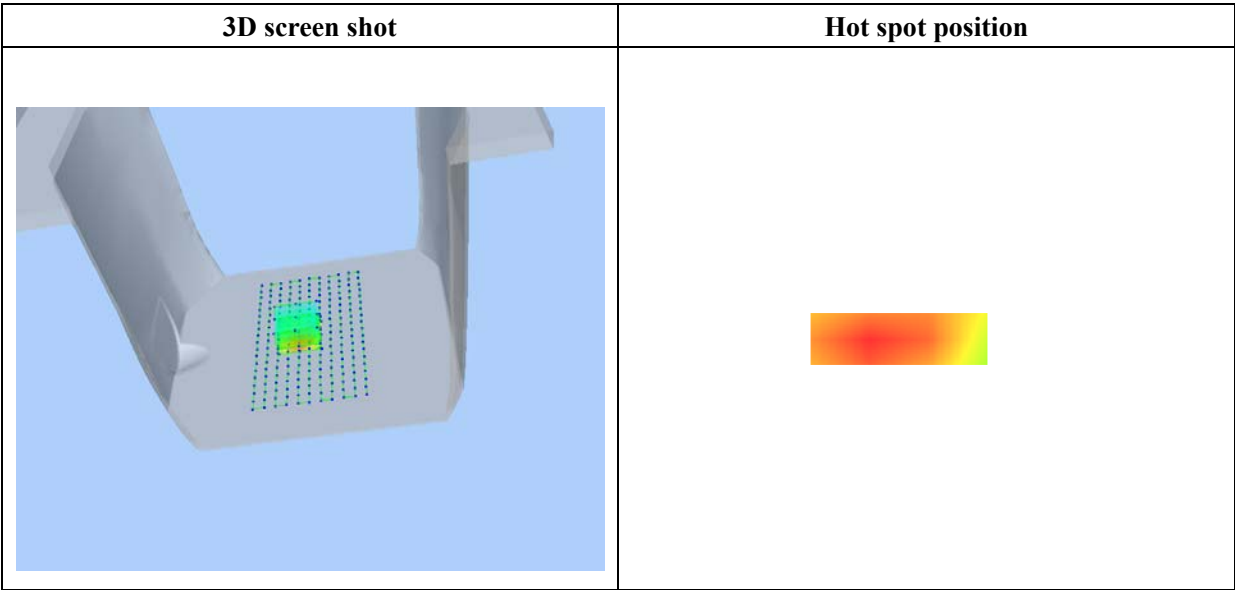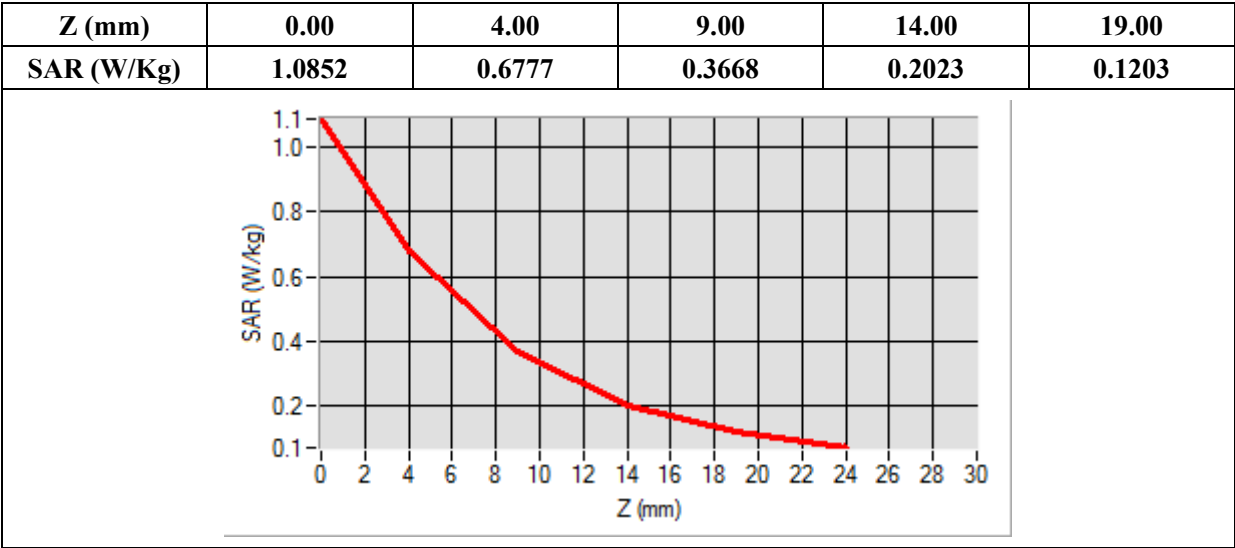

MEASUREMENT 229


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1907.600000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	1.163283
Ambient Temperature	21.1
Liquid Temperature	21.3

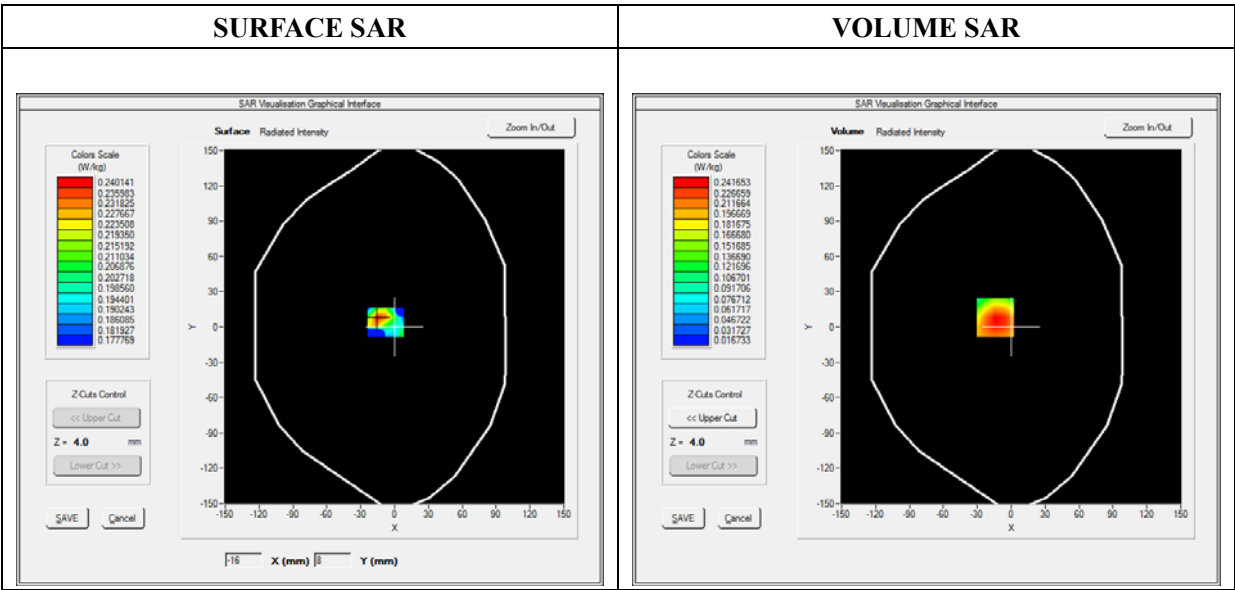

Maximum location: X=3.00, Y=2.00

SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.255781
SAR 1g (W/Kg)	0.465250

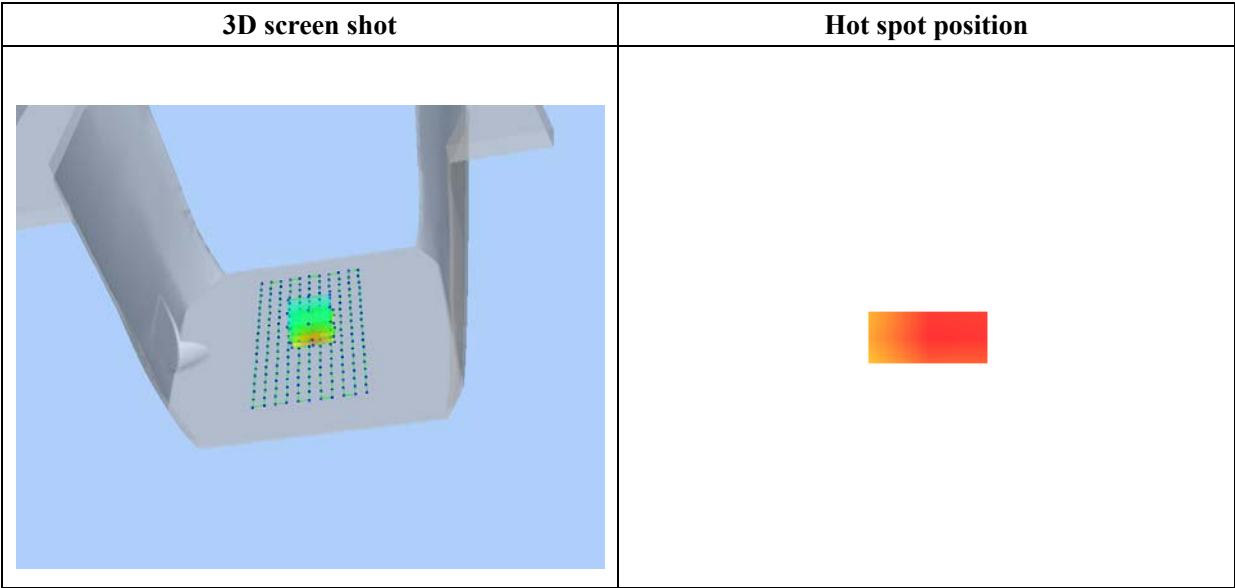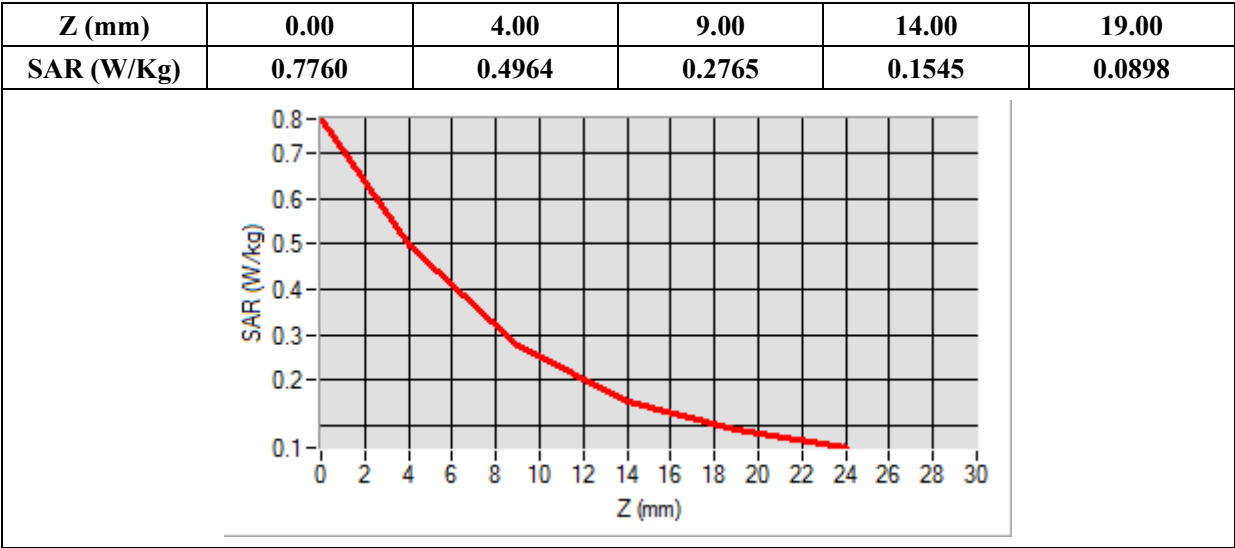

MEASUREMENT 150/231


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	WCDMA1700_RMC
Channels	High
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1752.600000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

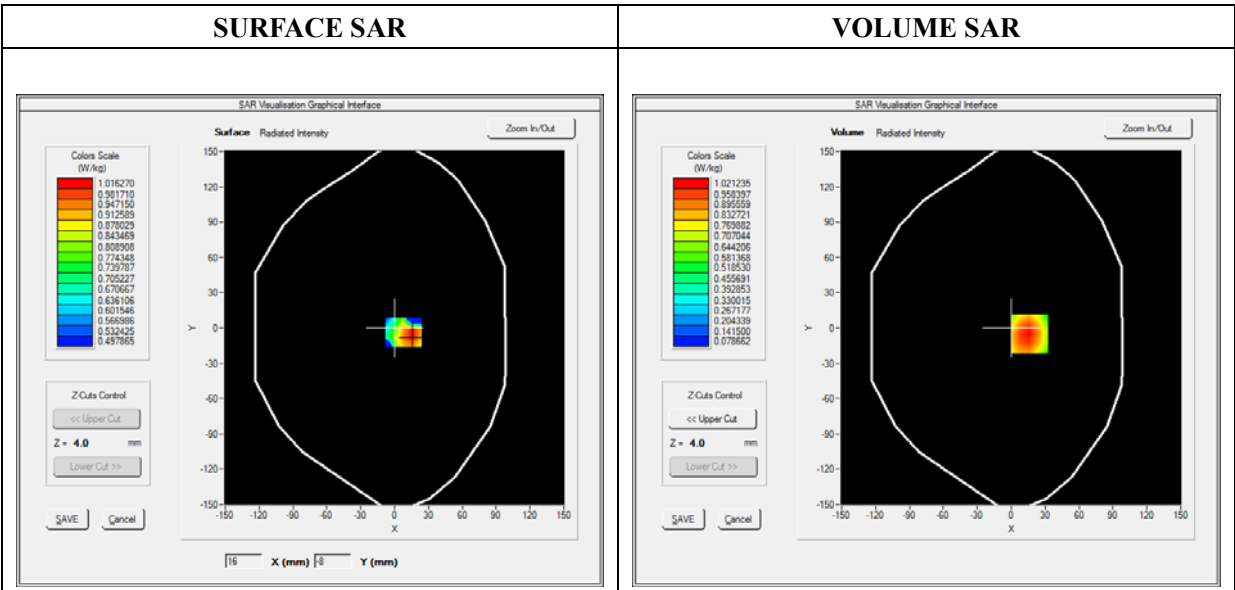

Maximum location: X=16.00, Y=-5.00

SAR Peak: 1.53 W/kg

SAR 10g (W/Kg)	0.584595
SAR 1g (W/Kg)	0.973909

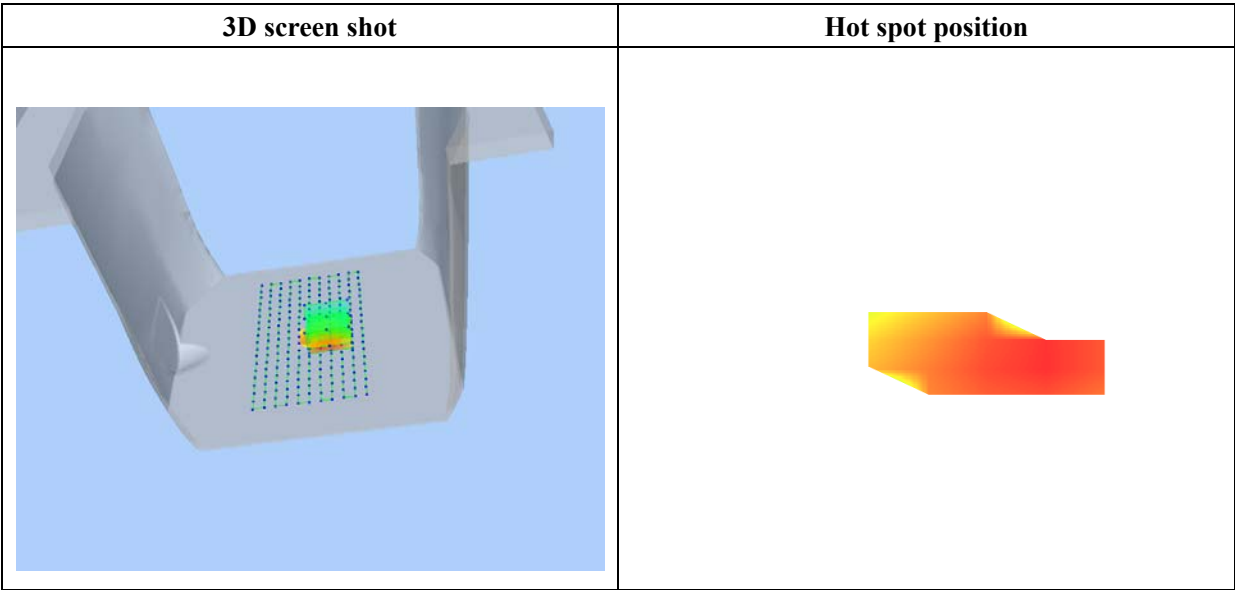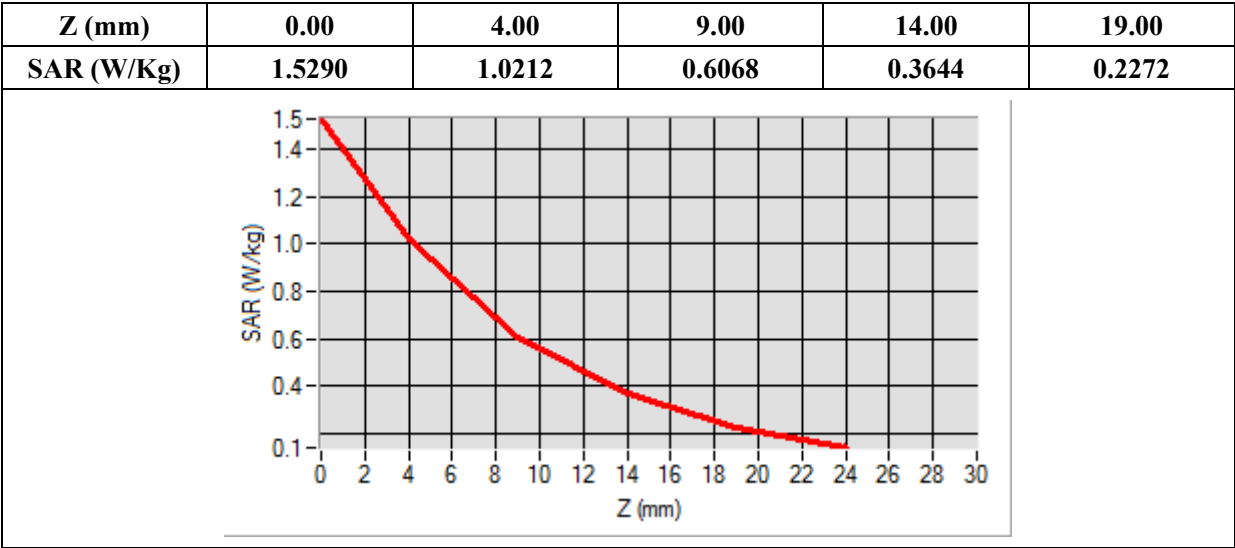

MEASUREMENT 153/239


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA850_RMC
Channels	Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	836.400000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	2.341234
Ambient Temperature	21.1
Liquid Temperature	21.3

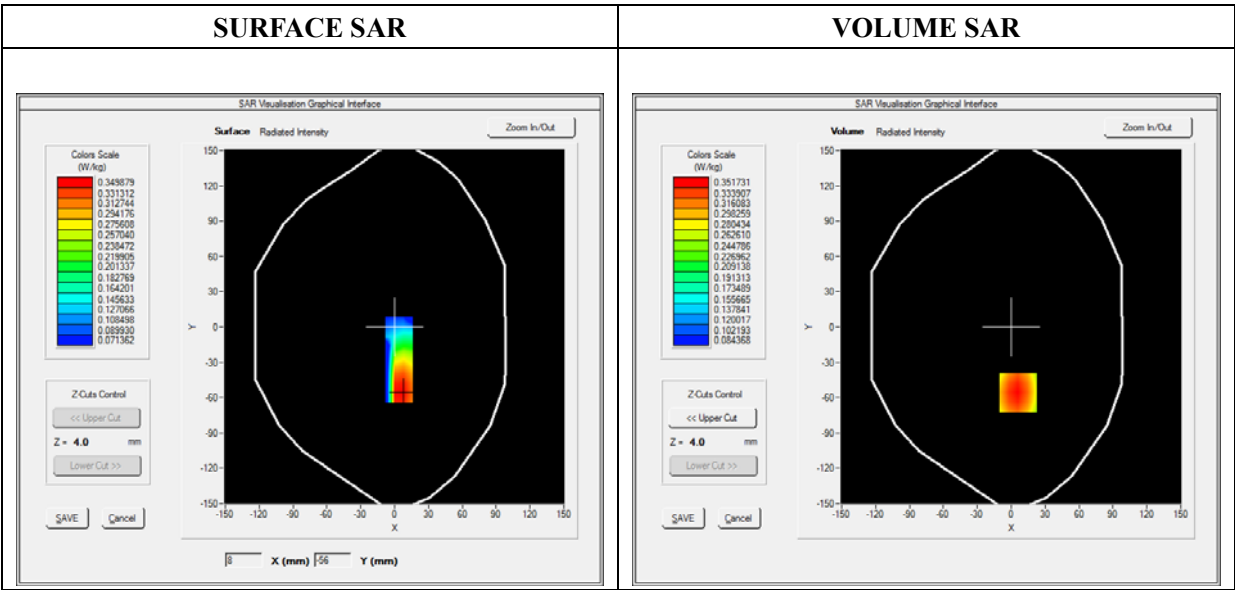

Maximum location: X=6.00, Y=-56.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.246092
SAR 1g (W/Kg)	0.340656

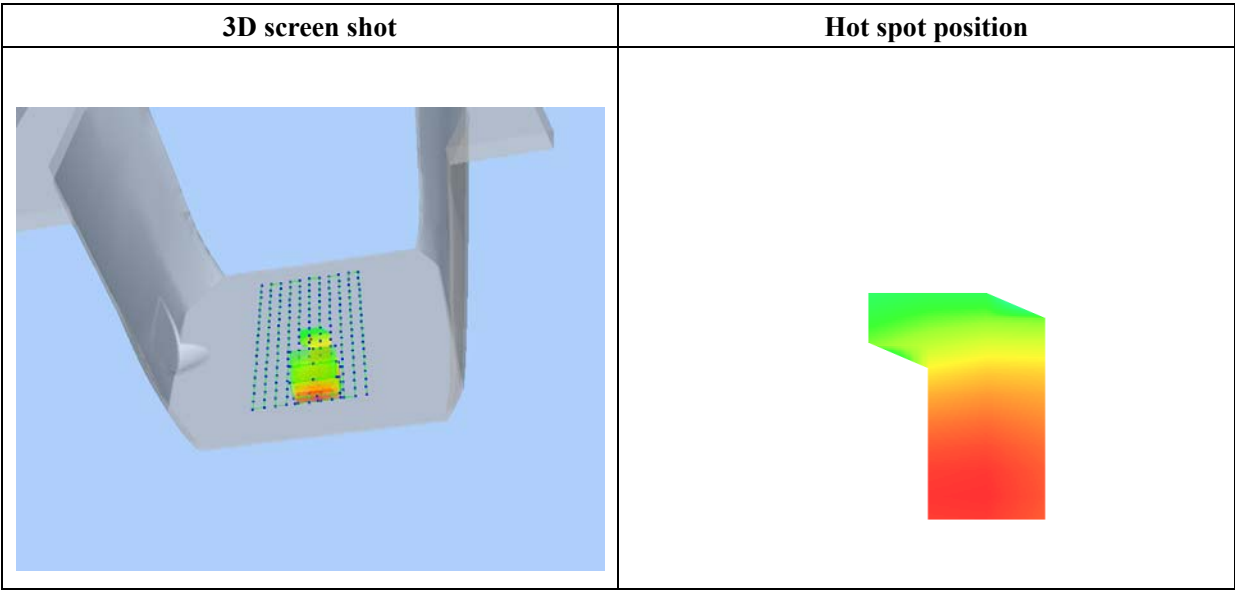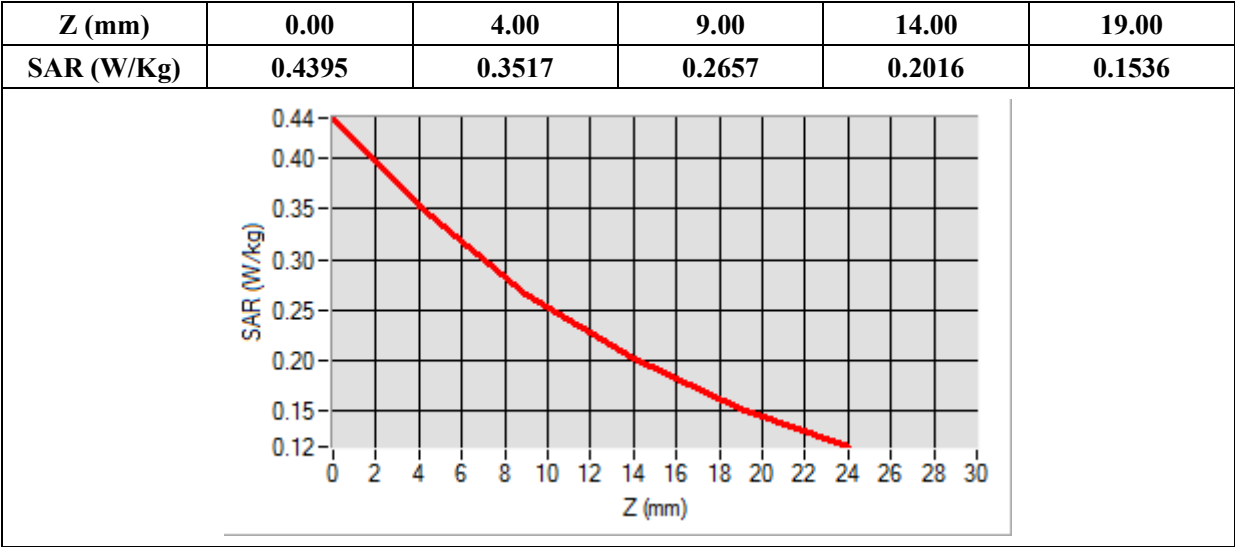

MEASUREMENT 248

Type: Phone measurement (Complete)

Date of measurement: 2020-10-24

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	LTE Band 2
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results

Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

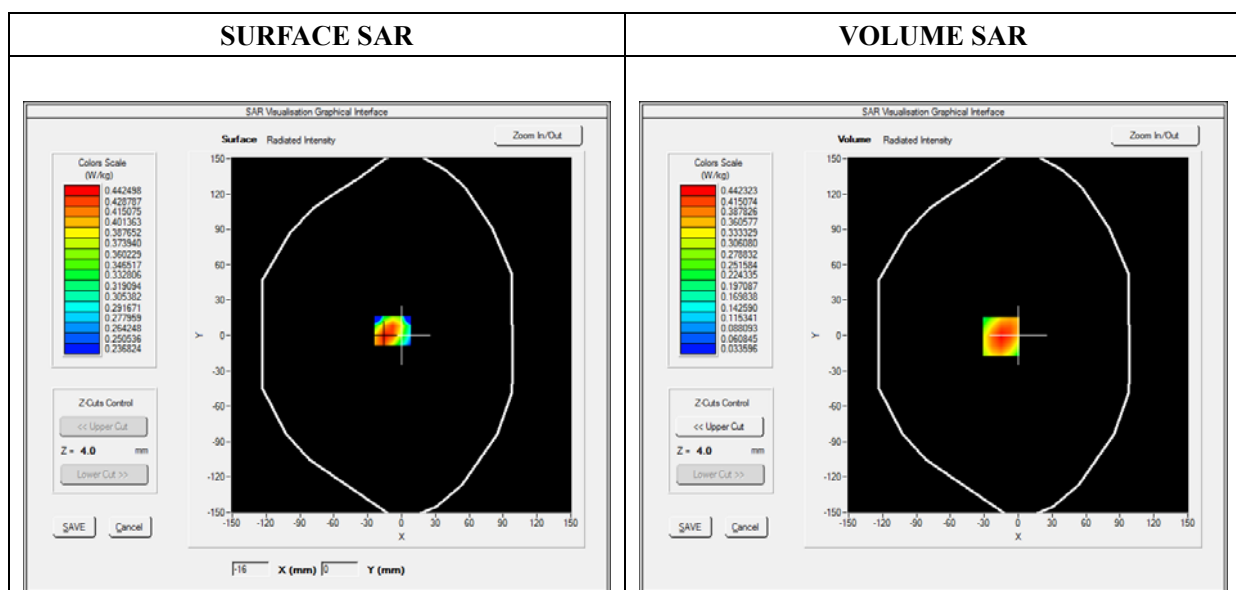



Maximum location: X=-15.00, Y=-1.00

Waltek Testing Group (Shenzhen) Co., Ltd.

<http://www.semtest.com.cn>

SAR Peak: 0.65 W/kg

SAR 10g (W/Kg)	0.252415
SAR 1g (W/Kg)	0.420241

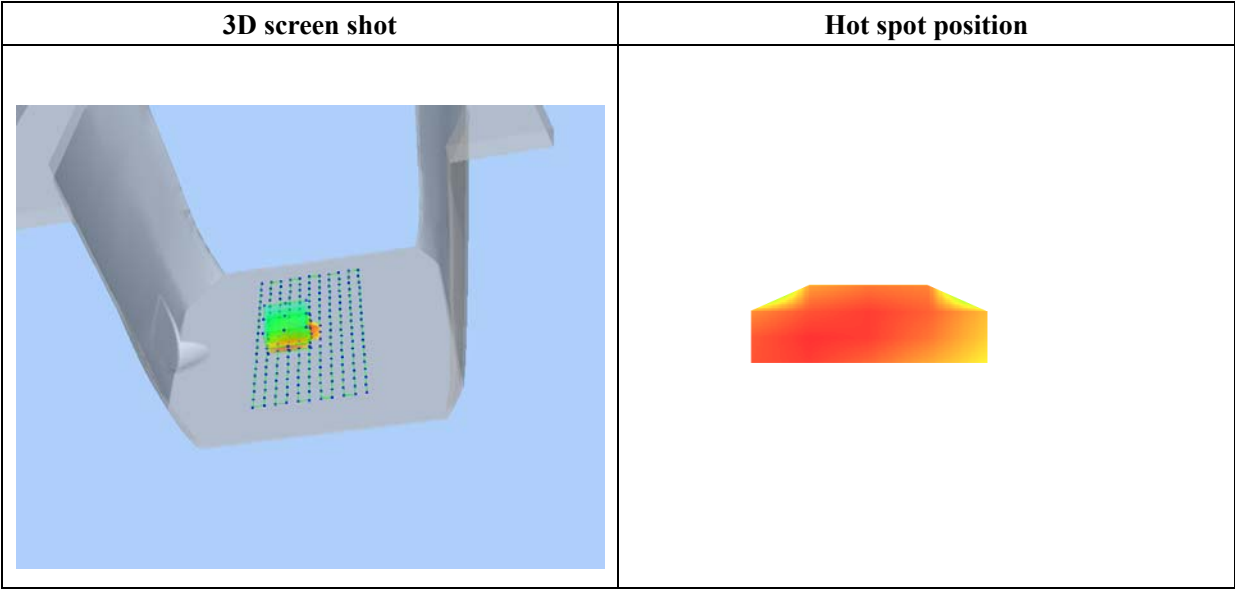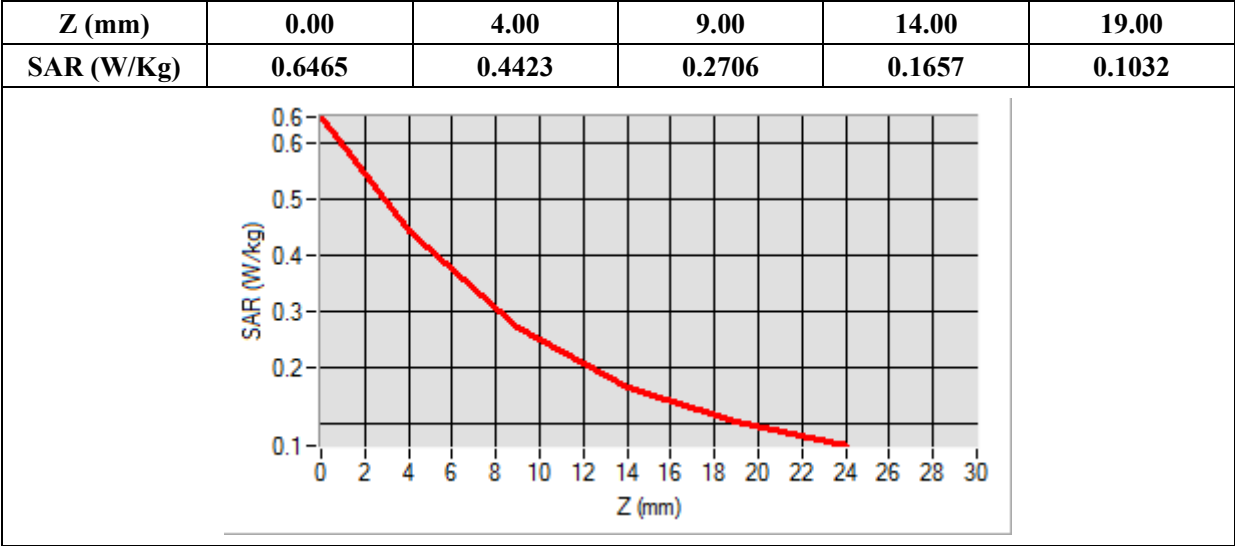

MEASUREMENT 163/264


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Front
Band	LTE Band 4
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1732.500000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

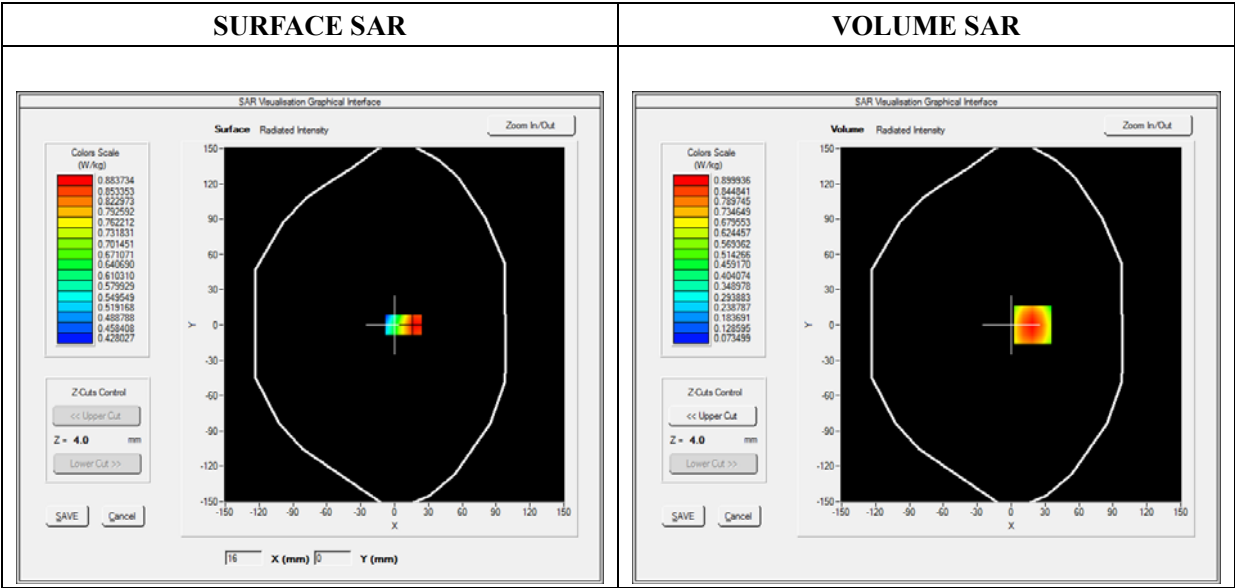

Maximum location: X=19.00, Y=0.00

SAR Peak: 1.34 W/kg

SAR 10g (W/Kg)	0.520791
SAR 1g (W/Kg)	0.857132

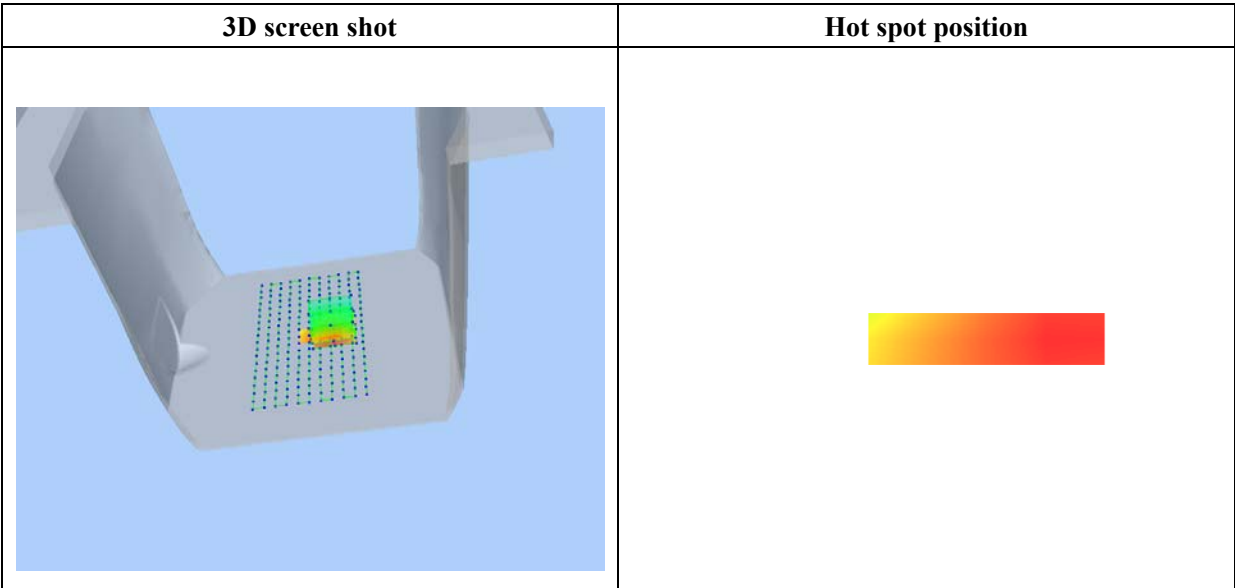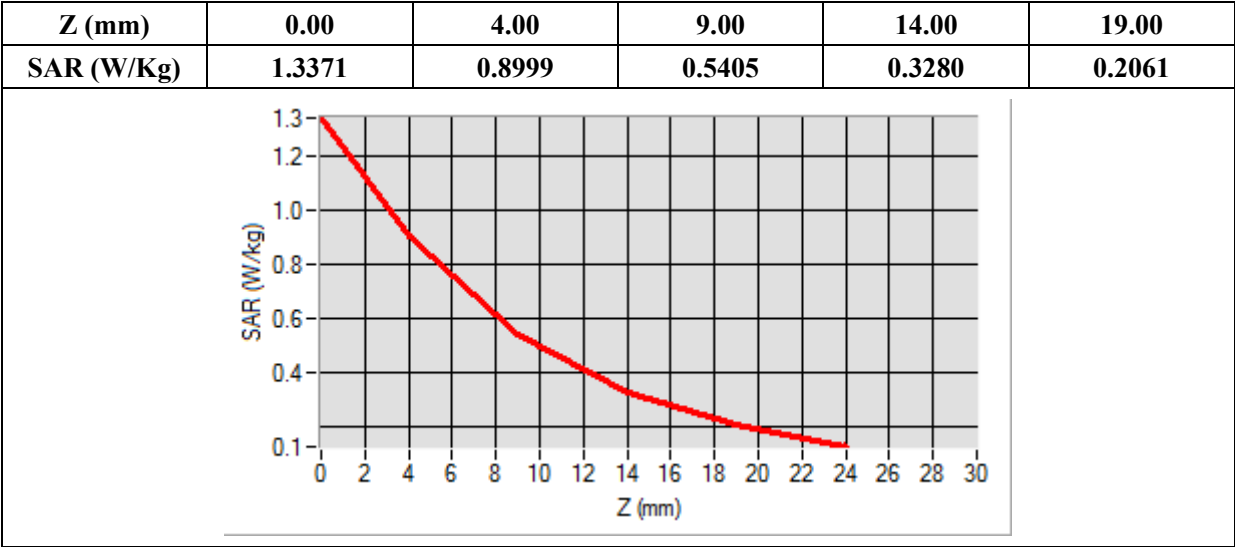

MEASUREMENT 165/266


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 5
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	829.000000
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

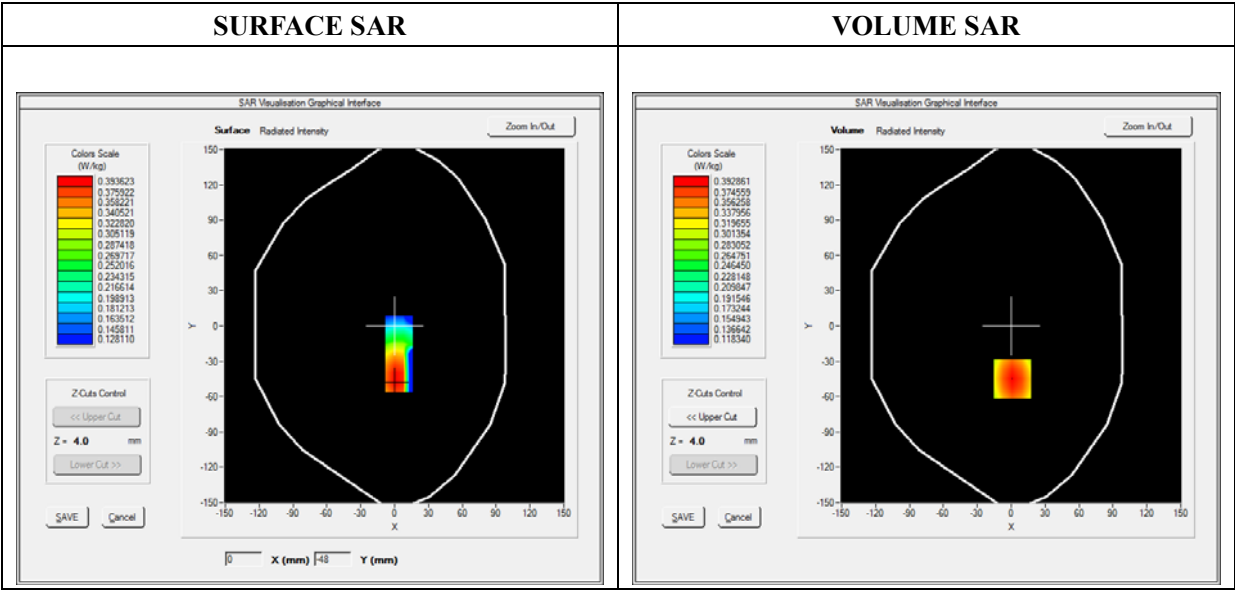

Maximum location: X=1.00, Y=-45.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.290228
SAR 1g (W/Kg)	0.381337

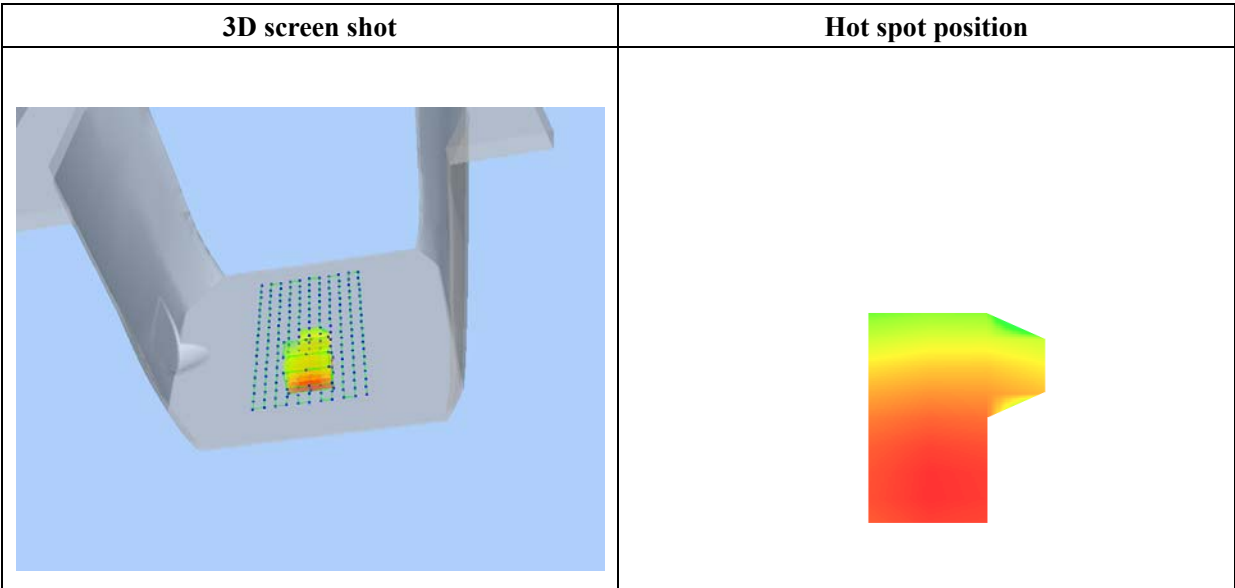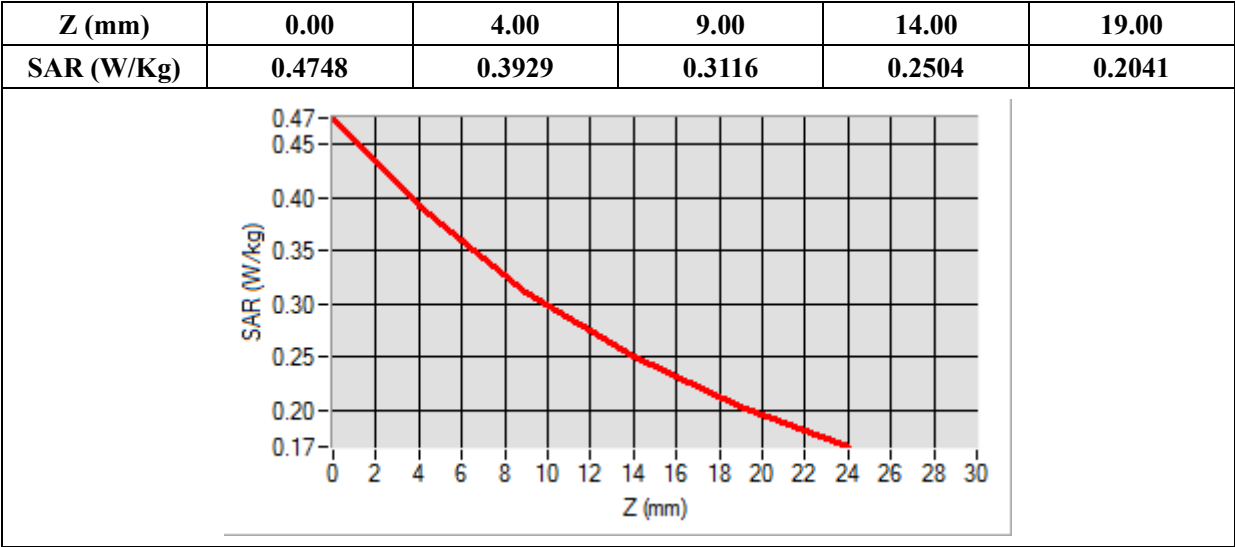

MEASUREMENT 174/287


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 7
Channels	QPSK, 20MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2535.000000
Relative Permittivity (real part)	52.241202
Conductivity (S/m)	2.120943
Power Variation (%)	3.672346
Ambient Temperature	21.1
Liquid Temperature	21.2

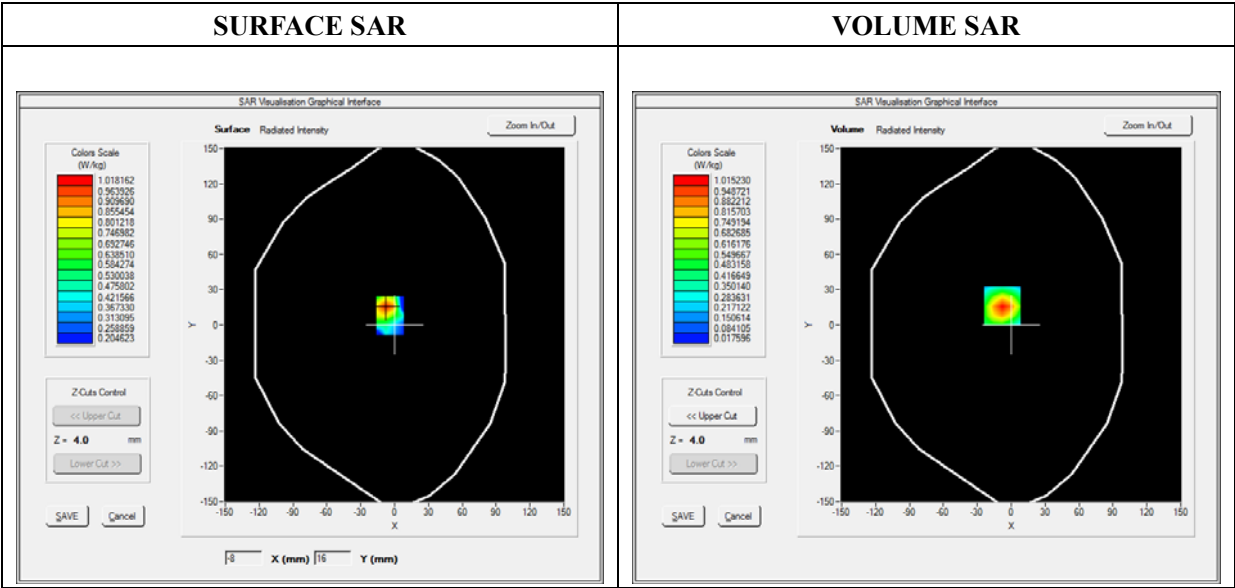

Maximum location: X=-8.00, Y=16.00

SAR Peak: 1.73 W/kg

SAR 10g (W/Kg)	0.456586
SAR 1g (W/Kg)	0.941416

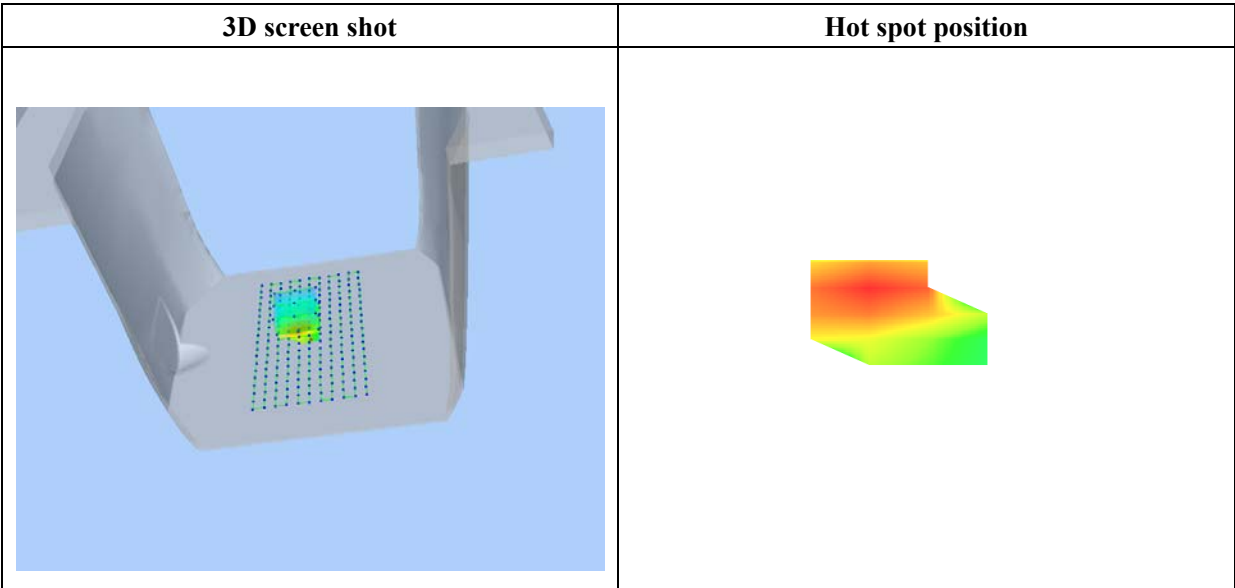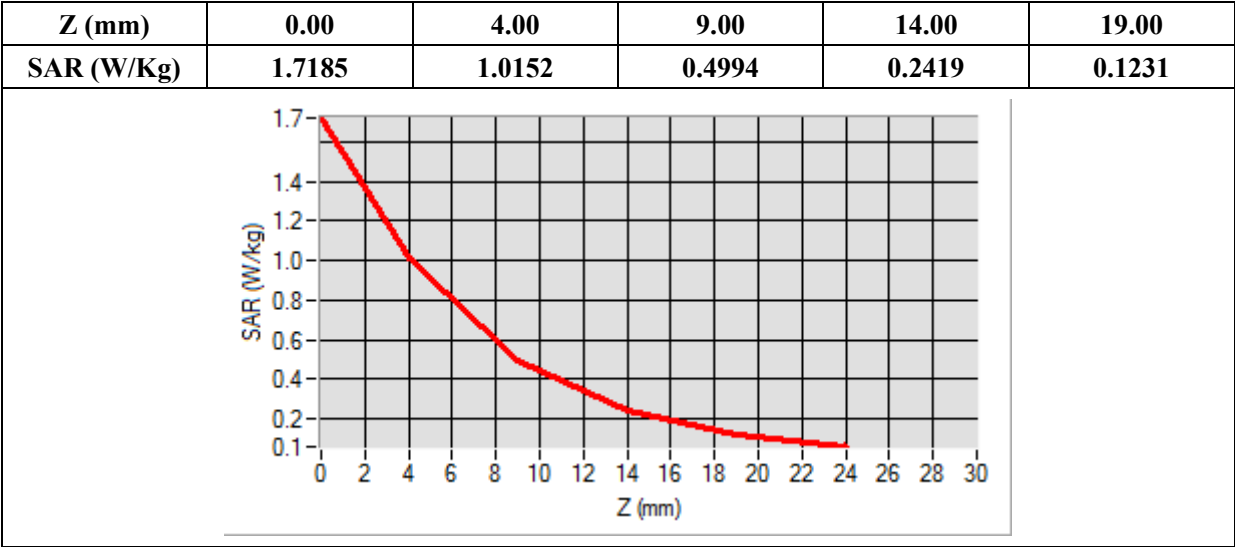

MEASUREMENT 175/288


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 12
Channels	QPSK, 10MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	704.000000
Relative Permittivity (real part)	55.851214
Conductivity (S/m)	0.941454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

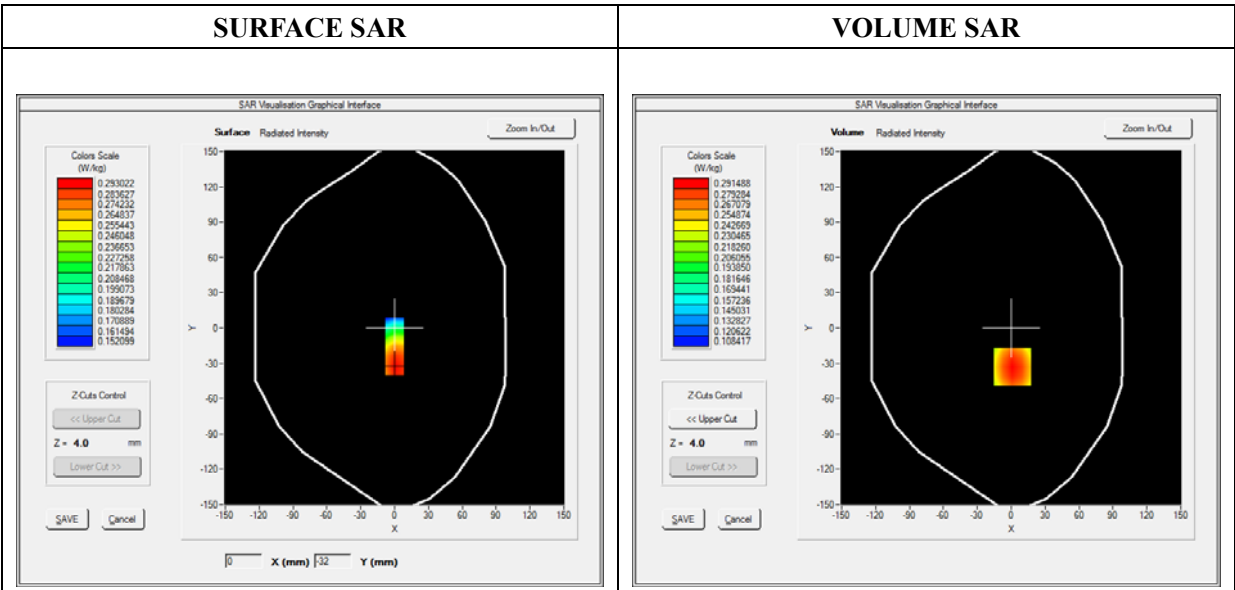

Maximum location: X=1.00, Y=-33.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.240260
SAR 1g (W/Kg)	0.299706

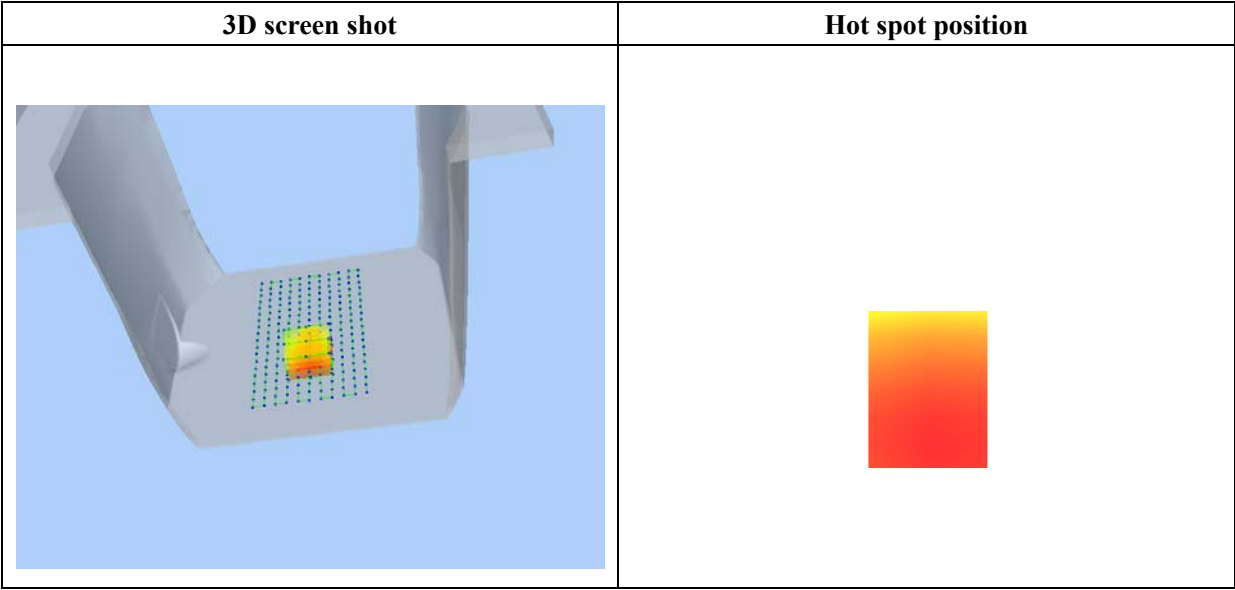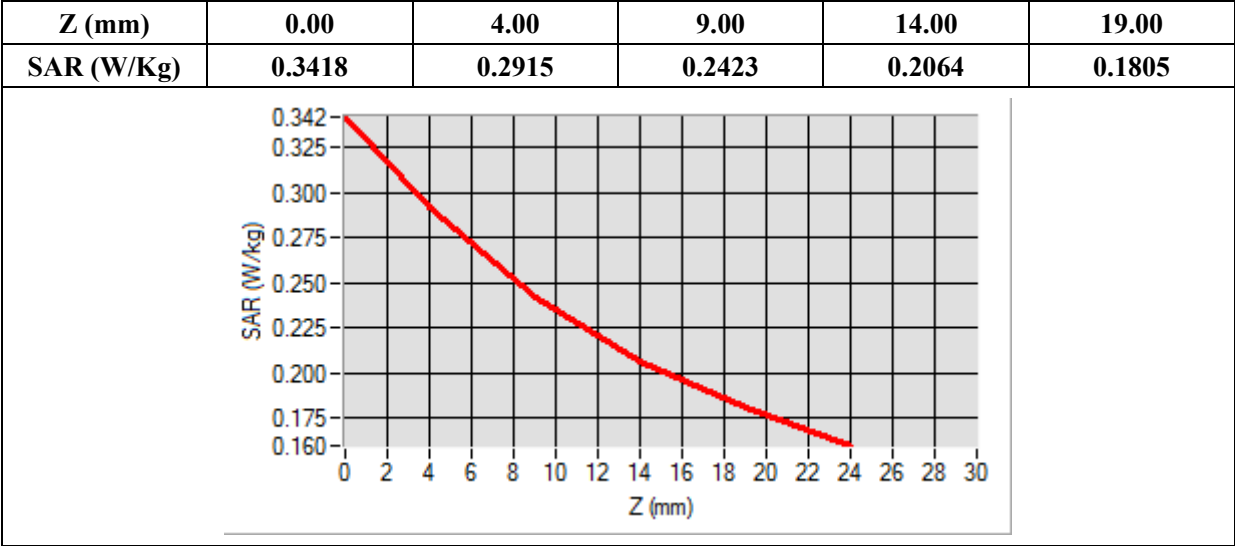

MEASUREMENT 179/298


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 13
Channels	QPSK, 10MHz, 1RB, Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	782.000000
Relative Permittivity (real part)	55.451214
Conductivity (S/m)	0.948454
Power Variation (%)	1.210493
Ambient Temperature	21.1
Liquid Temperature	21.2

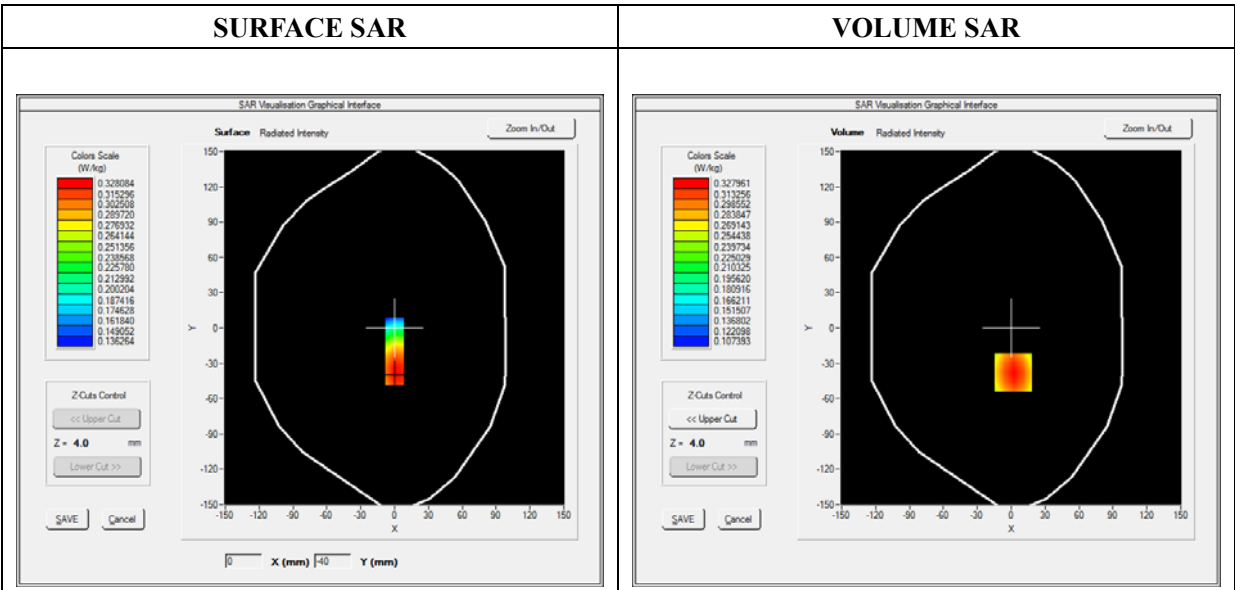

Maximum location: X=2.00, Y=-38.00

SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.256059
SAR 1g (W/Kg)	0.335824

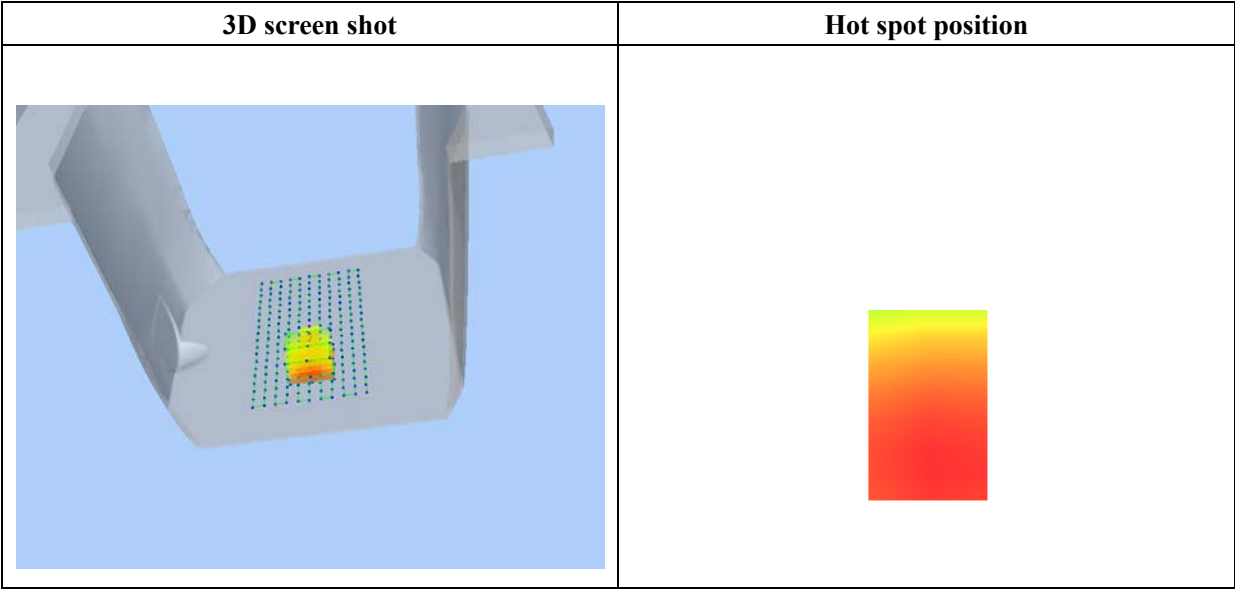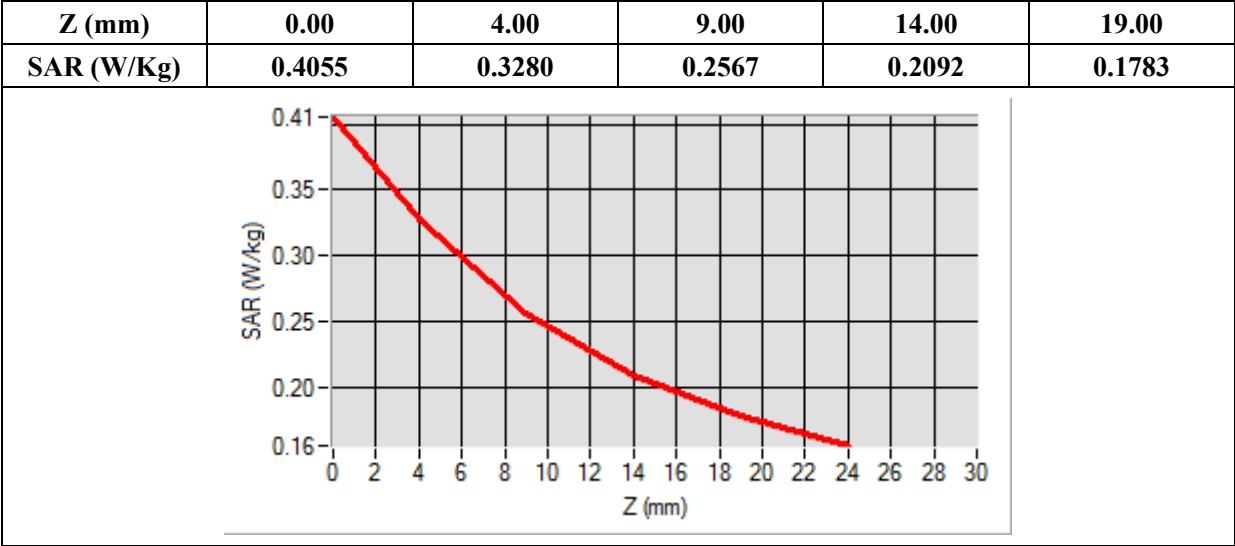

MEASUREMENT 312


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat plane
Device Position	Bottom
Band	LTE Band 25
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle: 1:4

B. SAR Measurement Results



Frequency (MHz)	1860.000000
Relative Permittivity (real part)	52.420415
Conductivity (S/m)	1.501966
Power Variation (%)	2.483762
Ambient Temperature	21.1
Liquid Temperature	21.3

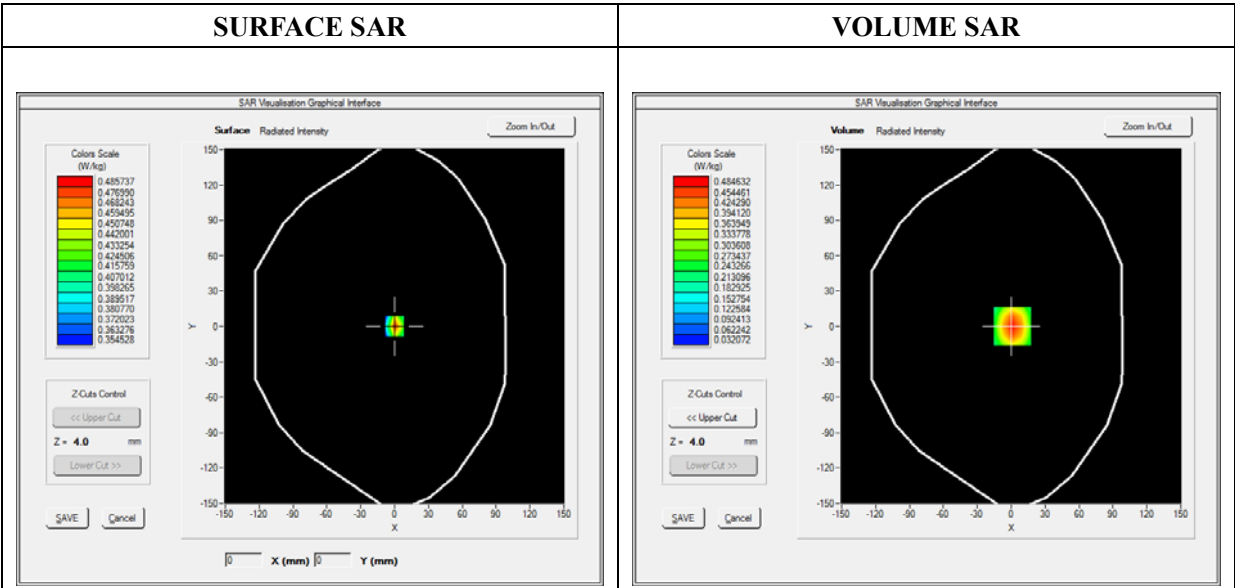

Maximum location: X=1.00, Y=0.00

SAR Peak: 0.75 W/kg

SAR 10g (W/Kg)	0.251793
SAR 1g (W/Kg)	0.454738

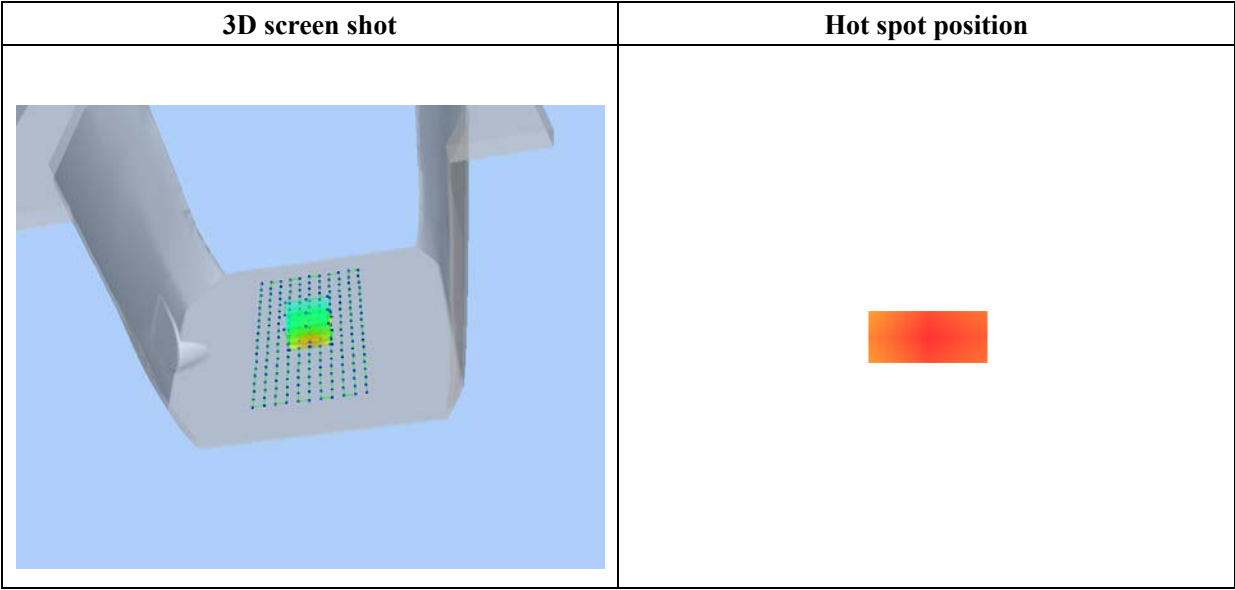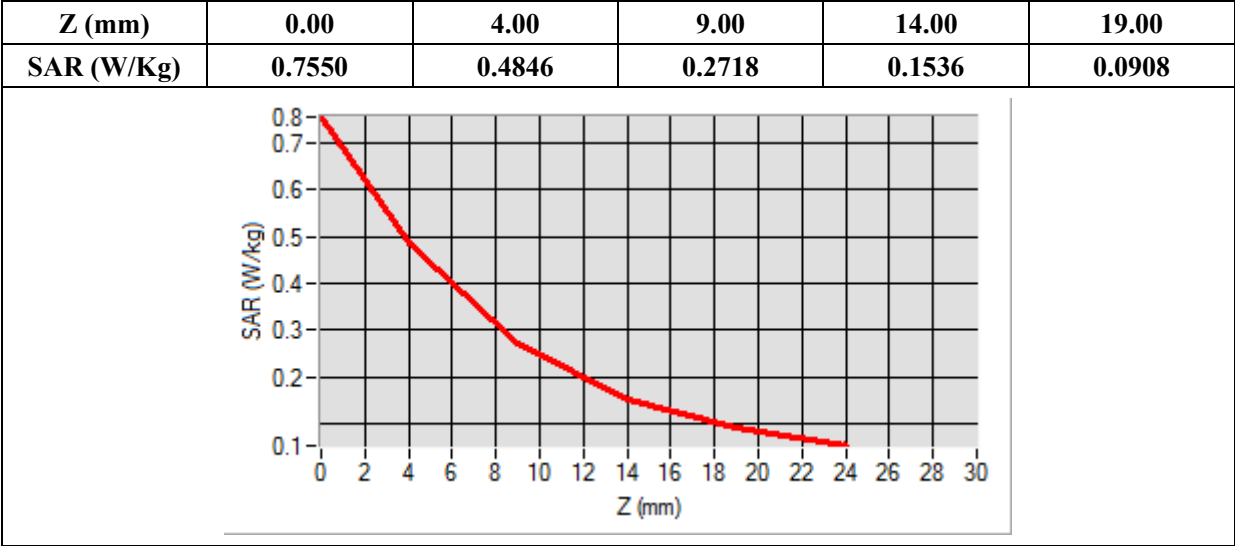

MEASUREMENT 189/323


Type: Phone measurement (Complete)
Date of measurement: 2020-10-22
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	LTE Band 26
Channels	QPSK, 15MHz, 1RB, Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results



Frequency (MHz)	821.599976
Relative Permittivity (real part)	54.851214
Conductivity (S/m)	0.951454
Power Variation (%)	0.901472
Ambient Temperature	21.1
Liquid Temperature	21.3

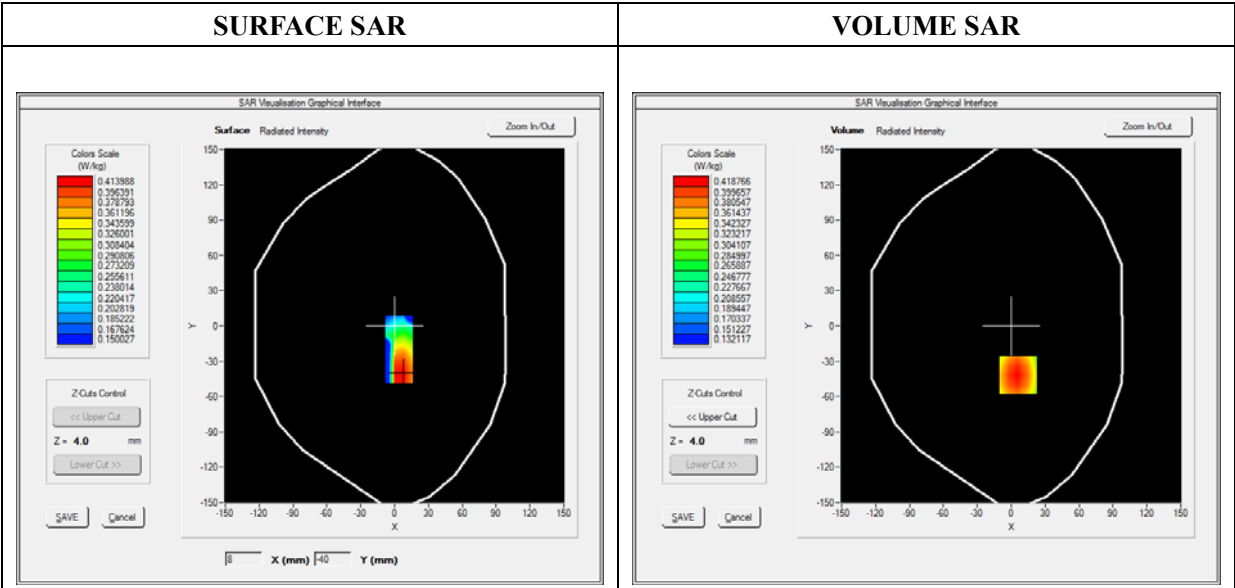

Maximum location: X=6.00, Y=-42.00

SAR Peak: 0.52 W/kg

SAR 10g (W/Kg)	0.311958
SAR 1g (W/Kg)	0.414728

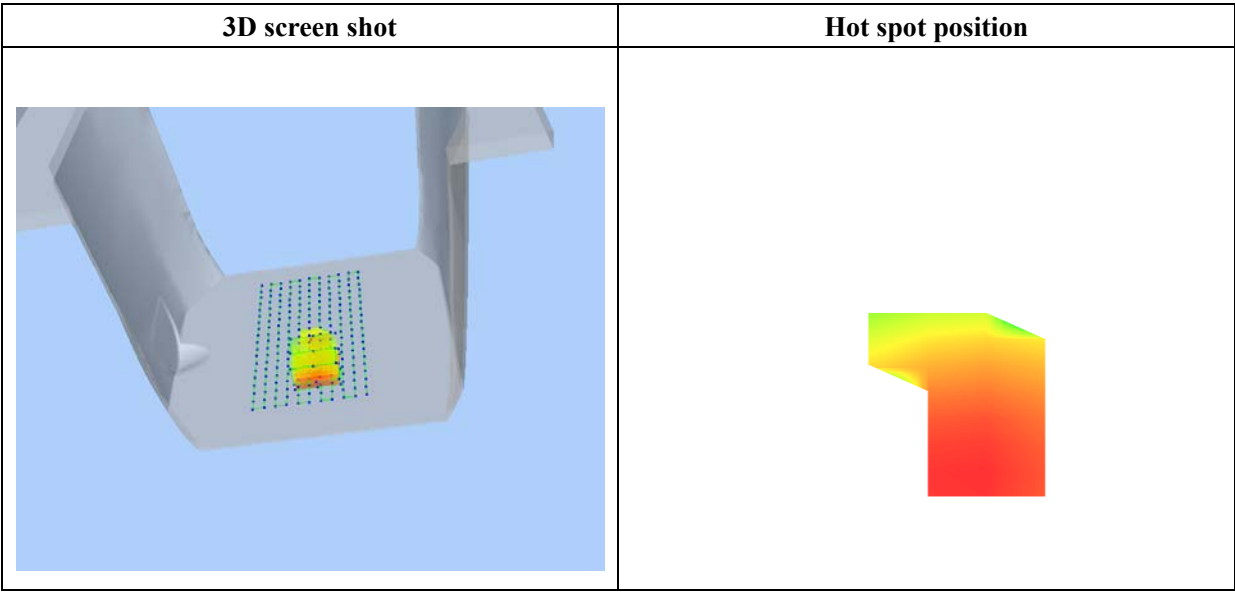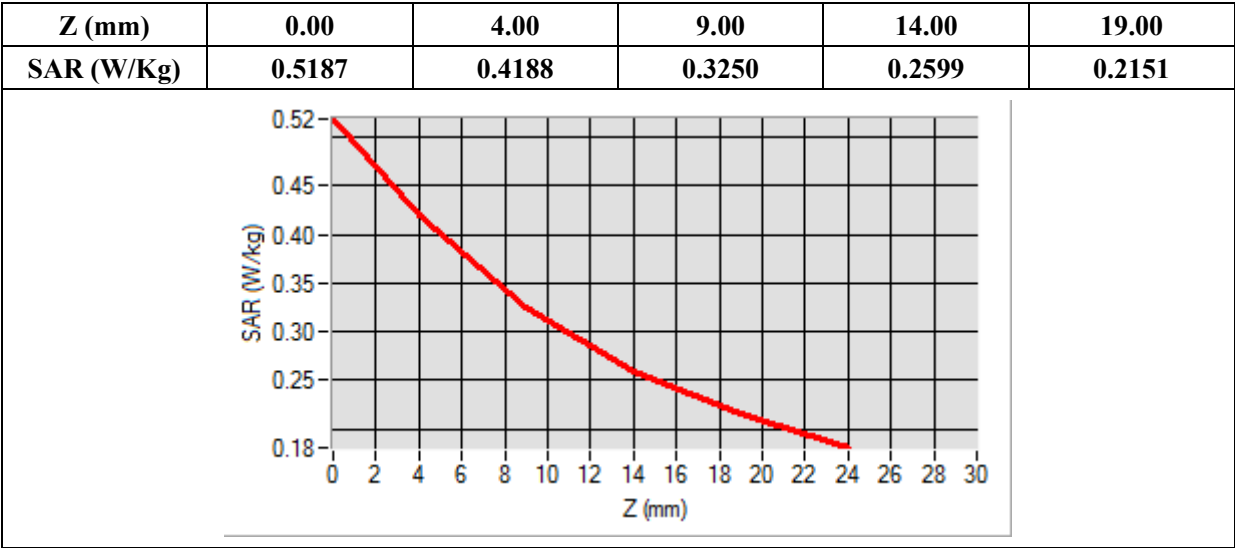

MEASUREMENT 337


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 30
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2310.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

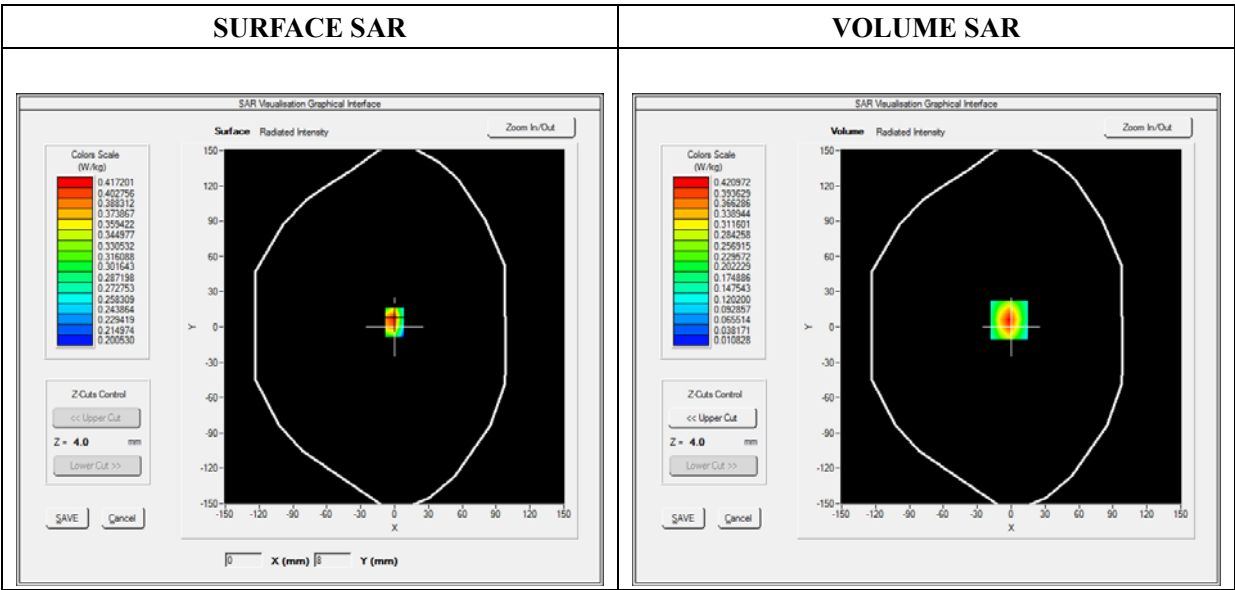

Maximum location: X=-2.00, Y=6.00

SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.198016
SAR 1g (W/Kg)	0.388463

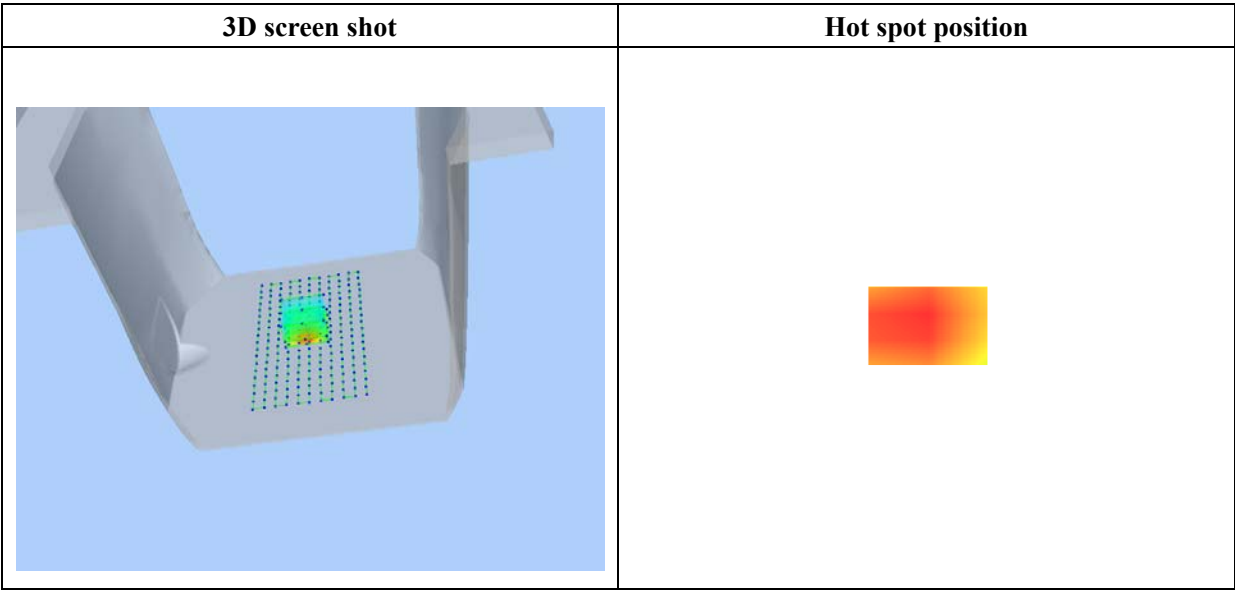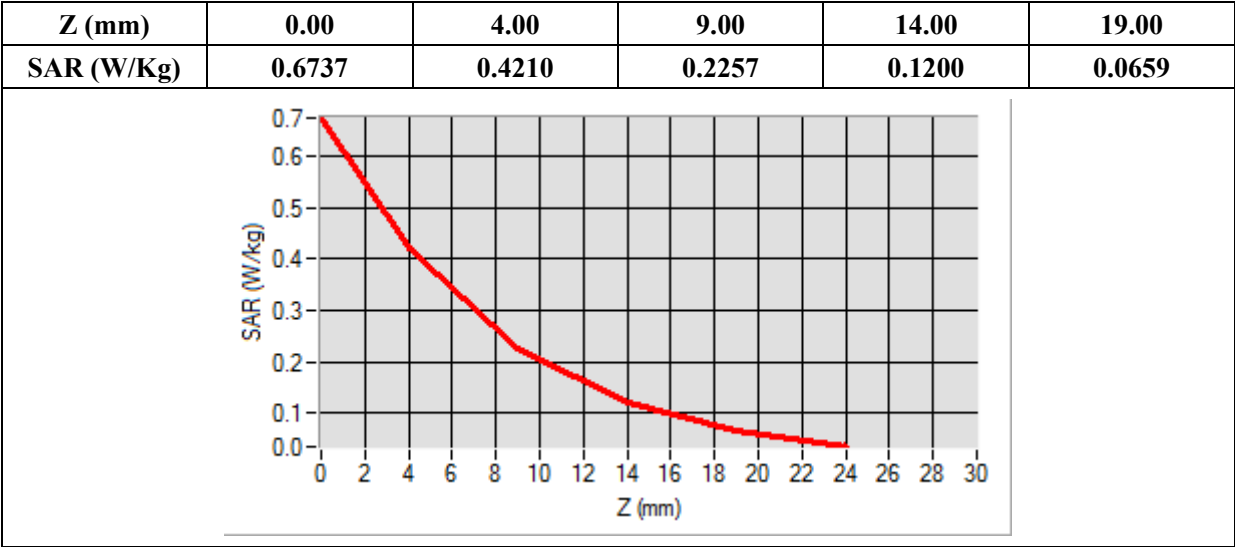

MEASUREMENT 347


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 40
Channels	QPSK, 10MHz, 1RB,Middle
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2350.000000
Relative Permittivity (real part)	53.010212
Conductivity (S/m)	1.880255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

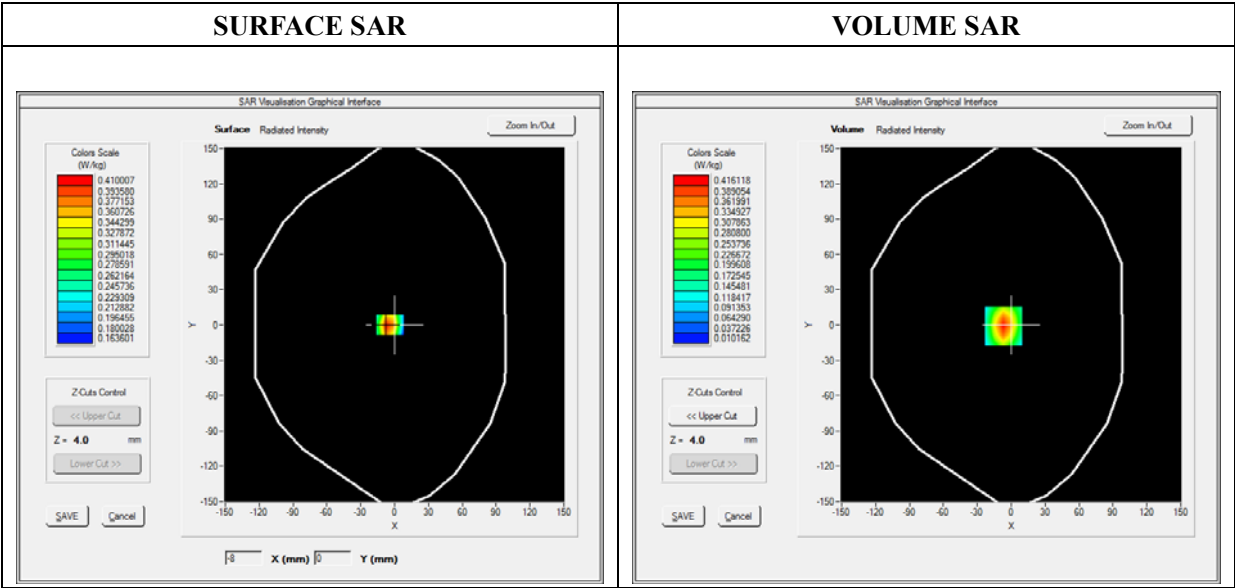

Maximum location: X=-7.00, Y=-1.00

SAR Peak: 0.67 W/kg

SAR 10g (W/Kg)	0.194200
SAR 1g (W/Kg)	0.384564

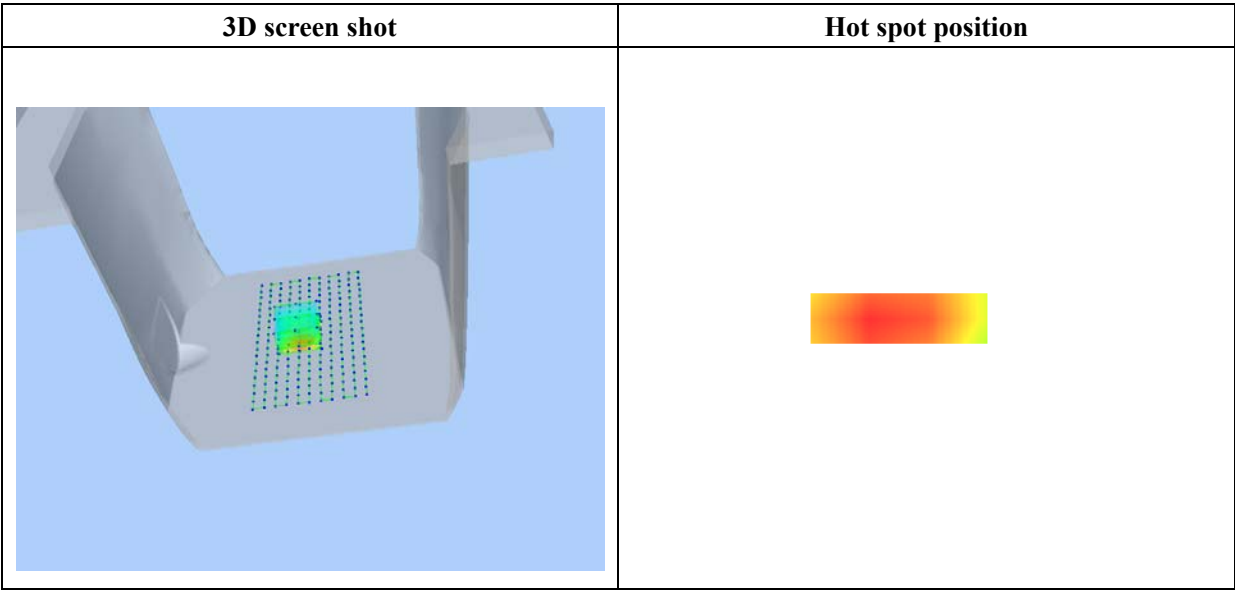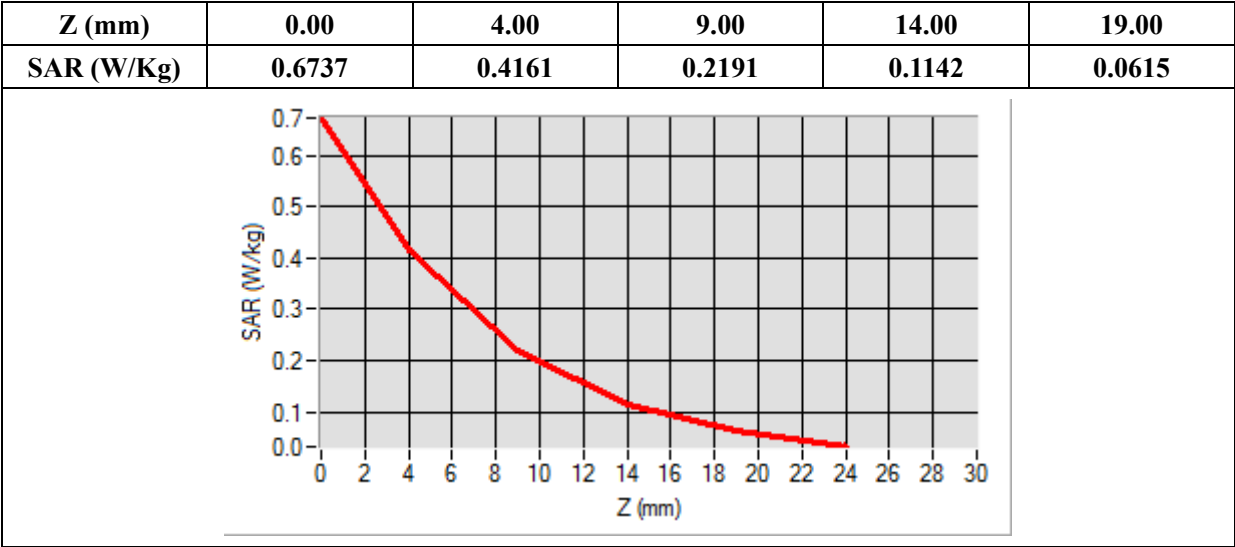

MEASUREMENT 357


Type: Phone measurement (Complete)
Date of measurement: 2020-10-24
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	LTE Band 66
Channels	QPSK, 20MHz, 1RB, Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	1720.00000
Relative Permittivity (real part)	51.224510
Conductivity (S/m)	1.461261
Power Variation (%)	0.858383
Ambient Temperature	21.1
Liquid Temperature	21.2

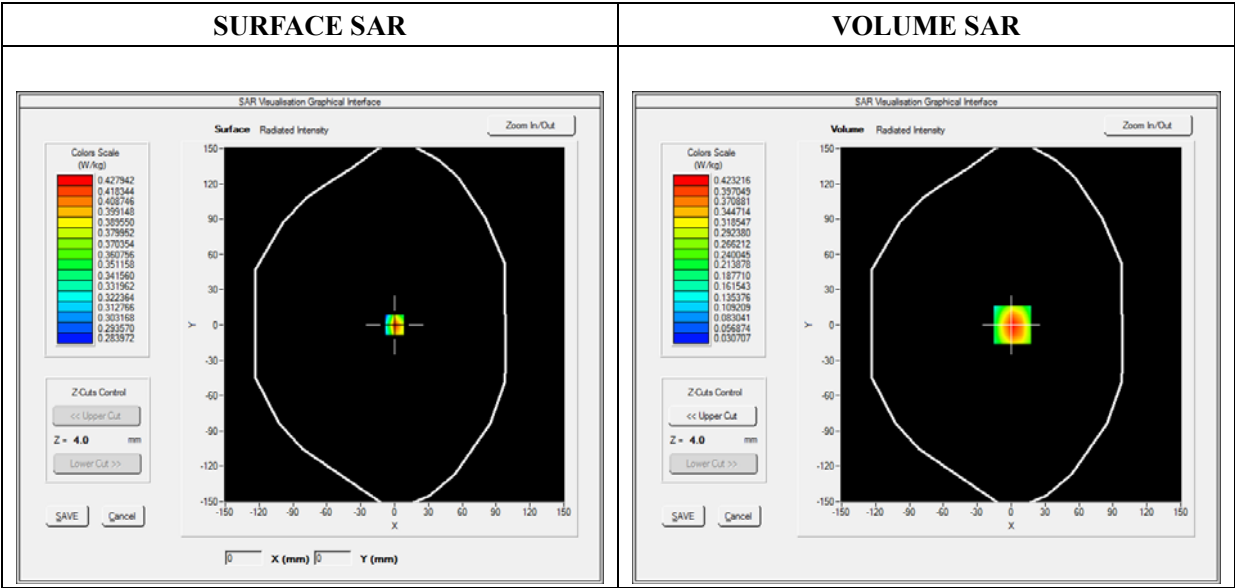

Maximum location: X=1.00, Y=0.00

SAR Peak: 0.62 W/kg

SAR 10g (W/Kg)	0.230692
SAR 1g (W/Kg)	0.397689

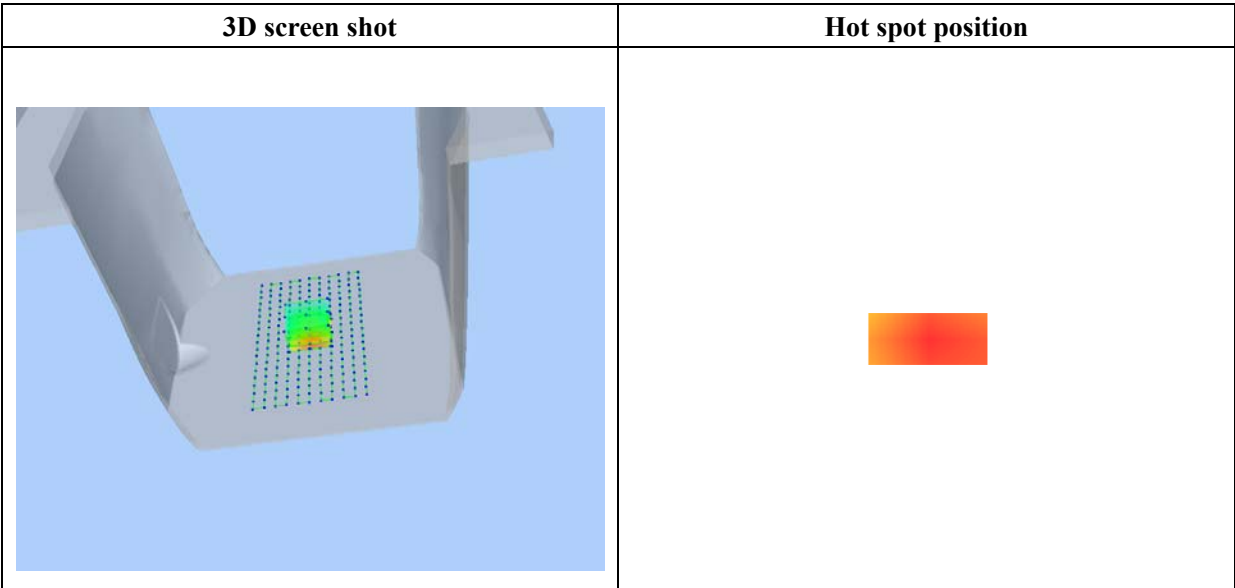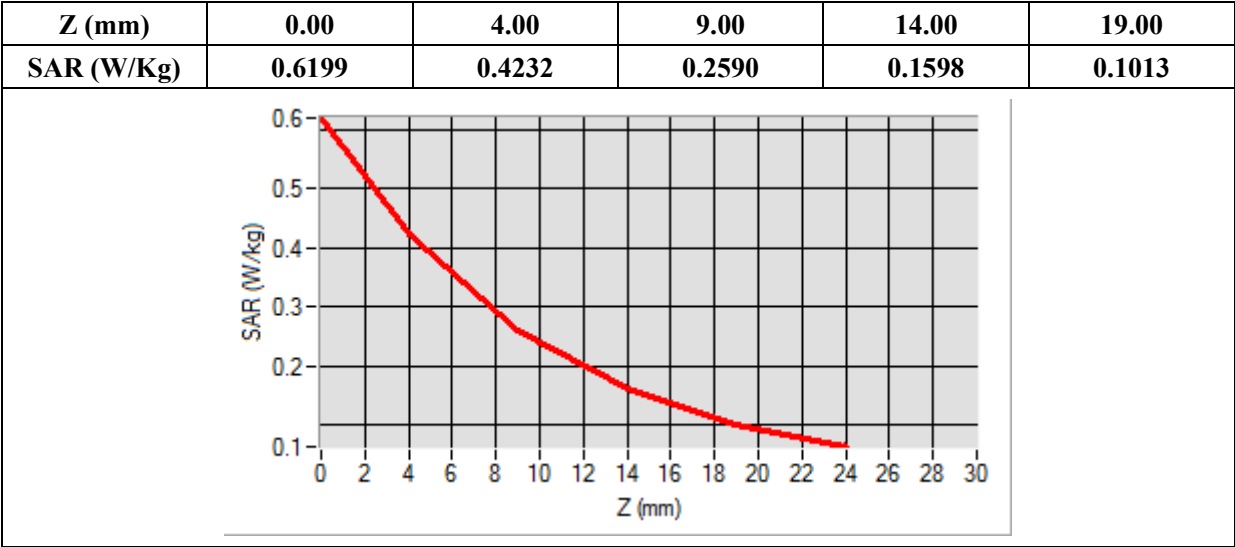

MEASUREMENT 363


Type: Phone measurement (Complete)
Date of measurement: 2020-10-26
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle 1:1

B. SAR Measurement Results



Frequency (MHz)	2412.000000
Relative Permittivity (real part)	52.010212
Conductivity (S/m)	1.910255
Power Variation (%)	2.492743
Ambient Temperature	21.1
Liquid Temperature	21.2

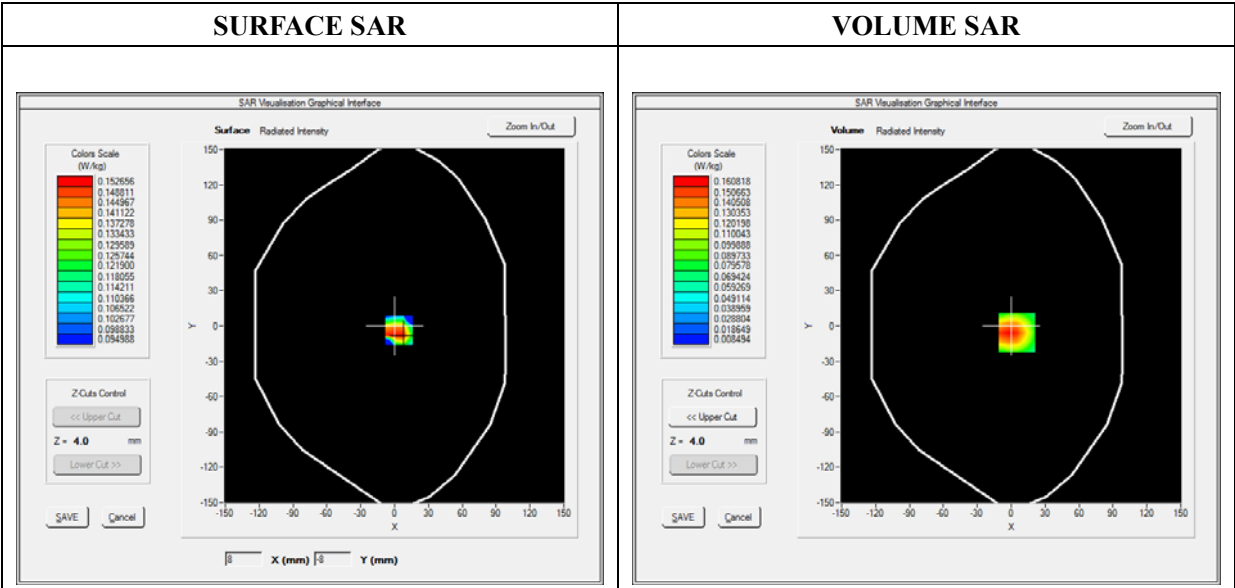

Maximum location: X=5.00, Y=-6.00

SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.083235
SAR 1g (W/Kg)	0.152474

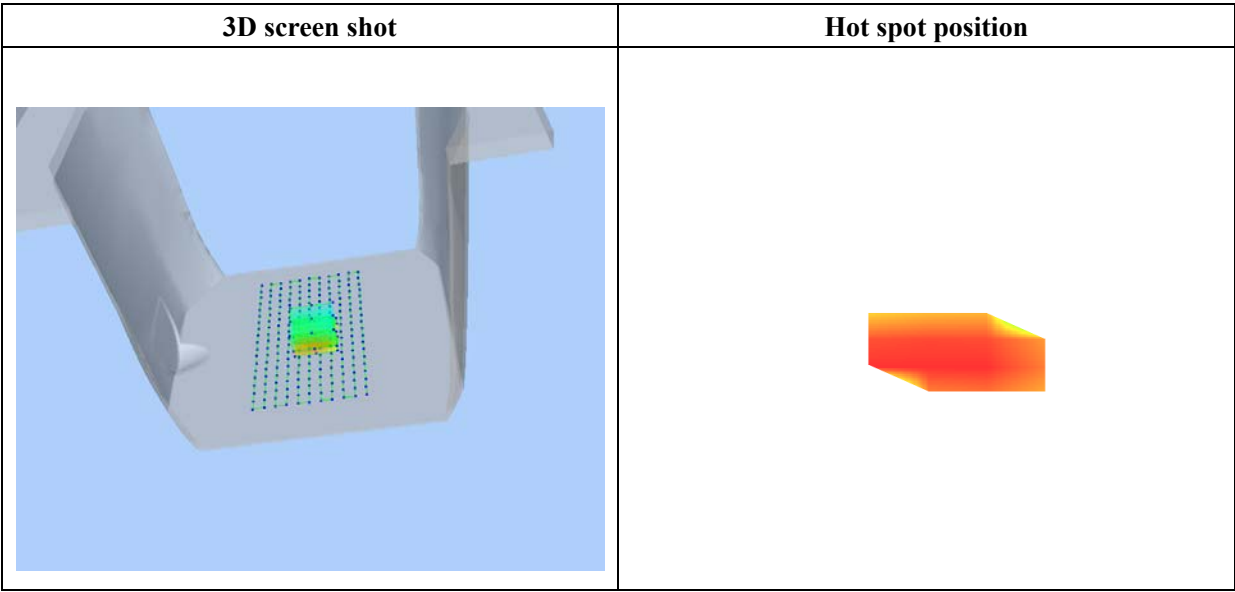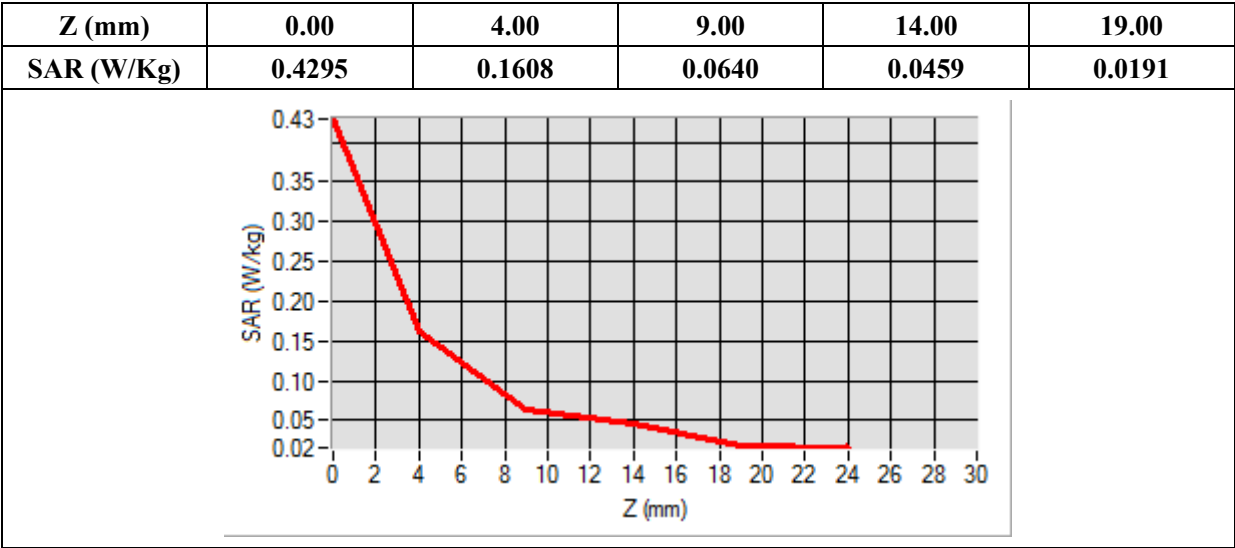

MEASUREMENT 207/367

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.2GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5180.000000
Relative Permittivity (real part)	35.612911
Conductivity (S/m)	4.871483
Power Variation (%)	0.542660
Ambient Temperature	22.0
Liquid Temperature	22.3

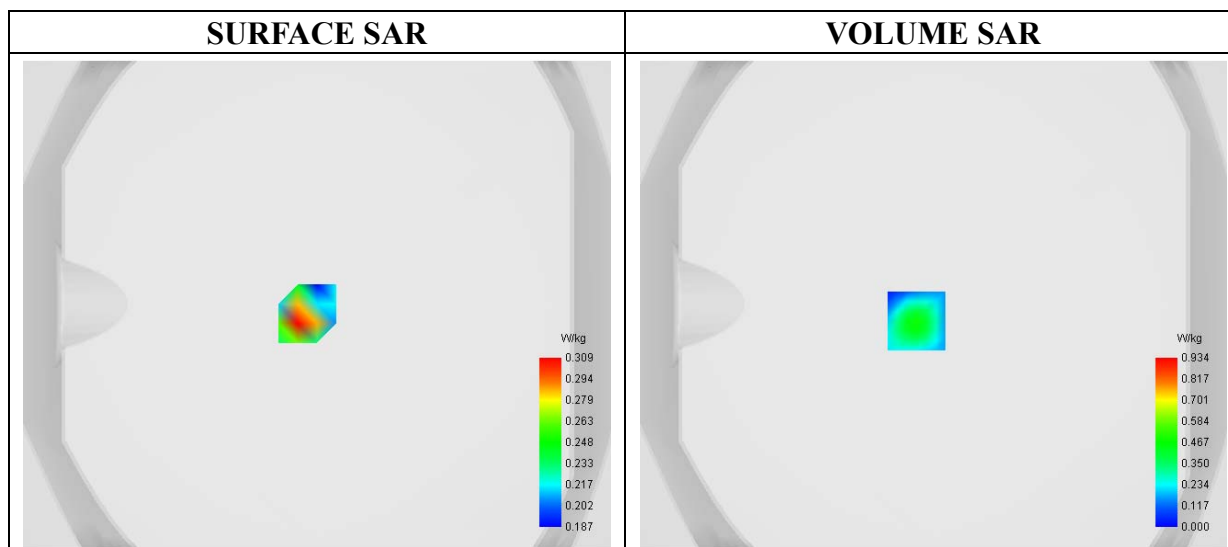

Maximum location: X=-7.00, Y=-7.00

SAR 10g (W/Kg)	0.156608
SAR 1g (W/Kg)	0.424230

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	1.1067	0.4822	0.0810	0.0000	0.1698	0.2175	0.0594	0.4251	0.2968

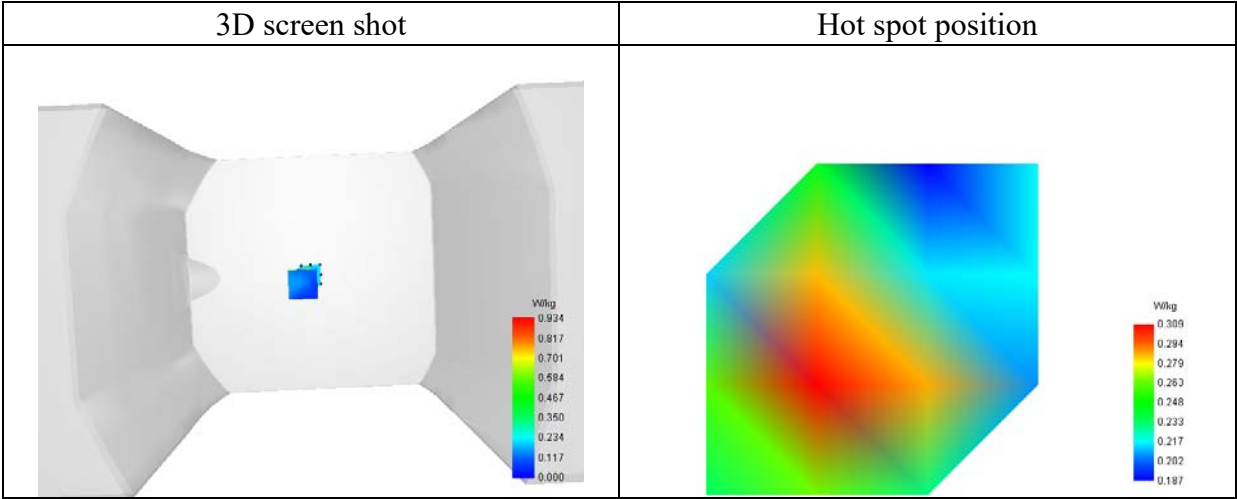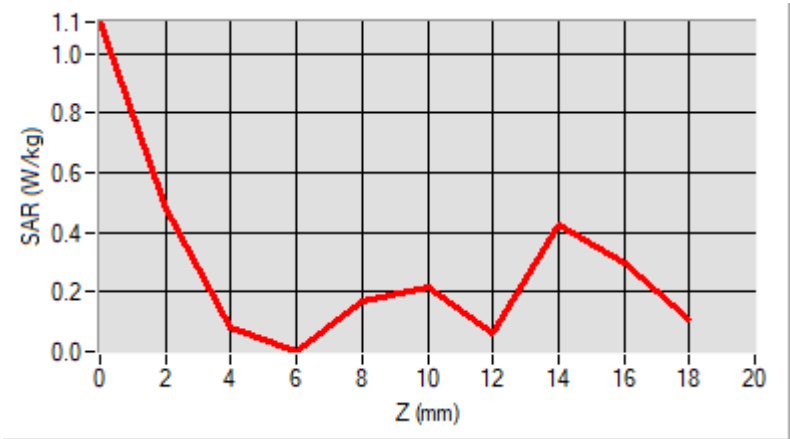

MEASUREMENT 371

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi(5.3GHz)_802.11 n (HT20)
Channels	High
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5320.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	4.740192
Power Variation (%)	0.463782
Ambient Temperature	22.0
Liquid Temperature	22.3

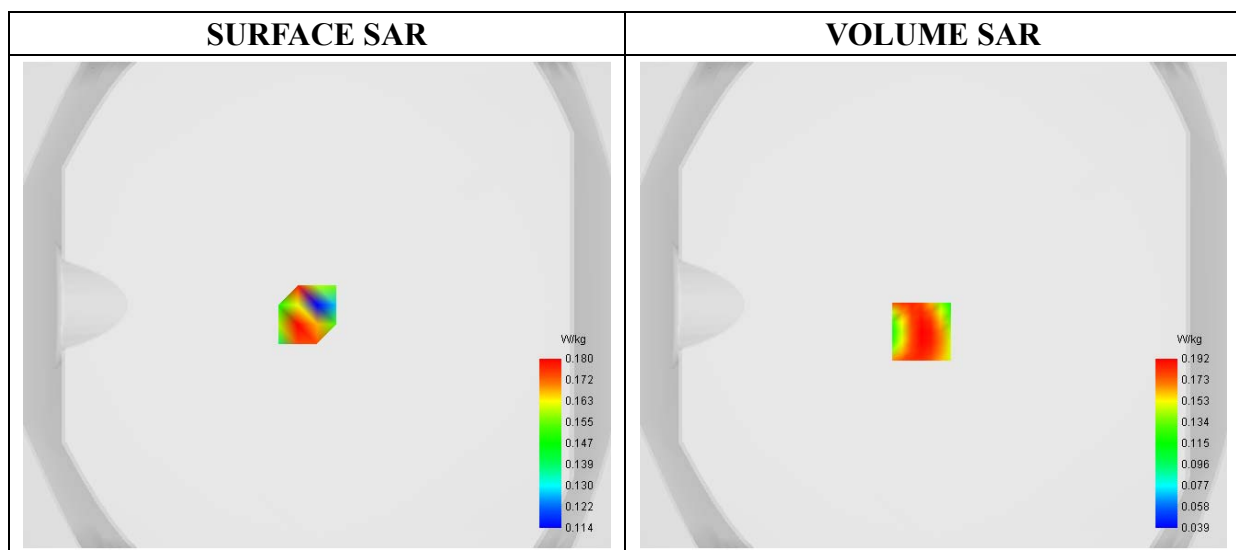

Maximum location: X=-5.00, Y=-11.00

SAR 10g (W/Kg)	0.138551
SAR 1g (W/Kg)	0.191207

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.2212	0.1917	0.1674	0.1474	0.1312	0.1179	0.1069	0.0976	0.0893

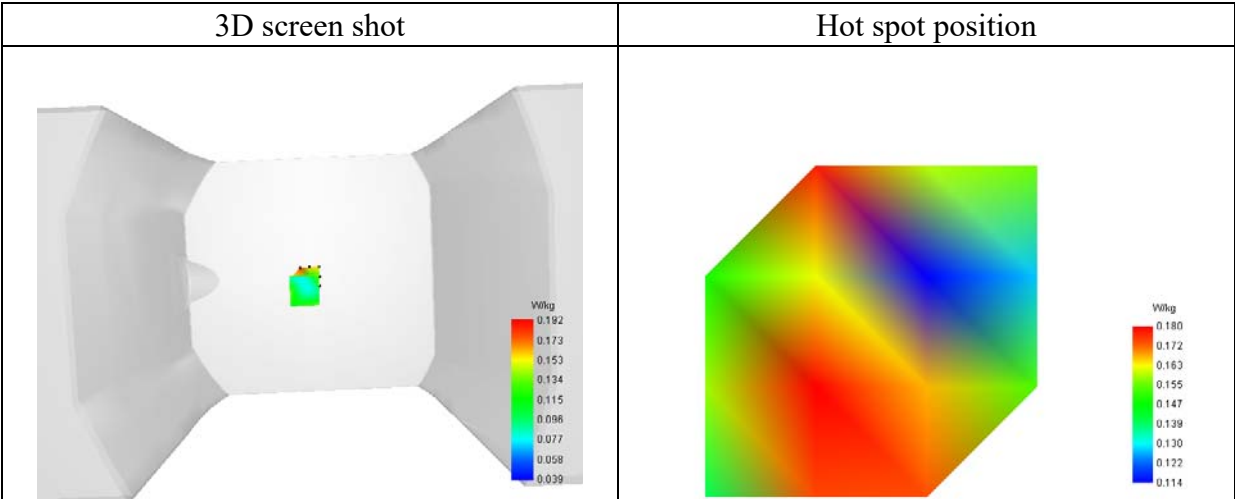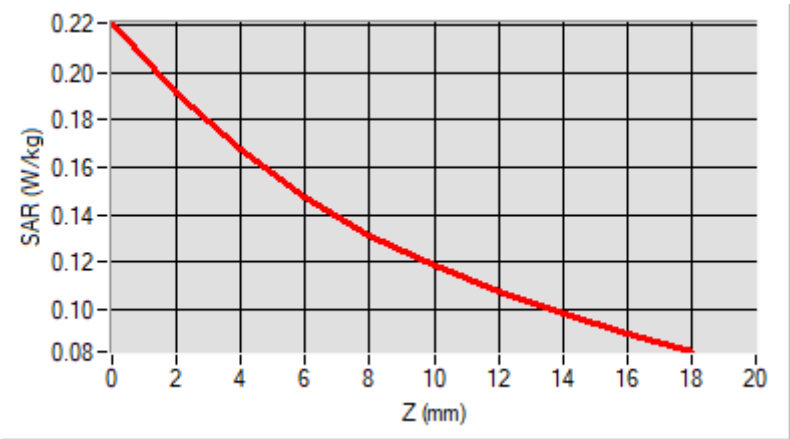

MEASUREMENT 377


Type: Phone measurement (Complete)
Date of measurement: 2020-10-13
Measurement duration: 12 minutes 3 seconds
E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right
Band	WiFi(5.6GHz)_802.11 n (HT40)
Channels	Middle
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5590.000000
Relative Permittivity (real part)	35.301254
Conductivity (S/m)	5.210512
Power Variation (%)	0.848732
Ambient Temperature	22.0
Liquid Temperature	22.3

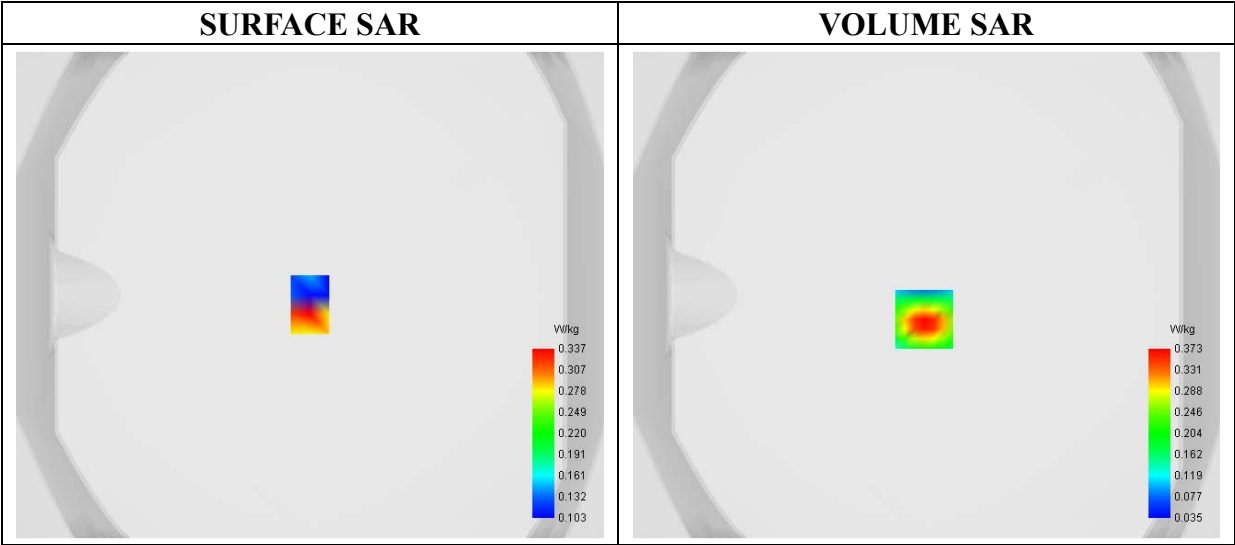

Maximum location: X=-1.00, Y=-10.00

SAR 10g (W/Kg)	0.131580
SAR 1g (W/Kg)	0.255390

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.6598	0.3731	0.1975	0.1043	0.0620	0.0461	0.0451	0.0546	0.0733

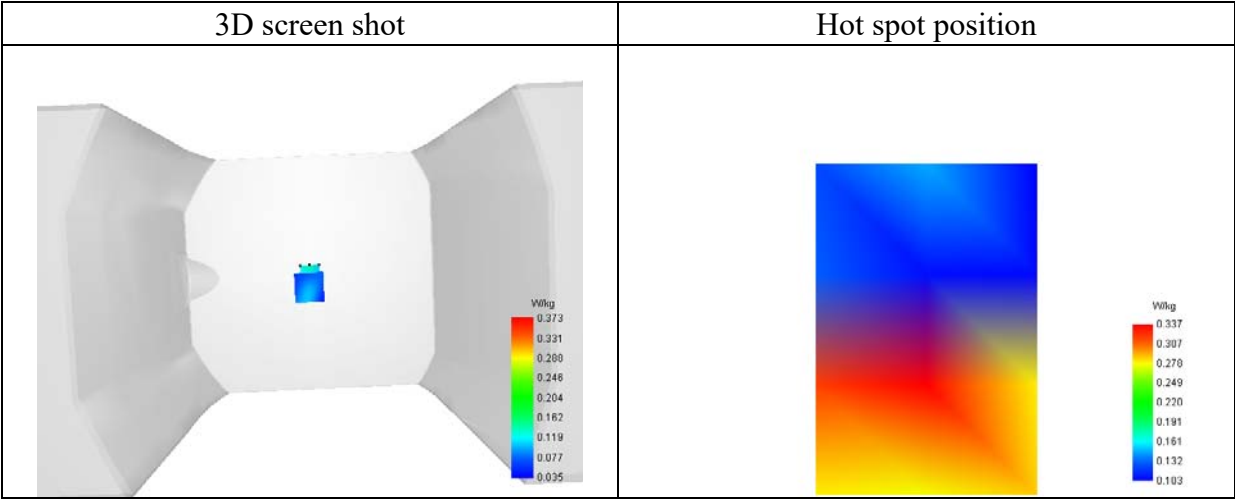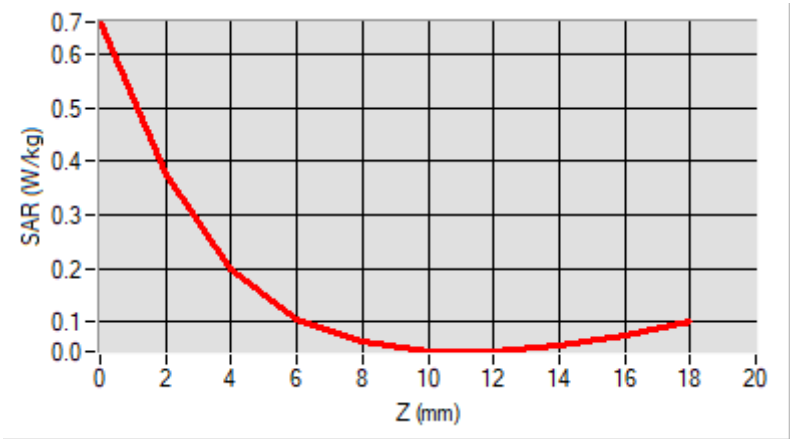

MEASUREMENT 381

Type: Phone measurement (Complete)

Date of measurement: 2020-10-13

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE2 - SN 45/15 EPGO280; ConvF: Refer to the Calibration Certificate; Calibrated: 2020-07-03

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right
Band	WiFi(5.8GHz)_802.11a
Channels	Low
Signal	Duty Cycle: 1:1

B. SAR Measurement Results



Frequency (MHz)	5745.000000
Relative Permittivity (real part)	35.620839
Conductivity (S/m)	35.301254
Power Variation (%)	5.210512
Ambient Temperature	22.0
Liquid Temperature	22.3

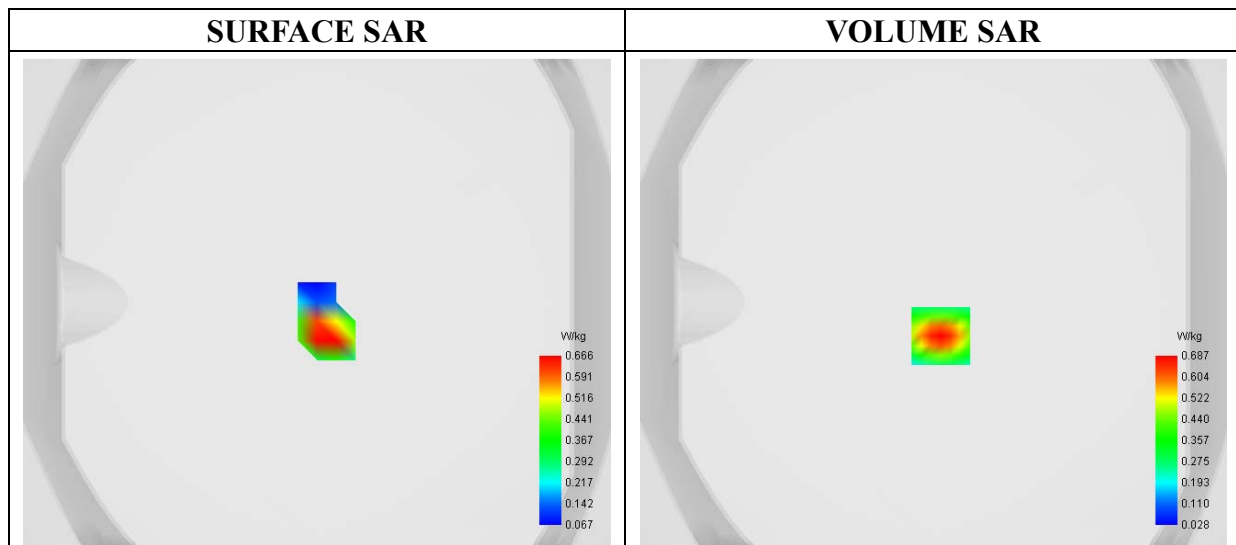

Maximum location: X=3.00, Y=-14.00

SAR 10g (W/Kg)	0.235950
SAR 1g (W/Kg)	0.491043

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00
SAR (W/Kg)	0.9531	0.6868	0.4963	0.3624	0.2729	0.2134	0.1737	0.1468	0.1275

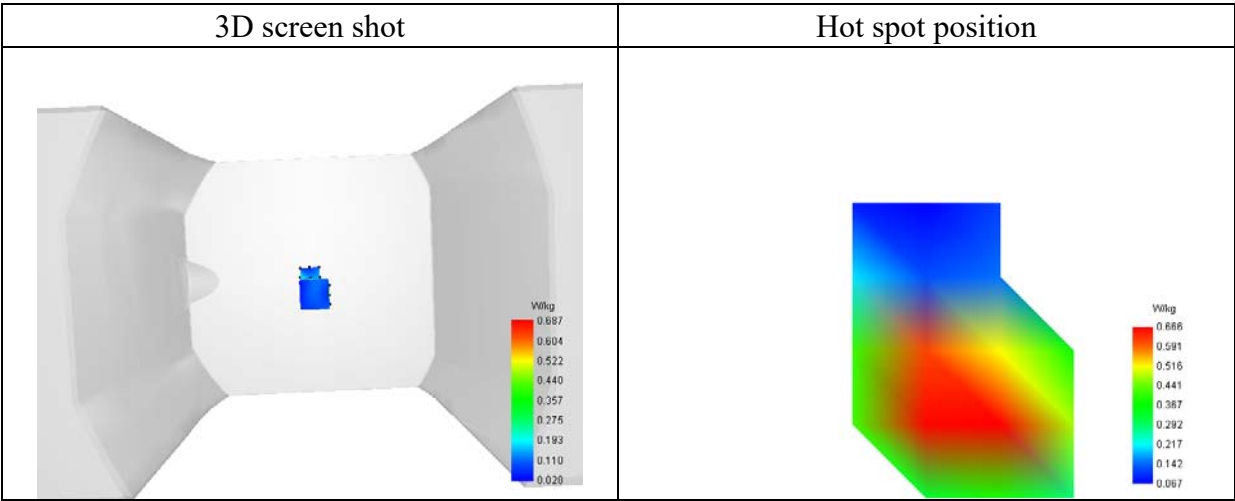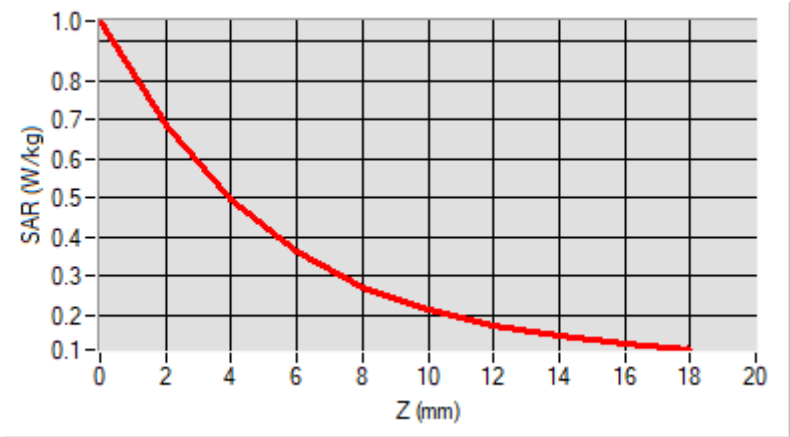


Annex C. EUT Photos

EUT View Front



EUT View Back

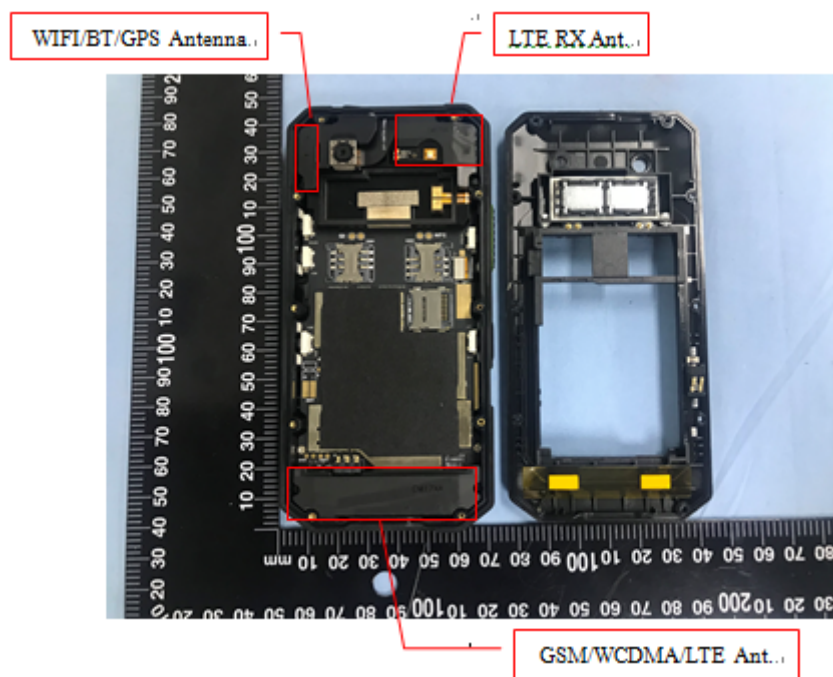


Antenna View

Annex D. Test Setup Photos

Head Exposure Conditions


Right Cheek

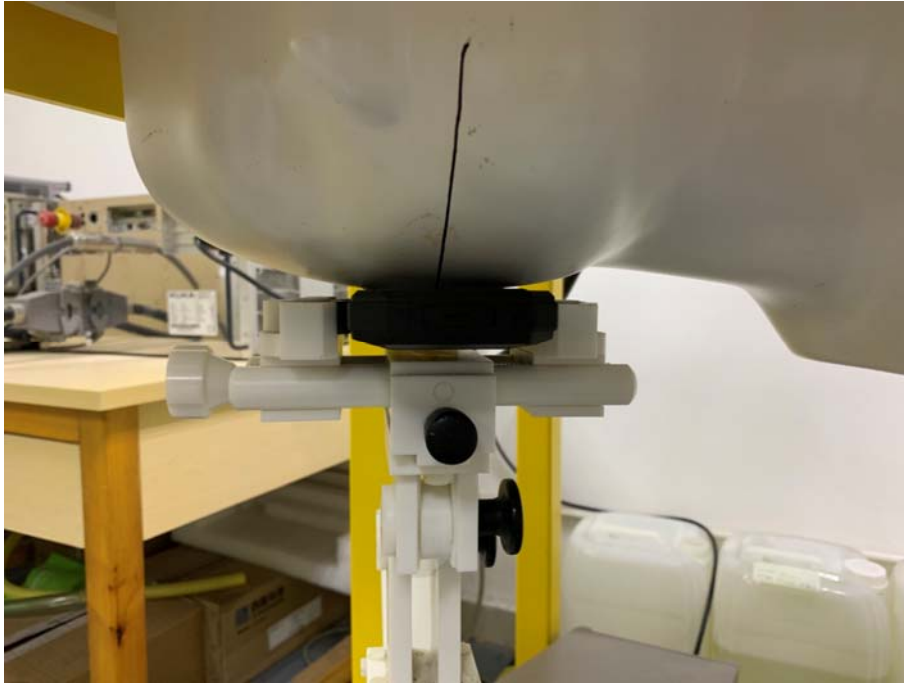

Right Tilt



Left Cheek

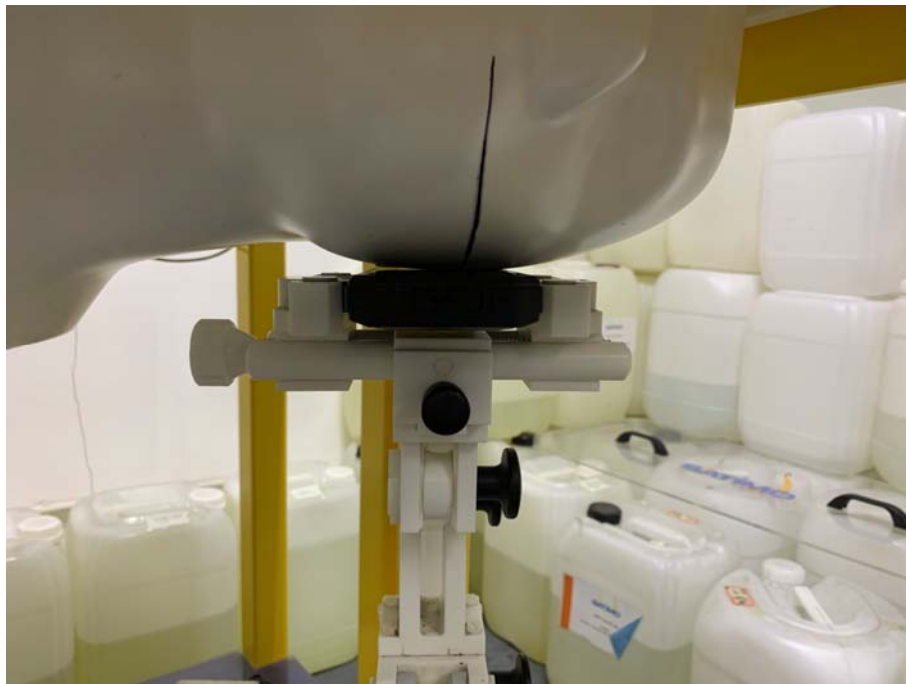

Left Tilt



Body mode Exposure Conditions


Body Front




Body Back




Body Right

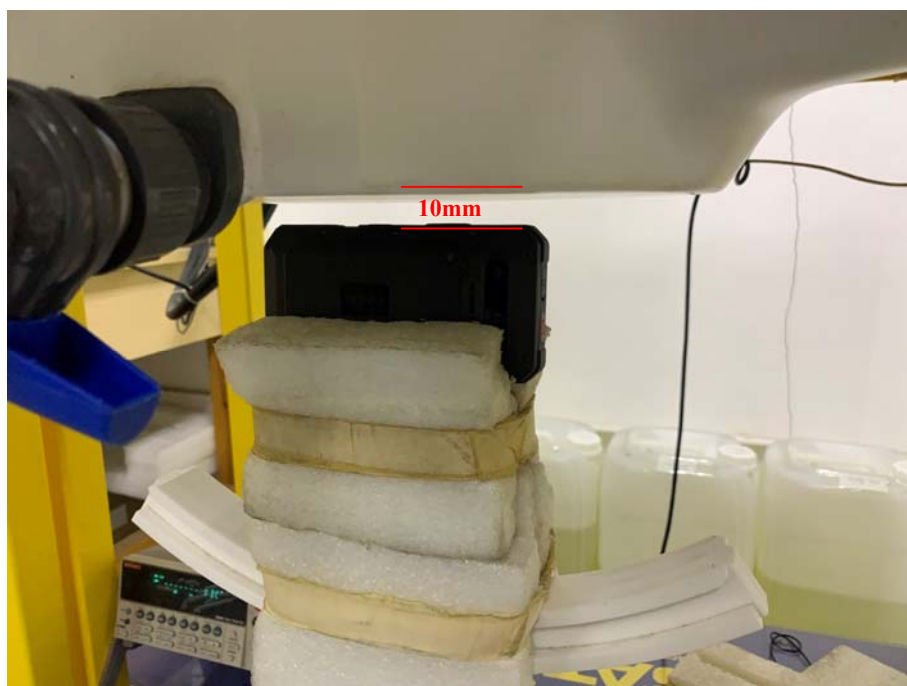


Body Left

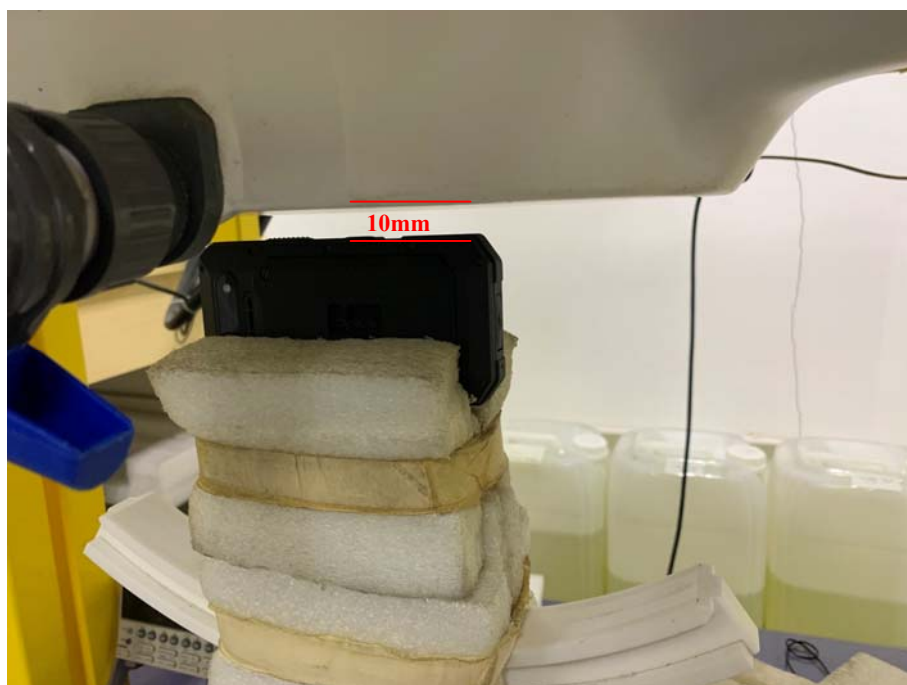

Body Top

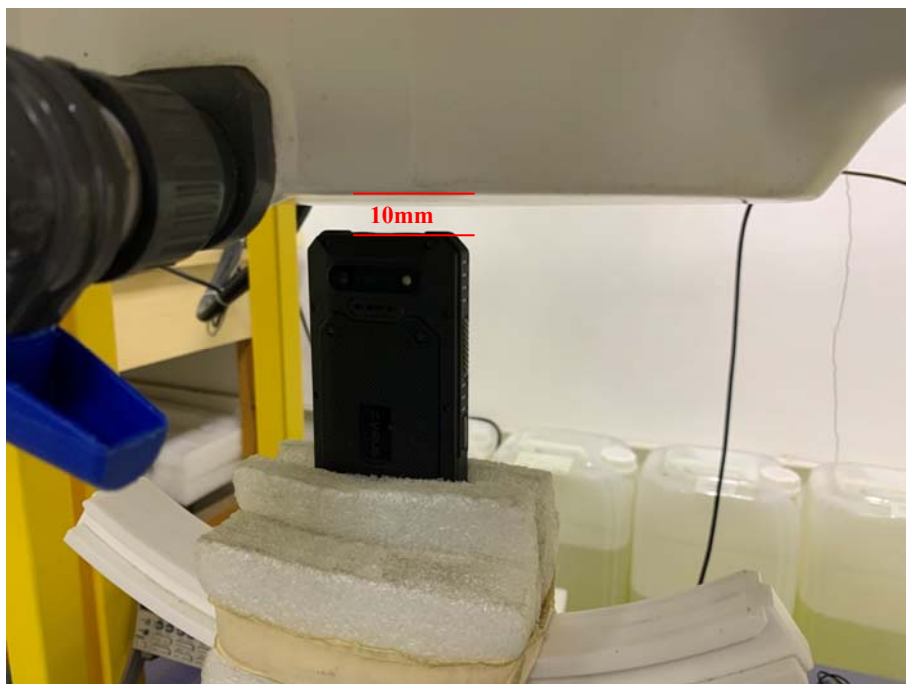

Body Bottom

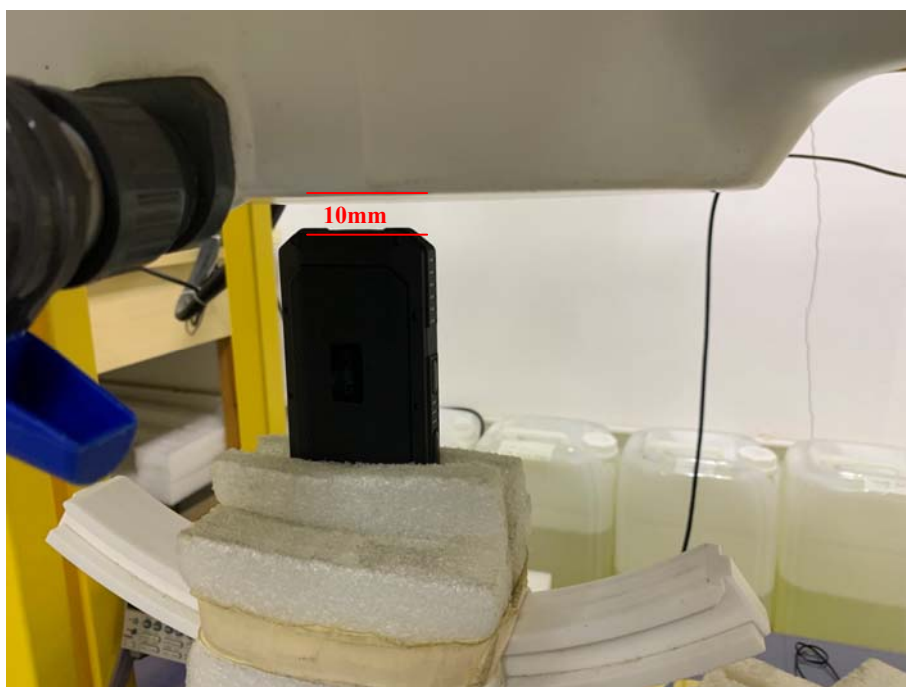

Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******