

TEST REPORT

Applicant: LLW Enterprise LLC

Address of Applicant: 15486 N Nebraska Ave, Lutz, Florida 33549, United States

Manufacturer/Factory: Shenzhen Publise Technology Co., Ltd.

Address of Manufacturer/Factory: Building 7, Tianliao First Industrial Zone, Yutang Street, Guangming District, Shenzhen, Guangdong, 518132, China

Equipment Under Test (EUT)

Product Name: GU4 RF Bulb

Model No.: GU4-20-RGBCW1-R1, ZGU4-20-RGBCWX-R#
(where "Z" can be any characters or blank for commercial purpose; "X" can be any alphanumeric characters for internal code; "-R#" can be blank or "#" can be any alphanumeric character representing the revision No.)

Trade Mark: 

FCC ID: 2A14G-GU4-RF

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249

Date of sample receipt: July 14, 2025

Date of Test: July 14, 2025-November 13, 2025

Date of report issued: November 14, 2025

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:


Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	November 14, 2025	Original

Tested By:



Date:

November 14, 2025

Test Engineer

Prepared By:




Date:

November 14, 2025

Project Engineer

Check By:



Date:

November 14, 2025

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 DESCRIPTION OF SUPPORT UNITS	6
5.4 DEVIATION FROM STANDARDS	6
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.6 TEST FACILITY	6
5.7 TEST LOCATION	6
5.8 ADDITIONAL INSTRUCTIONS	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD	13
7.3.1 Field Strength of The Fundamental Signal	15
7.3.2 Spurious emissions	16
7.3.3 Bandedge emissions	24
7.4 20dB OCCUPY BANDWIDTH	28
8 TEST SETUP PHOTO	30
9 EUT CONSTRUCTIONAL DETAILS	30

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Remarks:

1. Test according to ANSI C63.10:2020.
2. Pass: The EUT complies with the essential requirements in the standard.
3. N/A: not applicable

4.1 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power	$\pm 0.75\text{dB}$
5	RF power density	$\pm 3\text{dB}$
6	Conducted Spurious emissions	$\pm 2.58\text{dB}$
7	AC Power Line Conducted Emission	$\pm 3.44\text{dB}$ (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	$\pm 3.1\text{dB}$ (9kHz-30MHz)
		$\pm 3.8039\text{dB}$ (30MHz-200MHz)
		$\pm 3.9679\text{dB}$ (200MHz-1GHz)
		$\pm 4.29\text{dB}$ (1GHz-18GHz)
		$\pm 3.30\text{dB}$ (18GHz-40GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Time	$\pm 3\%$

5 General Information

5.1 General Description of EUT

Product Name:	GU4 RF Bulb
Model No.:	GU4-20-RGBCW1-R1, ZGU4-20-RGBCWX-R# (where "Z" can be any characters or blank for commercial purpose; "X" can be any alphanumeric characters for internal code; "-R#" can be blank or "#" can be any alphanumeric character representing the revision No.)
Test Model No.:	GU4-20-RGBCW1-R1
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color, power and model name for commercial purpose.	
Test sample(s) ID:	GTS2025070224-1
Sample(s) Status	Engineered sample
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	3
Modulation Type:	GFSK
Antenna Type:	Wire Antenna
Antenna gain:	0.58dBi
Power supply:	AC 11-16V, 0.4A, 3.5W

Disclaimer statement:

1. Antenna gain information provided by the customer, and the laboratory is not responsible for its authenticity.
2. The information in this section is provided by the applicant or manufacturer, GTS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

The test frequencies are below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report (Only show the worst case:Y axis) and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	73.89	74.50	74.23

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Orientronic Manufacturing Ltd.	AC power supply	N/A	N/A
Shenzhen Publise Technology Co., Ltd.	Remote control	N/A	N/A

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● ISED—Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).
--

5.7 Test Location

All tests were performed at: Global United Technology Services Co., Ltd. Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.8 Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Apr. 11, 2025	Apr. 10, 2026
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Apr. 12, 2025	Apr. 11, 2026
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	Apr. 12, 2025	Apr. 11, 2026
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	Jul. 01, 2025	Jun. 30, 2026
7	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov.16, 2024	Nov.15, 2025
8	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	Apr. 11, 2025	Apr. 10, 2026
9	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	Apr. 11, 2025	Apr. 10, 2026
10	Horn Antenna (18GH-40GHz)	Schwarzbeck	BBHA 9170	GTS691	Apr. 11, 2025	Apr. 10, 2026
11	FSV·Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	Mar. 11, 2025	Mar. 10, 2026
12	Amplifier	/	LNA-1000-30S	GTS650	Apr. 11, 2025	Apr. 10, 2026
13	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 13, 2024	Nov. 12, 2025
14	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	Apr. 11, 2025	Apr. 10, 2026
15	Thermo meter	JINCHUANG	GSP-8A	GTS643	Apr. 15, 2025	Apr. 14, 2026
16	RE cable 1	GTS	N/A	GTS675	Jul. 11, 2025	Jul. 10, 2026
17	RE cable 2	GTS	N/A	GTS676	Jul. 11, 2025	Jul. 10, 2026
18	RE cable 3	GTS	N/A	GTS677	Jul. 11, 2025	Jul. 10, 2026
19	RE cable 4	GTS	N/A	GTS678	Jul. 11, 2025	Jul. 10, 2026
20	RE cable 5	GTS	N/A	GTS679	Jul. 11, 2025	Jul. 10, 2026
21	RE cable 6	GTS	N/A	GTS680	Jul. 11, 2025	Jul. 10, 2026
22	RE cable 7	GTS	N/A	GTS681	Jul. 11, 2025	Jul. 10, 2026
23	RE cable 8	GTS	N/A	GTS682	Jul. 11, 2025	Jul. 10, 2026
24	EMI Test Software	AUDIX	E3-6.100614a	GTS725	N/A	N/A

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	Jul. 12, 2022	Jul. 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	Apr. 11, 2025	Apr. 10, 2026
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	Thermo meter	JINCHUANG	GSP-8A	GTS642	Apr. 15, 2025	Apr. 14, 2026
6	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	Apr. 12, 2025	Apr. 11, 2026
7	ISN	SCHWARZBECK	NTFM 8158	GTS565	Apr. 11, 2025	Apr. 10, 2026
8	High voltage probe	SCHWARZBECK	TK9420	GTS537	Apr. 11, 2025	Apr. 10, 2026
9	Antenna end assembly	Weinschel	1870A	GTS560	Apr. 11, 2025	Apr. 10, 2026
10	EMI Test Software	AUDIX	E3-6.100622	GTS726	N/A	N/A
11	Current probe	CYBERTEK	EM5011	GTS698	Jan. 13, 2025	Jan. 12, 2026

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	Apr. 11, 2025	Apr. 10, 2026
2	EMI Test Receiver	R&S	ESCI 7	GTS552	Apr. 12, 2025	Apr. 11, 2026
3	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	Apr. 11, 2025	Apr. 10, 2026
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	Apr. 11, 2025	Apr. 10, 2026
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	Apr. 11, 2025	Apr. 10, 2026
6	Wideband Power Meter	Keysight	N1924A	GTS673	Apr. 11, 2025	Apr. 10, 2026
7	USB RF Power Sensor	DARE	RPR3006W	GTS569	Apr. 11, 2025	Apr. 10, 2026
8	RF Switch Box	Shongyi	RFSW3003328	GTS571	Apr. 11, 2025	Apr. 10, 2026
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	Apr. 11, 2025	Apr. 10, 2026
10	Thermo meter	JINCHUANG	GSP-8A	GTS641	Apr. 15, 2025	Apr. 14, 2026

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	Jul. 16, 2025	Jul. 15, 2026

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
The antenna is Integral antenna, reference to the appendix II for details.	


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																			
Test Method:	ANSI C63.10:2020																			
Test Frequency Range:	150KHz to 30MHz																			
Class / Severity:	Class B																			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																			
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.						Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																			
	Quasi-peak	Average																		
0.15-0.5	66 to 56*	56 to 46*																		
0.5-5	56	46																		
5-30	60	50																		
Test setup:	Reference Plane <i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m																			
Test procedure:	1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2020 on conducted measurement.																			
Test Instruments:	Refer to section 6.0 for details																			
Test mode:	Refer to section 5.2 for details																			
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar														
Test voltage:	AC 120V 60Hz																			
Test results:	Pass																			

Measurement data

Pre-scan all test modes, found worst case at 2440MHz, and so only show the test result of it.

Line:

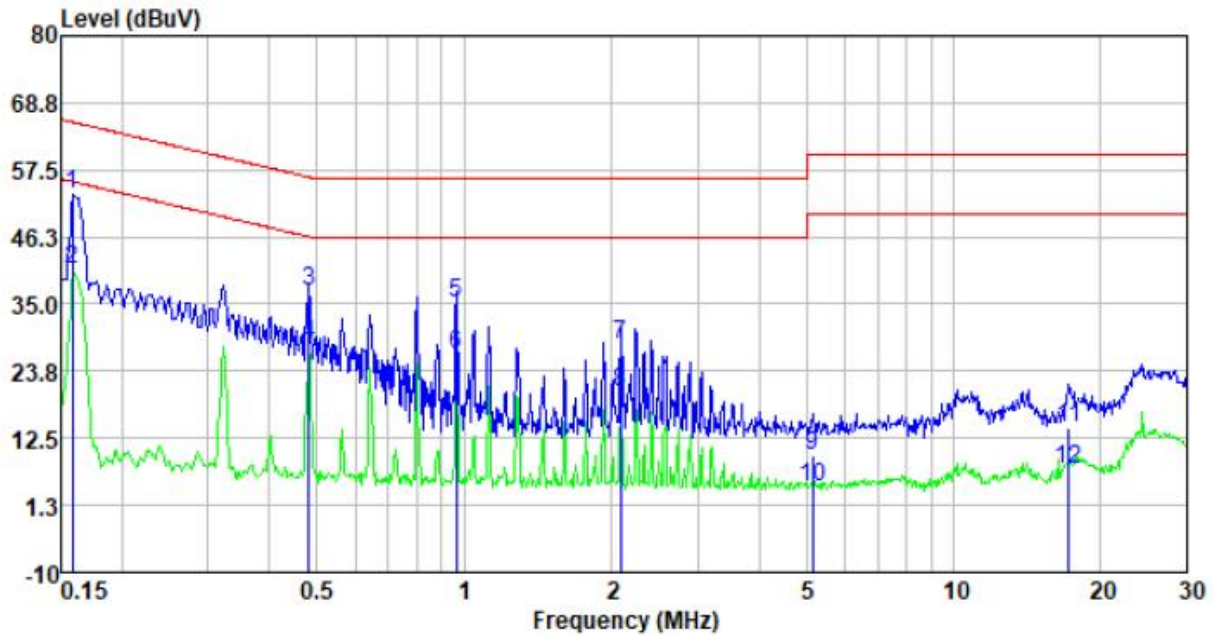


Freq	Reading level	Correct Factor	Final level	Limit level	Over limit	Remark
MHz	dBuV	dB	dBuV	level	dBuV	
0.16	33.88	19.60	53.48	65.56	-12.08	QP
0.16	21.18	19.60	40.78	55.56	-14.78	Average
0.48	17.39	19.60	36.99	56.32	-19.33	QP
0.48	8.48	19.60	28.08	46.32	-18.24	Average
0.96	15.49	19.62	35.11	56.00	-20.89	QP
0.96	6.84	19.62	26.46	46.00	-19.54	Average
2.09	8.54	19.66	28.20	56.00	-27.80	QP
2.09	0.51	19.66	20.17	46.00	-25.83	Average
5.14	-10.12	19.68	9.56	60.00	-50.44	QP
5.14	-15.37	19.68	4.31	50.00	-45.69	Average
17.20	-5.71	19.87	14.16	60.00	-45.84	QP
17.20	-12.55	19.87	7.32	50.00	-42.68	Average

Note: Correct Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

Final level (dBuV) = Reading level (dBuV) + Correct Factor (dB)

Neutral:

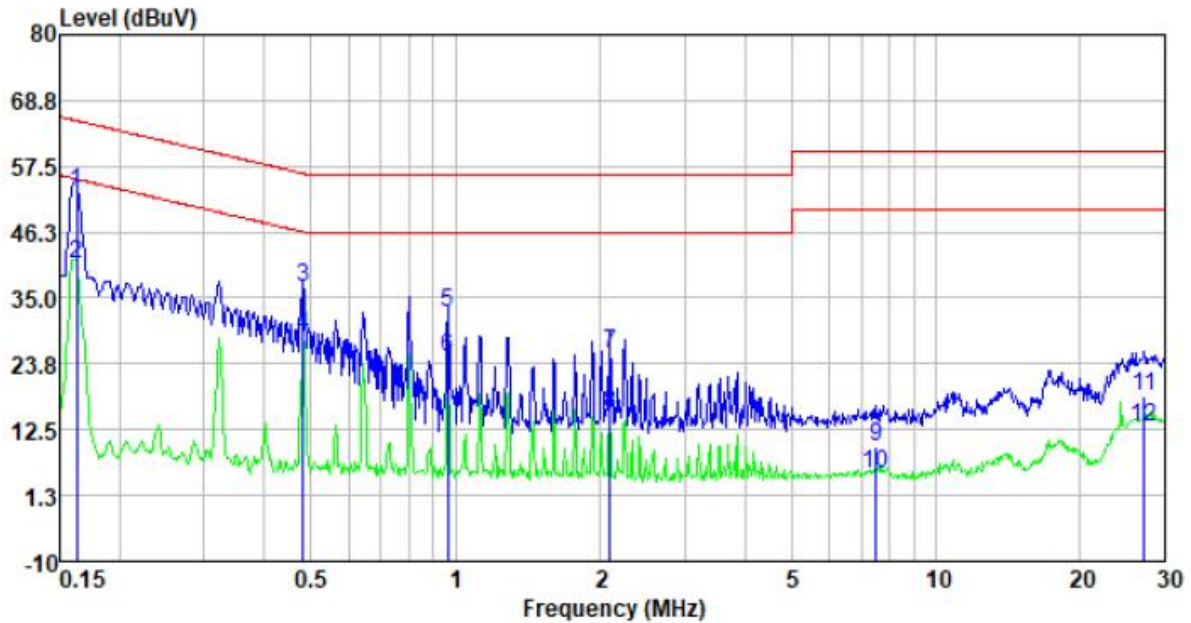

Freq	Reading level	Correct Factor	Final level	Limit level	Over limit	Remark
MHz	dBuV	dB	dBuV	level	dBuV	
0.16	33.65	19.60	53.25	65.34	-12.09	QP
0.16	21.12	19.60	40.72	55.34	-14.62	Average
0.48	17.24	19.60	36.84	56.32	-19.48	QP
0.48	8.83	19.60	28.43	46.32	-17.89	Average
0.96	12.89	19.62	32.51	56.00	-23.49	QP
0.96	5.35	19.62	24.97	46.00	-21.03	Average
2.10	5.86	19.66	25.52	56.00	-30.48	QP
2.10	-4.57	19.66	15.09	46.00	-30.91	Average
7.53	-10.28	19.72	9.44	60.00	-50.56	QP
7.53	-14.91	19.72	4.81	50.00	-45.19	Average
27.13	-2.09	20.24	18.15	60.00	-41.85	QP
27.13	-7.40	20.24	12.84	50.00	-37.16	Average


Note: Correct Factor (dB) = LISN Factor (dB) + Cable Loss (dB)


Final level (dBuV) = Reading level (dBuV) + Correct Factor (dB)

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

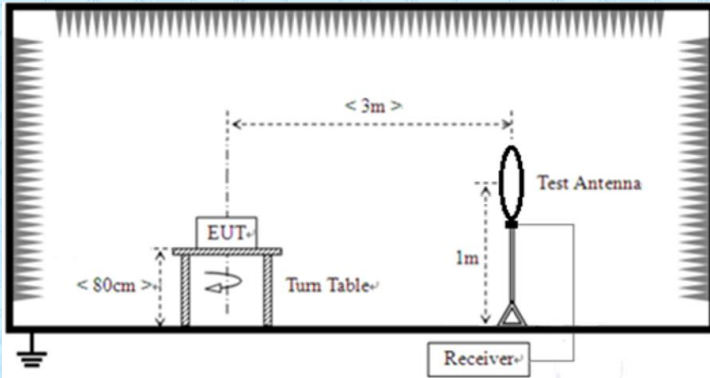Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz-150kHz	Quasi-peak	200Hz	300Hz	Quasi-peak Value
	150kHz-30MHz	Quasi-peak	9kHz	10kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
			114.00		Peak Value
Limit: (Spurious Emissions)	Frequency		Limit (uV/m)		Remark
	0.009MHz-0.490MHz		2400/F(kHz) @300m		Quasi-peak Value
	0.490MHz-1.705MHz		24000/F(kHz) @30m		Quasi-peak Value
	1.705MHz-30.0MHz		30 @30m		Quasi-peak Value
	30MHz-88MHz		100 @3m		Quasi-peak Value
	88MHz-216MHz		150 @3m		Quasi-peak Value
	216MHz-960MHz		200 @3m		Quasi-peak Value
	960MHz-1GHz		500 @3m		Quasi-peak Value
	Above 1GHz		500 @3m		Average Value
5000 @3m			Peak Value		
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to1GHz				

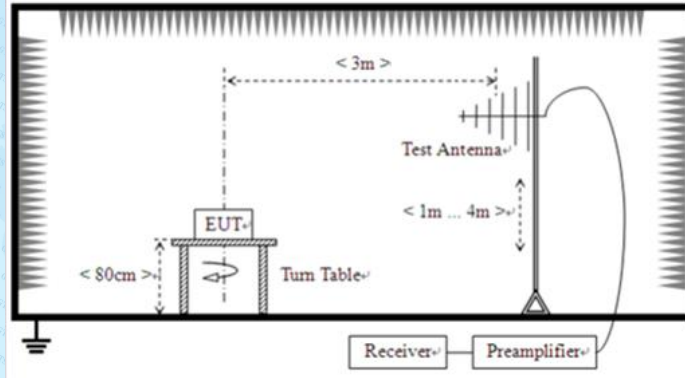

For radiated emissions above 1GHz

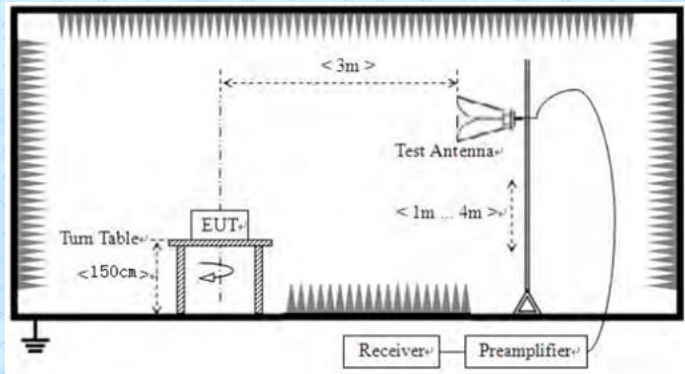

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test Instruments:

Refer to section 6.0 for details

Test mode:

Refer to section 5.2 for details

Test environment:

Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
--------	-------	---------	-----	---------	----------

Test voltage:

AC 120V 60Hz

Test results:

Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	80.32	27.14	4.16	39.40	72.22	114.00	-41.78	Vertical
2402.00	76.86	27.14	4.16	39.40	68.76	114.00	-45.24	Horizontal
2440.00	80.54	27.18	4.13	39.46	72.39	114.00	-41.61	Vertical
2440.00	82.65	27.18	4.13	39.46	74.50	114.00	-39.50	Horizontal
2480.00	78.14	27.22	4.11	39.51	69.96	114.00	-44.04	Vertical
2480.00	82.22	27.22	4.11	39.51	74.04	114.00	-39.96	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	69.29	27.14	4.16	39.40	61.19	94.00	-32.81	Vertical
2402.00	65.83	27.14	4.16	39.40	57.73	94.00	-36.27	Horizontal
2440.00	69.51	27.18	4.13	39.46	61.36	94.00	-32.64	Vertical
2440.00	71.62	27.18	4.13	39.46	63.47	94.00	-30.53	Horizontal
2480.00	67.11	27.22	4.11	39.51	58.93	94.00	-35.07	Vertical
2480.00	71.19	27.22	4.11	39.51	63.01	94.00	-30.99	Horizontal

Note: For fundamental frequency , RBW>20dB BW, VBW>=RBW, PK detector for PK value, RMS detector for AV value


7.3.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.


■ Below 1GHz

Pre-scan all test modes, found worst case at 2440MHz, and so only show the test result of it Horizontal

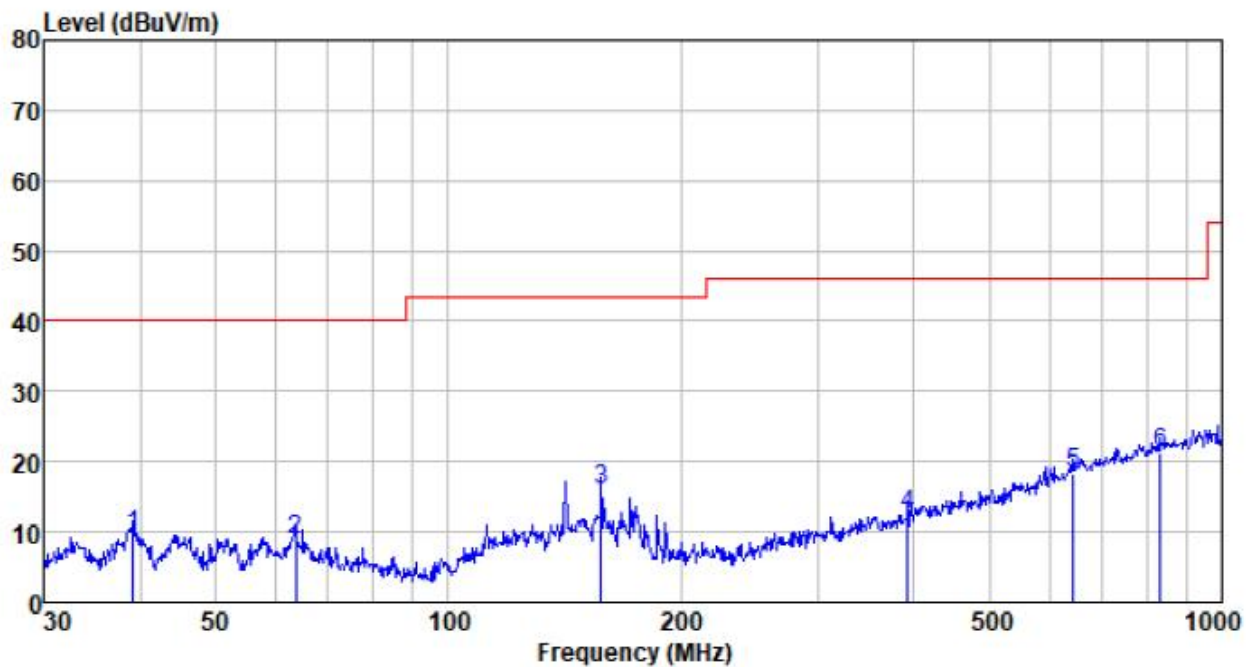

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Vertical

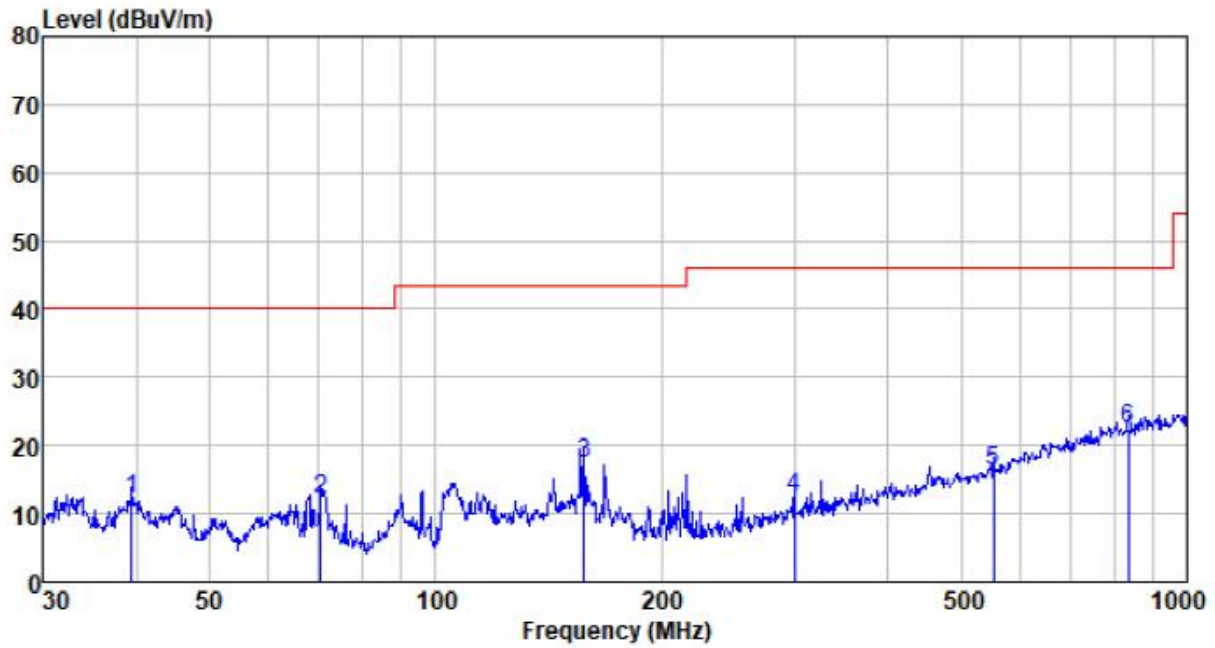


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.437	28.76	14.29	1.25	32.30	12.00	40.00	-28.00	QP
70.337	32.06	10.77	1.65	32.38	12.10	40.00	-27.90	QP
157.559	32.62	14.74	2.53	32.44	17.45	43.50	-26.05	QP
300.367	28.94	12.41	3.42	32.30	12.47	46.00	-33.53	QP
552.883	26.07	17.76	4.43	32.01	16.25	46.00	-29.75	QP
836.244	25.58	22.42	5.57	31.10	22.47	46.00	-23.53	QP

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

■ Above 1GHz


Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

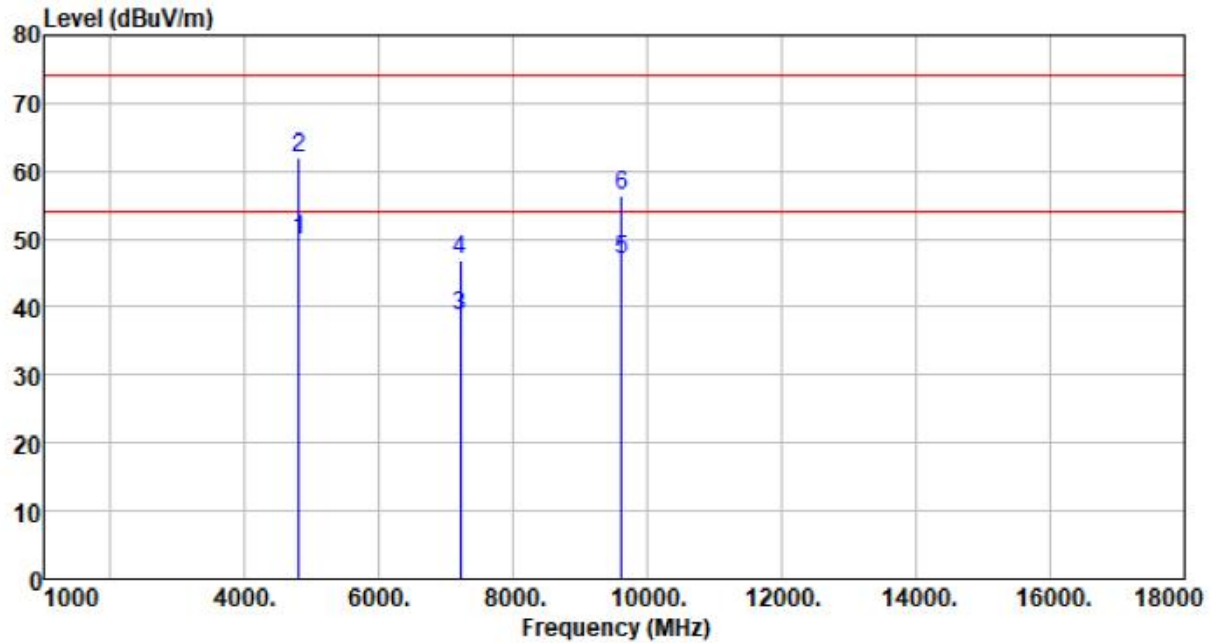

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	50.42	32.01	6.01	38.54	49.90	54.00	-4.10	Average
4804.000	62.45	32.01	6.01	38.54	61.93	74.00	-12.07	Peak
7206.000	33.78	36.21	7.92	39.14	38.77	54.00	-15.23	Average
7206.000	41.92	36.21	7.92	39.14	46.91	74.00	-27.09	Peak
9608.000	34.23	38.20	14.87	40.22	47.08	54.00	-6.92	Average
9608.000	43.47	38.20	14.87	40.22	56.32	74.00	-17.68	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor


Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

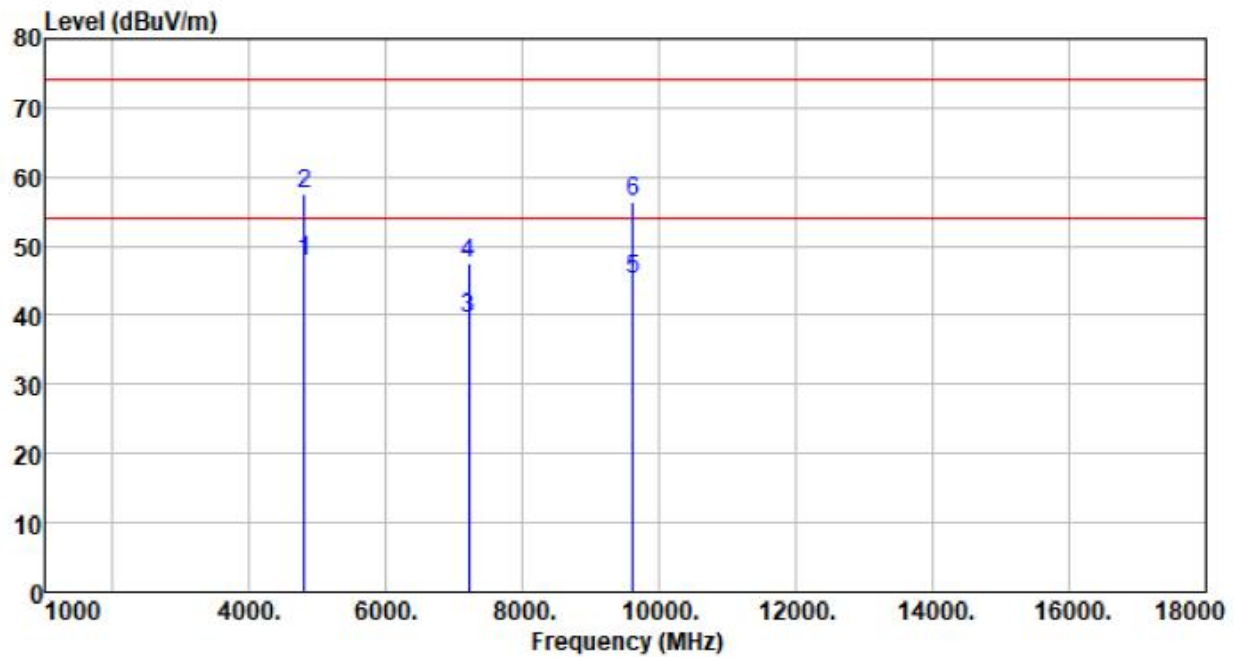

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4804.000	48.21	32.01	6.01	38.54	47.69	54.00	-6.31	Average
4804.000	58.04	32.01	6.01	38.54	57.52	74.00	-16.48	Peak
7206.000	34.68	36.21	7.92	39.14	39.67	54.00	-14.33	Average
7206.000	42.57	36.21	7.92	39.14	47.56	74.00	-26.44	Peak
9608.000	32.26	38.20	14.87	40.22	45.11	54.00	-8.89	Average
9608.000	43.40	38.20	14.87	40.22	56.25	74.00	-17.75	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor


Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

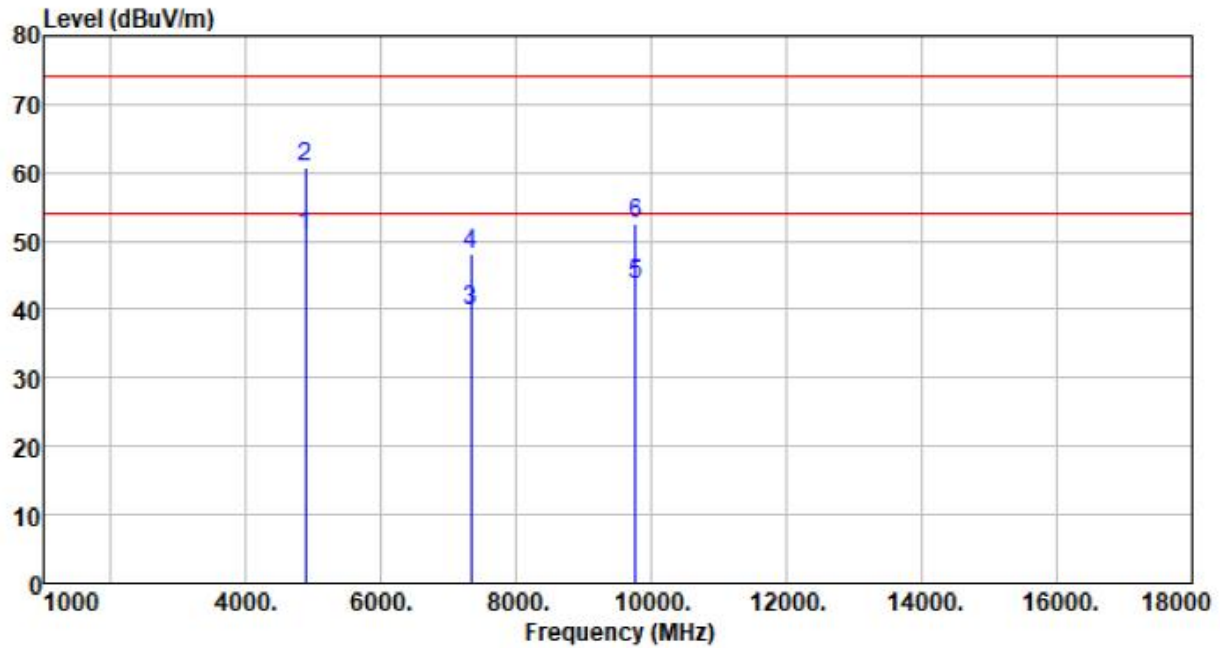

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	51.25	32.10	6.03	38.52	50.86	54.00	-3.14	Average
4880.000	61.34	32.10	6.03	38.52	60.95	74.00	-13.05	Peak
7320.000	34.71	36.30	8.04	39.22	39.83	54.00	-14.17	Average
7320.000	42.93	36.30	8.04	39.22	48.05	74.00	-25.95	Peak
9760.000	34.29	38.20	11.35	40.25	43.59	54.00	-10.41	Average
9760.000	43.15	38.20	11.35	40.25	52.45	74.00	-21.55	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor


Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

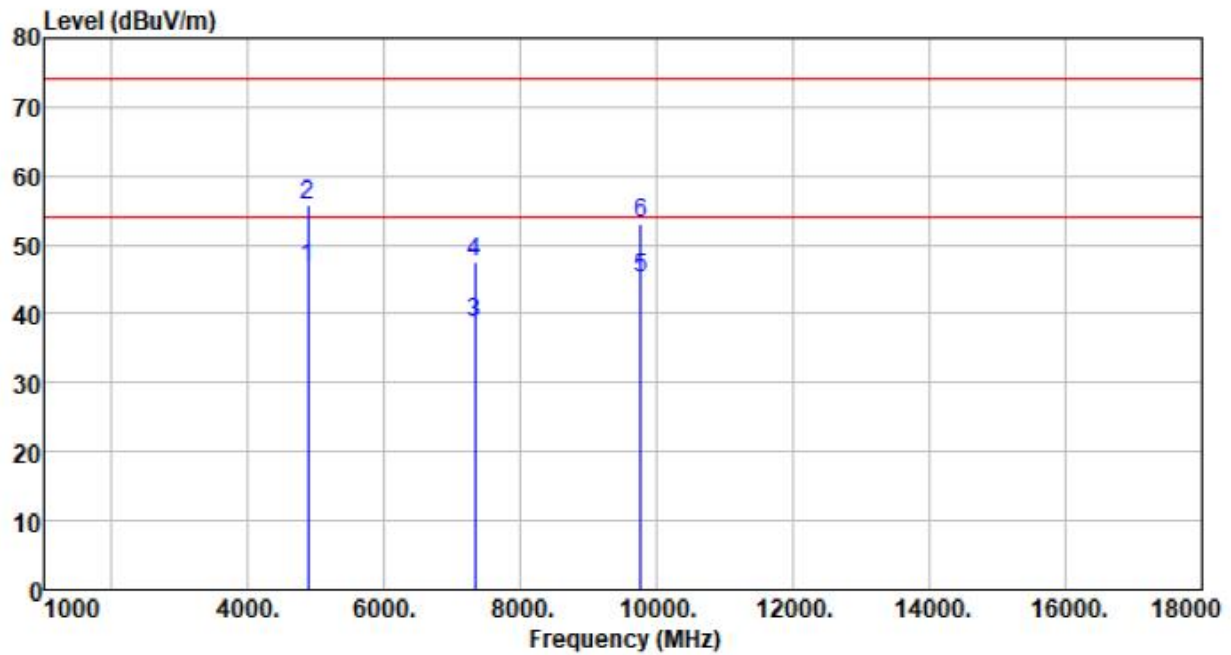

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	47.16	32.10	6.03	38.52	46.77	54.00	-7.23	Average
4880.000	56.29	32.10	6.03	38.52	55.90	74.00	-18.10	Peak
7320.000	33.51	36.30	8.04	39.22	38.63	54.00	-15.37	Average
7320.000	42.49	36.30	8.04	39.22	47.61	74.00	-26.39	Peak
9760.000	35.76	38.20	11.35	40.25	45.06	54.00	-8.94	Average
9760.000	43.92	38.20	11.35	40.25	53.22	74.00	-20.78	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor


Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

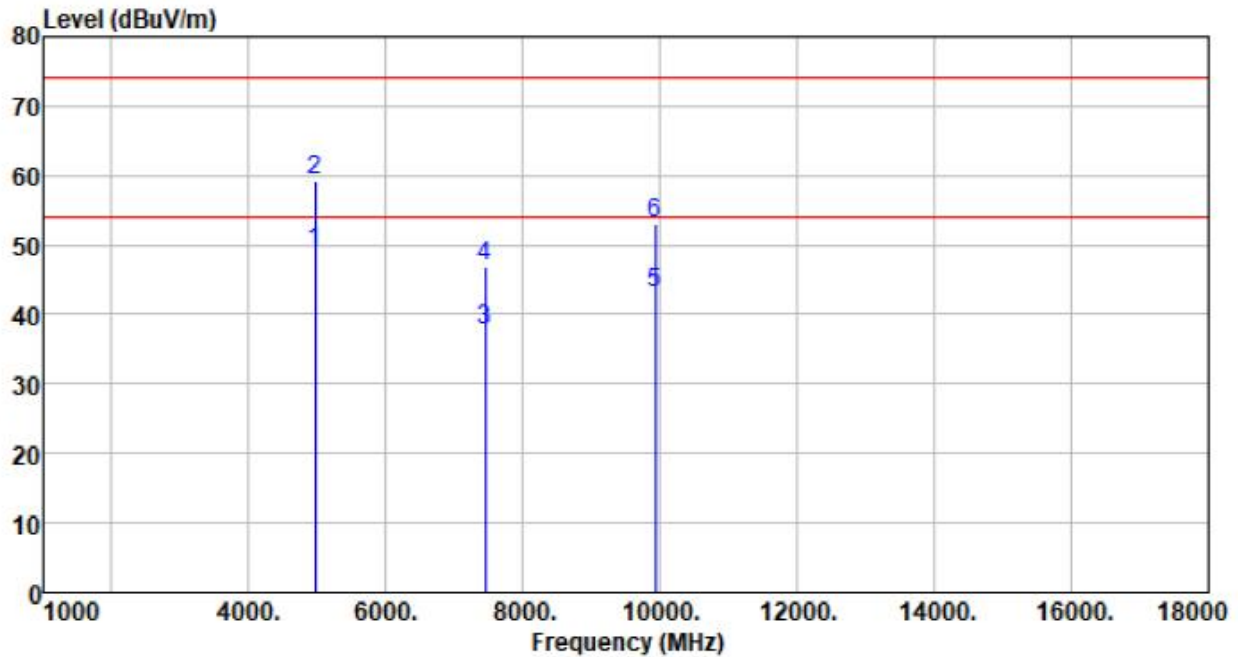

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	49.41	32.20	6.05	38.51	49.15	54.00	-4.85	Average
4960.000	59.53	32.20	6.05	38.51	59.27	74.00	-14.73	Peak
7440.000	32.78	36.30	8.16	39.31	37.93	54.00	-16.07	Average
7440.000	41.83	36.30	8.16	39.31	46.98	74.00	-27.02	Peak
9920.000	34.31	38.24	10.76	40.28	43.03	54.00	-10.97	Average
9920.000	44.42	38.24	10.76	40.28	53.14	74.00	-20.86	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

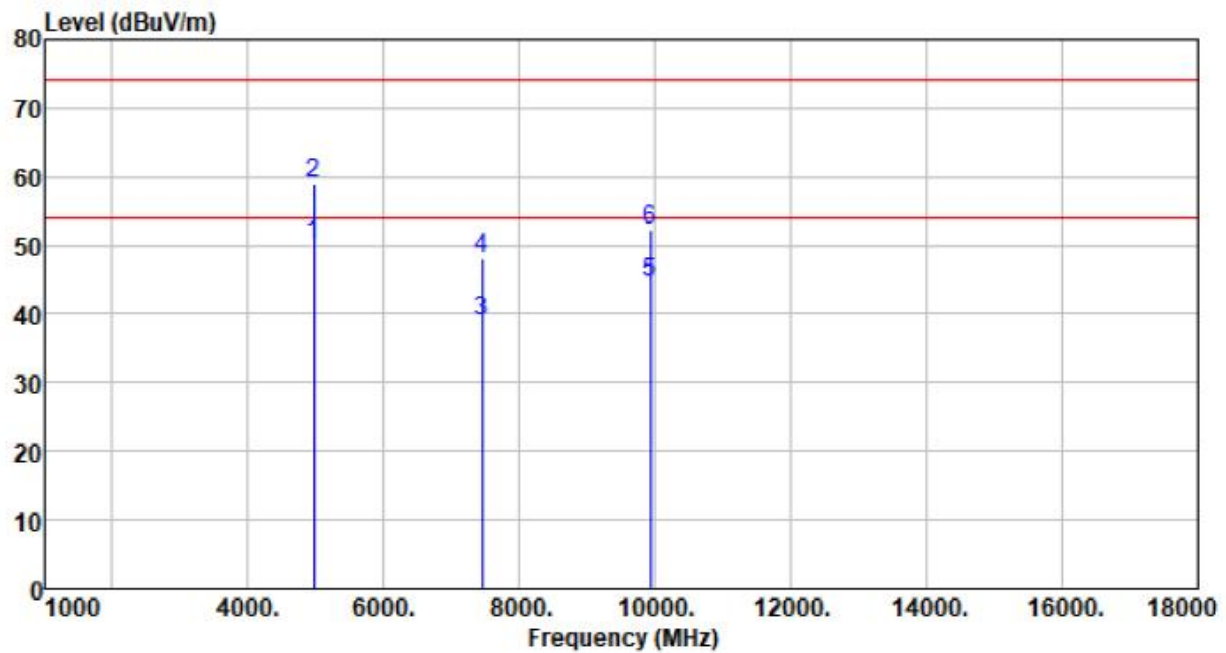

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	50.58	32.20	6.05	38.51	50.32	54.00	-3.68	Average
4960.000	59.44	32.20	6.05	38.51	59.18	74.00	-14.82	Peak
7440.000	33.92	36.30	8.16	39.31	39.07	54.00	-14.93	Average
7440.000	42.88	36.30	8.16	39.31	48.03	74.00	-25.97	Peak
9920.000	35.88	38.24	10.76	40.28	44.60	54.00	-9.40	Average
9920.000	43.60	38.24	10.76	40.28	52.32	74.00	-21.68	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor


Remarks:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- For above 18GHz, no emission found.
- If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

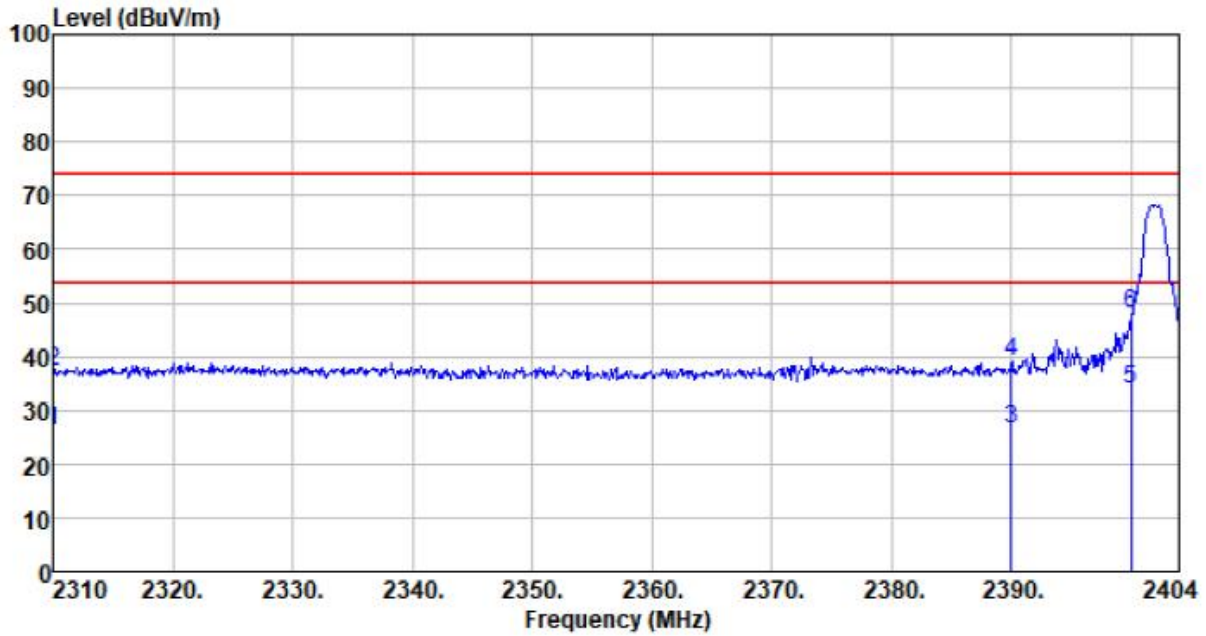


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	34.37	27.00	4.13	39.14	26.36	54.00	-27.64	Average
2310.000	45.27	27.00	4.13	39.14	37.26	74.00	-36.74	Peak
2390.000	34.48	27.08	4.17	39.34	26.39	54.00	-27.61	Average
2390.000	47.28	27.08	4.17	39.34	39.19	74.00	-34.81	Peak
2400.000	42.14	27.10	4.18	39.36	34.06	54.00	-19.94	Average
2400.000	55.98	27.10	4.18	39.36	47.90	74.00	-26.10	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

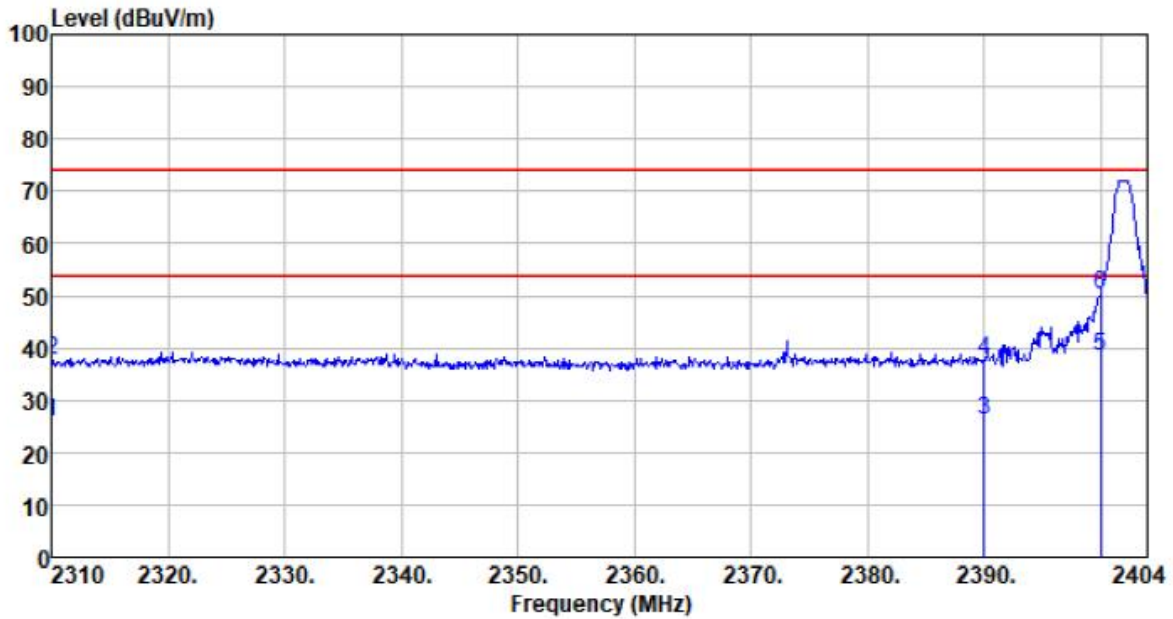


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	Final level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2310.000	33.92	27.00	4.13	39.14	25.91	54.00	-28.09	Average
2310.000	45.75	27.00	4.13	39.14	37.74	74.00	-36.26	Peak
2390.000	34.47	27.08	4.17	39.34	26.38	54.00	-27.62	Average
2390.000	45.69	27.08	4.17	39.34	37.60	74.00	-36.40	Peak
2400.000	46.35	27.10	4.18	39.36	38.27	54.00	-15.73	Average
2400.000	58.21	27.10	4.18	39.36	50.13	74.00	-23.87	Peak

Remarks:

Final level(dBuV/m) = Reading level(dBuV) + Antenna factor(dB/m) + Cable loss(dB) - Preamp Factor(dB)


Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

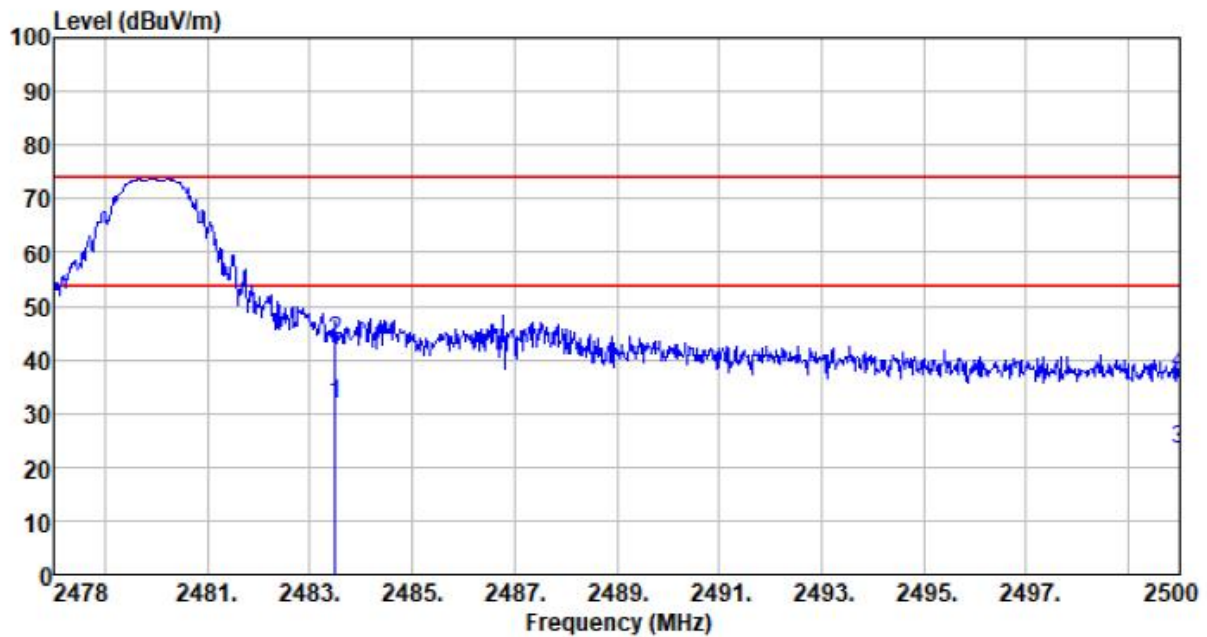

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	39.95	27.27	4.08	39.56	31.74	54.00	-22.26	Average
2483.500	51.89	27.27	4.08	39.56	43.68	74.00	-30.32	Peak
2500.000	31.64	27.30	4.06	39.60	23.40	54.00	-30.60	Average
2500.000	45.69	27.30	4.06	39.60	37.45	74.00	-36.55	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

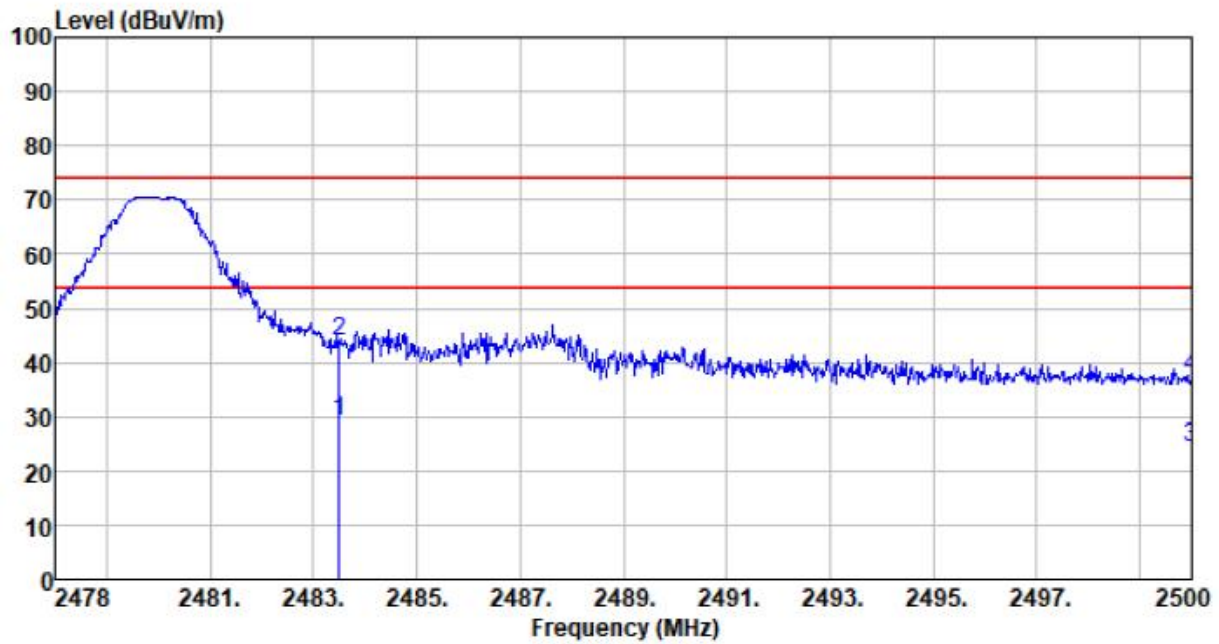


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
2483.500	37.30	27.27	4.08	39.56	29.09	54.00	-24.91	Average
2483.500	52.12	27.27	4.08	39.56	43.91	74.00	-30.09	Peak
2500.000	32.44	27.30	4.06	39.60	24.20	54.00	-29.80	Average
2500.000	45.65	27.30	4.06	39.60	37.41	74.00	-36.59	Peak

Remarks: level = Reading level + Antenna factor + Cable loss - Preamp Factor

Remark: For above 18GHz, no emission found


7.4 20dB Occupy Bandwidth

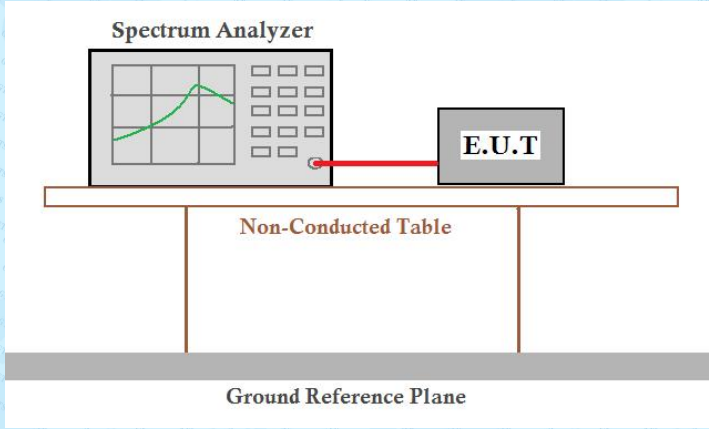Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2020
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. The setup is on a Non-Conducted Table, which is placed on a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	2.428	Pass
Middle	2.398	Pass
Highest	1.608	Pass

Test plot as follows:

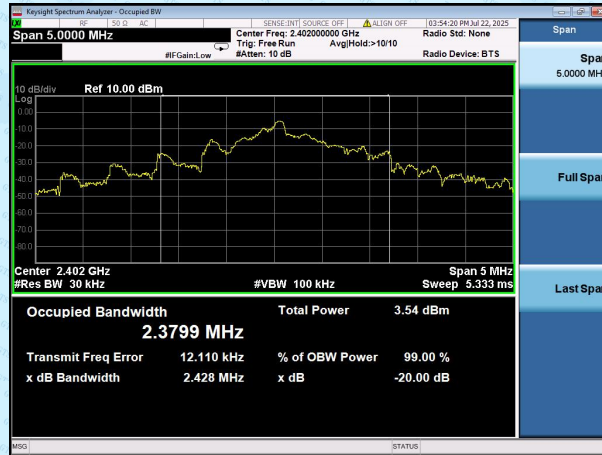

Lowest channel



Middle channel



Highest channel

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----