



## FCC Test Report (WIFI)

**FCC ID** : 2A16DX92

**Applicant** : SHENZHEN AMEDIATECH TECHNOLOGY CO., LTD  
3F, Tower A, Building A, Minsheng Industrial Park, Longhua Road,  
Longhua New Area, Shenzhen, China.

### Sample Description

**Product Name** : Smart TV BOX

**Model No.** : X92

**Serial No.** : X92 PRO

**Trademark** : N/A

**Receipt Date** : 2016-10-25

**Test Date** : 2016-10-26 to 2016-10-30

**Issue Date** : 2016-10-31

**Test Standard(s)** : FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Conclusions** : PASSED\*

\*In the configuration tested, the EUT complied with the standards specified above.

**Test/Witness Engineer** :

Tom Chen

**Approved & Authorized** :

Frank Zhang



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



## Contents

|                                                                  |           |
|------------------------------------------------------------------|-----------|
| <b>CONTENTS.....</b>                                             | <b>2</b>  |
| <b>1. GENERAL INFORMATION.....</b>                               | <b>4</b>  |
| 1.1 Client Information.....                                      | 4         |
| 1.2 General Description of EUT (Equipment Under Test).....       | 4         |
| 1.3 Description of Test Mode.....                                | 5         |
| 1.4 Test Instruments List.....                                   | 6         |
| <b>2. TEST SUMMARY.....</b>                                      | <b>8</b>  |
| <b>3. ANTENNA REQUIREMENT.....</b>                               | <b>9</b>  |
| 3.1. Standard Requirement.....                                   | 9         |
| 3.2. Antenna Connected Construction.....                         | 9         |
| <b>4. CONDUCTED EMISSION TEST.....</b>                           | <b>10</b> |
| 4.1 Test Standard and Limit.....                                 | 10        |
| 4.2 Test Setup.....                                              | 10        |
| 4.3 Test Procedure.....                                          | 10        |
| 4.4 Test Data.....                                               | 11        |
| <b>5. PEAK OUTPUT POWER TEST.....</b>                            | <b>14</b> |
| 5.1. Test Standard and Limit.....                                | 14        |
| 5.2. Test Setup.....                                             | 14        |
| 5.3. Test Procedure.....                                         | 14        |
| 5.4. Test Data.....                                              | 14        |
| <b>6. OCCUPY BANDWIDTH TEST.....</b>                             | <b>15</b> |
| 6.1. Test Standard and Limit.....                                | 15        |
| 6.2. Test Setup.....                                             | 15        |
| 6.3. Test Procedure.....                                         | 15        |
| 6.4. Test Data.....                                              | 15        |
| <b>7. POWER SPECTRAL DENSITY TEST.....</b>                       | <b>22</b> |
| 7.1. Test Standard and Limit.....                                | 22        |
| 7.2. Test Setup.....                                             | 22        |
| 7.3. Test Procedure.....                                         | 22        |
| 7.4. Test Data.....                                              | 22        |
| <b>8. BAND EDGE REQUIREMENT (CONDUCTED EMISSION METHOD).....</b> | <b>31</b> |
| 8.1. Test Standard and Limit.....                                | 31        |
| 8.2. Test Setup.....                                             | 31        |
| 8.3. Test Procedure.....                                         | 31        |
| 8.4. Test Data.....                                              | 31        |
| <b>9. BAND EDGE REQUIREMENT (RADIATED EMISSION METHOD).....</b>  | <b>34</b> |
| 9.1. Test Standard and Limit.....                                | 34        |



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 3 of 50

|                                                              |           |
|--------------------------------------------------------------|-----------|
| 9.2. Test Setup.....                                         | 34        |
| 9.3. Test Procedure.....                                     | 35        |
| 9.4. Test Data.....                                          | 35        |
| <b>10. SPURIOUS EMISSION (RADIATED EMISSION METHOD).....</b> | <b>38</b> |
| 10.1. Test Standard and Limit.....                           | 38        |
| 10.2. Test Setup.....                                        | 38        |
| 10.3. Test Procedure.....                                    | 39        |
| 10.4. Test Data.....                                         | 39        |



## 1. General Information

### 1.1 Client Information

|              |   |                                                                                                     |
|--------------|---|-----------------------------------------------------------------------------------------------------|
| Applicant    | : | SHENZHEN AMEDIATECH TECHNOLOGY CO., LTD                                                             |
| Address      | : | 3F, Tower A, Building A, Minsheng Industrial Park, Longhua Road, Longhua New Area, Shenzhen, China. |
| Manufacturer | : | SHENZHEN AMEDIATECH TECHNOLOGY CO., LTD                                                             |
| Address      | : | 3F, Tower A, Building A, Minsheng Industrial Park, Longhua Road, Longhua New Area, Shenzhen, China. |

### 1.2 General Description of EUT (Equipment Under Test)

|                     |   |                                                                                                                   |
|---------------------|---|-------------------------------------------------------------------------------------------------------------------|
| Product Name        | : | Smart TV BOX                                                                                                      |
| Models No.          | : | X92, X92 PRO                                                                                                      |
| Difference          | : | Only differ on apperaranace and name                                                                              |
| Product Description | : | Operation Frequency: 2412MHz~2462MHz<br>(802.11b/802.11g/802.11n(H20)/ 802.11n(H40)                               |
|                     | : | Transfer Rate: 802.11b: 1/ 2/ 5.5/ 11Mbps<br>802.11g: 6/ 9/ 12/ 18/ 24/ 36/, 48/54 Mbps<br>802.11n: Up to 300Mbps |
|                     | : | Number of Channel: 11 for 802.11b/802.11g/<br>802.11n(H20)/ 802.11n(H40)                                          |
|                     | : | Channel separation 5MHz                                                                                           |
|                     | : | Modulation Technology: 802.11b:DSSS<br>802.11g/ 802.11n:OFDM                                                      |
|                     | : | Antenna Type: Integral Antenna                                                                                    |
|                     | : | Antenna Gain: 2.0 dBi                                                                                             |
| Power Supply        | : | DC 5V powered by power adapter                                                                                    |

**Note:**

(1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:



CH 01~CH 11 for 802.11b/ g/ n(20M)

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 01      | 2412            | 05      | 2432            | 09      | 2452            |
| 02      | 2417            | 06      | 2437            | 10      | 2457            |
| 03      | 2422            | 07      | 2442            | 11      | 2462            |
| 04      | 2427            | 08      | 2447            |         |                 |

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 01      |                 | 05      | 2432            | 09      | 2452            |
| 02      |                 | 06      | 2437            | 10      |                 |
| 03      | 2422            | 07      | 2442            | 11      |                 |
| 04      | 2427            | 08      | 2447            |         |                 |

## 1.3 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| Test Mode         | Description                                             |
|-------------------|---------------------------------------------------------|
| Transmitting mode | Keep the EUT in continuous transmitting with modulation |

**Remark:** The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

| Per-scan all kind of data rate in lowest channel,<br>and found the follow list which it was worst case. |           |
|---------------------------------------------------------------------------------------------------------|-----------|
| Mode                                                                                                    | Data rate |
| 802.11b                                                                                                 | 1Mbps     |



|                                                                                                                                                                                                                                                                                                   |           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| 802.11g                                                                                                                                                                                                                                                                                           | 6Mbps     |
| 802.11n(H20)                                                                                                                                                                                                                                                                                      | 6.5Mbps   |
| 802.11n(H40)                                                                                                                                                                                                                                                                                      | 13.5 Mbps |
| <b>Final Test Mode:</b>                                                                                                                                                                                                                                                                           |           |
| According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20) and 13.5 Mbps for 802.11n(H40). Duty cycle setting during the transmission is 100% with maximum power setting for all modulations. |           |

## 1.4 Test Instruments List

|    | Test Equipment                     | Manufacturer                         | Model No.                   | Cal. Date     | Cal. Due date |
|----|------------------------------------|--------------------------------------|-----------------------------|---------------|---------------|
| 1  | Bilog Antenna                      | SCHWARZBECK<br>MESS-ELEKTRONIK       | VULB9163                    | May 22, 2016  | May 21, 2017  |
| 2  | Double -ridged<br>waveguide horn   | SCHWARZBECK<br>MESS-ELEKTRONIK       | BBHA9120D                   | May 27, 2016  | May 26, 2017  |
| 3  | Coaxial Cable                      | N/A                                  | N/A                         | Mar. 28, 2016 | Mar. 27, 2017 |
| 4  | Coaxial Cable                      | N/A                                  | N/A                         | Mar. 29, 2016 | Mar. 29, 2017 |
| 5  | Coaxial cable                      | N/A                                  | N/A                         | Mar. 29, 2016 | Mar. 29, 2017 |
| 6  | Coaxial Cable                      | N/A                                  | N/A                         | Mar. 29, 2016 | Mar. 29, 2017 |
| 7  | Coaxial Cable                      | N/A                                  | N/A                         | Mar. 29, 2016 | Mar. 29, 2017 |
| 8  | Amplifier<br>(10kHz-1.3GHz)        | HP                                   | 8447D                       | Mar. 29, 2016 | Mar. 29, 2017 |
| 9  | Amplifier<br>(1GHz-18GHz)          | Compliance Direction<br>Systems Inc. | PAP-1G18                    | Jun. 06, 2016 | Mar. 29, 2017 |
| 10 | Pre-amplifier<br>(18-26GHz)        | Rohde & Schwarz                      | AFS33-18002<br>650-30-8P-44 | Mar. 29, 2016 | Mar. 29, 2017 |
| 11 | Horn Antenna                       | ETS-LINDGREN                         | 3160                        | Mar. 27, 2016 | Mar. 27, 2017 |
| 12 | Positioning<br>Controller          | UC                                   | UC3000                      | N/A           | N/A           |
| 13 | Spectrum<br>analyzer<br>9kHz-30GHz | Rohde & Schwarz                      | FSP                         | May 26, 2016  | May 27, 2017  |
| 14 | EMI Test<br>Receiver               | Rohde & Schwarz                      | ESPI                        | Mar. 29, 2016 | Mar. 30, 2017 |
| 15 | Loop antenna                       | Laplace instrument                   | RF300                       | May 22,, 2016 | May 23, 2017  |



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 7 of 50

|    |                                      |                 |          |              |              |
|----|--------------------------------------|-----------------|----------|--------------|--------------|
| 16 | Universal radio communication tester | Rhode & Schwarz | CMU200   | May 26, 2016 | May 27, 2017 |
| 17 | Signal Analyzer                      | Rohde & Schwarz | FSIQ3    | May 26, 2016 | May 27, 2017 |
| 18 | L.I.S.N.#1                           | Rohde & Schwarz | NSLK8126 | May 26, 2016 | May 27, 2017 |
| 19 | L.I.S.N.#2                           | Rohde & Schwarz | ENV216   | May 26, 2016 | May 27, 2017 |
| 20 | Power Meter                          | Anritsu         | ML2495A  | May 26, 2016 | May 27, 2017 |
| 21 | Power sensor                         | Anritsu         | ML2491A  | May 26, 2016 | May 27, 2017 |



## 2. Test Summary

| Standard Section | Test Item                          | Judgment |
|------------------|------------------------------------|----------|
| 15.203/15.247(c) | Antenna Requirement                | PASSED   |
| 15.207           | Conducted Emission                 | PASSED   |
| 15.247(b)(3)     | Conducted Peak Output Power        | PASSED   |
| 15.247(a)(2)     | 99% OBW and 6dB Emission Bandwidth | PASSED   |
| 15.247(e)        | Power Spectral Density             | PASSED   |
| 15.247(d)        | Band Edge                          | PASSED   |
| 15.205/15.209    | Spurious Emission                  | PASSED   |



## 3. Antenna Requirement

### 3.1. Standard Requirement

#### 3.1.1 Test standard

FCC Part15 Section 15.203 /247(c)

#### 3.1.2 Requirement

1) 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

2) 15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2. Antenna Connected Construction

The antenna is an integral antenna which permanently attached, and the best case gain of the antenna is 2.0dBi. It complies with the standard requirement.

## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

FCC Part15 Section 15.207


#### 4.1.2 Test Limit

Conducted Emission Test Limit

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |

Remark: (1) \*Decreasing linearly with logarithm of the frequency.  
(2) The lower limit shall apply at the transition frequencies.

### 4.2 Test Setup

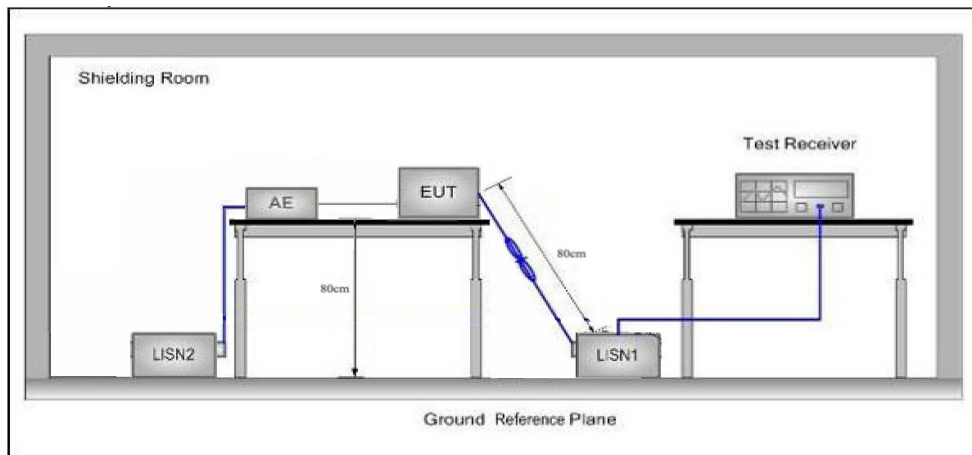

### 4.3 Test Procedure

- 1) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50  $\Omega$  /50 $\mu$ H + 5  $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.

The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal



ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

#### **4.4 Test Data**

Please refer to the following pages




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 12 of 50

## Conducted Emission Test Data

EUT: Smart TV BOX M/N: X92  
Operating Condition: WIFI mode  
Test Site: Shielded room  
Operator: Tom  
Test Specification: AC 120V/60Hz  
Polarization: Line  
Note: Tem:25°C Hum:50%

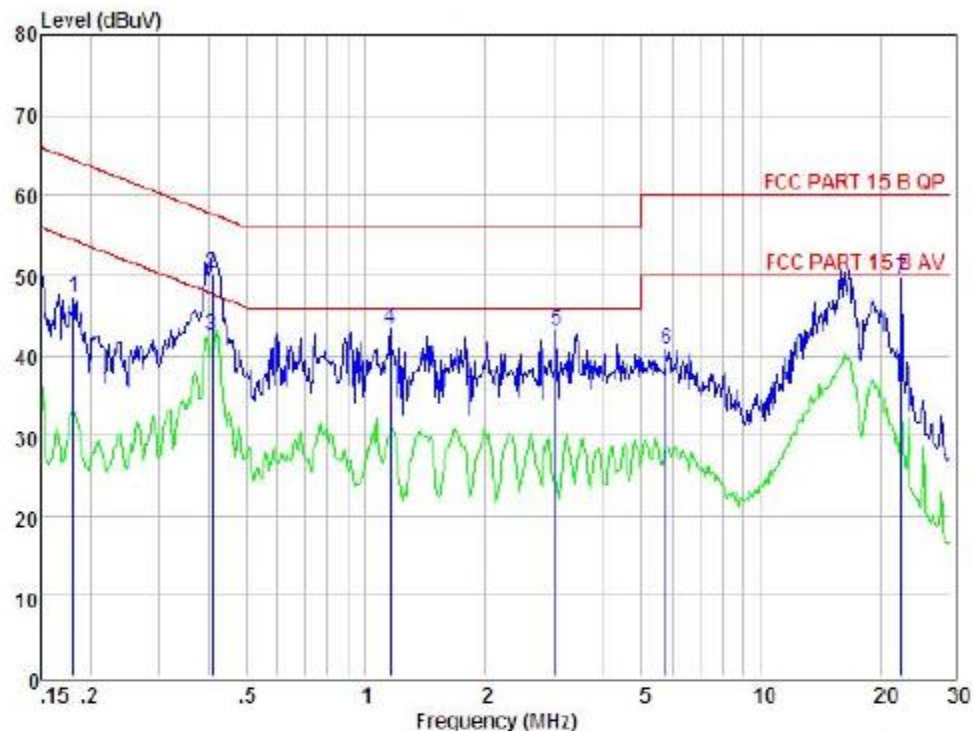

| Condition : FCC PART 15 B QP |        |       |        |        |       |       |       |        |         |
|------------------------------|--------|-------|--------|--------|-------|-------|-------|--------|---------|
| Item                         | Freq   | Read  | LISN   | Preamp | Cable | Level | Limit | Margin | Remark  |
|                              | MHz    | dBuV  | Factor | Factor | Loss  | dBuV  | dBuV  | dBuV   |         |
| 1                            | 0.182  | 37.44 | 0.03   | -9.52  | 0.10  | 47.09 | 64.42 | -17.33 | Peak    |
| 2                            | 0.408  | 40.50 | 0.03   | -9.57  | 0.10  | 50.20 | 57.68 | -7.48  | QP      |
| 3                            | 0.408  | 32.70 | 0.03   | -9.57  | 0.10  | 42.40 | 47.68 | -5.28  | Average |
| 4                            | 1.153  | 33.62 | 0.04   | -9.65  | 0.10  | 43.41 | 56.00 | -12.59 | Peak    |
| 5                            | 3.041  | 33.02 | 0.07   | -9.80  | 0.12  | 43.01 | 56.00 | -12.99 | Peak    |
| 6                            | 5.774  | 30.64 | 0.11   | -9.96  | 0.14  | 40.85 | 60.00 | -19.15 | Peak    |
| 7                            | 22.535 | 38.93 | 0.41   | -9.81  | 0.41  | 49.56 | 60.00 | -10.44 | Peak    |

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 13 of 50

## Conducted Emission Test Data

EUT: Smart TV BOX M/N: X92  
Operating Condition: WIFI mode  
Test Site: Shielded room  
Operator: Tom  
Test Specification: AC 120V/60Hz  
Polarization: Neutral  
Note: Tem:25°C Hum:50%

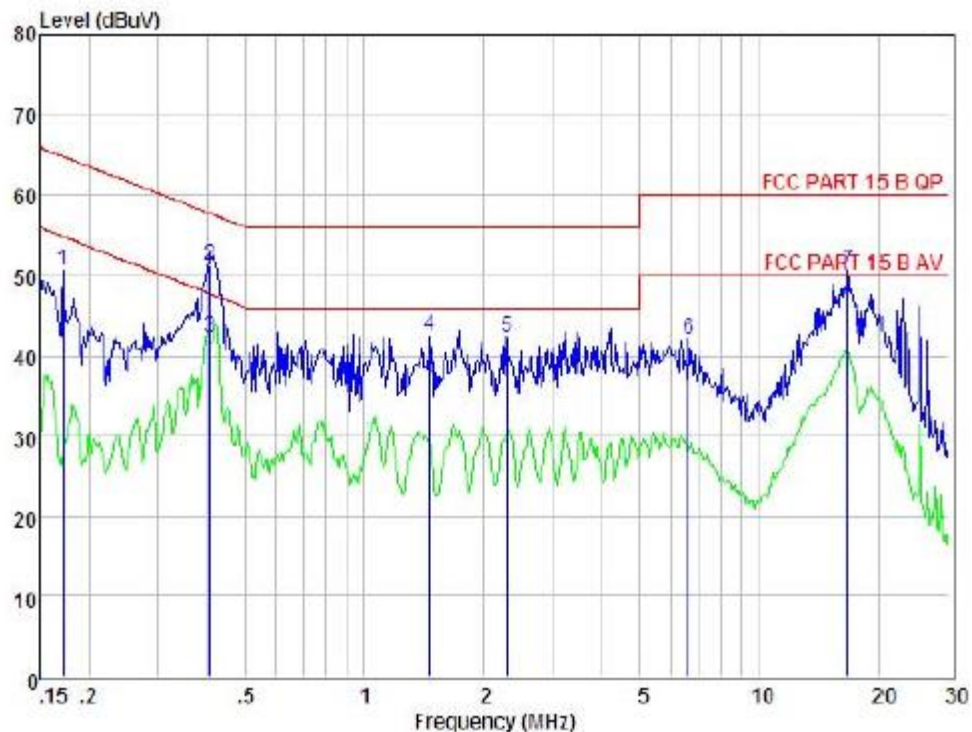

| Condition : FCC PART 15 B QP POL: NEUTRAL Temp: 25°C Hum: 51 % |             |                       |                      |                        |                     |               |               |                |         |
|----------------------------------------------------------------|-------------|-----------------------|----------------------|------------------------|---------------------|---------------|---------------|----------------|---------|
| Item                                                           | Freq<br>MHz | Read<br>Level<br>dBuV | LISN<br>Factor<br>dB | Preamp<br>Factor<br>dB | Cable<br>Loss<br>dB | Level<br>dBuV | Limit<br>dBuV | Margin<br>dBuV | Remark  |
| 1                                                              | 0.172       | 41.05                 | 0.03                 | -9.82                  | 0.10                | 50.70         | 64.86         | -14.16         | Peak    |
| 2                                                              | 0.406       | 41.50                 | 0.03                 | -9.87                  | 0.10                | 51.20         | 57.73         | -6.53          | QP      |
| 3                                                              | 0.406       | 32.50                 | 0.03                 | -9.87                  | 0.10                | 42.20         | 47.73         | -5.53          | Average |
| 4                                                              | 1.464       | 32.65                 | 0.05                 | -9.68                  | 0.10                | 42.48         | 56.00         | -13.52         | Peak    |
| 5                                                              | 2.309       | 32.35                 | 0.06                 | -9.74                  | 0.11                | 42.26         | 56.00         | -13.74         | Peak    |
| 6                                                              | 6.627       | 31.75                 | 0.12                 | -9.97                  | 0.15                | 41.99         | 60.00         | -18.01         | Peak    |
| 7                                                              | 16.839      | 40.31                 | 0.27                 | -9.83                  | 0.28                | 50.70         | 60.00         | -9.30          | Peak    |

Remark: Level = Read Level + LISN Factor - Preamp Factor + Cable Loss



## 5. Peak Output Power Test

### 5.1. Test Standard and Limit


#### 5.1.1 Test Standard

FCC Part15 C Section 15.247 (b)(3)

#### 5.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) |                  |                       |
|-------------------------------|------------------|-----------------------|
| Test Item                     | Limit            | Frequency Range (MHz) |
| Peak Output Power             | 1 Watt or 30 dBm | 2400~2483.5           |

### 5.2. Test Setup



### 5.3. Test Procedure

- (1) The EUT was directly connected to peak power meter and antenna output port as show in the block diagram above.
- (2) Measure out each mode and each bands peak output power of EUT.
- (3) The EUT was set to continuously transmitting in the max power during the test.

### 5.4. Test Data

| Test CH                      | Maximum Conducted Output Power (dBm) |         |              |              | Limit(dBm) | Result |
|------------------------------|--------------------------------------|---------|--------------|--------------|------------|--------|
|                              | 802.11b                              | 802.11g | 802.11n(H20) | 802.11n(H40) |            |        |
| Lowest                       | 22.52                                | 21.68   | 21.24        | 20.16        | 30.00dBm   | PASSED |
| Middle                       | 22.35                                | 21.72   | 21.32        | 20.43        |            | PASSED |
| Highest                      | 22.29                                | 21.84   | 21.35        | 20.43        |            | PASSED |
| Remark: Test plot as follows |                                      |         |              |              |            |        |



## 6. Occupy Bandwidth Test

### 6.1. Test Standard and Limit


#### 6.1.1 Test Standard

FCC Part15 C Section 15.247 (a)(2)

#### 6.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) |                          |                  |
|-------------------------------|--------------------------|------------------|
| Test Item                     | Limit                    | Frequency Range  |
| Bandwidth                     | >500 kHz (6dB bandwidth) | 2400~2483.5(MHz) |

### 6.2. Test Setup



### 6.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3) Spectrum Setting:

Bandwidth: RBW=100 kHz, VBW=300 kHz, detector= Peak

### 6.4. Test Data

| Test CH | 6dB Occupy Bandwidth (MHz) |         |              |              | Limit (kHz) | Result |
|---------|----------------------------|---------|--------------|--------------|-------------|--------|
|         | 802.11b                    | 802.11g | 802.11n(H20) | 802.11n(H40) |             |        |
| Lowest  | 9.564                      | 15.56   | 16.39        | 35.17        | >=500 kHz   | PASSED |
| Middle  | 10.05                      | 16.32   | 15.09        | 35.17        |             | PASSED |
| Highest | 9.573                      | 15.13   | 16.26        | 35.18        |             | PASSED |

**Remark:** Test plot as follows




4/F., Bldg. A17, Cuigang Industrial Four Area, Huaide Community, Fuyong Street, Bao'an District, Shenzhen, China  
Tel: (86)-0755-23498786 Fax: (86)-0755-29765125 [www.ata-test.com](http://www.ata-test.com)



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 17 of 50

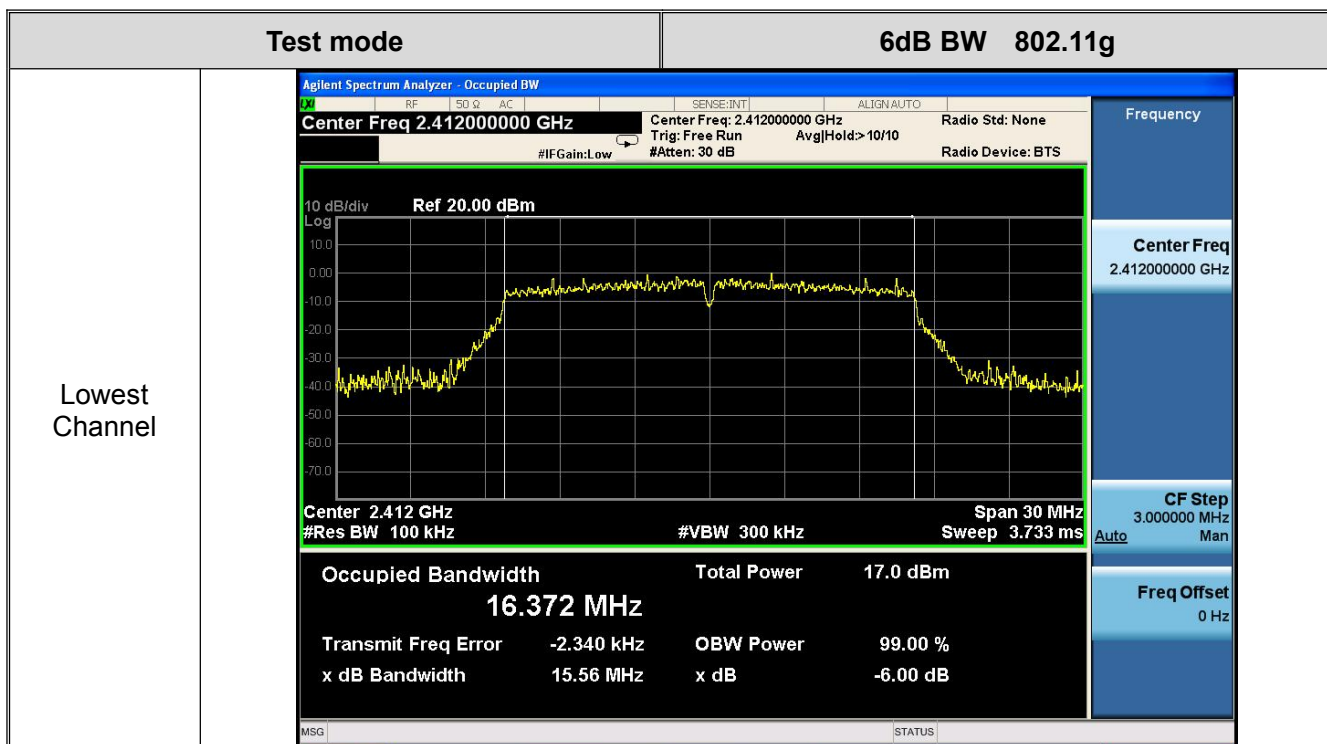




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 18 of 50

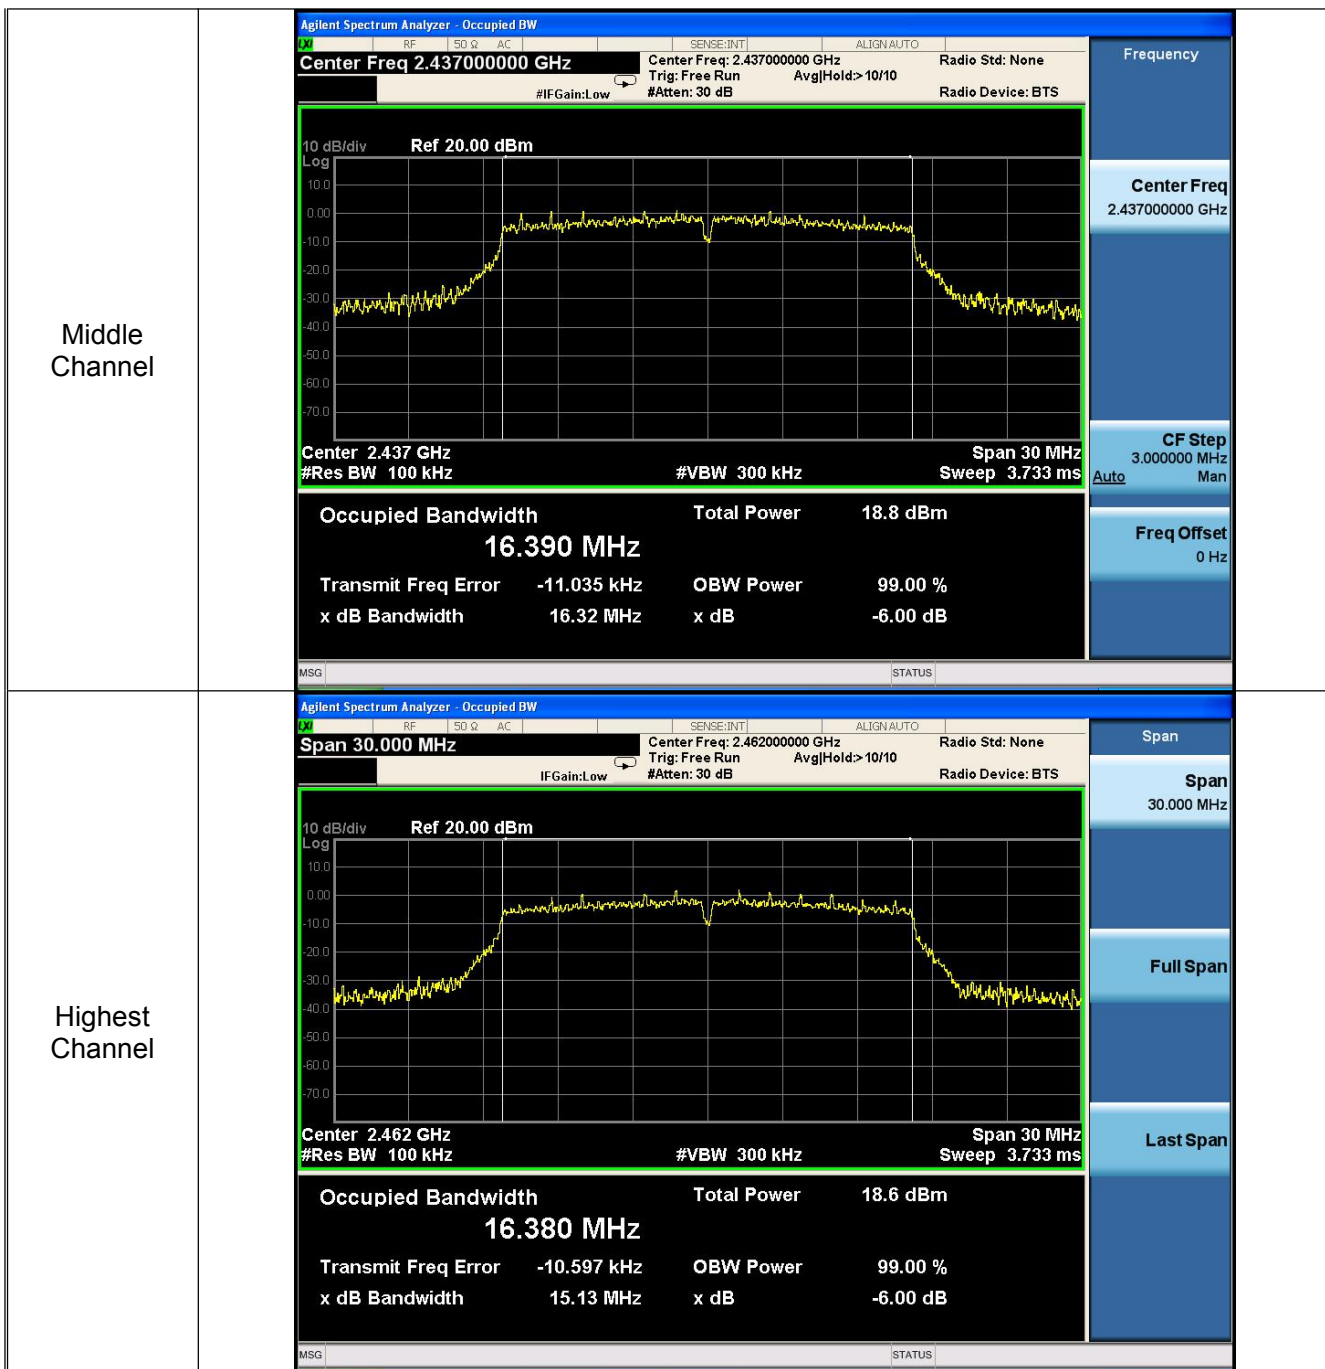




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 19 of 50


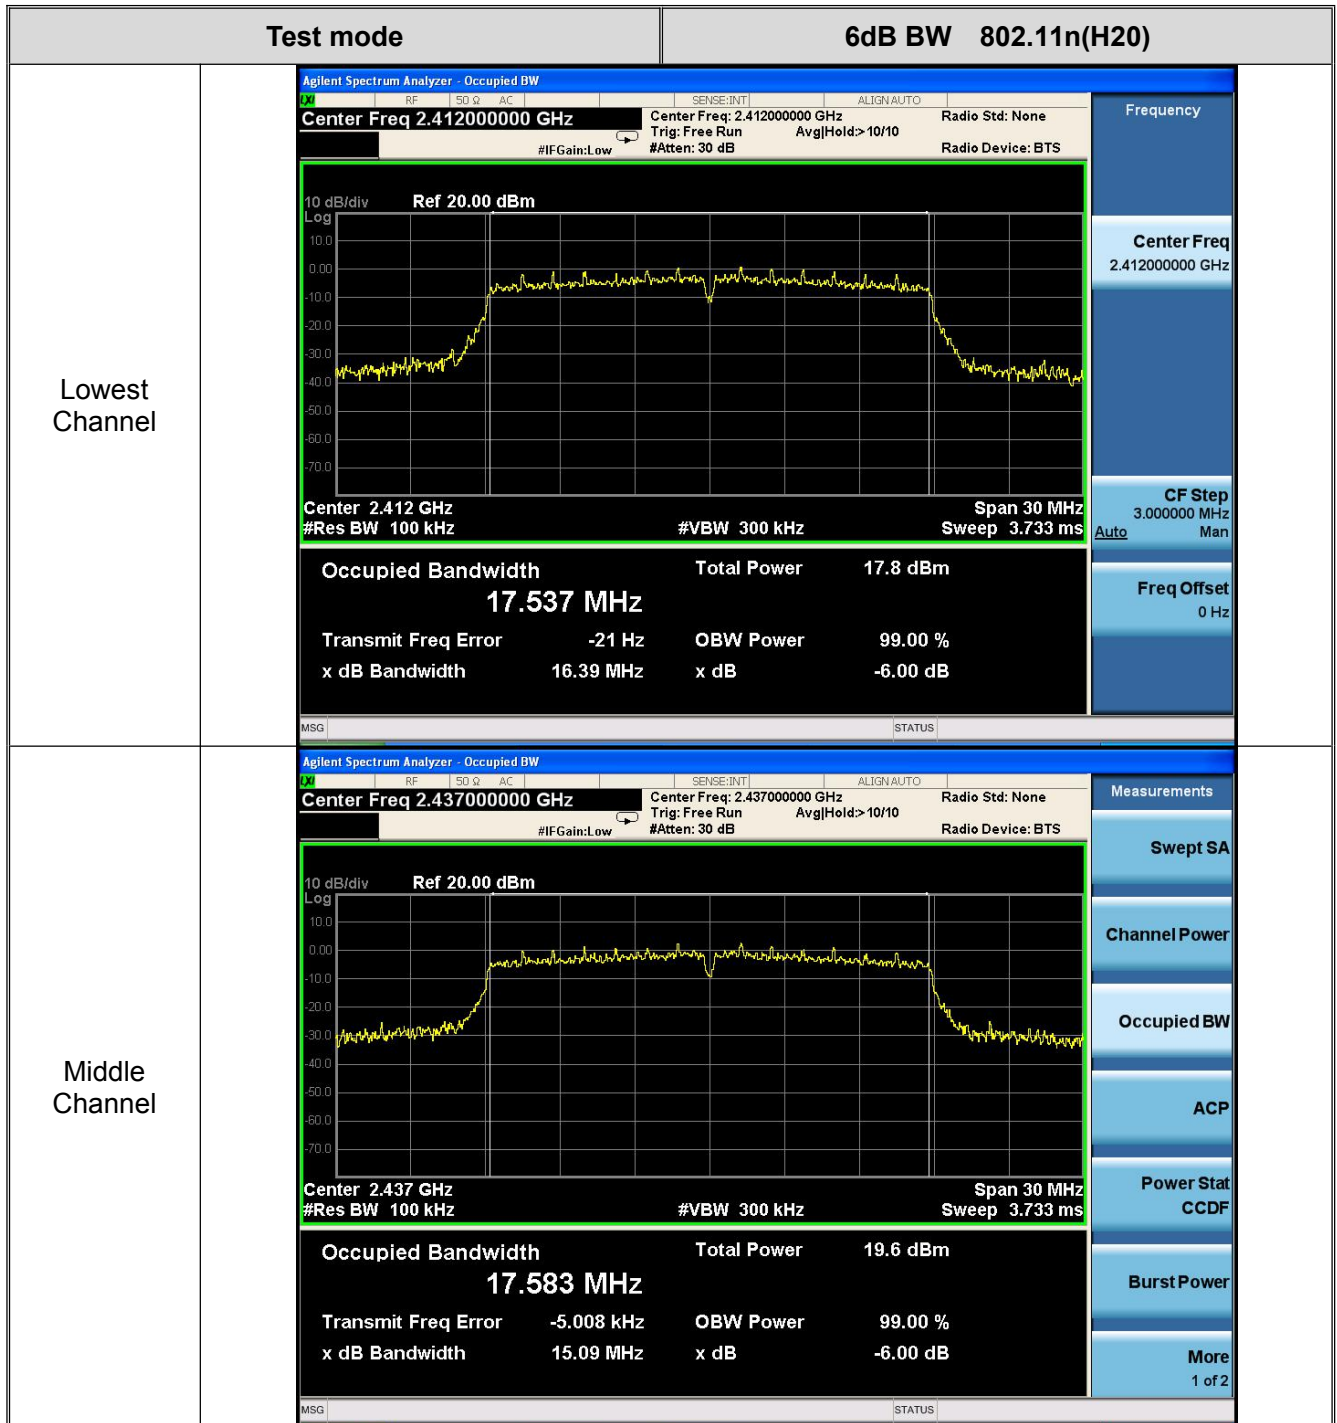




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 20 of 50

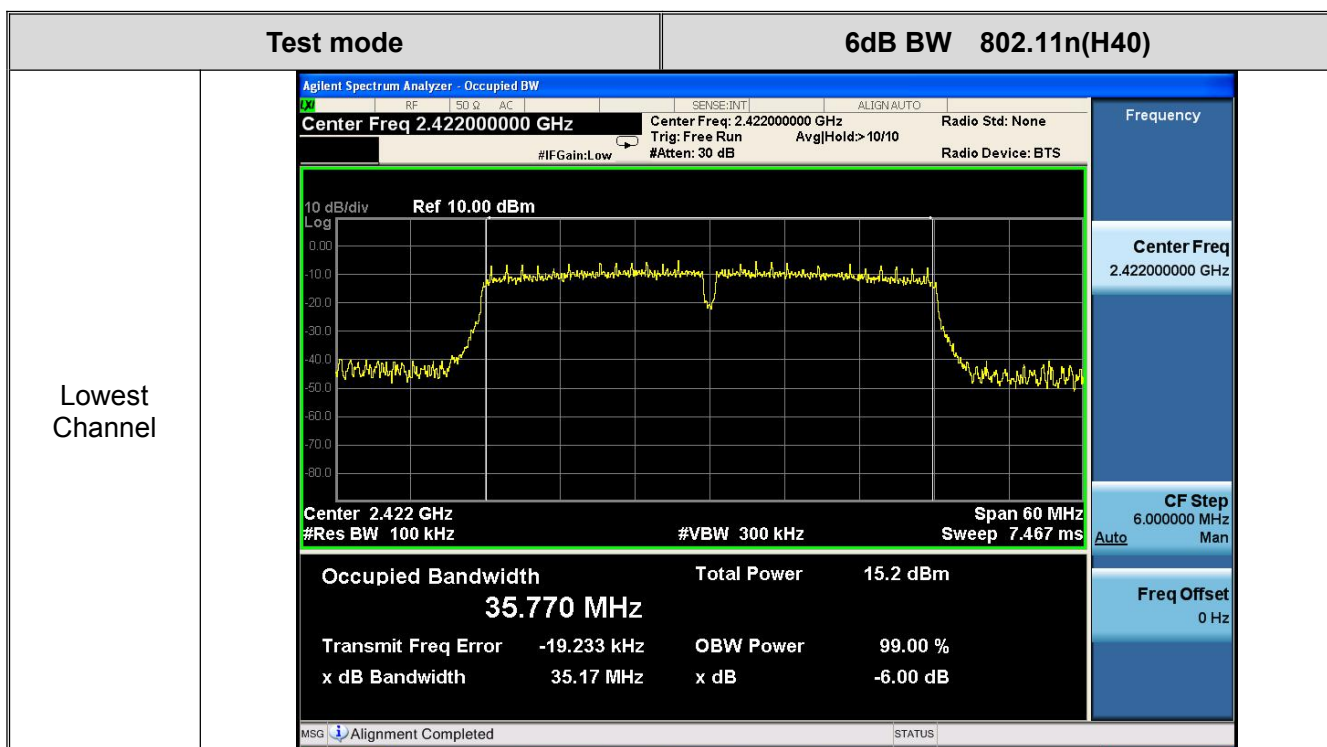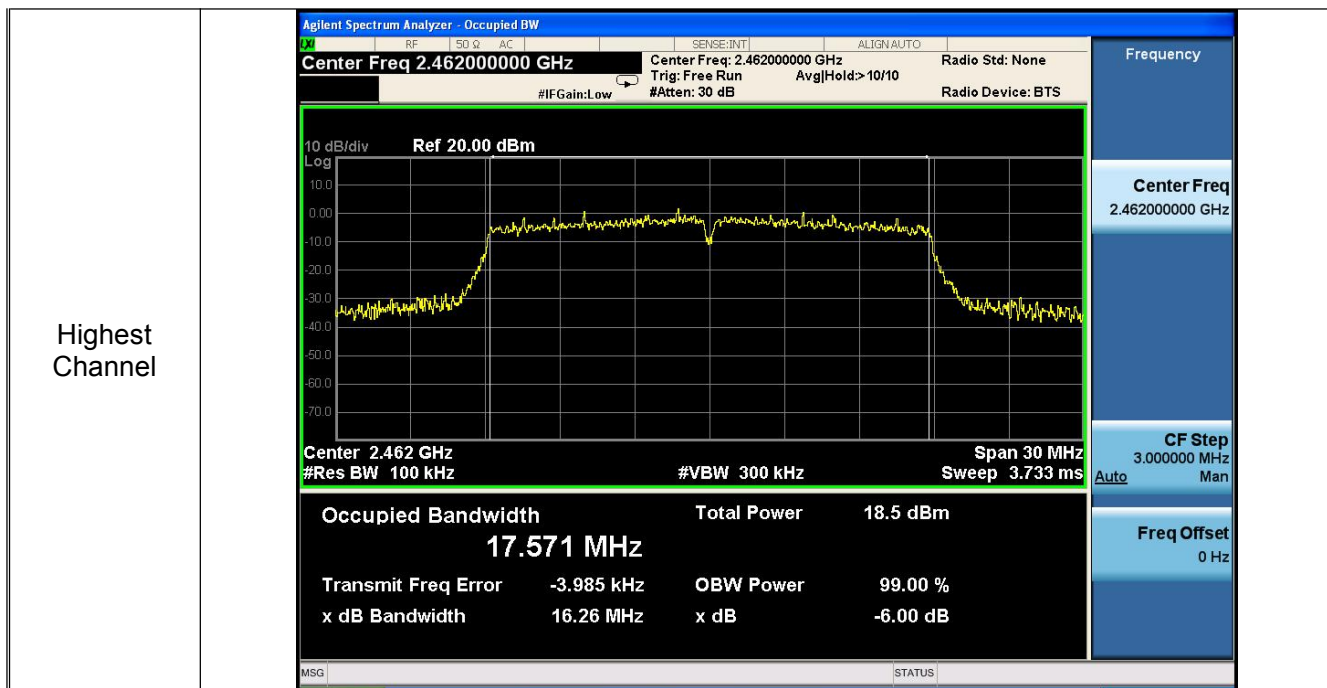




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 21 of 50

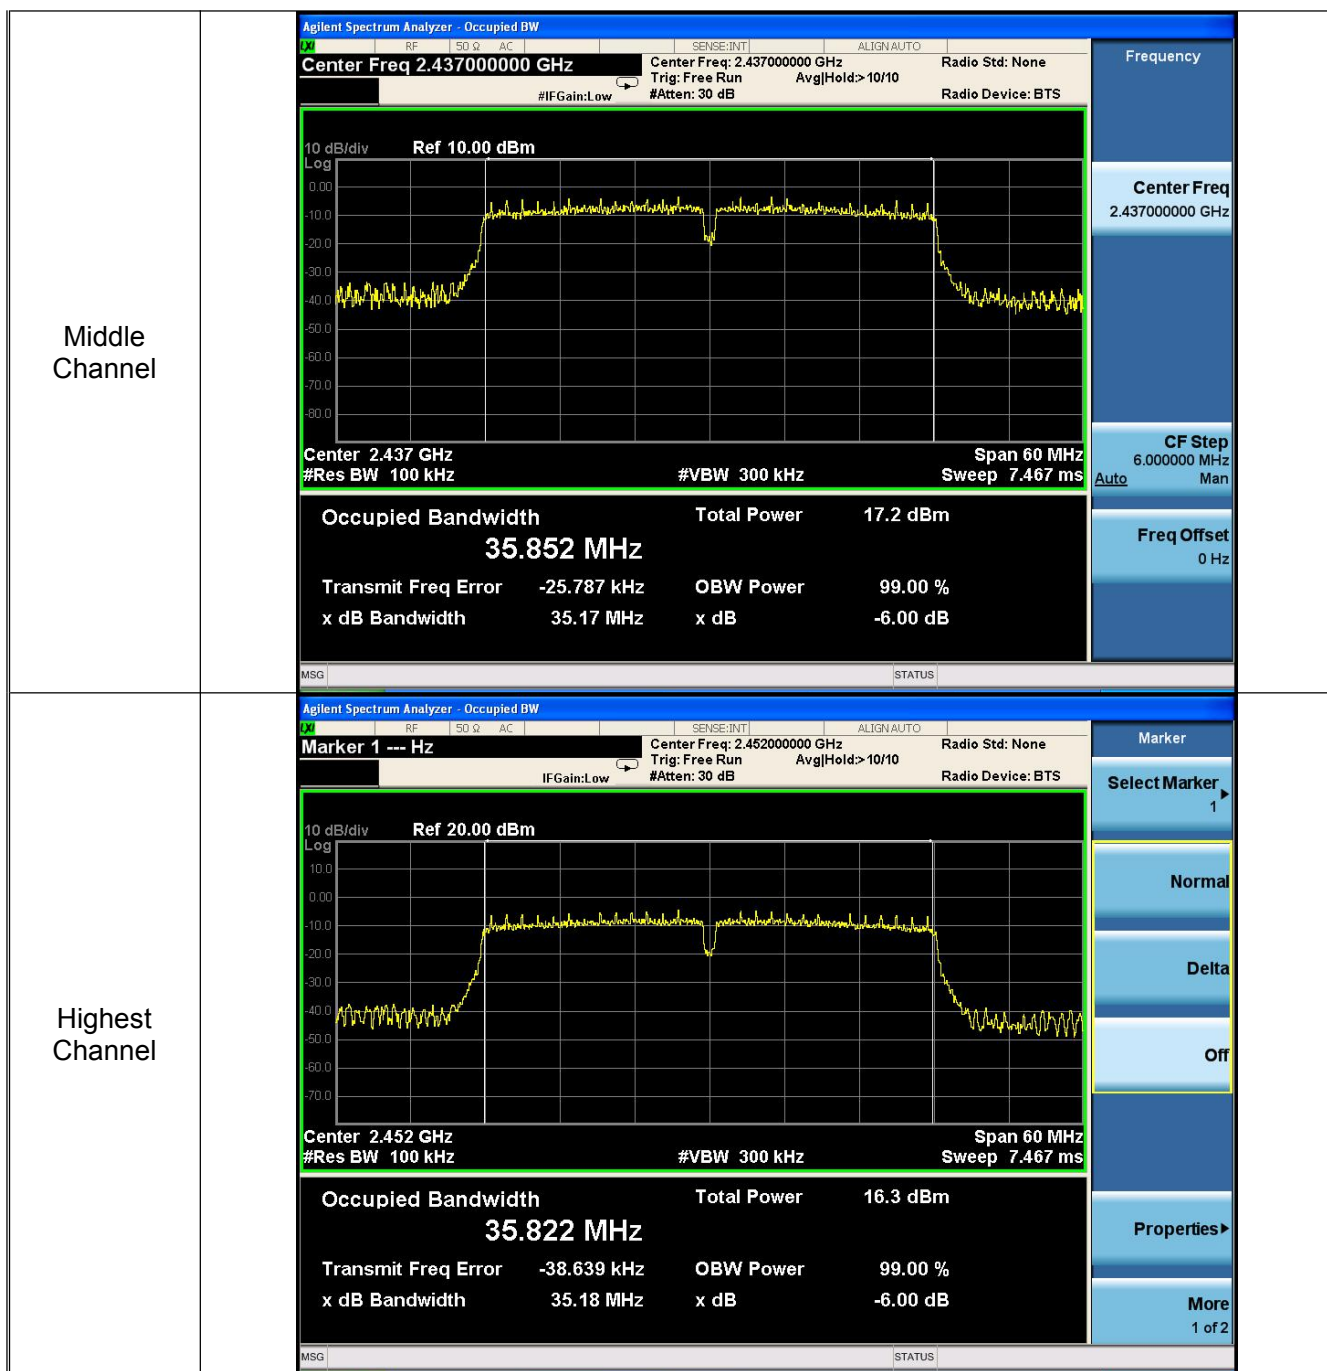



## 7. Power Spectral Density Test

### 7.1. Test Standard and Limit


#### 7.1.1 Test Standard

FCC Part15 C Section 15.247 (e)

#### 7.1.2 Test Limit

| FCC Part 15 Subpart C(15.247) |                    |                       |
|-------------------------------|--------------------|-----------------------|
| Test Item                     | Limit              | Frequency Range (MHz) |
| Power Spectral Density        | 8dBm(in any 3 kHz) | 2400~2483.5           |

### 7.2. Test Setup



### 7.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Measure the spectral power density the spectrum analyzer was set to Resolution Bandwidth=100 kHz, and Video Bandwidth≥300 kHz, Detector: Peak, Span to 5%~30% greater than EBW, Sweep time auto.
- (3) Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a BWCF=-15.2 dB.

### 7.4. Test Data


| Test CH                      | Power Spectral Density (dBm) |         |              |              | Limit (dBm) | Result |
|------------------------------|------------------------------|---------|--------------|--------------|-------------|--------|
|                              | 802.11b                      | 802.11g | 802.11n(H20) | 802.11n(H40) |             |        |
| Lowest                       | -7.499                       | -13.246 | -6.996       | -18.785      | 8           | Passed |
| Middle                       | -7.759                       | -10.312 | -11.796      | -15.726      |             | Passed |
| Highest                      | -6.755                       | -11.379 | -12.135      | -18.298      |             | Passed |
| Remark: Test plot as follows |                              |         |              |              |             |        |



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 23 of 50

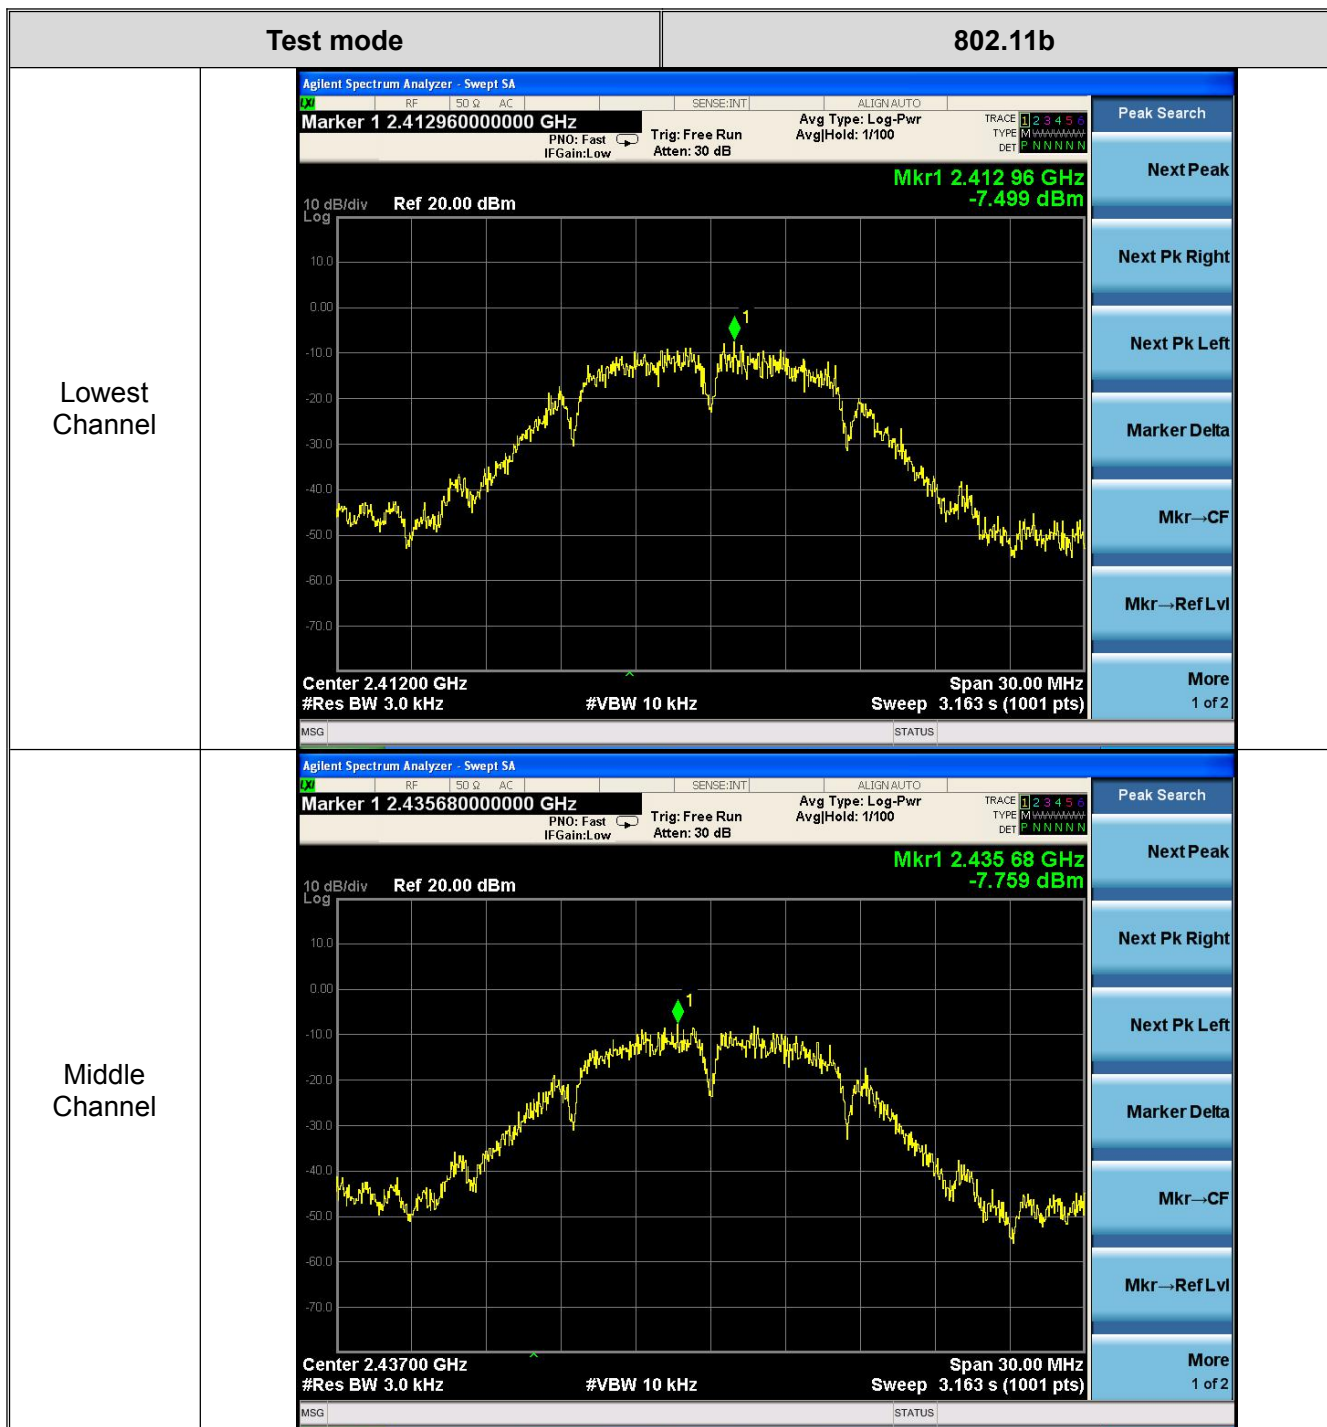



Page: 24 of 50






# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 25 of 50

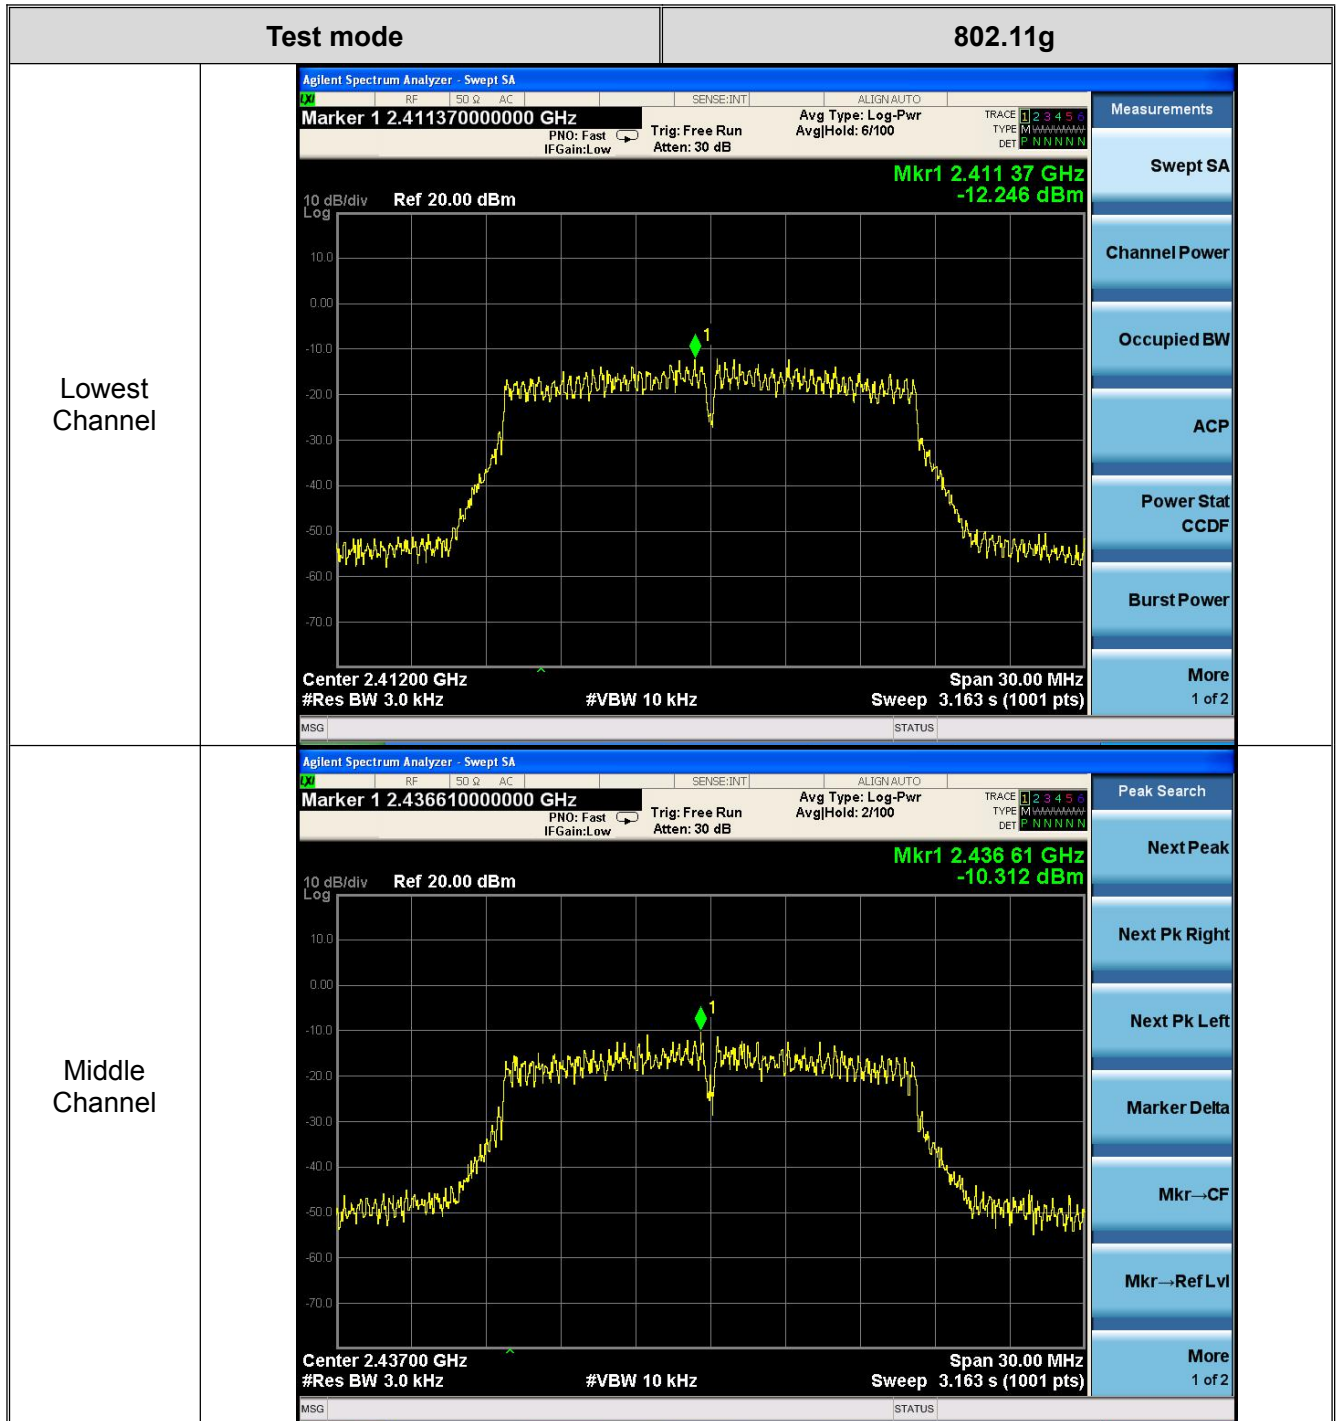




# ATA Testing Technology Service Co., Ltd.


Report No.: ATA161027012F

Page: 26 of 50

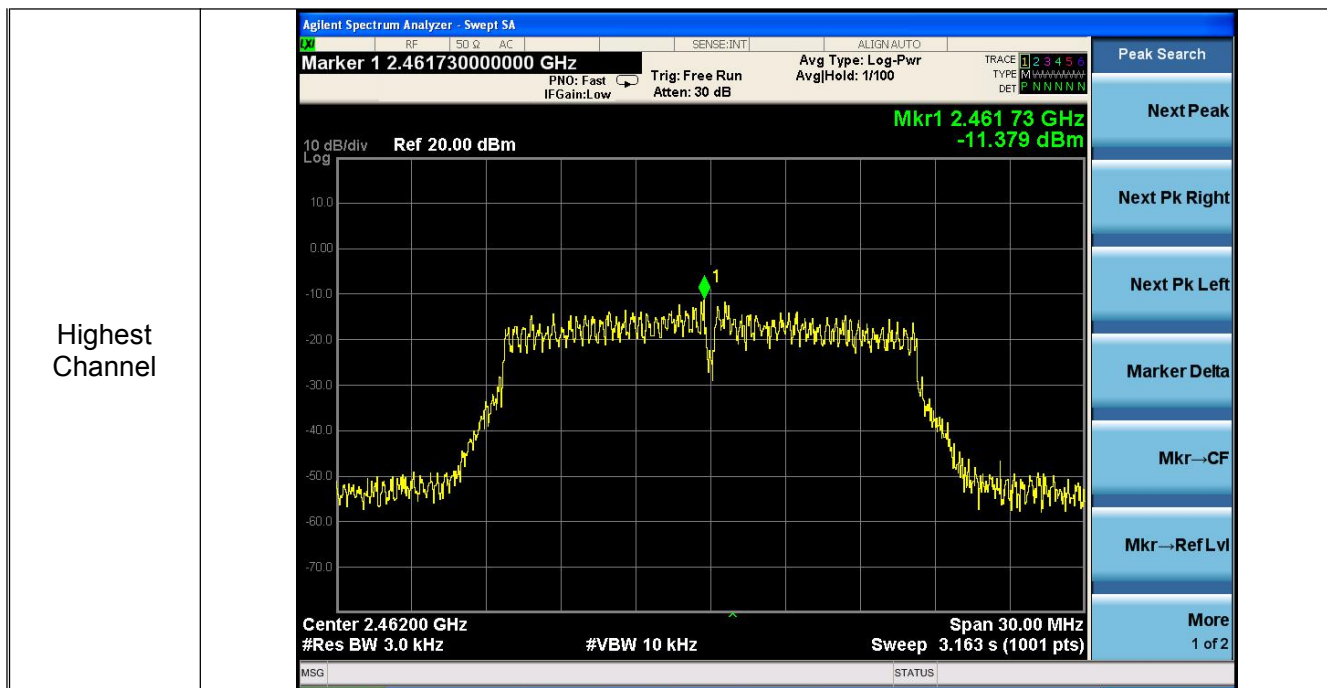



Page: 27 of 50

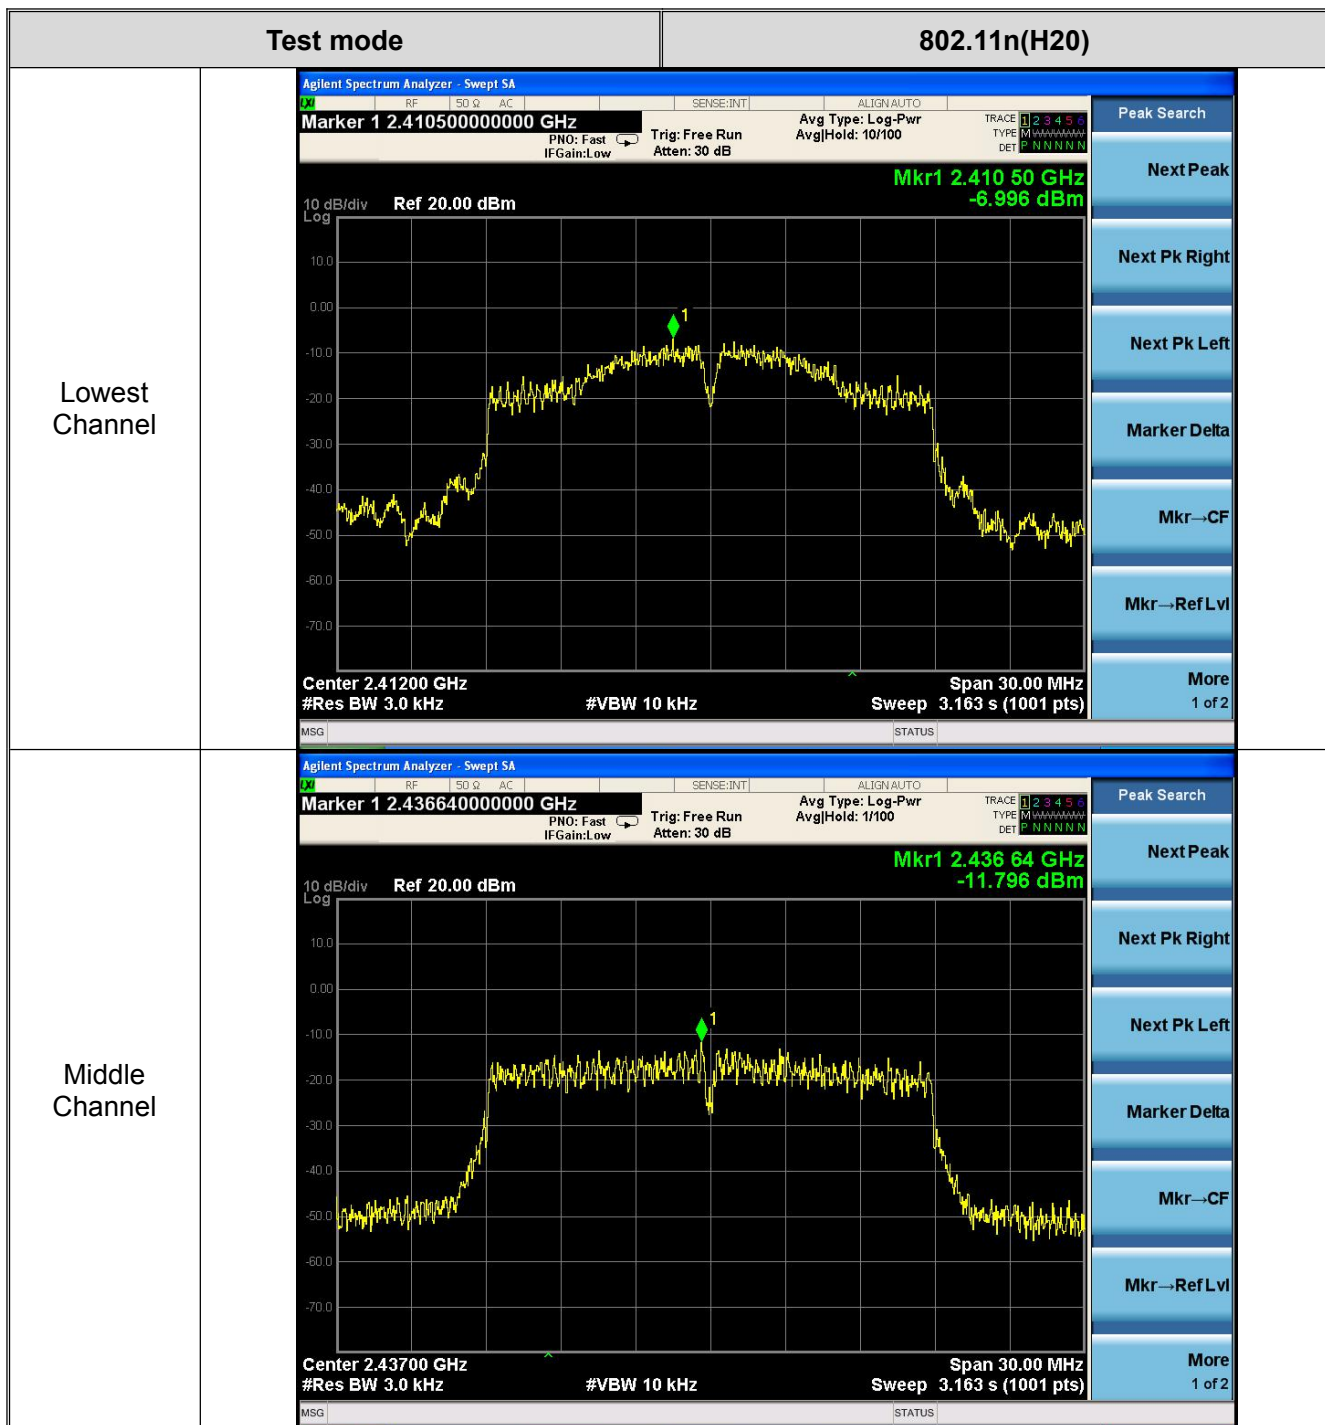




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 28 of 50

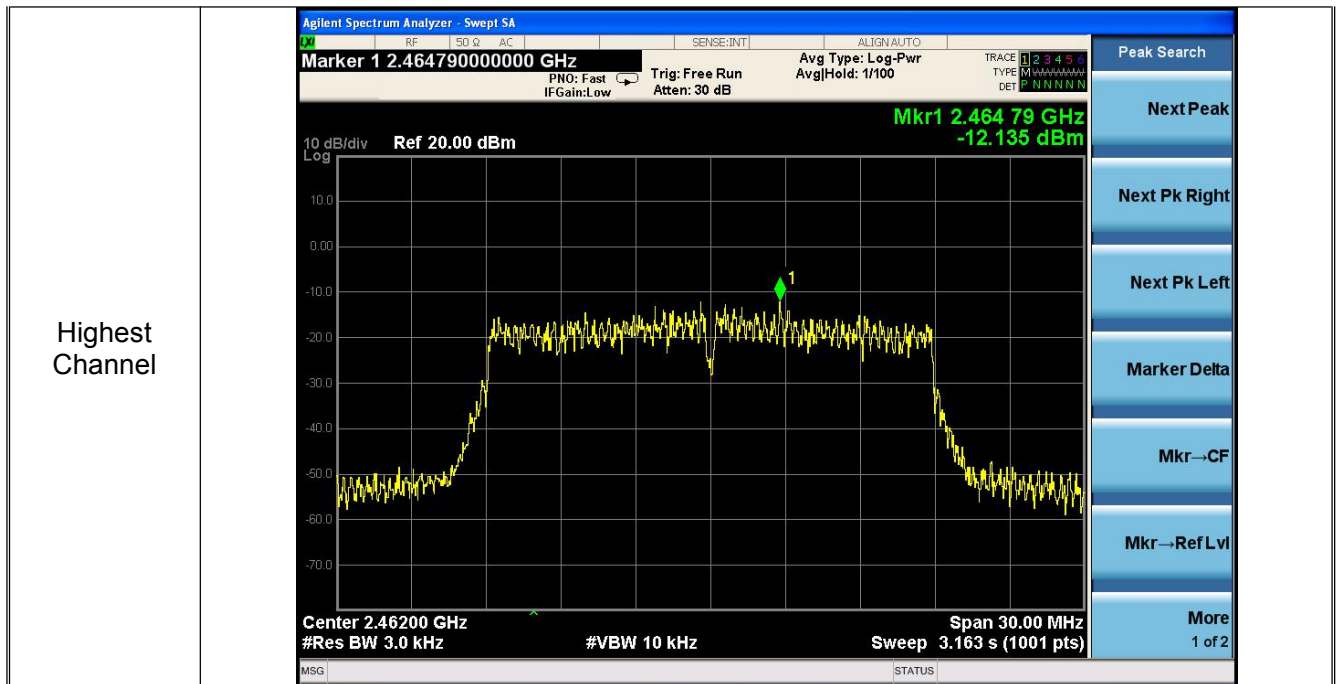




# ATA Testing Technology Service Co., Ltd.


Report No.: ATA161027012F

Page: 29 of 50

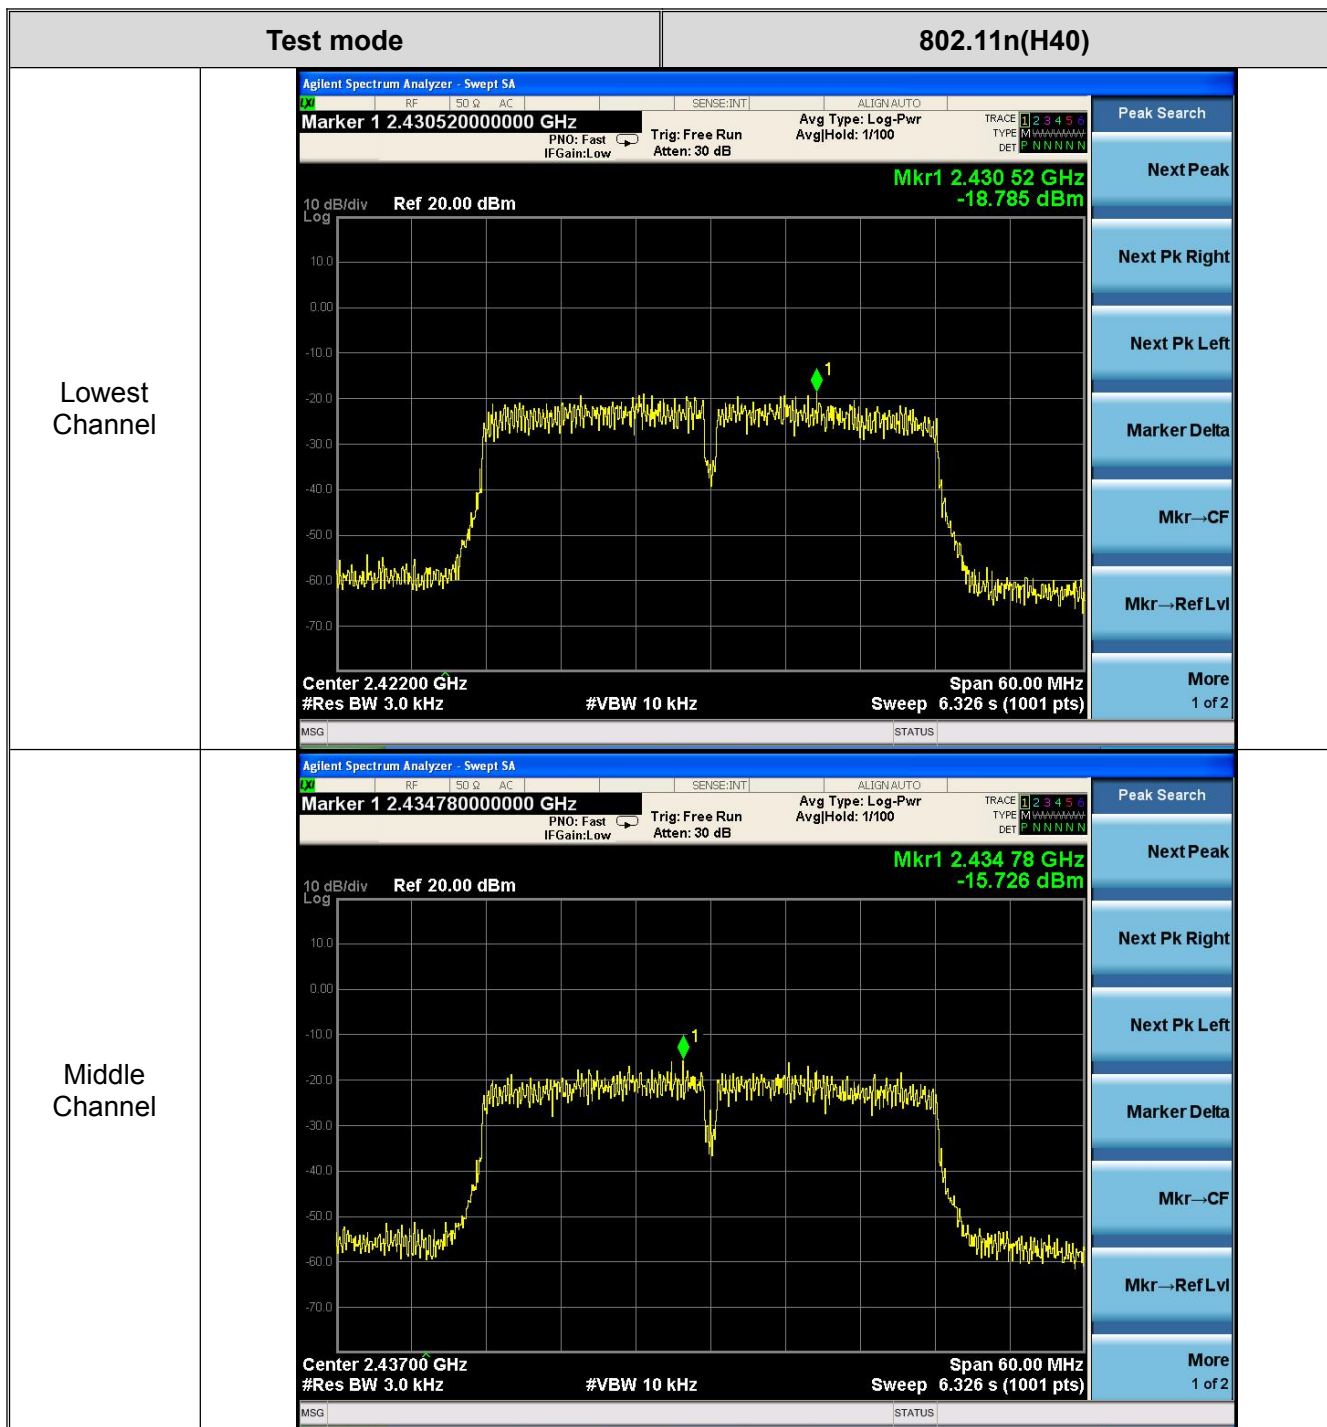



Page: 30 of 50

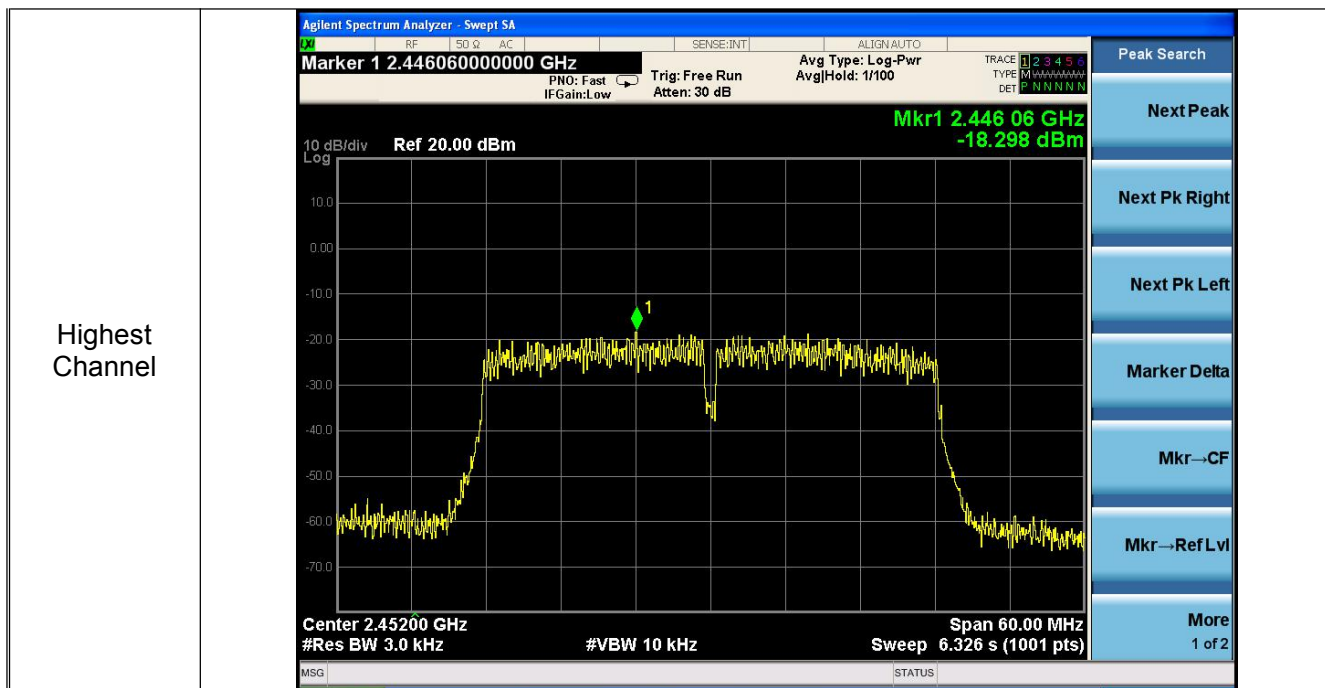



## 8. Band Edge Requirement (Conducted Emission Method)

### 8.1. Test Standard and Limit


#### 8.1.1 Test Standard

FCC Part15 C Section 15.247 (d)

#### 8.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 8.2. Test Setup



### 8.3. Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 kHz, VBW=300 kHz, Detector=Peak

### 8.4. Test Data



Test plot as follows



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 32 of 50

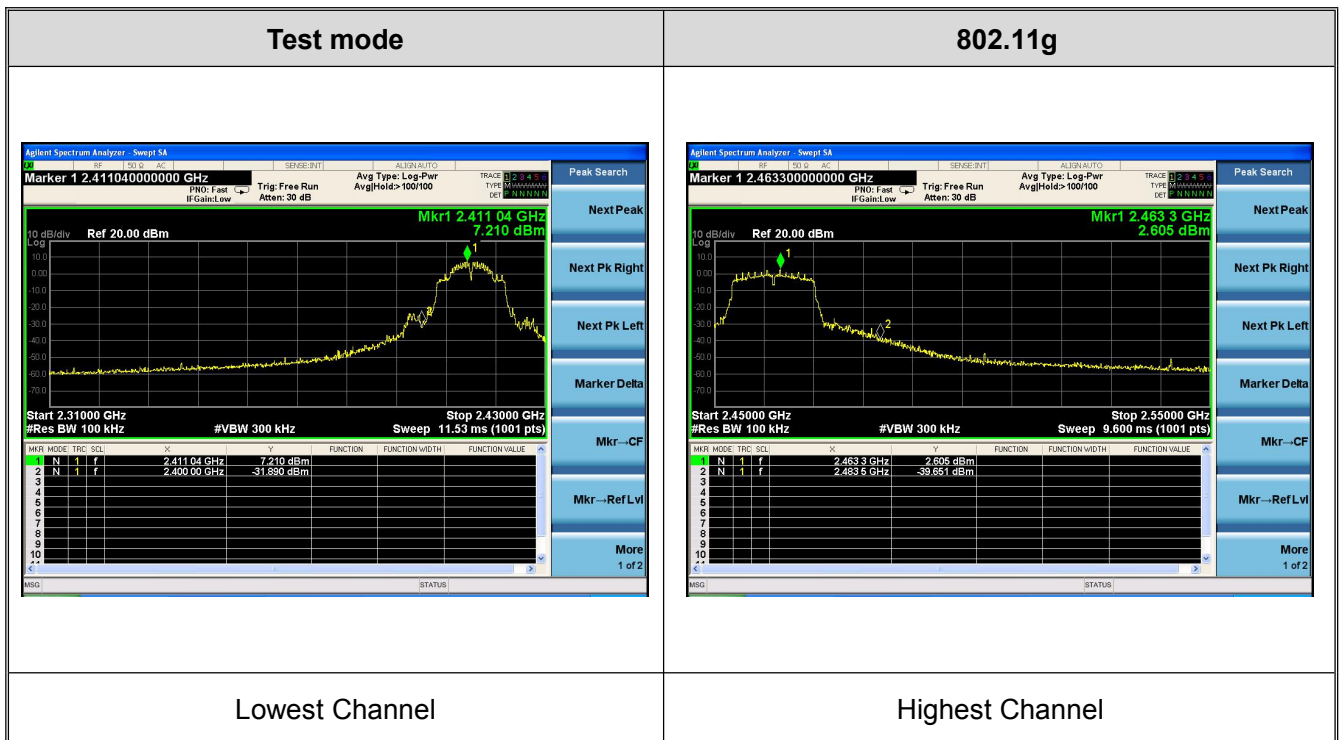
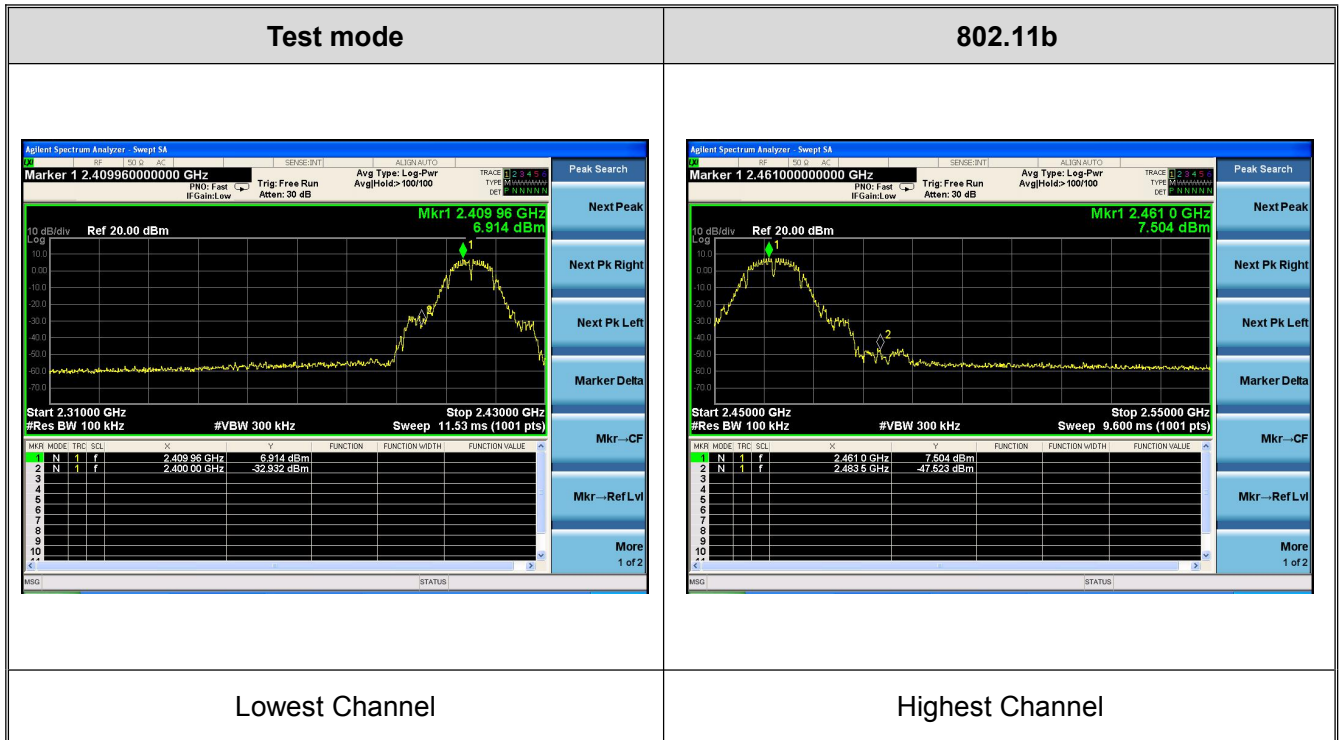




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 33 of 50

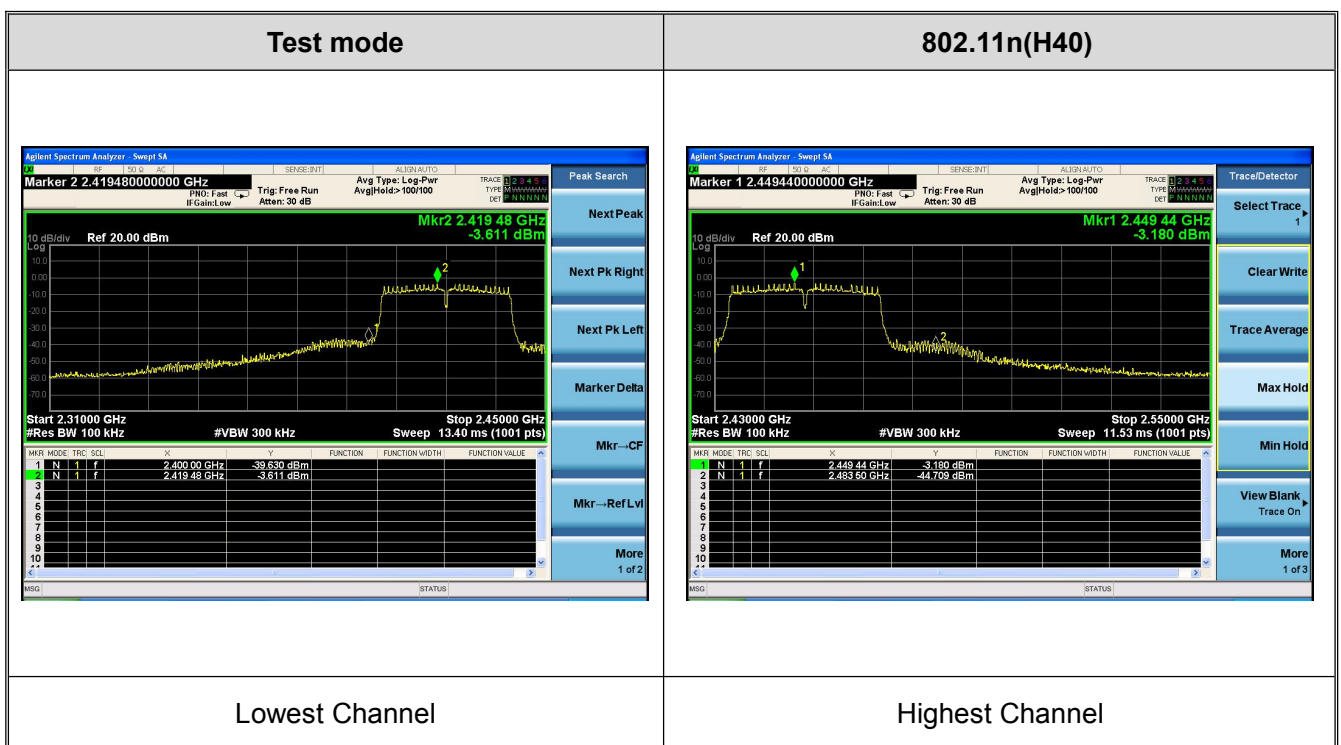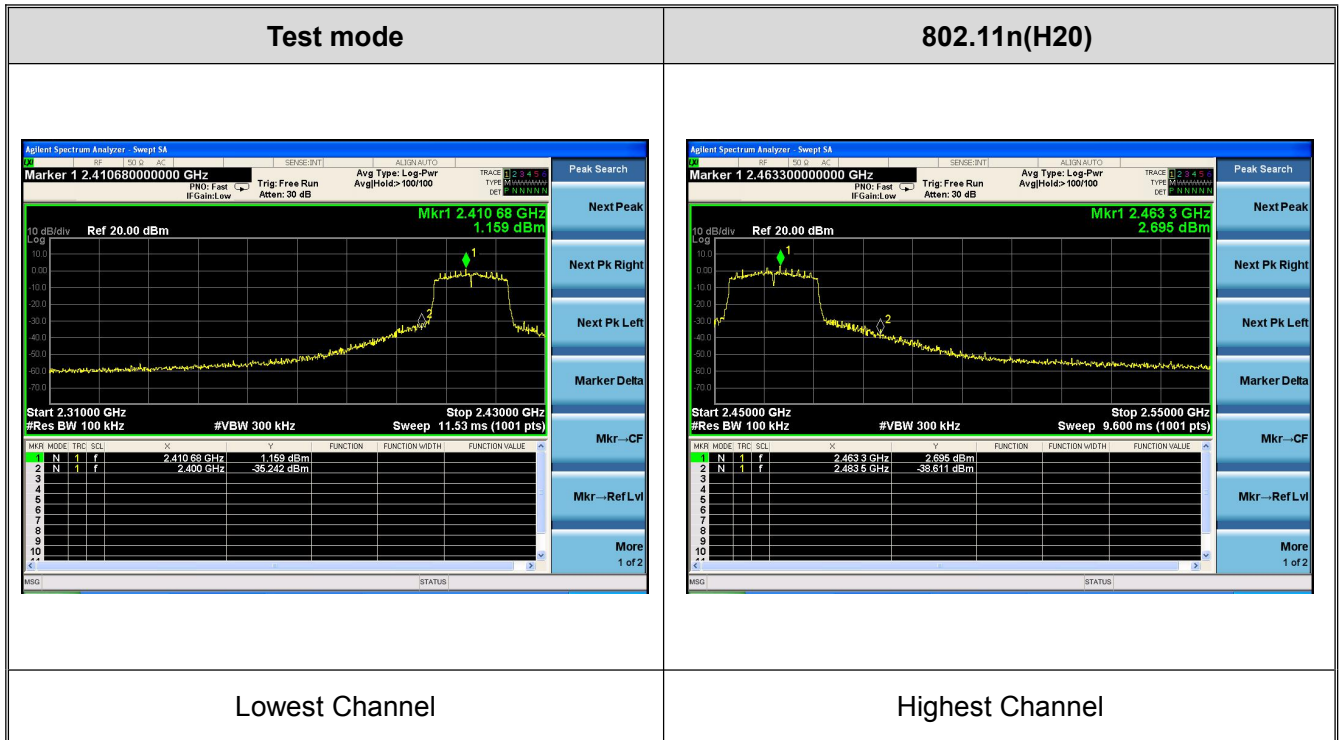

## 9. Band Edge Requirement (Radiated Emission Method)

### 9.1. Test Standard and Limit

#### 9.1.1 Test Standard



FCC Part15 C Section 15.209 and 15.205

#### 9.1.2 Test Limit

**Radiated Emission Test Limit**

| Frequency  | Limit (dB $\mu$ V/m @3m) | Remark        |
|------------|--------------------------|---------------|
| Above 1GHz | 54.00                    | Average value |
|            | 74.00                    | Peak value    |

### 9.2. Test Setup

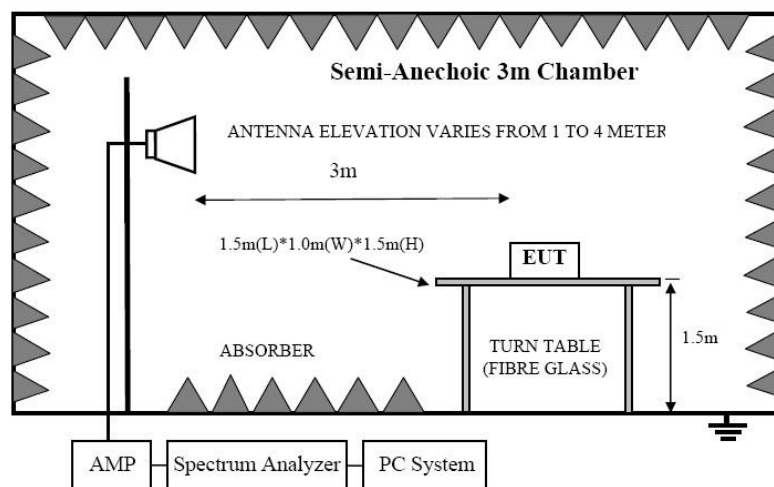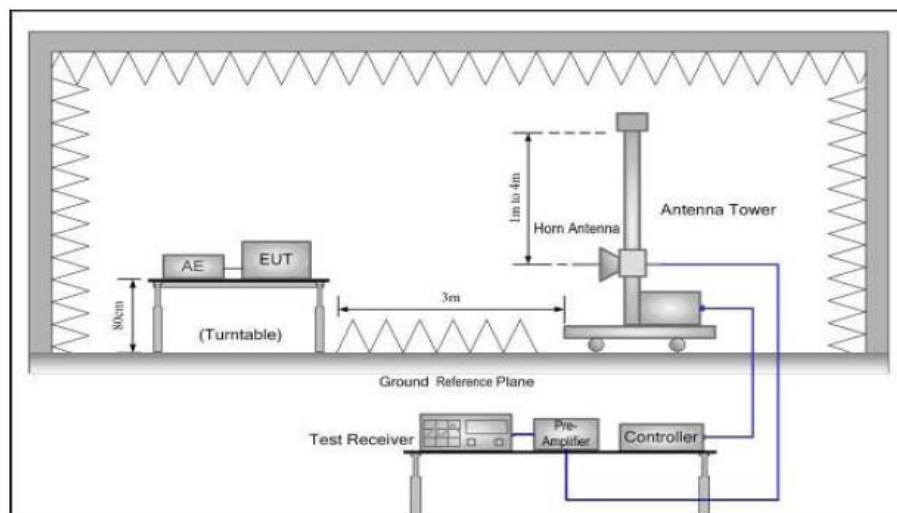



## 9.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz and 1.5 meters above the ground for above 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

## 9.4. Test Data

| Test mode: 802.11b |                   |                       |                 |                    | Test channel: Lowest  |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------|-----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2390.00            | 21.36             | 27.58                 | 5.67            | 0                  | 54.61                 | 74.00          | -19.39          | H    | PEAK  |
| 2390.00            | 20.91             | 27.58                 | 5.67            | 0                  | 54.16                 | 74.00          | -19.84          | V    | PEAK  |
| 2390.00            | 9.34              | 27.58                 | 5.67            | 0                  | 42.59                 | 54.00          | -11.41          | H    | AVG.  |
| 2390.00            | 9.76              | 27.58                 | 5.67            | 0                  | 43.01                 | 54.00          | -10.99          | V    | AVG.  |
| Test mode: 802.11b |                   |                       |                 |                    | Test channel: Highest |                |                 |      |       |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2483.50            | 21.96             | 27.52                 | 5.7             | 0                  | 55.18                 | 74.00          | -18.82          | H    | PEAK  |
| 2483.50            | 21.39             | 27.52                 | 5.7             | 0                  | 54.61                 | 74.00          | -19.39          | V    | PEAK  |
| 2483.50            | 9.76              | 27.52                 | 5.7             | 0                  | 42.98                 | 54.00          | -11.02          | H    | AVG.  |
| 2483.50            | 10.1              | 27.52                 | 5.7             | 0                  | 43.32                 | 54.00          | -10.68          | V    | AVG.  |

| Test mode: 802.11g |      |         |       |        | Test channel: Lowest |       |      |      |       |
|--------------------|------|---------|-------|--------|----------------------|-------|------|------|-------|
| Frequency          | Read | Antenna | Cable | Preamp | Level                | Limit | Over | Pol. | Level |



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 36 of 50

| (MHz)              | Level (dBuV)      | Factor (dB/m)         | Loss (dB)       | Factor (dB)              | (dBuV/m)              | (dBuV/m)       | Limit (dB)      |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------------|-----------------------|----------------|-----------------|------|-------|
| 2390.00            | 20.12             | 27.58                 | 5.67            | 0                        | 53.37                 | 74.00          | -20.63          | H    | PEAK  |
| 2390.00            | 20.54             | 27.58                 | 5.67            | 0                        | 53.79                 | 74.00          | -20.21          | V    | PEAK  |
| 2390.00            | 9.55              | 27.58                 | 5.67            | 0                        | 42.8                  | 54.00          | -11.20          | H    | AVG.  |
| 2390.00            | 10.01             | 27.58                 | 5.67            | 0                        | 43.26                 | 54.00          | -10.74          | V    | AVG.  |
| Test mode: 802.11g |                   |                       |                 |                          | Test channel: Highest |                |                 |      |       |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2483.50            | 20.34             | 27.52                 | 5.7             | 0                        | 53.56                 | 74.00          | -20.44          | H    | PEAK  |
| 2483.50            | 21.23             | 27.52                 | 5.7             | 0                        | 54.45                 | 74.00          | -19.55          | V    | PEAK  |
| 2483.50            | 9.01              | 27.52                 | 5.7             | 0                        | 42.23                 | 54.00          | -11.77          | H    | AVG.  |
| 2483.50            | 9.35              | 27.52                 | 5.7             | 0                        | 42.57                 | 54.00          | -11.43          | V    | AVG.  |

| Test mode: 802.11n(H20) |                   |                       |                 |                          | Test channel: Lowest  |                |                 |      |       |
|-------------------------|-------------------|-----------------------|-----------------|--------------------------|-----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2390.00                 | 21.45             | 27.58                 | 5.67            | 0                        | 54.7                  | 74.00          | -19.30          | H    | PEAK  |
| 2390.00                 | 21.59             | 27.58                 | 5.67            | 0                        | 54.84                 | 74.00          | -19.16          | V    | PEAK  |
| 2390.00                 | 9.37              | 27.58                 | 5.67            | 0                        | 42.62                 | 54.00          | -11.38          | H    | AVG.  |
| 2390.00                 | 9.55              | 27.58                 | 5.67            | 0                        | 42.8                  | 54.00          | -11.20          | V    | AVG.  |
| Test mode: 802.11n(H20) |                   |                       |                 |                          | Test channel: Highest |                |                 |      |       |
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2483.50                 | 20.07             | 27.52                 | 5.7             | 0                        | 53.29                 | 74.00          | -20.71          | H    | PEAK  |
| 2483.50                 | 21.21             | 27.52                 | 5.7             | 0                        | 54.43                 | 74.00          | -19.57          | V    | PEAK  |
| 2483.50                 | 9.32              | 27.52                 | 5.7             | 0                        | 42.54                 | 54.00          | -11.46          | H    | AVG.  |
| 2483.50                 | 9.57              | 27.52                 | 5.7             | 0                        | 42.79                 | 54.00          | -11.21          | V    | AVG.  |

| Test mode: 802.11n(H40) |                   |                       |                 |                          | Test channel: Lowest |                |                 |      |       |
|-------------------------|-------------------|-----------------------|-----------------|--------------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2390.00                 | 21.38             | 27.58                 | 5.67            | 0                        | 54.63                | 74.00          | -19.37          | H    | PEAK  |



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 37 of 50

| 2390.00                 | 21.29             | 27.58                 | 5.67            | 0                        | 54.54                 | 74.00          | -19.46          | V    | PEAK  |
|-------------------------|-------------------|-----------------------|-----------------|--------------------------|-----------------------|----------------|-----------------|------|-------|
| 2390.00                 | 9.5               | 27.58                 | 5.67            | 0                        | 42.75                 | 54.00          | -11.25          | H    | AVG.  |
| 2390.00                 | 9.41              | 27.58                 | 5.67            | 0                        | 42.66                 | 54.00          | -11.34          | V    | AVG.  |
| Test mode: 802.11n(H40) |                   |                       |                 |                          | Test channel: Highest |                |                 |      |       |
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 2483.50                 | 20.17             | 27.52                 | 5.7             | 0                        | 53.39                 | 74.00          | -20.61          | H    | PEAK  |
| 2483.50                 | 21.54             | 27.52                 | 5.7             | 0                        | 54.76                 | 74.00          | -19.24          | V    | PEAK  |
| 2483.50                 | 9.6               | 27.52                 | 5.7             | 0                        | 42.82                 | 54.00          | -11.18          | H    | AVG.  |
| 2483.50                 | 9.98              | 27.52                 | 5.7             | 0                        | 43.2                  | 54.00          | -10.80          | V    | AVG.  |

**Remark:**

1. Final Level = Read Level + Antenna Factor + Cable Loss
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 10. Spurious Emission (Radiated Emission Method)

### 10.1. Test Standard and Limit

#### 10.1.1 Test Standard

FCC Part15 C Section 15.209 and 15.205


#### 10.1.2 Test Limit

| Frequency<br>(MHz) | Limit (dB $\mu$ V/m) |            |
|--------------------|----------------------|------------|
|                    | At 3m Distance       |            |
| 30MHz~88MHz        | 40                   | Quasi-peak |
| 88MHz~216MHz       | 43.5                 | Quasi-peak |
| 216MHz~960MHz      | 46                   | Quasi-peak |
| 960MHz~1000MHz     | 54                   | Quasi-peak |
| Above 1000MHz      | 54                   | Average    |
|                    | 74                   | Peak       |


**Remark:** 1. The lower limit shall apply at the transition frequency.

### 10.2. Test Setup

#### Below 1GHz

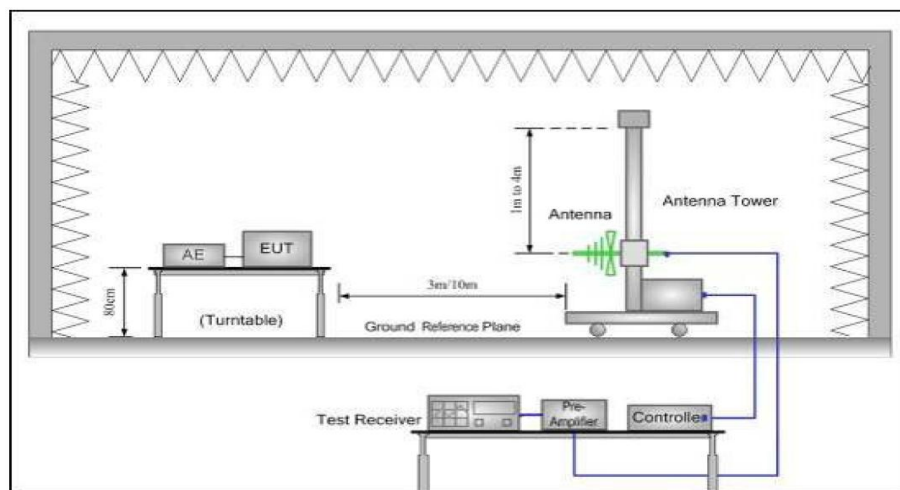

## Above 1GHz

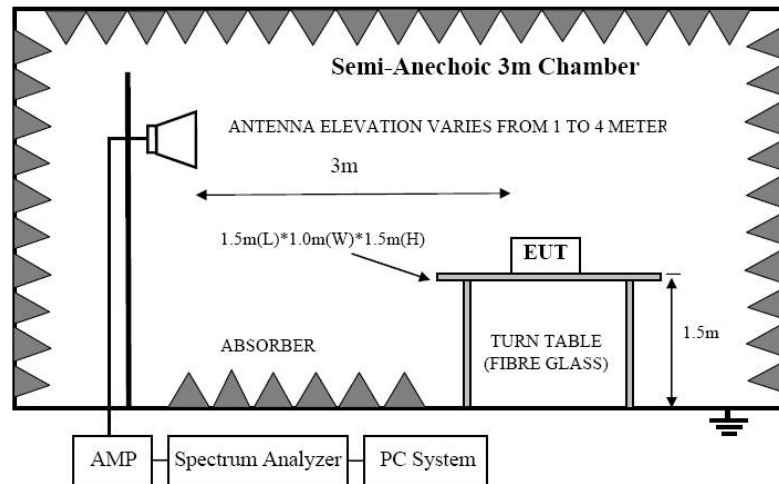

### 10.3. Test Procedure

- 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz and 1.5 meters above the ground for above 1GHz at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### 10.4. Test Data

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.
2. 9 kHz to 30MHz is noise floor, so only shows the data of above 30MHz in this report.




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 40 of 50

## Radiated Emission Test Data (Below 1GHz)

EUT: Smart TV BOX M/N: X92  
Operating Condition: WIFI mode  
Test Site: 3m chamber  
Operator: Tom  
Test Specification: AC 120V/60Hz  
Polarization: Horizontal  
Note: Tem:25°C Hum:50%

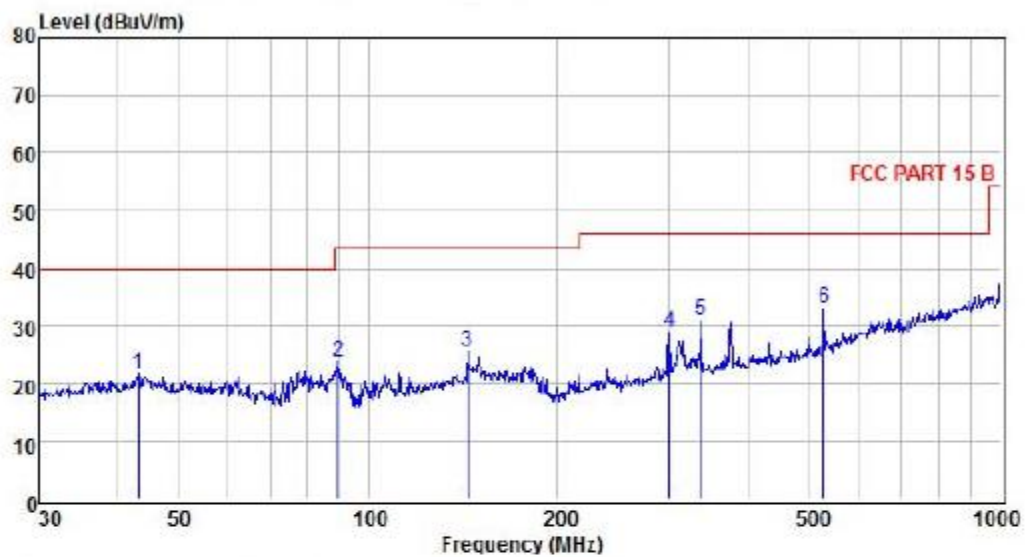

| Condition : FCC PART 15 B |             |                       |                         |                        |                     | POL: HORIZONTAL |               |                |        |
|---------------------------|-------------|-----------------------|-------------------------|------------------------|---------------------|-----------------|---------------|----------------|--------|
| Item                      | Freq<br>MHz | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Preamp<br>Factor<br>dB | Cable<br>Loss<br>dB | Level<br>dBuV   | Limit<br>dBuV | Margin<br>dBuV | Remark |
| 1                         | 43.05       | 38.29                 | 13.79                   | 30.40                  | 0.14                | 21.82           | 40.00         | -18.18         | Peak   |
| 2                         | 89.59       | 44.18                 | 9.44                    | 30.23                  | 0.33                | 23.72           | 43.50         | -19.78         | Peak   |
| 3                         | 143.83      | 40.81                 | 13.77                   | 29.39                  | 0.38                | 25.57           | 43.50         | -17.93         | Peak   |
| 4                         | 300.37      | 43.40                 | 12.85                   | 28.02                  | 0.64                | 28.87           | 46.00         | -17.13         | Peak   |
| 5                         | 336.04      | 44.24                 | 13.61                   | 27.84                  | 0.78                | 30.79           | 46.00         | -15.21         | Peak   |
| 6                         | 528.25      | 42.06                 | 17.03                   | 27.20                  | 1.07                | 32.96           | 46.00         | -13.04         | Peak   |

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss




# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 41 of 50

## Radiated Emission Test Data (Below 1GHz)

EUT: Smart TV BOX M/N: X92  
Operating Condition: WIFI mode  
Test Site: 3m chamber  
Operator: Tom  
Test Specification: AC 120V/60Hz  
Polarization: Vertical  
Note Tem:25°C Hum:50%

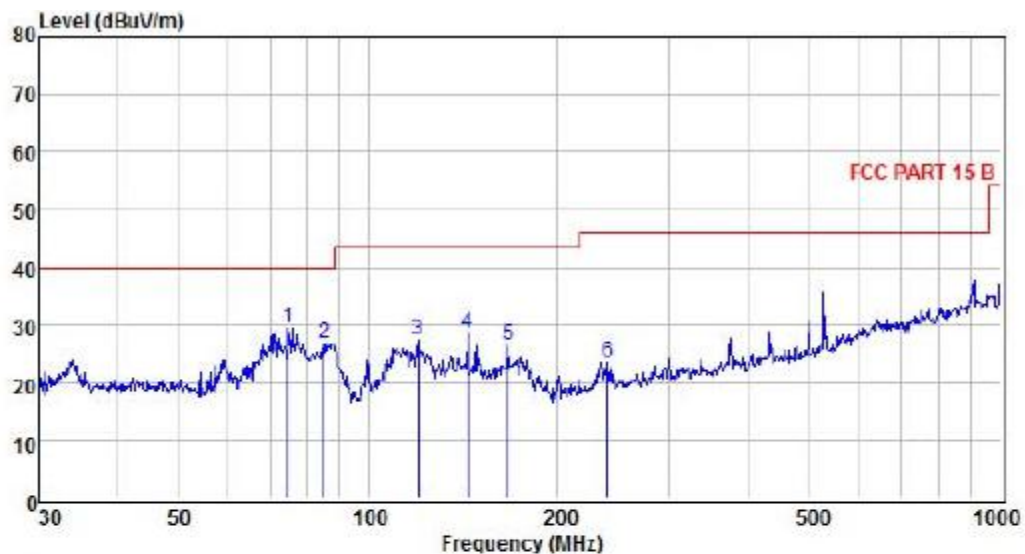

| Condition : FCC PART 15 B |             |                       |                         |                        | POL: VERTICAL       |               |               |                |        |
|---------------------------|-------------|-----------------------|-------------------------|------------------------|---------------------|---------------|---------------|----------------|--------|
| Item                      | Freq<br>MHz | Read<br>Level<br>dBuV | Antenna<br>Factor<br>dB | Preamp<br>Factor<br>dB | Cable<br>Loss<br>dB | Level<br>dBuV | Limit<br>dBuV | Margin<br>dBuV | Remark |
| 1                         | 74.66       | 49.39                 | 9.90                    | 30.09                  | 0.25                | 29.45         | 40.00         | -10.55         | Peak   |
| 2                         | 85.00       | 47.22                 | 9.36                    | 30.09                  | 0.29                | 26.80         | 40.00         | -13.20         | Peak   |
| 3                         | 119.86      | 44.56                 | 12.06                   | 29.68                  | 0.36                | 27.30         | 43.50         | -16.20         | Peak   |
| 4                         | 143.83      | 43.74                 | 13.77                   | 29.39                  | 0.38                | 28.50         | 43.50         | -15.00         | Peak   |
| 5                         | 166.65      | 41.63                 | 13.56                   | 29.13                  | 0.40                | 26.46         | 43.50         | -17.04         | Peak   |
| 6                         | 239.99      | 39.75                 | 11.45                   | 28.25                  | 0.53                | 23.48         | 46.00         | -22.52         | Peak   |

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 42 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11b |                   |                       |                 |                          | Test channel: Lowest |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4824.00            | 45.53             | 31.54                 | 8.92            | 40.22                    | 45.77                | 74.00          | -28.23          | V    | PEAK  |
| 7236.00            | 46.22             | 36.5                  | 10.62           | 41.22                    | 52.12                | 74.00          | -21.88          | V    | PEAK  |
| 1407.00            | 43.29             | 25.14                 | 2.68            | 34.84                    | 36.27                | 74.00          | -37.73          | V    | PEAK  |
| 9648.00            | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 12060.00           | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 14472.00           | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 4824.00            | 45.74             | 31.54                 | 8.92            | 40.22                    | 45.98                | 74.00          | -28.02          | H    | PEAK  |
| 7236.00            | 48.13             | 36.5                  | 10.62           | 41.22                    | 54.03                | 74.00          | -19.97          | H    | PEAK  |
| 1407.00            | 44.38             | 25.14                 | 2.68            | 34.84                    | 37.36                | 74.00          | -36.64          | H    | PEAK  |
| 9648.00            | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 12060.00           | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 14472.00           | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4824.00            | 34.05             | 31.54                 | 8.92            | 40.22                    | 34.29                | 54.00          | -19.71          | V    | AVG.  |
| 7236.00            | 34.13             | 36.5                  | 10.62           | 41.22                    | 40.03                | 54.00          | -13.97          | V    | AVG.  |
| 1407.00            | 33.2              | 25.14                 | 2.68            | 34.84                    | 26.18                | 54.00          | -27.82          | V    | AVG.  |
| 9648.00            | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 12060.00           | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 14472.00           | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 4824.00            | 35.91             | 31.54                 | 8.92            | 40.22                    | 36.15                | 54.00          | -17.85          | H    | AVG.  |
| 7236.00            | 37.4              | 36.5                  | 10.62           | 41.22                    | 43.3                 | 54.00          | -10.7           | H    | AVG.  |
| 1407.00            | 34.87             | 25.14                 | 2.68            | 34.84                    | 27.85                | 54.00          | -26.15          | H    | AVG.  |
| 9648.00            | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 12060.00           | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 14472.00           | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 43 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11b |                   |                       |                 |                    | Test channel: Middle |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4874.00            | 45.58             | 31.57                 | 8.98            | 40.15              | 45.98                | 74.00          | -28.02          | V    | PEAK  |
| 7311.00            | 48.16             | 36.48                 | 10.68           | 41.16              | 54.16                | 74.00          | -19.84          | V    | PEAK  |
| 1407.00            | 43.4              | 25.14                 | 2.68            | 34.84              | 36.38                | 74.00          | -37.62          | V    | PEAK  |
| 9748.00            | *                 |                       |                 |                    |                      | 74.00          |                 | V    | PEAK  |
| 12185.00           | *                 |                       |                 |                    |                      | 74.00          |                 | V    | PEAK  |
| 14622.00           | *                 |                       |                 |                    |                      | 74.00          |                 | V    | PEAK  |
| 4874.00            | 45.46             | 31.57                 | 8.98            | 40.15              | 45.86                | 74.00          | -28.14          | H    | PEAK  |
| 7311.00            | 45.88             | 36.48                 | 10.68           | 41.16              | 51.88                | 74.00          | -22.12          | H    | PEAK  |
| 1407.00            | 44.9              | 25.14                 | 2.68            | 34.84              | 37.88                | 74.00          | -36.12          | H    | PEAK  |
| 9748.00            | *                 |                       |                 |                    |                      | 74.00          |                 | H    | PEAK  |
| 12185.00           | *                 |                       |                 |                    |                      | 74.00          |                 | H    | PEAK  |
| 14622.00           | *                 |                       |                 |                    |                      | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4874.00            | 32.9              | 31.57                 | 8.98            | 40.15              | 33.3                 | 54.00          | -20.7           | V    | AVG.  |
| 7311.00            | 35.43             | 36.48                 | 10.68           | 41.16              | 41.43                | 54.00          | -12.57          | V    | AVG.  |
| 1407.00            | 31.87             | 25.14                 | 2.68            | 34.84              | 24.85                | 54.00          | -29.15          | V    | AVG.  |
| 9748.00            | *                 |                       |                 |                    |                      | 54.00          |                 | V    | AVG.  |
| 12185.00           | *                 |                       |                 |                    |                      | 54.00          |                 | V    | AVG.  |
| 14622.00           | *                 |                       |                 |                    |                      | 54.00          |                 | V    | AVG.  |
| 4874.00            | 32.33             | 31.57                 | 8.98            | 40.15              | 32.73                | 54.00          | -21.27          | H    | AVG.  |
| 7311.00            | 33.12             | 36.48                 | 10.68           | 41.16              | 39.12                | 54.00          | -14.88          | H    | AVG.  |
| 1407.00            | 32.79             | 25.14                 | 2.68            | 34.84              | 25.77                | 54.00          | -28.23          | H    | AVG.  |
| 9748.00            | *                 |                       |                 |                    |                      | 54.00          |                 | H    | AVG.  |
| 12185.00           | *                 |                       |                 |                    |                      | 54.00          |                 | H    | AVG.  |
| 14622.00           | *                 |                       |                 |                    |                      | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 44 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11b |                   |                       |                 |                    | Test channel: Highest |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------|-----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4924.00            | 44.58             | 31.61                 | 9.04            | 40.08              | 45.15                 | 74.00          | -28.85          | V    | PEAK  |
| 7386.00            | 47.09             | 36.52                 | 10.75           | 41.09              | 53.27                 | 74.00          | -20.73          | V    | PEAK  |
| 1407.00            | 43.7              | 25.14                 | 2.68            | 34.84              | 36.68                 | 74.00          | -37.32          | V    | PEAK  |
| 9848.00            | *                 |                       |                 |                    |                       | 74.00          |                 | V    | PEAK  |
| 12310.00           | *                 |                       |                 |                    |                       | 74.00          |                 | V    | PEAK  |
| 14772.00           | *                 |                       |                 |                    |                       | 74.00          |                 | V    | PEAK  |
| 4924.00            | 44.42             | 31.61                 | 9.04            | 40.08              | 44.99                 | 74.00          | -29.01          | H    | PEAK  |
| 7386.00            | 45.24             | 36.52                 | 10.75           | 41.09              | 51.42                 | 74.00          | -22.58          | H    | PEAK  |
| 1407.00            | 44.25             | 25.14                 | 2.68            | 34.84              | 37.23                 | 74.00          | -36.77          | H    | PEAK  |
| 9848.00            | *                 |                       |                 |                    |                       | 74.00          |                 | H    | PEAK  |
| 12310.00           | *                 |                       |                 |                    |                       | 74.00          |                 | H    | PEAK  |
| 14772.00           | *                 |                       |                 |                    |                       | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4924.00            | 32.74             | 31.61                 | 9.04            | 40.08              | 33.31                 | 54.00          | -20.69          | V    | AVG.  |
| 7386.00            | 35.97             | 36.52                 | 10.75           | 41.09              | 42.15                 | 54.00          | -11.85          | V    | AVG.  |
| 1407.00            | 31.7              | 25.14                 | 2.68            | 34.84              | 24.68                 | 54.00          | -29.32          | V    | AVG.  |
| 9848.00            | *                 |                       |                 |                    |                       | 54.00          |                 | V    | AVG.  |
| 12310.00           | *                 |                       |                 |                    |                       | 54.00          |                 | V    | AVG.  |
| 14772.00           | *                 |                       |                 |                    |                       | 54.00          |                 | V    | AVG.  |
| 4924.00            | 33.46             | 31.61                 | 9.04            | 40.08              | 34.03                 | 54.00          | -19.97          | H    | AVG.  |
| 7386.00            | 35.01             | 36.52                 | 10.75           | 41.09              | 41.19                 | 54.00          | -12.81          | H    | AVG.  |
| 1407.00            | 32.82             | 25.14                 | 2.68            | 34.84              | 25.8                  | 54.00          | -28.2           | H    | AVG.  |
| 9848.00            | *                 |                       |                 |                    |                       | 54.00          |                 | H    | AVG.  |
| 12310.00           | *                 |                       |                 |                    |                       | 54.00          |                 | H    | AVG.  |
| 14772.00           | *                 |                       |                 |                    |                       | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 45 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11g |                   |                       |                 |                          | Test channel: Lowest |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4824.00            | 44.79             | 31.54                 | 8.92            | 40.22                    | 45.03                | 74.00          | -28.97          | V    | PEAK  |
| 7236.00            | 45.49             | 36.5                  | 10.62           | 41.22                    | 51.39                | 74.00          | -22.61          | V    | PEAK  |
| 1407.00            | 42.28             | 25.14                 | 2.68            | 34.84                    | 35.26                | 74.00          | -38.74          | V    | PEAK  |
| 9648.00            | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 12060.00           | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 14472.00           | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 4824.00            | 46.12             | 31.54                 | 8.92            | 40.22                    | 46.36                | 74.00          | -27.64          | H    | PEAK  |
| 7236.00            | 42.19             | 36.5                  | 10.62           | 41.22                    | 48.09                | 74.00          | -25.91          | H    | PEAK  |
| 1407.00            | 43.39             | 25.14                 | 2.68            | 34.84                    | 36.37                | 74.00          | -37.63          | H    | PEAK  |
| 9648.00            | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 12060.00           | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 14472.00           | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4824.00            | 37.58             | 31.54                 | 8.92            | 40.22                    | 37.82                | 54.00          | -16.18          | V    | AVG.  |
| 7236.00            | 35.69             | 36.5                  | 10.62           | 41.22                    | 41.59                | 54.00          | -12.41          | V    | AVG.  |
| 1407.00            | 33.13             | 25.14                 | 2.68            | 34.84                    | 26.11                | 54.00          | -27.89          | V    | AVG.  |
| 9648.00            | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 12060.00           | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 14472.00           | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 4824.00            | 41.22             | 31.54                 | 8.92            | 40.22                    | 41.46                | 54.00          | -12.54          | H    | AVG.  |
| 7236.00            | 34.7              | 36.5                  | 10.62           | 41.22                    | 40.6                 | 54.00          | -13.4           | H    | AVG.  |
| 1407.00            | 33.58             | 25.14                 | 2.68            | 34.84                    | 26.56                | 54.00          | -27.44          | H    | AVG.  |
| 9648.00            | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 12060.00           | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 14472.00           | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 46 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11g |                   |                       |                 |                          | Test channel: Middle |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4874.00            | 42.6              | 31.57                 | 8.98            | 40.15                    | 43                   | 74.00          | -31             | V    | PEAK  |
| 7311.00            | 40.43             | 36.48                 | 10.68           | 41.16                    | 46.43                | 74.00          | -27.57          | V    | PEAK  |
| 1407.00            | 42.02             | 25.14                 | 2.68            | 34.84                    | 35                   | 74.00          | -39             | V    | PEAK  |
| 9748.00            | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 12185.00           | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 14622.00           | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 4874.00            | 44.32             | 31.57                 | 8.98            | 40.15                    | 44.72                | 74.00          | -29.28          | H    | PEAK  |
| 7311.00            | 42.28             | 36.48                 | 10.68           | 41.16                    | 48.28                | 74.00          | -25.72          | H    | PEAK  |
| 1407.00            | 42.9              | 25.14                 | 2.68            | 34.84                    | 35.88                | 74.00          | -38.12          | H    | PEAK  |
| 9748.00            | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 12185.00           | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 14622.00           | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4874.00            | 34.6              | 31.57                 | 8.98            | 40.15                    | 35                   | 54.00          | -19             | V    | AVG.  |
| 7311.00            | 32.69             | 36.48                 | 10.68           | 41.16                    | 38.69                | 54.00          | -15.31          | V    | AVG.  |
| 1407.00            | 32.3              | 25.14                 | 2.68            | 34.84                    | 25.28                | 54.00          | -28.72          | V    | AVG.  |
| 9748.00            | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 12185.00           | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 14622.00           | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 4874.00            | 32.59             | 31.57                 | 8.98            | 40.15                    | 32.99                | 54.00          | -21.01          | H    | AVG.  |
| 7311.00            | 30.5              | 36.48                 | 10.68           | 41.16                    | 36.5                 | 54.00          | -17.5           | H    | AVG.  |
| 1407.00            | 32.09             | 25.14                 | 2.68            | 34.84                    | 25.07                | 54.00          | -28.93          | H    | AVG.  |
| 9748.00            | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 12185.00           | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 14622.00           | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 47 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11g |                   |                       |                 |                          | Test channel: Highest |                |                 |      |       |
|--------------------|-------------------|-----------------------|-----------------|--------------------------|-----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4924.00            | 42.67             | 31.61                 | 9.04            | 40.08                    | 43.24                 | 74.00          | -30.76          | V    | PEAK  |
| 7386.00            | 39.55             | 36.52                 | 10.75           | 41.09                    | 45.73                 | 74.00          | -28.27          | V    | PEAK  |
| 1407.00            | 41.7              | 25.14                 | 2.68            | 34.84                    | 34.68                 | 74.00          | -39.32          | V    | PEAK  |
| 9848.00            | *                 |                       |                 |                          |                       | 74.00          |                 | V    | PEAK  |
| 12310.00           | *                 |                       |                 |                          |                       | 74.00          |                 | V    | PEAK  |
| 14772.00           | *                 |                       |                 |                          |                       | 74.00          |                 | V    | PEAK  |
| 4924.00            | 42.6              | 31.61                 | 9.04            | 40.08                    | 43.17                 | 74.00          | -30.83          | H    | PEAK  |
| 7386.00            | 40.96             | 36.52                 | 10.75           | 41.09                    | 47.14                 | 74.00          | -26.86          | H    | PEAK  |
| 1407.00            | 42.28             | 25.14                 | 2.68            | 34.84                    | 35.26                 | 74.00          | -38.74          | H    | PEAK  |
| 9848.00            | *                 |                       |                 |                          |                       | 74.00          |                 | H    | PEAK  |
| 12310.00           | *                 |                       |                 |                          |                       | 74.00          |                 | H    | PEAK  |
| 14772.00           | *                 |                       |                 |                          |                       | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)    | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4924.00            | 33.69             | 31.61                 | 9.04            | 40.08                    | 34.26                 | 54.00          | -19.74          | V    | AVG.  |
| 7386.00            | 29.55             | 36.52                 | 10.75           | 41.09                    | 35.73                 | 54.00          | -18.27          | V    | AVG.  |
| 1407.00            | 31.59             | 25.14                 | 2.68            | 34.84                    | 24.57                 | 54.00          | -29.43          | V    | AVG.  |
| 9848.00            | *                 |                       |                 |                          |                       | 54.00          |                 | V    | AVG.  |
| 12310.00           | *                 |                       |                 |                          |                       | 54.00          |                 | V    | AVG.  |
| 14772.00           | *                 |                       |                 |                          |                       | 54.00          |                 | V    | AVG.  |
| 4924.00            | 31.59             | 31.61                 | 9.04            | 40.08                    | 32.16                 | 54.00          | -21.84          | H    | AVG.  |
| 7386.00            | 30.5              | 36.52                 | 10.75           | 41.09                    | 36.68                 | 54.00          | -17.32          | H    | AVG.  |
| 1407.00            | 32.3              | 25.14                 | 2.68            | 34.84                    | 25.28                 | 54.00          | -28.72          | H    | AVG.  |
| 9848.00            | *                 |                       |                 |                          |                       | 54.00          |                 | H    | AVG.  |
| 12310.00           | *                 |                       |                 |                          |                       | 54.00          |                 | H    | AVG.  |
| 14772.00           | *                 |                       |                 |                          |                       | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 48 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11n(H20) |                   |                       |                 |                          | Test channel: Lowest |                |                 |      |       |
|-------------------------|-------------------|-----------------------|-----------------|--------------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4824.00                 | 43.69             | 31.54                 | 8.92            | 40.22                    | 43.93                | 74.00          | -30.07          | V    | PEAK  |
| 7236.00                 | 39.39             | 36.5                  | 10.62           | 41.22                    | 45.29                | 74.00          | -28.71          | V    | PEAK  |
| 1407.00                 | 42.29             | 25.14                 | 2.68            | 34.84                    | 35.27                | 74.00          | -38.73          | V    | PEAK  |
| 9648.00                 | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 12060.00                | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 14472.00                | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 4824.00                 | 44.59             | 31.54                 | 8.92            | 40.22                    | 44.83                | 74.00          | -29.17          | H    | PEAK  |
| 7236.00                 | 41.5              | 36.5                  | 10.62           | 41.22                    | 47.4                 | 74.00          | -26.6           | H    | PEAK  |
| 1407.00                 | 42.9              | 25.14                 | 2.68            | 34.84                    | 35.88                | 74.00          | -38.12          | H    | PEAK  |
| 9648.00                 | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 12060.00                | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 14472.00                | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4824.00                 | 34.68             | 31.54                 | 8.92            | 40.22                    | 34.92                | 54.00          | -19.08          | V    | AVG.  |
| 7236.00                 | 32.6              | 36.5                  | 10.62           | 41.22                    | 38.5                 | 54.00          | -15.5           | V    | AVG.  |
| 1407.00                 | 31.75             | 25.14                 | 2.68            | 34.84                    | 24.73                | 54.00          | -29.27          | V    | AVG.  |
| 9648.00                 | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 12060.00                | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 14472.00                | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 4824.00                 | 34.68             | 31.54                 | 8.92            | 40.22                    | 34.92                | 54.00          | -19.08          | H    | AVG.  |
| 7236.00                 | 34.32             | 36.5                  | 10.62           | 41.22                    | 40.22                | 54.00          | -13.78          | H    | AVG.  |
| 1407.00                 | 32.54             | 25.14                 | 2.68            | 34.84                    | 25.52                | 54.00          | -28.48          | H    | AVG.  |
| 9648.00                 | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 12060.00                | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 14472.00                | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 49 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11n(H20) |                   |                       |                 |                          | Test channel: Middle |                |                 |      |       |
|-------------------------|-------------------|-----------------------|-----------------|--------------------------|----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4874.00                 | 41.6              | 31.57                 | 8.98            | 40.15                    | 42                   | 74.00          | -32             | V    | PEAK  |
| 7311.00                 | 40.59             | 36.48                 | 10.68           | 41.16                    | 46.59                | 74.00          | -27.41          | V    | PEAK  |
| 1407.00                 | 41.47             | 25.14                 | 2.68            | 34.84                    | 34.45                | 74.00          | -39.55          | V    | PEAK  |
| 9748.00                 | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 12185.00                | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 14622.00                | *                 |                       |                 |                          |                      | 74.00          |                 | V    | PEAK  |
| 4874.00                 | 41.6              | 31.57                 | 8.98            | 40.15                    | 42                   | 74.00          | -32             | H    | PEAK  |
| 7311.00                 | 40.55             | 36.48                 | 10.68           | 41.16                    | 46.55                | 74.00          | -27.45          | H    | PEAK  |
| 1407.00                 | 42.89             | 25.14                 | 2.68            | 34.84                    | 35.87                | 74.00          | -38.13          | H    | PEAK  |
| 9748.00                 | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 12185.00                | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| 14622.00                | *                 |                       |                 |                          |                      | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)       | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4874.00                 | 34.58             | 31.57                 | 8.98            | 40.15                    | 34.98                | 54.00          | -19.02          | V    | AVG.  |
| 7311.00                 | 31.68             | 36.48                 | 10.68           | 41.16                    | 37.68                | 54.00          | -16.32          | V    | AVG.  |
| 1407.00                 | 31.98             | 25.14                 | 2.68            | 34.84                    | 24.96                | 54.00          | -29.04          | V    | AVG.  |
| 9748.00                 | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 12185.00                | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 14622.00                | *                 |                       |                 |                          |                      | 54.00          |                 | V    | AVG.  |
| 4874.00                 | 32.64             | 31.57                 | 8.98            | 40.15                    | 33.04                | 54.00          | -20.96          | H    | AVG.  |
| 7311.00                 | 33.42             | 36.48                 | 10.68           | 41.16                    | 39.42                | 54.00          | -14.58          | H    | AVG.  |
| 1407.00                 | 32.35             | 25.14                 | 2.68            | 34.84                    | 25.33                | 54.00          | -28.67          | H    | AVG.  |
| 9748.00                 | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 12185.00                | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |
| 14622.00                | *                 |                       |                 |                          |                      | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.



# ATA Testing Technology Service Co., Ltd.

Report No.: ATA161027012F

Page: 50 of 50

## Radiated Emission Test Data (Above 1GHz)

| Test mode: 802.11n(H20) |                   |                       |                 |                          | Test channel: Highest |                |                 |      |       |
|-------------------------|-------------------|-----------------------|-----------------|--------------------------|-----------------------|----------------|-----------------|------|-------|
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4924.00                 | 43.68             | 31.61                 | 9.04            | 40.08                    | 44.25                 | 74.00          | -29.75          | V    | PEAK  |
| 7386.00                 | 41.6              | 36.52                 | 10.75           | 41.09                    | 47.78                 | 74.00          | -26.22          | V    | PEAK  |
| 1407.00                 | 42.28             | 25.14                 | 2.68            | 34.84                    | 35.26                 | 74.00          | -38.74          | V    | PEAK  |
| 9848.00                 | *                 |                       |                 |                          |                       | 74.00          |                 | V    | PEAK  |
| 12310.00                | *                 |                       |                 |                          |                       | 74.00          |                 | V    | PEAK  |
| 14772.00                | *                 |                       |                 |                          |                       | 74.00          |                 | V    | PEAK  |
| 4924.00                 | 42.63             | 31.61                 | 9.04            | 40.08                    | 43.2                  | 74.00          | -30.8           | H    | PEAK  |
| 7386.00                 | 41.04             | 36.52                 | 10.75           | 41.09                    | 47.22                 | 74.00          | -26.78          | H    | PEAK  |
| 1407.00                 | 43.39             | 25.14                 | 2.68            | 34.84                    | 36.37                 | 74.00          | -37.63          | H    | PEAK  |
| 9848.00                 | *                 |                       |                 |                          |                       | 74.00          |                 | H    | PEAK  |
| 12310.00                | *                 |                       |                 |                          |                       | 74.00          |                 | H    | PEAK  |
| 14772.00                | *                 |                       |                 |                          |                       | 74.00          |                 | H    | PEAK  |
| Frequency (MHz)         | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamplifier Factor (dB) | Level (dBuV/m)        | Limit (dBuV/m) | Over Limit (dB) | Pol. | Level |
| 4924.00                 | 32.69             | 31.61                 | 9.04            | 40.08                    | 33.26                 | 54.00          | -20.74          | V    | AVG.  |
| 7386.00                 | 33.23             | 36.52                 | 10.75           | 41.09                    | 39.41                 | 54.00          | -14.59          | V    | AVG.  |
| 1407.00                 | 31.67             | 25.14                 | 2.68            | 34.84                    | 24.65                 | 54.00          | -29.35          | V    | AVG.  |
| 9848.00                 | *                 |                       |                 |                          |                       | 54.00          |                 | V    | AVG.  |
| 12310.00                | *                 |                       |                 |                          |                       | 54.00          |                 | V    | AVG.  |
| 14772.00                | *                 |                       |                 |                          |                       | 54.00          |                 | V    | AVG.  |
| 4924.00                 | 34.04             | 31.61                 | 9.04            | 40.08                    | 34.61                 | 54.00          | -19.39          | H    | AVG.  |
| 7386.00                 | 31.59             | 36.52                 | 10.75           | 41.09                    | 37.77                 | 54.00          | -16.23          | H    | AVG.  |
| 1407.00                 | 32.2              | 25.14                 | 2.68            | 34.84                    | 25.18                 | 54.00          | -28.82          | H    | AVG.  |
| 9848.00                 | *                 |                       |                 |                          |                       | 54.00          |                 | H    | AVG.  |
| 12310.00                | *                 |                       |                 |                          |                       | 54.00          |                 | H    | AVG.  |
| 14772.00                | *                 |                       |                 |                          |                       | 54.00          |                 | H    | AVG.  |

### Remark:

1. Final Level = Read Level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “\*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.