



Shenzhen Yingfeng antenna technology Co., LTD

S5178

Test Report

Address: Room 412, Building 7, Yungu Phase II, No. 2, Pingshan Road, Taoyuan Street, Nanshan District, Shenzhen

Guesthouse	Hai Lingwei
product	headset
engineer	Simon
telephone	18118726256
Mail box	lyg@yingfengtianxian.com
Day period	2024-10-14
editor	Andy





Report table of contents

- Test equipment
- Prototype appearance
- Antenna size diagram
- matching parameter
- Network debugging antenna S parameter
- Free field passive efficiency of the whole machine
- Complete free field passive field type
- Complete machine free field OTA data
- Complete free field OTA field type
- Stretch test



Test condition

- 1. Measurement of S parameters
- 2. Equipment: Network Analyzer (Agilent E5062A), microwave darkroom, MT8852B
- 3. Items: Impedance, return loss, VSWR, Efficiency, gain, radiation field pattern, Sensitivity, Power, frequency offset active data TRP TIS

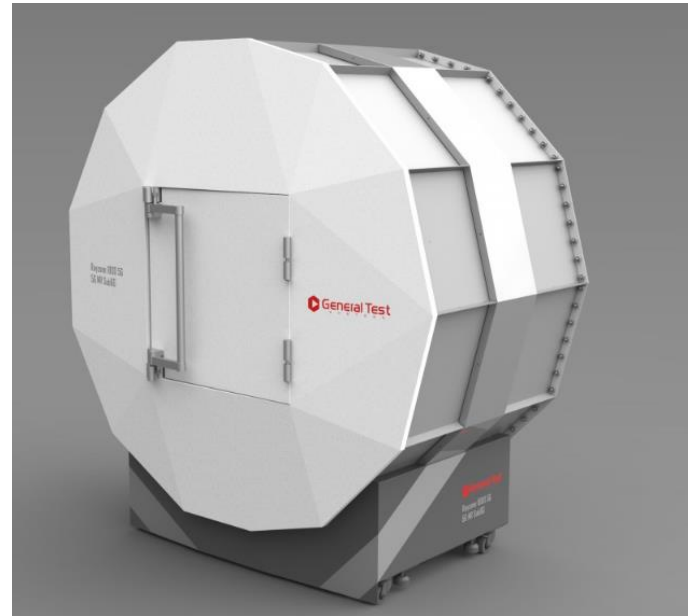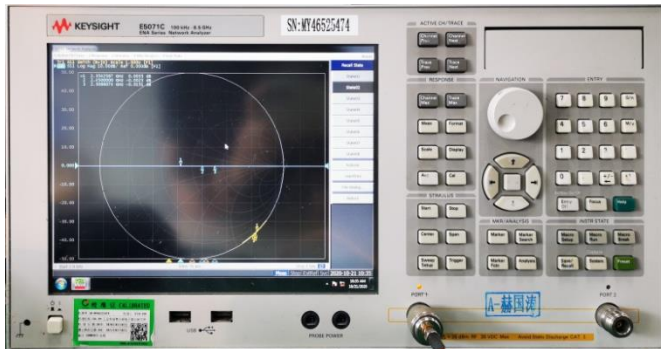



Shenzhen Yingfeng antenna technology Co., LTD


Prototype appearance





Shenzhen Yingfeng antenna technology Co., LTD

Antenna size diagram

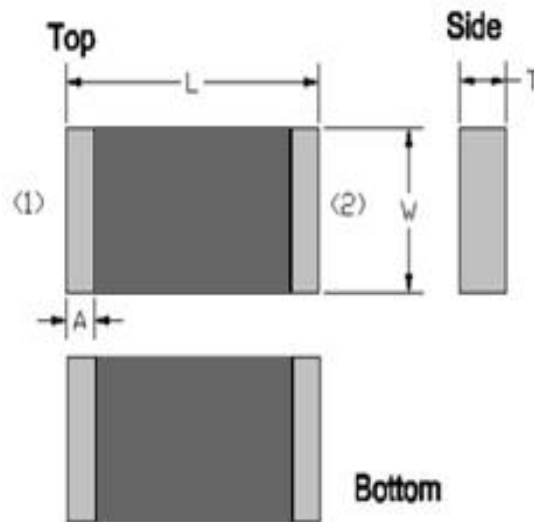

Dimension (mm)	
L	2.05 $\pm$ 0.15
W	1.20 $\pm$ 0.15
T	0.65 $\pm$ 0.10
A	0.20 $\pm$ 0.10


No.	Terminal Name
1	Feeding/GNG
2	GND/Feeding

P.S : Top & down and left & right side are symmetrical, No direction



Shenzhen Yingfeng antenna technology Co., LTD

matching parameter L

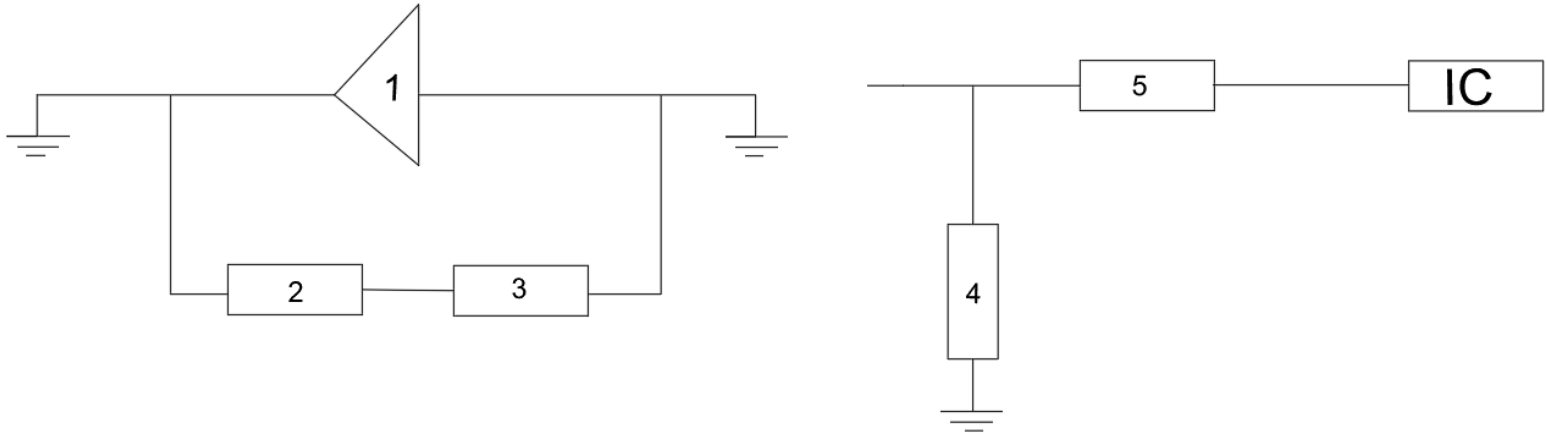


serial number	model	specification	manufacturer	object ID	tolerance	
1	YF2012C1	2012	Yingfeng	YF2012C1P2G45		
2	capacitance	1.2PF/0201	microvolume		$\pm 0.1\text{PF}$	
3	capacitance	1.0PF/0201	microvolume		$\pm 0.1\text{PF}$	充电柱
4	capacitance	0.5PF/0201	microvolume		$\pm 0.1\text{PF}$	
5	resistance	0 Ω	microvolume			



Shenzhen Yingfeng antenna technology Co., LTD

matching parameter R

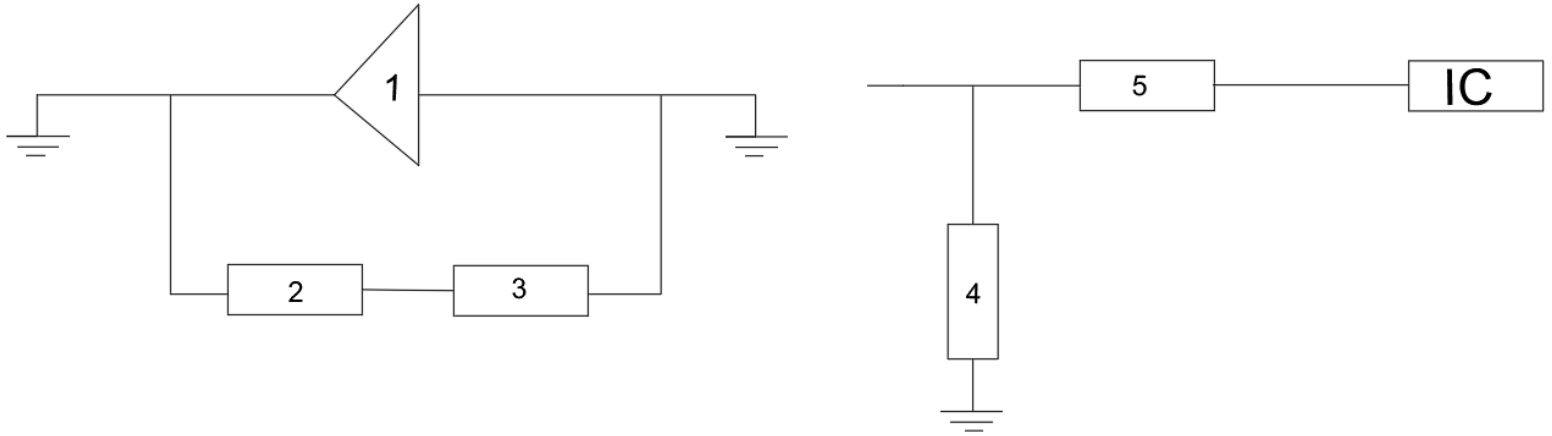

serial number	model	specification	manufacturer	object ID	tolerance	
1	YF2012C1	2012	Yingfeng	YF2012C1P2G45		
2	capacitance	0.75PF/0201	microvolume		$\pm 0.1\text{PF}$	
3	capacitance	0.7PF/0201	microvolume		$\pm 0.1\text{PF}$	充电桩
4	capacitance	0.5PF/0201	microvolume		$\pm 0.1\text{PF}$	
5	resistance	0 Ω	microvolume			





Network debugging antenna S parameter

Debug waveform

L



R

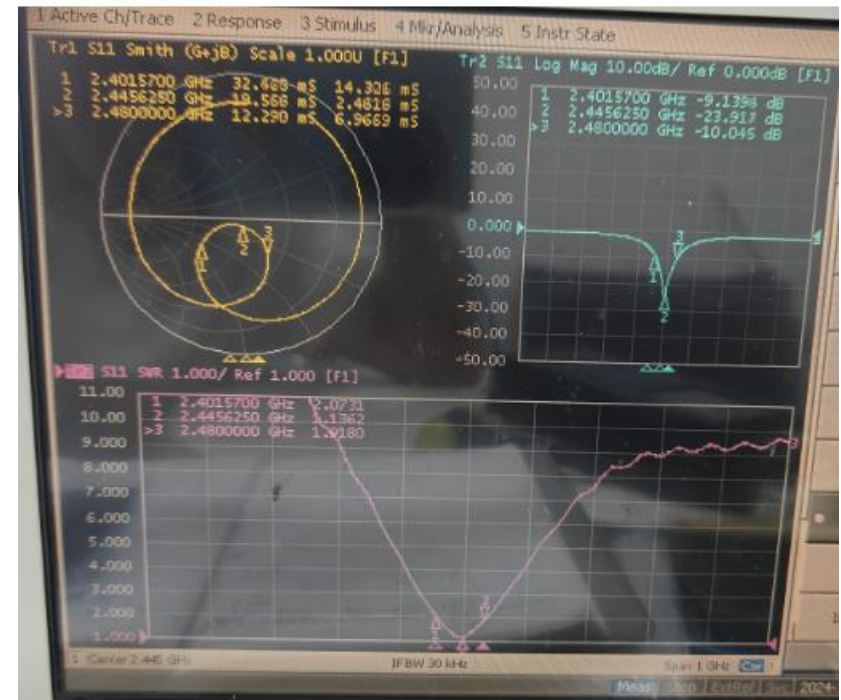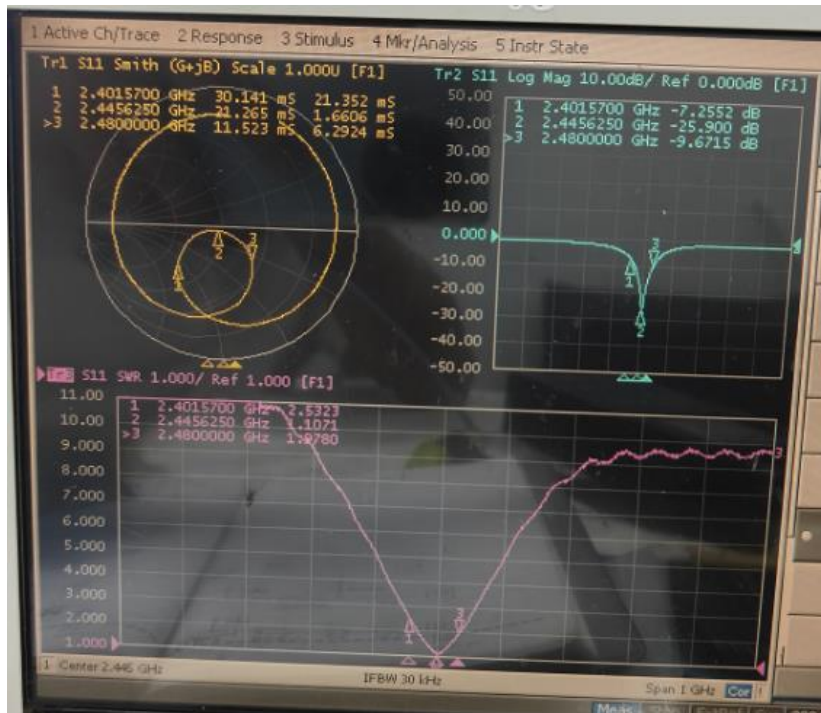



Shenzhen Yingfeng antenna technology Co., LTD

Radiation

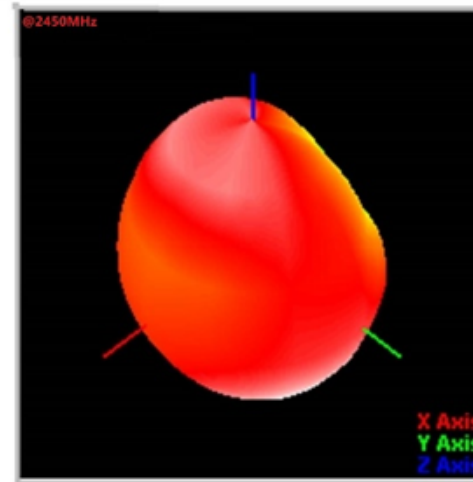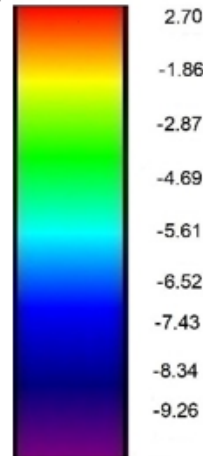

	2400MHz	2450MHz	2500MHz
Efficiency	70.56%	75.25%	71.01%
Gain(dBi)	1.86	2.50	1.33



Shenzhen Yingfeng antenna technology Co., LTD

Complete machine free field OTA data

	Channel	TRP (dBm)	TIS (dBm)
L	CH0	7.01089193	-86.73871492
	CH39	8.669394511	-85.16749163
	CH78	7.231225452	-86.29973295





	Channel	TRP (dBm)	TIS (dBm)
R	CH0	7.008617848	-84.36872184
	CH39	8.6394477	-85.61894432
	CH78	7.687183073	-85.47024907



Shenzhen Yingfeng antenna technology Co., LTD

Complete free field OTA field type

L.

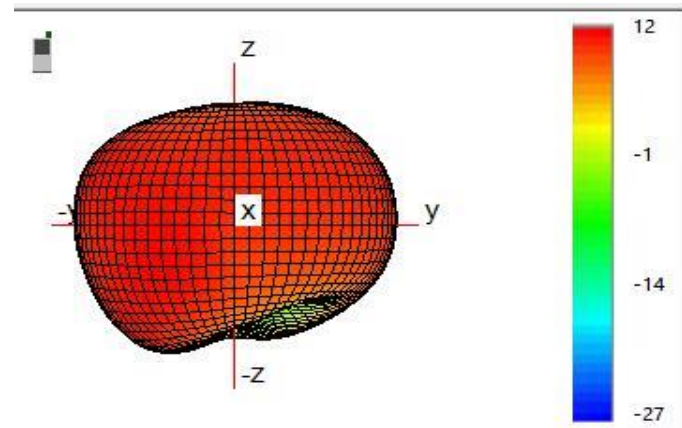
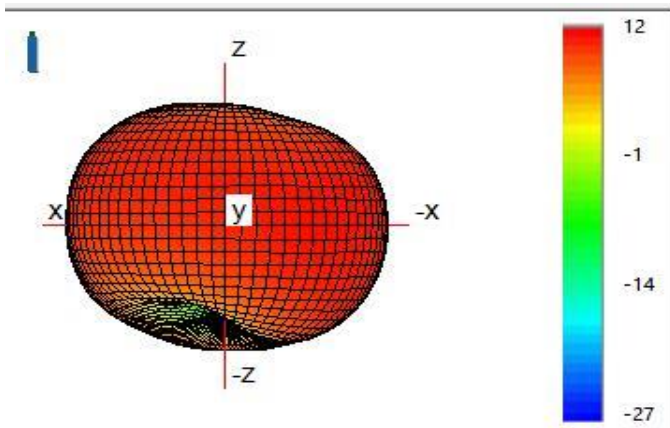
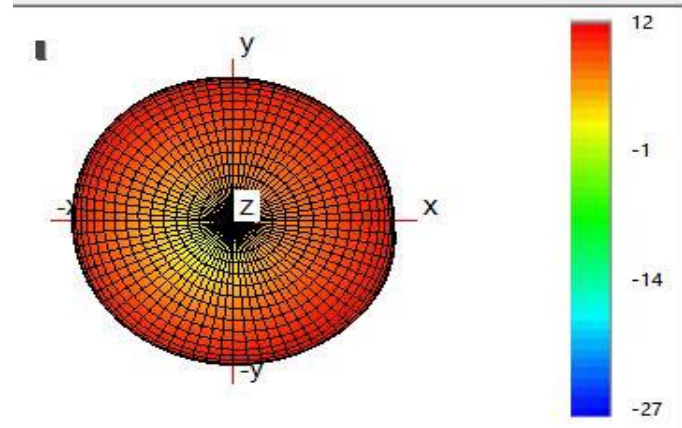
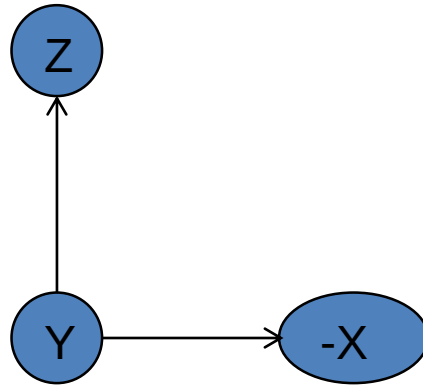




Shenzhen Yingfeng antenna technology Co., LTD

Complete free field OTA field type

R.

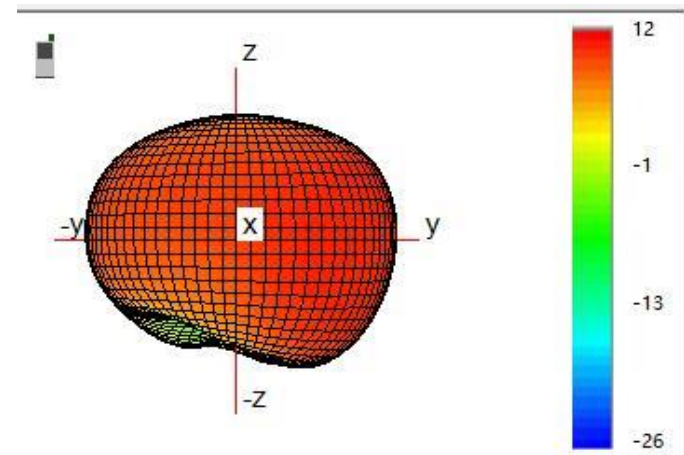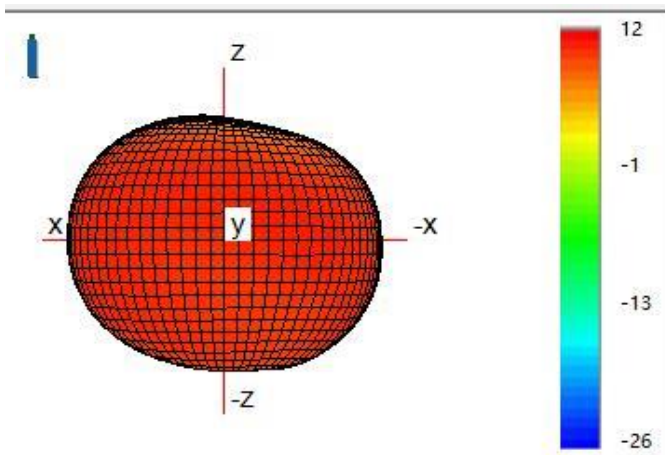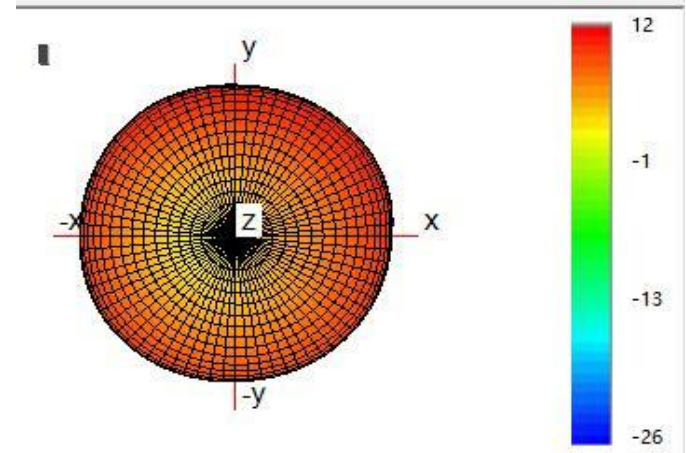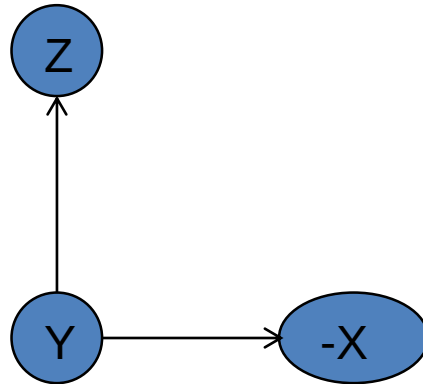



Stretch test

a. Environment/Mobile Phone

test item	measuring distance		Pocket test requirements (please state the following item test distance)		remark
Apple 6	10 meters	low	Right front	OK	Roof test line 30 meters, ear cover 3 meters
	20 meters	In the	Left front	OK	
	30 meters	high	Right rear	OK	
			Left rear	OK	



Shenzhen Yingfeng antenna technology Co., LTD

Thanks for Your Attention