


Prüfbericht-Nr.: <i>Test report No.:</i>	50055846 001	Auftrags-Nr.: <i>Order No.:</i>	164069063	Seite 1 von 15 <i>Page 1 of 15</i>	
Kunden-Referenz-Nr.: <i>Client reference No.:</i>	N/A	Auftragsdatum: <i>Order date.:</i>	14.07.2016		
Auftraggeber: <i>Client:</i>	ContextMedia LLC 330 N. Wabash Ave STE 2500, Chicago, Illinois United States.				
Prüfgegenstand: <i>Test item:</i>	13.3" Tablet				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	P-TAB-104-ELC-XX (XX equals to 00, 01, 02, 03...99) (ContextMedia Health)				
Auftrags-Inhalt: <i>Order content:</i>	FCC and IC approval				
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109 ICES-003 Issue 6 January 2016				
Wareneingangsdatum: <i>Date of receipt:</i>	21.07.2016	Please refer to photo documents			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000399543-001				
Prüfzeitraum: <i>Testing period:</i>	12.08.2016 - 26.08.2016				
Ort der Prüfung: <i>Place of testing:</i>	Accurate Technology Co., Ltd.				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
18.09.2016 Andy Yan / Project Manager 		18.09.2016 Owen Tian / Technical Certifier 			
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other: FCC ID: 2A16X-PTABELC IC: 21722-PTABELC HVIN: P-TAB-104-ELC-01, P-TAB-104-ELC-02, P-TAB-104-ELC-03 All the Identification no. are identical in the hardware and electronic aspects with each other. All the HVIN no. are identical in the hardware and electronic aspects with each other, the difference is only color appearance.					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

V04

Prüfbericht - Nr.: 50055846 001
Test Report No.

Seite 2 von 15
Page 2 of 15

Test Summary

5.1.1 CONDUCTED EMISSION

RESULT: Pass

5.1.2 RADIATED EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION	9
4.2	TEST OPERATION AND TEST SOFTWARE.....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	9
4.5	TEST SETUP DIAGRAM	10
5	TEST RESULTS	11
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	11
5.1.1	Conducted Emission	11
5.1.2	Radiated Emission	12
6	PHOTOGRAPHS OF THE TEST SET-UP	13
7	LIST OF TABLES.....	15
8	LIST OF PHOTOGRAPHS	15

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of Conducted Emission and Radiated Emission

2 Test Sites

2.1 Test Facilities

Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan Shenzhen, 518057, P.R. China

FCC Registration No.: 752051

Test site Industry Canada No.: 5077A-2

The tests at the test sites have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Accurate Technology Co., Ltd.

Radiated Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Spectrum Analyzer	R&S	FSV40	101495	09.01.2017
Test Receiver	R&S	ESCS30	100307	09.01.2017
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	14.01.2017
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	14.01.2017
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	09.01.2017
Pre-Amplifier	R&S	CBLU11835 40-01	3791	09.01.2017
50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	09.01.2017
RF Coaxial Cable	SUHNER	N-3m	No.8	09.01.2017
RF Coaxial Cable	RESENBERGER	N-3.5m	No.9	09.01.2017
RF Coaxial Cable	SUHNER	N-6m	No.10	09.01.2017
RF Coaxial Cable	RESENBERGER	N-12m	No.11	09.01.2017
50_ Coaxial Switch	Anritsu Corp	MP59B	6200283933	09.01.2017
Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
Test Receiver	R&S	ESCS30	100307	09.01.2017
L.I.S.N.	R&S	NLSK8126	8126431	09.01.2017
50Ω Coaxial Switch	Anritsu	MP59B	6200283933	09.01.2017

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

Item		Extended Uncertainty
Conducted Emission		± 3.0 dB
Radiated Emission (9kHz-30MHz)	Field strength (dB μ V/m)	U=3.08dB, k=2, σ =95%
Radiated Emission (30-1000MHz)	Field strength (dB μ V/m)	U=4.42dB, k=2, σ =95%
Radiated Emission (above 1000MHz)	Field strength (dB μ V/m)	U=4.06dB, k=2, σ =95%

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The Accurate Technology Co., Ltd. Test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan Shenzhen, 518057, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is a 13.3" Tablet which supports Data transfer, Video playing function etc. It also supports Bluetooth (dual mode) and Wi-Fi 802.11 a/b/g/n/ac wireless technology. This report is only for JBC. Other functions are reported in the related reports.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	13.3" Tablet
Type Designation	P-TAB-104-ELC-XX (XX equals to 00, 01, 02, 03...99)
Trade Mark	ContextMedia Health
FCC ID	2A16X-PTABELC
IC / HVIN	21722-PTABELC / P-TAB-104-ELC-01, P-TAB-104-ELC-02, P-TAB-104-ELC-03
Operating Temperature Range	0 °C ~ +40 °C
Highest internal source	Less than 1.2GHz
Operating Voltage	DC 5.0 V from AC/DC Adapter
Testing Voltage	AC 120V, 60Hz
AC/DC Adapter	Model: NBS18C050250VU Input: AC 100-240V~50/60Hz, 0.6A Output: DC 5.0V~2500mA

3.3 Independent Operation Modes

The basic operation modes are:

- A.1 On, USB1 Playing
- A.2 On, USB2 Playing
- A.3 ON, SD Playing
- A.4 ON, Memory Playing
- A.5 ON, Transfer data (Memory & SD Card)
- A.6 ON, Transfer data (Memory & USB Disk)
- A.7 ON, Transfer data (USB Disk & SD Card)
- A.8 ON, Transfer data (Connect to PC)

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|--------------------|----------------------------------|
| - Application Form | - FCC/IC Label and Location Info |
| - Block Diagram | - Photo Document |
| - User Manual | |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2014. For the test mode A1~A4, only the worst case emissions without headphone are reported.

4.3 Special Accessories and Auxiliary Equipment

Table 3: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Notebook PC	Lenovo	ThinkPad X240	N/A	N/A
Printer	HP	HP laserjet 1015	CNFG030424	N/A
Headphone	Lenovo	CE-1253H	N/A	N/A
Adapter	Mass Power	NBS18C050250VU	N/A	Input: 100-240V~, 50/60Hz, 0.6A Output: DC 5.0V, 2.5A
USB Cable	N/A	N/A	N/A	10cm with one ferrite core

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

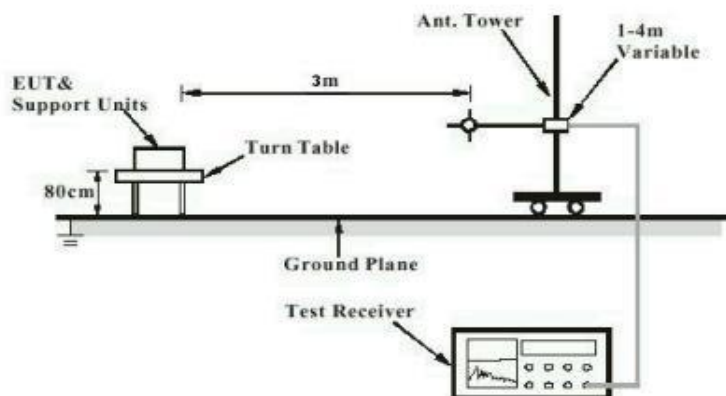


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


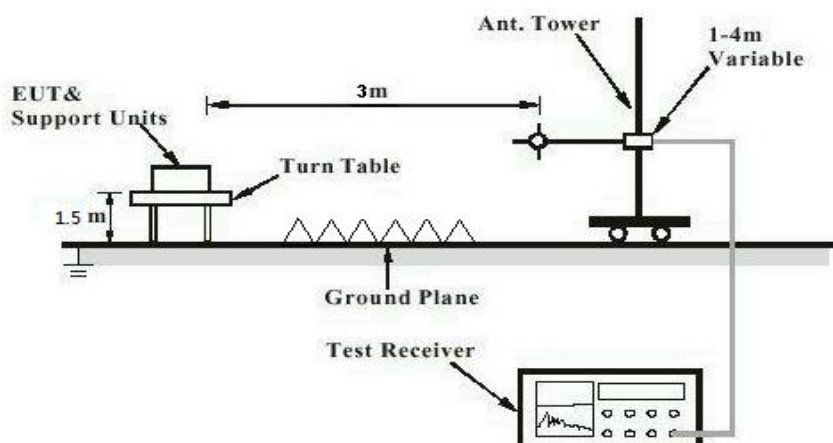


Diagram of Measurement Configuration for Mains Conduction Measurement

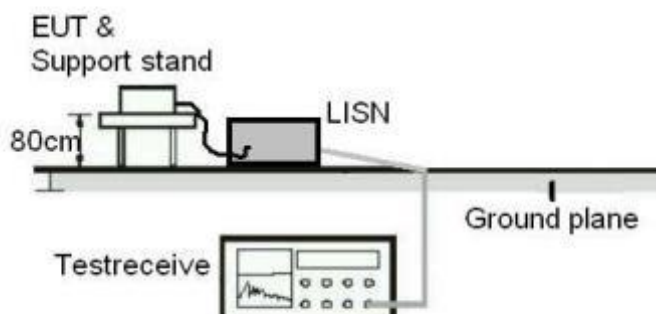

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Conducted Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.107(a) ICES-003
Basic standard	: ANSI C63.4: 2014
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.107(a) ICES-003 Table 2
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 26.08.2016
Input voltage	: AC 120V, 60Hz
Operation mode	: All testing mode refer to clause 3.3
Earthing	: Not connected
Ambient temperature	: 23 °C
Relative humidity	: 48 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the Appendix A.

5.1.2 Radiated Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.109(a) ICES-003
Basic standard	: ANSI C63.4: 2014
Frequency range	: 30 - 6000MHz
Classification	: Class B
Limits	: FCC Part 15.109(a) ICES-003 Table 5 & Table 7
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 12.08.2016~17.08.2016
Input voltage	: AC 120V, 60Hz
Operation mode	: All testing mode refer to clause 3.3
Earthing	: Not connected
Ambient temperature	: 23 °C
Relative humidity	: 48 %
Atmospheric pressure	: 101 kPa


For the measurement records, refer to the Appendix A.

6 Photographs of the Test Set-Up


Photograph 1: Set-up for Conducted Emission



Photograph 2: Set-up for Radiated Emission (30MHz ~ 1GHz)

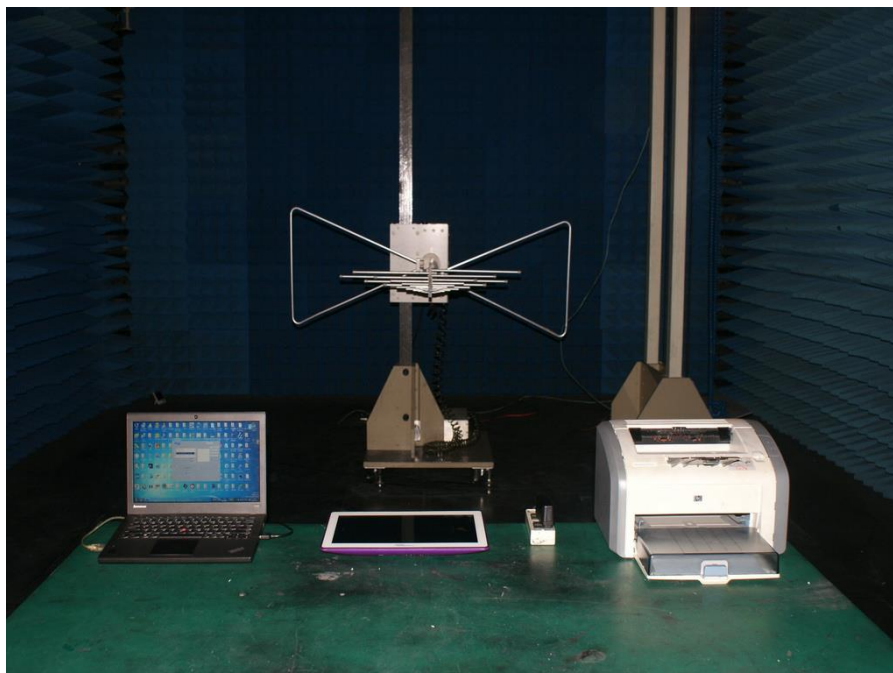

Photograph 3: Set-up for Radiated Emission (1GHz ~ 6GHz)

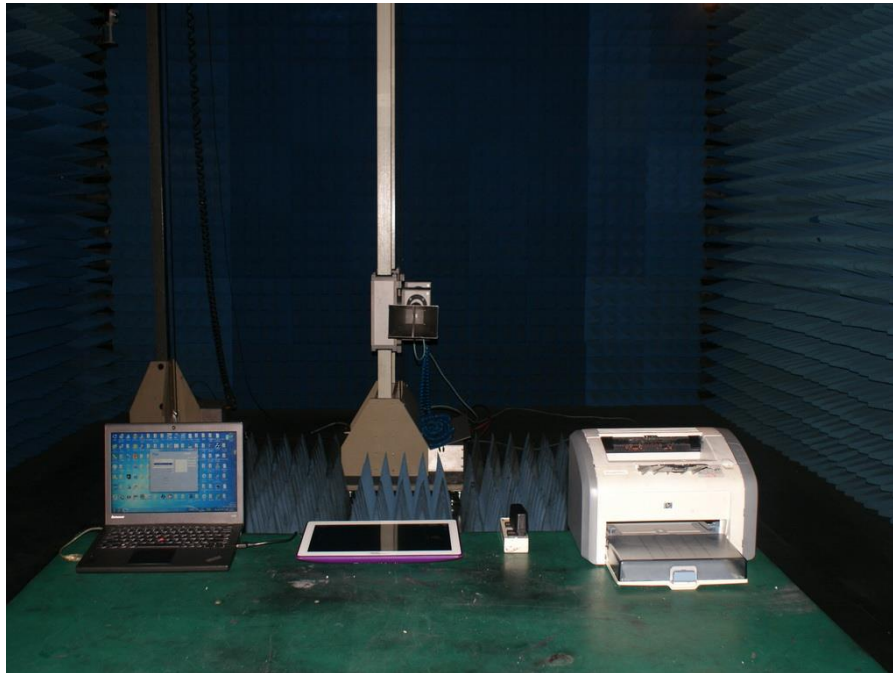

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: List of Accessories and Auxiliary Equipment.....	9

8 List of Photographs

Photograph 1: Set-up for Conducted Emission	13
Photograph 2: Set-up for Radiated Emission (30MHz ~ 1GHz)	13
Photograph 3: Set-up for Radiated Emission (1GHz ~ 6GHz).....	14

Appendix A

Test Results of Conducted Emission and Radiated Emission

Appendix A.1: Test Plots of Conducted Emission

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.1
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

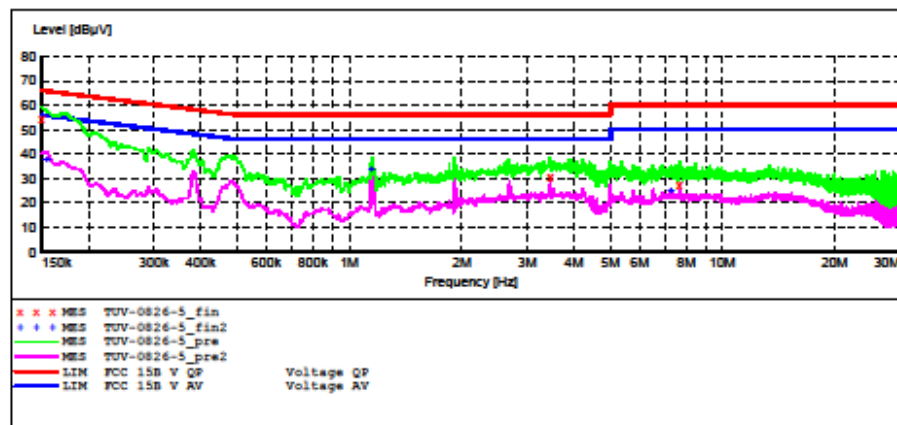

MEASUREMENT RESULT: "TUV-0826-5_fin"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	54.10	10.5	66	11.9	QP	L1	GND
3.460000	30.20	11.1	56	25.8	QP	L1	GND
7.660000	27.60	11.2	60	32.4	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-5_fin2"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	37.40	10.5	56	18.3	AV	L1	GND
1.150000	33.40	10.9	46	12.6	AV	L1	GND
7.280000	25.00	11.2	50	25.0	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.1
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

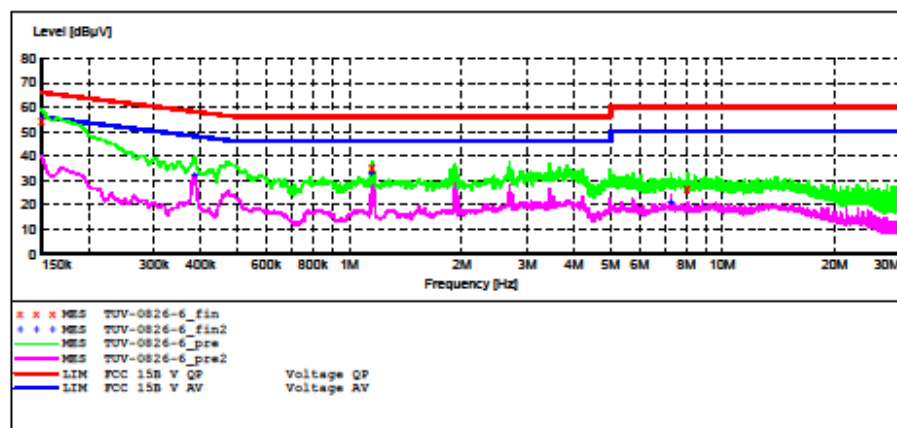

MEASUREMENT RESULT: "TUV-0826-6_fin"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	54.40	10.5	66	11.6	QP	N	GND
1.150000	35.30	10.9	56	20.7	QP	N	GND
8.050000	26.80	11.2	60	33.2	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-6_fin2"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.385000	32.30	10.7	48	15.9	AV	N	GND
1.150000	33.10	10.9	46	12.9	AV	N	GND
7.290000	21.30	11.2	50	28.7	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.2
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

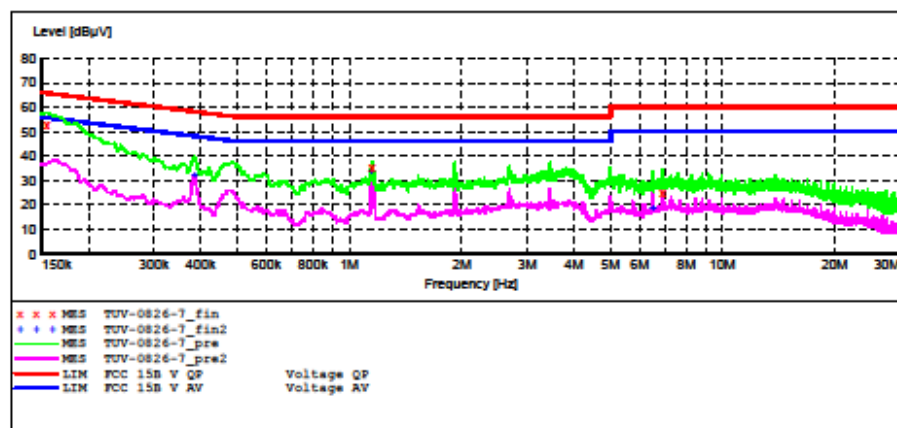

MEASUREMENT RESULT: "TUV-0826-7_fin"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	52.60	10.5	66	13.1	QP	N	GND
1.150000	35.40	10.9	56	20.6	QP	N	GND
6.900000	25.10	11.2	60	34.9	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-7_fin2"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.385000	32.10	10.7	48	16.1	AV	N	GND
1.150000	33.60	10.9	46	12.4	AV	N	GND
6.510000	18.90	11.2	50	31.1	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.2
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

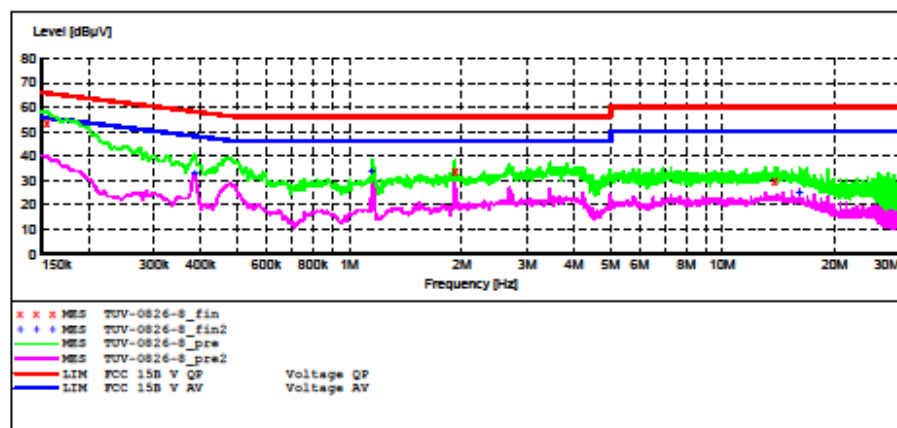

MEASUREMENT RESULT: "TUV-0826-8_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	53.80	10.5	66	11.9	QP	L1	GND
1.920000	33.40	11.0	56	22.6	QP	L1	GND
13.780000	29.60	11.3	60	30.4	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-8_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	32.90	10.7	48	15.3	AV	L1	GND
1.150000	33.70	10.9	46	12.3	AV	L1	GND
16.090000	25.40	11.4	50	24.6	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.3
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
			Average			
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

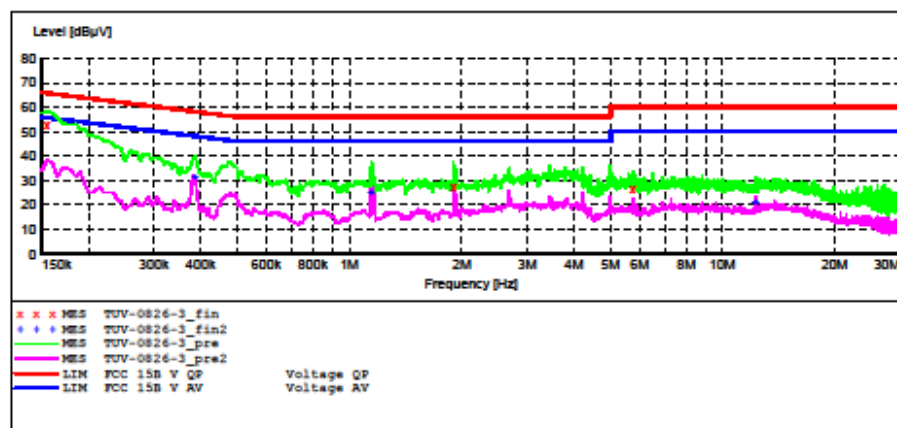

MEASUREMENT RESULT: "TUV-0826-3_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	52.90	10.5	66	12.8	QP	N	GND
1.900000	27.30	11.0	56	28.7	QP	N	GND
5.750000	26.80	11.2	60	33.2	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-3_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	31.70	10.7	48	16.5	AV	N	GND
1.145000	24.90	10.9	46	21.1	AV	N	GND
12.250000	20.70	11.3	50	29.3	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.3
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

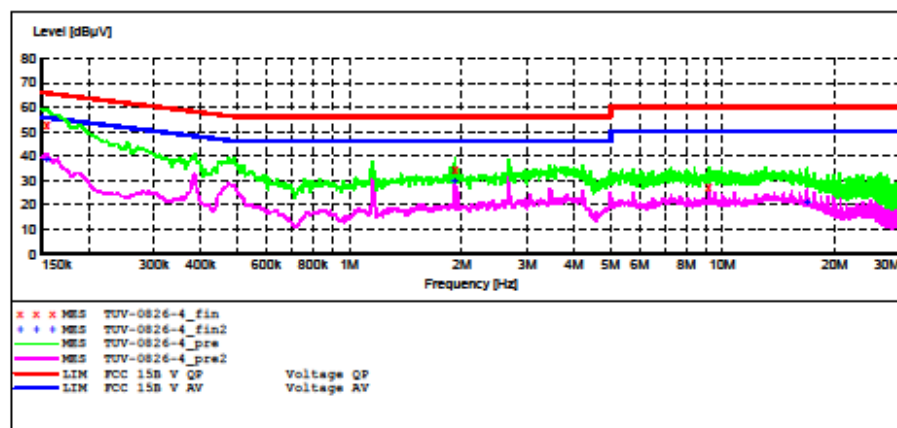

MEASUREMENT RESULT: "TUV-0826-4_fin"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	53.20	10.5	66	12.5	QP	L1	GND
1.920000	34.80	11.0	56	21.2	QP	L1	GND
9.190000	27.70	11.3	60	32.3	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-4_fin2"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	38.90	10.5	56	16.8	AV	L1	GND
1.920000	29.40	11.0	46	16.6	AV	L1	GND
16.840000	20.80	11.4	50	29.2	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
 Manufacturer: ContextMedia LLC
 Operating Condition: A.4
 Test Site: 1#Shielding Room
 Operator: LGWADE
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

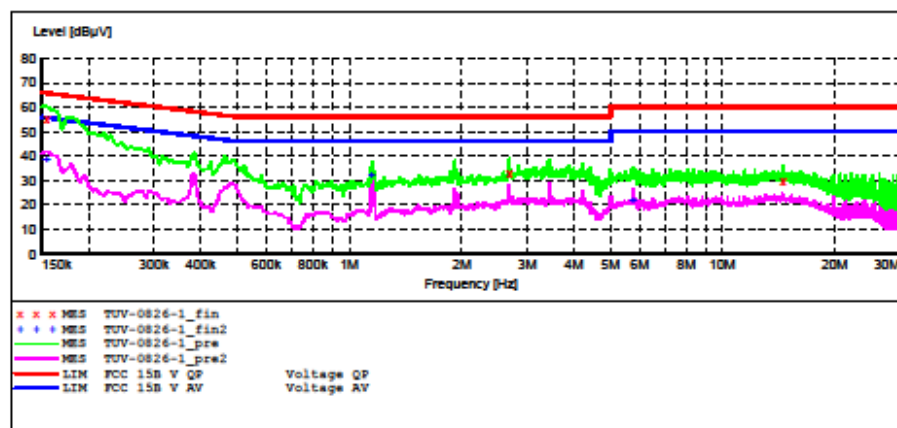

MEASUREMENT RESULT: "TUV-0826-1_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	55.40	10.5	66	10.3	QP	L1	GND
2.680000	32.00	11.0	56	23.0	QP	L1	GND
14.530000	29.80	11.4	60	30.2	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-1_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	38.60	10.5	56	17.1	AV	L1	GND
1.150000	32.00	10.9	46	14.0	AV	L1	GND
5.750000	22.10	11.2	50	27.9	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.4
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	1.0 s	9 kHz	NSLK8126 2008

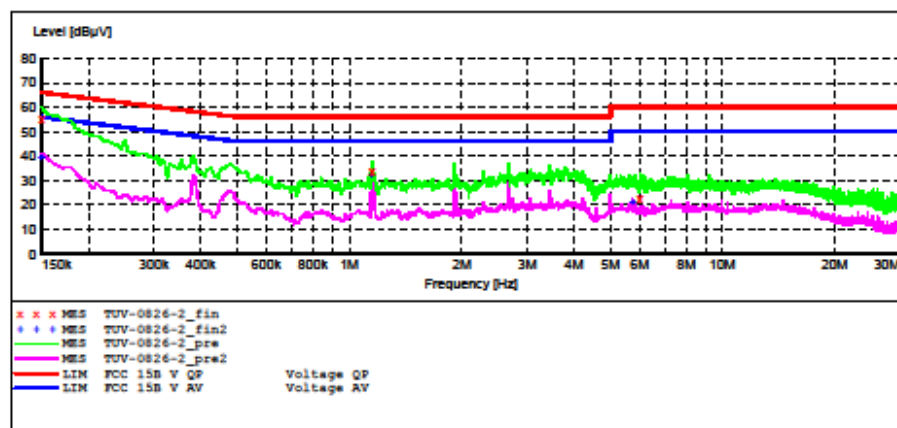

MEASUREMENT RESULT: "TUV-0826-2_fin"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	55.20	10.5	66	10.8	QP	N	GND
1.150000	32.70	10.9	56	22.3	QP	N	GND
6.010000	22.90	11.2	60	37.1	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-2_fin2"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	39.70	10.5	56	16.3	AV	N	GND
1.150000	31.80	10.9	46	14.2	AV	N	GND
5.750000	21.10	11.2	50	28.9	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.5
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

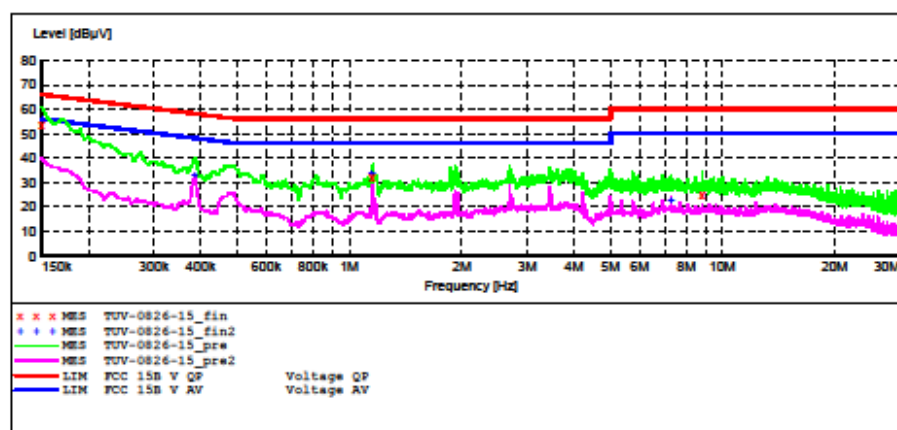

MEASUREMENT RESULT: "TUV-0826-15_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	53.70	10.5	66	12.3	QP	N	GND
1.150000	32.10	10.9	56	23.9	QP	N	GND
8.830000	25.10	11.3	60	34.9	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-15_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	32.60	10.7	48	15.6	AV	N	GND
1.150000	33.80	10.9	46	12.2	AV	N	GND
7.290000	22.30	11.2	50	27.7	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.5
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

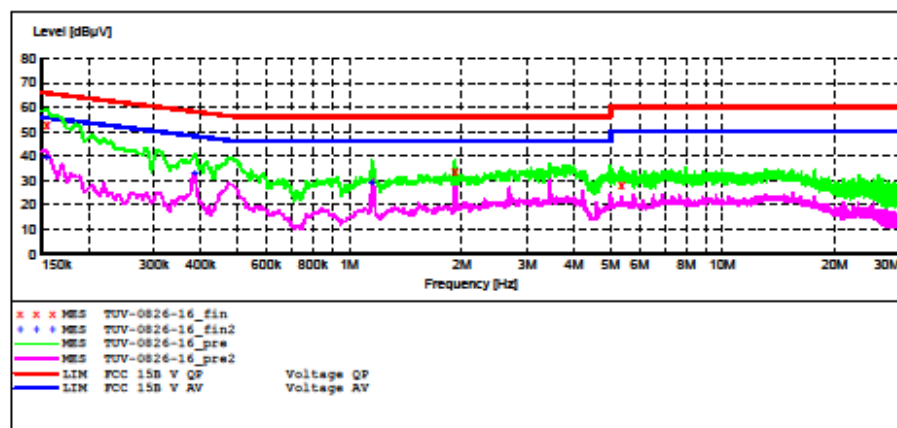

MEASUREMENT RESULT: "TUV-0826-16_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	53.00	10.5	66	12.7	QP	L1	GND
1.920000	32.50	11.0	56	22.5	QP	L1	GND
5.370000	27.80	11.2	60	32.2	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-16_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	39.20	10.5	56	16.5	AV	L1	GND
0.385000	32.90	10.7	48	15.3	AV	L1	GND
1.150000	29.20	10.9	46	16.8	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.6
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

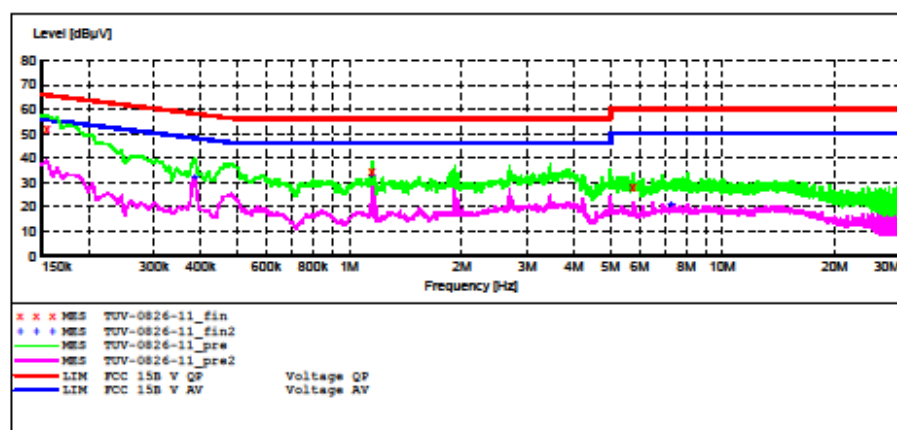

MEASUREMENT RESULT: "TUV-0826-11_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	52.10	10.5	66	13.6	QP	N	GND
1.150000	34.60	10.9	56	21.4	QP	N	GND
5.750000	28.30	11.2	60	31.7	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-11_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	32.40	10.7	48	15.8	AV	N	GND
1.150000	33.30	10.9	46	12.7	AV	N	GND
7.290000	20.70	11.2	50	29.3	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.6
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

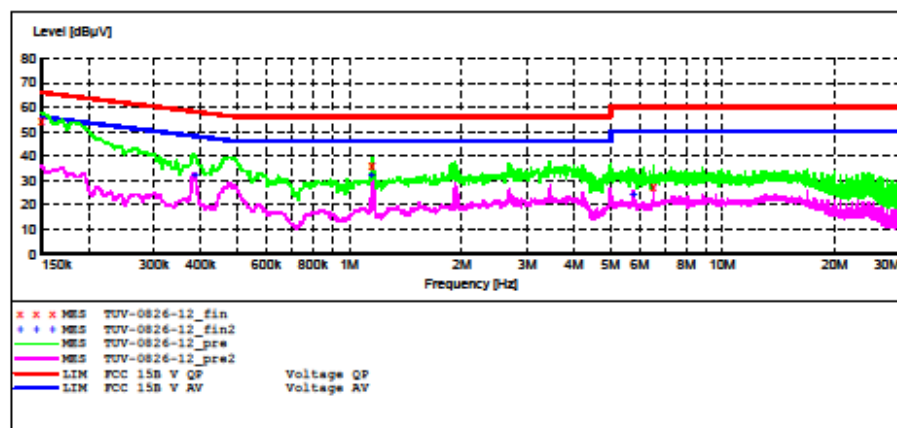

MEASUREMENT RESULT: "TUV-0826-12_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	54.20	10.5	66	11.8	QP	L1	GND
1.150000	36.00	10.9	56	20.0	QP	L1	GND
6.530000	27.50	11.2	60	32.5	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-12_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	32.50	10.7	48	15.7	AV	L1	GND
1.150000	31.90	10.9	46	14.1	AV	L1	GND
5.760000	24.00	11.2	50	26.0	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.7
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

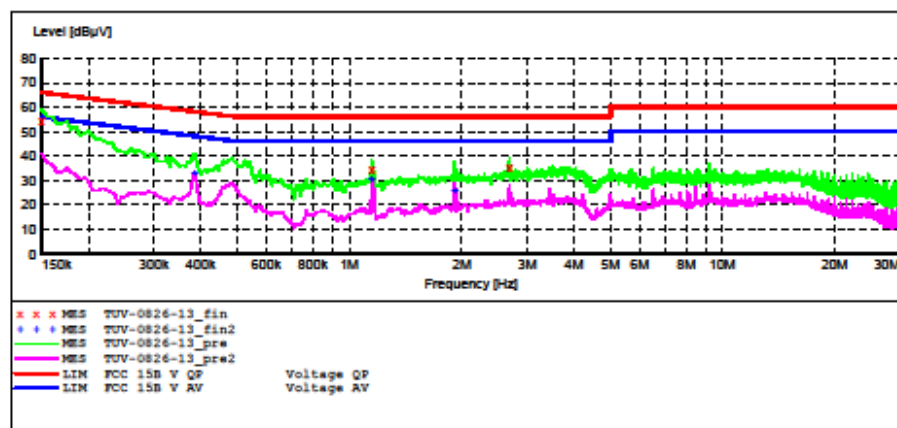

MEASUREMENT RESULT: "TUV-0826-13_fin"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	54.30	10.5	66	11.7	QP	L1	GND
1.150000	34.90	10.9	56	21.1	QP	L1	GND
2.690000	35.20	11.0	56	20.8	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-13_fin2"

8/26/2016

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.385000	33.10	10.7	48	15.1	AV	L1	GND
1.150000	30.70	10.9	46	15.3	AV	L1	GND
1.915000	25.50	11.0	46	20.5	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.7
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

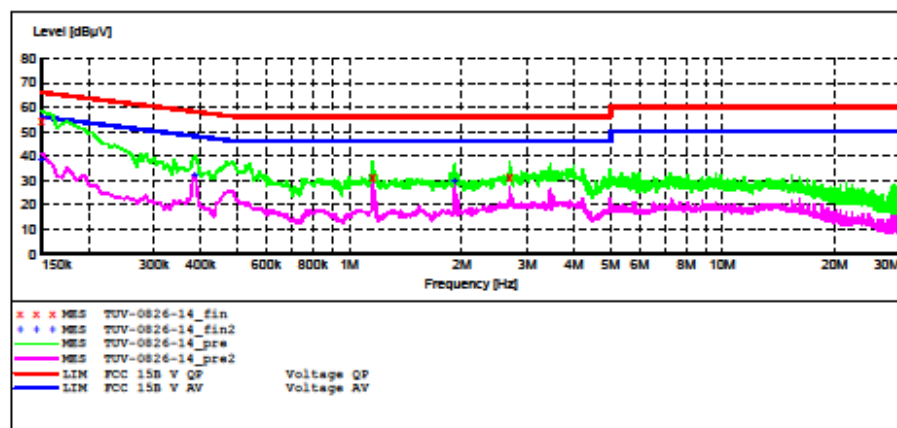

MEASUREMENT RESULT: "TUV-0826-14_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	54.40	10.5	66	11.6	QP	N	GND
1.155000	31.50	10.9	56	24.5	QP	N	GND
2.690000	31.70	11.0	56	24.3	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-14_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	38.70	10.5	56	17.3	AV	N	GND
0.385000	32.40	10.7	48	15.8	AV	N	GND
1.920000	30.10	11.0	46	15.9	AV	N	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.8
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

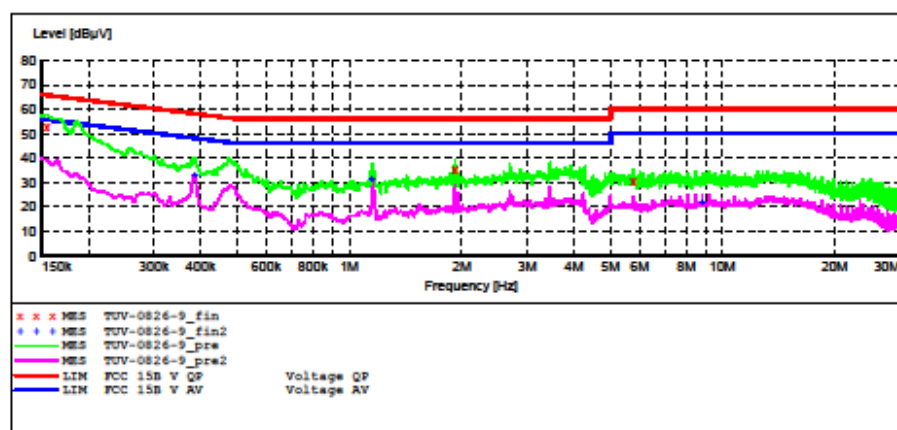

MEASUREMENT RESULT: "TUV-0826-9_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	53.10	10.5	66	12.6	QP	L1	GND
1.920000	35.20	11.0	56	20.8	QP	L1	GND
5.760000	30.50	11.2	60	29.5	QP	L1	GND

MEASUREMENT RESULT: "TUV-0826-9_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	32.60	10.7	48	15.6	AV	L1	GND
1.150000	31.50	10.9	46	14.5	AV	L1	GND
8.820000	21.50	11.3	50	28.5	AV	L1	GND

ACCURATE TECHNOLOGY CO., LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: ContextMedia Health M/N:P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC
Operating Condition: A.8
Test Site: 1#Shielding Room
Operator: LGWADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 8/26/2016 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: SUB STD VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average	QuasiPeak	1.0 s	9 kHz
			Average			NSLK8126 2008

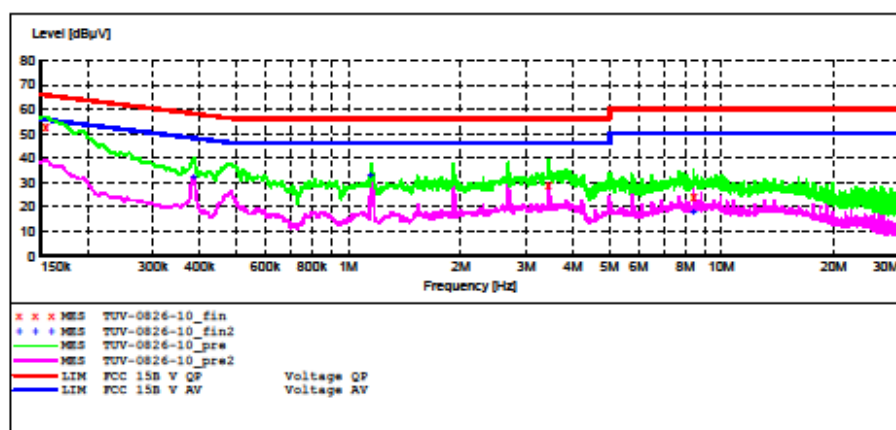

MEASUREMENT RESULT: "TUV-0826-10_fin"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.155000	52.60	10.5	66	13.1	QP	N	GND
3.440000	29.20	11.1	56	26.8	QP	N	GND
8.420000	24.00	11.3	60	36.0	QP	N	GND

MEASUREMENT RESULT: "TUV-0826-10_fin2"

8/26/2016

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.385000	32.30	10.7	48	15.9	AV	N	GND
1.150000	33.10	10.9	46	12.9	AV	N	GND
8.420000	18.10	11.3	50	31.9	AV	N	GND

Appendix A.2: Test Plots of Radiated Emission




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3637
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.1
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

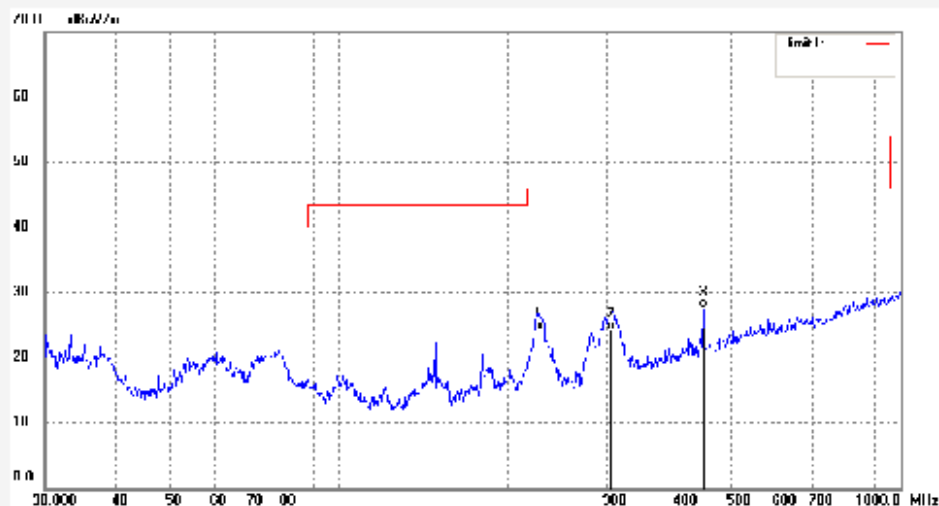

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	226.8935	36.62	-12.39	24.23	46.00	-21.77	QP			
2	305.6800	34.44	-10.18	24.26	46.00	-21.74	QP			
3	446.4141	34.43	-6.84	27.59	46.00	-18.41	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3638
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.1
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

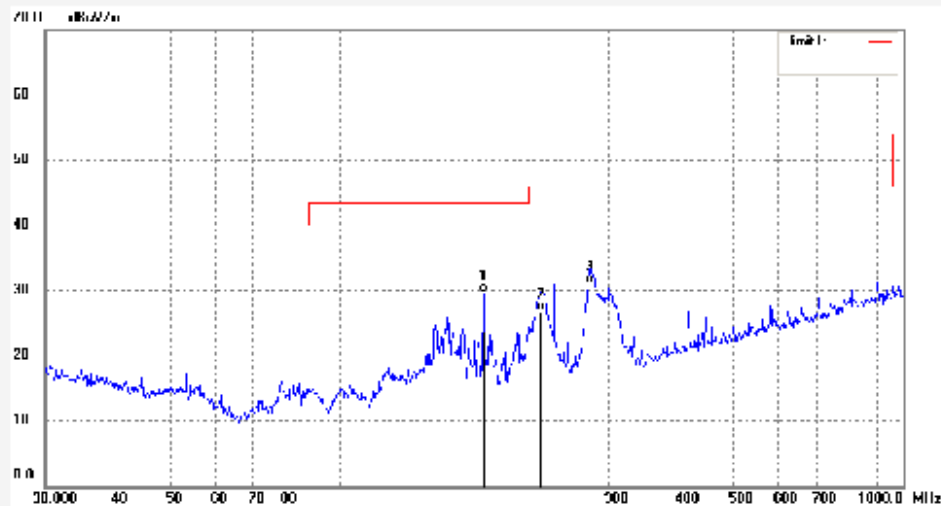

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	180.0165	44.11	-14.48	29.63	43.50	-13.87	QP			
2	227.6904	39.16	-12.38	26.78	46.00	-19.22	QP			
3	278.0668	41.99	-10.90	31.09	46.00	-14.91	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2671

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.1

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

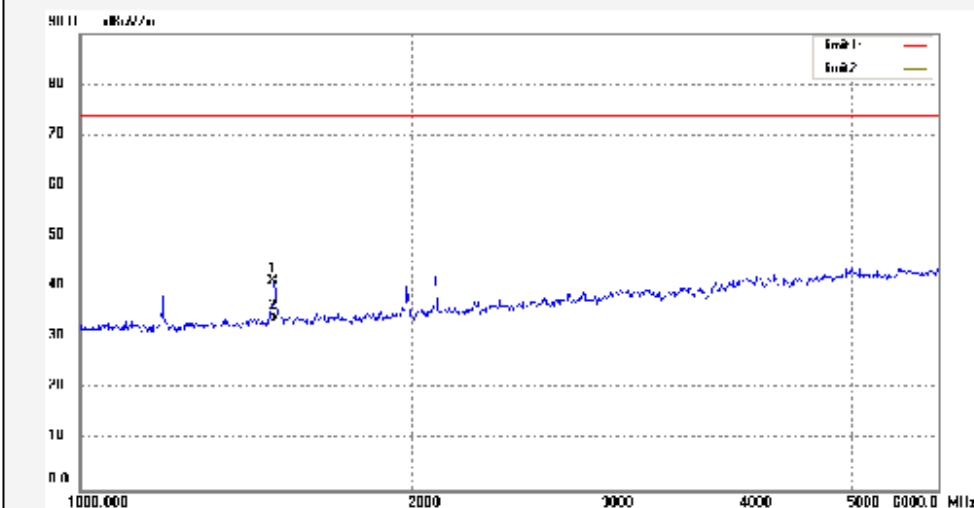

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1498.525	52.86	-11.51	41.35	74.00	-32.65	peak			
2	1498.525	44.74	-11.51	33.23	54.00	-20.77	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2672	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/08/12
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: A.1	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note:

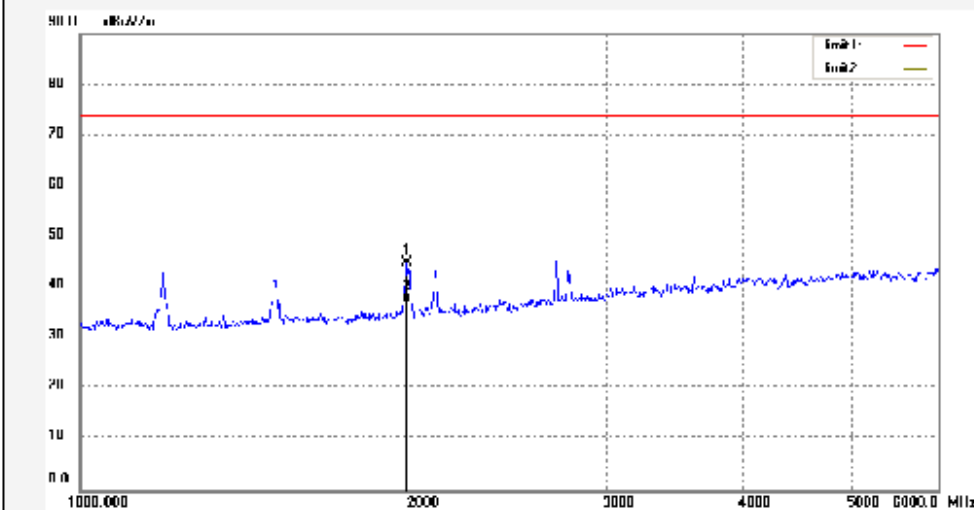

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1979.136	53.94	-9.13	44.81	74.00	-29.19	peak			
2	1979.136	46.07	-9.13	36.94	54.00	-17.06	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3639

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A2

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016-8-17

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

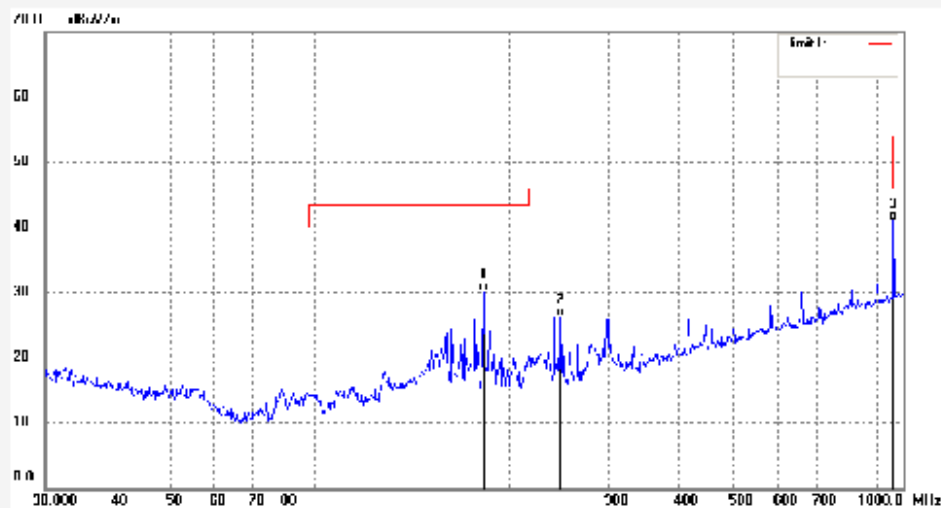

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	180.0165	44.66	-14.48	30.18	43.50	-13.32	QP			
2	246.8148	38.17	-11.80	26.37	46.00	-19.63	QP			
3	960.0000	39.64	1.37	41.01	46.00	-4.99	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3640
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A2
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

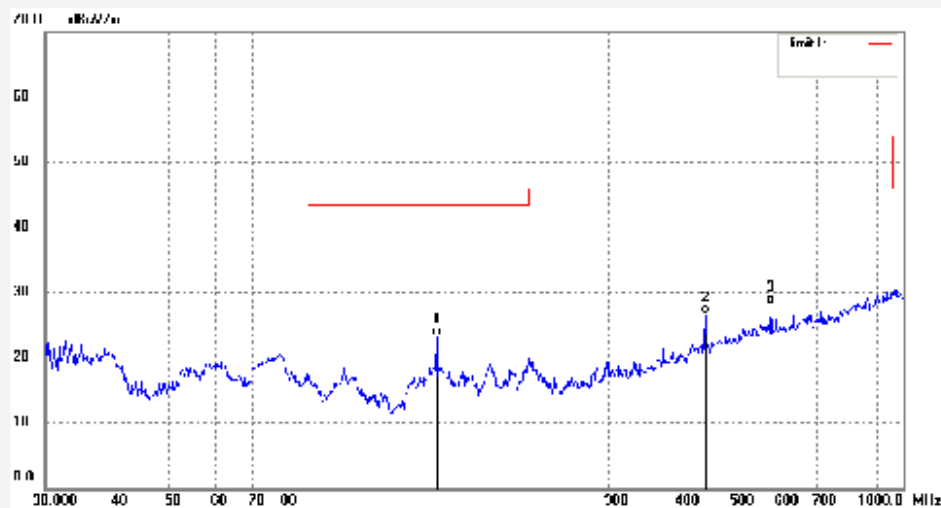

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	39.47	-16.18	23.29	43.50	-20.21	QP			
2	446.4141	33.59	-6.84	26.75	46.00	-19.25	QP			
3	582.7424	32.35	-4.10	28.25	46.00	-17.75	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2673

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A2

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

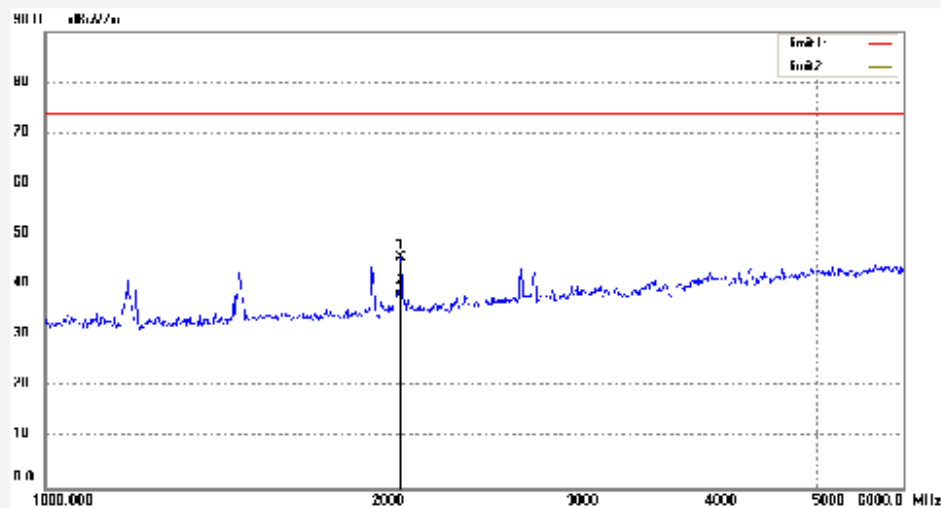

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2099.687	53.91	-8.44	45.47	74.00	-28.53	peak			
2	2099.687	46.03	-8.44	37.59	54.00	-16.41	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2674

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A2

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

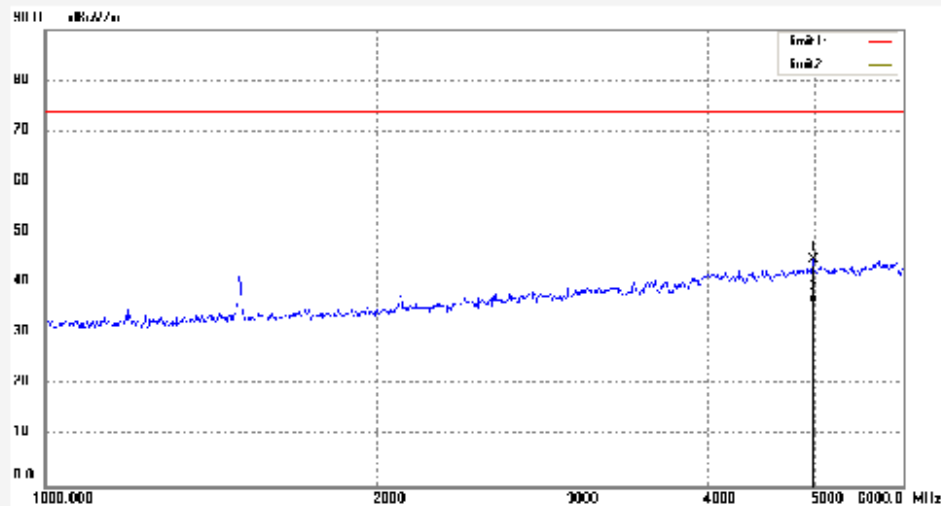

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4971.018	44.00	0.56	44.56	74.00	-29.44	peak			
2	4971.018	35.58	0.56	36.14	54.00	-17.86	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3641
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.3
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

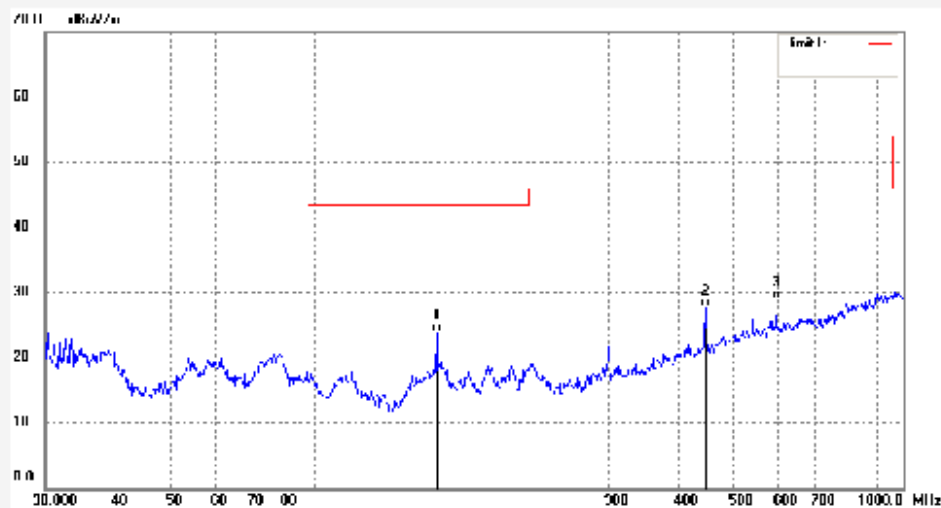

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	40.01	-16.18	23.83	43.50	-19.67	QP			
2	446.4141	34.51	-6.84	27.67	46.00	-18.33	QP			
3	595.1327	33.04	-4.02	29.02	46.00	-16.98	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3642
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.3
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

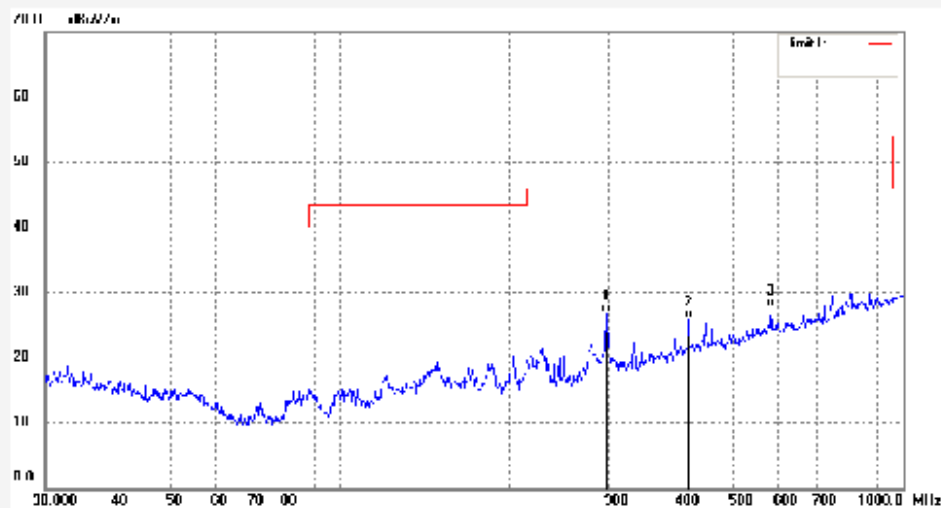

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	297.2241	37.24	-10.34	26.90	46.00	-19.10	QP			
2	416.1791	33.31	-7.35	25.96	46.00	-20.04	QP			
3	582.7424	31.92	-4.10	27.82	46.00	-18.18	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2689

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.3

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

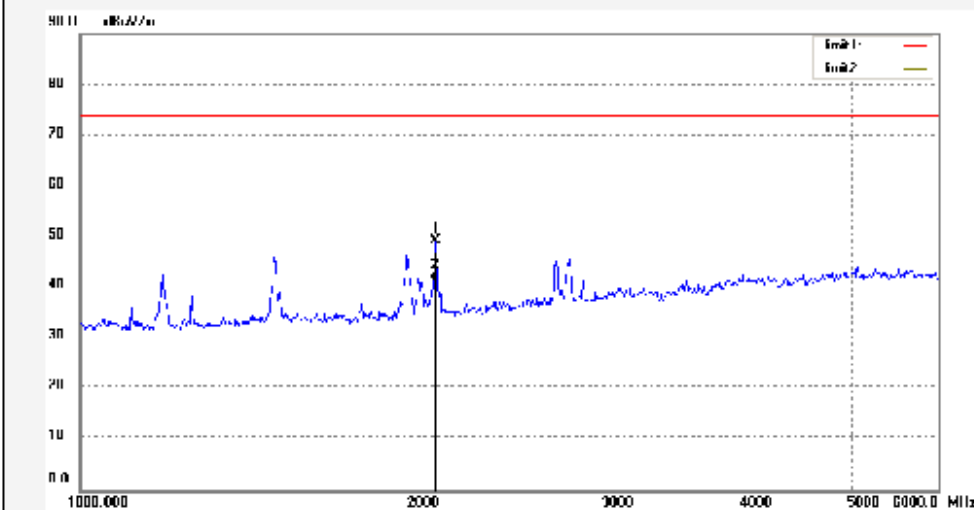

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2099.687	57.54	-8.44	49.10	74.00	-24.90	peak			
2	2099.687	49.67	-8.44	41.23	54.00	-12.77	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2670	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/08/12
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: A.3	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note:

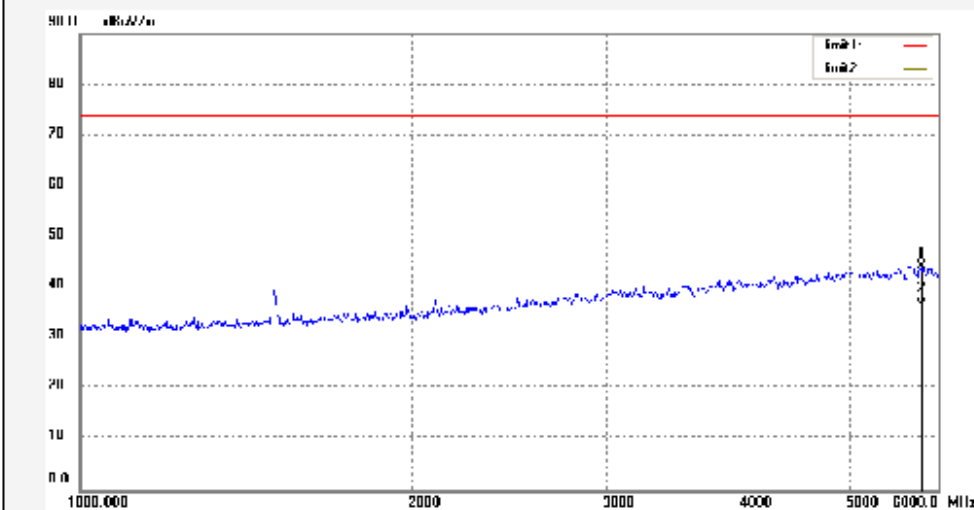

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5788.796	42.39	1.89	44.28	74.00	-29.72	peak			
2	5788.796	34.67	1.89	36.56	54.00	-17.44	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3643

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A4

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016-8-17

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

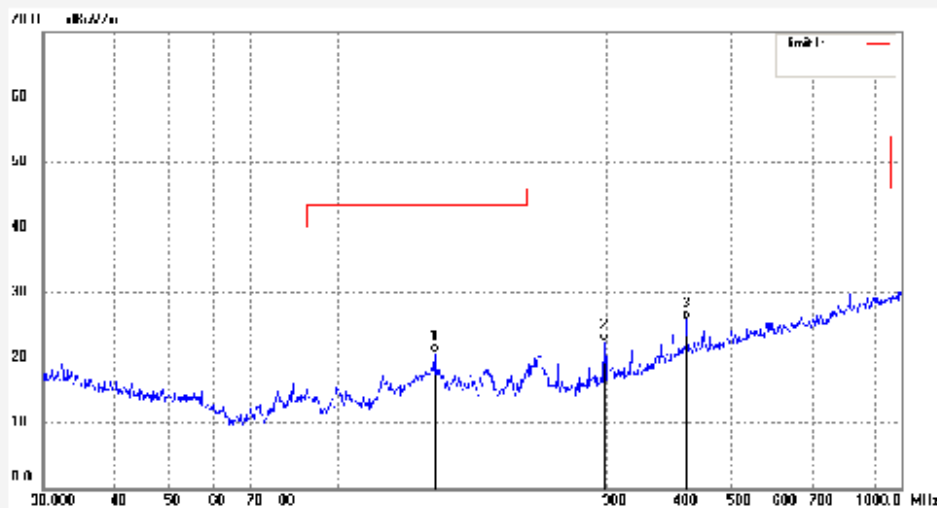

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	36.98	-16.18	20.80	43.50	-22.70	QP			
2	297.2241	32.91	-10.34	22.57	46.00	-23.43	QP			
3	416.1791	33.08	-7.35	25.73	46.00	-20.27	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3644
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A4
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

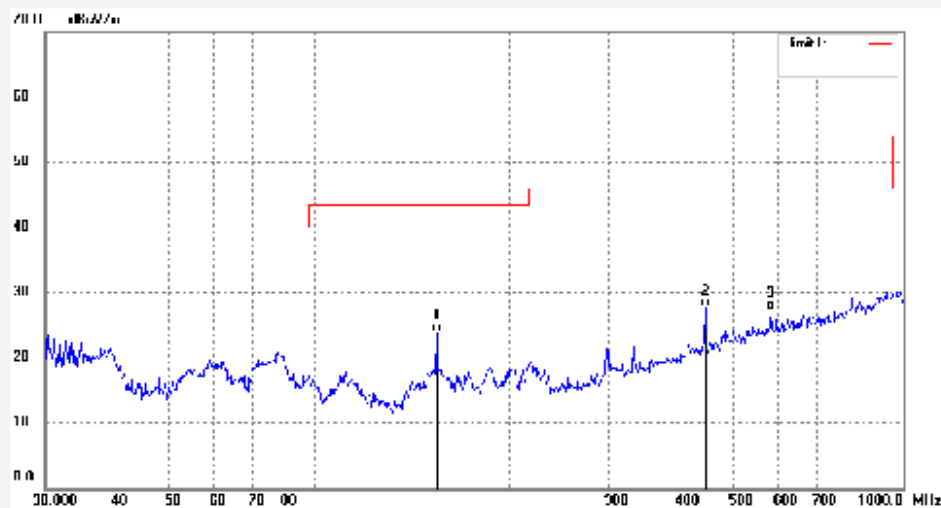

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	40.04	-16.18	23.86	43.50	-19.64	QP			
2	446.4141	34.64	-6.84	27.80	46.00	-18.20	QP			
3	582.7424	31.56	-4.10	27.46	46.00	-18.54	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2675

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A4

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz

Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5893.452	42.45	1.94	44.39	74.00	-29.61	peak			
2	5893.452	34.92	1.94	36.86	54.00	-17.14	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2676

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A4

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

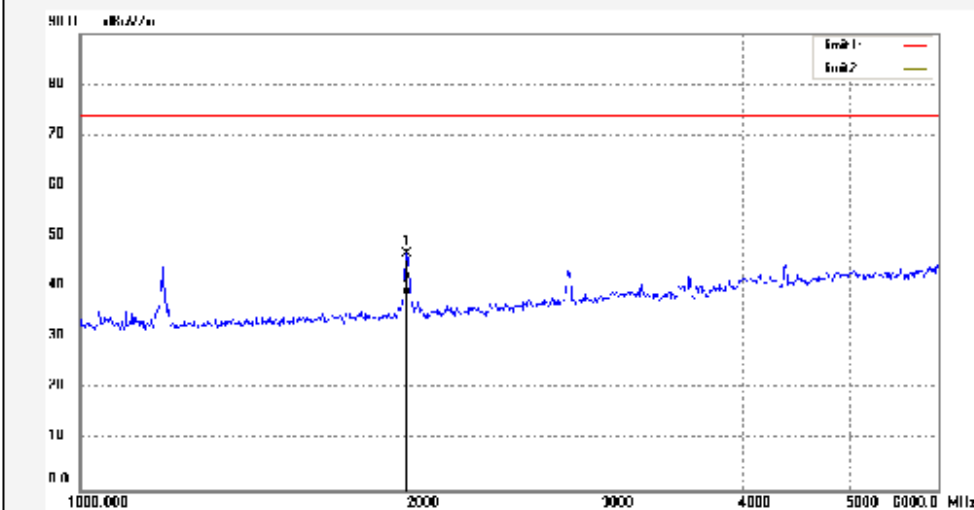

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1979.138	55.75	-9.13	46.62	74.00	-27.38	peak			
2	1979.138	47.59	-9.13	38.46	54.00	-15.54	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3631
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.5
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

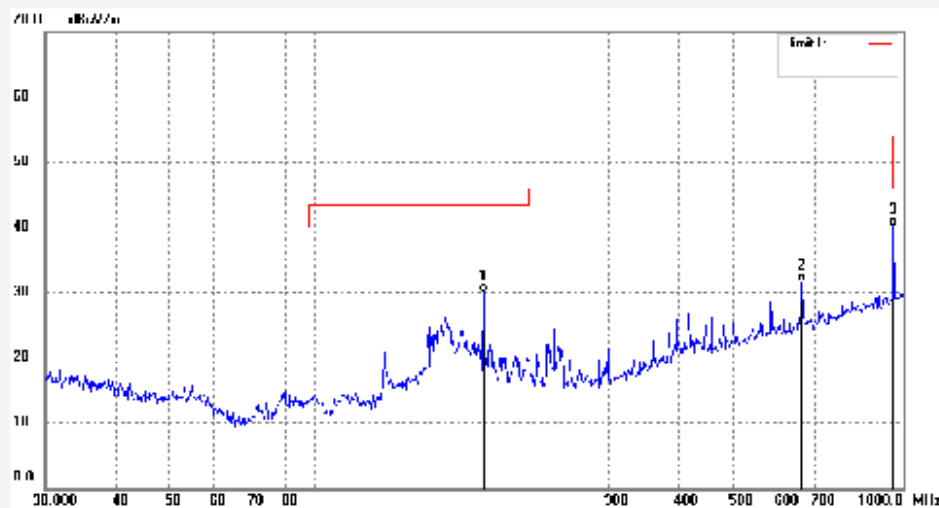

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	180.0165	44.41	-14.48	29.93	43.50	-13.57	QP			
2	661.1504	34.84	-3.24	31.60	46.00	-14.40	QP			
3	960.0000	38.81	1.37	40.18	46.00	-5.82	QP			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3632
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.5
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

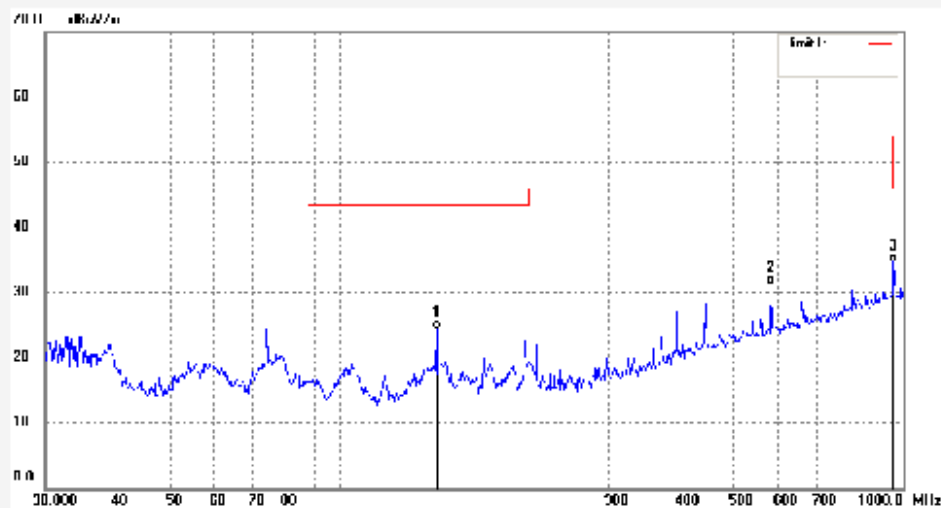

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	40.60	-16.18	24.42	43.50	-19.08	QP			
2	582.7424	35.29	-4.10	31.19	46.00	-14.81	QP			
3	980.0000	33.28	1.37	34.65	46.00	-11.35	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2677

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.5

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

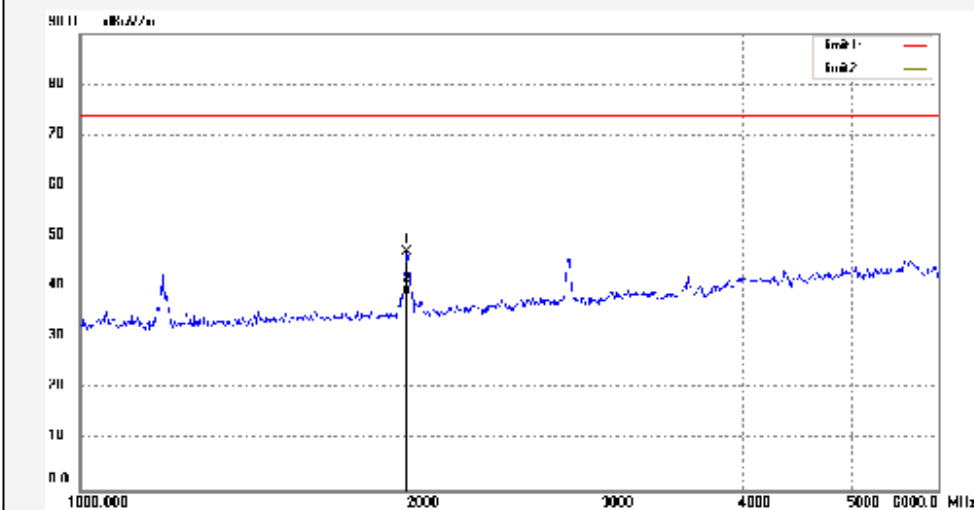

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1975.593	56.02	-9.15	46.87	74.00	-27.13	peak			
2	1975.593	47.72	-9.15	38.57	54.00	-15.43	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2678	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/08/12
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: A.5	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note:

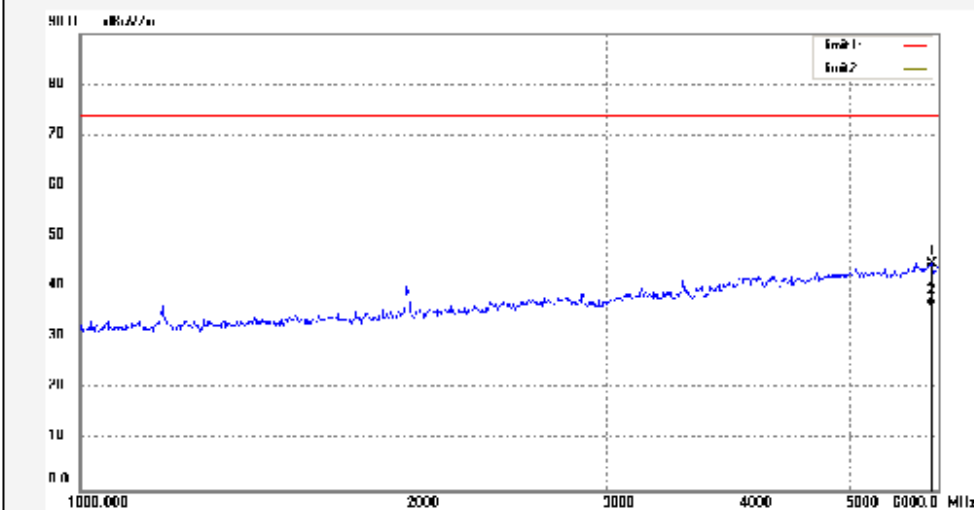

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5914.609	42.73	1.99	44.72	74.00	-29.28	peak			
2	5914.609	34.45	1.99	36.44	54.00	-17.56	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3633
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.B
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

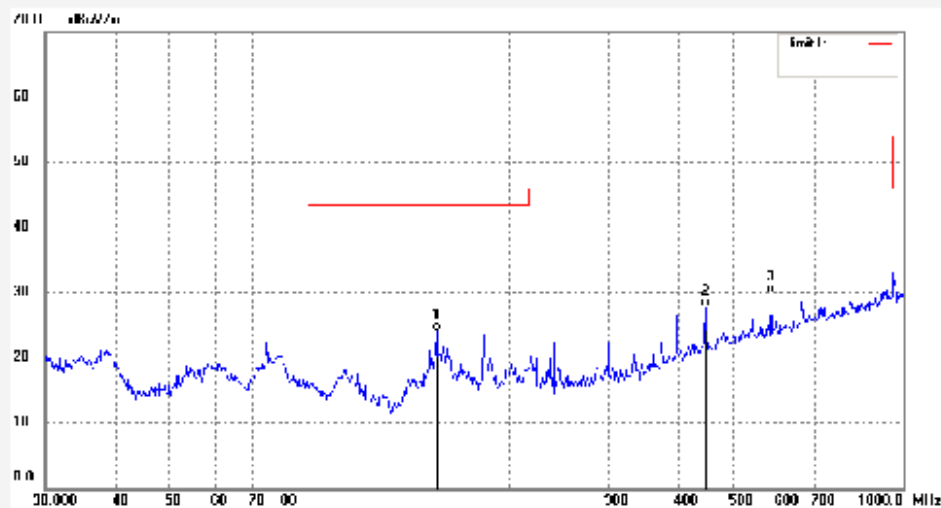

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	148.4410	40.22	-16.18	24.04	43.50	-19.46	QP			
2	446.4141	34.62	-6.84	27.78	46.00	-18.22	QP			
3	582.7424	34.02	-4.10	29.92	46.00	-16.08	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3634

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.B

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016-8-17

Time:

Engineer Signature: LGWADE

Distance: 3m

Note:

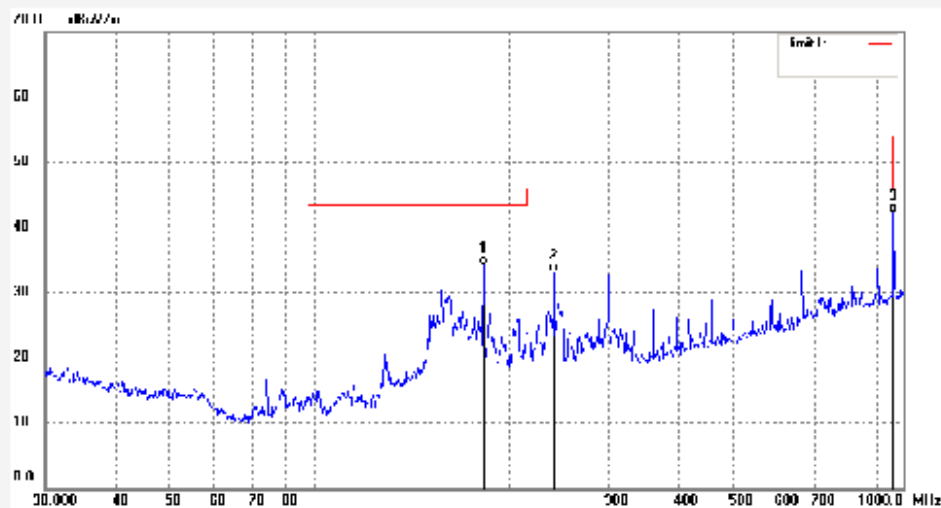

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	180.0165	48.61	-14.48	34.13	43.50	-9.37	QP			
2	239.9874	44.94	-11.84	33.10	46.00	-12.90	QP			
3	980.0000	40.82	1.37	42.19	46.00	-3.81	QP			



ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: PHY #2679	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2016/08/12
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: ContextMedia Health	Engineer Signature: PEI
Mode: A.6	Distance: 3m
Model: P-TAB-104-ELC-01	
Manufacturer: ContextMedia LLC	

Note:



No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5685.998	43.01	1.17	44.18	74.00	-29.82	peak			
2	5685.998	34.95	1.17	36.12	54.00	-17.88	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2680
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A6
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016/08/12
Time:
Engineer Signature: PEI
Distance: 3m

Note:

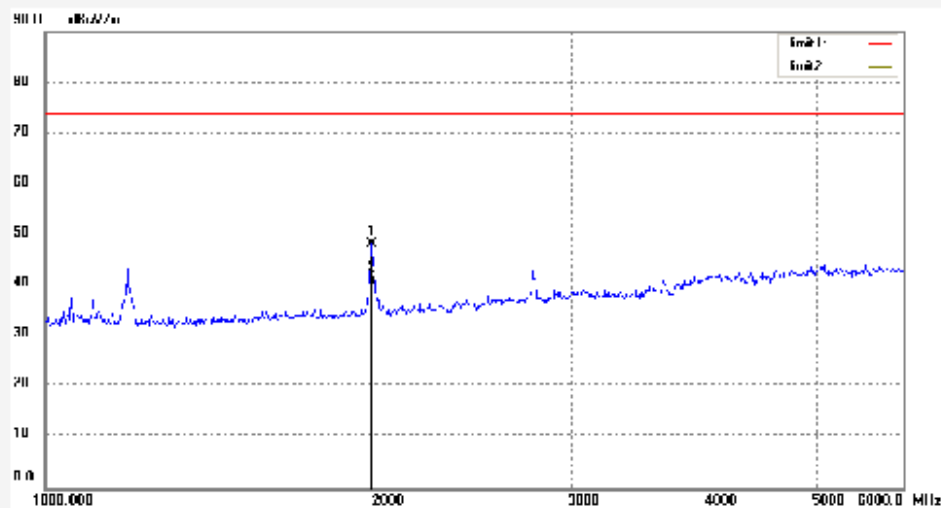

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1975.593	57.32	-9.15	48.17	74.00	-25.83	peak			
2	1975.593	49.38	-9.15	40.23	54.00	-13.77	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3635
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.7
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

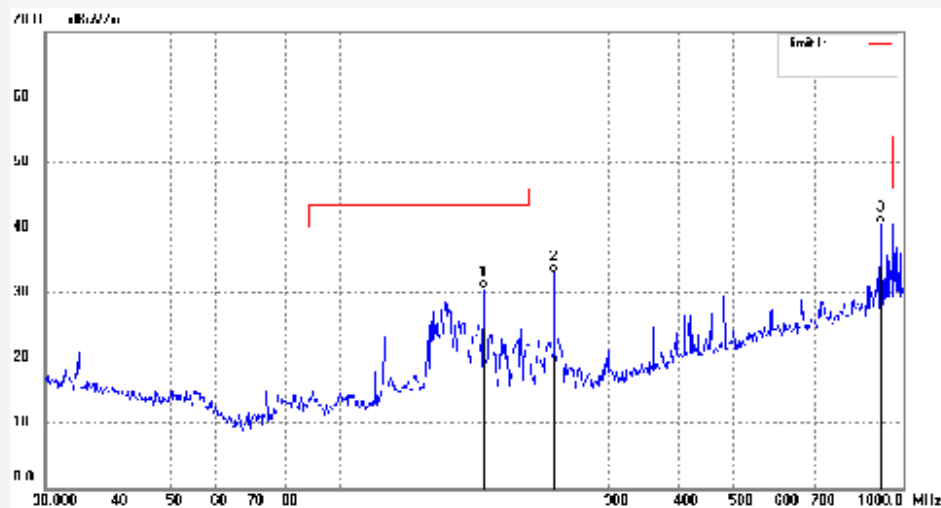

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	180.0165	44.97	-14.48	30.49	43.50	-13.01	QP			
2	239.9874	44.91	-11.84	33.07	46.00	-12.93	QP			
3	912.8619	40.05	0.40	40.45	46.00	-5.55	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3636
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.7
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

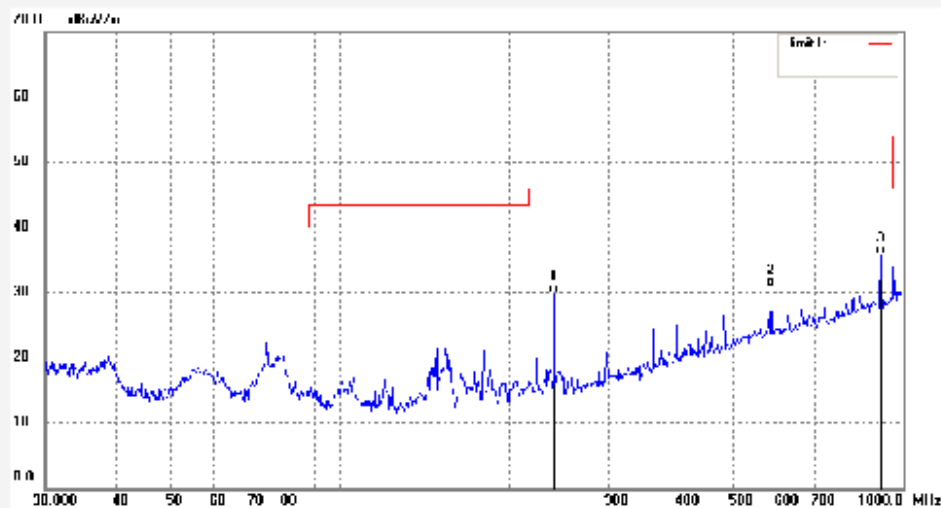

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	239.9874	41.63	-11.84	29.79	46.00	-16.21	QP			
2	582.7424	34.97	-4.10	30.87	46.00	-15.13	QP			
3	912.8619	35.39	0.40	35.79	46.00	-10.21	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2683

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.7

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 16/08/12/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

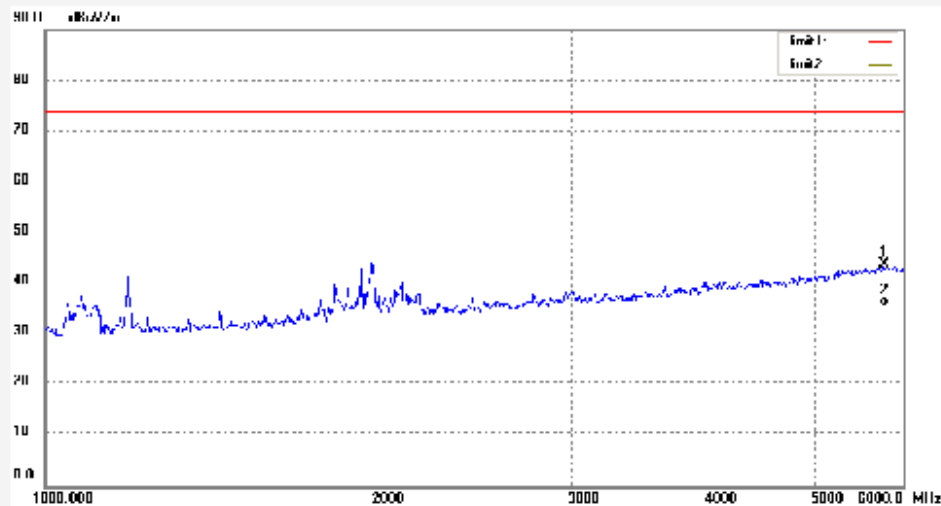

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5768.089	42.14	1.70	43.84	74.00	-30.16	peak			
2	5768.089	33.78	1.70	35.48	54.00	-18.52	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2684

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.7

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 16/08/12/

Time:

Engineer Signature: PEI

Distance: 3m

Note:

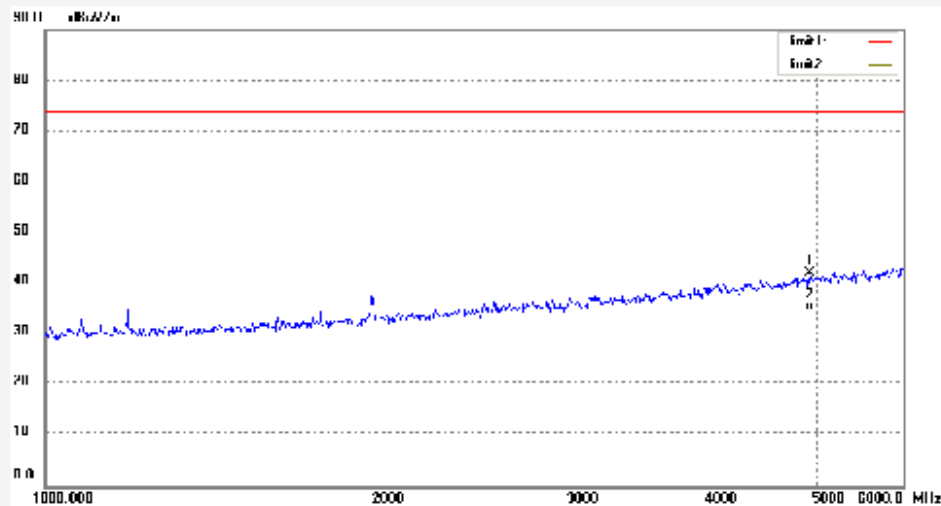

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	4835.518	41.66	0.41	42.07	74.00	-31.93	peak			
2	4835.518	34.16	0.41	34.57	54.00	-19.43	AVG			




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503398

Job No.: TUV2015 #3645
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.8
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

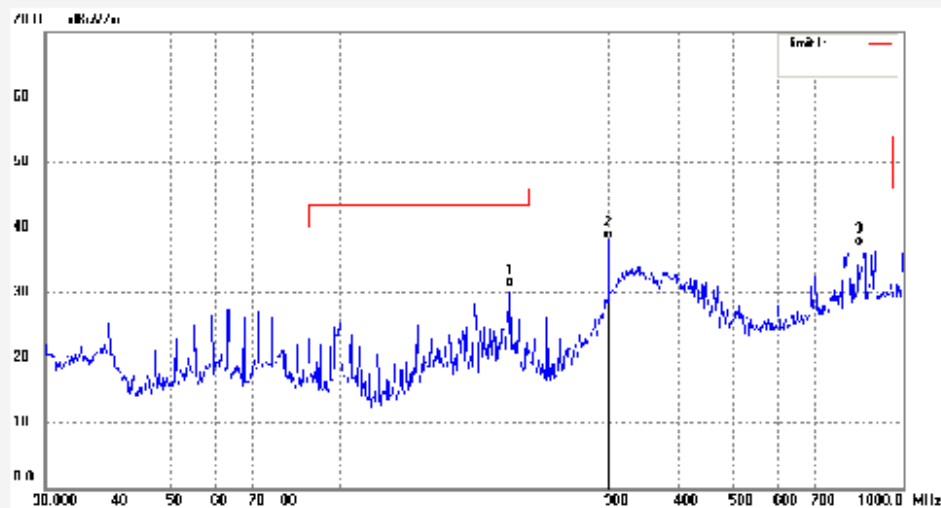

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	200.6879	44.38	-13.43	30.95	43.50	-12.55	QP			
2	300.3672	48.53	-10.29	38.24	46.00	-7.76	QP			
3	833.3170	37.58	-0.41	37.17	46.00	-8.83	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: TUV2015 #3646
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: ContextMedia Health
Mode: A.8
Model: P-TAB-104-ELC-01
Manufacturer: ContextMedia LLC

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2016-8-17
Time:
Engineer Signature: LGWADE
Distance: 3m

Note:

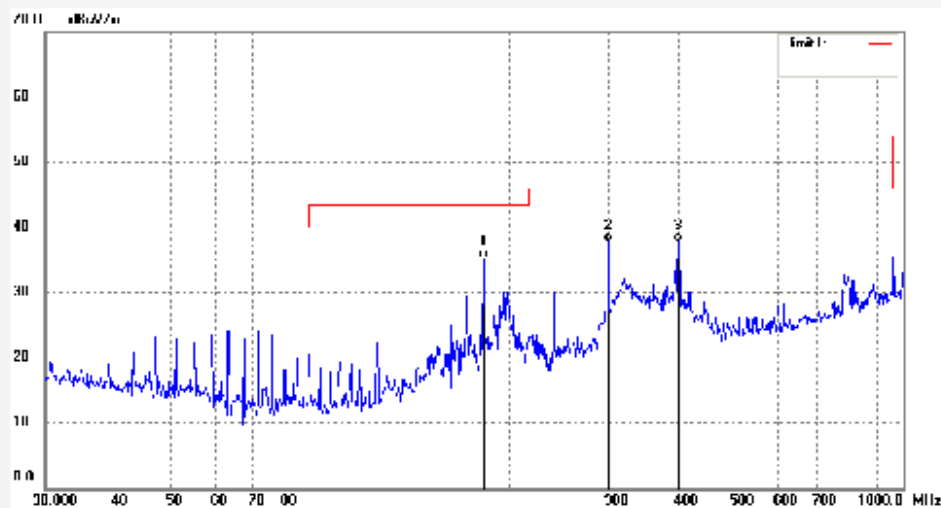

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	180.0165	49.78	-14.48	35.30	43.50	-8.20	QP			
2	300.3672	47.99	-10.29	37.70	46.00	-8.30	QP			
3	399.0300	45.49	-7.86	37.63	46.00	-8.37	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2681

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.8

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

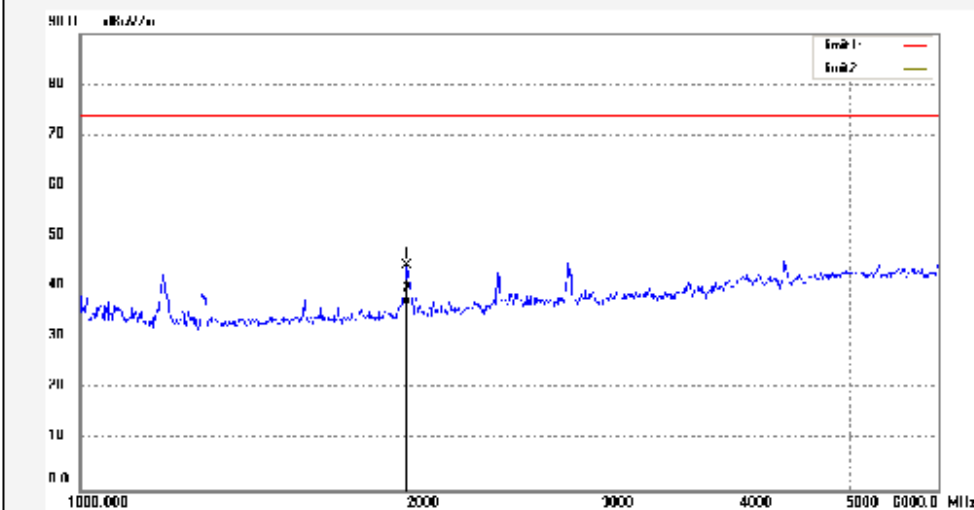

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1979.136	53.24	-9.13	44.11	74.00	-29.89	peak			
2	1979.136	45.59	-9.13	36.46	54.00	-17.54	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503398

Job No.: PHY #2682

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: ContextMedia Health

Mode: A.8

Model: P-TAB-104-ELC-01

Manufacturer: ContextMedia LLC

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2016/08/12

Time:

Engineer Signature: PEI

Distance: 3m

Note:

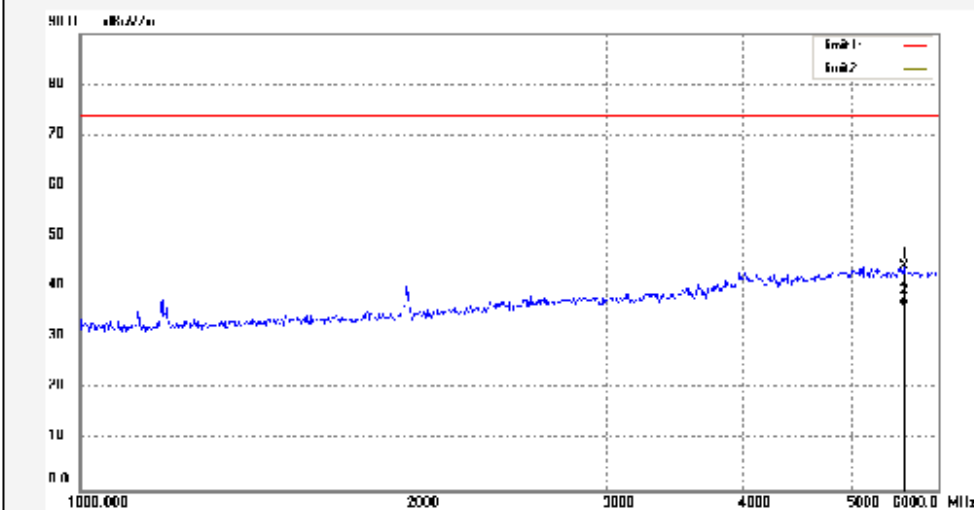

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5585.028	42.80	1.43	44.23	74.00	-29.77	peak			
2	5585.028	35.01	1.43	36.44	54.00	-17.56	AVG			