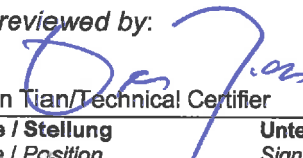


Prüfbericht-Nr.: <i>Test Report No.:</i>	50056690 003	Auftrags-Nr.: <i>Order No.:</i>	164069058	Seite 1 von 313 Page 1 of 313	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	14.07.2016		
Auftraggeber: <i>Client:</i>	ContextMedia LLC 330 N. Wabash Ave. Suite 2500, Chicago, IL 60611, USA				
Prüfgegenstand: <i>Test item:</i>	13.3" Tablet				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	P-TAB-104-YIT-01, P-TAB-104-YIT-02, P-TAB-104-YIT-03 (ContextMedia Health)				
Auftrags-Inhalt: <i>Order content:</i>	FCC/IC Certification				
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.407 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-247 Issue 1 May 2015 RSS-Gen Issue 4 November 2014 KDB 789033 D02 v01				
Wareneingangsdatum: <i>Date of receipt:</i>	25.07.2016				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000403562-001, A000403562-002, A000403562-003				
Prüfzeitraum: <i>Testing period:</i>	27.07.2016 - 13.09.2016				
Ort der Prüfung: <i>Place of testing:</i>	Shenzhen EMTEK Co., Ltd.				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Pass				
geprüft von / tested by:			kontrolliert von / reviewed by:		
22.09.2016	Andy Yan/Project Manager		22.09.2016	Owen Tian/Technical Certifier	
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:	FCC ID: 2AI6X-PTABYIT IC: 21722-PTABYIT				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>				
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(all) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(all) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(all) = failed a.m. test specification(s)	3 = satisfactory F(all) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

v04

Prüfbericht - Nr.: 50056690 003

Test Report No.

Seite 2 von 313

Page 2 of 313

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Pass***5.1.2 PEAK OUTPUT POWER***RESULT: Pass***5.1.3 26dB BANDWIDTH***RESULT: Pass***5.1.4 99% BANDWIDTH***RESULT: Pass***5.1.5 6dB BANDWIDTH***RESULT: Pass***5.1.6 POWER SPECTRAL DENSITY***RESULT: Pass***5.1.7 SPURIOUS EMISSION***RESULT: Pass***5.1.8 CONDUCTED EMISSIONS***RESULT: Pass*

CONTENTS

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS	10
4.	TEST SET-UP AND OPERATION MODES	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	11
4.2	TEST OPERATION AND TEST SOFTWARE	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE	11
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Peak Output Power</i>	<i>15</i>
5.1.3	<i>26dB Bandwidth</i>	<i>17</i>
5.1.4	<i>99% Bandwidth</i>	<i>19</i>
5.1.5	<i>6dB Bandwidth</i>	<i>21</i>
5.1.6	<i>Power spectral density</i>	<i>23</i>
5.1.7	<i>Spurious Emission</i>	<i>25</i>
5.1.8	<i>Conducted emissions.....</i>	<i>308</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	311
7.	LIST OF TABLES	313
8.	LIST OF PHOTOGRAPHS	313

1. General Remarks

1.1 Complementary Materials

None.

2. Test Sites

2.1 Test Facilities

Shenzhen EMTEK Co., Ltd.

(FCC Registration No.: 709623)

(Test site Industry Canada No.: 4480A-2)

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Transmitter spurious emissions				
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	2017-05-16
Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	2017-05-16
Cable	H+B	3M SF104-26.5	295838/4	2017-05-28
Cable	H+B	6M SF104-26.5	295840/4	2017-05-28
Pre-Amplifier	HP	8447F	2944A07999	2017-05-16
Bilog Antenna	Schwarzbeck	VULB9163	142	2017-05-28
Cable	Schwarzbeck	AK9513	ACRX1	2017-05-16
Cable	Rosenberger	N/A	FP2RX2	2017-05-16
Cable	Schwarzbeck	AK9513	CRPX1	2017-05-28
Cable	Schwarzbeck	AK9513	CRRX2	2017-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2017-05-16
Horn Antenna	Schwarzbeck	BBHA 9120	707	2017-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2017-05-16
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91703 99	2017-05-16
EMI Test Receiver	Rohde & Schwarz	FSV40	132.1- 3008K39- 100967-AP	2017-05-16
Pre-Amplifier	Lunar EM	LNA26G40-40	J101313102 8001	2017-05-16
Horn Antenna	AHS/USA	SAS-573	184	2017-05-16
Cable	H+B	0.5M SF104- 26.5	289147/4	2017-05-16
Cable	H+B	3M SF104-26.5	295838/4	2017-05-16
Cable	H+B	6M SF104-26.5	295840/4	2017-05-16
Radio Spectrum Test				
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2017-05-16
Vector Signal Generater	Agilent	N5182B	My53050553	2017-05-28
Analog Signal Generator	Agilent	N5171B	My53050878	2017-05-28
Signal Analyzer	Agilent	N9010A	My53470879	2017-05-28
Power Meter	Agilent	PS-X10-100	N/A	2017-05-28
Temp. / Humidity Chamber	Kingson	THS-M1	242	2017-05-28
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2017-05-16
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	2017-05-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	2017-05-16
Voltage Probe	Rohde & Schwarz	TK9416	N/A	2017-05-16
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	2017-05-16
50Ω Coaxial Switch	Anritsu	MP59B	M20531	2017-05-16

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

Prüfbericht - Nr.: 50056690 003*Test Report No.***Seite 7 von 313***Page 7 of 313*

2.7 Status of Facility Used for Testing

Shenzhen EMTEK Co., Ltd. test facility located at Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUTs are 13.3" tablet with Wi-Fi, Bluetooth function.
 All models are identical except the model name.
 For details refer to the User Manual and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

Technical Specification	Value
Kind of Equipment	13.3" Tablet
Type Designation	P-TAB-104-YIT-01, P-TAB-104-YIT-02, P-TAB-104-YIT-03
FCC ID	2A16X-PTABYIT
IC	21722-PTABYIT
Operating Frequency band	5180 – 5240MHz, 5745 – 5825MHz
Extreme Temperature Range	0~+40°C
Operation Voltage	DC 5V (via AC/DC adapter)
Antenna Gain	3.46dBi

Table 4: Technical Specification of 5GHz, 802.11a/n

Operating mode(s) / WiFi	IEEE 802.11a	IEEE 802.11n HT20	IEEE 802.11n HT40
Test modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
Transmit Frequency Range (MHz)	5180 - 5240, 5745 - 5825	5180 - 5240, 5745 - 5825	5190 - 5230, 5755 - 5795
Channel Number	9	9	4
Data Rate (Mbps)	6, 9, 12, 18, 24, 36, 48, 54	MCS0 ~ MCS7	MCS0 ~ MCS7
Maximum output power (dBm)	16	16	15

Table 5: Technical Specification of 5GHz, 802.11ac

Operating mode(s) / WiFi	IEEE 802.11ac VHT20	IEEE 802.11ac VHT40	IEEE 802.11ac VHT80
Test modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM)
Transmit Frequency Range (MHz)	5180 - 5240, 5745 - 5825	5190 - 5230, 5755 - 5795	5210, 5775
Channel Number	9	4	2
Data Rate (Mbps)	MCS0 ~ MCS8	MCS0 ~ MCS9	MCS0 ~ MCS9
Maximum output power (dBm)	16	15	14

Table 6: List of WLAN Channel of 5GHz 802.11a/n

802.11a		802.11n HT20		802.11n HT40	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	36	5180	38	5190
40	5200	40	5200	46	5230
44	5220	44	5220	151	5755
48	5240	48	5240	159	5795
149	5745	149	5745		
153	5765	153	5765		
157	5785	157	5785		
161	5805	161	5805		
165	5825	165	5825		

Table 7: List of WLAN Channel of 5GHz 802.11ac

802.11ac VHT20		802.11ac VHT40		802.11ac VHT80	
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	155	5775
44	5220	151	5755		
48	5240	159	5795		
149	5745				
153	5765				
157	5785				
161	5805				
165	5825				

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi mode
 1. Transmitting
 - a. 802.11a
 - b. 802.11n HT20
 - c. 802.11n HT40
 - d. 802.11ac VHT20
 - e. 802.11ac VHT40
 - f. 802.11ac VHT80
 2. Receiving
- B. Standby
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- Constructional Drawing
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	Rating
AC/DC Adapter	Shenzhen Mass Power Electronic Limited	NBS18C050250VU	Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5V, 3.0A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
DC input port	2 cores, non-shielded port, 1m	DC Power Input

4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test of below 1GHz

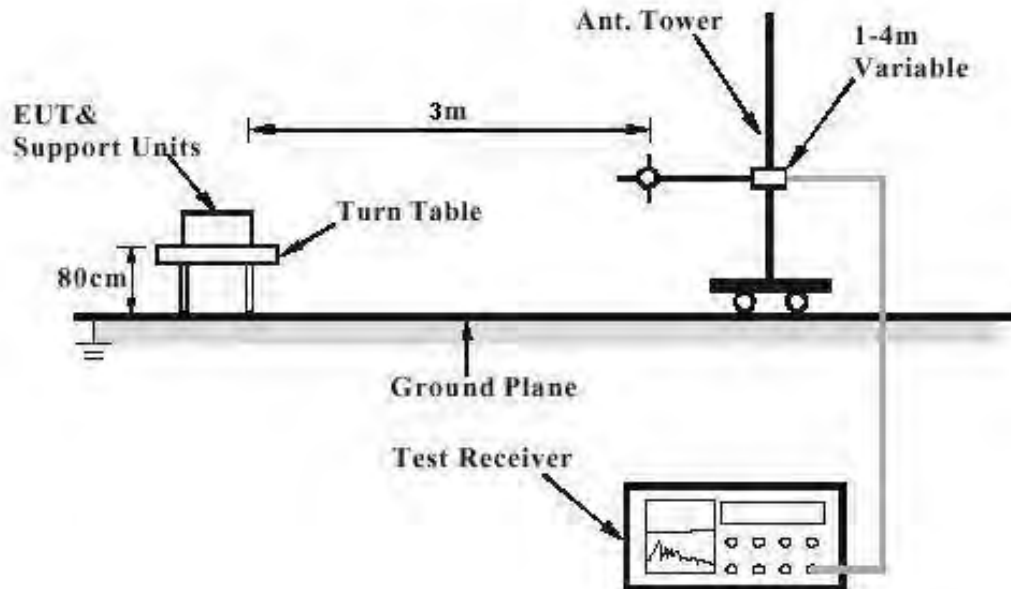


Diagram of Measurement Configuration for Radiation Test of above 1GHz

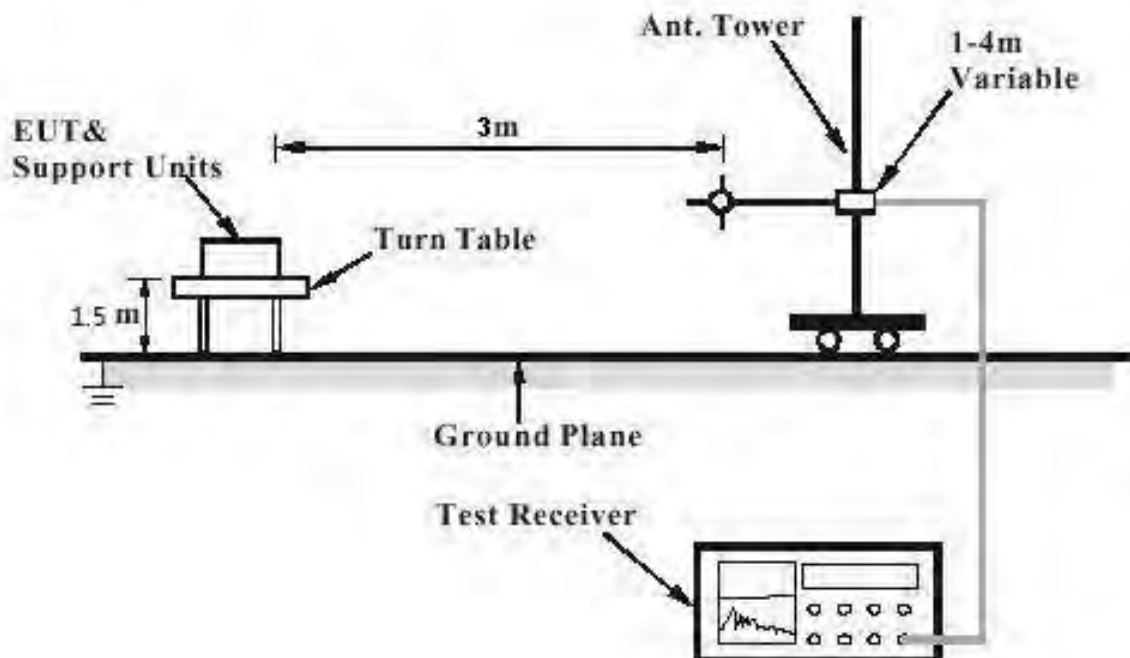


Diagram of Measurement Equipment Configuration for Conduction Measurement


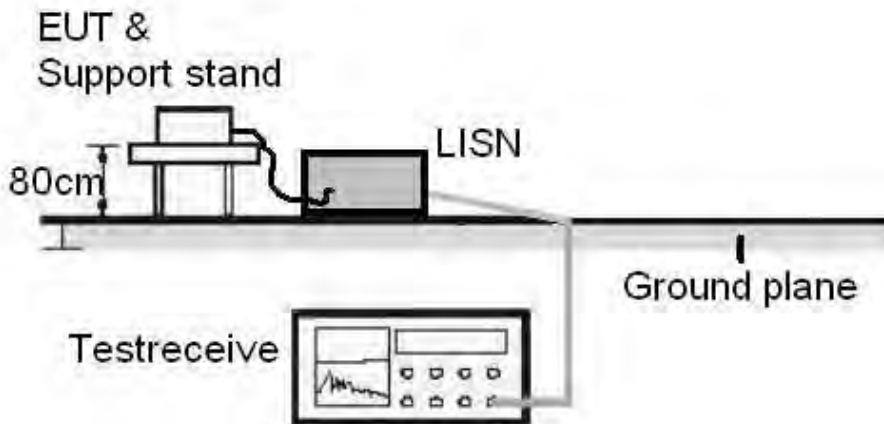


Diagram of Measurement Equipment Configuration for Transmitter Measurement

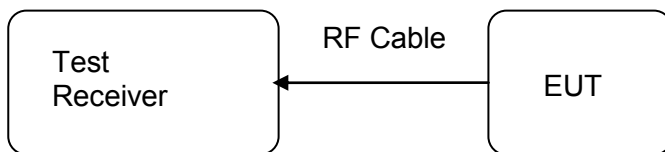

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass**

Test standard : FCC Part 15.203
RSS-Gen Clause 8.3
Limit The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 3.46dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

5.1.2 Peak Output Power

RESULT:
Pass

Test date : 2016-08-09
 Test standard : FCC Part 15.407(a)(1)(iv)
 FCC Part 15.407(a)(3)
 RSS-247 clause 6.2.1(1)
 RSS-247 clause 6.2.4(1)
 Basic standard : ANSI C63.10: 2013
 Limit : 24dBm for FCC, 23dBm for IC (Band U-NII-1)
 30dBm (Band U-NII-3)
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 8: Test result of Peak Output Power of Band U-NII-1

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11a	5180	16.27	23
	5200	16.33	23
	5240	16.51	23
802.11n HT20	5180	15.62	23
	5200	16.28	23
	5240	16.41	23
802.11n HT40	5190	12.51	23
	5230	14.07	23
802.11ac VHT20	5180	15.58	23
	5200	16.18	23
	5240	16.36	23
802.11ac VHT40	5190	12.86	23
	5230	14.02	23
802.11ac VHT80	5210	12.42	23

Table 9: Test result of Peak Output Power of Band U-NII-3

Mode	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
802.11a	5745	16.43	30
	5785	16.09	30
	5825	16.06	30
802.11n HT20	5745	16.55	30
	5785	16.13	30
	5825	16.10	30
802.11n HT40	5755	14.12	30
	5795	13.47	30
802.11ac VHT20	5745	16.50	30
	5785	15.99	30
	5825	15.98	30
802.11ac VHT40	5755	14.17	30
	5795	13.60	30
802.11ac VHT80	5775	13.51	30

5.1.3 26dB Bandwidth

RESULT:
Pass

Date of testing : 2016-07-27
 Test standard : FCC Part 15.407(a)(5)
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 10: Test result of 26dB Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	21.71	N/A
	5200	21.50	N/A
	5240	21.47	N/A
802.11n HT20	5180	25.81	N/A
	5200	27.79	N/A
	5240	29.62	N/A
802.11n HT40	5190	64.14	N/A
	5230	59.86	N/A
802.11ac VHT20	5180	25.90	N/A
	5200	28.56	N/A
	5240	26.33	N/A
802.11ac VHT40	5190	56.07	N/A
	5230	55.17	N/A
802.11ac VHT80	5210	95.65	N/A

Table 11: Test result of 26dB Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	25.29	N/A
	5785	22.46	N/A
	5825	23.33	N/A
802.11n HT20	5745	28.15	N/A
	5785	28.82	N/A
	5825	28.59	N/A
802.11n HT40	5755	76.92	N/A
	5795	71.66	N/A
802.11ac VHT20	5745	28.17	N/A
	5785	29.10	N/A
	5825	24.09	N/A
802.11ac VHT40	5755	75.34	N/A
	5795	71.09	N/A
802.11ac VHT80	5775	144.00	N/A

5.1.4 99% Bandwidth

RESULT:
Pass

Date of testing : 2016-07-27
 Test standard : RSS-Gen clause 6.6
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 12: Test result of 99% Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.812	N/A
	5200	16.810	N/A
	5240	16.784	N/A
802.11n HT20	5180	18.005	N/A
	5200	18.012	N/A
	5240	18.002	N/A
802.11n HT40	5190	36.506	N/A
	5230	36.483	N/A
802.11ac VHT20	5180	17.976	N/A
	5200	18.035	N/A
	5240	18.006	N/A
802.11ac VHT40	5190	36.574	N/A
	5230	36.541	N/A
802.11ac VHT80	5210	76.011	N/A

Table 13: Test result of 99% Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.958	N/A
	5785	16.883	N/A
	5825	16.860	N/A
802.11n HT20	5745	18.083	N/A
	5785	18.024	N/A
	5825	18.060	N/A
802.11n HT40	5755	36.904	N/A
	5795	36.728	N/A
802.11ac VHT20	5745	18.095	N/A
	5785	18.086	N/A
	5825	18.046	N/A
802.11ac VHT40	5755	37.058	N/A
	5795	36.794	N/A
802.11ac VHT80	5775	76.421	N/A

5.1.5 6dB Bandwidth

RESULT:
Pass

Date of testing : 2016-07-27
 Test standard : FCC Part 15.407(e)
 : RSS-247 clause 6.2.4(1)
 Basic standard : ANSI C63.10: 2013
 Limit : 500kHz for 6dB bandwidth
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A.1
 Ambient temperature : 25°C
 Relative humidity : 50%
 Atmospheric pressure : 101kPa

Table 14: Test result of 6dB Bandwidth Band U-NII-1

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5180	16.39	≥0.5
	5200	16.38	≥0.5
	5240	16.39	≥0.5
802.11n HT20	5180	17.65	≥0.5
	5200	17.65	≥0.5
	5240	17.63	≥0.5
802.11n HT40	5190	36.43	≥0.5
	5230	36.35	≥0.5
802.11ac VHT20	5180	17.65	≥0.5
	5200	17.60	≥0.5
	5240	17.63	≥0.5
802.11ac VHT40	5190	36.41	≥0.5
	5230	36.31	≥0.5
802.11ac VHT80	5210	75.65	≥0.5

Table 15: Test result of 6dB Bandwidth of Band U-NII-3

Mode	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
802.11a	5745	16.39	≥0.5
	5785	16.37	≥0.5
	5825	16.39	≥0.5
802.11n HT20	5745	17.64	≥0.5
	5785	17.62	≥0.5
	5825	17.63	≥0.5
802.11n HT40	5755	36.40	≥0.5
	5795	36.39	≥0.5
802.11ac VHT20	5745	17.64	≥0.5
	5785	17.65	≥0.5
	5825	17.67	≥0.5
802.11ac VHT40	5755	36.38	≥0.5
	5795	36.38	≥0.5
802.11ac VHT80	5775	75.88	≥0.5

Prüfbericht - Nr.: 50056690 003
Test Report No.
Seite 23 von 313
Page 23 of 313

5.1.6 Power spectral density

RESULT:
Pass

Date of testing	:	2016-09-13
Test standard	:	FCC Part 15.407(a)(1)(iv) FCC Part 15.407(a)(3) RSS-247 clause 6.2.1(1) RSS-247 clause 6.2.4(1)
Basic standard	:	ANSI C63.10: 2013
Limit	:	11dBm/MHz for FCC, 10dBm/MHz for IC (Band U-NII-1) 30dBm/500kHz (Band U-NII-3)
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A.1
Ambient temperature	:	25°C
Relative humidity	:	50%
Atmospheric pressure	:	101kPa

Table 16: Test result of power spectral density of Band U-NII-1

Mode	Channel Frequency (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)
802.11a	5180	8.635	10
	5200	8.933	10
	5240	9.674	10
802.11n HT20	5180	8.708	10
	5200	9.348	10
	5240	9.817	10
802.11n HT40	5190	6.318	10
	5230	8.113	10
802.11ac VHT20	5180	8.553	10
	5200	8.658	10
	5240	9.744	10
802.11ac VHT40	5190	6.836	10
	5230	8.075	10
802.11ac VHT80	5210	4.407	10

Table 17: Test result of power spectral density of Band U-NII-3

Mode	Channel Frequency (MHz)	Result (dBm/500kHz)	Limit (dBm/500kHz)
802.11a	5745	9.241	30
	5785	8.350	30
	5825	8.539	30
802.11n HT20	5745	9.918	30
	5785	9.141	30
	5825	9.221	30
802.11n HT40	5755	4.805	30
	5795	3.707	30
802.11ac VHT20	5745	9.242	30
	5785	8.982	30
	5825	9.011	30
802.11ac VHT40	5755	4.905	30
	5795	4.032	30
802.11ac VHT80	5775	2.091	30

Prüfbericht - Nr.: 50056690 003

Test Report No.

Seite 25 von 313

Page 25 of 313

5.1.7 Spurious Emission

RESULT:**Pass**

Date of testing : 2016-08-20 to 2016-09-06
Test standard : FCC part 15.407(b)
RSS-247 clause 6.2.1(2)
RSS-247 clause 6.2.4(2)
KDB789033 D02 v01
Basic standard : ANSI C63.10: 2013
Limits : FCC part 15.209(a)
Kind of test site : 3m Semi-Anechoic Chamber & Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High
Operation mode : A.1
Ambient temperature : 24°C
Relative humidity : 53%
Atmospheric pressure : 101kPa

The frequency range of testing is 30MHz to 40GHz, and no any emissions were found from 26.5GHz to 40GHz, hence the radiated emissions from 26.5GHz to 40GHz were not recorded.

For details refer to following test plot.


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1653

Date:

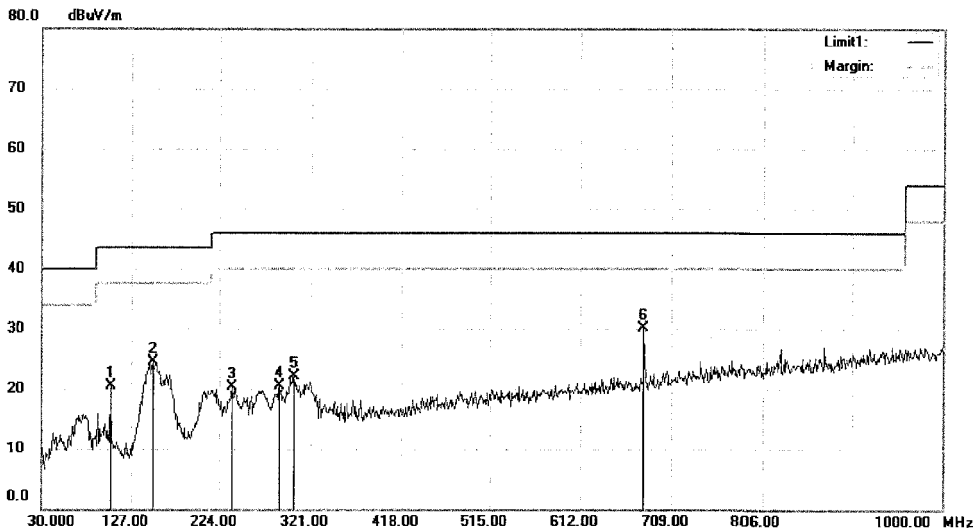

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		103.7200	35.75	-15.30	20.45	43.50	-23.05	QP		
2		151.2500	43.20	-18.79	24.41	43.50	-19.09	QP		
3		237.5800	34.34	-14.01	20.33	46.00	-25.67	QP		
4		288.0200	32.56	-12.11	20.45	46.00	-25.55	QP		
5		303.5400	33.61	-11.55	22.06	46.00	-23.94	QP		
6	*	678.9300	34.70	-4.58	30.12	46.00	-15.88	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1653

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

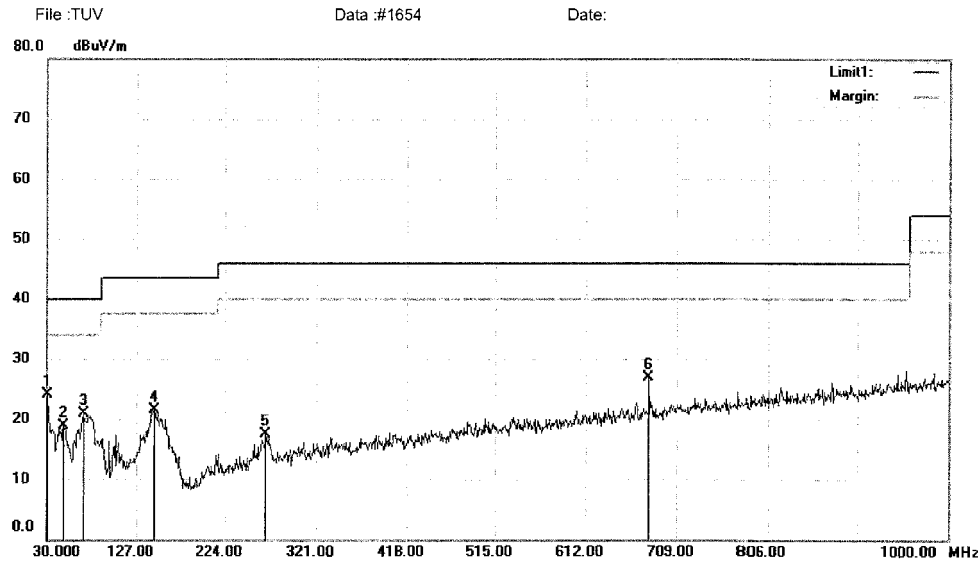
Radiated Emission Measurement


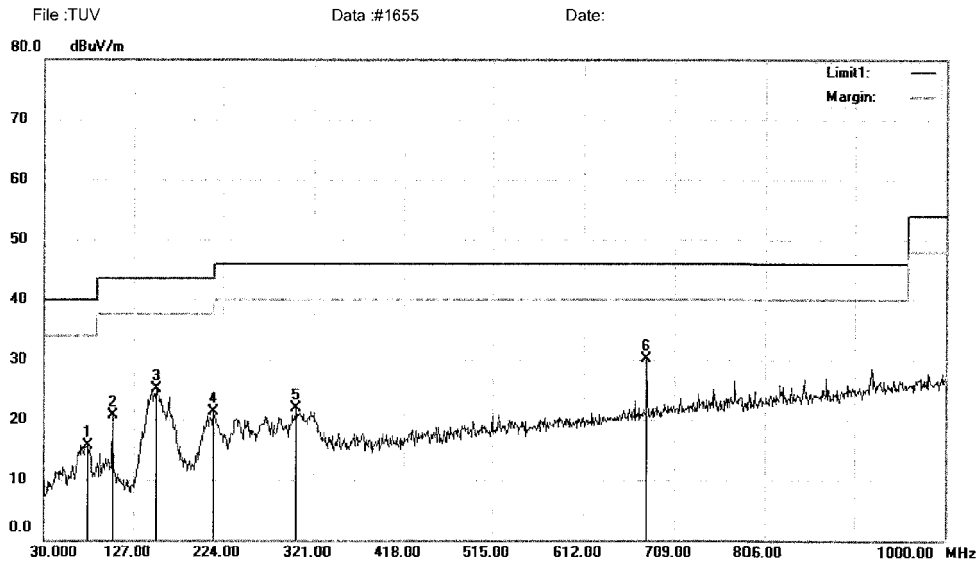
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	41.53	-17.48	24.05	40.00	-15.95	QP		
2		47.4600	32.81	-13.83	18.98	40.00	-21.02	QP		
3		68.8000	38.42	-17.57	20.85	40.00	-19.15	QP		
4		147.3700	40.47	-18.91	21.56	43.50	-21.94	QP		
5		267.6500	30.36	-12.79	17.57	46.00	-28.43	QP		
6		678.9300	31.58	-4.58	27.00	46.00	-19.00	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		76.5600	35.05	-19.33	15.72	40.00	-24.28	QP			
2		103.7200	35.99	-15.30	20.69	43.50	-22.81	QP			
3		152.2200	43.77	-18.74	25.03	43.50	-18.47	QP			
4		214.3000	36.17	-14.80	21.37	43.50	-22.13	QP			
5		302.5700	33.39	-11.57	21.82	46.00	-24.18	QP			
6	*	678.9300	34.68	-4.58	30.10	46.00	-15.90	QP			

*:Maximum data x:Over limit l:over margin

Operator: KK

File:TUV\Data:#1655

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1656

Date:

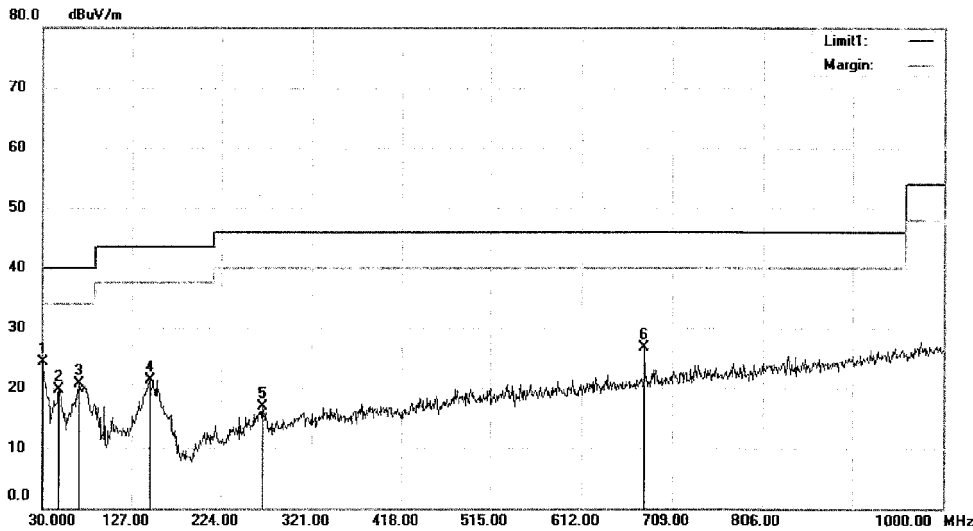

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	41.86	-17.48	24.38	40.00	-15.62	QP		
2		47.4600	33.52	-13.83	19.69	40.00	-20.31	QP		
3		69.7700	38.50	-17.85	20.65	40.00	-19.35	QP		
4		146.4000	40.33	-18.93	21.40	43.50	-22.10	QP		
5		268.6200	29.68	-12.76	16.92	46.00	-29.08	QP		
6		678.9300	31.33	-4.58	26.75	46.00	-19.25	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1656

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1657

Date:

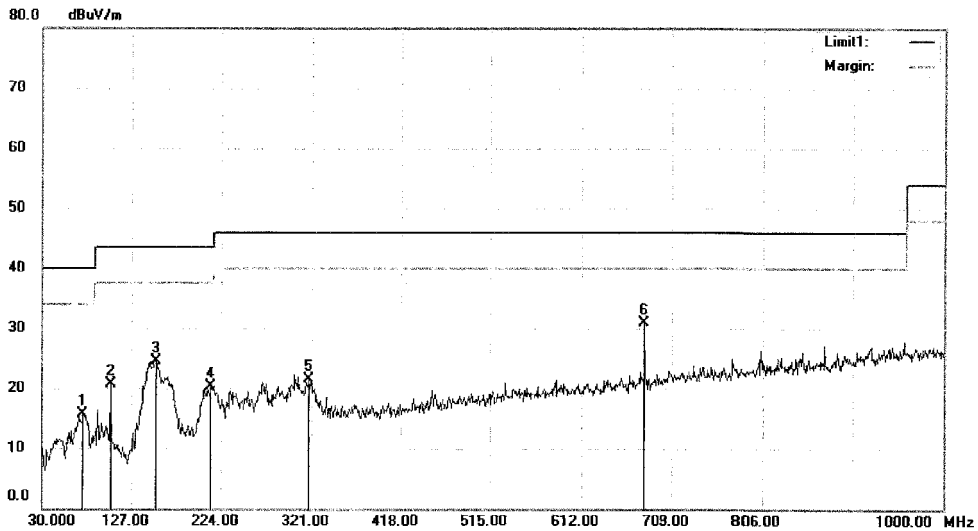

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		73.6500	34.38	-18.62	15.76	40.00	-24.24	QP		
2		103.7200	35.99	-15.30	20.69	43.50	-22.81	QP		
3		153.1900	43.25	-18.70	24.55	43.50	-18.95	QP		
4		213.3300	35.17	-14.84	20.33	43.50	-23.17	QP		
5		318.0900	32.93	-11.37	21.56	46.00	-24.44	QP		
6	*	678.9300	35.44	-4.58	30.86	46.00	-15.14	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1657

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Najialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

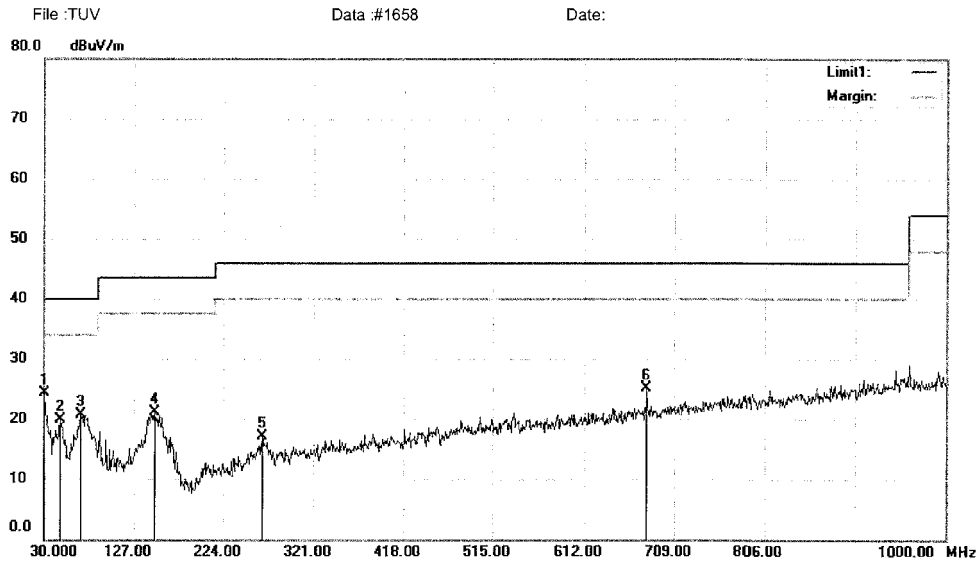
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	41.78	-17.48	24.30	40.00	-15.70	QP		
2		47.4600	33.77	-13.83	19.94	40.00	-20.06	QP		
3		69.7700	38.54	-17.85	20.69	40.00	-19.31	QP		
4		149.3100	39.87	-18.86	21.01	43.50	-22.49	QP		
5		265.7100	29.95	-12.84	17.11	46.00	-28.89	QP		
6		678.9300	29.67	-4.58	25.09	46.00	-20.91	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1658

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1659

Date:

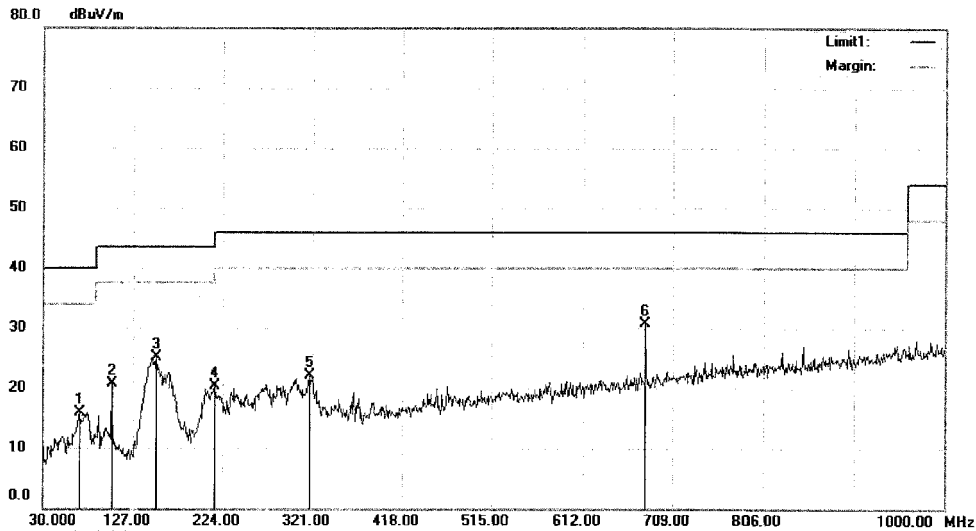

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		68.8000	33.56	-17.57	15.99	40.00	-24.01	QP		
2		103.7200	36.09	-15.30	20.79	43.50	-22.71	QP		
3		152.2200	43.92	-18.74	25.18	43.50	-18.32	QP		
4		215.2700	34.99	-14.73	20.26	43.50	-23.24	QP		
5		318.0900	33.39	-11.37	22.02	46.00	-23.98	QP		
6	*	678.9300	35.35	-4.58	30.77	46.00	-15.23	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1659

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1660

Date:

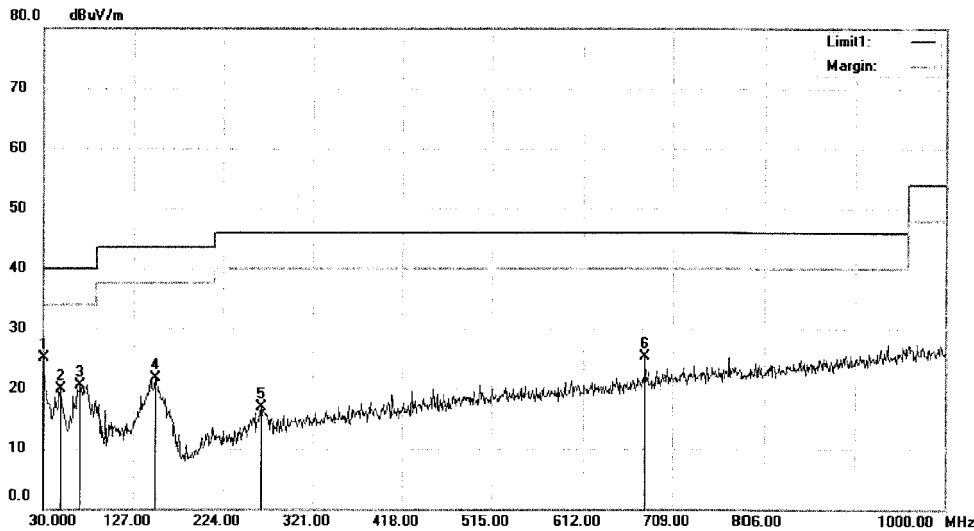

Site 3m Chamber #3

 Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	42.55	-17.48	25.07	40.00	-14.93	QP		
2		48.4300	33.81	-13.90	19.91	40.00	-20.09	QP		
3		69.7700	38.43	-17.85	20.58	40.00	-19.42	QP		
4		150.2800	40.54	-18.83	21.71	43.50	-21.79	QP		
5		265.7100	29.82	-12.84	16.98	46.00	-29.02	QP		
6		678.9300	29.80	-4.58	25.22	46.00	-20.78	QP		


*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUVData :#1660

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

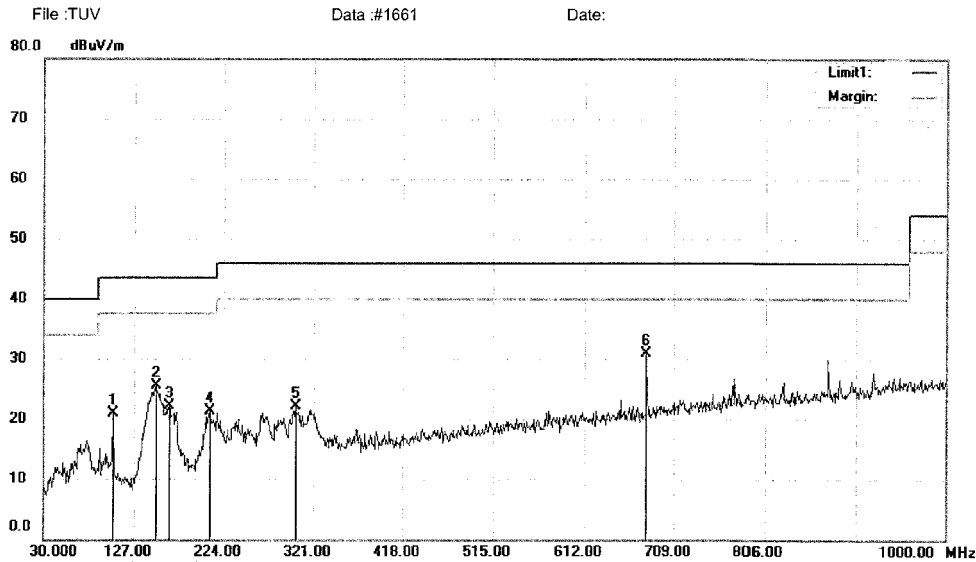
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		103.7200	36.30	-15.30	21.00	43.50	-22.50	QP		
2		150.2800	44.33	-18.83	25.50	43.50	-18.00	QP		
3		164.8300	39.93	-17.83	22.10	43.50	-21.40	QP		
4		208.4800	36.50	-15.10	21.40	43.50	-22.10	QP		
5		301.6000	33.70	-11.58	22.12	46.00	-23.88	QP		
6	*	678.9300	35.54	-4.58	30.96	46.00	-15.04	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1662

Date:

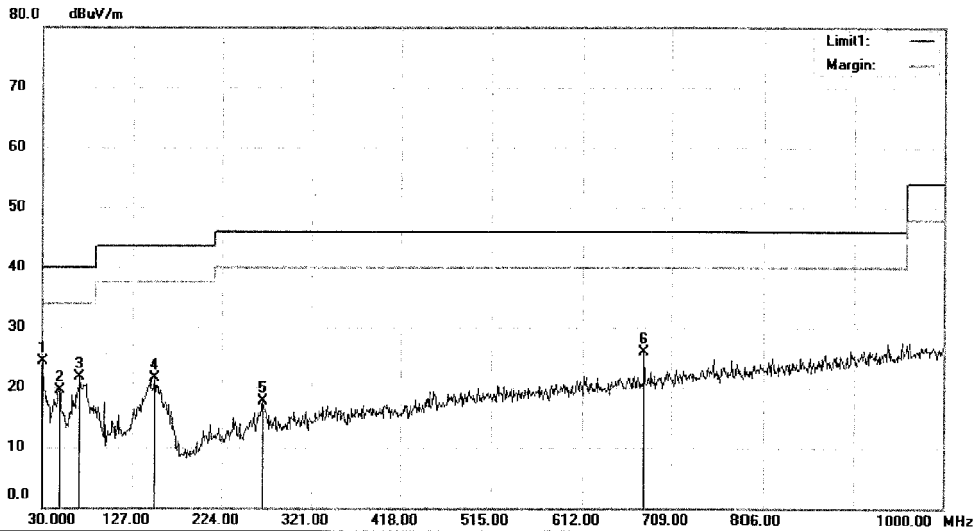

Site 3m Chamber #3

 Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	41.78	-17.48	24.30	40.00	-15.70	QP		
2		48.4300	33.40	-13.90	19.50	40.00	-20.50	QP		
3		69.7700	39.61	-17.85	21.76	40.00	-18.24	QP		
4		151.2500	40.20	-18.79	21.41	43.50	-22.09	QP		
5		268.6200	30.41	-12.76	17.65	46.00	-28.35	QP		
6		678.9300	30.57	-4.58	25.99	46.00	-20.01	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1662

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1663

Date:

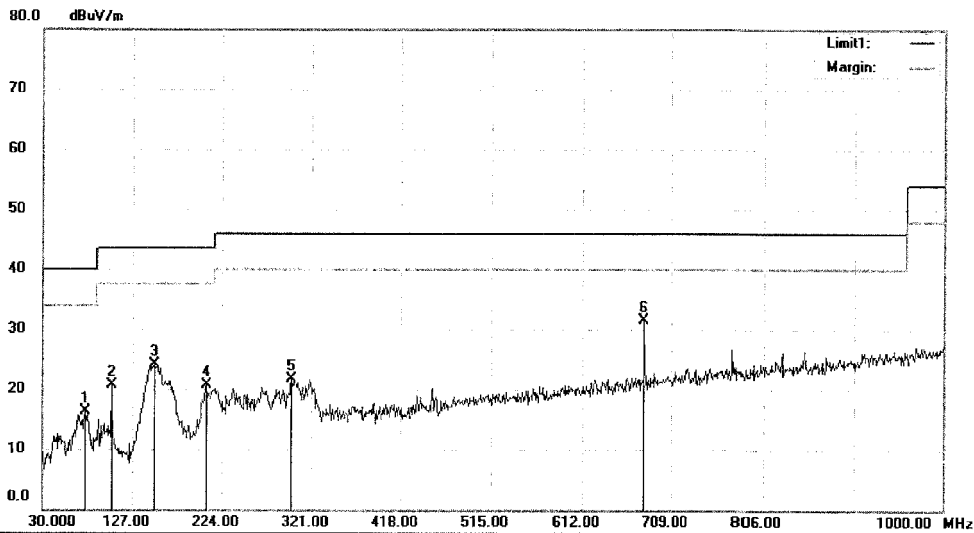

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		75.5900	35.40	-19.05	16.35	40.00	-23.65	QP		
2		103.7200	35.91	-15.30	20.61	43.50	-22.89	QP		
3		150.2800	42.90	-18.83	24.07	43.50	-19.43	QP		
4		207.5100	35.79	-15.14	20.65	43.50	-22.85	QP		
5		299.6600	33.36	-11.61	21.75	46.00	-24.25	QP		
6	*	678.9300	36.11	-4.58	31.53	46.00	-14.47	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1663

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1664

Date:

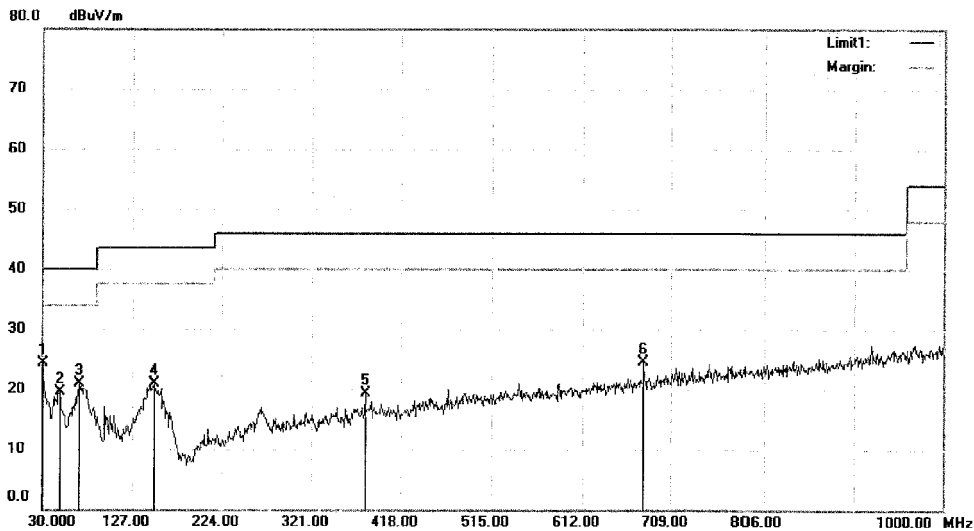

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	41.88	-17.48	24.40	40.00	-15.60	QP		
2		48.4300	33.35	-13.90	19.45	40.00	-20.55	QP		
3		69.7700	38.72	-17.85	20.87	40.00	-19.13	QP		
4		150.2800	39.81	-18.83	20.98	43.50	-22.52	QP		
5		379.2000	29.58	-10.19	19.39	46.00	-26.61	QP		
6		678.9300	29.04	-4.58	24.46	46.00	-21.54	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1664

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1669

Date:

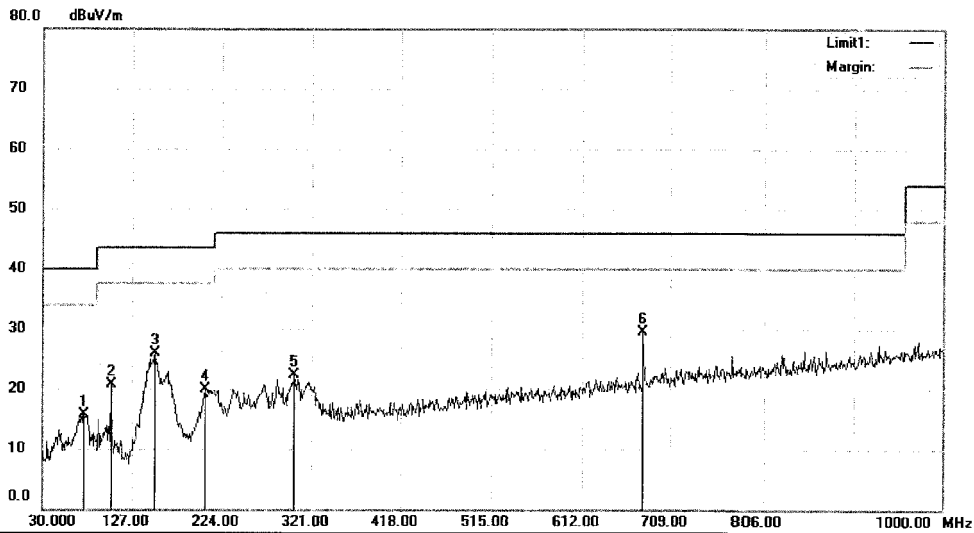

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		74.6200	34.48	-18.80	15.68	40.00	-24.32	QP		
2		103.7200	35.97	-15.30	20.67	43.50	-22.83	QP		
3		152.2200	44.58	-18.74	25.84	43.50	-17.66	QP		
4		206.5400	35.07	-15.20	19.87	43.50	-23.63	QP		
5		302.5700	33.81	-11.57	22.24	46.00	-23.76	QP		
6	*	678.9300	34.13	-4.58	29.55	46.00	-16.45	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1669

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

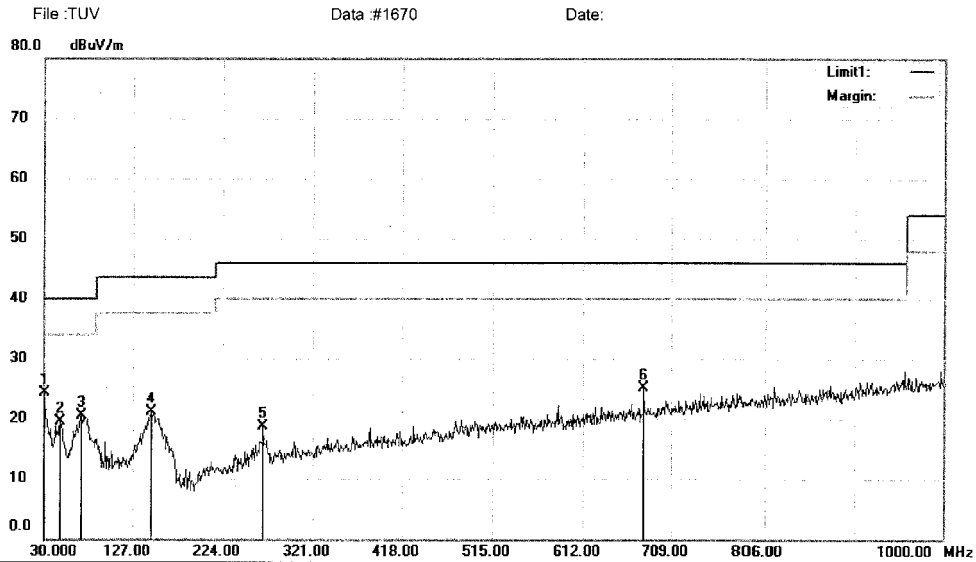
Radiated Emission Measurement


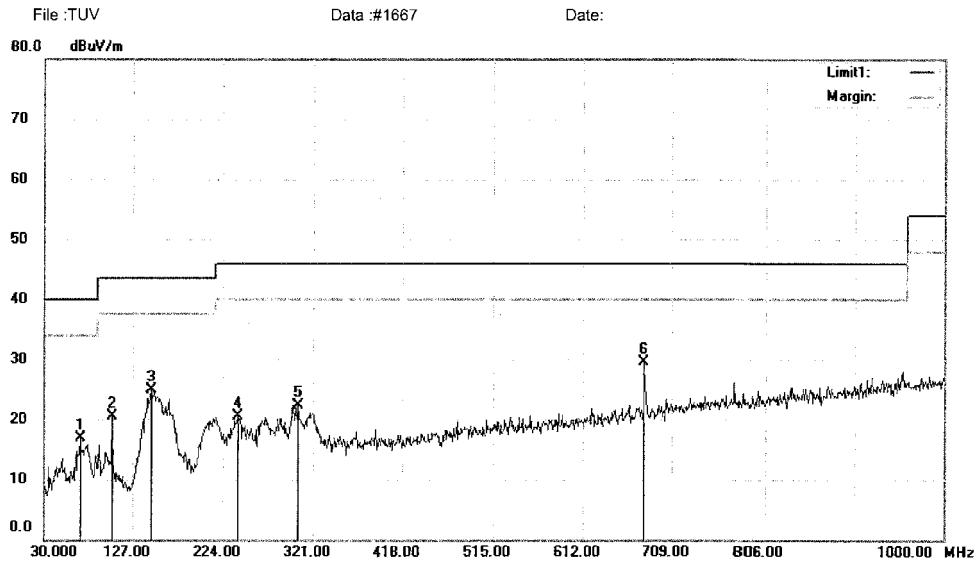
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	41.73	-17.48	24.25	40.00	-15.75	QP		
2		47.4600	33.35	-13.83	19.52	40.00	-20.48	QP		
3		70.7400	38.60	-18.06	20.54	40.00	-19.46	QP		
4		147.3700	40.02	-18.91	21.11	43.50	-22.39	QP		
5		267.6500	31.58	-12.79	18.79	46.00	-27.21	QP		
6		678.9300	29.59	-4.58	25.01	46.00	-20.99	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		68.8000	34.48	-17.57	16.91	40.00	-23.09	QP		
2		103.7200	35.73	-15.30	20.43	43.50	-23.07	QP		
3		146.4000	43.85	-18.93	24.92	43.50	-18.58	QP		
4		239.5200	34.37	-13.96	20.41	46.00	-25.59	QP		
5		304.5100	33.90	-11.54	22.36	46.00	-23.64	QP		
6	*	678.9300	34.02	-4.58	29.44	46.00	-16.56	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1667

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

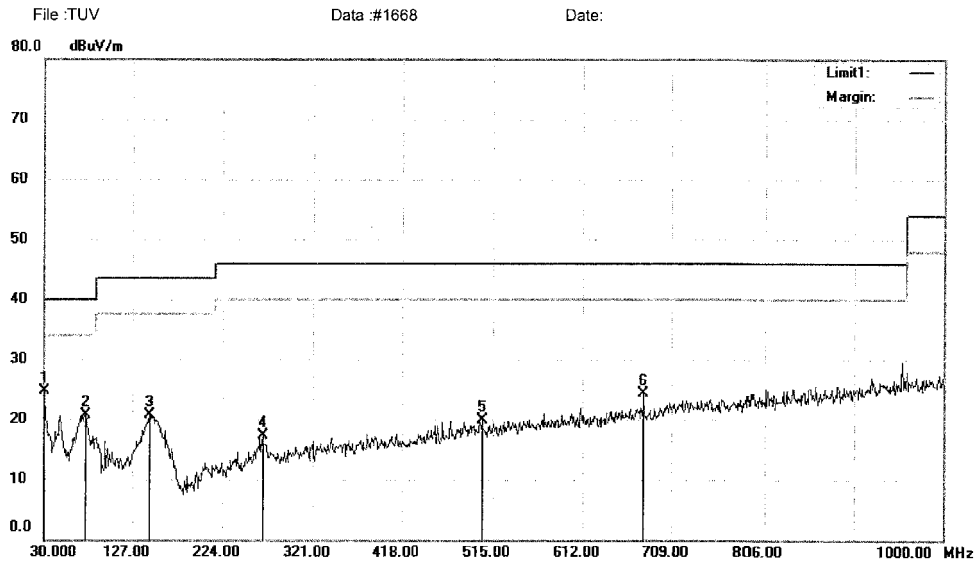
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	42.28	-17.48	24.80	40.00	-15.20	QP		
2		75.5900	39.71	-19.05	20.66	40.00	-19.34	QP		
3		145.4300	39.74	-18.96	20.78	43.50	-22.72	QP		
4		266.6800	30.10	-12.81	17.29	46.00	-28.71	QP		
5		503.3600	27.27	-7.41	19.86	46.00	-26.14	QP		
6		678.9300	28.85	-4.58	24.27	46.00	-21.73	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Radiated Emission Measurement

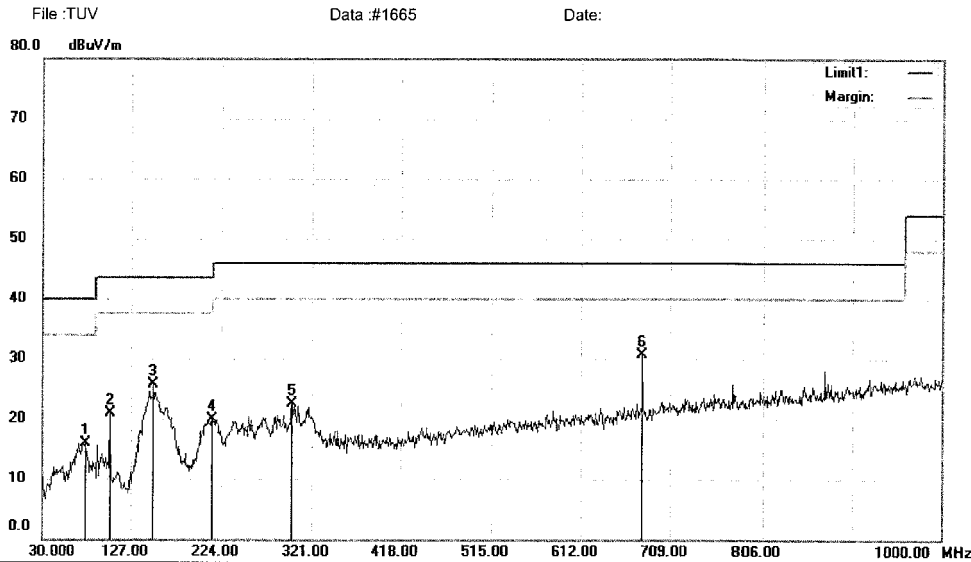

Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: 13.3" Tablet
M/N: P-TA13-104-YIT-01
Mode:11n(20MHz) 5825
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		76.5600	35.26	-19.33	15.93	40.00	-24.07	QP		
2		103.7200	36.14	-15.30	20.84	43.50	-22.66	QP		
3		151.2500	44.43	-18.79	25.64	43.50	-17.86	QP		
4		214.3000	34.67	-14.80	19.87	43.50	-23.63	QP		
5		299.6600	34.12	-11.61	22.51	46.00	-23.49	QP		
6	*	678.9300	35.29	-4.58	30.71	46.00	-15.29	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1666

Date:

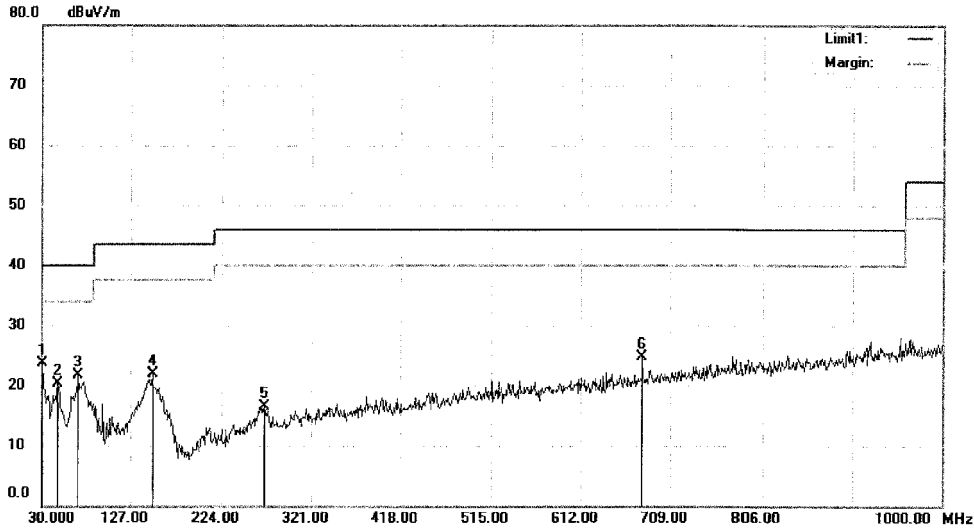

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	41.25	-17.48	23.77	40.00	-16.23	QP		
2		47.4600	34.17	-13.83	20.34	40.00	-19.66	QP		
3		69.7700	39.48	-17.85	21.63	40.00	-18.37	QP		
4		150.2800	40.74	-18.83	21.91	43.50	-21.59	QP		
5		269.5900	29.23	-12.73	16.50	46.00	-29.50	QP		
6		678.9300	29.33	-4.58	24.75	46.00	-21.25	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1666

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

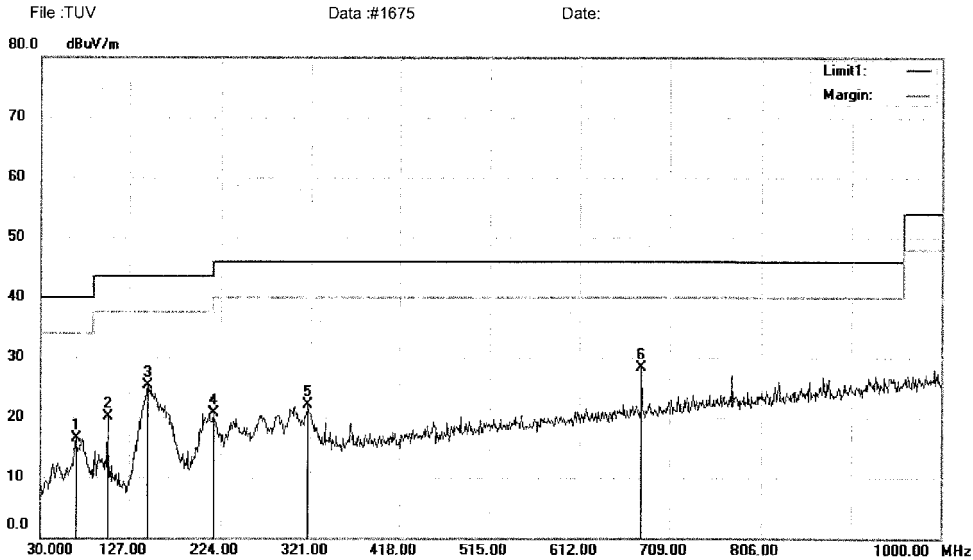
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		68.8000	34.13	-17.57	16.56	40.00	-23.44	QP		
2		103.7200	35.42	-15.30	20.12	43.50	-23.38	QP		
3		146.4000	44.16	-18.93	25.23	43.50	-18.27	QP		
4		216.2400	35.46	-14.69	20.77	46.00	-25.23	QP		
5		318.0900	33.41	-11.37	22.04	46.00	-23.96	QP		
6	*	678.9300	32.81	-4.58	28.23	46.00	-17.77	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1675

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1676

Date:

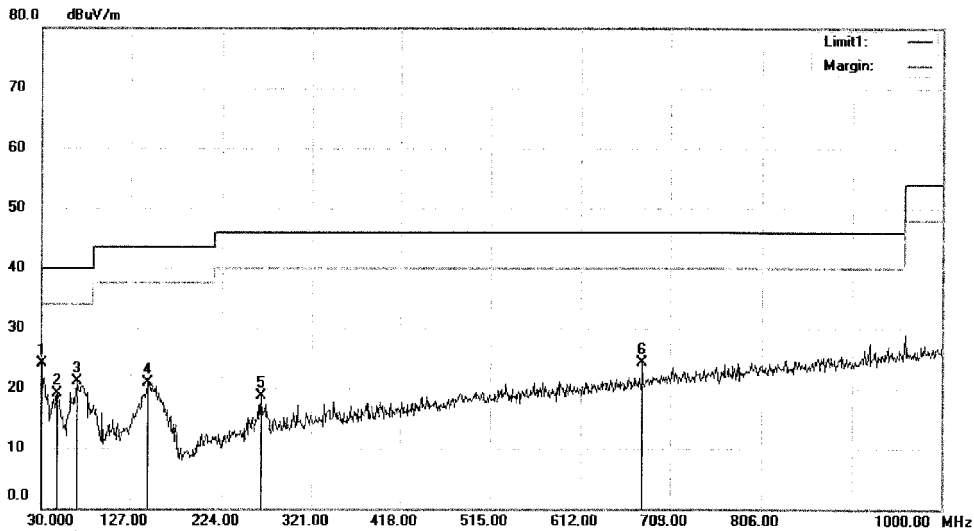

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	41.66	-17.48	24.18	40.00	-15.82	QP		
2		47.4600	33.03	-13.83	19.20	40.00	-20.80	QP		
3		69.7700	38.97	-17.85	21.12	40.00	-18.88	QP		
4		145.4300	39.79	-18.96	20.83	43.50	-22.67	QP		
5		265.7100	31.51	-12.84	18.67	46.00	-27.33	QP		
6		678.9300	28.91	-4.58	24.33	46.00	-21.67	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1676

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1673

Date:

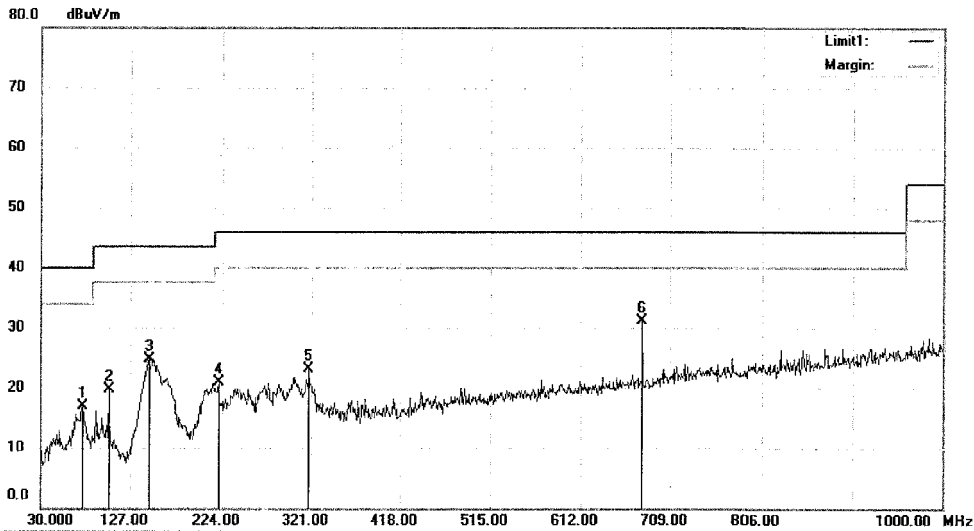

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		75.5900	36.00	-19.05	16.95	40.00	-23.05	QP		
2		103.7200	34.93	-15.30	19.63	43.50	-23.87	QP		
3		146.4000	43.61	-18.93	24.68	43.50	-18.82	QP		
4		220.1200	35.40	-14.49	20.91	46.00	-25.09	QP		
5		318.0900	34.39	-11.37	23.02	46.00	-22.98	QP		
6	*	678.9300	35.71	-4.58	31.13	46.00	-14.87	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1673

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

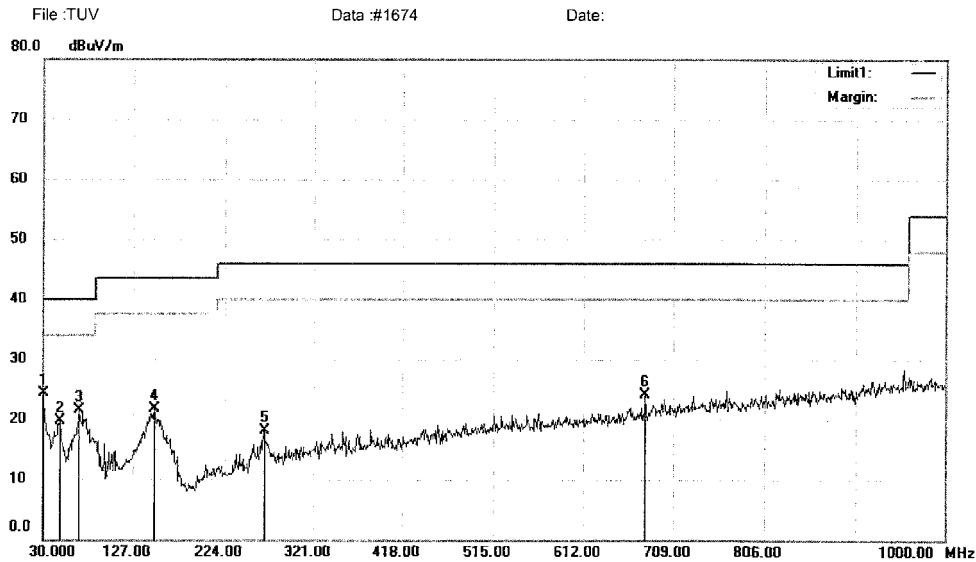
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	41.81	-17.48	24.33	40.00	-15.67	QP		
2		48.4300	33.52	-13.90	19.62	40.00	-20.38	QP		
3		69.7700	39.29	-17.85	21.44	40.00	-18.56	QP		
4		149.3100	40.54	-18.86	21.68	43.50	-21.82	QP		
5		266.6800	30.95	-12.81	18.14	46.00	-27.86	QP		
6		678.9300	28.75	-4.58	24.17	46.00	-21.83	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1674

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1671

Date:

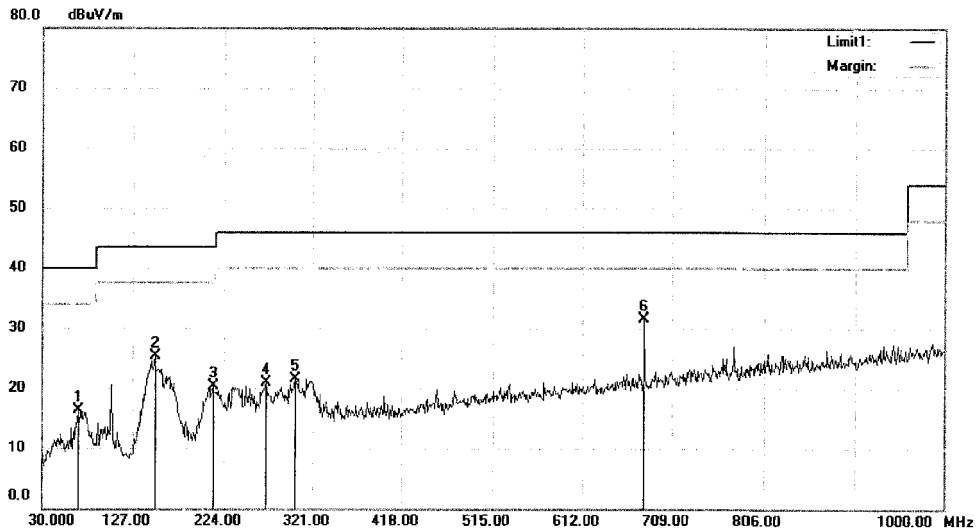

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		69.7700	34.25	-17.85	16.40	40.00	-23.60	QP		
2		150.2800	44.09	-18.83	25.26	43.50	-18.24	QP		
3		212.3600	35.14	-14.89	20.25	43.50	-23.25	QP		
4		269.5900	33.68	-12.73	20.95	46.00	-25.05	QP		
5		301.6000	33.14	-11.58	21.56	46.00	-24.44	QP		
6	*	678.9300	35.99	-4.58	31.41	46.00	-14.59	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1671

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File:TUV

Data:#1672

Date:

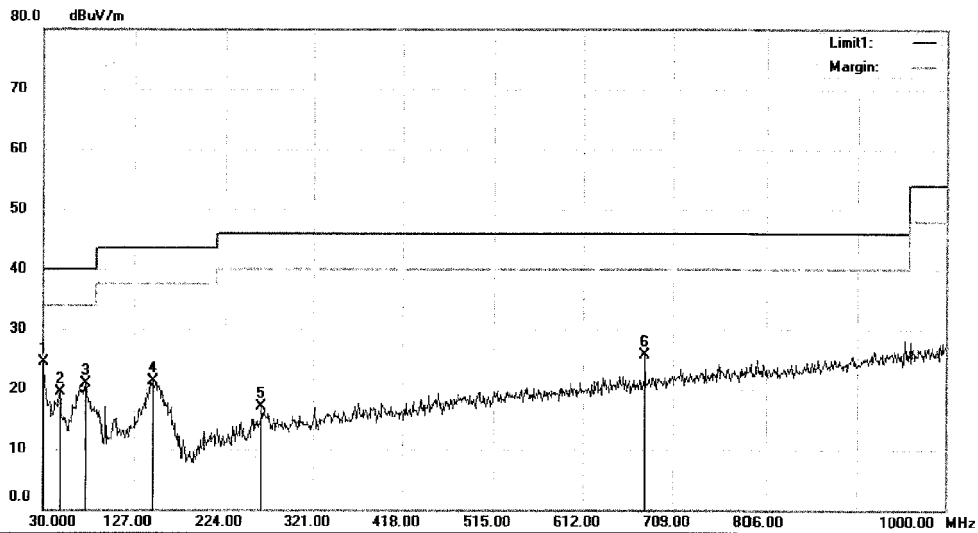

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	41.90	-17.48	24.42	40.00	-15.58	QP		
2		48.4300	33.42	-13.90	19.52	40.00	-20.48	QP		
3		75.5900	39.92	-19.05	20.87	40.00	-19.13	QP		
4		146.4000	40.27	-18.93	21.34	43.50	-22.16	QP		
5		263.7700	29.91	-12.89	17.02	46.00	-28.98	QP		
6		678.9300	30.31	-4.58	25.73	46.00	-20.27	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUVData:#1672

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

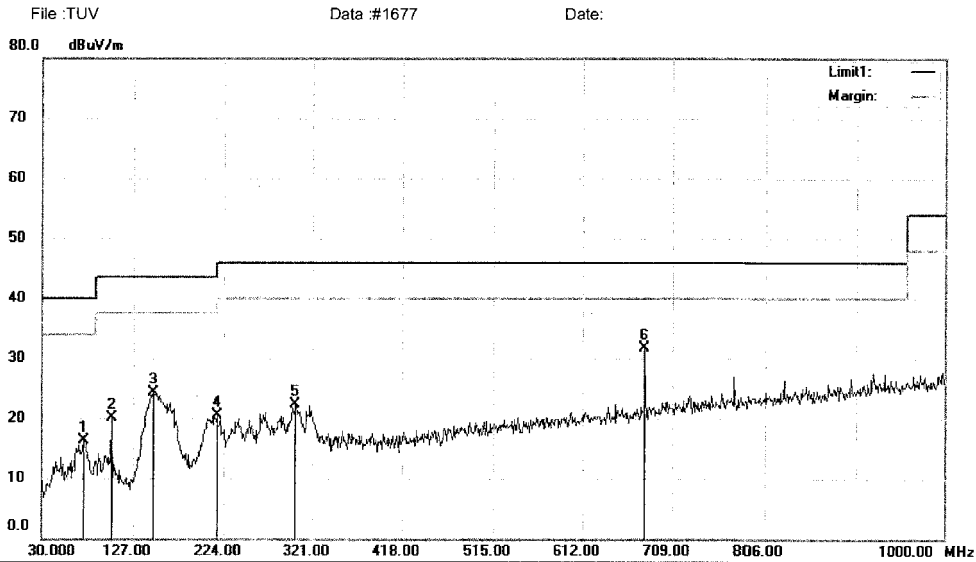
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		74.6200	35.18	-18.80	16.38	40.00	-23.62	QP		
2		103.7200	35.50	-15.30	20.20	43.50	-23.30	QP		
3		148.3400	43.23	-18.88	24.35	43.50	-19.15	QP		
4		216.2400	35.15	-14.69	20.46	46.00	-25.54	QP		
5		302.5700	33.80	-11.57	22.23	46.00	-23.77	QP		
6	*	678.9300	36.21	-4.58	31.63	46.00	-14.37	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1677

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1678

Date:

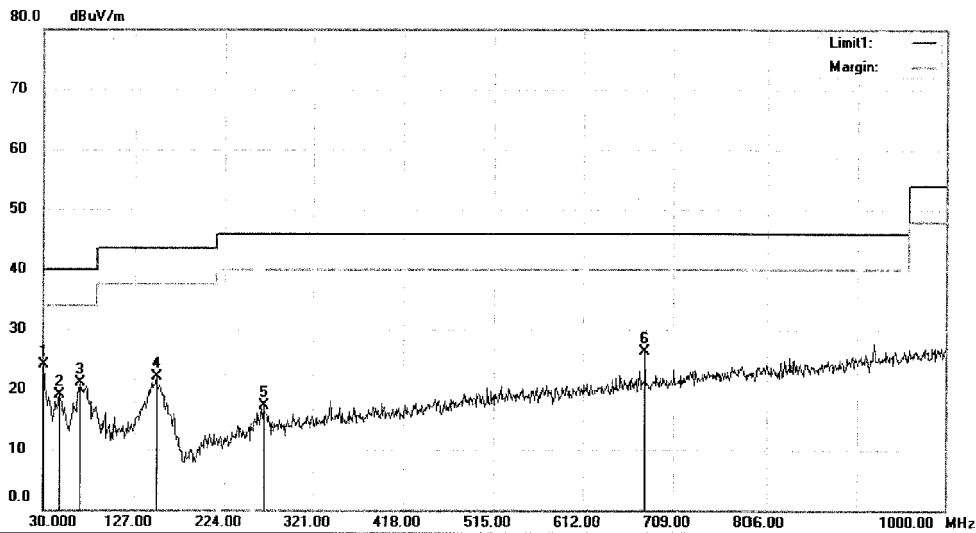

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5180

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	30.0000	41.65	-17.48	24.17	40.00	-15.83			QP	
2		47.4600	32.99	-13.83	19.16	40.00	-20.84			QP	
3		69.7700	39.02	-17.85	21.17	40.00	-18.83			QP	
4		150.2800	40.95	-18.83	22.12	43.50	-21.38			QP	
5		266.6800	30.13	-12.81	17.32	46.00	-28.68			QP	
6		678.9300	30.87	-4.58	26.29	46.00	-19.71			QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1678

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1679

Date:

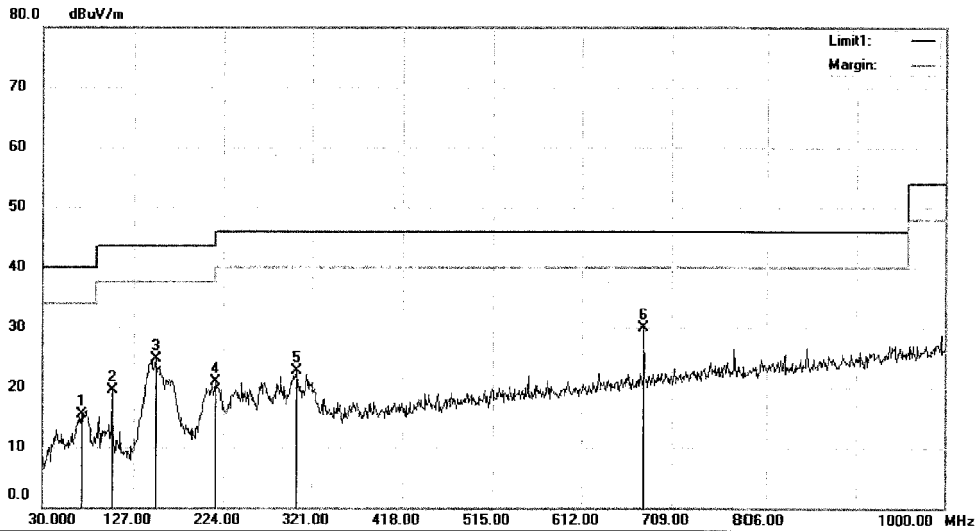

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.7100	33.75	-18.25	15.50	40.00	-24.50	QP		
2		103.7200	34.88	-15.30	19.58	43.50	-23.92	QP		
3		150.2800	43.46	-18.83	24.63	43.50	-18.87	QP		
4		215.2700	35.60	-14.73	20.87	43.50	-22.63	QP		
5		304.5100	34.26	-11.54	22.72	46.00	-23.28	QP		
6	*	678.9300	34.53	-4.58	29.95	46.00	-16.05	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1679

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1680

Date:

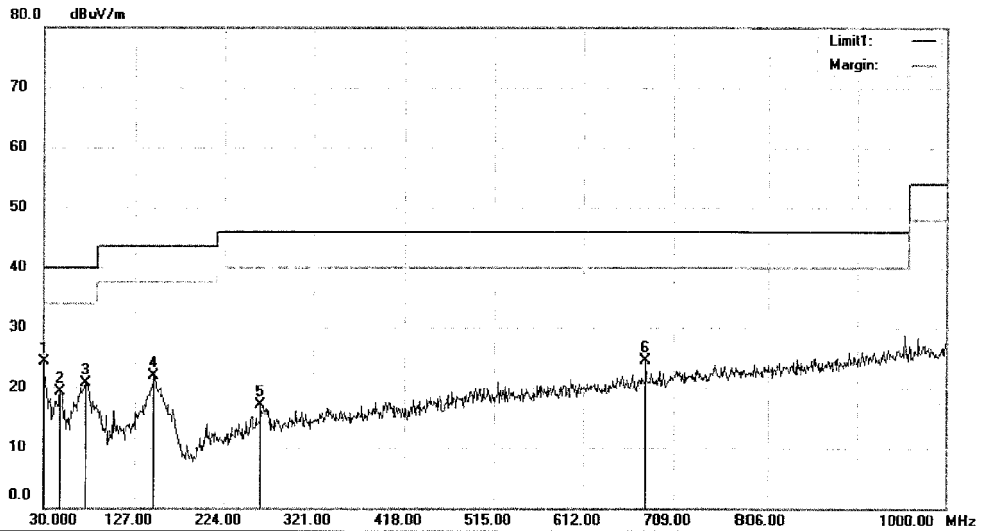

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.0000	41.87	-17.48	24.39	40.00	-15.61	QP			
2		47.4600	33.22	-13.83	19.39	40.00	-20.61	QP			
3		74.6200	39.52	-18.80	20.72	40.00	-19.28	QP			
4		147.3700	40.89	-18.91	21.98	43.50	-21.52	QP			
5		263.7700	30.07	-12.89	17.18	46.00	-28.82	QP			
6		678.9300	29.03	-4.58	24.45	46.00	-21.55	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1680

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1681

Date:

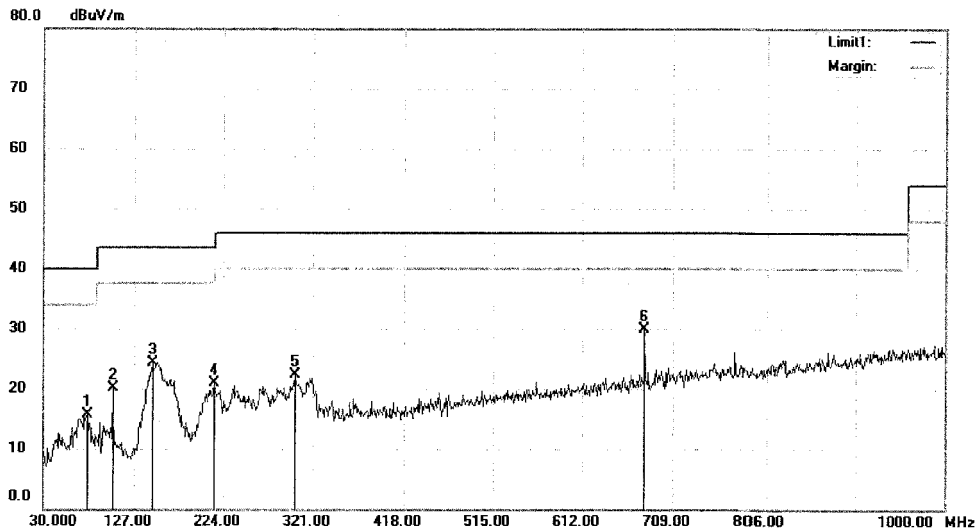

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		77.5300	35.29	-19.61	15.68	40.00	-24.32	QP		
2		103.7200	35.48	-15.30	20.18	43.50	-23.32	QP		
3		146.4000	43.26	-18.93	24.33	43.50	-19.17	QP		
4		214.3000	35.69	-14.80	20.89	43.50	-22.61	QP		
5		302.5700	33.84	-11.57	22.27	46.00	-23.73	QP		
6	*	678.9300	34.41	-4.58	29.83	46.00	-16.17	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1681

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1682

Date:

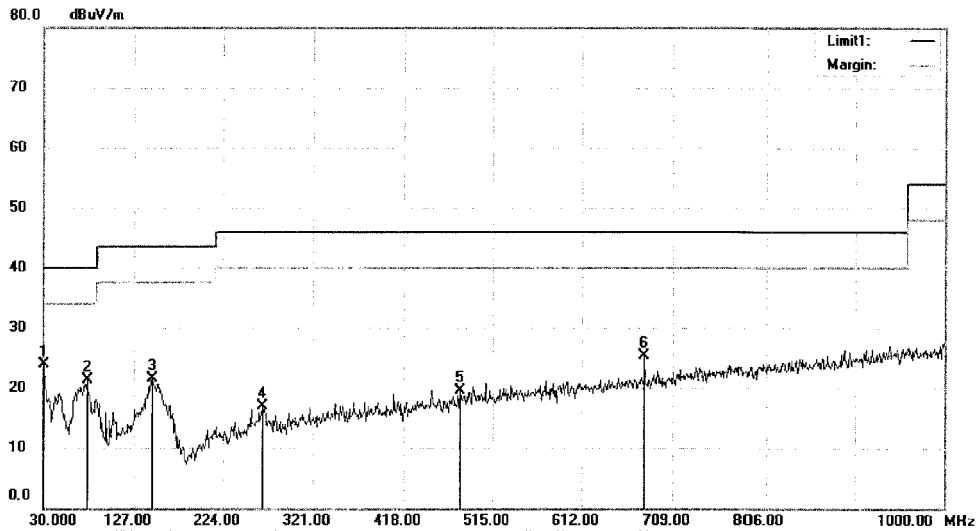

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	41.44	-17.48	23.96	40.00	-16.04	QP		
2		76.5600	40.63	-19.33	21.30	40.00	-18.70	QP		
3		146.4000	40.44	-18.93	21.51	43.50	-21.99	QP		
4		267.6500	29.78	-12.79	16.99	46.00	-29.01	QP		
5		479.1100	27.38	-7.83	19.55	46.00	-26.45	QP		
6		678.9300	29.95	-4.58	25.37	46.00	-20.63	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1682

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

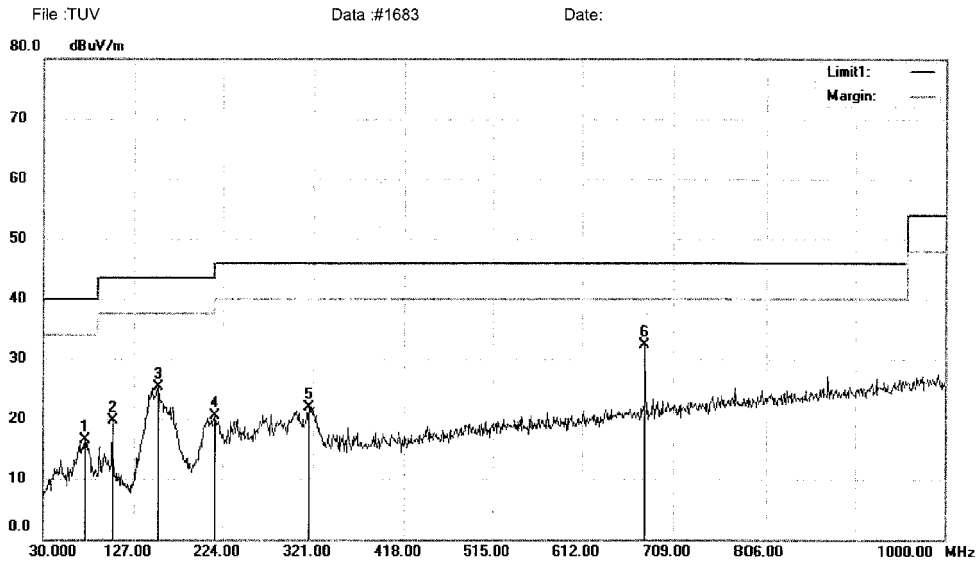
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		74.6200	35.40	-18.80	16.60	40.00	-23.40	QP		
2		103.7200	34.98	-15.30	19.68	43.50	-23.82	QP		
3		153.1900	44.05	-18.70	25.35	43.50	-18.15	QP		
4		215.2700	35.14	-14.73	20.41	43.50	-23.09	QP		
5		316.1500	33.32	-11.39	21.93	46.00	-24.07	QP		
6	*	678.9300	36.86	-4.58	32.28	46.00	-13.72	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1683

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

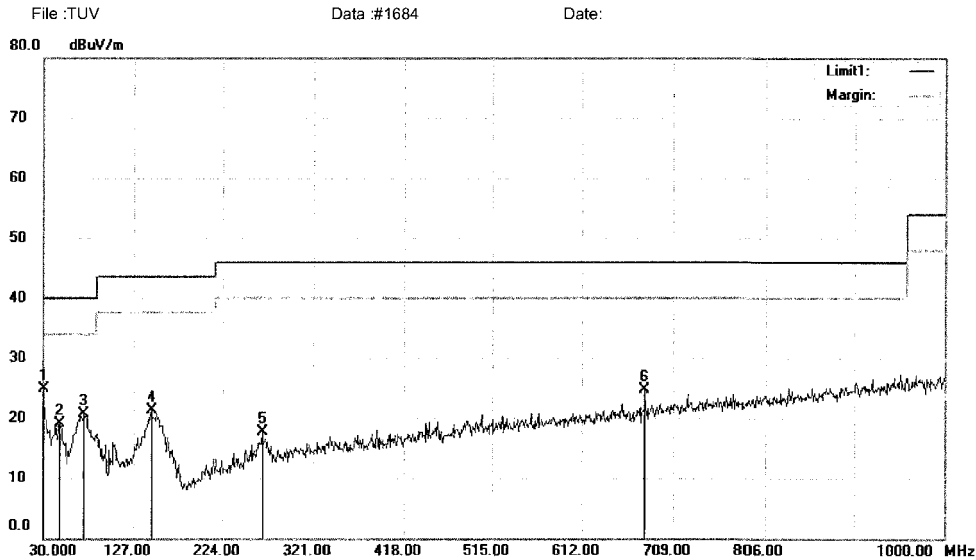
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	42.38	-17.48	24.90	40.00	-15.10	QP		
2		47.4600	33.02	-13.83	19.19	40.00	-20.81	QP		
3		73.6500	39.42	-18.62	20.80	40.00	-19.20	QP		
4		146.4000	40.27	-18.93	21.34	43.50	-22.16	QP		
5		266.6800	30.51	-12.81	17.70	46.00	-28.30	QP		
6		678.9300	29.30	-4.58	24.72	46.00	-21.28	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1684

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1685

Date:

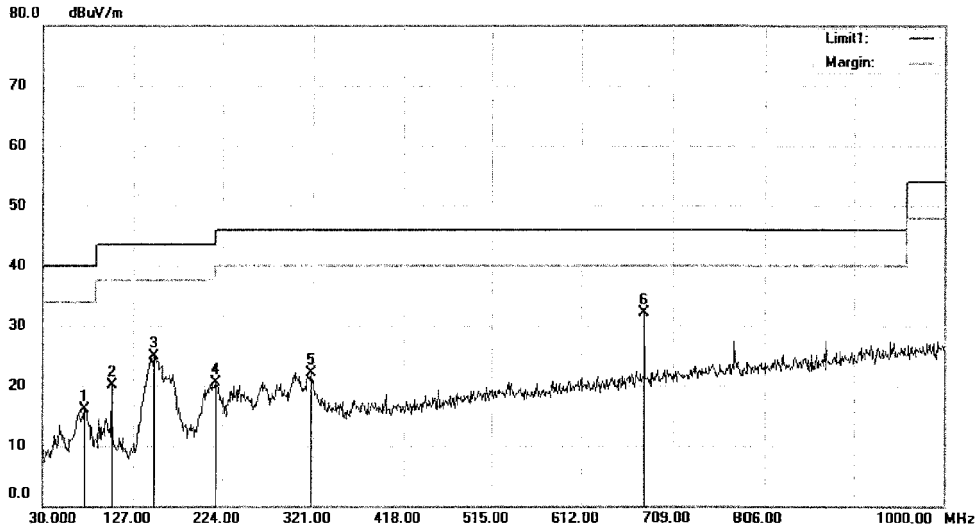

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		74.6200	34.89	-18.80	16.09	40.00	-23.91	QP		
2		103.7200	35.32	-15.30	20.02	43.50	-23.48	QP		
3		149.3100	43.75	-18.86	24.89	43.50	-18.61	QP		
4		216.2400	35.24	-14.69	20.55	46.00	-25.45	QP		
5		319.0600	33.42	-11.35	22.07	46.00	-23.93	QP		
6	*	678.9300	36.71	-4.58	32.13	46.00	-13.87	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1685

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1686

Date:

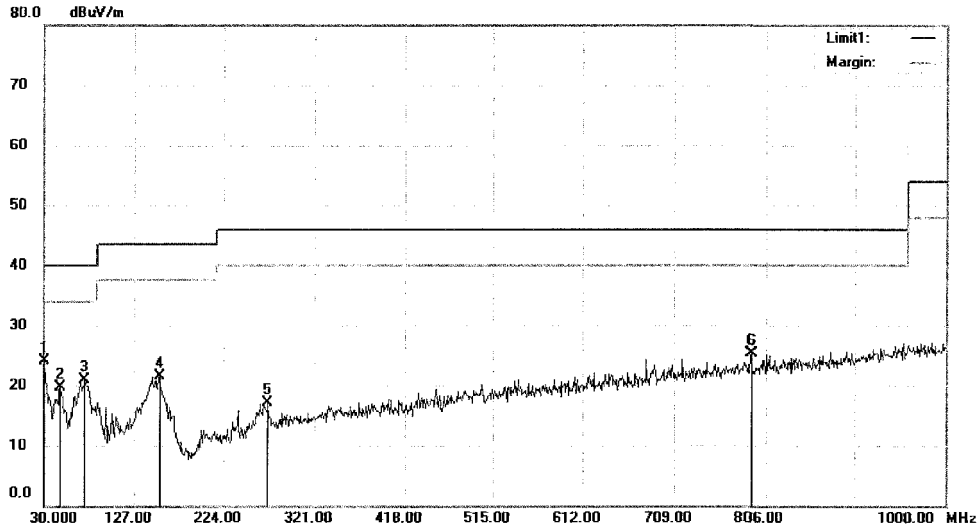

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	41.51	-17.48	24.03	40.00	-15.97	QP		
2		47.4600	33.59	-13.83	19.76	40.00	-20.24	QP		
3		73.6500	39.48	-18.62	20.86	40.00	-19.14	QP		
4		154.1600	40.21	-18.65	21.56	43.50	-21.94	QP		
5		271.5300	29.80	-12.68	17.12	46.00	-28.88	QP		
6		790.4800	28.36	-2.96	25.40	46.00	-20.60	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1686

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1687

Date:

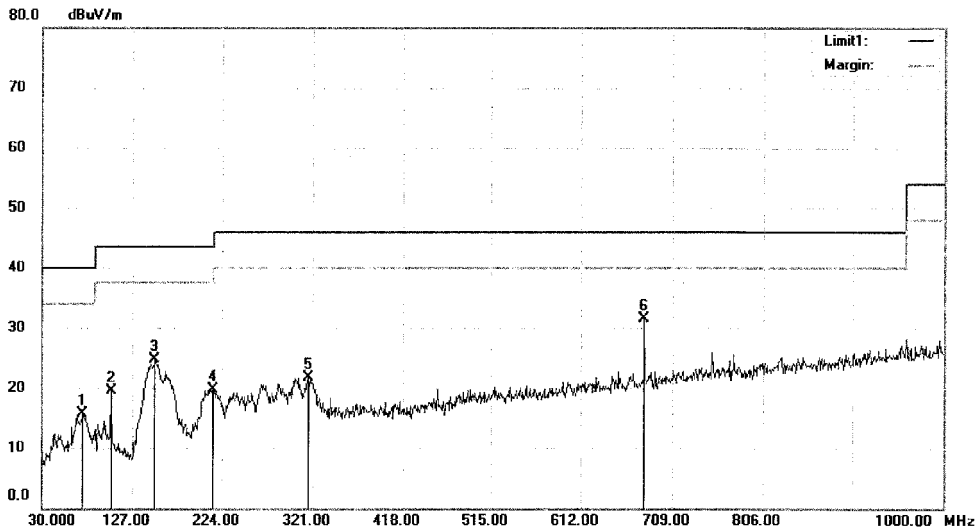

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		73.6500	34.41	-18.62	15.79	40.00	-24.21	QP			
2		103.7200	34.80	-15.30	19.50	43.50	-24.00	QP			
3		151.2500	43.48	-18.79	24.69	43.50	-18.81	QP			
4		214.3000	34.48	-14.80	19.68	43.50	-23.82	QP			
5		316.1500	33.02	-11.39	21.63	46.00	-24.37	QP			
6	*	678.9300	36.01	-4.58	31.43	46.00	-14.57	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1687

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1688

Date:

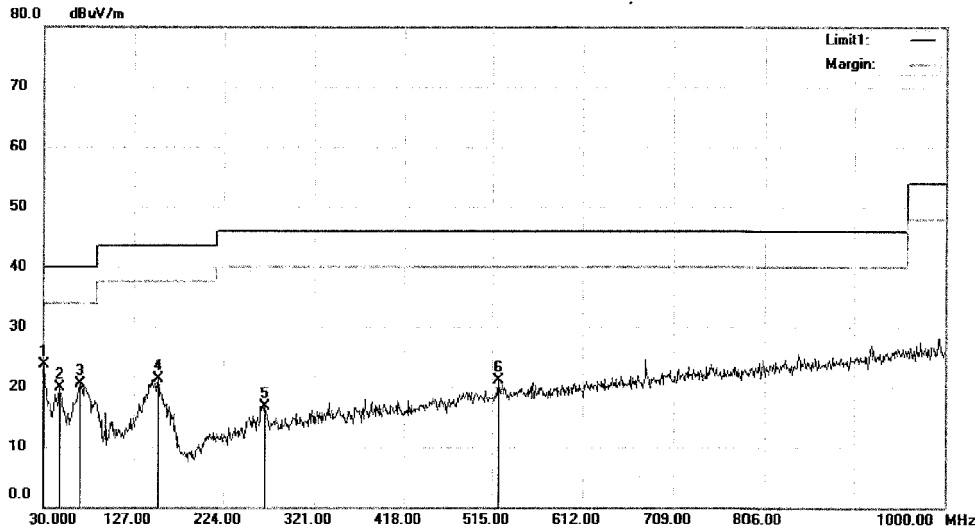

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.0000	41.09	-17.48	23.61	40.00	-16.39	QP			
2		47.4600	33.82	-13.83	19.99	40.00	-20.01	QP			
3		68.8000	38.04	-17.57	20.47	40.00	-19.53	QP			
4		153.1900	39.95	-18.70	21.25	43.50	-22.25	QP			
5		268.6200	29.45	-12.76	16.69	46.00	-29.31	QP			
6		521.7900	28.13	-7.11	21.02	46.00	-24.98	QP			


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1688

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

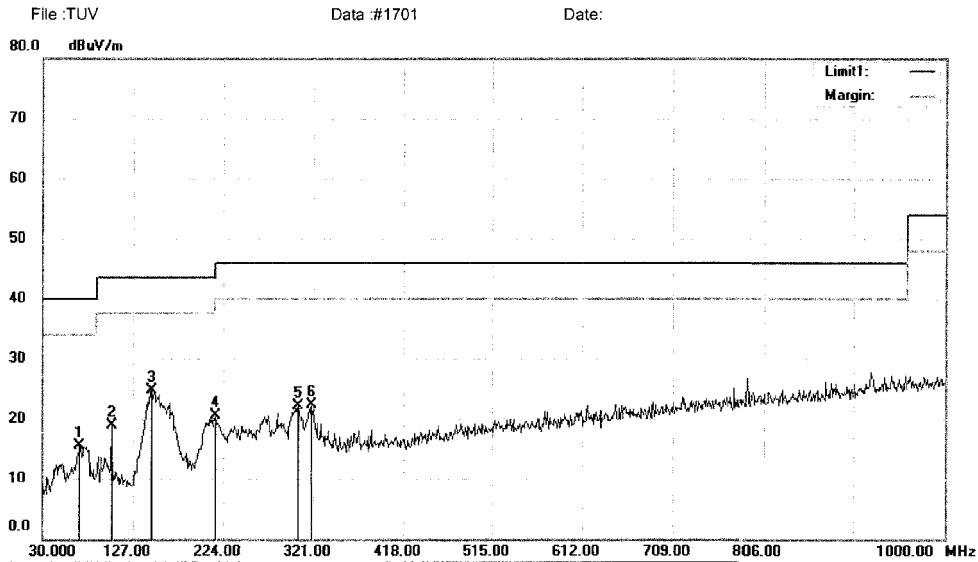
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		69.7700	33.43	-17.85	15.58	40.00	-24.42	QP			
2		103.7200	34.17	-15.30	18.87	43.50	-24.63	QP			
3	*	146.4000	43.71	-18.93	24.78	43.50	-18.72	QP			
4		215.2700	35.32	-14.73	20.59	43.50	-22.91	QP			
5		304.5100	33.74	-11.54	22.20	46.00	-23.80	QP			
6		319.0600	33.64	-11.35	22.29	46.00	-23.71	QP			


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1701

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

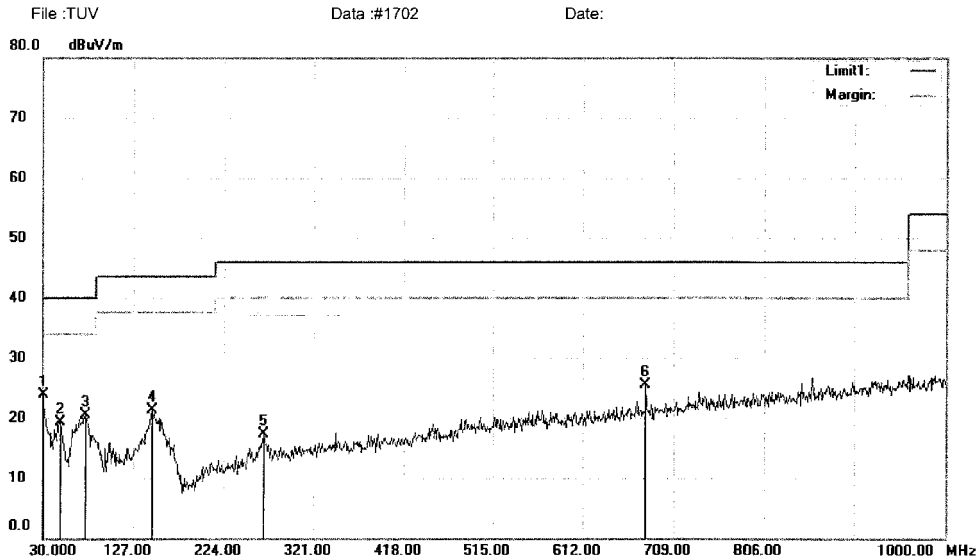
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	30.0000	41.42	-17.48	23.94	40.00	-16.06	QP			
2		48.4300	33.23	-13.90	19.33	40.00	-20.67	QP			
3		75.5900	39.60	-19.05	20.55	40.00	-19.45	QP			
4		146.4000	40.20	-18.93	21.27	43.50	-22.23	QP			
5		267.6500	30.08	-12.79	17.29	46.00	-28.71	QP			
6		678.9300	30.18	-4.58	25.60	46.00	-20.40	QP			


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1702

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

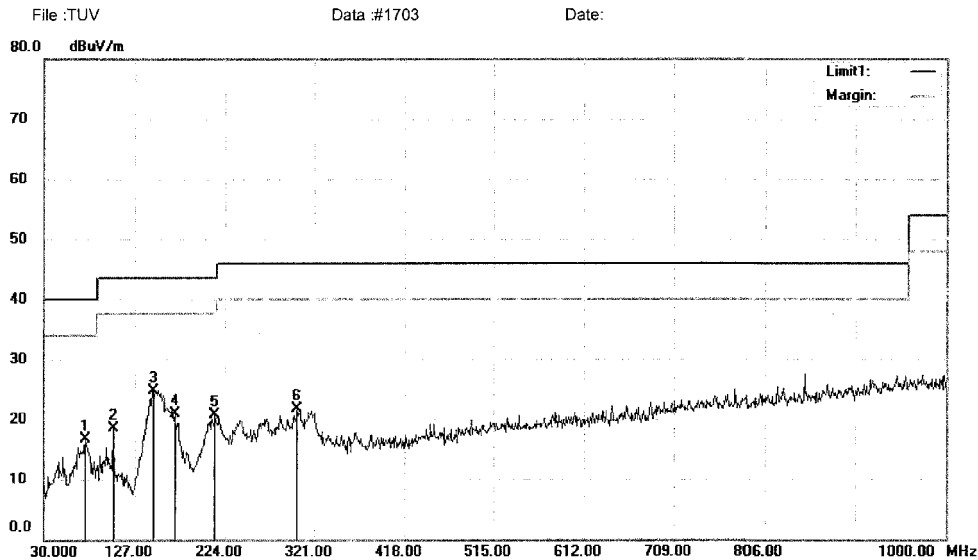Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		74.6200	35.46	-18.80	16.66	40.00	-23.34	QP		
2		103.7200	33.71	-15.30	18.41	43.50	-25.09	QP		
3	*	146.4000	43.63	-18.93	24.70	43.50	-18.80	QP		
4		169.6800	38.10	-17.26	20.84	43.50	-22.66	QP		
5		213.3300	35.45	-14.84	20.61	43.50	-22.89	QP		
6		302.5700	33.37	-11.57	21.80	46.00	-24.20	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1703

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1704

Date:

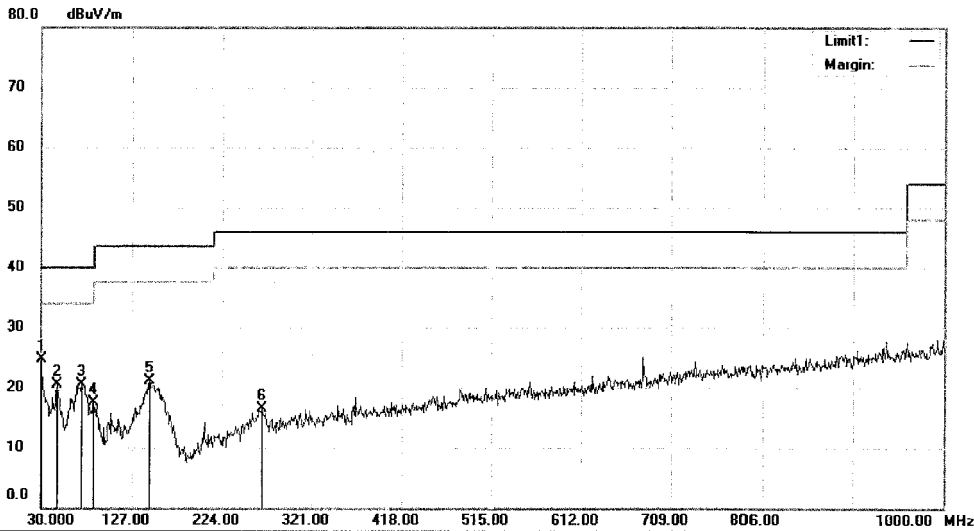

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	42.12	-17.48	24.64	40.00	-15.36	QP		
2		47.4600	34.27	-13.83	20.44	40.00	-19.56	QP		
3		73.6500	39.07	-18.62	20.45	40.00	-19.55	QP		
4		86.2600	36.02	-18.47	17.55	40.00	-22.45	QP		
5		145.4300	40.09	-18.96	21.13	43.50	-22.37	QP		
6		267.6500	29.25	-12.79	16.46	46.00	-29.54	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1704

Page: 1


Shenzhen EMTEK Co., Ltd.
 8ldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1705

Date:

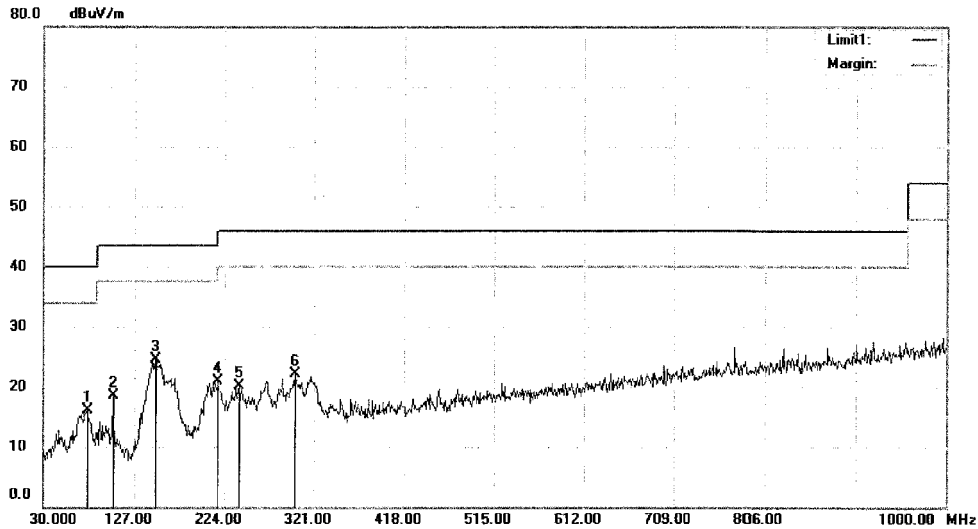

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		76.5600	35.48	-19.33	16.15	40.00	-23.85	QP		
2		103.7200	33.85	-15.30	18.55	43.50	-24.95	QP		
3	*	149.3100	43.44	-18.86	24.58	43.50	-18.92	QP		
4		217.2100	35.54	-14.64	20.90	46.00	-25.10	QP		
5		239.5200	34.08	-13.96	20.12	46.00	-25.88	QP		
6		300.6300	33.72	-11.59	22.13	46.00	-23.87	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1705

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1706

Date:

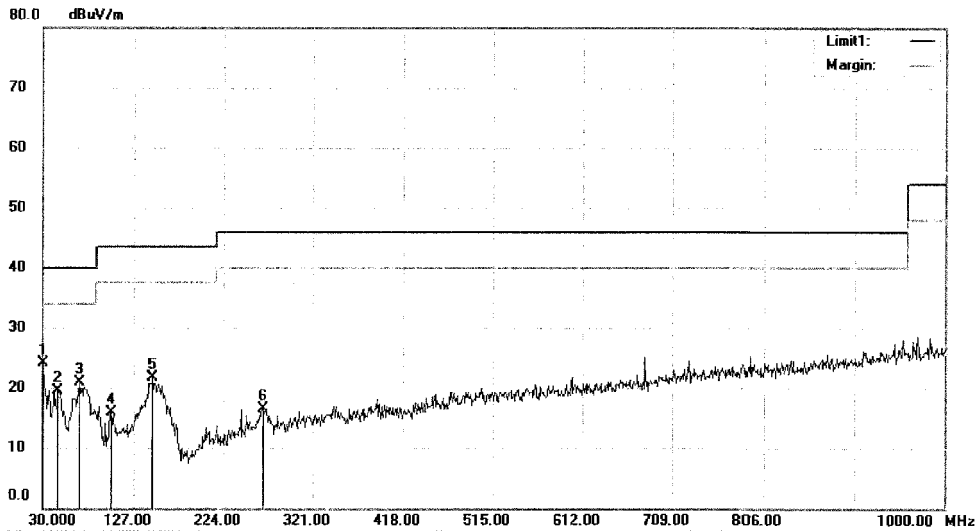

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	41.50	-17.48	24.02	40.00	-15.98	QP		
2		46.4900	33.59	-14.00	19.59	40.00	-20.41	QP		
3		69.7700	38.69	-17.85	20.84	40.00	-19.16	QP		
4		102.7500	31.15	-15.30	15.85	43.50	-27.65	QP		
5		147.3700	40.68	-18.91	21.77	43.50	-21.73	QP		
6		266.6800	29.40	-12.81	16.59	46.00	-29.41	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1706

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4260 Fax:+86-755-2695 4282

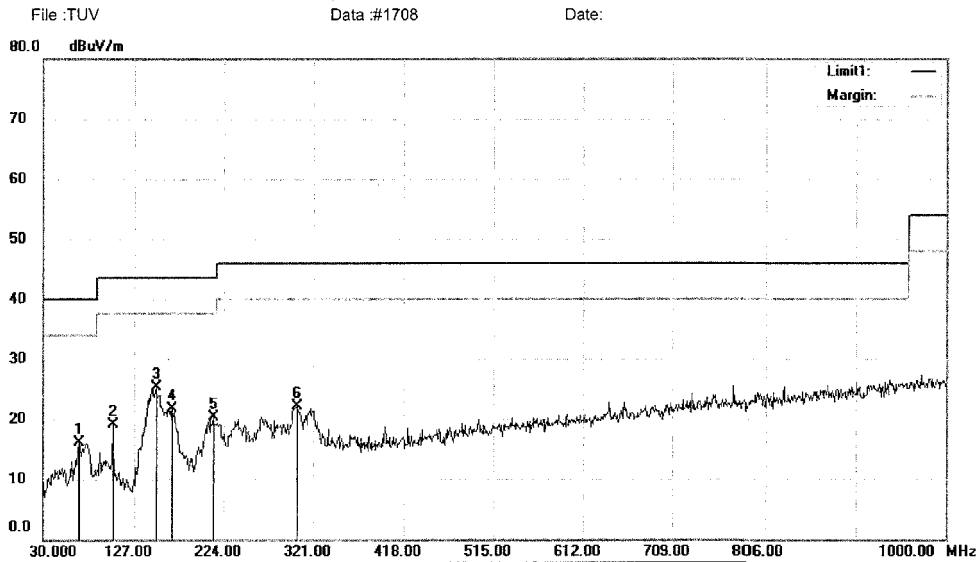
Radiated Emission Measurement


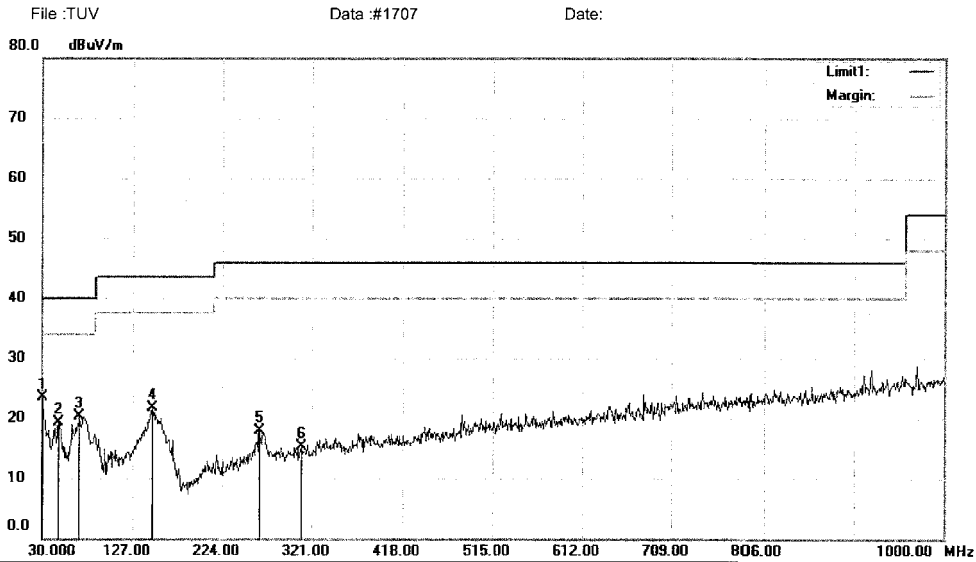
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		67.8300	33.45	-17.29	16.16	40.00	-23.84	QP		
2		103.7200	34.41	-15.30	19.11	43.50	-24.39	QP		
3	*	150.2800	44.04	-18.83	25.21	43.50	-18.29	QP		
4		167.7400	39.21	-17.48	21.73	43.50	-21.77	QP		
5		212.3600	35.21	-14.89	20.32	43.50	-23.18	QP		
6		303.5400	33.69	-11.55	22.14	46.00	-23.86	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	40.89	-17.48	23.41	40.00	-16.59	QP		
2		47.4600	33.10	-13.83	19.27	40.00	-20.73	QP		
3		69.7700	38.15	-17.85	20.30	40.00	-19.70	QP		
4		148.3400	40.56	-18.88	21.68	43.50	-21.82	QP		
5		264.7400	30.83	-12.88	17.95	46.00	-28.05	QP		
6		310.3300	26.81	-11.47	15.34	46.00	-30.66	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1707

Page: 1


Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1699

Date:

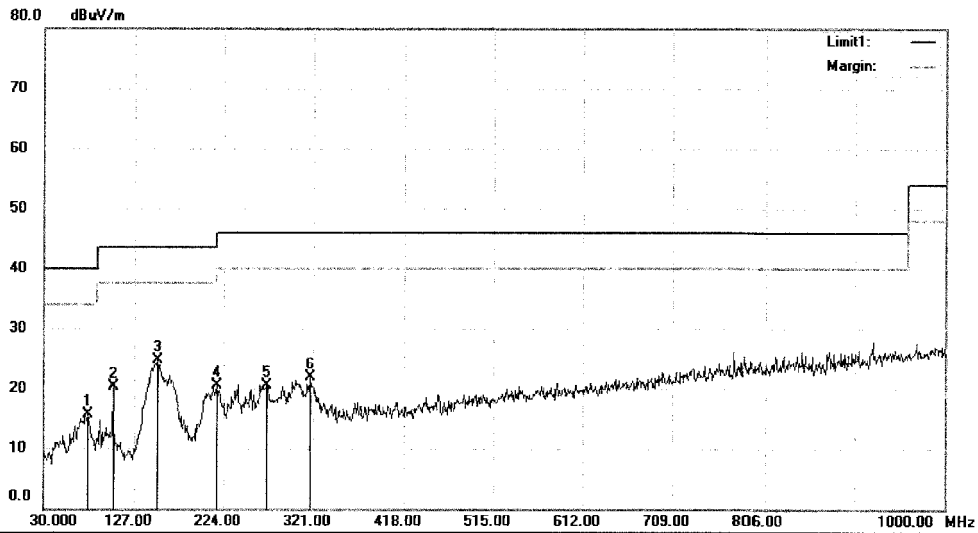

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		77.5300	35.28	-19.61	15.67	40.00	-24.33	QP		
2		103.7200	35.58	-15.30	20.28	43.50	-23.22	QP		
3	*	152.2200	43.37	-18.74	24.63	43.50	-18.87	QP		
4		217.2100	35.23	-14.64	20.59	46.00	-25.41	QP		
5		271.5300	33.20	-12.68	20.52	46.00	-25.48	QP		
6		318.0900	33.22	-11.37	21.85	46.00	-24.15	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1699

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1700

Date:

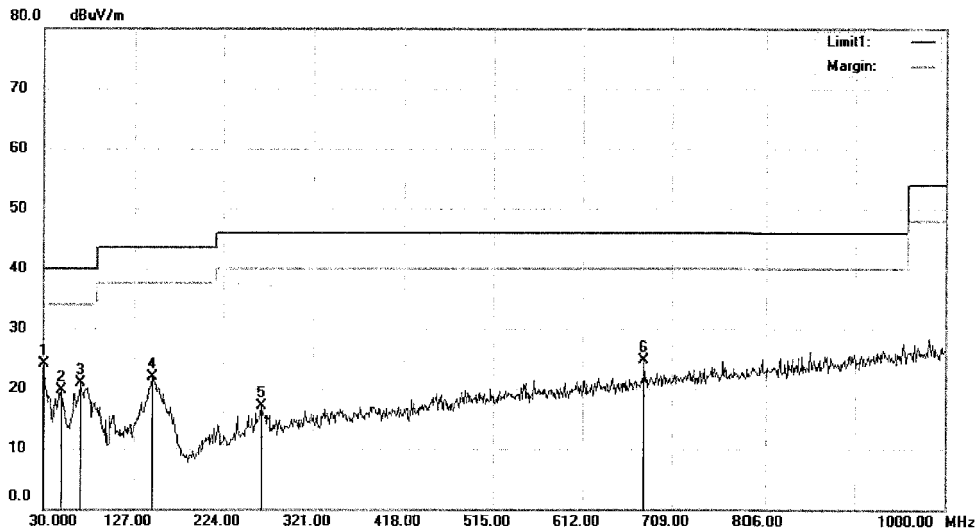

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.0000	41.60	-17.48	24.12	40.00	-15.88	QP		
2		48.4300	33.58	-13.90	19.68	40.00	-20.32	QP		
3		69.7700	38.69	-17.85	20.84	40.00	-19.16	QP		
4		147.3700	40.81	-18.91	21.90	43.50	-21.60	QP		
5		265.7100	29.87	-12.84	17.03	46.00	-28.97	QP		
6		678.9300	29.29	-4.58	24.71	46.00	-21.29	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1700

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1697

Date:

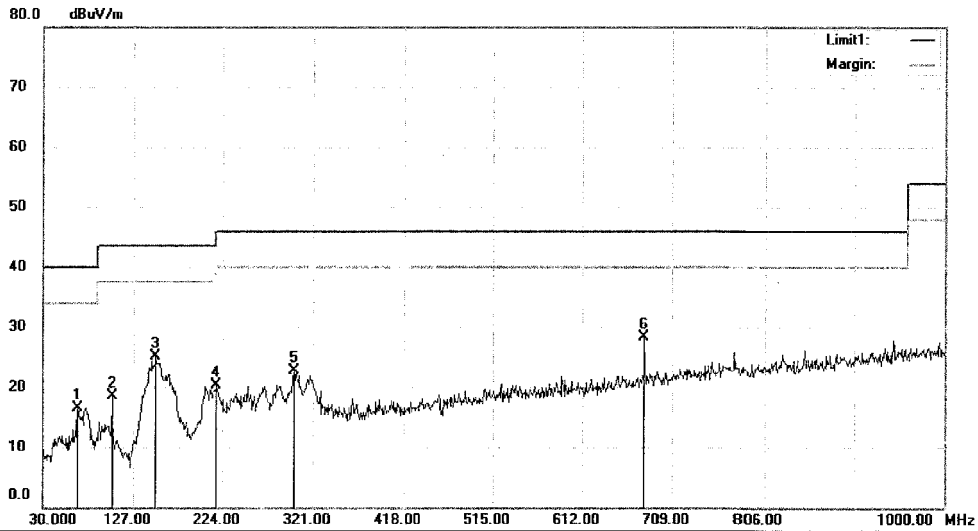

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		66.8600	33.53	-17.01	16.52	40.00	-23.48	QP		
2		103.7200	33.85	-15.30	18.55	43.50	-24.95	QP		
3		151.2500	43.82	-18.79	25.03	43.50	-18.47	QP		
4		217.2100	35.04	-14.64	20.40	46.00	-25.60	QP		
5		300.6300	34.36	-11.59	22.77	46.00	-23.23	QP		
6	*	678.9300	32.89	-4.58	28.31	46.00	-17.69	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1697

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1698

Date:

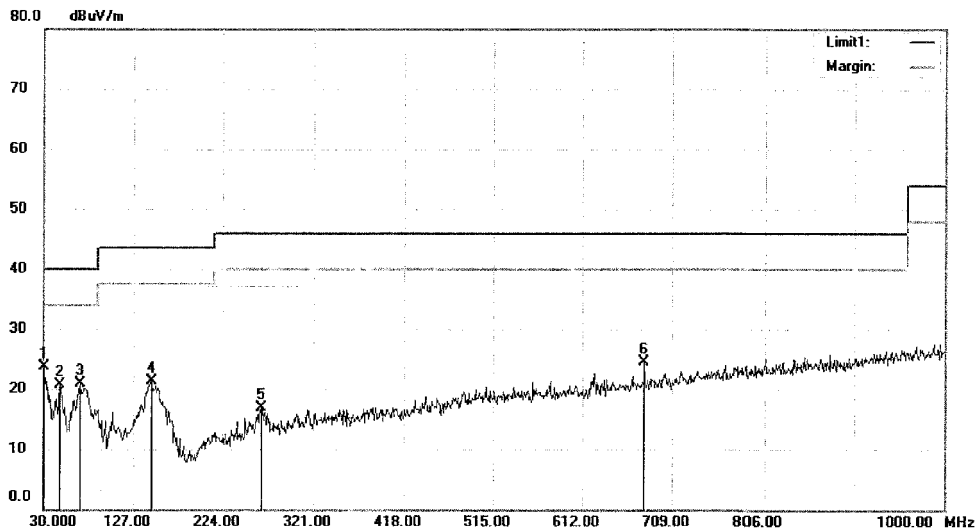

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	41.27	-17.48	23.79	40.00	-16.21	QP		
2		47.4600	34.59	-13.83	20.76	40.00	-19.24	QP		
3		69.7700	38.85	-17.85	21.00	40.00	-19.00	QP		
4		146.4000	40.20	-18.93	21.27	43.50	-22.23	QP		
5		265.7100	29.77	-12.84	16.93	46.00	-29.07	QP		
6		678.9300	29.06	-4.58	24.48	46.00	-21.52	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1698

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Meijialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1695

Date:

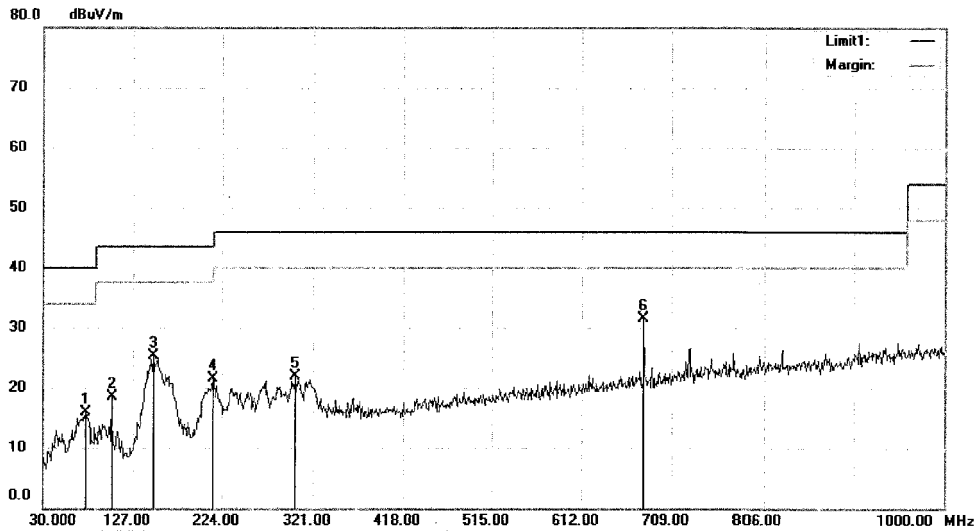

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		75.5900	34.89	-19.05	15.84	40.00	-24.16	QP		
2		103.7200	33.86	-15.30	18.56	43.50	-24.94	QP		
3		149.3100	44.21	-18.86	25.35	43.50	-18.15	QP		
4		214.3000	36.39	-14.80	21.59	43.50	-21.91	QP		
5		302.5700	33.50	-11.57	21.93	46.00	-24.07	QP		
6	*	678.9300	36.01	-4.58	31.43	46.00	-14.57	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1695

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1696

Date:

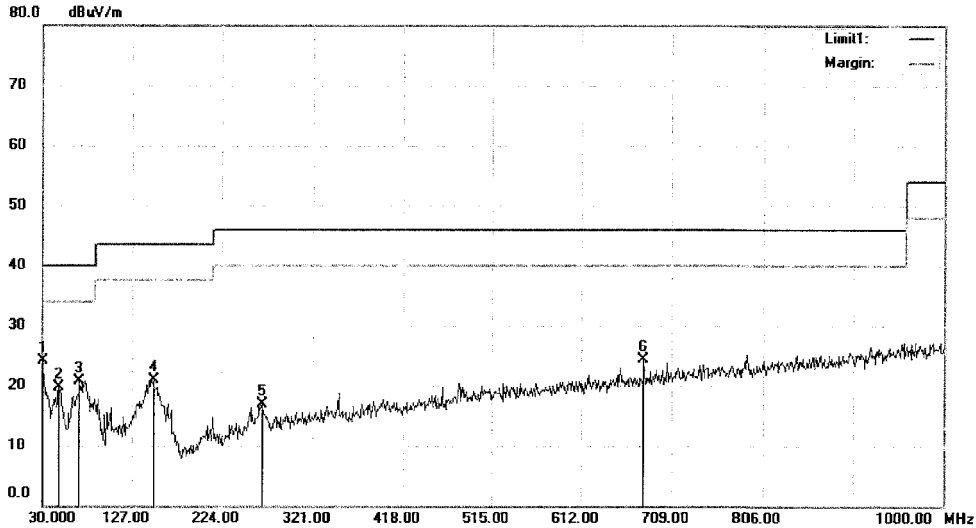

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.0000	41.50	-17.48	24.02	40.00	-15.98	QP		
2		47.4600	33.49	-13.83	19.66	40.00	-20.34	QP		
3		69.7700	38.59	-17.85	20.74	40.00	-19.26	QP		
4		150.2800	39.78	-18.83	20.95	43.50	-22.55	QP		
5		267.6500	29.76	-12.79	16.97	46.00	-29.03	QP		
6		678.9300	28.84	-4.58	24.26	46.00	-21.74	QP		

*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV\Data :#1696

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1693

Date:

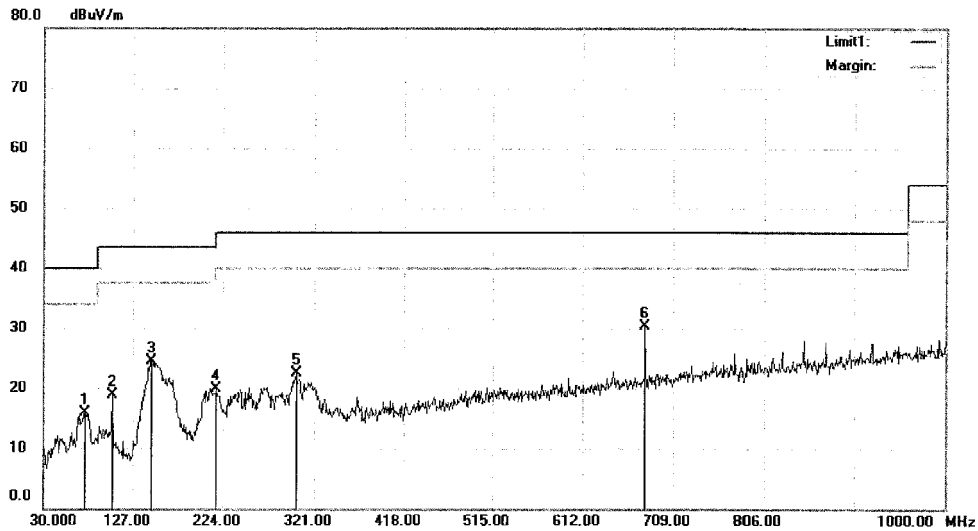

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		74.6200	34.72	-18.80	15.92	40.00	-24.08	QP		
2		103.7200	34.20	-15.30	18.90	43.50	-24.60	QP		
3		146.4000	43.44	-18.93	24.51	43.50	-18.99	QP		
4		217.2100	34.61	-14.64	19.97	46.00	-26.03	QP		
5		301.6000	34.00	-11.58	22.42	46.00	-23.58	QP		
6	*	678.9300	34.81	-4.58	30.23	46.00	-15.77	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1693

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File:TUV

Data:#1694

Date:

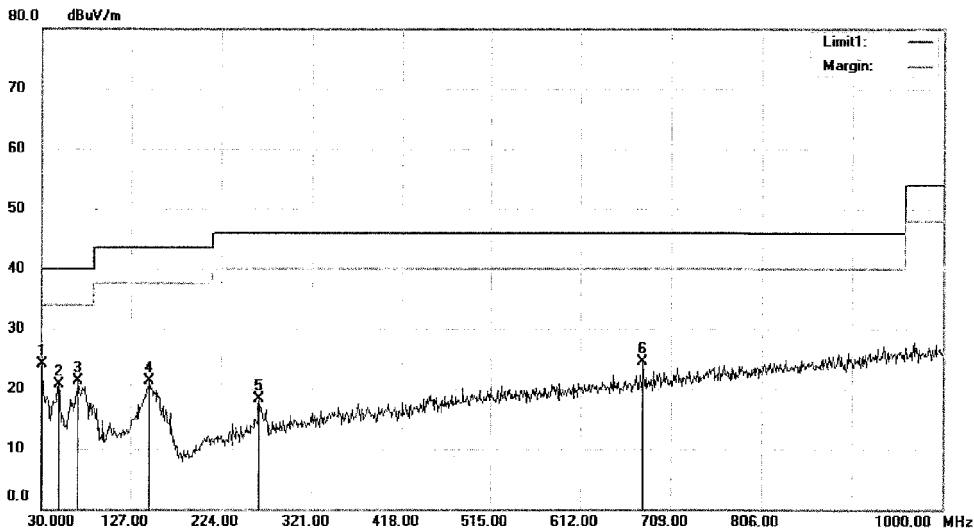

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	30.0000	41.58	-17.48	24.10	40.00	-15.90	QP			
2		48.4300	34.70	-13.90	20.80	40.00	-19.20	QP			
3		69.7700	39.24	-17.85	21.39	40.00	-18.61	QP			
4		147.3700	40.17	-18.91	21.26	43.50	-22.24	QP			
5		264.7400	31.11	-12.88	18.23	46.00	-27.77	QP			
6		678.9300	29.10	-4.58	24.52	46.00	-21.48	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData:#1694

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1689

Date:

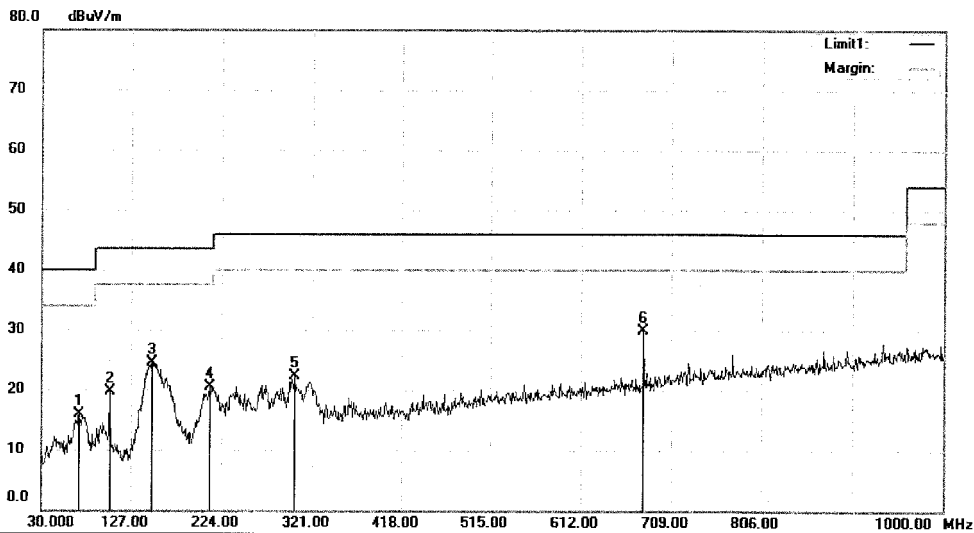

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(80MHz) 5210

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		70.7400	33.87	-18.06	15.81	40.00	-24.19	QP		
2		103.7200	35.02	-15.30	19.72	43.50	-23.78	QP		
3		149.3100	43.28	-18.86	24.42	43.50	-19.08	QP		
4		211.3900	35.44	-14.95	20.49	43.50	-23.01	QP		
5		302.5700	33.84	-11.57	22.27	46.00	-23.73	QP		
6	*	678.9300	34.43	-4.58	29.85	46.00	-16.15	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1689

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

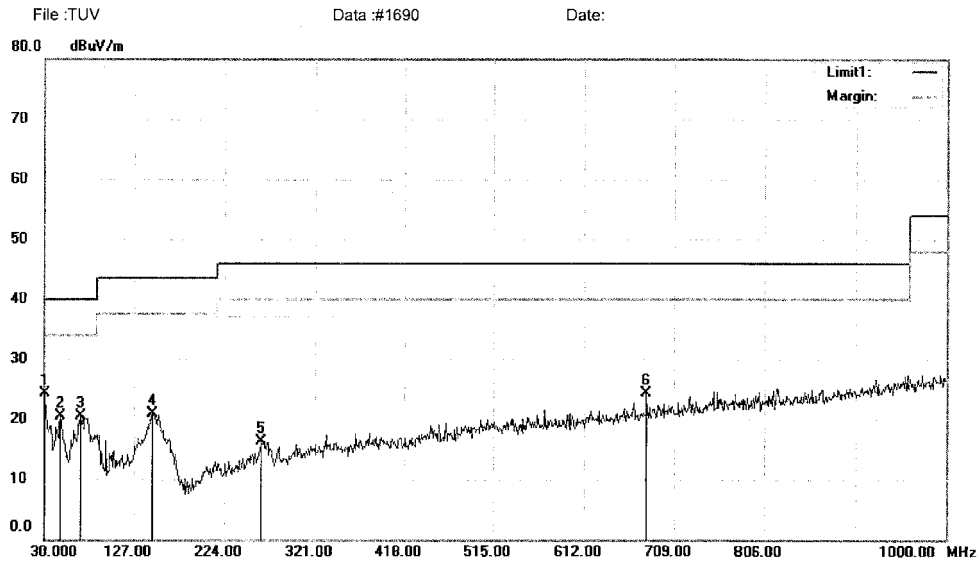
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	41.71	-17.48	24.23	40.00	-15.77	QP		
2		47.4600	34.42	-13.83	20.59	40.00	-19.41	QP		
3		69.7700	38.39	-17.85	20.54	40.00	-19.46	QP		
4		146.4000	39.88	-18.93	20.95	43.50	-22.55	QP		
5		263.7700	29.16	-12.89	16.27	46.00	-29.73	QP		
6		678.9300	28.90	-4.58	24.32	46.00	-21.68	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1690

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1691

Date:

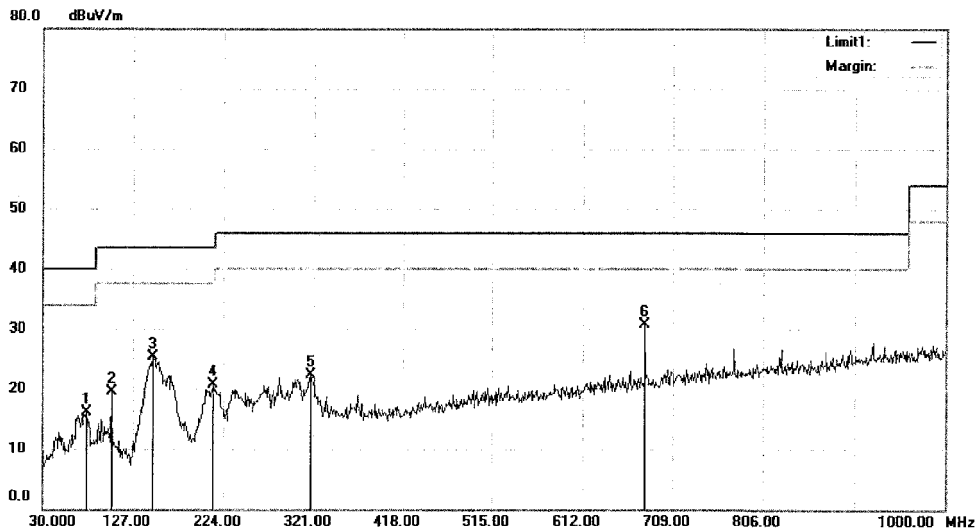

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(80MHz) 5775

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		76.5600	35.53	-19.33	16.20	40.00	-23.80	QP		
2		103.7200	34.73	-15.30	19.43	43.50	-24.07	QP		
3		148.3400	44.15	-18.88	25.27	43.50	-18.23	QP		
4		213.3300	35.64	-14.84	20.80	43.50	-22.70	QP		
5		318.0900	33.60	-11.37	22.23	46.00	-23.77	QP		
6	*	678.9300	35.36	-4.58	30.78	46.00	-15.22	QP		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1691

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

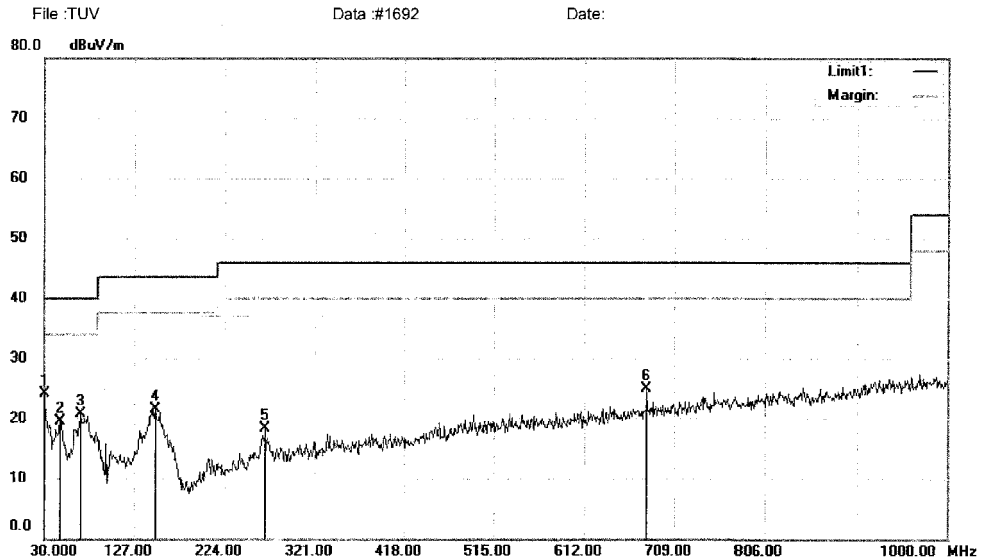Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	41.65	-17.48	24.17	40.00	-15.83	QP		
2		47.4600	33.30	-13.83	19.47	40.00	-20.53	QP		
3		69.7700	38.46	-17.85	20.61	40.00	-19.39	QP		
4		149.3100	40.46	-18.86	21.60	43.50	-21.90	QP		
5		267.6500	31.07	-12.79	18.28	46.00	-27.72	QP		
6		678.9300	29.42	-4.58	24.84	46.00	-21.16	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1692

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2041

Date:

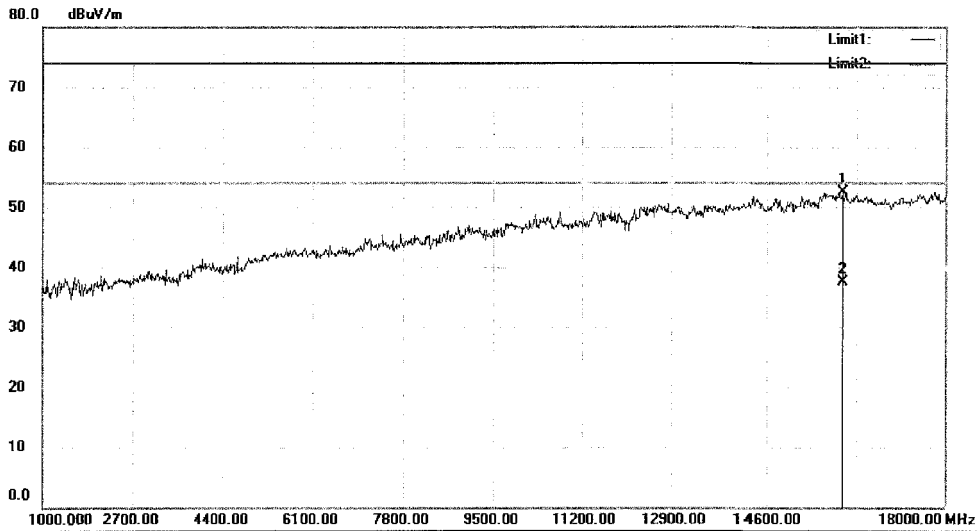

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16028.00	53.61	-1.18	52.43	74.00	-21.57	peak		0
2	*	16028.00	38.78	-1.18	37.60	54.00	-16.40	AVG		0


*:Maximum data x:Over limit !:over margin

Operator:

File :TUVData :#2041

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

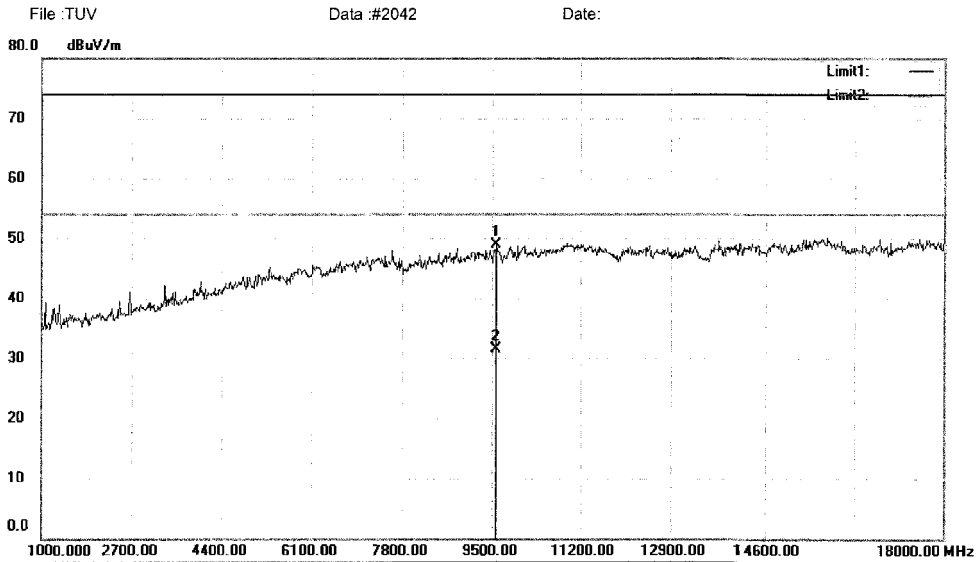
Radiated Emission Measurement


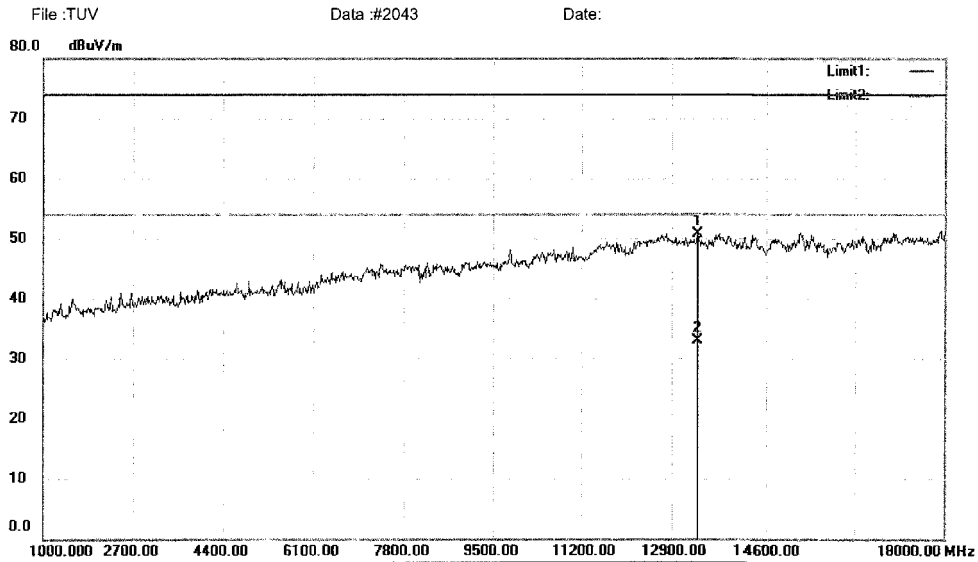
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		9585.000	56.41	-7.56	48.85	74.00	-25.15	peak		
2	*	9585.000	39.16	-7.56	31.60	54.00	-22.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		13393.00	49.63	1.11	50.74	74.00	-23.26	peak			
2	*	13393.00	31.89	1.11	33.00	54.00	-21.00	AVG			


*:Maximum data x:Over limit !:over margin

Operator:

File:TUVData:#2043

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

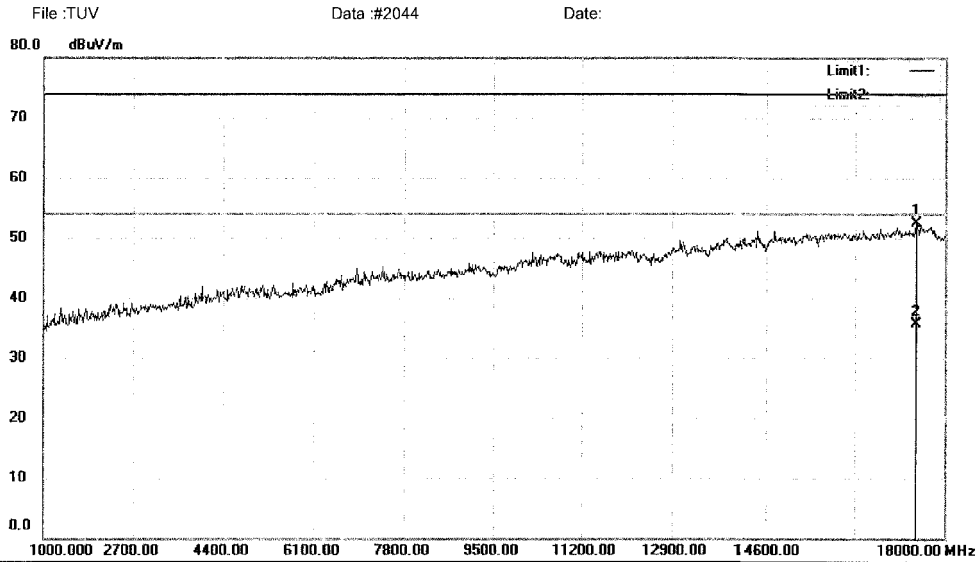
Radiated Emission Measurement


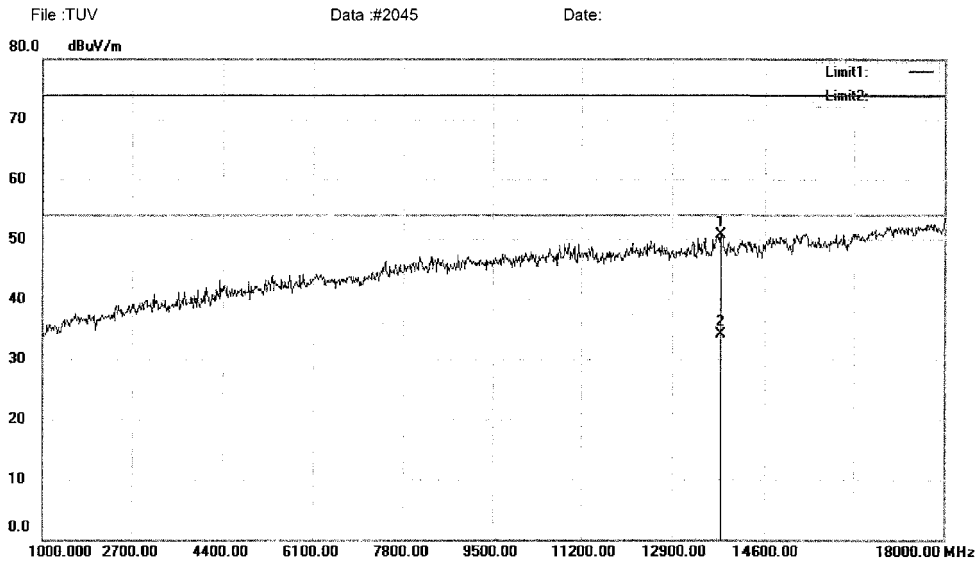
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17456.00	44.05	8.45	52.50	74.00	-21.50	peak		
2	*	17456.00	27.25	8.45	35.70	54.00	-18.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		13818.00	45.80	4.93	50.73	74.00	-23.27	peak		
2	*	13818.00	29.27	4.93	34.20	54.00	-19.80	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2045

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

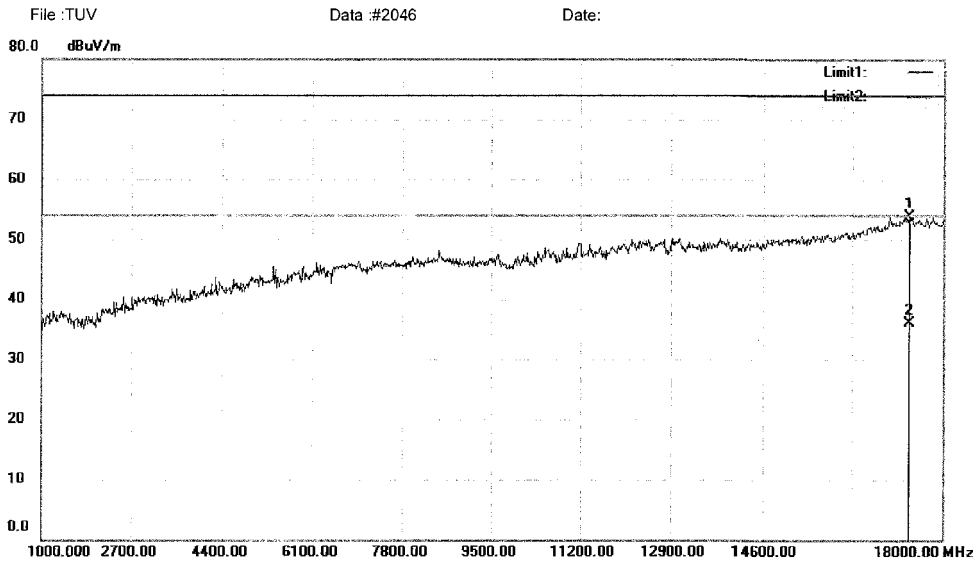
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17371.00	43.27	10.69	53.96	74.00	-20.04	peak		
2	*	17371.00	25.41	10.69	36.10	54.00	-17.90	AVG		


*: Maximum data x: Over limit !: over margin

Operator: KK

File: TUVData: #2046

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

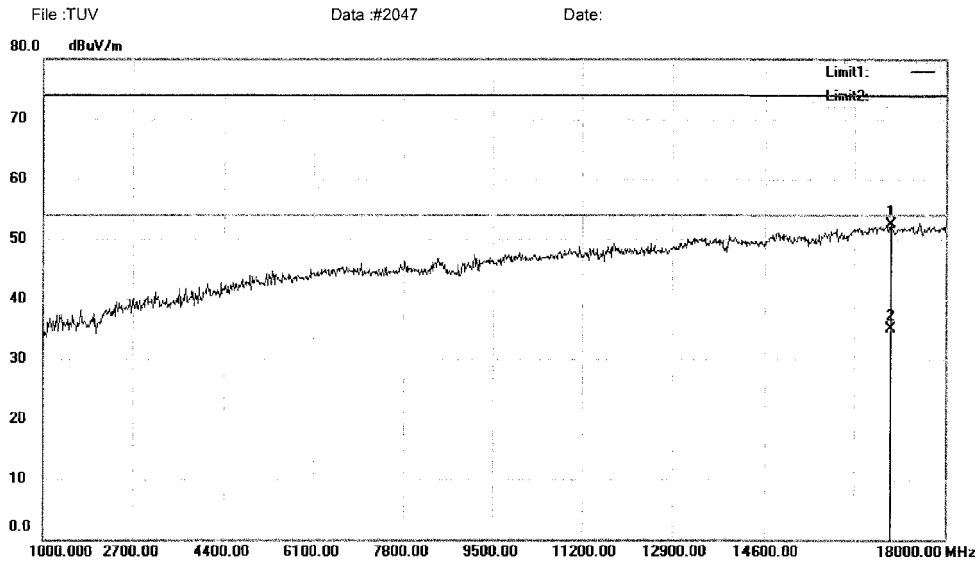
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		16980.00	46.90	5.67	52.57	74.00	-21.43	peak		
2	*	16980.00	29.43	5.67	35.10	54.00	-18.90	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUVData : #2047

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

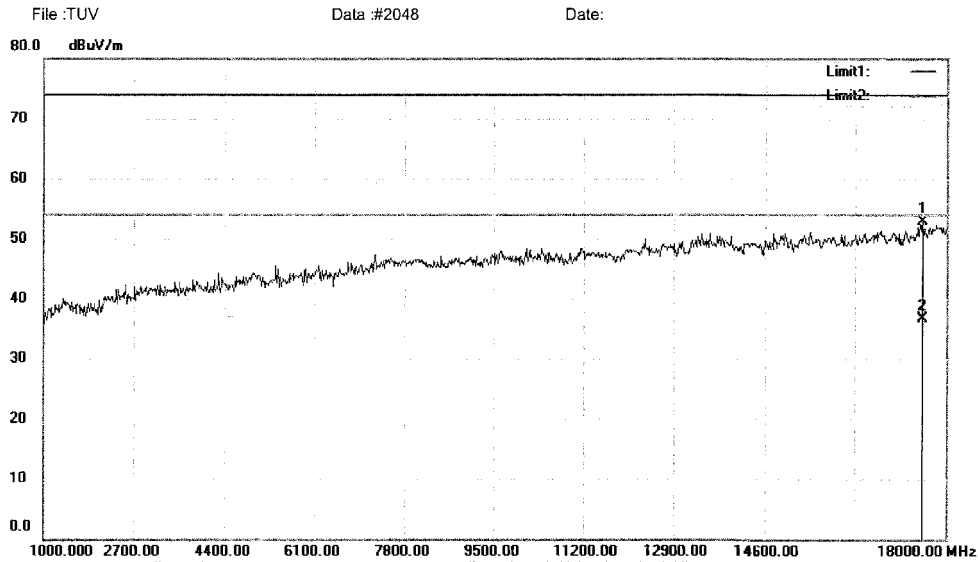
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17558.00	39.65	13.18	52.83	74.00	-21.17	peak	0	
2	*	17558.00	23.52	13.18	36.70	54.00	-17.30	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #2048

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2049

Date:

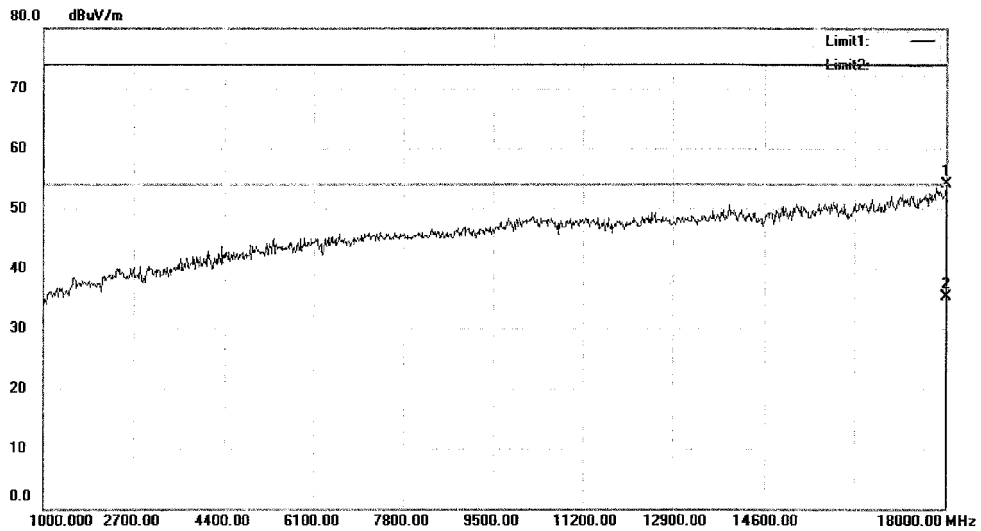

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		18000.00	35.10	19.05	54.15	74.00	-19.85	peak			
2	*	18000.00	16.35	19.05	35.40	54.00	-18.60	AVG			


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2049

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

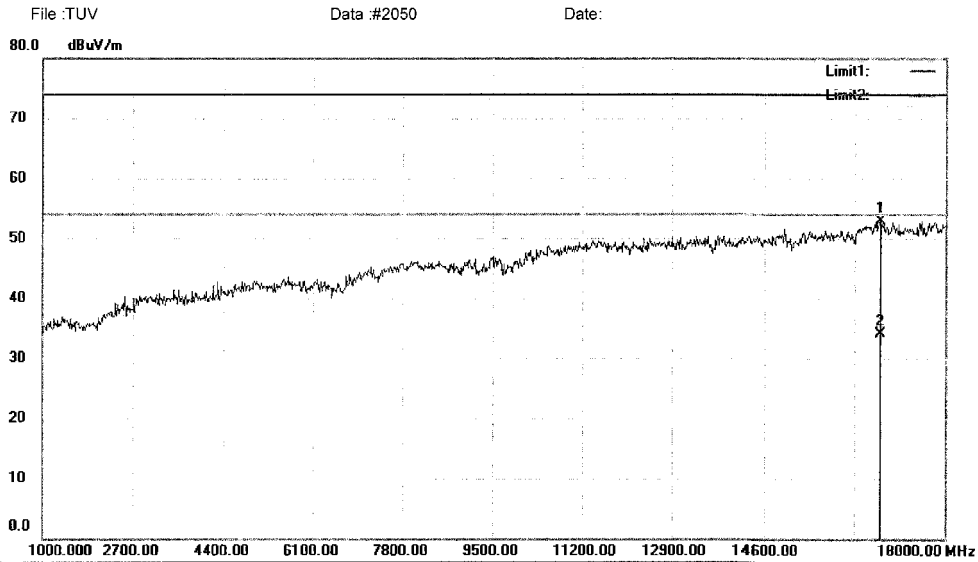
Radiated Emission Measurement


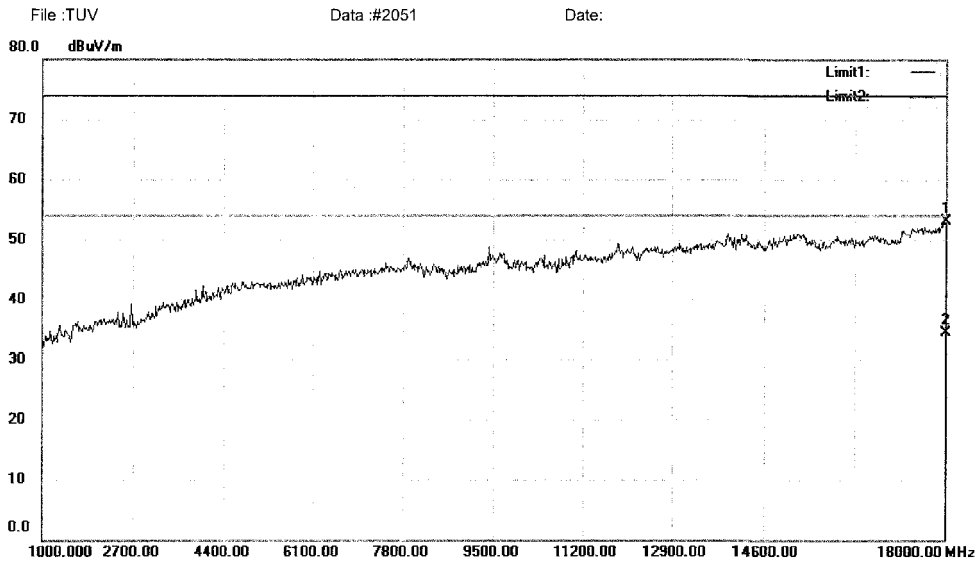
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16793.00	48.06	4.84	52.90	74.00	-21.10	peak			
2	*	16793.00	29.36	4.84	34.20	54.00	-19.80	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		18000.00	37.84	15.22	53.06	74.00	-20.94	peak		
2	*	18000.00	19.38	15.22	34.60	54.00	-19.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2051

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2052

Date:

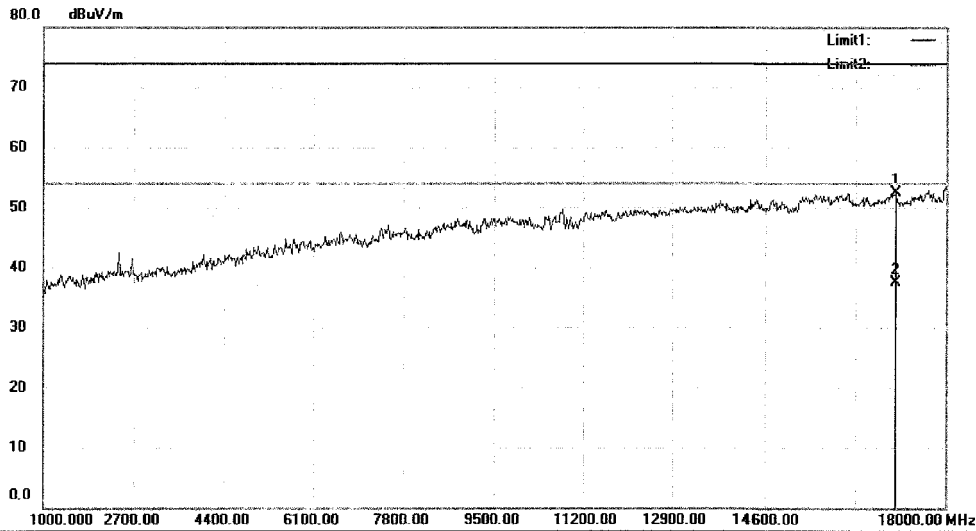

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		17065.00	49.65	2.93	52.58	74.00	-21.42	peak		0	
2	*	17065.00	34.67	2.93	37.60	54.00	-16.40	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2052

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

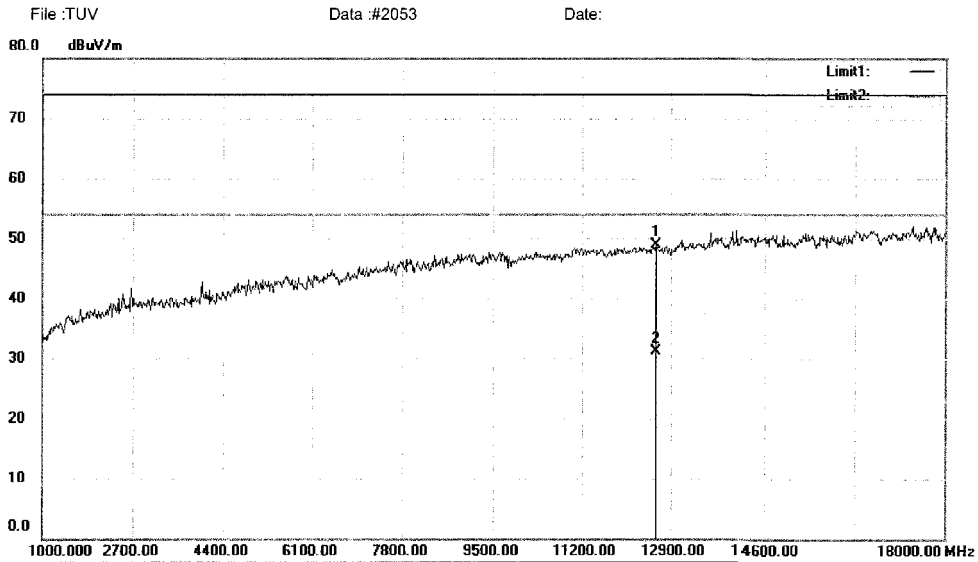
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		12611.00	51.56	-2.59	48.97	74.00	-25.03			peak
2	*	12611.00	33.79	-2.59	31.20	54.00	-22.80			AVG


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2053

Page: 1

Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

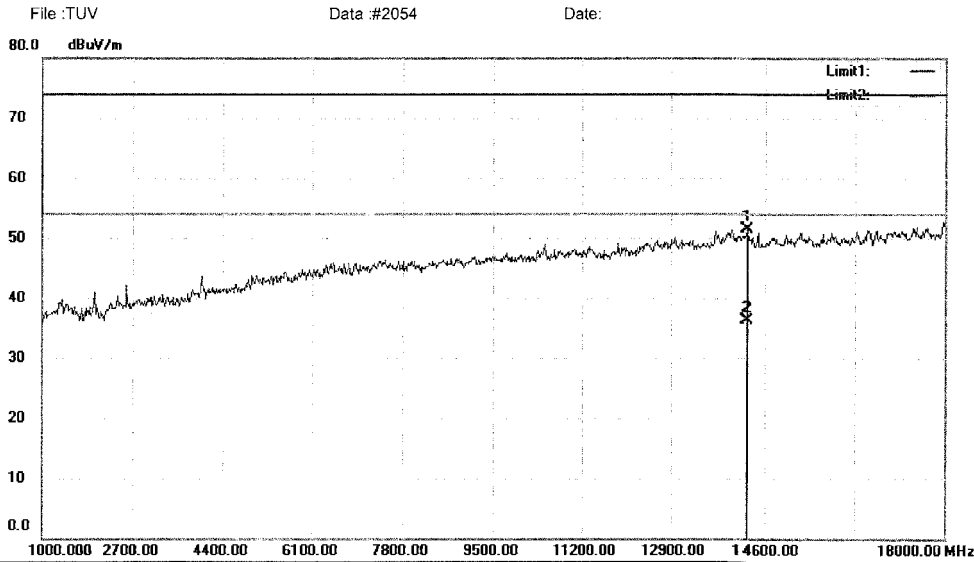
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		14260.00	49.17	2.29	51.46	74.00	-22.54	peak		0	
2	*	14260.00	34.11	2.29	36.40	54.00	-17.60	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2054

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

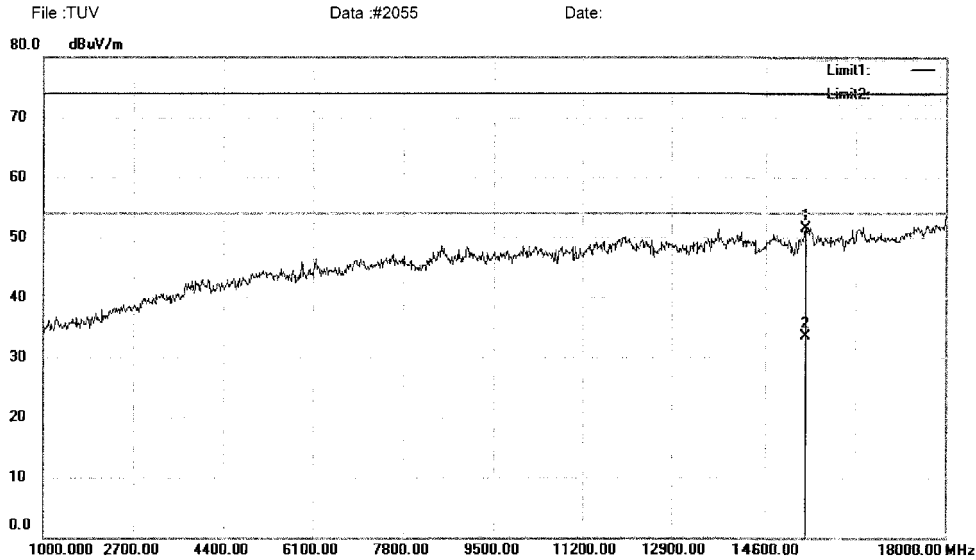
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15365.00	51.23	0.36	51.59	74.00	-22.41	peak		
2	*	15365.00	33.24	0.36	33.60	54.00	-20.40	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #2055

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

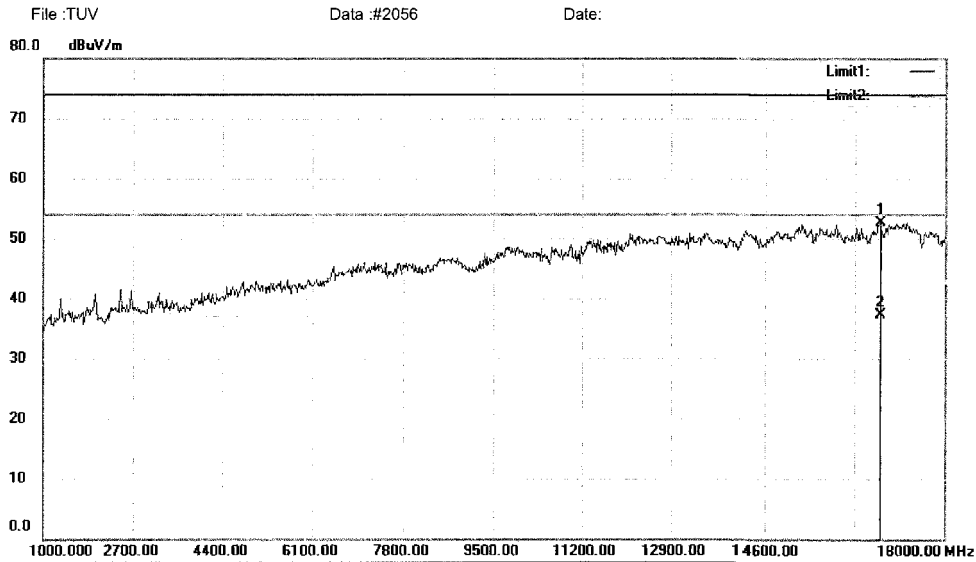
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16776.00	51.66	1.14	52.80	74.00	-21.20	peak		0	
2	*	16776.00	36.26	1.14	37.40	54.00	-16.60	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2056

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2058

Date:

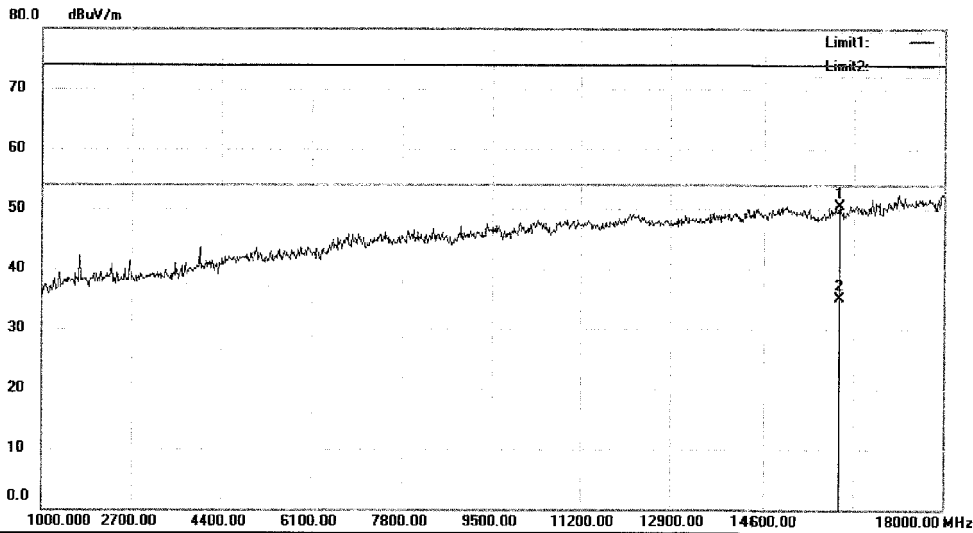

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16045.00	52.47	-1.91	50.56	74.00	-23.44	peak		0	
2	*	16045.00	37.11	-1.91	35.20	54.00	-18.80	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2058

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

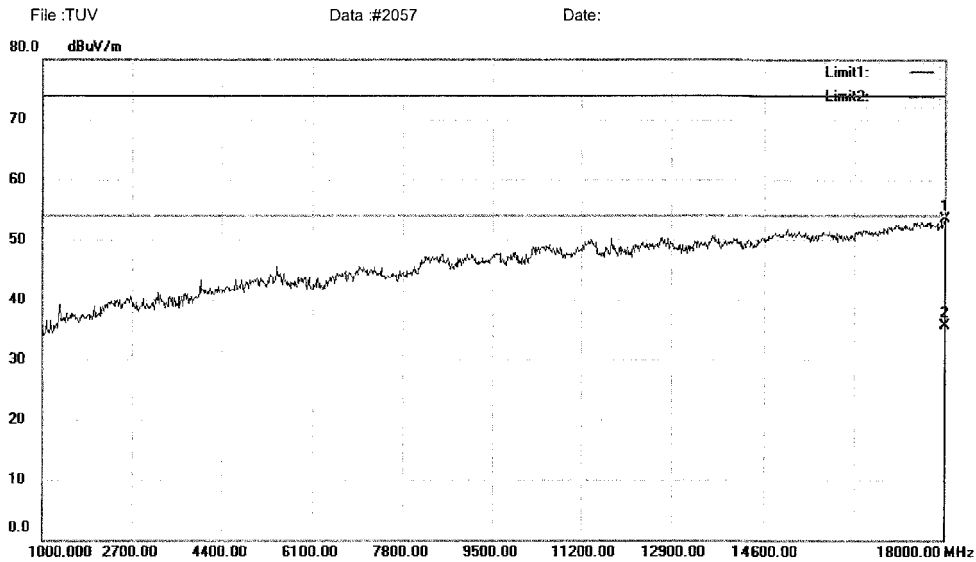
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		18000.00	38.27	15.22	53.49	74.00	-20.51			peak
2	*	18000.00	20.48	15.22	35.70	54.00	-18.30			AVG


*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUVData:#2057

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

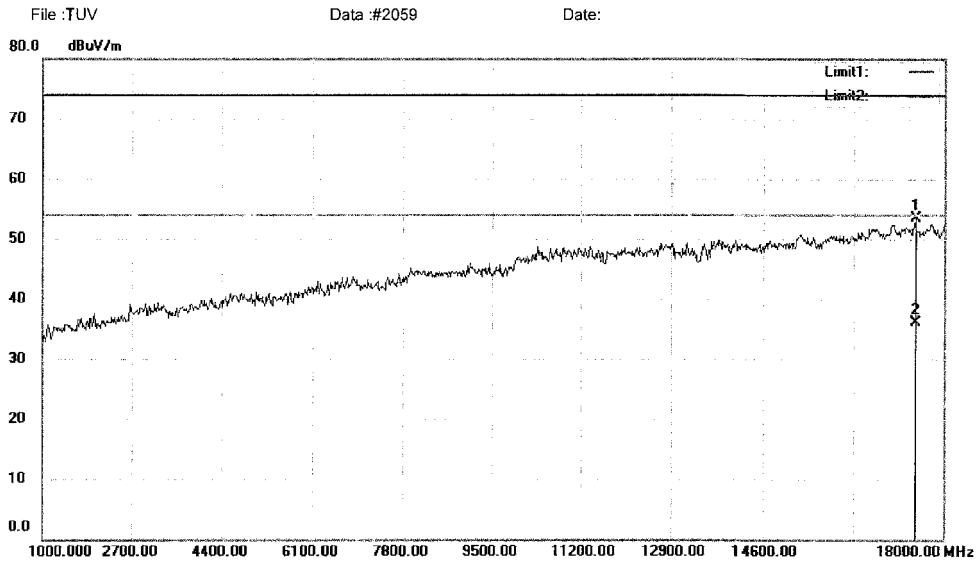
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17456.00	43.69	9.90	53.59	74.00	-20.41	peak		
2	*	17456.00	26.20	9.90	36.10	54.00	-17.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2059

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2060

Date:

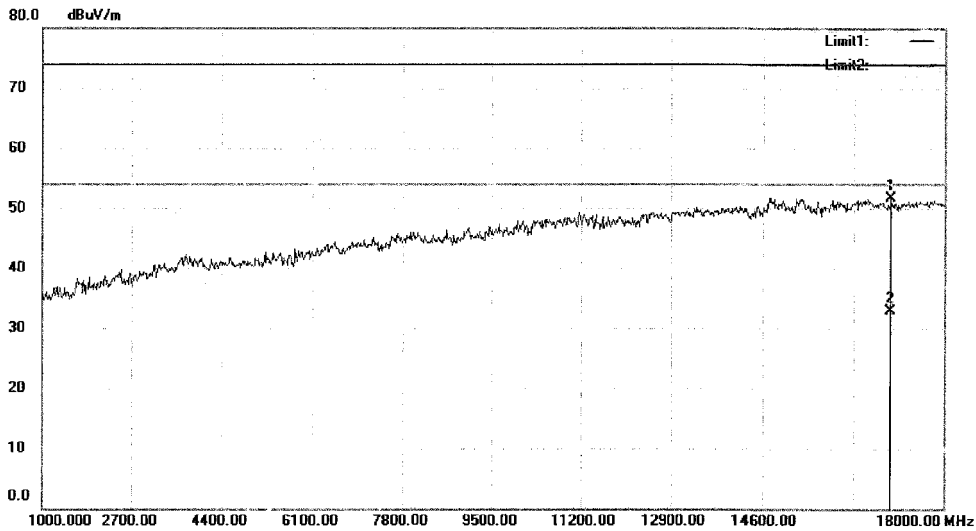

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16997.00	47.28	4.41	51.69	74.00	-22.31	peak		
2	*	16997.00	28.49	4.41	32.90	54.00	-21.10	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2060

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

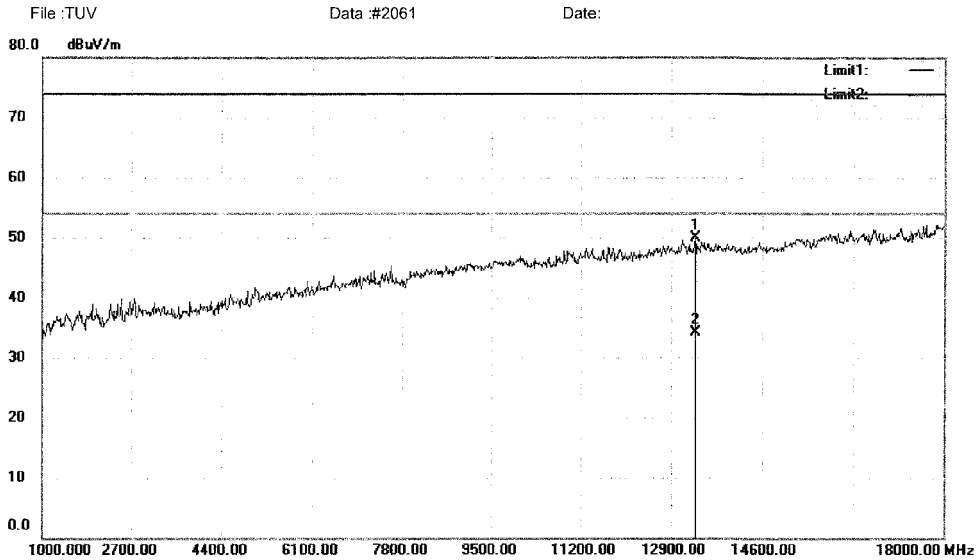
Radiated Emission Measurement


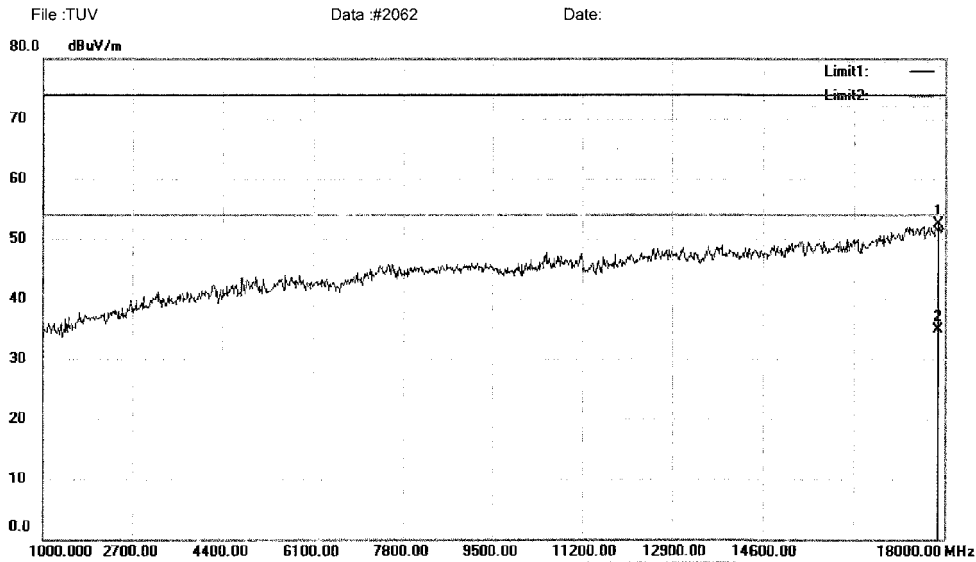
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		13359.00	47.66	2.28	49.94	74.00	-24.06	peak		0	
2	*	13359.00	31.82	2.28	34.10	54.00	-19.90	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17881.00	37.42	15.00	52.42	74.00	-21.58	peak		
2	*	17881.00	20.00	15.00	35.00	54.00	-19.00	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2064

Date:

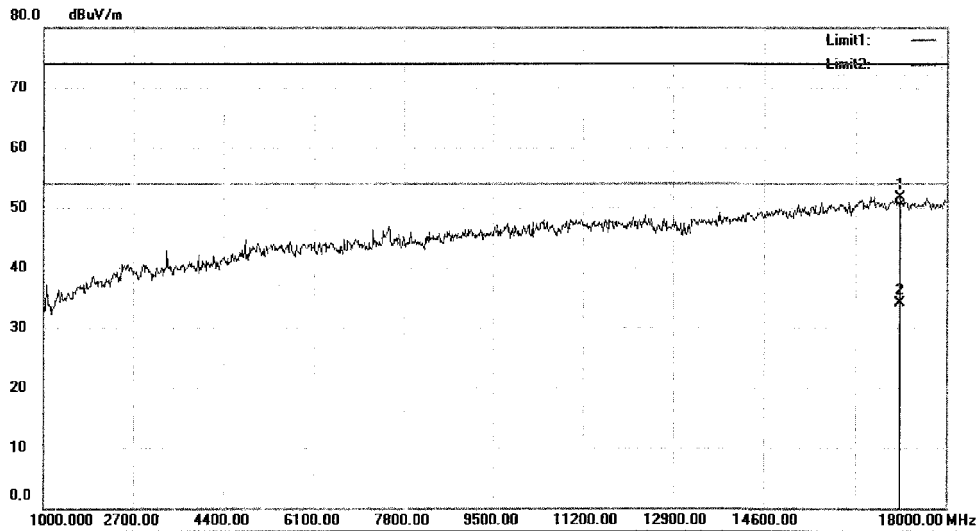

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17116.00	47.50	4.27	51.77	74.00	-22.23	peak		
2	*	17116.00	29.83	4.27	34.10	54.00	-19.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2064

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2063

Date:

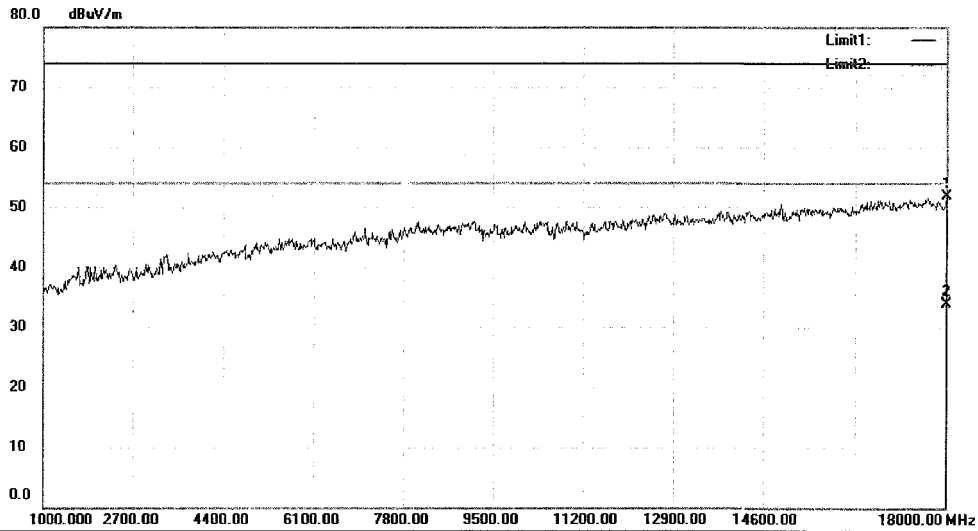

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	36.83	15.12	51.95	74.00	-22.05	peak		
2	*	18000.00	18.78	15.12	33.90	54.00	-20.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2063

Page: 1


Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #2073

Date:

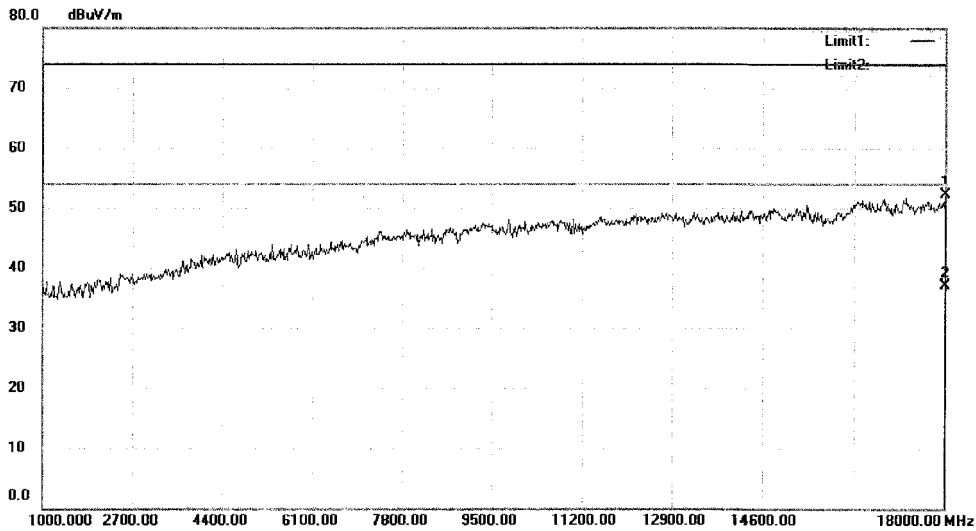

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	37.18	15.12	52.30	74.00	-21.70	peak		
2	*	18000.00	21.98	15.12	37.10	54.00	-16.90	AVG		


*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#2073

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

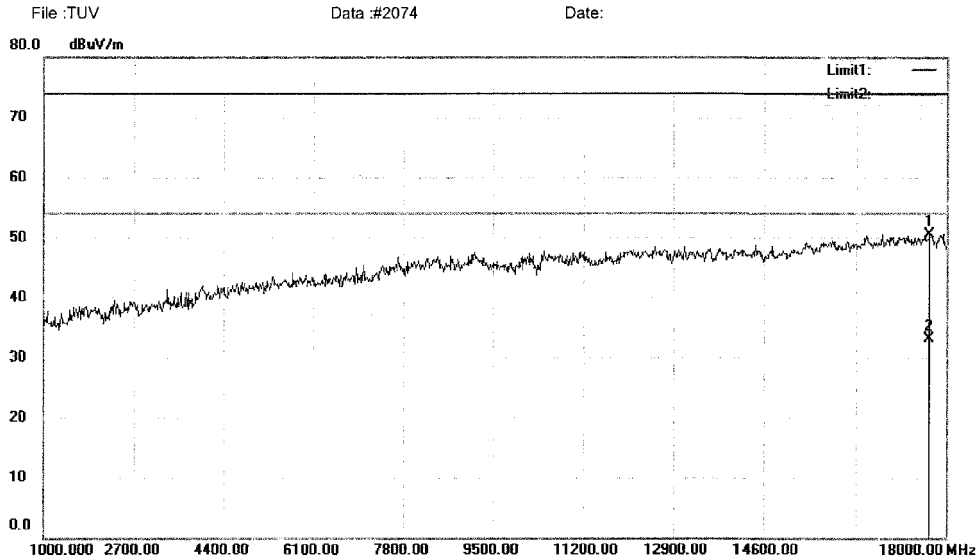
Radiated Emission Measurement


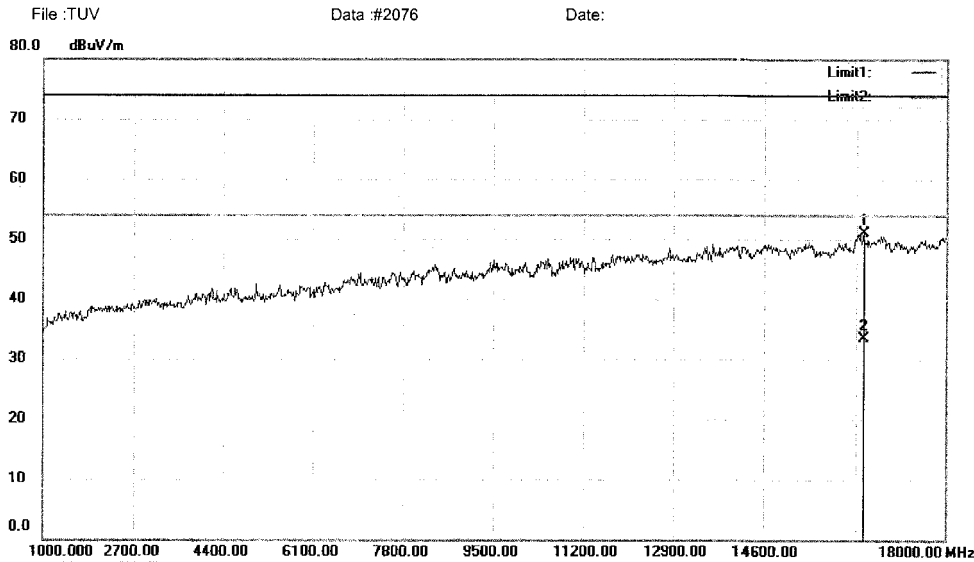
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17677.00	39.41	11.16	50.57	74.00	-23.43	peak		
2	*	17677.00	22.04	11.16	33.20	54.00	-20.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16436.00	49.06	2.00	51.06	74.00	-22.94			peak
2	*	16436.00	31.50	2.00	33.50	54.00	-20.50			AVG


*:Maximum data x:Over limit !:over margin

Operator: XLX

File :TUVData :#2076

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

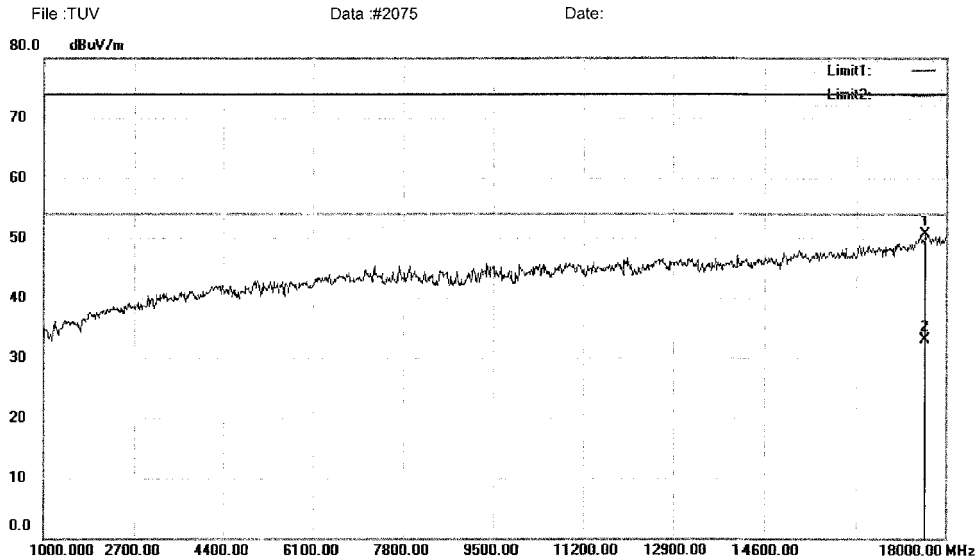
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17609.00	38.95	11.74	50.69	74.00	-23.31			peak
2	*	17609.00	21.46	11.74	33.20	54.00	-20.80			AVG


*:Maximum data x:Over limit !:over margin

Operator: XLX

File: TUVData: #2075

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

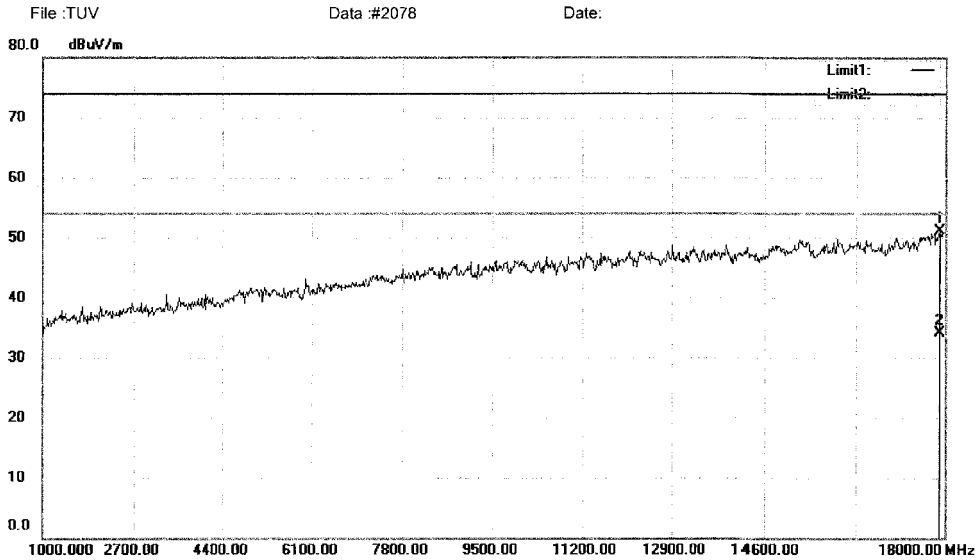
Radiated Emission Measurement


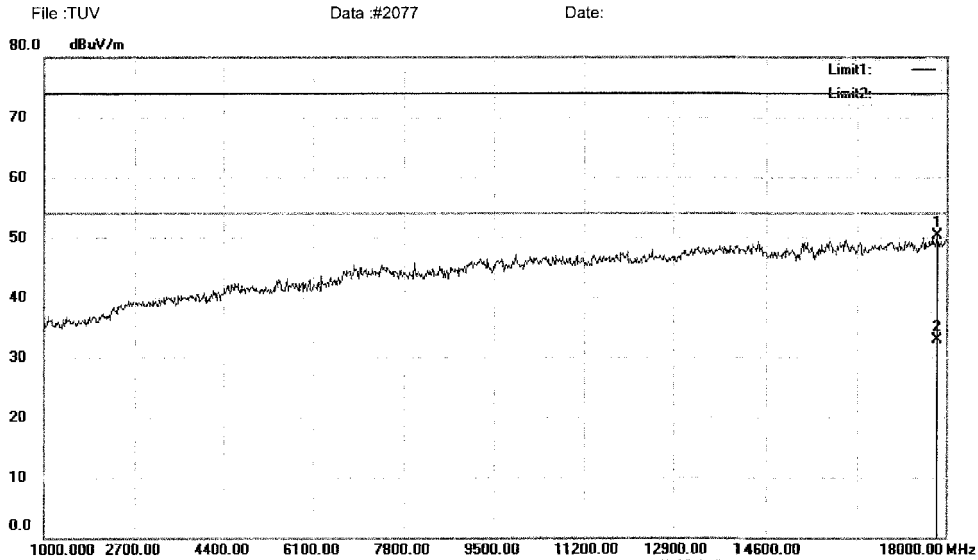
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17898.00	35.89	15.21	51.10	74.00	-22.90	peak		
2	*	17898.00	18.99	15.21	34.20	54.00	-19.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: XLX

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17830.00	35.87	14.39	50.26	74.00	-23.74	peak		
2	*	17830.00	18.61	14.39	33.00	54.00	-21.00	AVG		


*:Maximum data x:Over limit !:over margin

Operator: XLX

File :TUV\Data :#2077

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

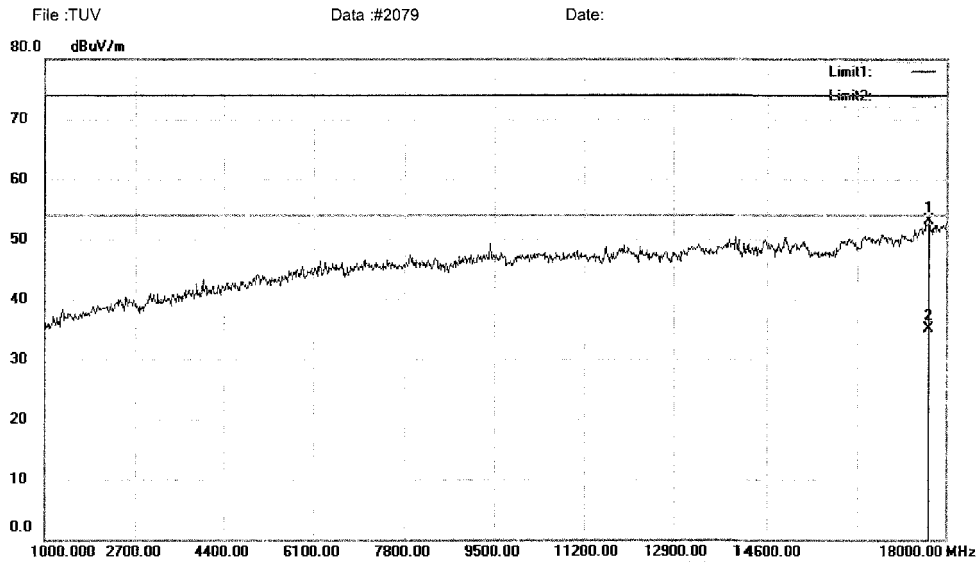
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17677.00	42.07	10.98	53.05	74.00	-20.95	peak		
2	*	17677.00	24.22	10.98	35.20	54.00	-18.80	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2079

Page: 1

Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

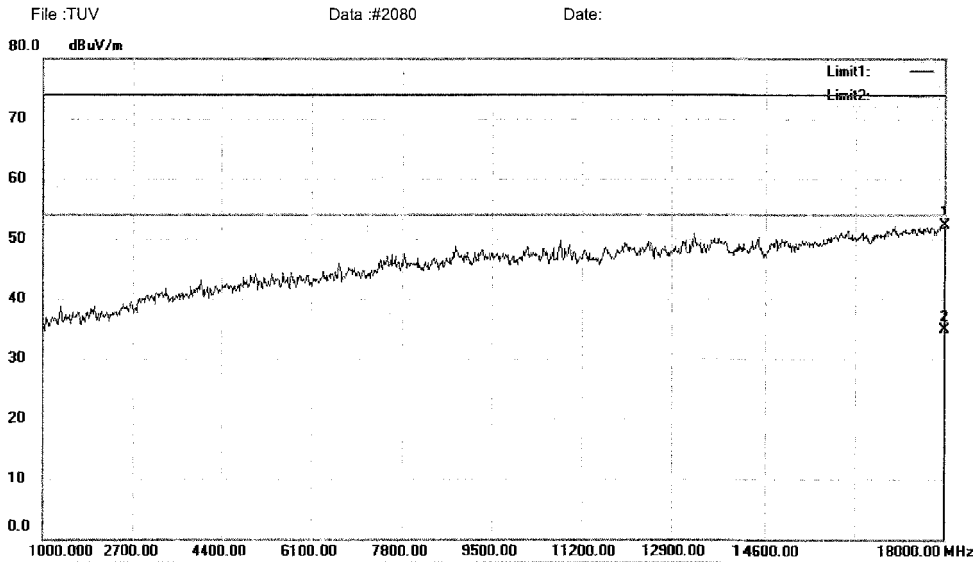
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		18000.00	37.18	15.22	52.40	74.00	-21.60	peak		
2	*	18000.00	19.68	15.22	34.90	54.00	-19.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2080

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2082

Date:

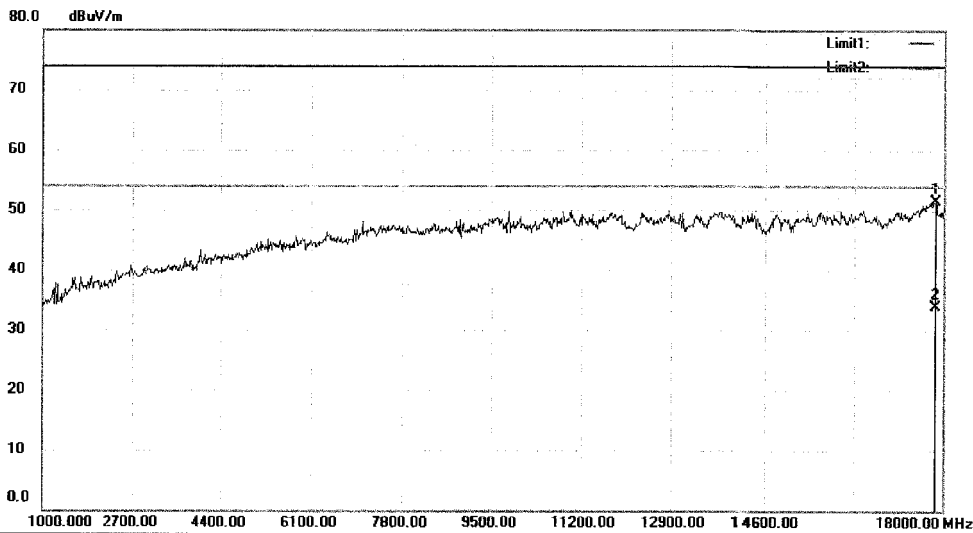

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17847.00	38.28	13.23	51.51	74.00	-22.49			peak
2	*	17847.00	20.67	13.23	33.90	54.00	-20.10			AVG

*:Maximum data x:Over limit !:over margin

Operator:

File :TUVData :#2082

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2081

Date:

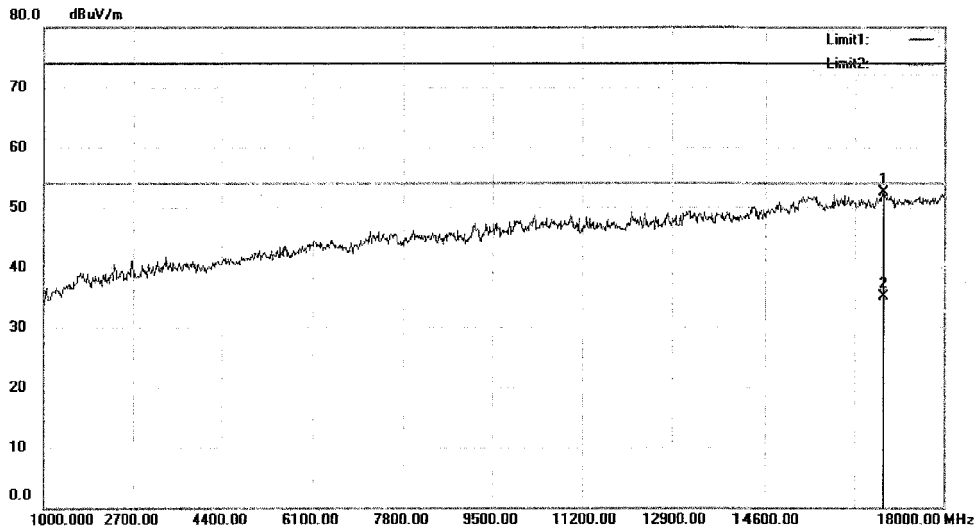

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16861.00	50.15	2.26	52.41	74.00	-21.59	peak			
2	*	16861.00	32.84	2.26	35.10	54.00	-18.90	AVG			


*:Maximum data x:Over limit !:over margin

Operator:

File :TUVData :#2081

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

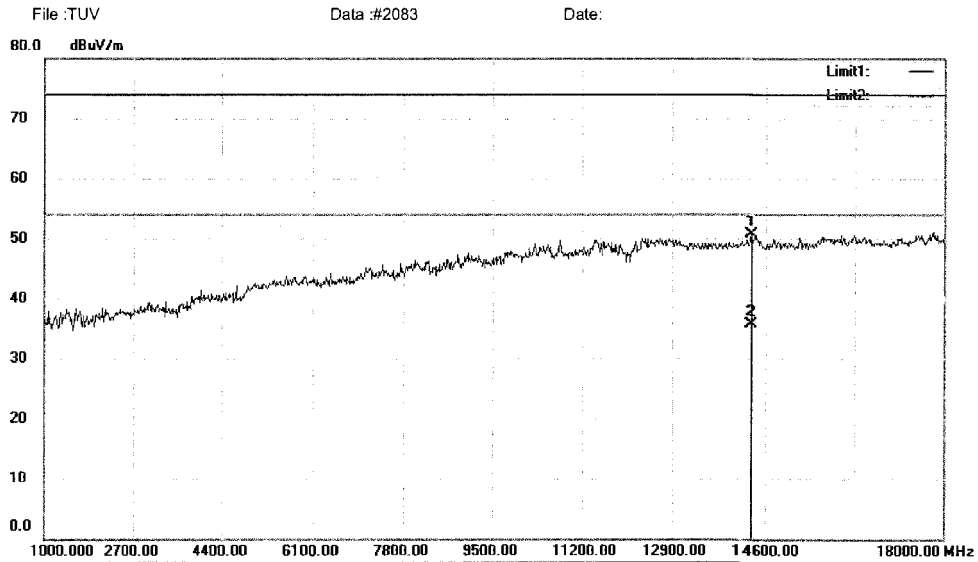
Radiated Emission Measurement


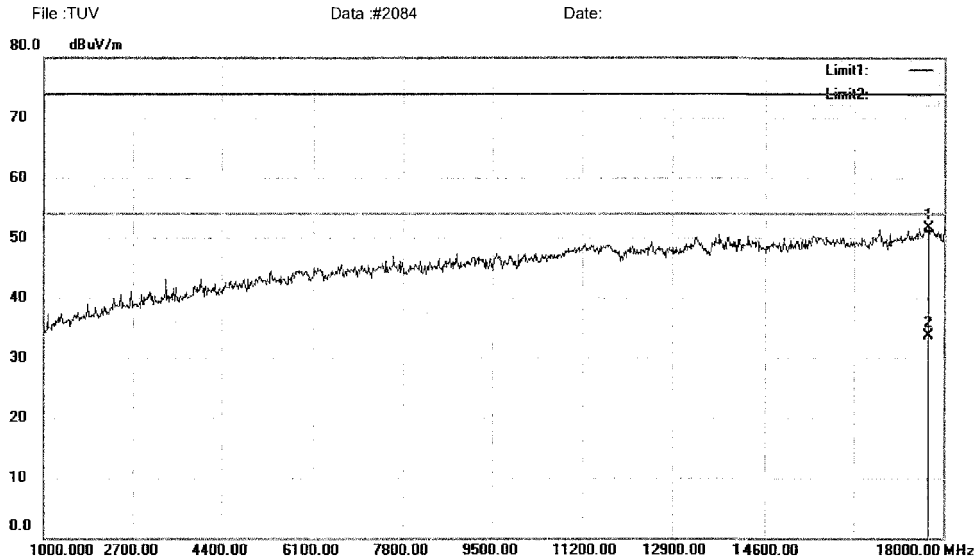
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		14328.00	47.29	3.40	50.69	74.00	-23.31	peak		0	
2	*	14328.00	32.40	3.40	35.80	54.00	-18.20	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator:

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


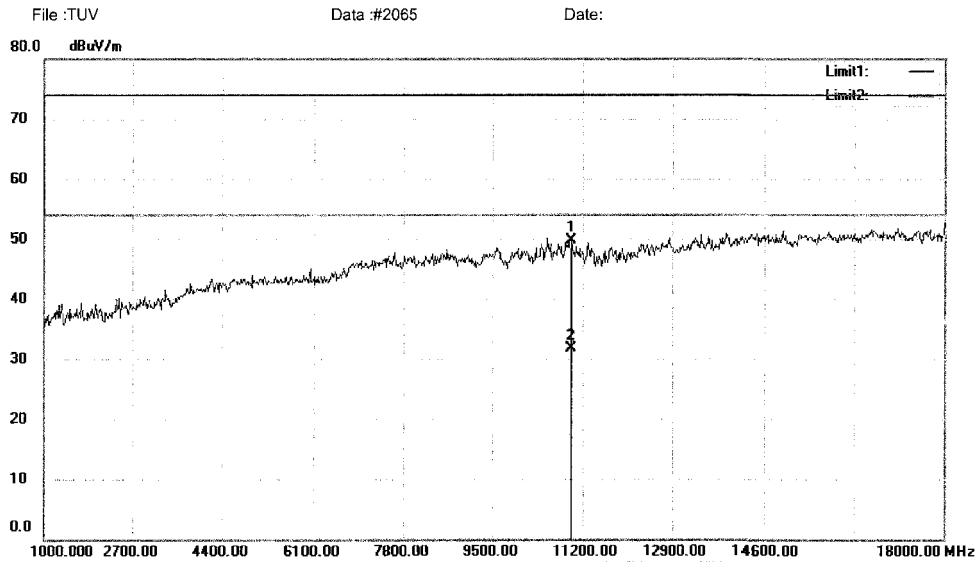
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17711.00	40.10	11.57	51.67	74.00	-22.33			peak
2	*	17711.00	22.13	11.57	33.70	54.00	-20.30			AVG

*:Maximum data x:Over limit !:over margin

Operator:

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		10979.00	53.87	-4.24	49.63	74.00	-24.37	peak	0	
2	*	10979.00	36.04	-4.24	31.80	54.00	-22.20	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2066

Date:

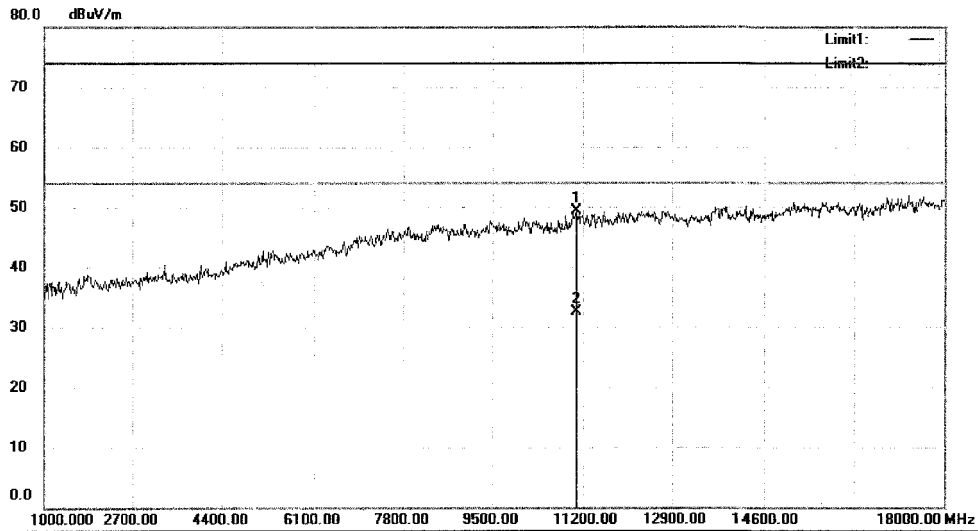

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11064.00	53.37	-4.10	49.27	74.00	-24.73			peak
2	*	11064.00	36.70	-4.10	32.60	54.00	-21.40			AVG


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2066

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

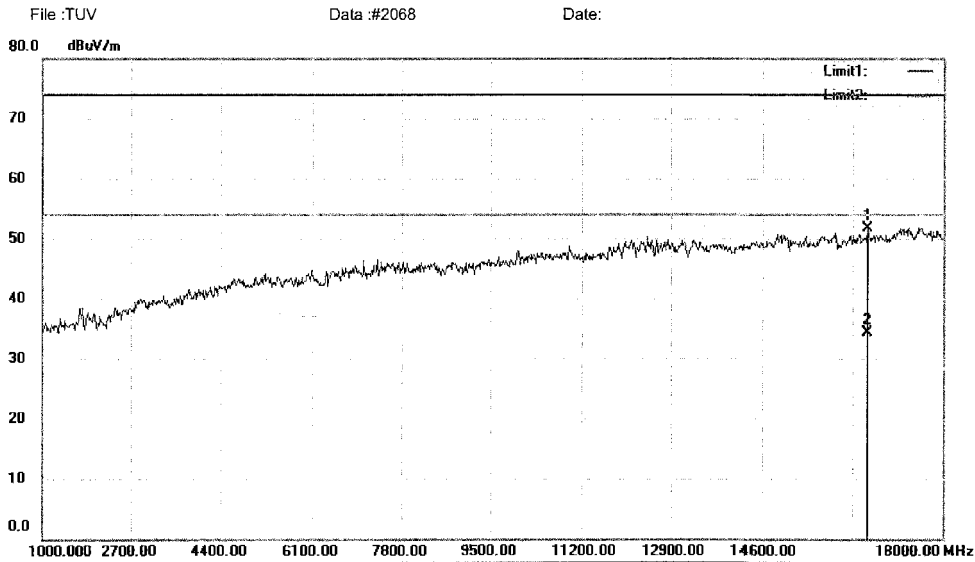
Radiated Emission Measurement


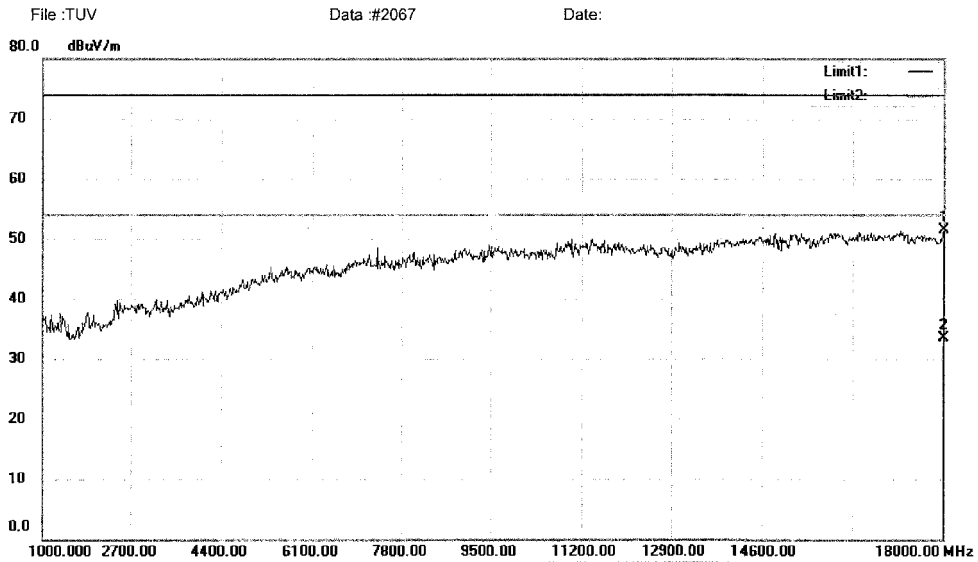
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16572.00	50.57	1.06	51.63	74.00	-22.37	peak			
2	*	16572.00	33.24	1.06	34.30	54.00	-19.70	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		18000.00	36.33	15.12	51.45	74.00	-22.55	peak			
2	*	18000.00	18.38	15.12	33.50	54.00	-20.50	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2070

Date:

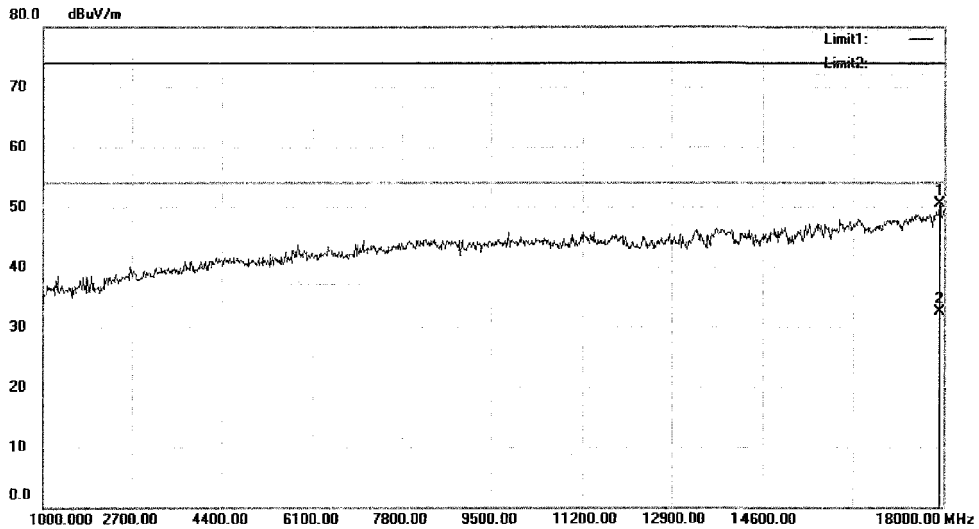

Site 3m Chamber #3

 Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17915.00	36.46	14.07	50.53	74.00	-23.47	peak		
2	*	17915.00	18.43	14.07	32.50	54.00	-21.50	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#2070

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2069

Date:

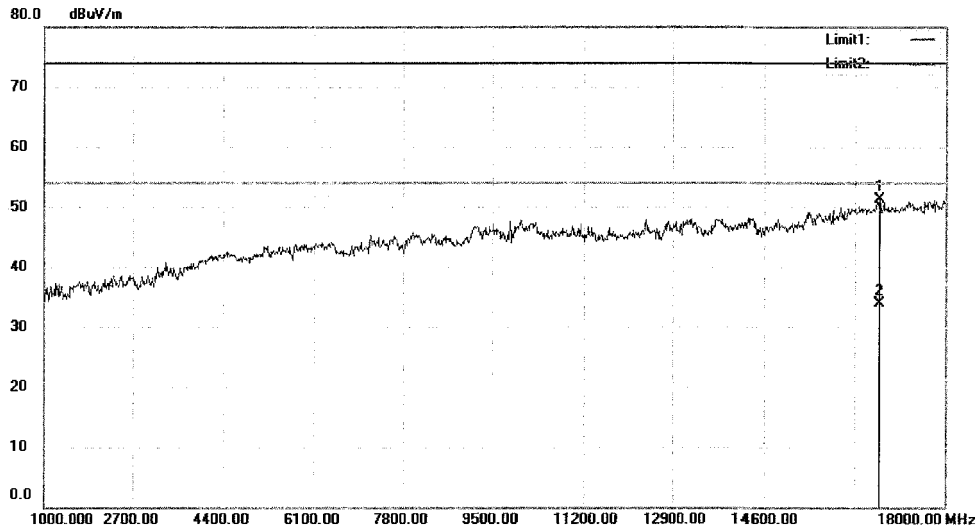

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16759.00	49.55	1.84	51.39	74.00	-22.61			peak
2	*	16759.00	32.16	1.84	34.00	54.00	-20.00			AVG

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#2069

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2071

Date:

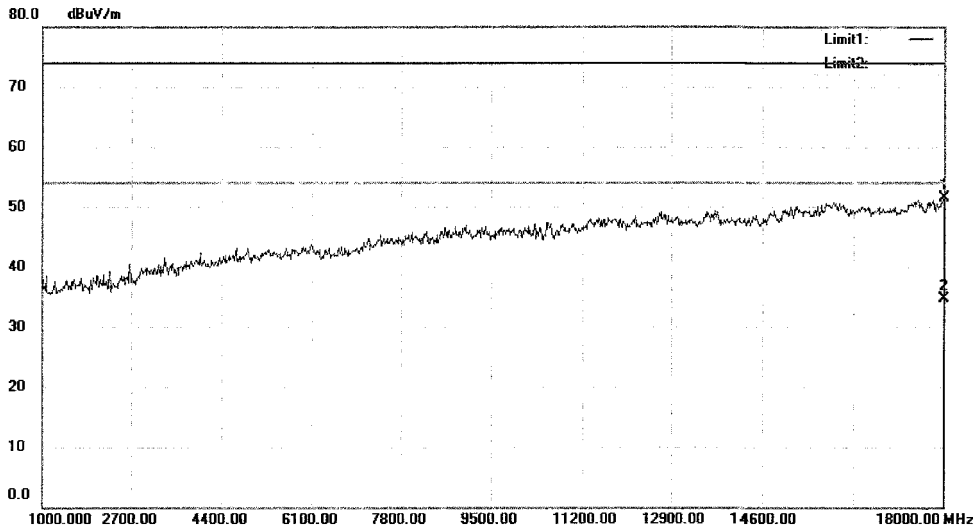

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		18000.00	36.30	15.12	51.42	74.00	-22.58	peak		
2	*	18000.00	19.58	15.12	34.70	54.00	-19.30	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUVData :#2071

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2072

Date:

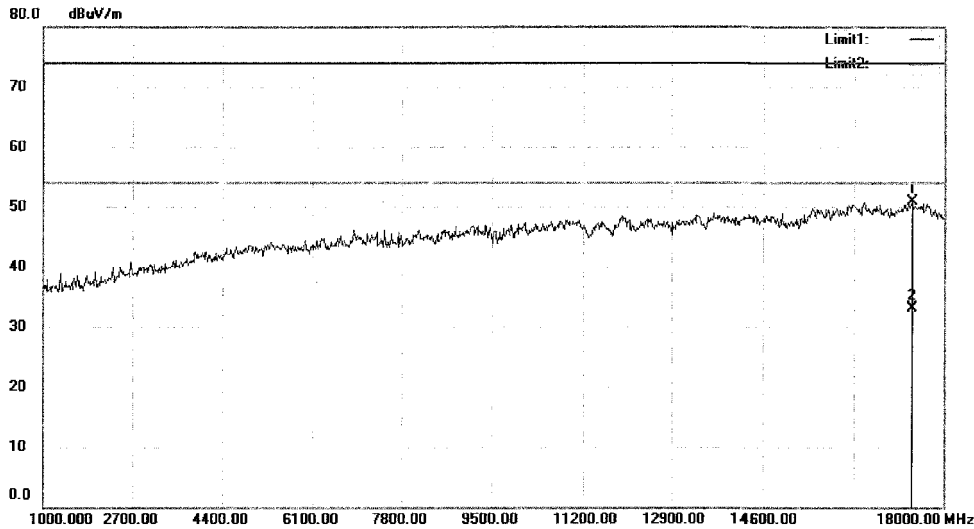

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		17388.00	43.24	7.61	50.85	74.00	-23.15	peak		
2	*	17388.00	25.49	7.61	33.10	54.00	-20.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#2072

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2085

Date:

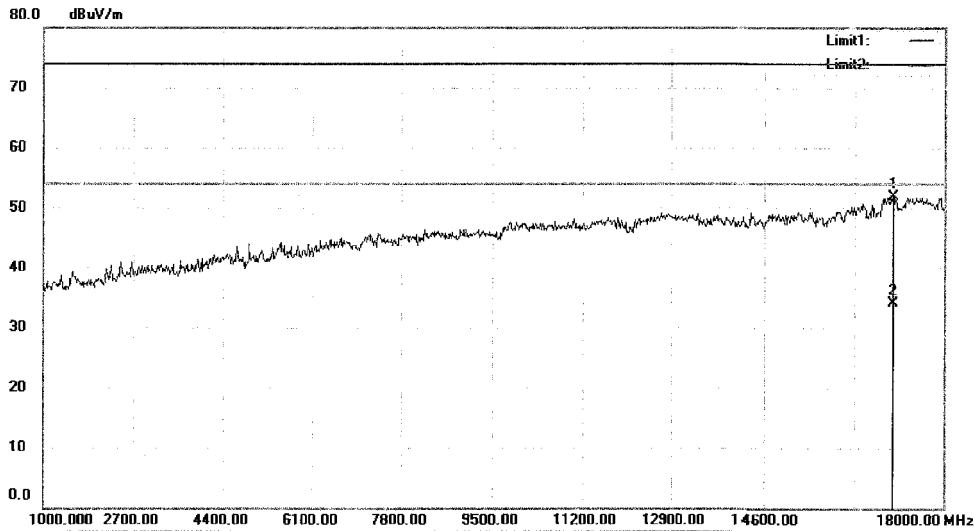

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		17031.00	48.59	3.22	51.81	74.00	-22.19	peak			
2	*	17031.00	30.88	3.22	34.10	54.00	-19.90	AVG			


*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#2085

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

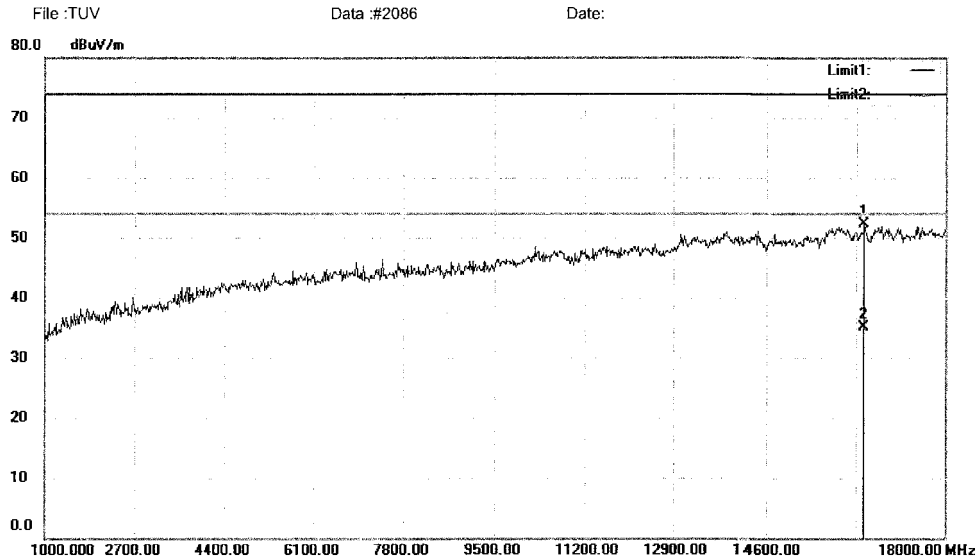
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16453.00	51.74	0.57	52.31	74.00	-21.69			peak
2	*	16453.00	34.53	0.57	35.10	54.00	-18.90			AVG

*:Maximum data x:Over limit !:over margin

Operator:

File :TUV\Data :#2086

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2087

Date:

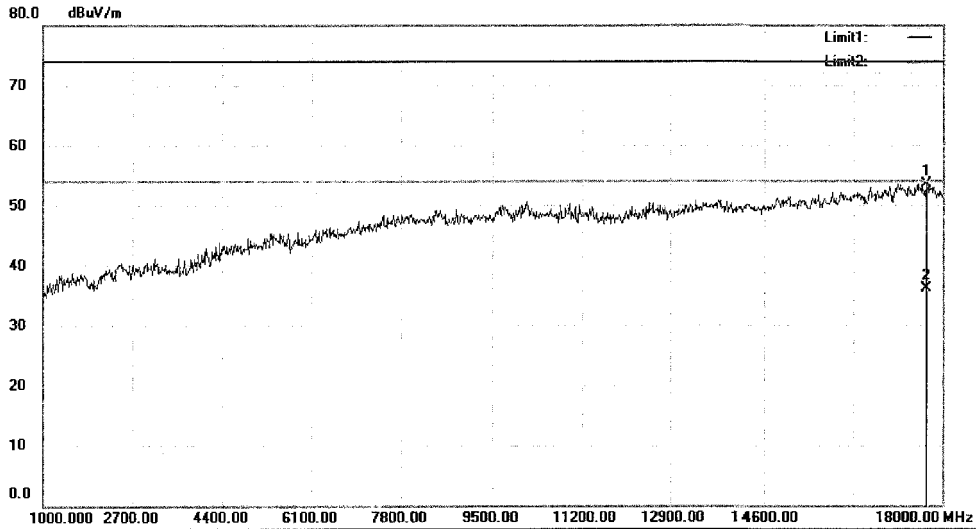

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		17694.00	38.56	14.98	53.54	74.00	-20.46			peak
2	*	17694.00	21.12	14.98	36.10	54.00	-17.90			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#2087

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2088

Date:

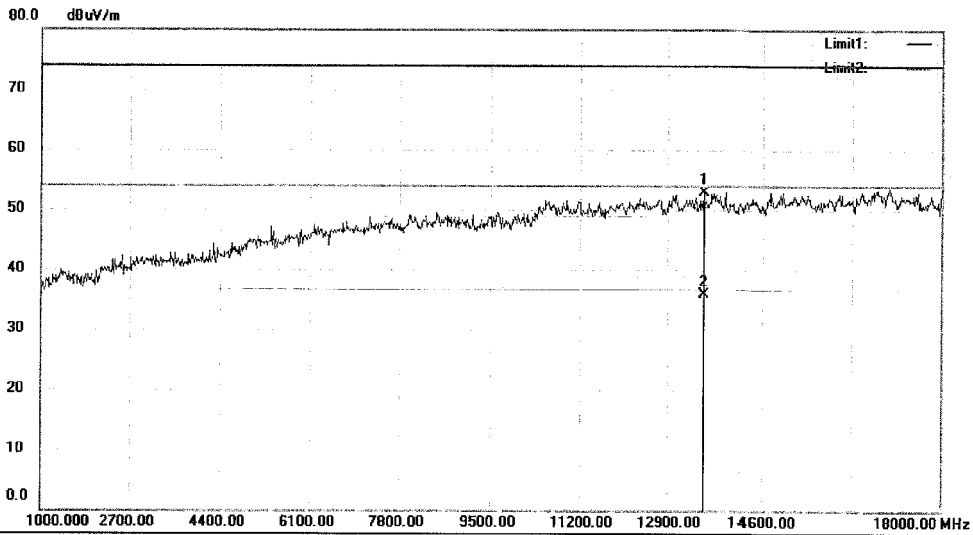

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		13580.00	48.93	3.96	52.89	74.00	-21.11	peak		0
2	*	13580.00	31.94	3.96	35.90	54.00	-18.10	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2088

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2089

Date:

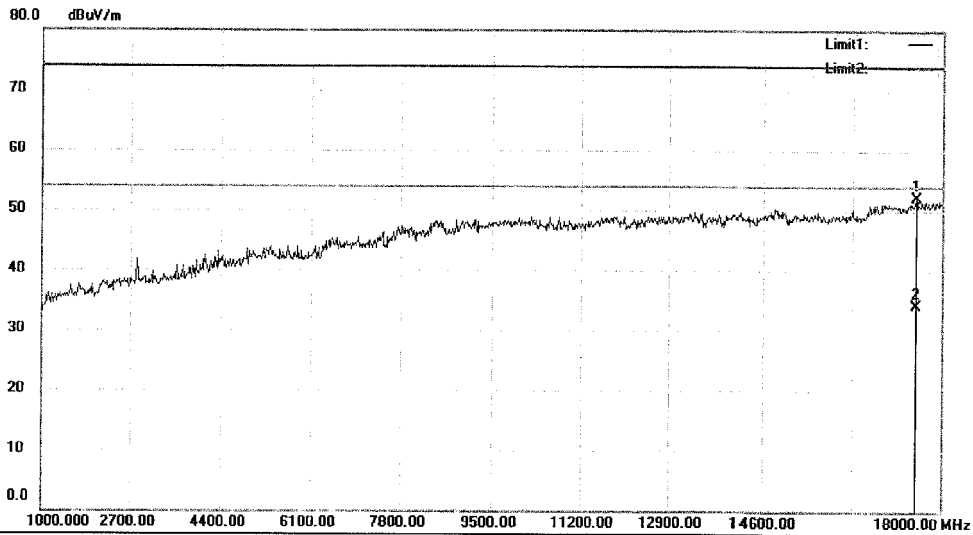

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17507.00	39.61	12.50	52.11	74.00	-21.89	peak		
2	*	17507.00	21.70	12.50	34.20	54.00	-19.80	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2089

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

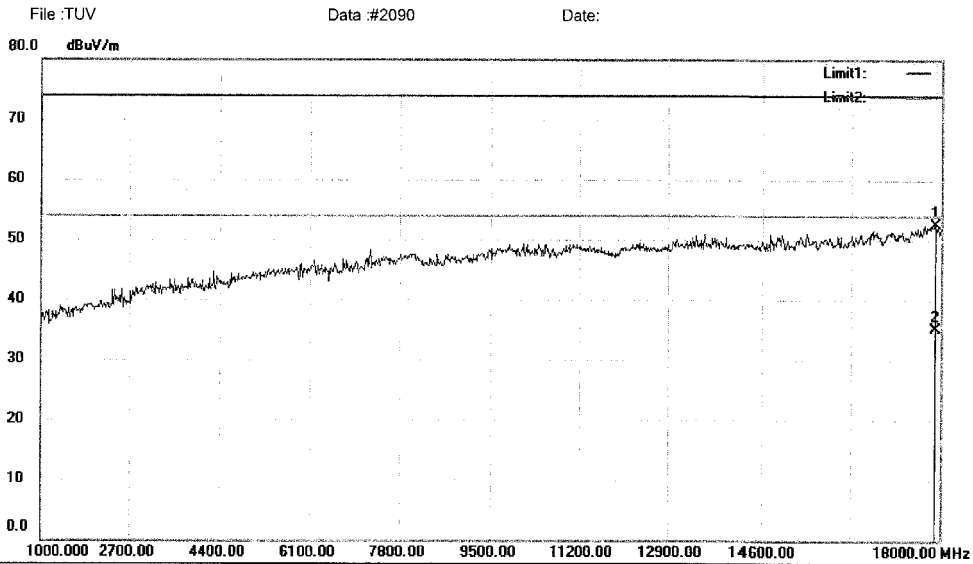
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17898.00	34.78	17.70	52.48	74.00	-21.52	peak		
2	*	17898.00	17.40	17.70	35.10	54.00	-18.90	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2091

Date:

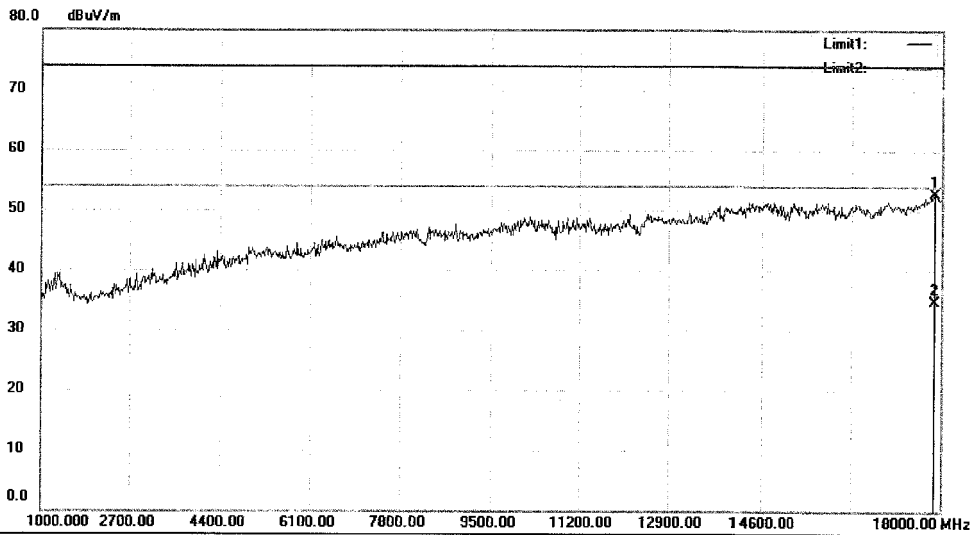

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17881.00	35.33	17.47	52.80	74.00	-21.20	peak		
2	*	17881.00	17.33	17.47	34.80	54.00	-19.20	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2091

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

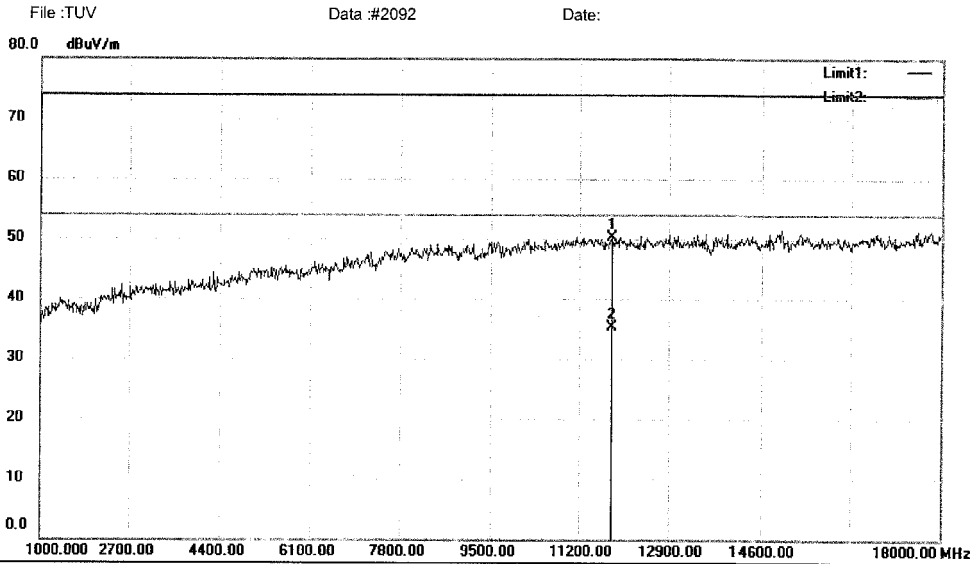
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11812.00	51.42	-1.10	50.32	74.00	-23.68	peak	0	
2	*	11812.00	36.50	-1.10	35.40	54.00	-18.60	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#2095

Date:

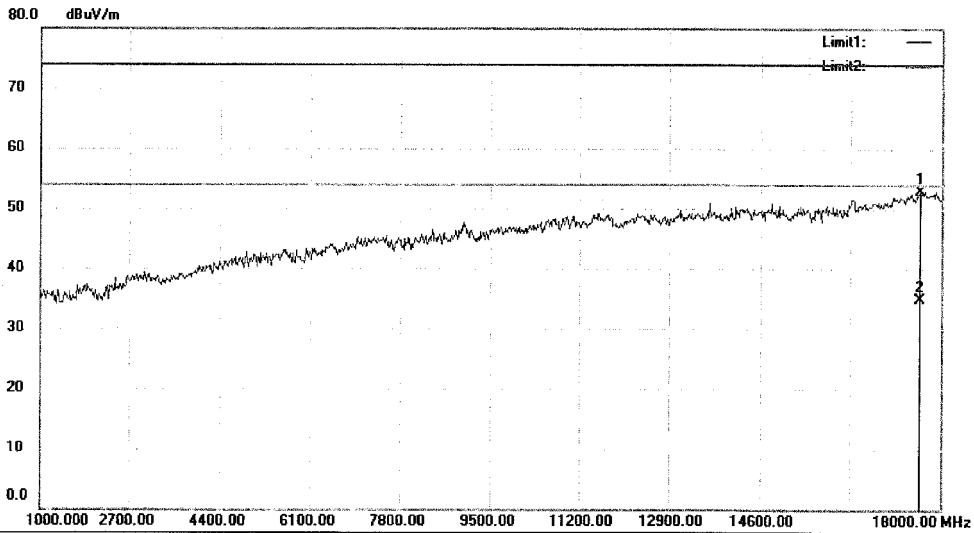

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 C

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(80MHz) 5210

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17609.00	42.88	10.08	52.96	74.00	-21.04	peak		
2	*	17609.00	24.82	10.08	34.90	54.00	-19.10	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2095

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

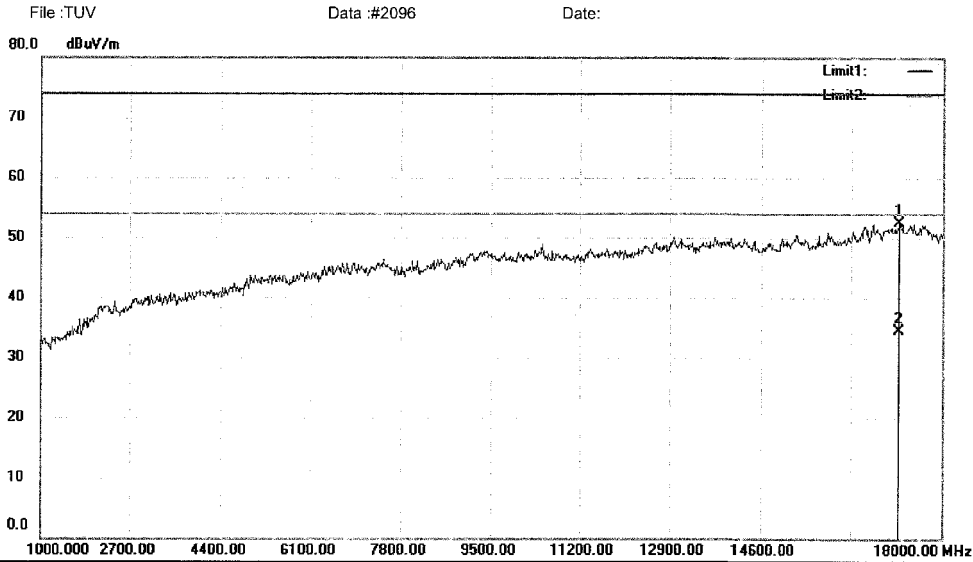
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17201.00	47.81	4.71	52.52	74.00	-21.48	peak		
2	*	17201.00	29.89	4.71	34.60	54.00	-19.40	AVG		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#2096

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

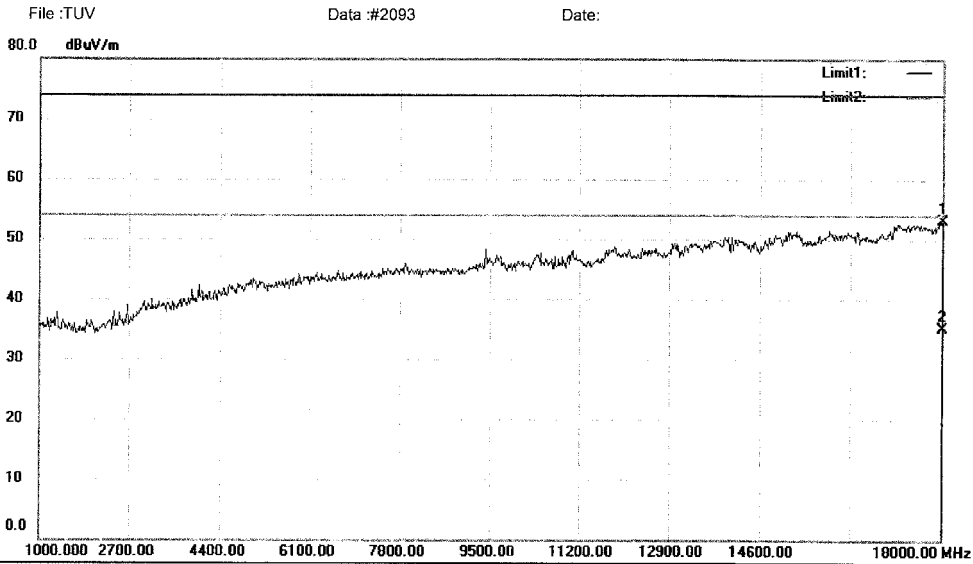
Radiated Emission Measurement


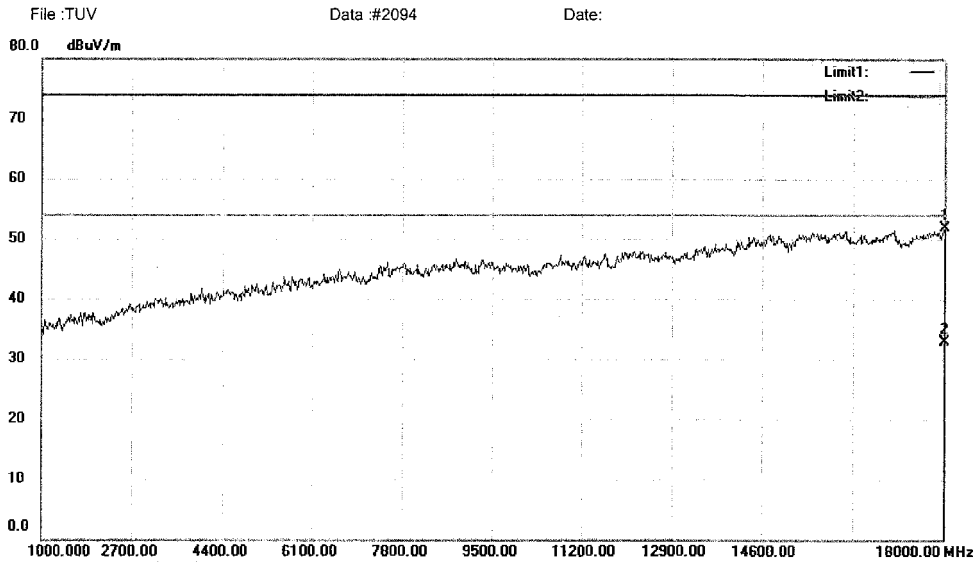
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	37.84	15.22	53.06	74.00	-20.94			peak
2	*	18000.00	19.98	15.22	35.20	54.00	-18.80			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		18000.00	36.68	15.22	51.90	74.00	-22.10	peak		
2	*	18000.00	17.68	15.22	32.90	54.00	-21.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#2094

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1781 Date:

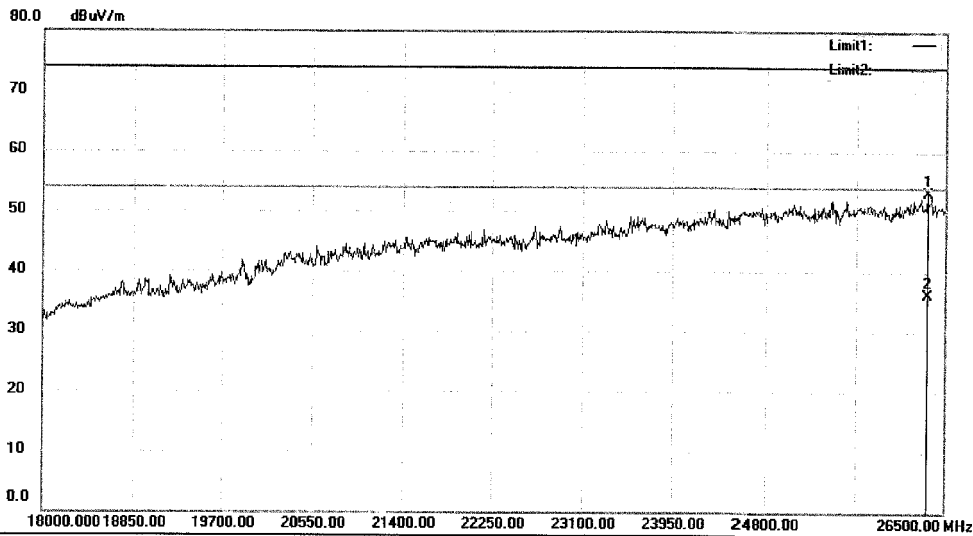

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		26330.00	88.54	-35.39	53.15	74.00	-20.85	peak	0	
2	*	26330.00	71.49	-35.39	36.10	54.00	-17.90	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1781

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1782

Date:

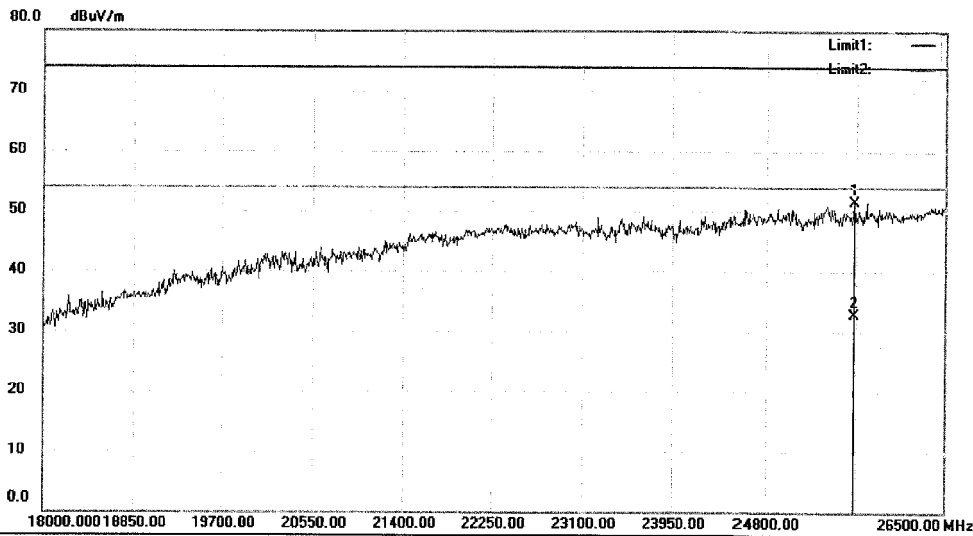

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25633.00	87.82	-36.24	51.58	74.00	-22.42	peak		0	
2	*	25633.00	69.04	-36.24	32.80	54.00	-21.20	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1782

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

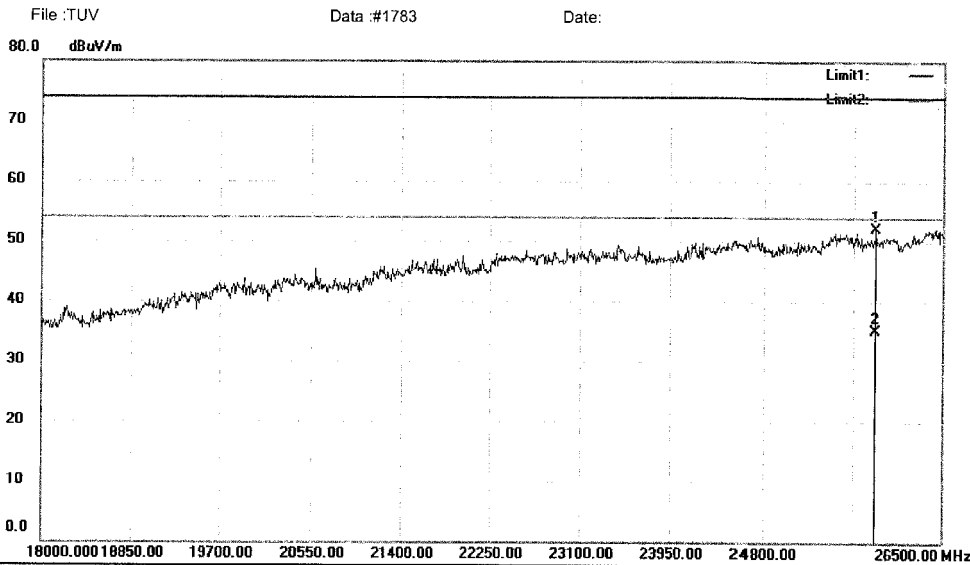
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25862.50	87.97	-35.96	52.01	74.00	-21.99	peak	0	
2	*	25862.50	71.16	-35.96	35.20	54.00	-18.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1783

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

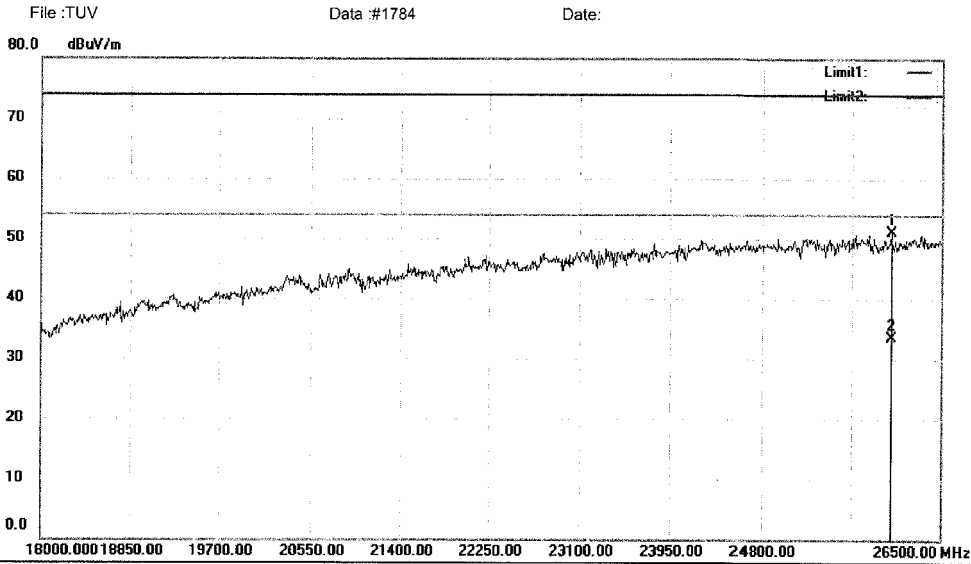
Radiated Emission Measurement


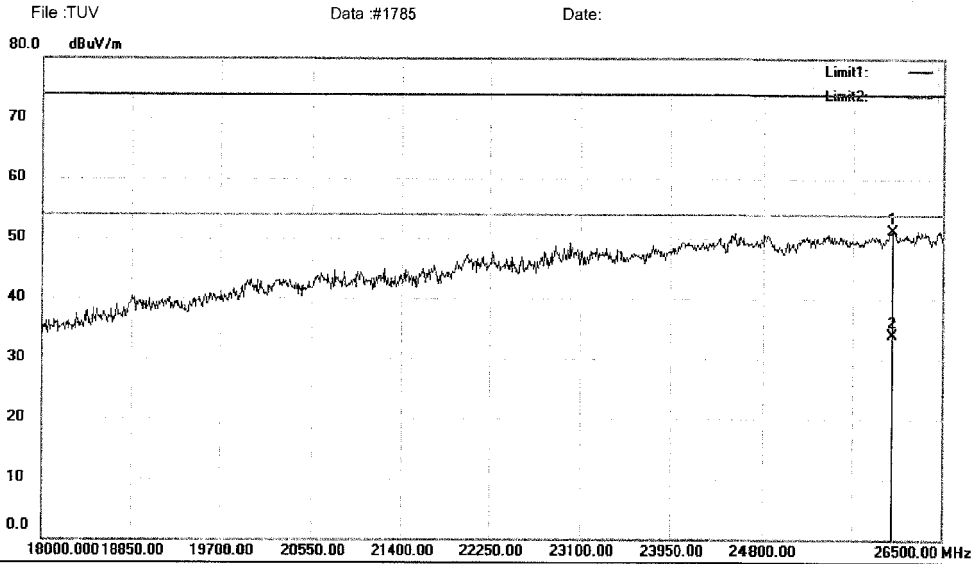
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		26024.00	86.78	-35.76	51.02	74.00	-22.98	peak	0	
2	*	26024.00	69.36	-35.76	33.60	54.00	-20.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


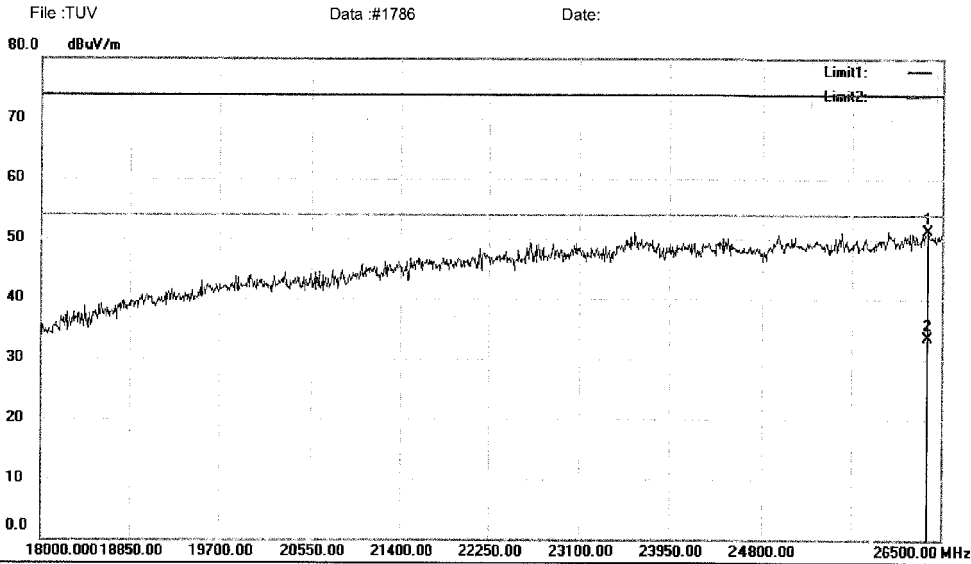
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		26032.50	87.14	-35.75	51.39	74.00	-22.61	peak	0	
2	*	26032.50	69.65	-35.75	33.90	54.00	-20.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


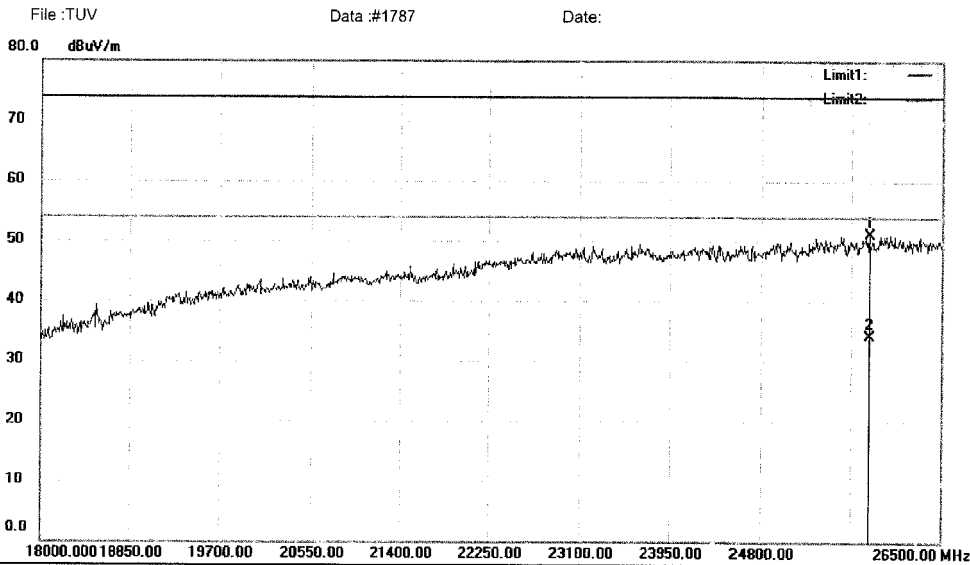
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		26372.50	86.65	-35.34	51.31	74.00	-22.69	peak	0	
2	*	26372.50	68.84	-35.34	33.50	54.00	-20.50	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25820.00	87.21	-36.01	51.20	74.00	-22.80	peak	0	
2	*	25820.00	70.21	-36.01	34.20	54.00	-19.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1787

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

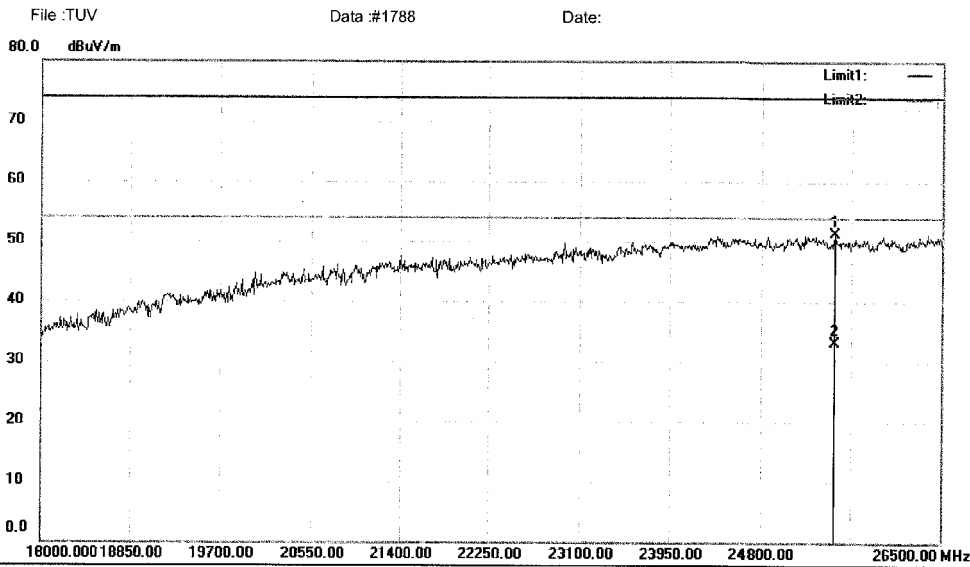
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		25497.00	87.65	-36.40	51.25	74.00	-22.75	peak	0	
2	*	25497.00	69.60	-36.40	33.20	54.00	-20.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData:#1788

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

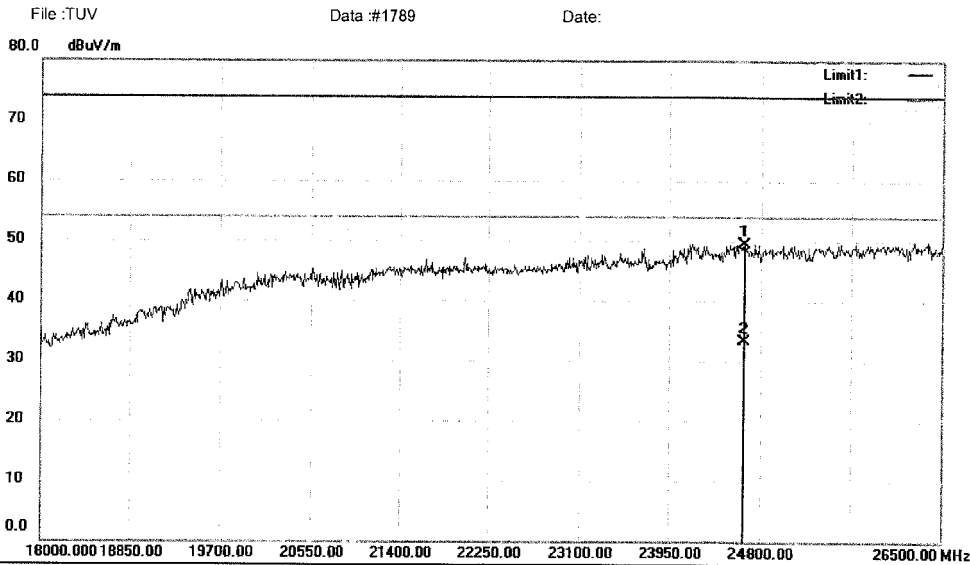
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		24647.00	86.50	-37.05	49.45	74.00	-24.55	peak	0	
2	*	24647.00	70.45	-37.05	33.40	54.00	-20.60	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File :TUV Data :#1790 Date:

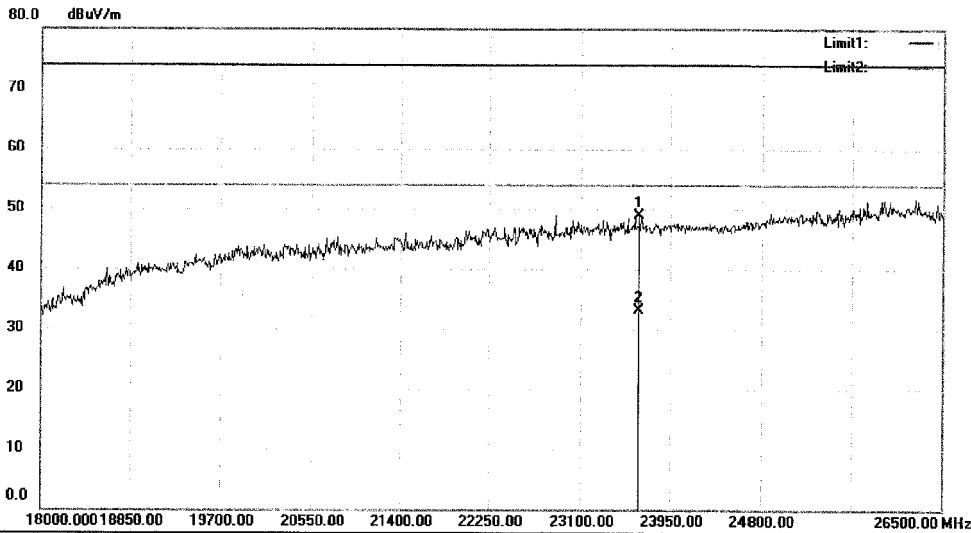
 Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		23652.50	86.41	-37.49	48.92	74.00	-25.08	peak		0	
2	*	23652.50	70.59	-37.49	33.10	54.00	-20.90	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1790

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

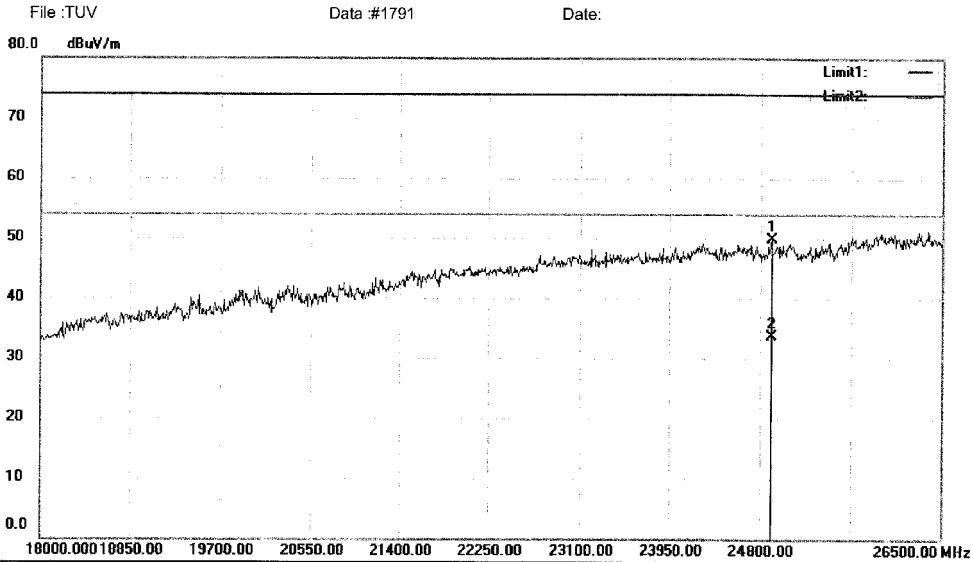
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24902.00	86.85	-37.02	49.83	74.00	-24.17	peak	0	
2	*	24902.00	70.82	-37.02	33.80	54.00	-20.20	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1791

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

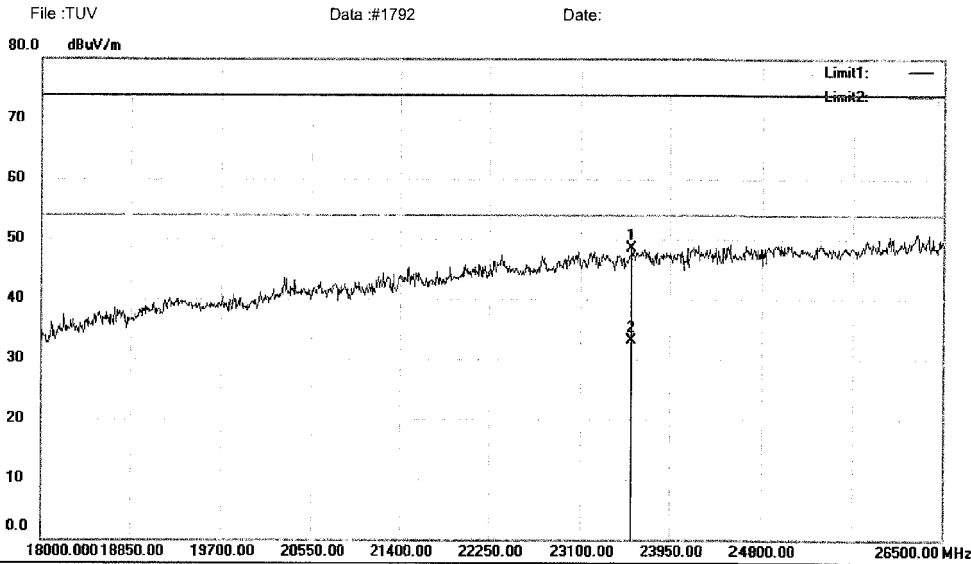
Radiated Emission Measurement


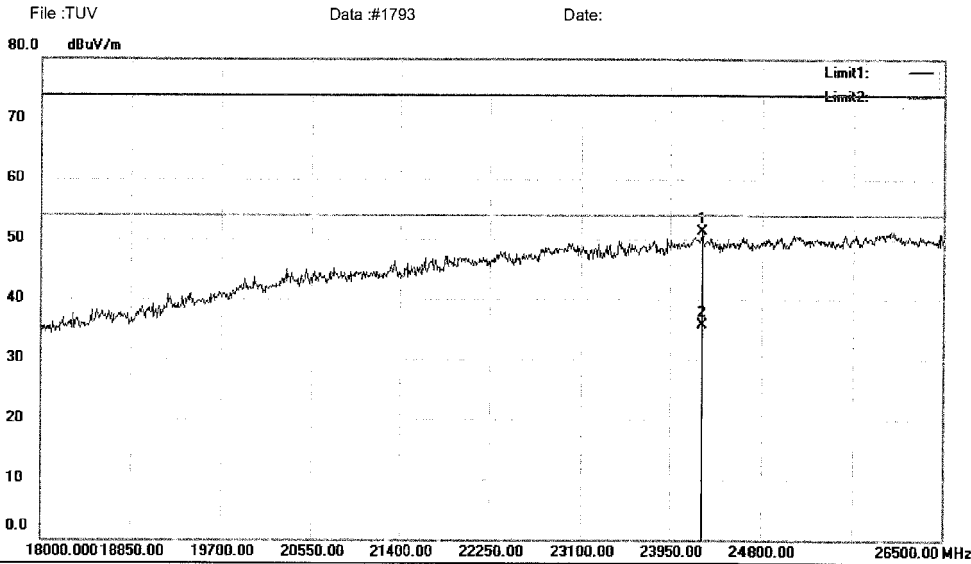
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		23584.50	86.12	-37.57	48.55	74.00	-25.45	peak		0	
2	*	23584.50	70.67	-37.57	33.10	54.00	-20.90	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24264.50	88.45	-37.10	51.35	74.00	-22.65	peak		0	
2	*	24264.50	72.80	-37.10	35.70	54.00	-18.30	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1793

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

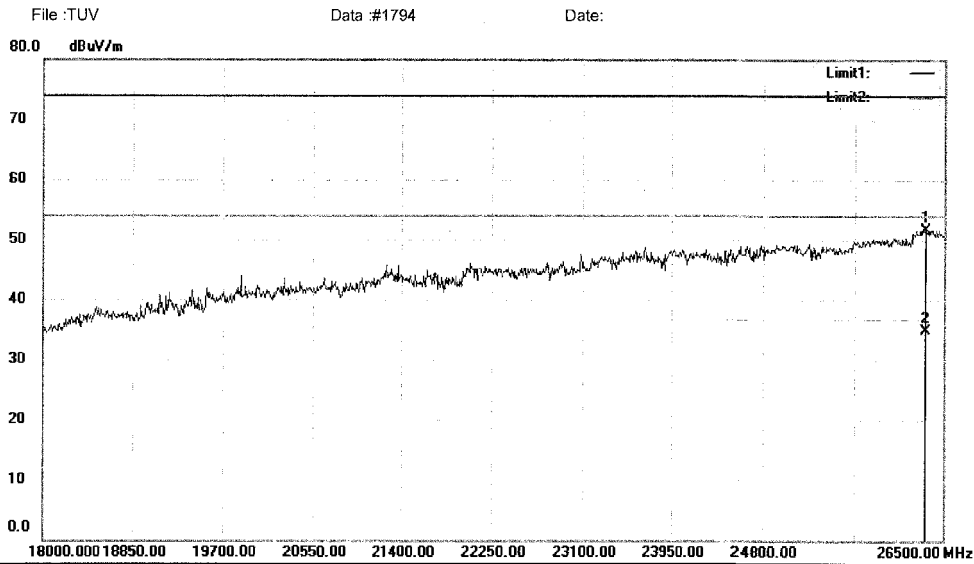
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		26321.50	87.17	-35.40	51.77	74.00	-22.23	peak	0	
2	*	26321.50	70.30	-35.40	34.90	54.00	-19.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData #1794

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1795 Date:

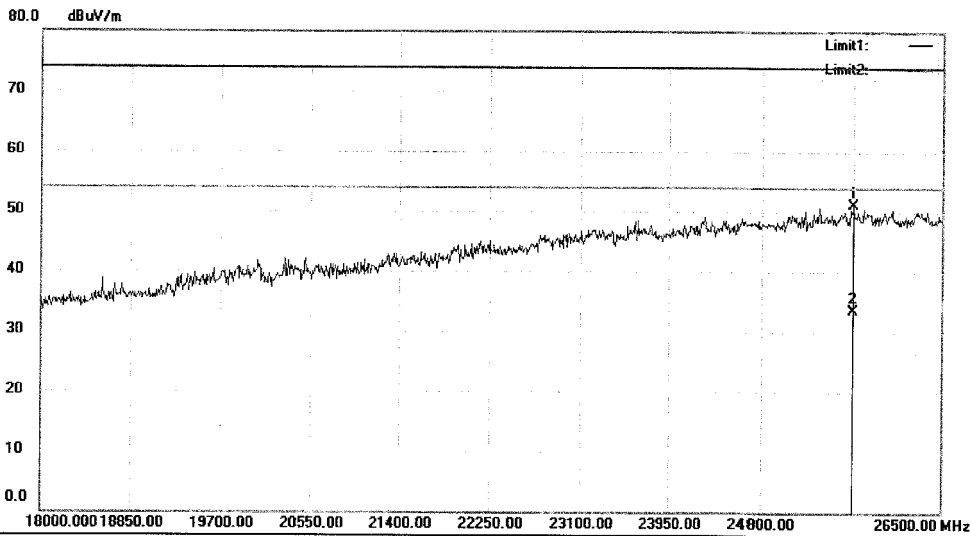

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		25658.50	87.38	-36.21	51.17	74.00	-22.83	peak	0
2	*	25658.50	69.71	-36.21	33.50	54.00	-20.50	AVG	0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1795

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

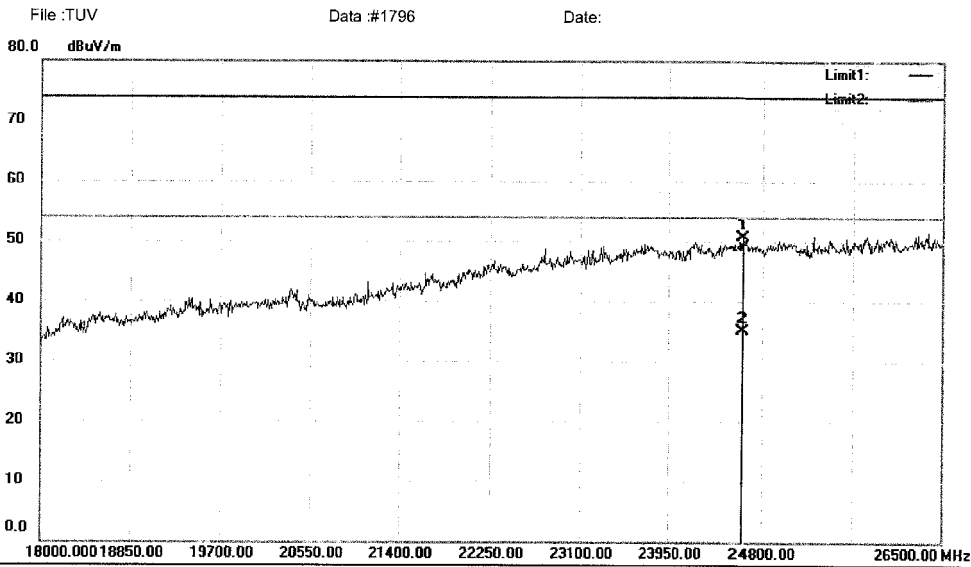
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24621.50	87.69	-37.06	50.63	74.00	-23.37	peak	0	
2	*	24621.50	72.16	-37.06	35.10	54.00	-18.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1797 Date:

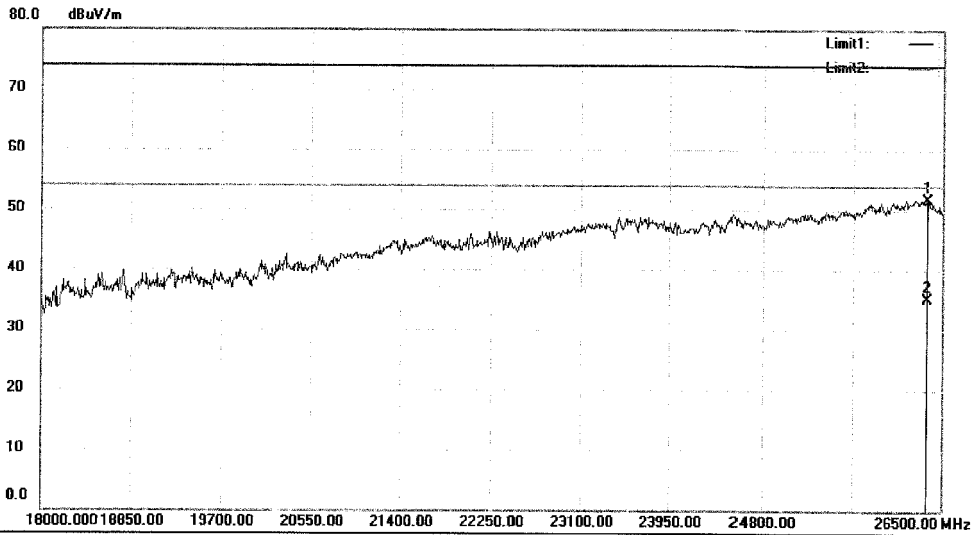

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	26355.50	87.15	-35.36	51.79	74.00	-22.21	peak	0	
2 *	26355.50	70.46	-35.36	35.10	54.00	-18.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1797

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

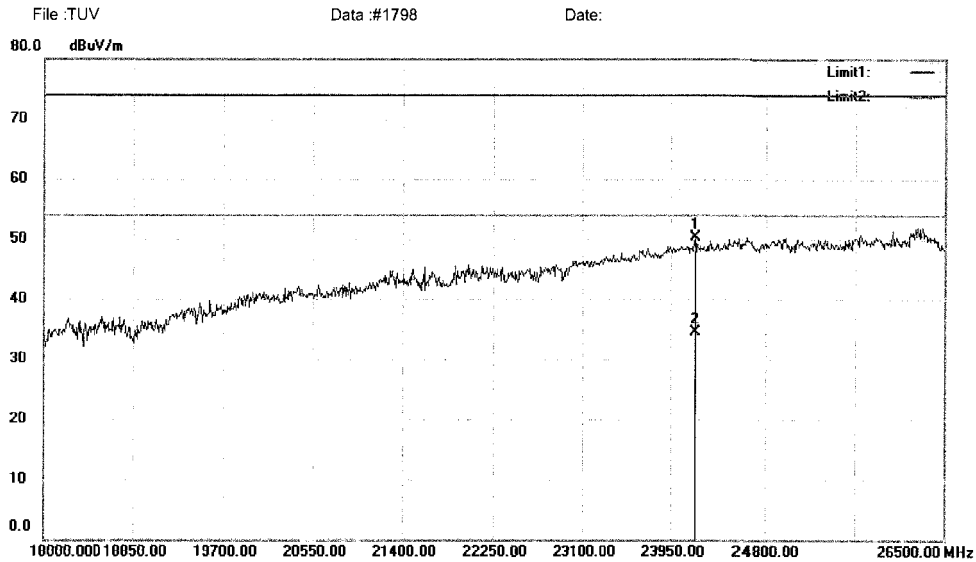
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24179.50	87.46	-37.11	50.35	74.00	-23.65	peak	0	
2	*	24179.50	71.71	-37.11	34.60	54.00	-19.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1798

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1799 Date:

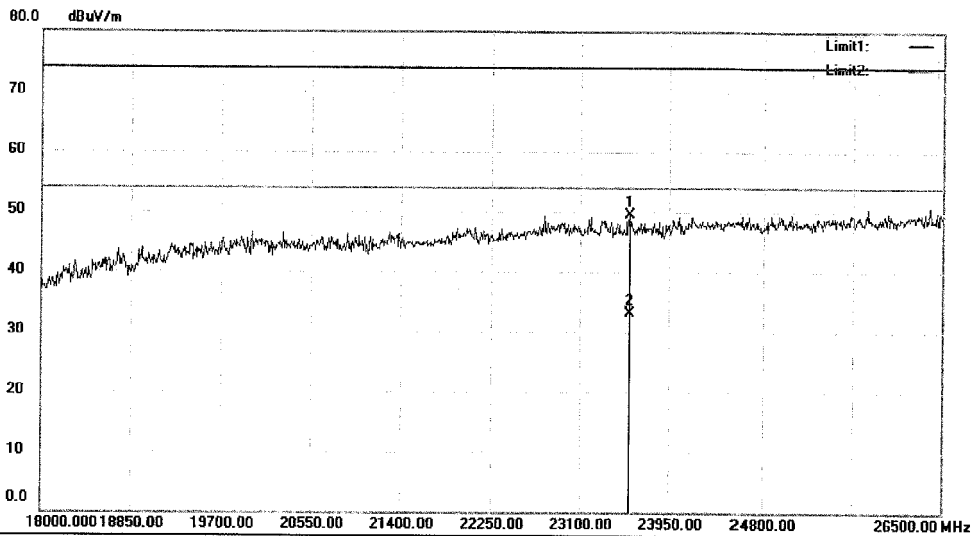

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23584.50	87.00	-37.57	49.43	74.00	-24.57	peak		0
2	*	23584.50	70.77	-37.57	33.20	54.00	-20.80	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1799

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1800

Date:

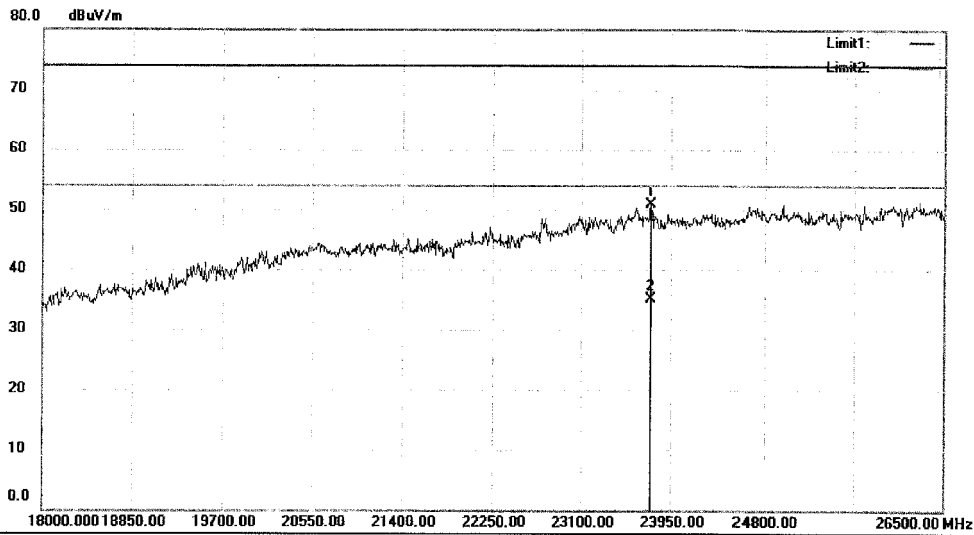

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23763.00	88.29	-37.38	50.91	74.00	-23.09	peak	0	
2	*	23763.00	72.58	-37.38	35.20	54.00	-18.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1800

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

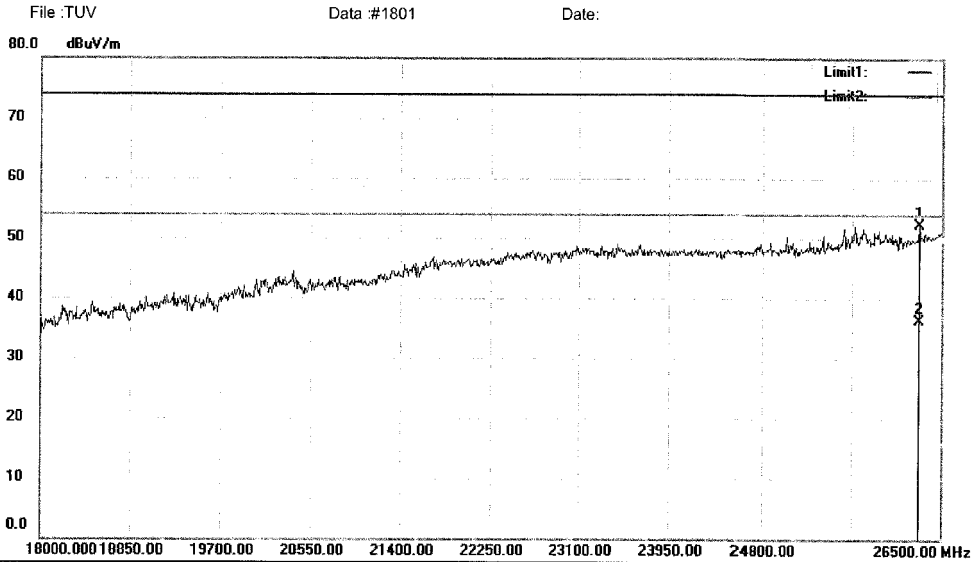
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		26287.50	87.76	-35.44	52.32	74.00	-21.68	peak	0	
2	*	26287.50	71.84	-35.44	36.40	54.00	-17.60	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1801

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Najialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1802

Date:

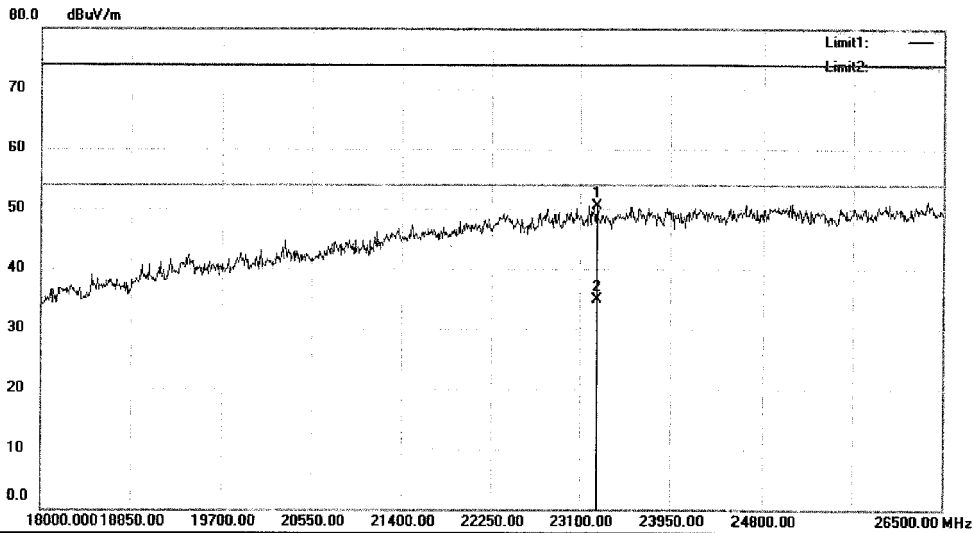

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23261.50	88.51	-37.91	50.60	74.00	-23.40	peak	0	
2	*	23261.50	72.81	-37.91	34.90	54.00	-19.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1802

Page: 1


Shenzhen **EMTEK** Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1803

Date:

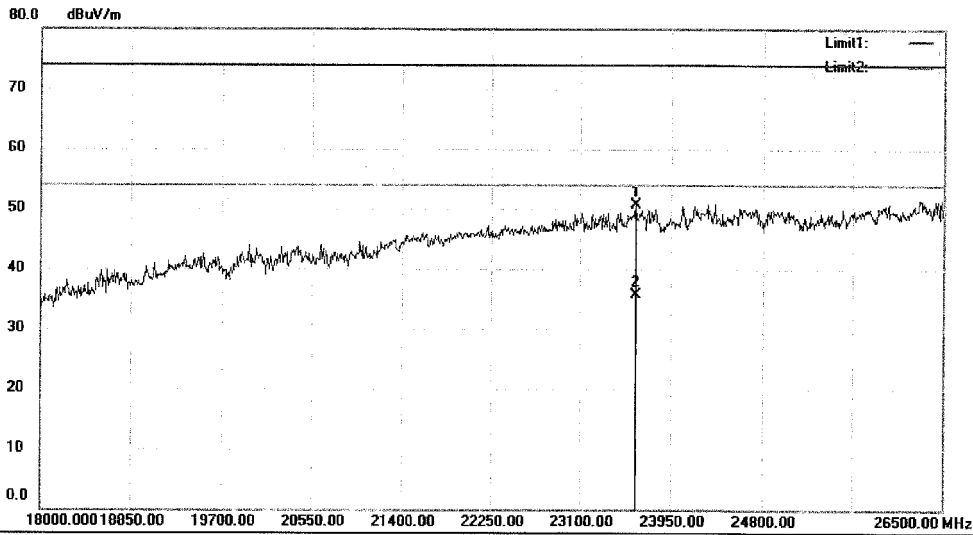

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23627.00	88.19	-37.52	50.67	74.00	-23.33	peak	0	
2	*	23627.00	73.32	-37.52	35.80	54.00	-18.20	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1803

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1804

Date:

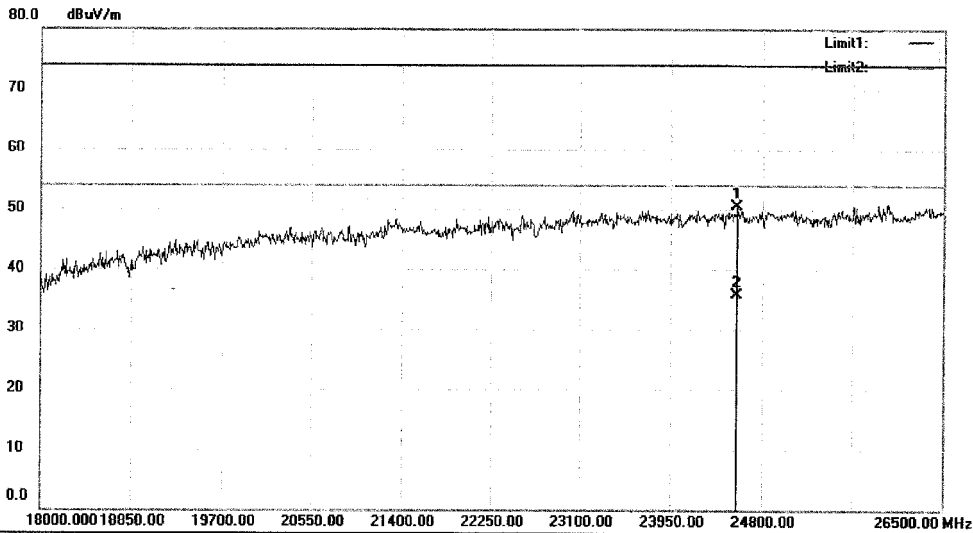

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode: 11n(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24570.50	87.57	-37.06	50.51	74.00	-23.49	peak	0	
2	*	24570.50	72.86	-37.06	35.80	54.00	-18.20	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1804

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1813

Date:

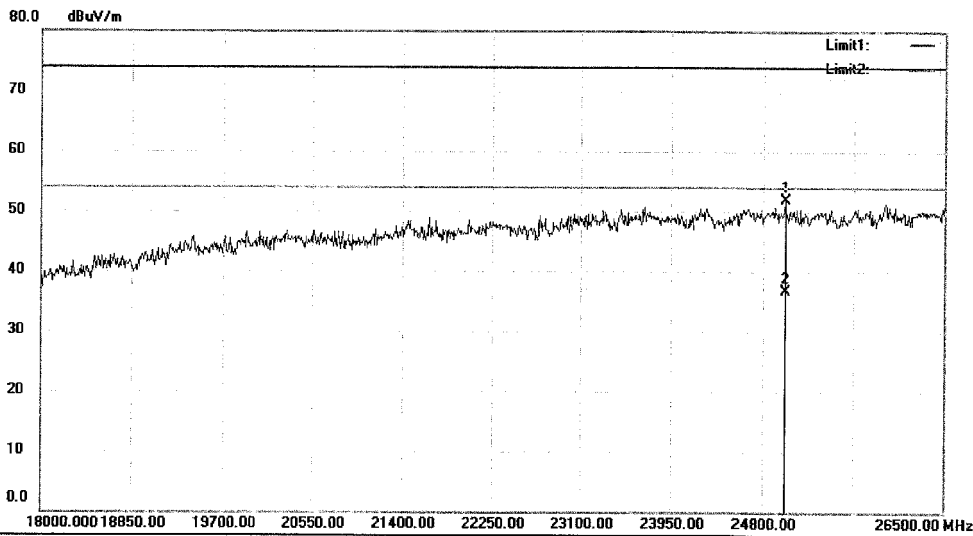

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25004.00	88.84	-37.01	51.83	74.00	-22.17	peak	0	
2	*	25004.00	73.71	-37.01	36.70	54.00	-17.30	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1813

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

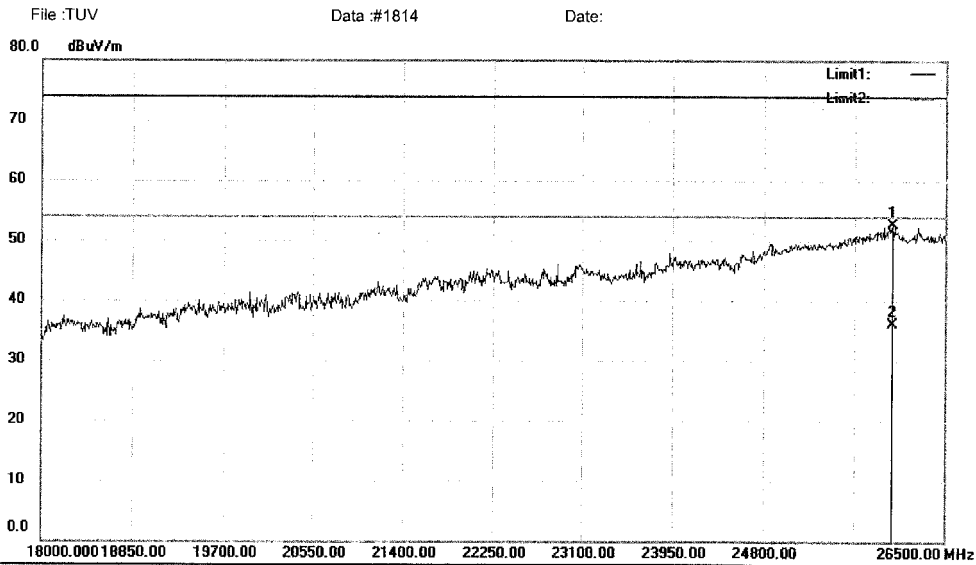
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	26007.00	88.56	-35.78	52.78	74.00	-21.22	peak	0	
2 *	26007.00	71.88	-35.78	36.10	54.00	-17.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUVData:#1814

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

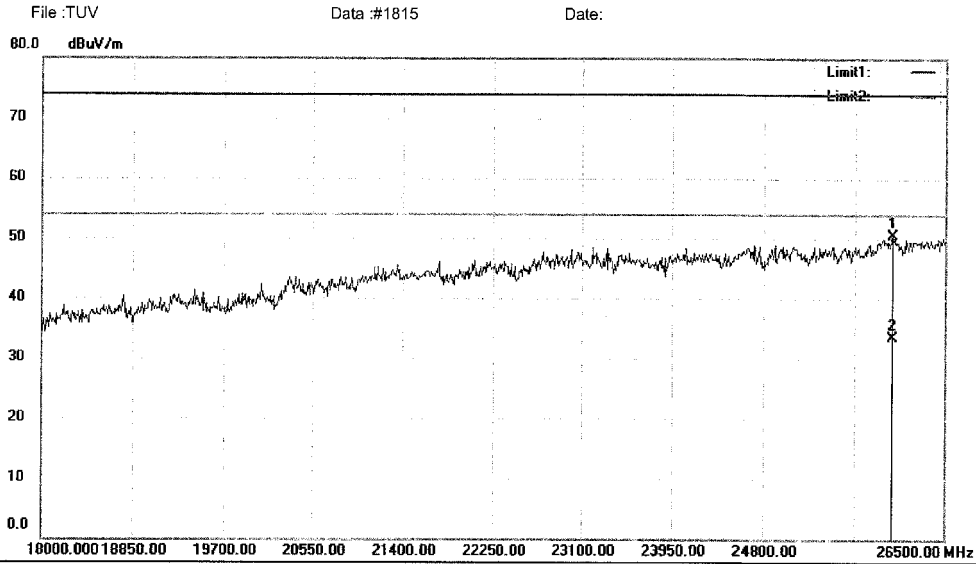
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5200
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	26007.00	86.28	-35.78	50.50	74.00	-23.50	peak		0
2 *	26007.00	69.28	-35.78	33.50	54.00	-20.50	AVG		0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1815

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

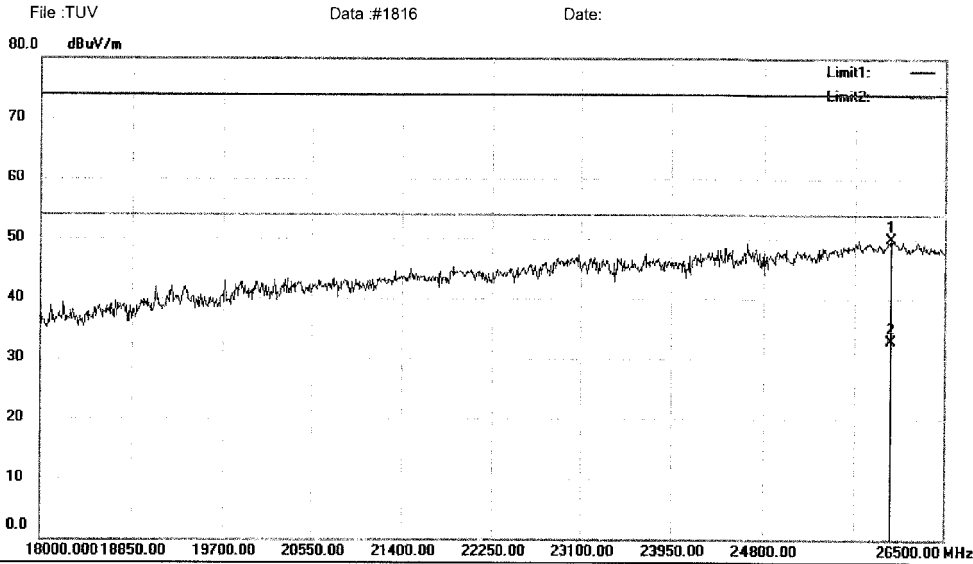
Radiated Emission Measurement


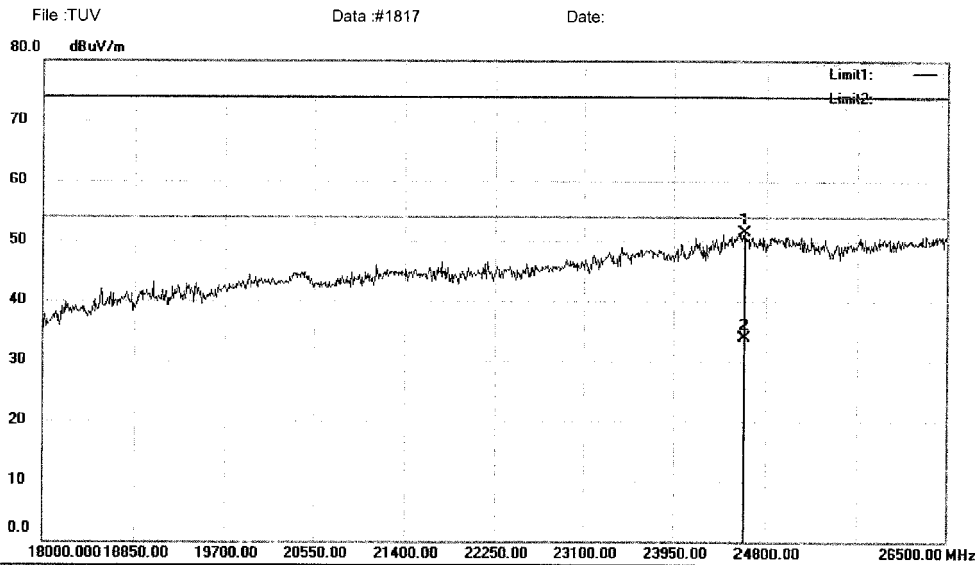
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(20MHz) 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25990.00	85.63	-35.80	49.83	74.00	-24.17	peak		0
2	*	25990.00	68.80	-35.80	33.00	54.00	-21.00	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	24596.00	88.48	-37.06	51.42	74.00	-22.58	peak		0	
2 *	24596.00	70.96	-37.06	33.90	54.00	-20.10	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1817

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

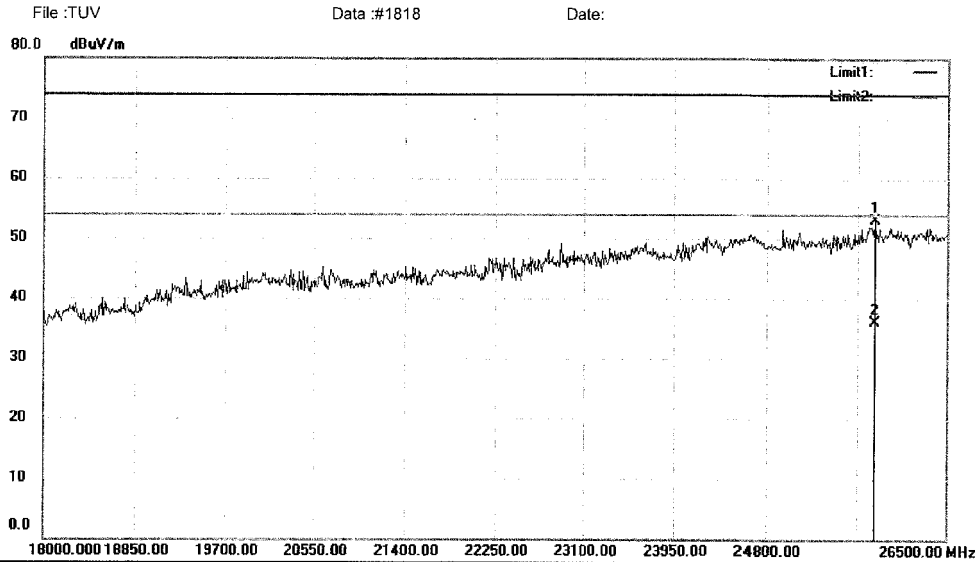
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25811.50	89.14	-36.02	53.12	74.00	-20.88	peak	0	
2	*	25811.50	72.12	-36.02	36.10	54.00	-17.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1818

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Najialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

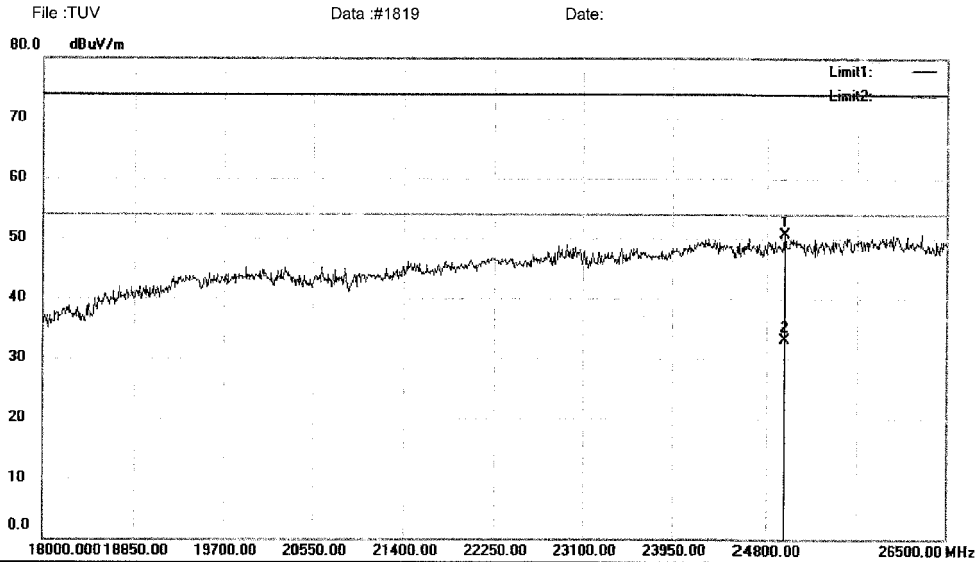Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	24961.50	87.74	-37.01	50.73	74.00	-23.27	peak	0	
2 *	24961.50	70.11	-37.01	33.10	54.00	-20.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1819

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

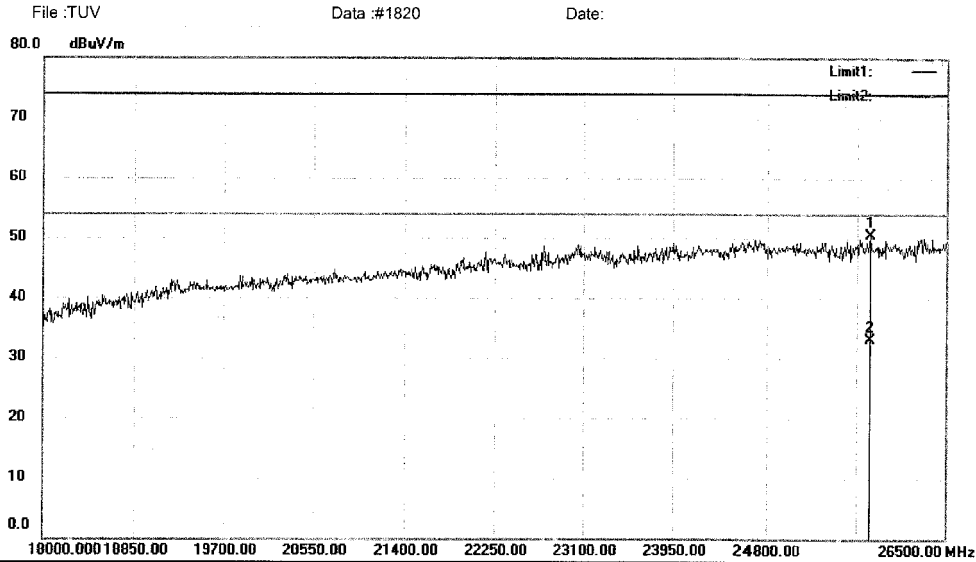
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25777.50	86.58	-36.06	50.52	74.00	-23.48	peak		0	
2	*	25777.50	69.26	-36.06	33.20	54.00	-20.80	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1820

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

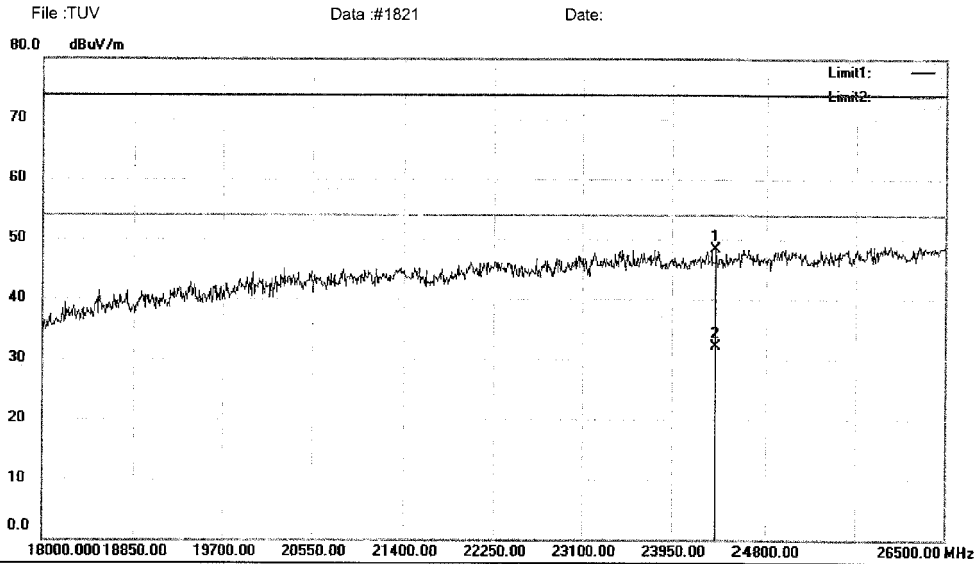
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24366.50	85.40	-37.09	48.31	74.00	-25.69	peak		0
2	*	24366.50	69.19	-37.09	32.10	54.00	-21.90	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1821

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1822

Date:

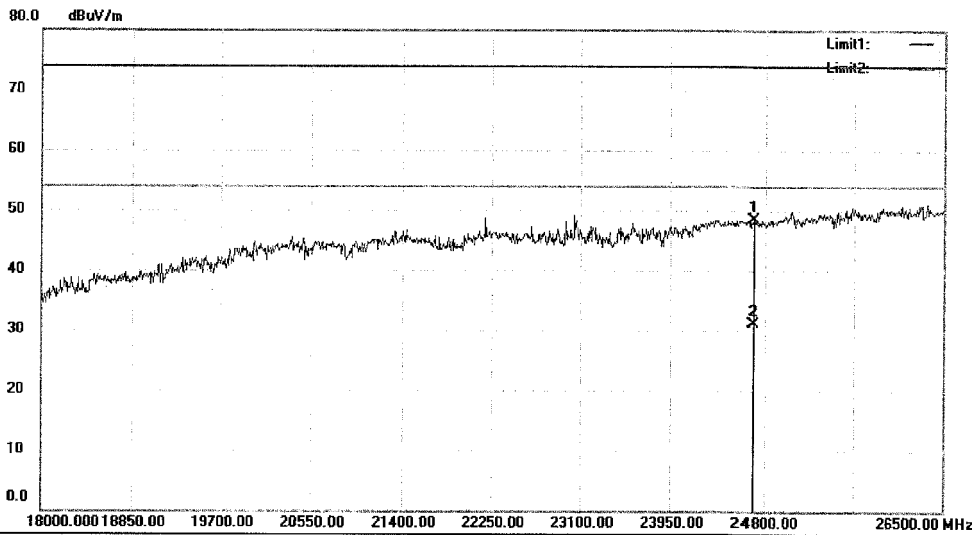

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5785

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24689.50	85.49	-37.05	48.44	74.00	-25.56	peak	0	
2	*	24689.50	68.25	-37.05	31.20	54.00	-22.80	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1822

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1823

Date:

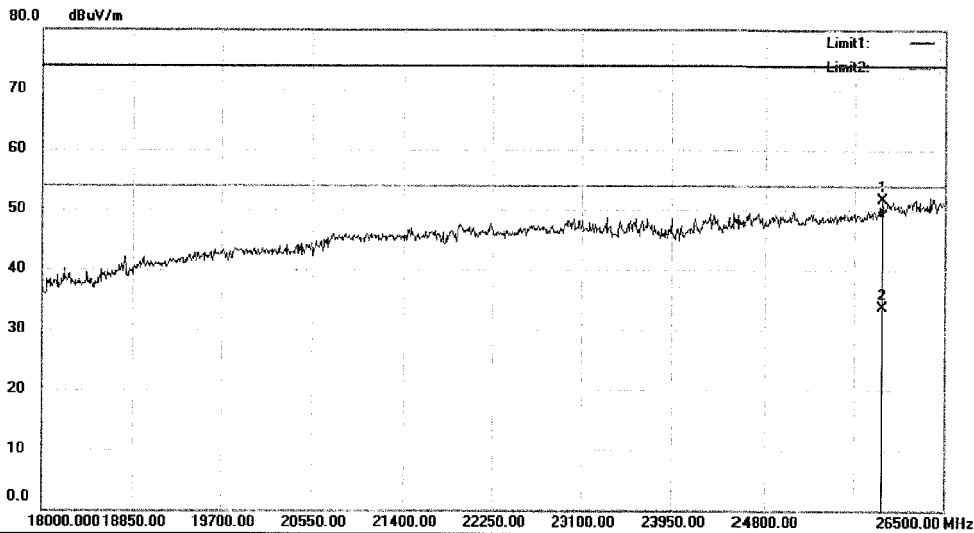

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25913.50	87.69	-35.90	51.79	74.00	-22.21	peak	0	
2	*	25913.50	69.70	-35.90	33.80	54.00	-20.20	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1823

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement

File :TUV

Data :#1824

Date:

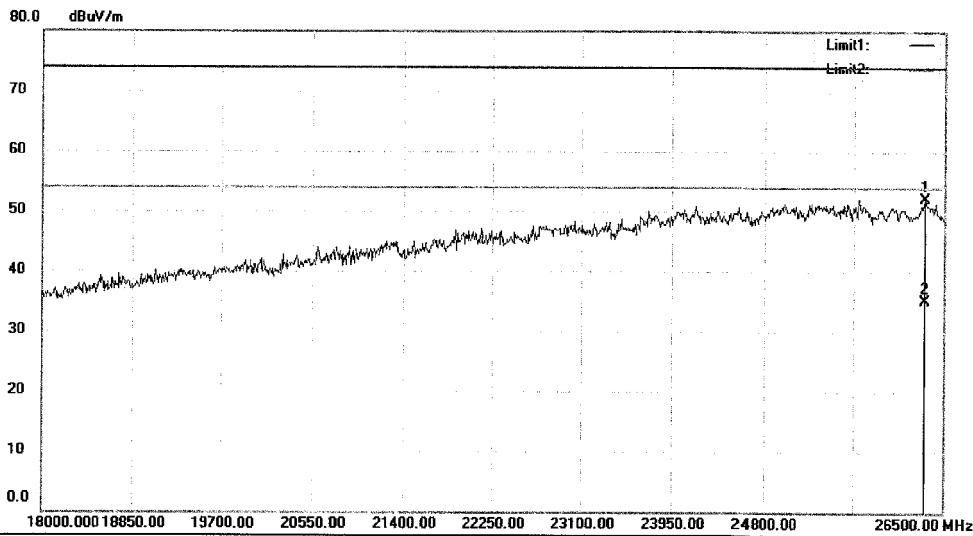

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5825

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	26321.50	87.52	-35.40	52.12	74.00	-21.88	peak	0	
2 *	26321.50	70.50	-35.40	35.10	54.00	-18.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1824

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

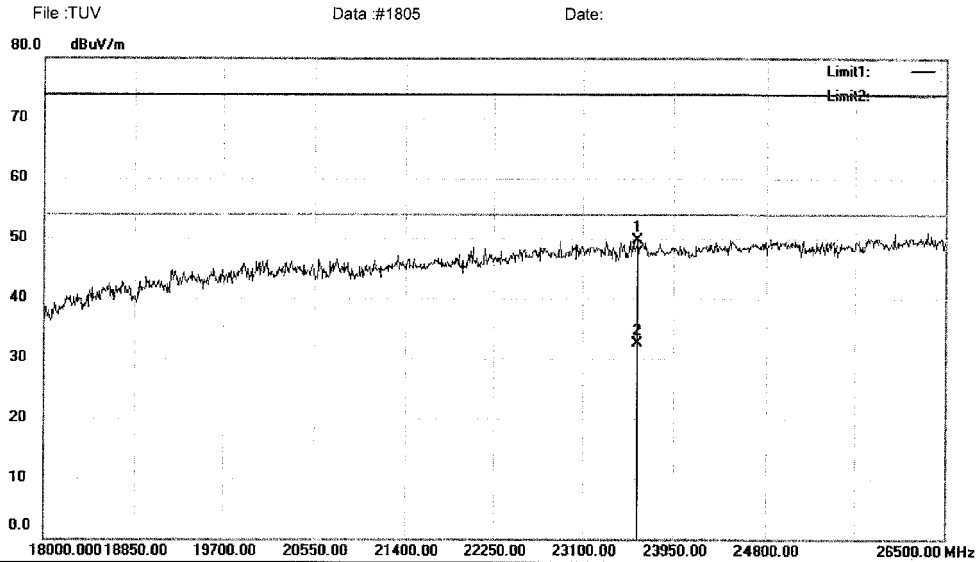
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23618.50	87.14	-37.53	49.61	74.00	-24.39	peak	0	
2	*	23618.50	70.03	-37.53	32.50	54.00	-21.50	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1805

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1806

Date:

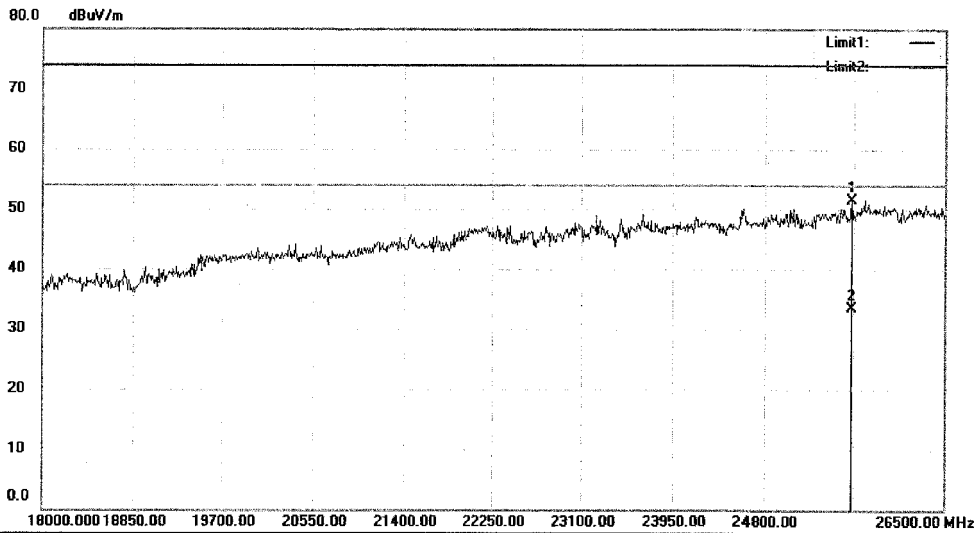

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25633.00	87.82	-36.24	51.58	74.00	-22.42	peak		0	
2	*	25633.00	69.74	-36.24	33.50	54.00	-20.50	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1806

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

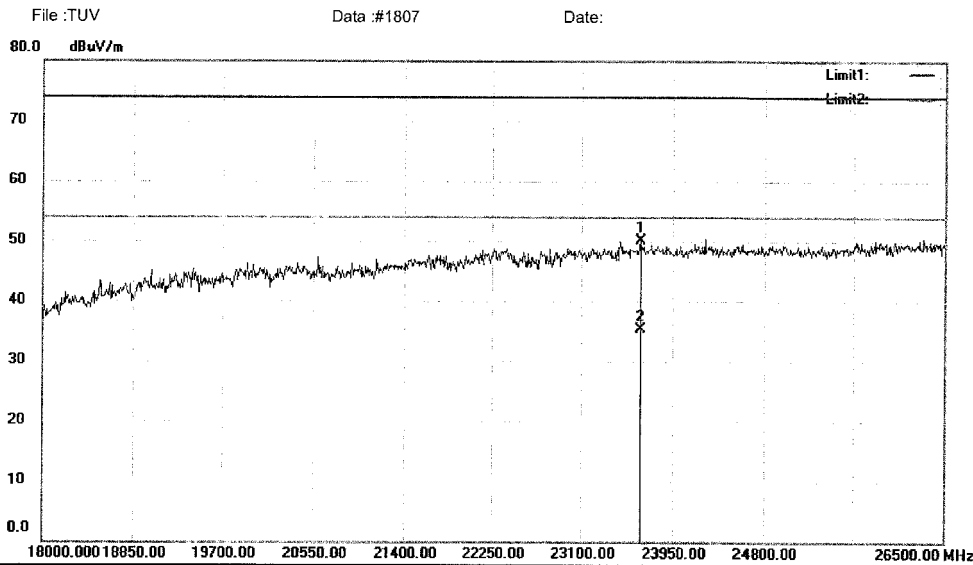Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		23644.00	87.54	-37.50	50.04	74.00	-23.96	peak	0	
2	*	23644.00	72.90	-37.50	35.40	54.00	-18.60	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1807

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1808

Date:

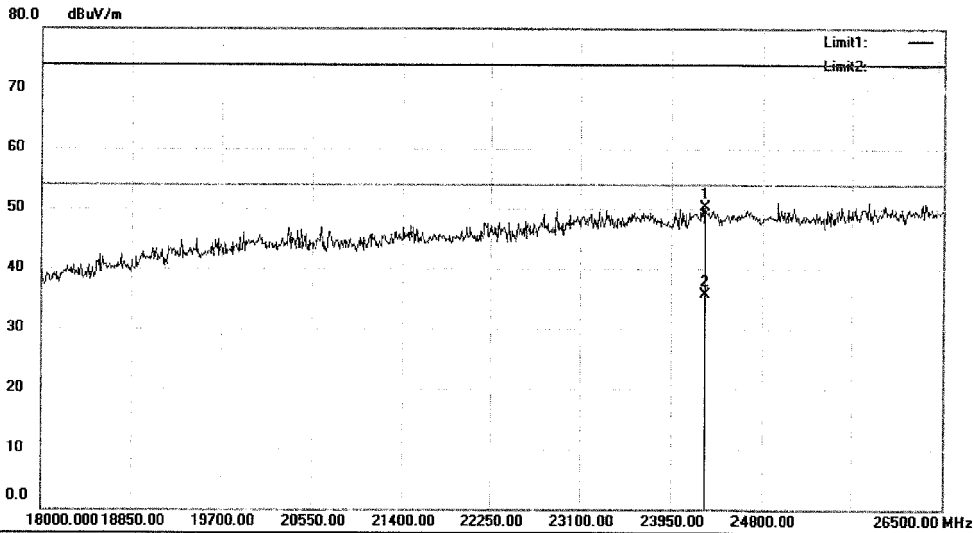

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode: 11n(40MHz) 5230

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24273.00	87.46	-37.10	50.36	74.00	-23.64	peak		0
2	*	24273.00	72.90	-37.10	35.80	54.00	-18.20	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1808

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

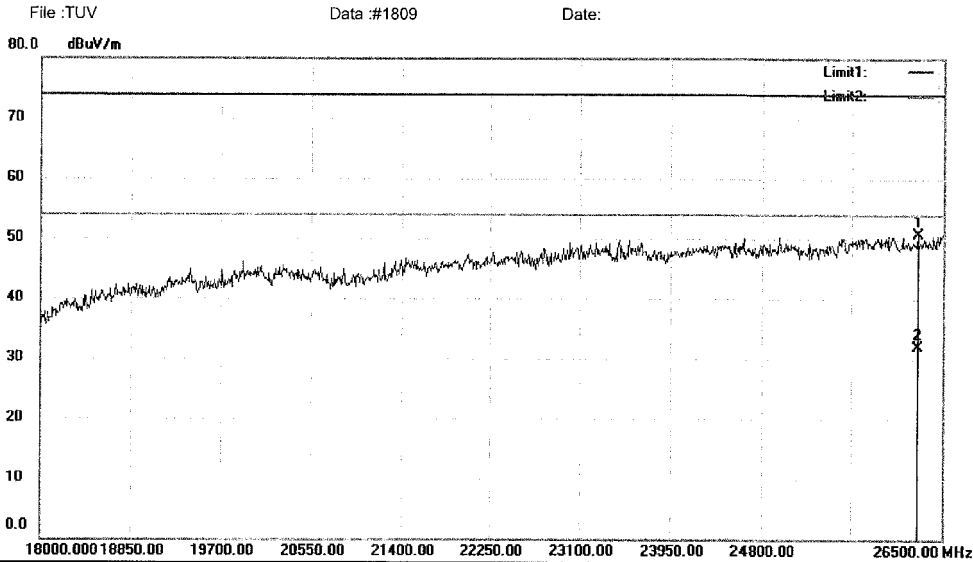

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: 13.3" Tablet
M/N: P-TA13-104-YIT-01
Mode:11n(40MHz) 5755
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		26262.00	86.21	-35.47	50.74	74.00	-23.26	peak	0	
2	*	26262.00	67.37	-35.47	31.90	54.00	-22.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1810

Date:

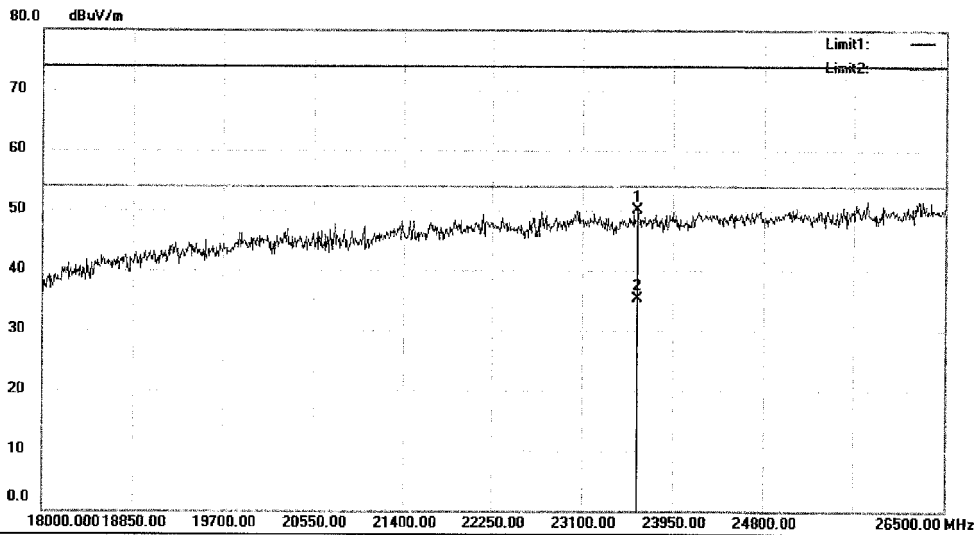

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23618.50	87.71	-37.53	50.18	74.00	-23.82	peak	0	
2	*	23618.50	72.93	-37.53	35.40	54.00	-18.60	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1810

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

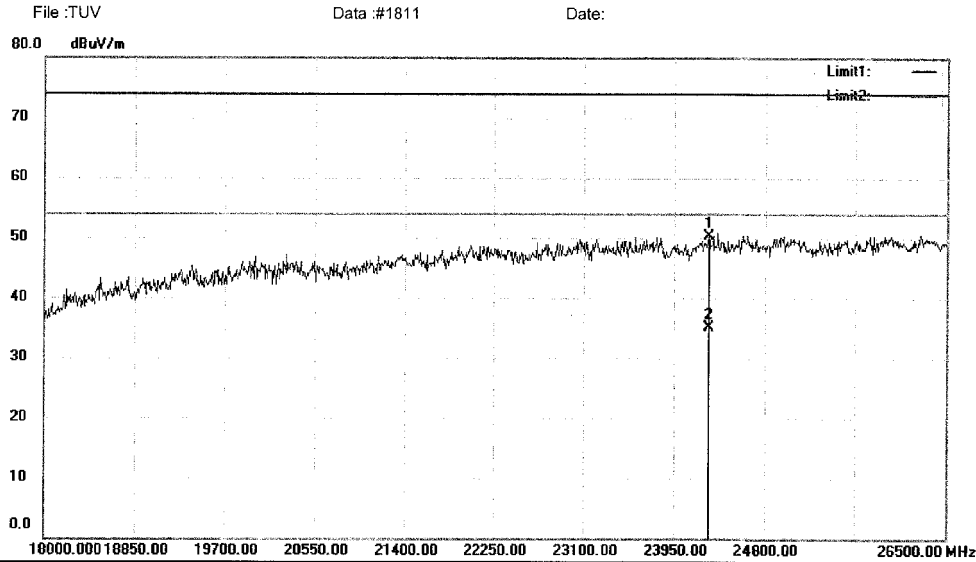
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24281.50	87.43	-37.10	50.33	74.00	-23.67	peak	0	
2	*	24281.50	72.30	-37.10	35.20	54.00	-18.80	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1811

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1812 Date:

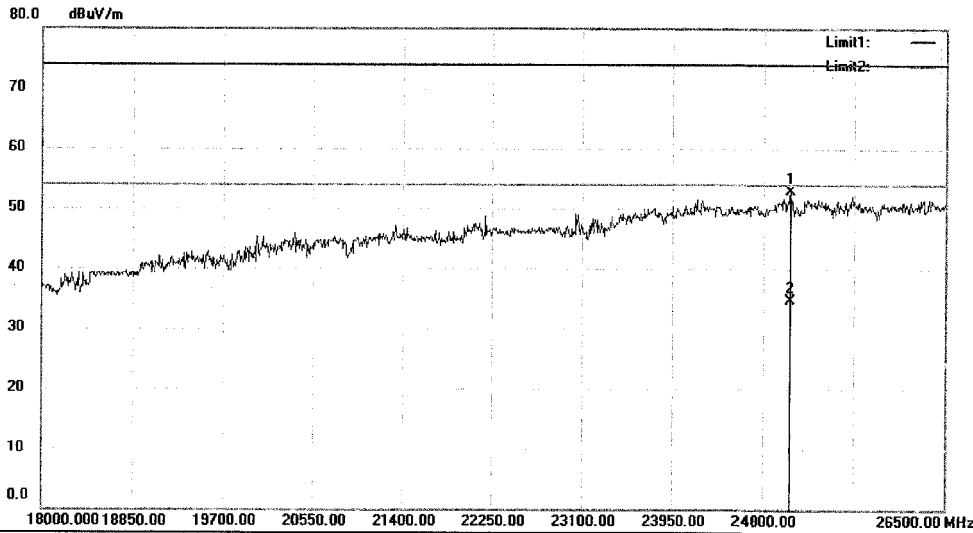

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		25055.00	89.83	-36.94	52.89	74.00	-21.11	peak	0	
2	*	25055.00	71.64	-36.94	34.70	54.00	-19.30	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1825 Date:

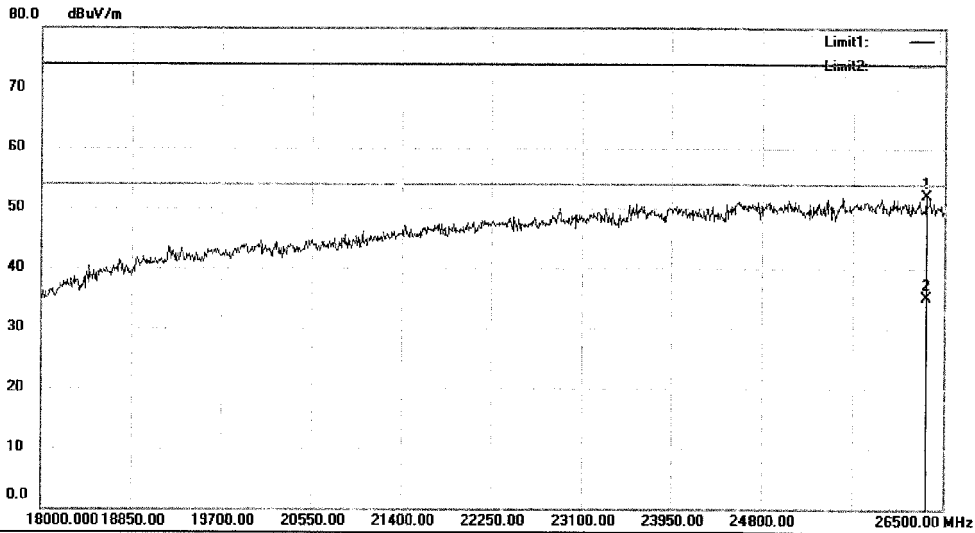


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		26330.00	87.54	-35.39	52.15	74.00	-21.85	peak		0	
2	*	26330.00	70.59	-35.39	35.20	54.00	-18.80	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

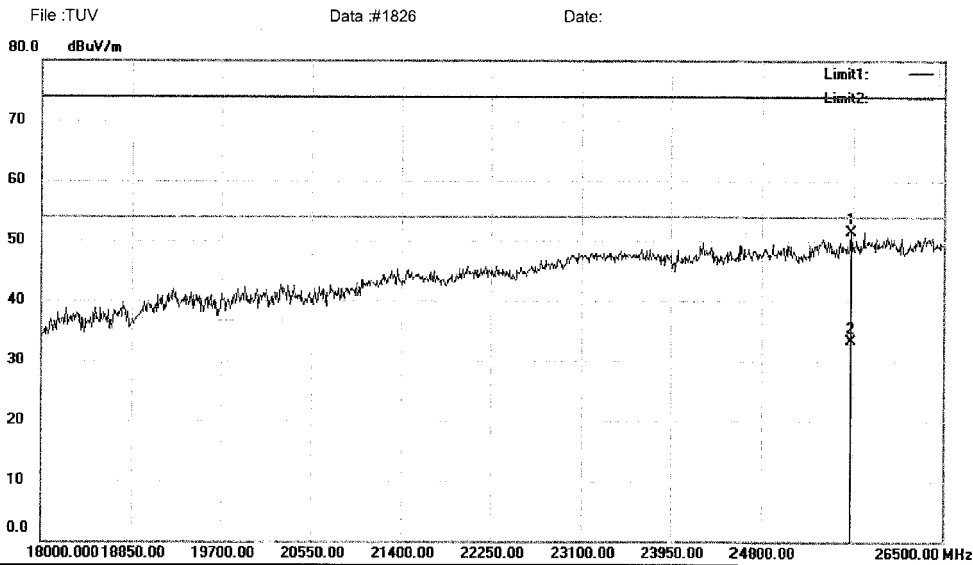
Radiated Emission Measurement


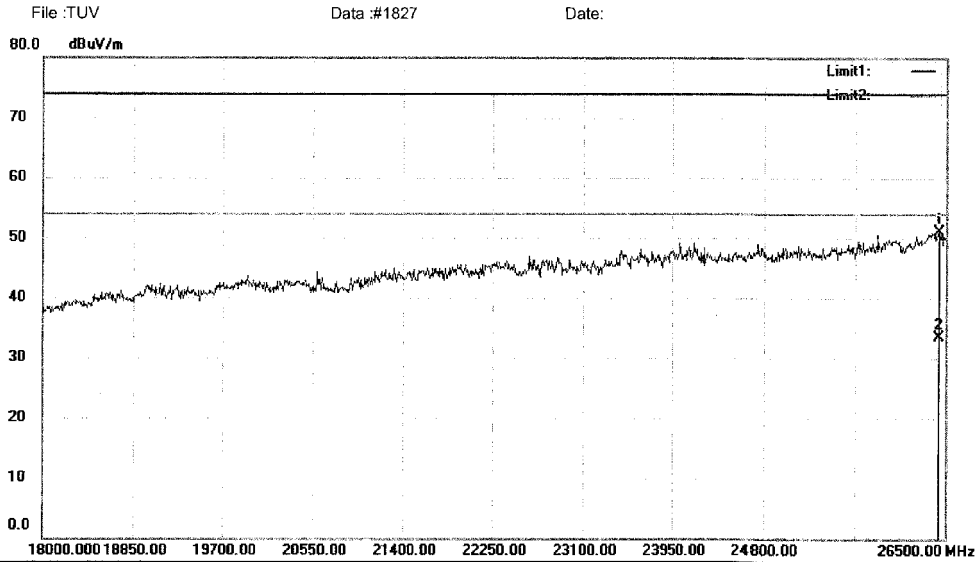
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25633.00	87.82	-36.24	51.58	74.00	-22.42	peak	0	
2	*	25633.00	69.64	-36.24	33.40	54.00	-20.60	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


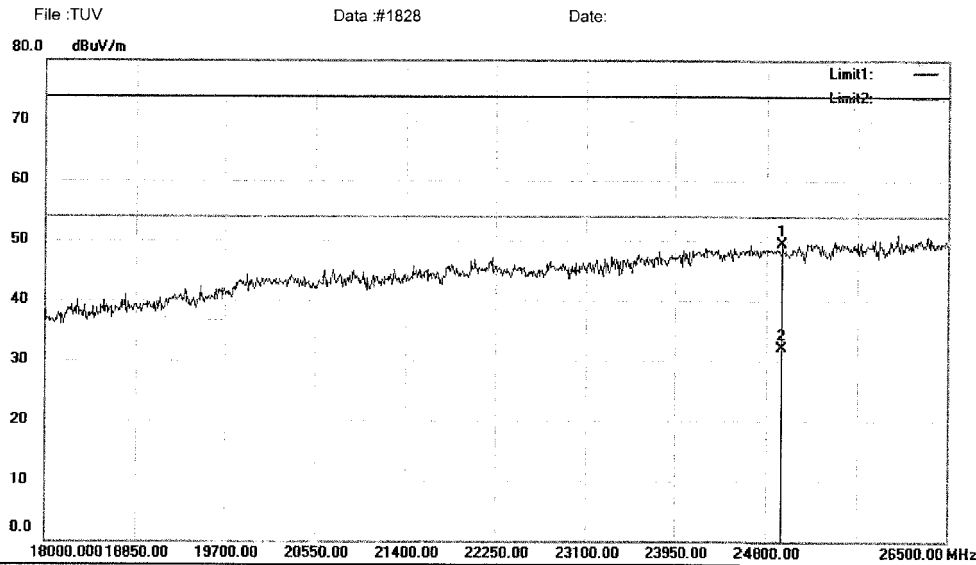
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		26432.00	86.27	-35.26	51.01	74.00	-22.99	peak	0	
2	*	26432.00	68.76	-35.26	33.50	54.00	-20.50	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


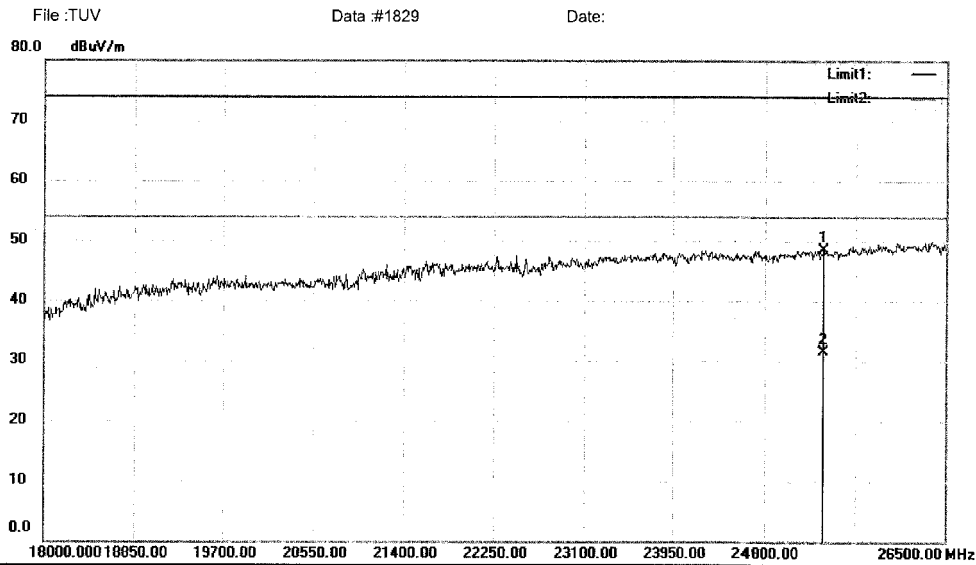
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24944.50	86.60	-37.02	49.58	74.00	-24.42	peak	0	
2	*	24944.50	69.12	-37.02	32.10	54.00	-21.90	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25352.50	84.99	-36.58	48.41	74.00	-25.59	peak		0
2	*	25352.50	68.18	-36.58	31.60	54.00	-22.40	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1830

Date:

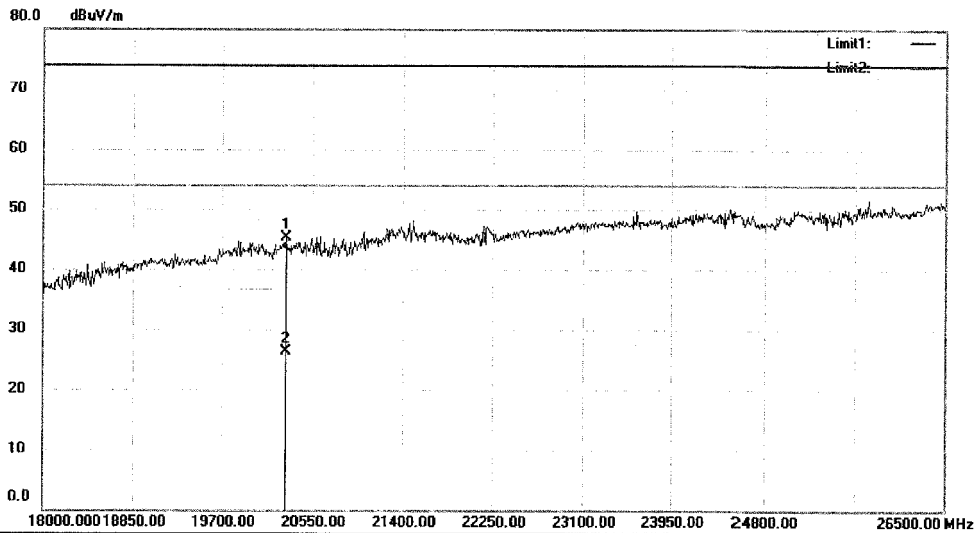

Site 3m Chamber #3

 Polarization: *Vertical*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		20303.50	85.73	-40.40	45.33	74.00	-28.67	peak	0	
2	*	20303.50	66.80	-40.40	26.40	54.00	-27.60	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #1830

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Najialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1831

Date:

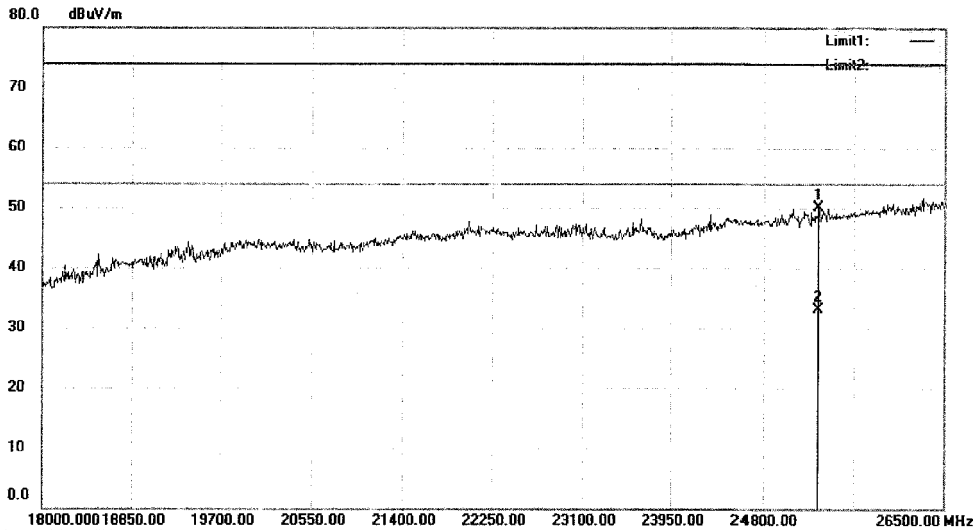

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25318.50	86.67	-36.62	50.05	74.00	-23.95	peak		0	
2	*	25318.50	69.72	-36.62	33.10	54.00	-20.90	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1831

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV Data #1832 Date:

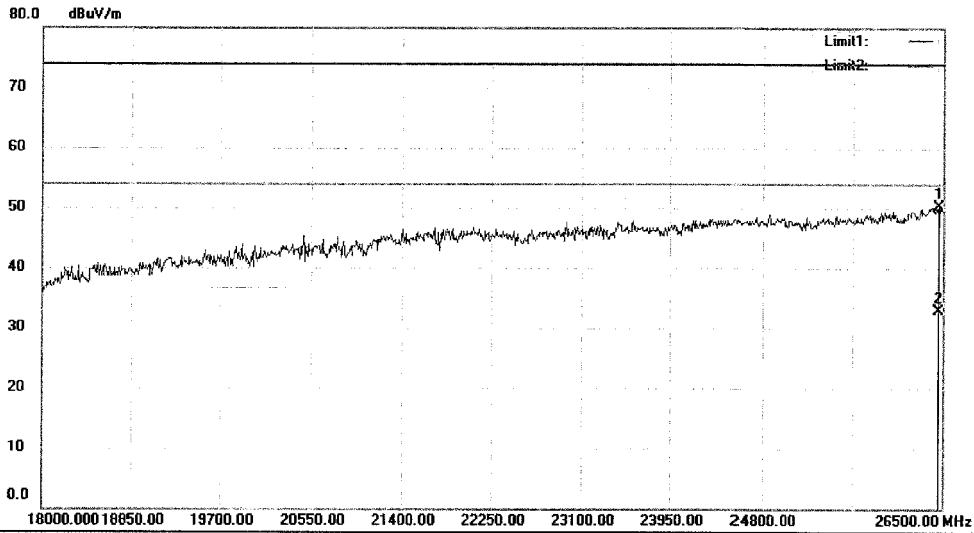

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		26457.50	85.49	-35.23	50.26	74.00	-23.74	peak	0
2	*	26457.50	68.23	-35.23	33.00	54.00	-21.00	AVG	0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1832

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

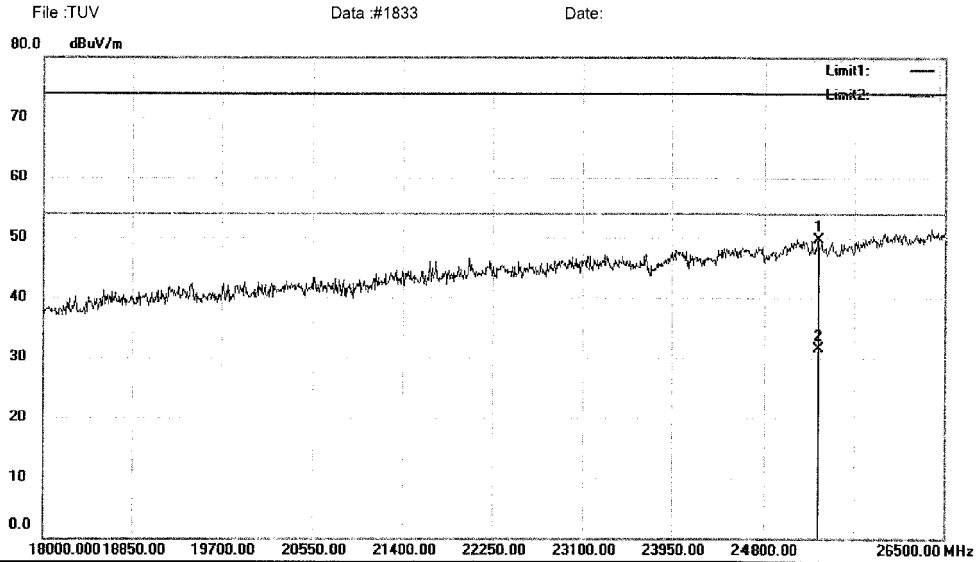
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25310.00	86.35	-36.63	49.72	74.00	-24.28	peak		0	
2	*	25310.00	68.23	-36.63	31.60	54.00	-22.40	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1834 Date:

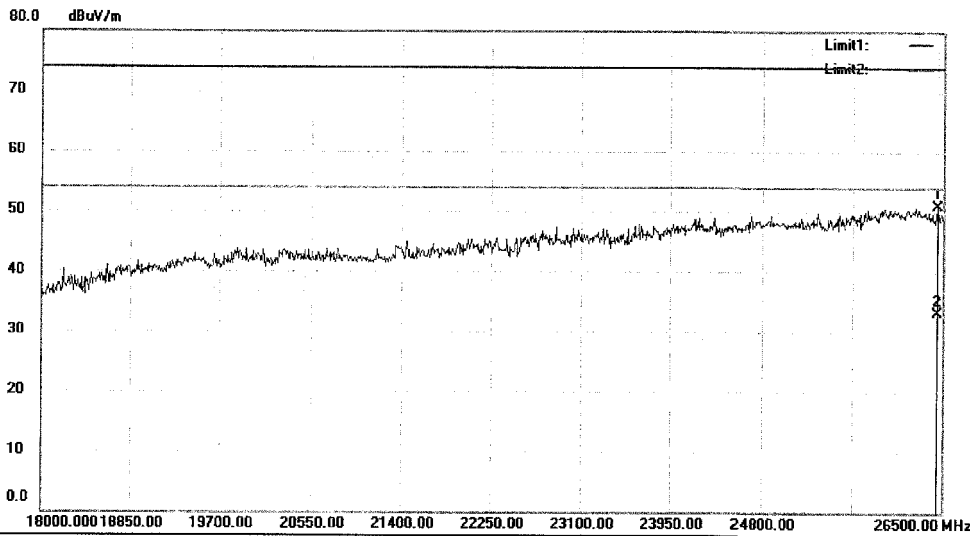


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		26449.00	86.06	-35.24	50.82	74.00	-23.18	peak		0	
2	*	26449.00	68.34	-35.24	33.10	54.00	-20.90	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

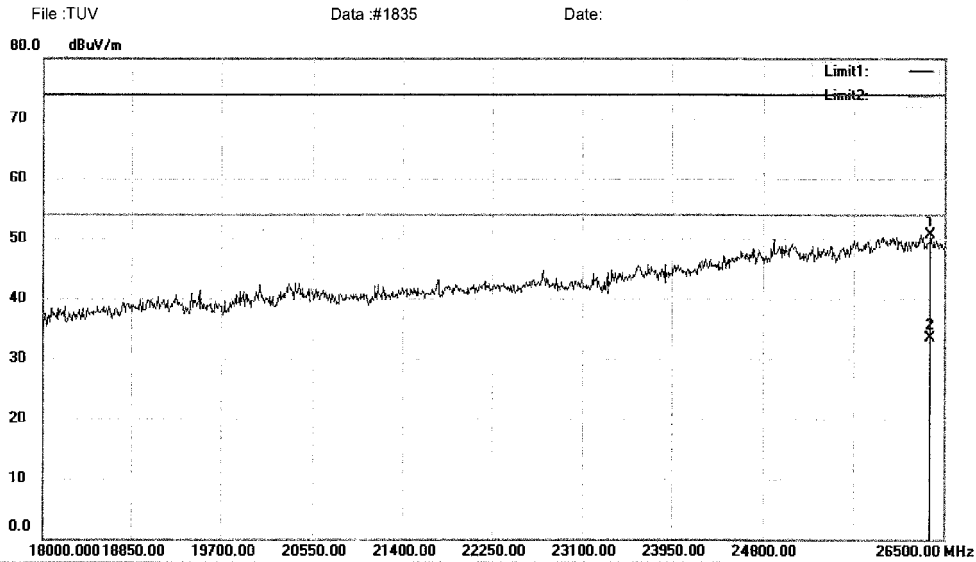
Radiated Emission Measurement


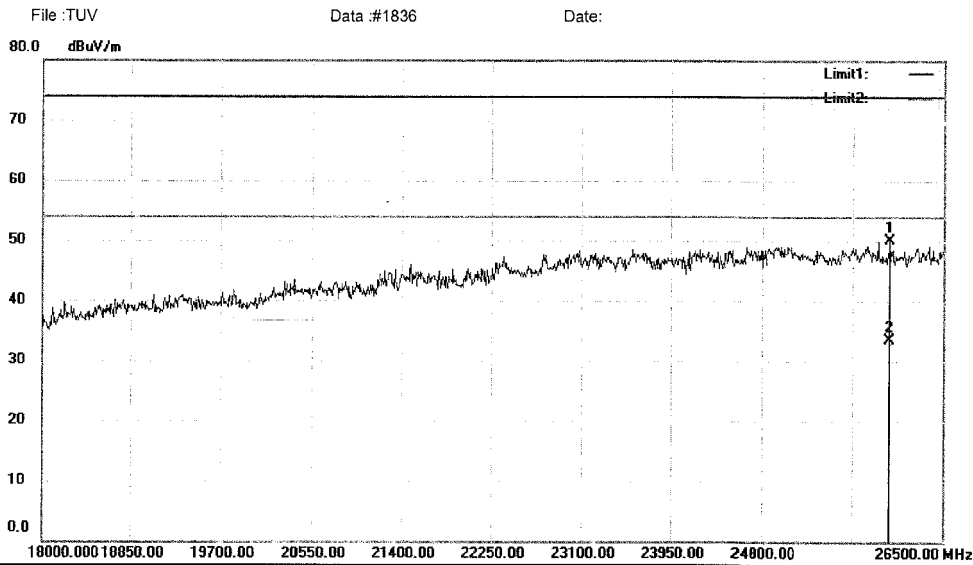
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		26372.50	86.12	-35.34	50.78	74.00	-23.22	peak	0	
2	*	26372.50	68.94	-35.34	33.60	54.00	-20.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		25998.50	85.87	-35.79	50.08	74.00	-23.92	peak	0	
2	*	25998.50	69.39	-35.79	33.60	54.00	-20.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1854

Date:

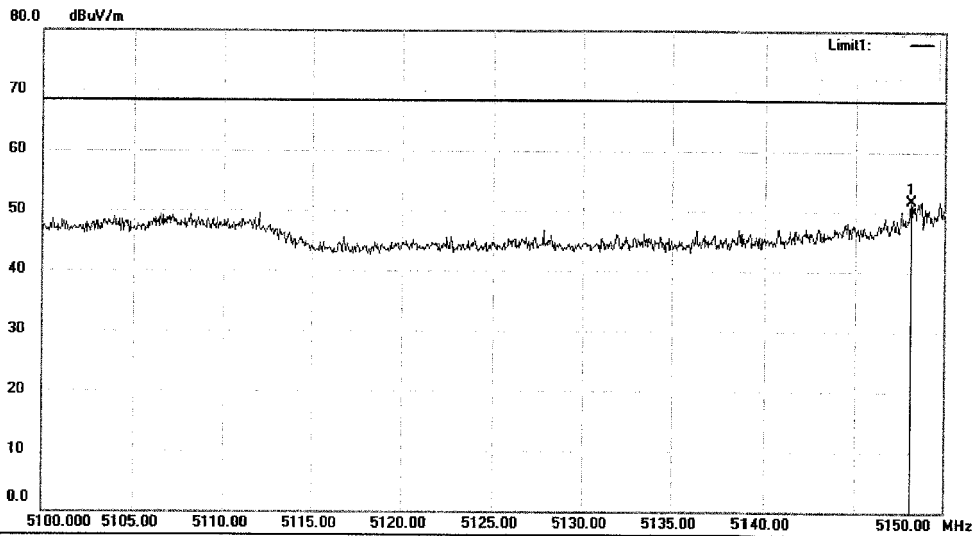

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5148.150	65.89	-14.11	51.78	68.20	-16.42 peak		0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1854

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

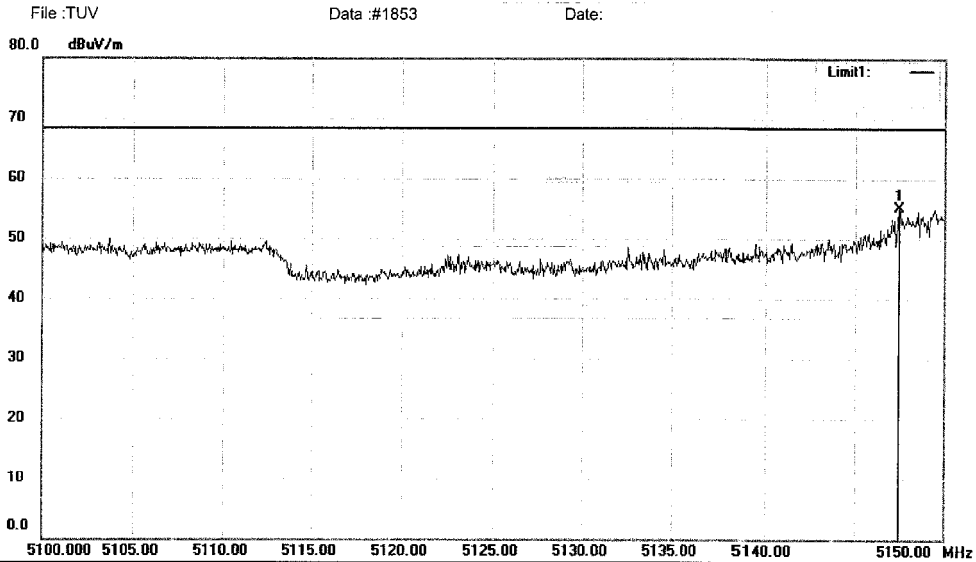
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5147.500	69.19	-14.11	55.08	68.20	-13.12	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUVData:#1853

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

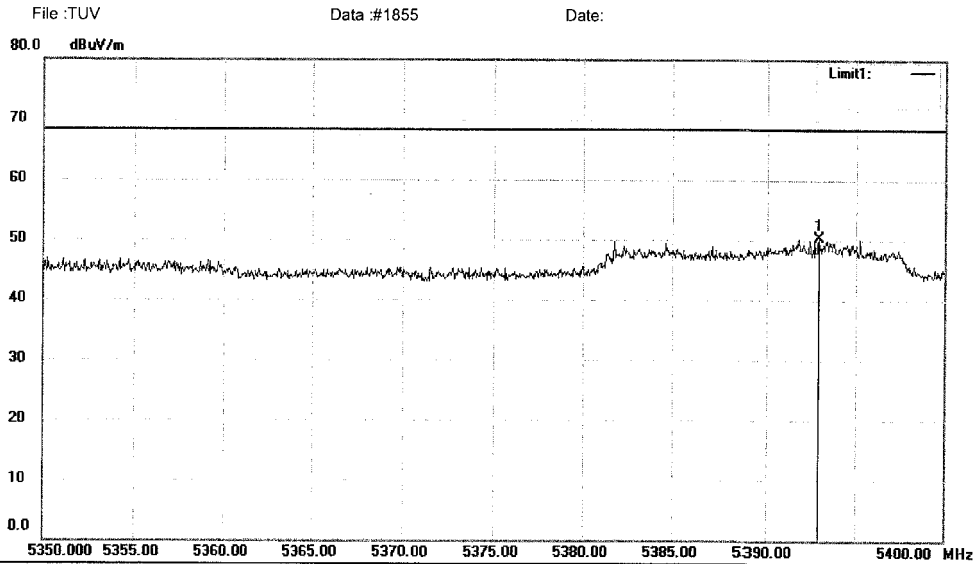
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5392.900	64.04	-13.68	50.36	68.20	-17.84	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1856

Date:

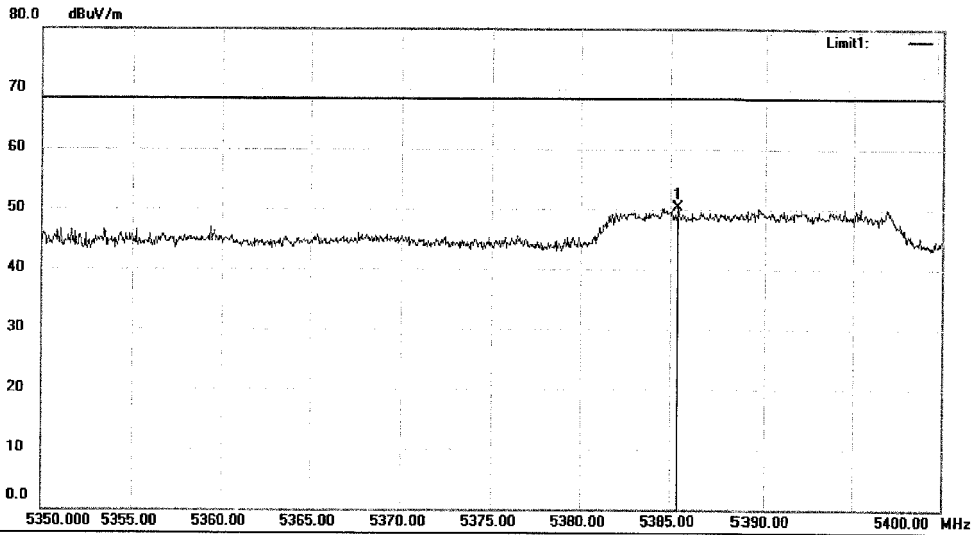

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5385.450	63.94	-13.68	50.26	68.20	-17.94	peak	0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1856

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1857

Date:

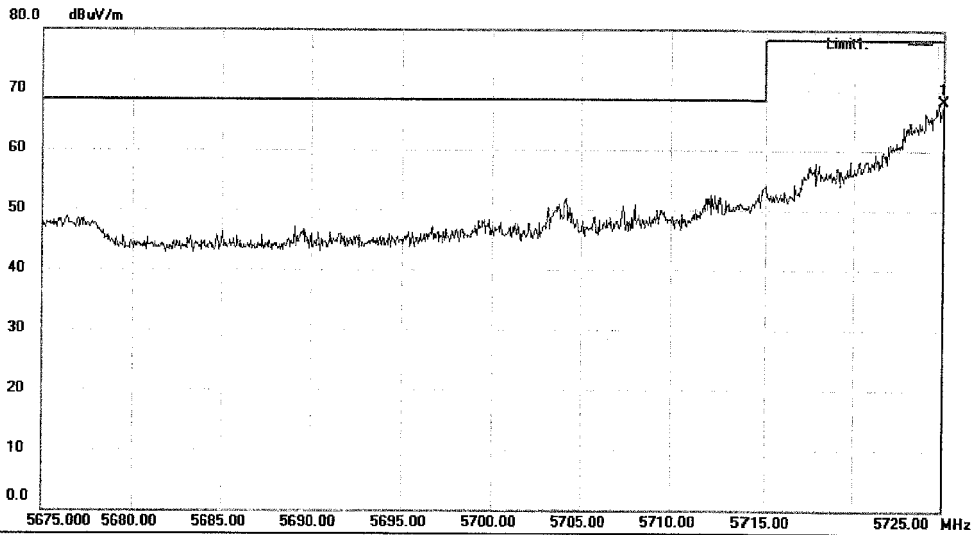

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.000	81.09	-13.06	68.03	78.20	-10.17	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1857

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1858

Date:

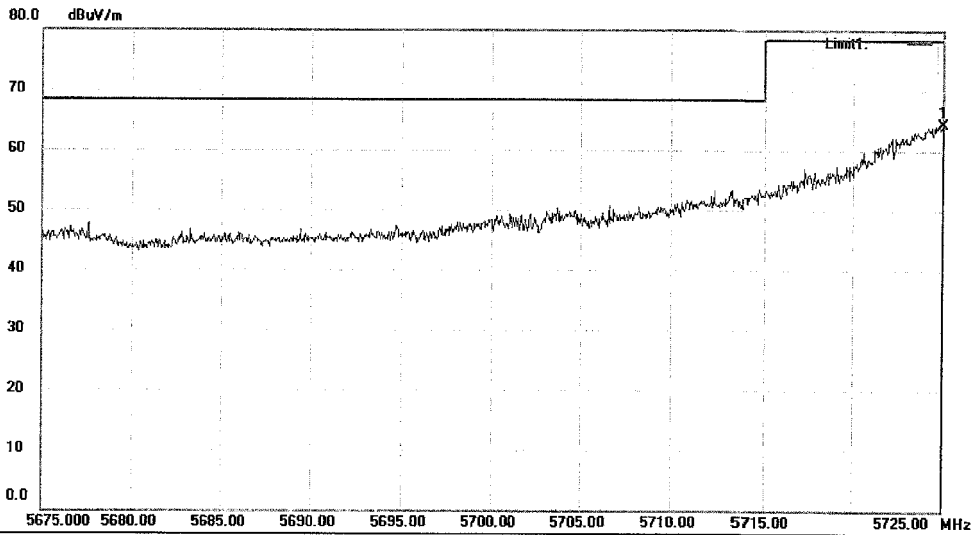

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5725.000	77.45	-13.06	64.39	78.20	-13.81	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1858

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282




Radiated Emission Measurement

File :TUV

Data #1859

Date:

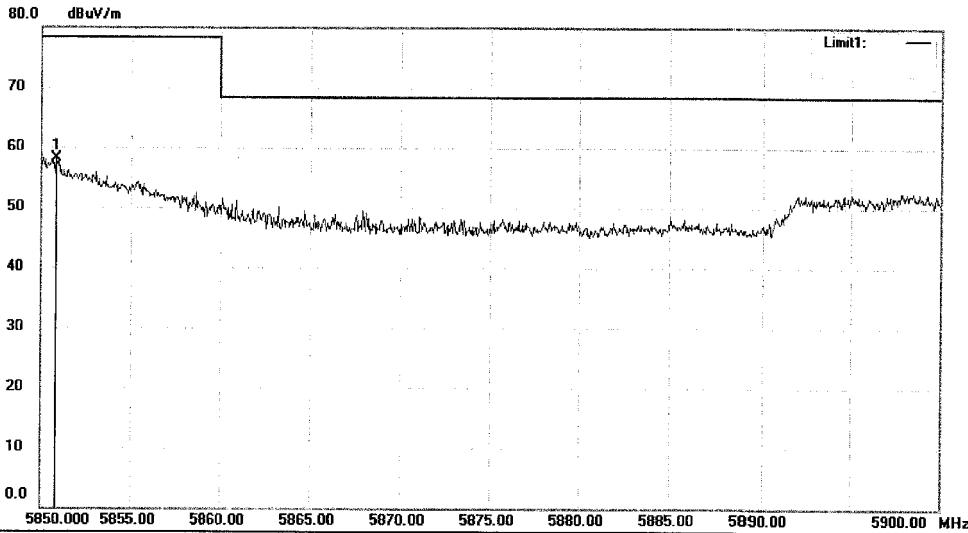

Site 3m Chamber #3

Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5850.800	70.89	-12.84	58.05	78.20	-20.15	peak	0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1859

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

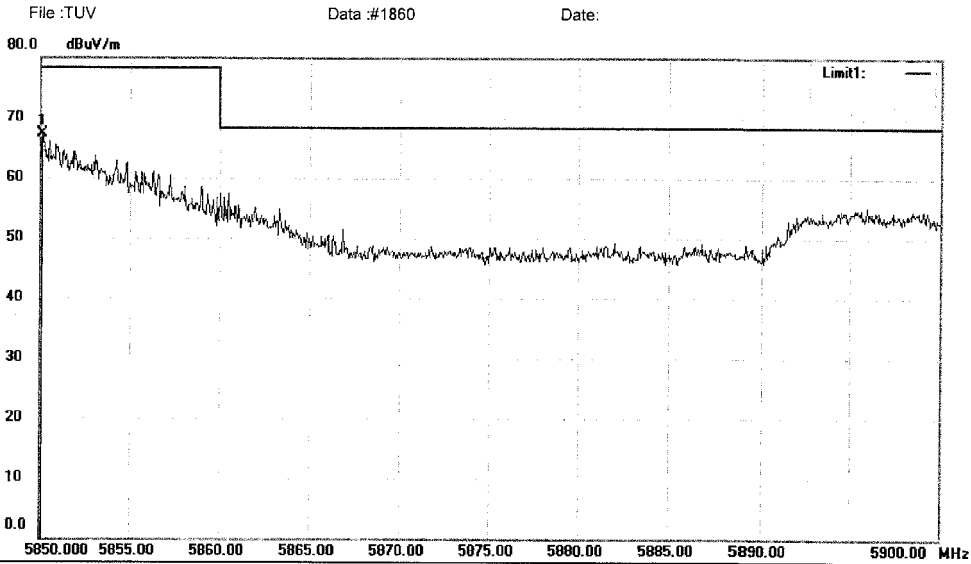
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5850.100	80.19	-12.84	67.35	78.20	-10.85	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1860

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1861

Date:

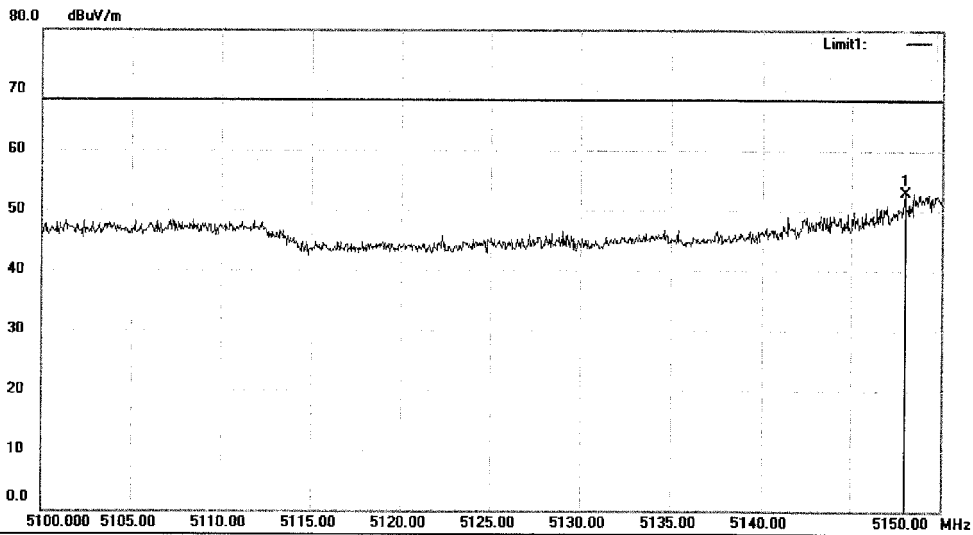

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIF(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5148.000	66.99	-14.11	52.88	68.20	-15.32	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1861

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1862

Date:

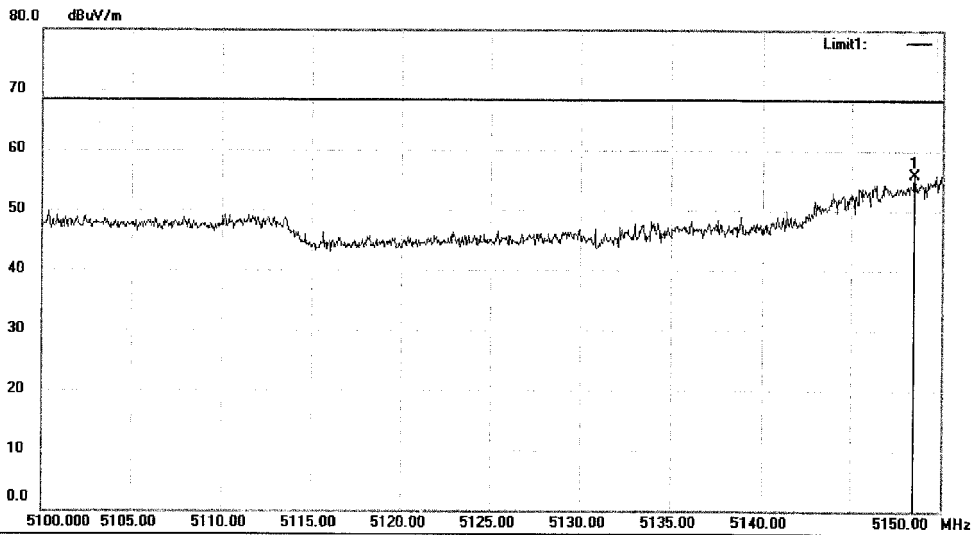

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5148.500	70.03	-14.11	55.92	68.20	-12.28	peak		0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1862

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1863 Date:

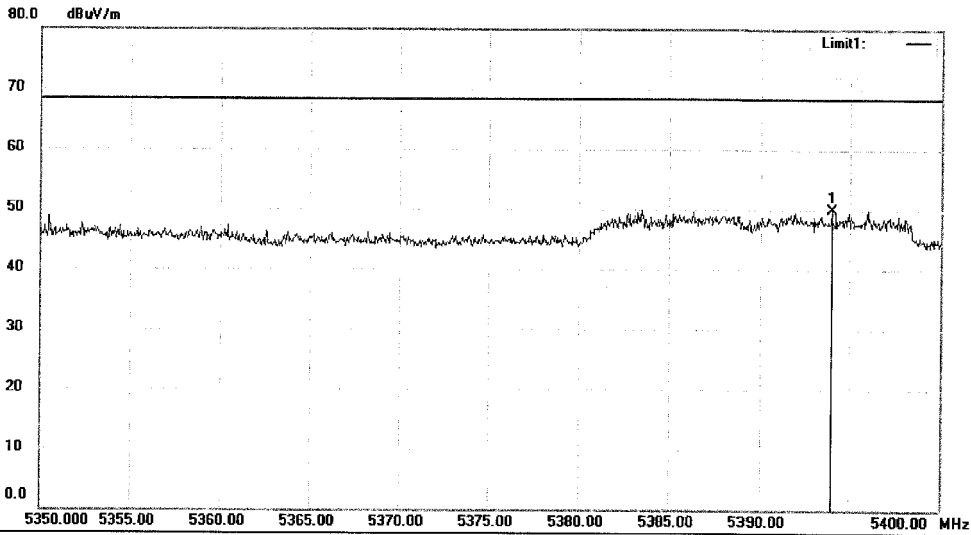

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5394.000	63.57	-13.66	49.91	68.20	-18.29	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1863

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1864

Date:

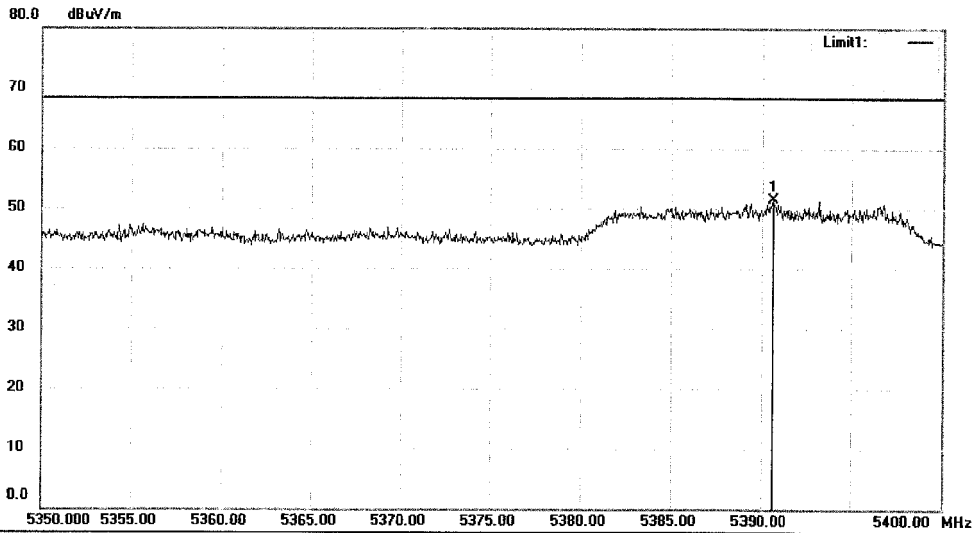

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5390.600	65.11	-13.68	51.43	68.20	-16.77	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1864

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

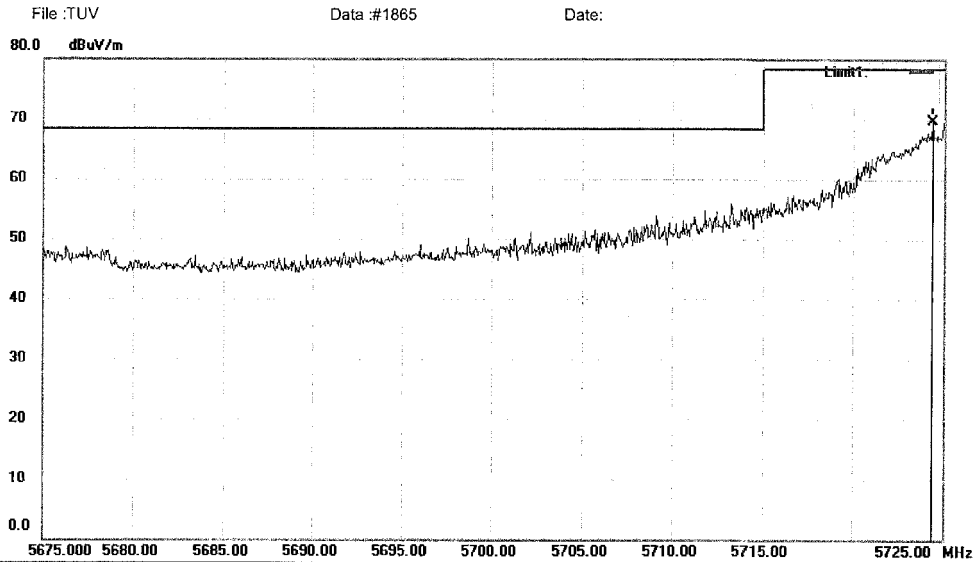Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5724.350	82.75	-13.06	69.69	78.20	-8.51	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1865

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1866

Date:

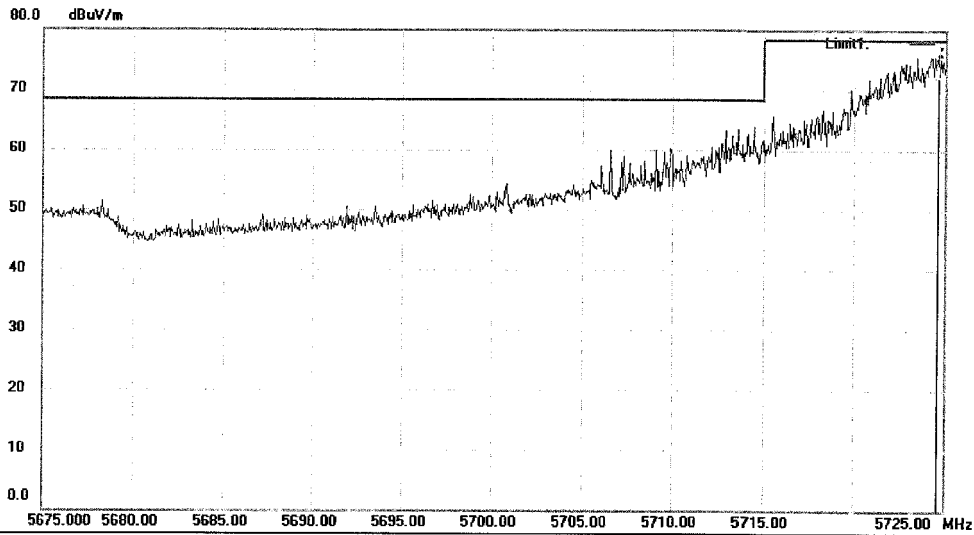

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5724.650	89.24	-13.06	76.18	78.20	-2.02	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1866

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

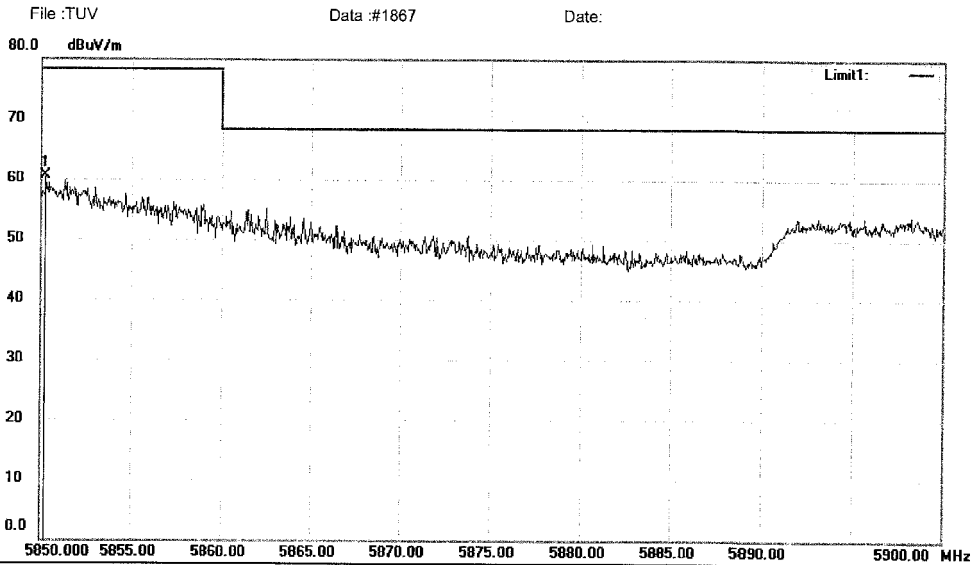
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1	*	5850.250	73.29	-12.84	60.45	78.20	-17.75	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1867

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1868

Date:

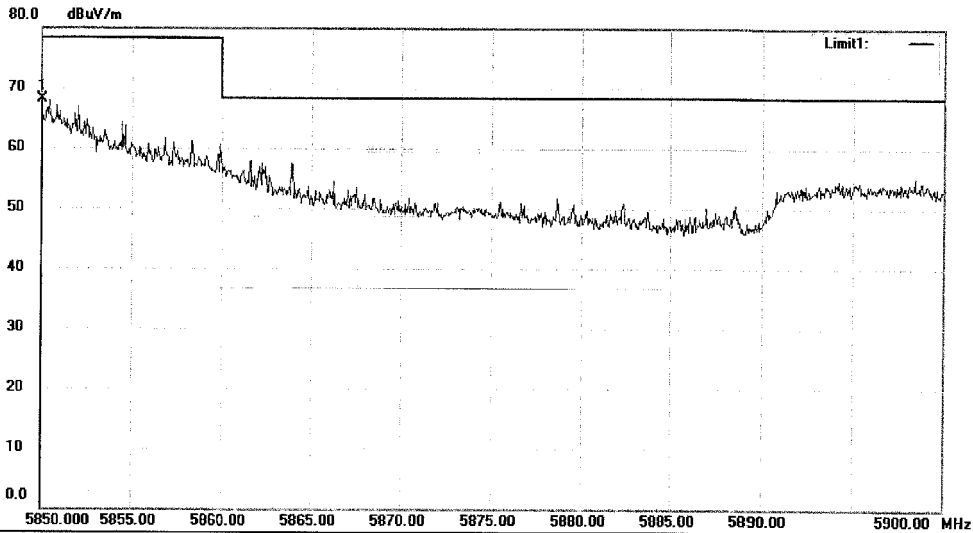

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5850.000	80.89	-12.84	68.05	78.20	-10.15	peak	0		


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1868

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

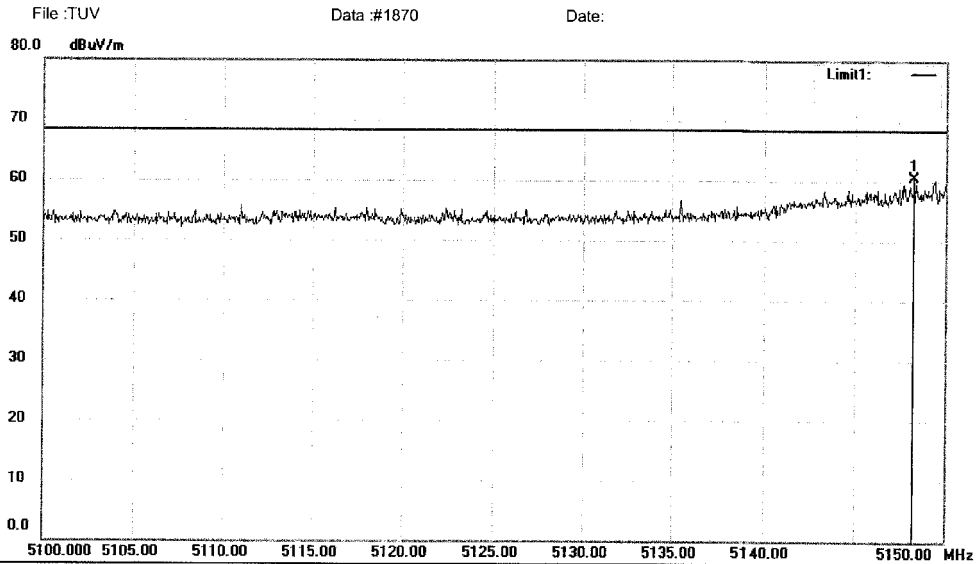Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5148.250	22.41	38.00	60.41	68.20	-7.79	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1870

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1869

Date:

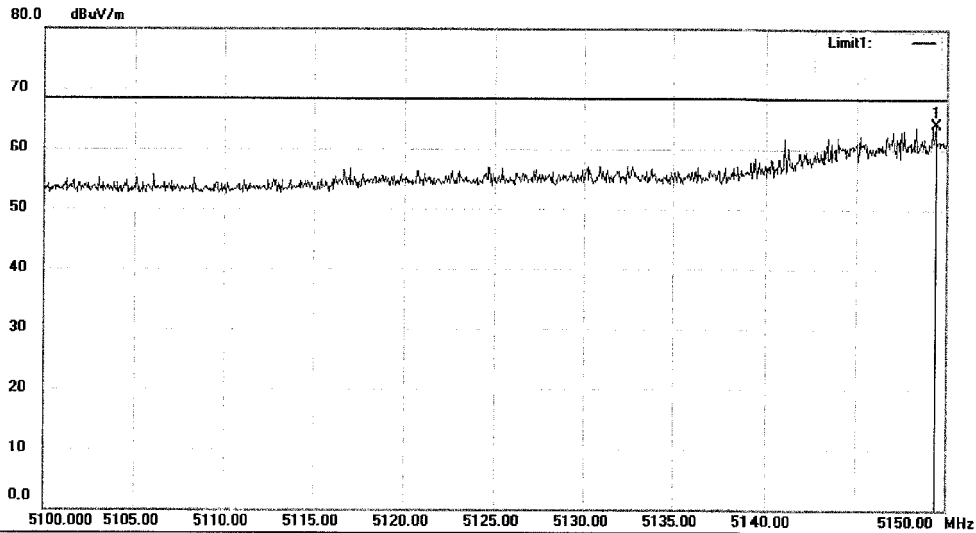

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5149.400	26.04	38.00	64.04	68.20	-4.16	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1869

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

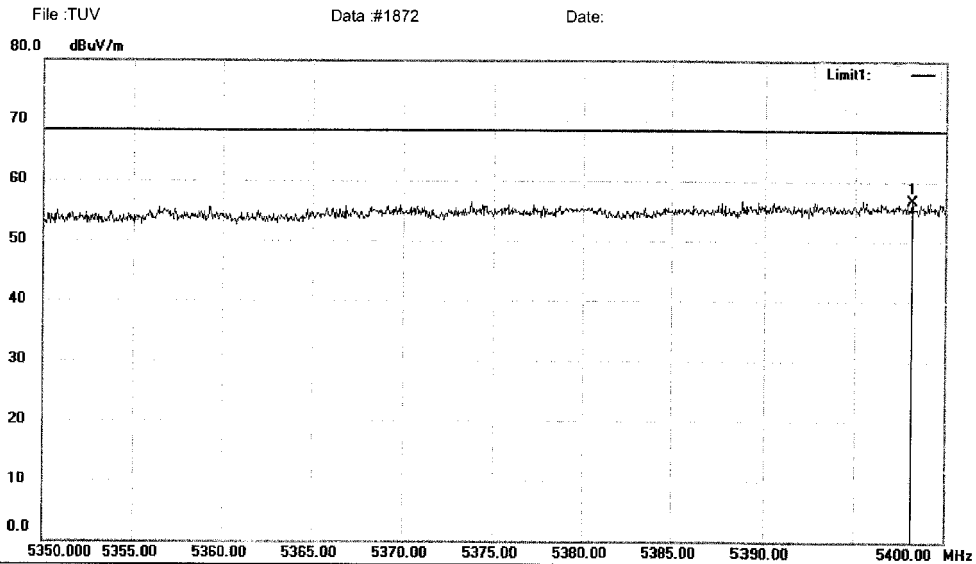
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5398.150	18.28	38.48	56.76	68.20	-11.44	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1872

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

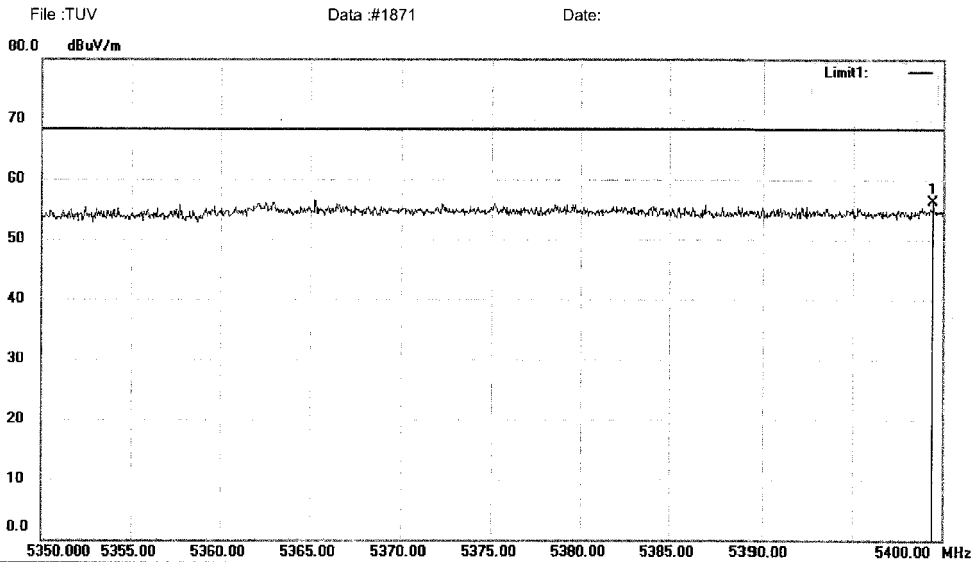
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5399.450	17.73	38.48	56.21	68.20	-11.99	peak		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1871

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1874

Date:

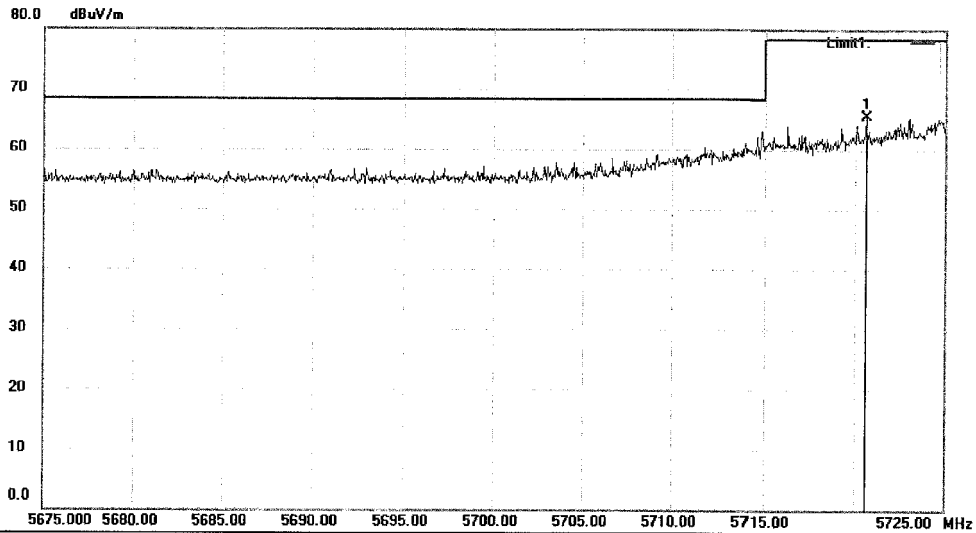

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5720.600	26.49	39.10	65.59	78.20	-12.61	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1874

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

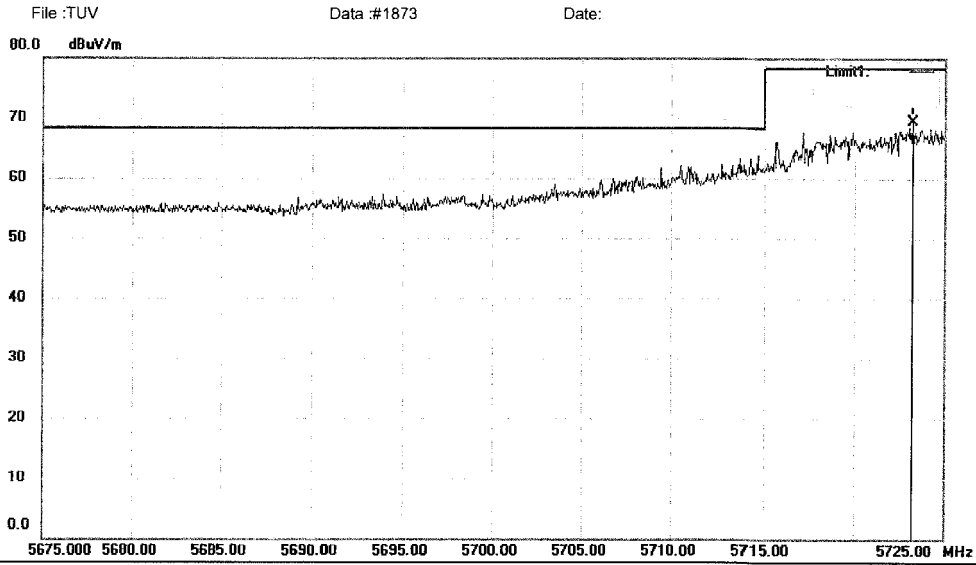
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	5723.200	30.37	39.11	69.48	78.20	-8.72	peak		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Radiated Emission Measurement

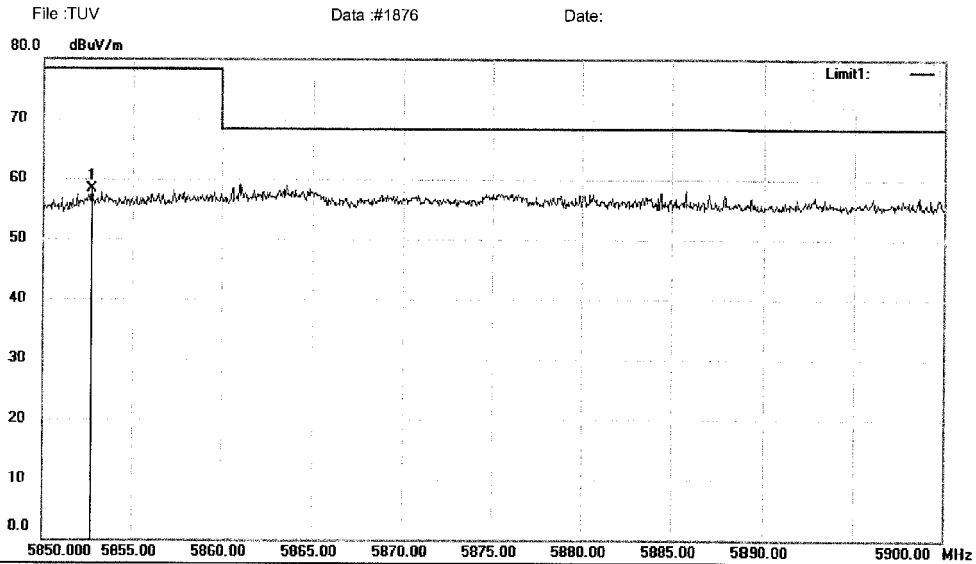

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: 13.3" Tablet
M/N: P-TA13-104-YIT-01
Mode:11n(40MHz) 5795
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5852.700	18.86	39.35	58.21	78.20	-19.99	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1875

Date:

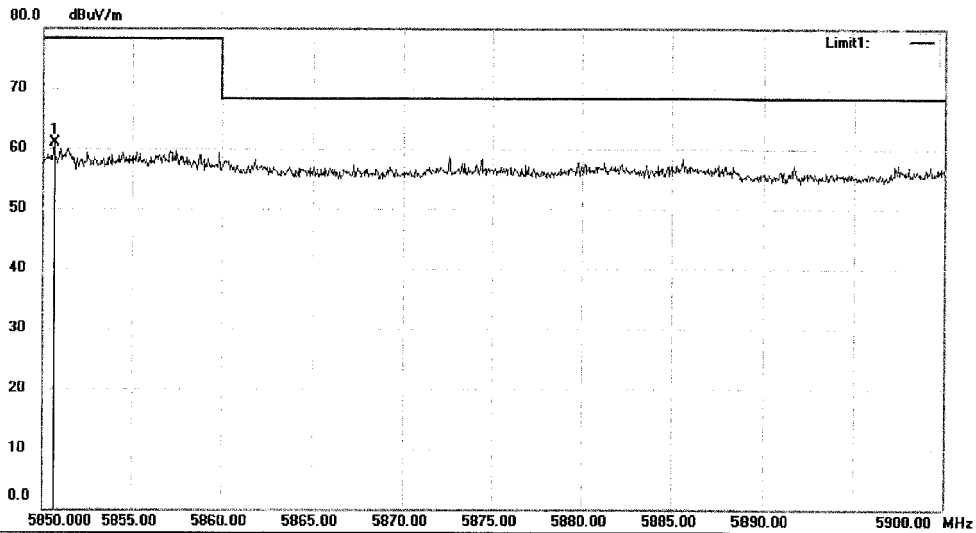

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5850.600	21.53	39.35	60.88	78.20	-17.32	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1875

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1878

Date:

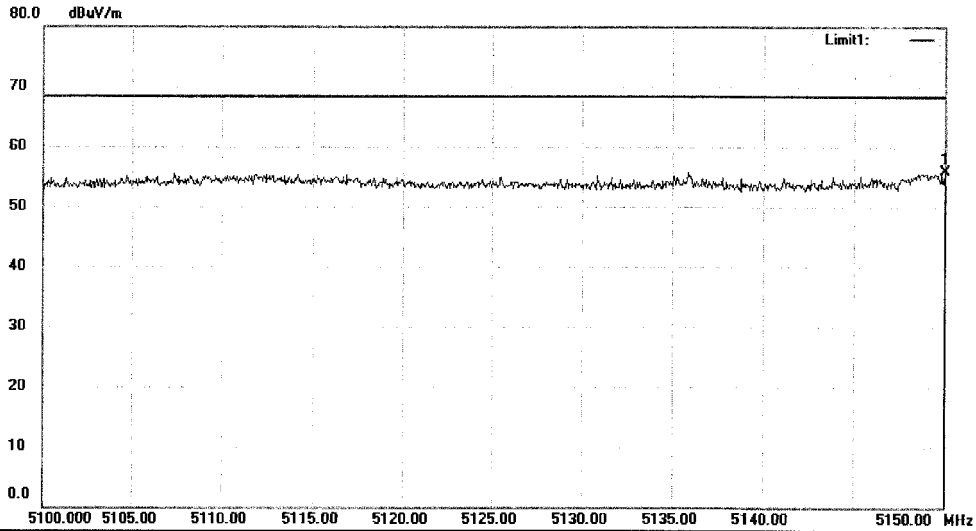

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5150.000	17.94	38.00	55.94	68.20	-12.26	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1878


Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV Data :#1877 Date:

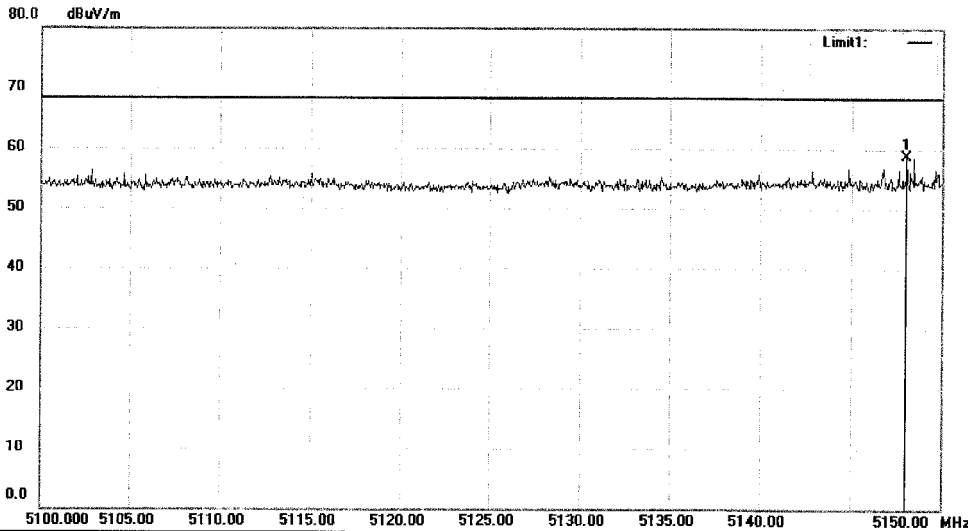

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
EUT: 13.3" Tablet
M/N: P-TA13-104-YIT-01
Mode:11ac(20MHz) 5180
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5148.050	20.69	38.00	58.69	68.20	-9.51	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1877

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1879

Date:

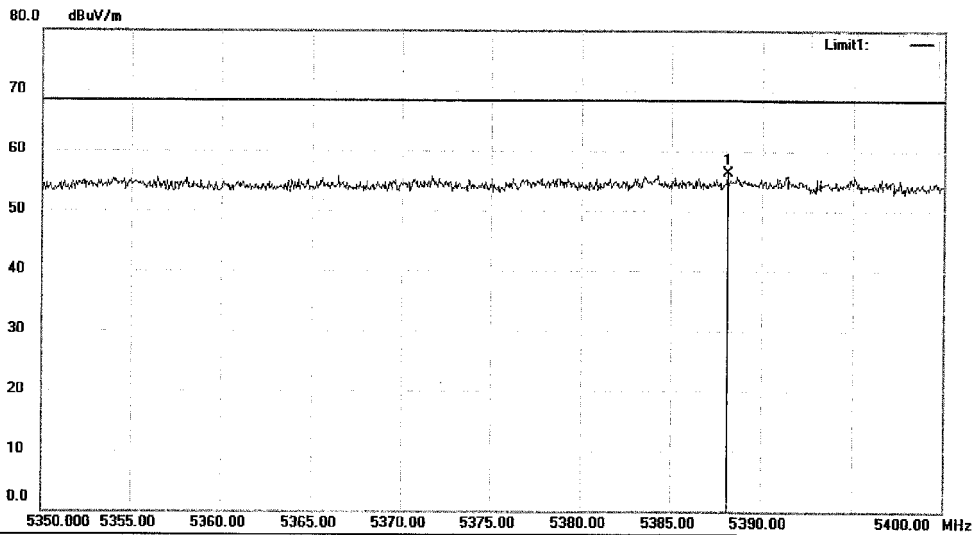

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5388.200	17.88	38.46	56.34	68.20	-11.86	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1879

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1880

Date:

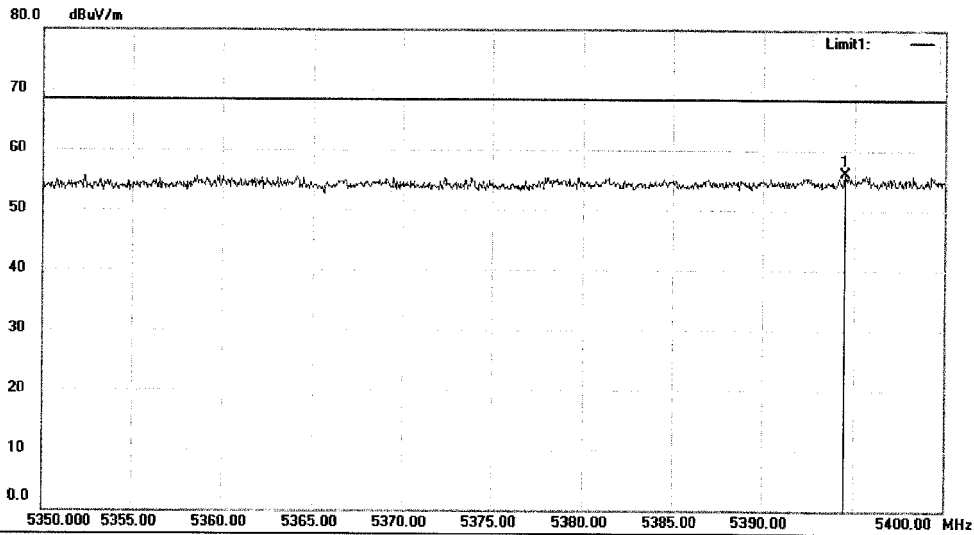

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5394.500	17.57	38.48	56.05	68.20	-12.15	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #:1880

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1881

Date:

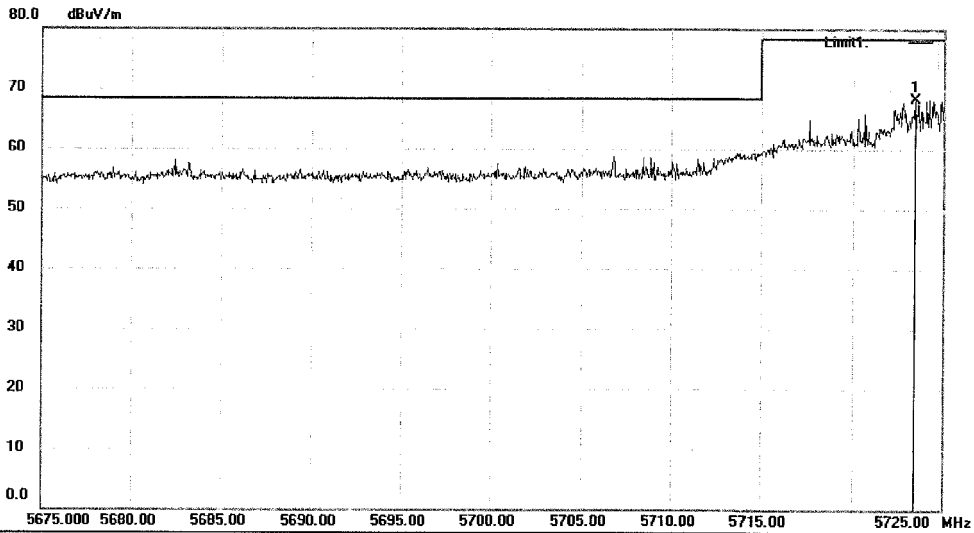

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5723.450	29.28	39.11	68.39	78.20	-9.81	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1881

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1882

Date:

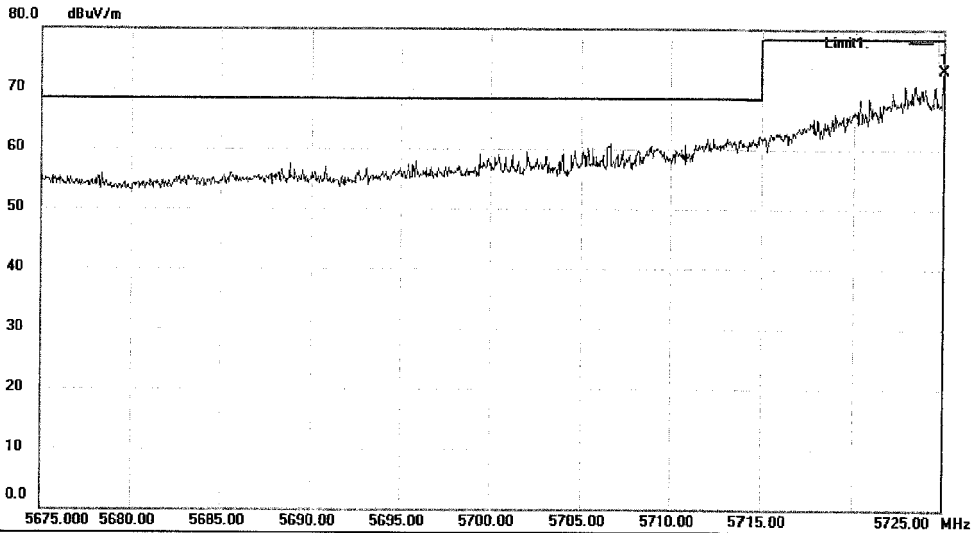

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5725.000	33.99	39.11	73.10	78.20	-5.10	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1882

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1883

Date:

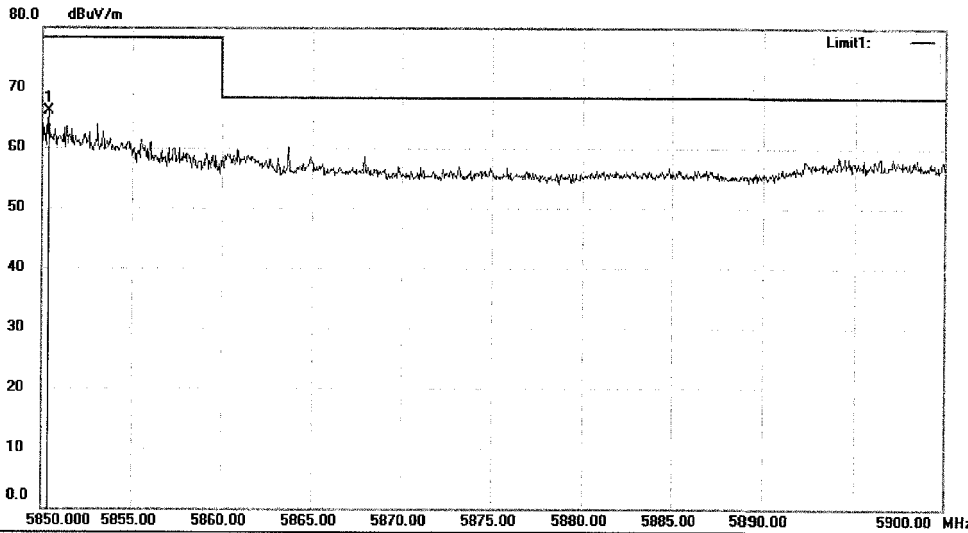

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5850.350	26.85	39.35	66.20	78.20	-12.00	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1883

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1884

Date:

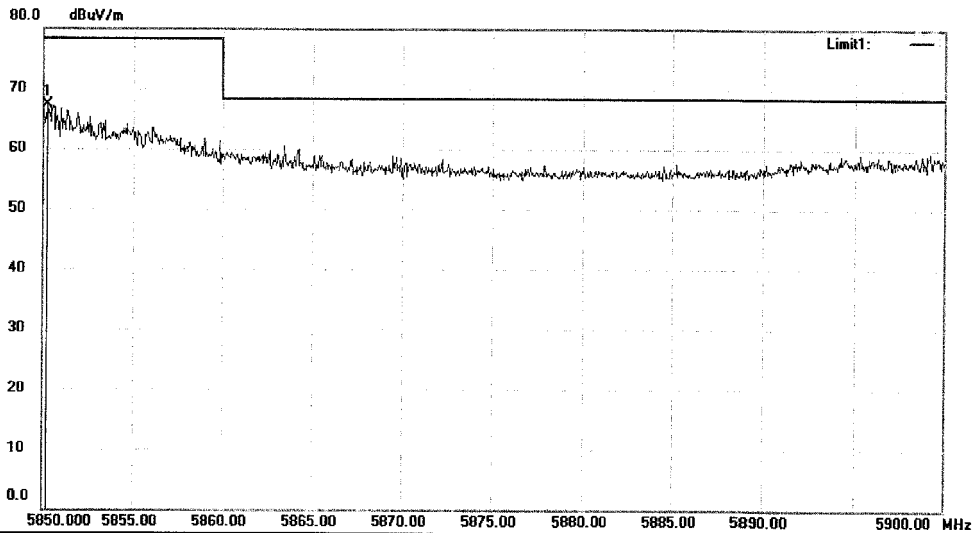

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5850.250	27.95	39.35	67.30	78.20	-10.90	peak	0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1884

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1885

Date:

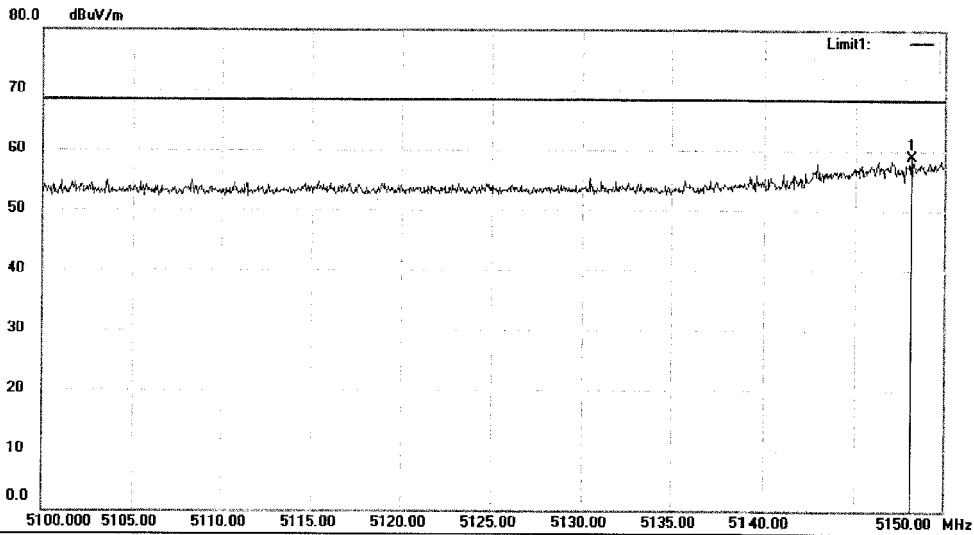

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIF(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5148.150	20.85	38.00	58.85	68.20	-9.35	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1885

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1886

Date:

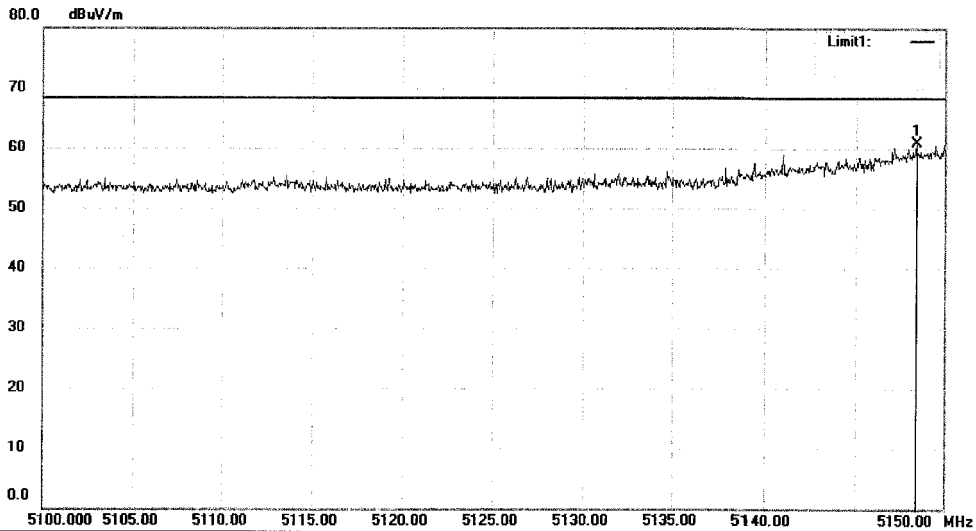

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5148.400	22.98	38.00	60.98	68.20	-7.22	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1886

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

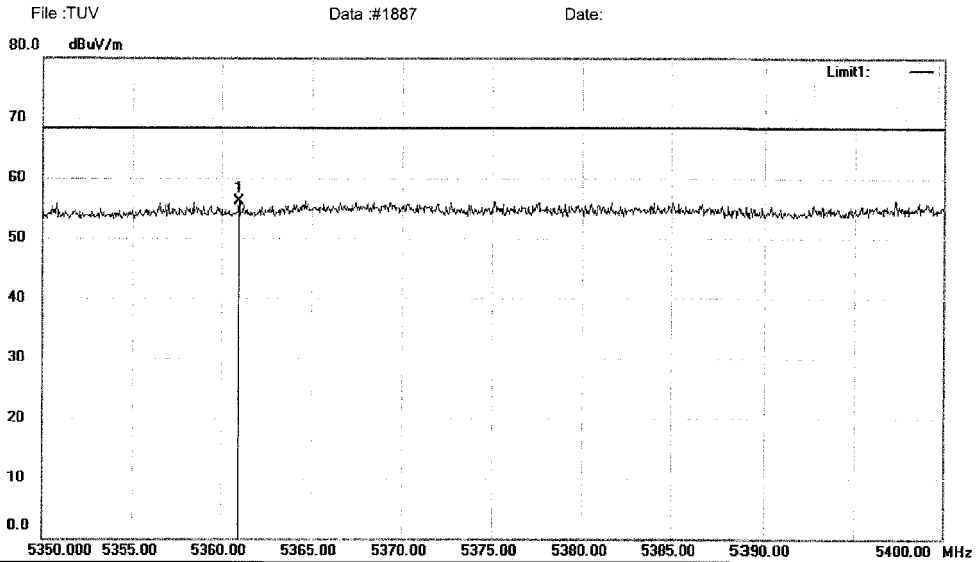
Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5360.950	17.79	38.41	56.20	68.20	-12.00	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1887

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

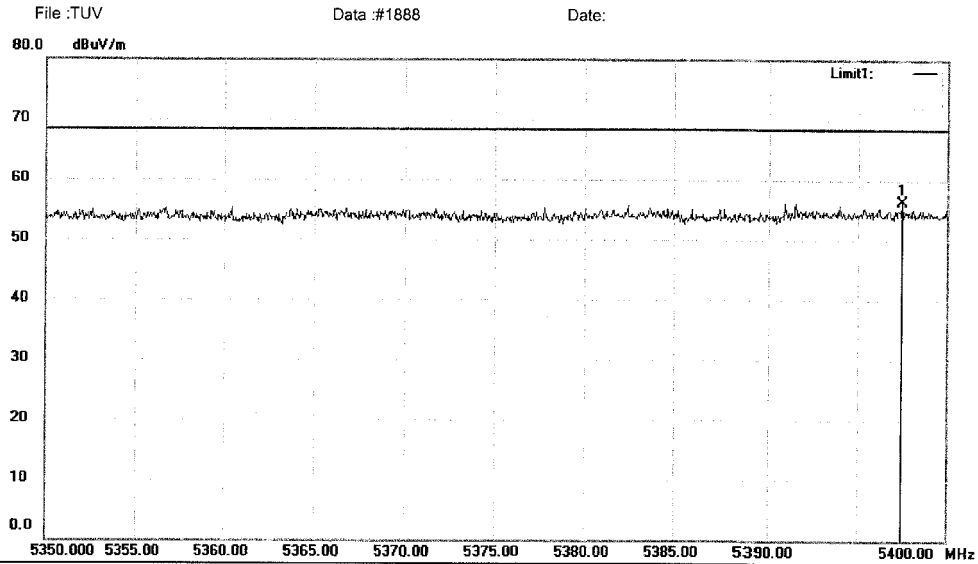
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5397.500	17.83	38.48	56.31	68.20	-11.89	peak	0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1888

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1889

Date:

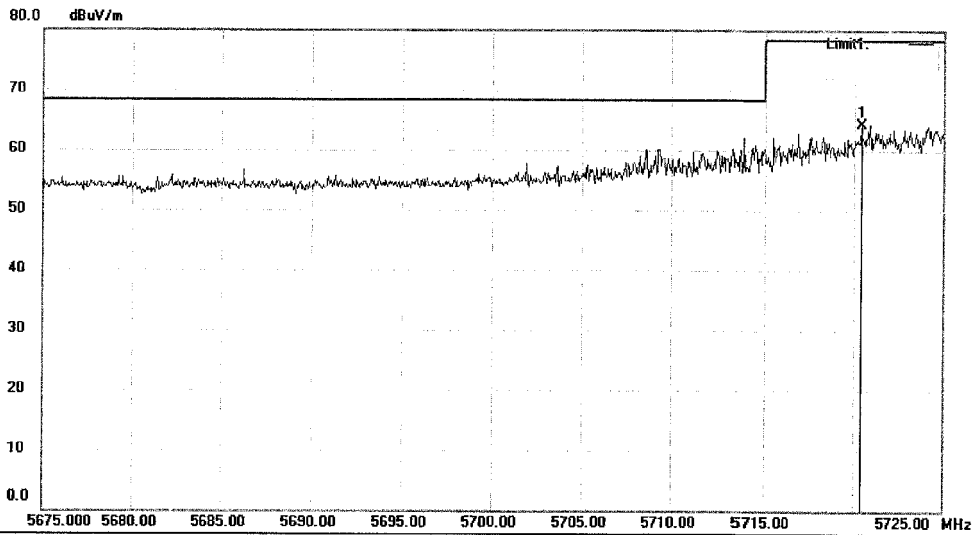

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5755

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5720.400	25.23	39.10	64.33	78.20	-13.87	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1889

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

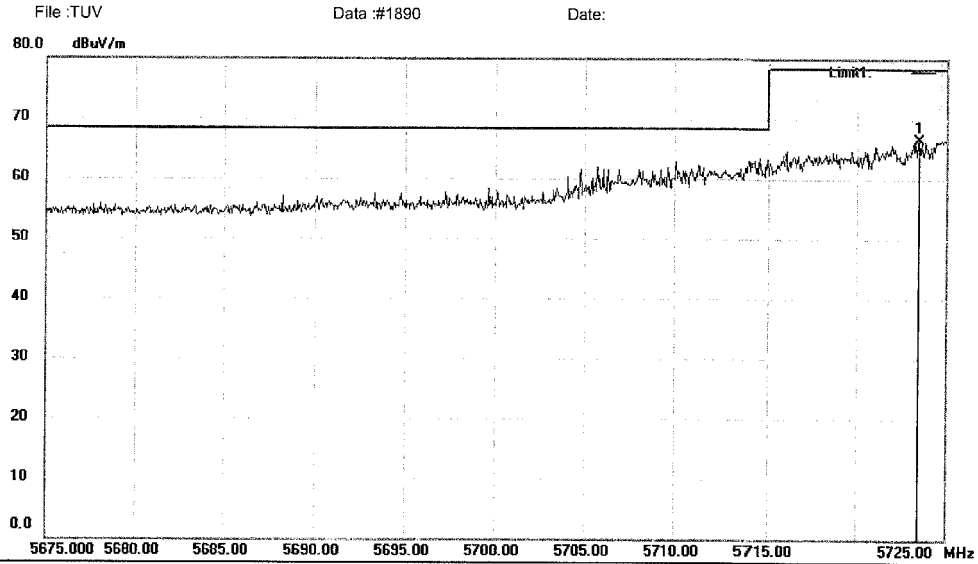
Radiated Emission Measurement


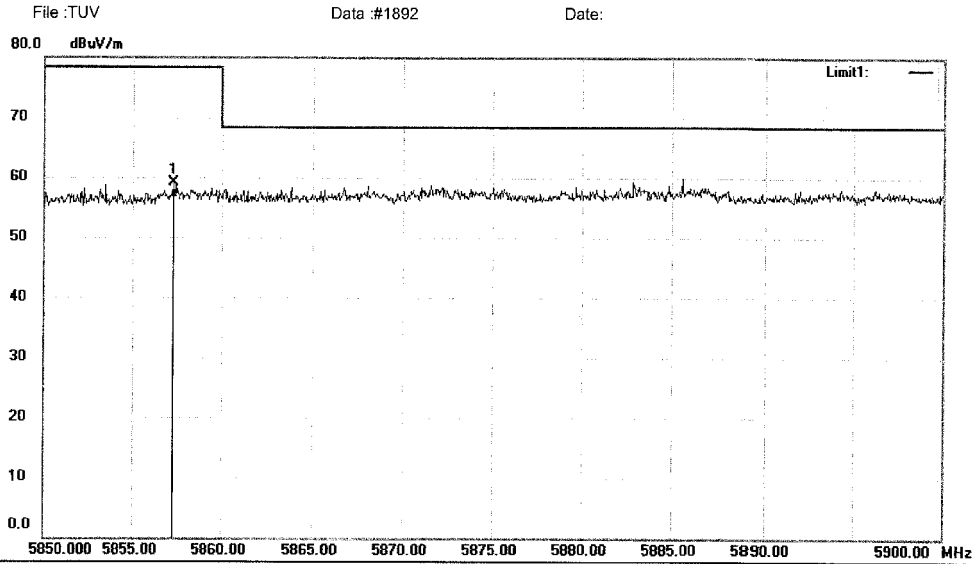
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5723.500	27.39	39.11	66.50	78.20	-11.70	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5857.300	19.70	39.37	59.07	78.20	-19.13	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #1892

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

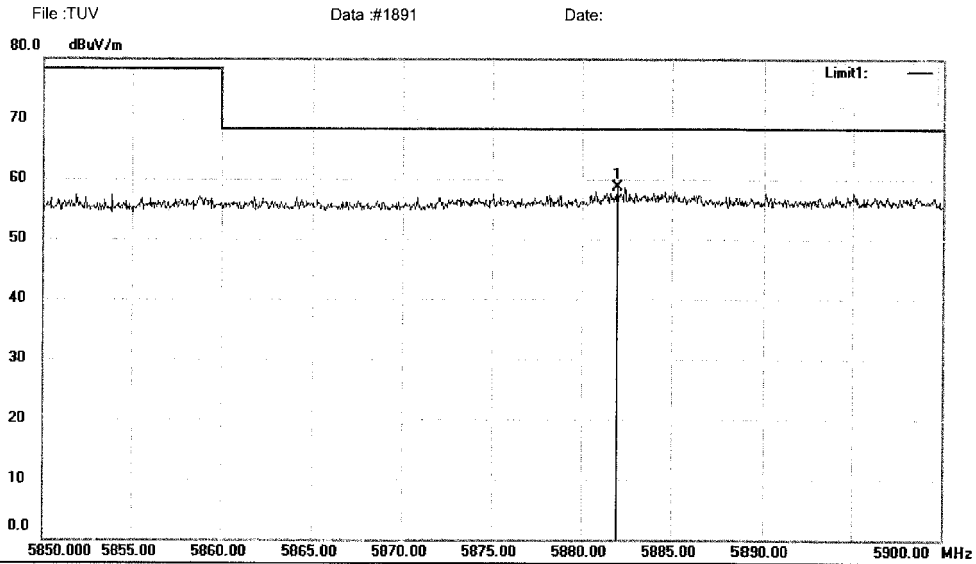
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5881.950	19.33	39.42	58.75	68.20	-9.45	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1891

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data #1893

Date:

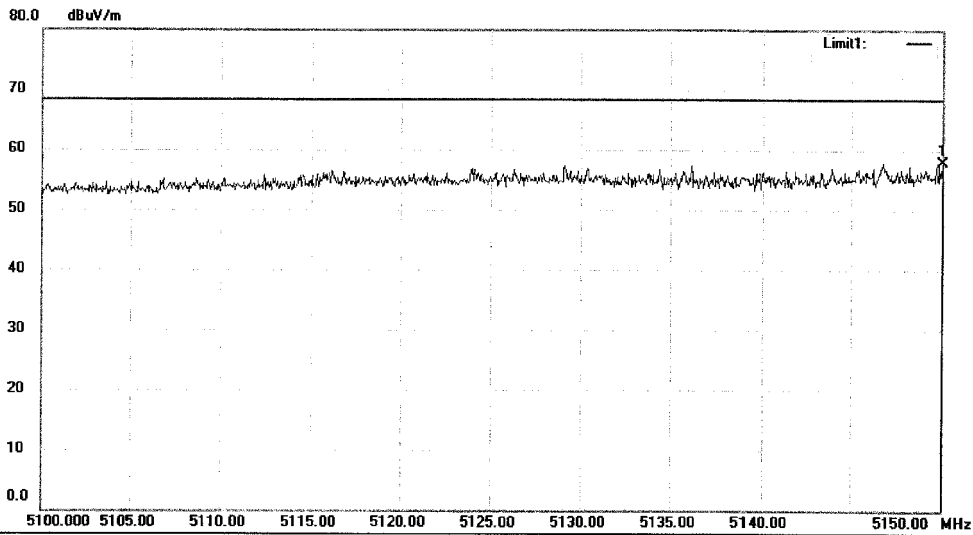

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(80MHz) 5210

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5150.000	19.98	38.00	57.98	68.20	-10.22	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData:#1893

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

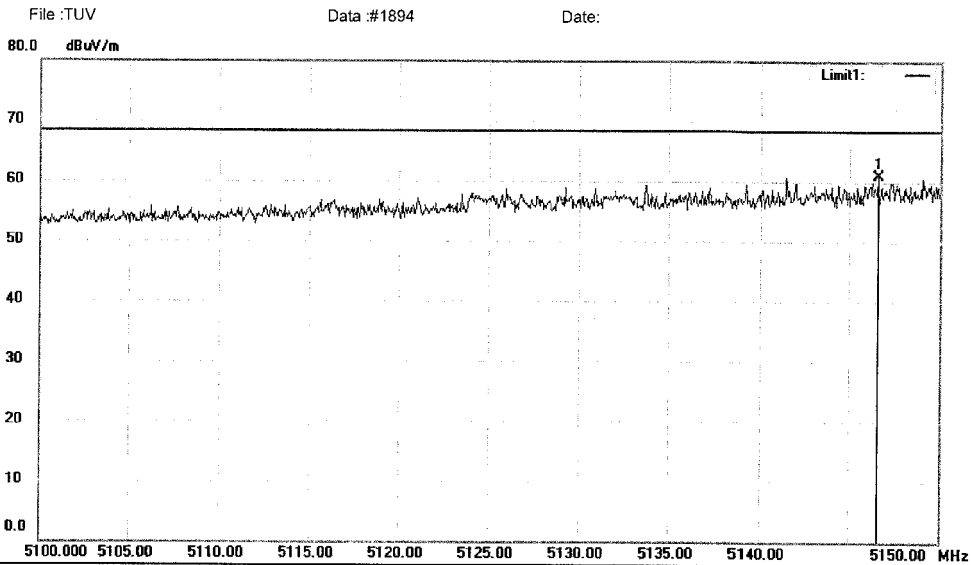
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5146.600	22.94	38.00	60.94	68.20	-7.26	peak	0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1894

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

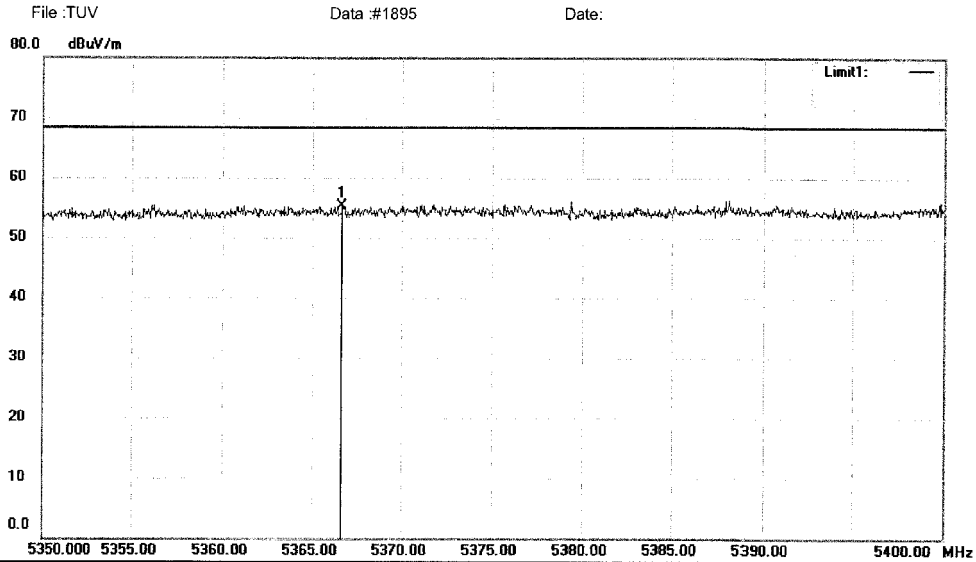
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree Comment
1 *	5366.650	16.99	38.41	55.40	68.20	-12.80	peak	0


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV\Data: #1895

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

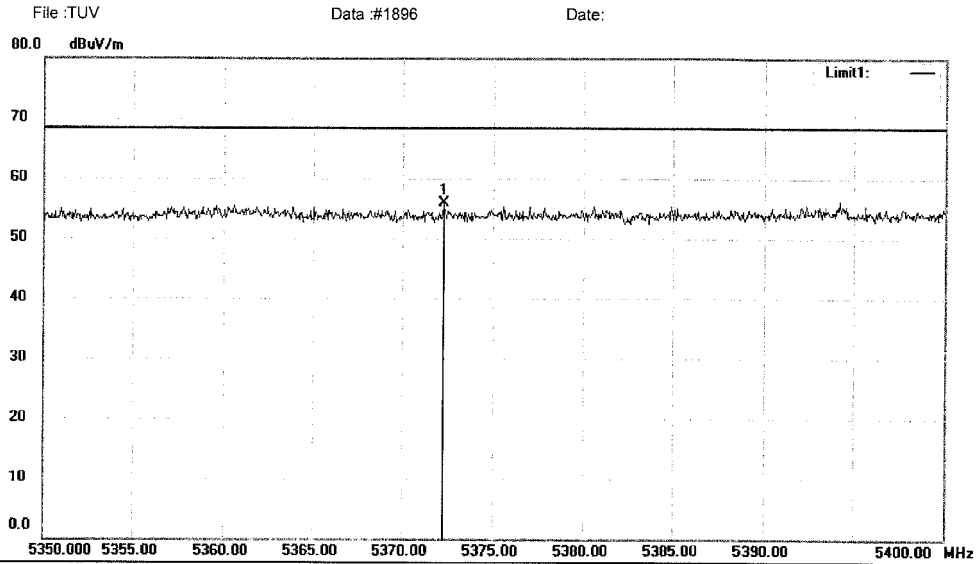
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5372.300	17.55	38.43	55.98	68.20	-12.22	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1896

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

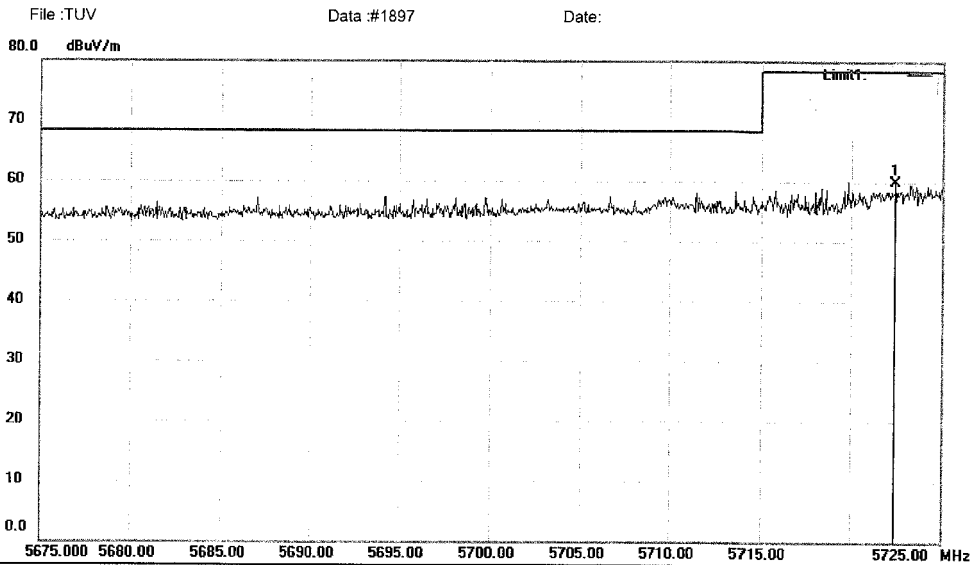
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	5722.450	20.77	39.11	59.88	78.20	-18.32	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1897

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV Data #1898 Date:

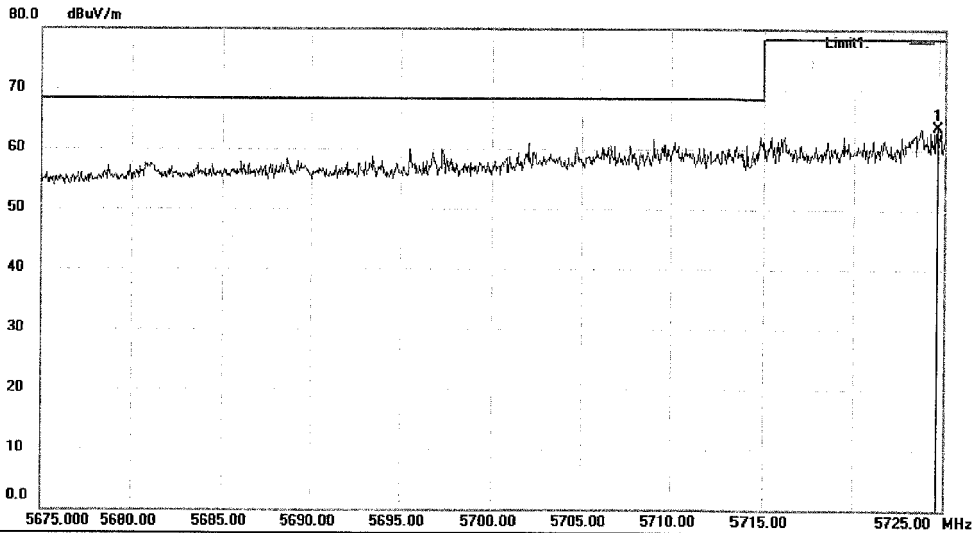

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5724.650	24.68	39.11	63.79	78.20	-14.41	peak	0

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1898

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1899

Date:

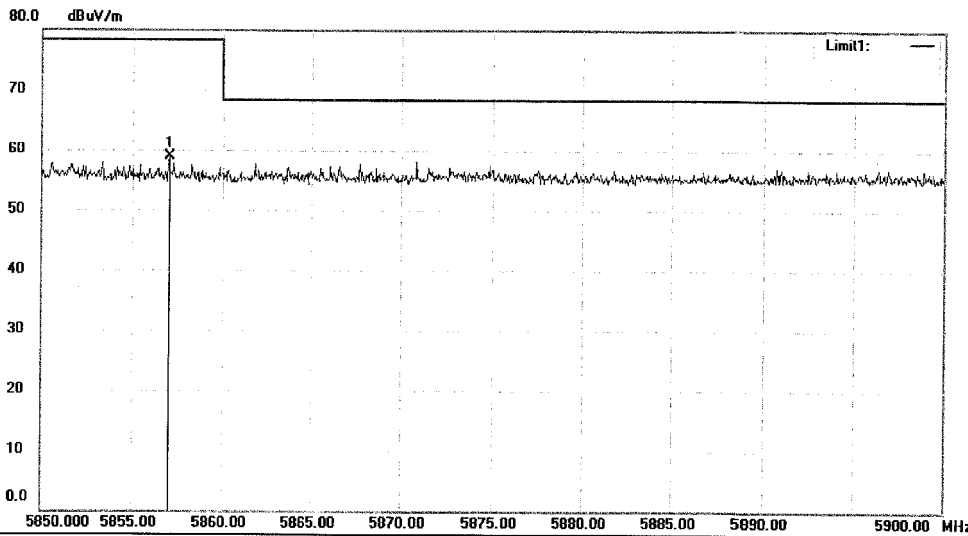

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)5GWIFI(Bandedge) Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(80MHz) 5775

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5857.000	19.47	39.37	58.84	78.20	-19.36	peak	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1899

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

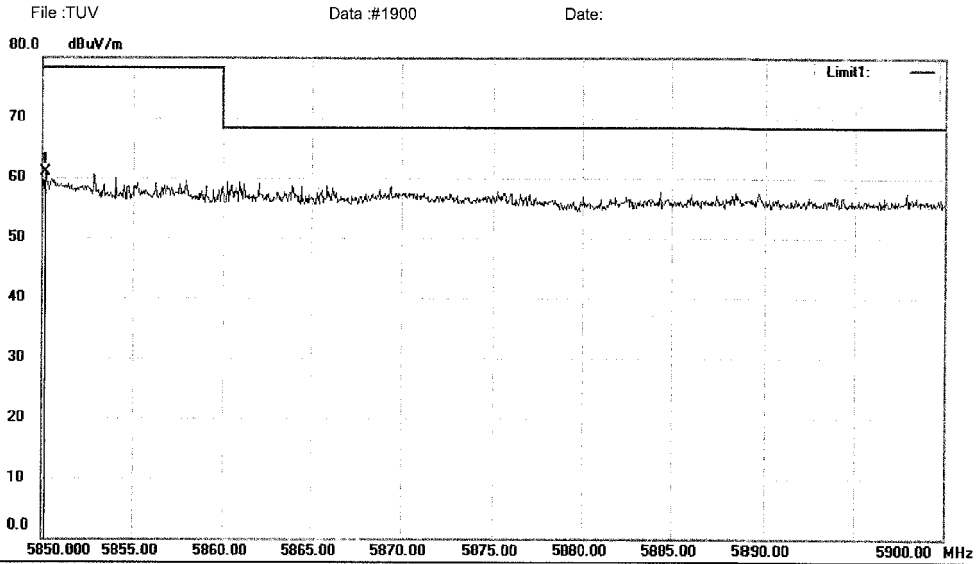
Radiated Emission Measurement


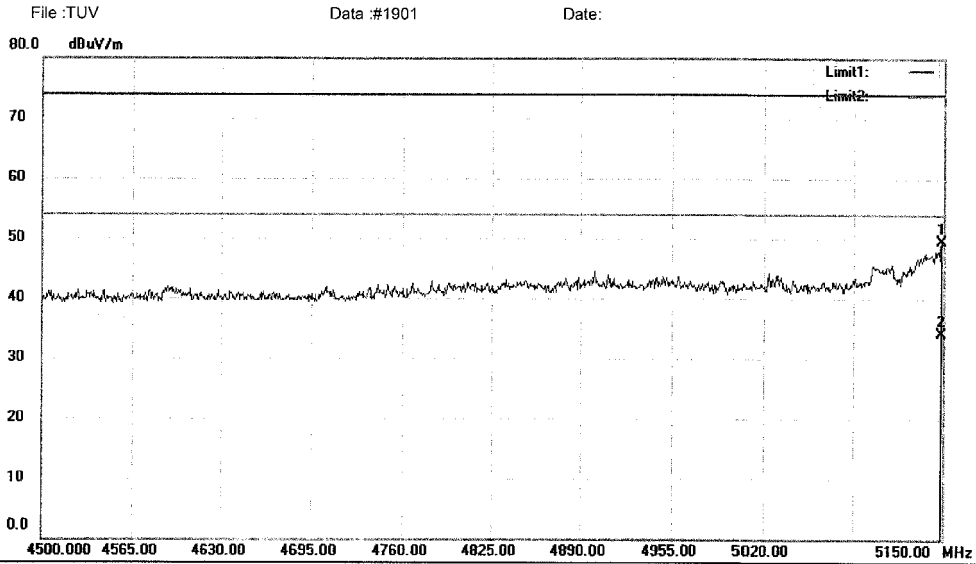
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)5GWIFI(Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1 *	5850.150	21.64	39.35	60.99	78.20	-17.21	peak	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	5148.700	11.45	38.00	49.45	74.00	-24.55	peak	0	
2 *	5148.700	-3.80	38.00	34.20	54.00	-19.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File:TUVData:#1901

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

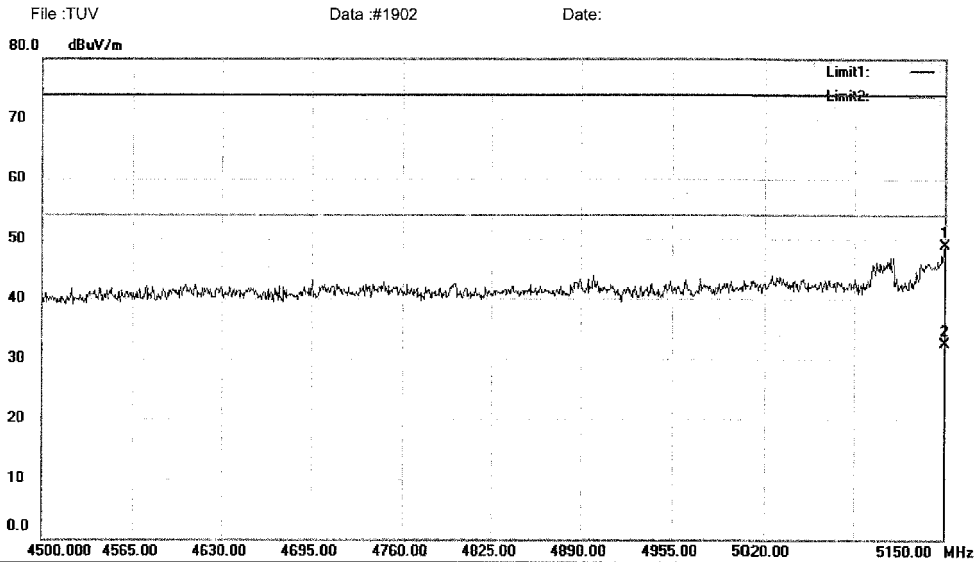
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	10.90	38.00	48.90	74.00	-25.10	peak	0	
2	*	5150.000	-5.40	38.00	32.60	54.00	-21.40	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV\Data : #1902

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

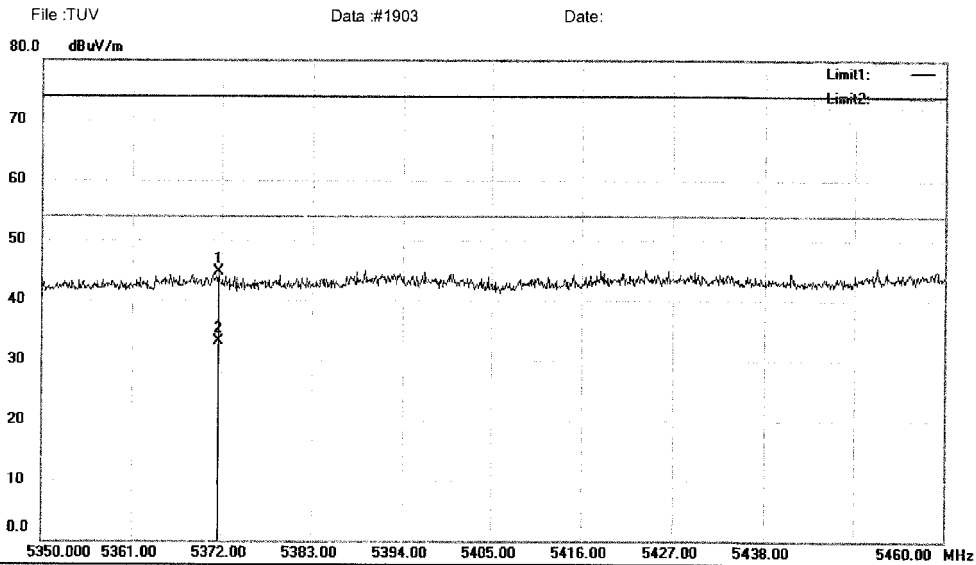
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5371.670	6.27	38.43	44.70	74.00	-29.30	peak	0	
2	*	5371.670	-5.23	38.43	33.20	54.00	-20.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1903

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Najialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

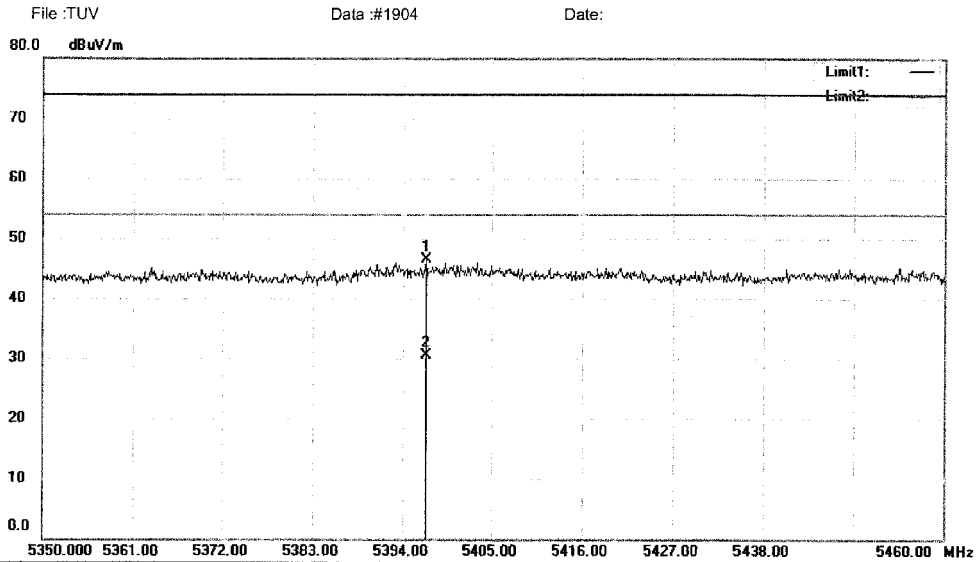
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5396.860	8.09	38.48	46.57	74.00	-27.43	peak	0	
2	*	5396.860	-7.88	38.48	30.60	54.00	-23.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1904

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1907

Date:

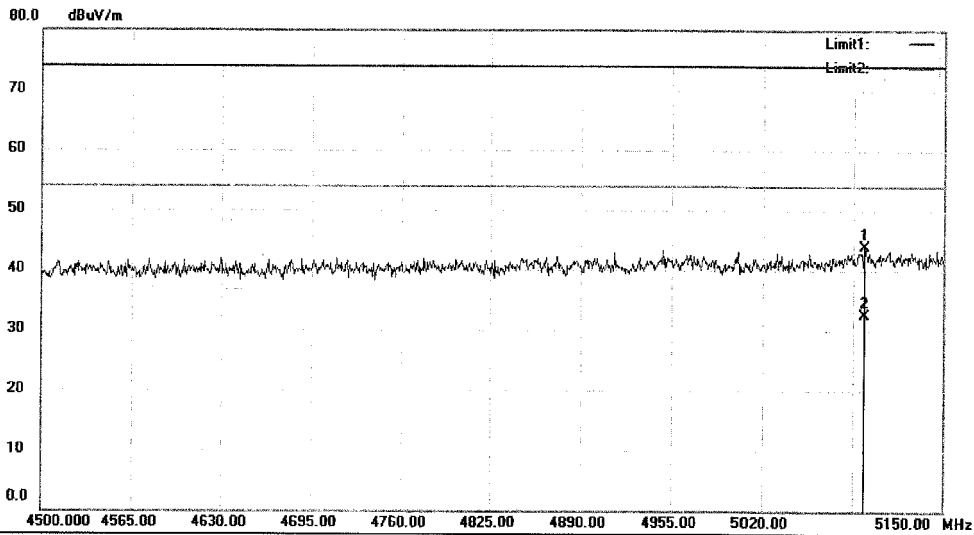

Site 3m Chamber #3

 Polarization: **Horizontal**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5093.450	6.11	37.89	44.00	74.00	-30.00	peak	0	
2	*	5093.450	-5.29	37.89	32.60	54.00	-21.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK


File :TUVData :#1907

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV Data :#1908 Date:

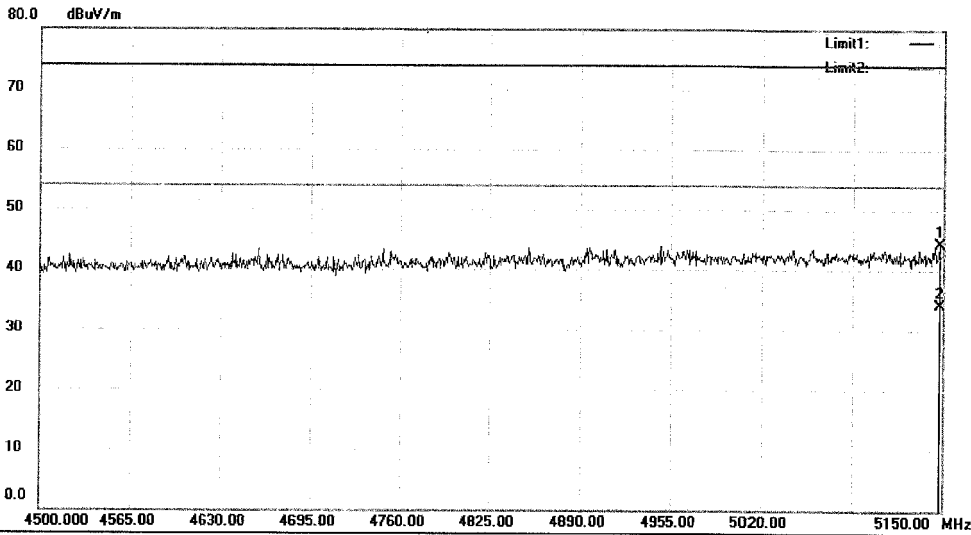


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5147.400	6.24	38.00	44.24	74.00	-29.76	peak	0	
2	*	5147.400	-3.80	38.00	34.20	54.00	-19.80	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

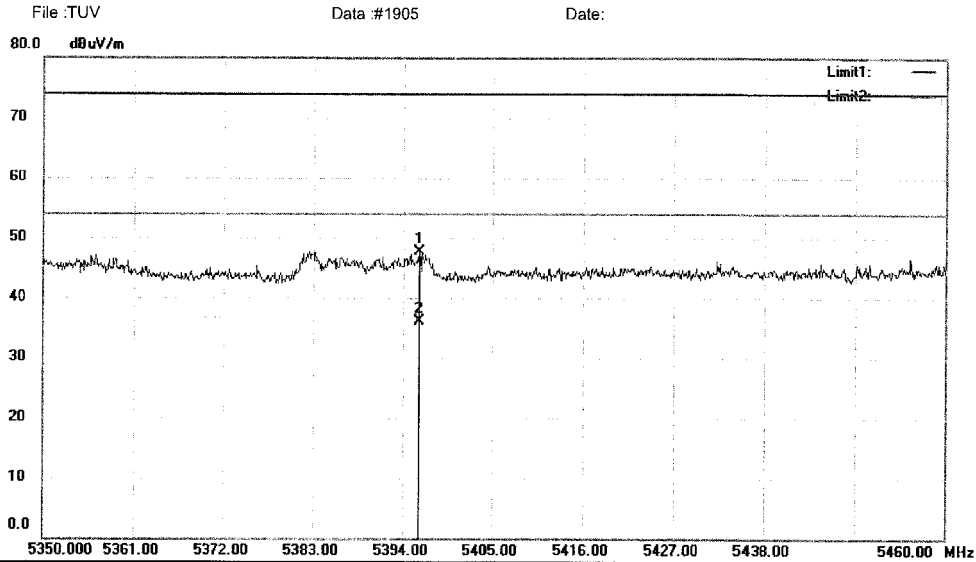
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5395.980	9.17	38.48	47.65	74.00	-26.35	peak	0	
2	*	5395.980	-2.28	38.48	36.20	54.00	-17.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1905

Page: 1

Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

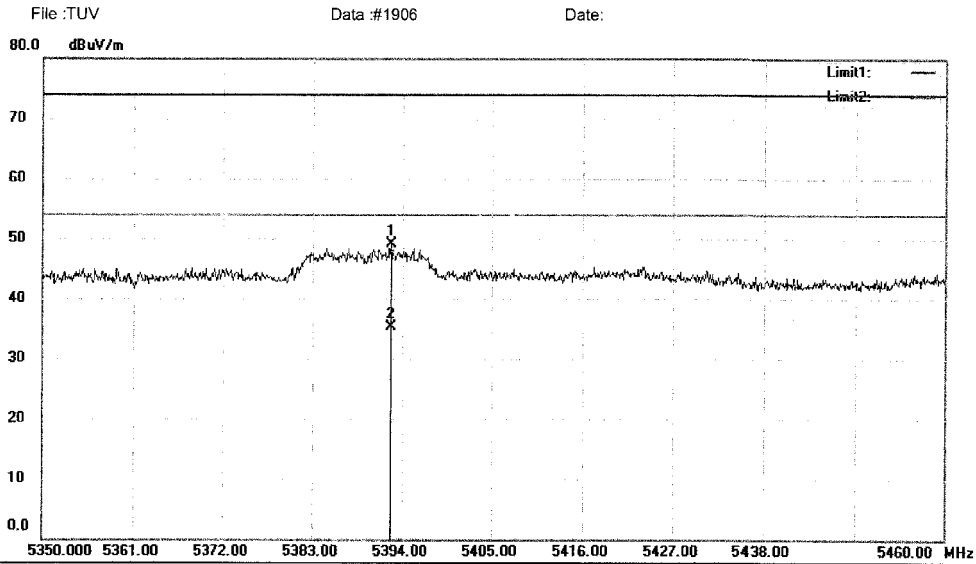
Radiated Emission Measurement


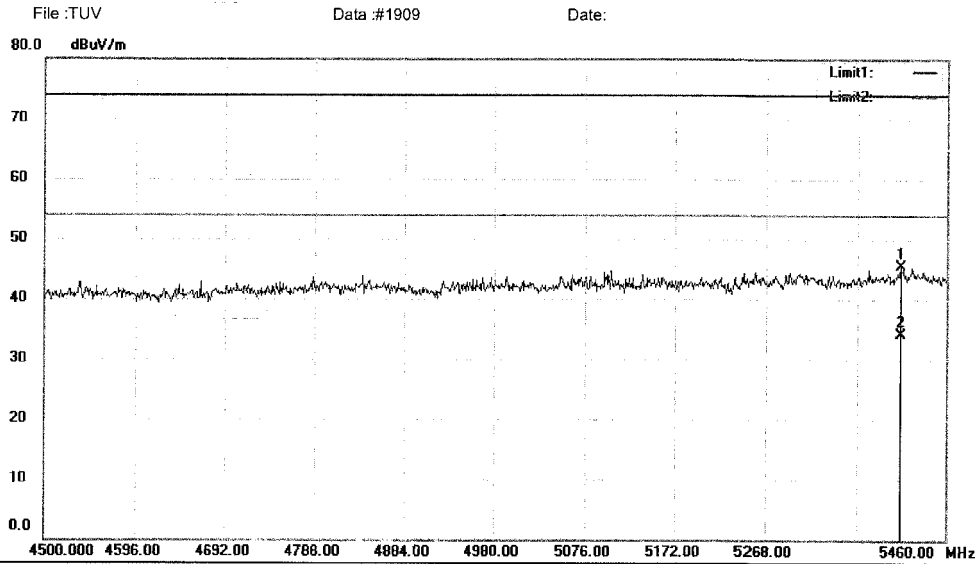
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5392.570	10.73	38.46	49.19	74.00	-24.81	peak	0	
2	*	5392.570	-3.16	38.46	35.30	54.00	-18.70	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5410.080	6.91	38.50	45.41	74.00	-28.59	peak	0	
2	*	5410.080	-4.40	38.50	34.10	54.00	-19.90	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1909

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1910

Date:

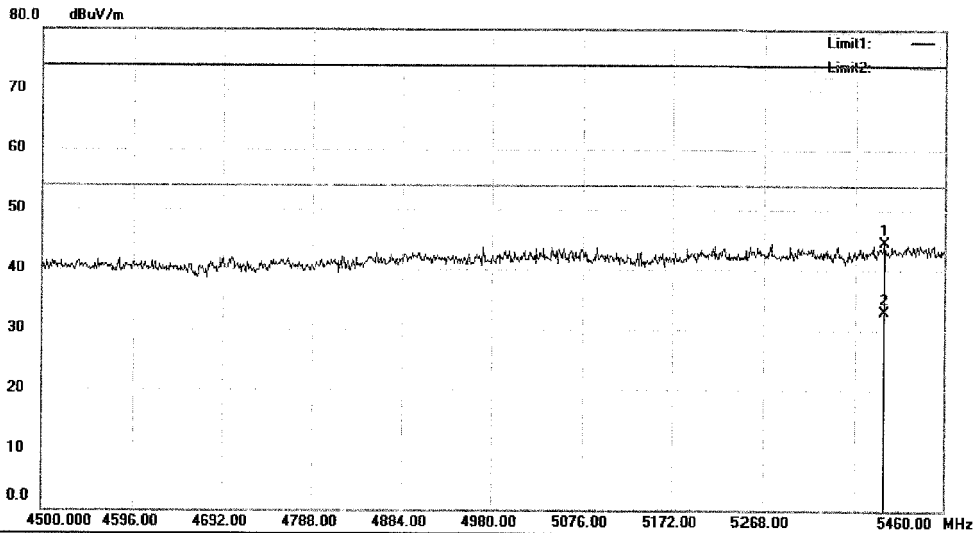

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11a 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5394.720	6.07	38.48	44.55	74.00	-29.45	peak	0	
2	*	5394.720	-5.58	38.48	32.90	54.00	-21.10	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1910

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

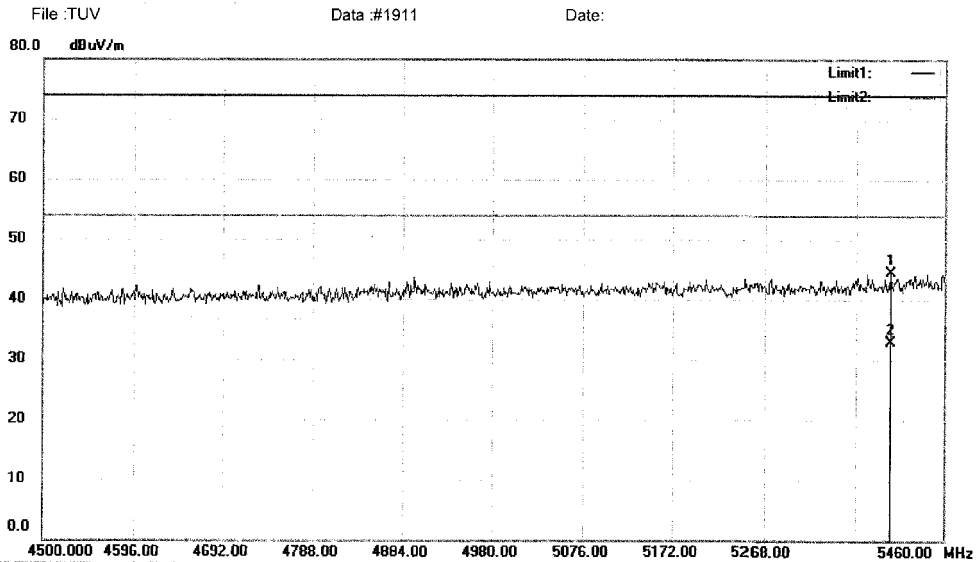
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5401.440	5.96	38.48	44.44	74.00	-29.56	peak	0	
2	*	5401.440	-5.48	38.48	33.00	54.00	-21.00	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1911

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

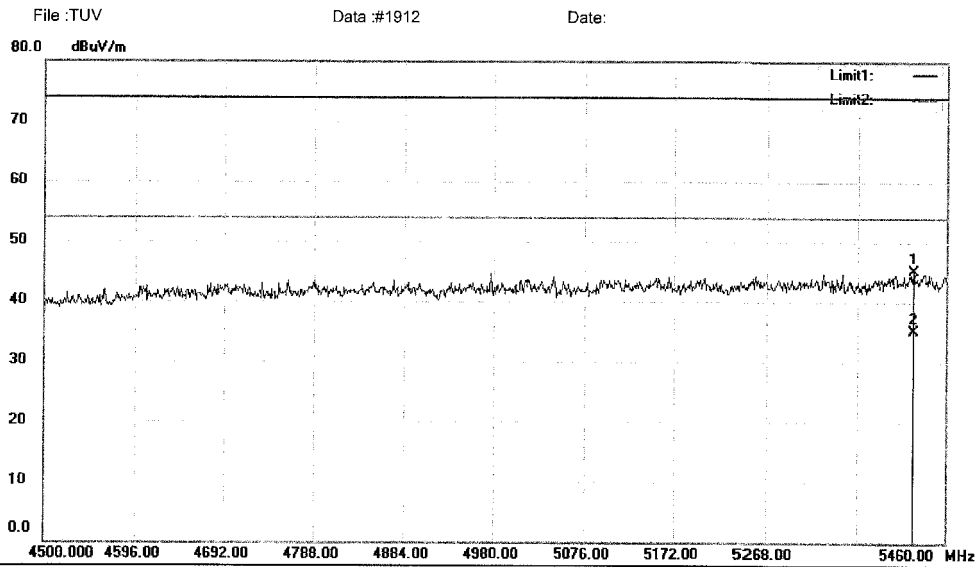
Radiated Emission Measurement


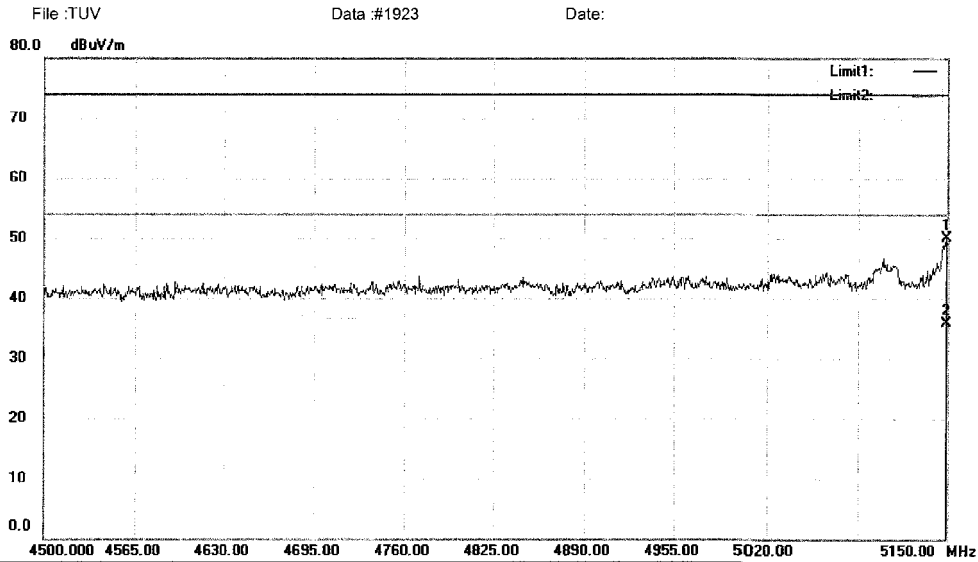
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11a 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5424.480	6.49	38.53	45.02	74.00	-28.98	peak	0	
2	*	5424.480	-3.43	38.53	35.10	54.00	-18.90	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.350	12.02	38.00	50.02	74.00	-23.98	peak	0	
2	*	5149.350	-2.10	38.00	35.90	54.00	-18.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1923

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1924

Date:

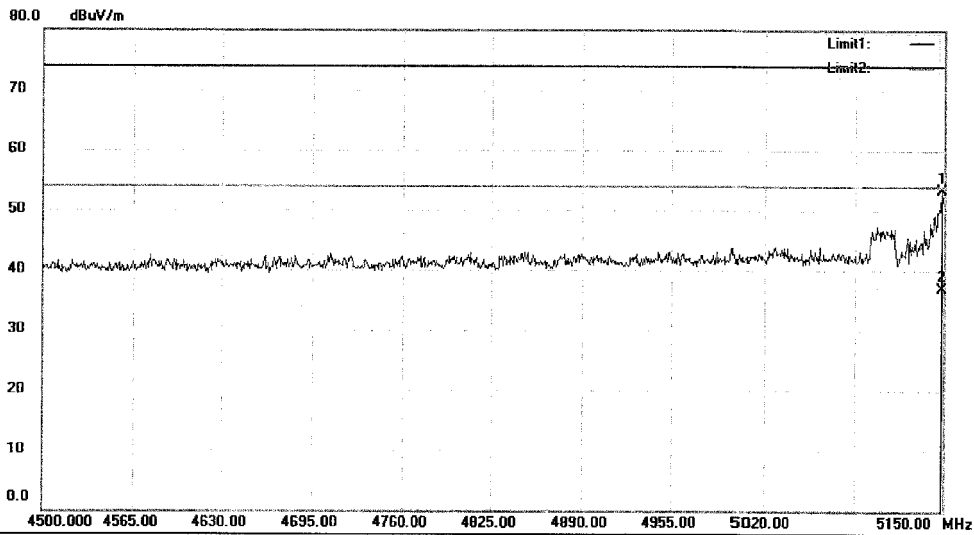

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11n(20MHz) 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5148.700	15.26	38.00	53.26	74.00	-20.74	peak	0	
2	*	5148.700	-1.10	38.00	36.90	54.00	-17.10	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1924

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

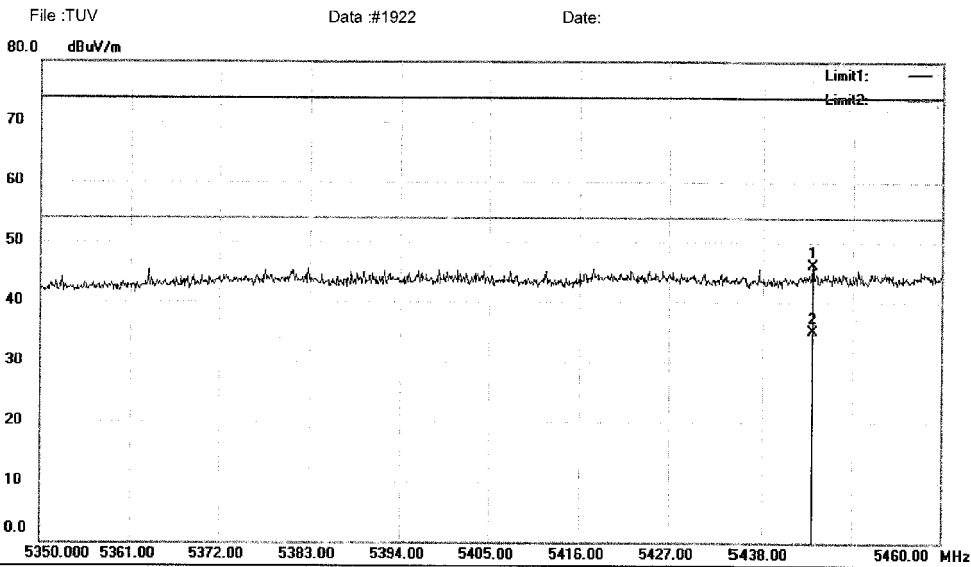
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5444.050	7.45	38.57	46.02	74.00	-27.98	peak	0	
2	*	5444.050	-3.37	38.57	35.20	54.00	-18.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1922

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

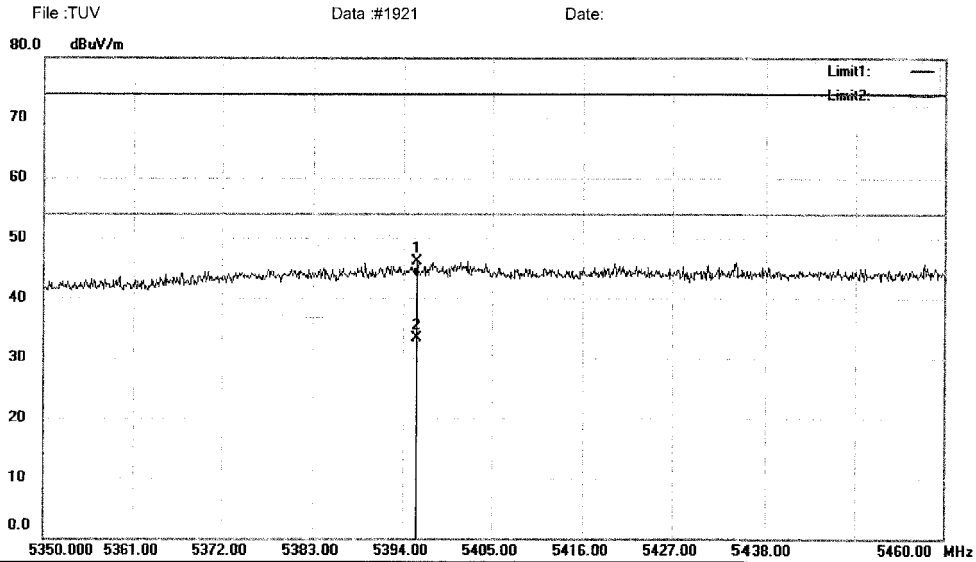
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5395.650	7.68	38.48	46.16	74.00	-27.84	peak	0	
2	*	5395.650	-5.08	38.48	33.40	54.00	-20.60	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1921

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

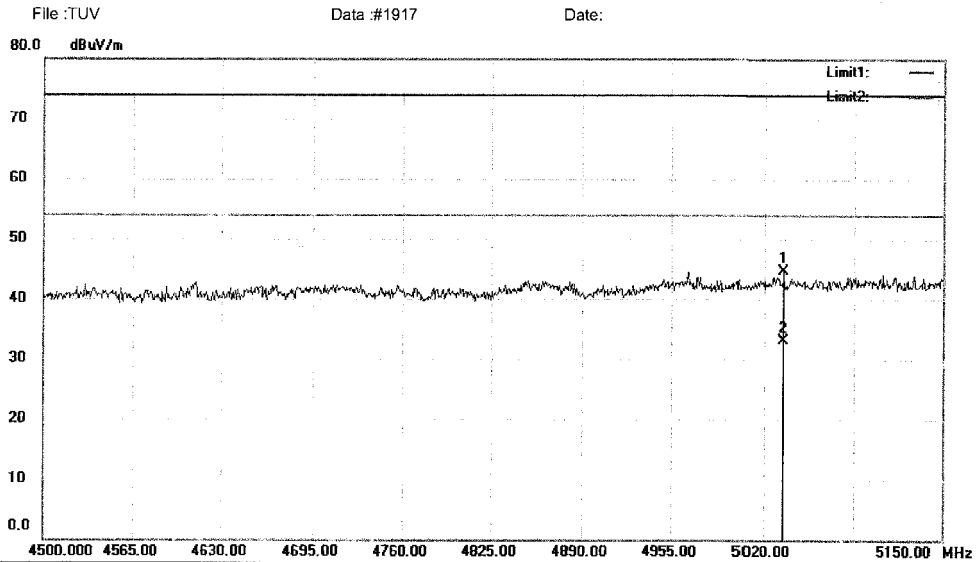Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5033.650	6.87	37.78	44.65	74.00	-29.35	peak		0
2	*	5033.650	-4.58	37.78	33.20	54.00	-20.80	AVG		0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1917

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

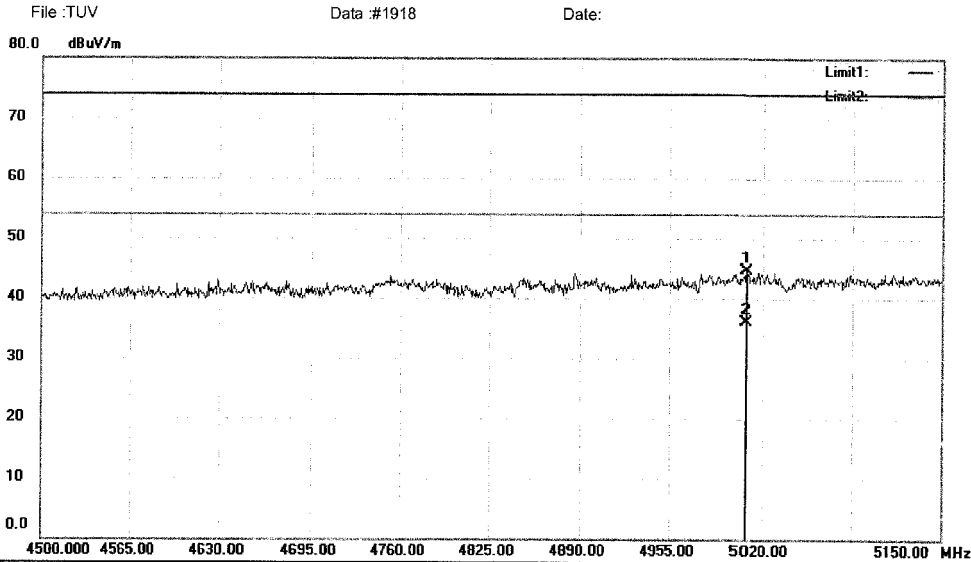
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5008.300	7.05	37.73	44.78	74.00	-29.22	peak	0	
2	*	5008.300	-1.63	37.73	36.10	54.00	-17.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1918

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

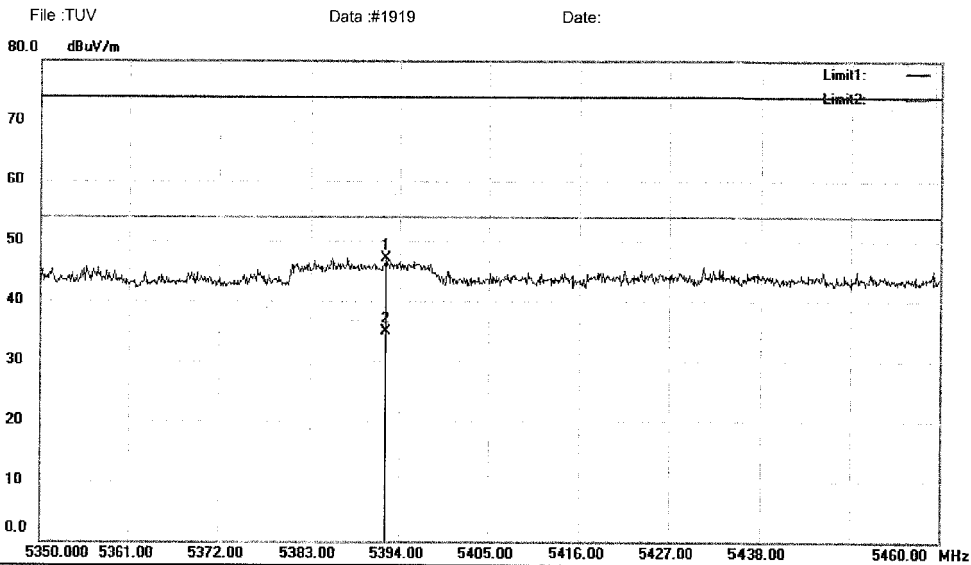
Radiated Emission Measurement


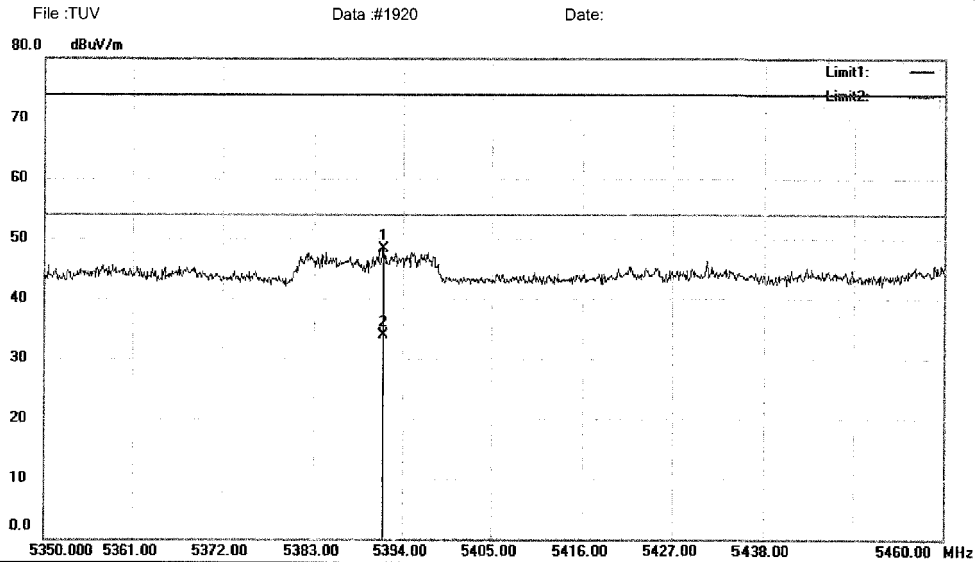
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5392.350	8.74	38.46	47.20	74.00	-26.80	peak	0	
2	*	5392.350	-3.56	38.46	34.90	54.00	-19.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		5391.580	9.75	38.46	48.21	74.00	-25.79	peak	0	
2	*	5391.580	-4.56	38.46	33.90	54.00	-20.10	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData:#1920

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

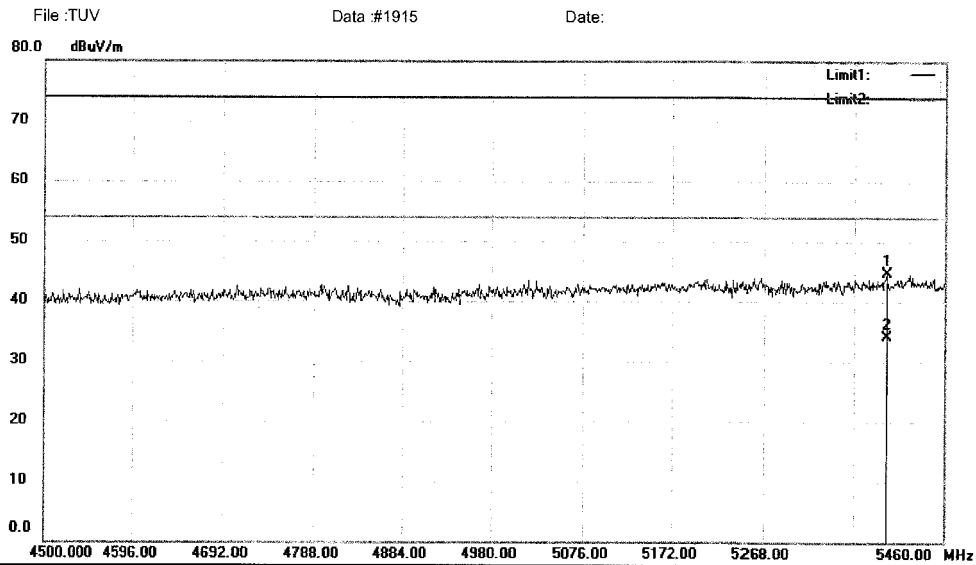
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5398.560	6.14	38.48	44.62	74.00	-29.38	peak		0	
2	*	5398.560	-4.28	38.48	34.20	54.00	-19.80	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1915

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

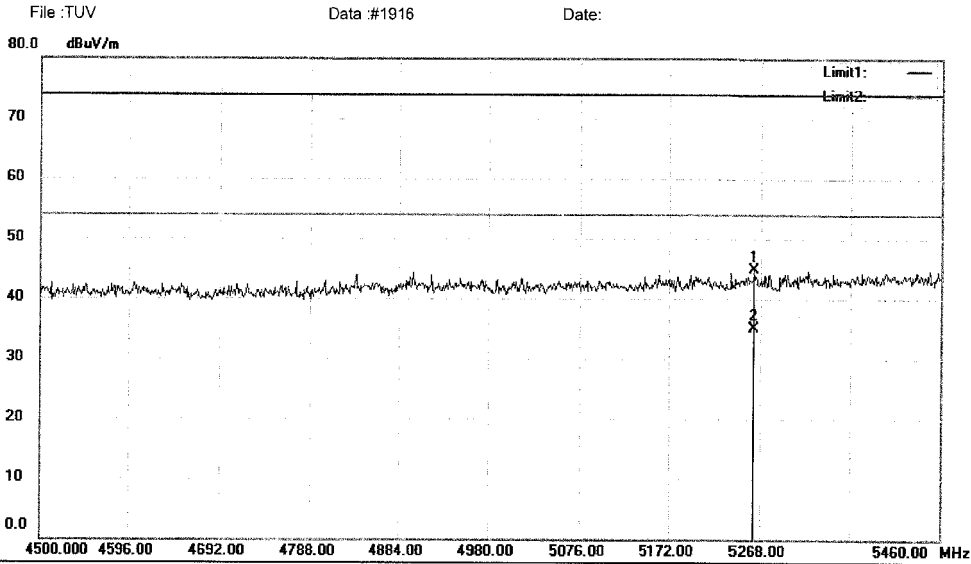
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	
1		5261.280	6.61	38.22	44.83	74.00	-29.17	peak	0	
2	*	5261.280	-3.12	38.22	35.10	54.00	-18.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #:1916

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

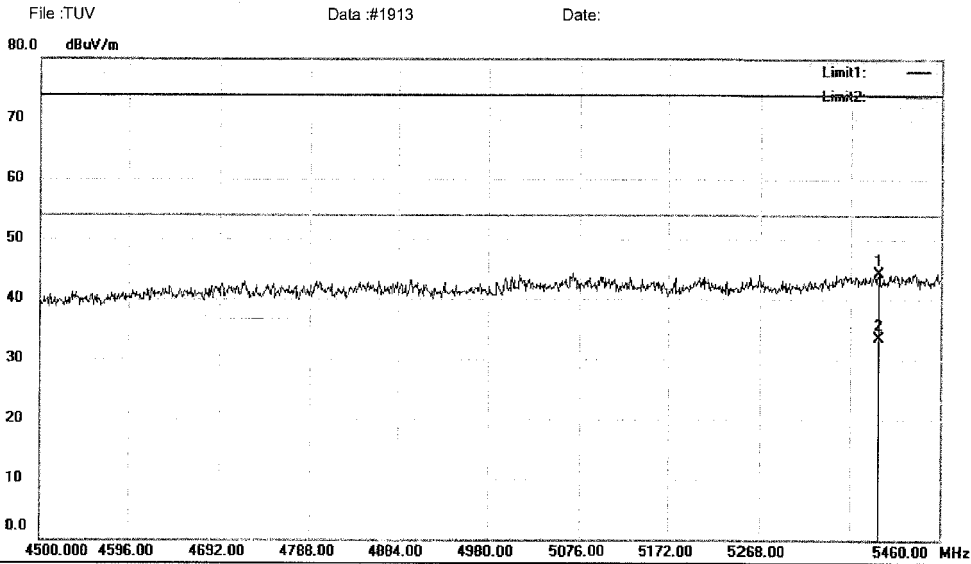
Radiated Emission Measurement


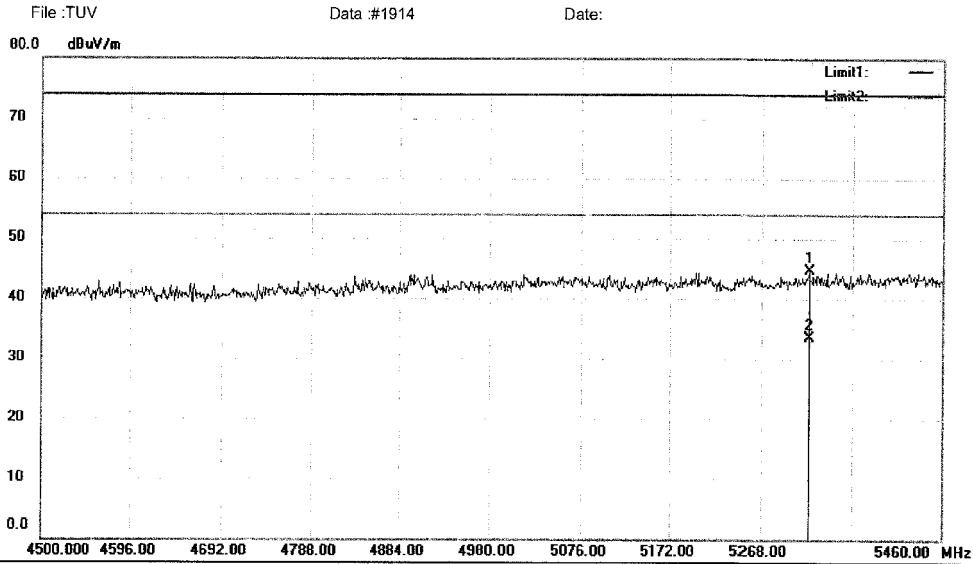
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5393.760	5.92	38.47	44.39	74.00	-29.61	peak	0	
2	*	5393.760	-4.87	38.47	33.60	54.00	-20.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5317.920	6.48	38.32	44.80	74.00	-29.20	peak	0	
2	*	5317.920	-4.82	38.32	33.50	54.00	-20.50	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1914

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

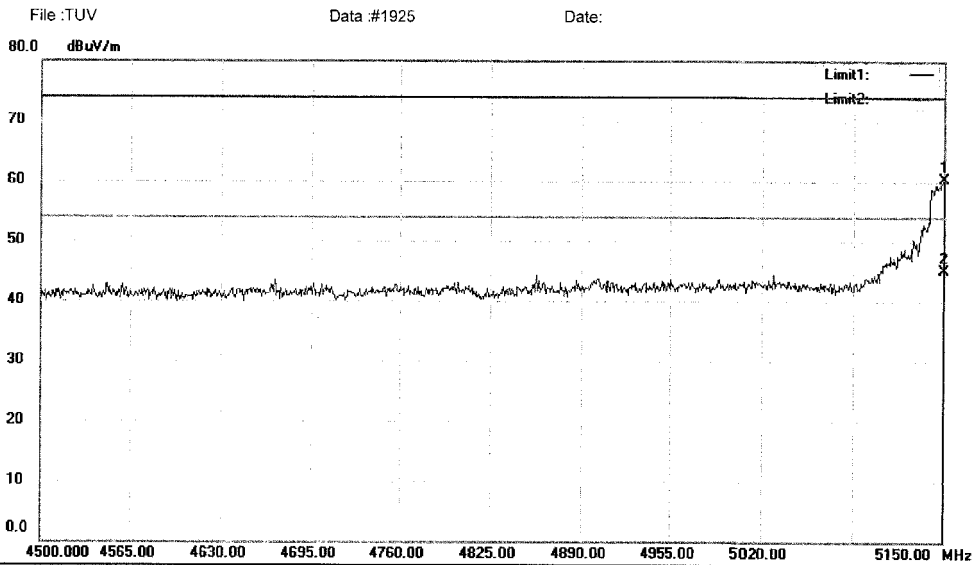
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	22.24	38.00	60.24	74.00	-13.76	peak	0	
2	*	5150.000	7.20	38.00	45.20	54.00	-8.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1925

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

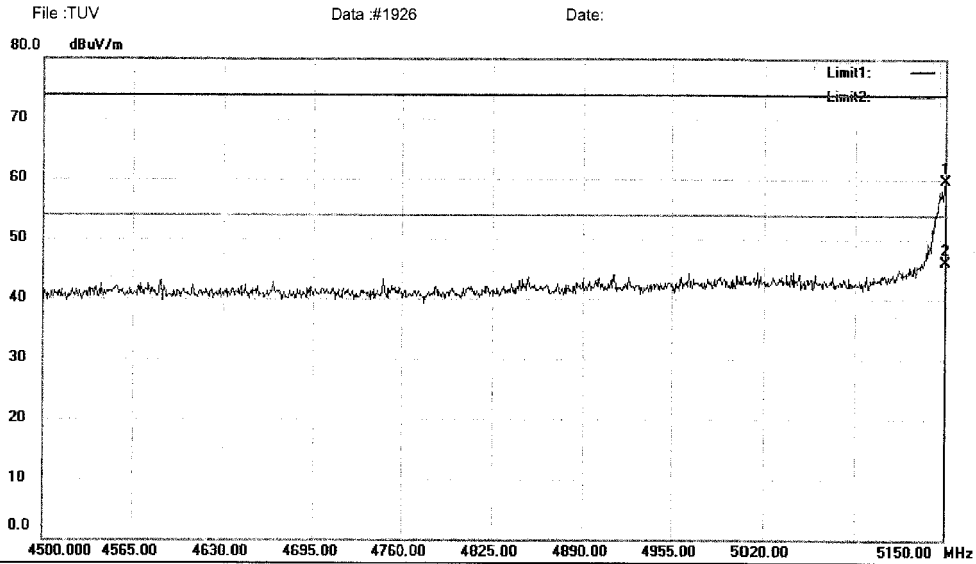
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	21.70	38.00	59.70	74.00	-14.30	peak	0	
2	*	5150.000	8.20	38.00	46.20	54.00	-7.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1926

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

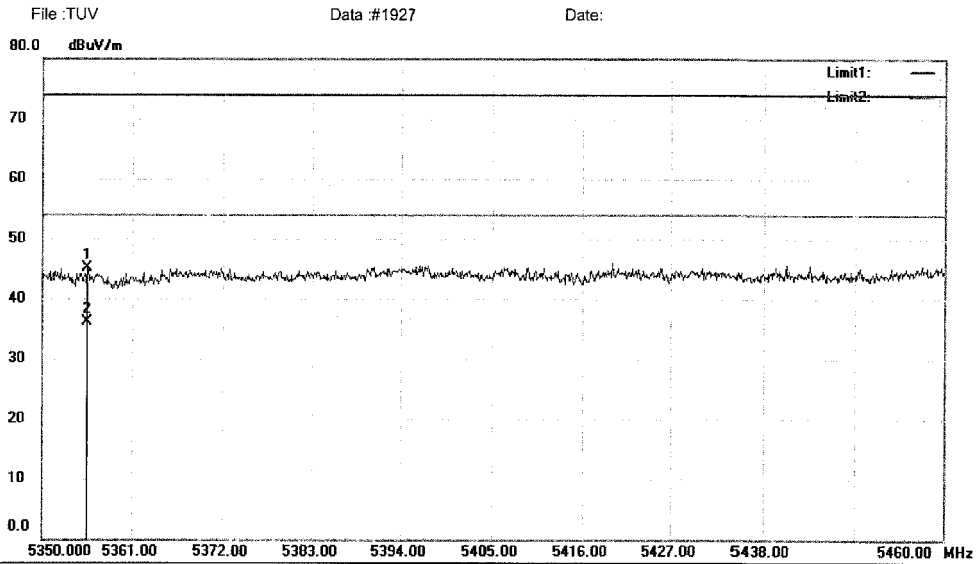
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5355.500	6.77	38.39	45.16	74.00	-28.84	peak	0	
2	*	5355.500	-2.19	38.39	36.20	54.00	-17.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1927

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

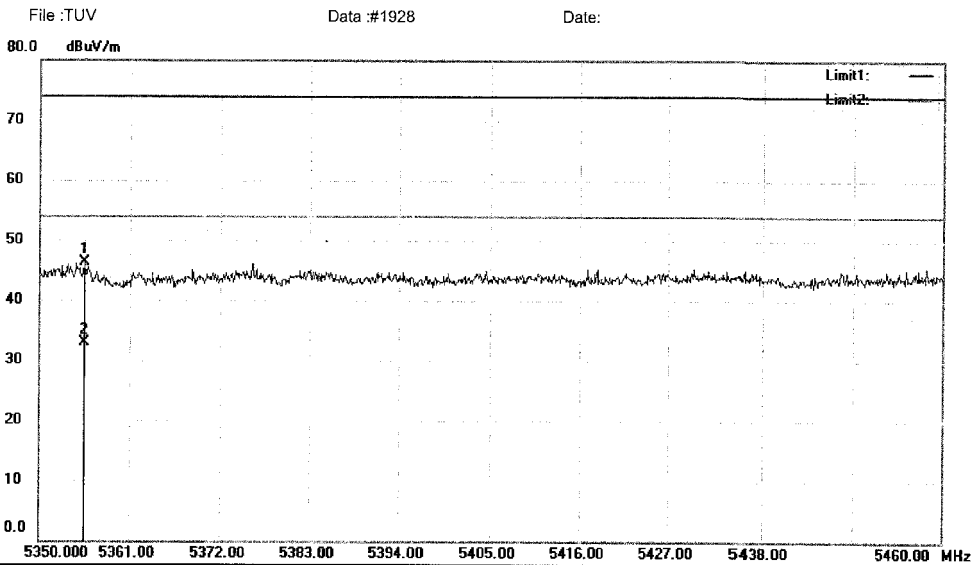
Radiated Emission Measurement


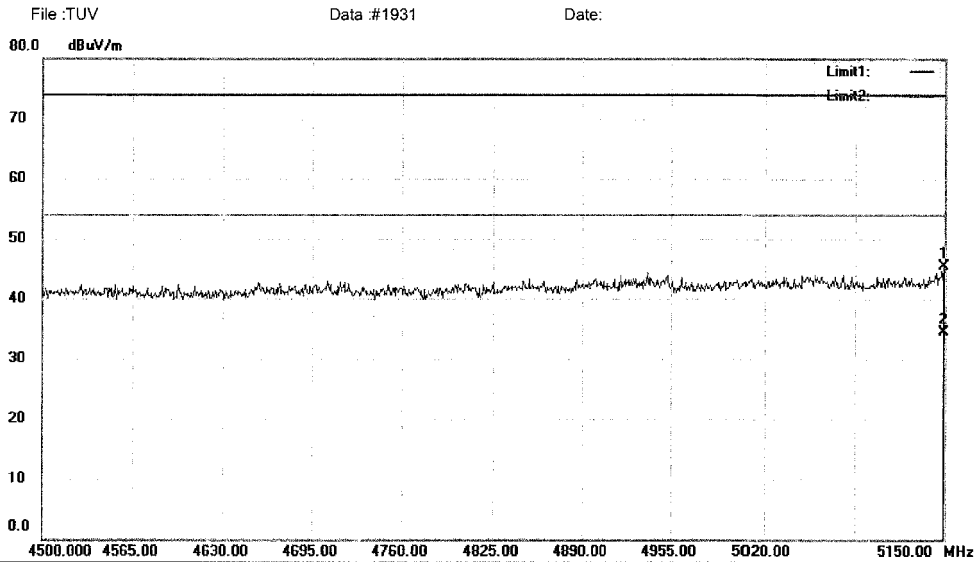
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5355.500	7.84	38.39	46.23	74.00	-27.77	peak	0	
2	*	5355.500	-5.49	38.39	32.90	54.00	-21.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		5149.350	7.50	38.00	45.50	74.00	-28.50	peak		0	
2	*	5149.350	-3.40	38.00	34.60	54.00	-19.40	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1931

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

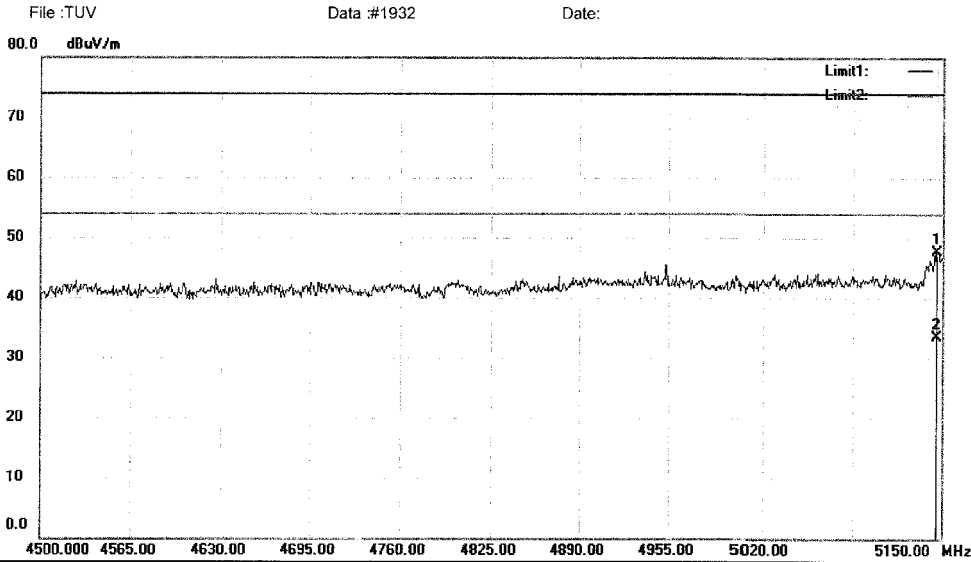Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	5146.100	9.69	38.00	47.69	74.00	-26.31	peak		0	
2 *	5146.100	-4.40	38.00	33.60	54.00	-20.40	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1932

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

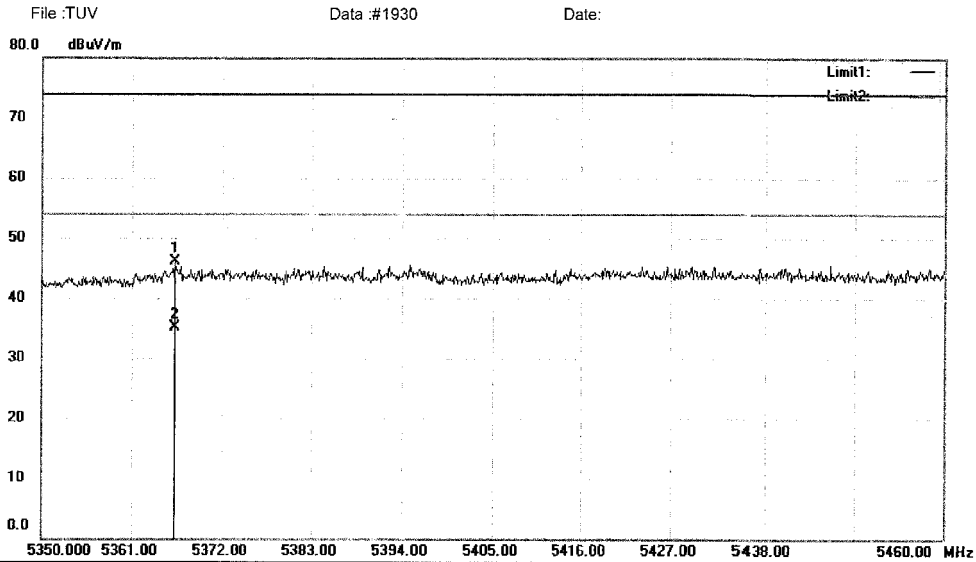
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(40MHz) 5230
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	5366.170	7.67	38.41	46.08	74.00	-27.92	peak		0	
2 *	5366.170	-3.21	38.41	35.20	54.00	-18.80	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1930

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

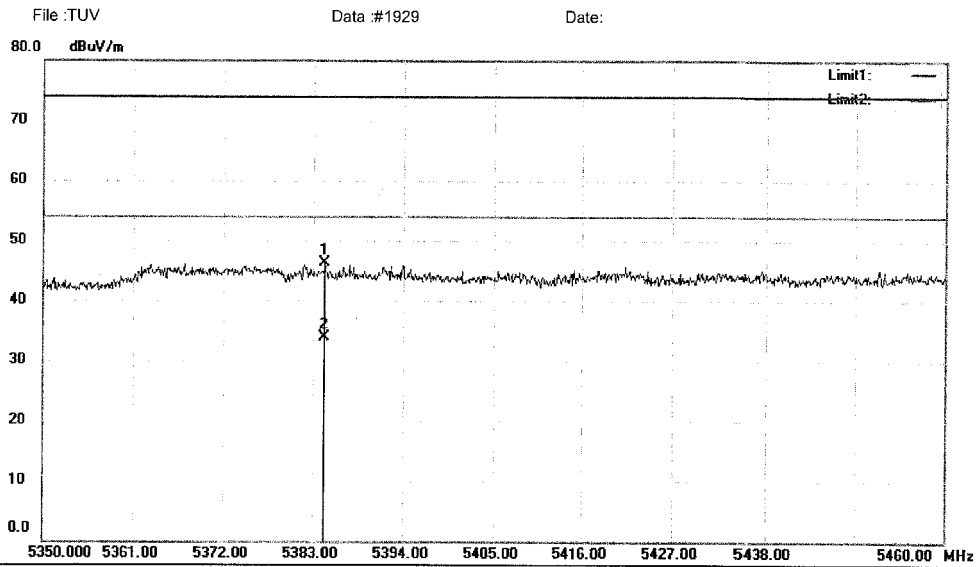
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5230
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	5384.430	7.79	38.45	46.24	74.00	-27.76	peak	0	
2 *	5384.430	-4.55	38.45	33.90	54.00	-20.10	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1929

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

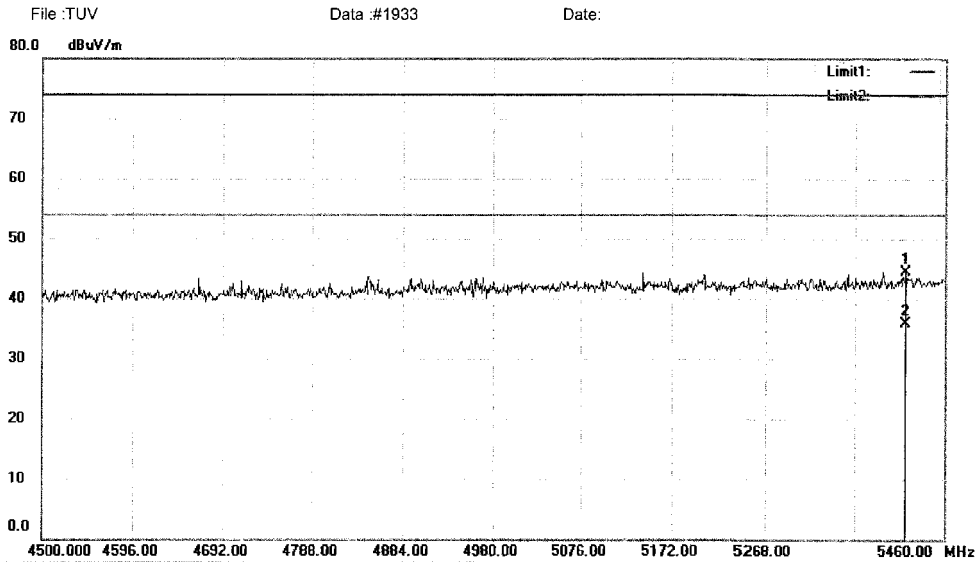
Radiated Emission Measurement


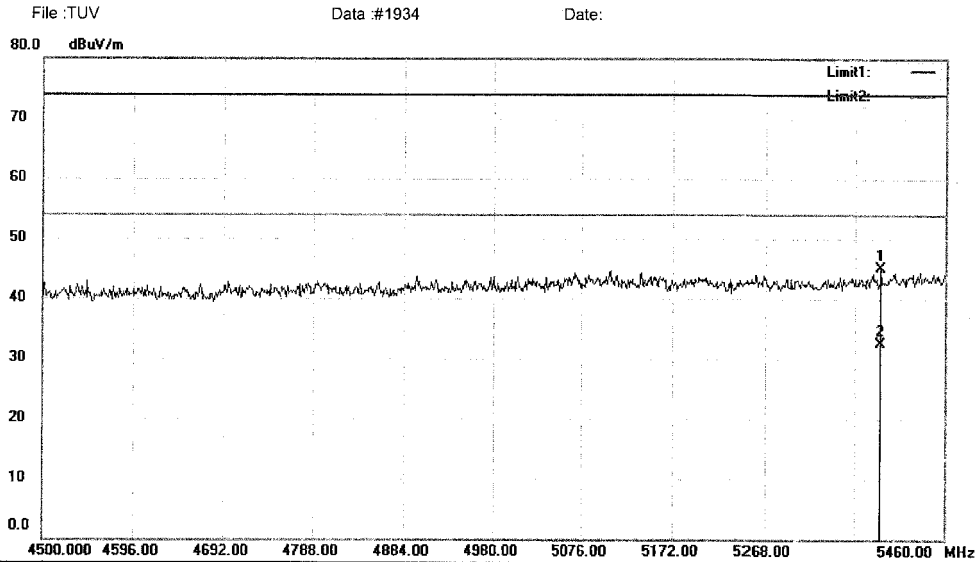
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5418.720	5.96	38.51	44.47	74.00	-29.53	peak	0	
2	*	5418.720	-2.51	38.51	36.00	54.00	-18.00	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


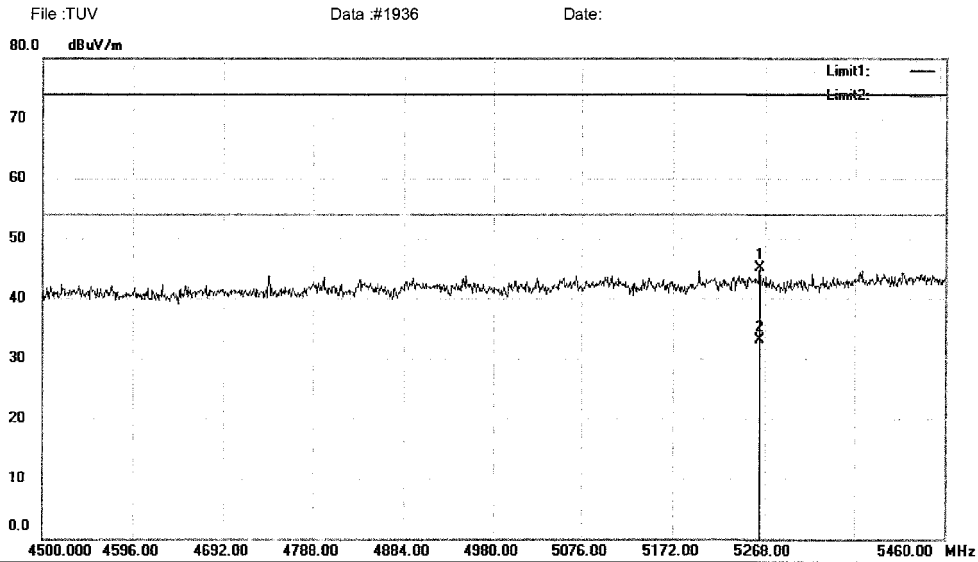
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5391.840	6.73	38.46	45.19	74.00	-28.81	peak	0	
2	*	5391.840	-5.86	38.46	32.60	54.00	-21.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


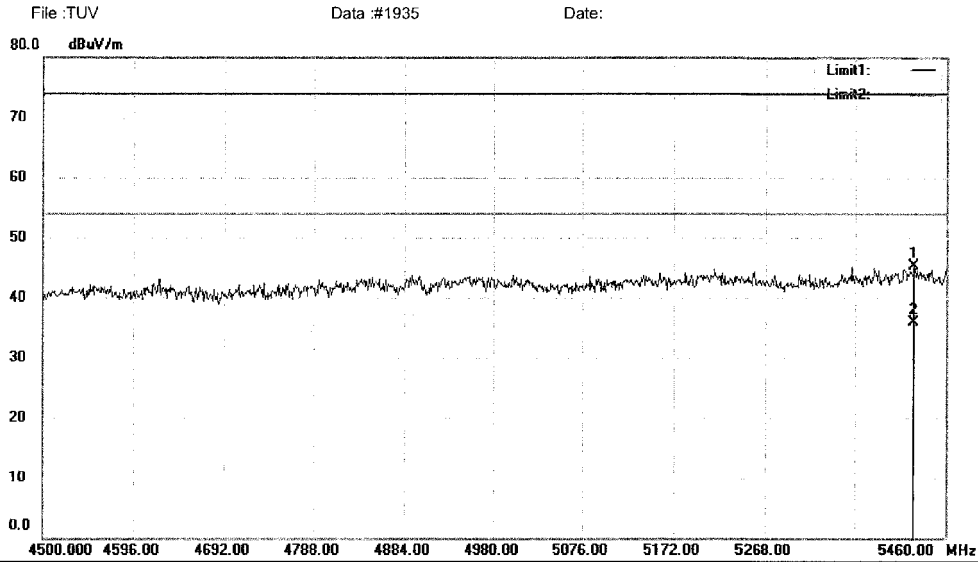
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5262.240	6.84	38.22	45.06	74.00	-28.94	peak		0
2	*	5262.240	-5.02	38.22	33.20	54.00	-20.80	AVG		0

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


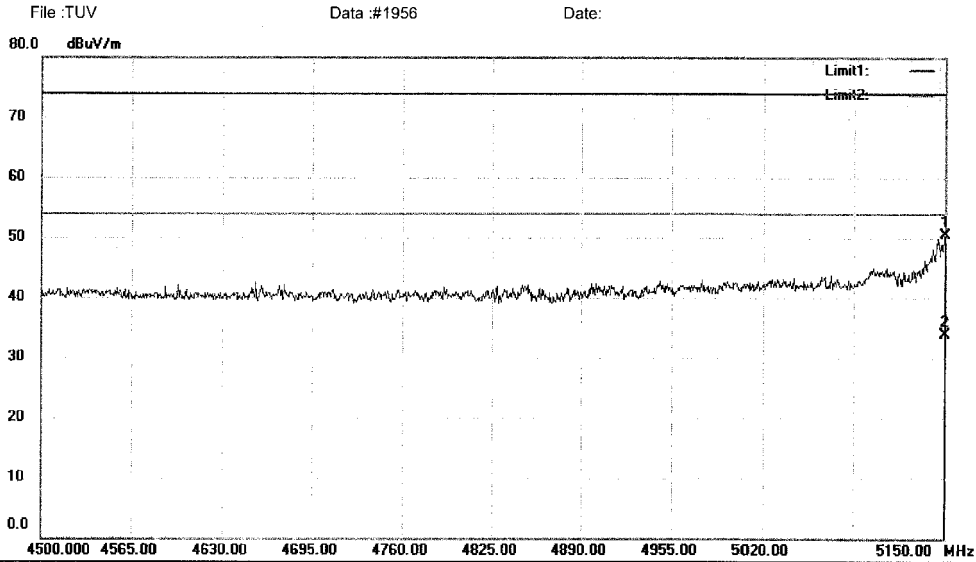
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11n(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5426.400	6.72	38.53	45.25	74.00	-28.75	peak	0	
2	*	5426.400	-2.63	38.53	35.90	54.00	-18.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen ENTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


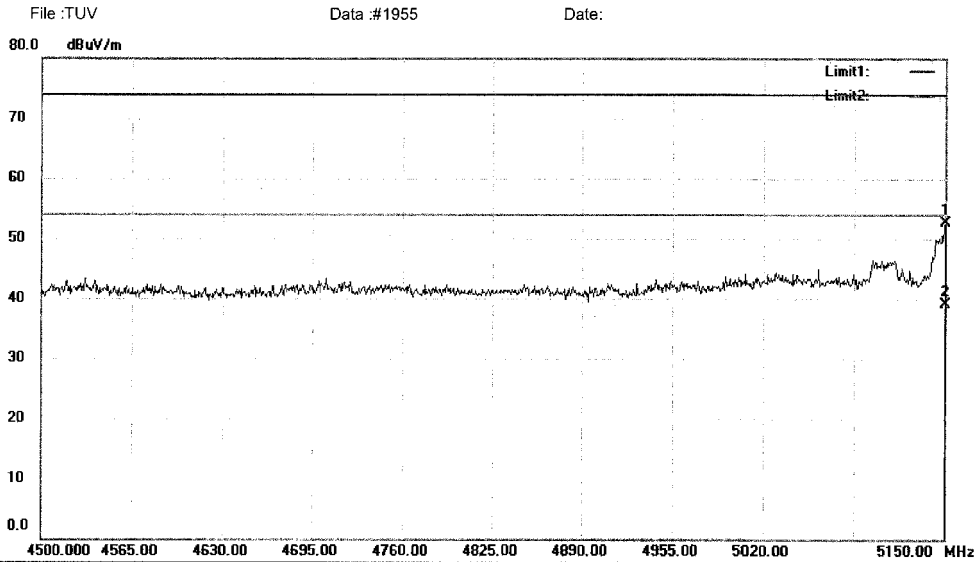
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	12.44	38.00	50.44	74.00	-23.56	peak	0	
2	*	5150.000	-4.10	38.00	33.90	54.00	-20.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode: 11ac(20MHz) 5180
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	5150.000	14.66	38.00	52.66	74.00	-21.34	peak		0	
2 *	5150.000	1.20	38.00	39.20	54.00	-14.80	AVG		0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUVData: #1955

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

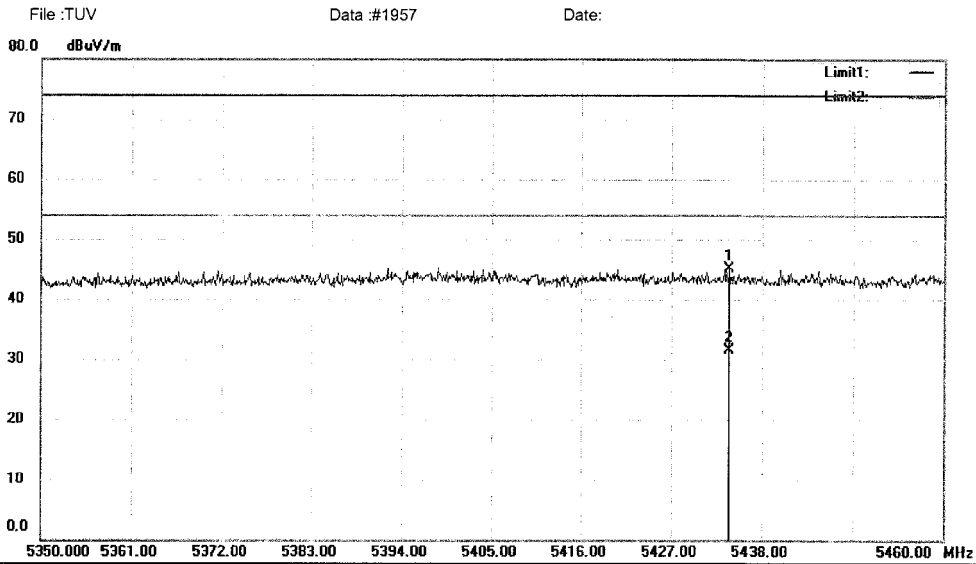
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	5434.150	6.52	38.55	45.07	74.00	-28.93	peak	0	
2 *	5434.150	-6.95	38.55	31.60	54.00	-22.40	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1957

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

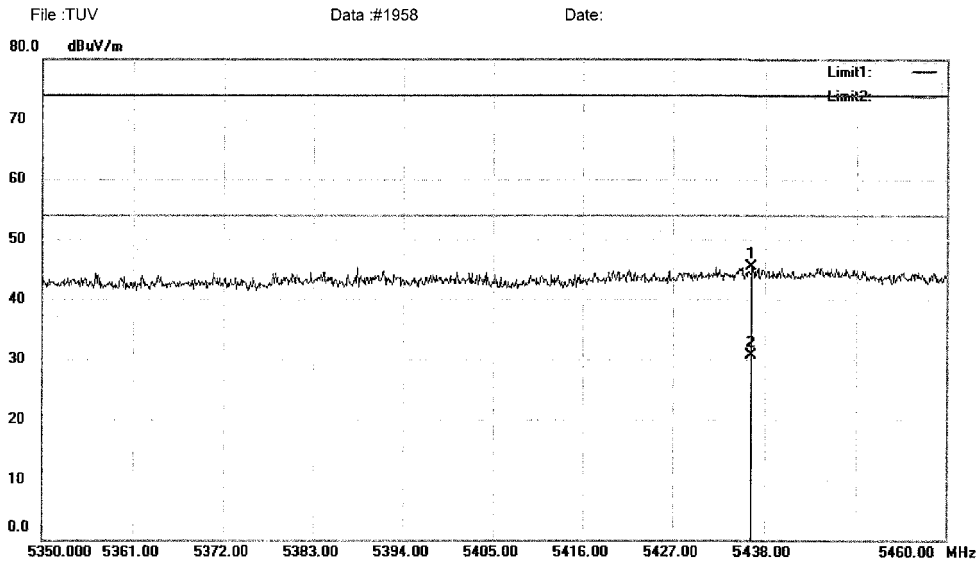
Radiated Emission Measurement


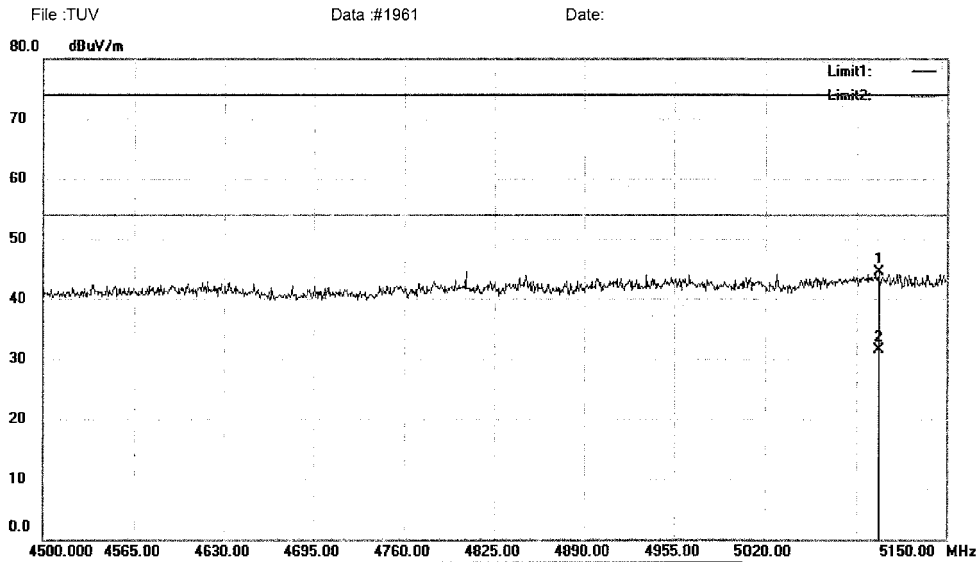
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5436.350	6.94	38.55	45.49	74.00	-28.51	peak	0	
2	*	5436.350	-7.75	38.55	30.80	54.00	-23.20	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5100.600	6.58	37.90	44.48	74.00	-29.52	peak	0	
2	*	5100.600	-6.40	37.90	31.50	54.00	-22.50	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1961

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

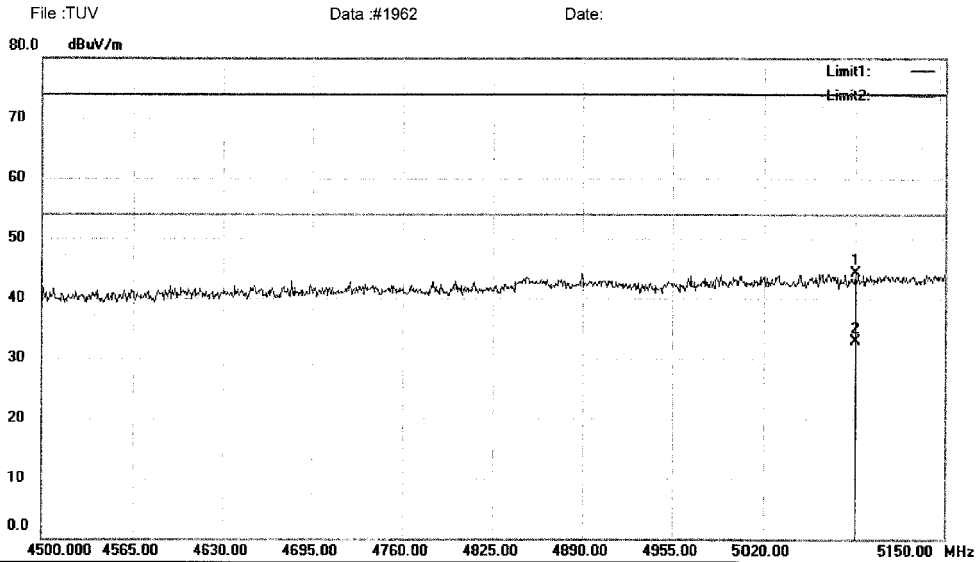
Radiated Emission Measurement


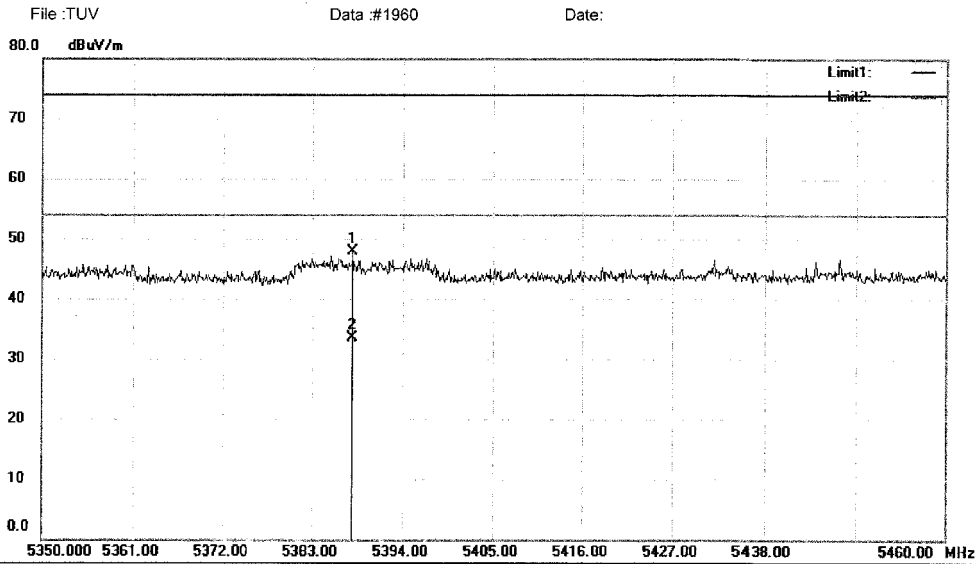
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5085.000	6.51	37.88	44.39	74.00	-29.61	peak	0	
2	*	5085.000	-4.88	37.88	33.00	54.00	-21.00	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5240
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	5387.950	9.48	38.46	47.94	74.00	-26.06	peak	0	
2 *	5387.950	-4.86	38.46	33.60	54.00	-20.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1960

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1959

Date:

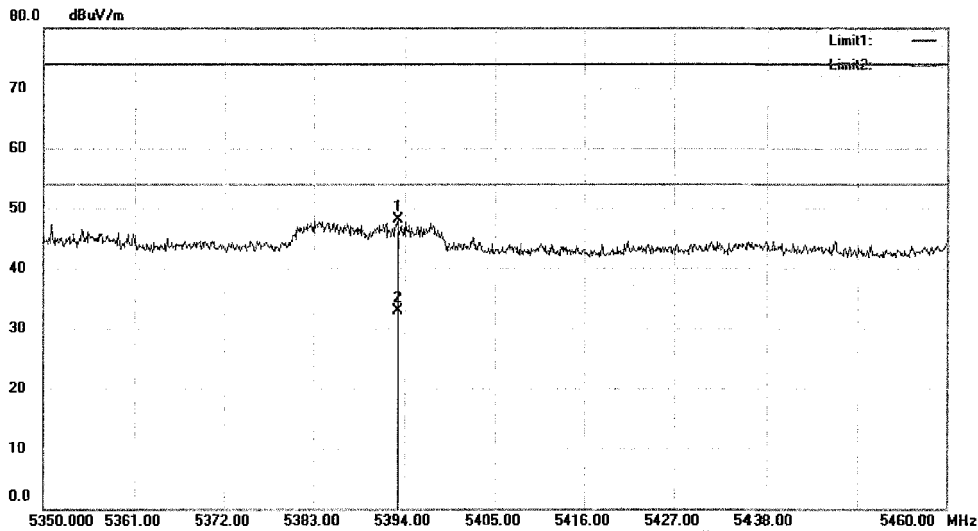

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(20MHz) 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5393.120	9.63	38.46	48.09	74.00	-25.91	peak	0	
2	*	5393.120	-5.56	38.46	32.90	54.00	-21.10	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1959

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

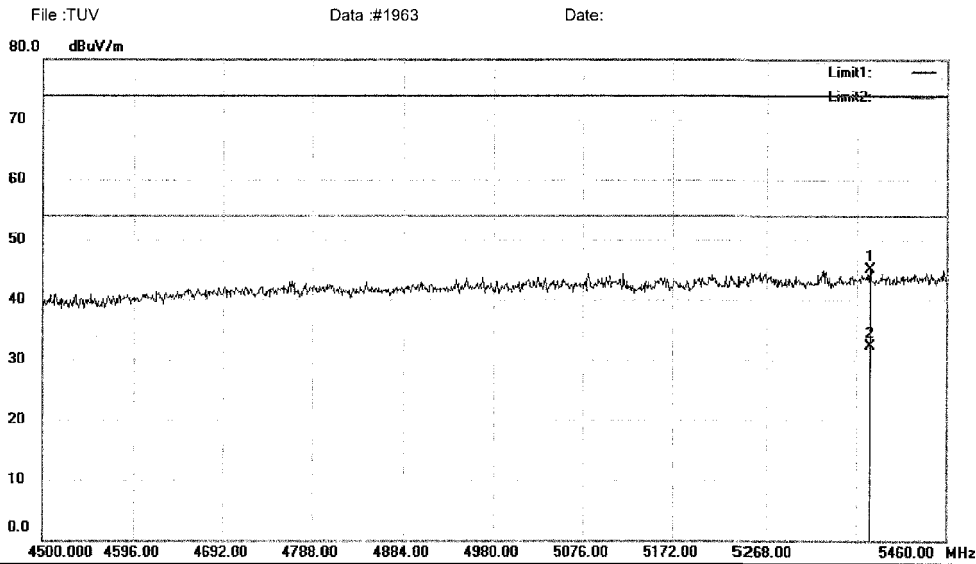
Radiated Emission Measurement


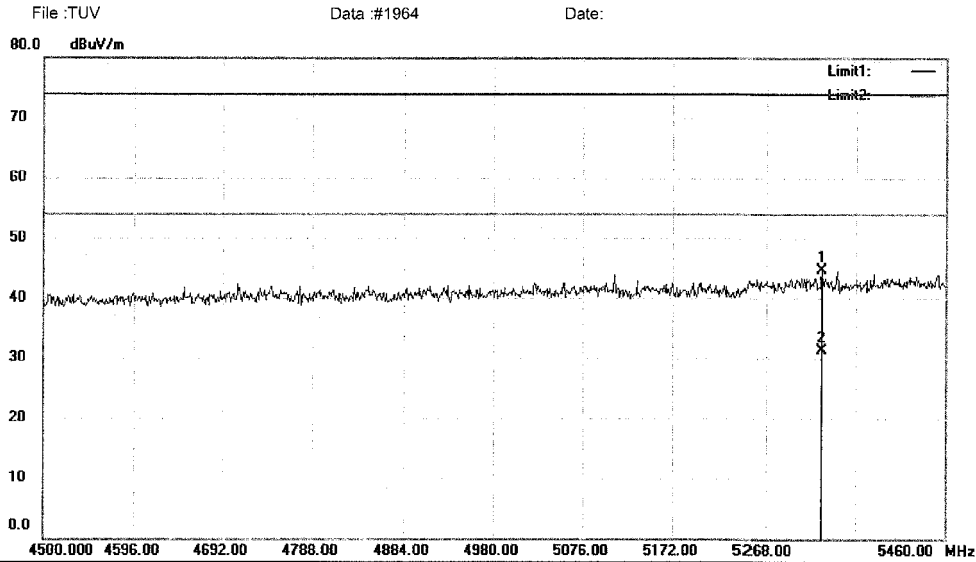
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5378.400	6.57	38.44	45.01	74.00	-28.99	peak		0	
2	*	5378.400	-6.04	38.44	32.40	54.00	-21.60	AVG		0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5327.520	6.29	38.34	44.63	74.00	-29.37	peak	0	
2	*	5327.520	-7.04	38.34	31.30	54.00	-22.70	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1964

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

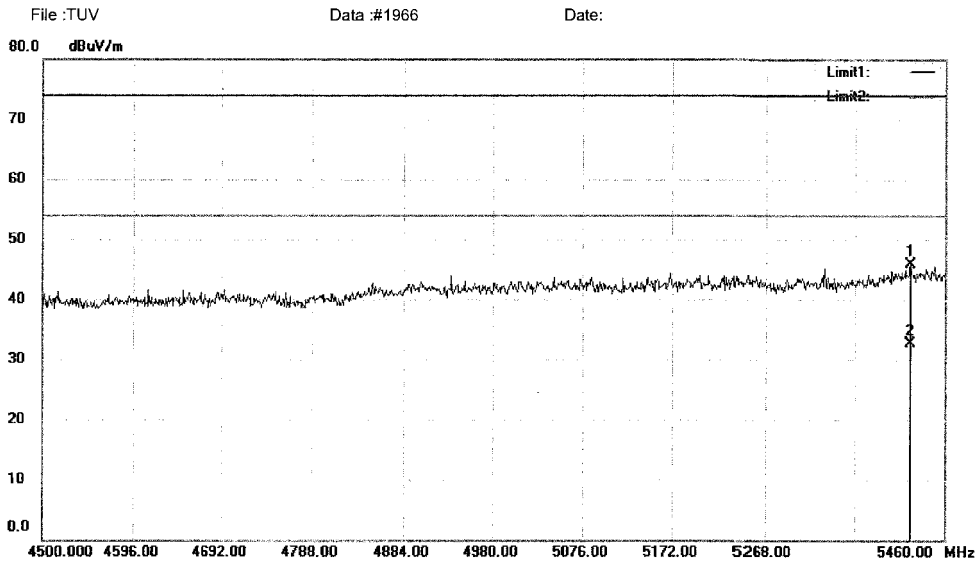Radiated Emission Measurement


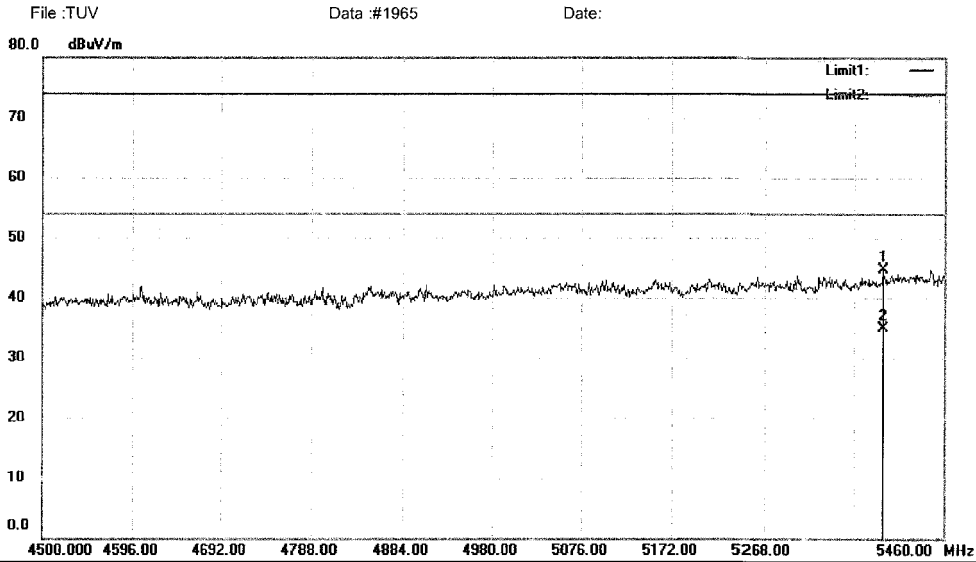
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		5423.520	7.38	38.53	45.91	74.00	-28.09	peak	0
2	*	5423.520	-5.73	38.53	32.80	54.00	-21.20	AVG	0

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


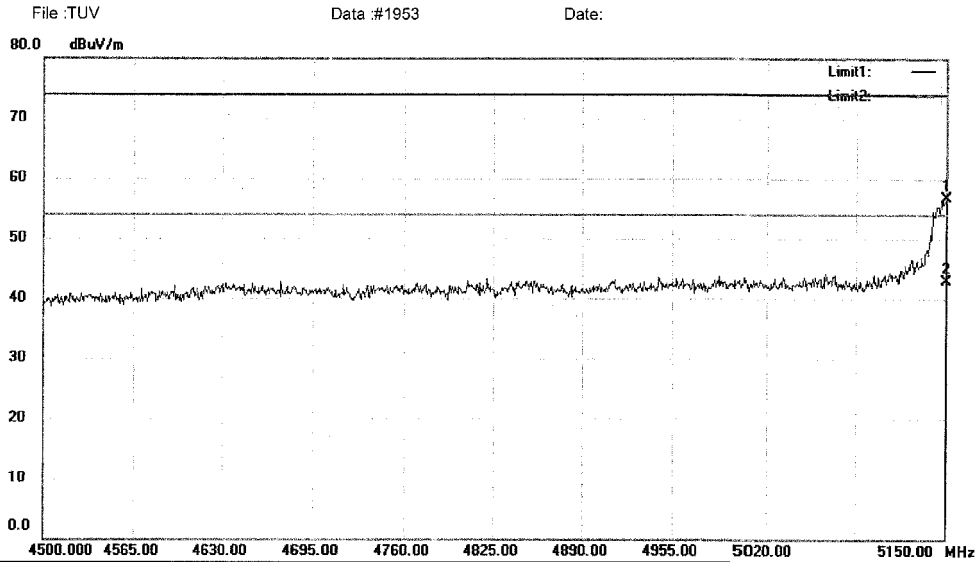
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(20MHz) 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5394.720	6.24	38.48	44.72	74.00	-29.28	peak	0	
2	*	5394.720	-3.48	38.48	35.00	54.00	-19.00	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	18.69	38.00	56.69	74.00	-17.31	peak	0	
2	*	5150.000	4.90	38.00	42.90	54.00	-11.10	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1953

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1954

Date:

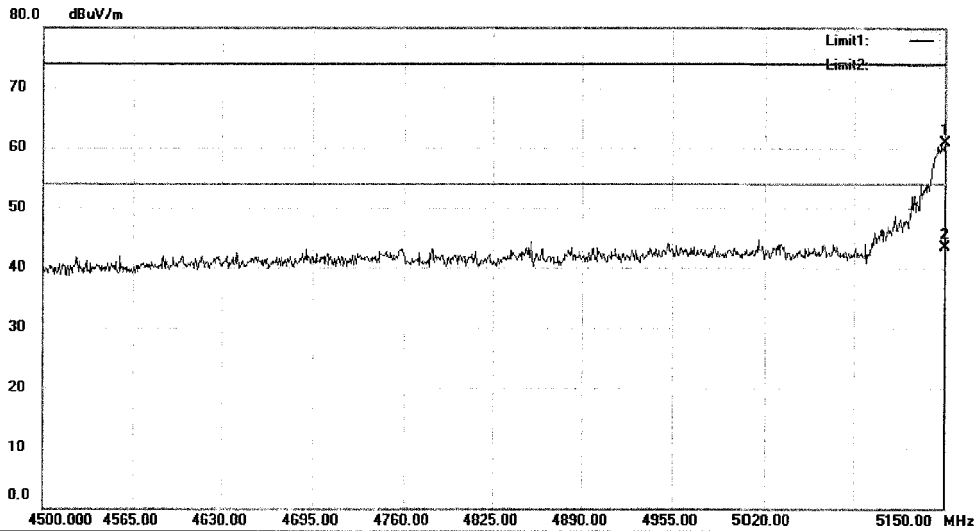

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	22.87	38.00	60.87	74.00	-13.13	peak	0	
2	*	5150.000	5.60	38.00	43.60	54.00	-10.40	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1954

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

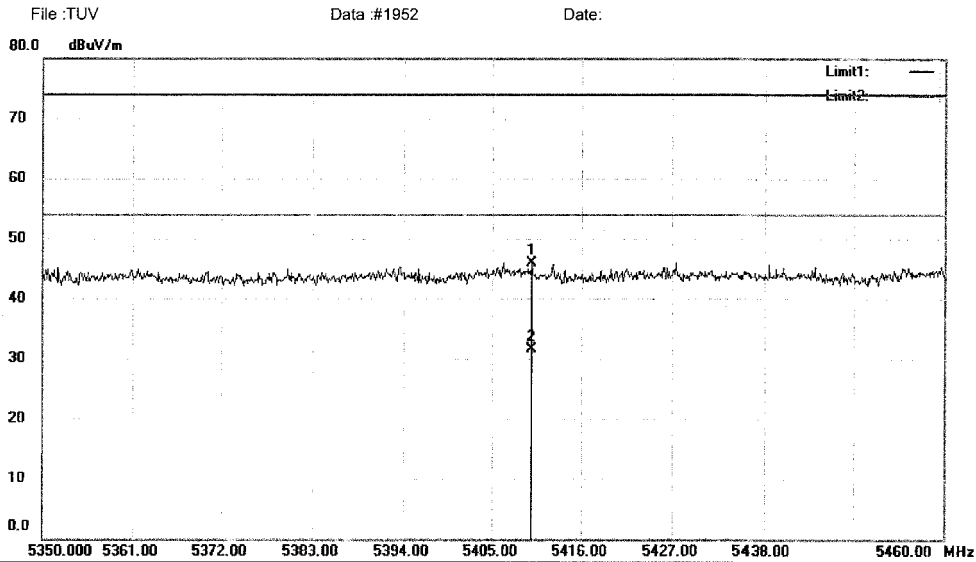
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5409.950	7.37	38.50	45.87	74.00	-28.13	peak	0	
2	*	5409.950	-6.90	38.50	31.60	54.00	-22.40	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1952

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

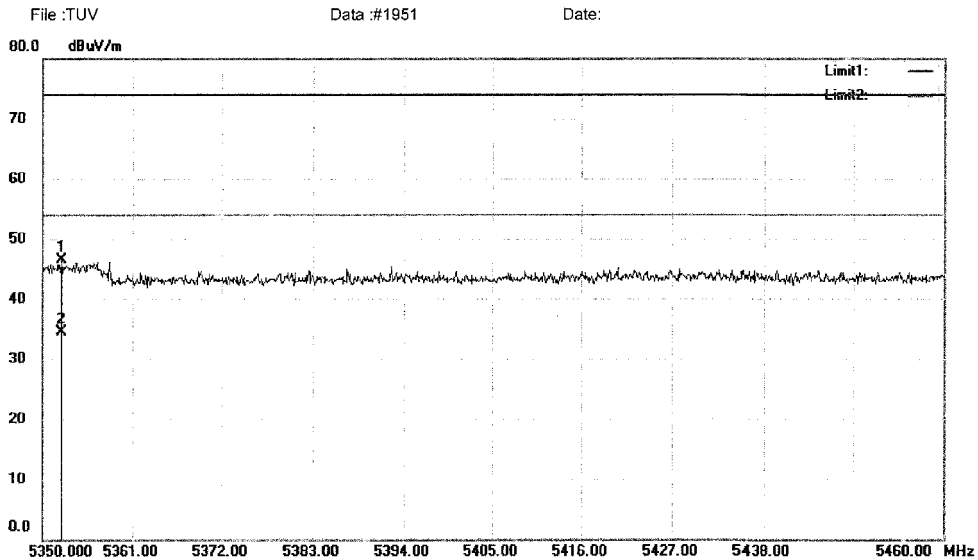
Radiated Emission Measurement


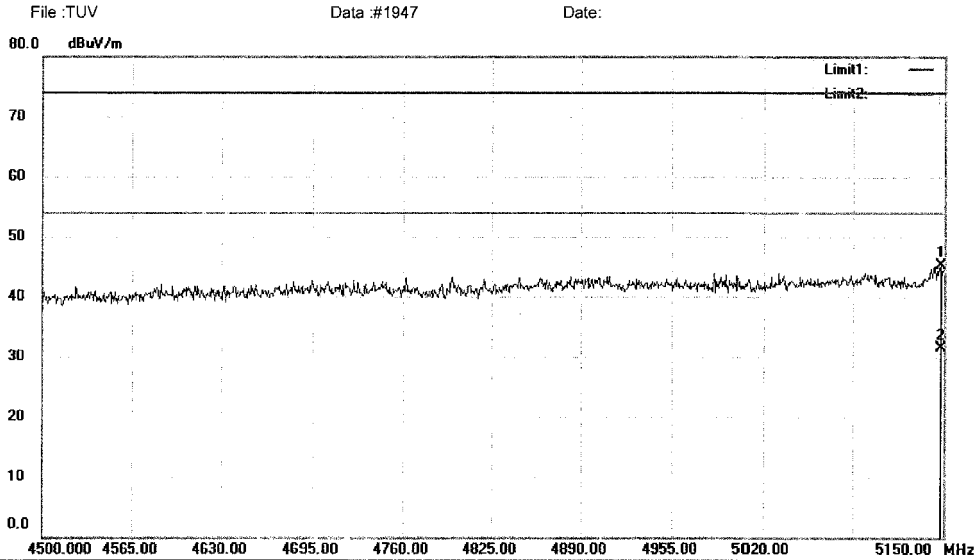
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5352.310	8.03	38.39	46.42	74.00	-27.58	peak	0	
2	*	5352.310	-3.79	38.39	34.60	54.00	-19.40	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		5148.050	7.29	38.00	45.29	74.00	-28.71	peak	0	
2	*	5148.050	-6.50	38.00	31.50	54.00	-22.50	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV\Data :#1947

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

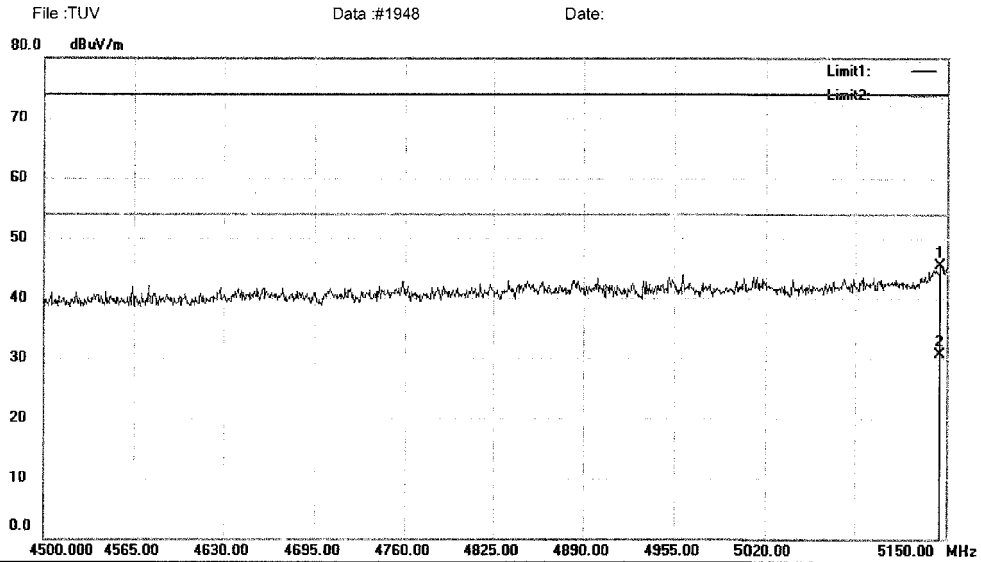
Radiated Emission Measurement


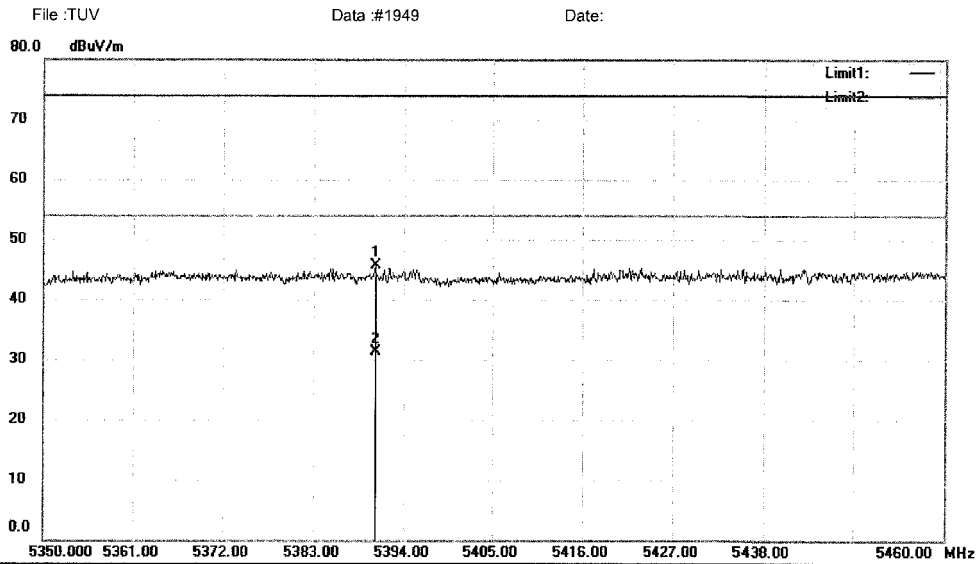
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5145.450	7.50	37.99	45.49	74.00	-28.51	peak	0	
2	*	5145.450	-7.19	37.99	30.80	54.00	-23.20	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

Radiated Emission Measurement


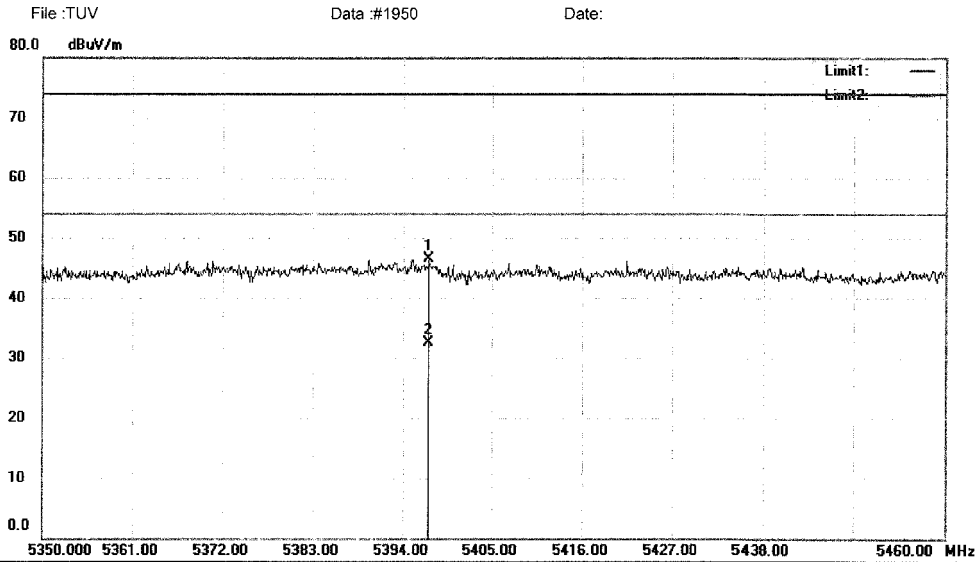
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5390.480	7.34	38.46	45.80	74.00	-28.20	peak	0	
2	*	5390.480	-7.16	38.46	31.30	54.00	-22.70	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5397.190	8.02	38.48	46.50	74.00	-27.50	peak	0	
2	*	5397.190	-5.98	38.48	32.50	54.00	-21.50	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1950

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

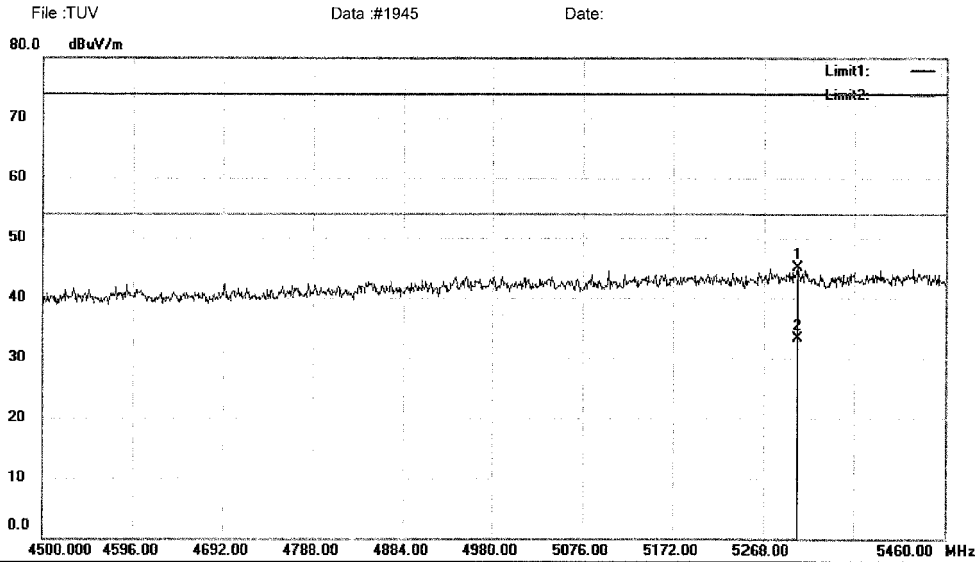
Radiated Emission Measurement


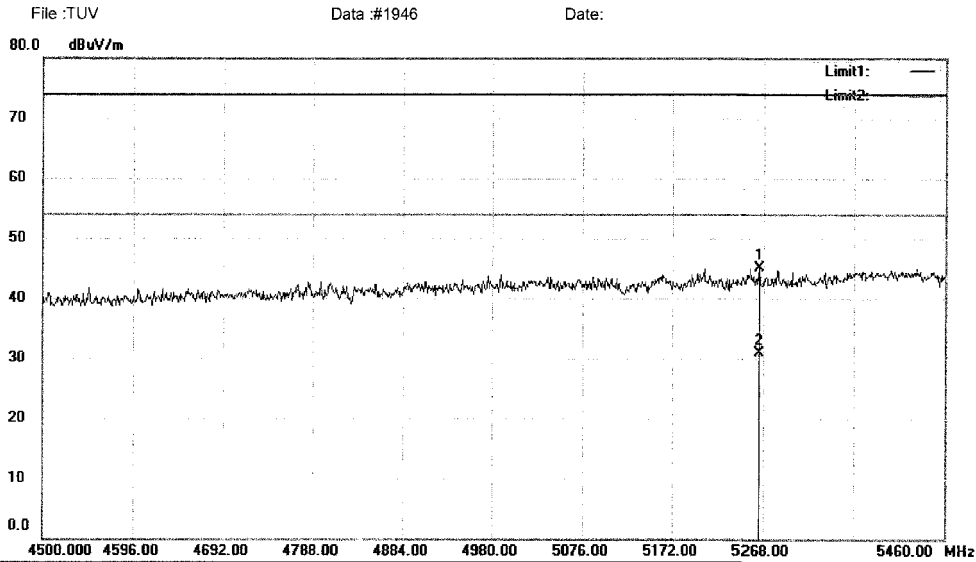
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5304.480	6.80	38.29	45.09	74.00	-28.91	peak	0	
2	*	5304.480	-4.89	38.29	33.40	54.00	-20.60	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5263.200	6.84	38.22	45.06	74.00	-28.94	peak	0	
2	*	5263.200	-7.32	38.22	30.90	54.00	-23.10	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1946

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

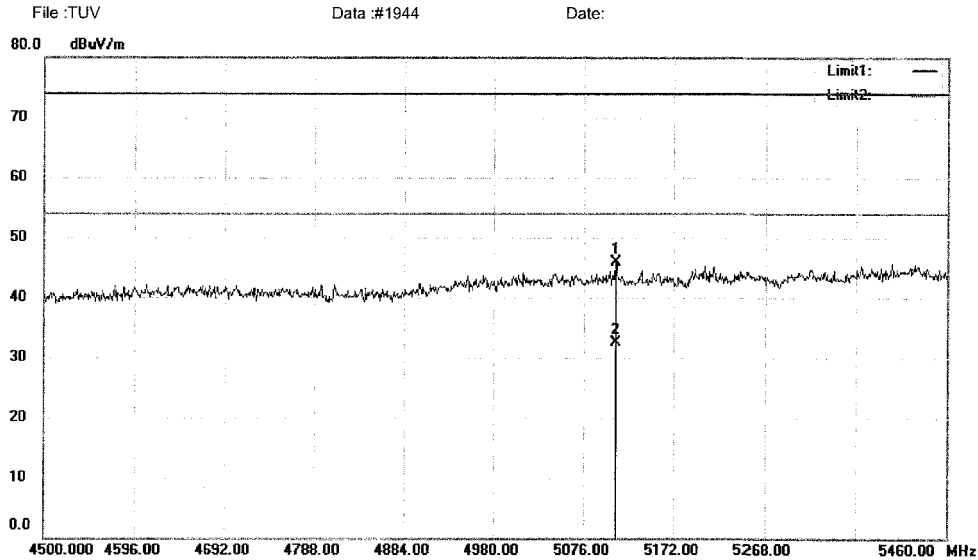Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(40MHz) 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5109.600	7.93	37.92	45.85	74.00	-28.15	peak	0	
2	*	5109.600	-5.42	37.92	32.50	54.00	-21.50	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1944

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1943

Date:

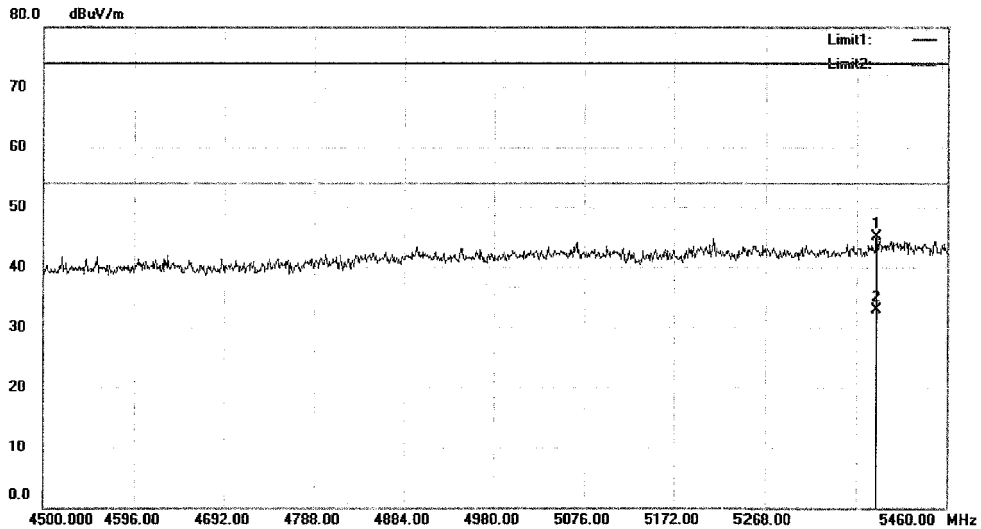

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(40MHz) 5795

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5385.120	6.72	38.46	45.18	74.00	-28.82	peak		0
2	*	5385.120	-5.46	38.46	33.00	54.00	-21.00	AVG		0


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1943

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

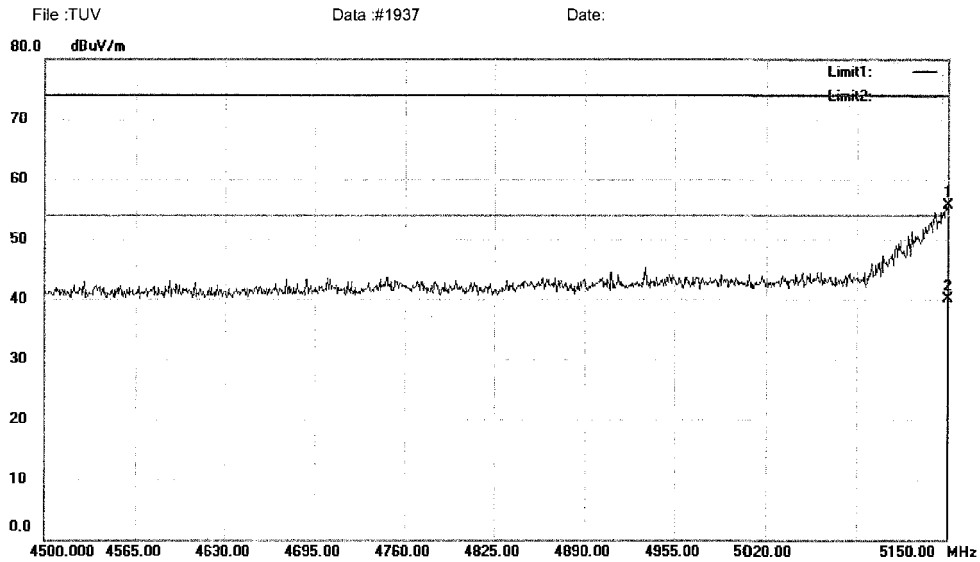
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5150.000	17.78	38.00	55.78	74.00	-18.22	peak	0	
2	*	5150.000	2.20	38.00	40.20	54.00	-13.80	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1937

Page: 1


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV

Data :#1938

Date:

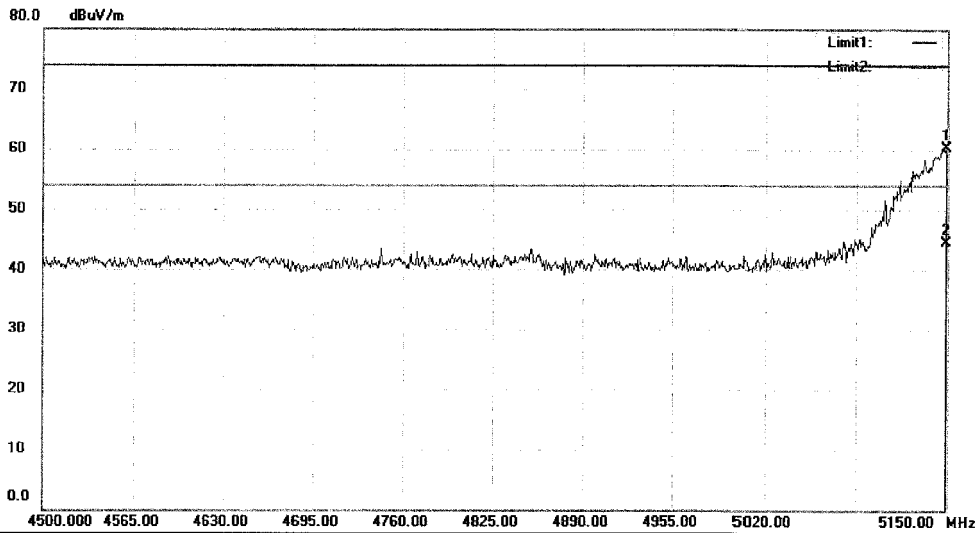

Site 3m Chamber #3

 Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)Restricted Band Peak

Power: AC 120V/60Hz

Humidity: 53 %

EUT: 13.3" Tablet

M/N: P-TA13-104-YIT-01

Mode:11ac(80MHz) 5210

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5149.350	22.39	38.00	60.39	74.00	-13.61	peak	0	
2	*	5149.350	6.60	38.00	44.60	54.00	-9.40	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1938

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

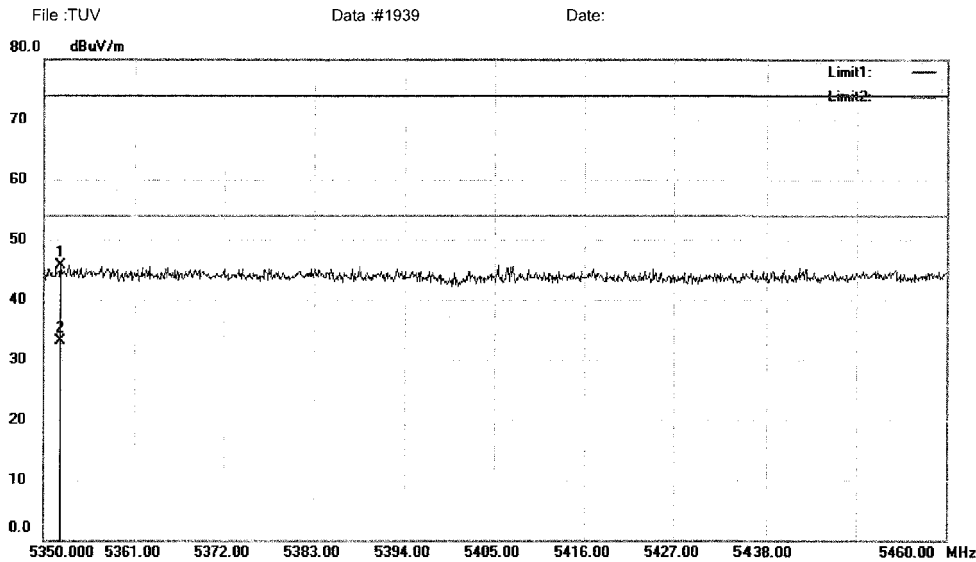Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5351.980	7.31	38.39	45.70	74.00	-28.30	peak	0	
2	*	5351.980	-5.19	38.39	33.20	54.00	-20.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1939

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

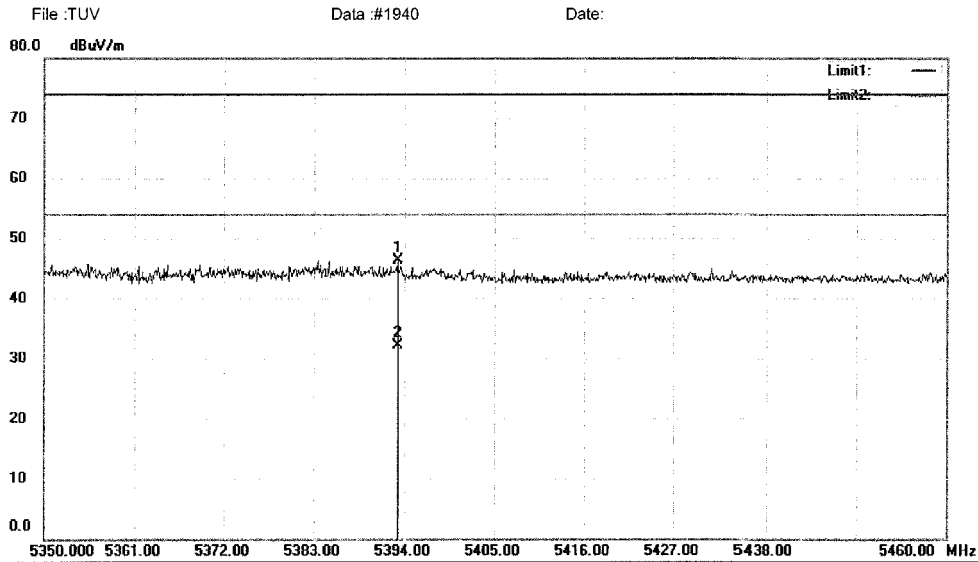
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5210
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5393.120	7.89	38.46	46.35	74.00	-27.65	peak	0	
2	*	5393.120	-6.36	38.46	32.10	54.00	-21.90	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData :#1940

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

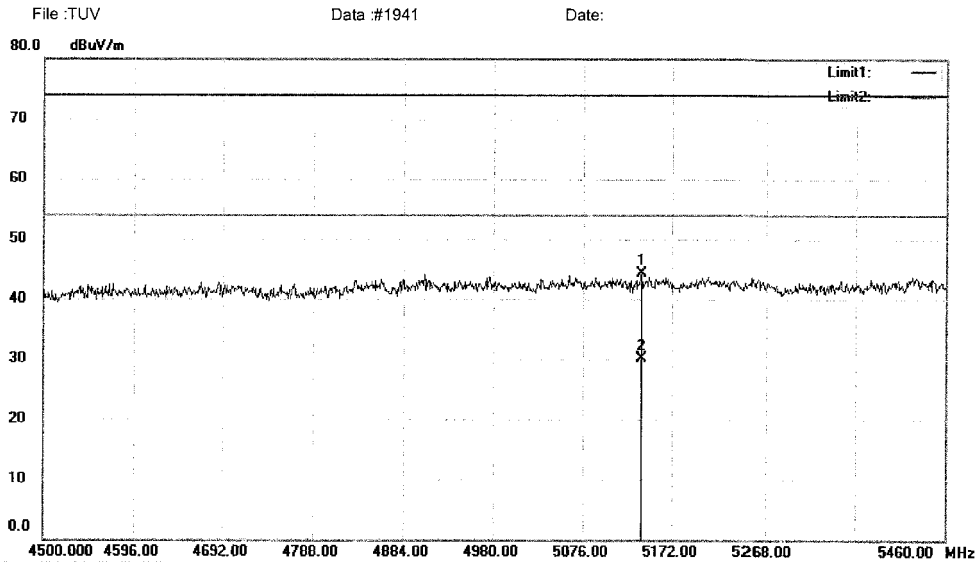
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5139.360	6.41	37.98	44.39	74.00	-29.61	peak	0	
2	*	5139.360	-7.78	37.98	30.20	54.00	-23.80	AVG	0	


*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUVData #1941

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

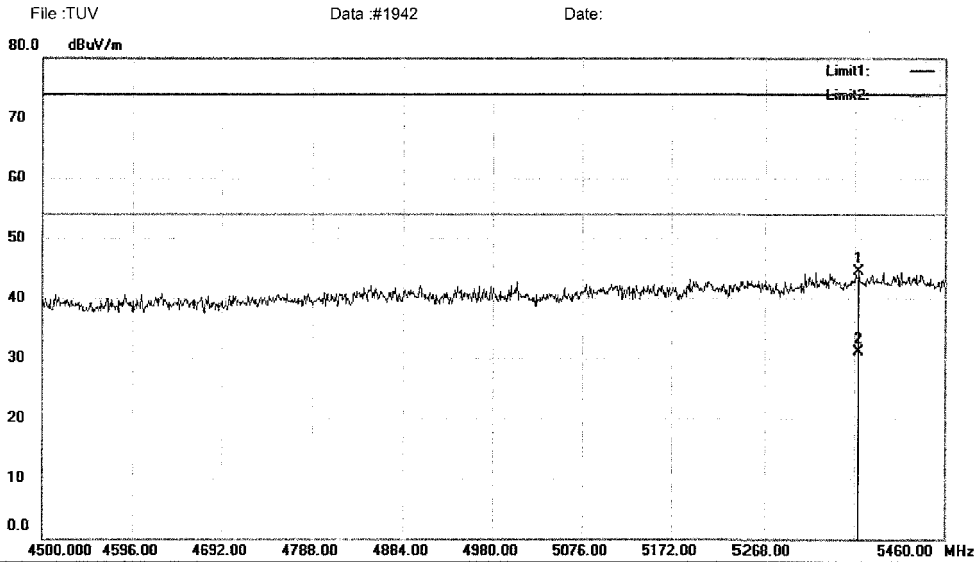
Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)Restricted Band Peak Power: AC 120V/60Hz Humidity: 53 %
 EUT: 13.3" Tablet
 M/N: P-TA13-104-YIT-01
 Mode:11ac(80MHz) 5775
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5368.800	6.09	38.43	44.52	74.00	-29.48	peak	0	
2	*	5368.800	-7.23	38.43	31.20	54.00	-22.80	AVG	0	

*:Maximum data x:Over limit !:over margin

Operator: KK

Prüfbericht - Nr.: 50056690 003

Test Report No.

Seite 308 von 313

Page 308 of 313

5.1.8 Conducted emissions

RESULT:**Pass**

Date of testing : 2016-08-05
Test standard : FCC Part 15.207
FCC part 15.407(b)(6)
RSS-Gen Clause 8.8
Basic standard : ANSI C63.10: 2013
Frequency range : 0.15 – 30MHz
Limits : FCC Part 15.207
Kind of test site : Shield room

Test setup


Input Voltage : AC 120V, 60Hz
Operation Mode : A.1
Earthing : Not Connected
Ambient temperature : 22°C
Relative humidity : 55%
Atmospheric pressure : 101kPa

For details refer to following test plot.

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Conducted Emission Measurement

File: TUV Data: #1053 Date: 2016/08/05

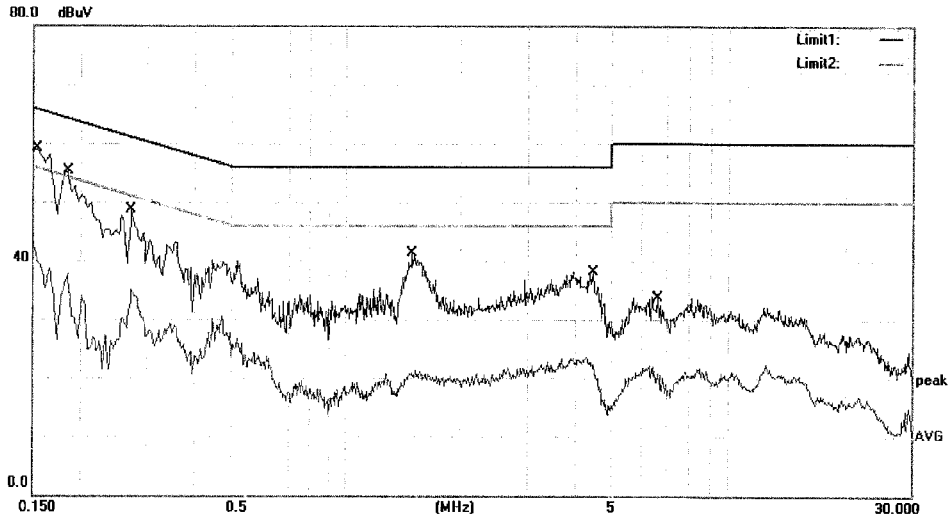

Site Conducted #3 Phase: **L1** Temperature: 26
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 EUT: 13.3' TABLET
 M/N: P-TAB-104-YIT-01
 Mode: wifi5g Connect
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit		Over	Detector	Comment
						dBuV	dB			
1	*	0.1540	49.50	9.62	59.12	65.78	-6.66	QP		
2		0.1540	33.62	9.62	43.24	55.78	-12.54	AVG		
3		0.1860	45.67	9.63	55.30	64.21	-8.91	QP		
4		0.1860	28.00	9.63	37.63	54.21	-16.58	AVG		
5		0.2740	38.98	9.65	48.63	61.00	-12.37	QP		
6		0.2740	25.41	9.65	35.06	51.00	-15.94	AVG		
7		1.4940	31.50	9.85	41.35	56.00	-14.65	QP		
8		1.4940	11.41	9.85	21.26	46.00	-24.74	AVG		
9		4.4420	28.27	9.87	38.14	56.00	-17.86	QP		
10		4.4420	13.68	9.87	23.55	46.00	-22.45	AVG		
11		6.6180	23.80	9.88	33.68	60.00	-26.32	QP		
12		6.6180	12.20	9.88	22.08	50.00	-27.92	AVG		

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL


File: TUV\Data: #1053

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Conducted Emission Measurement

File: TUV Data: #1054 Date: 2016/08/05

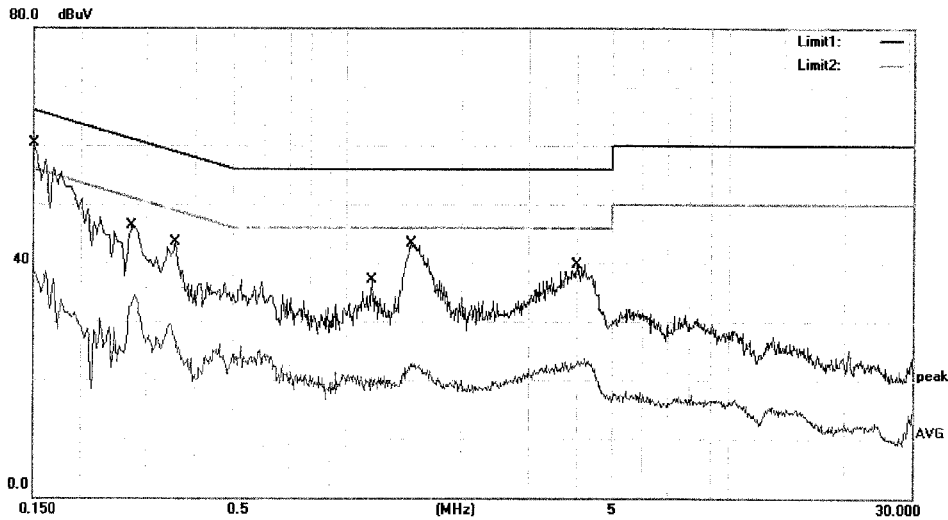

Site Conducted #3 Phase: **N** Temperature: 26
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 EUT: 13.3' TABLET
 M/N: P-TAB-104-YIT-01
 Mode: wifi5g Connect
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1500	50.71	9.62	60.33	66.00	-5.67	QP	
2		0.1500	29.57	9.62	39.19	56.00	-16.81	AVG	
3		0.2740	36.56	9.65	46.21	61.00	-14.79	QP	
4		0.2740	24.90	9.65	34.55	51.00	-16.45	AVG	
5		0.3540	33.79	9.67	43.46	58.87	-15.41	QP	
6		0.3540	19.89	9.67	29.56	48.87	-19.31	AVG	
7		1.1620	27.19	9.85	37.04	56.00	-18.96	QP	
8		1.1620	11.54	9.85	21.39	46.00	-24.61	AVG	
9		1.4780	33.51	9.85	43.36	56.00	-12.64	QP	
10		1.4780	13.02	9.85	22.87	46.00	-23.13	AVG	
11		3.9900	29.89	9.86	39.75	56.00	-16.25	QP	
12		3.9900	13.83	9.86	23.69	46.00	-22.31	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

File: TUV\Data: #1054

Page: 1

6. Photographs of the Test Set-Up

Photograph 1: Set-up for Conducted Emissions



Photograph 2: Set-up for Spurious Emissions for 30 - 1000MHz



Photograph 3: Set-up for Spurious Emissions for 1 - 18GHz



Photograph 4: Set-up for Spurious Emissions for 18 - 40GHz



7. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Measurement Uncertainty	6
Table 3: Technical Specification of EUT	8
Table 4: Technical Specification of 5GHz, 802.11a/n	8
Table 5: Technical Specification of 5GHz, 802.11ac	9
Table 6: List of WLAN Channel of 5GHz 802.11a/n	9
Table 7: List of WLAN Channel of 5GHz 802.11ac	10
Table 8: Test result of Peak Output Power of Band U-NII-1	15
Table 9: Test result of Peak Output Power of Band U-NII-3	16
Table 10: Test result of 26dB Bandwidth Band U-NII-1	17
Table 11: Test result of 26dB Bandwidth of Band U-NII-3	18
Table 12: Test result of 99% Bandwidth Band U-NII-1	19
Table 13: Test result of 99% Bandwidth of Band U-NII-3	20
Table 14: Test result of 6dB Bandwidth Band U-NII-1	21
Table 15: Test result of 6dB Bandwidth of Band U-NII-3	22
Table 16: Test result of power spectral density of Band U-NII-1	23
Table 17: Test result of power spectral density of Band U-NII-3	24

8. List of Photographs

Photograph 1: Set-up for Conducted Emissions	311
Photograph 2: Set-up for Spurious Emissions for 30 - 1000MHz	311
Photograph 3: Set-up for Spurious Emissions for 1 - 18GHz	312
Photograph 4: Set-up for Spurious Emissions for 18 - 40GHz	312