



RF MEASUREMENT REPORT

FCC ID: 2AI9TOAW-AP1541
Applicant: ALE USA Inc.
Product: OmniAccess Stellar
Model No.: OAW-AP1541
Brand Name: Alcatel-Lucent Enterprise
FCC Classification: 15E 6 GHz Low Power Indoor Access Point (6ID)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Result: Complies
Received Date: 2025-11-25
Test Date: 2025-12-15 ~ 2026-01-29

Reviewed By:

Vincent Yu

Vincent Yu

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1060119-U206	V01	Initial Report	2026-05-21	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	8
1.6. Working Frequencies	8
1.7. Antenna Details	10
1.8. WLAN Configuration	11
2. Test Configuration	12
2.1. Test Mode	12
2.2. Test System Connection Diagram	13
2.3. Test Software	13
2.4. Applied Standards	14
2.5. Test Environment Condition	14
3. Antenna Requirements	15
4. Measuring Instrument	16
5. Decision Rules and Measurement Uncertainty	18
5.1. Decision Rules	18
5.2. Measurement Uncertainty	18
6. Test Result	19
6.1. Summary	19
6.2. 26 dB Bandwidth Measurement	20
6.2.1. Test Limit	20
6.2.2. Test Procedure	20
6.2.3. Test Setting	20
6.2.4. Test Setup	21
6.2.5. Test Result	21
6.3. Output Power Measurement	22
6.3.1. Test Limit	22
6.3.2. Test Procedure	22
6.3.3. Test Setting	22
6.3.4. Test Setup	22
6.3.5. Test Result	22
6.4. Power Spectral Density Measurement	23

6.4.1.	Test Limit	23
6.4.2.	Test Procedure	23
6.4.3.	Test Setting	23
6.4.4.	Test Setup.....	23
6.4.5.	Test Result	24
6.5.	In-Band Emission Measurement	25
6.5.1.	Test Limit	25
6.5.2.	Test Procedure	25
6.5.3.	Test Setting	25
6.5.4.	Test Setup.....	26
6.5.5.	Test Result	26
6.6.	Frequency Stability Measurement.....	27
6.6.1.	Test Limit	27
6.6.2.	Test Procedure	27
6.6.3.	Test Setup.....	27
6.6.4.	Test Result.....	28
6.7.	Contention Based Protocol Measurement	29
6.7.1.	Test Limit	29
6.7.2.	Test Procedure	29
6.7.3.	Test Setting	29
6.7.4.	Test Setup.....	30
6.7.5.	Test Result.....	30
6.8.	Radiated Spurious Emission Measurement	31
6.8.1.	Test Limit	31
6.8.2.	Test Procedure	31
6.8.3.	Test Setting	32
6.8.4.	Test Setup.....	34
6.8.5.	Test Result.....	35
6.9.	Radiated Restricted Band Edge Measurement.....	36
6.9.1.	Test Limit	36
6.9.2.	Test Procedure	38
6.9.3.	Test Setting	38
6.9.4.	Test Setup.....	39
6.9.5.	Test Result.....	39
6.10.	AC Conducted Emissions Measurement.....	40
6.10.1.	Test Limit	40
6.10.2.	Test Setup.....	40
6.10.3.	Test Result.....	40

Appendix A - Test Result.....	41
--------------------------------------	-----------

A.1	Duty Cycle Test Result	41
A.2	26 dB Bandwidth Test Result	43
A.3	Output Power Test Result	56
A.4	Power Spectral Density Test Result	60
A.5	In-Band Emission Measurement	106
A.6	Frequency Stability Test Result	138
A.7	Contention Based Protocol Test Result	139
A.8	Radiated Spurious Emission Test Result	151
A.9	Radiated Restricted Band Edge Test Result	211
A.10	AC Conducted Emissions Test Result	251
Appendix B - Test Setup Photograph		255
Appendix C - EUT Photograph		256

1. General Information

1.1. Applicant

ALE USA Inc.
2000 Corporate Center Drive
Thousand Oaks, CA 91320

1.2. Manufacturer

ALE USA Inc.
2000 Corporate Center Drive
Thousand Oaks, CA 91320

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166
	CNAS: L10551 ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284
	ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: 3261 FCC: 291082, TW3261
	ISED: TW3261

1.4. Product Information

Product Name	OmniAccess Stellar
Model No.	OAW-AP1541
EUT Identification No.	20251125Sample#07 (Conducted) 20251125Sample#01 (Radiated) 20251125Sample#03 (CBP)
Bluetooth Specification	Bluetooth_LE
ZigBee Specification	802.15.4
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Operating Temperature	0 °C ~ 50 °C
Antenna Information	Refer to section 1.7
Power Type	AC/DC Adapter or PoE Injector
Accessory(ies)	
AC/DC Adapter	Model No.: AA65U-540A Input Power: 100-240 V ~ 50/60 Hz, 1.6 A Output Power: 54 V = 1.2 A, 64.8 W
PoE Injector	Model: POE60U-1BT-X Input: 100-240 V ~ 50/60 Hz, 1.5 A Output: 56 V, 0.535 A, 30 W PIN 3,6+ PIN 1,2 Return Output: 56 V, 0.535 A, 30 W PIN 4,5+ PIN 7,8 Return
Notes:	
1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	
2. AC/DC Adapter and PoE Injector are not marketed in conjunction with the device.	

1.5. Radio Specification under Test

Frequency Range	UNII-5: 5925 ~ 6425 MHz UNII-6: 6425 ~ 6525 MHz UNII-7: 6525 ~ 6875 MHz UNII-8: 6875 ~ 7125 MHz	
Modulation Technology	802.11ax: OFDMA	
Data Rate	802.11ax: up to 4804 Mbps 802.11be: up to 11528 Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	6495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--

802.11ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

802.11be-EHT320

Channel	Frequency	Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz	95	6425 MHz
127	6585 MHz	159	6745 MHz	191	6905 MHz

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)				Directional Gain (dBi)	
		Ant 0	Ant 1	Ant 2	Ant 3	For Power	For PSD
Wi-Fi Antenna (2.4 GHz / 5 GHz Full Band)							
PIFA	2400 ~ 2483.5	4.63	5.42	5.08	5.95	1.97	7.23
	5150 ~ 5250	3.91	4.39	3.58	4.08	1.94	7.93
	5250 ~ 5350	4.50	4.39	3.72	3.69	1.94	7.93
	5470 ~ 5725	3.73	3.67	3.70	3.78	1.88	7.75
	5725 ~ 5850	4.17	4.75	3.46	5.54	1.75	7.73
Wi-Fi Antenna (5 GHz Low Band)							
PIFA	5150 ~ 5250	3.91	4.39	3.58	4.08	1.94	7.93
	5250 ~ 5350	4.50	4.39	3.72	3.69	1.94	7.93
Antenna Type	Frequency Band (MHz)	Antenna Gain (dBi)				Directional Gain (dBi)	
		Ant 4	Ant 5	Ant 6	Ant 7	For Power	For PSD
Wi-Fi Antenna (6 GHz)							
PIFA	5925 ~ 6425	3.09	3.39	3.99	4.12	1.36	7.33
	6425 ~ 6525	3.23	3.23	4.18	3.41	1.93	7.83
	6525 ~ 6875	3.23	4.09	4.18	3.41	1.93	7.83
	6875 ~ 7125	2.90	3.77	2.57	2.19	1.44	7.37
Wi-Fi Antenna (5 GHz High Band)							
PIFA	5470 ~ 5725	4.06	4.80	3.98	3.32	1.73	7.73
	5725 ~ 5850	3.21	3.76	4.58	3.60	1.38	7.30
Notes:							
1. The EUT supports Cyclic Delay Diversity (CDD) mode for 802.11a/b/g/n/ac/ax/be.							
2. The EUT also supports Beamforming mode for 802.11n/ac/ax/be, not include 802.11a/b/g.							
3. All antenna information is provided by the manufacturer.							

1.8. WLAN Configuration

Model No.	WLAN Antenna Port	WLAN Config 1 - Supporting Band	WLAN Config 2 - Supporting Band
OAW-AP1541	5 GHz 4TX Port	5 GHz Full Band: U-NII-1 (5150-5250 MHz) U-NII-2A (5250-5350 MHz) U-NII-2C (5470-5725 MHz) U-NII-3 (5725-5850 MHz)	5 GHz Low Band: U-NII-1 (5150-5250 MHz) U-NII-2A (5250-5350 MHz)
	2 GHz 4TX Port	2400-2483.5 MHz	2400-2483.5 MHz
	6 GHz 4TX Port	U-NII-5 (5925-6425 MHz) U-NII-6 (6425-6525 MHz) U-NII-7 (6525-6875MHz) U-NII-8 (6875-7125 MHz)	5 GHz High Band: U-NII-2C (5470-5725 MHz) U-NII-3 (5725-5850 MHz)
Note 1: WLAN Config 1 and WLAN Config 2 only differ in the software settings and there are no changes in the hardware. Note 2: For WLAN Config 2, only the 5 GHz High Band was tested; the data for the 5 GHz Low Band is referenced from WLAN Config 1.			


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11ax-HE20 (MCS0)
Mode 2: Transmit by 802.11ax-HE40 (MCS0)
Mode 3: Transmit by 802.11ax-HE80 (MCS0)
Mode 4: Transmit by 802.11ax-HE160 (MCS0)
Mode 5: Transmit by 802.11be-EHT20 (MCS0)
Mode 6: Transmit by 802.11be-EHT40 (MCS0)
Mode 7: Transmit by 802.11be-EHT80 (MCS0)
Mode 8: Transmit by 802.11be-EHT160 (MCS0)
Mode 9: Transmit by 802.11be-EHT320 (MCS0)
Note 1: All applicable modes of operation and data rates were investigated. The RF test requirements were performed on the selected representative worst-case configurations with the highest measured output power.
Note 2: For beamforming operation, the software automatically backs power down based on CDD power. Therefore, only the CDD mode was evaluated in this report.
Note 3: 802.11ax (HE) and 802.11be (EHT) are both OFDMA-based modes. Considering the similarity of the modulation technology and the output power verification results, 802.11be were selected as representative worst-case modes for RF testing. Therefore, only the 802.11be test data are presented in this report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10-2020 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

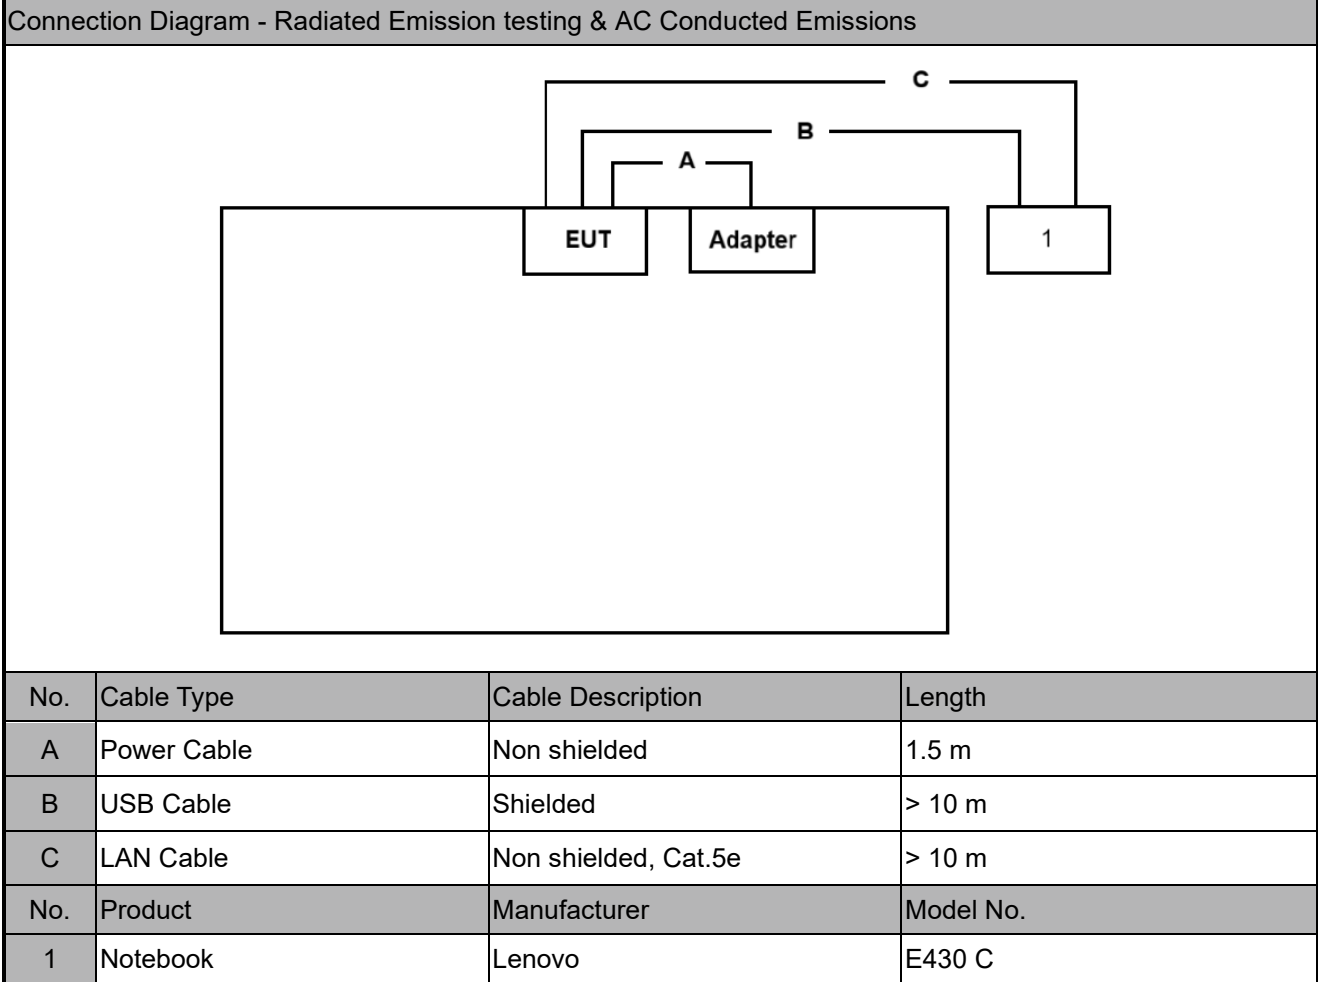

2.3. Test Software

The test utility software used during testing was “QSPR” and the version was “5.0-00202”.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024
- FCC KDB 789033 D02 v02r01
- FCC KDB 987594 D02 v03
- FCC KDB 987594 D04 v03
- FCC KDB 662911 D01 v02r01
- FCC KDB 414788 D01 v01r01
- FCC KDB 412172 D01 v01r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.407(a)(10) of the FCC Rules/Regulations:

Access points operating under the provisions of paragraphs (a)(5) and (a)(6) of this section must employ a permanently attached integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(10).

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19 2027-04-14	WJ-AC1
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07076	1 year	2026-11-18	WJ-AC1
TRILOG Broad Band Antenna	Schwarzbeck	VULB 9163	MRTSUE07099	1 year	2026-04-22 2027-04-21	WJ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11333	1 year	2026-06-16	WJ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11402	1 year	2026-11-30	WJ-AC1
Anechoic Chamber	TDK	WJ-AC1	MRTSUE07115	1 year	2026-05-16	WJ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE07285	1 year	2026-02-18 2027-02-11	WJ-AC2
Horn Antenna	RFSPIN	DRH18-E	MRTSUE07105	1 year	2026-05-12	WJ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2026-08-18	WJ-AC2
Preamplifier	EMCI	EMC118A45SE	MRTSUE07102	1 year	2026-04-09 2027-04-08	WJ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE07103	1 year	2026-04-09 2027-04-08	WJ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11315	1 year	2026-06-16	WJ-AC2
Thermohygrometer	testo	608-H1	MRTSUE11332	1 year	2026-06-05	WJ-AC2
Anechoic Chamber	TDK	WJ-AC2	MRTSUE07117	1 year	2026-05-12	WJ-AC2
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2026-08-31	WJ-TR1
Fixed Attenuator	MVE	MVE2213	MRTSUE07316	Note	Note	WJ-TR1
RF Cable	UCwave	UCE500	MRTSUE07340	Note	Note	WJ-TR1
High and low temperature-humidity test chamber	GWS	EL-01JA	MRTSUE07114	1 year	2026-05-17	WJ-TR1
Thermohygrometer	testo	608-H1	MRTSUE11403	1 year	2026-11-30	WJ-TR1
USB Power Sensor	Keysight	U2021XA	MRTSUE07141	1 year	2026-03-15 2027-03-12	WJ-SR3
Signal Analyzer	Keysight	N9020B	MRTSUE07037	1 year	2026-08-31	WJ-SR3
Fixed Attenuator	MVE	MVE2213	MRTSUE07316	Note	Note	WJ-SR3
RF Cable	UCwave	UCE500	MRTSUE07340	Note	Note	WJ-SR3
Thermohygrometer	testo	608-H1	MRTSUE11331	1 year	2026-06-05	WJ-SR3
Shielding Room	TDK	WJ-SR3	MRTSUE07125	N/A	N/A	WJ-SR3
EMI Test Receiver	R&S	ESR3	MRTSUE07110	1 year	2026-04-19 2027-04-14	WJ-SR5
Two-Line V-Network	R&S	ENV216	MRTSUE07202	1 year	2026-05-26	WJ-SR5

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Thermohygrometer	testo	608-H1	MRTSUE11317	1 year	2026-06-05	WJ-SR5
Shielding Room	TDK	WJ-SR5	MRTSUE07127	N/A	N/A	WJ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE07028	1 year	2026-09-28	SIP-TR1
Pxle Microwave Vector Signal Source test set	Keysight	M9384B	MRTSUE06994	1 year	2026-12-03	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE06618	1 year	2026-10-08	SIP-TR1
Power Divider	MVE	MVE8577	MRTSUE06745	Note	Note	SIP-TR1
Attenuator	MVE	MVE2213	MRTSUE11116	Note	Note	SIP-TR1
Digital Multimeter	Fluke	18B+	MRTSUE11134	Note	Note	SIP-TR1
RF Cable	UCwave	UCE500	MRTSUE07410	Note	Note	SIP-TR1

Note: The loss of the Power Divider & Directional Coupler & Attenuator & Cable will be measured before testing.

Software	Version	Function
e3	230711	RE & CE
CONTROLLER CO3000	V 1.03.02	RE Antenna & Turntable
Agilent Power Panel	V 3.9	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9 kHz ~ 150 kHz: 3.59 dB 150 kHz ~ 30 MHz: 3.20 dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9 kHz ~ 30 MHz: 2.56 dB Coplanar: 9 kHz ~ 30 MHz: 2.55 dB Horizontal: 30 MHz ~ 200 MHz: 3.48 dB 200 MHz ~ 1 GHz: 4.17 dB 1 GHz ~ 40 GHz: 5.01 dB Vertical: 30 MHz ~ 200 MHz: 4.09 dB 200 MHz ~ 1 GHz: 5.30 dB 1 GHz ~ 40 GHz: 4.85 dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.9 dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 1.4 dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.9 dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$): 2.6%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)(11)	26 dB Bandwidth	Conducted	Pass
15.407(a)(5)	Maximum Equivalent Isotropically Radiated Power (EIRP)		Pass
15.407(a)(5)	Maximum Power Spectral Density (EIRP)		Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(g)	Frequency Stability		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(b)(6)	Unwanted Emissions	Radiated	Pass
15.407(b)(9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150 kHz - 30 MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26 dB Bandwidth Measurement

6.2.1. Test Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

6.2.2. Test Procedure

KDB 789033 D02 v02r01- Section II)C)1) (26 dB Bandwidth)

KDB 789033 D02 v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26 dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26 dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum EIRP over the frequency band of operation must not exceed 30 dBm.

6.3.2. Test Procedure


KDB 789033 D02 v02r01- Section II(E)3)b) Method PM-G

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

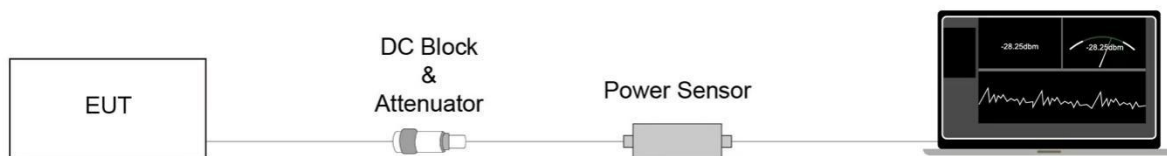

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm EIRP in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02 v02r01-Section II)F)

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26 dB EBW of the signal.
3. RBW = 1 MHz
4. VBW = 3 MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

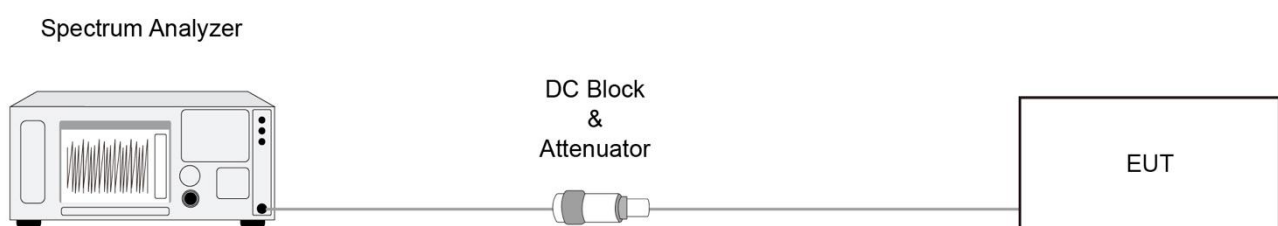

6.4.5. Test Result

Refer to Appendix A.4.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge.

(The channel edge is defined as the 26 dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02 v03 - Section J

6.5.3. Test Setting

Emissions Mask Reference Level Measurement


1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

Spectrum Analyzer

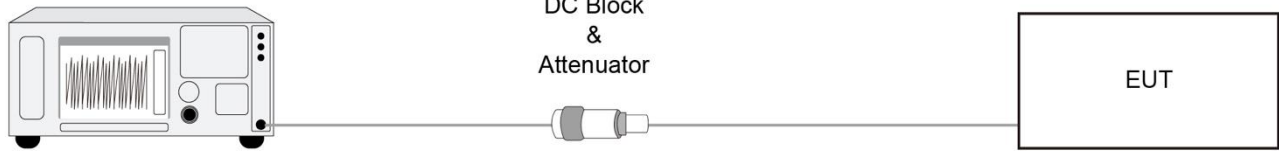

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 °C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 °C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20 °C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

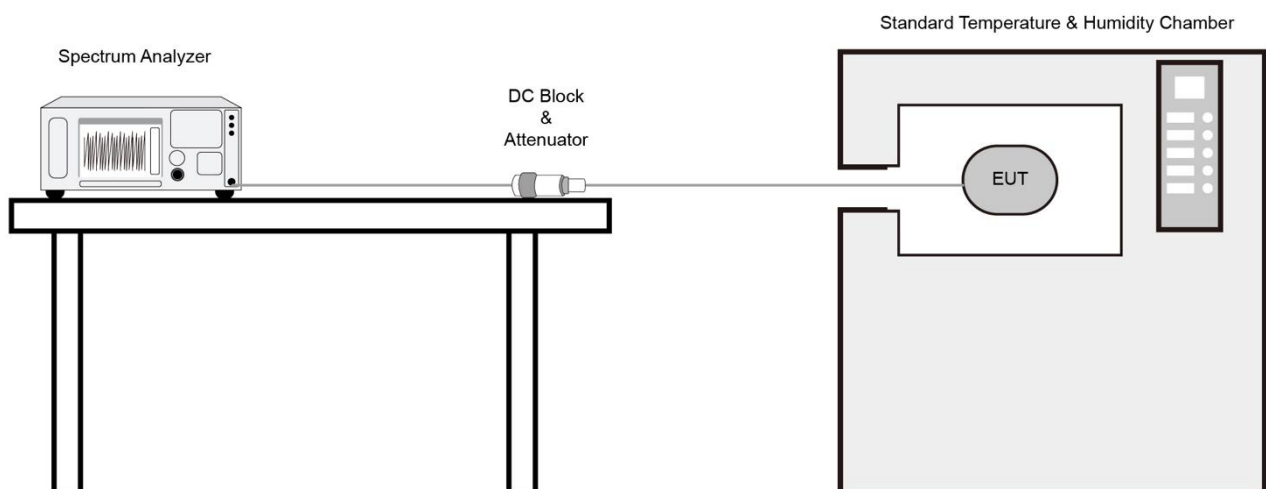

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Contention Based Protocol Measurement

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62 dBm (The threshold is referenced to a 0 dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure


KDB 987594 D02 v03- Section I

6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN

signal and repeat the process.

6.7.4. Test Setup

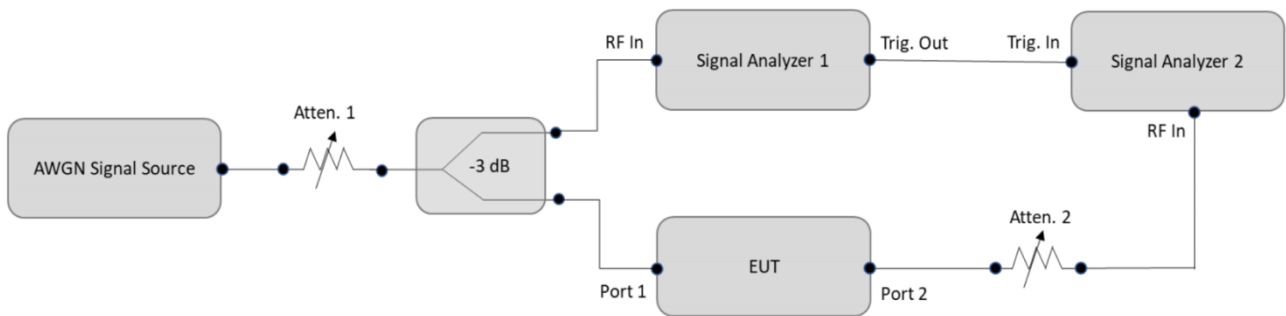

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For 15.407(b)(6) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6 GHz EMC Measurement v03 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02 v02r01-Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.


4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.8.4. Test Setup


Below 30 MHz Test Setup:

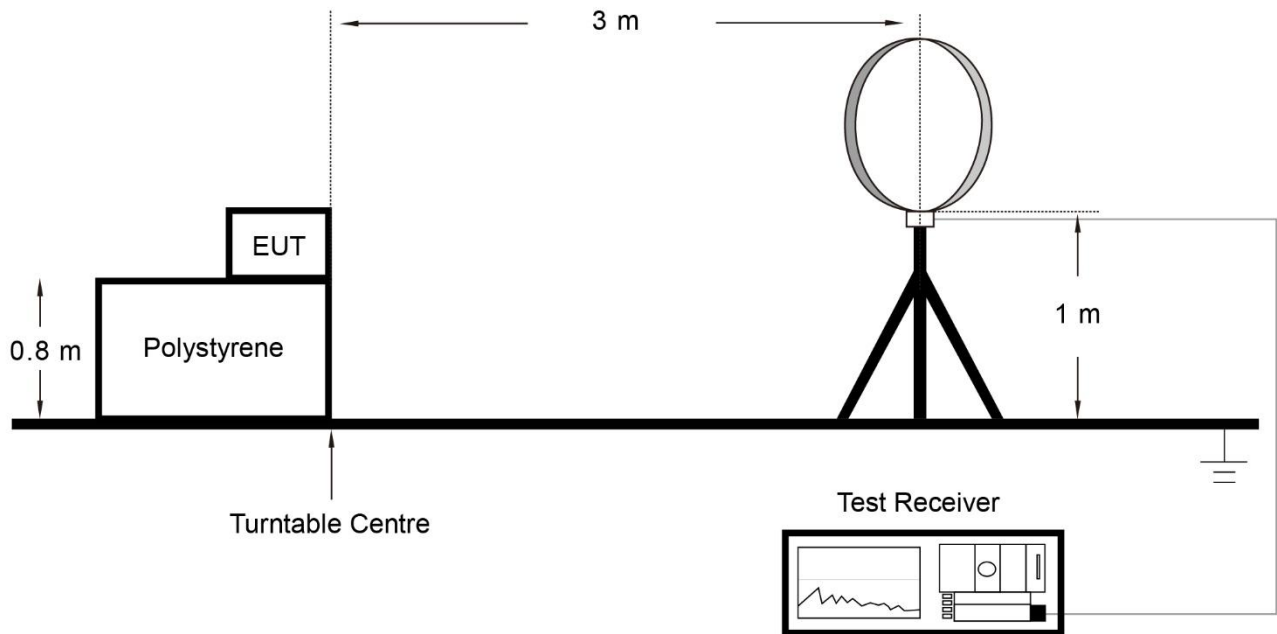

Below 1 GHz Test Setup:

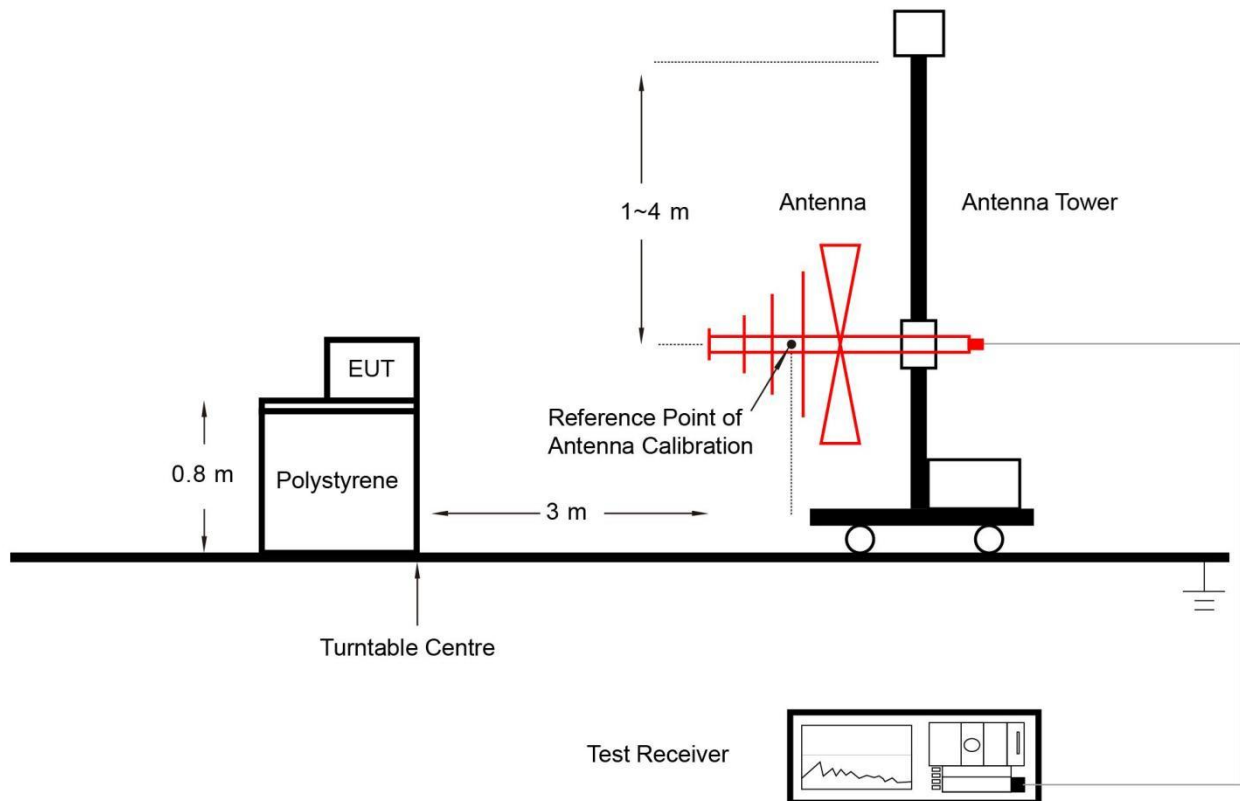

Above 1 GHz Test Setup:

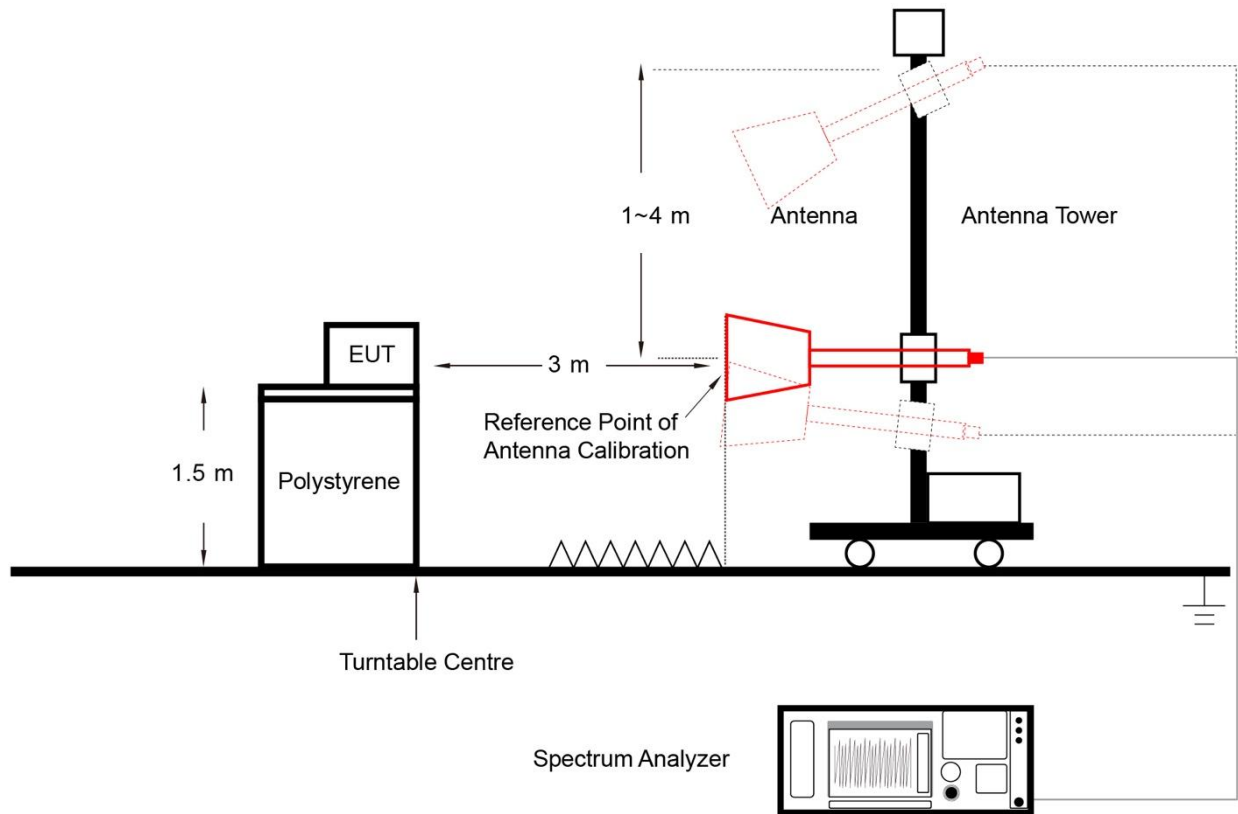

6.8.5. Test Result

Refer to Appendix A.8.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(6) requirement:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6 GHz EMC Measurement v03 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02 v02r01-Section II)G)

6.9.3. Test Setting


Peak Measurements above 1 GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW = 3 MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1 GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1 MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

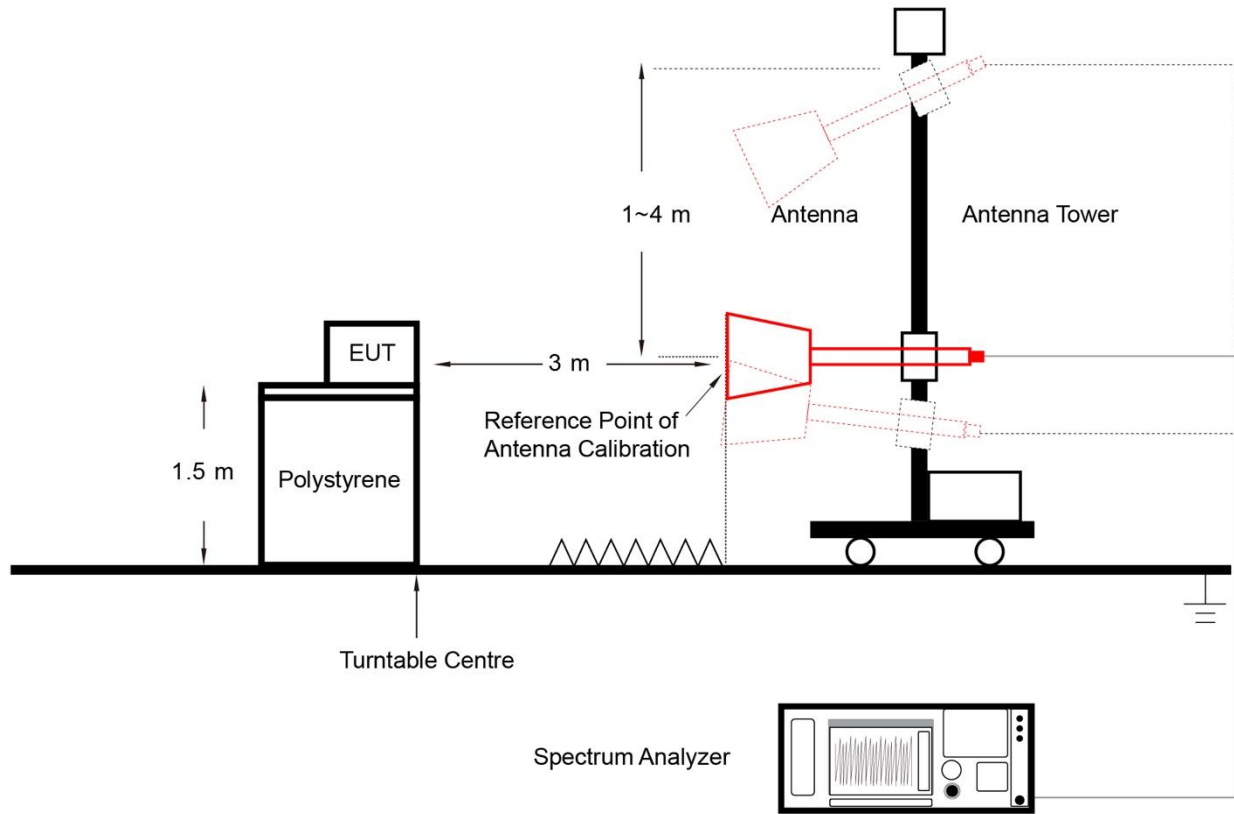

6.9.5. Test Result

Refer to Appendix A.9.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.10.2. Test Setup

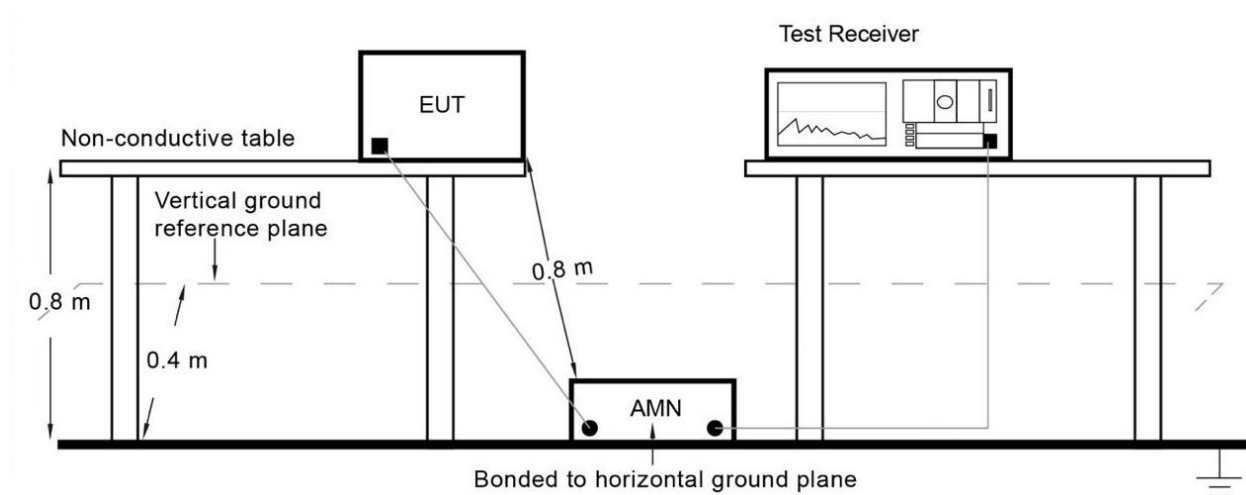

6.10.3. Test Result

Refer to Appendix A.10.


Appendix A - Test Result

A.1 Duty Cycle Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-02	Model No.	OAW-AP1541

Test Mode	Duty Cycle
802.11be-EHT20	98.13%
802.11be-EHT40	97.18%
802.11be-EHT80	97.32%
802.11be-EHT160	97.32%
802.11be-EHT320	97.18%

Duty Cycle (T = Transmission Duration)	
802.11be-EHT20 (T = 5.452 ms)	802.11be-EHT40 (T = 5.450 ms)

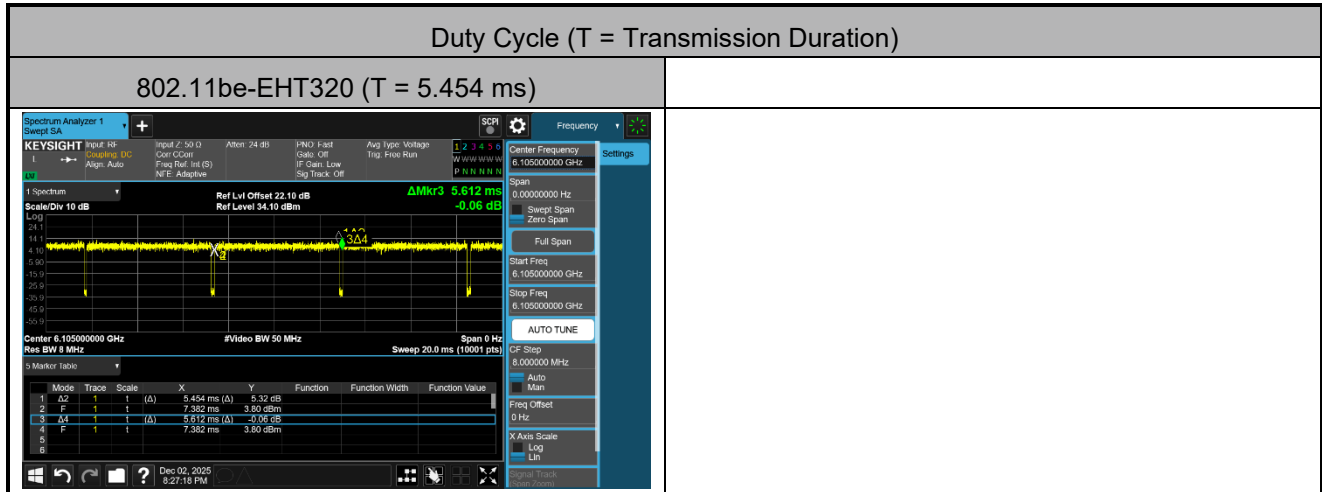

A.2 26 dB Bandwidth Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-26 ~ 2025-12-29	Model No.	OAW-AP1541

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11be-EHT20	MCS0	1	5955	23.12	19.109	≤ 320
802.11be-EHT20	MCS0	49	6195	22.21	19.043	≤ 320
802.11be-EHT20	MCS0	93	6415	22.68	19.039	≤ 320
802.11be-EHT20	MCS0	97	6435	22.64	19.059	≤ 320
802.11be-EHT20	MCS0	105	6475	22.94	19.091	≤ 320
802.11be-EHT20	MCS0	113	6515	23.15	19.085	≤ 320
802.11be-EHT20	MCS0	117	6535	23.35	19.065	≤ 320
802.11be-EHT20	MCS0	149	6695	22.70	19.066	≤ 320
802.11be-EHT20	MCS0	181	6855	23.21	19.059	≤ 320
802.11be-EHT20	MCS0	185	6875	22.83	19.056	≤ 320
802.11be-EHT20	MCS0	189	6895	22.83	19.112	≤ 320
802.11be-EHT20	MCS0	209	6995	23.15	19.058	≤ 320
802.11be-EHT20	MCS0	229	7095	22.56	19.036	≤ 320
802.11be-EHT40	MCS0	3	5965	42.36	37.902	≤ 320
802.11be-EHT40	MCS0	51	6205	42.34	37.986	≤ 320
802.11be-EHT40	MCS0	91	6405	42.52	38.022	≤ 320
802.11be-EHT40	MCS0	99	6445	42.49	37.953	≤ 320
802.11be-EHT40	MCS0	107	6485	42.92	37.928	≤ 320
802.11be-EHT40	MCS0	115	6525	42.64	37.859	≤ 320
802.11be-EHT40	MCS0	123	6565	42.17	37.966	≤ 320
802.11be-EHT40	MCS0	147	6685	42.57	37.966	≤ 320
802.11be-EHT40	MCS0	179	6845	42.07	37.885	≤ 320
802.11be-EHT40	MCS0	187	6885	42.18	38.009	≤ 320
802.11be-EHT40	MCS0	195	6925	43.30	38.021	≤ 320
802.11be-EHT40	MCS0	211	7005	43.52	38.028	≤ 320
802.11be-EHT40	MCS0	227	7085	43.23	38.016	≤ 320

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11be-EHT80	MCS0	7	5985	87.79	77.550	≤ 320
802.11be-EHT80	MCS0	55	6225	87.36	77.849	≤ 320
802.11be-EHT80	MCS0	87	6385	87.61	77.859	≤ 320
802.11be-EHT80	MCS0	103	6465	87.63	77.571	≤ 320
802.11be-EHT80	MCS0	119	6545	87.60	77.542	≤ 320
802.11be-EHT80	MCS0	135	6625	88.38	77.566	≤ 320
802.11be-EHT80	MCS0	151	6705	88.52	77.865	≤ 320
802.11be-EHT80	MCS0	167	6785	86.78	77.656	≤ 320
802.11be-EHT80	MCS0	183	6865	86.44	77.646	≤ 320
802.11be-EHT80	MCS0	199	6945	85.81	77.719	≤ 320
802.11be-EHT80	MCS0	215	7025	87.70	77.675	≤ 320
802.11be-EHT160	MCS0	15	6025	172.3	156.78	≤ 320
802.11be-EHT160	MCS0	47	6185	172.8	156.83	≤ 320
802.11be-EHT160	MCS0	79	6345	171.6	157.01	≤ 320
802.11be-EHT160	MCS0	111	6505	172.6	157.04	≤ 320
802.11be-EHT160	MCS0	143	6665	174.8	156.90	≤ 320
802.11be-EHT160	MCS0	175	6825	171.2	157.12	≤ 320
802.11be-EHT160	MCS0	207	6985	173.2	157.28	≤ 320
802.11be-EHT320	MCS0	31	6105	336.9	315.23	≤ 320
802.11be-EHT320	MCS0	63	6265	335.2	315.57	≤ 320
802.11be-EHT320	MCS0	95	6425	337.1	315.35	≤ 320
802.11be-EHT320	MCS0	127	6585	336.3	315.37	≤ 320
802.11be-EHT320	MCS0	159	6745	338.8	315.20	≤ 320
802.11be-EHT320	MCS0	191	6905	336.1	316.03	≤ 320


Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.


For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

802.11be-EHT20 26 dB Bandwidth


Channel 1 (5955 MHz)

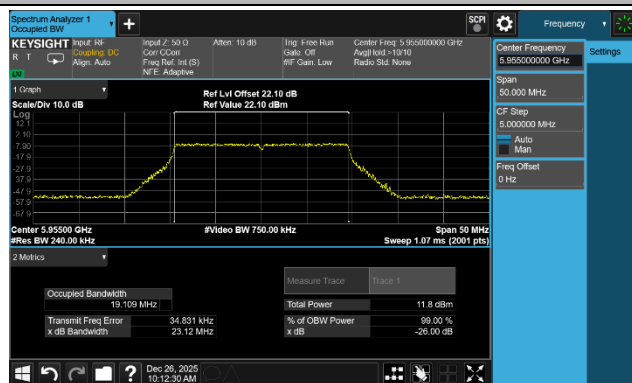


Channel 49 (6195 MHz)

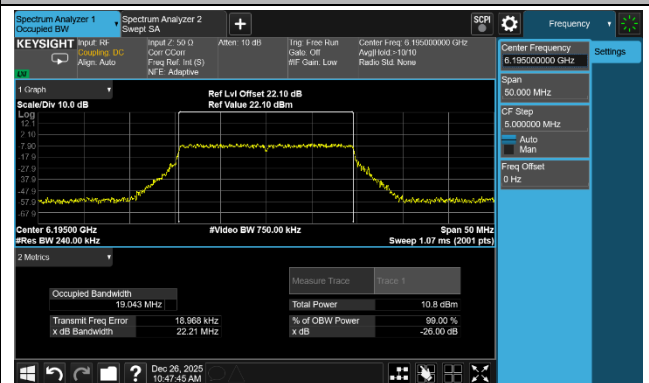


Channel 93 (6415 MHz)

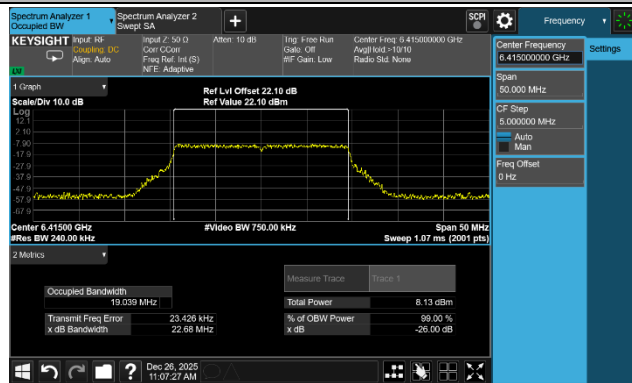


Channel 97 (6435 MHz)

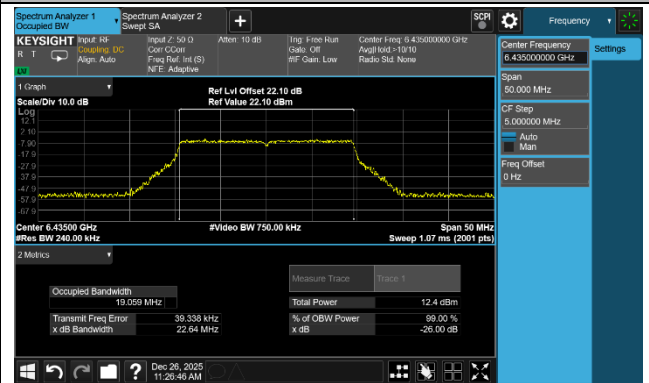

Channel 105 (6475 MHz)

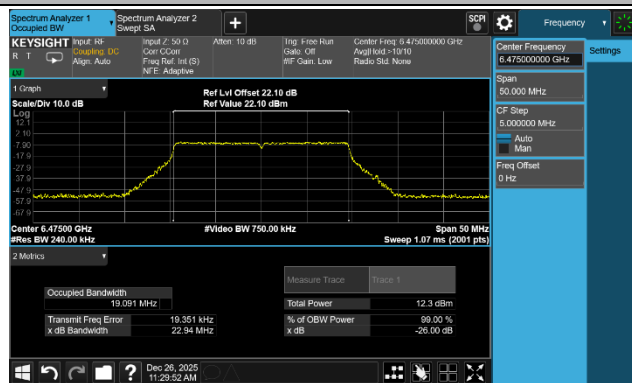


Channel 113 (6515 MHz)

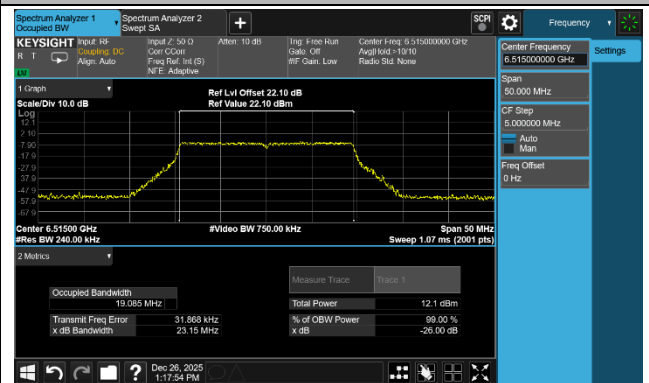


802.11be-EHT20 26 dB Bandwidth


Channel 117 (6535 MHz)

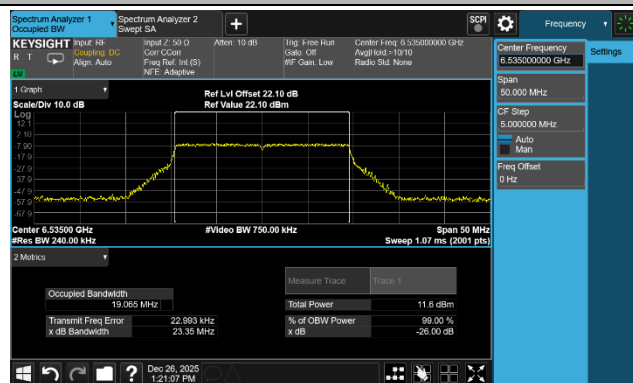


Channel 149 (6695 MHz)

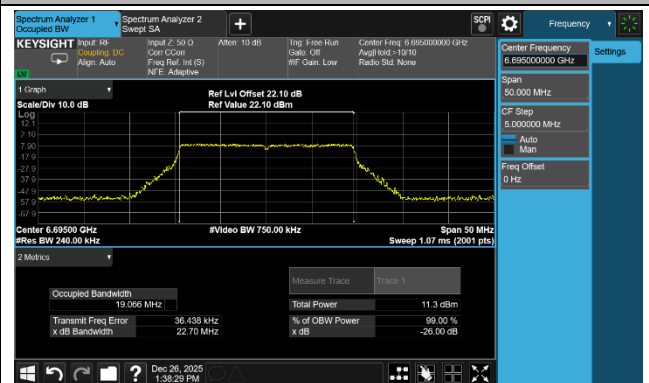


Channel 181 (6855 MHz)

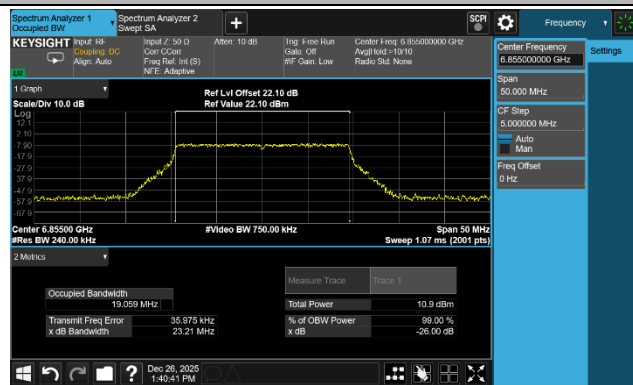


Channel 185 (6875 MHz)

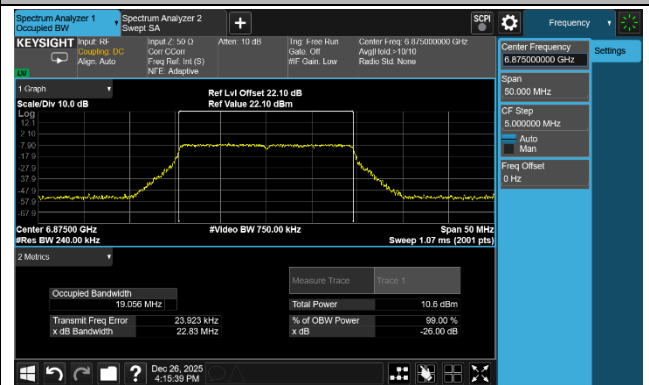


Channel 189 (6895 MHz)

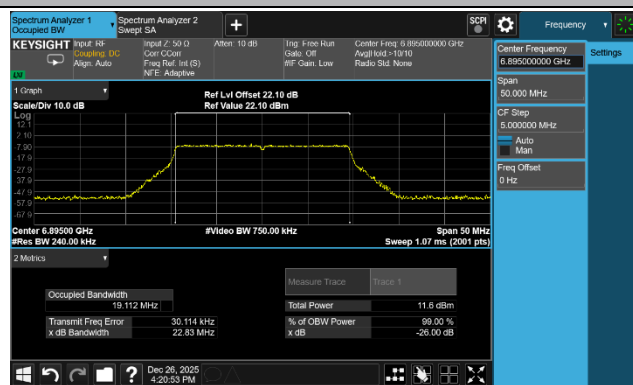


Channel 209 (6995 MHz)

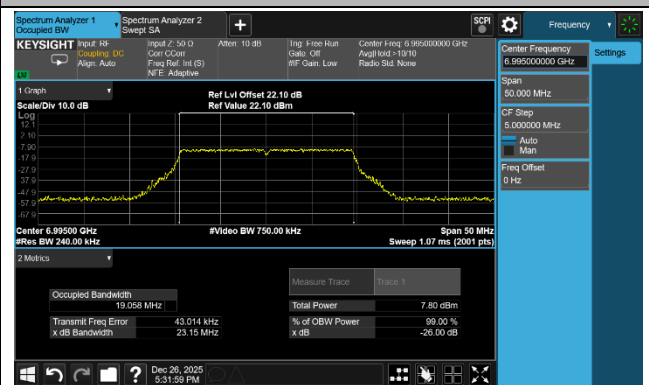

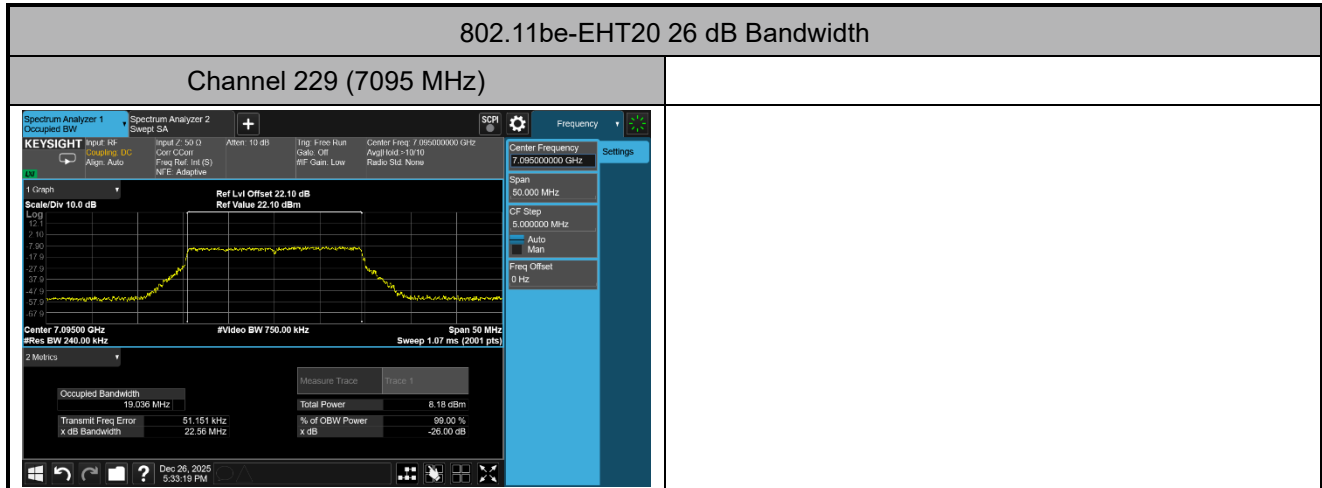


802.11be-EHT40 26 dB Bandwidth


Channel 3 (5965 MHz)

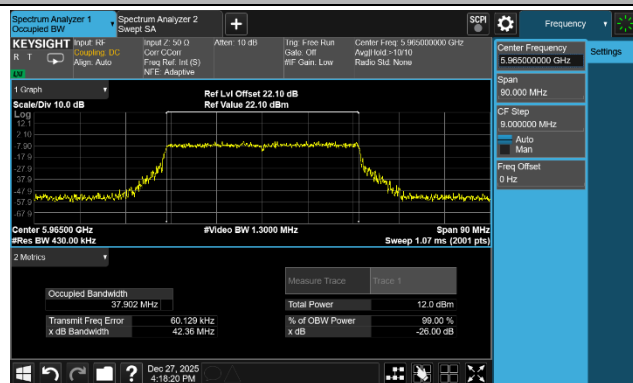


Channel 51 (6205 MHz)

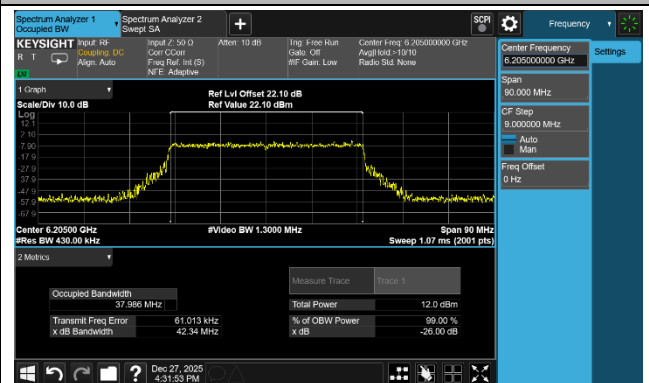


Channel 91 (6405 MHz)

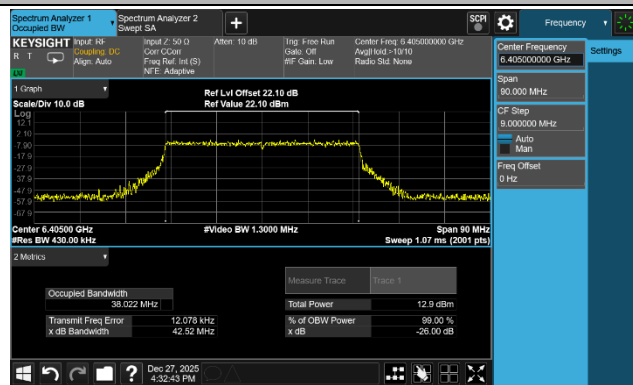


Channel 99 (6445 MHz)

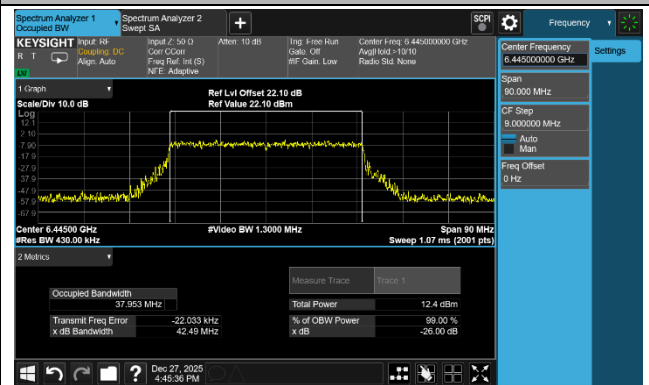

Channel 107 (6485 MHz)

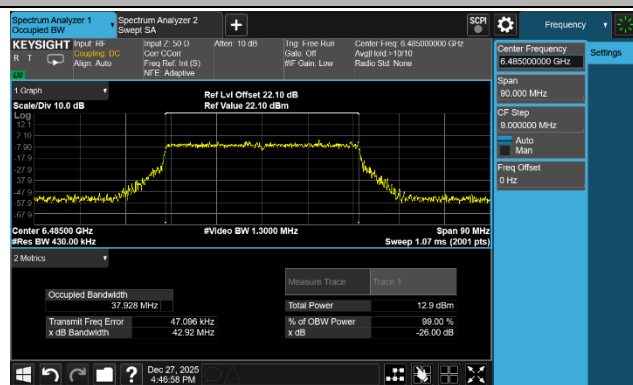


Channel 115 (6525 MHz)

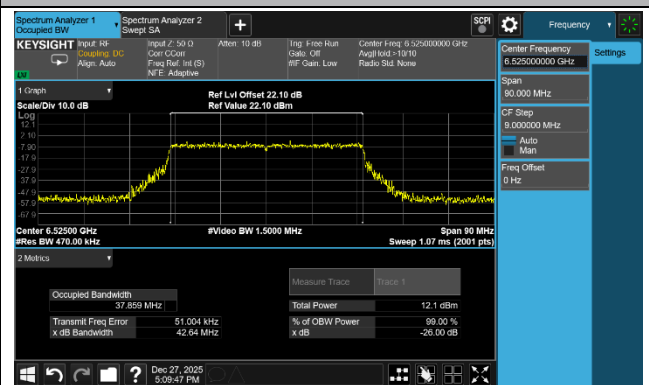


802.11be-EHT40 26 dB Bandwidth


Channel 123 (6565 MHz)

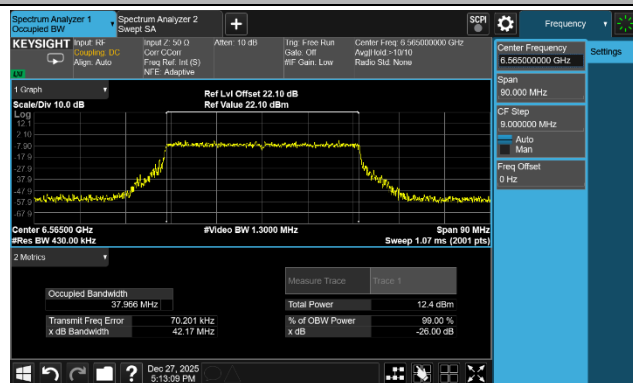


Channel 147 (6685 MHz)

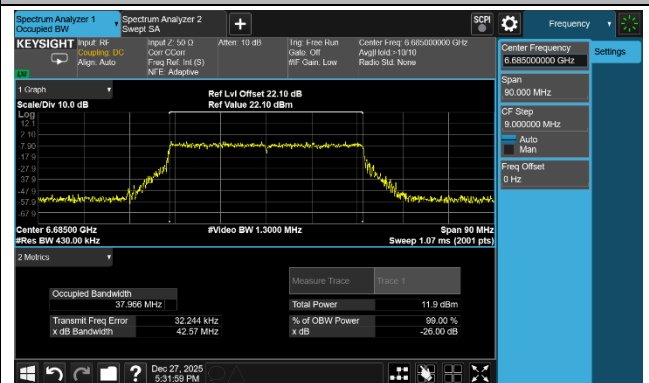


Channel 179 (6845 MHz)

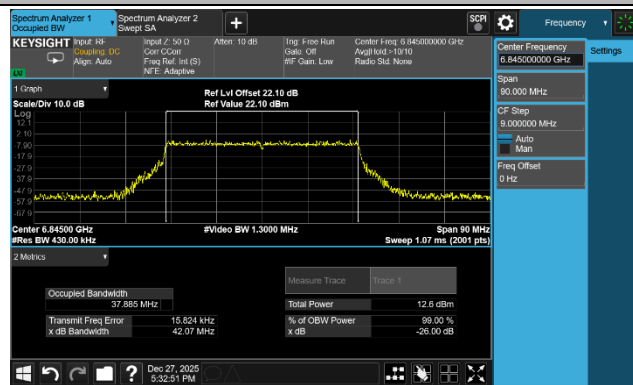


Channel 187 (6885 MHz)

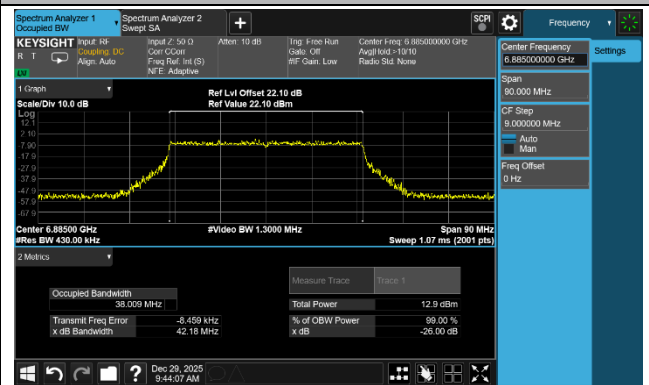


Channel 195 (6925 MHz)

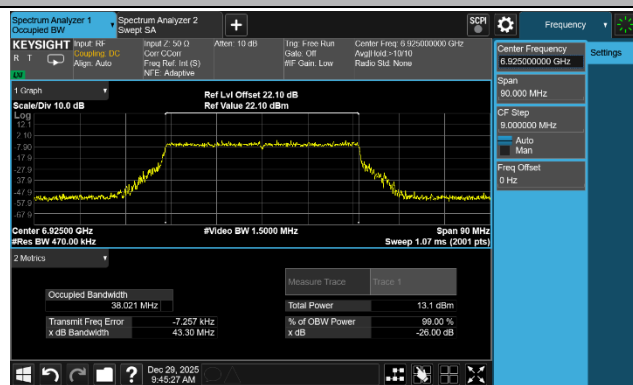


Channel 211 (7005 MHz)

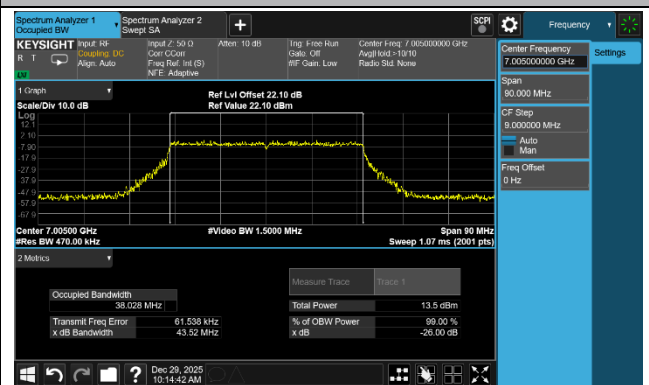

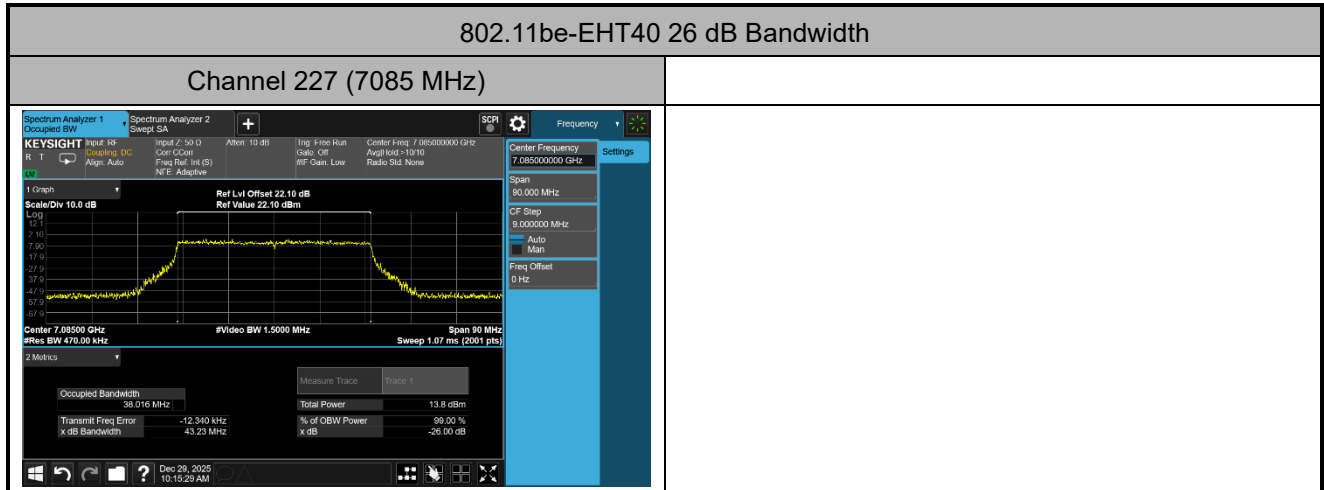


802.11be-EHT80 26 dB Bandwidth


Channel 7 (5985 MHz)

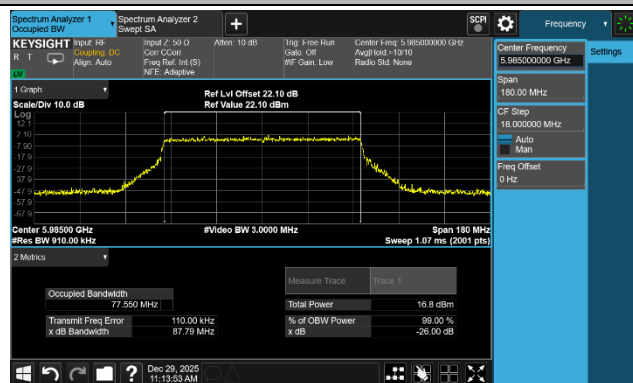


Channel 55 (6225 MHz)

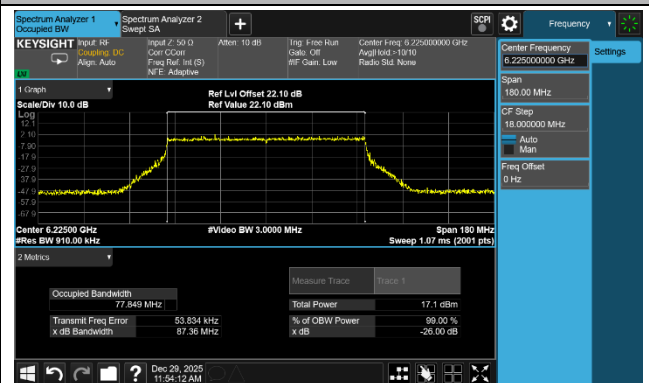


Channel 87 (6385 MHz)

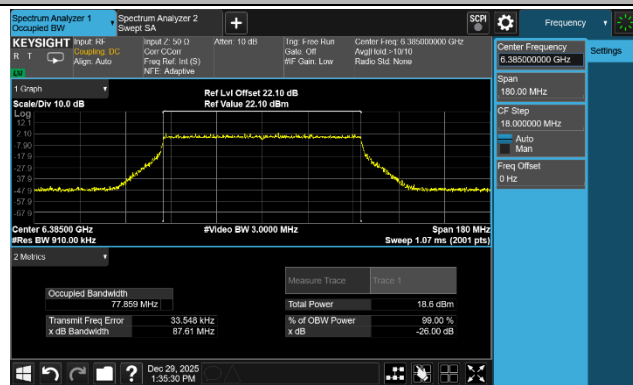


Channel 103 (6465 MHz)

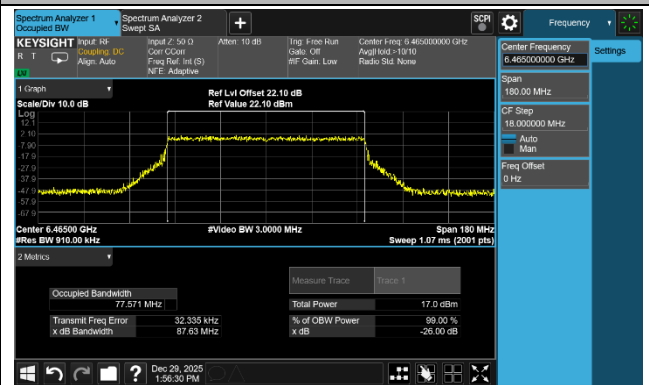

Channel 119 (6545 MHz)

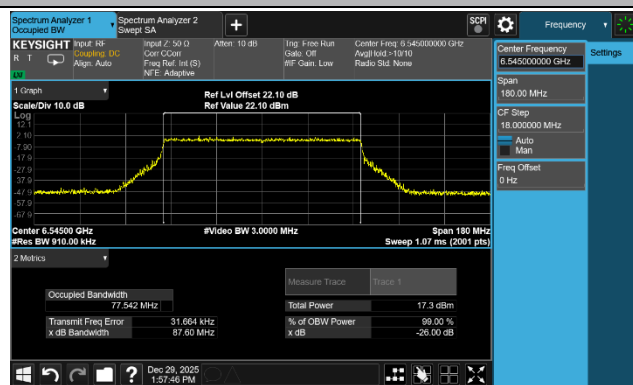


Channel 135 (6625 MHz)

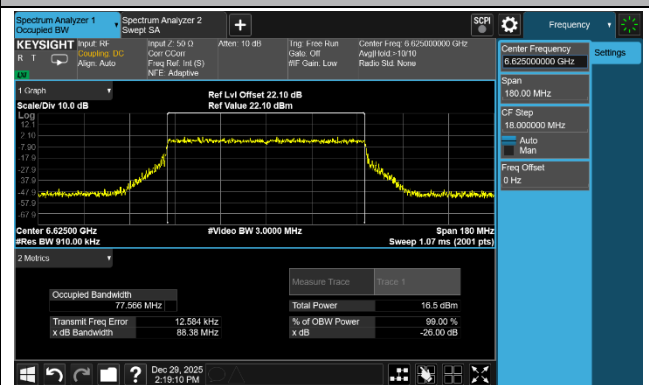


802.11be-EHT80 26 dB Bandwidth


Channel 151 (6705 MHz)

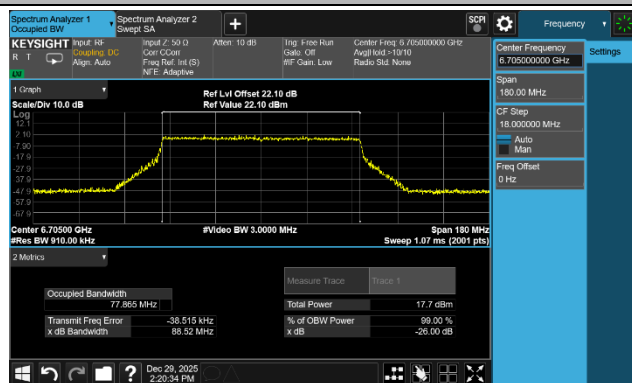


Channel 151 (6785 MHz)

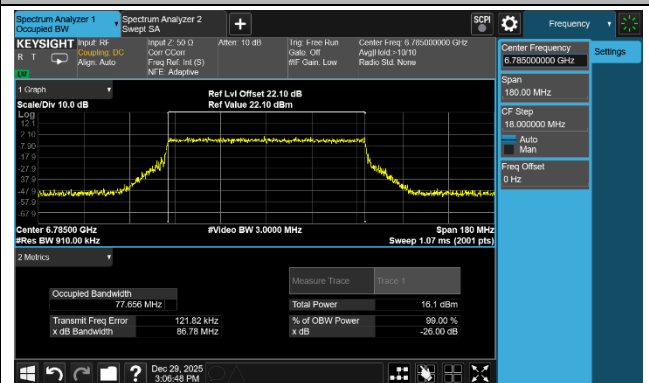


Channel 183 (6865 MHz)

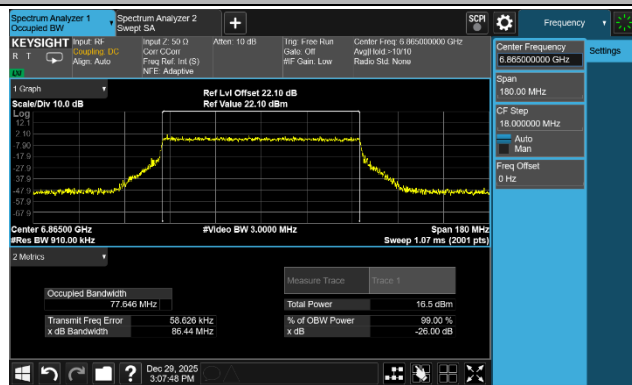

Channel 199 (6945 MHz)

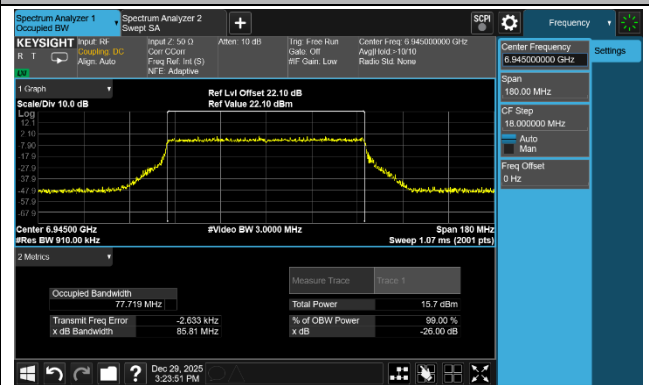


Channel 215 (7025 MHz)

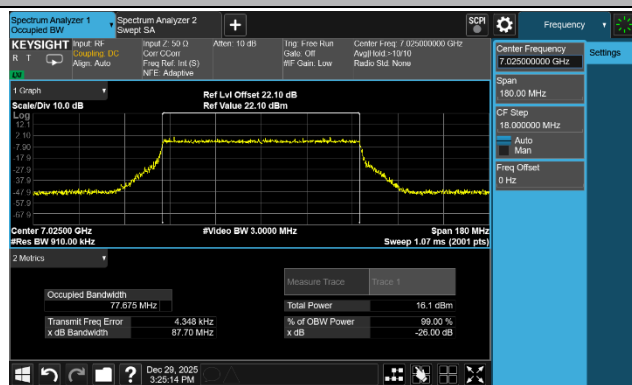


802.11be-EHT160 26 dB Bandwidth


Channel 15 (6025 MHz)

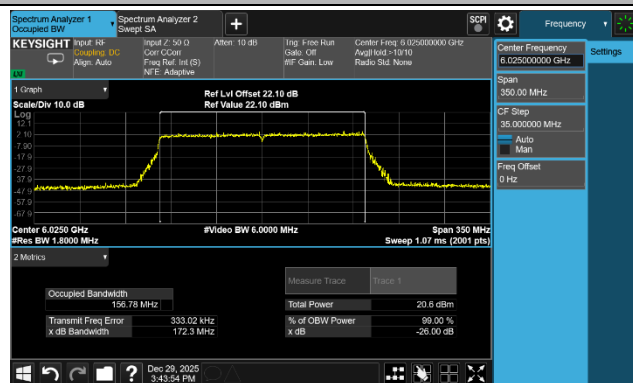


Channel 47 (6185 MHz)

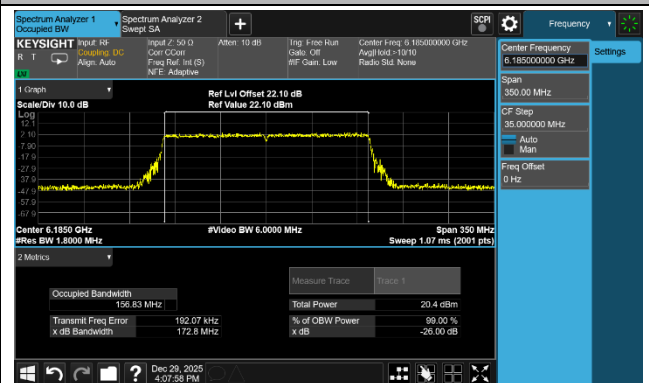


Channel 79 (6345 MHz)

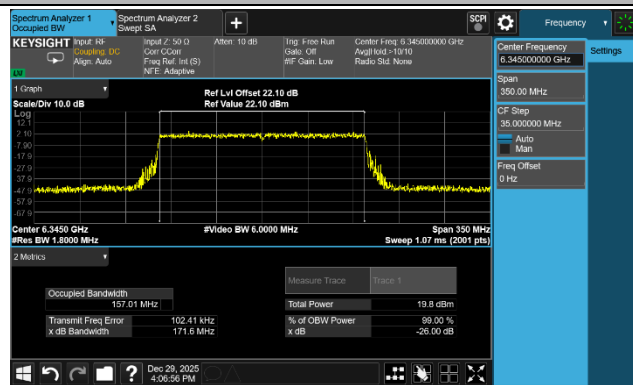


Channel 111 (6505 MHz)

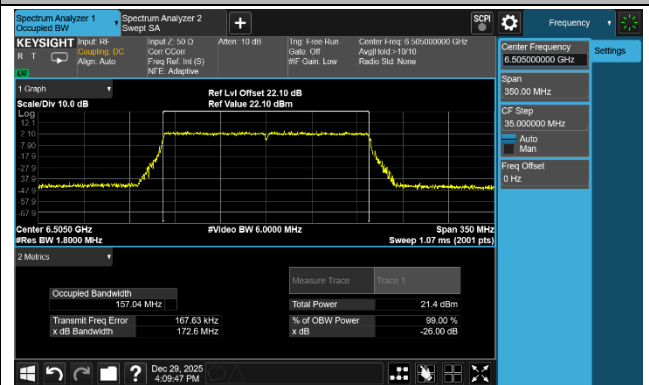


Channel 143 (6665 MHz)

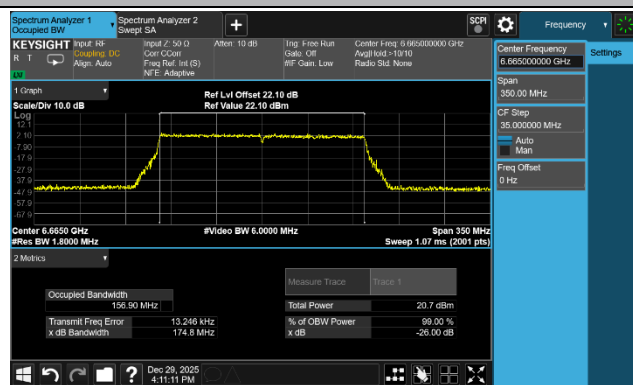


Channel 175 (6825 MHz)

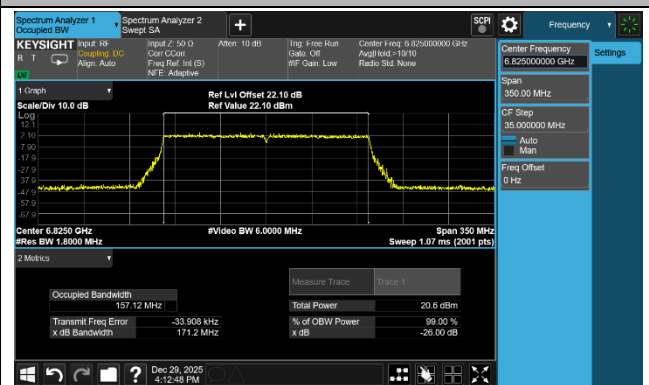

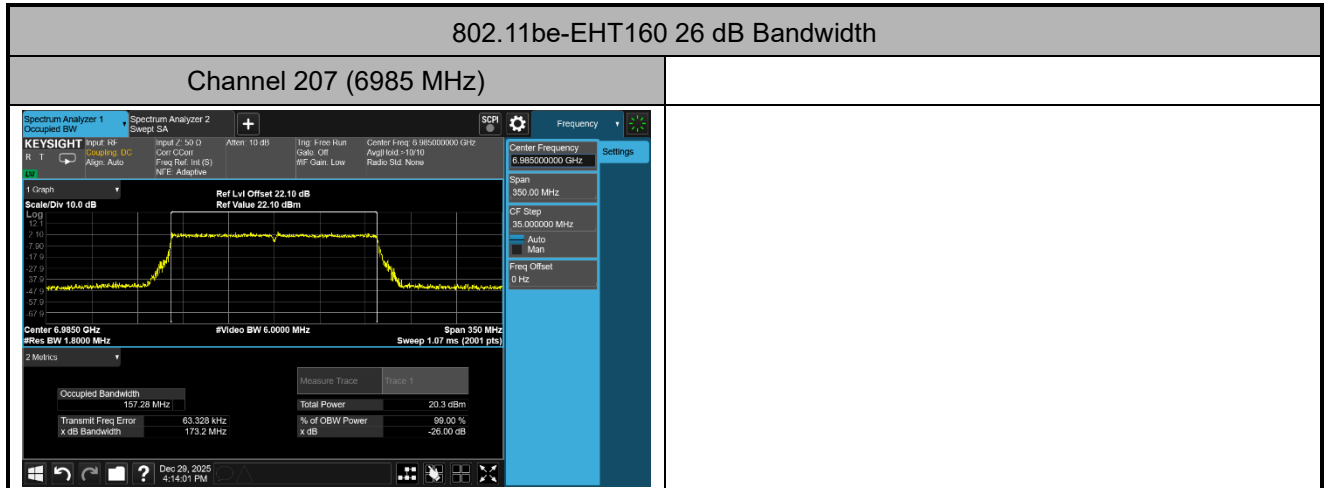


802.11be-EHT320 26 dB Bandwidth


Channel 31 (6105 MHz)

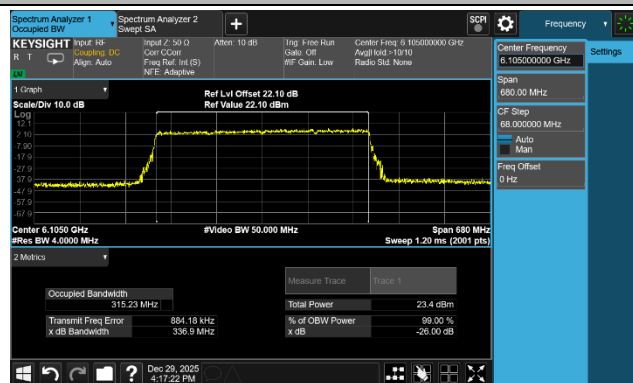


Channel 63 (6265 MHz)

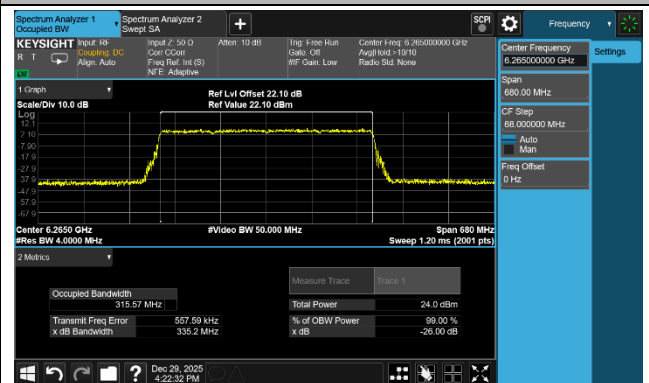


Channel 95 (6425 MHz)

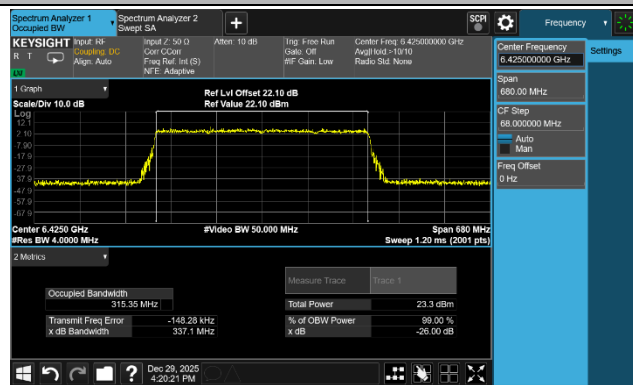


Channel 127 (6585 MHz)

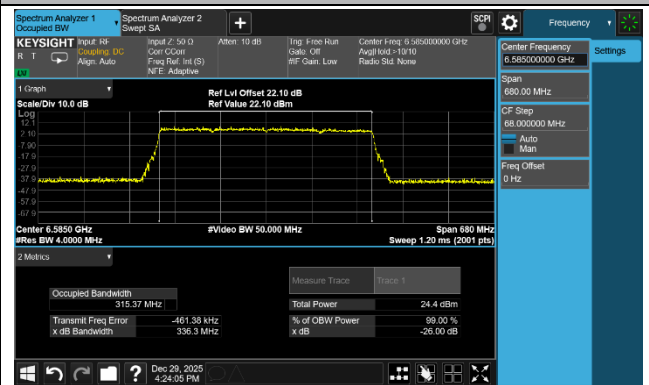

Channel 159 (6745 MHz)

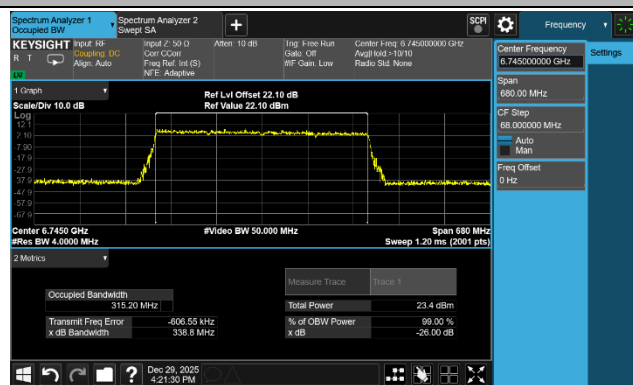

Channel 191 (6905 MHz)

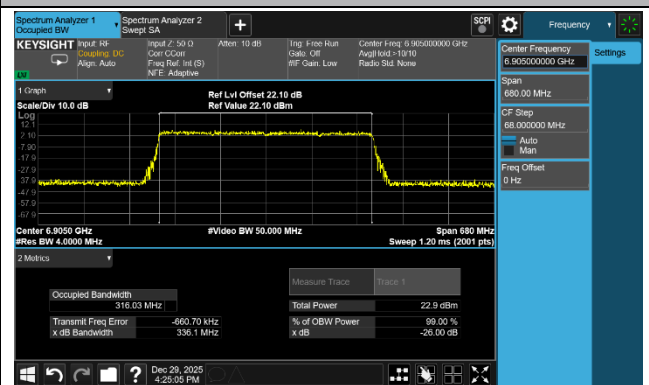

A.3 Output Power Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-22 ~ 2025-12-23	Model No.	OAW-AP1541

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11ax-HE20	MCS0	1	5955	4.00	3.37	4.31	3.51	9.83	1.36	11.19	≤ 30.00
802.11ax-HE20	MCS0	49	6195	4.11	3.64	4.14	3.32	9.84	1.36	11.20	≤ 30.00
802.11ax-HE20	MCS0	93	6415	4.31	3.61	3.35	3.08	9.63	1.36	10.99	≤ 30.00
802.11ax-HE20	MCS0	97	6435	4.38	3.47	3.18	3.11	9.59	1.93	11.52	≤ 30.00
802.11ax-HE20	MCS0	105	6475	3.71	2.91	2.17	2.20	8.81	1.93	10.74	≤ 30.00
802.11ax-HE20	MCS0	113	6515	4.12	3.12	2.98	2.82	9.31	1.93	11.24	≤ 30.00
802.11ax-HE20	MCS0	117	6535	4.05	3.20	3.11	2.87	9.35	1.93	11.28	≤ 30.00
802.11ax-HE20	MCS0	149	6695	4.01	3.05	3.07	2.68	9.25	1.93	11.18	≤ 30.00
802.11ax-HE20	MCS0	181	6855	3.88	3.08	3.16	2.91	9.29	1.93	11.22	≤ 30.00
802.11ax-HE20	MCS0	185	6875	3.66	3.27	3.03	3.12	9.30	1.93	11.23	≤ 30.00
802.11ax-HE20	MCS0	189	6895	4.03	3.75	4.01	3.80	9.92	1.44	11.36	≤ 30.00
802.11ax-HE20	MCS0	209	6995	4.17	3.91	4.13	3.70	10.00	1.44	11.44	≤ 30.00
802.11ax-HE20	MCS0	229	7095	3.88	3.68	3.46	3.50	9.65	1.44	11.09	≤ 30.00
802.11ax-HE40	MCS0	3	5965	6.03	6.16	6.44	5.42	12.05	1.36	13.41	≤ 30.00
802.11ax-HE40	MCS0	51	6205	6.18	6.01	6.31	5.31	11.99	1.36	13.35	≤ 30.00
802.11ax-HE40	MCS0	91	6405	6.12	5.91	5.25	4.99	11.61	1.36	12.97	≤ 30.00
802.11ax-HE40	MCS0	99	6445	6.63	5.01	5.43	4.79	11.55	1.93	13.48	≤ 30.00
802.11ax-HE40	MCS0	107	6485	6.55	5.21	5.37	4.51	11.49	1.93	13.42	≤ 30.00
802.11ax-HE40	MCS0	115	6525	6.16	5.57	5.42	4.40	11.45	1.93	13.38	≤ 30.00
802.11ax-HE40	MCS0	123	6565	6.61	5.75	6.01	5.23	11.95	1.93	13.88	≤ 30.00
802.11ax-HE40	MCS0	147	6685	6.27	5.44	6.06	5.15	11.77	1.93	13.70	≤ 30.00
802.11ax-HE40	MCS0	179	6845	6.38	6.09	6.11	5.41	12.03	1.93	13.96	≤ 30.00
802.11ax-HE40	MCS0	187	6885	6.32	5.99	6.08	5.71	12.05	1.93	13.98	≤ 30.00
802.11ax-HE40	MCS0	195	6925	6.61	6.01	6.33	5.87	12.24	1.44	13.68	≤ 30.00
802.11ax-HE40	MCS0	211	7005	6.05	5.97	6.09	5.37	11.90	1.44	13.34	≤ 30.00
802.11ax-HE40	MCS0	227	7085	6.43	6.05	6.22	5.69	12.13	1.44	13.57	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11ax-HE80	MCS0	7	5985	9.11	8.80	9.37	8.68	15.02	1.36	16.38	≤ 30.00
802.11ax-HE80	MCS0	55	6225	9.22	8.94	9.15	8.63	15.01	1.36	16.37	≤ 30.00
802.11ax-HE80	MCS0	87	6385	9.70	8.84	8.59	8.17	14.88	1.36	16.24	≤ 30.00
802.11ax-HE80	MCS0	103	6465	9.50	8.66	8.36	7.71	14.63	1.93	16.56	≤ 30.00
802.11ax-HE80	MCS0	119	6545	9.13	8.35	8.28	7.68	14.41	1.93	16.34	≤ 30.00
802.11ax-HE80	MCS0	135	6625	9.46	8.73	9.01	8.28	14.91	1.93	16.84	≤ 30.00
802.11ax-HE80	MCS0	151	6705	9.60	8.91	8.84	8.43	14.99	1.93	16.92	≤ 30.00
802.11ax-HE80	MCS0	167	6785	9.45	9.04	9.29	8.40	15.08	1.93	17.01	≤ 30.00
802.11ax-HE80	MCS0	183	6865	9.18	8.11	9.21	8.28	14.74	1.93	16.67	≤ 30.00
802.11ax-HE80	MCS0	199	6945	9.02	8.67	9.04	8.44	14.82	1.44	16.26	≤ 30.00
802.11ax-HE80	MCS0	215	7025	8.84	8.58	8.68	8.11	14.58	1.44	16.02	≤ 30.00
802.11ax-HE160	MCS0	15	6025	11.86	11.38	12.19	11.65	17.80	1.36	19.16	≤ 30.00
802.11ax-HE160	MCS0	47	6185	12.16	11.96	12.28	11.85	18.09	1.36	19.45	≤ 30.00
802.11ax-HE160	MCS0	79	6345	12.31	11.76	12.17	11.48	17.96	1.36	19.32	≤ 30.00
802.11ax-HE160	MCS0	111	6505	11.56	11.45	11.34	10.69	17.29	1.93	19.22	≤ 30.00
802.11ax-HE160	MCS0	143	6665	11.45	10.83	11.58	10.74	17.19	1.93	19.12	≤ 30.00
802.11ax-HE160	MCS0	175	6825	11.39	11.41	11.35	10.85	17.28	1.93	19.21	≤ 30.00
802.11ax-HE160	MCS0	207	6985	11.62	11.52	11.61	11.21	17.51	1.44	18.95	≤ 30.00
802.11be-EHT20	MCS0	1	5955	4.16	3.71	4.14	3.34	9.87	1.36	11.23	≤ 30.00
802.11be-EHT20	MCS0	49	6195	4.24	3.87	3.93	3.30	9.87	1.36	11.23	≤ 30.00
802.11be-EHT20	MCS0	93	6415	4.54	3.69	3.23	2.93	9.66	1.36	11.02	≤ 30.00
802.11be-EHT20	MCS0	97	6435	4.65	3.72	3.38	3.01	9.75	1.93	11.68	≤ 30.00
802.11be-EHT20	MCS0	105	6475	4.10	3.14	2.57	2.20	9.08	1.93	11.01	≤ 30.00
802.11be-EHT20	MCS0	113	6515	4.37	3.38	2.66	2.74	9.36	1.93	11.29	≤ 30.00
802.11be-EHT20	MCS0	117	6535	4.34	3.44	3.28	2.63	9.49	1.93	11.42	≤ 30.00
802.11be-EHT20	MCS0	149	6695	3.94	3.24	3.03	2.69	9.27	1.93	11.20	≤ 30.00
802.11be-EHT20	MCS0	181	6855	4.04	3.46	3.23	3.03	9.48	1.93	11.41	≤ 30.00
802.11be-EHT20	MCS0	185	6875	3.84	3.31	3.26	3.05	9.40	1.93	11.33	≤ 30.00
802.11be-EHT20	MCS0	189	6895	4.26	3.95	3.98	3.71	10.00	1.44	11.44	≤ 30.00
802.11be-EHT20	MCS0	209	6995	4.34	4.09	4.17	3.56	10.07	1.44	11.51	≤ 30.00
802.11be-EHT20	MCS0	229	7095	4.12	3.82	3.61	3.34	9.75	1.44	11.19	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT40	MCS0	3	5965	6.16	6.21	6.61	5.51	12.16	1.36	13.52	≤ 30.00
802.11be-EHT40	MCS0	51	6205	6.36	6.08	6.41	5.40	12.10	1.36	13.46	≤ 30.00
802.11be-EHT40	MCS0	91	6405	6.53	6.02	5.98	5.01	11.94	1.36	13.30	≤ 30.00
802.11be-EHT40	MCS0	99	6445	6.74	5.60	5.51	4.84	11.75	1.93	13.68	≤ 30.00
802.11be-EHT40	MCS0	107	6485	6.67	5.44	5.42	4.53	11.60	1.93	13.53	≤ 30.00
802.11be-EHT40	MCS0	115	6525	6.17	5.50	5.55	4.54	11.50	1.93	13.43	≤ 30.00
802.11be-EHT40	MCS0	123	6565	6.64	5.95	6.06	5.14	12.00	1.93	13.93	≤ 30.00
802.11be-EHT40	MCS0	147	6685	6.40	5.45	6.15	5.26	11.86	1.93	13.79	≤ 30.00
802.11be-EHT40	MCS0	179	6845	6.55	6.20	6.16	5.53	12.15	1.93	14.08	≤ 30.00
802.11be-EHT40	MCS0	187	6885	6.40	6.03	6.17	5.58	12.08	1.93	14.01	≤ 30.00
802.11be-EHT40	MCS0	195	6925	6.70	6.18	6.36	5.88	12.31	1.44	13.75	≤ 30.00
802.11be-EHT40	MCS0	211	7005	6.22	5.97	6.02	5.42	11.94	1.44	13.38	≤ 30.00
802.11be-EHT40	MCS0	227	7085	6.79	6.07	6.25	5.57	12.21	1.44	13.65	≤ 30.00
802.11be-EHT80	MCS0	7	5985	9.36	9.25	9.70	8.77	15.30	1.36	16.66	≤ 30.00
802.11be-EHT80	MCS0	55	6225	9.45	9.28	9.32	8.68	15.21	1.36	16.57	≤ 30.00
802.11be-EHT80	MCS0	87	6385	9.89	9.33	8.97	8.33	15.19	1.36	16.55	≤ 30.00
802.11be-EHT80	MCS0	103	6465	9.71	8.87	8.51	7.91	14.82	1.93	16.75	≤ 30.00
802.11be-EHT80	MCS0	119	6545	9.24	8.41	8.48	7.72	14.52	1.93	16.45	≤ 30.00
802.11be-EHT80	MCS0	135	6625	9.65	8.93	9.05	8.26	15.02	1.93	16.95	≤ 30.00
802.11be-EHT80	MCS0	151	6705	9.83	9.08	9.05	8.71	15.21	1.93	17.14	≤ 30.00
802.11be-EHT80	MCS0	167	6785	9.60	9.25	9.40	8.67	15.26	1.93	17.19	≤ 30.00
802.11be-EHT80	MCS0	183	6865	9.55	9.08	9.52	8.58	15.22	1.93	17.15	≤ 30.00
802.11be-EHT80	MCS0	199	6945	9.40	8.98	9.19	8.61	15.08	1.44	16.52	≤ 30.00
802.11be-EHT80	MCS0	215	7025	9.06	8.68	8.92	8.31	14.77	1.44	16.21	≤ 30.00
802.11be-EHT160	MCS0	15	6025	12.06	12.13	12.38	11.65	18.08	1.36	19.44	≤ 30.00
802.11be-EHT160	MCS0	47	6185	12.26	12.20	12.50	11.95	18.25	1.36	19.61	≤ 30.00
802.11be-EHT160	MCS0	79	6345	12.80	12.17	12.37	11.61	18.28	1.36	19.64	≤ 30.00
802.11be-EHT160	MCS0	111	6505	12.53	11.74	11.67	10.71	17.73	1.93	19.66	≤ 30.00
802.11be-EHT160	MCS0	143	6665	12.08	11.38	11.97	10.91	17.63	1.93	19.56	≤ 30.00
802.11be-EHT160	MCS0	175	6825	12.09	11.58	11.60	11.11	17.63	1.93	19.56	≤ 30.00
802.11be-EHT160	MCS0	207	6985	11.80	11.64	11.95	11.47	17.74	1.44	19.18	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	Average Power (dBm)				Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT320	MCS0	31	6105	14.39	14.64	14.61	13.96	20.43	1.36	21.79	≤ 30.00
802.11be-EHT320	MCS0	63	6265	15.22	14.74	14.81	13.99	20.73	1.36	22.09	≤ 30.00
802.11be-EHT320	MCS0	95	6425	14.59	13.90	13.55	12.69	19.76	1.93	21.69	≤ 30.00
802.11be-EHT320	MCS0	127	6585	14.94	14.06	14.19	13.69	20.26	1.93	22.19	≤ 30.00
802.11be-EHT320	MCS0	159	6745	14.57	13.95	14.35	13.48	20.13	1.93	22.06	≤ 30.00
802.11be-EHT320	MCS0	191	6905	14.48	13.87	13.98	13.56	20.01	1.93	21.94	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 4 Average Power} / 10)} + 10^{(\text{Ant 5 Average Power} / 10)} + 10^{(\text{Ant 6 Average Power} / 10)} + 10^{(\text{Ant 7 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

A.4 Power Spectral Density Test Result

Test Site	WJ-SR3	Test Engineer	Ellie Wang
Test Date	2025-12-15 ~ 2025-12-21	Model No.	OAW-AP1541

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT20	MCS0	1	5955	-8.389	-8.682	-7.915	-8.787	98.13	7.33	4.92	≤ 5.00
802.11be-EHT20	MCS0	49	6195	-8.027	-8.380	-8.494	-8.912	98.13	7.33	4.91	≤ 5.00
802.11be-EHT20	MCS0	93	6415	-7.889	-8.620	-9.167	-9.330	98.13	7.33	4.64	≤ 5.00
802.11be-EHT20	MCS0	97	6435	-8.041	-8.916	-9.220	-9.405	98.13	7.83	4.99	≤ 5.00
802.11be-EHT20	MCS0	105	6475	-8.399	-9.335	-9.713	-9.993	98.13	7.83	4.53	≤ 5.00
802.11be-EHT20	MCS0	113	6515	-8.239	-9.317	-9.169	-9.507	98.13	7.83	4.82	≤ 5.00
802.11be-EHT20	MCS0	117	6535	-8.449	-9.185	-9.377	-9.863	98.13	7.83	4.66	≤ 5.00
802.11be-EHT20	MCS0	149	6695	-8.484	-9.225	-8.933	-9.329	98.13	7.83	4.87	≤ 5.00
802.11be-EHT20	MCS0	181	6855	-8.650	-9.001	-9.021	-9.400	98.13	7.83	4.84	≤ 5.00
802.11be-EHT20	MCS0	185	6875	-8.759	-9.162	-9.334	-9.525	98.13	7.83	4.66	≤ 5.00
802.11be-EHT20	MCS0	189	6895	-8.326	-8.498	-8.515	-9.002	98.13	7.37	4.81	≤ 5.00
802.11be-EHT20	MCS0	209	6995	-8.236	-8.383	-8.556	-9.036	98.13	7.37	4.85	≤ 5.00
802.11be-EHT20	MCS0	229	7095	-8.392	-8.768	-9.135	-9.228	98.13	7.37	4.52	≤ 5.00
802.11be-EHT40	MCS0	3	5965	-8.685	-8.656	-8.672	-9.530	97.18	7.33	4.60	≤ 5.00
802.11be-EHT40	MCS0	51	6205	-8.467	-9.008	-8.638	-9.536	97.18	7.33	4.58	≤ 5.00
802.11be-EHT40	MCS0	91	6405	-7.891	-8.488	-8.651	-9.501	97.18	7.33	4.88	≤ 5.00
802.11be-EHT40	MCS0	99	6445	-8.143	-9.072	-9.241	-9.851	97.18	7.83	4.94	≤ 5.00
802.11be-EHT40	MCS0	107	6485	-8.129	-9.309	-9.435	-10.058	97.18	7.83	4.80	≤ 5.00
802.11be-EHT40	MCS0	115	6525	-8.797	-9.414	-9.390	-10.353	97.18	7.83	4.52	≤ 5.00
802.11be-EHT40	MCS0	123	6565	-8.469	-9.047	-8.935	-9.817	97.18	7.83	4.93	≤ 5.00
802.11be-EHT40	MCS0	147	6685	-8.720	-9.834	-9.201	-9.982	97.18	7.83	4.57	≤ 5.00
802.11be-EHT40	MCS0	179	6845	-8.479	-9.333	-9.043	-9.683	97.18	7.83	4.86	≤ 5.00
802.11be-EHT40	MCS0	187	6885	-8.598	-9.342	-9.363	-9.533	97.18	7.83	4.78	≤ 5.00
802.11be-EHT40	MCS0	195	6925	-8.507	-9.094	-8.713	-9.186	97.18	7.37	4.65	≤ 5.00
802.11be-EHT40	MCS0	211	7005	-8.559	-8.867	-8.641	-9.326	97.18	7.37	4.68	≤ 5.00
802.11be-EHT40	MCS0	227	7085	-7.918	-8.893	-8.514	-9.323	97.18	7.37	4.88	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq (MHz)	PSD (dBm/MHz)				Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 4	Ant 5	Ant 6	Ant 7				
802.11be-EHT80	MCS0	7	5985	-8.646	-8.648	-8.637	-9.545	97.32	7.33	4.62	≤ 5.00
802.11be-EHT80	MCS0	55	6225	-8.727	-8.884	-8.926	-9.183	97.32	7.33	4.54	≤ 5.00
802.11be-EHT80	MCS0	87	6385	-7.915	-8.416	-8.845	-9.230	97.32	7.33	4.89	≤ 5.00
802.11be-EHT80	MCS0	103	6465	-7.994	-9.224	-9.108	-9.890	97.32	7.83	4.97	≤ 5.00
802.11be-EHT80	MCS0	119	6545	-8.492	-9.308	-9.529	-10.178	97.32	7.83	4.63	≤ 5.00
802.11be-EHT80	MCS0	135	6625	-8.366	-9.435	-9.117	-9.928	97.32	7.83	4.79	≤ 5.00
802.11be-EHT80	MCS0	151	6705	-8.431	-9.254	-9.267	-9.769	97.32	7.83	4.82	≤ 5.00
802.11be-EHT80	MCS0	167	6785	-8.601	-9.182	-8.843	-9.679	97.32	7.83	4.91	≤ 5.00
802.11be-EHT80	MCS0	183	6865	-8.753	-9.067	-9.145	-9.457	97.32	7.83	4.87	≤ 5.00
802.11be-EHT80	MCS0	199	6945	-8.534	-8.987	-8.741	-9.197	97.32	7.37	4.65	≤ 5.00
802.11be-EHT80	MCS0	215	7025	-8.639	-8.993	-8.765	-9.304	97.32	7.37	4.59	≤ 5.00
802.11be-EHT160	MCS0	15	6025	-8.682	-8.975	-8.582	-8.706	97.32	7.33	4.73	≤ 5.00
802.11be-EHT160	MCS0	47	6185	-8.631	-8.983	-8.843	-8.972	97.32	7.33	4.61	≤ 5.00
802.11be-EHT160	MCS0	79	6345	-7.974	-8.599	-8.417	-9.123	97.32	7.33	4.96	≤ 5.00
802.11be-EHT160	MCS0	111	6505	-8.528	-9.425	-9.765	-9.820	97.32	7.83	4.62	≤ 5.00
802.11be-EHT160	MCS0	143	6665	-8.270	-9.496	-8.839	-9.619	97.32	7.83	4.95	≤ 5.00
802.11be-EHT160	MCS0	175	6825	-8.724	-9.188	-9.327	-9.698	97.32	7.83	4.75	≤ 5.00
802.11be-EHT160	MCS0	207	6985	-8.781	-8.932	-8.615	-9.120	97.32	7.37	4.65	≤ 5.00
802.11be-EHT320	MCS0	31	6105	-8.449	-8.924	-8.632	-8.448	97.18	7.33	4.87	≤ 5.00
802.11be-EHT320	MCS0	63	6265	-7.856	-8.557	-8.546	-9.114	97.18	7.33	4.98	≤ 5.00
802.11be-EHT320	MCS0	95	6425	-8.432	-9.306	-9.851	-10.340	97.18	7.83	4.55	≤ 5.00
802.11be-EHT320	MCS0	127	6585	-8.242	-9.569	-9.395	-9.755	97.18	7.83	4.78	≤ 5.00
802.11be-EHT320	MCS0	159	6745	-8.060	-9.582	-9.057	-9.864	97.18	7.83	4.89	≤ 5.00
802.11be-EHT320	MCS0	191	6905	-8.627	-9.554	-9.282	-9.757	97.18	7.83	4.69	≤ 5.00

Note: When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 4 PSD}/10)} + 10^{(\text{Ant 5 PSD}/10)} + 10^{(\text{Ant 6 PSD}/10)} + 10^{(\text{Ant 7 PSD}/10)}\}$ (dBm/MHz) + $10 \times \log (1/\text{Duty Cycle})$ + Antenna Gain (dBi).

When EUT duty cycle ≥ 98%, EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 4 PSD}/10)} + 10^{(\text{Ant 5 PSD}/10)} + 10^{(\text{Ant 6 PSD}/10)} + 10^{(\text{Ant 7 PSD}/10)}\}$ (dBm/MHz) + Antenna Gain (dBi).