



802.11ac-VHT40 Power Spectral Density - Ant 3


Channel 102 (5510 MHz)

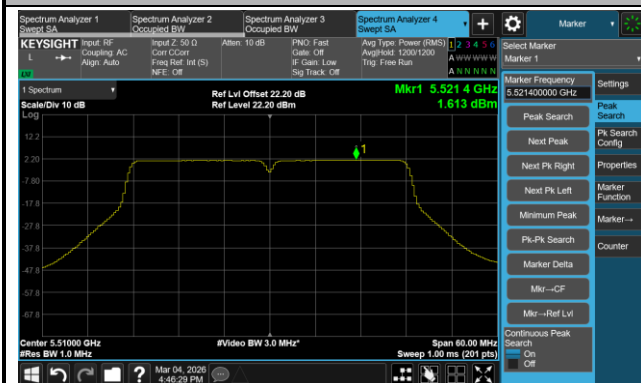

Channel 110 (5550 MHz)

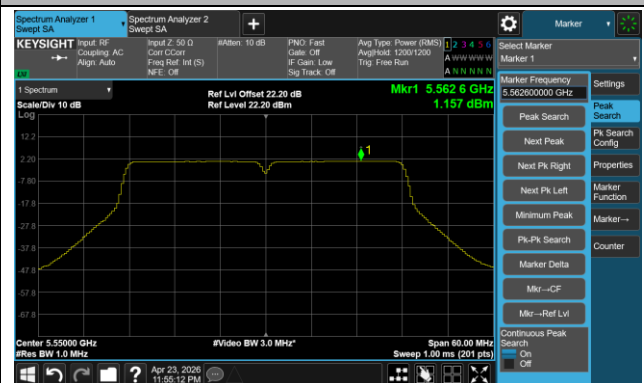


Channel 134 (5670 MHz)

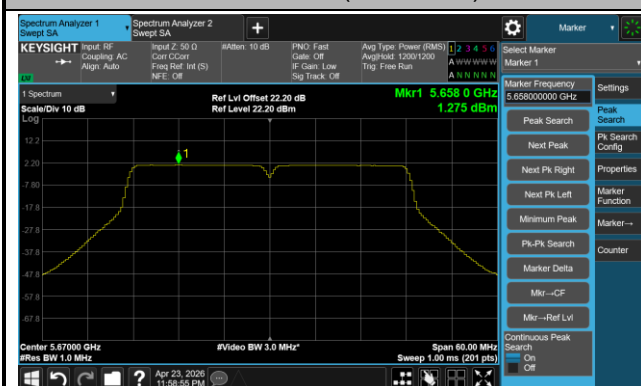

Channel 142 (5710 MHz)



Channel 151 (5755 MHz)

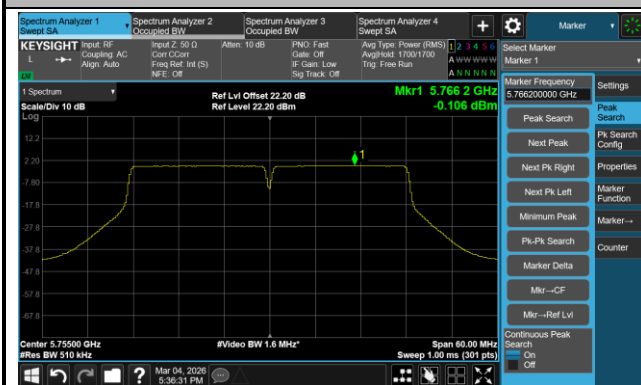


Channel 159 (5795 MHz)




802.11ac-VHT80 Power Spectral Density - Ant 3


Channel 106 (5530 MHz)

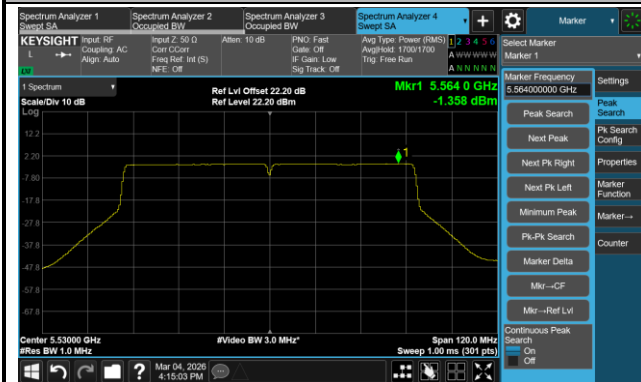


Channel 122 (5610 MHz)

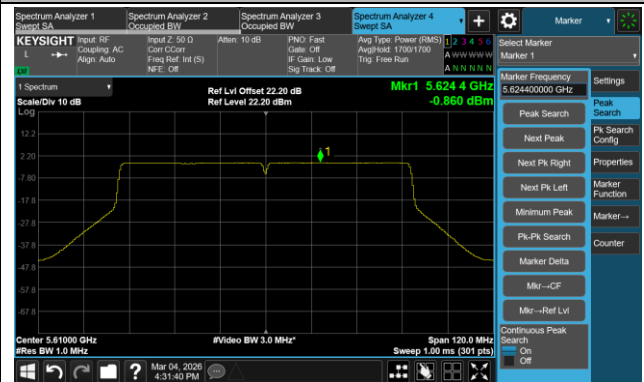

Channel 138 (5690 MHz)

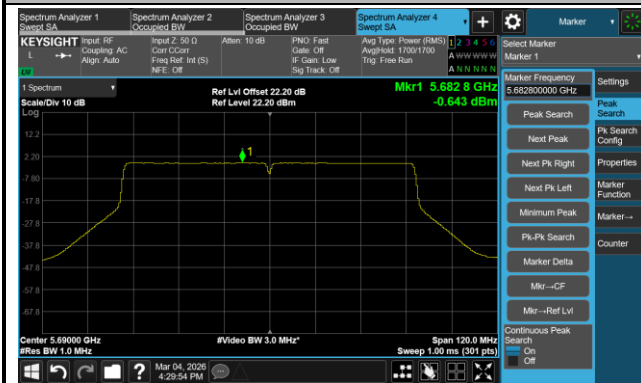


Channel 155 (5775 MHz)

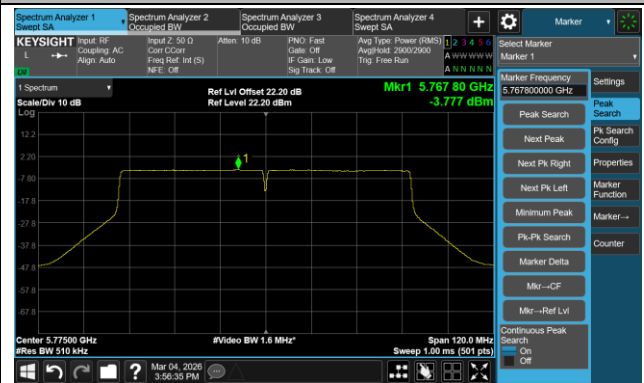

802.11ac-VHT160 Power Spectral Density - Ant 3

Channel 114 (5570 MHz)

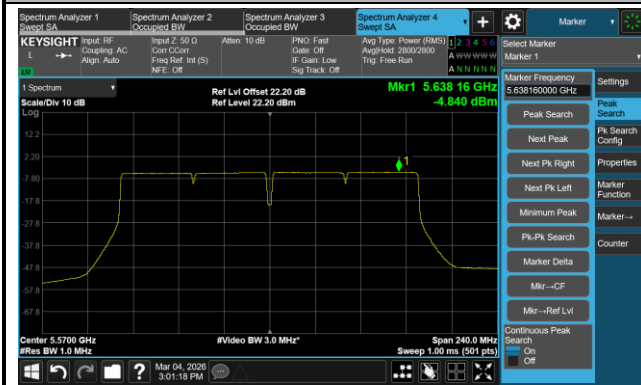

802.11be-EHT20 Power Spectral Density - Ant 3


Channel 100 (5500 MHz)



Channel 116 (5580 MHz)




Channel 140 (5700 MHz)

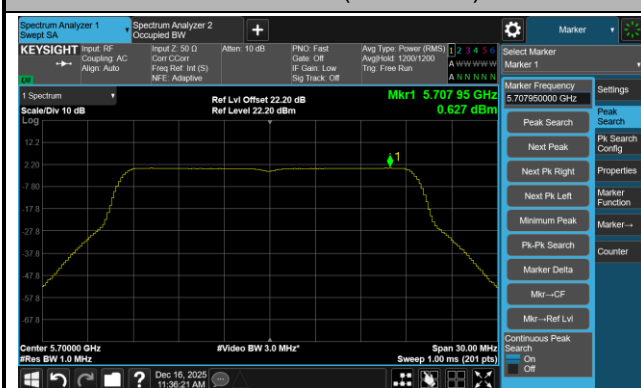


Channel 144 (5720 MHz)




Channel 149 (5745 MHz)

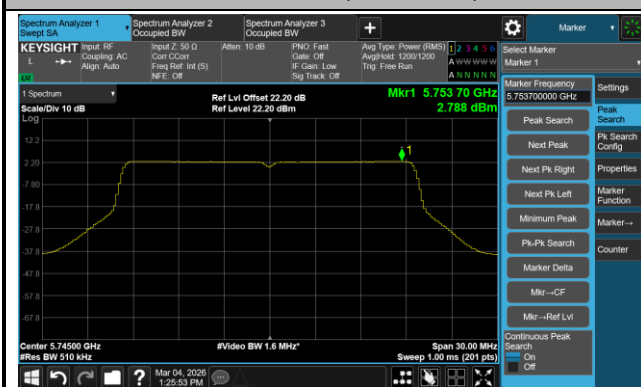

Channel 157 (5785 MHz)

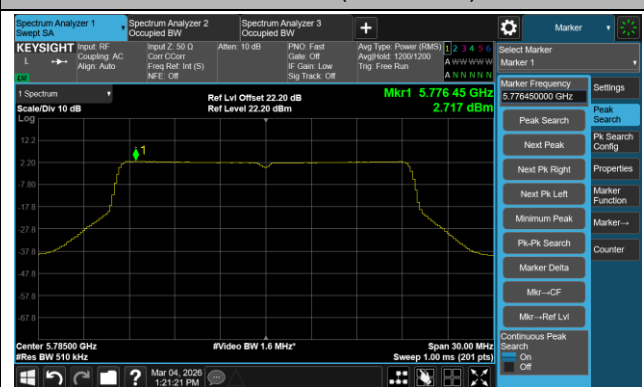


Channel 165 (5825 MHz)

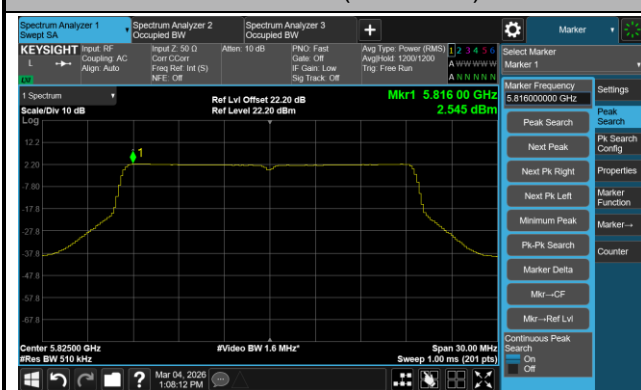


802.11be-EHT40 Power Spectral Density - Ant 3


Channel 102 (5510 MHz)

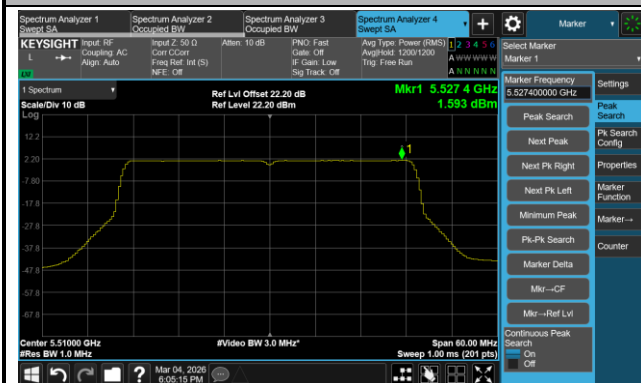


Channel 110 (5550 MHz)

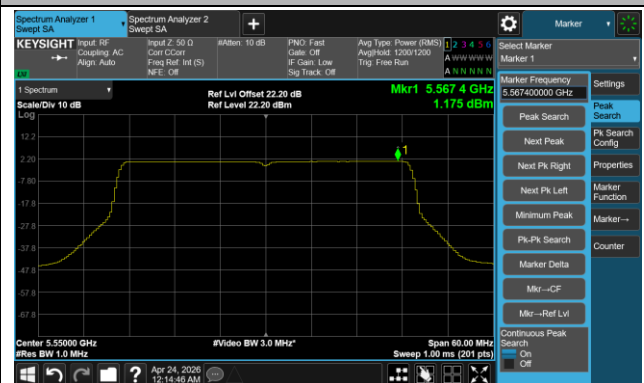


Channel 134 (5670 MHz)

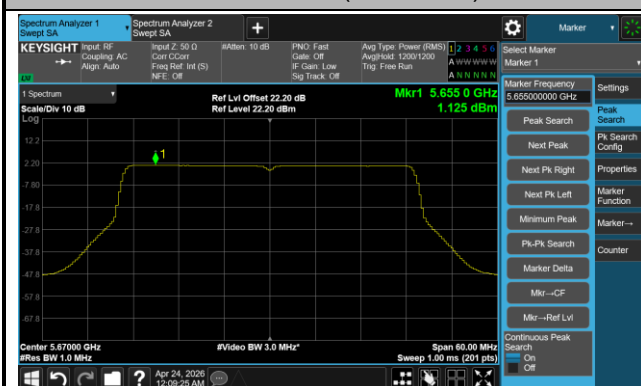

Channel 142 (5710 MHz)

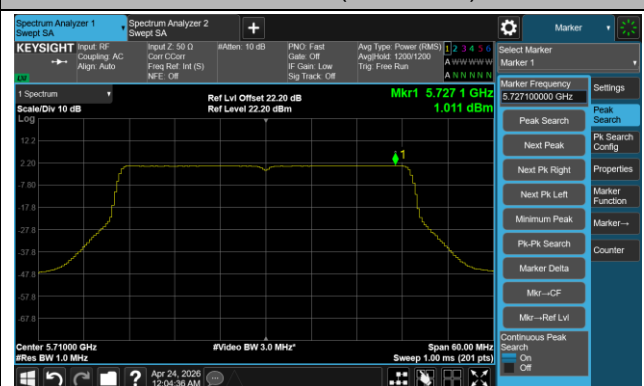

Channel 151 (5755 MHz)

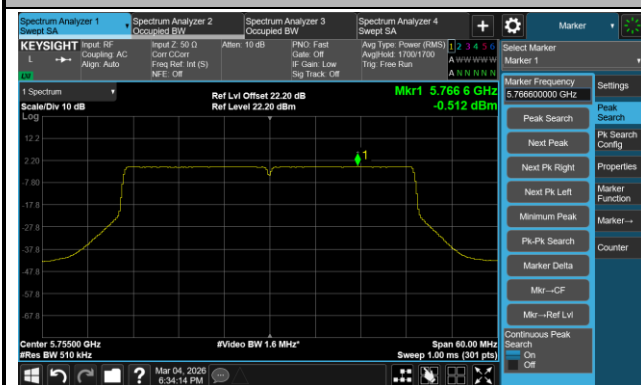


Channel 159 (5795 MHz)




802.11be-EHT80 Power Spectral Density - Ant 3


Channel 106 (5530 MHz)

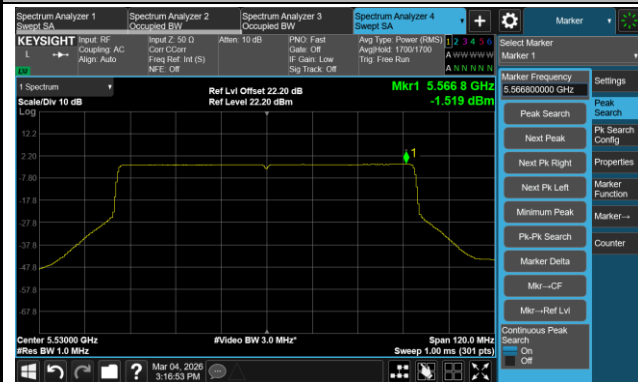

Channel 122 (5610 MHz)

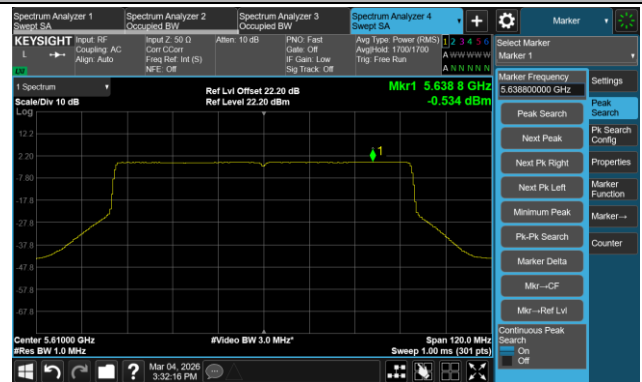

Channel 138 (5690 MHz)

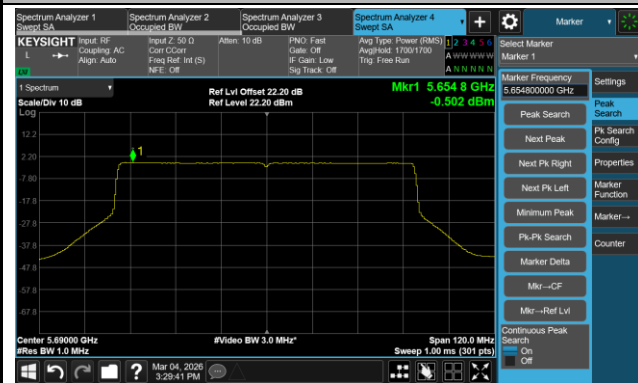

Channel 155 (5775 MHz)



802.11be-EHT160 Power Spectral Density - Ant 3

Channel 114 (5570 MHz)



A.6 Frequency Stability Test Result

OAW-AP1542 - WLAN Config 1

Test Site	SIP-TR1	Test Engineer	Ryan Wang
Test Date	2026-01-14	Test Mode	5180 MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	5.29	5.31	5.20	5.19
		- 20	5.21	5.19	4.67	4.44
		- 10	4.58	3.40	2.90	2.67
		0	2.56	2.26	2.59	0.87
		+ 10	0.46	-0.21	-0.71	-0.87
		+ 20	-0.52	-1.28	-1.67	-1.78
		+ 30	-1.71	-1.78	-1.75	-1.38
		+ 40	-1.31	0.53	-1.35	1.08
		+ 50	4.34	4.53	5.74	6.74
115%	138	+ 20	-1.37	-1.75	-1.07	-1.78
85%	102	+ 20	-0.64	-1.34	-1.73	-1.55

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emissions Test Result

OAW-AP1542 - WLAN Config 1

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	13981.20	45.02	3.12	48.14	68.20	-20.06	Peak	Horizontal
	15550.30	34.20	5.90	40.10	54.00	-13.90	Average	Horizontal
	15550.30	45.17	5.90	51.07	74.00	-22.93	Peak	Horizontal
*	17153.40	43.53	7.69	51.22	68.20	-16.98	Peak	Horizontal
	17755.20	32.94	8.58	41.52	54.00	-12.48	Average	Horizontal
	17755.20	44.69	8.58	53.27	74.00	-20.73	Peak	Horizontal
	10361.90	39.88	-0.79	39.09	54.00	-14.91	Average	Vertical
*	10361.90	51.80	-0.79	51.01	68.20	-17.19	Peak	Vertical
	11910.60	49.23	-0.87	48.37	74.00	-25.63	Peak	Vertical
	15545.20	40.80	5.82	46.62	54.00	-7.38	Average	Vertical
	15545.20	53.30	5.82	59.12	74.00	-14.88	Peak	Vertical
*	17398.20	43.85	8.34	52.19	68.20	-16.01	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	12381.50	46.19	-0.34	45.85	74.00	-28.15	Peak	Horizontal
*	14521.80	44.43	3.68	48.10	68.20	-20.10	Peak	Horizontal
	15669.30	38.60	5.13	43.73	54.00	-10.27	Average	Horizontal
	15669.30	51.65	5.13	56.78	74.00	-17.22	Peak	Horizontal
*	17126.20	44.36	7.50	51.86	68.20	-16.34	Peak	Horizontal
	11885.10	47.24	-0.76	46.48	74.00	-27.52	Peak	Vertical
*	14406.20	44.55	3.81	48.36	68.20	-19.84	Peak	Vertical
	15664.20	42.17	5.11	47.28	54.00	-6.72	Average	Vertical
	15664.20	54.95	5.11	60.06	74.00	-13.94	Peak	Vertical
*	17498.50	43.79	8.48	52.27	68.20	-15.93	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10480.90	48.03	-0.87	47.15	68.20	-21.05	Peak	Horizontal
	12310.10	46.73	-0.49	46.24	74.00	-27.76	Peak	Horizontal
	15725.40	38.90	5.78	44.68	54.00	-9.32	Average	Horizontal
	15725.40	50.60	5.78	56.38	74.00	-17.62	Peak	Horizontal
*	17491.70	44.30	8.58	52.88	68.20	-15.32	Peak	Horizontal
*	10480.90	48.93	-0.87	48.06	68.20	-20.14	Peak	Vertical
	11801.80	46.91	-1.00	45.90	74.00	-28.10	Peak	Vertical
	15725.40	41.50	5.78	47.28	54.00	-6.72	Average	Vertical
	15725.40	54.09	5.78	59.87	74.00	-14.13	Peak	Vertical
*	17495.10	43.63	8.53	52.15	68.20	-16.05	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8440.90	46.97	-2.74	44.23	74.00	-29.77	Peak	Horizontal
	11701.50	47.17	-0.87	46.30	74.00	-27.70	Peak	Horizontal
*	13863.90	45.60	2.22	47.82	68.20	-20.38	Peak	Horizontal
*	17190.80	43.89	7.69	51.58	68.20	-16.62	Peak	Horizontal
	8328.70	47.05	-2.86	44.18	74.00	-29.82	Peak	Vertical
	11013.00	46.86	-0.59	46.27	74.00	-27.73	Peak	Vertical
*	14018.60	45.42	2.09	47.51	68.20	-20.69	Peak	Vertical
*	17447.50	43.16	8.49	51.65	68.20	-16.55	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8406.90	46.97	-2.81	44.16	74.00	-29.84	Peak	Horizontal
	11725.30	47.28	-0.76	46.52	74.00	-27.48	Peak	Horizontal
*	14418.10	44.80	3.88	48.69	68.20	-19.51	Peak	Horizontal
*	17119.40	44.52	7.52	52.03	68.20	-16.17	Peak	Horizontal
	8310.00	46.50	-2.65	43.84	74.00	-30.16	Peak	Vertical
	11504.30	46.83	-1.14	45.70	74.00	-28.30	Peak	Vertical
*	15108.30	43.56	4.80	48.37	68.20	-19.83	Peak	Vertical
*	17379.50	44.03	8.03	52.07	68.20	-16.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8260.70	47.45	-2.99	44.46	74.00	-29.54	Peak	Horizontal
	11633.50	47.53	-1.07	46.46	74.00	-27.54	Peak	Horizontal
*	13982.90	44.92	3.14	48.07	68.20	-20.13	Peak	Horizontal
*	17459.40	42.79	8.64	51.43	68.20	-16.77	Peak	Horizontal
	8177.40	47.01	-3.26	43.75	74.00	-30.25	Peak	Vertical
	11704.90	46.47	-0.85	45.62	74.00	-28.38	Peak	Vertical
*	14764.90	44.73	3.88	48.61	68.20	-19.59	Peak	Vertical
*	17107.50	43.74	7.70	51.44	68.20	-16.76	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8395.00	47.13	-2.81	44.32	74.00	-29.68	Peak	Horizontal
	11018.10	46.63	-0.67	45.96	74.00	-28.04	Peak	Horizontal
*	13991.40	45.21	3.04	48.24	68.20	-19.96	Peak	Horizontal
*	17204.40	43.88	7.63	51.51	68.20	-16.69	Peak	Horizontal
	8429.00	47.05	-2.92	44.13	74.00	-29.87	Peak	Vertical
	11966.70	47.20	-0.84	46.36	74.00	-27.64	Peak	Vertical
*	13882.60	45.83	2.32	48.15	68.20	-20.05	Peak	Vertical
*	17136.40	43.59	7.53	51.13	68.20	-17.07	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8429.00	46.71	-2.92	43.79	74.00	-30.21	Peak	Horizontal
	12276.10	46.69	-0.36	46.32	74.00	-27.68	Peak	Horizontal
*	14088.30	46.01	2.94	48.95	68.20	-19.25	Peak	Horizontal
*	17246.90	43.38	7.94	51.32	68.20	-16.88	Peak	Horizontal
	8400.10	46.95	-2.80	44.14	74.00	-29.86	Peak	Vertical
	10742.70	46.53	-0.83	45.70	74.00	-28.30	Peak	Vertical
*	13687.10	46.08	1.74	47.82	68.20	-20.38	Peak	Vertical
*	17083.70	43.14	8.01	51.15	68.20	-17.05	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8378.00	46.73	-3.02	43.70	74.00	-30.30	Peak	Horizontal
	11891.90	46.81	-0.74	46.07	74.00	-27.93	Peak	Horizontal
*	14418.10	44.02	3.88	47.90	68.20	-20.30	Peak	Horizontal
*	17394.80	43.68	8.31	51.99	68.20	-16.21	Peak	Horizontal
	8342.30	46.85	-2.88	43.97	74.00	-30.03	Peak	Vertical
	11400.60	43.37	-1.07	42.30	54.00	-11.70	Average	Vertical
	11400.60	49.58	-1.07	48.51	74.00	-25.49	Peak	Vertical
*	14103.60	46.15	2.79	48.94	68.20	-19.26	Peak	Vertical
*	17175.50	44.52	7.68	52.21	68.20	-15.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8311.70	46.48	-2.67	43.80	74.00	-30.20	Peak	Horizontal
	12288.00	46.02	-0.42	45.60	74.00	-28.40	Peak	Horizontal
*	13993.10	44.81	2.95	47.75	68.20	-20.45	Peak	Horizontal
*	17173.80	44.07	7.66	51.73	68.20	-16.47	Peak	Horizontal
	8452.80	46.91	-2.77	44.14	74.00	-29.86	Peak	Vertical
	11014.70	46.14	-0.62	45.52	74.00	-28.48	Peak	Vertical
*	14780.20	44.90	4.06	48.96	68.20	-19.24	Peak	Vertical
*	17469.60	43.82	8.59	52.41	68.20	-15.79	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8335.50	46.70	-2.87	43.83	74.00	-30.17	Peak	Horizontal
	11121.80	47.19	-0.82	46.37	74.00	-27.63	Peak	Horizontal
*	14911.10	44.41	4.20	48.61	68.20	-19.59	Peak	Horizontal
*	17218.00	44.02	8.00	52.02	68.20	-16.18	Peak	Horizontal
	8417.10	47.90	-2.85	45.06	74.00	-28.94	Peak	Vertical
	11489.00	42.30	-1.29	41.01	54.00	-12.99	Average	Vertical
	11489.00	49.84	-1.29	48.54	74.00	-25.46	Peak	Vertical
*	14424.90	45.55	3.64	49.19	68.20	-19.01	Peak	Vertical
*	17228.20	45.89	7.69	53.58	68.20	-14.62	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8323.60	46.69	-2.82	43.87	74.00	-30.13	Peak	Horizontal
	12301.60	46.82	-0.44	46.38	74.00	-27.62	Peak	Horizontal
*	14717.30	44.19	4.03	48.22	68.20	-19.98	Peak	Horizontal
*	16833.80	43.09	7.32	50.40	68.20	-17.80	Peak	Horizontal
	8349.10	46.27	-2.87	43.40	74.00	-30.60	Peak	Vertical
	11570.60	47.78	-1.06	46.72	74.00	-27.28	Peak	Vertical
*	14720.70	43.93	4.01	47.94	68.20	-20.26	Peak	Vertical
*	17345.50	46.85	7.58	54.43	68.20	-13.77	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8332.10	46.97	-2.87	44.10	74.00	-29.90	Peak	Horizontal
	11908.90	46.80	-0.85	45.96	74.00	-28.04	Peak	Horizontal
*	13969.30	45.30	2.94	48.23	68.20	-19.97	Peak	Horizontal
*	17454.30	43.59	8.62	52.21	68.20	-15.99	Peak	Horizontal
	8361.00	46.79	-2.83	43.96	74.00	-30.04	Peak	Vertical
	11648.80	43.50	-1.17	42.33	54.00	-11.67	Average	Vertical
	11648.80	54.32	-1.17	53.15	74.00	-20.85	Peak	Vertical
*	14520.10	43.90	3.72	47.62	68.20	-20.58	Peak	Vertical
*	17474.70	44.51	8.58	53.09	68.20	-15.11	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10361.90	47.22	-0.79	46.43	68.20	-21.77	Peak	Horizontal
	12101.00	46.63	-0.61	46.02	74.00	-27.98	Peak	Horizontal
*	14372.20	45.06	3.35	48.41	68.20	-19.79	Peak	Horizontal
	15545.20	35.64	5.82	41.46	54.00	-12.54	Average	Horizontal
	15545.20	45.69	5.82	51.51	74.00	-22.49	Peak	Horizontal
*	10361.90	48.35	-0.79	47.56	68.20	-20.64	Peak	Vertical
	11910.60	47.72	-0.87	46.85	74.00	-27.15	Peak	Vertical
	15545.20	40.87	5.82	46.69	54.00	-7.31	Average	Vertical
	15545.20	49.49	5.82	55.31	74.00	-18.69	Peak	Vertical
*	17216.30	43.60	7.95	51.55	68.20	-16.65	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10225.90	46.52	-1.07	45.45	68.20	-22.75	Peak	Horizontal
	12566.80	46.63	-0.02	46.62	74.00	-27.38	Peak	Horizontal
	15664.20	38.05	5.11	43.16	54.00	-10.84	Average	Horizontal
	15664.20	47.36	5.11	52.46	74.00	-21.54	Peak	Horizontal
*	17105.80	44.24	7.74	51.98	68.20	-16.22	Peak	Horizontal
*	10441.80	47.77	-0.68	47.09	68.20	-21.11	Peak	Vertical
	11176.20	46.83	-0.88	45.94	74.00	-28.06	Peak	Vertical
	15647.20	43.60	5.13	48.73	54.00	-5.27	Average	Vertical
	15647.20	52.49	5.13	57.63	74.00	-16.37	Peak	Vertical
*	17610.70	43.50	8.12	51.62	68.20	-16.58	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10482.60	48.49	-0.90	47.59	68.20	-20.61	Peak	Horizontal
	10880.40	46.79	-0.59	46.21	74.00	-27.79	Peak	Horizontal
	15728.80	38.41	5.62	44.03	54.00	-9.97	Average	Horizontal
	15728.80	47.22	5.62	52.84	74.00	-21.16	Peak	Horizontal
*	17398.20	43.63	8.34	51.97	68.20	-16.23	Peak	Horizontal
*	10480.90	47.84	-0.87	46.97	68.20	-21.23	Peak	Vertical
	11800.10	47.53	-1.03	46.50	74.00	-27.50	Peak	Vertical
	15705.00	41.18	5.29	46.47	54.00	-7.53	Average	Vertical
	15705.00	50.48	5.29	55.76	74.00	-18.24	Peak	Vertical
*	17537.60	44.03	8.24	52.27	68.20	-15.93	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8418.80	47.44	-2.86	44.59	74.00	-29.41	Peak	Horizontal
*	10098.40	46.35	-1.01	45.34	68.20	-22.86	Peak	Horizontal
	11592.70	46.81	-1.09	45.73	74.00	-28.27	Peak	Horizontal
*	17144.90	44.31	7.65	51.96	68.20	-16.24	Peak	Horizontal
	8400.10	47.09	-2.80	44.28	74.00	-29.72	Peak	Vertical
*	10288.80	46.73	-0.71	46.02	68.20	-22.18	Peak	Vertical
	11703.20	47.49	-0.86	46.63	74.00	-27.37	Peak	Vertical
*	17467.90	43.41	8.60	52.01	68.20	-16.19	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8395.00	47.23	-2.81	44.42	74.00	-29.58	Peak	Horizontal
*	10074.60	46.20	-0.99	45.20	68.20	-23.00	Peak	Horizontal
	11733.80	46.82	-0.85	45.97	74.00	-28.03	Peak	Horizontal
*	17552.90	43.85	8.30	52.14	68.20	-16.06	Peak	Horizontal
	8389.90	47.29	-2.87	44.41	74.00	-29.59	Peak	Vertical
*	10083.10	46.19	-1.02	45.17	68.20	-23.03	Peak	Vertical
	11703.20	47.73	-0.86	46.87	74.00	-27.13	Peak	Vertical
*	17483.20	43.39	8.59	51.98	68.20	-16.22	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8201.20	47.21	-3.23	43.99	74.00	-30.01	Peak	Horizontal
*	10295.60	46.04	-0.71	45.34	68.20	-22.86	Peak	Horizontal
	12184.30	46.91	-0.74	46.17	74.00	-27.83	Peak	Horizontal
*	17474.70	43.05	8.58	51.63	68.20	-16.57	Peak	Horizontal
	8335.50	46.86	-2.87	43.99	74.00	-30.01	Peak	Vertical
*	10547.20	45.67	-0.61	45.06	68.20	-23.14	Peak	Vertical
	12376.40	46.52	-0.42	46.10	74.00	-27.90	Peak	Vertical
*	17146.60	44.20	7.67	51.87	68.20	-16.33	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8463.00	46.87	-2.92	43.96	74.00	-30.04	Peak	Horizontal
*	9991.30	46.26	-0.80	45.46	68.20	-22.74	Peak	Horizontal
	12272.70	46.27	-0.35	45.92	74.00	-28.08	Peak	Horizontal
*	17403.30	43.64	8.41	52.05	68.20	-16.15	Peak	Horizontal
	8342.30	46.94	-2.88	44.05	74.00	-29.95	Peak	Vertical
*	10309.20	46.34	-0.77	45.57	68.20	-22.63	Peak	Vertical
	12141.80	46.32	-0.40	45.92	74.00	-28.08	Peak	Vertical
*	17517.20	43.70	8.33	52.04	68.20	-16.16	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8400.10	46.89	-2.80	44.08	74.00	-29.92	Peak	Horizontal
*	10040.60	46.19	-0.94	45.25	68.20	-22.95	Peak	Horizontal
	12356.00	47.06	-0.50	46.57	74.00	-27.43	Peak	Horizontal
*	17575.00	43.96	8.26	52.22	68.20	-15.98	Peak	Horizontal
	8435.80	47.48	-2.81	44.67	74.00	-29.33	Peak	Vertical
*	9908.00	46.29	-1.22	45.07	68.20	-23.13	Peak	Vertical
	11985.40	46.16	-0.60	45.56	74.00	-28.44	Peak	Vertical
*	17534.20	43.61	8.26	51.87	68.20	-16.33	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8403.50	47.78	-2.81	44.98	74.00	-29.02	Peak	Horizontal
*	9857.00	47.72	-1.00	46.72	68.20	-21.48	Peak	Horizontal
	12260.80	46.93	-0.37	46.56	74.00	-27.44	Peak	Horizontal
*	17495.10	43.48	8.53	52.01	68.20	-16.19	Peak	Horizontal
	8349.10	47.32	-2.87	44.44	74.00	-29.56	Peak	Vertical
*	9772.00	47.09	-1.43	45.66	68.20	-22.54	Peak	Vertical
	12381.50	46.34	-0.34	45.99	74.00	-28.01	Peak	Vertical
*	17459.40	43.14	8.64	51.78	68.20	-16.42	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8415.40	48.60	-2.84	45.76	74.00	-28.24	Peak	Horizontal
*	10382.30	47.01	-0.68	46.33	68.20	-21.87	Peak	Horizontal
	12179.20	47.68	-0.69	46.99	74.00	-27.01	Peak	Horizontal
*	17393.10	43.62	8.29	51.91	68.20	-16.29	Peak	Horizontal
	8296.40	47.43	-2.72	44.72	74.00	-29.28	Peak	Vertical
*	10010.00	46.27	-0.97	45.30	68.20	-22.90	Peak	Vertical
	11439.70	47.45	-1.13	46.32	74.00	-27.68	Peak	Vertical
*	17408.40	43.33	8.29	51.61	68.20	-16.59	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8160.40	48.09	-3.32	44.77	74.00	-29.23	Peak	Horizontal
*	9800.90	46.75	-1.19	45.56	68.20	-22.64	Peak	Horizontal
	12344.10	46.33	-0.57	45.75	74.00	-28.25	Peak	Horizontal
*	17233.30	45.30	7.53	52.83	68.20	-15.37	Peak	Horizontal
	8408.60	47.07	-2.81	44.26	74.00	-29.74	Peak	Vertical
*	10135.80	45.94	-0.66	45.29	68.20	-22.91	Peak	Vertical
	11490.70	47.37	-1.27	46.10	74.00	-27.90	Peak	Vertical
*	17236.70	45.34	7.55	52.89	68.20	-15.31	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8435.80	47.33	-2.81	44.52	74.00	-29.48	Peak	Horizontal
*	10027.00	45.95	-0.74	45.21	68.20	-22.99	Peak	Horizontal
	11679.40	47.01	-1.22	45.79	74.00	-28.21	Peak	Horizontal
*	17350.60	44.62	7.66	52.28	68.20	-15.92	Peak	Horizontal
	8435.80	47.02	-2.81	44.21	74.00	-29.79	Peak	Vertical
*	9976.00	46.05	-0.75	45.30	68.20	-22.90	Peak	Vertical
	11567.20	47.56	-1.09	46.48	74.00	-27.52	Peak	Vertical
*	17357.40	46.14	7.74	53.88	68.20	-14.32	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8437.50	47.09	-2.79	44.30	74.00	-29.70	Peak	Horizontal
*	9833.20	46.73	-1.05	45.68	68.20	-22.52	Peak	Horizontal
	11647.10	39.26	-1.15	38.11	54.00	-15.89	Average	Horizontal
	11647.10	48.73	-1.15	47.58	74.00	-26.42	Peak	Horizontal
*	17105.80	44.47	7.74	52.21	68.20	-15.99	Peak	Horizontal
	8355.90	46.76	-2.85	43.91	74.00	-30.09	Peak	Vertical
*	10193.60	46.09	-1.03	45.06	68.20	-23.14	Peak	Vertical
	11657.30	40.17	-1.28	38.89	54.00	-15.11	Average	Vertical
	11657.30	49.64	-1.28	48.35	74.00	-25.65	Peak	Vertical
*	17469.60	44.36	8.59	52.96	68.20	-15.24	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8412.00	47.38	-2.82	44.57	74.00	-29.43	Peak	Horizontal
*	10021.90	46.39	-0.81	45.58	68.20	-22.62	Peak	Horizontal
	12393.40	46.25	-0.22	46.03	74.00	-27.97	Peak	Horizontal
*	17490.00	43.59	8.60	52.19	68.20	-16.01	Peak	Horizontal
	8289.60	47.24	-2.78	44.47	74.00	-29.53	Peak	Vertical
*	10191.90	46.17	-1.01	45.17	68.20	-23.03	Peak	Vertical
	12284.60	46.37	-0.40	45.97	74.00	-28.03	Peak	Vertical
*	17654.90	43.85	8.45	52.31	68.20	-15.89	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9804.30	46.27	-1.13	45.14	68.20	-23.06	Peak	Horizontal
	11975.20	47.53	-0.72	46.81	74.00	-27.19	Peak	Horizontal
	15723.70	34.99	5.86	40.85	54.00	-13.15	Average	Horizontal
	15723.70	44.81	5.86	50.66	74.00	-23.34	Peak	Horizontal
*	17481.50	43.28	8.59	51.87	68.20	-16.33	Peak	Horizontal
*	10462.20	46.26	-0.71	45.55	68.20	-22.65	Peak	Vertical
	12155.40	46.24	-0.37	45.87	74.00	-28.13	Peak	Vertical
	15677.80	39.53	5.28	44.81	54.00	-9.19	Average	Vertical
	15677.80	49.09	5.28	54.37	74.00	-19.63	Peak	Vertical
*	17405.00	43.43	8.43	51.85	68.20	-16.35	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8391.60	47.34	-2.85	44.48	74.00	-29.52	Peak	Horizontal
*	10552.30	47.43	-0.49	46.94	68.20	-21.26	Peak	Horizontal
	11976.90	47.48	-0.70	46.79	74.00	-27.21	Peak	Horizontal
*	17216.30	43.01	7.95	50.96	68.20	-17.24	Peak	Horizontal
*	10542.10	49.06	-0.73	48.33	68.20	-19.87	Peak	Vertical
	12390.00	46.11	-0.22	45.89	74.00	-28.11	Peak	Vertical
	15818.90	36.38	5.47	41.85	54.00	-12.15	Average	Vertical
	15818.90	46.15	5.47	51.62	74.00	-22.38	Peak	Vertical
*	17490.00	43.06	8.60	51.66	68.20	-16.54	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8316.80	47.13	-2.74	44.40	74.00	-29.60	Peak	Horizontal
*	9902.90	46.63	-1.19	45.43	68.20	-22.77	Peak	Horizontal
	12379.80	46.53	-0.37	46.16	74.00	-27.84	Peak	Horizontal
*	17556.30	43.86	8.32	52.18	68.20	-16.02	Peak	Horizontal
*	9817.90	46.31	-1.18	45.13	68.20	-23.07	Peak	Vertical
	10623.70	47.41	-1.11	46.30	74.00	-27.70	Peak	Vertical
	15937.90	35.61	5.43	41.04	54.00	-12.96	Average	Vertical
	15937.90	45.56	5.43	50.99	74.00	-23.01	Peak	Vertical
*	17484.90	42.94	8.59	51.53	68.20	-16.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8417.10	47.59	-2.85	44.74	74.00	-29.26	Peak	Horizontal
*	9998.10	45.83	-0.86	44.97	68.20	-23.23	Peak	Horizontal
	12398.50	46.43	-0.20	46.22	74.00	-27.78	Peak	Horizontal
*	17490.00	43.36	8.60	51.96	68.20	-16.24	Peak	Horizontal
	8408.60	47.06	-2.81	44.24	74.00	-29.76	Peak	Vertical
*	9976.00	46.01	-0.75	45.26	68.20	-22.94	Peak	Vertical
	12495.40	46.02	-0.51	45.50	74.00	-28.50	Peak	Vertical
*	17508.70	43.04	8.37	51.40	68.20	-16.80	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8417.10	46.36	-2.85	43.51	74.00	-30.49	Peak	Horizontal
*	10103.50	46.34	-0.99	45.36	68.20	-22.84	Peak	Horizontal
	12090.80	46.61	-0.70	45.92	74.00	-28.08	Peak	Horizontal
*	17496.80	43.82	8.50	52.33	68.20	-15.87	Peak	Horizontal
	8284.50	48.07	-2.84	45.23	74.00	-28.77	Peak	Vertical
*	10161.30	45.90	-0.57	45.34	68.20	-22.86	Peak	Vertical
	12281.20	47.10	-0.39	46.71	74.00	-27.29	Peak	Vertical
*	17484.90	43.65	8.59	52.25	68.20	-15.95	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8401.80	46.98	-2.81	44.17	74.00	-29.83	Peak	Horizontal
*	9981.10	46.19	-0.77	45.42	68.20	-22.78	Peak	Horizontal
	11910.60	46.87	-0.87	46.01	74.00	-27.99	Peak	Horizontal
*	17513.80	43.74	8.35	52.08	68.20	-16.12	Peak	Horizontal
	8412.00	47.05	-2.82	44.24	74.00	-29.76	Peak	Vertical
*	9976.00	46.17	-0.75	45.42	68.20	-22.78	Peak	Vertical
	11716.80	46.70	-0.79	45.91	74.00	-28.09	Peak	Vertical
*	17530.80	44.43	8.28	52.70	68.20	-15.50	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8442.60	47.19	-2.71	44.48	74.00	-29.52	Peak	Horizontal
*	9974.30	46.04	-0.75	45.29	68.20	-22.91	Peak	Horizontal
	12398.50	46.39	-0.20	46.18	74.00	-27.82	Peak	Horizontal
*	17490.00	44.08	8.60	52.68	68.20	-15.52	Peak	Horizontal
	8296.40	47.16	-2.72	44.45	74.00	-29.55	Peak	Vertical
*	10266.70	45.67	-0.58	45.09	68.20	-23.11	Peak	Vertical
	11421.00	46.87	-0.97	45.90	74.00	-28.10	Peak	Vertical
*	17401.60	44.17	8.38	52.55	68.20	-15.65	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8277.70	47.35	-2.92	44.43	74.00	-29.57	Peak	Horizontal
*	10140.90	45.84	-0.63	45.21	68.20	-22.99	Peak	Horizontal
	11120.10	46.87	-0.81	46.05	74.00	-27.95	Peak	Horizontal
*	17246.90	44.24	7.94	52.18	68.20	-16.02	Peak	Horizontal
	8197.80	47.97	-3.27	44.70	74.00	-29.30	Peak	Vertical
*	10152.80	46.64	-0.59	46.05	68.20	-22.15	Peak	Vertical
	12561.70	46.15	0.00	46.14	74.00	-27.86	Peak	Vertical
*	17257.10	45.40	8.07	53.47	68.20	-14.73	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8354.20	46.90	-2.86	44.04	74.00	-29.96	Peak	Horizontal
*	10263.30	46.07	-0.60	45.47	68.20	-22.73	Peak	Horizontal
	12281.20	46.59	-0.39	46.21	74.00	-27.79	Peak	Horizontal
*	17388.00	44.58	8.23	52.81	68.20	-15.39	Peak	Horizontal
	8306.60	47.19	-2.67	44.52	74.00	-29.48	Peak	Vertical
*	10156.20	45.77	-0.58	45.19	68.20	-23.01	Peak	Vertical
	12471.60	47.16	-0.29	46.87	74.00	-27.13	Peak	Vertical
*	17405.00	46.09	8.43	54.52	68.20	-13.68	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8395.00	47.33	-2.81	44.52	74.00	-29.48	Peak	Horizontal
*	9586.70	46.86	-1.56	45.31	68.20	-22.89	Peak	Horizontal
	11721.90	46.63	-0.77	45.86	74.00	-28.14	Peak	Horizontal
*	17476.40	43.10	8.58	51.68	68.20	-16.52	Peak	Horizontal
	8466.40	46.96	-2.92	44.05	74.00	-29.95	Peak	Vertical
*	9797.50	46.43	-1.26	45.16	68.20	-23.04	Peak	Vertical
	11006.20	46.36	-0.61	45.75	74.00	-28.25	Peak	Vertical
*	17325.10	44.73	7.35	52.08	68.20	-16.12	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8310.00	47.52	-2.65	44.87	74.00	-29.13	Peak	Horizontal
*	9892.70	46.61	-1.14	45.47	68.20	-22.73	Peak	Horizontal
	12395.10	46.29	-0.21	46.08	74.00	-27.92	Peak	Horizontal
*	17454.30	43.27	8.62	51.89	68.20	-16.31	Peak	Horizontal
	8466.40	47.51	-2.92	44.59	74.00	-29.41	Peak	Vertical
*	10579.50	46.70	-0.41	46.29	68.20	-21.91	Peak	Vertical
	11951.40	47.09	-0.75	46.34	74.00	-27.66	Peak	Vertical
*	17505.30	43.77	8.39	52.17	68.20	-16.03	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8417.10	47.73	-2.85	44.89	74.00	-29.11	Peak	Horizontal
*	10132.40	46.30	-0.67	45.62	68.20	-22.58	Peak	Horizontal
	11701.50	46.94	-0.87	46.08	74.00	-27.92	Peak	Horizontal
*	17474.70	43.44	8.58	52.02	68.20	-16.18	Peak	Horizontal
	8364.40	47.24	-2.87	44.37	74.00	-29.63	Peak	Vertical
*	9984.50	46.36	-0.78	45.58	68.20	-22.62	Peak	Vertical
	12179.20	46.88	-0.69	46.18	74.00	-27.82	Peak	Vertical
*	17569.90	43.67	8.28	51.95	68.20	-16.25	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8311.70	47.27	-2.67	44.59	74.00	-29.41	Peak	Horizontal
*	10397.60	45.98	-0.64	45.34	68.20	-22.86	Peak	Horizontal
	12393.40	46.60	-0.22	46.38	74.00	-27.62	Peak	Horizontal
*	17551.20	44.23	8.29	52.51	68.20	-15.69	Peak	Horizontal
	8401.80	47.58	-2.81	44.78	74.00	-29.22	Peak	Vertical
*	10251.40	47.34	-0.86	46.49	68.20	-21.71	Peak	Vertical
	11007.90	46.51	-0.60	45.91	74.00	-28.09	Peak	Vertical
*	17544.40	44.12	8.24	52.37	68.20	-15.83	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8401.80	47.22	-2.81	44.42	74.00	-29.58	Peak	Horizontal
*	9979.40	46.97	-0.76	46.21	68.20	-21.99	Peak	Horizontal
	10834.50	46.83	-0.91	45.92	74.00	-28.08	Peak	Horizontal
*	17564.80	44.03	8.30	52.33	68.20	-15.87	Peak	Horizontal
	8355.90	47.28	-2.85	44.43	74.00	-29.57	Peak	Vertical
*	10560.80	46.75	-0.40	46.35	68.20	-21.85	Peak	Vertical
	11910.60	47.36	-0.87	46.50	74.00	-27.50	Peak	Vertical
*	17600.50	44.35	8.08	52.43	68.20	-15.77	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8304.90	47.39	-2.68	44.71	74.00	-29.29	Peak	Horizontal
*	9965.80	46.85	-0.77	46.08	68.20	-22.12	Peak	Horizontal
	10880.40	46.83	-0.59	46.25	74.00	-27.75	Peak	Horizontal
*	17287.70	44.13	7.80	51.93	68.20	-16.27	Peak	Horizontal
	8447.70	47.29	-2.69	44.60	74.00	-29.40	Peak	Vertical
*	9976.00	46.00	-0.75	45.25	68.20	-22.95	Peak	Vertical
	12281.20	46.29	-0.39	45.91	74.00	-28.09	Peak	Vertical
*	17391.40	44.04	8.27	52.31	68.20	-15.89	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8415.40	47.82	-2.84	44.99	74.00	-29.01	Peak	Horizontal
*	9925.00	46.56	-1.09	45.46	68.20	-22.74	Peak	Horizontal
	11123.50	47.08	-0.83	46.25	74.00	-27.75	Peak	Horizontal
*	17476.40	43.22	8.58	51.80	68.20	-16.40	Peak	Horizontal
	8415.40	48.36	-2.84	45.53	74.00	-28.47	Peak	Vertical
*	10038.90	46.71	-0.92	45.79	68.20	-22.41	Peak	Vertical
	12090.80	47.33	-0.70	46.64	74.00	-27.36	Peak	Vertical
*	17495.10	44.23	8.53	52.76	68.20	-15.44	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8413.70	47.22	-2.83	44.39	74.00	-29.61	Peak	Horizontal
*	10076.30	47.08	-1.01	46.07	68.20	-22.13	Peak	Horizontal
	12269.30	47.33	-0.34	46.98	74.00	-27.02	Peak	Horizontal
*	17471.30	43.36	8.58	51.94	68.20	-16.26	Peak	Horizontal
	8372.90	46.92	-2.97	43.96	74.00	-30.04	Peak	Vertical
*	10157.90	46.25	-0.58	45.67	68.20	-22.53	Peak	Vertical
	12140.10	47.06	-0.42	46.64	74.00	-27.36	Peak	Vertical
*	17495.10	43.40	8.53	51.93	68.20	-16.27	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11958.20	47.34	-0.81	46.53	74.00	-27.47	Peak	Horizontal
*	14802.30	44.52	4.08	48.60	68.20	-19.60	Peak	Horizontal
	15548.60	35.51	5.87	41.38	54.00	-12.62	Average	Horizontal
	15548.60	45.33	5.87	51.20	74.00	-22.80	Peak	Horizontal
*	17114.30	44.53	7.56	52.09	68.20	-16.11	Peak	Horizontal
*	10361.90	48.05	-0.79	47.26	68.20	-20.94	Peak	Vertical
	12395.10	46.98	-0.21	46.77	74.00	-27.23	Peak	Vertical
	15529.90	36.90	5.62	42.52	54.00	-11.48	Average	Vertical
	15529.90	47.02	5.62	52.64	74.00	-21.36	Peak	Vertical
*	17216.30	44.50	7.95	52.45	68.20	-15.75	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11011.30	46.61	-0.60	46.01	74.00	-27.99	Peak	Horizontal
*	13986.30	45.43	3.19	48.62	68.20	-19.58	Peak	Horizontal
	15664.20	40.03	5.11	45.14	54.00	-8.86	Average	Horizontal
	15664.20	47.98	5.11	53.09	74.00	-20.91	Peak	Horizontal
*	17551.20	44.19	8.29	52.48	68.20	-15.72	Peak	Horizontal
*	10441.80	47.66	-0.68	46.99	68.20	-21.21	Peak	Vertical
	11910.60	47.14	-0.87	46.27	74.00	-27.73	Peak	Vertical
	15667.60	42.30	5.12	47.42	54.00	-6.58	Average	Vertical
	15667.60	50.29	5.12	55.41	74.00	-18.59	Peak	Vertical
*	17099.00	44.60	7.88	52.48	68.20	-15.72	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11987.10	47.63	-0.59	47.04	74.00	-26.96	Peak	Horizontal
*	14222.60	45.01	2.89	47.90	68.20	-20.30	Peak	Horizontal
	15725.40	36.90	5.78	42.68	54.00	-11.32	Average	Horizontal
	15725.40	46.59	5.78	52.36	74.00	-21.64	Peak	Horizontal
*	17408.40	43.76	8.29	52.05	68.20	-16.15	Peak	Horizontal
*	10491.10	48.38	-0.90	47.48	68.20	-20.72	Peak	Vertical
	12138.40	46.72	-0.43	46.28	74.00	-27.72	Peak	Vertical
	15728.80	42.16	5.62	47.78	54.00	-6.22	Average	Vertical
	15728.80	52.17	5.62	57.79	74.00	-16.21	Peak	Vertical
*	17507.00	44.37	8.37	52.74	68.20	-15.46	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8354.20	46.99	-2.86	44.13	74.00	-29.87	Peak	Horizontal
	12279.50	46.37	-0.38	45.99	74.00	-28.01	Peak	Horizontal
*	13984.60	45.25	3.17	48.41	68.20	-19.79	Peak	Horizontal
*	17496.80	44.40	8.50	52.90	68.20	-15.30	Peak	Horizontal
*	10521.70	49.43	-0.84	48.59	68.20	-19.61	Peak	Vertical
	11907.20	47.20	-0.83	46.37	74.00	-27.63	Peak	Vertical
*	13683.70	47.32	1.70	49.02	68.20	-19.18	Peak	Vertical
	15786.60	41.58	5.44	47.02	54.00	-6.98	Average	Vertical
	15786.60	47.42	5.44	52.85	74.00	-21.15	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8413.70	48.05	-2.83	45.22	74.00	-28.78	Peak	Horizontal
	12289.70	46.93	-0.42	46.51	74.00	-27.49	Peak	Horizontal
*	14962.10	44.18	4.15	48.33	68.20	-19.87	Peak	Horizontal
*	17476.40	43.34	8.58	51.92	68.20	-16.28	Peak	Horizontal
	8423.90	47.65	-2.89	44.76	74.00	-29.24	Peak	Vertical
	12141.80	46.50	-0.40	46.10	74.00	-27.90	Peak	Vertical
*	13775.50	46.25	2.00	48.25	68.20	-19.95	Peak	Vertical
*	17178.90	43.52	7.73	51.25	68.20	-16.95	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8328.70	47.36	-2.86	44.50	74.00	-29.50	Peak	Horizontal
	11995.60	46.59	-0.54	46.05	74.00	-27.95	Peak	Horizontal
*	13994.80	44.87	2.86	47.73	68.20	-20.47	Peak	Horizontal
*	17398.20	43.19	8.34	51.53	68.20	-16.67	Peak	Horizontal
	7631.70	47.53	-4.16	43.37	74.00	-30.63	Peak	Vertical
	12356.00	46.92	-0.50	46.42	74.00	-27.58	Peak	Vertical
*	14516.70	45.55	3.82	49.37	68.20	-18.83	Peak	Vertical
*	17692.30	43.99	8.54	52.53	68.20	-15.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8174.00	46.77	-3.24	43.53	74.00	-30.47	Peak	Horizontal
	11992.20	46.33	-0.56	45.78	74.00	-28.22	Peak	Horizontal
*	14100.20	44.70	2.84	47.54	68.20	-20.66	Peak	Horizontal
*	17569.90	44.21	8.28	52.49	68.20	-15.71	Peak	Horizontal
	8396.70	46.94	-2.81	44.13	74.00	-29.87	Peak	Vertical
	12075.50	46.78	-0.81	45.97	74.00	-28.03	Peak	Vertical
*	13988.00	45.02	3.21	48.23	68.20	-19.97	Peak	Vertical
*	17195.90	44.24	7.61	51.85	68.20	-16.35	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8355.90	47.14	-2.85	44.29	74.00	-29.71	Peak	Horizontal
	11140.50	46.35	-0.98	45.37	74.00	-28.63	Peak	Horizontal
*	14103.60	45.11	2.79	47.90	68.20	-20.30	Peak	Horizontal
*	17090.50	42.82	7.95	50.77	68.20	-17.43	Peak	Horizontal
	9081.80	47.75	-2.09	45.66	74.00	-28.34	Peak	Vertical
	12116.30	45.74	-0.43	45.30	74.00	-28.70	Peak	Vertical
*	14683.30	44.56	3.58	48.15	68.20	-20.05	Peak	Vertical
*	17510.40	43.21	8.36	51.57	68.20	-16.63	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8160.40	47.67	-3.32	44.35	74.00	-29.65	Peak	Horizontal
	11898.70	46.80	-0.74	46.06	74.00	-27.94	Peak	Horizontal
*	14790.40	44.43	4.19	48.61	68.20	-19.59	Peak	Horizontal
*	17180.60	44.50	7.75	52.25	68.20	-15.95	Peak	Horizontal
	8401.80	46.91	-2.81	44.10	74.00	-29.90	Peak	Vertical
*	10207.20	47.23	-1.08	46.15	68.20	-22.05	Peak	Vertical
	11587.60	46.71	-1.08	45.62	74.00	-28.38	Peak	Vertical
*	13624.20	46.83	0.82	47.64	68.20	-20.56	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8151.90	48.05	-3.31	44.74	74.00	-29.26	Peak	Horizontal
*	10062.70	47.66	-0.91	46.75	68.20	-21.45	Peak	Horizontal
	11701.50	47.71	-0.87	46.84	74.00	-27.16	Peak	Horizontal
*	17393.10	44.41	8.29	52.70	68.20	-15.50	Peak	Horizontal
	8291.30	47.69	-2.75	44.93	74.00	-29.07	Peak	Vertical
*	10069.50	46.82	-0.96	45.86	68.20	-22.34	Peak	Vertical
	11871.50	46.88	-0.80	46.08	74.00	-27.92	Peak	Vertical
*	13882.60	46.13	2.32	48.46	68.20	-19.74	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8298.10	47.06	-2.71	44.35	74.00	-29.65	Peak	Horizontal
	11898.70	47.06	-0.74	46.32	74.00	-27.68	Peak	Horizontal
*	14605.10	45.14	3.79	48.93	68.20	-19.27	Peak	Horizontal
*	17235.00	45.40	7.48	52.89	68.20	-15.31	Peak	Horizontal
	8213.10	47.08	-3.12	43.96	74.00	-30.04	Peak	Vertical
	11910.60	47.47	-0.87	46.60	74.00	-27.40	Peak	Vertical
*	13702.40	46.47	1.84	48.31	68.20	-19.89	Peak	Vertical
*	17228.20	46.02	7.69	53.71	68.20	-14.49	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8367.80	47.27	-2.91	44.36	74.00	-29.64	Peak	Horizontal
	12388.30	46.45	-0.25	46.20	74.00	-27.80	Peak	Horizontal
*	13994.80	45.73	2.86	48.59	68.20	-19.61	Peak	Horizontal
*	17354.00	44.80	7.71	52.51	68.20	-15.69	Peak	Horizontal
	8369.50	47.31	-2.93	44.38	74.00	-29.62	Peak	Vertical
	12320.30	47.20	-0.57	46.63	74.00	-27.37	Peak	Vertical
*	14406.20	44.89	3.81	48.70	68.20	-19.50	Peak	Vertical
*	17355.70	49.16	7.73	56.89	68.20	-11.31	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8199.50	48.18	-3.25	44.93	74.00	-29.07	Peak	Horizontal
*	9858.70	47.58	-1.01	46.57	68.20	-21.63	Peak	Horizontal
	11650.50	38.90	-1.19	37.71	54.00	-16.29	Average	Horizontal
	11650.50	48.88	-1.19	47.69	74.00	-26.31	Peak	Horizontal
*	17359.10	44.95	7.75	52.70	68.20	-15.50	Peak	Horizontal
	8451.10	47.12	-2.74	44.38	74.00	-29.62	Peak	Vertical
	11650.50	43.70	-1.19	42.51	54.00	-11.49	Average	Vertical
	11650.50	50.65	-1.19	49.46	74.00	-24.54	Peak	Vertical
*	13977.80	45.37	3.07	48.44	68.20	-19.76	Peak	Vertical
*	17486.60	45.96	8.60	54.56	68.20	-13.64	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8398.40	47.22	-2.81	44.42	74.00	-29.58	Peak	Horizontal
	11880.00	46.82	-0.78	46.04	74.00	-27.96	Peak	Horizontal
*	14715.60	44.20	4.04	48.24	68.20	-19.96	Peak	Horizontal
*	17444.10	43.65	8.42	52.07	68.20	-16.13	Peak	Horizontal
	8291.30	46.76	-2.75	44.01	74.00	-29.99	Peak	Vertical
	12135.00	47.34	-0.47	46.87	74.00	-27.13	Peak	Vertical
*	13972.70	46.25	3.00	49.25	68.20	-18.95	Peak	Vertical
*	17090.50	43.73	7.95	51.68	68.20	-16.52	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11995.60	46.58	-0.54	46.05	74.00	-27.95	Peak	Horizontal
*	13989.70	45.26	3.12	48.38	68.20	-19.82	Peak	Horizontal
	15676.10	35.60	5.24	40.84	54.00	-13.16	Average	Horizontal
	15676.10	46.18	5.24	51.42	74.00	-22.58	Peak	Horizontal
*	16830.40	44.27	7.33	51.60	68.20	-16.60	Peak	Horizontal
	11905.50	47.01	-0.81	46.20	74.00	-27.80	Peak	Vertical
*	13977.80	45.09	3.07	48.17	68.20	-20.03	Peak	Vertical
	15696.50	39.90	5.39	45.29	54.00	-8.71	Average	Vertical
	15696.50	47.93	5.39	53.32	74.00	-20.68	Peak	Vertical
*	17461.10	44.52	8.63	53.15	68.20	-15.05	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8230.10	47.03	-3.12	43.92	74.00	-30.08	Peak	Horizontal
	11810.30	46.85	-0.87	45.98	74.00	-28.02	Peak	Horizontal
*	14411.30	44.63	4.00	48.63	68.20	-19.57	Peak	Horizontal
*	17287.70	44.17	7.80	51.97	68.20	-16.23	Peak	Horizontal
*	10540.40	48.47	-0.77	47.70	68.20	-20.50	Peak	Vertical
	11910.60	47.74	-0.87	46.87	74.00	-27.13	Peak	Vertical
	15798.50	38.90	5.46	44.36	54.00	-9.64	Average	Vertical
	15798.50	47.60	5.46	53.07	74.00	-20.93	Peak	Vertical
*	17144.90	44.42	7.65	52.07	68.20	-16.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8400.10	47.36	-2.80	44.56	74.00	-29.44	Peak	Horizontal
	12442.70	47.02	-0.22	46.80	74.00	-27.20	Peak	Horizontal
*	14598.30	44.82	3.92	48.73	68.20	-19.47	Peak	Horizontal
*	17173.80	43.93	7.66	51.59	68.20	-16.61	Peak	Horizontal
	12269.30	47.35	-0.34	47.01	74.00	-26.99	Peak	Vertical
*	14766.60	44.52	3.86	48.38	68.20	-19.82	Peak	Vertical
	15920.90	37.10	5.52	42.62	54.00	-11.38	Average	Vertical
	15920.90	46.96	5.52	52.48	74.00	-21.52	Peak	Vertical
*	17644.70	43.61	8.37	51.98	68.20	-16.22	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8403.50	47.50	-2.81	44.69	74.00	-29.31	Peak	Horizontal
	11997.30	46.34	-0.53	45.81	74.00	-28.19	Peak	Horizontal
*	14409.60	44.63	3.94	48.57	68.20	-19.63	Peak	Horizontal
*	17396.50	43.41	8.32	51.73	68.20	-16.47	Peak	Horizontal
	8355.90	46.85	-2.85	44.00	74.00	-30.00	Peak	Vertical
	11910.60	46.91	-0.87	46.05	74.00	-27.95	Peak	Vertical
*	14615.30	45.53	3.44	48.97	68.20	-19.23	Peak	Vertical
*	17240.10	43.58	7.68	51.26	68.20	-16.94	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8270.90	47.11	-2.96	44.15	74.00	-29.85	Peak	Horizontal
	11980.30	46.23	-0.65	45.58	74.00	-28.42	Peak	Horizontal
*	13974.40	45.58	3.03	48.60	68.20	-19.60	Peak	Horizontal
*	17087.10	42.93	7.98	50.91	68.20	-17.29	Peak	Horizontal
	8281.10	46.86	-2.88	43.98	74.00	-30.02	Peak	Vertical
	12425.70	46.13	-0.16	45.97	74.00	-28.03	Peak	Vertical
*	14195.40	45.50	2.80	48.30	68.20	-19.90	Peak	Vertical
*	17486.60	43.95	8.60	52.54	68.20	-15.66	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8418.80	46.99	-2.86	44.13	74.00	-29.87	Peak	Horizontal
	12247.20	46.38	-0.42	45.95	74.00	-28.05	Peak	Horizontal
*	14579.60	44.76	3.36	48.13	68.20	-20.07	Peak	Horizontal
*	17454.30	43.57	8.62	52.19	68.20	-16.01	Peak	Horizontal
	8100.90	47.86	-3.32	44.55	74.00	-29.45	Peak	Vertical
	11910.60	46.17	-0.87	45.31	74.00	-28.69	Peak	Vertical
*	15149.10	43.62	5.13	48.75	68.20	-19.45	Peak	Vertical
*	17644.70	43.87	8.37	52.24	68.20	-15.96	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8277.70	46.61	-2.92	43.69	74.00	-30.31	Peak	Horizontal
	12145.20	46.28	-0.37	45.91	74.00	-28.09	Peak	Horizontal
*	15065.80	43.61	4.48	48.09	68.20	-20.11	Peak	Horizontal
*	17398.20	43.29	8.34	51.63	68.20	-16.57	Peak	Horizontal
	8318.50	46.08	-2.76	43.32	74.00	-30.68	Peak	Vertical
	12260.80	45.92	-0.37	45.55	74.00	-28.45	Peak	Vertical
*	13994.80	45.52	2.86	48.38	68.20	-19.82	Peak	Vertical
*	17216.30	44.97	7.95	52.92	68.20	-15.28	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8410.30	46.70	-2.82	43.88	74.00	-30.12	Peak	Horizontal
	12274.40	46.37	-0.35	46.01	74.00	-27.99	Peak	Horizontal
*	13984.60	45.69	3.17	48.86	68.20	-19.34	Peak	Horizontal
*	17282.60	44.88	7.85	52.72	68.20	-15.48	Peak	Horizontal
	11910.60	47.68	-0.87	46.81	74.00	-27.19	Peak	Vertical
*	14093.40	45.46	2.93	48.39	68.20	-19.81	Peak	Vertical
	16079.00	32.10	6.48	38.58	54.00	-15.42	Average	Vertical
	16079.00	44.75	6.48	51.23	74.00	-22.77	Peak	Vertical
*	17286.00	44.74	7.83	52.57	68.20	-15.63	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8150.20	47.01	-3.30	43.70	74.00	-30.30	Peak	Horizontal
	12384.90	46.42	-0.30	46.13	74.00	-27.87	Peak	Horizontal
*	14719.00	43.47	4.03	47.50	68.20	-20.70	Peak	Horizontal
*	17449.20	43.94	8.53	52.47	68.20	-15.73	Peak	Horizontal
	8398.40	46.77	-2.81	43.96	74.00	-30.04	Peak	Vertical
	11885.10	47.21	-0.76	46.45	74.00	-27.55	Peak	Vertical
*	15060.70	43.72	4.52	48.24	68.20	-19.96	Peak	Vertical
*	17583.50	44.94	8.13	53.07	68.20	-15.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8439.20	47.23	-2.76	44.47	74.00	-29.53	Peak	Horizontal
*	10178.30	46.71	-0.81	45.90	68.20	-22.30	Peak	Horizontal
	11531.50	47.60	-1.08	46.52	74.00	-27.48	Peak	Horizontal
*	17507.00	43.88	8.37	52.26	68.20	-15.94	Peak	Horizontal
	8221.60	47.19	-3.10	44.09	74.00	-29.91	Peak	Vertical
*	9982.80	46.05	-0.77	45.28	68.20	-22.92	Peak	Vertical
	12271.00	46.41	-0.34	46.08	74.00	-27.92	Peak	Vertical
*	17544.40	43.88	8.24	52.13	68.20	-16.07	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8347.40	47.47	-2.88	44.59	74.00	-29.41	Peak	Horizontal
*	10261.60	46.01	-0.64	45.37	68.20	-22.83	Peak	Horizontal
	12519.20	47.09	-0.42	46.67	74.00	-27.33	Peak	Horizontal
*	17585.20	44.53	8.11	52.64	68.20	-15.56	Peak	Horizontal
	8323.60	46.98	-2.82	44.16	74.00	-29.84	Peak	Vertical
*	9789.00	46.41	-1.43	44.97	68.20	-23.23	Peak	Vertical
	12007.50	46.64	-0.52	46.12	74.00	-27.88	Peak	Vertical
*	17632.80	43.75	8.13	51.88	68.20	-16.32	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8347.40	47.33	-2.88	44.46	74.00	-29.54	Peak	Horizontal
*	10152.80	45.90	-0.59	45.31	68.20	-22.89	Peak	Horizontal
	11198.30	46.93	-1.10	45.83	74.00	-28.17	Peak	Horizontal
*	17486.60	43.68	8.60	52.27	68.20	-15.93	Peak	Horizontal
	8320.20	46.84	-2.78	44.07	74.00	-29.93	Peak	Vertical
*	9868.90	47.09	-1.06	46.03	68.20	-22.17	Peak	Vertical
	11910.60	48.66	-0.87	47.79	74.00	-26.21	Peak	Vertical
*	17546.10	43.94	8.25	52.20	68.20	-16.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8204.60	47.05	-3.18	43.86	74.00	-30.14	Peak	Horizontal
*	10127.30	46.48	-0.72	45.76	68.20	-22.44	Peak	Horizontal
	12386.60	46.45	-0.27	46.18	74.00	-27.82	Peak	Horizontal
*	17410.10	44.08	8.21	52.29	68.20	-15.91	Peak	Horizontal
	8313.40	46.33	-2.70	43.63	74.00	-30.37	Peak	Vertical
*	10084.80	46.03	-1.02	45.01	68.20	-23.19	Peak	Vertical
	11910.60	46.80	-0.87	45.93	74.00	-28.07	Peak	Vertical
*	17406.70	43.86	8.36	52.21	68.20	-15.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8422.20	46.98	-2.88	44.10	74.00	-29.90	Peak	Horizontal
*	9688.70	46.88	-1.18	45.69	68.20	-22.51	Peak	Horizontal
	12184.30	46.67	-0.74	45.92	74.00	-28.08	Peak	Horizontal
*	17508.70	43.82	8.37	52.18	68.20	-16.02	Peak	Horizontal
	8430.70	47.72	-2.89	44.83	74.00	-29.17	Peak	Vertical
*	9840.00	46.79	-0.94	45.85	68.20	-22.35	Peak	Vertical
	12277.80	46.20	-0.37	45.83	74.00	-28.17	Peak	Vertical
*	17080.30	43.69	7.96	51.65	68.20	-16.55	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8437.50	47.03	-2.79	44.24	74.00	-29.76	Peak	Horizontal
*	10095.00	46.08	-1.02	45.06	68.20	-23.14	Peak	Horizontal
	11992.20	46.14	-0.56	45.58	74.00	-28.42	Peak	Horizontal
*	17542.70	44.58	8.23	52.81	68.20	-15.39	Peak	Horizontal
	8386.50	46.81	-2.92	43.90	74.00	-30.10	Peak	Vertical
*	10448.60	46.12	-0.68	45.44	68.20	-22.76	Peak	Vertical
	11519.60	47.23	-1.11	46.12	74.00	-27.88	Peak	Vertical
*	17104.10	45.58	7.78	53.35	68.20	-14.85	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8454.50	47.26	-2.79	44.47	74.00	-29.53	Peak	Horizontal
*	9799.20	46.95	-1.23	45.73	68.20	-22.47	Peak	Horizontal
	12396.80	46.08	-0.21	45.88	74.00	-28.12	Peak	Horizontal
*	17534.20	44.24	8.26	52.50	68.20	-15.70	Peak	Horizontal
	8378.00	46.73	-3.02	43.70	74.00	-30.30	Peak	Vertical
*	10159.60	45.91	-0.57	45.34	68.20	-22.86	Peak	Vertical
	12452.90	47.03	-0.27	46.76	74.00	-27.24	Peak	Vertical
*	17518.90	43.21	8.33	51.54	68.20	-16.66	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2026-02-12	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8294.70	47.84	-2.73	45.11	74.00	-28.89	Peak	Horizontal
*	10193.60	46.43	-1.03	45.39	68.20	-22.81	Peak	Horizontal
	11704.90	46.80	-0.85	45.96	74.00	-28.04	Peak	Horizontal
*	17668.50	43.80	8.63	52.43	68.20	-15.77	Peak	Horizontal
	8388.20	46.51	-2.90	43.62	74.00	-30.38	Peak	Vertical
*	10140.90	45.70	-0.63	45.07	68.20	-23.13	Peak	Vertical
	11103.10	46.64	-1.02	45.62	74.00	-28.38	Peak	Vertical
*	17517.20	43.92	8.33	52.26	68.20	-15.94	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

OAW-AP1542 - WLAN Config 2

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	14305.90	45.50	3.03	48.52	-19.68	68.20	Peak	Horizontal
	16107.90	33.47	6.29	39.76	-14.24	54.00	Average	Horizontal
	16107.90	44.38	6.29	50.66	-23.34	74.00	Peak	Horizontal
*	16697.80	45.42	6.87	52.29	-15.91	68.20	Peak	Horizontal
	17830.00	32.58	9.47	42.05	-11.95	54.00	Average	Horizontal
	17830.00	43.50	9.47	52.97	-21.03	74.00	Peak	Horizontal
*	13986.30	44.93	3.19	48.12	-20.08	68.20	Peak	Vertical
	15710.10	32.94	5.48	38.42	-15.58	54.00	Average	Vertical
	15710.10	44.64	5.48	50.12	-23.88	74.00	Peak	Vertical
*	17410.10	45.09	8.21	53.31	-14.89	68.20	Peak	Vertical
	17977.90	31.52	9.60	41.12	-12.88	54.00	Average	Vertical
	17977.90	43.05	9.60	52.65	-21.35	74.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8340.60	47.14	-2.88	44.26	-29.74	74.00	Peak	Horizontal
*	9848.50	46.88	-0.97	45.91	-22.29	68.20	Peak	Horizontal
	12260.80	47.31	-0.37	46.94	-27.06	74.00	Peak	Horizontal
*	17386.30	43.88	8.19	52.07	-16.13	68.20	Peak	Horizontal
	8357.60	47.42	-2.84	44.58	-29.42	74.00	Peak	Vertical
*	10562.50	45.91	-0.39	45.52	-22.68	68.20	Peak	Vertical
	12390.00	46.76	-0.22	46.54	-27.46	74.00	Peak	Vertical
*	17110.90	45.29	7.63	52.92	-15.28	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8381.40	47.35	-2.98	44.37	-29.63	74.00	Peak	Horizontal
*	10428.20	46.53	-0.68	45.85	-22.35	68.20	Peak	Horizontal
	11847.70	47.99	-0.88	47.11	-26.89	74.00	Peak	Horizontal
*	17405.00	44.02	8.43	52.45	-15.75	68.20	Peak	Horizontal
	8427.30	47.86	-2.91	44.95	-29.05	74.00	Peak	Vertical
*	9809.40	46.98	-1.12	45.86	-22.34	68.20	Peak	Vertical
	11687.90	47.52	-1.03	46.49	-27.51	74.00	Peak	Vertical
*	17593.70	44.39	8.02	52.41	-15.79	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8281.10	47.39	-2.88	44.51	-29.49	74.00	Peak	Horizontal
*	9806.00	46.92	-1.10	45.82	-22.38	68.20	Peak	Horizontal
	12085.70	47.02	-0.74	46.28	-27.72	74.00	Peak	Horizontal
*	17262.20	44.45	8.01	52.46	-15.74	68.20	Peak	Horizontal
	8417.10	47.56	-2.85	44.71	-29.29	74.00	Peak	Vertical
*	10259.90	46.42	-0.67	45.75	-22.45	68.20	Peak	Vertical
	12570.20	46.66	-0.02	46.64	-27.36	74.00	Peak	Vertical
*	17508.70	44.44	8.37	52.81	-15.39	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8294.70	47.95	-2.73	45.23	-28.77	74.00	Peak	Horizontal
*	10152.80	46.12	-0.59	45.54	-22.66	68.20	Peak	Horizontal
	10938.20	47.24	-1.14	46.11	-27.89	74.00	Peak	Horizontal
*	17396.50	43.88	8.32	52.21	-15.99	68.20	Peak	Horizontal
	8393.30	47.23	-2.83	44.40	-29.60	74.00	Peak	Vertical
*	9950.50	46.20	-0.86	45.35	-22.85	68.20	Peak	Vertical
	11489.00	42.37	-1.29	41.08	-12.92	54.00	Average	Vertical
	11489.00	51.61	-1.29	50.32	-23.68	74.00	Peak	Vertical
*	17464.50	43.13	8.62	51.74	-16.46	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8440.90	47.10	-2.74	44.37	-29.63	74.00	Peak	Horizontal
*	10135.80	46.07	-0.66	45.42	-22.78	68.20	Peak	Horizontal
	12271.00	47.17	-0.34	46.83	-27.17	74.00	Peak	Horizontal
*	17561.40	43.78	8.32	52.10	-16.10	68.20	Peak	Horizontal
	8388.20	47.06	-2.90	44.17	-29.83	74.00	Peak	Vertical
*	10169.80	47.23	-0.67	46.55	-21.65	68.20	Peak	Vertical
	11572.30	42.61	-1.05	41.56	-12.44	54.00	Average	Vertical
	11572.30	52.49	-1.05	51.45	-22.55	74.00	Peak	Vertical
*	17471.30	43.39	8.58	51.98	-16.22	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8111.10	47.55	-3.33	44.23	-29.77	74.00	Peak	Horizontal
*	9984.50	46.44	-0.78	45.66	-22.54	68.20	Peak	Horizontal
	12264.20	46.77	-0.36	46.41	-27.59	74.00	Peak	Horizontal
*	17469.60	44.36	8.59	52.95	-15.25	68.20	Peak	Horizontal
	8391.60	47.09	-2.85	44.23	-29.77	74.00	Peak	Vertical
*	10074.60	46.36	-0.99	45.36	-22.84	68.20	Peak	Vertical
	11647.10	52.21	-1.15	51.07	-22.93	74.00	Peak	Vertical
*	17474.70	44.48	8.58	53.06	-15.14	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8456.20	47.24	-2.82	44.43	-29.57	74.00	Peak	Horizontal
*	9768.60	46.98	-1.40	45.58	-22.62	68.20	Peak	Horizontal
	12364.50	46.53	-0.48	46.04	-27.96	74.00	Peak	Horizontal
*	17403.30	43.93	8.41	52.34	-15.86	68.20	Peak	Horizontal
	8218.20	47.39	-3.11	44.28	-29.72	74.00	Peak	Vertical
*	9986.20	46.18	-0.78	45.40	-22.80	68.20	Peak	Vertical
	12012.60	46.75	-0.52	46.23	-27.77	74.00	Peak	Vertical
*	17653.20	43.65	8.44	52.08	-16.12	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8049.90	48.54	-3.48	45.07	-28.93	74.00	Peak	Horizontal
*	10232.70	46.50	-1.05	45.46	-22.74	68.20	Peak	Horizontal
	12293.10	46.77	-0.43	46.34	-27.66	74.00	Peak	Horizontal
*	17452.60	43.67	8.59	52.27	-15.93	68.20	Peak	Horizontal
	8168.90	47.64	-3.27	44.36	-29.64	74.00	Peak	Vertical
*	10166.40	46.64	-0.62	46.02	-22.18	68.20	Peak	Vertical
	12396.80	47.17	-0.21	46.96	-27.04	74.00	Peak	Vertical
*	17653.20	43.85	8.44	52.28	-15.92	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8461.30	47.81	-2.89	44.92	-29.08	74.00	Peak	Horizontal
*	10147.70	45.99	-0.60	45.39	-22.81	68.20	Peak	Horizontal
	10945.00	47.71	-1.11	46.61	-27.39	74.00	Peak	Horizontal
*	17493.40	43.68	8.55	52.23	-15.97	68.20	Peak	Horizontal
	8393.30	47.29	-2.83	44.46	-29.54	74.00	Peak	Vertical
*	9681.90	46.70	-1.25	45.46	-22.74	68.20	Peak	Vertical
	12279.50	46.82	-0.38	46.44	-27.56	74.00	Peak	Vertical
*	17272.40	43.87	7.91	51.78	-16.42	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8410.30	46.99	-2.82	44.18	-29.82	74.00	Peak	Horizontal
*	9996.40	46.26	-0.84	45.42	-22.78	68.20	Peak	Horizontal
	12243.80	46.76	-0.44	46.32	-27.68	74.00	Peak	Horizontal
*	17552.90	43.80	8.30	52.09	-16.11	68.20	Peak	Horizontal
	8393.30	48.12	-2.83	45.29	-28.71	74.00	Peak	Vertical
*	10152.80	46.56	-0.59	45.97	-22.23	68.20	Peak	Vertical
	11584.20	47.60	-1.07	46.53	-27.47	74.00	Peak	Vertical
*	17590.30	44.51	8.03	52.54	-15.66	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8430.70	47.46	-2.89	44.57	-29.43	74.00	Peak	Horizontal
*	9964.10	46.89	-0.78	46.11	-22.09	68.20	Peak	Horizontal
	12129.90	46.79	-0.45	46.34	-27.66	74.00	Peak	Horizontal
*	17507.00	43.88	8.37	52.25	-15.95	68.20	Peak	Horizontal
	8427.30	47.23	-2.91	44.32	-29.68	74.00	Peak	Vertical
*	10038.90	46.71	-0.92	45.80	-22.40	68.20	Peak	Vertical
	11489.00	41.82	-1.29	40.53	-13.47	54.00	Average	Vertical
	11489.00	51.78	-1.29	50.49	-23.51	74.00	Peak	Vertical
*	17643.00	44.46	8.36	52.82	-15.38	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8463.00	47.54	-2.92	44.62	-29.38	74.00	Peak	Horizontal
*	10003.20	46.66	-0.91	45.76	-22.44	68.20	Peak	Horizontal
	11808.60	47.25	-0.90	46.35	-27.65	74.00	Peak	Horizontal
*	17085.40	44.59	8.00	52.58	-15.62	68.20	Peak	Horizontal
	8406.90	47.48	-2.81	44.67	-29.33	74.00	Peak	Vertical
*	10174.90	46.47	-0.76	45.72	-22.48	68.20	Peak	Vertical
	11570.60	42.39	-1.06	41.33	-12.67	54.00	Average	Vertical
	11570.60	52.27	-1.06	51.21	-22.79	74.00	Peak	Vertical
*	17092.20	44.22	7.94	52.16	-16.04	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8075.40	48.14	-3.56	44.58	-29.42	74.00	Peak	Horizontal
*	10055.90	46.98	-0.92	46.06	-22.14	68.20	Peak	Horizontal
	12150.30	46.40	-0.33	46.07	-27.93	74.00	Peak	Horizontal
*	17471.30	44.12	8.58	52.71	-15.49	68.20	Peak	Horizontal
	8357.60	48.12	-2.84	45.27	-28.73	74.00	Peak	Vertical
*	10088.20	46.78	-1.02	45.76	-22.44	68.20	Peak	Vertical
	11653.90	43.65	-1.24	42.41	-11.59	54.00	Average	Vertical
	11653.90	53.32	-1.24	52.08	-21.92	74.00	Peak	Vertical
*	17466.20	45.01	8.61	53.62	-14.58	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8474.90	47.19	-2.92	44.28	-29.72	74.00	Peak	Horizontal
*	9970.90	46.63	-0.76	45.87	-22.33	68.20	Peak	Horizontal
	12366.20	46.86	-0.48	46.38	-27.62	74.00	Peak	Horizontal
	15973.60	44.25	5.58	49.83	-24.17	74.00	Peak	Horizontal
	8446.00	47.42	-2.66	44.76	-29.24	74.00	Peak	Vertical
*	10147.70	46.50	-0.60	45.90	-22.30	68.20	Peak	Vertical
	11019.80	39.53	-0.70	38.83	-15.17	54.00	Average	Vertical
	11019.80	49.23	-0.70	48.53	-25.47	74.00	Peak	Vertical
*	17530.80	43.99	8.28	52.26	-15.94	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8434.10	47.09	-2.84	44.25	-29.75	74.00	Peak	Horizontal
*	10273.50	46.65	-0.64	46.01	-22.19	68.20	Peak	Horizontal
	12663.70	46.94	-0.03	46.91	-27.09	74.00	Peak	Horizontal
*	17440.70	43.80	8.35	52.15	-16.05	68.20	Peak	Horizontal
	8420.50	47.31	-2.87	44.45	-29.55	74.00	Peak	Vertical
*	9976.00	46.86	-0.75	46.11	-22.09	68.20	Peak	Vertical
	11099.70	50.41	-1.09	49.32	-24.68	74.00	Peak	Vertical
*	17394.80	43.88	8.31	52.19	-16.01	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8191.00	47.85	-3.35	44.50	-29.50	74.00	Peak	Horizontal
*	10149.40	46.70	-0.60	46.10	-22.10	68.20	Peak	Horizontal
	12318.60	46.63	-0.56	46.07	-27.93	74.00	Peak	Horizontal
*	17586.90	44.68	8.08	52.76	-15.44	68.20	Peak	Horizontal
	8107.70	47.97	-3.31	44.66	-29.34	74.00	Peak	Vertical
*	9982.80	46.73	-0.77	45.96	-22.24	68.20	Peak	Vertical
	11344.50	40.77	-1.23	39.54	-14.46	54.00	Average	Vertical
	11344.50	50.43	-1.23	49.20	-24.80	74.00	Peak	Vertical
*	17250.30	43.57	8.07	51.64	-16.56	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8366.10	47.27	-2.89	44.38	-29.62	74.00	Peak	Horizontal
*	10033.80	46.90	-0.84	46.06	-22.14	68.20	Peak	Horizontal
	12021.10	47.21	-0.57	46.63	-27.37	74.00	Peak	Horizontal
*	17496.80	43.04	8.50	51.55	-16.65	68.20	Peak	Horizontal
	8418.80	47.80	-2.86	44.94	-29.06	74.00	Peak	Vertical
*	10157.90	46.72	-0.58	46.14	-22.06	68.20	Peak	Vertical
	11419.30	42.30	-0.98	41.32	-12.68	54.00	Average	Vertical
	11419.30	52.03	-0.98	51.05	-22.95	74.00	Peak	Vertical
*	17518.90	43.98	8.33	52.31	-15.89	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8272.60	46.70	-2.95	43.75	-30.25	74.00	Peak	Horizontal
*	10018.50	47.17	-0.85	46.31	-21.89	68.20	Peak	Horizontal
	11983.70	46.98	-0.61	46.37	-27.63	74.00	Peak	Horizontal
*	17384.60	43.77	8.15	51.92	-16.28	68.20	Peak	Horizontal
	8405.20	47.04	-2.81	44.23	-29.77	74.00	Peak	Vertical
*	9783.90	46.43	-1.43	45.00	-23.20	68.20	Peak	Vertical
	11507.70	39.61	-1.12	38.49	-15.51	54.00	Average	Vertical
	11507.70	48.71	-1.12	47.59	-26.41	74.00	Peak	Vertical
*	17610.70	43.55	8.12	51.67	-16.53	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8281.10	46.46	-2.88	43.58	-30.42	74.00	Peak	Horizontal
*	9707.40	46.85	-1.30	45.55	-22.65	68.20	Peak	Horizontal
	12150.30	46.39	-0.33	46.07	-27.93	74.00	Peak	Horizontal
*	17405.00	43.38	8.43	51.80	-16.40	68.20	Peak	Horizontal
	8447.70	46.81	-2.69	44.12	-29.88	74.00	Peak	Vertical
*	10081.40	45.98	-1.02	44.96	-23.24	68.20	Peak	Vertical
	11596.10	47.65	-1.07	46.58	-27.42	74.00	Peak	Vertical
*	17661.70	43.31	8.52	51.83	-16.37	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8168.90	47.32	-3.27	44.05	-29.95	74.00	Peak	Horizontal
*	10450.30	45.81	-0.68	45.13	-23.07	68.20	Peak	Horizontal
	12141.80	46.50	-0.40	46.10	-27.90	74.00	Peak	Horizontal
*	17585.20	43.29	8.11	51.40	-16.80	68.20	Peak	Horizontal
	8449.40	46.75	-2.72	44.04	-29.96	74.00	Peak	Vertical
*	9952.20	45.88	-0.84	45.03	-23.17	68.20	Peak	Vertical
	11050.40	46.89	-0.99	45.91	-28.09	74.00	Peak	Vertical
*	17500.20	43.17	8.46	51.63	-16.57	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8427.30	47.56	-2.91	44.65	-29.35	74.00	Peak	Horizontal
*	10567.60	45.66	-0.35	45.30	-22.90	68.20	Peak	Horizontal
	12449.50	46.42	-0.25	46.17	-27.83	74.00	Peak	Horizontal
*	17566.50	43.61	8.30	51.90	-16.30	68.20	Peak	Horizontal
	8291.30	46.94	-2.75	44.18	-29.82	74.00	Peak	Vertical
*	10336.40	46.08	-0.75	45.32	-22.88	68.20	Peak	Vertical
	11230.60	39.12	-1.04	38.08	-15.92	54.00	Average	Vertical
	11230.60	48.16	-1.04	47.11	-26.89	74.00	Peak	Vertical
*	17391.40	43.48	8.27	51.75	-16.45	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8471.50	47.14	-2.92	44.22	-29.78	74.00	Peak	Horizontal
*	10358.50	46.43	-0.82	45.60	-22.60	68.20	Peak	Horizontal
	12415.50	46.16	-0.18	45.98	-28.02	74.00	Peak	Horizontal
*	17382.90	44.20	8.11	52.31	-15.89	68.20	Peak	Horizontal
	8315.10	46.94	-2.72	44.22	-29.78	74.00	Peak	Vertical
*	10271.80	45.62	-0.63	44.99	-23.21	68.20	Peak	Vertical
	11402.30	39.76	-1.04	38.72	-15.28	54.00	Average	Vertical
	11402.30	48.88	-1.04	47.84	-26.16	74.00	Peak	Vertical
*	17581.80	43.69	8.16	51.85	-16.35	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8316.80	46.77	-2.74	44.03	-29.97	74.00	Peak	Horizontal
*	10098.40	46.76	-1.01	45.75	-22.45	68.20	Peak	Horizontal
	11519.60	47.20	-1.11	46.09	-27.91	74.00	Peak	Horizontal
*	17384.60	44.28	8.15	52.43	-15.77	68.20	Peak	Horizontal
	8410.30	47.30	-2.82	44.48	-29.52	74.00	Peak	Vertical
*	9863.80	46.00	-1.04	44.97	-23.23	68.20	Peak	Vertical
	11558.70	39.22	-1.15	38.07	-15.93	54.00	Average	Vertical
	11558.70	48.66	-1.15	47.51	-26.49	74.00	Peak	Vertical
*	17439.00	43.20	8.31	51.51	-16.69	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8332.10	47.22	-2.87	44.35	-29.65	74.00	Peak	Horizontal
*	10234.40	46.78	-1.03	45.75	-22.45	68.20	Peak	Horizontal
	12488.60	46.62	-0.47	46.15	-27.85	74.00	Peak	Horizontal
*	17083.70	43.64	8.01	51.65	-16.55	68.20	Peak	Horizontal
	8332.10	47.22	-2.87	44.35	-29.65	74.00	Peak	Vertical
*	10234.40	46.78	-1.03	45.75	-22.45	68.20	Peak	Vertical
	12488.60	46.62	-0.47	46.15	-27.85	74.00	Peak	Vertical
*	17083.70	43.64	8.01	51.65	-16.55	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8422.20	46.68	-2.88	43.81	-30.19	74.00	Peak	Horizontal
*	9877.40	46.15	-1.10	45.05	-23.15	68.20	Peak	Horizontal
	12282.90	46.07	-0.40	45.68	-28.32	74.00	Peak	Horizontal
*	17405.00	43.08	8.43	51.50	-16.70	68.20	Peak	Horizontal
	8401.80	47.36	-2.81	44.55	-29.45	74.00	Peak	Vertical
*	10341.50	46.08	-0.81	45.27	-22.93	68.20	Peak	Vertical
	12602.50	46.13	-0.34	45.80	-28.20	74.00	Peak	Vertical
*	17524.00	43.07	8.31	51.38	-16.82	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8194.40	47.33	-3.31	44.02	-29.98	74.00	Peak	Horizontal
*	10571.00	45.70	-0.33	45.37	-22.83	68.20	Peak	Horizontal
	12272.70	47.00	-0.35	46.65	-27.35	74.00	Peak	Horizontal
*	17260.50	43.42	8.03	51.46	-16.74	68.20	Peak	Horizontal
	8367.80	46.89	-2.91	43.98	-30.02	74.00	Peak	Vertical
*	10163.00	45.81	-0.56	45.24	-22.96	68.20	Peak	Vertical
	11152.40	47.49	-1.06	46.43	-27.57	74.00	Peak	Vertical
*	17411.80	43.37	8.14	51.51	-16.69	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8185.90	47.07	-3.32	43.75	-30.25	74.00	Peak	Horizontal
*	9811.10	46.11	-1.13	44.98	-23.22	68.20	Peak	Horizontal
	12152.00	46.16	-0.31	45.85	-28.15	74.00	Peak	Horizontal
*	17510.40	43.82	8.36	52.18	-16.02	68.20	Peak	Horizontal
	8461.30	46.86	-2.89	43.97	-30.03	74.00	Peak	Vertical
*	10134.10	45.49	-0.66	44.82	-23.38	68.20	Peak	Vertical
	11699.80	46.75	-0.88	45.87	-28.13	74.00	Peak	Vertical
*	17563.10	43.41	8.31	51.72	-16.48	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8313.40	46.94	-2.70	44.25	-29.75	74.00	Peak	Horizontal
*	9989.60	46.99	-0.79	46.19	-22.01	68.20	Peak	Horizontal
	12172.40	47.24	-0.63	46.62	-27.38	74.00	Peak	Horizontal
*	17459.40	43.59	8.64	52.23	-15.97	68.20	Peak	Horizontal
	8408.60	47.25	-2.81	44.43	-29.57	74.00	Peak	Vertical
*	10015.10	46.11	-0.90	45.21	-22.99	68.20	Peak	Vertical
	11441.40	47.17	-1.15	46.02	-27.98	74.00	Peak	Vertical
*	17467.90	43.89	8.60	52.49	-15.71	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8151.90	47.91	-3.31	44.59	-29.41	74.00	Peak	Horizontal
*	10171.50	46.06	-0.70	45.36	-22.84	68.20	Peak	Horizontal
	12284.60	46.61	-0.40	46.20	-27.80	74.00	Peak	Horizontal
*	17469.60	43.29	8.59	51.88	-16.32	68.20	Peak	Horizontal
	8354.20	47.55	-2.86	44.69	-29.31	74.00	Peak	Vertical
*	10144.30	46.08	-0.61	45.46	-22.74	68.20	Peak	Vertical
	11495.80	41.73	-1.22	40.51	-13.49	54.00	Average	Vertical
	11495.80	51.69	-1.22	50.47	-23.53	74.00	Peak	Vertical
*	17258.80	43.87	8.05	51.92	-16.28	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8259.00	47.33	-3.00	44.33	-29.67	74.00	Peak	Horizontal
*	9986.20	46.47	-0.78	45.68	-22.52	68.20	Peak	Horizontal
	12203.00	46.71	-0.80	45.92	-28.08	74.00	Peak	Horizontal
*	17595.40	43.92	8.04	51.95	-16.25	68.20	Peak	Horizontal
	8274.30	46.75	-2.95	43.80	-30.20	74.00	Peak	Vertical
*	9600.30	46.79	-1.47	45.32	-22.88	68.20	Peak	Vertical
	11579.10	42.15	-1.05	41.10	-12.90	54.00	Average	Vertical
	11579.10	51.83	-1.05	50.78	-23.22	74.00	Peak	Vertical
*	17442.40	43.16	8.38	51.54	-16.66	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8447.70	47.60	-2.69	44.91	-29.09	74.00	Peak	Horizontal
*	10103.50	46.37	-0.99	45.38	-22.82	68.20	Peak	Horizontal
	11990.50	46.99	-0.57	46.42	-27.58	74.00	Peak	Horizontal
*	17473.00	43.44	8.58	52.02	-16.18	68.20	Peak	Horizontal
	8388.20	46.65	-2.90	43.75	-30.25	74.00	Peak	Vertical
*	10163.00	45.62	-0.56	45.05	-23.15	68.20	Peak	Vertical
	11647.10	40.20	-1.15	39.05	-14.95	54.00	Average	Vertical
	11647.10	49.88	-1.15	48.73	-25.27	74.00	Peak	Vertical
*	17520.60	43.77	8.32	52.09	-16.11	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8396.70	47.83	-2.81	45.02	-28.98	74.00	Peak	Horizontal
*	10101.80	46.06	-0.99	45.06	-23.14	68.20	Peak	Horizontal
	11021.50	46.71	-0.72	45.99	-28.01	74.00	Peak	Horizontal
*	17457.70	43.43	8.65	52.08	-16.12	68.20	Peak	Horizontal
	8349.10	47.24	-2.87	44.36	-29.64	74.00	Peak	Vertical
*	9778.80	46.93	-1.43	45.50	-22.70	68.20	Peak	Vertical
	11021.50	49.41	-0.72	48.69	-25.31	74.00	Peak	Vertical
*	17551.20	44.08	8.29	52.36	-15.84	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8269.20	46.85	-2.96	43.89	-30.11	74.00	Peak	Horizontal
*	10555.70	46.92	-0.44	46.49	-21.71	68.20	Peak	Horizontal
	12429.10	46.94	-0.17	46.76	-27.24	74.00	Peak	Horizontal
*	17212.90	43.83	7.86	51.69	-16.51	68.20	Peak	Horizontal
	8206.30	47.69	-3.16	44.53	-29.47	74.00	Peak	Vertical
*	10307.50	46.50	-0.76	45.74	-22.46	68.20	Peak	Vertical
	11098.00	41.33	-1.12	40.21	-13.79	54.00	Average	Vertical
	11098.00	51.25	-1.12	50.13	-23.87	74.00	Peak	Vertical
*	16708.00	44.59	7.09	51.69	-16.51	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8413.70	47.08	-2.83	44.25	-29.75	74.00	Peak	Horizontal
*	10259.90	46.93	-0.67	46.25	-21.95	68.20	Peak	Horizontal
	12395.10	46.17	-0.21	45.96	-28.04	74.00	Peak	Horizontal
*	17561.40	43.78	8.32	52.09	-16.11	68.20	Peak	Horizontal
	8362.70	47.82	-2.85	44.97	-29.03	74.00	Peak	Vertical
*	10244.60	46.32	-0.95	45.36	-22.84	68.20	Peak	Vertical
	11322.40	39.58	-0.92	38.66	-15.34	54.00	Average	Vertical
	11322.40	48.94	-0.92	48.02	-25.98	74.00	Peak	Vertical
*	17286.00	43.67	7.83	51.50	-16.70	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8464.70	47.57	-2.92	44.66	-29.34	74.00	Peak	Horizontal
*	10197.00	46.95	-1.08	45.87	-22.33	68.20	Peak	Horizontal
	11009.60	46.53	-0.60	45.93	-28.07	74.00	Peak	Horizontal
*	17386.30	43.54	8.19	51.73	-16.47	68.20	Peak	Horizontal
	8463.00	46.95	-2.92	44.04	-29.96	74.00	Peak	Vertical
*	10042.30	46.24	-0.97	45.28	-22.92	68.20	Peak	Vertical
	11417.60	40.36	-0.98	39.38	-14.62	54.00	Average	Vertical
	11417.60	50.18	-0.98	49.19	-24.81	74.00	Peak	Vertical
*	17518.90	43.35	8.33	51.68	-16.52	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8439.20	46.68	-2.76	43.91	-30.09	74.00	Peak	Horizontal
*	9899.50	46.37	-1.18	45.19	-23.01	68.20	Peak	Horizontal
	12301.60	46.19	-0.44	45.75	-28.25	74.00	Peak	Horizontal
*	17593.70	44.40	8.02	52.42	-15.78	68.20	Peak	Horizontal
	8440.90	47.56	-2.74	44.83	-29.17	74.00	Peak	Vertical
*	10149.40	45.54	-0.60	44.94	-23.26	68.20	Peak	Vertical
	11500.90	40.06	-1.17	38.89	-15.11	54.00	Average	Vertical
	11500.90	49.28	-1.17	48.11	-25.89	74.00	Peak	Vertical
*	17483.20	43.37	8.59	51.96	-16.24	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8291.30	46.71	-2.75	43.96	-30.04	74.00	Peak	Horizontal
*	10169.80	45.73	-0.67	45.06	-23.14	68.20	Peak	Horizontal
	11721.90	47.04	-0.77	46.27	-27.73	74.00	Peak	Horizontal
*	17221.40	44.91	7.89	52.80	-15.40	68.20	Peak	Horizontal
	8325.30	47.11	-2.84	44.27	-29.73	74.00	Peak	Vertical
*	9775.40	46.35	-1.43	44.91	-23.29	68.20	Peak	Vertical
	11585.90	43.29	-1.08	42.21	-11.79	54.00	Average	Vertical
	11585.90	52.63	-1.08	51.55	-22.45	74.00	Peak	Vertical
*	17394.80	43.63	8.31	51.94	-16.26	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8350.80	47.14	-2.87	44.27	-29.73	74.00	Peak	Horizontal
*	9959.00	45.73	-0.79	44.94	-23.26	68.20	Peak	Horizontal
	11713.40	46.68	-0.80	45.88	-28.12	74.00	Peak	Horizontal
*	17654.90	43.61	8.45	52.06	-16.14	68.20	Peak	Horizontal
	8327.00	47.20	-2.86	44.34	-29.66	74.00	Peak	Vertical
*	10253.10	46.24	-0.82	45.42	-22.78	68.20	Peak	Vertical
	11040.20	47.29	-0.90	46.39	-27.61	74.00	Peak	Vertical
*	17422.00	44.19	7.72	51.91	-16.29	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8432.40	47.68	-2.87	44.81	-29.19	74.00	Peak	Horizontal
*	9683.60	47.25	-1.22	46.03	-22.17	68.20	Peak	Horizontal
	12175.80	47.05	-0.66	46.39	-27.61	74.00	Peak	Horizontal
*	17401.60	43.54	8.38	51.92	-16.28	68.20	Peak	Horizontal
	8311.70	46.69	-2.67	44.01	-29.99	74.00	Peak	Vertical
*	10028.70	45.80	-0.76	45.04	-23.16	68.20	Peak	Vertical
	11217.00	48.05	-1.08	46.97	-27.03	74.00	Peak	Vertical
*	17479.80	43.94	8.59	52.53	-15.67	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8369.50	47.12	-2.93	44.20	-29.80	74.00	Peak	Horizontal
*	9982.80	46.23	-0.77	45.46	-22.74	68.20	Peak	Horizontal
	11577.40	47.19	-1.05	46.15	-27.85	74.00	Peak	Horizontal
*	17488.30	43.57	8.60	52.17	-16.03	68.20	Peak	Horizontal
	8342.30	47.15	-2.88	44.26	-29.74	74.00	Peak	Vertical
*	10101.80	46.30	-0.99	45.31	-22.89	68.20	Peak	Vertical
	11407.40	40.39	-1.01	39.38	-14.62	54.00	Average	Vertical
	11407.40	49.77	-1.01	48.76	-25.24	74.00	Peak	Vertical
*	17252.00	44.05	8.14	52.19	-16.01	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8320.20	46.74	-2.78	43.96	-30.04	74.00	Peak	Horizontal
*	9889.30	46.82	-1.13	45.69	-22.51	68.20	Peak	Horizontal
	11132.00	46.83	-0.87	45.96	-28.04	74.00	Peak	Horizontal
*	17471.30	44.35	8.58	52.93	-15.27	68.20	Peak	Horizontal
	8393.30	46.80	-2.83	43.97	-30.03	74.00	Peak	Vertical
*	10151.10	45.90	-0.59	45.31	-22.89	68.20	Peak	Vertical
	11563.80	39.11	-1.11	38.00	-16.00	54.00	Average	Vertical
	11563.80	48.23	-1.11	47.11	-26.89	74.00	Peak	Vertical
*	17491.70	43.12	8.58	51.70	-16.50	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-02-13	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8332.10	47.16	-2.87	44.29	-29.71	74.00	Peak	Horizontal
*	10021.90	46.08	-0.81	45.27	-22.93	68.20	Peak	Horizontal
	12301.60	46.76	-0.44	46.32	-27.68	74.00	Peak	Horizontal
*	17530.80	43.67	8.28	51.94	-16.26	68.20	Peak	Horizontal
	8406.90	48.01	-2.81	45.20	-28.80	74.00	Peak	Vertical
*	9874.00	46.11	-1.09	45.02	-23.18	68.20	Peak	Vertical
	12014.30	47.06	-0.52	46.54	-27.46	74.00	Peak	Vertical
*	17466.20	43.07	8.61	51.68	-16.52	68.20	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst-case Result of Radiated Emission 9 kHz ~ 30 MHz:

OAW-AP1542 - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

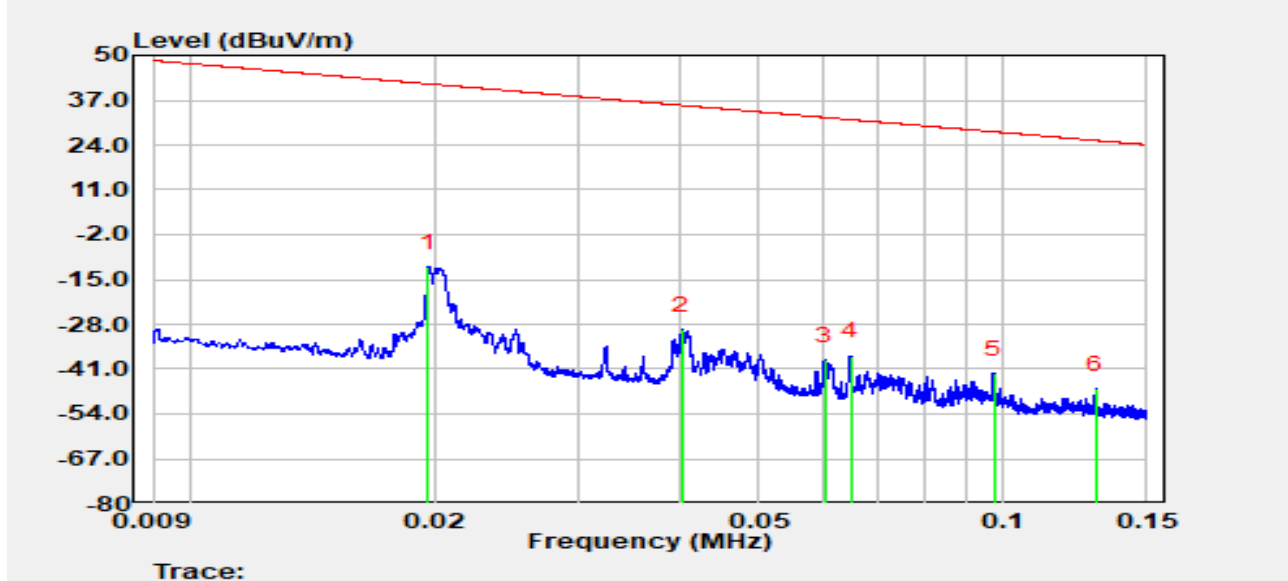


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.020	48.81	-60.25	-11.44	-53.17	41.73	Peak
2		0.040	30.88	-60.37	-29.49	-64.99	35.50	Peak
3		0.060	22.19	-60.56	-38.37	-70.36	31.99	Peak
4		0.065	23.42	-60.59	-37.17	-68.51	31.34	Peak
5		0.097	18.37	-60.61	-42.23	-70.05	27.82	Peak
6		0.130	13.93	-60.59	-46.66	-71.99	25.32	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

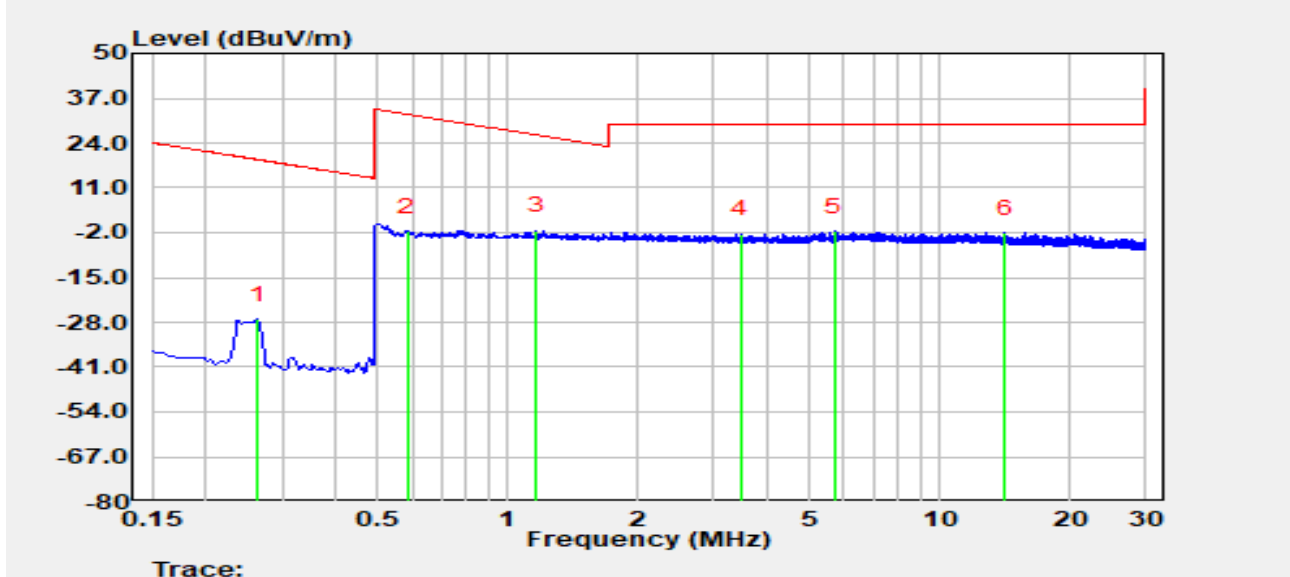


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.263	33.43	-60.66	-27.24	-46.42	19.19	Peak
2		0.586	19.06	-20.70	-1.64	-33.89	32.25	Peak
3	*	1.165	19.32	-20.69	-1.37	-27.66	26.30	Peak
4		3.460	18.14	-20.60	-2.45	-31.95	29.50	Peak
5		5.714	18.75	-20.41	-1.66	-31.16	29.50	Peak
6		14.108	18.08	-20.24	-2.16	-31.66	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

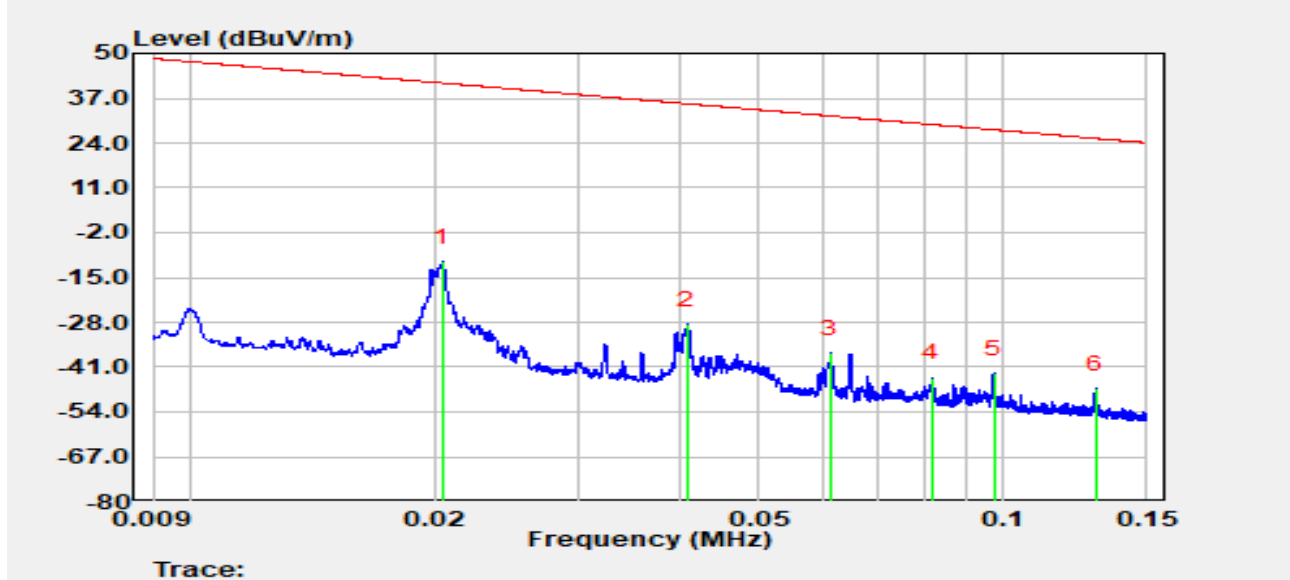


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.020	49.82	-60.28	-10.46	-51.85	41.39	Peak
2		0.041	31.71	-60.37	-28.66	-64.04	35.38	Peak
3		0.061	23.66	-60.57	-36.90	-68.76	31.86	Peak
4		0.082	16.54	-60.60	-44.06	-73.42	29.36	Peak
5		0.097	17.73	-60.61	-42.88	-70.72	27.84	Peak
6		0.130	13.38	-60.59	-47.22	-72.55	25.33	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

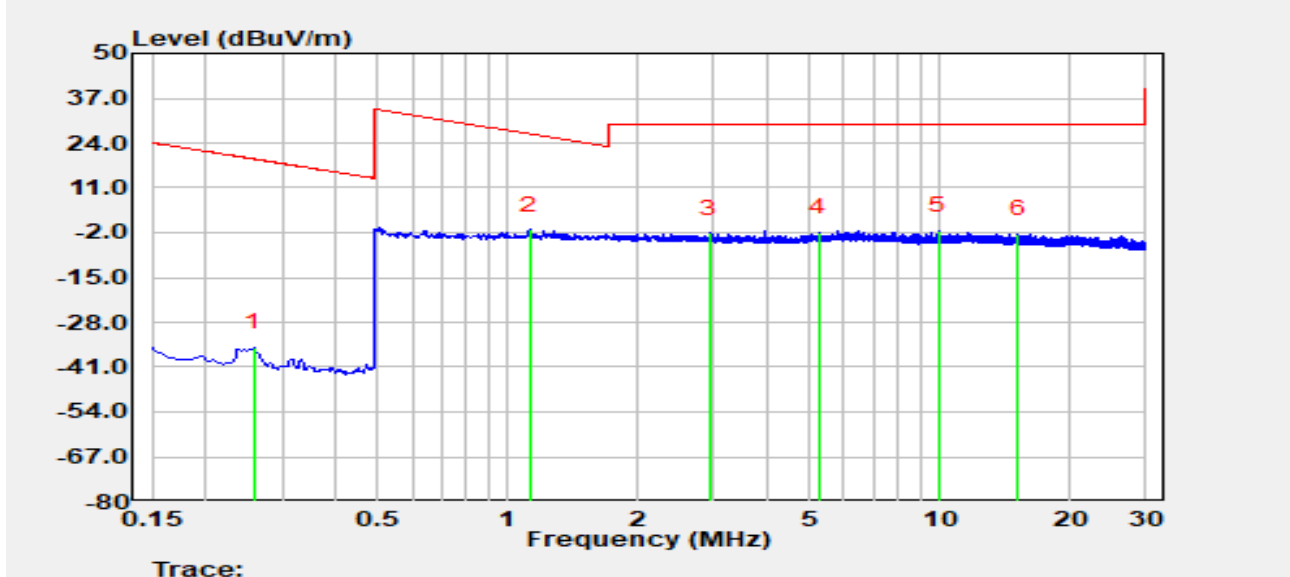


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.257	25.43	-60.66	-35.24	-54.62	19.39	Peak
2	*	1.123	19.59	-20.68	-1.09	-27.70	26.62	Peak
3		2.926	18.52	-20.55	-2.04	-31.54	29.50	Peak
4		5.260	18.58	-20.35	-1.77	-31.27	29.50	Peak
5		9.935	18.75	-20.23	-1.48	-30.98	29.50	Peak
6		15.159	17.72	-20.16	-2.44	-31.94	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

OAW-AP1542 - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

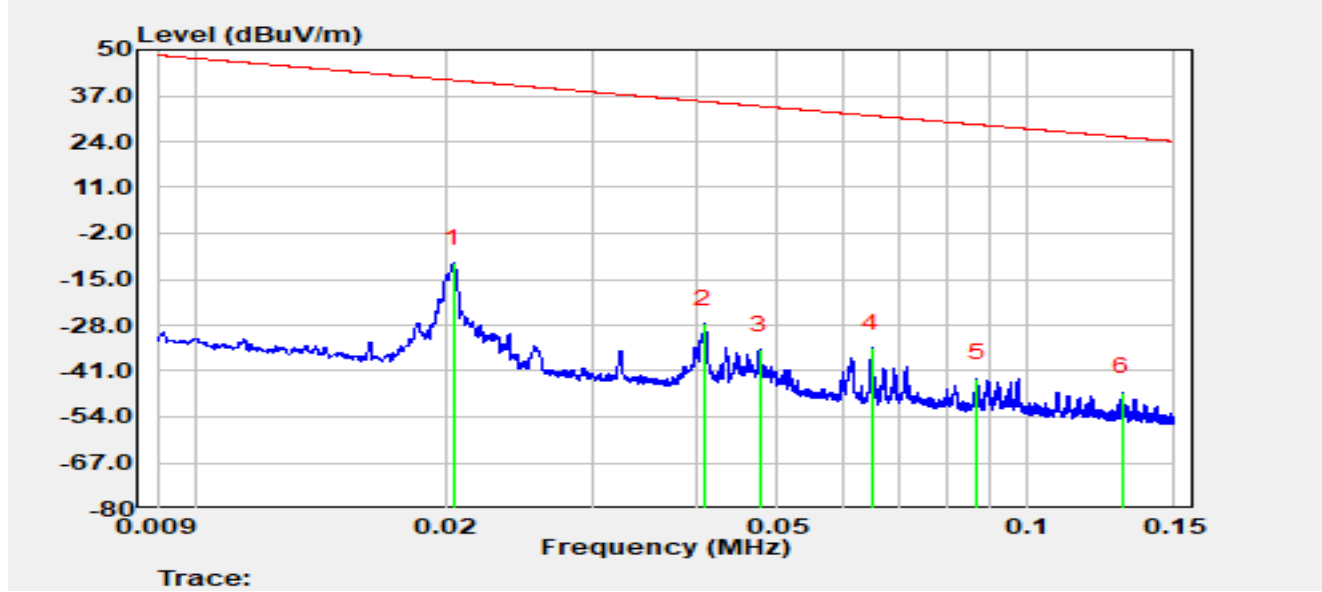


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.020	49.85	-60.28	-10.43	-51.82	41.40	Peak
2		0.041	32.73	-60.37	-27.65	-63.03	35.38	Peak
3		0.048	25.53	-60.45	-34.93	-68.96	34.04	Peak
4		0.065	26.03	-60.59	-34.56	-65.90	31.34	Peak
5		0.087	17.64	-60.61	-42.97	-71.78	28.81	Peak
6		0.130	13.60	-60.59	-47.00	-72.31	25.32	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

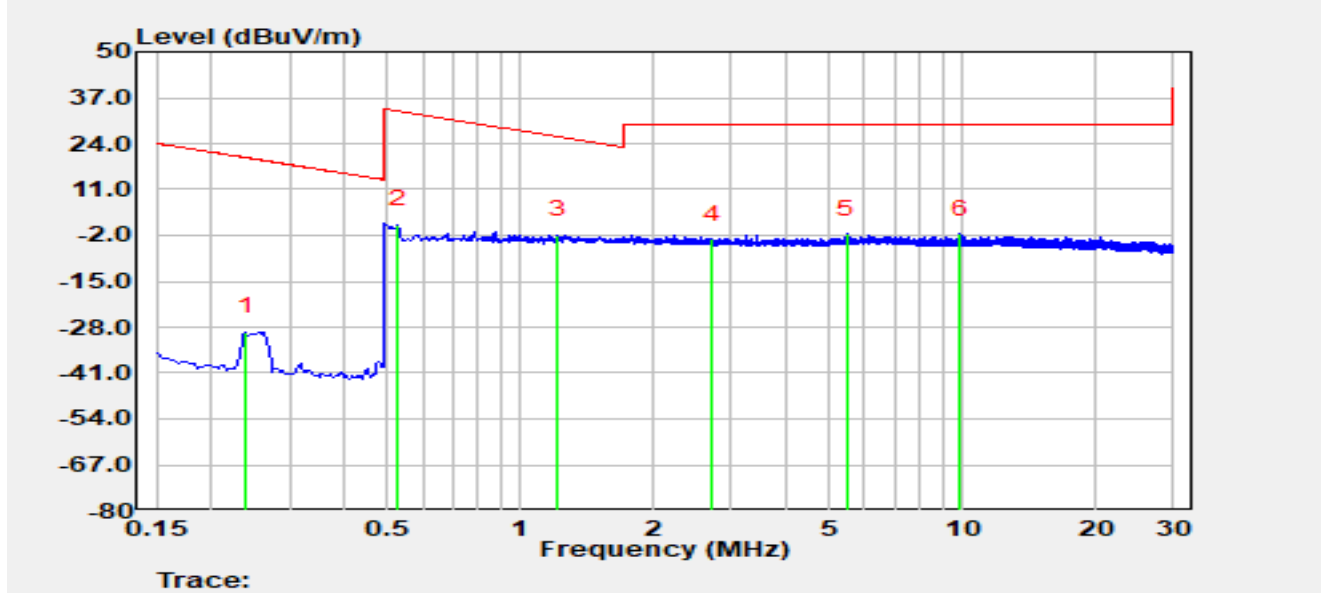


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.240	31.24	-60.66	-29.42	-49.43	20.01	Peak
2		0.526	21.80	-20.69	1.11	-32.08	33.18	Peak
3	*	1.213	18.77	-20.67	-1.90	-27.85	25.95	Peak
4		2.720	17.50	-20.56	-3.07	-32.57	29.50	Peak
5		5.478	18.73	-20.41	-1.68	-31.18	29.50	Peak
6		9.899	18.49	-20.23	-1.74	-31.24	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

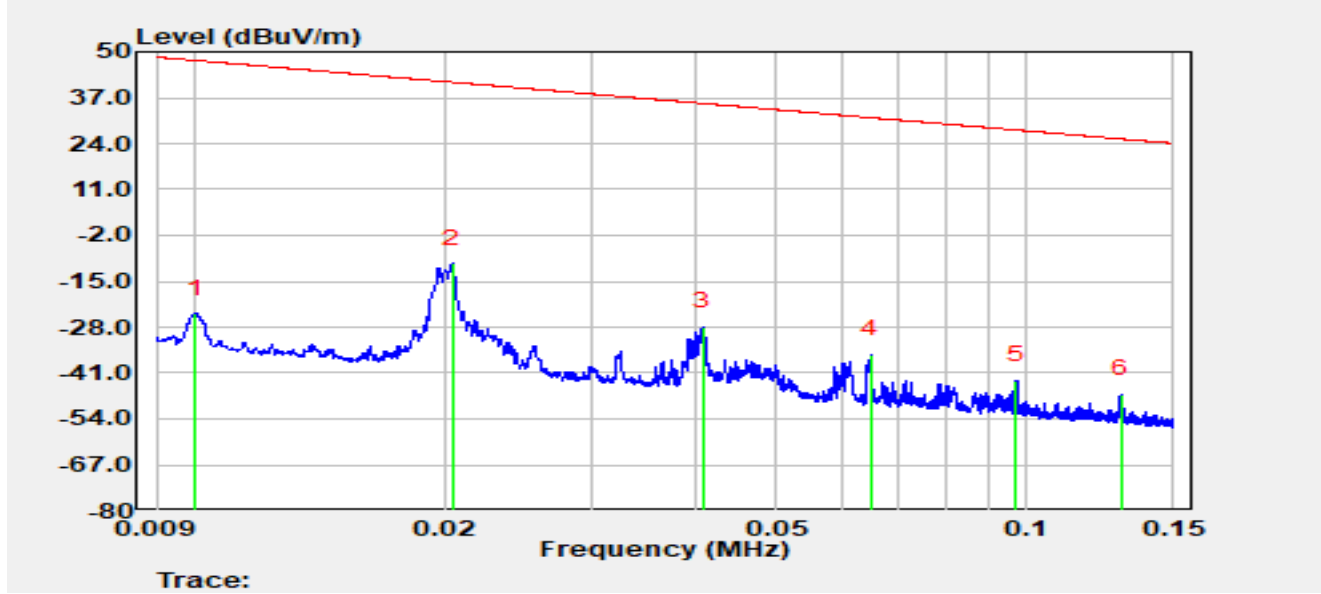


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.010	35.39	-59.57	-24.18	-71.75	47.57	Peak
2	*	0.020	50.26	-60.28	-10.01	-51.42	41.41	Peak
3		0.041	32.56	-60.37	-27.82	-63.20	35.39	Peak
4		0.065	24.81	-60.59	-35.79	-67.13	31.34	Peak
5		0.097	17.61	-60.61	-43.00	-70.87	27.87	Peak
6		0.130	13.71	-60.59	-46.89	-72.20	25.32	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

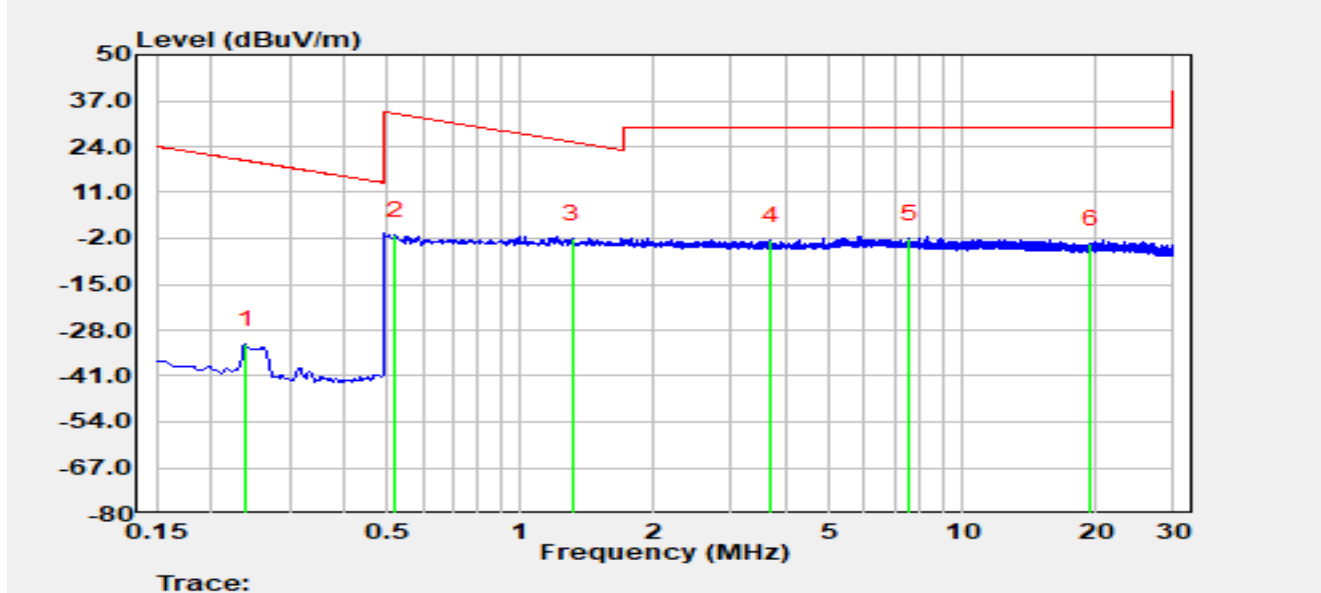

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.240	28.50	-60.66	-32.16	-52.17	20.01	Peak
2		0.520	19.57	-20.69	-1.12	-34.40	33.28	Peak
3	*	1.308	18.48	-20.66	-2.18	-27.47	25.29	Peak
4		3.693	18.02	-20.61	-2.59	-32.09	29.50	Peak
5		7.592	18.34	-20.35	-2.01	-31.51	29.50	Peak
6		19.448	16.54	-20.08	-3.55	-33.05	29.50	Peak


Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission 30 MHz ~ 1 GHz:

OAW-AP1542 - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

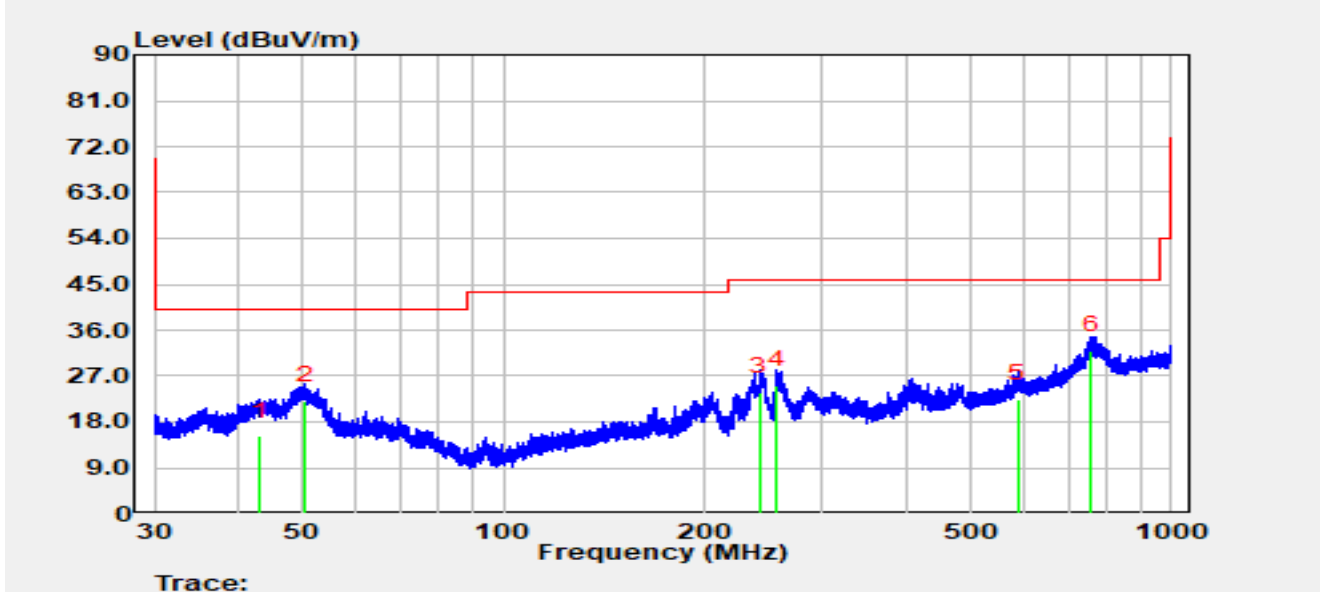


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		43.126	-2.90	18.07	15.17	-24.83	40.00	QP
2		50.515	3.90	18.34	22.24	-17.76	40.00	QP
3		242.100	7.20	16.57	23.77	-22.23	46.00	QP
4		256.611	8.10	17.08	25.18	-20.82	46.00	QP
5		589.732	-3.10	25.67	22.57	-23.43	46.00	QP
6	*	758.041	3.20	28.76	31.96	-14.04	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

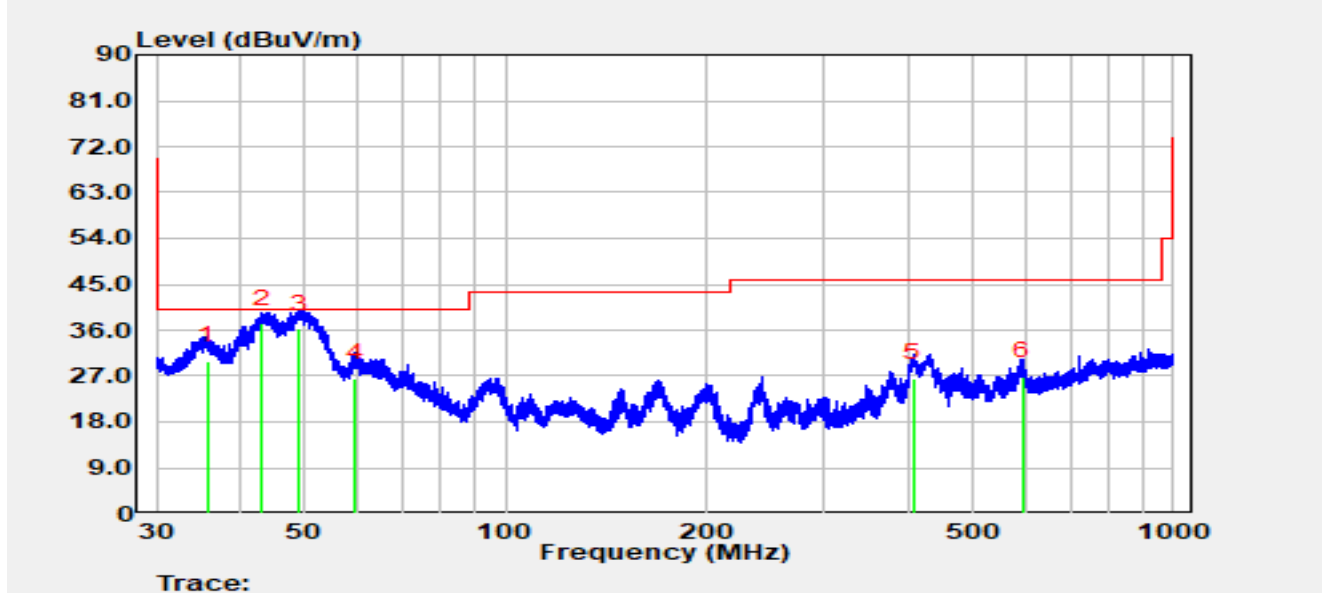


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.724	12.80	17.24	30.04	-9.96	40.00	QP
2	*	43.141	19.20	18.07	37.27	-2.73	40.00	QP
3		49.100	17.90	18.33	36.23	-3.77	40.00	QP
4		59.649	9.00	17.62	26.62	-13.38	40.00	QP
5		407.943	5.20	21.32	26.52	-19.48	46.00	QP
6		593.882	1.20	25.77	26.97	-19.03	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

OAW-AP1542 - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

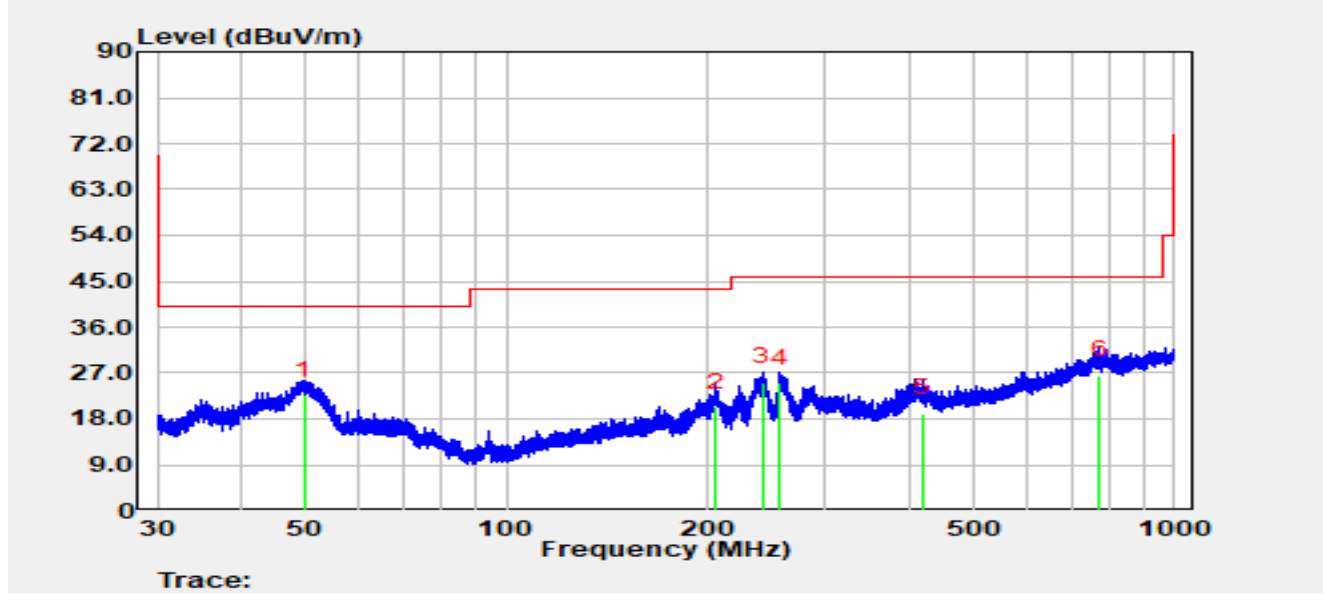


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	49.759	4.30	18.33	22.63	-17.37	40.00	QP
2		206.181	5.10	15.12	20.22	-23.28	43.50	QP
3		242.185	8.60	16.58	25.18	-20.82	46.00	QP
4		256.162	7.90	17.07	24.97	-21.03	46.00	QP
5		418.521	-2.40	21.47	19.07	-26.93	46.00	QP
6		771.719	-2.10	28.73	26.63	-19.37	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.0°C	Humidity	52.7%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

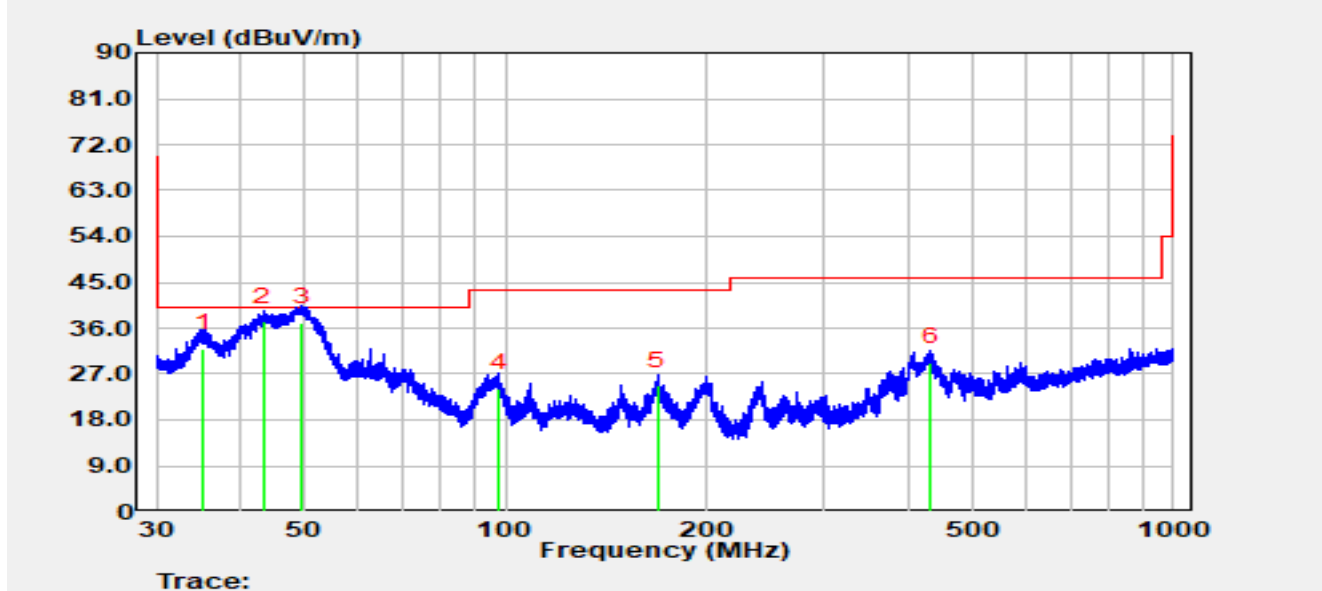

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		35.251	14.80	17.20	32.00	-8.00	40.00	QP
2	*	43.445	19.20	18.10	37.30	-2.70	40.00	QP
3		49.498	18.70	18.33	37.03	-2.97	40.00	QP
4		97.627	11.20	13.00	24.20	-19.30	43.50	QP
5		168.591	6.80	17.87	24.67	-18.83	43.50	QP
6		432.697	7.40	21.93	29.33	-16.67	46.00	QP


Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission 1 ~ 18 GHz:

OAW-AP1542 - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-12
Temperature	15.4 °C	Humidity	38.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5220MHz		

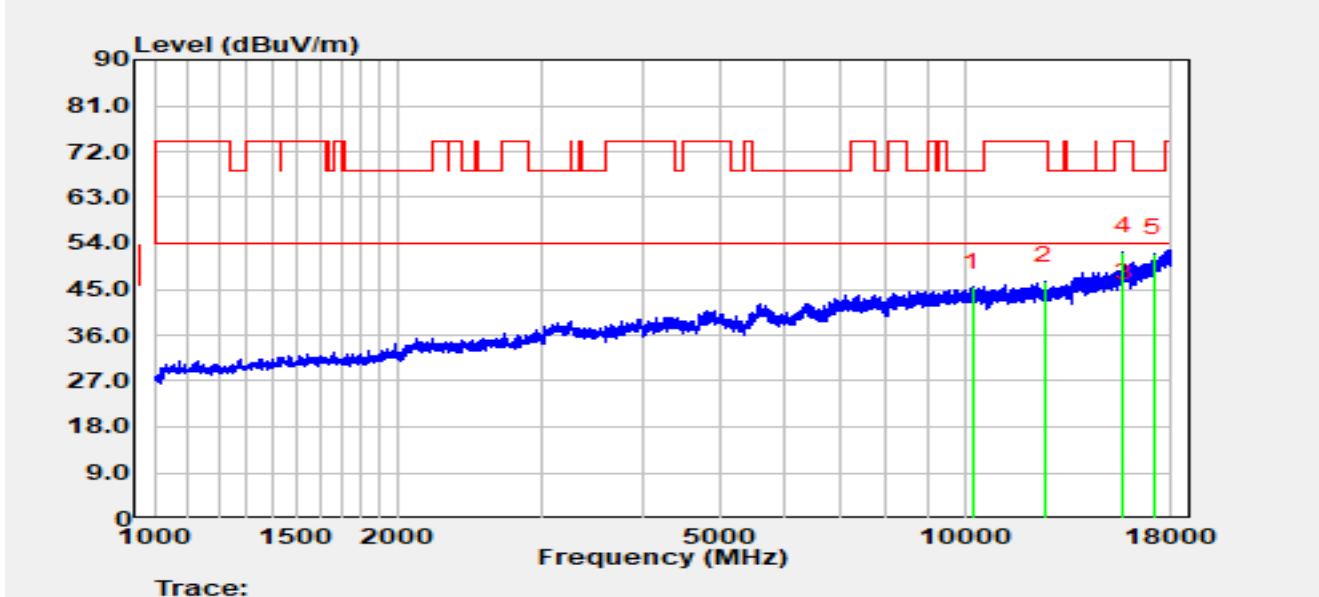


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		10225.900	46.52	-1.07	45.45	-22.75	68.20	Peak
2		12566.800	46.63	-0.02	46.62	-27.38	74.00	Peak
3	*	15664.200	38.05	5.11	43.16	-10.84	54.00	Average
4		15664.200	47.36	5.11	52.46	-21.54	74.00	Peak
5		17105.800	44.24	7.74	51.98	-16.22	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-12
Temperature	15.4 °C	Humidity	38.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5220MHz		

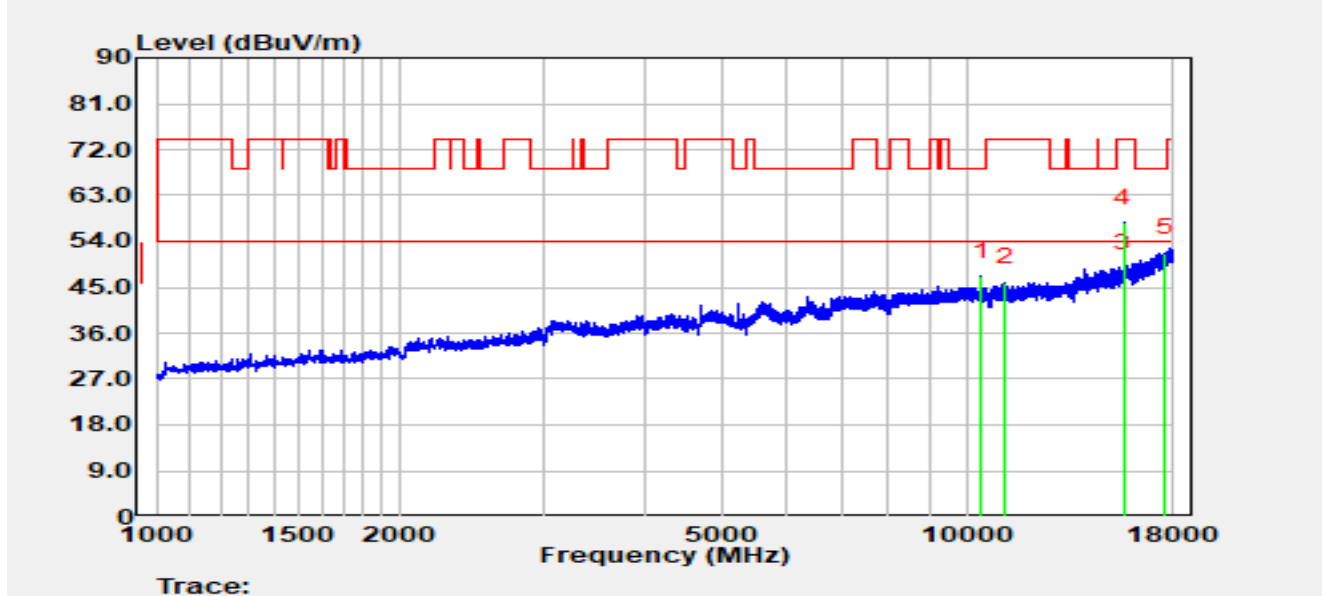


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		10441.800	47.77	-0.68	47.09	-21.11	68.20	Peak
2		11176.200	46.83	-0.88	45.94	-28.06	74.00	Peak
3	*	15647.200	43.60	5.13	48.73	-5.27	54.00	Average
4		15647.200	52.49	5.13	57.63	-16.37	74.00	Peak
5		17610.700	43.50	8.12	51.62	-16.58	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

OAW-AP1542 - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-13
Temperature	15.6 °C	Humidity	41.4%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

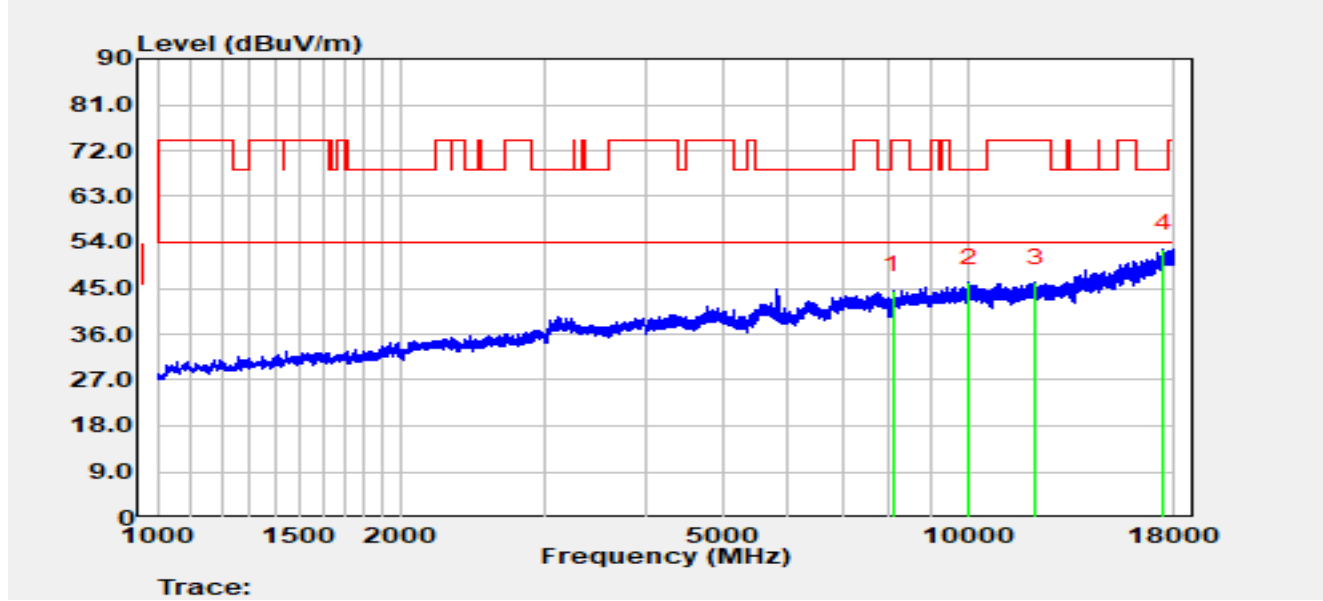


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		8075.400	48.14	-3.56	44.58	-29.42	74.00	Peak
2		10055.900	46.98	-0.92	46.06	-22.14	68.20	Peak
3		12150.300	46.40	-0.33	46.07	-27.93	74.00	Peak
4	*	17471.300	44.12	8.58	52.71	-15.49	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-13
Temperature	15.6 °C	Humidity	41.4%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

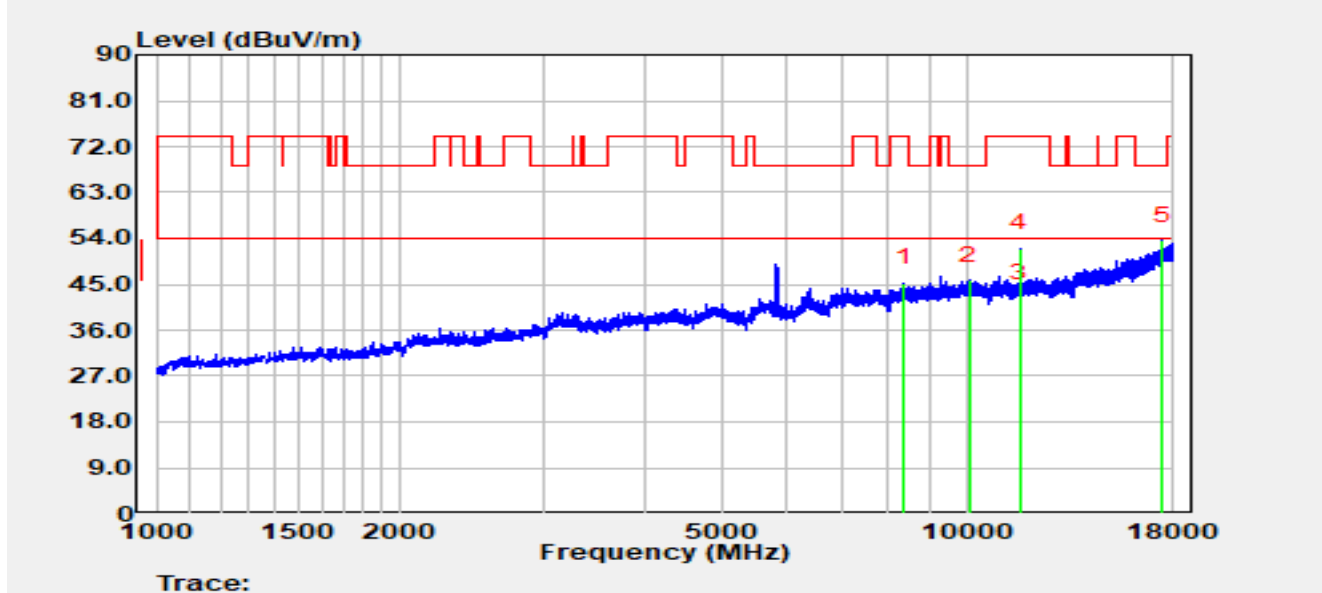

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		8357.600	48.12	-2.84	45.27	-28.73	74.00	Peak
2		10088.200	46.78	-1.02	45.76	-22.44	68.20	Peak
3	*	11653.900	43.65	-1.24	42.41	-11.59	54.00	Average
4		11653.900	53.32	-1.24	52.08	-21.92	74.00	Peak
5		17466.200	45.01	8.61	53.62	-14.58	68.20	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Worst-case Result of Radiated Emission above 18 GHz:

OAW-AP1542 - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

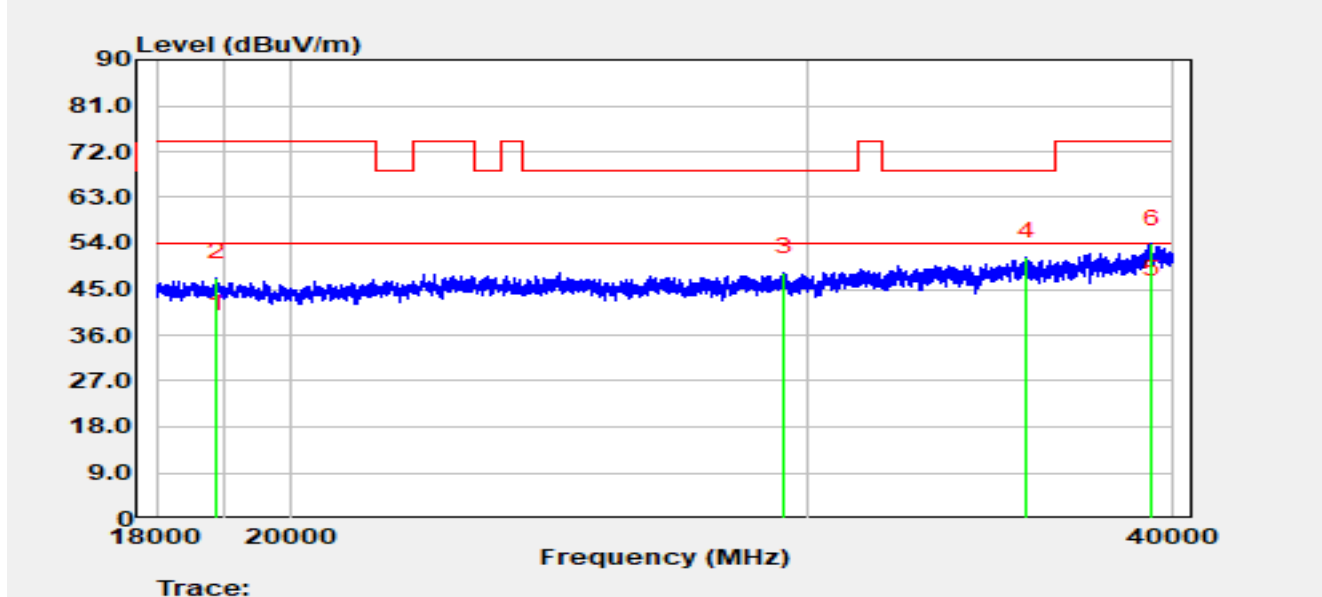


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18880.000	47.66	-10.51	37.15	-16.85	54.00	Average
2		18880.000	57.74	-10.51	47.23	-26.77	74.00	Peak
3		29459.800	57.16	-8.78	48.38	-19.82	68.20	Peak
4		35659.400	56.86	-5.58	51.29	-16.91	68.20	Peak
5	*	39313.600	42.59	1.47	44.06	-9.94	54.00	Average
6		39313.600	52.38	1.47	53.85	-20.15	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

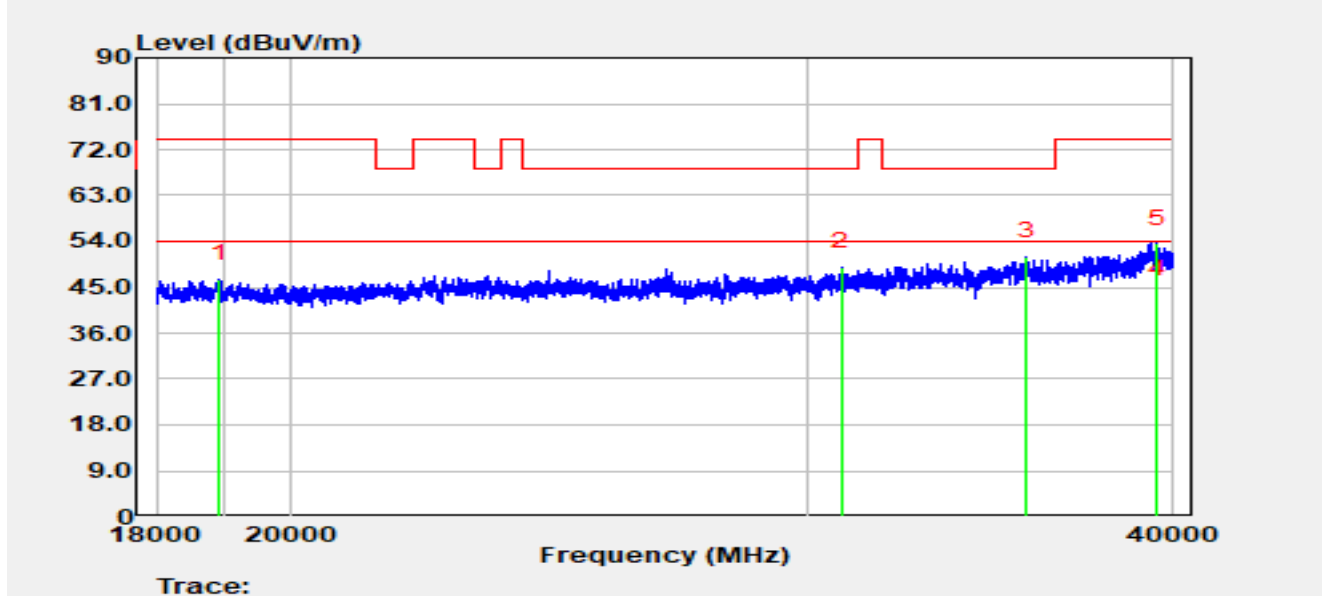


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18919.600	56.38	-9.85	46.53	-27.47	74.00	Peak
2		30837.000	58.07	-9.12	48.95	-19.25	68.20	Peak
3		35644.000	56.88	-5.82	51.06	-17.14	68.20	Peak
4	*	39483.000	42.79	0.81	43.60	-10.40	54.00	Average
5		39483.000	52.81	0.81	53.63	-20.37	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

OAW-AP1542 - WLAN Config 2

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

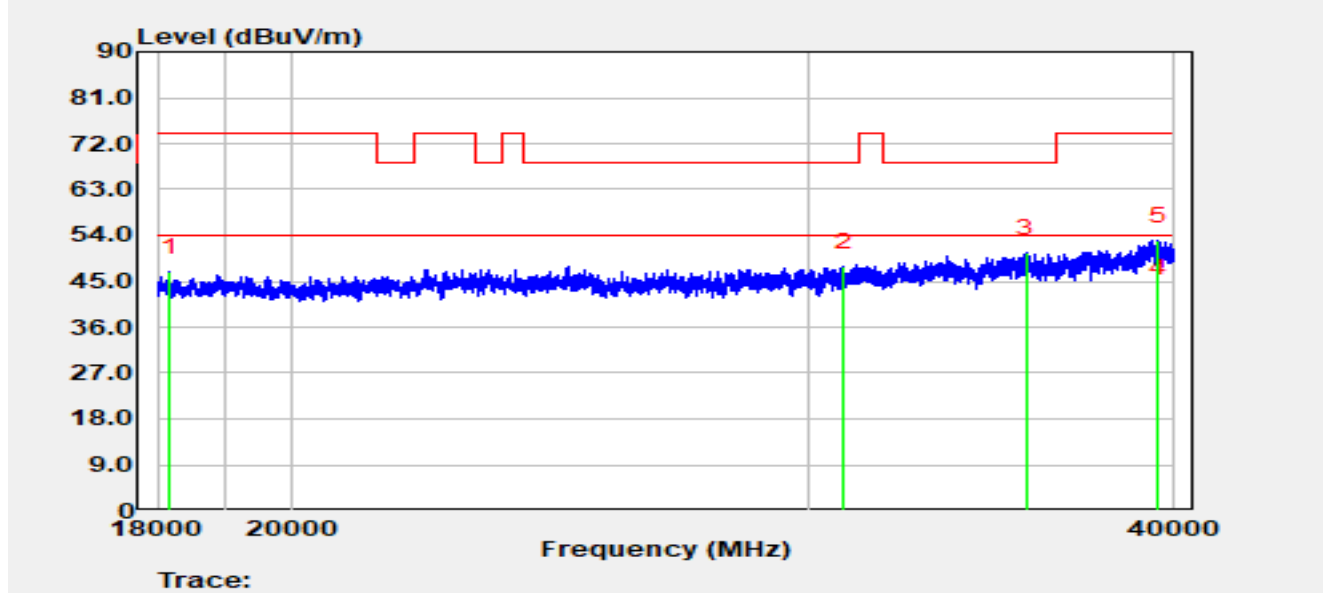


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18176.000	57.51	-10.79	46.72	-27.28	74.00	Peak
2		30861.200	56.58	-8.83	47.75	-20.45	68.20	Peak
3		35602.200	56.48	-5.94	50.54	-17.66	68.20	Peak
4	*	39498.400	42.36	0.38	42.74	-11.26	54.00	Average
5		39498.400	52.58	0.38	52.95	-21.05	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-25
Temperature	16.3°C	Humidity	37.8%
Limit	FCC_Part 15.209_RSE(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5720 MHz		

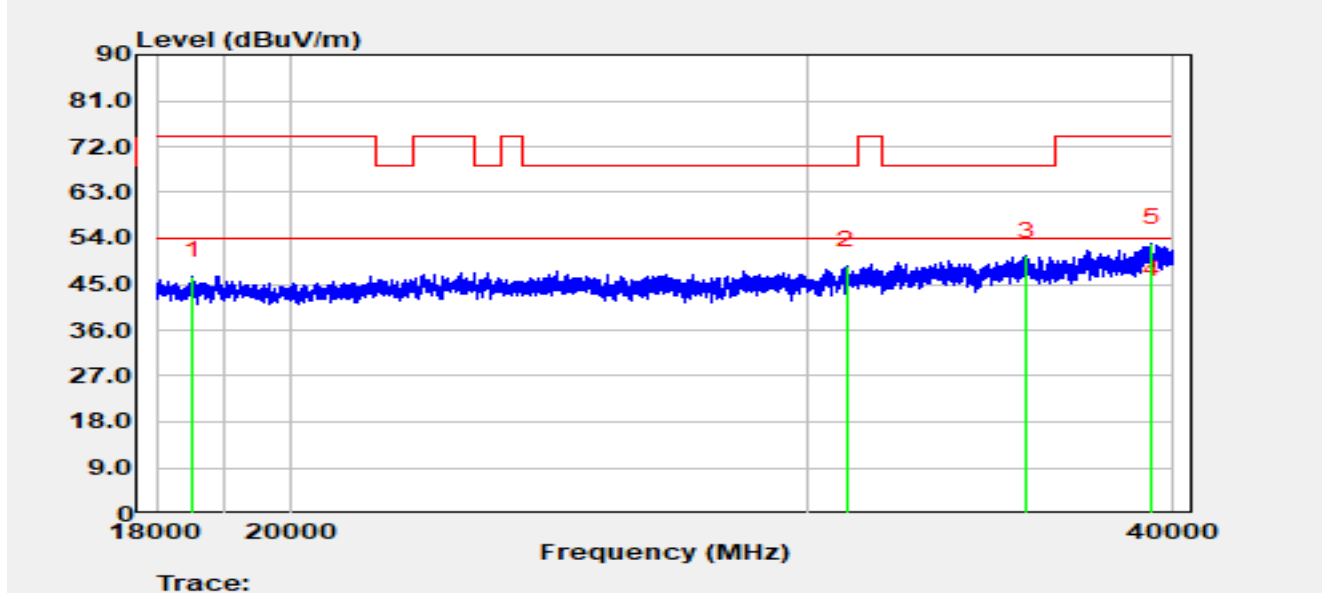

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		18510.400	57.10	-10.46	46.64	-27.36	74.00	Peak
2		30936.000	57.46	-8.79	48.67	-19.53	68.20	Peak
3		35657.200	56.10	-5.61	50.49	-17.71	68.20	Peak
4	*	39307.000	41.53	1.34	42.87	-11.13	54.00	Average
5		39307.000	51.69	1.34	53.03	-20.97	74.00	Peak


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 Radiated Restricted Band Edge Test Result

OAW-AP1542 - WLAN Config 1

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

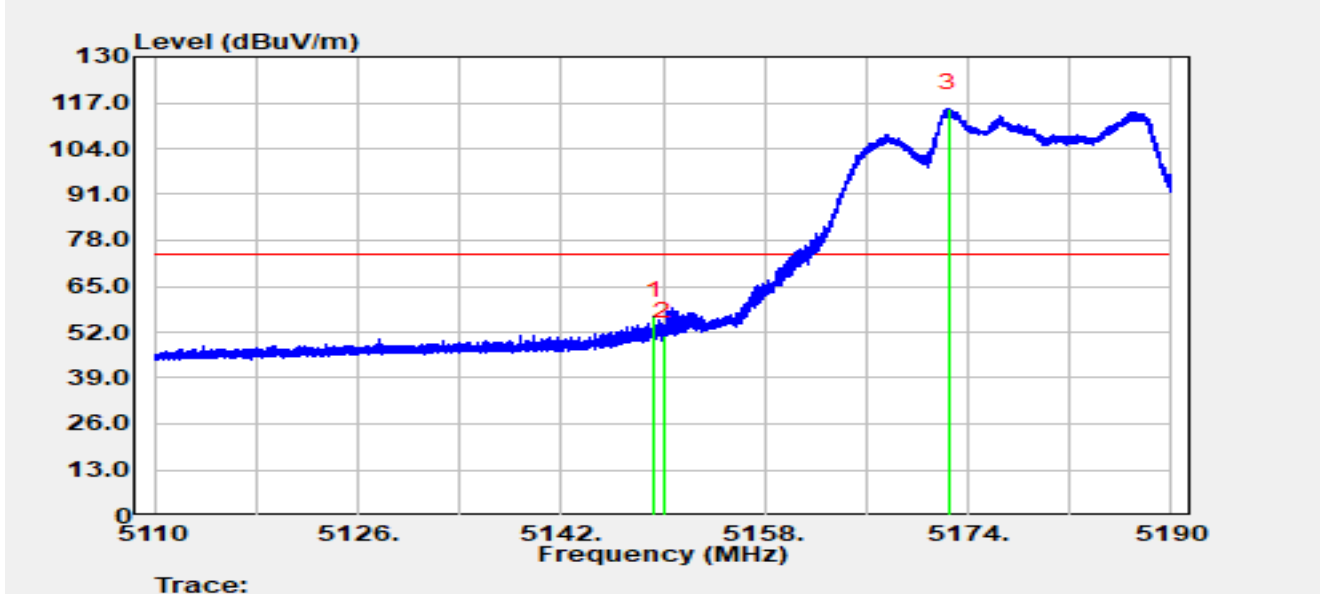


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.360	57.67	-1.17	56.50	-17.50	74.00	Peak
2		5150.000	51.89	-0.99	50.90	-23.10	74.00	Peak
3		5172.448	62.18	53.17	115.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

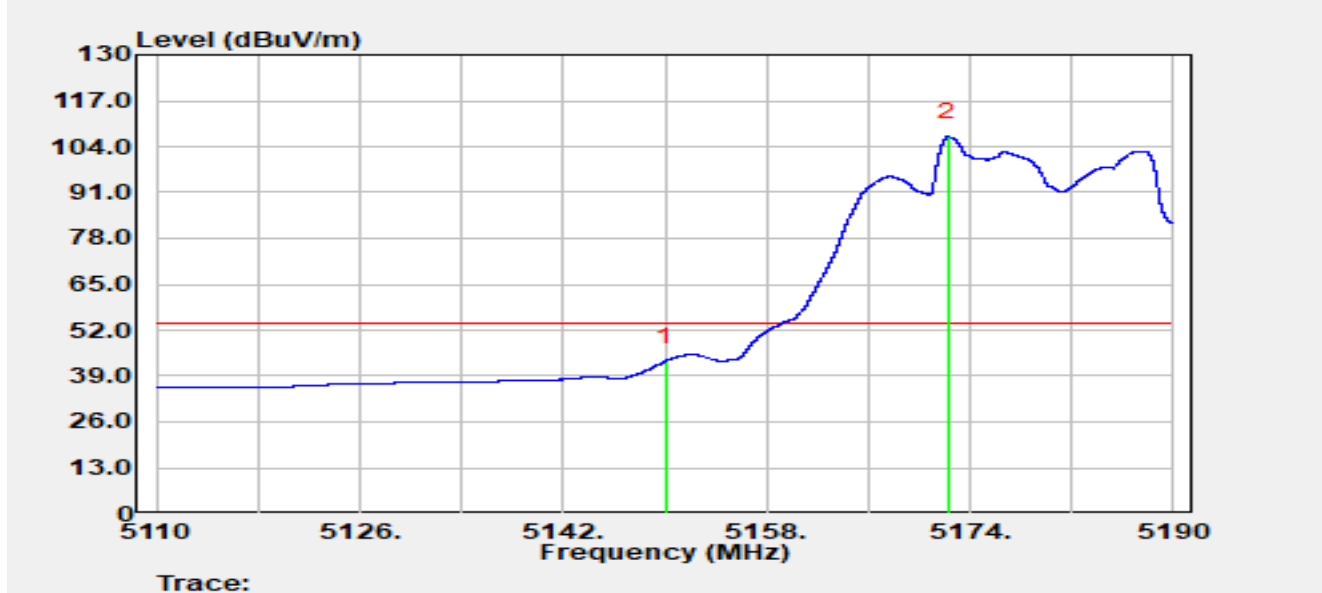


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	44.08	-0.99	43.09	-10.91	54.00	Average
2		5172.296	53.70	53.05	106.75	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

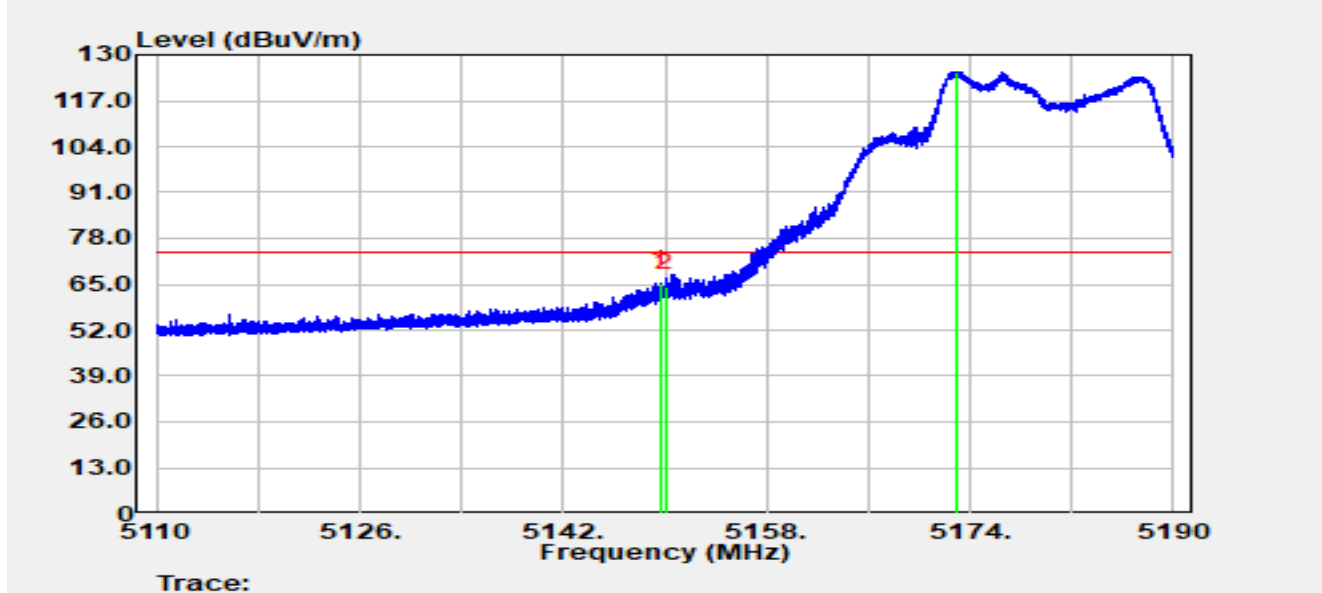


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.600	66.15	-1.10	65.04	-8.96	74.00	Peak
2		5150.000	65.10	-0.99	64.11	-9.89	74.00	Peak
3		5173.000	71.67	53.61	125.28	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

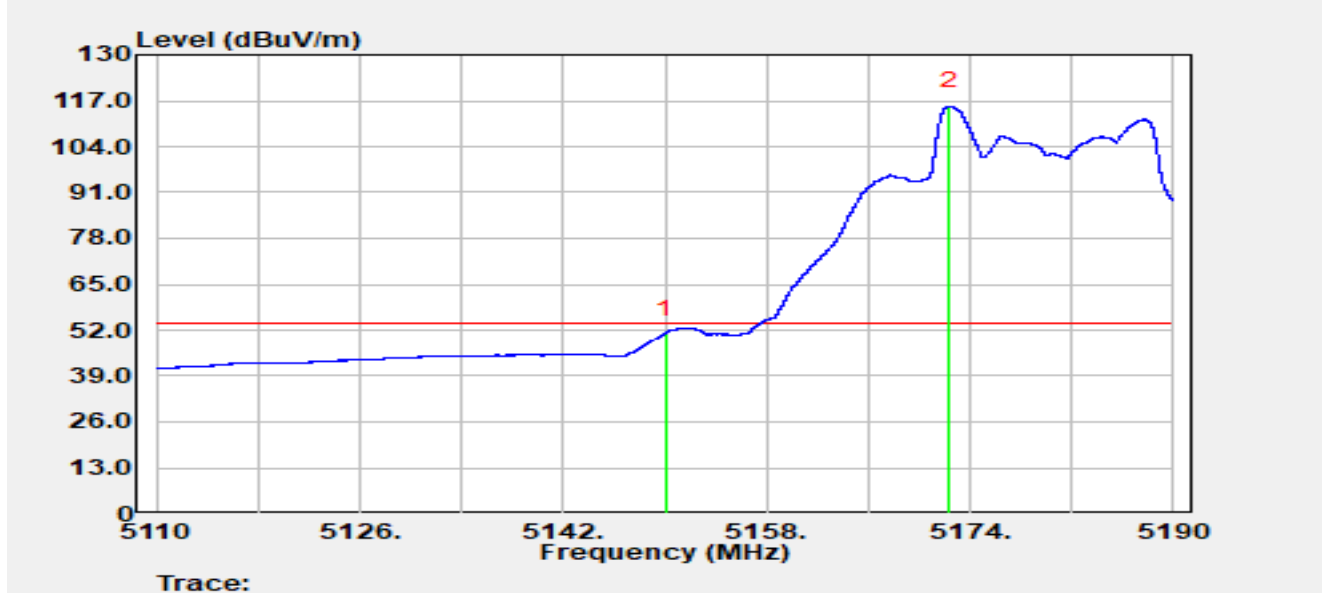


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	51.93	-0.99	50.94	-3.06	54.00	Average
2		5172.400	62.31	53.14	115.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

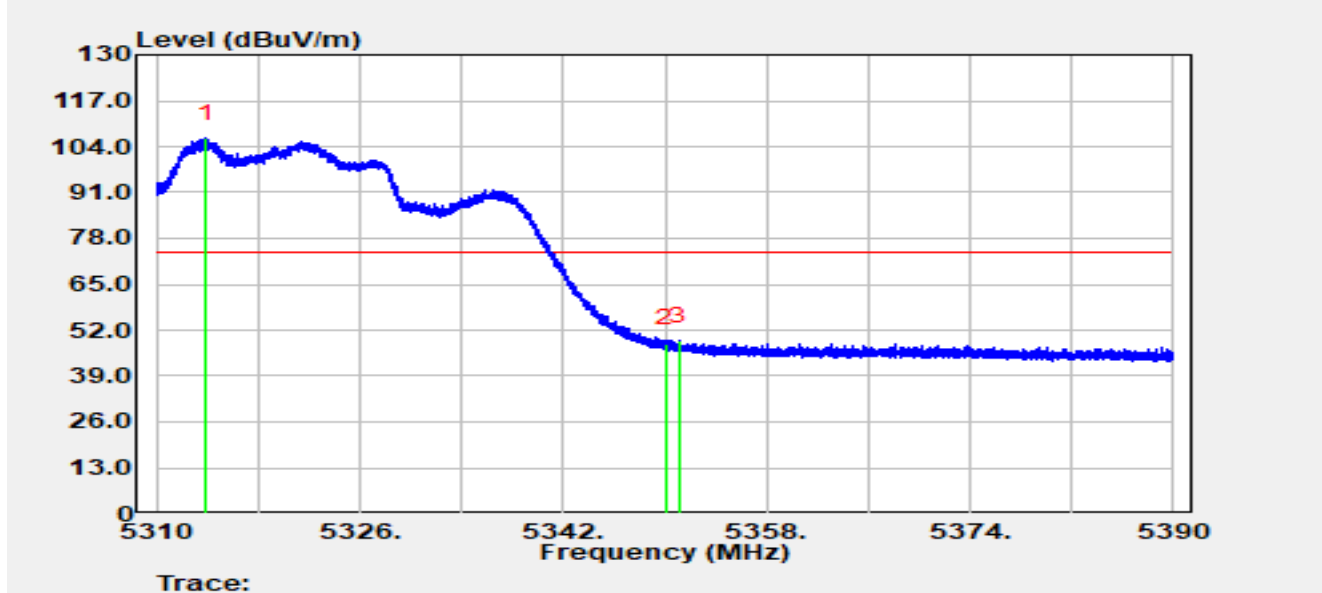


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.952	57.37	48.89	106.26	N/A	N/A	Peak
2		5350.000	48.02	0.19	48.20	-25.80	74.00	Peak
3	*	5351.064	49.34	-0.42	48.92	-25.08	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

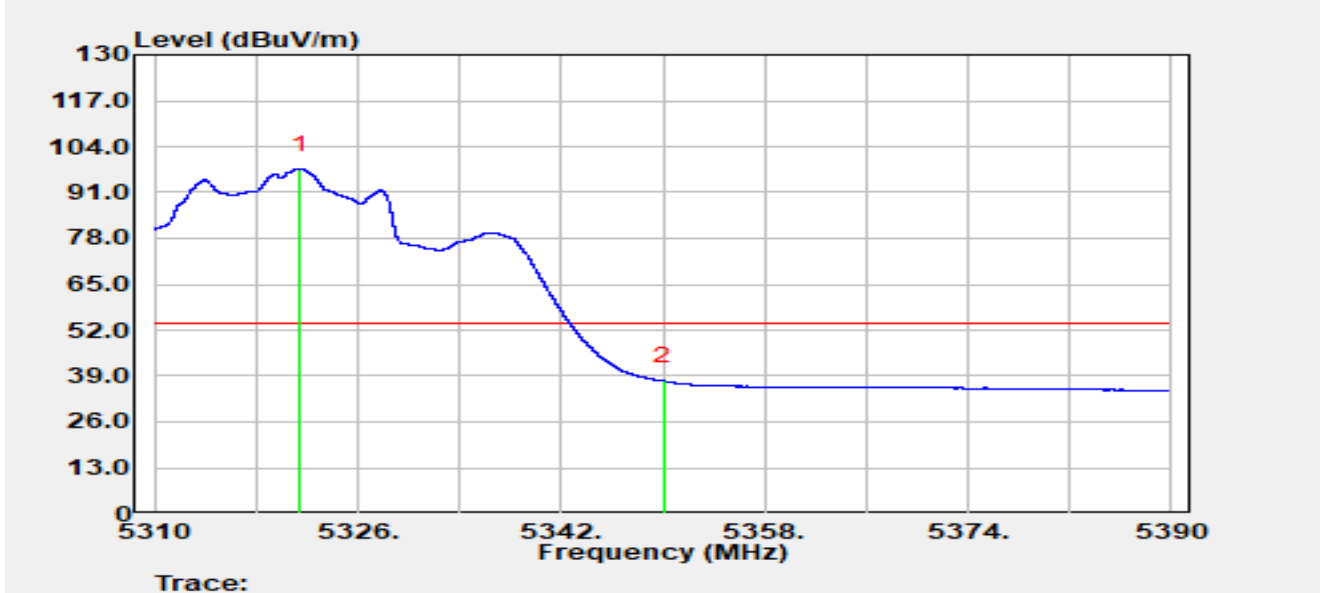


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.464	57.53	40.04	97.57	N/A	N/A	Average
2	*	5350.000	37.36	0.19	37.55	-16.45	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

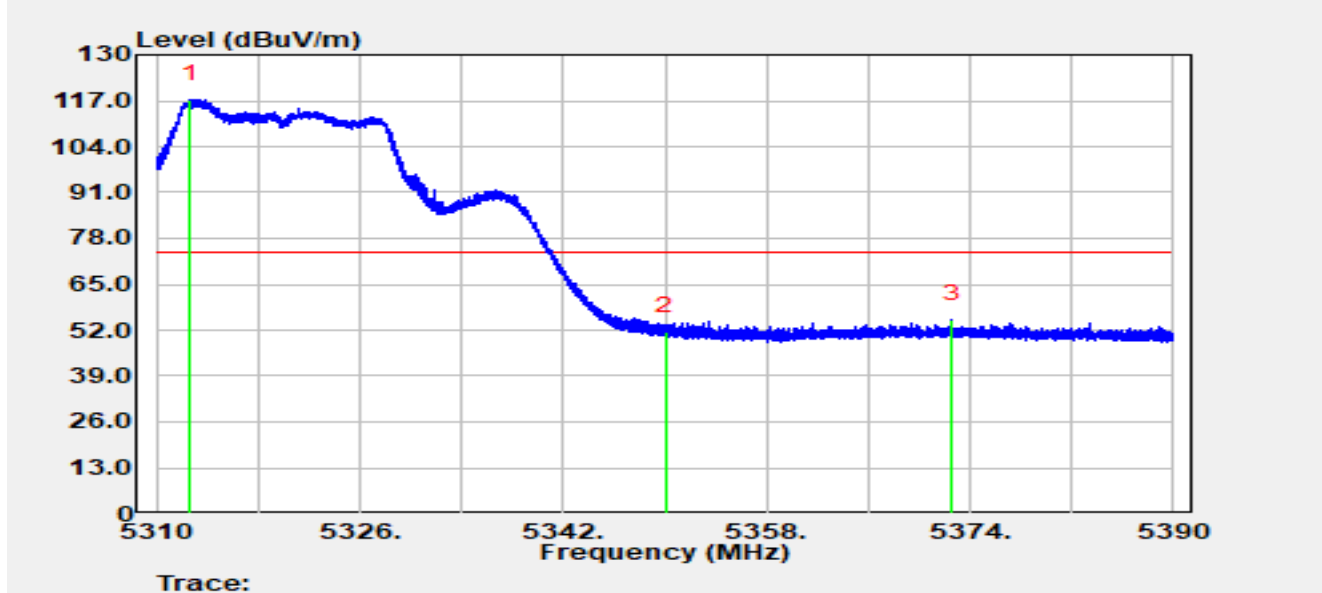


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.656	70.19	47.20	117.39	N/A	N/A	Peak
2		5350.000	51.45	0.19	51.64	-22.36	74.00	Peak
3	*	5372.616	58.04	-3.03	55.01	-18.99	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

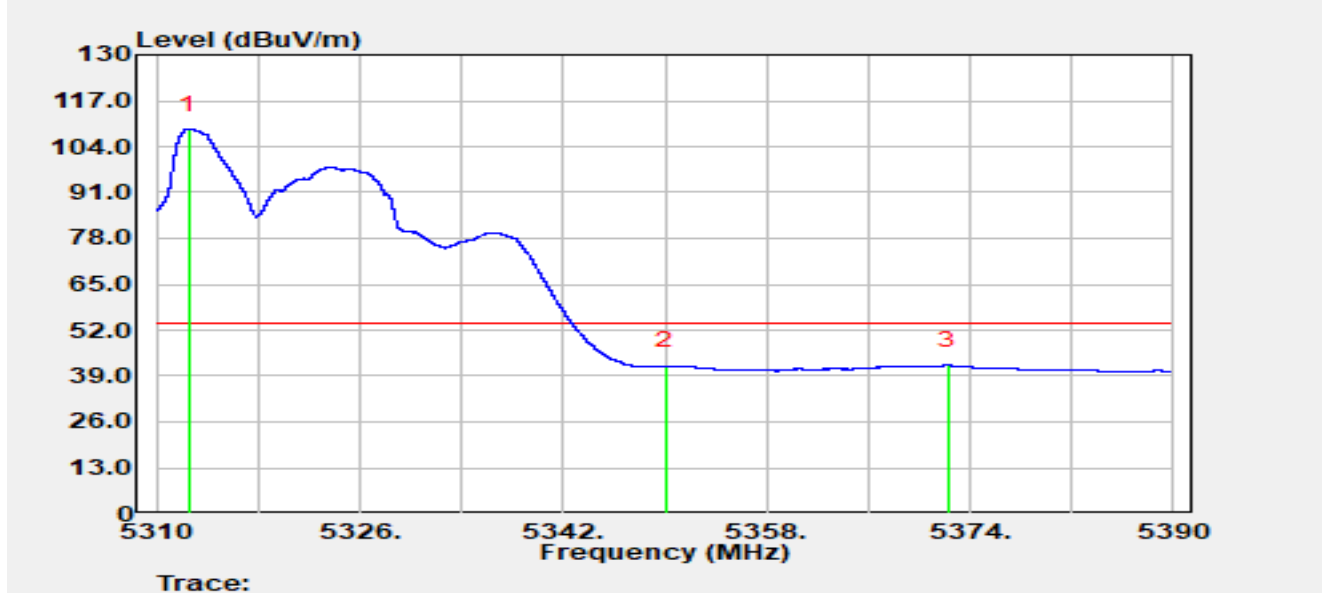


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.512	61.88	46.99	108.87	N/A	N/A	Average
2		5350.000	41.66	0.19	41.84	-12.16	54.00	Average
3	*	5372.248	45.01	-3.02	42.00	-12.00	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

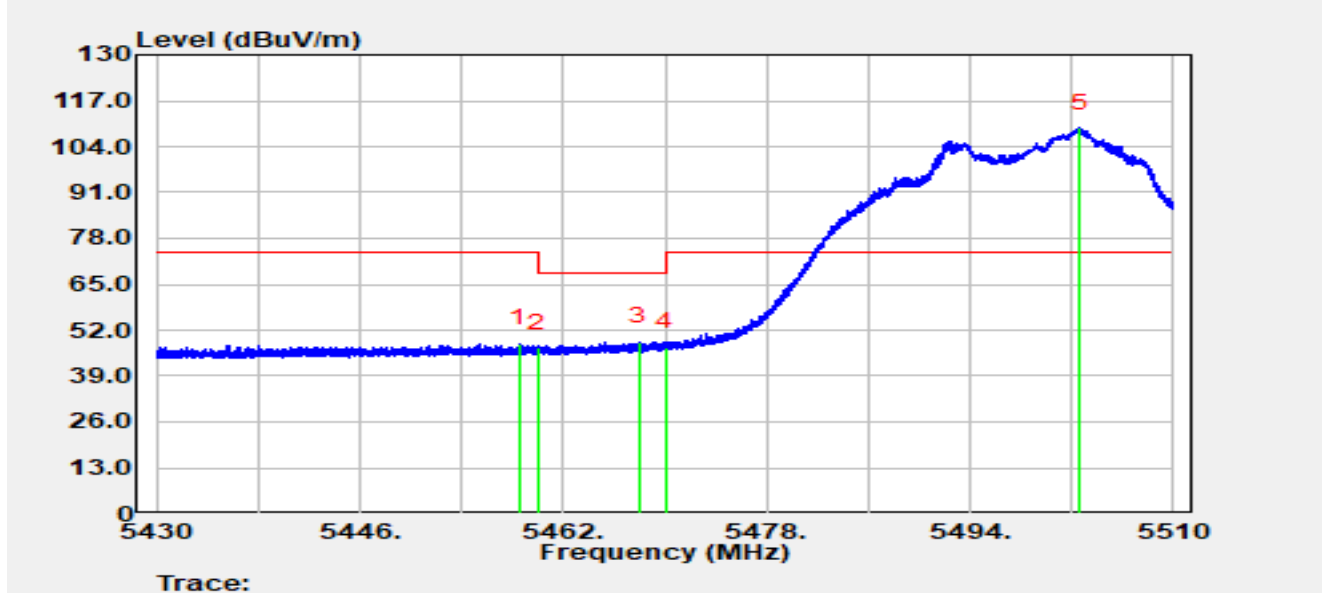


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.576	51.45	-3.36	48.09	-25.91	74.00	Peak
2		5460.000	50.31	-3.25	47.06	-21.14	68.20	Peak
3	*	5467.936	50.97	-2.20	48.76	-19.44	68.20	Peak
4		5470.000	49.02	-1.75	47.26	-20.94	68.20	Peak
5		5502.600	64.51	44.80	109.31	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

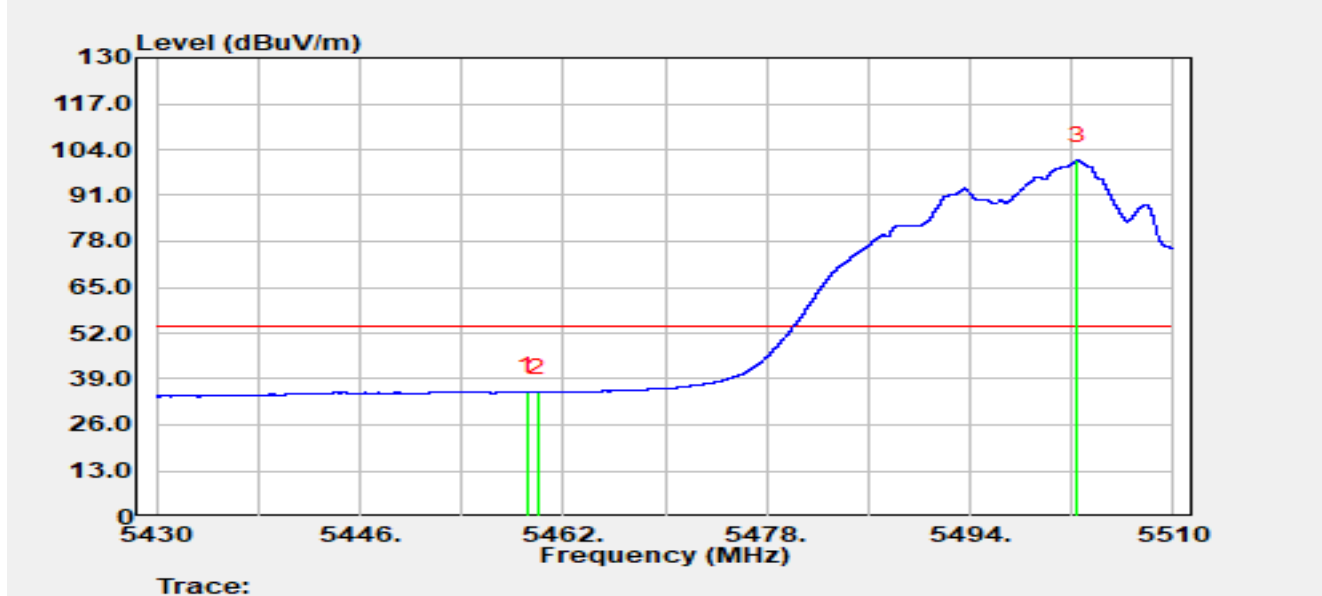


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5459.184	38.58	-3.17	35.41	-18.59	54.00	Average
2		5460.000	38.48	-3.25	35.24	-18.76	54.00	Average
3		5502.400	56.31	44.65	100.96	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

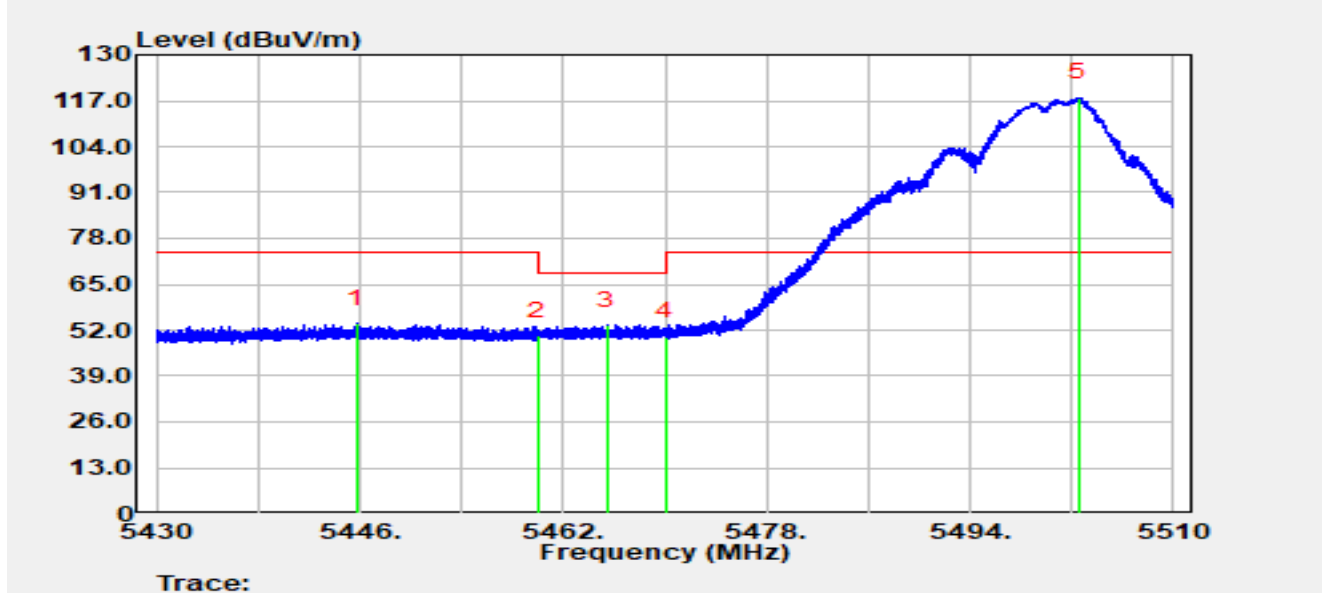


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.736	57.79	-4.03	53.76	-20.24	74.00	Peak
2		5460.000	53.66	-3.25	50.41	-17.79	68.20	Peak
3	*	5465.440	55.93	-2.63	53.30	-14.90	68.20	Peak
4		5470.000	51.95	-1.75	50.19	-18.01	68.20	Peak
5		5502.552	73.19	44.77	117.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

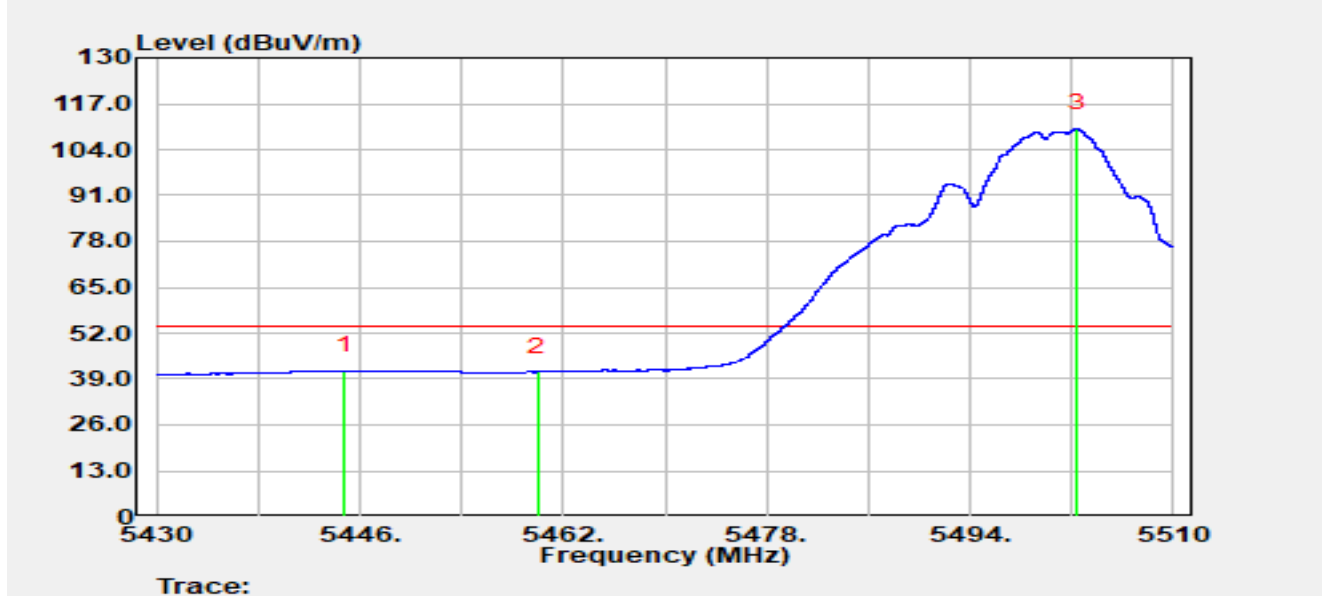


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.760	45.22	-3.80	41.43	-12.57	54.00	Average
2		5460.000	44.22	-3.25	40.98	-13.02	54.00	Average
3		5502.400	65.36	44.65	110.01	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

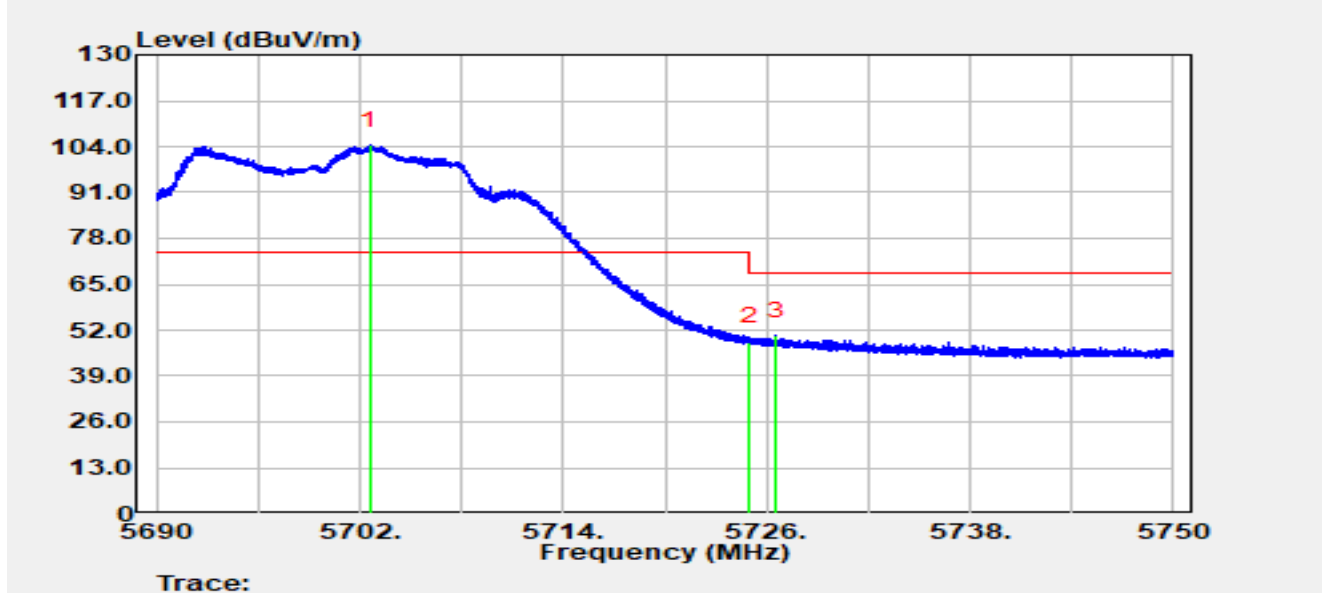


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.630	67.06	37.19	104.25	N/A	N/A	Peak
2		5725.000	48.42	0.39	48.81	-19.39	68.20	Peak
3	*	5726.558	50.91	-0.52	50.39	-17.81	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

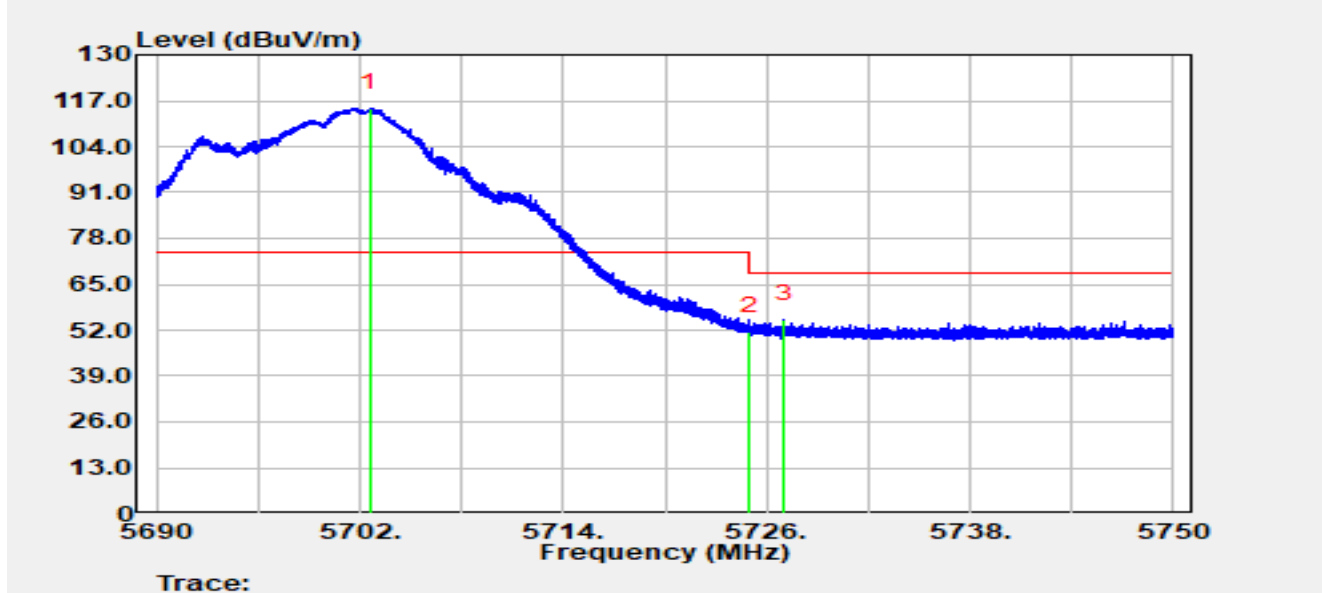


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.624	77.81	37.18	114.98	N/A	N/A	Peak
2		5725.000	51.21	0.39	51.60	-16.60	68.20	Peak
3	*	5727.044	55.90	-0.76	55.14	-13.06	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

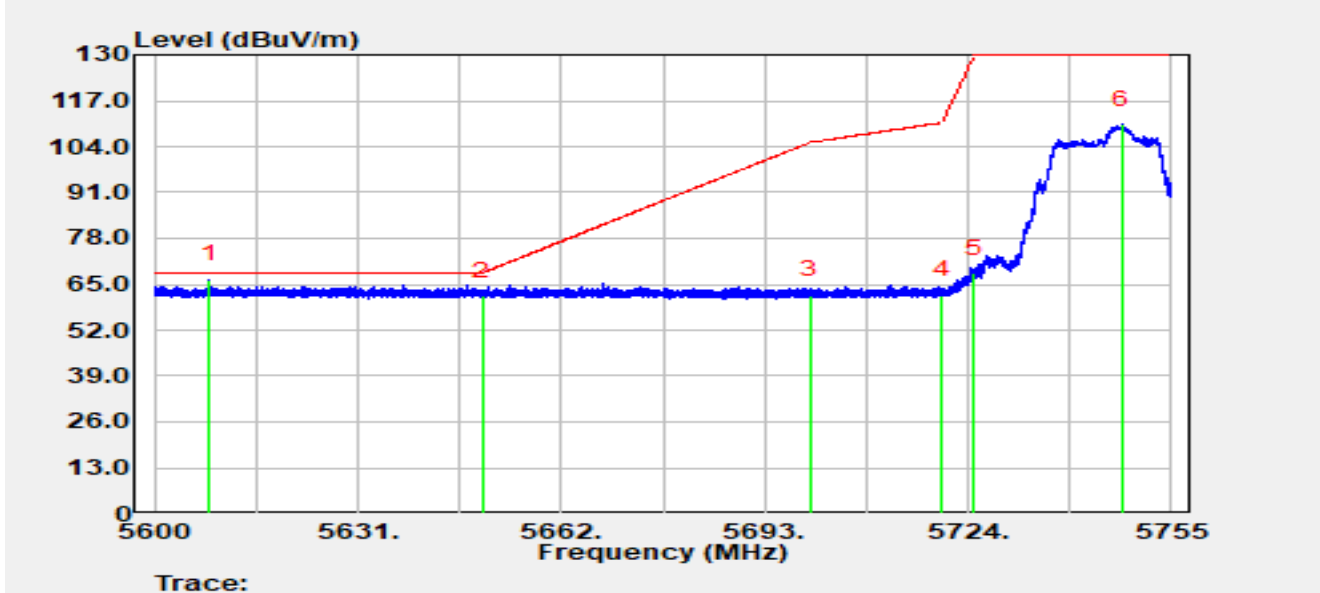


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5608.432	72.45	-6.15	66.30	-1.90	68.20	Peak
2		5650.000	67.91	-6.34	61.57	-6.63	68.20	Peak
3		5700.000	68.28	-6.38	61.89	-43.31	105.20	Peak
4		5720.000	68.16	-6.33	61.83	-48.97	110.80	Peak
5		5725.000	74.37	-6.33	68.04	-61.96	130.00	Peak
6		5747.482	116.50	-6.30	110.19	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

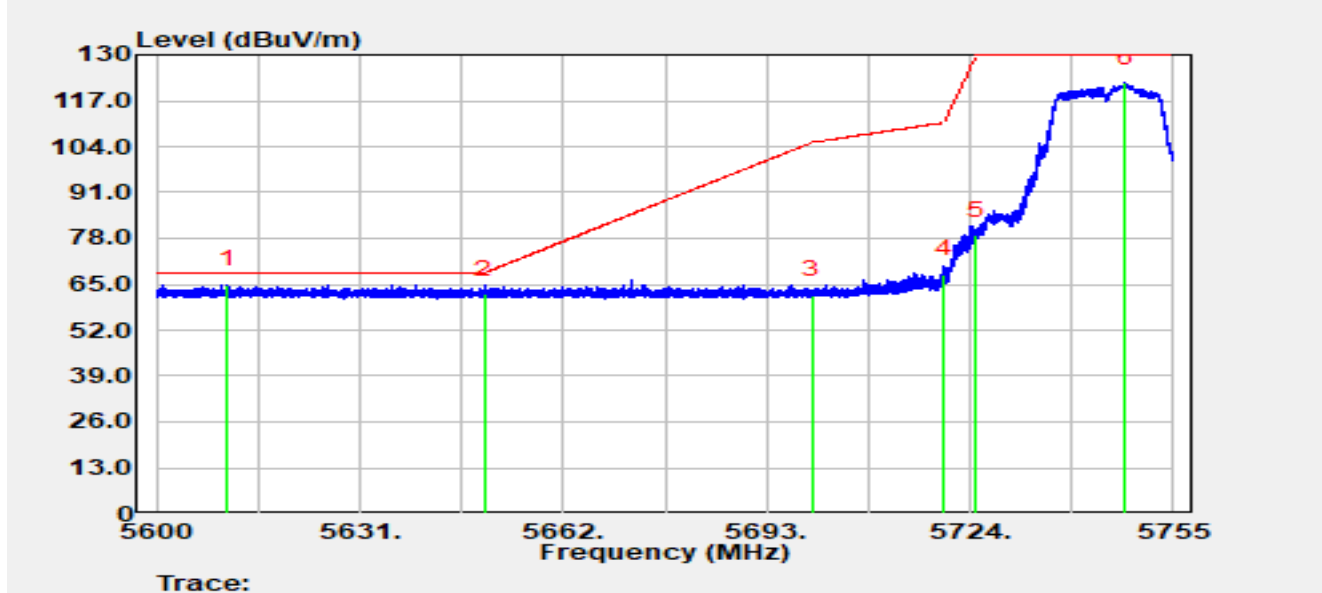


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5610.742	71.00	-6.16	64.84	-3.36	68.20	Peak
2		5650.000	68.44	-6.34	62.11	-6.09	68.20	Peak
3		5700.000	68.33	-6.38	61.94	-43.26	105.20	Peak
4		5720.000	74.24	-6.33	67.91	-42.89	110.80	Peak
5		5725.000	85.21	-6.33	78.88	-51.12	130.00	Peak
6		5747.576	128.32	-6.30	122.01	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

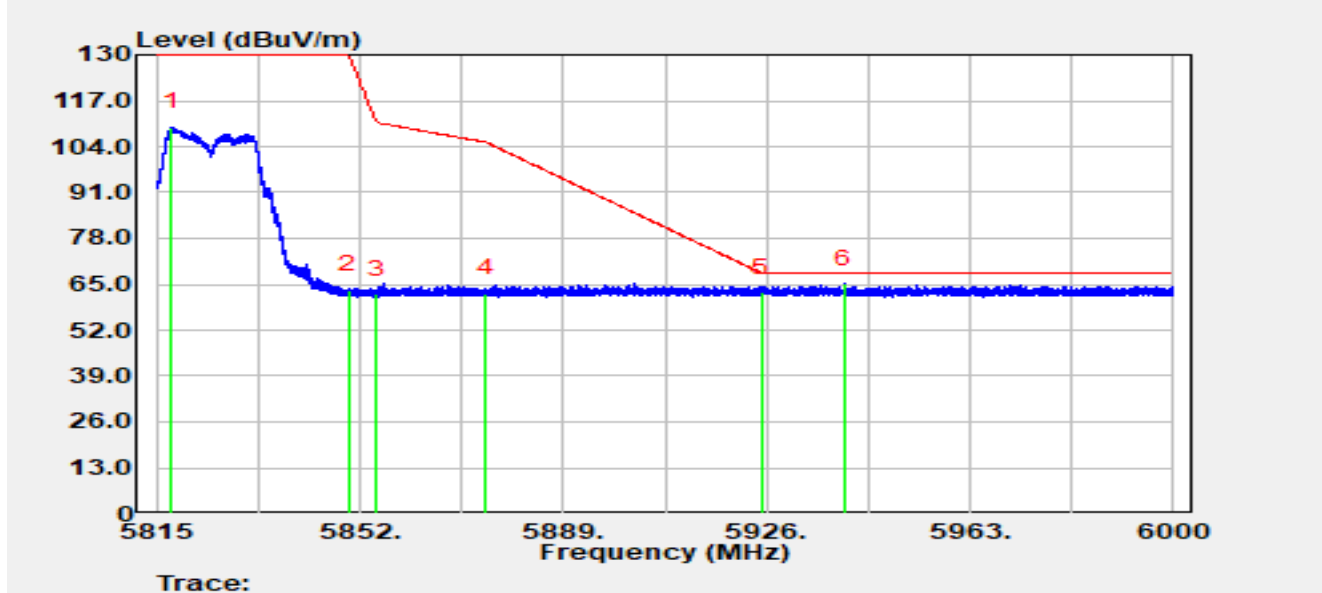


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5817.627	115.95	-6.33	109.61	N/A	N/A	Peak
2		5850.000	69.63	-6.31	63.31	-66.69	130.00	Peak
3		5855.000	68.53	-6.27	62.26	-48.54	110.80	Peak
4		5875.000	68.56	-6.24	62.32	-42.88	105.20	Peak
5		5925.000	68.64	-6.05	62.59	-5.61	68.20	Peak
6	*	5940.171	71.20	-6.15	65.05	-3.15	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

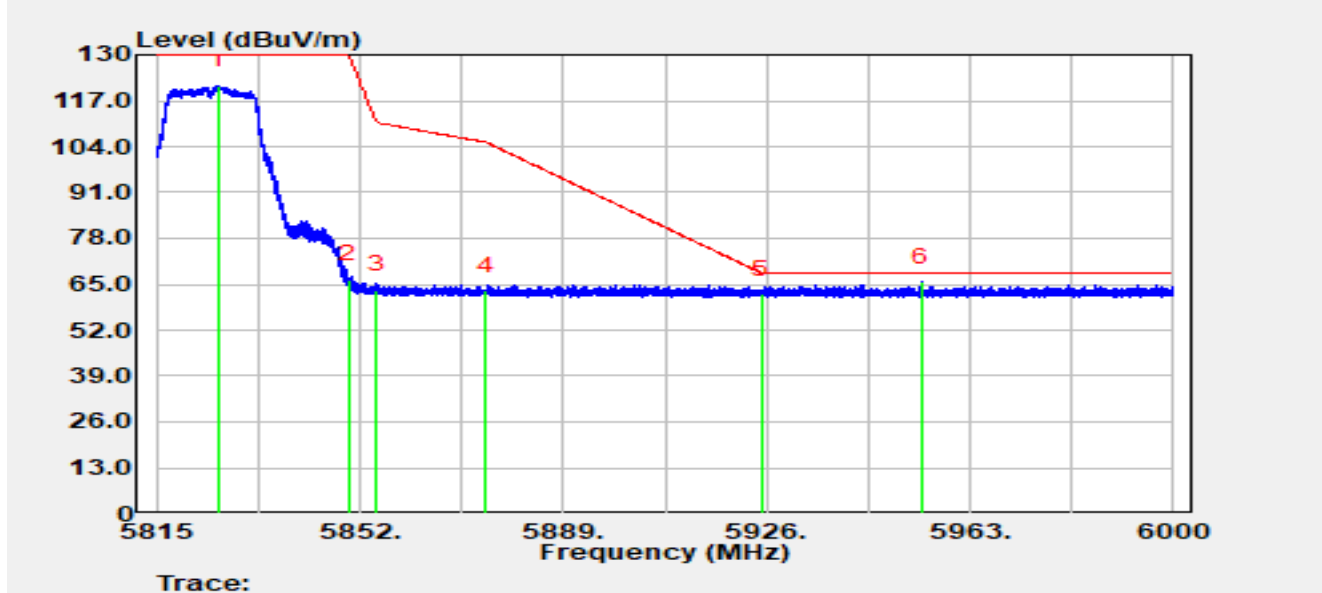


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.082	127.48	-6.28	121.21	N/A	N/A	Peak
2		5850.000	72.60	-6.31	66.28	-63.72	130.00	Peak
3		5855.000	69.77	-6.27	63.51	-47.29	110.80	Peak
4		5875.000	69.31	-6.24	63.07	-42.13	105.20	Peak
5		5925.000	68.28	-6.05	62.23	-5.97	68.20	Peak
6	*	5954.083	71.72	-6.16	65.56	-2.64	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

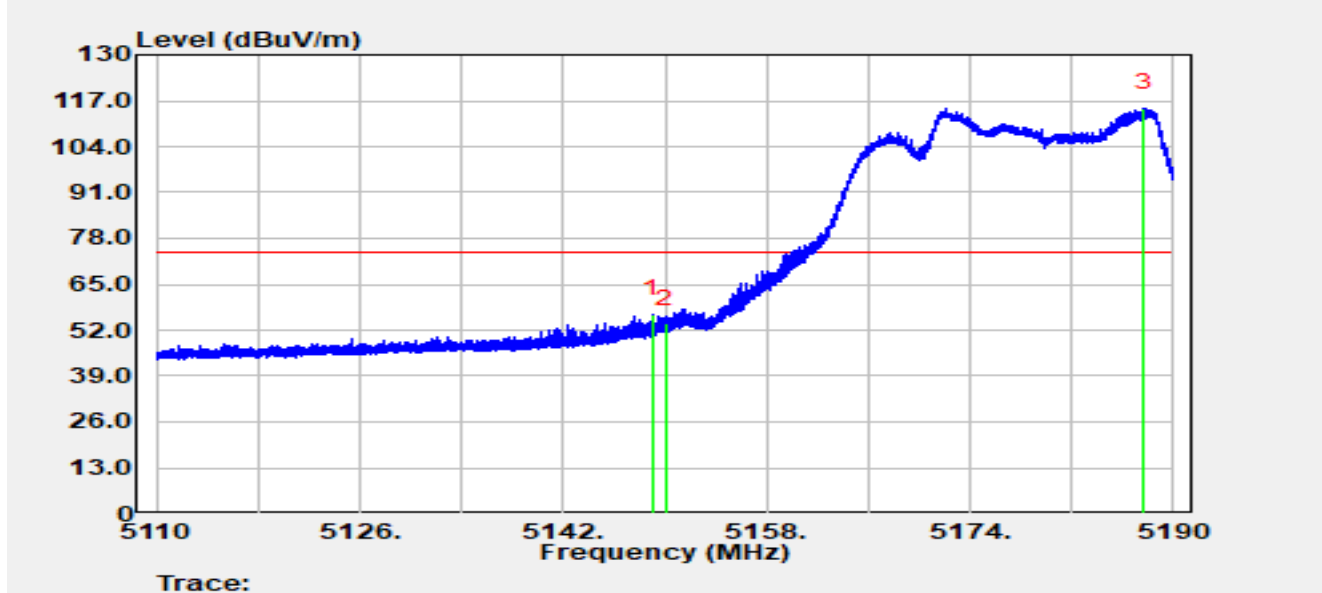


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.960	57.91	-1.28	56.63	-17.37	74.00	Peak
2		5150.000	54.82	-0.99	53.83	-20.17	74.00	Peak
3		5187.656	74.05	40.91	114.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

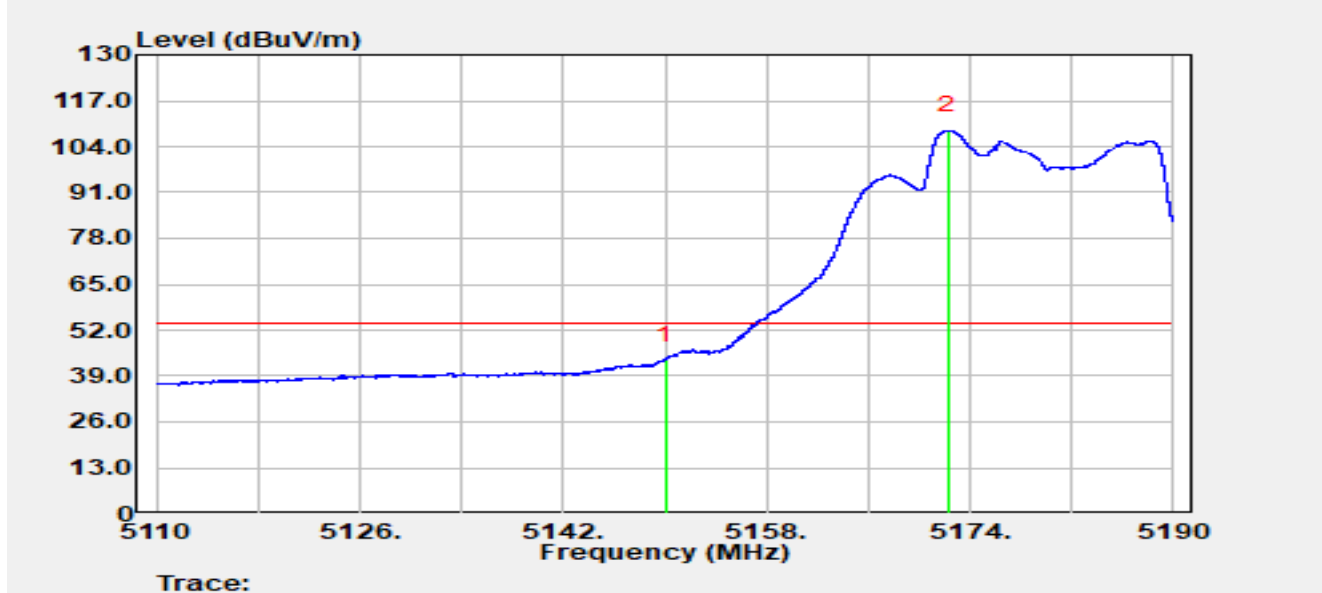


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.64	-0.99	43.65	-10.35	54.00	Average
2		5172.240	55.61	53.01	108.62	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

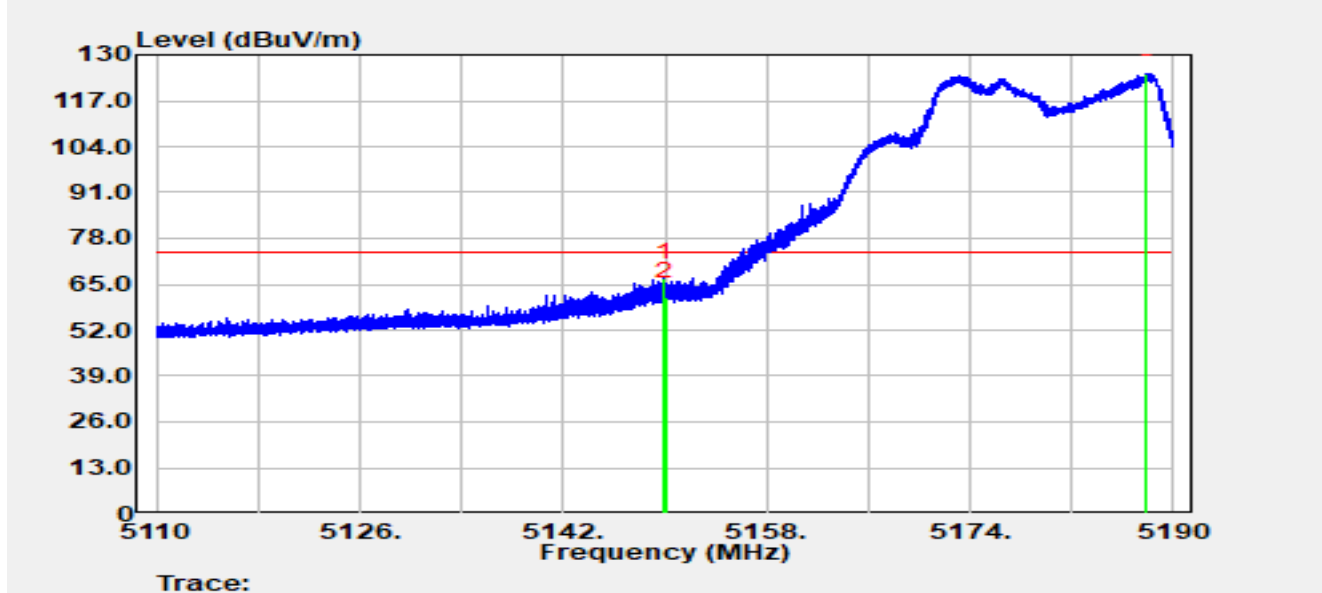


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.896	67.83	-1.02	66.81	-7.19	74.00	Peak
2		5150.000	62.52	-0.99	61.52	-12.48	74.00	Peak
3		5187.880	83.22	41.37	124.58	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

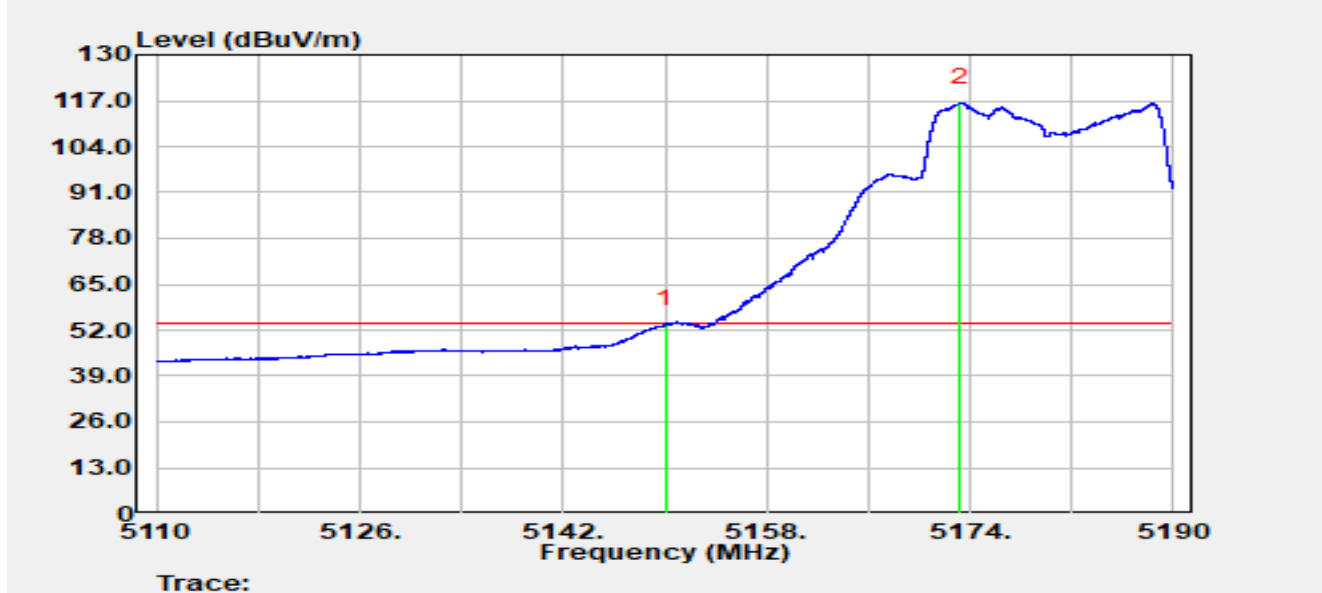


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.55	-0.99	53.56	-0.44	54.00	Average
2		5173.240	62.75	53.70	116.45	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

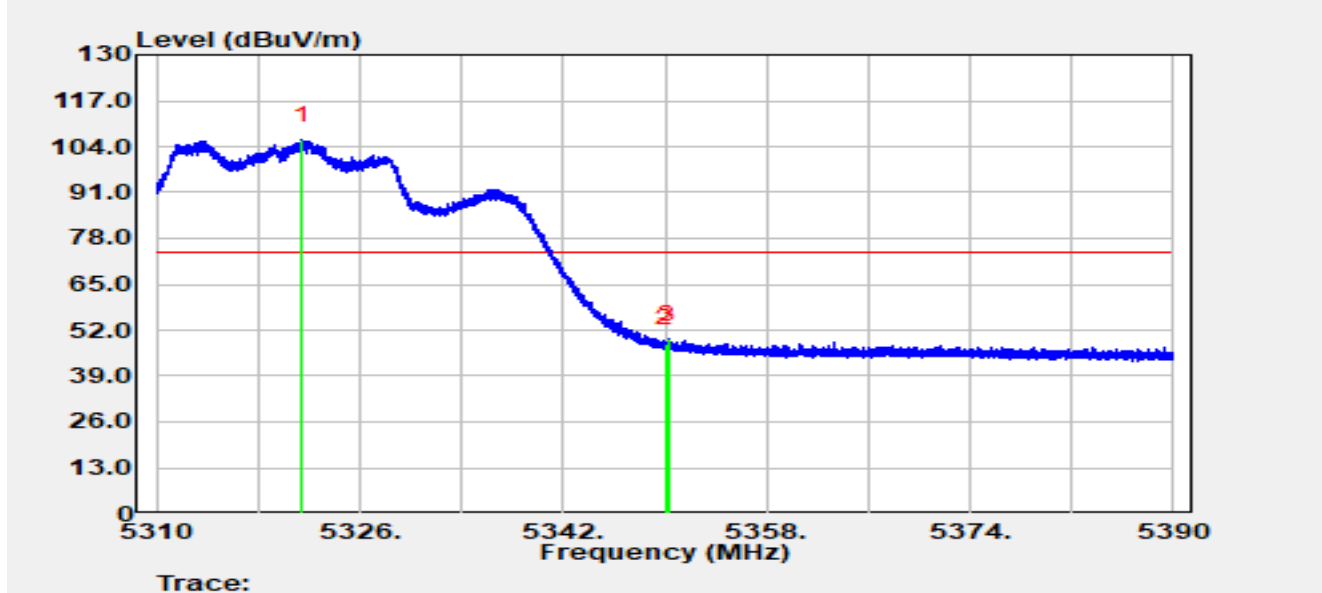


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.480	65.78	40.05	105.84	N/A	N/A	Peak
2		5350.000	47.97	0.19	48.16	-25.84	74.00	Peak
3	*	5350.288	49.49	-0.04	49.45	-24.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

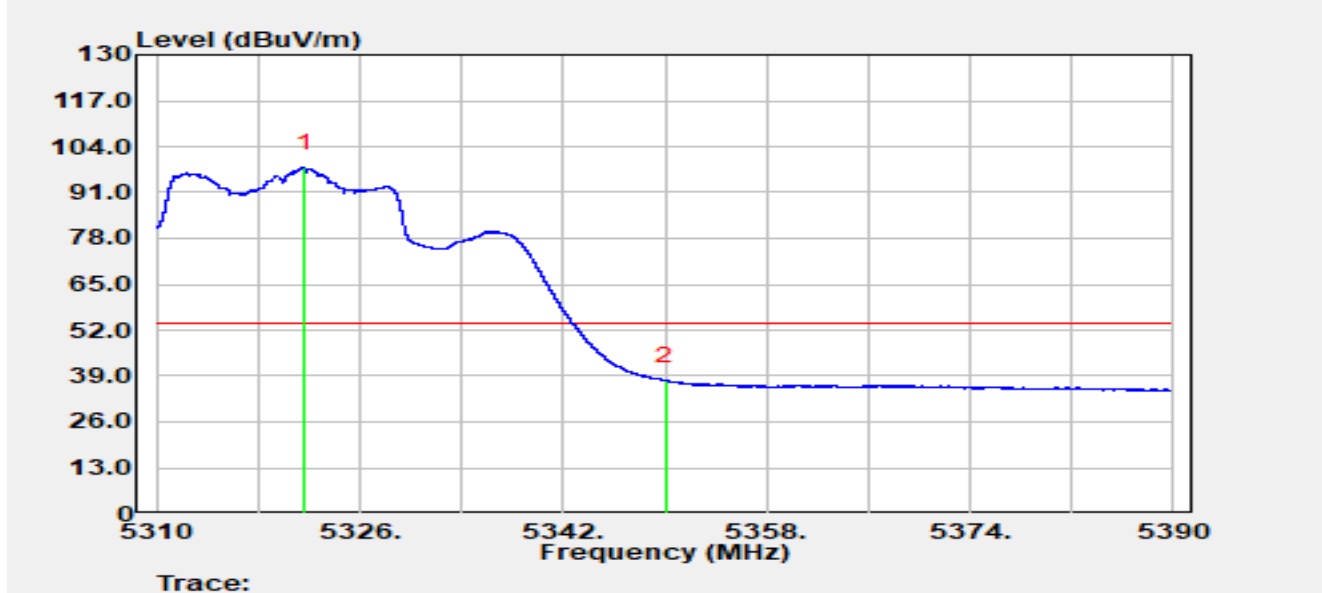


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.632	57.84	40.17	98.01	N/A	N/A	Average
2	*	5350.000	37.42	0.19	37.60	-16.40	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

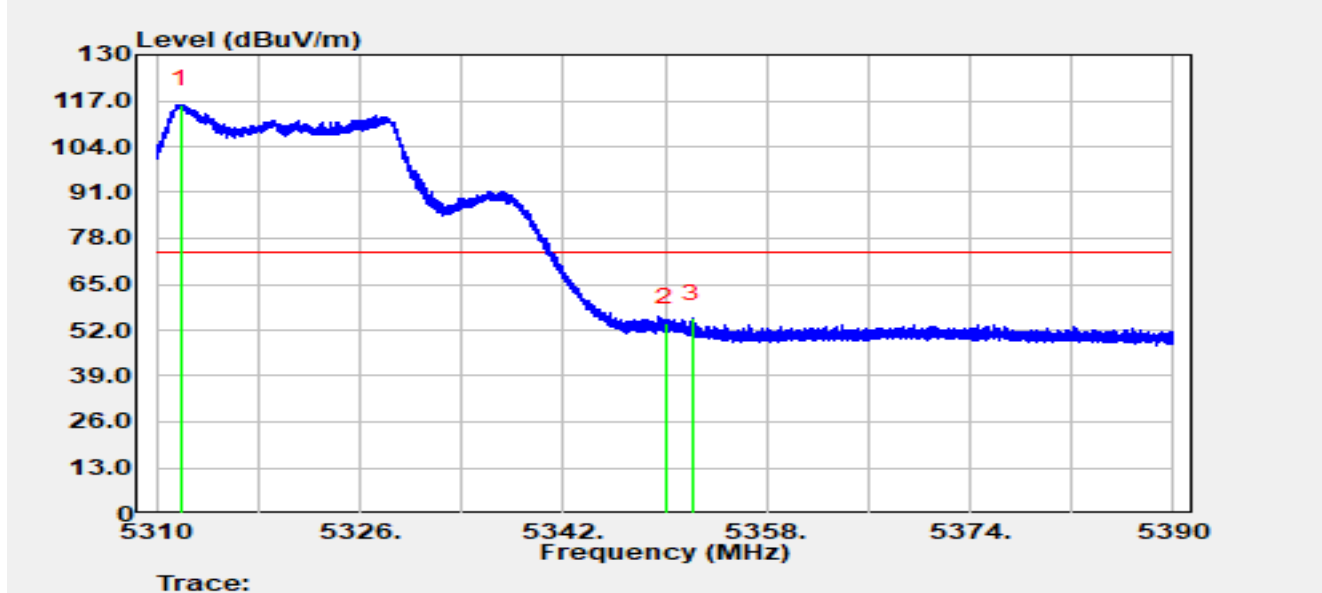


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.864	69.93	46.05	115.97	N/A	N/A	Peak
2		5350.000	53.97	0.19	54.16	-19.84	74.00	Peak
3	*	5352.136	56.36	-0.94	55.42	-18.58	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

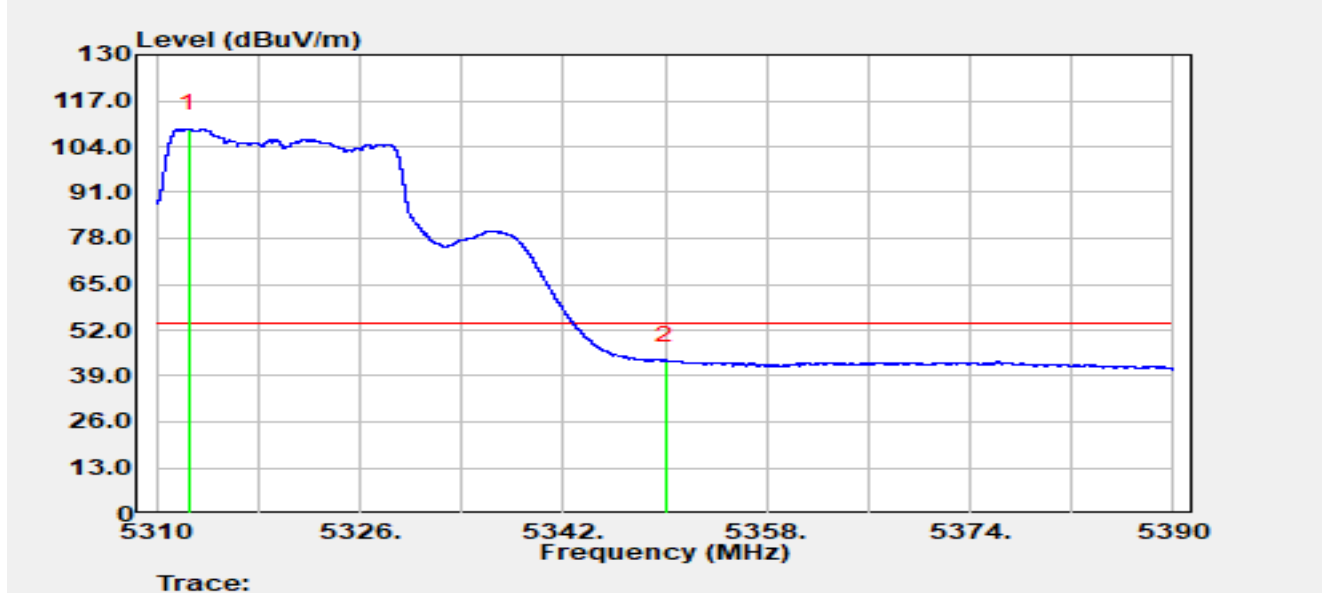


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.504	61.97	46.98	108.95	N/A	N/A	Average
2	*	5350.000	43.12	0.19	43.30	-10.70	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

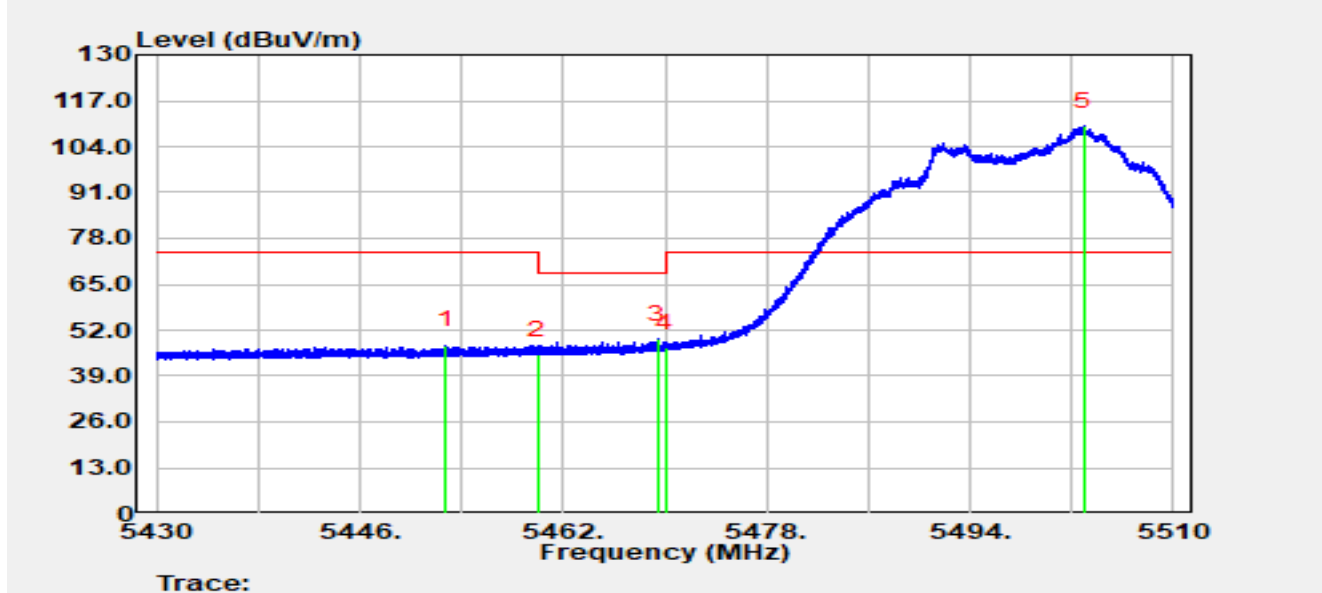


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.736	51.36	-3.58	47.77	-26.23	74.00	Peak
2		5460.000	48.22	-3.25	44.98	-23.22	68.20	Peak
3	*	5469.424	51.24	-1.74	49.50	-18.70	68.20	Peak
4		5470.000	48.80	-1.75	47.04	-21.16	68.20	Peak
5		5502.952	64.74	44.93	109.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

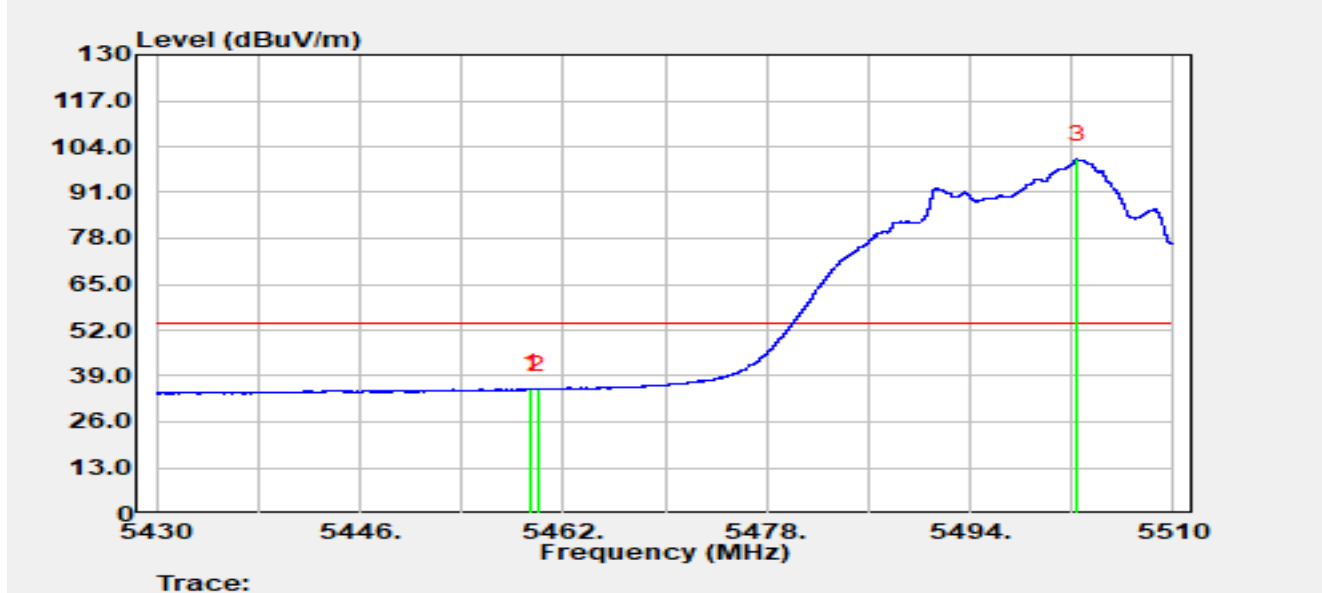


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.488	38.62	-3.21	35.40	-18.60	54.00	Average
2		5460.000	38.46	-3.25	35.22	-18.78	54.00	Average
3		5502.464	55.63	44.70	100.33	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

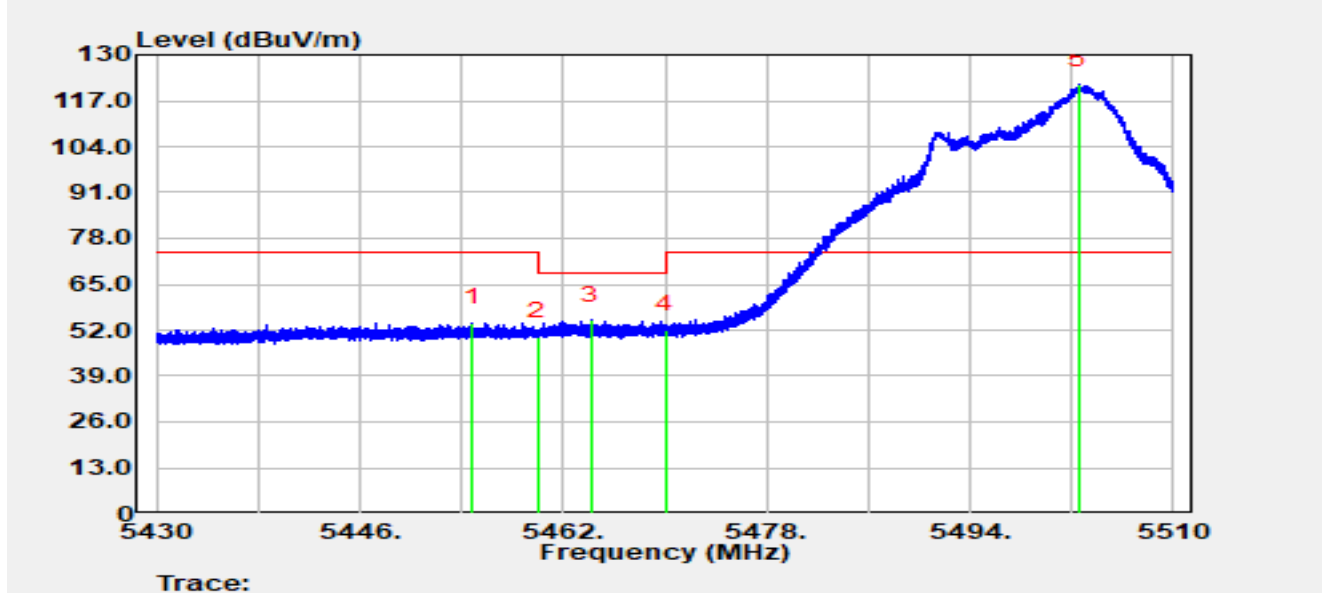


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.872	57.73	-3.56	54.17	-19.83	74.00	Peak
2		5460.000	53.39	-3.25	50.14	-18.06	68.20	Peak
3	*	5464.152	57.83	-2.99	54.83	-13.37	68.20	Peak
4		5470.000	53.86	-1.75	52.10	-16.10	68.20	Peak
5		5502.504	76.79	44.73	121.52	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

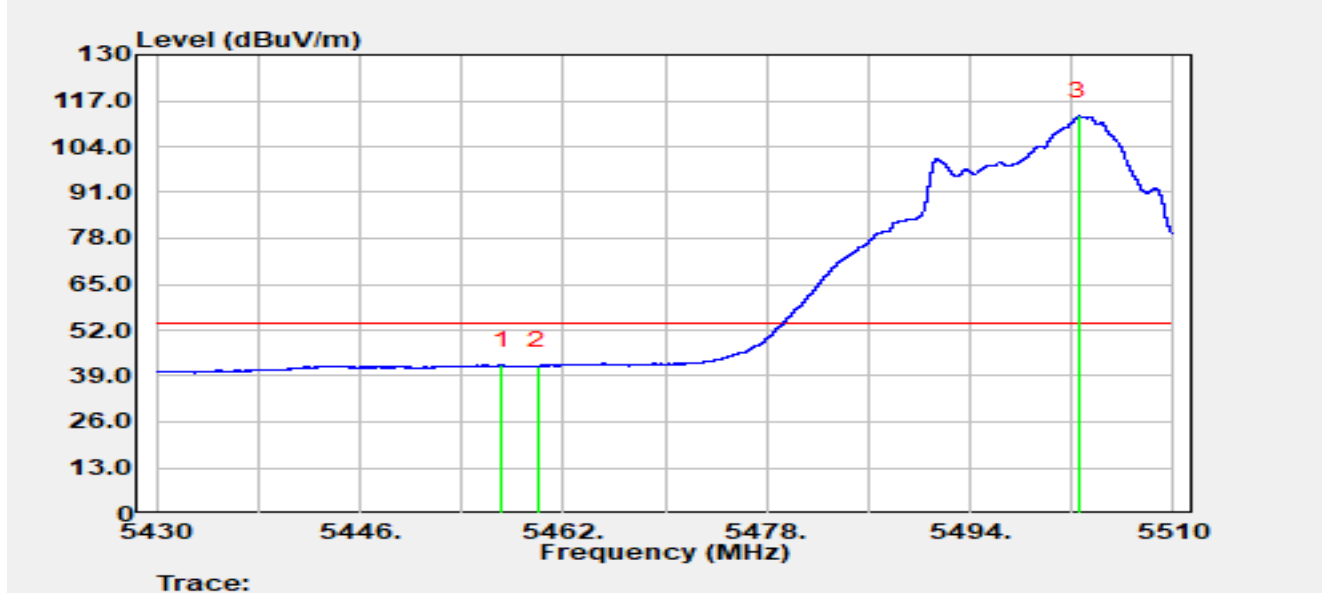


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.216	45.49	-3.38	42.11	-11.89	54.00	Average
2		5460.000	44.99	-3.25	41.75	-12.25	54.00	Average
3		5502.520	67.89	44.74	112.64	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

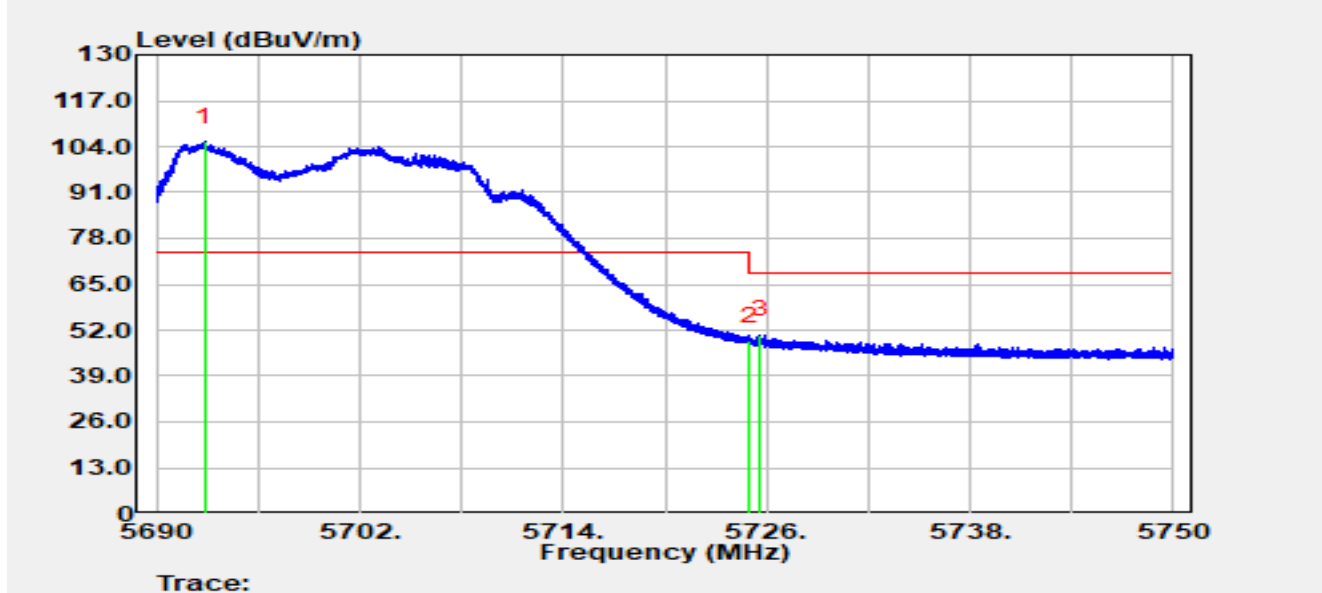


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.880	62.71	42.63	105.34	N/A	N/A	Peak
2		5725.000	48.63	0.39	49.02	-19.18	68.20	Peak
3	*	5725.616	50.57	0.13	50.70	-17.50	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

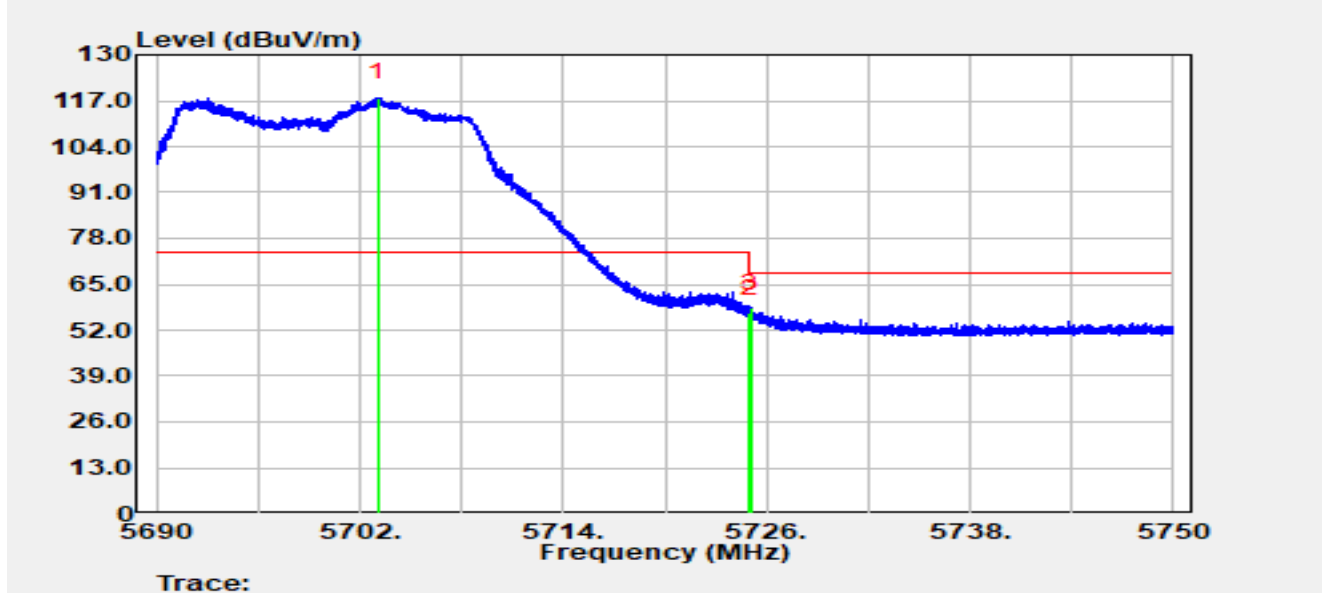


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.056	80.00	37.83	117.83	N/A	N/A	Peak
2		5725.000	56.33	0.39	56.72	-11.48	68.20	Peak
3	*	5725.064	57.84	0.31	58.15	-10.05	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

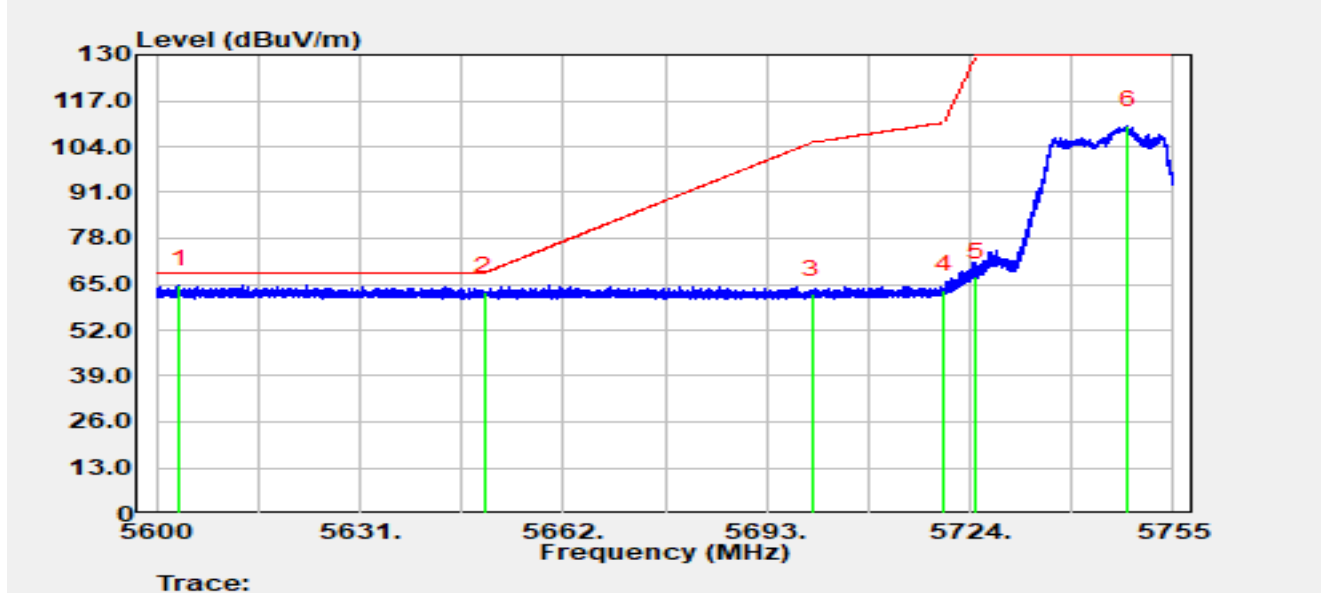


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5603.487	70.91	-6.12	64.78	-3.42	68.20	Peak
2		5650.000	69.34	-6.34	63.00	-5.20	68.20	Peak
3		5700.000	68.61	-6.38	62.23	-42.97	105.20	Peak
4		5720.000	69.71	-6.33	63.37	-47.43	110.80	Peak
5		5725.000	73.40	-6.33	67.08	-62.92	130.00	Peak
6		5748.009	116.25	-6.30	109.95	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

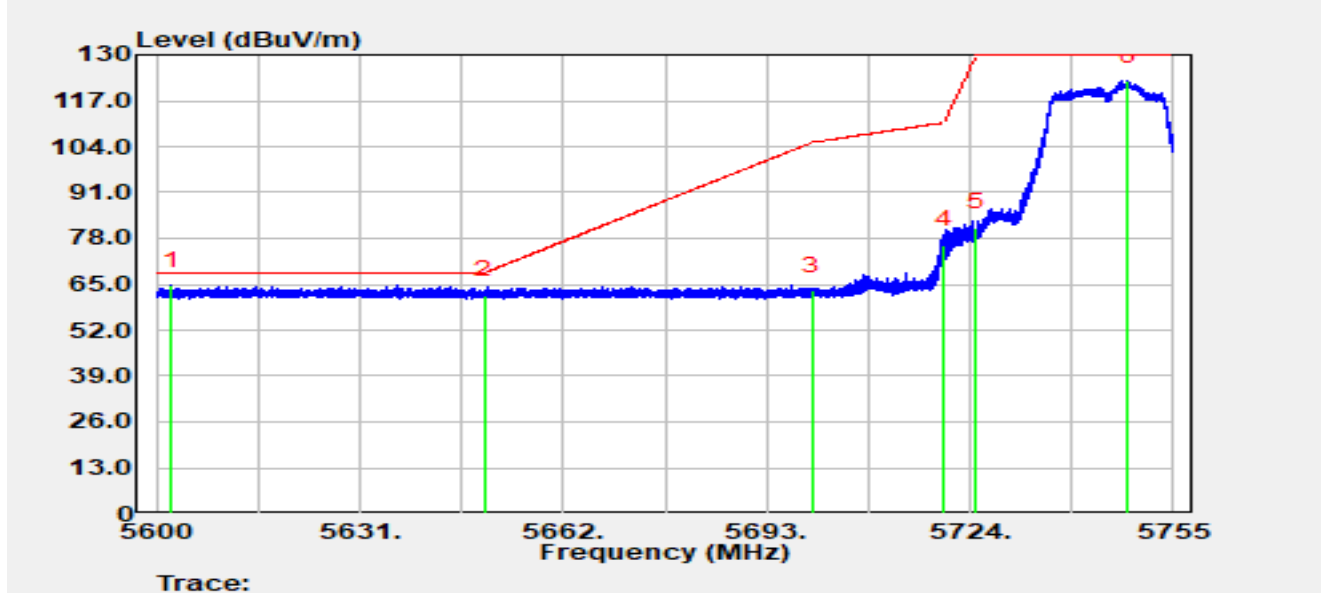


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5602.356	70.69	-6.11	64.58	-3.62	68.20	Peak
2		5650.000	68.17	-6.34	61.84	-6.36	68.20	Peak
3		5700.000	69.56	-6.38	63.17	-42.03	105.20	Peak
4		5720.000	82.43	-6.33	76.10	-34.70	110.80	Peak
5		5725.000	87.40	-6.33	81.07	-48.93	130.00	Peak
6		5747.963	128.90	-6.30	122.60	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

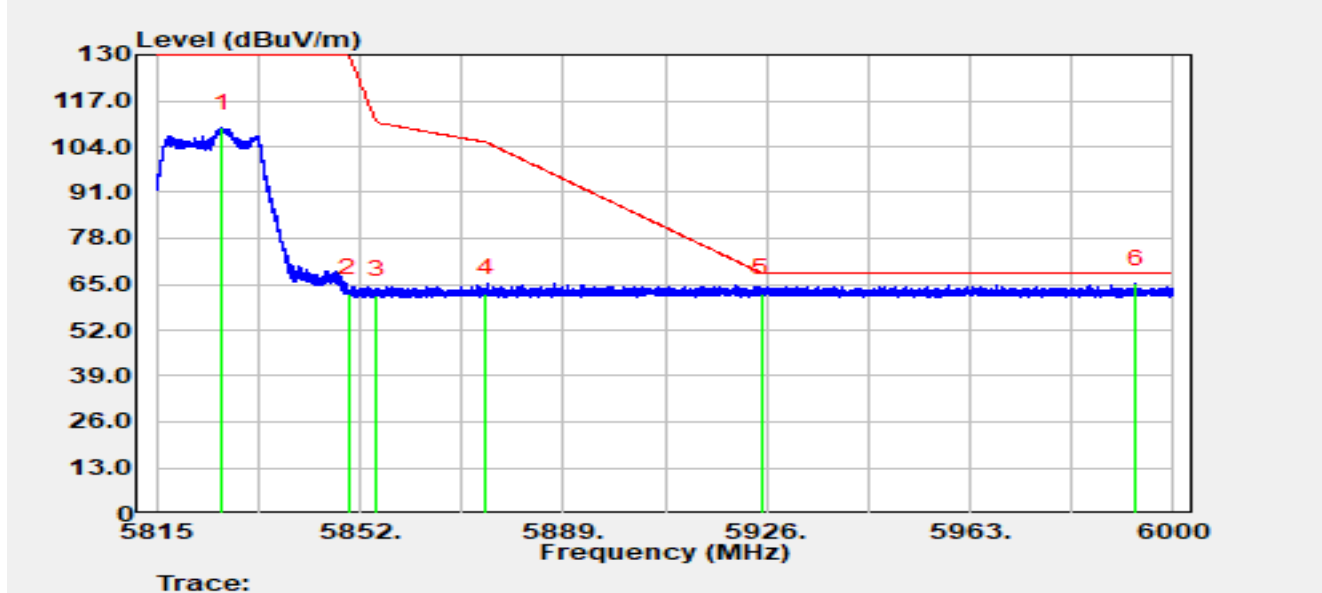


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.914	115.61	-6.27	109.34	N/A	N/A	Peak
2		5850.000	68.66	-6.31	62.34	-67.66	130.00	Peak
3		5855.000	68.19	-6.27	61.92	-48.88	110.80	Peak
4		5875.000	68.57	-6.24	62.33	-42.87	105.20	Peak
5		5925.000	68.40	-6.05	62.34	-5.86	68.20	Peak
6	*	5993.266	71.13	-5.97	65.16	-3.04	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

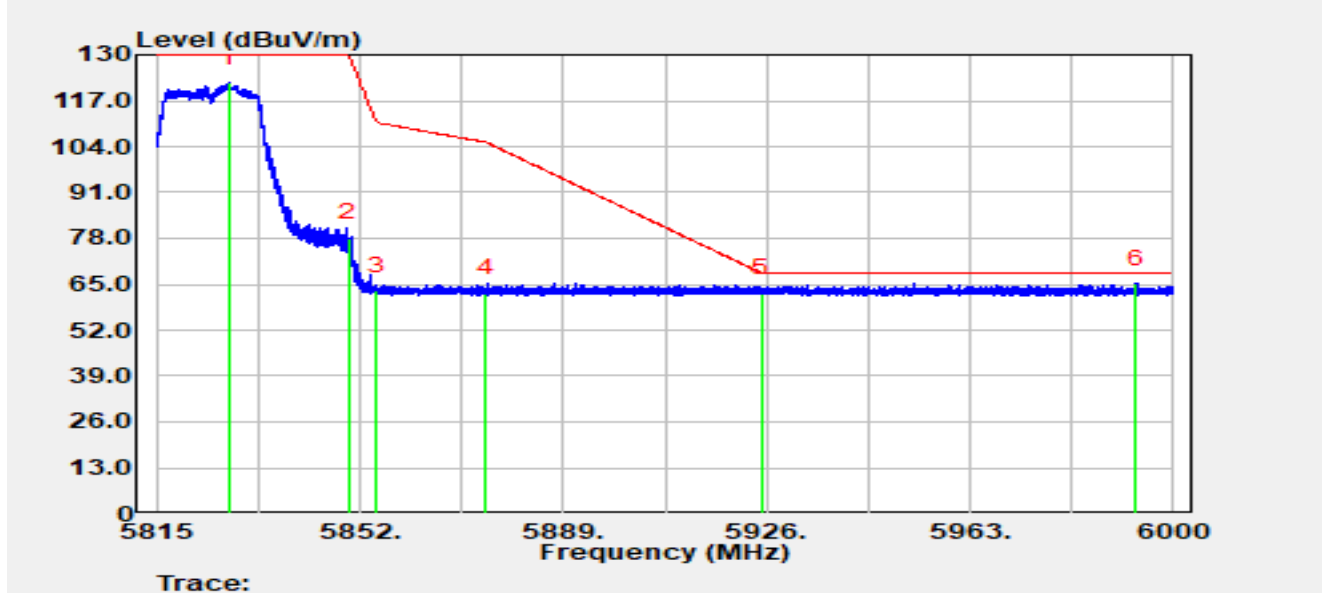


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.190	128.27	-6.26	122.00	N/A	N/A	Peak
2		5850.000	84.35	-6.31	78.04	-51.96	130.00	Peak
3		5855.000	69.33	-6.27	63.06	-47.74	110.80	Peak
4		5875.000	68.57	-6.24	62.33	-42.87	105.20	Peak
5		5925.000	68.58	-6.05	62.53	-5.67	68.20	Peak
6	*	5993.266	71.13	-5.97	65.16	-3.04	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

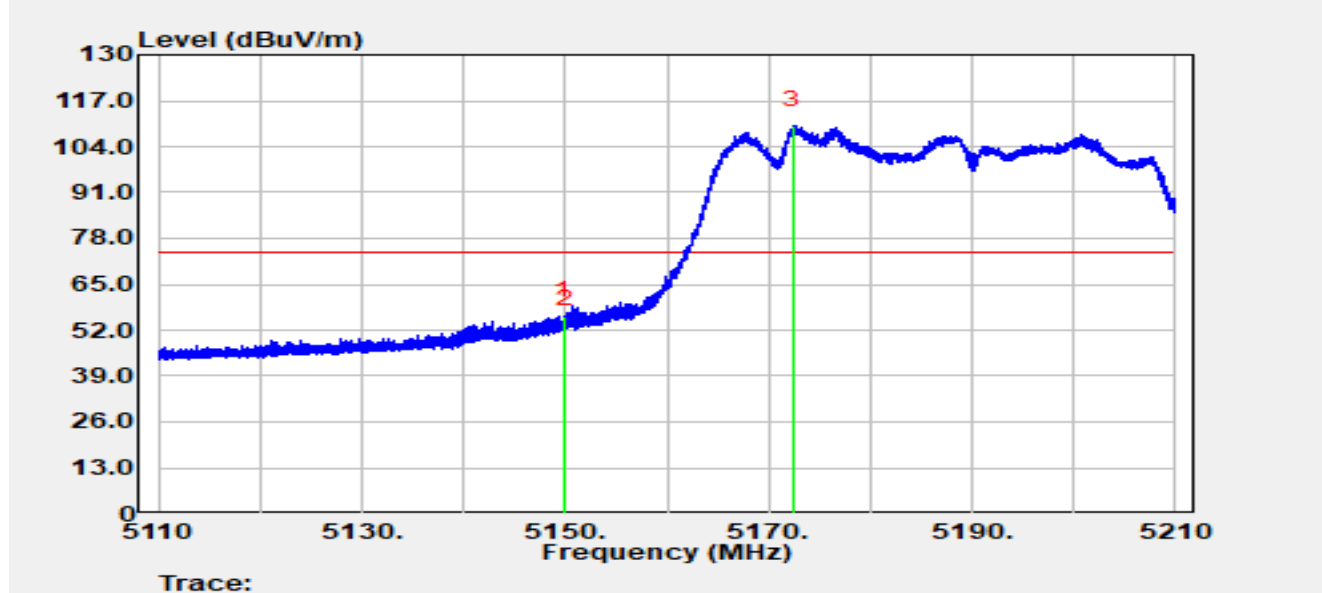


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.850	57.04	-1.03	56.01	-17.99	74.00	Peak
2		5150.000	54.62	-0.99	53.63	-20.37	74.00	Peak
3		5172.400	56.81	53.14	109.95	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

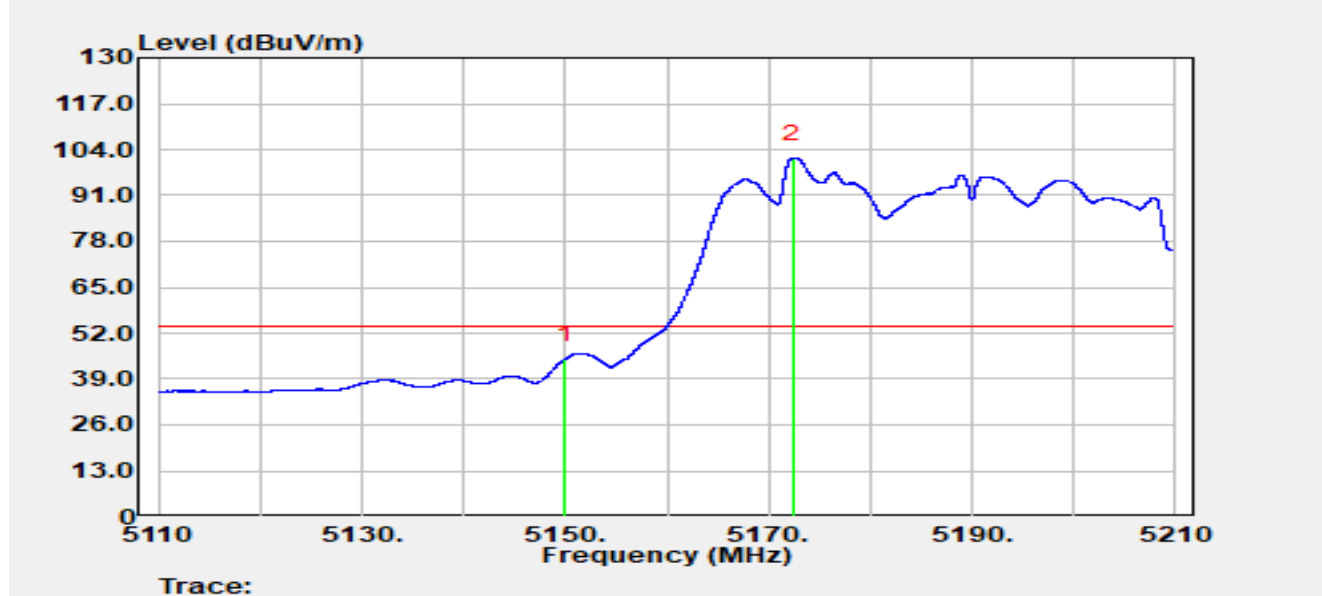


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	45.61	-0.99	44.62	-9.38	54.00	Average
2		5172.400	48.39	53.14	101.53	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

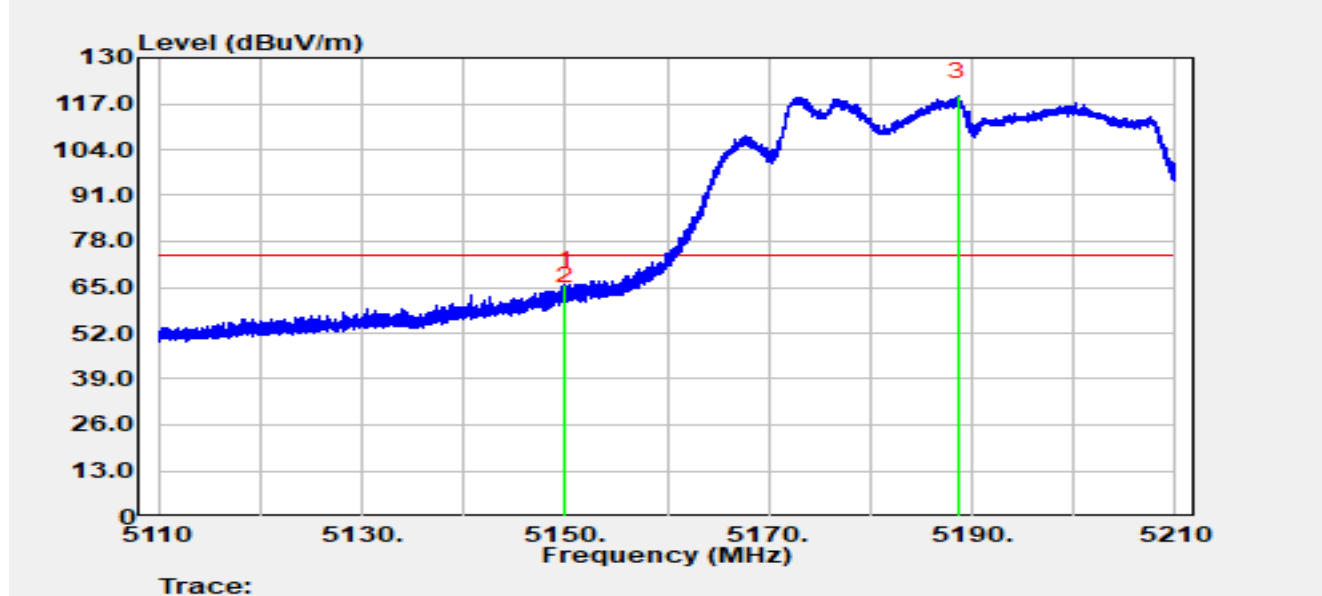


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.920	66.65	-1.01	65.64	-8.36	74.00	Peak
2		5150.000	62.23	-0.99	61.24	-12.76	74.00	Peak
3		5188.590	76.26	42.80	119.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

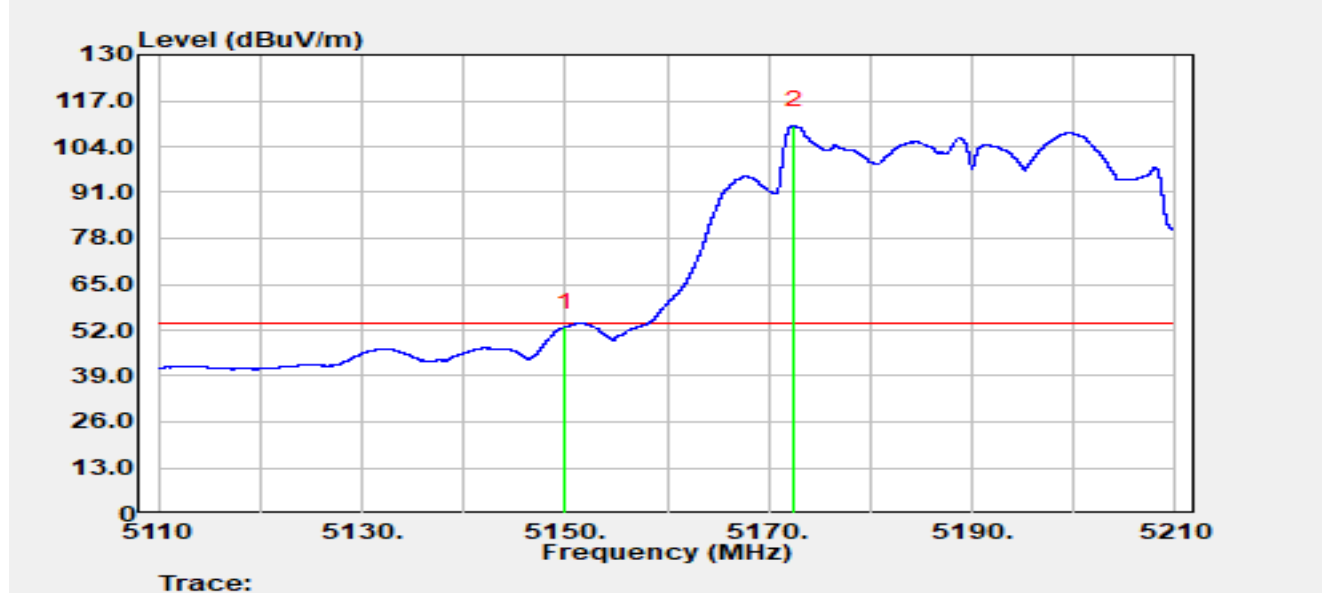


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.92	-0.99	52.93	-1.07	54.00	Average
2		5172.470	56.74	53.19	109.93	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

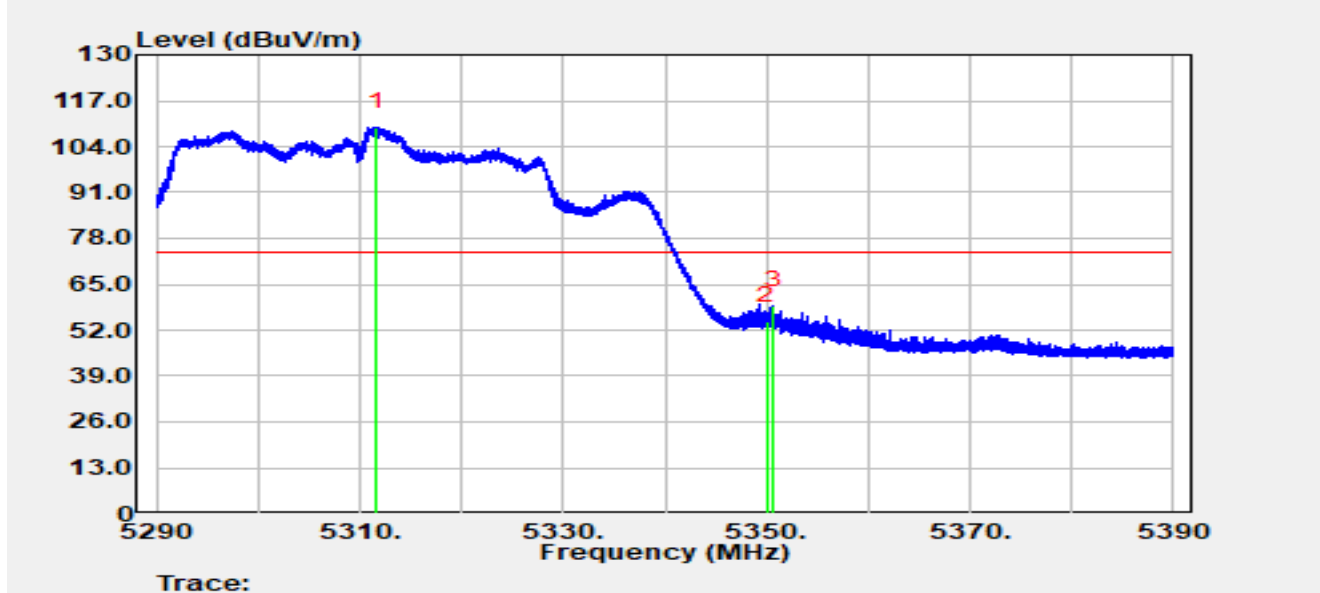


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.700	63.66	45.83	109.49	N/A	N/A	Peak
2		5350.000	54.45	0.19	54.63	-19.37	74.00	Peak
3	*	5350.740	59.34	-0.26	59.08	-14.92	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

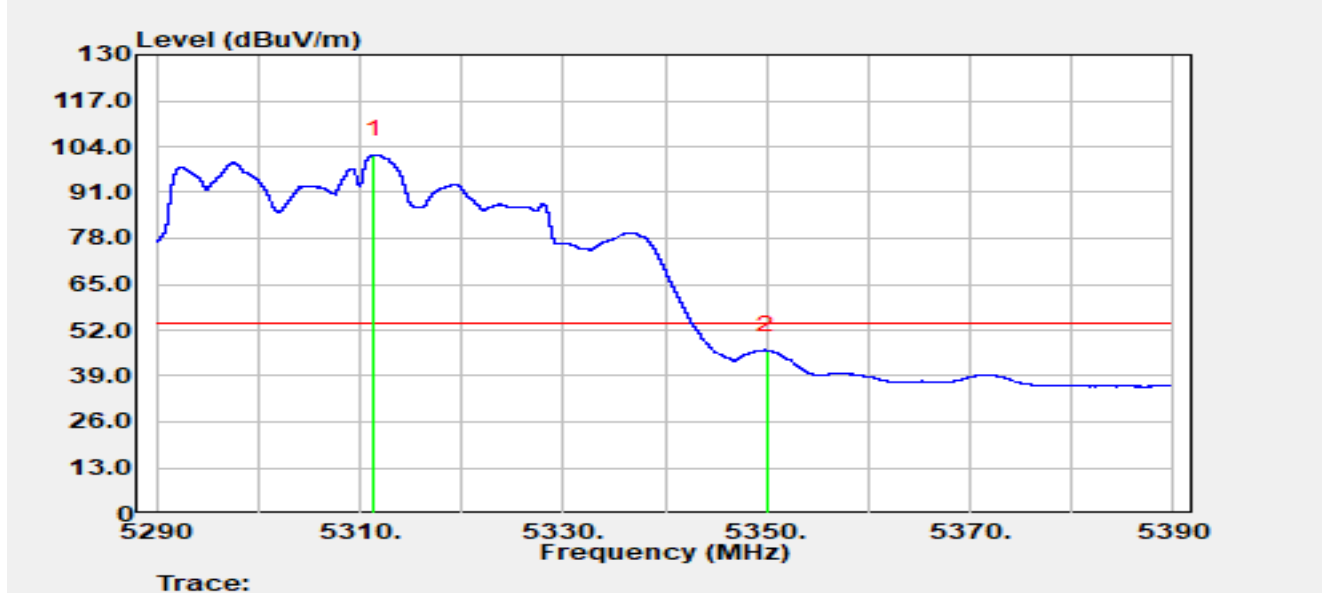


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.440	56.15	45.50	101.66	N/A	N/A	Average
2	*	5350.000	46.09	0.19	46.27	-7.73	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

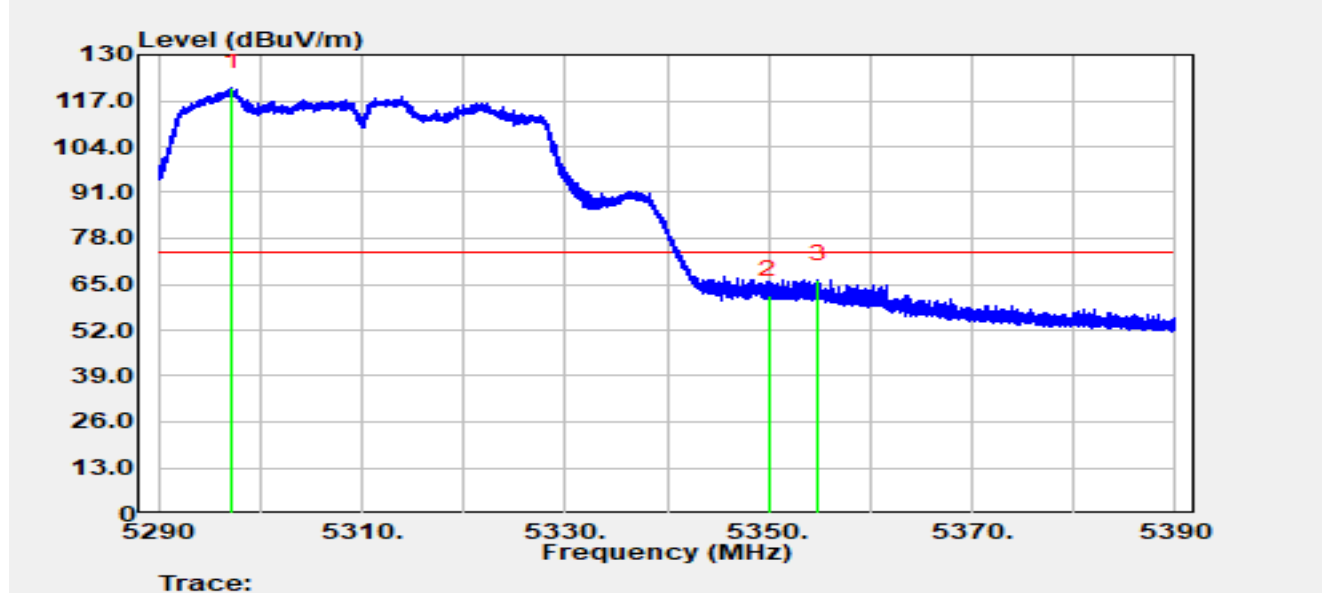


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.260	74.15	46.63	120.78	N/A	N/A	Peak
2		5350.000	61.83	0.19	62.02	-11.98	74.00	Peak
3	*	5354.880	67.95	-1.63	66.32	-7.68	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

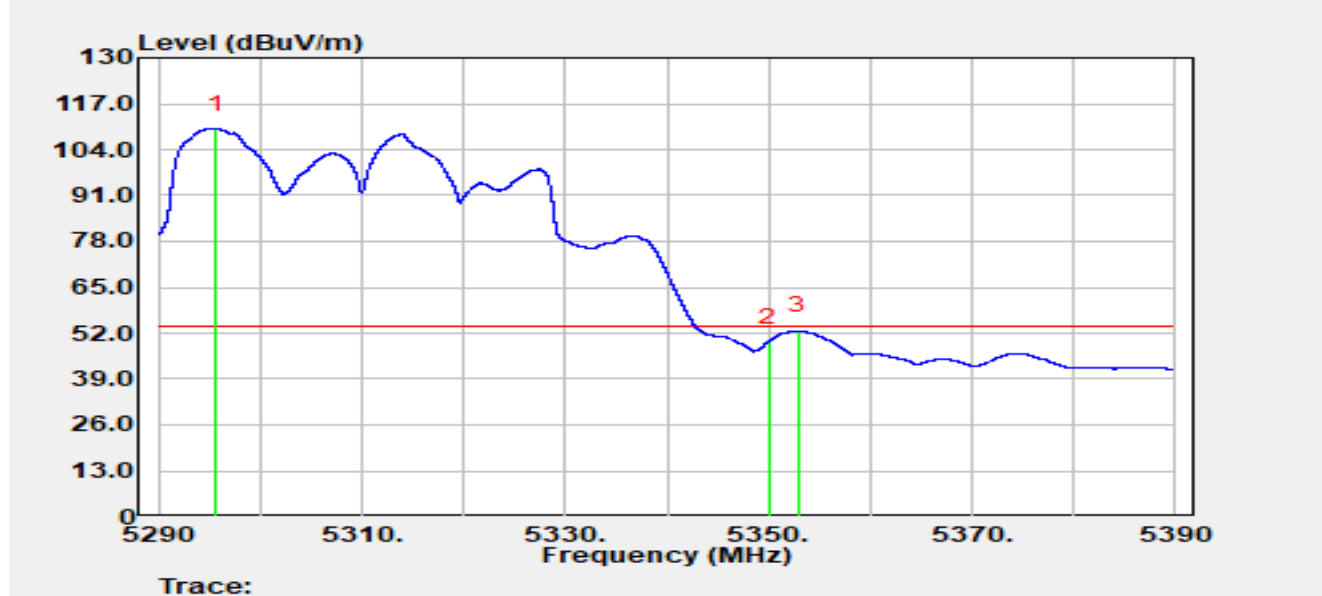


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5295.620	66.39	43.47	109.87	N/A	N/A	Average
2		5350.000	49.24	0.19	49.43	-4.57	54.00	Average
3	*	5352.850	53.93	-1.19	52.74	-1.26	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

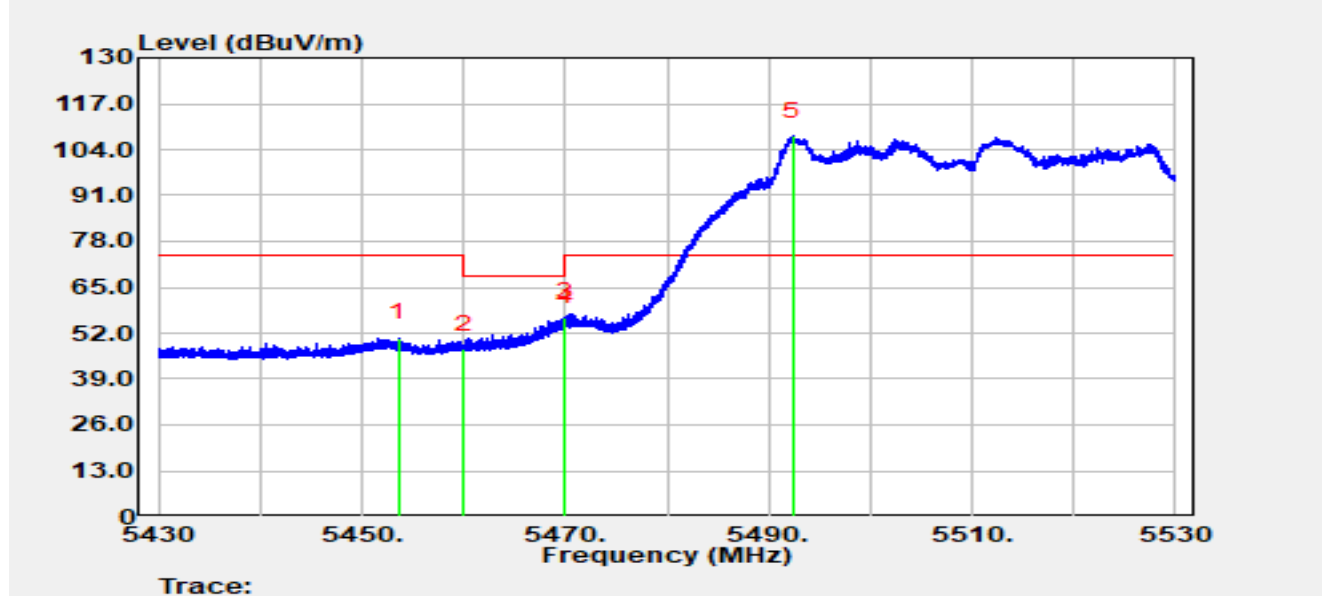


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5453.640	54.16	-3.54	50.63	-23.37	74.00	Peak
2		5460.000	50.63	-3.25	47.39	-20.81	68.20	Peak
3	*	5469.930	58.21	-1.75	56.46	-11.74	68.20	Peak
4		5470.000	57.14	-1.75	55.39	-12.81	68.20	Peak
5		5492.420	60.20	47.69	107.89	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

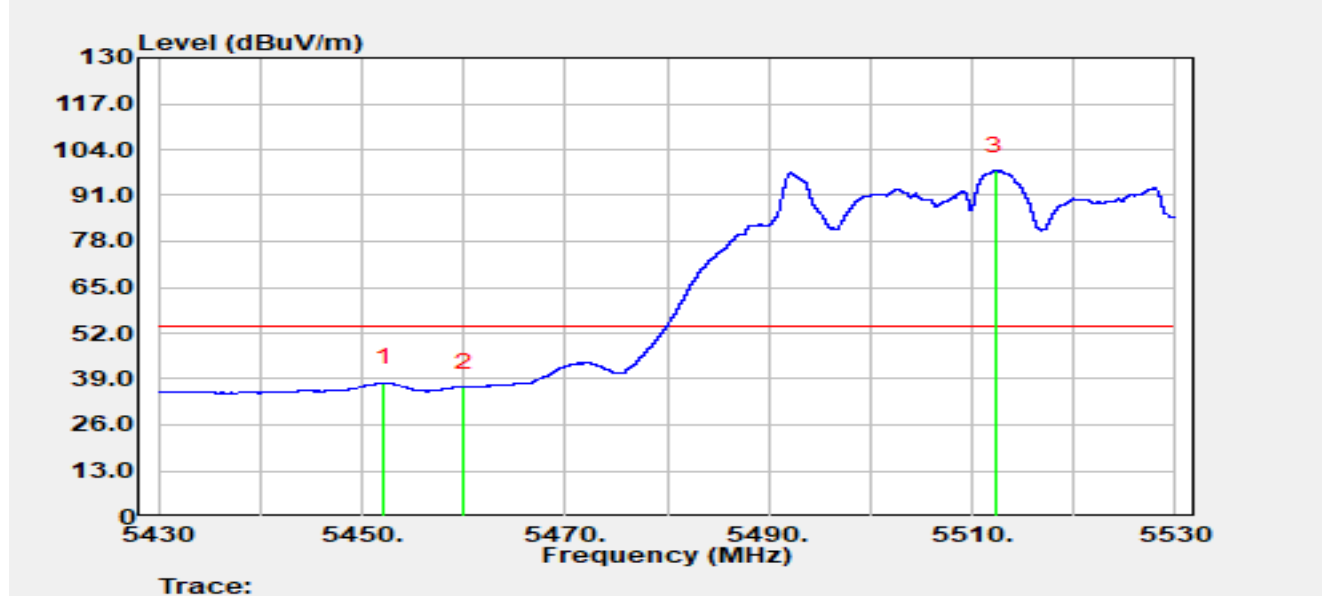


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.140	41.43	-3.59	37.84	-16.16	54.00	Average
2		5460.000	39.96	-3.25	36.71	-17.29	54.00	Average
3		5512.270	58.18	39.76	97.94	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

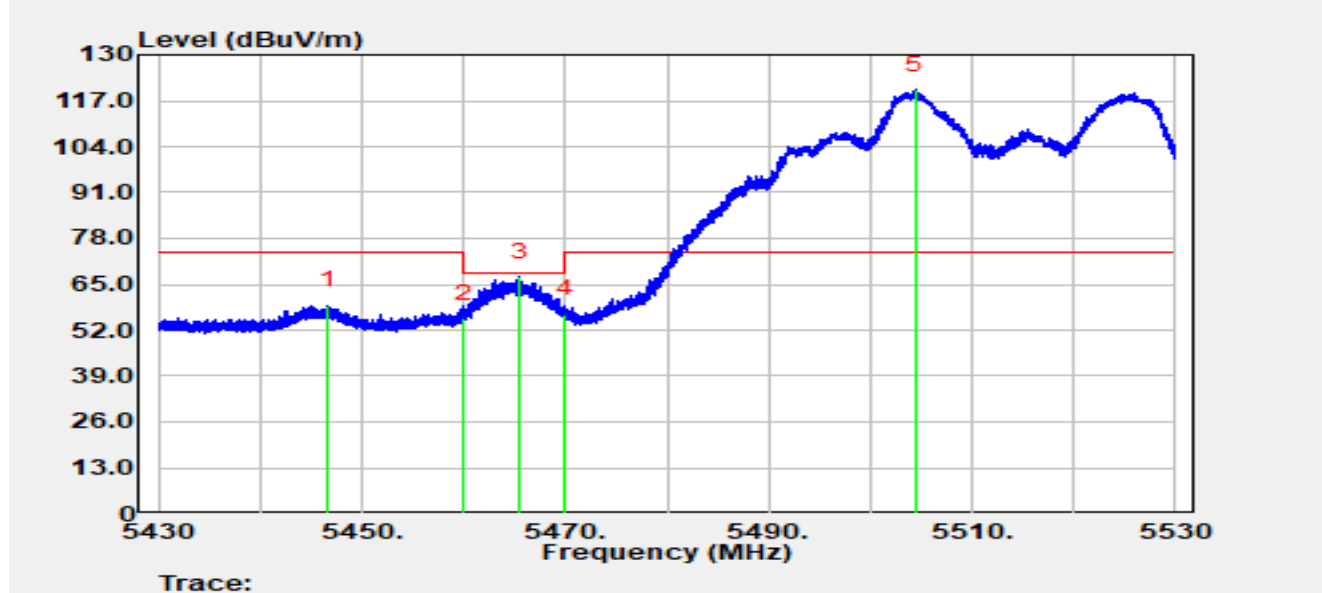


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5446.700	63.04	-3.93	59.11	-14.89	74.00	Peak
2		5460.000	58.64	-3.25	55.40	-12.80	68.20	Peak
3	*	5465.570	69.77	-2.67	67.11	-1.09	68.20	Peak
4		5470.000	58.25	-1.75	56.49	-11.71	68.20	Peak
5		5504.440	73.72	46.31	120.03	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

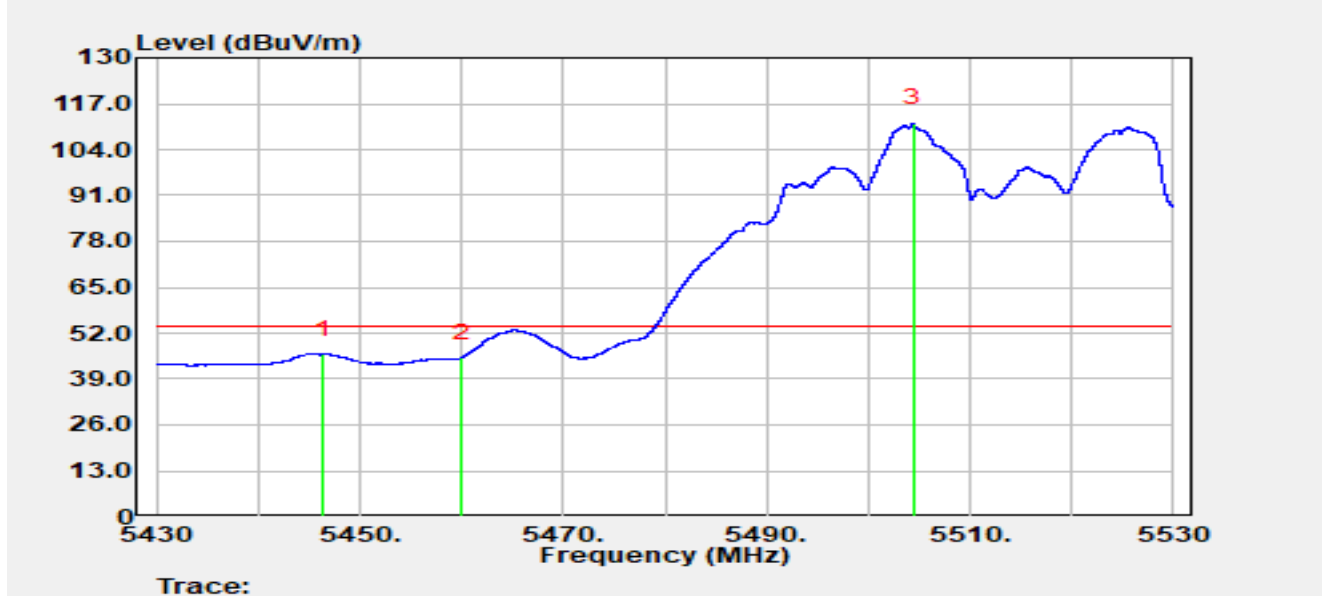


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5446.420	49.98	-3.90	46.08	-7.92	54.00	Average
2		5460.000	48.23	-3.25	44.98	-9.02	54.00	Average
3		5504.400	65.00	46.42	111.42	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

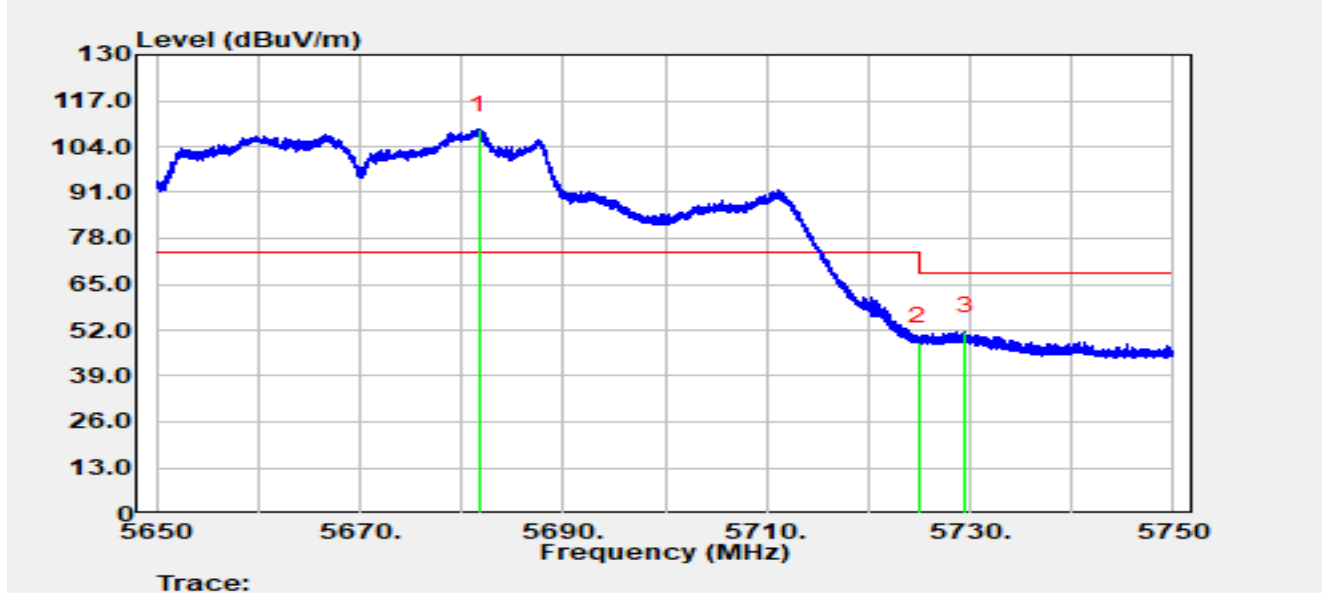


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5681.690	61.27	47.56	108.83	N/A	N/A	Peak
2		5725.000	48.34	0.39	48.73	-19.47	68.20	Peak
3	*	5729.490	52.98	-1.42	51.56	-16.64	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

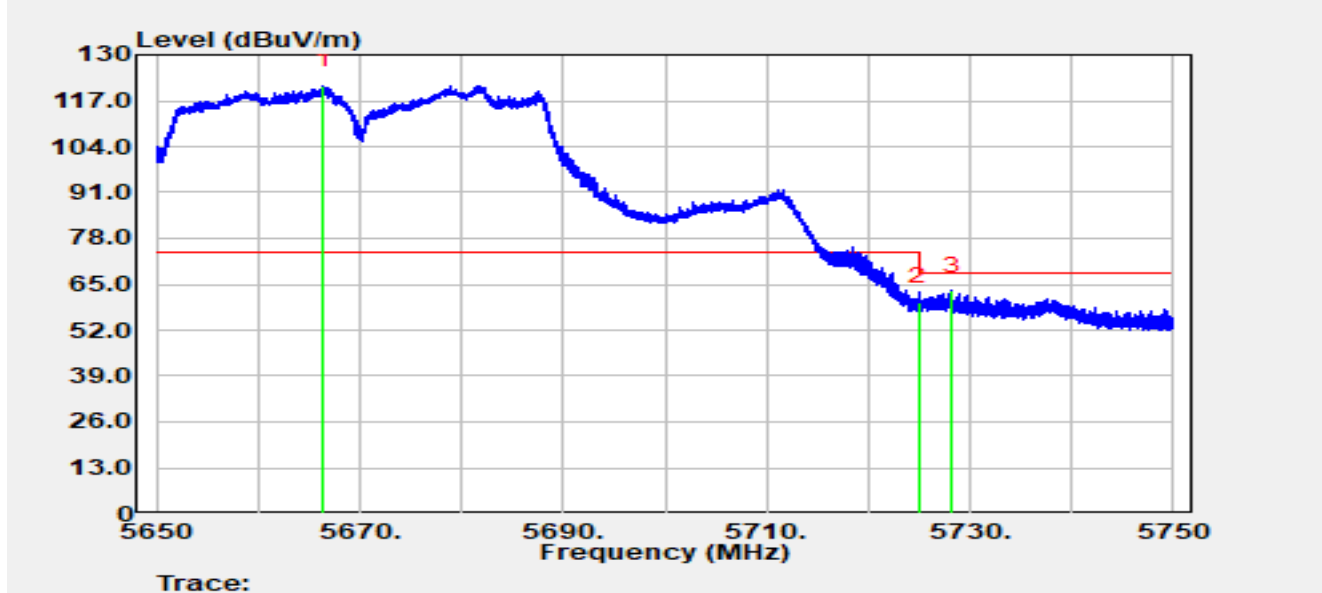


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.350	75.26	46.06	121.31	N/A	N/A	Peak
2		5725.000	59.46	0.39	59.85	-8.35	68.20	Peak
3	*	5728.200	64.18	-1.02	63.16	-5.04	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

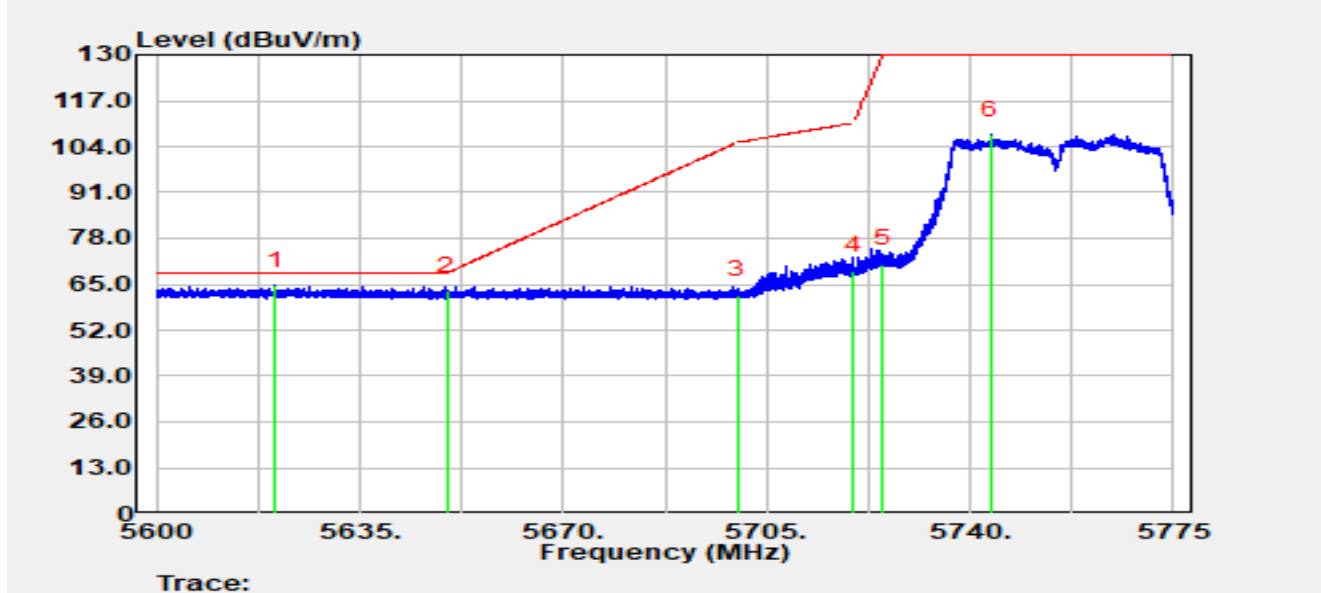


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.370	70.79	-6.18	64.62	-3.58	68.20	Peak
2		5650.000	69.43	-6.34	63.09	-5.11	68.20	Peak
3		5700.000	68.37	-6.38	61.99	-43.21	105.20	Peak
4		5720.000	75.24	-6.33	68.90	-41.90	110.80	Peak
5		5725.000	77.21	-6.33	70.88	-59.12	130.00	Peak
6		5743.658	113.55	-6.33	107.22	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

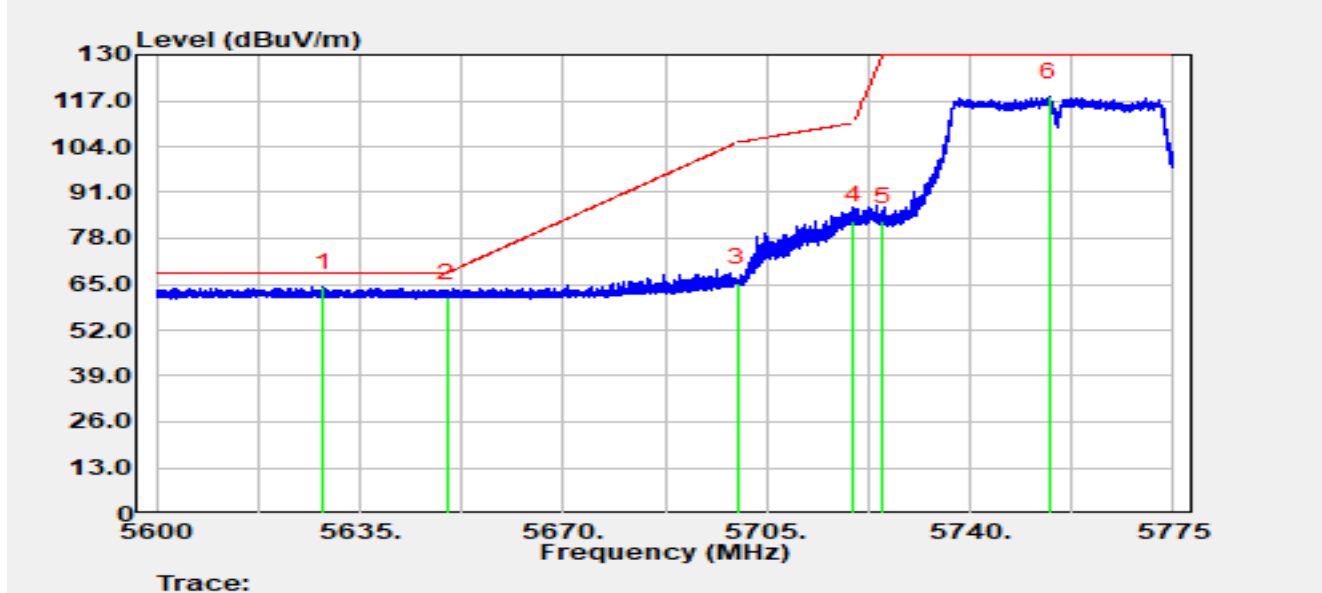


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5628.717	70.42	-6.22	64.20	-4.00	68.20	Peak
2		5650.000	67.54	-6.34	61.21	-6.99	68.20	Peak
3		5700.000	71.74	-6.38	65.35	-39.85	105.20	Peak
4		5720.000	89.35	-6.33	83.01	-27.79	110.80	Peak
5		5725.000	89.10	-6.33	82.77	-47.23	130.00	Peak
6		5753.685	124.26	-6.25	118.00	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

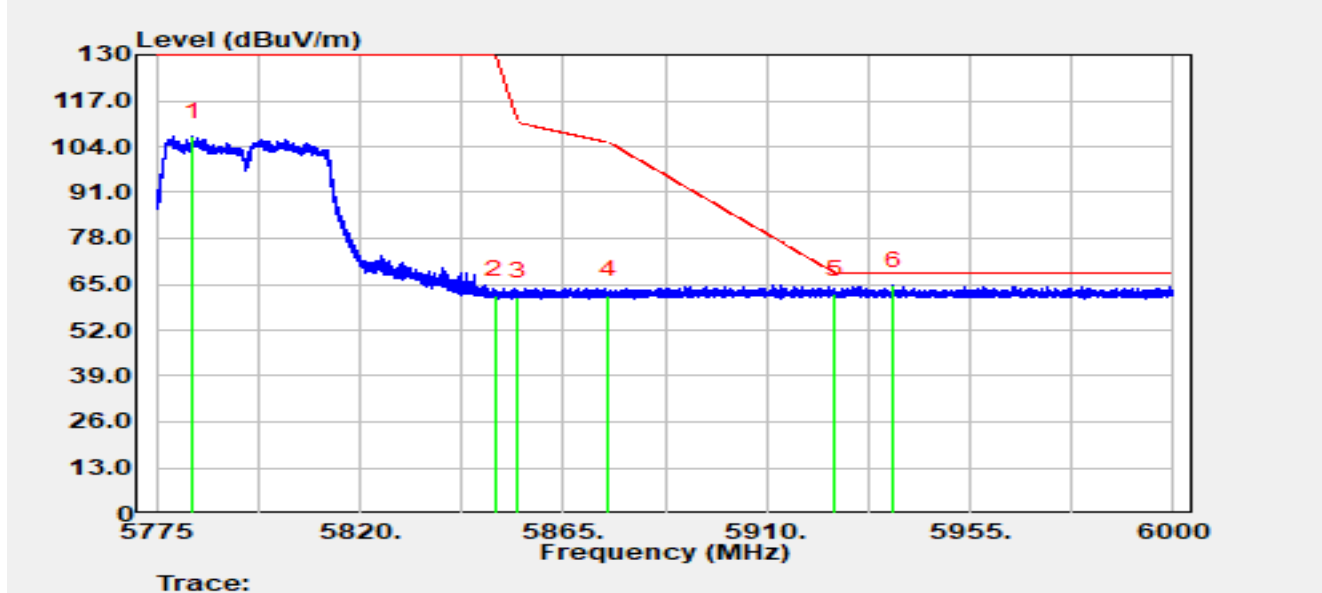


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5782.942	113.16	-6.38	106.78	N/A	N/A	Peak
2		5850.000	68.14	-6.31	61.83	-68.17	130.00	Peak
3		5855.000	67.82	-6.27	61.55	-49.25	110.80	Peak
4		5875.000	68.05	-6.24	61.81	-43.39	105.20	Peak
5		5925.000	68.14	-6.05	62.09	-6.11	68.20	Peak
6	*	5938.058	70.76	-6.12	64.63	-3.57	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

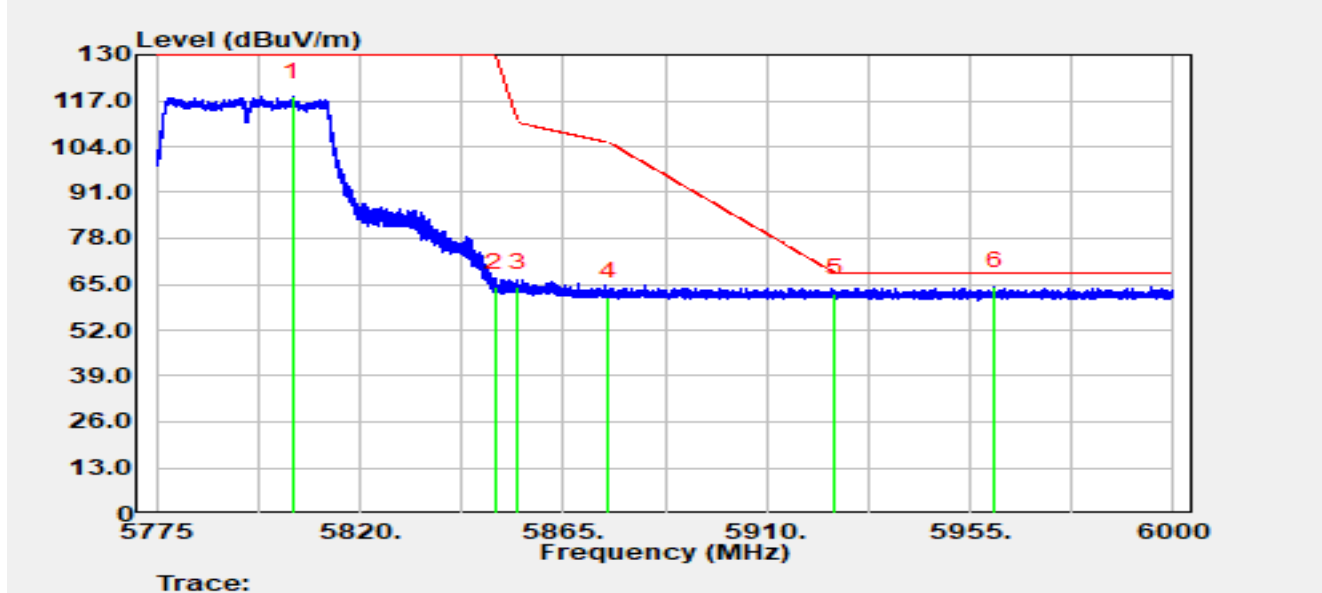


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5805.263	124.46	-6.34	118.12	N/A	N/A	Peak
2		5850.000	70.52	-6.31	64.21	-65.79	130.00	Peak
3		5855.000	70.32	-6.27	64.06	-46.74	110.80	Peak
4		5875.000	67.80	-6.24	61.56	-43.64	105.20	Peak
5		5925.000	68.55	-6.05	62.50	-5.70	68.20	Peak
6	*	5960.535	70.56	-6.10	64.46	-3.74	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

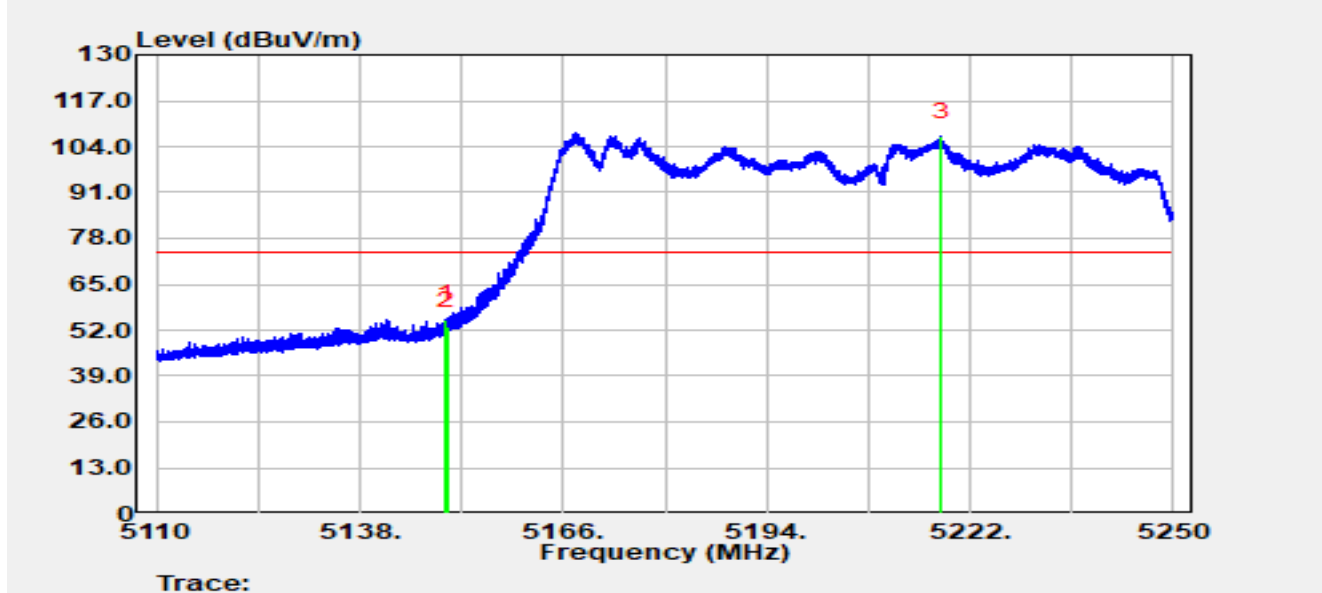


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.746	56.24	-1.06	55.18	-18.82	74.00	Peak
2		5150.000	53.99	-0.99	53.00	-21.00	74.00	Peak
3		5217.968	58.42	48.37	106.79	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

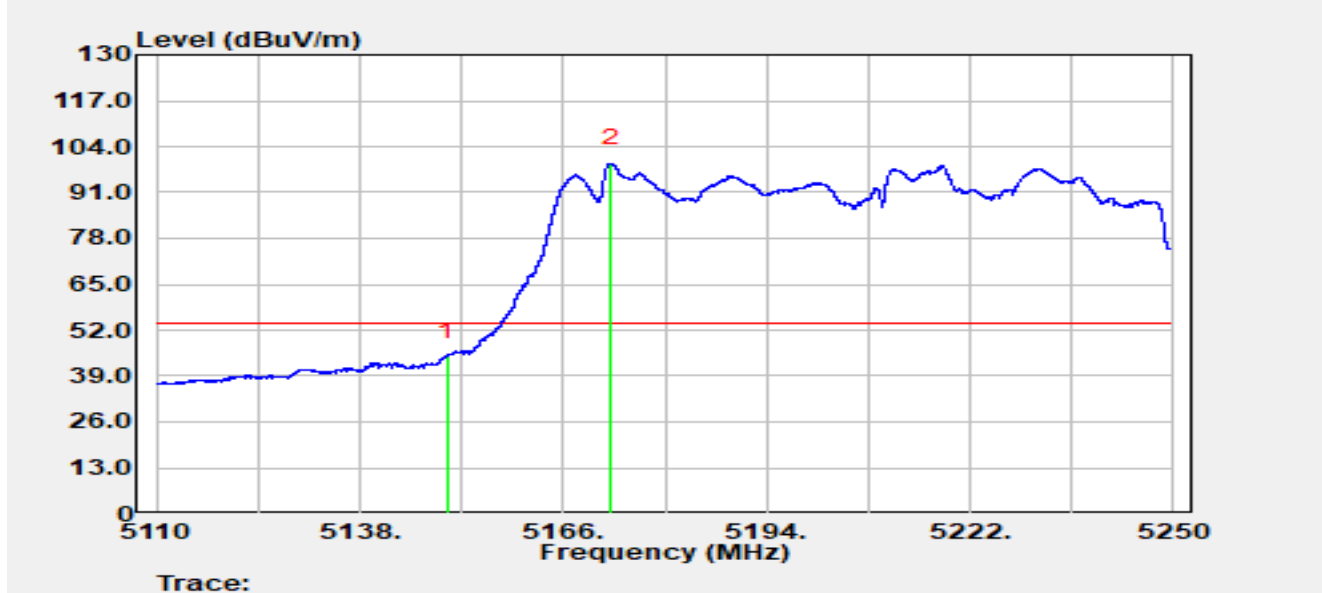


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	45.59	-0.99	44.60	-9.40	54.00	Average
2		5172.566	46.01	53.27	99.28	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

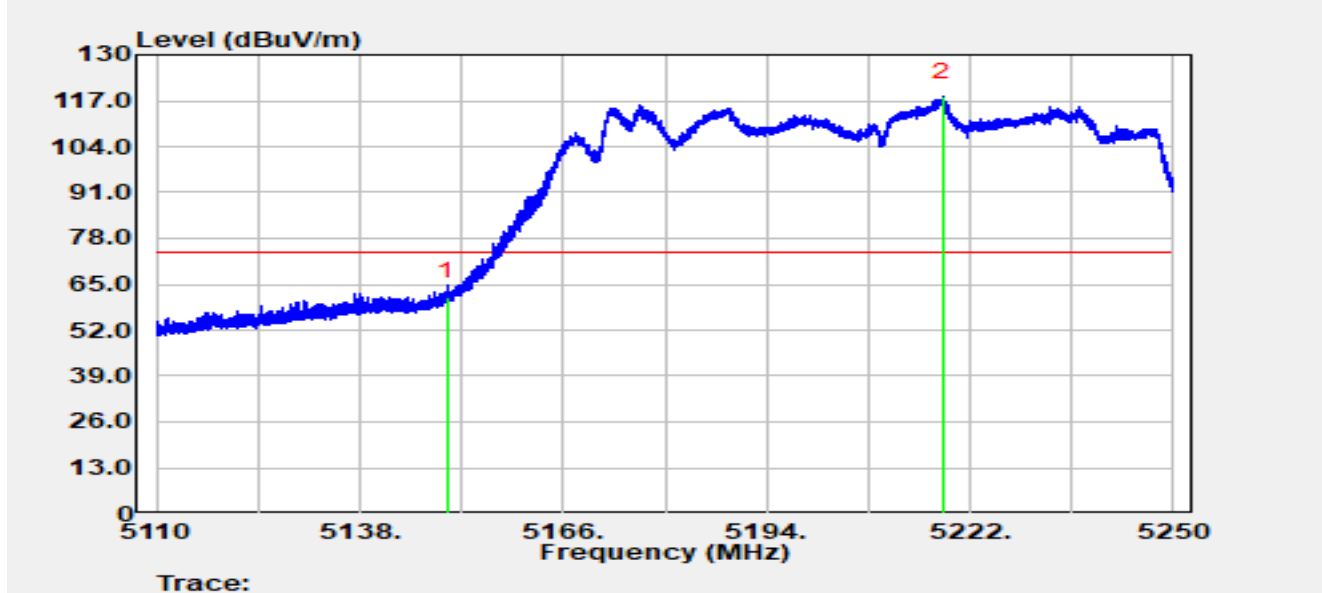


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	62.52	-0.99	61.53	-12.47	74.00	Peak
2		5218.290	68.86	49.25	118.11	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

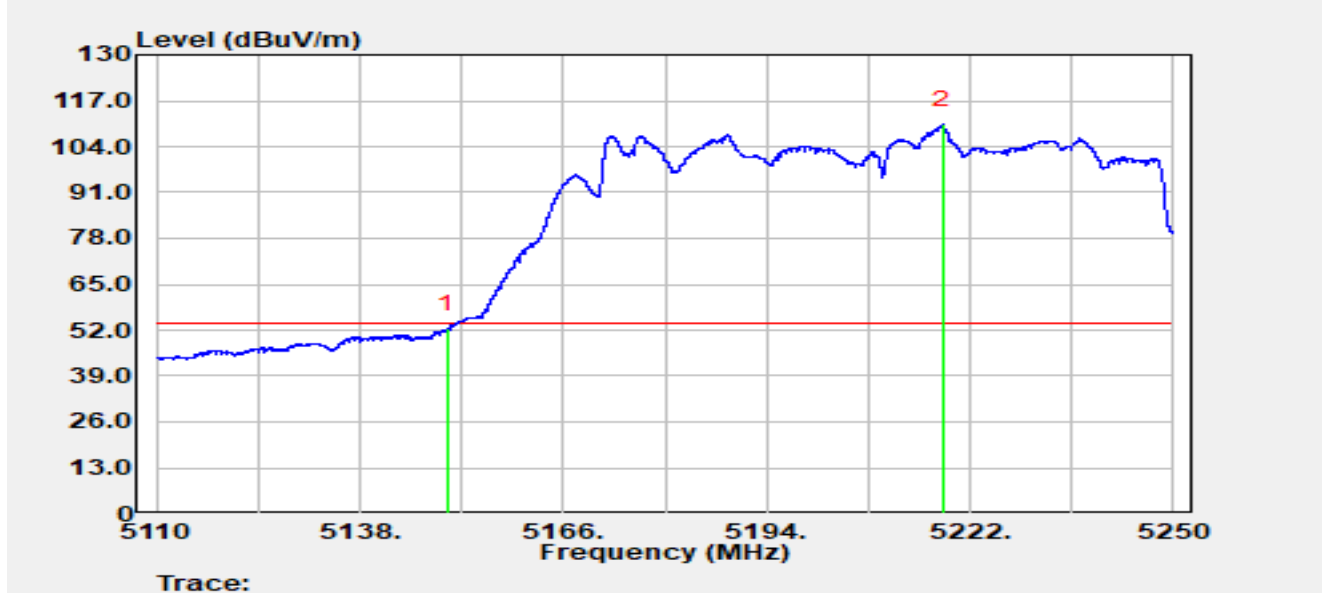


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.38	-0.99	52.39	-1.61	54.00	Average
2		5218.276	60.93	49.22	110.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

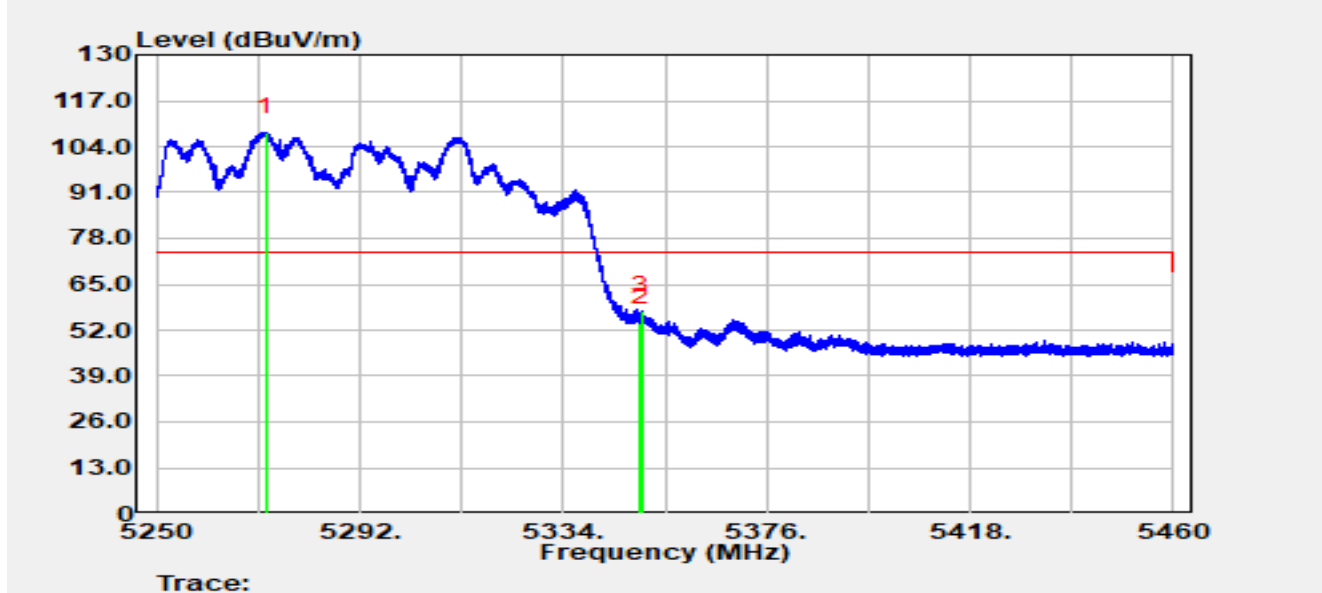


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5272.533	67.45	40.62	108.07	N/A	N/A	Peak
2		5350.000	54.01	0.19	54.19	-19.81	74.00	Peak
3	*	5350.128	57.36	0.09	57.45	-16.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

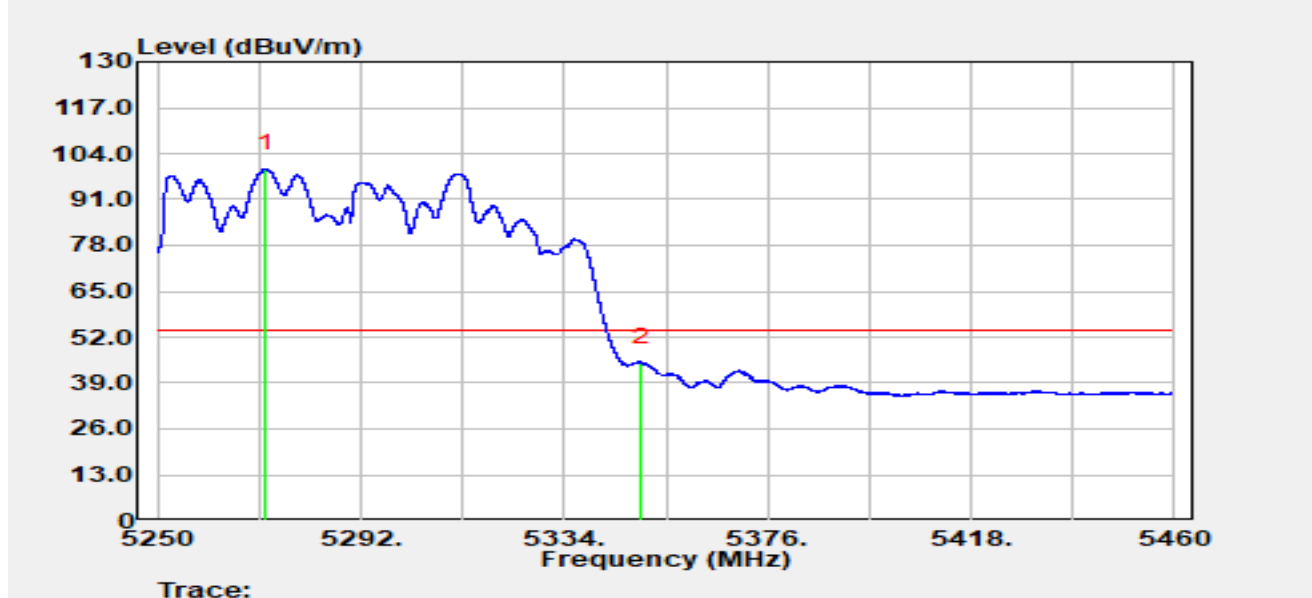


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5272.407	59.02	40.61	99.64	N/A	N/A	Average
2	*	5350.000	44.69	0.19	44.88	-9.12	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

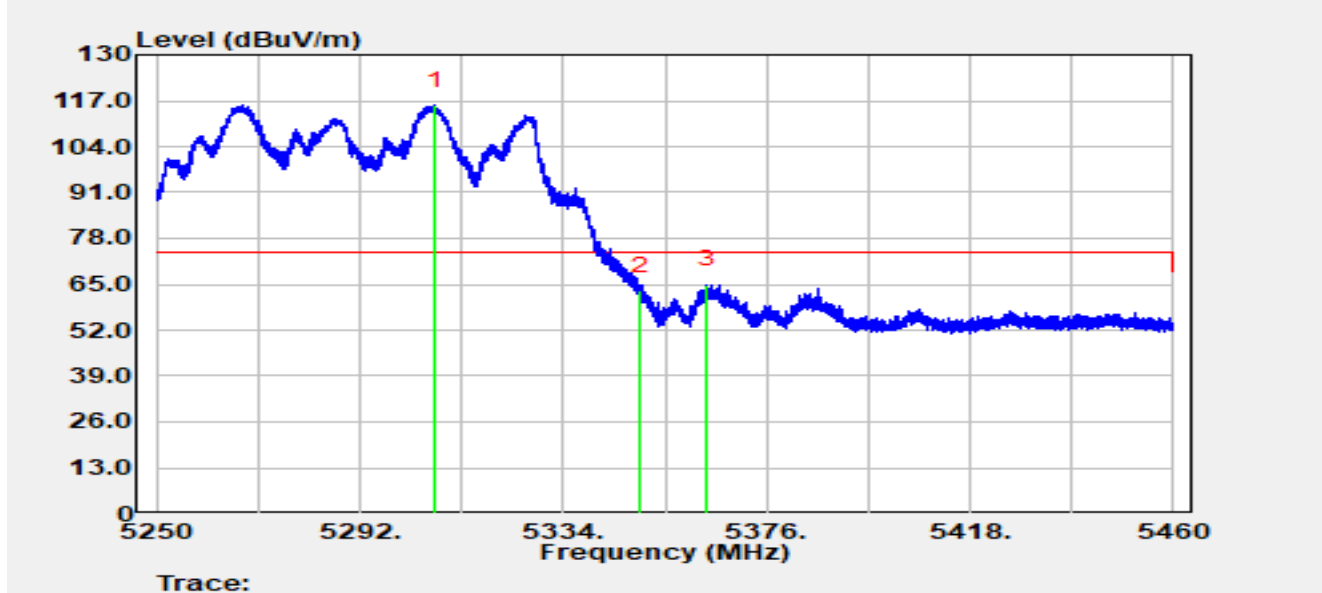


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.540	74.00	41.66	115.66	N/A	N/A	Peak
2		5350.000	63.04	0.19	63.22	-10.78	74.00	Peak
3	*	5363.673	67.70	-2.71	64.99	-9.01	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

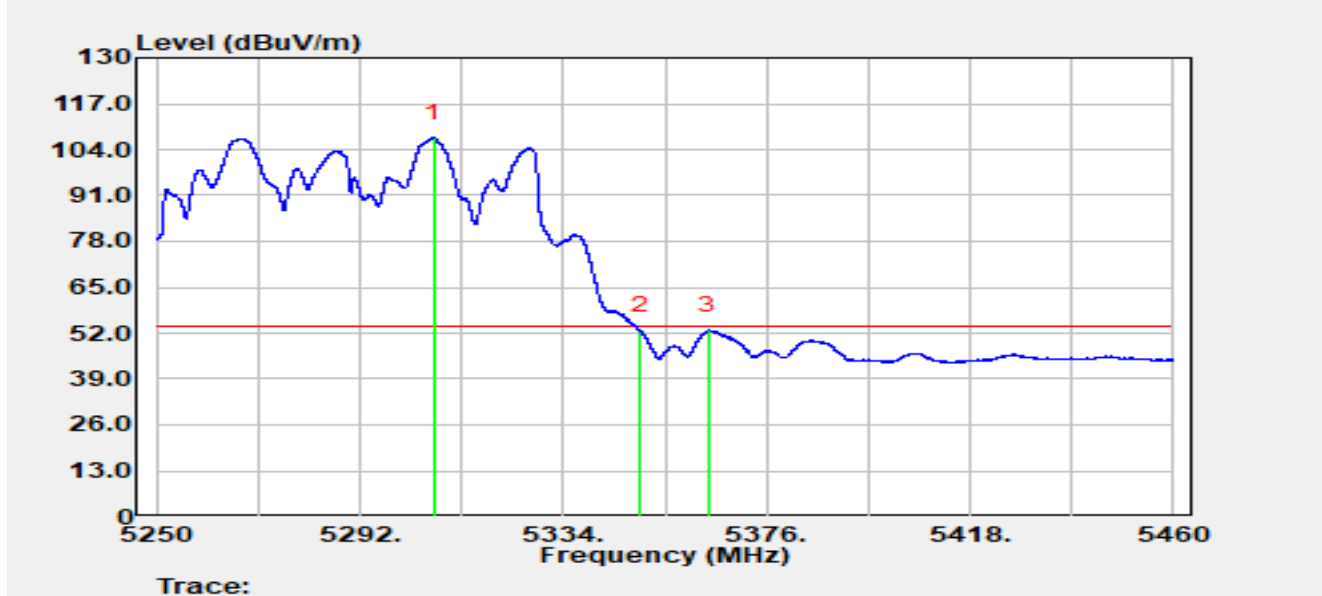


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5307.288	65.72	41.52	107.24	N/A	N/A	Average
2		5350.000	52.31	0.19	52.49	-1.51	54.00	Average
3	*	5363.841	55.49	-2.74	52.74	-1.26	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

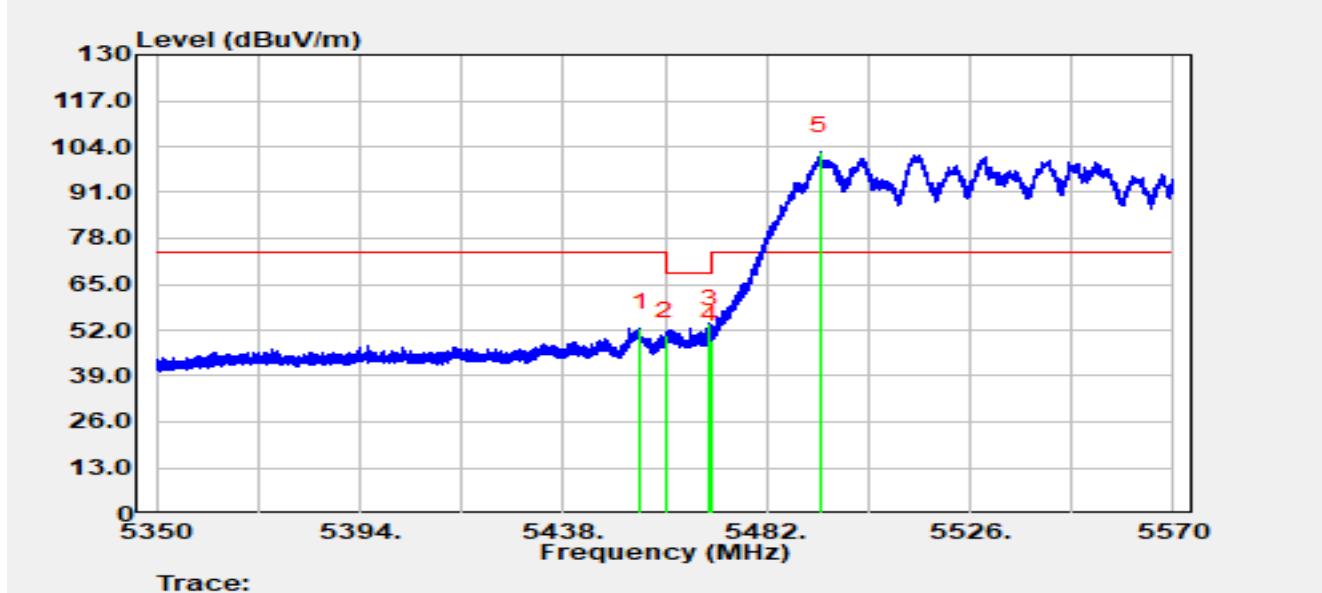


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5454.698	56.18	-3.57	52.61	-21.39	74.00	Peak
2		5460.000	53.62	-3.25	50.38	-17.82	68.20	Peak
3	*	5469.548	55.63	-1.73	53.90	-14.30	68.20	Peak
4		5470.000	50.97	-1.75	49.22	-18.98	68.20	Peak
5		5493.594	53.88	48.66	102.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

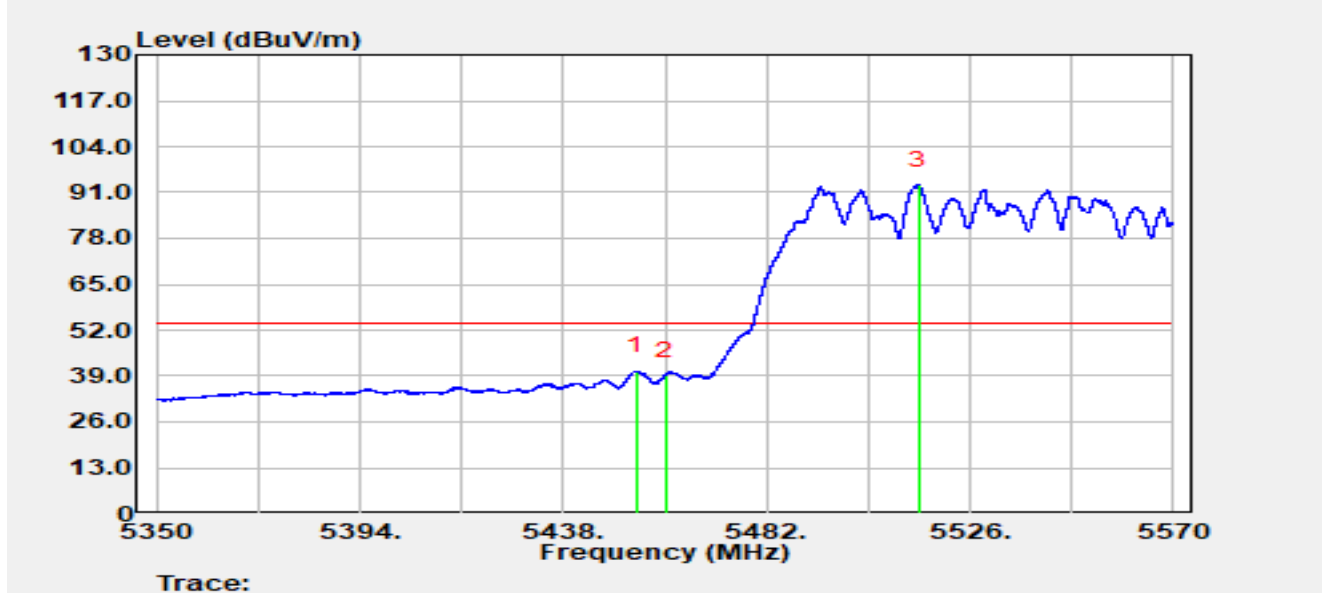


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5453.884	43.96	-3.57	40.39	-13.61	54.00	Average
2		5460.000	42.35	-3.25	39.10	-14.90	54.00	Average
3		5514.780	50.01	43.04	93.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

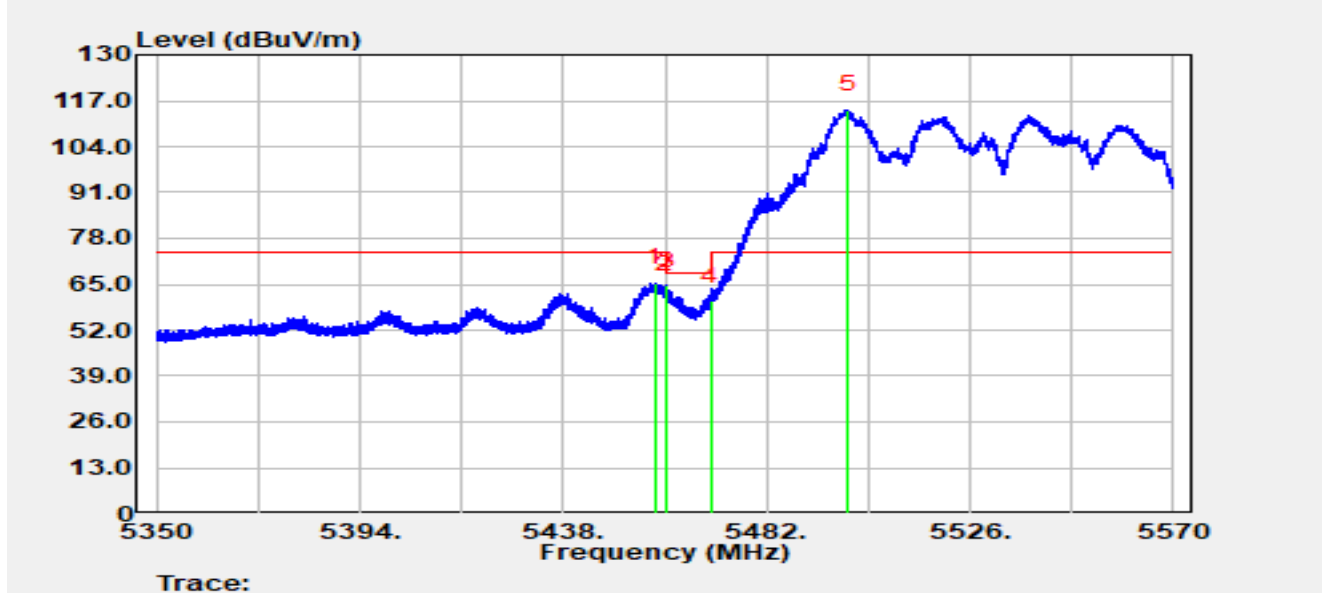


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.866	68.79	-3.35	65.44	-8.56	74.00	Peak
2		5460.000	66.91	-3.25	63.66	-4.54	68.20	Peak
3	*	5460.418	67.70	-3.12	64.58	-3.62	68.20	Peak
4		5470.000	62.03	-1.75	60.27	-7.93	68.20	Peak
5		5499.490	73.37	41.16	114.53	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

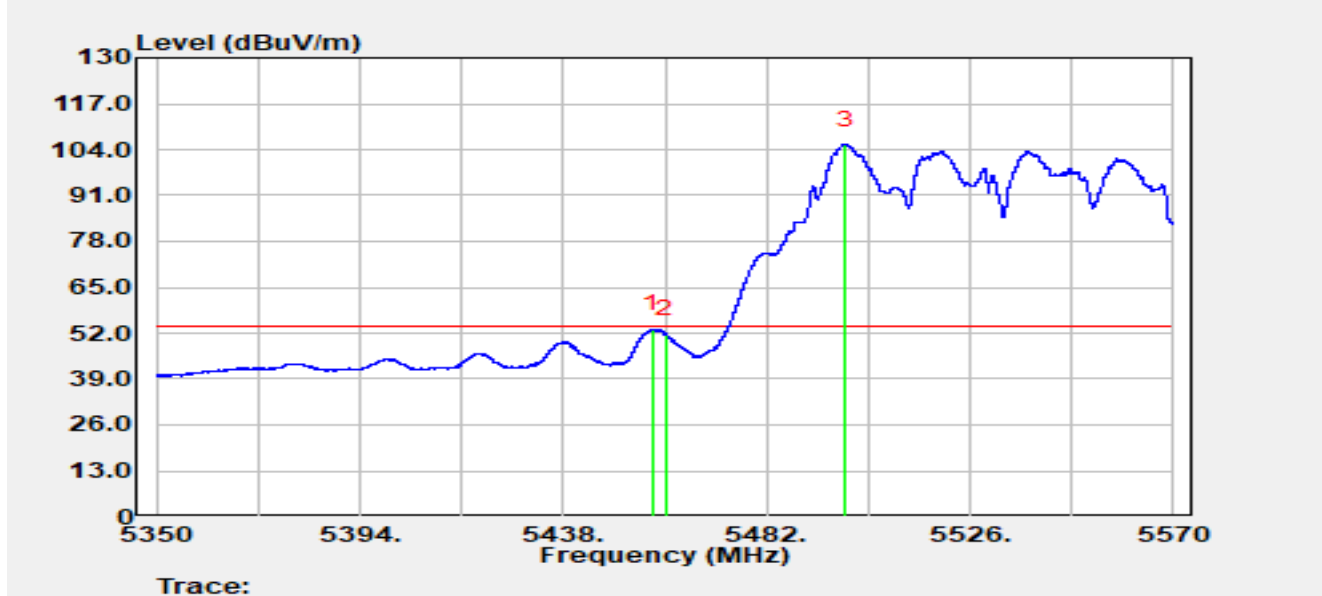


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5457.316	56.53	-3.37	53.16	-0.84	54.00	Average
2		5460.000	54.89	-3.25	51.65	-2.35	54.00	Average
3		5499.116	64.08	41.36	105.44	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

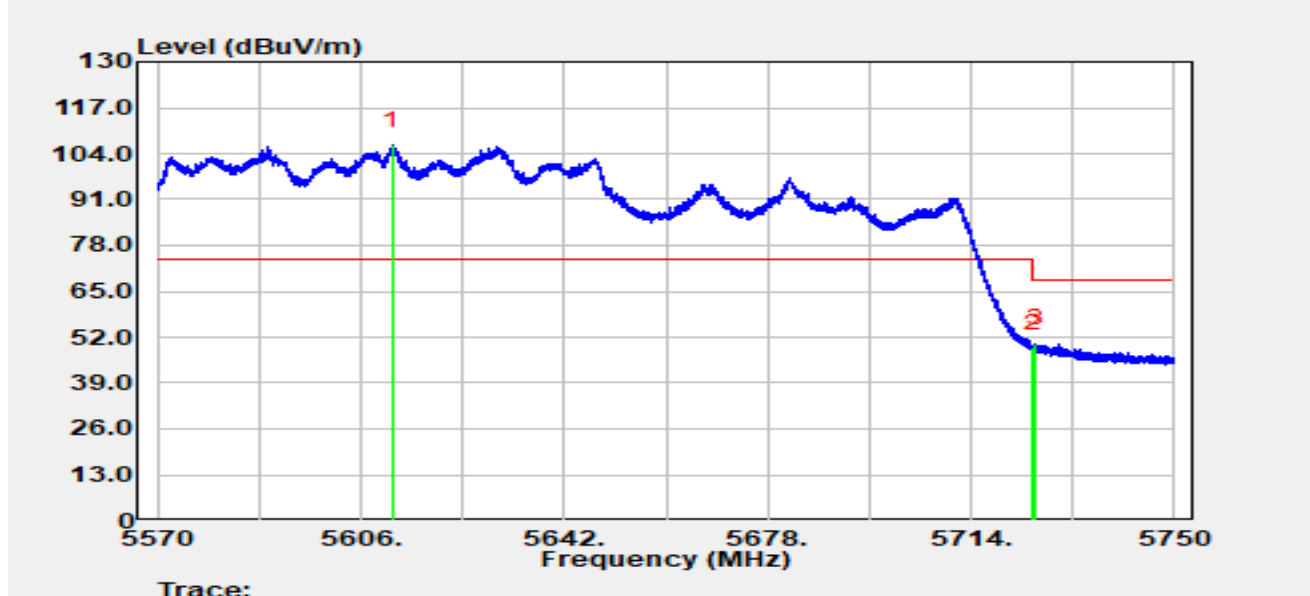


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5611.526	56.77	49.63	106.40	N/A	N/A	Peak
2		5725.000	48.47	0.39	48.86	-19.34	68.20	Peak
3	*	5725.412	49.98	0.14	50.12	-18.08	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

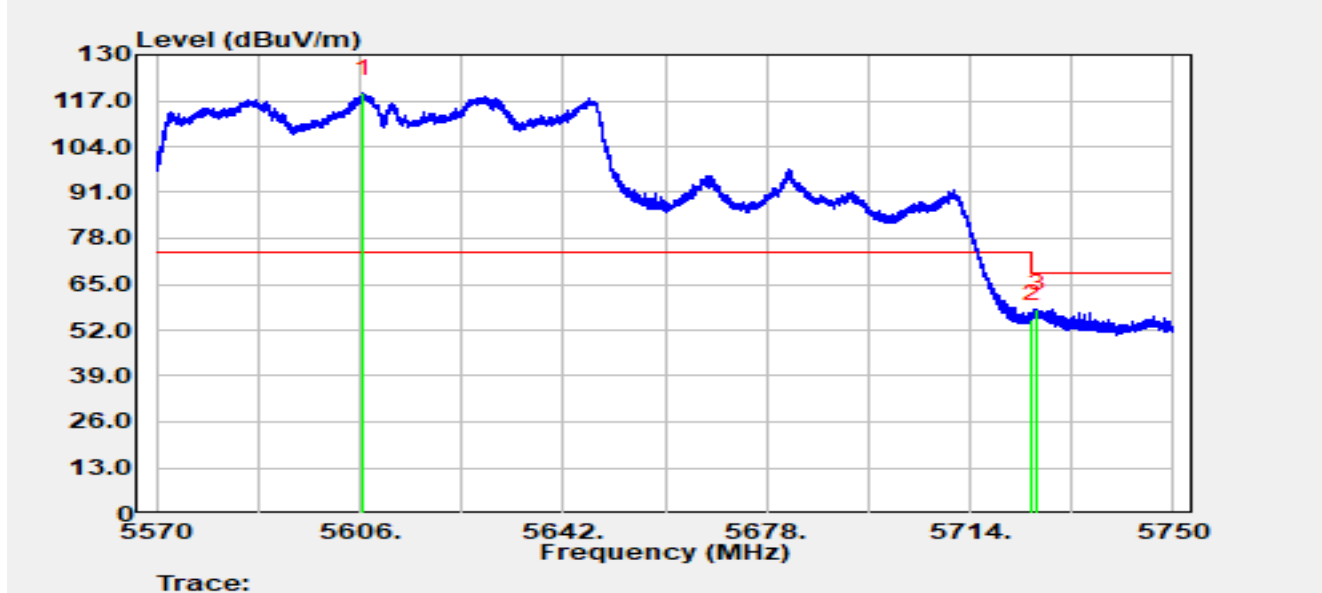


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5606.540	76.83	42.33	119.15	N/A	N/A	Peak
2		5725.000	54.56	0.39	54.95	-13.25	68.20	Peak
3	*	5725.826	58.17	-0.05	58.11	-10.09	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

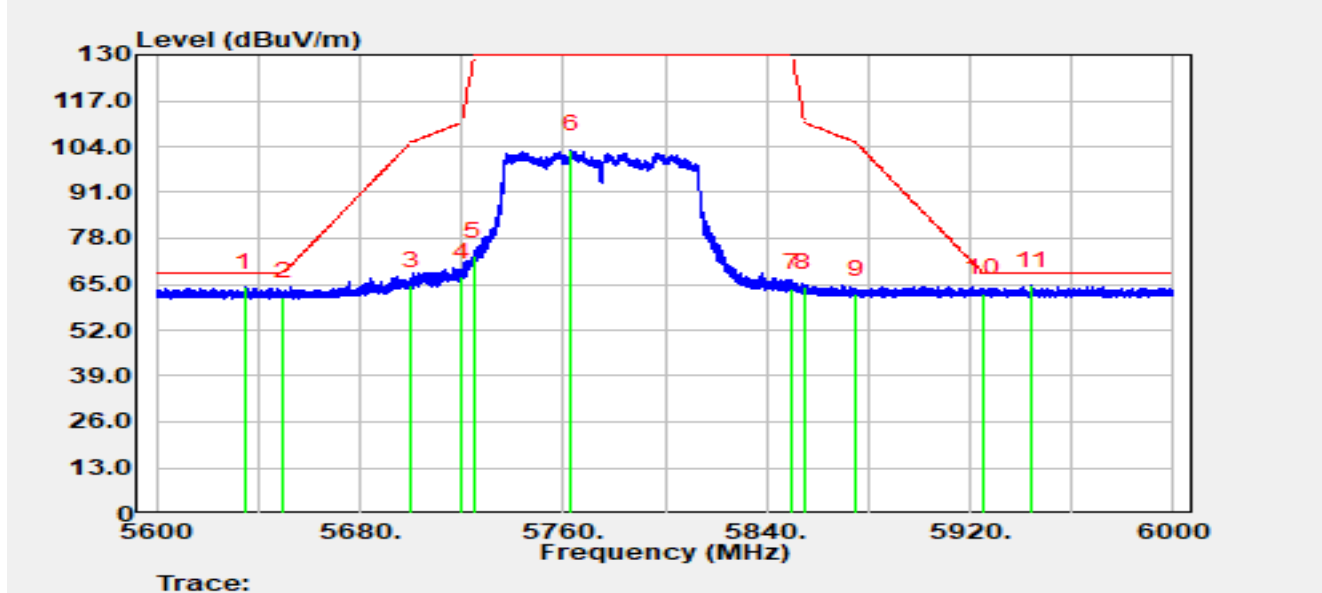


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5634.600	70.29	-6.27	64.03	-4.17	68.20	Peak
2		5650.000	67.75	-6.34	61.41	-6.79	68.20	Peak
3		5700.000	71.12	-6.38	64.74	-40.46	105.20	Peak
4		5720.000	73.38	-6.33	67.05	-43.75	110.80	Peak
5		5725.000	79.24	-6.33	72.91	-57.09	130.00	Peak
6		5763.080	109.43	-6.24	103.19	N/A	N/A	Peak
7		5850.000	70.28	-6.31	63.97	-66.03	130.00	Peak
8		5855.000	70.41	-6.27	64.14	-46.66	110.80	Peak
9		5875.000	68.44	-6.24	62.21	-42.99	105.20	Peak
10		5925.000	68.47	-6.05	62.42	-5.78	68.20	Peak
11	*	5944.280	70.81	-6.20	64.60	-3.60	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

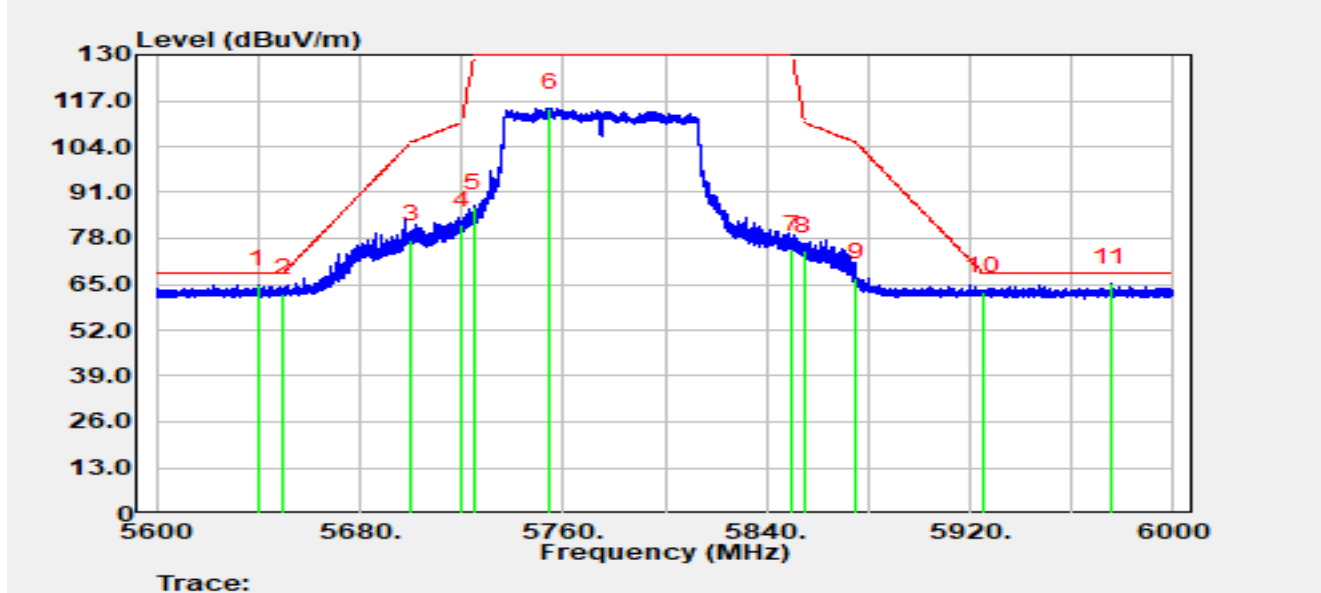


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5640.000	71.20	-6.31	64.89	-3.31	68.20	Peak
2		5650.000	68.70	-6.34	62.36	-5.84	68.20	Peak
3		5700.000	84.10	-6.38	77.72	-27.48	105.20	Peak
4		5720.000	88.04	-6.33	81.70	-29.10	110.80	Peak
5		5725.000	93.07	-6.33	86.74	-43.26	130.00	Peak
6		5754.800	121.18	-6.24	114.93	N/A	N/A	Peak
7		5850.000	81.33	-6.31	75.02	-54.98	130.00	Peak
8		5855.000	80.72	-6.27	74.45	-36.35	110.80	Peak
9		5875.000	73.03	-6.24	66.79	-38.41	105.20	Peak
10		5925.000	68.91	-6.05	62.86	-5.34	68.20	Peak
11	*	5975.120	71.37	-6.05	65.32	-2.88	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

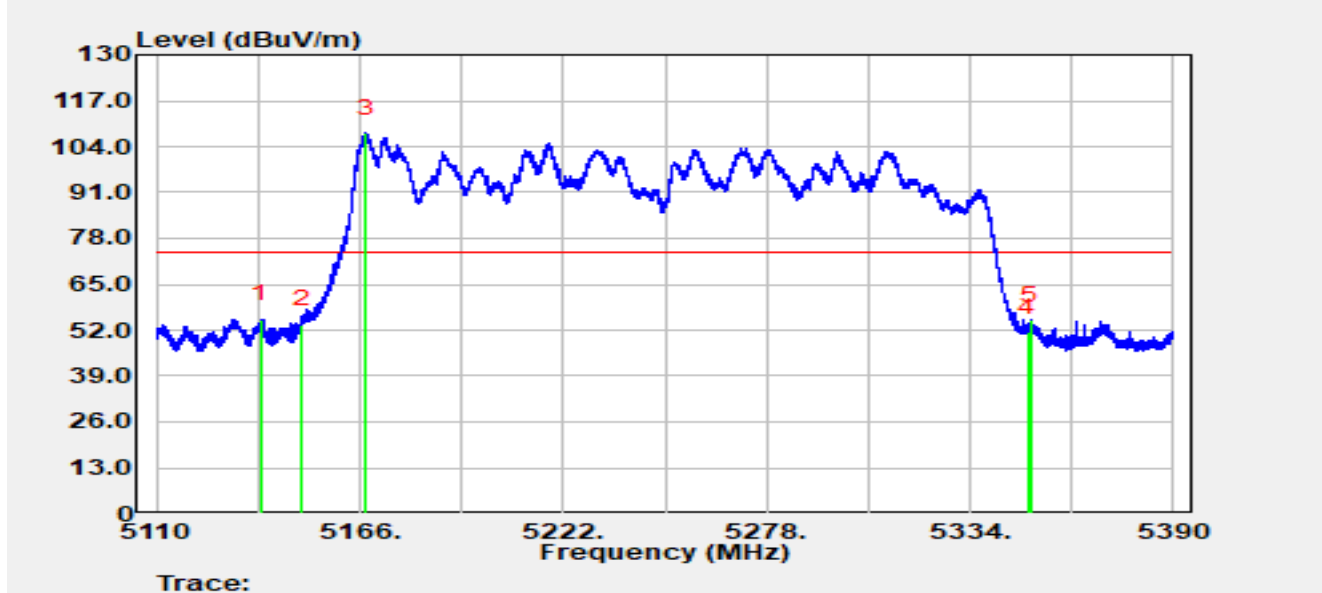


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.840	57.15	-2.02	55.14	-18.86	74.00	Peak
2		5150.000	54.63	-0.99	53.64	-20.36	74.00	Peak
3		5167.652	48.76	58.95	107.71	N/A	N/A	Peak
4		5350.000	51.27	0.19	51.45	-22.55	74.00	Peak
5		5350.828	55.15	-0.30	54.84	-19.16	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

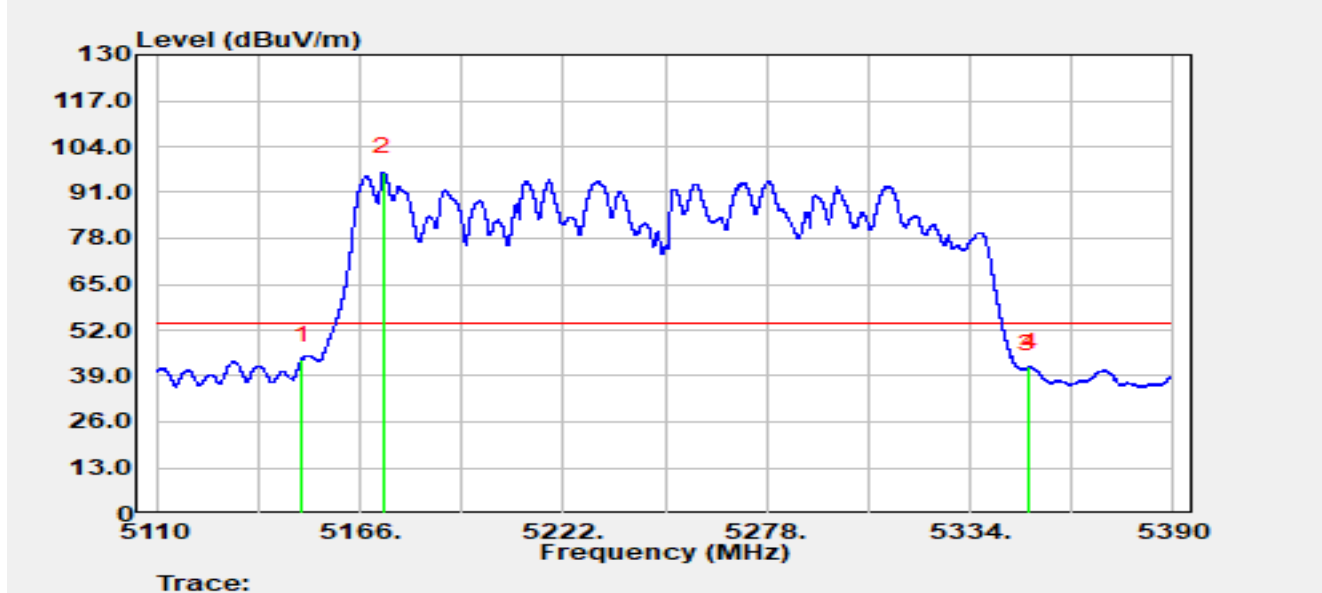


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.55	-0.99	43.56	-10.44	54.00	Average
2		5172.468	43.58	53.19	96.77	N/A	N/A	Average
3		5350.000	41.00	0.19	41.19	-12.81	54.00	Average
4		5350.324	41.70	-0.06	41.64	-12.36	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

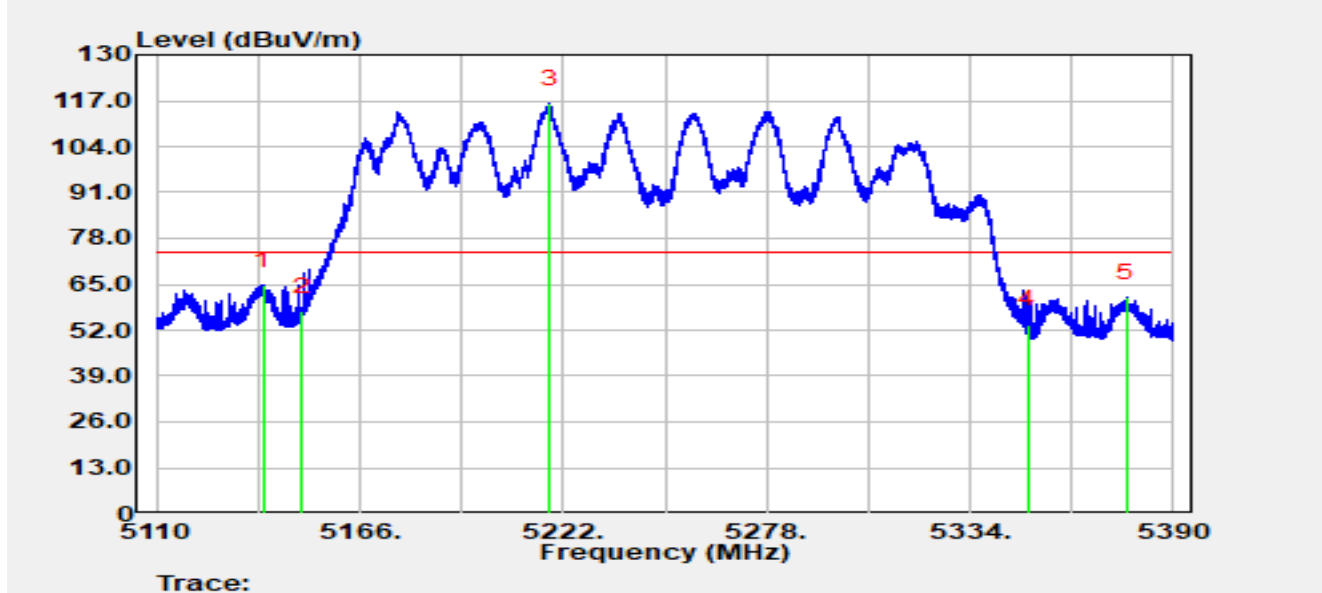


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5139.372	66.56	-1.98	64.58	-9.42	74.00	Peak
2		5150.000	58.20	-0.99	57.21	-16.79	74.00	Peak
3		5218.220	67.14	49.06	116.20	N/A	N/A	Peak
4		5350.000	53.33	0.19	53.52	-20.48	74.00	Peak
5		5377.148	64.59	-3.30	61.29	-12.71	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

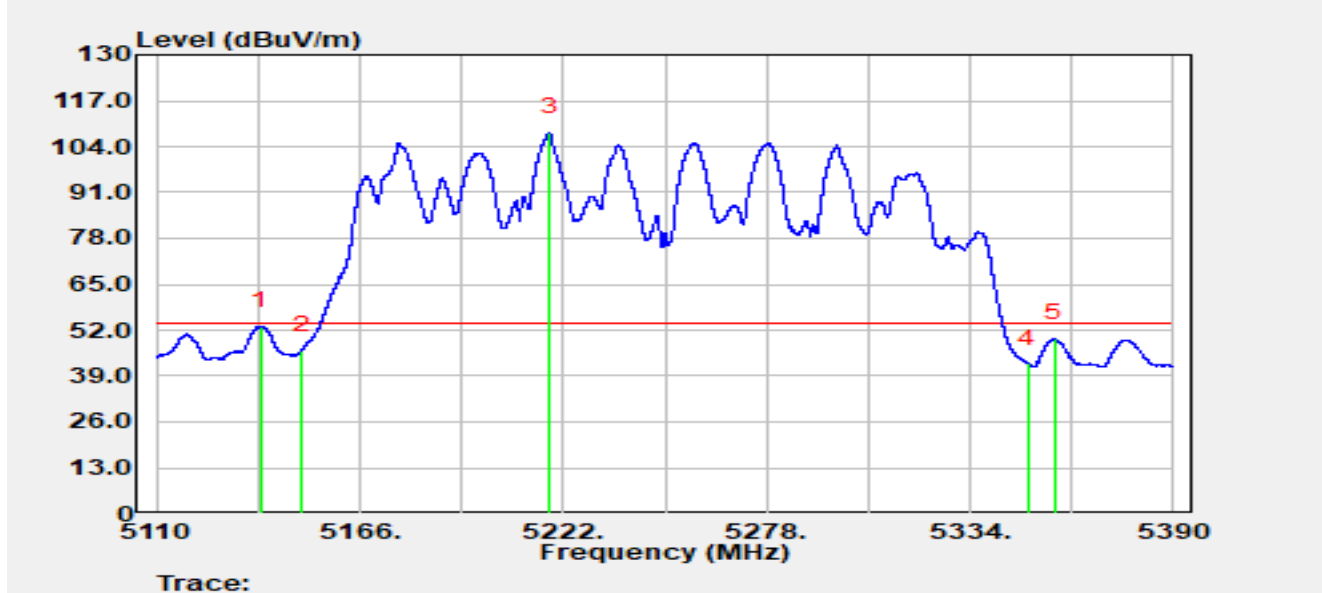


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.700	55.26	-2.04	53.22	-0.78	54.00	Average
2		5150.000	47.19	-0.99	46.20	-7.80	54.00	Average
3		5218.304	58.76	49.27	108.03	N/A	N/A	Average
4		5350.000	42.26	0.19	42.44	-11.56	54.00	Average
5		5357.380	51.78	-2.11	49.67	-4.33	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

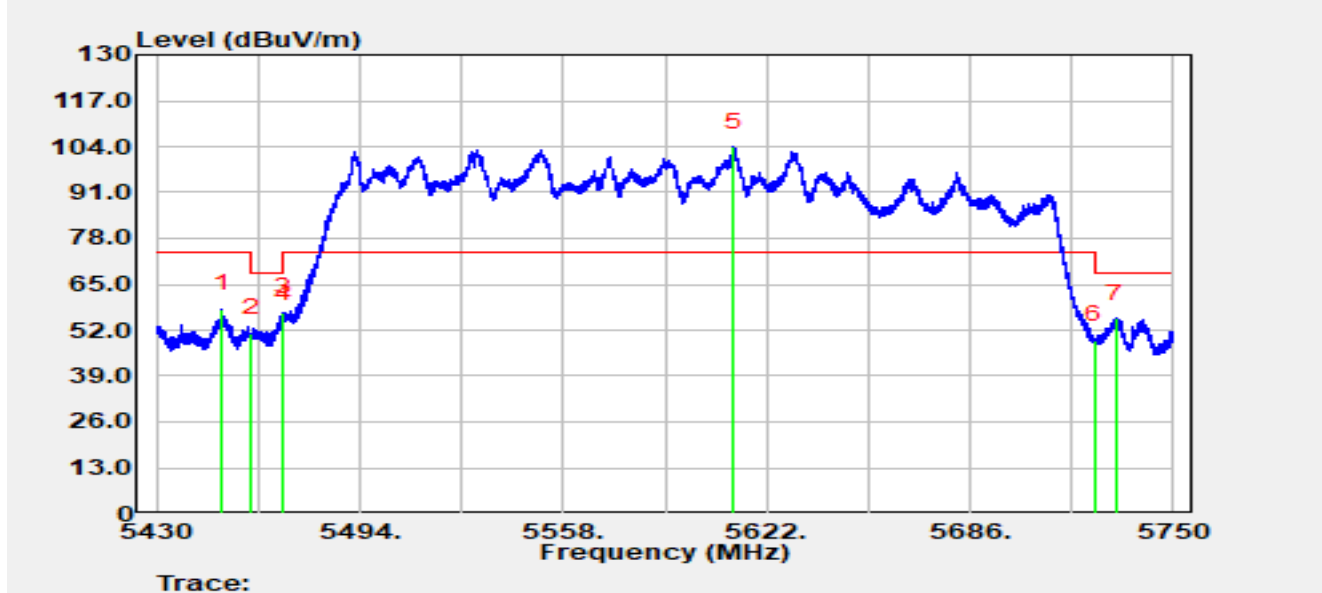


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.544	61.80	-3.89	57.91	-16.09	74.00	Peak
2		5460.000	54.44	-3.25	51.19	-17.01	68.20	Peak
3	*	5469.744	58.87	-1.73	57.14	-11.06	68.20	Peak
4		5470.000	56.94	-1.75	55.19	-13.01	68.20	Peak
5		5611.632	54.01	49.91	103.92	N/A	N/A	Peak
6		5725.000	48.87	0.39	49.26	-18.94	68.20	Peak
7		5731.728	57.23	-1.91	55.31	-12.89	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

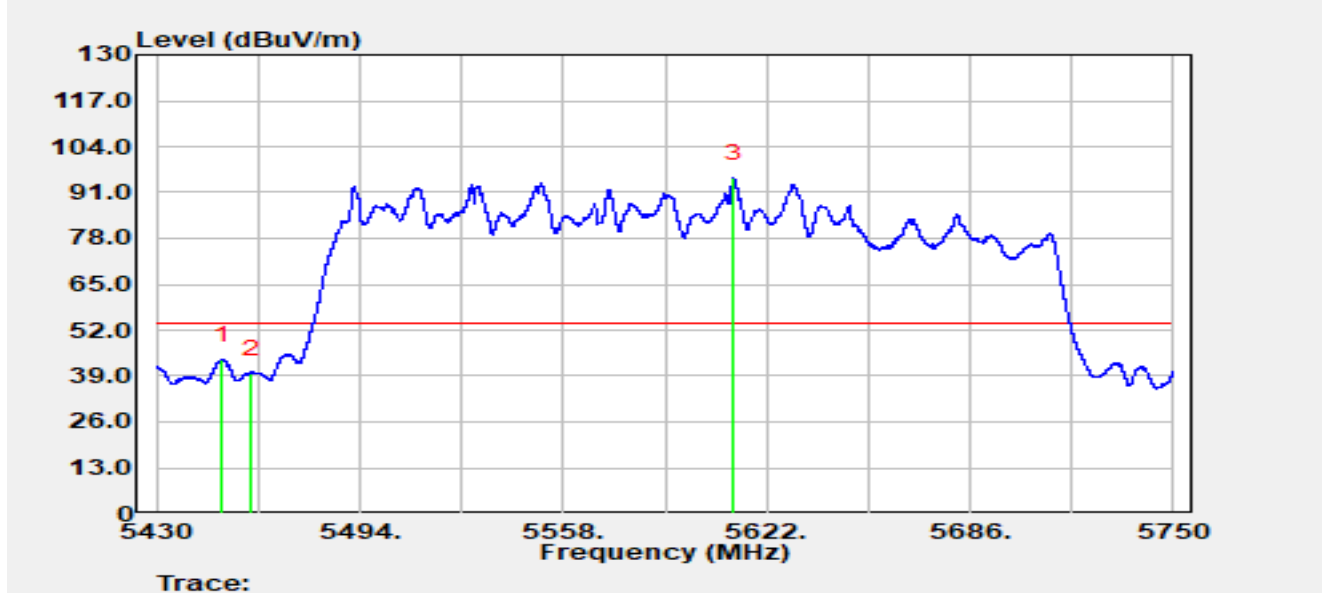


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5450.768	47.51	-3.91	43.60	-10.40	54.00	Average
2		5460.000	42.86	-3.25	39.61	-14.39	54.00	Average
3		5611.600	45.18	49.94	95.12	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

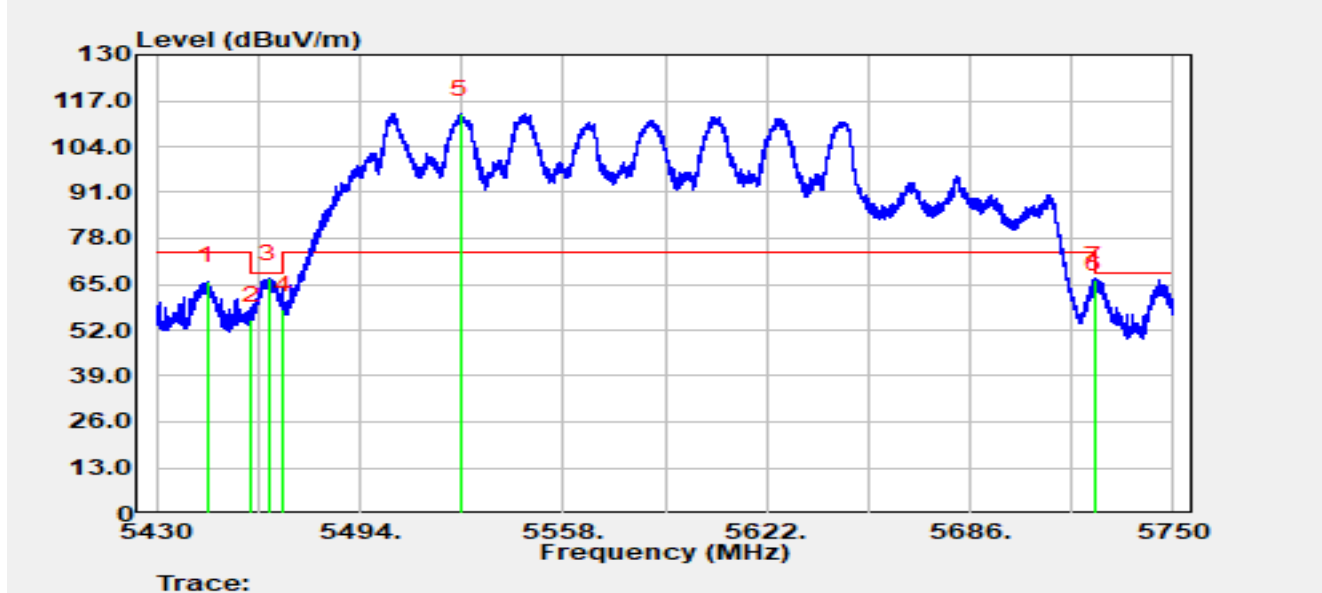


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.872	69.87	-4.06	65.80	-8.20	74.00	Peak
2		5460.000	58.14	-3.25	54.89	-13.31	68.20	Peak
3	*	5465.136	69.18	-2.59	66.59	-1.61	68.20	Peak
4		5470.000	59.49	-1.75	57.74	-10.46	68.20	Peak
5		5525.552	71.34	41.94	113.28	N/A	N/A	Peak
6		5725.000	62.90	0.39	63.29	-4.91	68.20	Peak
7		5725.360	66.06	0.14	66.20	-2.00	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

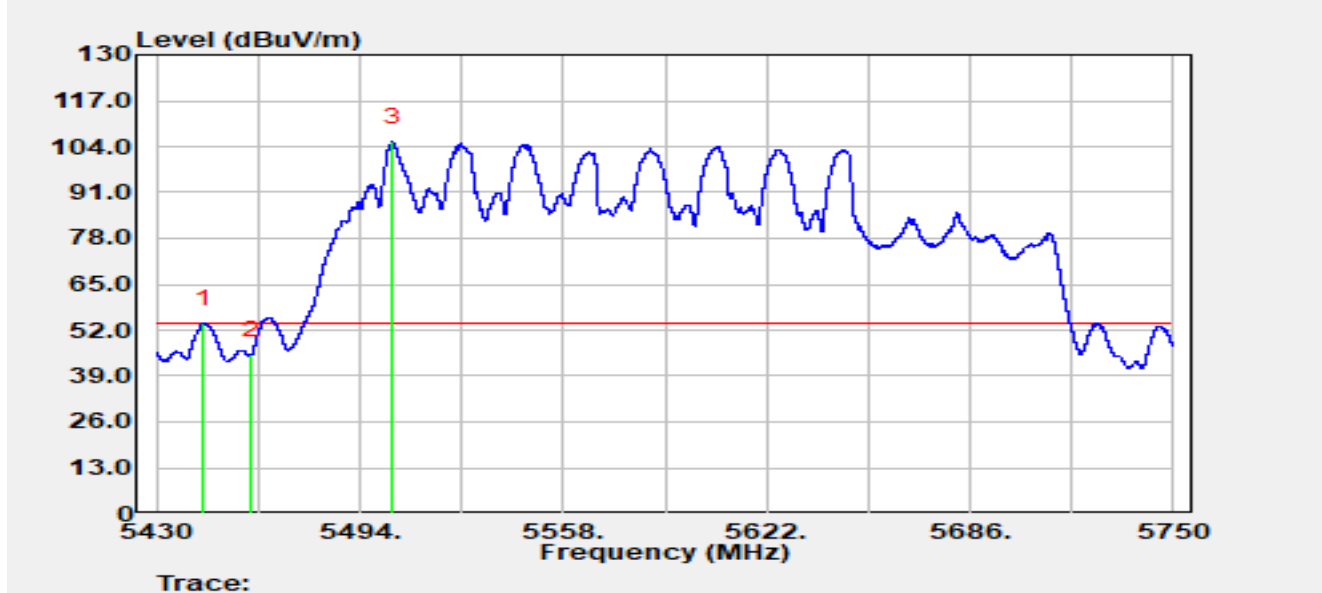


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.624	57.61	-3.84	53.78	-0.22	54.00	Average
2		5460.000	48.24	-3.25	45.00	-9.00	54.00	Average
3		5504.400	58.83	46.42	105.25	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

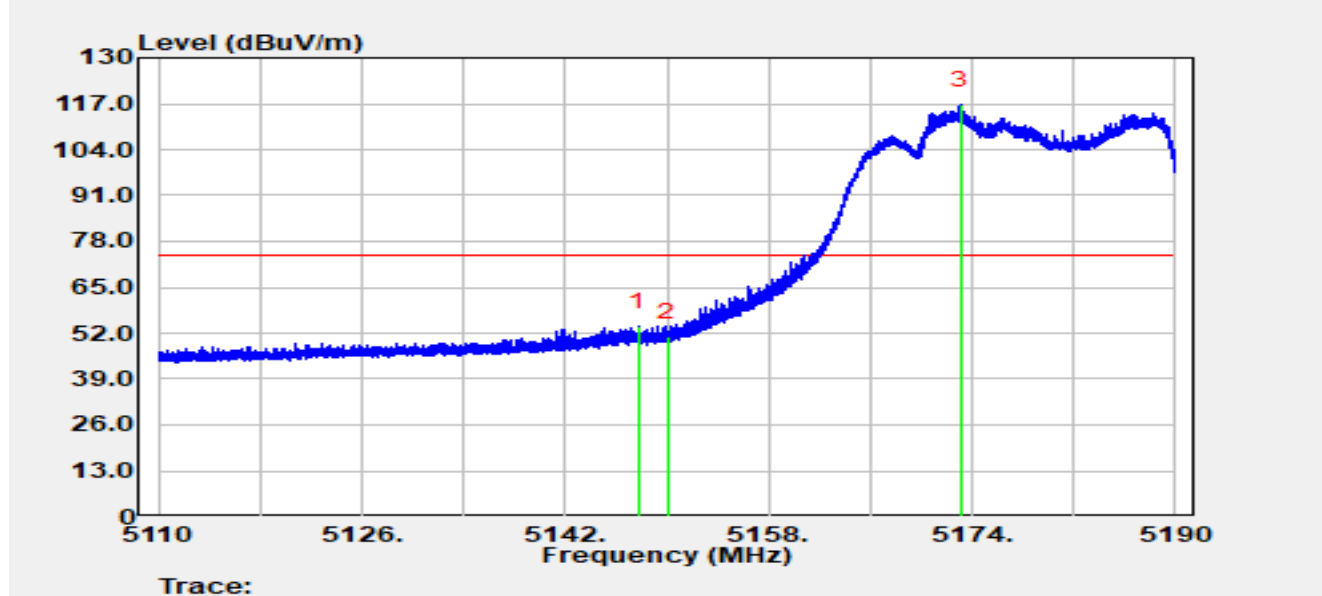


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.768	55.47	-1.54	53.93	-20.07	74.00	Peak
2		5150.000	51.84	-0.99	50.85	-23.15	74.00	Peak
3		5173.104	62.98	53.69	116.68	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

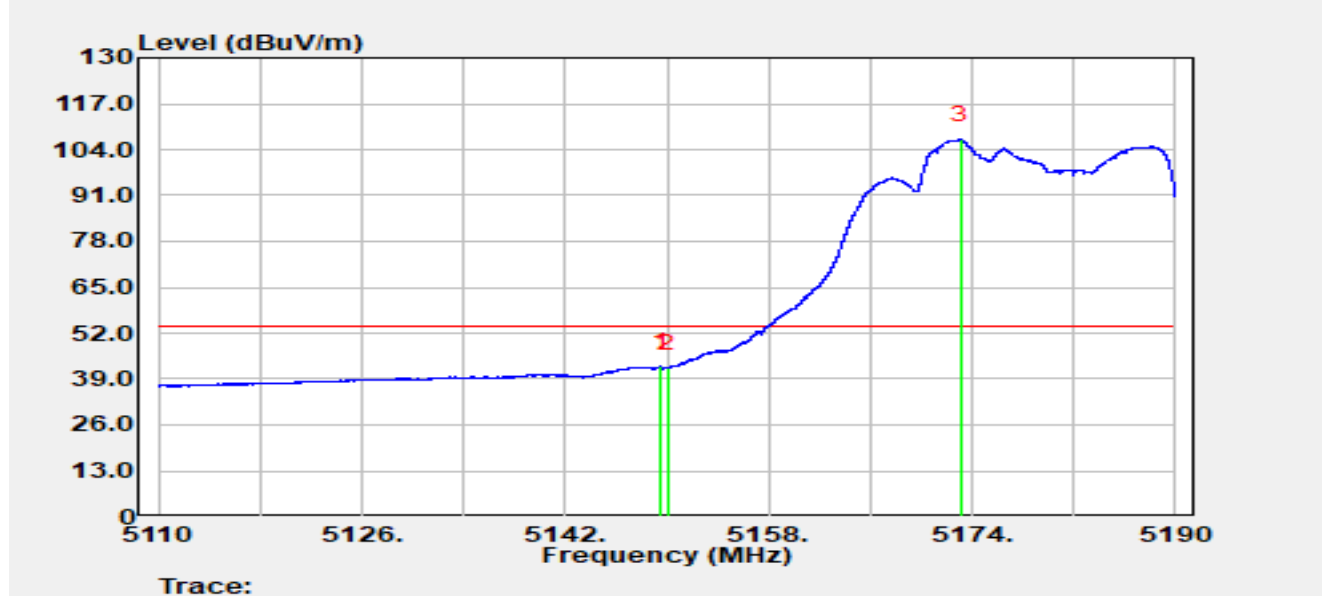


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.520	43.61	-1.12	42.49	-11.51	54.00	Average
2		5150.000	43.13	-0.99	42.13	-11.87	54.00	Average
3		5173.104	53.06	53.69	106.75	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

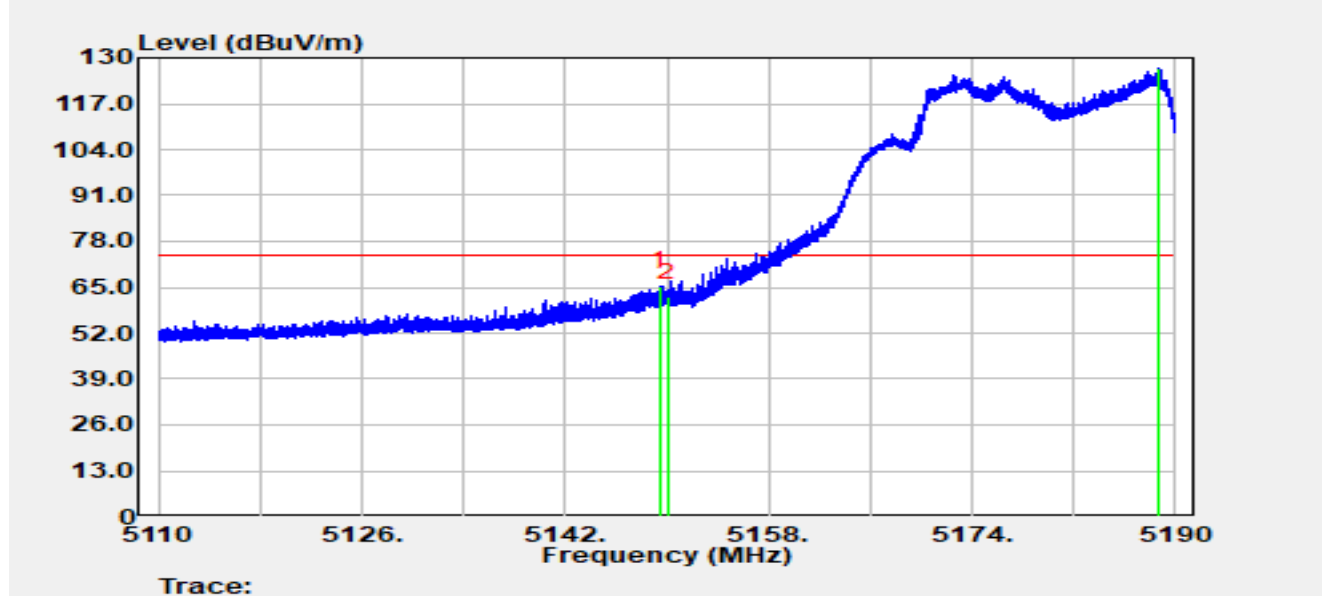


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.424	66.46	-1.15	65.31	-8.69	74.00	Peak
2		5150.000	63.05	-0.99	62.06	-11.94	74.00	Peak
3		5188.736	84.60	42.64	127.24	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

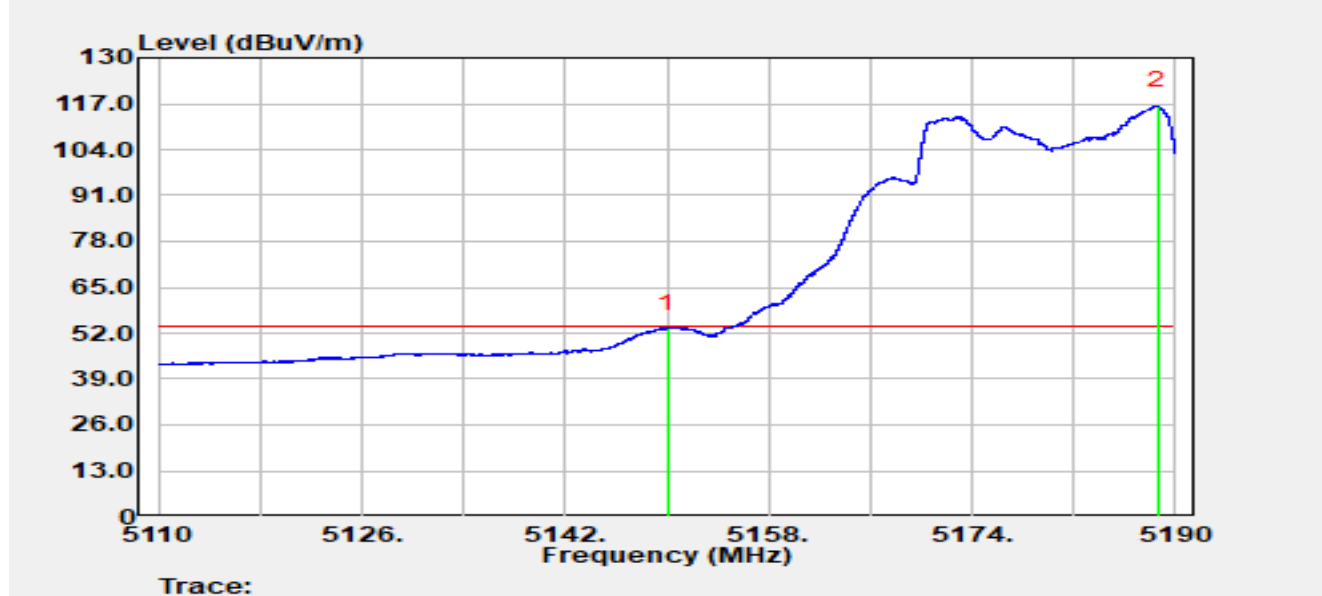


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.35	-0.99	53.36	-0.64	54.00	Average
2		5188.600	73.51	42.82	116.33	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

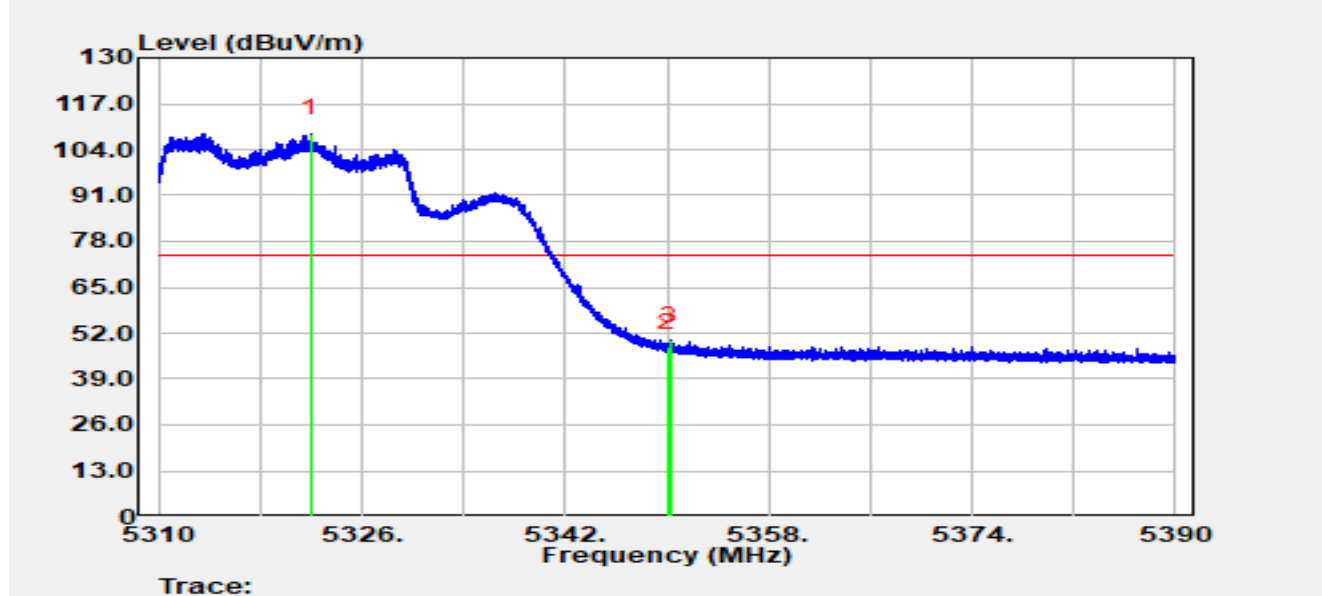


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.936	68.37	40.16	108.53	N/A	N/A	Peak
2		5350.000	47.79	0.19	47.97	-26.03	74.00	Peak
3	*	5350.248	49.92	-0.01	49.91	-24.09	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

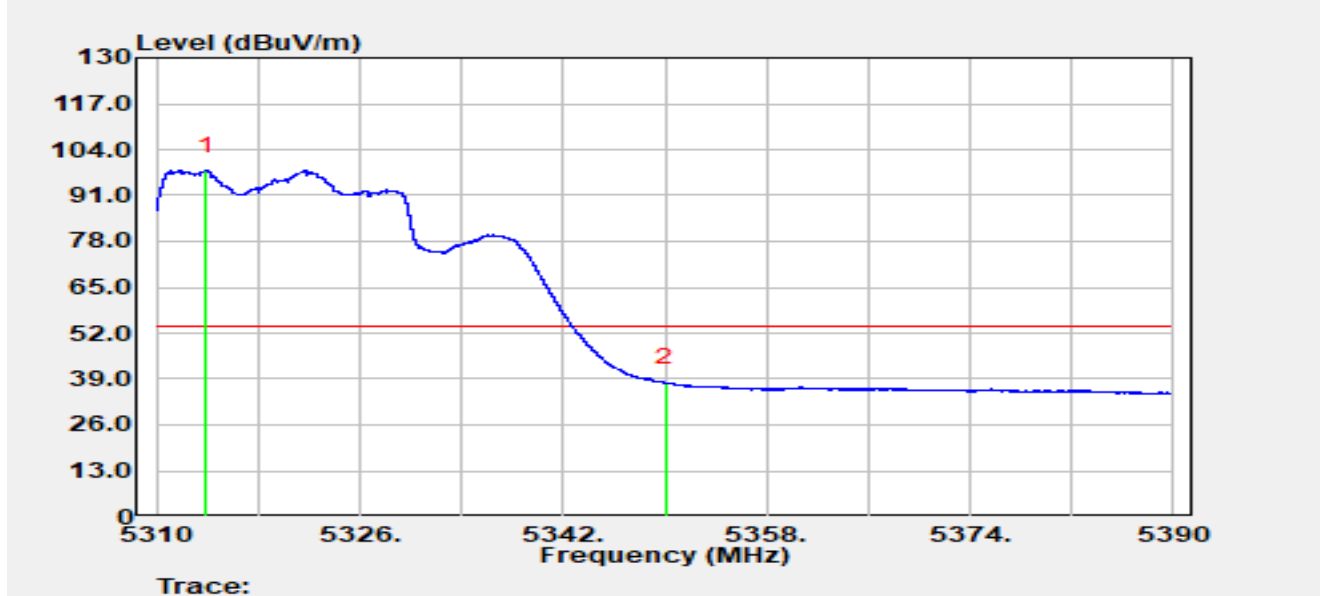


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.920	49.19	48.85	98.04	N/A	N/A	Average
2	*	5350.000	37.73	0.19	37.92	-16.08	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

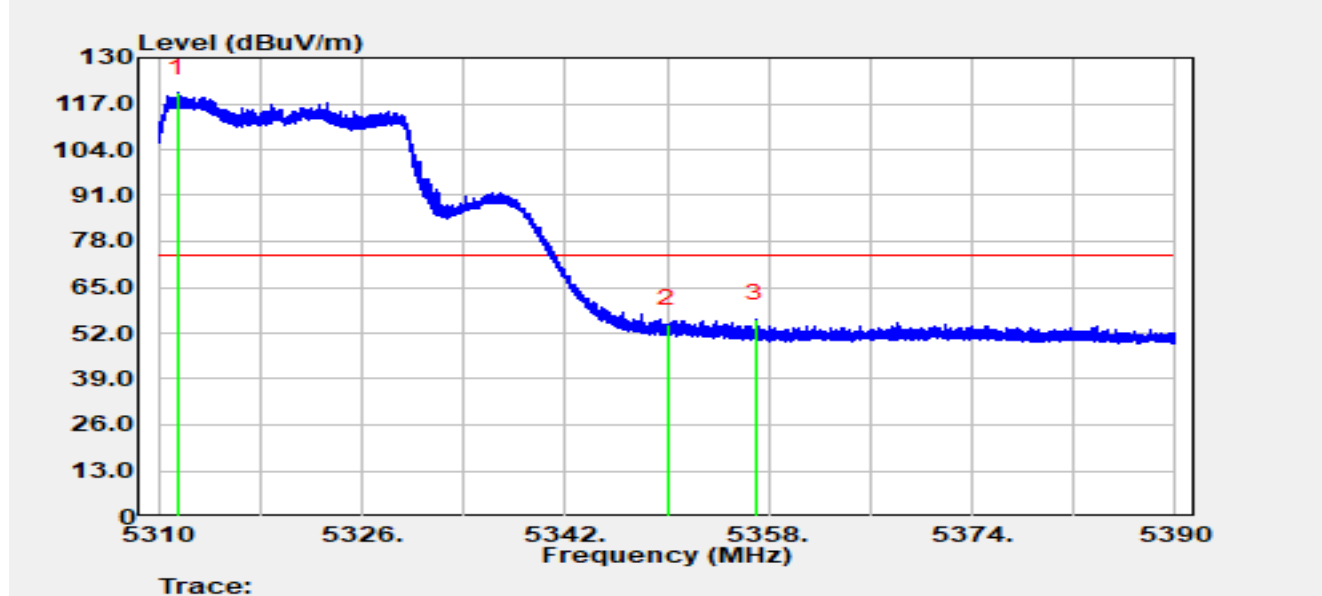


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.472	74.51	45.54	120.05	N/A	N/A	Peak
2		5350.000	54.38	0.19	54.56	-19.44	74.00	Peak
3	*	5356.944	58.14	-1.98	56.16	-17.84	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

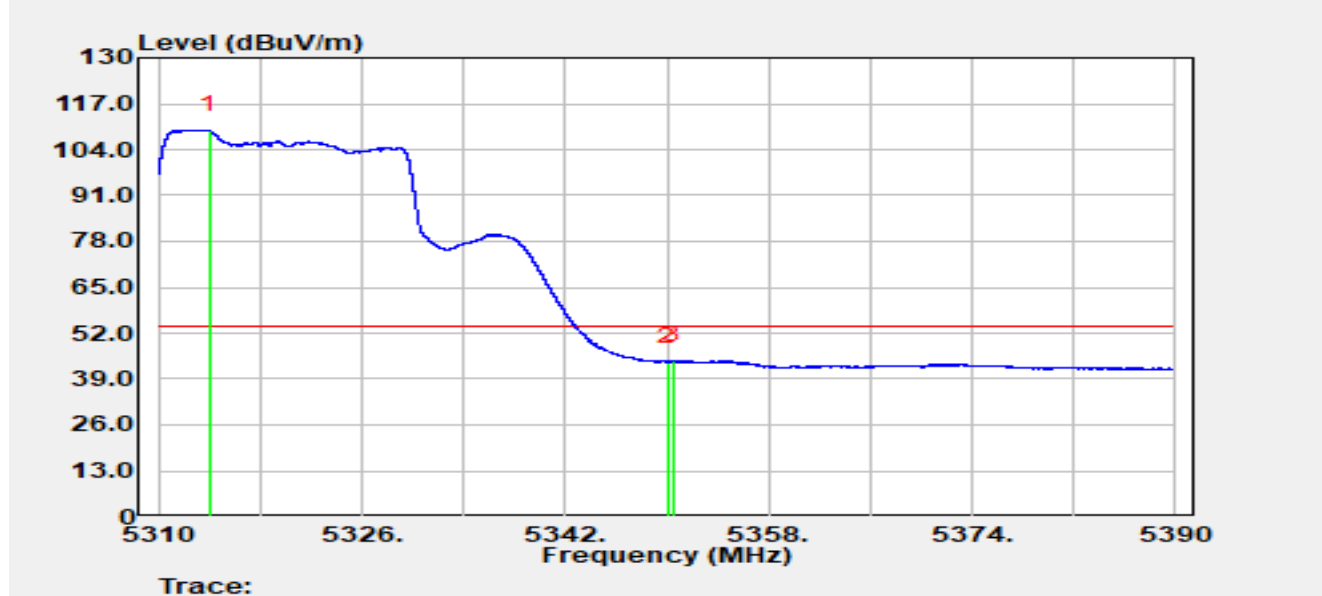


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.968	60.65	48.91	109.56	N/A	N/A	Average
2		5350.000	43.68	0.19	43.86	-10.14	54.00	Average
3	*	5350.472	44.47	-0.13	44.34	-9.66	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

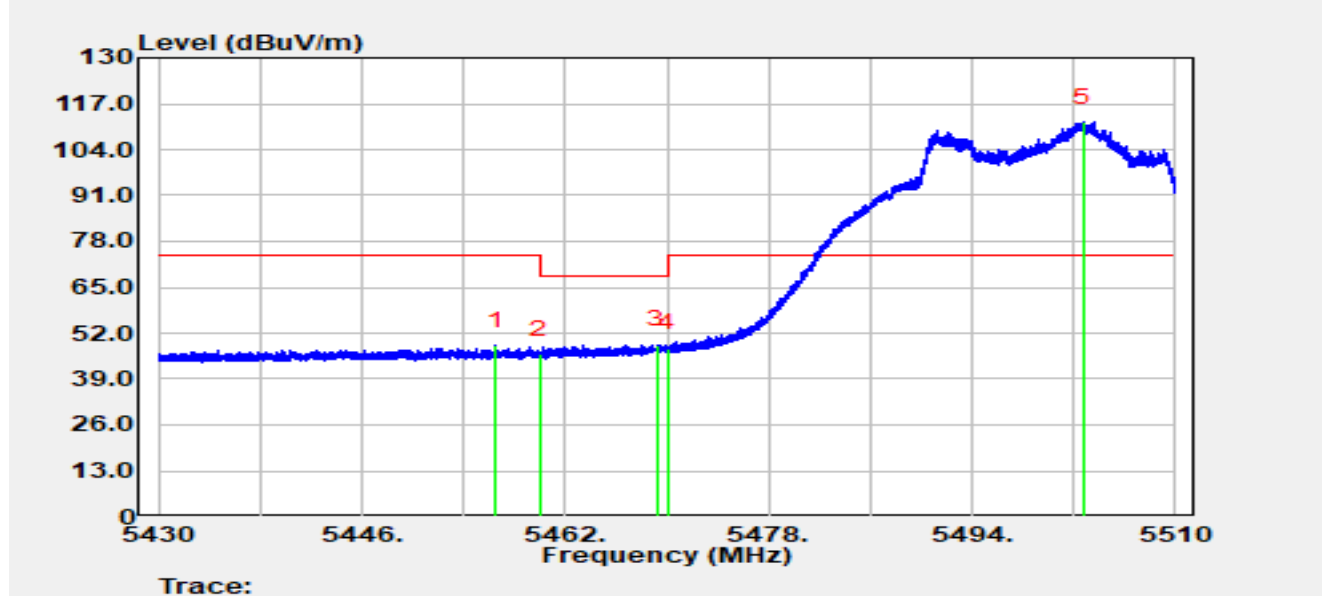


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.552	52.01	-3.49	48.51	-25.49	74.00	Peak
2		5460.000	49.24	-3.25	46.00	-22.20	68.20	Peak
3	*	5469.240	50.47	-1.76	48.71	-19.49	68.20	Peak
4		5470.000	49.48	-1.75	47.72	-20.48	68.20	Peak
5		5502.744	66.92	44.91	111.83	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

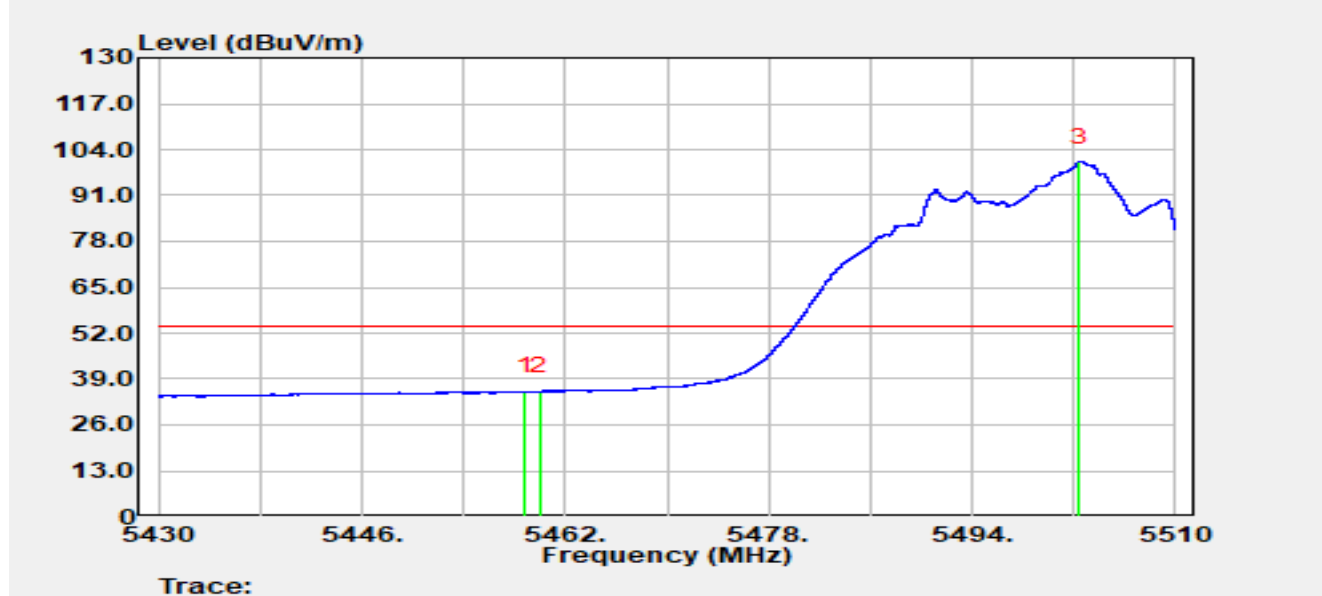


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.840	38.79	-3.32	35.47	-18.53	54.00	Average
2		5460.000	38.62	-3.25	35.37	-18.63	54.00	Average
3		5502.400	55.81	44.65	100.46	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

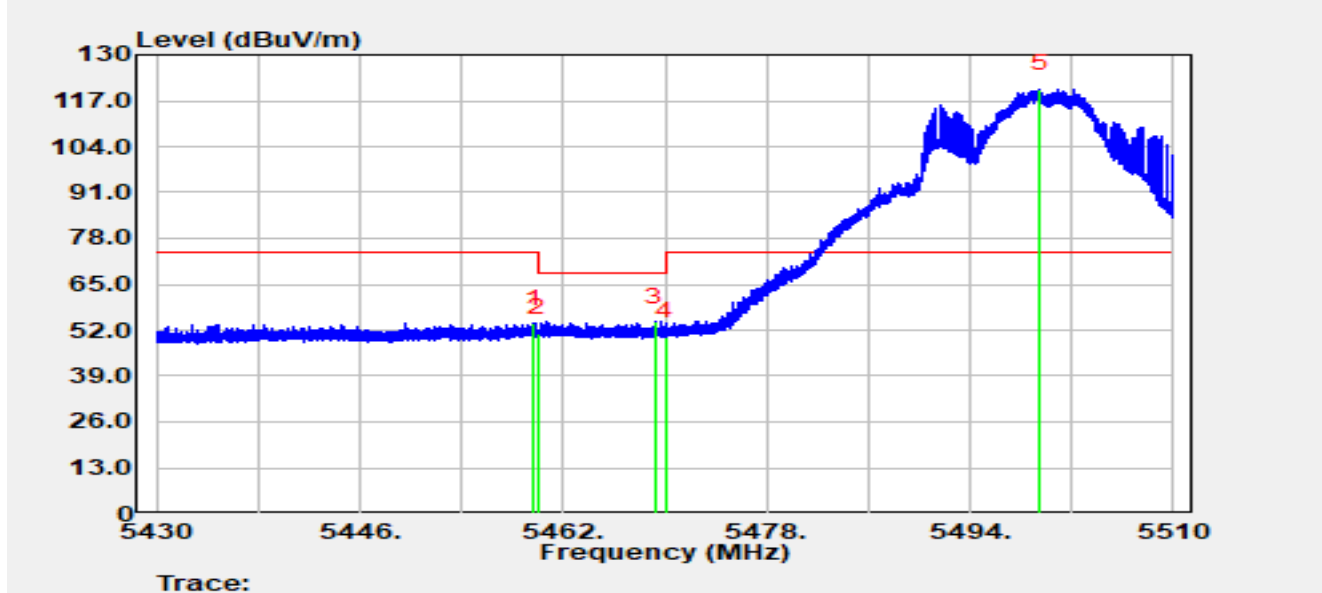


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.696	57.15	-3.23	53.91	-20.09	74.00	Peak
2		5460.000	54.30	-3.25	51.06	-17.14	68.20	Peak
3	*	5469.200	56.12	-1.77	54.35	-13.85	68.20	Peak
4		5470.000	51.96	-1.75	50.20	-18.00	68.20	Peak
5	*	5499.488	79.22	41.16	120.37	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

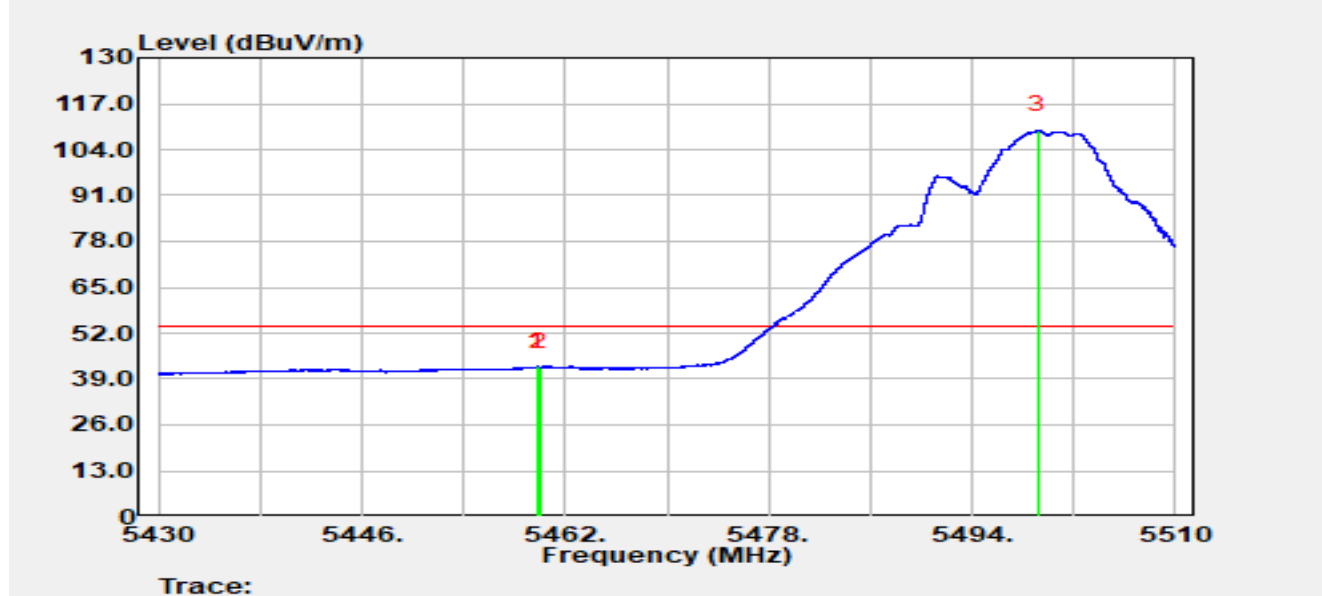


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.776	45.72	-3.24	42.48	-11.52	54.00	Average
2		5460.000	45.52	-3.25	42.28	-11.72	54.00	Average
3		5499.200	68.07	41.40	109.47	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

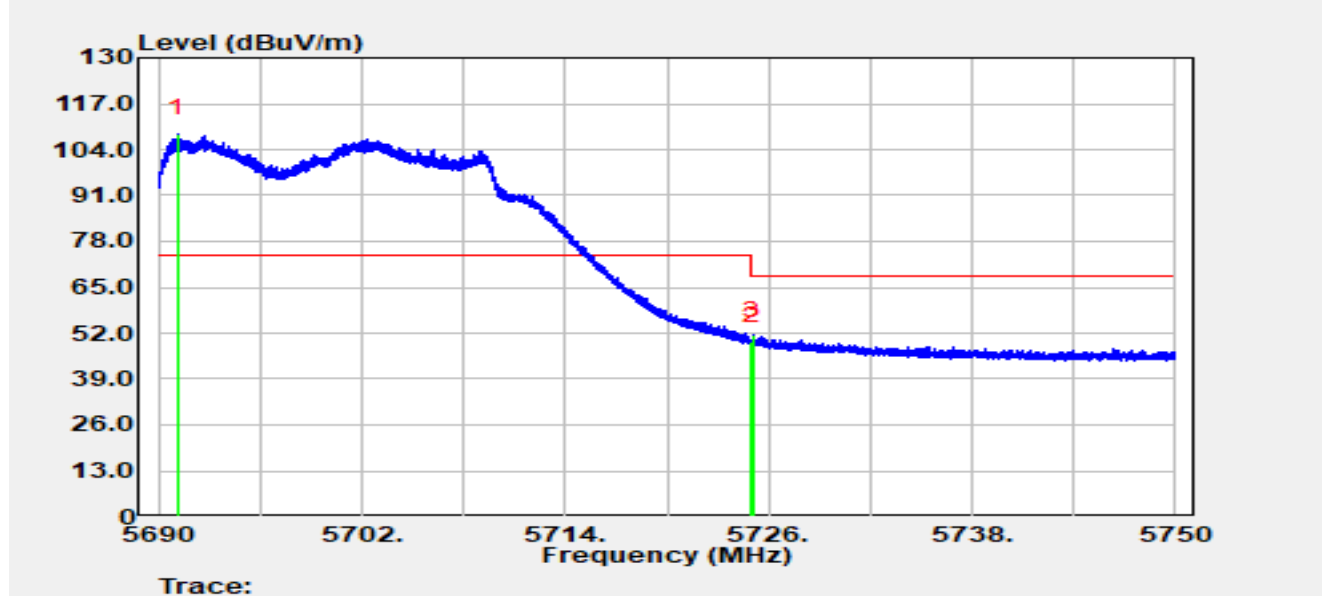


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.098	66.94	41.50	108.44	N/A	N/A	Peak
2		5725.000	49.26	0.39	49.65	-18.55	68.20	Peak
3	*	5725.070	51.17	0.30	51.48	-16.72	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

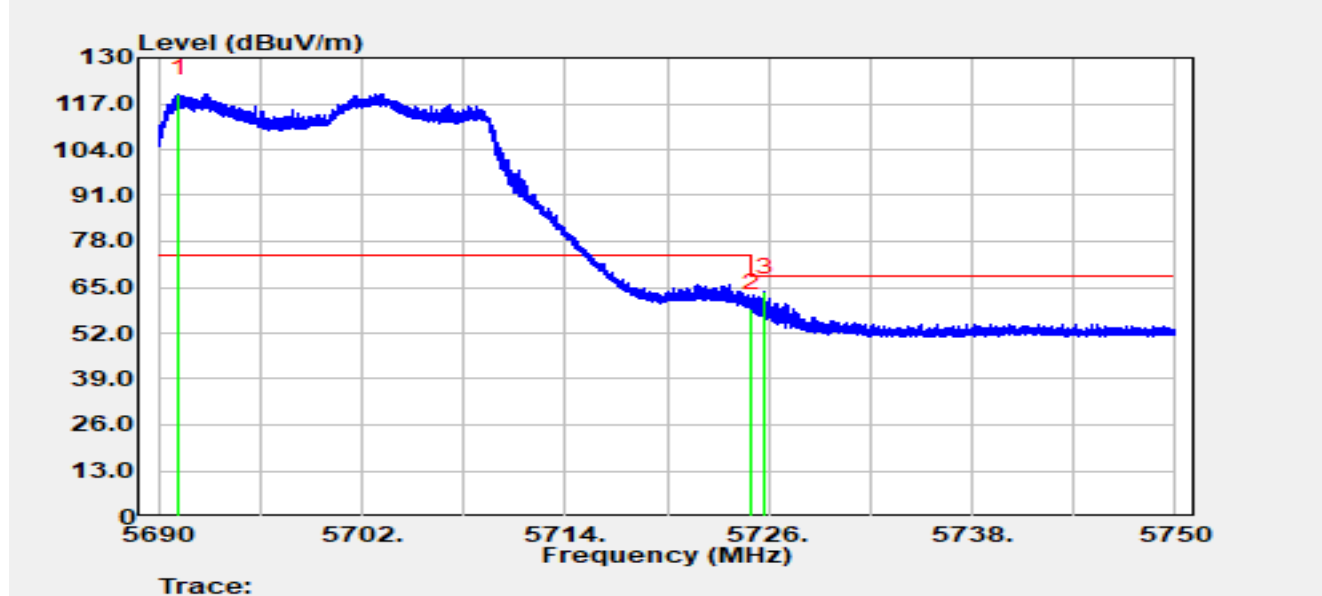


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.230	78.09	41.76	119.85	N/A	N/A	Peak
2		5725.000	58.65	0.39	59.04	-9.16	68.20	Peak
3	*	5725.814	63.66	-0.04	63.62	-4.58	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

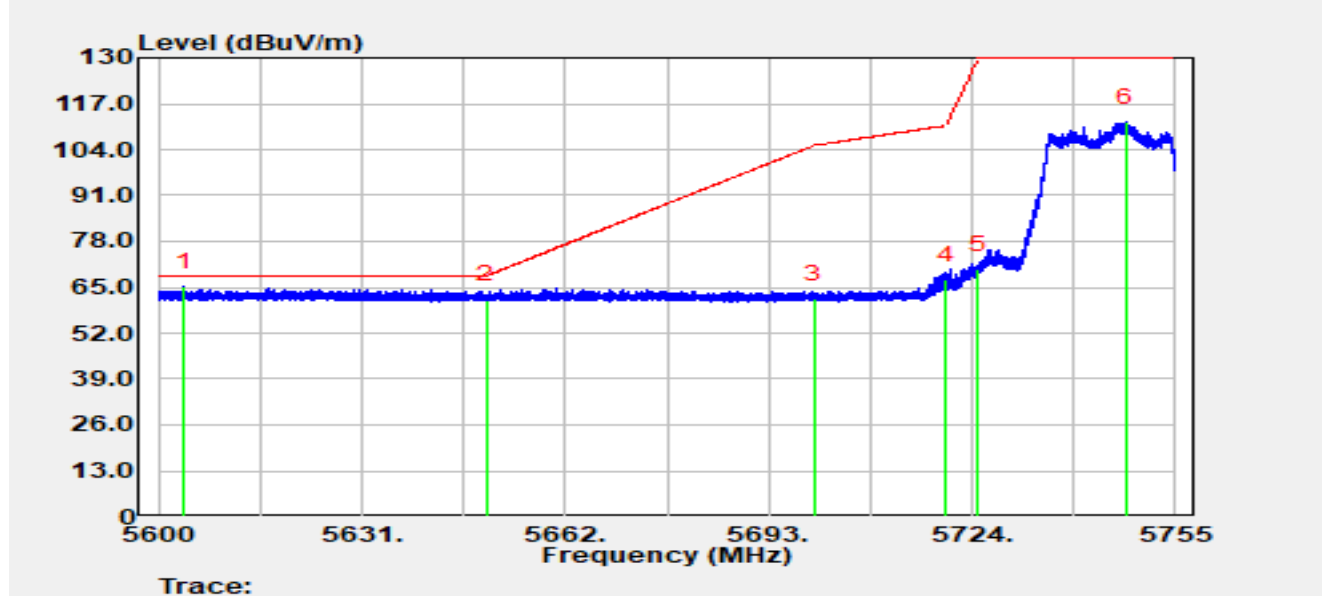


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5603.875	71.15	-6.12	65.03	-3.17	68.20	Peak
2		5650.000	67.83	-6.34	61.50	-6.70	68.20	Peak
3		5700.000	68.06	-6.38	61.68	-43.52	105.20	Peak
4		5720.000	73.46	-6.33	67.12	-43.68	110.80	Peak
5		5725.000	76.34	-6.33	70.01	-59.99	130.00	Peak
6		5747.405	117.96	-6.31	111.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

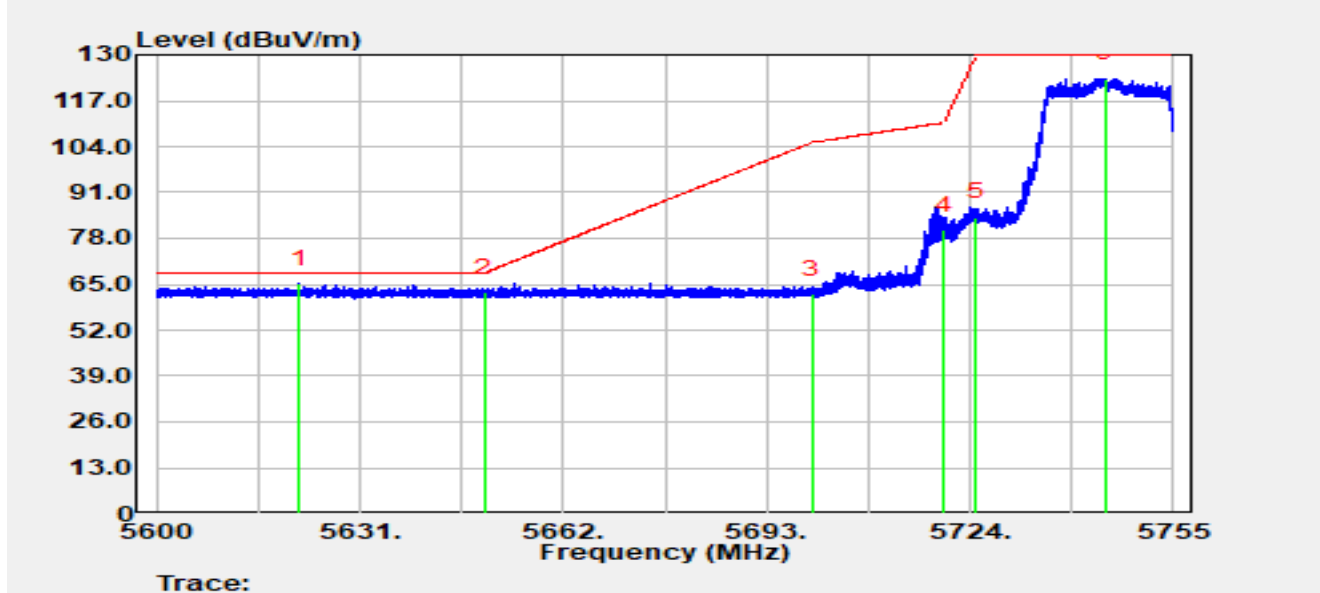


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5621.824	71.25	-6.18	65.07	-3.13	68.20	Peak
2		5650.000	69.10	-6.34	62.77	-5.43	68.20	Peak
3		5700.000	68.66	-6.38	62.28	-42.92	105.20	Peak
4		5720.000	86.73	-6.33	80.39	-30.41	110.80	Peak
5		5725.000	90.29	-6.33	83.96	-46.04	130.00	Peak
6		5744.600	129.68	-6.32	123.36	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

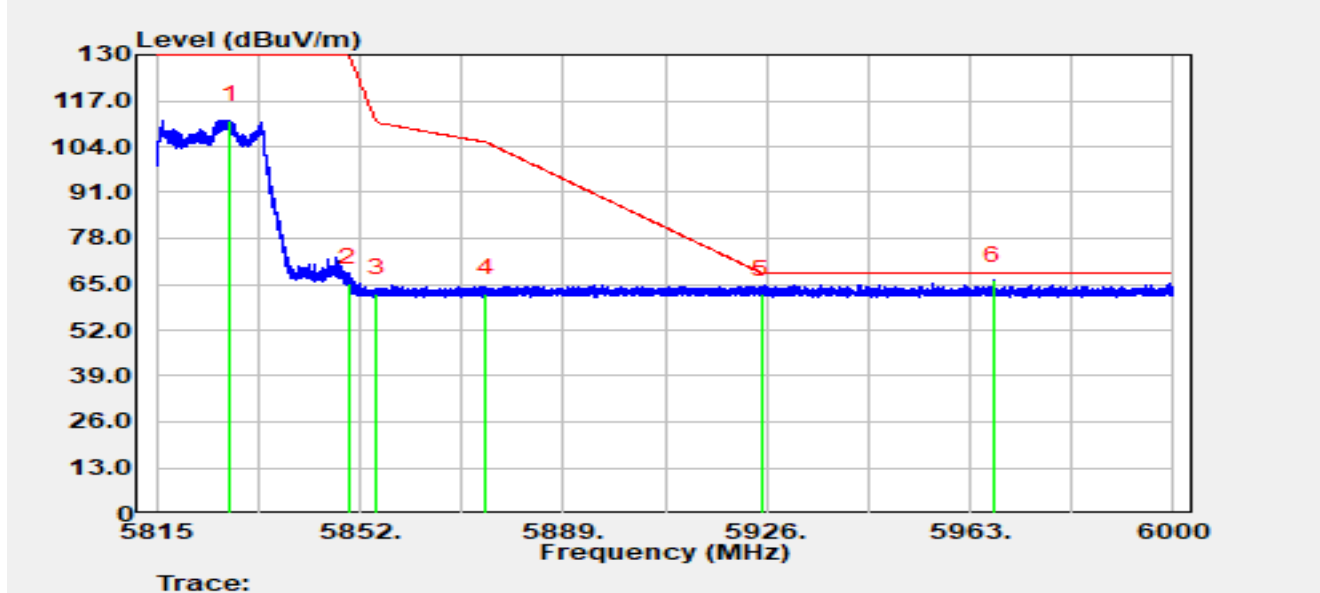


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5828.301	117.82	-6.26	111.55	N/A	N/A	Peak
2		5850.000	71.69	-6.31	65.37	-64.63	130.00	Peak
3		5855.000	68.57	-6.27	62.31	-48.49	110.80	Peak
4		5875.000	68.57	-6.24	62.33	-42.87	105.20	Peak
5		5925.000	68.16	-6.05	62.11	-6.09	68.20	Peak
6	*	5967.255	72.07	-6.06	66.01	-2.19	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

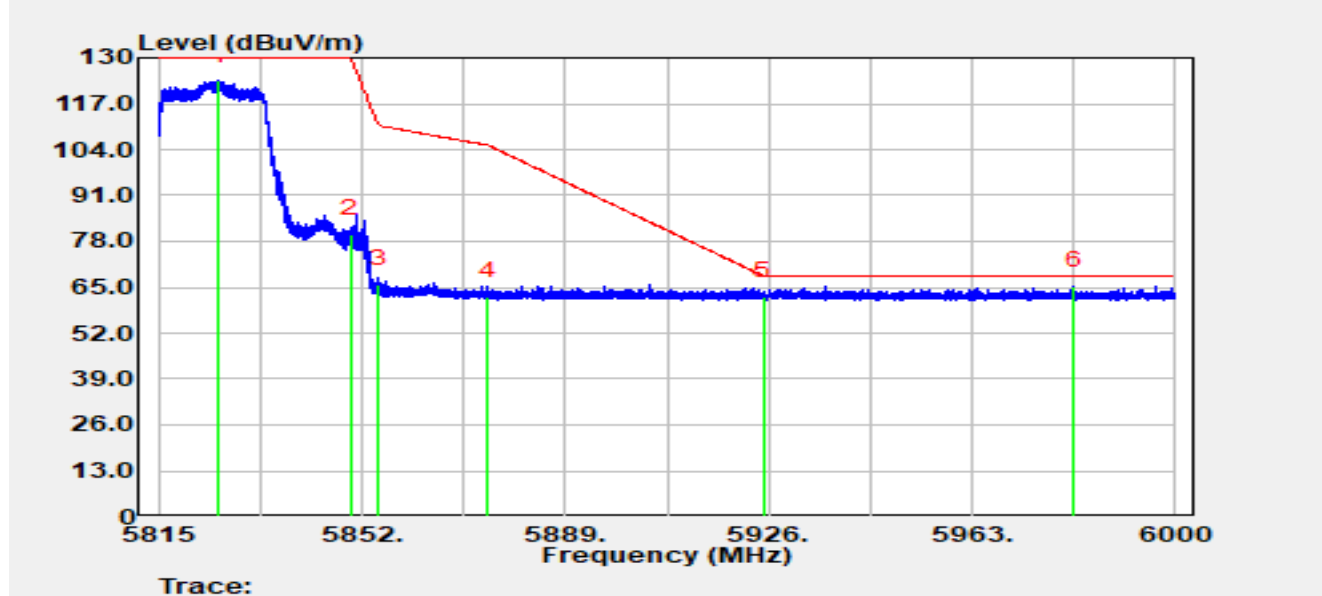


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5825.971	129.72	-6.28	123.44	N/A	N/A	Peak
2		5850.000	86.31	-6.31	80.00	-50.00	130.00	Peak
3		5855.000	72.20	-6.27	65.94	-44.86	110.80	Peak
4		5875.000	68.55	-6.24	62.31	-42.89	105.20	Peak
5		5925.000	68.42	-6.05	62.36	-5.84	68.20	Peak
6	*	5981.556	71.43	-6.04	65.39	-2.81	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

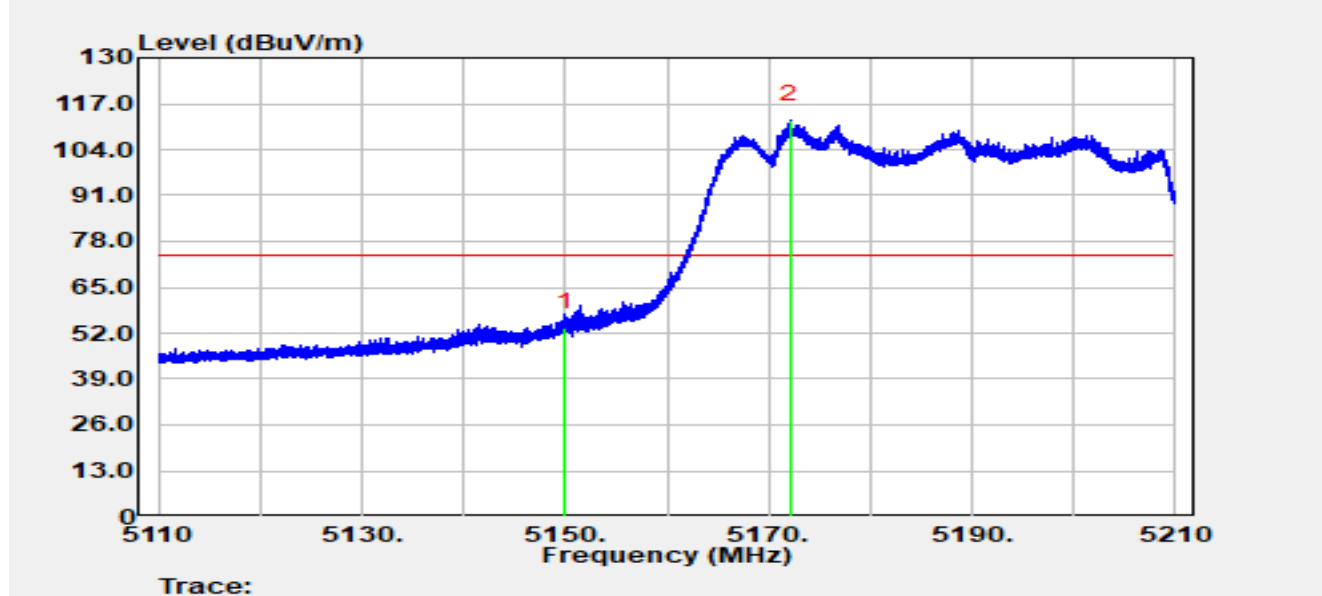


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.71	-0.99	53.71	-20.29	74.00	Peak
2		5172.060	59.53	52.82	112.35	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

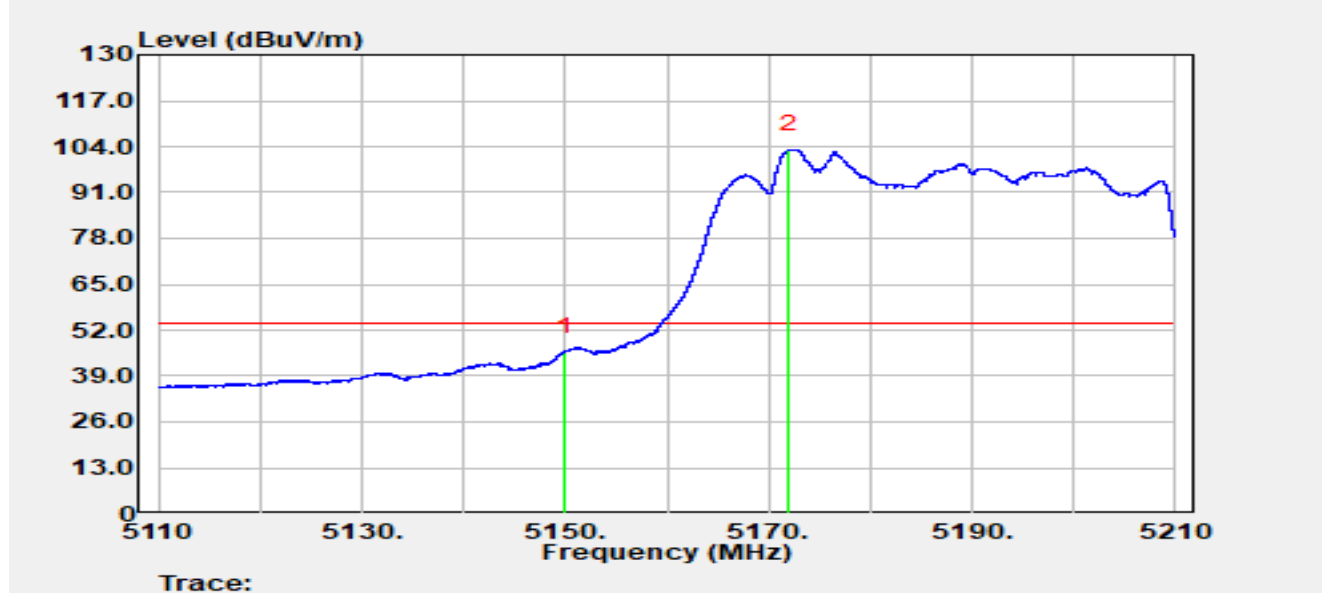


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	46.79	-0.99	45.80	-8.20	54.00	Average
2		5172.050	50.39	52.80	103.20	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

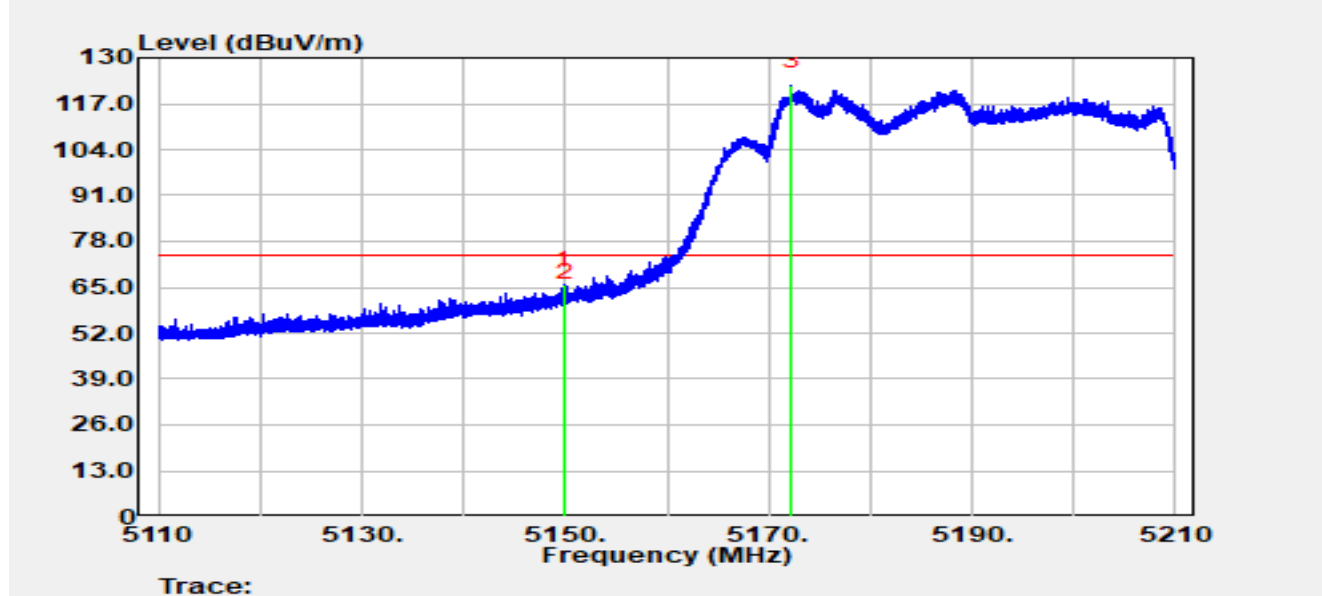


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.800	66.66	-1.05	65.62	-8.38	74.00	Peak
2		5150.000	62.97	-0.99	61.98	-12.02	74.00	Peak
3		5172.190	68.99	52.97	121.96	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

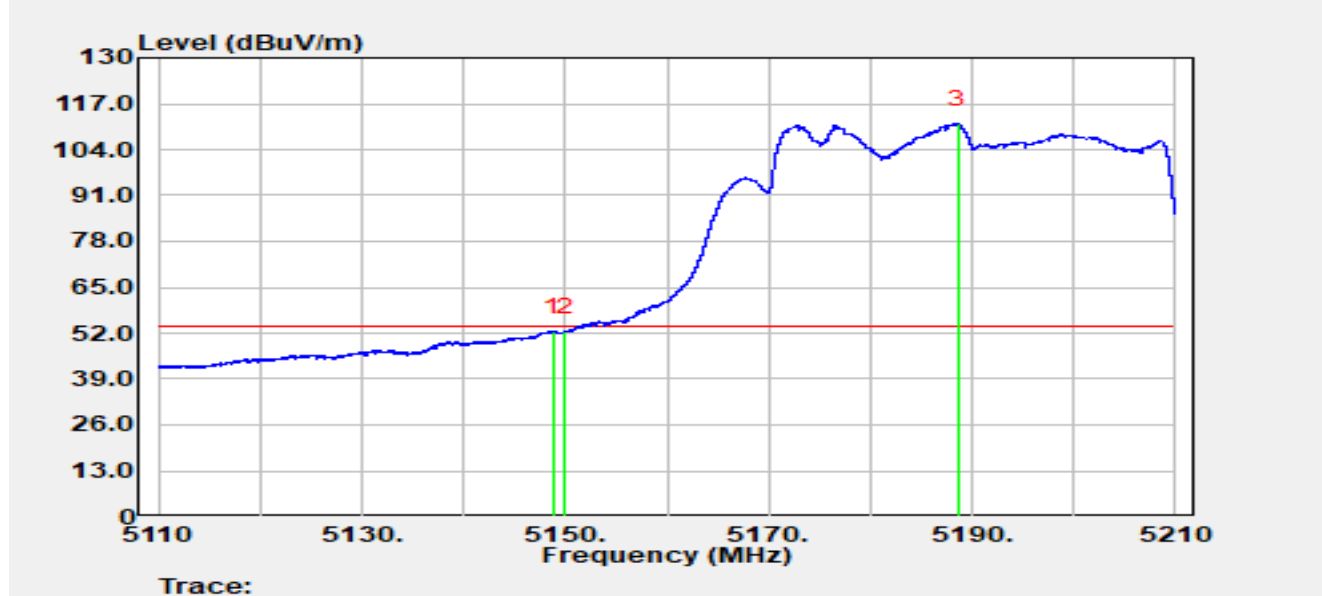


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.830	53.72	-1.31	52.42	-1.58	54.00	Average
2		5150.000	53.40	-0.99	52.40	-1.60	54.00	Average
3		5188.590	68.55	42.80	111.35	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

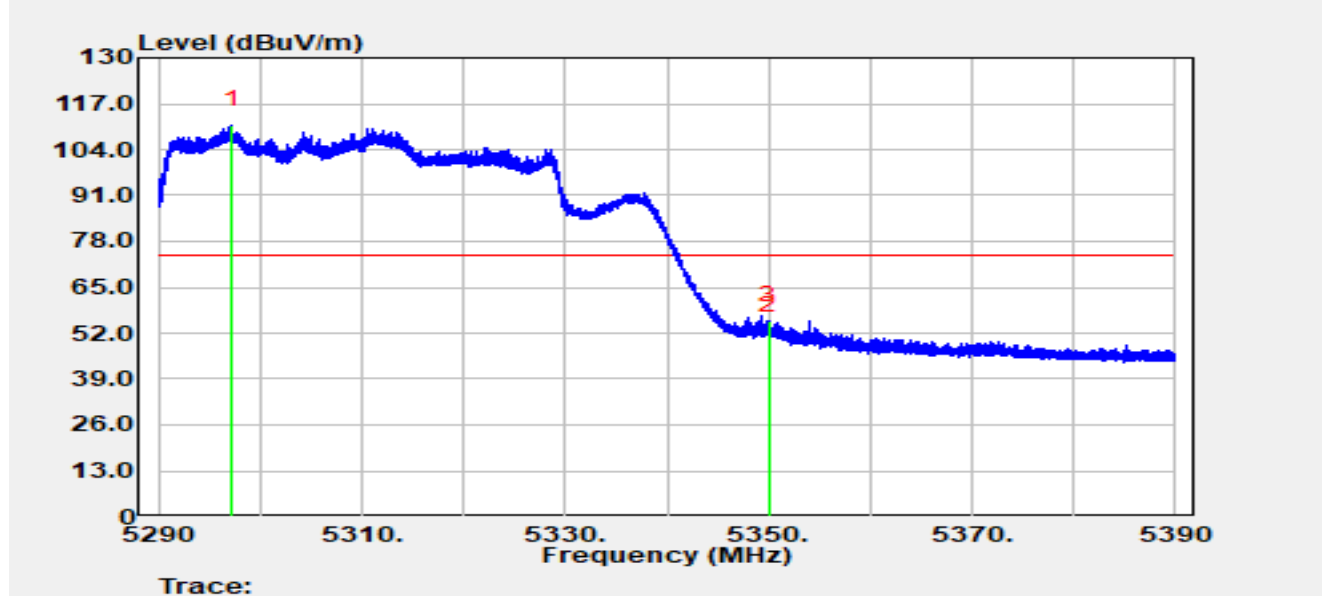


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.260	64.46	46.63	111.09	N/A	N/A	Peak
2		5350.000	52.51	0.19	52.70	-21.30	74.00	Peak
3	*	5350.080	55.33	0.12	55.45	-18.55	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

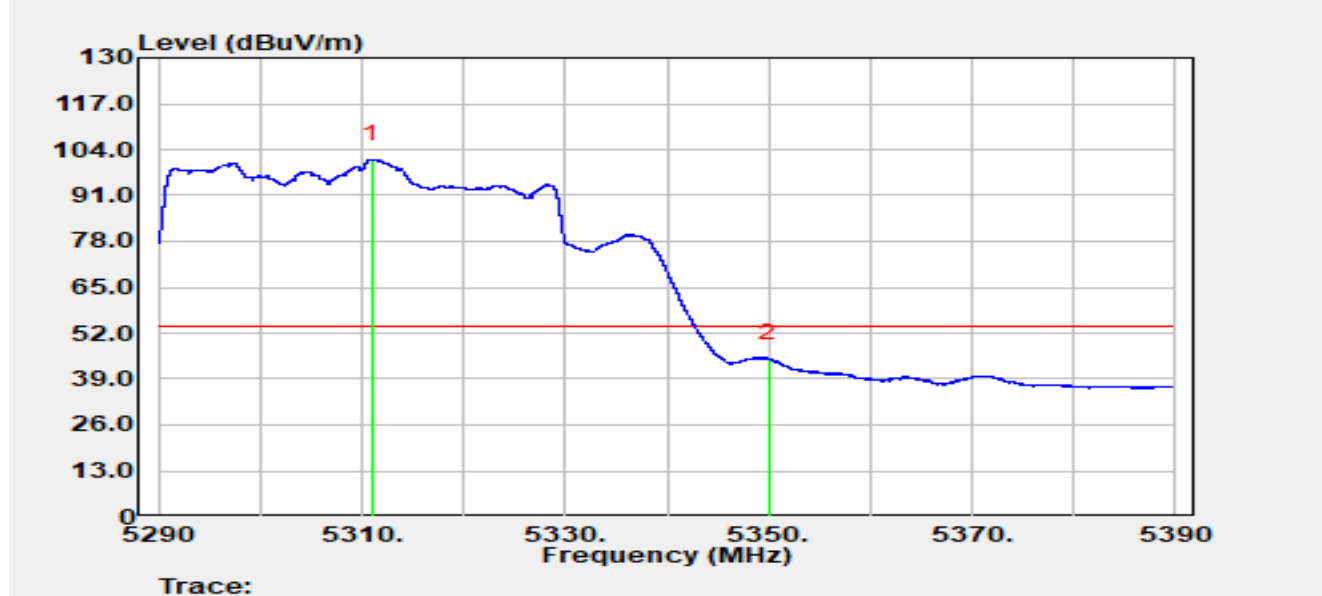


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.960	56.33	44.91	101.23	N/A	N/A	Average
2	*	5350.000	44.50	0.19	44.69	-9.31	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

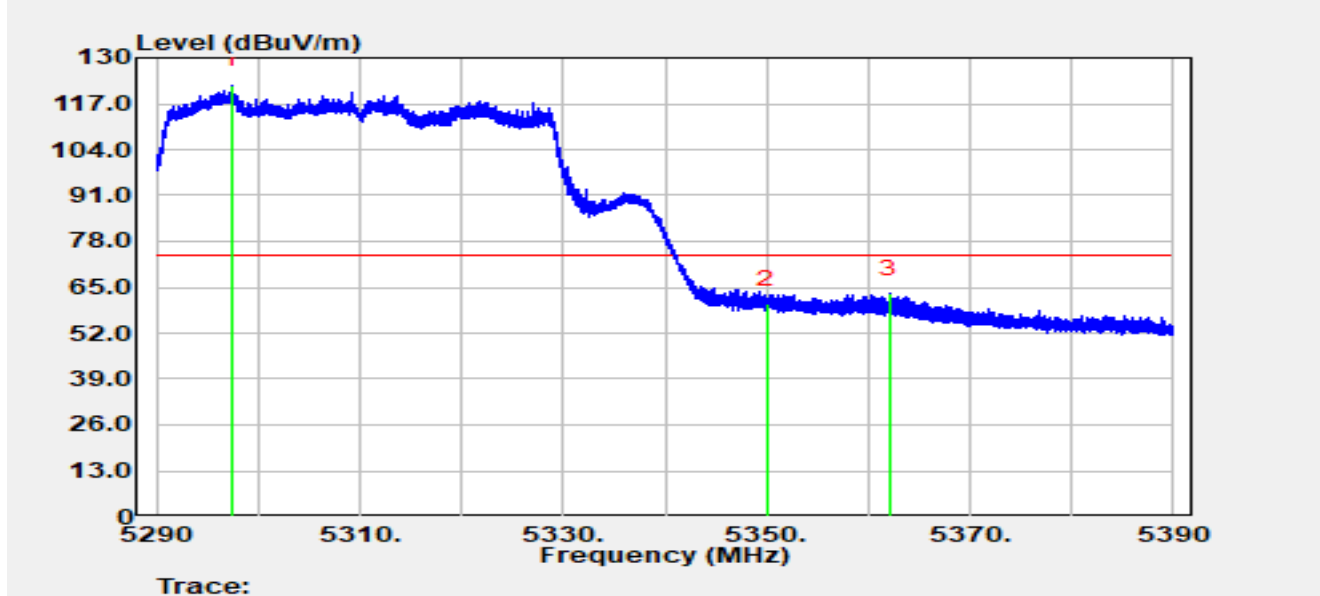


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.400	75.35	46.91	122.26	N/A	N/A	Peak
2		5350.000	60.09	0.19	60.28	-13.72	74.00	Peak
3	*	5362.100	65.71	-2.62	63.09	-10.91	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.4°C	Humidity	42.1%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Justin Guo
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

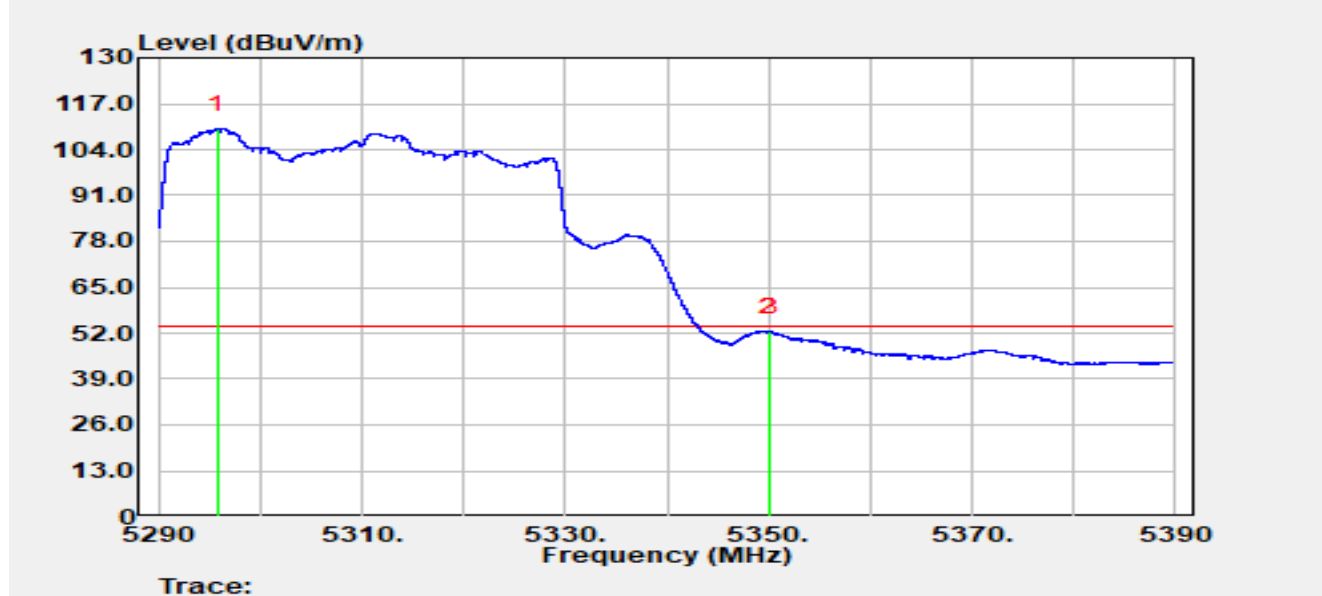


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5295.840	65.93	43.89	109.82	N/A	N/A	Average
2		5350.000	52.21	0.19	52.39	-1.61	54.00	Average
3	*	5350.120	52.35	0.09	52.44	-1.56	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

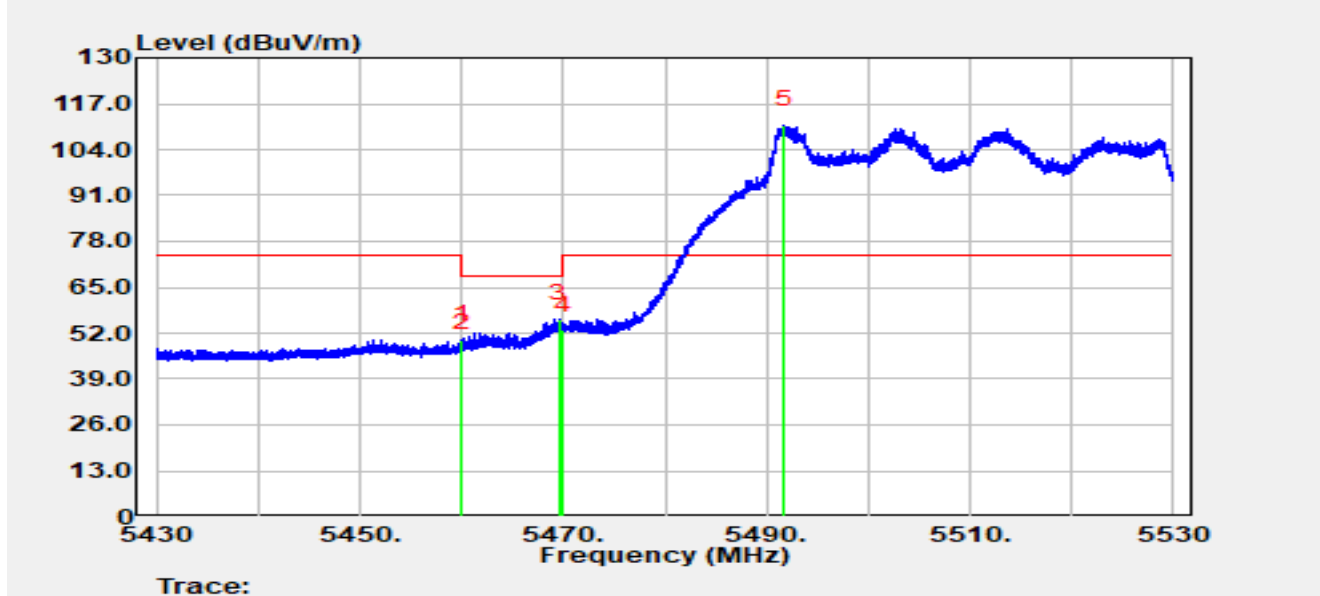


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.980	53.50	-3.24	50.26	-23.74	74.00	Peak
2		5460.000	51.04	-3.25	47.80	-20.40	68.20	Peak
3	*	5469.610	57.85	-1.72	56.12	-12.08	68.20	Peak
4		5470.000	54.55	-1.75	52.80	-15.40	68.20	Peak
5		5491.670	63.49	47.50	110.99	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

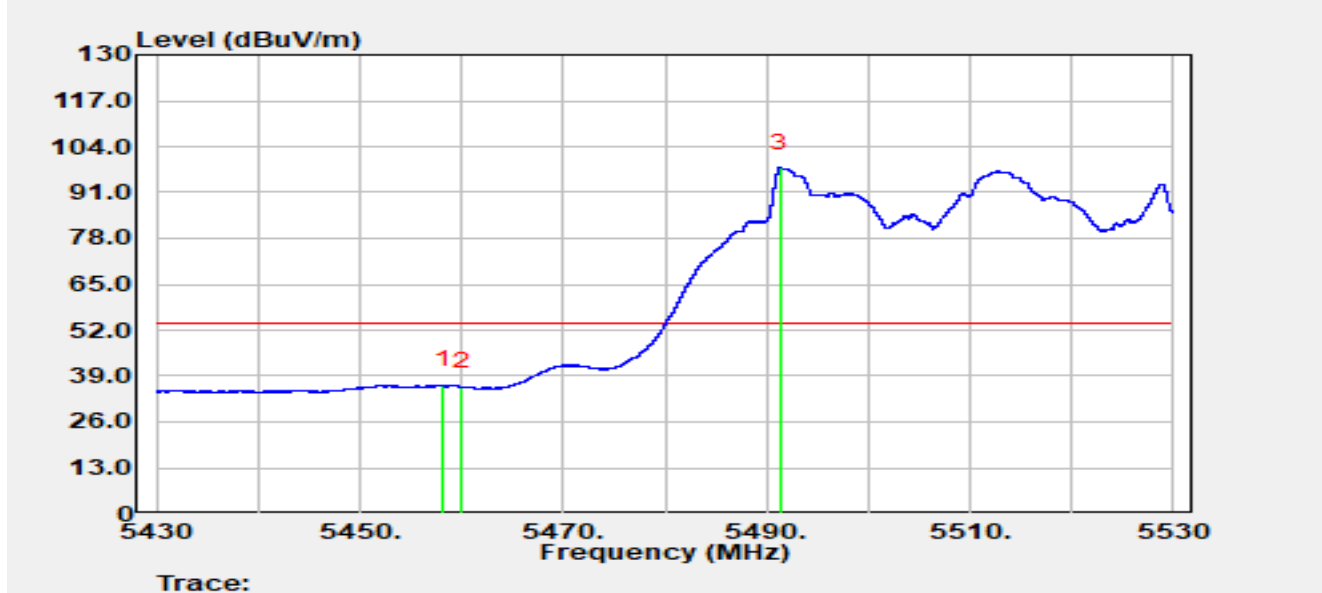


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.190	39.70	-3.37	36.33	-17.67	54.00	Average
2		5460.000	39.18	-3.25	35.94	-18.06	54.00	Average
3		5491.320	49.93	48.14	98.08	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_PK	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

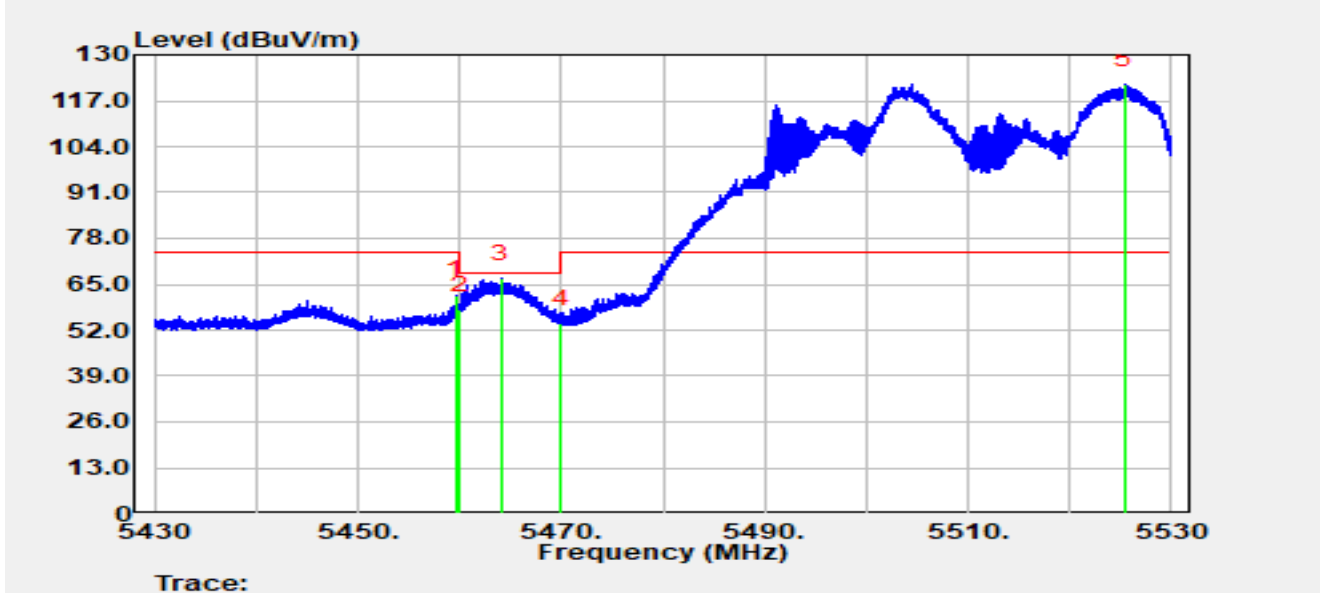


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.580	65.14	-3.23	61.91	-12.09	74.00	Peak
2		5460.000	61.01	-3.25	57.77	-10.43	68.20	Peak
3	*	5464.150	69.51	-2.99	66.51	-1.69	68.20	Peak
4		5470.000	55.60	-1.75	53.85	-14.35	68.20	Peak
5		5525.370	80.12	41.53	121.64	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-02-05
Temperature	16.9°C	Humidity	40.6%
Limit	FCC_Part15_Band Edge(3m)_AV	Test Engineer	Yuuki Qiu
Test Voltage	AC 120V/60Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

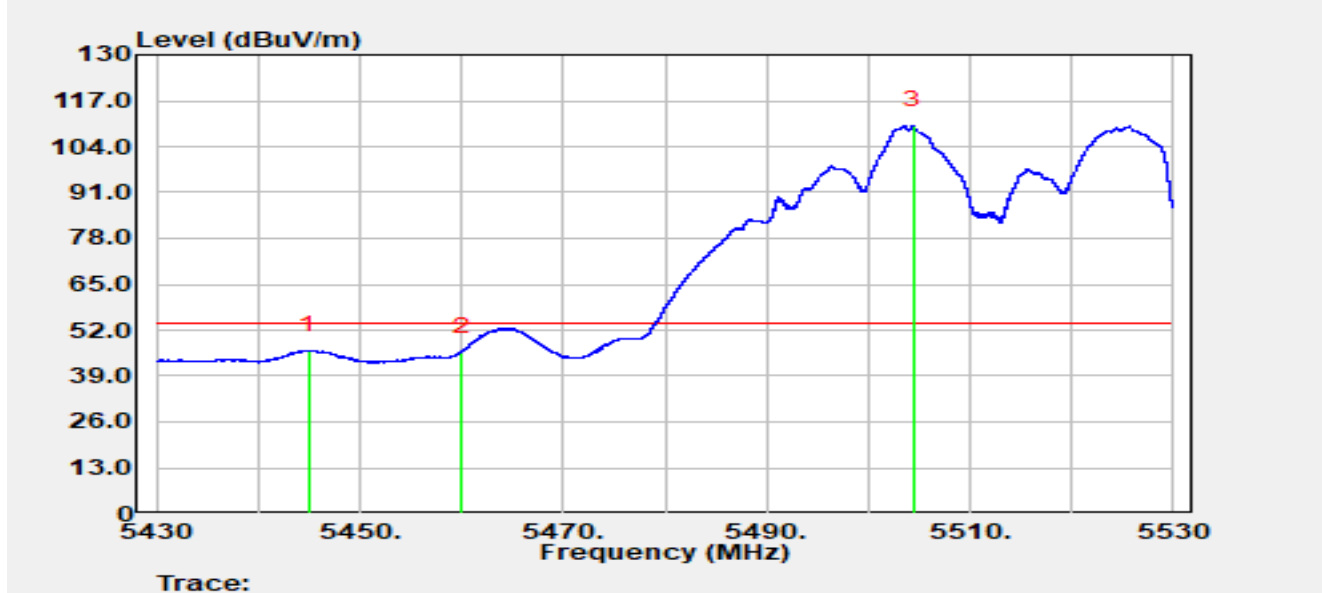

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.990	50.21	-3.90	46.31	-7.69	54.00	Average
2		5460.000	49.04	-3.25	45.79	-8.21	54.00	Average
3		5504.400	63.54	46.42	109.97	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).