



802.11ac-VHT80 Power Spectral Density - Ant 1


Channel 106 (5530 MHz)

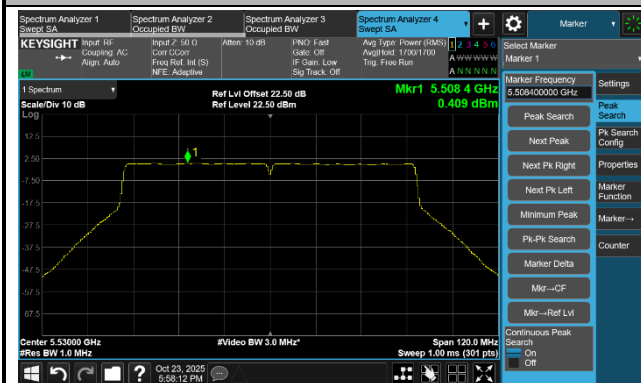

Channel 122 (5610 MHz)

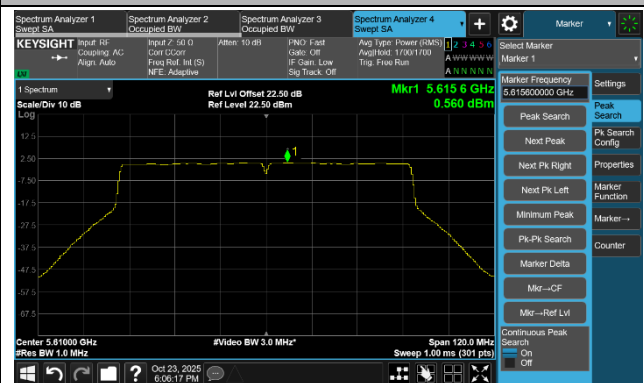


Channel 138 (5690 MHz)

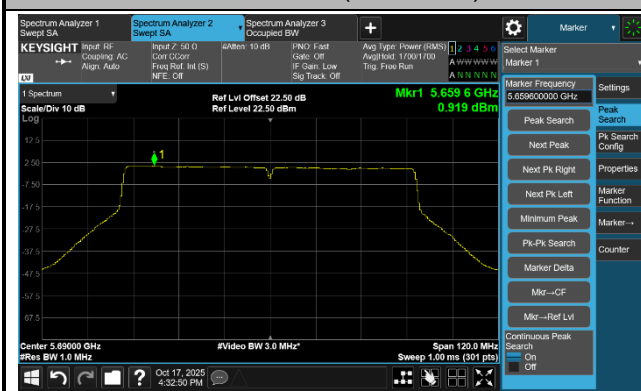


Channel 155 (5775 MHz)



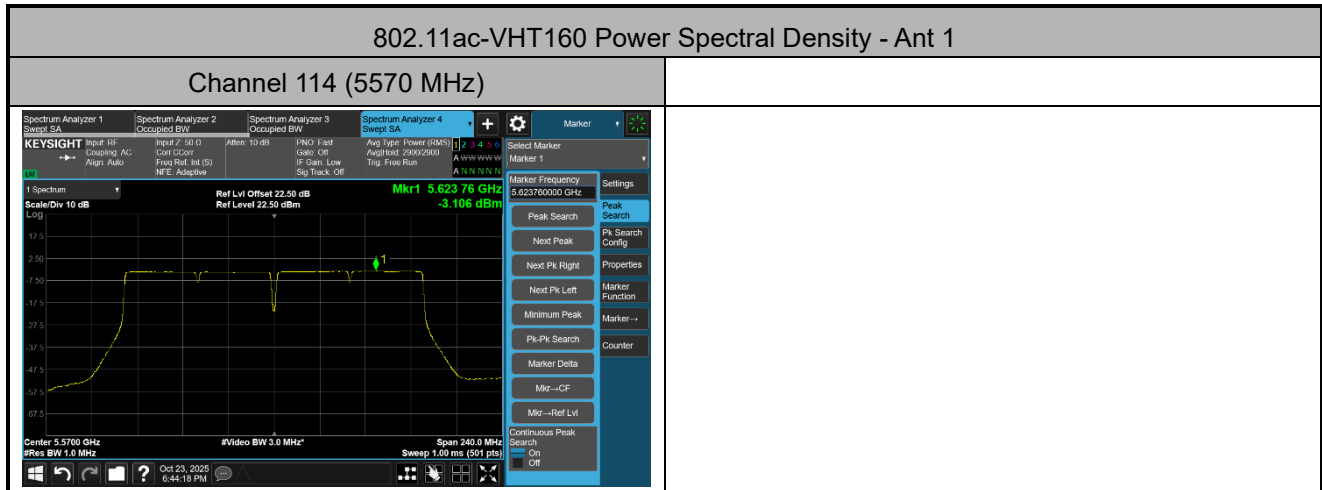


802.11be-EHT20 Power Spectral Density - Ant 1

Channel 100 (5500 MHz)

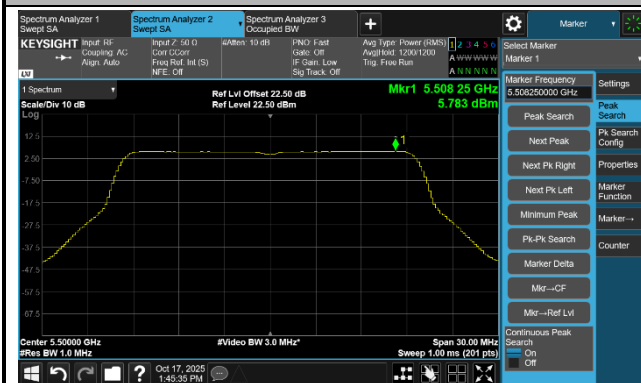


Channel 116 (5580 MHz)

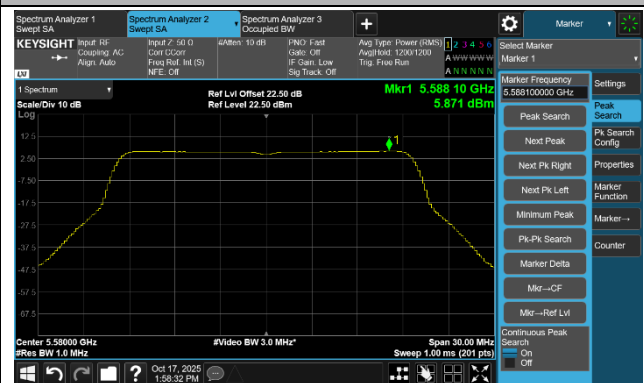

Channel 140 (5700 MHz)



Channel 144(5720 MHz)

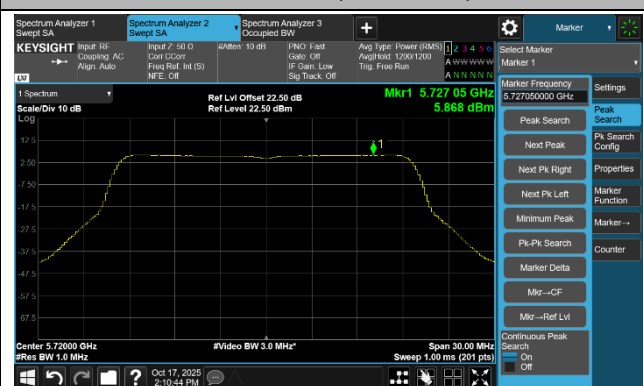

Channel 149 (5745 MHz)




Channel 157 (5785 MHz)




802.11be-EHT20 Power Spectral Density - Ant 1

Channel 165 (5825 MHz)

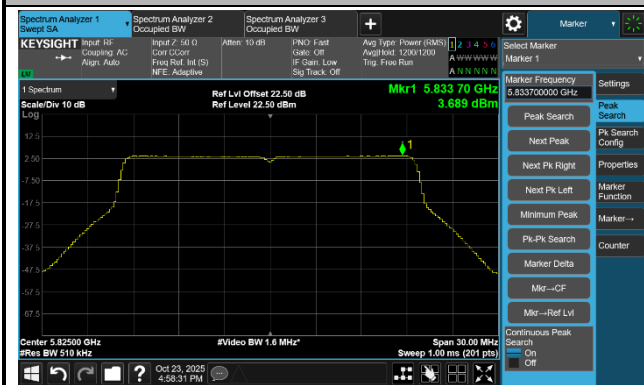


802.11be-EHT40 Power Spectral Density - Ant 1


Channel 102 (5510 MHz)

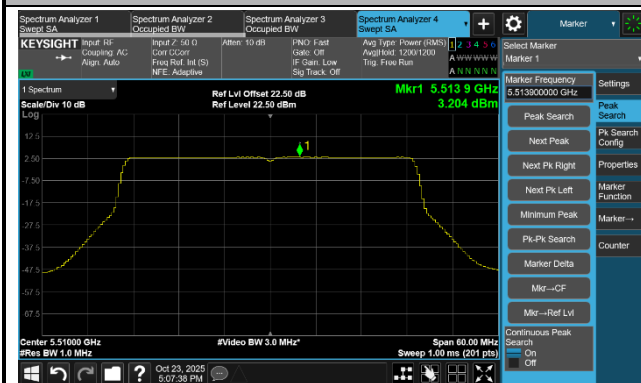

Channel 110 (5550 MHz)

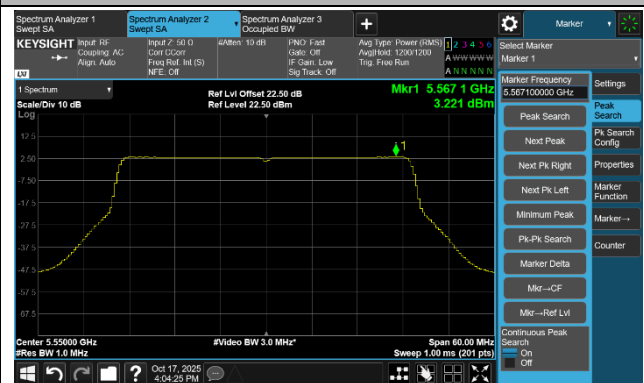


Channel 134 (5670 MHz)

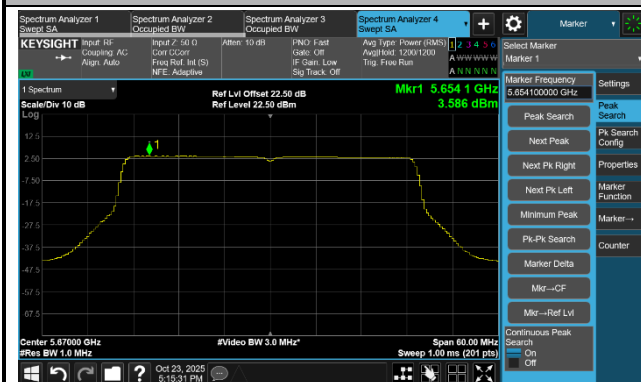

Channel 142(5710 MHz)



Channel 151 (5755 MHz)

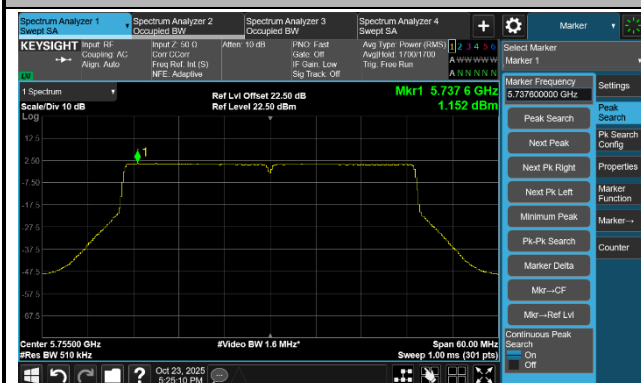


Channel 159 (5795 MHz)




802.11be-EHT80 Power Spectral Density - Ant 1


Channel 106 (5530 MHz)

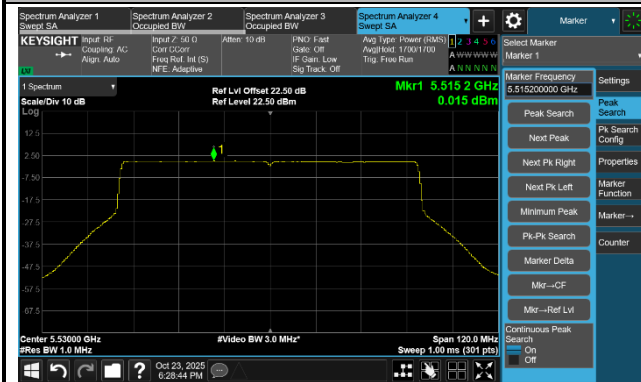

Channel 122 (5610 MHz)

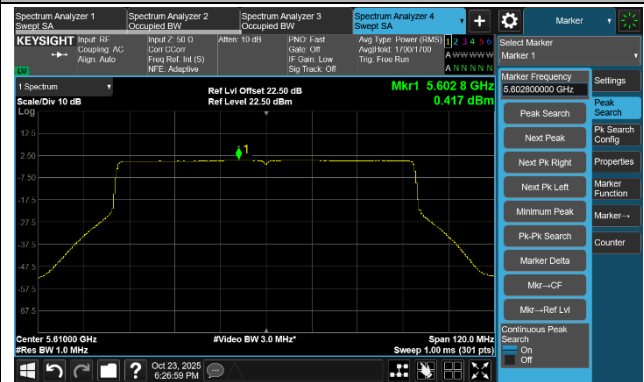


Channel 138 (5690 MHz)

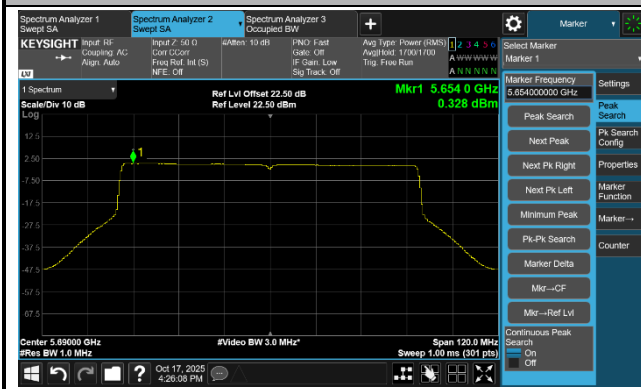

Channel 155 (5775 MHz)



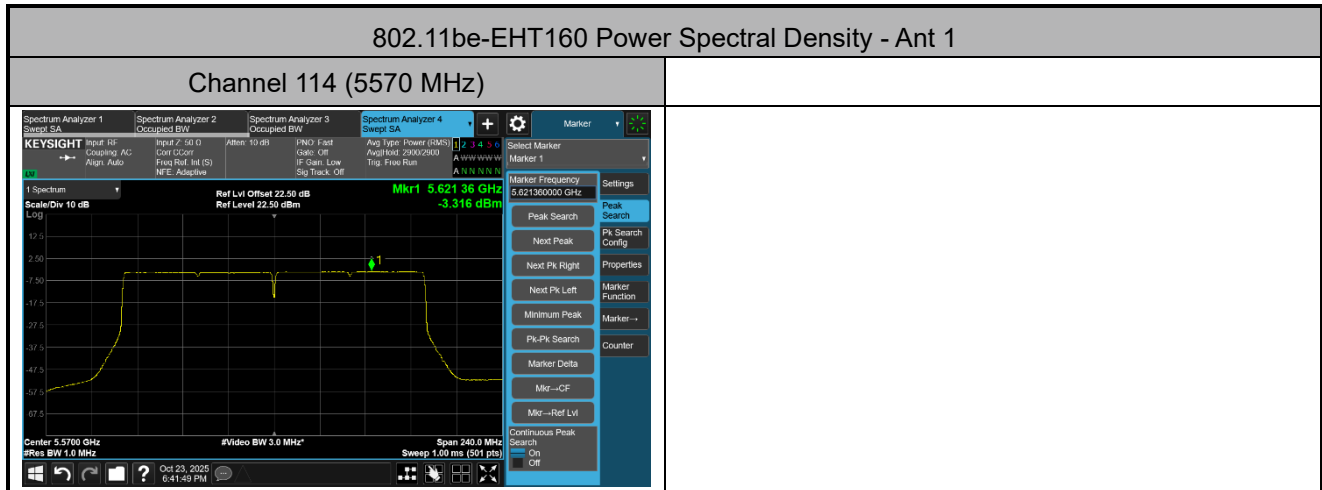

A.6 Frequency Stability Test Result

Test Site	SIP-TR2	Test Engineer	Nolan Chen
Test Date	2025-10-24	Test Mode	5180 MHz (Carrier Mode)
Model No.	OAW-AP1561		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	13.87	13.98	13.42	12.72
		- 20	13.92	14.01	14.05	14.08
		- 10	14.45	14.42	14.38	14.29
		0	13.92	13.90	13.51	13.04
		+ 10	11.75	11.20	10.64	9.92
		+ 20	9.57	8.67	7.75	6.48
		+ 30	2.40	1.81	1.32	0.97
		+ 40	1.19	1.16	0.24	-1.35
		+ 50	-1.91	-3.01	-4.15	-5.49
115%	138	+ 20	9.24	8.36	7.50	6.23
85%	102	+ 20	9.42	8.51	7.62	6.33

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emissions Test Result

WLAN Config 1:

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 36
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8247.10	47.29	-1.49	45.80	74.00	-28.20	Peak	Horizontal
*	9828.10	46.45	0.23	46.68	68.20	-21.52	Peak	Horizontal
	11703.20	47.45	0.40	47.85	74.00	-26.15	Peak	Horizontal
*	13729.60	43.36	3.02	46.38	68.20	-21.82	Peak	Horizontal
	8112.80	46.58	-1.44	45.14	74.00	-28.86	Peak	Vertical
*	10123.90	46.26	0.38	46.64	68.20	-21.56	Peak	Vertical
	11689.60	46.40	0.47	46.87	74.00	-27.13	Peak	Vertical
*	13637.80	44.65	2.58	47.23	68.20	-20.97	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 44
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8168.90	46.71	-1.59	45.12	74.00	-28.88	Peak	Horizontal
*	10236.10	45.91	0.41	46.33	68.20	-21.87	Peak	Horizontal
	12344.10	46.51	1.09	47.60	74.00	-26.40	Peak	Horizontal
*	14248.10	43.65	3.91	47.56	68.20	-20.64	Peak	Horizontal
	8422.20	46.66	-1.32	45.35	74.00	-28.65	Peak	Vertical
*	9942.00	45.85	0.38	46.23	68.20	-21.97	Peak	Vertical
	11696.40	46.54	0.49	47.03	74.00	-26.97	Peak	Vertical
*	13646.30	44.32	2.67	47.00	68.20	-21.20	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 48
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8197.80	47.46	-1.80	45.66	74.00	-28.34	Peak	Horizontal
*	10113.70	46.30	0.31	46.61	68.20	-21.59	Peak	Horizontal
	12298.20	46.69	0.89	47.58	74.00	-26.42	Peak	Horizontal
*	14185.20	44.31	3.23	47.54	68.20	-20.66	Peak	Horizontal
	8077.10	46.84	-1.88	44.96	74.00	-29.04	Peak	Vertical
*	10123.90	47.46	0.38	47.84	68.20	-20.36	Peak	Vertical
	12386.60	45.99	1.39	47.38	74.00	-26.62	Peak	Vertical
*	14288.90	42.98	4.01	46.99	68.20	-21.21	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 52
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8134.90	47.52	-1.65	45.88	74.00	-28.12	Peak	Horizontal
*	10389.10	45.74	0.52	46.26	68.20	-21.94	Peak	Horizontal
	12225.10	46.32	0.88	47.20	74.00	-26.80	Peak	Horizontal
*	13544.30	43.89	3.54	47.43	68.20	-20.77	Peak	Horizontal
	8447.70	46.88	-1.30	45.58	74.00	-28.42	Peak	Vertical
*	9833.20	46.06	0.28	46.34	68.20	-21.86	Peak	Vertical
	12374.70	46.06	1.35	47.42	74.00	-26.58	Peak	Vertical
*	14350.10	43.32	4.52	47.85	68.20	-20.35	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 60
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8121.30	46.94	-1.43	45.51	74.00	-28.49	Peak	Horizontal
*	9823.00	46.42	0.17	46.59	68.20	-21.61	Peak	Horizontal
	11628.40	47.57	-0.11	47.45	74.00	-26.55	Peak	Horizontal
*	13761.90	43.72	3.23	46.95	68.20	-21.25	Peak	Horizontal
	8075.40	47.11	-1.88	45.23	74.00	-28.77	Peak	Vertical
*	9724.40	45.61	-0.04	45.57	68.20	-22.63	Peak	Vertical
	12250.60	46.33	0.97	47.30	74.00	-26.70	Peak	Vertical
*	14304.20	42.78	4.03	46.81	68.20	-21.39	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 64
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8327.00	47.86	-1.51	46.35	74.00	-27.65	Peak	Horizontal
*	9806.00	46.67	0.14	46.81	68.20	-21.39	Peak	Horizontal
	10931.40	47.57	0.00	47.57	74.00	-26.43	Peak	Horizontal
*	13554.50	43.94	3.33	47.28	68.20	-20.92	Peak	Horizontal
	8440.90	46.66	-1.28	45.37	74.00	-28.63	Peak	Vertical
*	9943.70	46.05	0.40	46.45	68.20	-21.75	Peak	Vertical
	12452.90	45.65	1.62	47.27	74.00	-26.73	Peak	Vertical
*	14288.90	43.61	4.01	47.62	68.20	-20.58	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 100
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8389.90	46.66	-1.51	45.15	74.00	-28.85	Peak	Horizontal
*	9729.50	48.33	-0.04	48.29	68.20	-19.91	Peak	Horizontal
	12345.80	46.04	1.11	47.15	74.00	-26.85	Peak	Horizontal
*	14353.50	42.70	4.66	47.36	68.20	-20.84	Peak	Horizontal
	8170.60	46.82	-1.59	45.22	74.00	-28.78	Peak	Vertical
*	10134.10	46.42	0.43	46.85	68.20	-21.35	Peak	Vertical
	12466.50	45.42	1.61	47.03	74.00	-26.97	Peak	Vertical
*	14246.40	43.78	3.96	47.74	68.20	-20.46	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 116
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8095.80	47.41	-1.71	45.70	74.00	-28.30	Peak	Horizontal
*	10307.50	45.99	0.48	46.47	68.20	-21.73	Peak	Horizontal
	11708.30	46.92	0.33	47.25	74.00	-26.75	Peak	Horizontal
*	14368.80	42.38	4.77	47.15	68.20	-21.05	Peak	Horizontal
	8235.20	46.89	-1.52	45.38	74.00	-28.62	Peak	Vertical
*	10171.50	46.00	0.37	46.37	68.20	-21.83	Peak	Vertical
	12546.40	45.45	1.94	47.39	74.00	-26.61	Peak	Vertical
*	14292.30	43.92	3.89	47.81	68.20	-20.39	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 140
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8344.00	46.78	-1.54	45.24	74.00	-28.76	Peak	Horizontal
*	10321.10	46.49	0.41	46.90	68.20	-21.30	Peak	Horizontal
	12140.10	46.49	0.66	47.15	74.00	-26.85	Peak	Horizontal
*	14355.20	42.36	4.73	47.09	68.20	-21.11	Peak	Horizontal
	8230.10	47.88	-1.55	46.33	74.00	-27.67	Peak	Vertical
*	10176.60	45.84	0.34	46.18	68.20	-22.02	Peak	Vertical
	11812.00	47.30	-0.29	47.01	74.00	-26.99	Peak	Vertical
*	14331.40	43.12	4.35	47.48	68.20	-20.72	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 144
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8233.50	46.73	-1.53	45.20	74.00	-28.80	Peak	Horizontal
*	10300.70	45.69	0.55	46.23	68.20	-21.97	Peak	Horizontal
	12427.40	45.70	1.62	47.31	74.00	-26.69	Peak	Horizontal
*	13733.00	43.95	3.07	47.02	68.20	-21.18	Peak	Horizontal
	8136.60	46.56	-1.68	44.88	74.00	-29.12	Peak	Vertical
*	9678.50	46.43	-0.07	46.36	68.20	-21.84	Peak	Vertical
	12546.40	44.82	1.94	46.76	74.00	-27.24	Peak	Vertical
*	13772.10	44.73	3.30	48.03	68.20	-20.17	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 149
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8235.20	48.10	-1.52	46.59	74.00	-27.41	Peak	Horizontal
*	9647.90	47.36	-0.34	47.03	68.20	-21.17	Peak	Horizontal
	12247.20	45.69	0.98	46.67	74.00	-27.33	Peak	Horizontal
*	14326.30	43.52	4.34	47.86	68.20	-20.34	Peak	Horizontal
	8148.50	46.49	-1.66	44.83	74.00	-29.17	Peak	Vertical
*	10140.90	45.75	0.44	46.19	68.20	-22.01	Peak	Vertical
	11800.10	47.14	-0.25	46.89	74.00	-27.11	Peak	Vertical
*	14311.00	43.29	4.16	47.45	68.20	-20.75	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 157
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8136.60	46.79	-1.68	45.11	74.00	-28.89	Peak	Horizontal
*	9680.20	46.55	-0.06	46.49	68.20	-21.71	Peak	Horizontal
	11205.10	47.14	0.04	47.18	74.00	-26.82	Peak	Horizontal
*	14244.70	43.11	4.01	47.11	68.20	-21.09	Peak	Horizontal
	8167.20	46.97	-1.59	45.38	74.00	-28.62	Peak	Vertical
*	9940.30	46.27	0.36	46.63	68.20	-21.57	Peak	Vertical
	12106.10	46.40	0.65	47.05	74.00	-26.95	Peak	Vertical
*	13600.40	44.23	3.03	47.26	68.20	-20.94	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 165
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8175.70	47.94	-1.61	46.33	74.00	-27.67	Peak	Horizontal
*	10310.90	45.90	0.45	46.34	68.20	-21.86	Peak	Horizontal
	11626.70	47.29	-0.12	47.17	74.00	-26.83	Peak	Horizontal
*	14324.60	43.77	4.32	48.09	68.20	-20.11	Peak	Horizontal
	8208.00	47.83	-1.81	46.03	74.00	-27.97	Peak	Vertical
*	10292.20	45.73	0.50	46.23	68.20	-21.97	Peak	Vertical
	12384.90	45.92	1.38	47.30	74.00	-26.70	Peak	Vertical
*	14278.70	43.18	4.38	47.56	68.20	-20.64	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 36
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.80	46.56	-1.44	45.12	74.00	-28.88	Peak	Horizontal
*	9855.30	45.86	0.43	46.29	68.20	-21.91	Peak	Horizontal
	12259.10	45.83	0.98	46.81	74.00	-27.19	Peak	Horizontal
*	14234.50	43.14	4.02	47.16	68.20	-21.04	Peak	Horizontal
	8177.40	47.98	-1.63	46.35	74.00	-27.65	Peak	Vertical
*	9670.00	45.97	-0.12	45.85	68.20	-22.35	Peak	Vertical
	12424.00	45.41	1.62	47.03	74.00	-26.97	Peak	Vertical
*	14431.70	44.13	4.82	48.95	68.20	-19.25	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 44
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8123.00	46.69	-1.42	45.27	74.00	-28.73	Peak	Horizontal
*	9850.20	45.66	0.40	46.07	68.20	-22.13	Peak	Horizontal
	12529.40	45.87	1.64	47.51	74.00	-26.49	Peak	Horizontal
*	14227.70	43.93	4.00	47.93	68.20	-20.27	Peak	Horizontal
	8354.20	46.98	-1.47	45.51	74.00	-28.49	Peak	Vertical
*	9899.50	45.49	0.23	45.71	68.20	-22.49	Peak	Vertical
	12551.50	44.55	1.92	46.47	74.00	-27.53	Peak	Vertical
*	13845.20	44.79	2.68	47.47	68.20	-20.73	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 48
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8196.10	47.04	-1.79	45.24	74.00	-28.76	Peak	Horizontal
*	10271.80	45.45	0.58	46.03	68.20	-22.17	Peak	Horizontal
	12157.10	46.05	0.59	46.64	74.00	-27.36	Peak	Horizontal
*	14426.60	42.79	4.78	47.58	68.20	-20.62	Peak	Horizontal
	8175.70	47.30	-1.61	45.69	74.00	-28.31	Peak	Vertical
*	10147.70	45.51	0.44	45.95	68.20	-22.25	Peak	Vertical
	12208.10	46.24	0.57	46.80	74.00	-27.20	Peak	Vertical
*	14406.20	43.92	4.61	48.53	68.20	-19.67	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 52
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8327.00	46.70	-1.51	45.20	74.00	-28.80	Peak	Horizontal
*	9923.30	45.94	0.15	46.09	68.20	-22.11	Peak	Horizontal
	12162.20	46.23	0.57	46.80	74.00	-27.20	Peak	Horizontal
*	14222.60	43.50	3.85	47.35	68.20	-20.85	Peak	Horizontal
	8119.60	46.62	-1.43	45.19	74.00	-28.81	Peak	Vertical
*	9952.20	45.88	0.49	46.37	68.20	-21.83	Peak	Vertical
	12339.00	45.72	1.02	46.74	74.00	-27.26	Peak	Vertical
*	14224.30	44.07	3.92	48.00	68.20	-20.20	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 60
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8177.40	47.54	-1.63	45.91	74.00	-28.09	Peak	Horizontal
*	9950.50	46.51	0.47	46.98	68.20	-21.22	Peak	Horizontal
	12446.10	45.38	1.62	47.00	74.00	-27.00	Peak	Horizontal
*	14351.80	42.83	4.59	47.42	68.20	-20.78	Peak	Horizontal
	8150.20	47.94	-1.64	46.29	74.00	-27.71	Peak	Vertical
*	9666.60	45.78	-0.17	45.61	68.20	-22.59	Peak	Vertical
	11716.80	46.62	0.18	46.80	74.00	-27.20	Peak	Vertical
*	13649.70	45.92	2.70	48.62	68.20	-19.58	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 64
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8141.70	47.11	-1.72	45.38	74.00	-28.62	Peak	Horizontal
*	9928.40	45.71	0.19	45.90	68.20	-22.30	Peak	Horizontal
	12425.70	45.25	1.62	46.87	74.00	-27.13	Peak	Horizontal
*	14248.10	43.55	3.91	47.46	68.20	-20.74	Peak	Horizontal
	8158.70	46.87	-1.59	45.27	74.00	-28.73	Peak	Vertical
*	10038.90	45.74	-0.02	45.72	68.20	-22.48	Peak	Vertical
	11247.60	47.24	0.35	47.58	74.00	-26.42	Peak	Vertical
*	13546.00	43.61	3.75	47.36	68.20	-20.84	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 100
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8184.20	47.27	-1.71	45.56	74.00	-28.44	Peak	Horizontal
*	10147.70	45.95	0.44	46.39	68.20	-21.81	Peak	Horizontal
	12016.00	46.53	0.20	46.73	74.00	-27.27	Peak	Horizontal
*	13763.60	43.77	3.30	47.08	68.20	-21.12	Peak	Horizontal
	8131.50	46.56	-1.58	44.98	74.00	-29.02	Peak	Vertical
*	10154.50	45.99	0.43	46.43	68.20	-21.77	Peak	Vertical
	11385.30	46.72	0.07	46.79	74.00	-27.21	Peak	Vertical
*	14224.30	43.32	3.92	47.24	68.20	-20.96	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 116
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8262.40	46.59	-1.57	45.02	74.00	-28.98	Peak	Horizontal
*	9622.40	47.35	-0.49	46.86	68.20	-21.34	Peak	Horizontal
	12118.00	46.56	0.73	47.30	74.00	-26.70	Peak	Horizontal
*	13551.10	44.27	3.50	47.77	68.20	-20.43	Peak	Horizontal
	8131.50	47.17	-1.58	45.59	74.00	-28.41	Peak	Vertical
*	10237.80	45.39	0.43	45.82	68.20	-22.38	Peak	Vertical
	11715.10	47.08	0.21	47.29	74.00	-26.71	Peak	Vertical
*	13544.30	43.68	3.54	47.22	68.20	-20.98	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 140
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8384.80	47.39	-1.55	45.84	74.00	-28.16	Peak	Horizontal
*	10147.70	45.89	0.44	46.33	68.20	-21.87	Peak	Horizontal
	12121.40	46.07	0.72	46.79	74.00	-27.21	Peak	Horizontal
*	14261.70	44.11	3.67	47.78	68.20	-20.42	Peak	Horizontal
	8276.00	47.06	-1.62	45.44	74.00	-28.56	Peak	Vertical
*	9867.20	46.13	0.25	46.39	68.20	-21.81	Peak	Vertical
	12359.40	45.51	1.28	46.79	74.00	-27.21	Peak	Vertical
*	14328.00	42.98	4.36	47.34	68.20	-20.86	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 144
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8269.20	47.49	-1.59	45.89	74.00	-28.11	Peak	Horizontal
*	9845.10	46.47	0.38	46.85	68.20	-21.35	Peak	Horizontal
	11179.60	46.33	0.20	46.52	74.00	-27.48	Peak	Horizontal
*	14365.40	42.65	4.88	47.53	68.20	-20.67	Peak	Horizontal
	8250.50	47.02	-1.51	45.52	74.00	-28.48	Peak	Vertical
*	9908.00	45.59	0.23	45.81	68.20	-22.39	Peak	Vertical
	11225.50	46.22	0.18	46.41	74.00	-27.59	Peak	Vertical
*	14943.40	42.61	6.31	48.92	68.20	-19.28	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 149
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8323.60	46.33	-1.49	44.84	74.00	-29.16	Peak	Horizontal
*	9680.20	46.21	-0.06	46.15	68.20	-22.05	Peak	Horizontal
	11650.50	46.79	0.04	46.83	74.00	-27.17	Peak	Horizontal
*	13733.00	43.39	3.07	46.46	68.20	-21.74	Peak	Horizontal
	8430.70	46.80	-1.28	45.52	74.00	-28.48	Peak	Vertical
*	9945.40	45.13	0.42	45.55	68.20	-22.65	Peak	Vertical
	12089.10	46.13	0.53	46.66	74.00	-27.34	Peak	Vertical
*	14243.00	44.66	4.05	48.71	68.20	-19.49	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 157
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8172.30	47.02	-1.59	45.43	74.00	-28.57	Peak	Horizontal
*	9741.40	45.87	-0.02	45.85	68.20	-22.35	Peak	Horizontal
	12102.70	46.85	0.63	47.48	74.00	-26.52	Peak	Horizontal
*	14363.70	43.41	4.94	48.35	68.20	-19.85	Peak	Horizontal
	8395.00	46.66	-1.48	45.18	74.00	-28.82	Peak	Vertical
*	9766.90	45.57	-0.02	45.55	68.20	-22.65	Peak	Vertical
	11351.30	46.95	0.08	47.04	74.00	-26.96	Peak	Vertical
*	14275.30	44.12	4.35	48.47	68.20	-19.73	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 165
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8177.40	47.38	-1.63	45.75	74.00	-28.25	Peak	Horizontal
*	9959.00	46.04	0.55	46.60	68.20	-21.60	Peak	Horizontal
	12435.90	45.91	1.62	47.53	74.00	-26.47	Peak	Horizontal
*	13729.60	44.00	3.02	47.02	68.20	-21.18	Peak	Horizontal
	8372.90	47.08	-1.55	45.54	74.00	-28.46	Peak	Vertical
*	10008.30	45.99	0.15	46.14	68.20	-22.06	Peak	Vertical
	10962.00	47.37	0.10	47.47	74.00	-26.53	Peak	Vertical
*	13656.50	44.52	2.73	47.24	68.20	-20.96	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 38
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8163.80	47.27	-1.59	45.68	74.00	-28.32	Peak	Horizontal
*	9933.50	45.43	0.26	45.69	68.20	-22.51	Peak	Horizontal
	12247.20	46.41	0.98	47.38	74.00	-26.62	Peak	Horizontal
*	14331.40	43.72	4.35	48.07	68.20	-20.13	Peak	Horizontal
	8330.40	46.56	-1.51	45.05	74.00	-28.95	Peak	Vertical
*	9789.00	45.72	-0.08	45.64	68.20	-22.56	Peak	Vertical
	12427.40	45.11	1.62	46.72	74.00	-27.28	Peak	Vertical
*	14278.70	43.70	4.38	48.07	68.20	-20.13	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 46
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8242.00	46.77	-1.47	45.30	74.00	-28.70	Peak	Horizontal
*	9838.30	46.52	0.34	46.86	68.20	-21.34	Peak	Horizontal
	12119.70	46.22	0.73	46.95	74.00	-27.05	Peak	Horizontal
*	14244.70	43.26	4.01	47.26	68.20	-20.94	Peak	Horizontal
	8403.50	46.46	-1.42	45.04	74.00	-28.96	Peak	Vertical
*	9851.90	45.35	0.41	45.76	68.20	-22.44	Peak	Vertical
	12401.90	45.49	1.41	46.90	74.00	-27.10	Peak	Vertical
*	14312.70	43.42	4.18	47.59	68.20	-20.61	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 54
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8316.80	46.69	-1.47	45.22	74.00	-28.78	Peak	Horizontal
*	9948.80	45.64	0.46	46.10	68.20	-22.10	Peak	Horizontal
	12442.70	44.99	1.62	46.61	74.00	-27.39	Peak	Horizontal
*	14362.00	42.76	4.99	47.75	68.20	-20.45	Peak	Horizontal
	8158.70	47.83	-1.59	46.24	74.00	-27.76	Peak	Vertical
*	9953.90	45.38	0.50	45.89	68.20	-22.31	Peak	Vertical
	12332.20	46.72	0.93	47.65	74.00	-26.35	Peak	Vertical
*	14220.90	44.19	3.78	47.97	68.20	-20.23	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 62
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8236.90	46.45	-1.50	44.95	74.00	-29.05	Peak	Horizontal
*	9947.10	46.14	0.44	46.58	68.20	-21.62	Peak	Horizontal
	11949.70	46.46	-0.16	46.30	74.00	-27.70	Peak	Horizontal
*	13614.00	43.44	2.97	46.41	68.20	-21.79	Peak	Horizontal
	8384.80	47.36	-1.55	45.81	74.00	-28.19	Peak	Vertical
*	9834.90	45.26	0.30	45.57	68.20	-22.63	Peak	Vertical
	11631.80	47.11	-0.10	47.01	74.00	-26.99	Peak	Vertical
*	14217.50	43.41	3.63	47.04	68.20	-21.16	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 102
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8174.00	46.62	-1.59	45.03	74.00	-28.97	Peak	Horizontal
*	9777.10	45.86	-0.06	45.80	68.20	-22.40	Peak	Horizontal
	11645.40	46.36	-0.02	46.34	74.00	-27.66	Peak	Horizontal
*	14263.40	43.59	3.76	47.35	68.20	-20.85	Peak	Horizontal
	8140.00	47.42	-1.74	45.67	74.00	-28.33	Peak	Vertical
*	9792.40	46.02	-0.03	45.99	68.20	-22.21	Peak	Vertical
	12240.40	46.09	0.99	47.07	74.00	-26.93	Peak	Vertical
*	14222.60	43.15	3.85	47.00	68.20	-21.20	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 110
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8277.70	47.48	-1.62	45.85	74.00	-28.15	Peak	Horizontal
*	9721.00	46.26	-0.05	46.21	68.20	-21.99	Peak	Horizontal
	12446.10	45.35	1.62	46.97	74.00	-27.03	Peak	Horizontal
*	13767.00	43.62	3.45	47.07	68.20	-21.13	Peak	Horizontal
	8269.20	47.12	-1.59	45.53	74.00	-28.47	Peak	Vertical
*	9925.00	46.46	0.14	46.60	68.20	-21.60	Peak	Vertical
	12407.00	45.14	1.41	46.55	74.00	-27.45	Peak	Vertical
*	14385.80	42.62	4.48	47.10	68.20	-21.10	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 134
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8376.30	47.01	-1.58	45.43	74.00	-28.57	Peak	Horizontal
*	9751.60	46.31	0.03	46.34	68.20	-21.86	Peak	Horizontal
	11628.40	47.72	-0.11	47.61	74.00	-26.39	Peak	Horizontal
*	14232.80	43.55	4.02	47.57	68.20	-20.63	Peak	Horizontal
	8238.60	46.58	-1.49	45.09	74.00	-28.91	Peak	Vertical
*	10030.40	45.81	0.00	45.81	68.20	-22.39	Peak	Vertical
	10849.80	47.03	0.32	47.36	74.00	-26.64	Peak	Vertical
*	14244.70	44.05	4.01	48.06	68.20	-20.14	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 142
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8100.90	46.58	-1.58	45.00	74.00	-29.00	Peak	Horizontal
*	9950.50	45.48	0.47	45.96	68.20	-22.24	Peak	Horizontal
	12422.30	45.49	1.60	47.09	74.00	-26.91	Peak	Horizontal
*	14275.30	43.95	4.35	48.30	68.20	-19.90	Peak	Horizontal
	8315.10	46.88	-1.46	45.42	74.00	-28.58	Peak	Vertical
*	9967.50	45.22	0.40	45.62	68.20	-22.58	Peak	Vertical
	12429.10	45.40	1.62	47.02	74.00	-26.98	Peak	Vertical
*	13726.20	43.96	2.97	46.93	68.20	-21.27	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 151
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8182.50	46.81	-1.69	45.13	74.00	-28.87	Peak	Horizontal
*	9938.60	45.23	0.33	45.56	68.20	-22.64	Peak	Horizontal
	11601.20	46.32	0.09	46.41	74.00	-27.59	Peak	Horizontal
*	13551.10	43.44	3.50	46.94	68.20	-21.26	Peak	Horizontal
	8191.00	46.69	-1.78	44.91	74.00	-29.09	Peak	Vertical
*	9943.70	45.92	0.40	46.32	68.20	-21.88	Peak	Vertical
	11366.60	46.86	0.09	46.95	74.00	-27.05	Peak	Vertical
*	13765.30	44.02	3.38	47.40	68.20	-20.80	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 159
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8140.00	47.54	-1.74	45.80	74.00	-28.20	Peak	Horizontal
*	9642.80	46.24	-0.31	45.92	68.20	-22.28	Peak	Horizontal
	12124.80	46.29	0.71	47.00	74.00	-27.00	Peak	Horizontal
*	14237.90	44.11	4.04	48.15	68.20	-20.05	Peak	Horizontal
	8124.70	46.79	-1.46	45.33	74.00	-28.67	Peak	Vertical
*	10122.20	45.50	0.37	45.87	68.20	-22.33	Peak	Vertical
	12531.10	45.98	1.68	47.66	74.00	-26.34	Peak	Vertical
*	14314.40	44.13	4.20	48.32	68.20	-19.88	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 42
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8204.60	47.36	-1.80	45.55	74.00	-28.45	Peak	Horizontal
*	9505.10	47.55	-0.53	47.01	68.20	-21.19	Peak	Horizontal
	12180.90	46.21	0.46	46.67	74.00	-27.33	Peak	Horizontal
*	14360.30	42.64	4.93	47.57	68.20	-20.63	Peak	Horizontal
	8369.50	46.48	-1.51	44.97	74.00	-29.03	Peak	Vertical
*	10183.40	46.39	0.30	46.70	68.20	-21.50	Peak	Vertical
	11704.90	46.95	0.38	47.33	74.00	-26.67	Peak	Vertical
*	14309.30	44.26	4.12	48.39	68.20	-19.81	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 58
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	47.68	-1.66	46.02	74.00	-27.98	Peak	Horizontal
*	9855.30	46.64	0.43	47.07	68.20	-21.13	Peak	Horizontal
	11710.00	46.36	0.31	46.67	74.00	-27.33	Peak	Horizontal
*	14350.10	43.40	4.52	47.92	68.20	-20.28	Peak	Horizontal
	8162.10	46.65	-1.59	45.06	74.00	-28.94	Peak	Vertical
*	9955.60	45.48	0.52	46.01	68.20	-22.19	Peak	Vertical
	11133.70	46.84	0.31	47.14	74.00	-26.86	Peak	Vertical
*	13821.40	43.96	3.11	47.07	68.20	-21.13	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 106
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8388.20	47.61	-1.53	46.08	74.00	-27.92	Peak	Horizontal
*	10020.20	45.99	0.06	46.05	68.20	-22.15	Peak	Horizontal
	11133.70	46.44	0.31	46.75	74.00	-27.25	Peak	Horizontal
*	14236.20	44.17	4.03	48.20	68.20	-20.00	Peak	Horizontal
	8369.50	46.95	-1.51	45.44	74.00	-28.56	Peak	Vertical
*	10147.70	45.79	0.44	46.24	68.20	-21.96	Peak	Vertical
	12325.40	45.31	0.84	46.15	74.00	-27.85	Peak	Vertical
*	13818.00	43.42	3.19	46.61	68.20	-21.59	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 122
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8352.50	46.99	-1.49	45.51	74.00	-28.49	Peak	Horizontal
*	9840.00	45.74	0.36	46.10	68.20	-22.10	Peak	Horizontal
	12009.20	46.70	0.23	46.93	74.00	-27.07	Peak	Horizontal
*	14132.50	44.61	3.03	47.64	68.20	-20.56	Peak	Horizontal
	8121.30	46.76	-1.43	45.33	74.00	-28.67	Peak	Vertical
*	9962.40	45.68	0.49	46.17	68.20	-22.03	Peak	Vertical
	12118.00	45.70	0.73	46.44	74.00	-27.56	Peak	Vertical
*	13731.30	44.18	3.05	47.23	68.20	-20.97	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 138
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8128.10	46.87	-1.52	45.35	74.00	-28.65	Peak	Horizontal
*	9959.00	45.15	0.55	45.70	68.20	-22.50	Peak	Horizontal
	12097.60	46.38	0.59	46.97	74.00	-27.03	Peak	Horizontal
*	14362.00	42.76	4.99	47.76	68.20	-20.44	Peak	Horizontal
	8325.30	46.77	-1.50	45.27	74.00	-28.73	Peak	Vertical
*	10117.10	46.09	0.33	46.42	68.20	-21.78	Peak	Vertical
	12349.20	46.79	1.16	47.95	74.00	-26.05	Peak	Vertical
*	14251.50	43.58	3.82	47.40	68.20	-20.80	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 155
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8253.90	47.81	-1.53	46.28	74.00	-27.72	Peak	Horizontal
*	10135.80	46.61	0.43	47.04	68.20	-21.16	Peak	Horizontal
	12228.50	45.88	0.91	46.80	74.00	-27.20	Peak	Horizontal
*	13751.70	45.65	2.80	48.44	68.20	-19.76	Peak	Horizontal
	8213.10	47.63	-1.74	45.89	74.00	-28.11	Peak	Vertical
*	9955.60	45.36	0.52	45.88	68.20	-22.32	Peak	Vertical
	12211.50	46.55	0.64	47.19	74.00	-26.81	Peak	Vertical
*	13591.90	45.10	3.02	48.12	68.20	-20.08	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT160 - Channel 50
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8252.20	46.73	-1.52	45.22	74.00	-28.78	Peak	Horizontal
*	9817.90	45.58	0.16	45.74	68.20	-22.46	Peak	Horizontal
	12522.60	46.50	1.52	48.02	74.00	-25.98	Peak	Horizontal
*	13734.70	45.21	3.04	48.24	68.20	-19.96	Peak	Horizontal
	8262.40	46.41	-1.57	44.85	74.00	-29.15	Peak	Vertical
*	9647.90	46.61	-0.34	46.28	68.20	-21.92	Peak	Vertical
	10725.70	46.51	0.61	47.11	74.00	-26.89	Peak	Vertical
*	14251.50	44.42	3.82	48.24	68.20	-19.96	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT160-Channel 114
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8100.90	47.04	-1.58	45.45	74.00	-28.55	Peak	Horizontal
*	9902.90	45.72	0.23	45.95	68.20	-22.25	Peak	Horizontal
	12357.70	46.22	1.27	47.49	74.00	-26.51	Peak	Horizontal
*	13602.10	45.15	3.03	48.18	68.20	-20.02	Peak	Horizontal
	8340.60	47.03	-1.53	45.49	74.00	-28.51	Peak	Vertical
*	9891.00	45.65	0.23	45.88	68.20	-22.32	Peak	Vertical
	11164.30	46.69	0.42	47.11	74.00	-26.89	Peak	Vertical
*	13673.50	45.90	2.68	48.58	68.20	-19.62	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 36
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8236.90	46.29	-1.50	44.79	74.00	-29.21	Peak	Horizontal
*	10317.70	45.66	0.40	46.06	68.20	-22.14	Peak	Horizontal
	12349.20	45.97	1.16	47.13	74.00	-26.87	Peak	Horizontal
*	14421.50	44.25	4.73	48.98	68.20	-19.22	Peak	Horizontal
	8349.10	47.28	-1.51	45.77	74.00	-28.23	Peak	Vertical
*	9902.90	45.57	0.23	45.80	68.20	-22.40	Peak	Vertical
	12437.60	45.54	1.62	47.16	74.00	-26.84	Peak	Vertical
*	13551.10	44.23	3.50	47.73	68.20	-20.47	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 44
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8158.70	48.01	-1.59	46.41	74.00	-27.59	Peak	Horizontal
*	10129.00	45.52	0.42	45.94	68.20	-22.26	Peak	Horizontal
	12473.30	45.74	1.59	47.33	74.00	-26.67	Peak	Horizontal
*	13654.80	45.28	2.72	48.00	68.20	-20.20	Peak	Horizontal
	8235.20	46.41	-1.52	44.90	74.00	-29.10	Peak	Vertical
*	9834.90	45.44	0.30	45.75	68.20	-22.45	Peak	Vertical
	12461.40	45.30	1.62	46.92	74.00	-27.08	Peak	Vertical
*	13566.40	45.30	2.91	48.22	68.20	-19.98	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 48
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8396.70	46.69	-1.46	45.23	74.00	-28.77	Peak	Horizontal
*	10044.00	46.27	-0.02	46.25	68.20	-21.95	Peak	Horizontal
	12097.60	45.93	0.59	46.52	74.00	-27.48	Peak	Horizontal
*	13641.20	45.50	2.62	48.12	68.20	-20.08	Peak	Horizontal
	8335.50	46.57	-1.52	45.04	74.00	-28.96	Peak	Vertical
*	10035.50	46.16	-0.01	46.14	68.20	-22.06	Peak	Vertical
	12240.40	46.53	0.99	47.52	74.00	-26.48	Peak	Vertical
*	13760.20	45.95	3.16	49.11	68.20	-19.09	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 52
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8211.40	46.61	-1.76	44.85	74.00	-29.15	Peak	Horizontal
*	9834.90	45.50	0.30	45.80	68.20	-22.40	Peak	Horizontal
	12366.20	46.14	1.31	47.46	74.00	-26.54	Peak	Horizontal
*	13772.10	44.97	3.30	48.27	68.20	-19.93	Peak	Horizontal
	8418.80	46.53	-1.34	45.19	74.00	-28.81	Peak	Vertical
*	9977.70	46.18	0.25	46.43	68.20	-21.77	Peak	Vertical
	12458.00	46.03	1.63	47.65	74.00	-26.35	Peak	Vertical
*	14249.80	44.33	3.86	48.19	68.20	-20.01	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 60
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8097.50	47.01	-1.67	45.34	74.00	-28.66	Peak	Horizontal
*	10137.50	46.02	0.43	46.46	68.20	-21.74	Peak	Horizontal
	12454.60	45.63	1.63	47.26	74.00	-26.74	Peak	Horizontal
*	13554.50	45.05	3.33	48.38	68.20	-19.82	Peak	Horizontal
	8133.20	46.76	-1.61	45.15	74.00	-28.85	Peak	Vertical
*	10021.90	45.59	0.04	45.64	68.20	-22.56	Peak	Vertical
	12243.80	46.17	0.98	47.15	74.00	-26.85	Peak	Vertical
*	13756.80	45.61	3.01	48.63	68.20	-19.57	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 64
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8128.10	47.47	-1.52	45.95	74.00	-28.05	Peak	Horizontal
*	10229.30	45.75	0.36	46.11	68.20	-22.09	Peak	Horizontal
	12424.00	45.48	1.62	47.10	74.00	-26.90	Peak	Horizontal
*	14443.60	43.71	4.87	48.59	68.20	-19.61	Peak	Horizontal
	8080.50	47.12	-1.88	45.24	74.00	-28.76	Peak	Vertical
*	10159.60	45.46	0.43	45.88	68.20	-22.32	Peak	Vertical
	11718.50	46.79	0.15	46.94	74.00	-27.06	Peak	Vertical
*	13637.80	46.02	2.58	48.60	68.20	-19.60	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 100
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8398.40	46.10	-1.45	44.65	74.00	-29.35	Peak	Horizontal
*	9928.40	46.37	0.19	46.56	68.20	-21.64	Peak	Horizontal
	12152.00	46.67	0.62	47.28	74.00	-26.72	Peak	Horizontal
*	13733.00	45.36	3.07	48.43	68.20	-19.77	Peak	Horizontal
	8395.00	46.95	-1.48	45.47	74.00	-28.53	Peak	Vertical
*	9647.90	47.51	-0.34	47.18	68.20	-21.02	Peak	Vertical
	11902.10	47.24	-0.19	47.05	74.00	-26.95	Peak	Vertical
*	13899.60	45.14	2.93	48.08	68.20	-20.12	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 116
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8435.80	46.94	-1.28	45.66	74.00	-28.34	Peak	Horizontal
*	10139.20	45.48	0.44	45.92	68.20	-22.28	Peak	Horizontal
	11591.00	46.75	0.19	46.94	74.00	-27.06	Peak	Horizontal
*	13709.20	45.84	2.84	48.68	68.20	-19.52	Peak	Horizontal
	8364.40	46.94	-1.46	45.48	74.00	-28.52	Peak	Vertical
*	10095.00	45.59	0.31	45.90	68.20	-22.30	Peak	Vertical
	12089.10	46.71	0.53	47.24	74.00	-26.76	Peak	Vertical
*	14350.10	43.50	4.52	48.03	68.20	-20.17	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 140
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8157.00	46.98	-1.59	45.38	74.00	-28.62	Peak	Horizontal
*	10008.30	46.12	0.15	46.27	68.20	-21.93	Peak	Horizontal
	12452.90	46.27	1.62	47.89	74.00	-26.11	Peak	Horizontal
*	13702.40	45.99	2.85	48.84	68.20	-19.36	Peak	Horizontal
	8248.80	46.53	-1.50	45.03	74.00	-28.97	Peak	Vertical
*	10297.30	46.07	0.55	46.62	68.20	-21.58	Peak	Vertical
	11703.20	45.98	0.40	46.38	74.00	-27.62	Peak	Vertical
*	13546.00	44.37	3.75	48.12	68.20	-20.08	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 144
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8168.90	46.76	-1.59	45.17	74.00	-28.83	Peak	Horizontal
*	10117.10	45.60	0.33	45.93	68.20	-22.27	Peak	Horizontal
	12422.30	45.08	1.60	46.68	74.00	-27.32	Peak	Horizontal
*	13855.40	45.68	2.60	48.28	68.20	-19.92	Peak	Horizontal
	8153.60	47.00	-1.62	45.38	74.00	-28.62	Peak	Vertical
*	9967.50	45.38	0.40	45.78	68.20	-22.42	Peak	Vertical
	12116.30	46.78	0.72	47.50	74.00	-26.50	Peak	Vertical
*	13734.70	44.78	3.04	47.82	68.20	-20.38	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 149
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8264.10	46.67	-1.57	45.10	74.00	-28.90	Peak	Horizontal
*	9885.90	45.74	0.20	45.94	68.20	-22.26	Peak	Horizontal
	12532.80	46.03	1.72	47.75	74.00	-26.25	Peak	Horizontal
*	13705.80	44.95	2.85	47.80	68.20	-20.40	Peak	Horizontal
	8206.30	46.53	-1.80	44.72	74.00	-29.28	Peak	Vertical
*	9960.70	46.18	0.52	46.70	68.20	-21.50	Peak	Vertical
	12395.10	45.43	1.40	46.83	74.00	-27.17	Peak	Vertical
*	14265.10	44.14	3.84	47.98	68.20	-20.22	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 157
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	47.35	-1.66	45.69	74.00	-28.31	Peak	Horizontal
*	9819.60	47.13	0.16	47.30	68.20	-20.90	Peak	Horizontal
	12316.90	46.12	0.84	46.96	74.00	-27.04	Peak	Horizontal
*	13744.90	45.40	2.83	48.22	68.20	-19.98	Peak	Horizontal
	8155.30	47.18	-1.61	45.58	74.00	-28.42	Peak	Vertical
*	10112.00	45.81	0.29	46.10	68.20	-22.10	Peak	Vertical
	12529.40	45.62	1.64	47.26	74.00	-26.74	Peak	Vertical
*	14321.20	43.97	4.28	48.24	68.20	-19.96	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 165
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8206.30	47.80	-1.80	45.99	74.00	-28.01	Peak	Horizontal
*	9957.30	45.12	0.54	45.65	68.20	-22.55	Peak	Horizontal
	12231.90	46.38	0.94	47.33	74.00	-26.67	Peak	Horizontal
*	14424.90	43.65	4.77	48.42	68.20	-19.78	Peak	Horizontal
	8289.60	46.68	-1.65	45.04	74.00	-28.96	Peak	Vertical
*	9974.30	46.48	0.28	46.76	68.20	-21.44	Peak	Vertical
	12274.40	46.09	0.99	47.08	74.00	-26.92	Peak	Vertical
*	13913.20	45.06	3.26	48.33	68.20	-19.87	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 38
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8162.10	46.86	-1.59	45.27	74.00	-28.73	Peak	Horizontal
*	10254.80	46.06	0.59	46.65	68.20	-21.55	Peak	Horizontal
	11575.70	46.86	0.31	47.17	74.00	-26.83	Peak	Horizontal
*	13751.70	45.67	2.80	48.46	68.20	-19.74	Peak	Horizontal
	8123.00	46.96	-1.42	45.54	74.00	-28.46	Peak	Vertical
*	9872.30	45.41	0.16	45.57	68.20	-22.63	Peak	Vertical
	12408.70	45.88	1.43	47.31	74.00	-26.69	Peak	Vertical
*	14277.00	43.72	4.44	48.16	68.20	-20.04	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 46
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8379.70	47.27	-1.59	45.68	74.00	-28.32	Peak	Horizontal
*	10224.20	45.78	0.33	46.10	68.20	-22.10	Peak	Horizontal
	12226.80	46.54	0.90	47.44	74.00	-26.56	Peak	Horizontal
*	13603.80	45.06	3.02	48.07	68.20	-20.13	Peak	Horizontal
	8196.10	47.26	-1.79	45.47	74.00	-28.53	Peak	Vertical
*	10363.60	45.98	0.31	46.29	68.20	-21.91	Peak	Vertical
	11305.40	47.39	-0.04	47.35	74.00	-26.65	Peak	Vertical
*	14355.20	44.10	4.73	48.83	68.20	-19.37	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 54
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8143.40	47.05	-1.71	45.34	74.00	-28.66	Peak	Horizontal
*	9918.20	46.52	0.17	46.70	68.20	-21.50	Peak	Horizontal
	11703.20	46.95	0.40	47.35	74.00	-26.65	Peak	Horizontal
*	13551.10	45.17	3.50	48.67	68.20	-19.53	Peak	Horizontal
	8357.60	46.45	-1.45	45.00	74.00	-29.00	Peak	Vertical
*	9851.90	46.08	0.41	46.49	68.20	-21.71	Peak	Vertical
	11332.60	47.13	-0.06	47.07	74.00	-26.93	Peak	Vertical
*	13615.70	45.40	2.92	48.32	68.20	-19.88	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 62
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8216.50	48.43	-1.69	46.73	74.00	-27.27	Peak	Horizontal
*	9738.00	46.94	-0.03	46.91	68.20	-21.29	Peak	Horizontal
	12373.00	46.05	1.35	47.40	74.00	-26.60	Peak	Horizontal
*	14241.30	43.74	4.05	47.78	68.20	-20.42	Peak	Horizontal
	8168.90	46.66	-1.59	45.07	74.00	-28.93	Peak	Vertical
*	10137.50	45.87	0.43	46.31	68.20	-21.89	Peak	Vertical
	12441.00	45.85	1.62	47.47	74.00	-26.53	Peak	Vertical
*	13566.40	45.41	2.91	48.32	68.20	-19.88	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 102
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8170.60	48.39	-1.59	46.80	74.00	-27.20	Peak	Horizontal
*	10523.40	46.00	0.50	46.50	68.20	-21.70	Peak	Horizontal
	12432.50	45.89	1.62	47.51	74.00	-26.49	Peak	Horizontal
*	14372.20	44.11	4.66	48.77	68.20	-19.43	Peak	Horizontal
	8187.60	47.33	-1.74	45.58	74.00	-28.42	Peak	Vertical
*	10316.00	45.57	0.40	45.97	68.20	-22.23	Peak	Vertical
	12422.30	44.99	1.60	46.59	74.00	-27.41	Peak	Vertical
*	14237.90	44.08	4.04	48.12	68.20	-20.08	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 110
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8238.60	47.44	-1.49	45.95	74.00	-28.05	Peak	Horizontal
*	10134.10	46.06	0.43	46.49	68.20	-21.71	Peak	Horizontal
	12571.90	45.21	1.82	47.03	74.00	-26.97	Peak	Horizontal
*	13687.10	45.33	2.67	48.00	68.20	-20.20	Peak	Horizontal
	8257.30	46.96	-1.54	45.42	74.00	-28.58	Peak	Vertical
*	10125.60	46.28	0.40	46.68	68.20	-21.52	Peak	Vertical
	12272.70	46.29	1.01	47.30	74.00	-26.70	Peak	Vertical
*	13835.00	45.81	2.78	48.60	68.20	-19.60	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 134
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8174.00	47.59	-1.59	46.00	74.00	-28.00	Peak	Horizontal
*	10149.40	45.99	0.44	46.43	68.20	-21.77	Peak	Horizontal
	12549.80	45.13	1.93	47.06	74.00	-26.94	Peak	Horizontal
*	13614.00	45.66	2.97	48.62	68.20	-19.58	Peak	Horizontal
	8347.40	46.95	-1.52	45.44	74.00	-28.56	Peak	Vertical
*	9965.80	46.05	0.43	46.48	68.20	-21.72	Peak	Vertical
	11234.00	47.36	0.23	47.59	74.00	-26.41	Peak	Vertical
*	14372.20	43.98	4.66	48.64	68.20	-19.56	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 142
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8260.70	46.70	-1.56	45.14	74.00	-28.86	Peak	Horizontal
*	10401.00	46.16	0.43	46.58	68.20	-21.62	Peak	Horizontal
	12136.70	46.54	0.68	47.22	74.00	-26.78	Peak	Horizontal
*	13802.70	44.80	3.21	48.01	68.20	-20.19	Peak	Horizontal
	8264.10	46.74	-1.57	45.17	74.00	-28.83	Peak	Vertical
*	10176.60	45.77	0.34	46.11	68.20	-22.09	Peak	Vertical
	12403.60	45.50	1.41	46.91	74.00	-27.09	Peak	Vertical
*	13668.40	45.04	2.73	47.77	68.20	-20.43	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 151
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8174.00	47.42	-1.59	45.83	74.00	-28.17	Peak	Horizontal
*	9768.60	46.43	-0.03	46.40	68.20	-21.80	Peak	Horizontal
	12089.10	46.34	0.53	46.87	74.00	-27.13	Peak	Horizontal
*	13678.60	45.60	2.62	48.23	68.20	-19.97	Peak	Horizontal
	8359.30	46.23	-1.44	44.79	74.00	-29.21	Peak	Vertical
*	10531.90	45.92	0.55	46.46	68.20	-21.74	Peak	Vertical
	12126.50	46.73	0.71	47.44	74.00	-26.56	Peak	Vertical
*	13741.50	45.05	2.90	47.95	68.20	-20.25	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 159
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8216.50	47.77	-1.69	46.08	74.00	-27.92	Peak	Horizontal
*	10236.10	45.53	0.41	45.95	68.20	-22.25	Peak	Horizontal
	12228.50	46.53	0.91	47.45	74.00	-26.55	Peak	Horizontal
*	13566.40	45.53	2.91	48.44	68.20	-19.76	Peak	Horizontal
	8213.10	47.21	-1.74	45.47	74.00	-28.53	Peak	Vertical
*	10355.10	46.94	0.33	47.26	68.20	-20.94	Peak	Vertical
	12514.10	45.58	1.39	46.97	74.00	-27.03	Peak	Vertical
*	13569.80	45.82	2.92	48.73	68.20	-19.47	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 42
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8330.40	46.57	-1.51	45.06	74.00	-28.94	Peak	Horizontal
*	10168.10	45.81	0.39	46.20	68.20	-22.00	Peak	Horizontal
	12544.70	45.91	1.94	47.85	74.00	-26.15	Peak	Horizontal
*	13846.90	45.33	2.66	47.99	68.20	-20.21	Peak	Horizontal
	8167.20	48.42	-1.59	46.82	74.00	-27.18	Peak	Vertical
*	9692.10	46.57	-0.04	46.53	68.20	-21.67	Peak	Vertical
	12543.00	45.21	1.95	47.15	74.00	-26.85	Peak	Vertical
*	14244.70	44.62	4.01	48.62	68.20	-19.58	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 58
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8146.80	47.38	-1.68	45.71	74.00	-28.29	Peak	Horizontal
*	10028.70	46.68	0.00	46.68	68.20	-21.52	Peak	Horizontal
	12417.20	45.36	1.54	46.90	74.00	-27.10	Peak	Horizontal
*	13744.90	45.47	2.83	48.30	68.20	-19.90	Peak	Horizontal
	8257.30	46.60	-1.54	45.05	74.00	-28.95	Peak	Vertical
*	9834.90	46.05	0.30	46.35	68.20	-21.85	Peak	Vertical
	12281.20	46.85	0.91	47.76	74.00	-26.24	Peak	Vertical
*	13629.30	45.40	2.55	47.95	68.20	-20.25	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 106
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8174.00	47.59	-1.59	46.00	74.00	-28.00	Peak	Horizontal
*	9833.20	46.22	0.28	46.50	68.20	-21.70	Peak	Horizontal
	11567.20	46.62	0.28	46.90	74.00	-27.10	Peak	Horizontal
*	13845.20	45.96	2.68	48.64	68.20	-19.56	Peak	Horizontal
	8236.90	46.67	-1.50	45.17	74.00	-28.83	Peak	Vertical
*	9891.00	45.33	0.23	45.56	68.20	-22.64	Peak	Vertical
	11601.20	47.49	0.09	47.59	74.00	-26.41	Peak	Vertical
*	13615.70	45.15	2.92	48.07	68.20	-20.13	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 122
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8162.10	46.85	-1.59	45.25	74.00	-28.75	Peak	Horizontal
*	9647.90	47.18	-0.34	46.85	68.20	-21.35	Peak	Horizontal
	12466.50	45.70	1.61	47.31	74.00	-26.69	Peak	Horizontal
*	13738.10	45.06	2.97	48.03	68.20	-20.17	Peak	Horizontal
	8253.90	47.29	-1.53	45.76	74.00	-28.24	Peak	Vertical
*	9858.70	45.93	0.41	46.33	68.20	-21.87	Peak	Vertical
	12152.00	46.42	0.62	47.04	74.00	-26.96	Peak	Vertical
*	13693.90	45.15	2.78	47.93	68.20	-20.27	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 138
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8219.90	47.23	-1.65	45.58	74.00	-28.42	Peak	Horizontal
*	9851.90	45.66	0.41	46.07	68.20	-22.13	Peak	Horizontal
	12408.70	46.05	1.43	47.49	74.00	-26.51	Peak	Horizontal
*	13617.40	45.53	2.87	48.40	68.20	-19.80	Peak	Horizontal
	8128.10	46.69	-1.52	45.18	74.00	-28.82	Peak	Vertical
*	10135.80	45.41	0.43	45.85	68.20	-22.35	Peak	Vertical
	12541.30	45.93	1.91	47.84	74.00	-26.16	Peak	Vertical
*	14426.60	43.82	4.78	48.60	68.20	-19.60	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 155
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8158.70	47.22	-1.59	45.63	74.00	-28.37	Peak	Horizontal
*	9756.70	46.28	0.04	46.32	68.20	-21.88	Peak	Horizontal
	12429.10	45.46	1.62	47.08	74.00	-26.92	Peak	Horizontal
*	13607.20	45.49	3.00	48.49	68.20	-19.71	Peak	Horizontal
	8095.80	47.37	-1.71	45.66	74.00	-28.34	Peak	Vertical
*	10324.50	45.56	0.41	45.98	68.20	-22.22	Peak	Vertical
	11689.60	46.70	0.47	47.17	74.00	-26.83	Peak	Vertical
*	14404.50	43.64	4.60	48.24	68.20	-19.96	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT160 - Channel 50
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8446.00	47.24	-1.29	45.96	74.00	-28.04	Peak	Horizontal
*	10426.50	47.19	0.37	47.56	68.20	-20.64	Peak	Horizontal
	11623.30	46.48	-0.11	46.37	74.00	-27.63	Peak	Horizontal
*	13707.50	44.91	2.84	47.75	68.20	-20.45	Peak	Horizontal
	8355.90	47.21	-1.46	45.75	74.00	-28.25	Peak	Vertical
*	10159.60	45.81	0.43	46.24	68.20	-21.96	Peak	Vertical
	12279.50	46.07	0.93	47.00	74.00	-27.00	Peak	Vertical
*	14336.50	43.70	4.34	48.04	68.20	-20.16	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT160-Channel 114
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8167.20	48.00	-1.59	46.41	74.00	-27.59	Peak	Horizontal
*	10047.40	45.88	0.01	45.89	68.20	-22.31	Peak	Horizontal
	11324.10	47.41	-0.08	47.34	74.00	-26.66	Peak	Horizontal
*	13727.90	44.97	3.00	47.97	68.20	-20.23	Peak	Horizontal
	8423.90	46.52	-1.31	45.22	74.00	-28.78	Peak	Vertical
*	9829.80	46.65	0.25	46.90	68.20	-21.30	Peak	Vertical
	11699.80	47.00	0.45	47.45	74.00	-26.55	Peak	Vertical
*	13738.10	44.99	2.97	47.96	68.20	-20.24	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

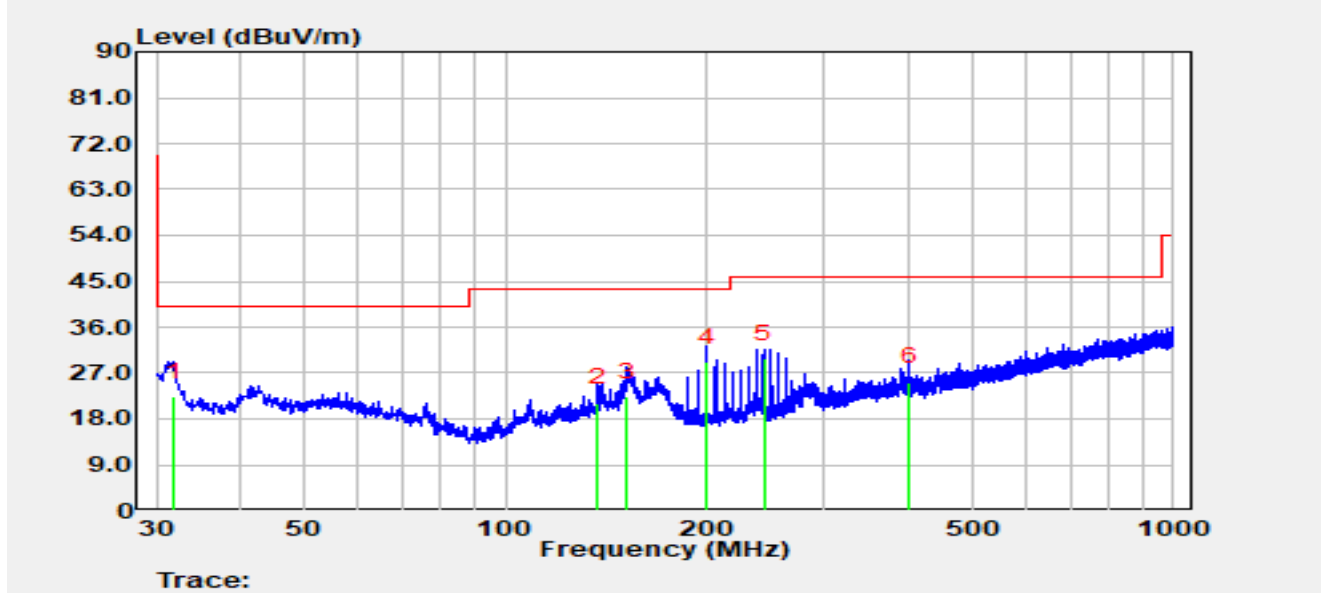


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		31.843	5.30	17.02	22.32	-17.68	40.00	QP
2		137.476	3.70	17.51	21.21	-22.29	43.50	QP
3		151.638	4.10	18.22	22.32	-21.18	43.50	QP
4	*	200.041	14.00	15.09	29.09	-14.41	43.50	QP
5		243.788	13.20	16.65	29.85	-16.15	46.00	QP
6		401.607	3.90	21.28	25.18	-20.82	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5610 MHz		

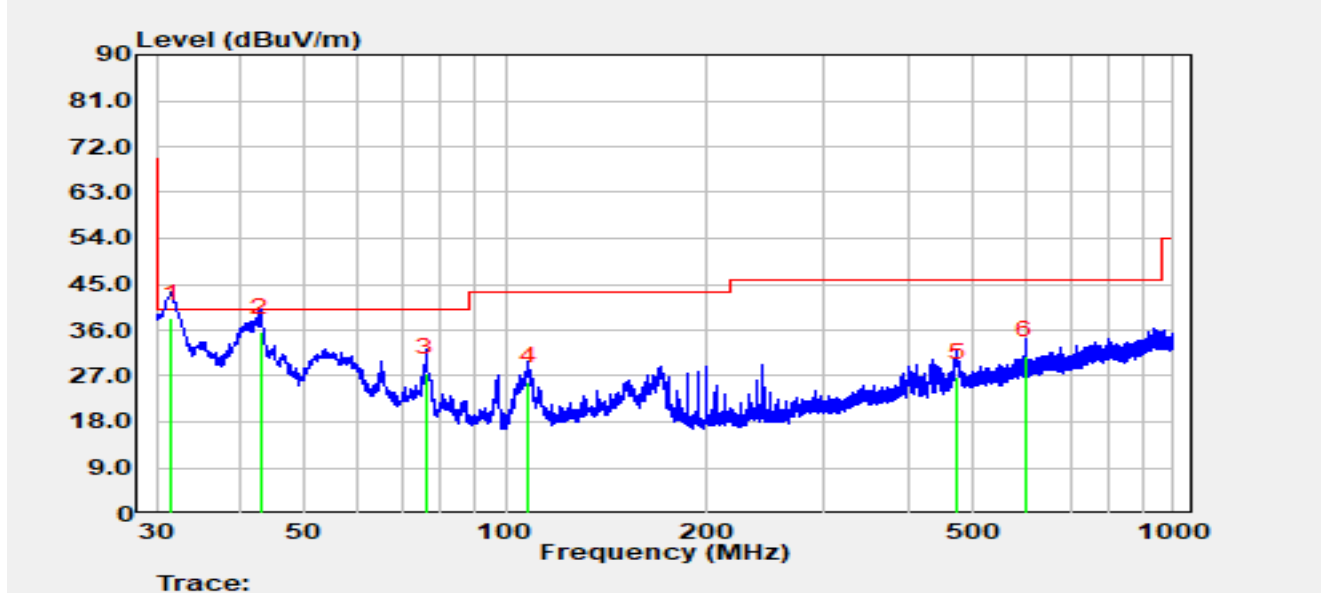

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.649	21.30	17.02	38.32	-1.68	40.00	QP
2		42.901	17.60	18.06	35.66	-4.34	40.00	QP
3		75.881	12.70	14.92	27.62	-12.38	40.00	QP
4		108.182	11.00	14.88	25.88	-17.62	43.50	QP
5		474.163	3.90	22.93	26.83	-19.17	46.00	QP
6		598.808	5.10	25.84	30.94	-15.06	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

WLAN Config 2:

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 100
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8179.10	47.03	-1.65	45.38	74.00	-28.62	Peak	Horizontal
*	10139.20	45.81	0.44	46.24	68.20	-21.96	Peak	Horizontal
	12539.60	46.00	1.87	47.87	74.00	-26.13	Peak	Horizontal
*	14324.60	43.86	4.32	48.18	68.20	-20.02	Peak	Horizontal
	8211.40	47.44	-1.76	45.68	74.00	-28.32	Peak	Vertical
*	10346.60	46.01	0.35	46.37	68.20	-21.83	Peak	Vertical
	12216.60	46.59	0.76	47.35	74.00	-26.65	Peak	Vertical
*	14749.60	43.74	5.89	49.63	68.20	-18.57	Peak	Vertical

Note 1: "*" is not in restricted band

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 116
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8218.20	47.69	-1.67	46.01	74.00	-27.99	Peak	Horizontal
*	10020.20	46.48	0.06	46.54	68.20	-21.66	Peak	Horizontal
	11987.10	46.53	0.30	46.83	74.00	-27.17	Peak	Horizontal
*	14095.10	45.22	2.85	48.07	68.20	-20.13	Peak	Horizontal
	8140.00	46.59	-1.74	44.85	74.00	-29.15	Peak	Vertical
*	9931.80	45.85	0.24	46.09	68.20	-22.11	Peak	Vertical
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Vertical
*	13019.00	44.55	0.73	45.28	68.20	-22.92	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 140
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8236.90	46.94	-1.50	45.44	74.00	-28.56	Peak	Horizontal
*	9637.70	46.88	-0.29	46.59	68.20	-21.61	Peak	Horizontal
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Horizontal
*	12995.20	45.00	1.08	46.08	68.20	-22.12	Peak	Horizontal
	8148.50	48.22	-1.66	46.56	74.00	-27.44	Peak	Vertical
*	9931.80	45.85	0.24	46.09	68.20	-22.11	Peak	Vertical
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Vertical
*	12995.20	45.00	1.08	46.08	68.20	-22.12	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 144
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	48.22	-1.66	46.56	74.00	-27.44	Peak	Horizontal
*	9865.50	46.90	0.28	47.19	68.20	-21.01	Peak	Horizontal
	12005.80	47.81	0.24	48.06	74.00	-25.94	Peak	Horizontal
*	12833.70	45.89	0.97	46.86	68.20	-21.34	Peak	Horizontal
	8223.30	47.14	-1.60	45.53	74.00	-28.47	Peak	Vertical
*	9841.70	45.62	0.37	45.99	68.20	-22.21	Peak	Vertical
	12036.40	46.84	0.12	46.95	74.00	-27.05	Peak	Vertical
*	12939.10	44.86	0.86	45.72	68.20	-22.48	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 149
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8393.30	47.16	-1.49	45.67	74.00	-28.33	Peak	Horizontal
*	9637.70	47.17	-0.29	46.88	68.20	-21.32	Peak	Horizontal
	11443.10	46.87	-0.01	46.86	74.00	-27.14	Peak	Horizontal
*	14244.70	42.56	4.01	46.57	68.20	-21.63	Peak	Horizontal
	8362.70	47.14	-1.44	45.69	74.00	-28.31	Peak	Vertical
*	9763.50	47.06	0.00	47.06	68.20	-21.14	Peak	Vertical
	12481.80	45.50	1.49	46.99	74.00	-27.01	Peak	Vertical
*	14227.70	43.66	4.00	47.66	68.20	-20.54	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 157
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8182.50	47.46	-1.69	45.77	74.00	-28.23	Peak	Horizontal
*	10404.40	45.59	0.42	46.01	68.20	-22.19	Peak	Horizontal
	12441.00	45.83	1.62	47.45	74.00	-26.55	Peak	Horizontal
*	13552.80	43.45	3.42	46.87	68.20	-21.33	Peak	Horizontal
	8230.10	47.47	-1.55	45.92	74.00	-28.08	Peak	Vertical
*	9964.10	45.69	0.46	46.15	68.20	-22.05	Peak	Vertical
	12393.40	45.75	1.40	47.15	74.00	-26.85	Peak	Vertical
*	13663.30	43.30	2.76	46.06	68.20	-22.14	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11a - Channel 165
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8148.50	46.92	-1.66	45.26	74.00	-28.74	Peak	Horizontal
*	9848.50	46.15	0.40	46.55	68.20	-21.65	Peak	Horizontal
	12041.50	46.87	0.06	46.93	74.00	-27.07	Peak	Horizontal
*	13767.00	42.67	3.45	46.12	68.20	-22.08	Peak	Horizontal
	8252.20	46.80	-1.52	45.28	74.00	-28.72	Peak	Vertical
*	10407.80	45.00	0.41	45.42	68.20	-22.78	Peak	Vertical
	12264.20	46.36	1.00	47.37	74.00	-26.63	Peak	Vertical
*	13823.10	42.16	3.07	45.23	68.20	-22.97	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 100
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8257.30	46.51	-1.54	44.97	74.00	-29.03	Peak	Horizontal
*	9960.70	45.27	0.52	45.79	68.20	-22.41	Peak	Horizontal
	11733.80	46.24	-0.05	46.19	74.00	-27.81	Peak	Horizontal
*	13644.60	44.07	2.65	46.73	68.20	-21.47	Peak	Horizontal
	8204.60	46.87	-1.80	45.06	74.00	-28.94	Peak	Vertical
*	10406.10	46.11	0.42	46.53	68.20	-21.67	Peak	Vertical
	12265.90	46.01	1.01	47.02	74.00	-26.98	Peak	Vertical
*	13593.60	43.61	3.03	46.64	68.20	-21.56	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 116
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8123.00	47.76	-1.42	46.34	74.00	-27.66	Peak	Horizontal
*	10130.70	45.45	0.42	45.88	68.20	-22.32	Peak	Horizontal
	12415.50	46.29	1.51	47.81	74.00	-26.19	Peak	Horizontal
*	13692.20	43.82	2.75	46.57	68.20	-21.63	Peak	Horizontal
	8369.50	46.40	-1.51	44.88	74.00	-29.12	Peak	Vertical
*	10198.70	45.08	0.25	45.33	68.20	-22.87	Peak	Vertical
	12429.10	46.16	1.62	47.77	74.00	-26.23	Peak	Vertical
*	13646.30	44.83	2.67	47.50	68.20	-20.70	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 140
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8218.20	46.82	-1.67	45.15	74.00	-28.85	Peak	Horizontal
*	10123.90	45.98	0.38	46.36	68.20	-21.84	Peak	Horizontal
	11718.50	47.21	0.15	47.36	74.00	-26.64	Peak	Horizontal
*	13627.60	44.26	2.60	46.86	68.20	-21.34	Peak	Horizontal
	8163.80	46.80	-1.59	45.21	74.00	-28.79	Peak	Vertical
*	9998.10	45.54	0.20	45.74	68.20	-22.46	Peak	Vertical
	12543.00	45.48	1.95	47.43	74.00	-26.57	Peak	Vertical
*	13824.80	42.29	3.03	45.32	68.20	-22.88	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 144
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8187.60	47.23	-1.74	45.49	74.00	-28.51	Peak	Horizontal
*	9955.60	45.61	0.52	46.13	68.20	-22.07	Peak	Horizontal
	11970.10	46.81	0.05	46.86	74.00	-27.14	Peak	Horizontal
*	14266.80	42.95	3.93	46.87	68.20	-21.33	Peak	Horizontal
	8364.40	46.26	-1.46	44.80	74.00	-29.20	Peak	Vertical
*	10049.10	46.04	0.03	46.07	68.20	-22.13	Peak	Vertical
	12124.80	45.71	0.71	46.42	74.00	-27.58	Peak	Vertical
*	14088.30	42.30	2.85	45.14	68.20	-23.06	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 149
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8228.40	47.32	-1.56	45.76	74.00	-28.24	Peak	Horizontal
*	10021.90	45.56	0.04	45.61	68.20	-22.59	Peak	Horizontal
	11733.80	47.16	-0.05	47.10	74.00	-26.90	Peak	Horizontal
*	14309.30	42.61	4.12	46.73	68.20	-21.47	Peak	Horizontal
	8260.70	46.80	-1.56	45.24	74.00	-28.76	Peak	Vertical
*	10122.20	45.22	0.37	45.60	68.20	-22.60	Peak	Vertical
	12441.00	45.28	1.62	46.90	74.00	-27.10	Peak	Vertical
*	14149.50	43.98	2.95	46.93	68.20	-21.27	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 157
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8204.60	47.21	-1.80	45.40	74.00	-28.60	Peak	Horizontal
*	10195.30	46.10	0.26	46.36	68.20	-21.84	Peak	Horizontal
	12439.30	45.35	1.62	46.97	74.00	-27.03	Peak	Horizontal
*	14227.70	41.92	4.00	45.92	68.20	-22.28	Peak	Horizontal
	8332.10	47.35	-1.52	45.83	74.00	-28.17	Peak	Vertical
*	10302.40	46.25	0.53	46.78	68.20	-21.42	Peak	Vertical
	12362.80	46.10	1.30	47.40	74.00	-26.60	Peak	Vertical
*	14232.80	42.57	4.02	46.59	68.20	-21.61	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT20 - Channel 165
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8160.40	46.59	-1.59	45.00	74.00	-29.00	Peak	Horizontal
*	9836.60	45.78	0.32	46.10	68.20	-22.10	Peak	Horizontal
	12578.70	46.26	1.75	48.01	74.00	-25.99	Peak	Horizontal
*	13136.30	45.93	1.08	47.01	68.20	-21.19	Peak	Horizontal
	8291.30	46.80	-1.65	45.15	74.00	-28.85	Peak	Vertical
*	9738.00	46.29	-0.03	46.26	68.20	-21.94	Peak	Vertical
	11694.70	46.68	0.51	47.19	74.00	-26.81	Peak	Vertical
*	13542.60	43.92	3.33	47.25	68.20	-20.95	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 102
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8116.20	47.11	-1.44	45.68	74.00	-28.32	Peak	Horizontal
*	10220.80	46.50	0.31	46.81	68.20	-21.39	Peak	Horizontal
	12233.60	45.81	0.96	46.77	74.00	-27.23	Peak	Horizontal
*	13546.00	43.40	3.75	47.16	68.20	-21.04	Peak	Horizontal
	8245.40	47.22	-1.48	45.73	74.00	-28.27	Peak	Vertical
*	10191.90	46.09	0.27	46.36	68.20	-21.84	Peak	Vertical
	12412.10	45.22	1.47	46.69	74.00	-27.31	Peak	Vertical
*	13554.50	44.05	3.33	47.39	68.20	-20.81	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 110
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8124.70	46.82	-1.46	45.36	74.00	-28.64	Peak	Horizontal
*	9945.40	45.65	0.42	46.07	68.20	-22.13	Peak	Horizontal
	11225.50	47.66	0.18	47.84	74.00	-26.16	Peak	Horizontal
*	14380.70	42.79	4.45	47.24	68.20	-20.96	Peak	Horizontal
	8349.10	47.86	-1.51	46.35	74.00	-27.65	Peak	Vertical
*	10023.60	45.94	0.03	45.97	68.20	-22.23	Peak	Vertical
	12561.70	45.42	1.89	47.31	74.00	-26.69	Peak	Vertical
*	14413.00	42.88	4.65	47.53	68.20	-20.67	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 134
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8172.30	47.30	-1.59	45.71	74.00	-28.29	Peak	Horizontal
*	9970.90	45.70	0.34	46.04	68.20	-22.16	Peak	Horizontal
	12464.80	46.51	1.61	48.12	74.00	-25.88	Peak	Horizontal
*	14319.50	44.25	4.26	48.51	68.20	-19.69	Peak	Horizontal
	8219.90	46.76	-1.65	45.11	74.00	-28.89	Peak	Vertical
*	9928.40	45.36	0.19	45.54	68.20	-22.66	Peak	Vertical
	12233.60	45.76	0.96	46.72	74.00	-27.28	Peak	Vertical
*	14311.00	43.32	4.16	47.48	68.20	-20.72	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 142
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8170.60	46.38	-1.59	44.79	74.00	-29.21	Peak	Horizontal
*	9821.30	45.91	0.17	46.08	68.20	-22.12	Peak	Horizontal
	12422.30	45.61	1.60	47.21	74.00	-26.79	Peak	Horizontal
*	14384.10	43.02	4.47	47.49	68.20	-20.71	Peak	Horizontal
	8123.00	47.35	-1.42	45.92	74.00	-28.08	Peak	Vertical
*	10157.90	45.39	0.43	45.82	68.20	-22.38	Peak	Vertical
	12413.80	45.44	1.49	46.93	74.00	-27.07	Peak	Vertical
*	14316.10	43.58	4.22	47.80	68.20	-20.40	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 151
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8182.50	46.63	-1.69	44.94	74.00	-29.06	Peak	Horizontal
*	10146.00	45.58	0.45	46.03	68.20	-22.17	Peak	Horizontal
	12563.40	45.55	1.88	47.43	74.00	-26.57	Peak	Horizontal
*	14353.50	43.02	4.66	47.67	68.20	-20.53	Peak	Horizontal
	8434.10	47.27	-1.28	45.99	74.00	-28.01	Peak	Vertical
*	9843.40	45.46	0.38	45.84	68.20	-22.36	Peak	Vertical
	12347.50	45.82	1.14	46.95	74.00	-27.05	Peak	Vertical
*	14419.80	43.11	4.72	47.82	68.20	-20.38	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT40 - Channel 159
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8179.10	47.15	-1.65	45.50	74.00	-28.50	Peak	Horizontal
*	9868.90	46.60	0.22	46.82	68.20	-21.38	Peak	Horizontal
	12109.50	46.72	0.68	47.40	74.00	-26.60	Peak	Horizontal
*	14363.70	43.50	4.94	48.44	68.20	-19.76	Peak	Horizontal
	8440.90	46.51	-1.28	45.23	74.00	-28.77	Peak	Vertical
*	10237.80	45.10	0.43	45.53	68.20	-22.67	Peak	Vertical
	12526.00	45.85	1.57	47.41	74.00	-26.59	Peak	Vertical
*	14365.40	42.58	4.88	47.46	68.20	-20.74	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 106
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8094.10	46.89	-1.75	45.14	74.00	-28.86	Peak	Horizontal
*	9729.50	46.21	-0.04	46.17	68.20	-22.03	Peak	Horizontal
	12339.00	46.20	1.02	47.22	74.00	-26.78	Peak	Horizontal
*	14333.10	43.65	4.35	48.00	68.20	-20.20	Peak	Horizontal
	8262.40	47.07	-1.57	45.50	74.00	-28.50	Peak	Vertical
*	10219.10	46.08	0.29	46.38	68.20	-21.82	Peak	Vertical
	12435.90	45.05	1.62	46.67	74.00	-27.33	Peak	Vertical
*	14384.10	43.59	4.47	48.06	68.20	-20.14	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 122
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8151.90	46.96	-1.63	45.33	74.00	-28.67	Peak	Horizontal
*	9943.70	45.67	0.40	46.07	68.20	-22.13	Peak	Horizontal
	12179.20	46.63	0.47	47.10	74.00	-26.90	Peak	Horizontal
*	14368.80	43.10	4.77	47.87	68.20	-20.33	Peak	Horizontal
	8145.10	47.27	-1.69	45.58	74.00	-28.42	Peak	Vertical
*	9858.70	46.04	0.41	46.44	68.20	-21.76	Peak	Vertical
	12554.90	45.34	1.91	47.26	74.00	-26.74	Peak	Vertical
*	14418.10	42.30	4.70	47.00	68.20	-21.20	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 138
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8434.10	47.00	-1.28	45.72	74.00	-28.28	Peak	Horizontal
*	9950.50	45.89	0.47	46.36	68.20	-21.84	Peak	Horizontal
	12339.00	46.37	1.02	47.39	74.00	-26.61	Peak	Horizontal
*	14350.10	42.92	4.52	47.44	68.20	-20.76	Peak	Horizontal
	8157.00	46.83	-1.59	45.24	74.00	-28.76	Peak	Vertical
*	10093.30	46.28	0.30	46.58	68.20	-21.62	Peak	Vertical
	11619.90	47.16	-0.08	47.08	74.00	-26.92	Peak	Vertical
*	14319.50	43.59	4.26	47.84	68.20	-20.36	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT80 - Channel 155
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8389.90	46.98	-1.51	45.47	74.00	-28.53	Peak	Horizontal
*	9855.30	45.16	0.43	45.59	68.20	-22.61	Peak	Horizontal
	12259.10	46.15	0.98	47.13	74.00	-26.87	Peak	Horizontal
*	14421.50	43.80	4.73	48.54	68.20	-19.66	Peak	Horizontal
	8342.30	46.63	-1.54	45.10	74.00	-28.90	Peak	Vertical
*	9850.20	45.57	0.40	45.97	68.20	-22.23	Peak	Vertical
	12391.70	45.60	1.40	47.01	74.00	-26.99	Peak	Vertical
*	14397.70	43.45	4.56	48.01	68.20	-20.19	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11ac-VHT160-Channel 114
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8446.00	46.33	-1.29	45.05	74.00	-28.95	Peak	Horizontal
*	9938.60	46.19	0.33	46.52	68.20	-21.68	Peak	Horizontal
	12014.30	46.39	0.21	46.59	74.00	-27.41	Peak	Horizontal
*	14322.90	43.44	4.30	47.74	68.20	-20.46	Peak	Horizontal
	8425.60	46.32	-1.30	45.03	74.00	-28.97	Peak	Vertical
*	9834.90	46.18	0.30	46.49	68.20	-21.71	Peak	Vertical
	12269.30	46.43	1.02	47.45	74.00	-26.55	Peak	Vertical
*	14362.00	43.57	4.99	48.56	68.20	-19.64	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 100
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8328.70	46.72	-1.51	45.21	74.00	-28.79	Peak	Horizontal
*	9969.20	45.43	0.37	45.80	68.20	-22.40	Peak	Horizontal
	12430.80	45.52	1.62	47.14	74.00	-26.86	Peak	Horizontal
*	14305.90	43.12	4.06	47.18	68.20	-21.02	Peak	Horizontal
	8325.30	47.51	-1.50	46.00	74.00	-28.00	Peak	Vertical
*	10016.80	45.95	0.09	46.04	68.20	-22.17	Peak	Vertical
	12551.50	44.95	1.92	46.87	74.00	-27.13	Peak	Vertical
*	14317.80	43.47	4.24	47.71	68.20	-20.49	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 116
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8376.30	47.07	-1.58	45.49	74.00	-28.51	Peak	Horizontal
*	10033.80	46.01	-0.01	46.00	68.20	-22.20	Peak	Horizontal
	12577.00	45.47	1.79	47.26	74.00	-26.74	Peak	Horizontal
*	14317.80	43.07	4.24	47.31	68.20	-20.89	Peak	Horizontal
	8150.20	47.76	-1.64	46.11	74.00	-27.89	Peak	Vertical
*	9821.30	45.68	0.17	45.85	68.20	-22.35	Peak	Vertical
	12255.70	46.73	0.97	47.70	74.00	-26.30	Peak	Vertical
*	14324.60	43.63	4.32	47.95	68.20	-20.25	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 140
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8344.00	46.76	-1.54	45.22	74.00	-28.78	Peak	Horizontal
*	9834.90	44.99	0.30	45.29	68.20	-22.91	Peak	Horizontal
	11623.30	48.03	-0.11	47.92	74.00	-26.08	Peak	Horizontal
*	14311.00	43.01	4.16	47.17	68.20	-21.03	Peak	Horizontal
	8427.30	46.43	-1.28	45.14	74.00	-28.86	Peak	Vertical
*	9753.30	46.18	0.04	46.22	68.20	-21.98	Peak	Vertical
	12454.60	45.49	1.63	47.12	74.00	-26.88	Peak	Vertical
*	14324.60	44.23	4.32	48.55	68.20	-19.65	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 144
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.80	46.57	-1.44	45.13	74.00	-28.87	Peak	Horizontal
*	10144.30	45.18	0.44	45.63	68.20	-22.57	Peak	Horizontal
	11727.00	46.89	-0.02	46.87	74.00	-27.13	Peak	Horizontal
*	13542.60	44.16	3.33	47.49	68.20	-20.71	Peak	Horizontal
	8216.50	47.30	-1.69	45.61	74.00	-28.39	Peak	Vertical
*	9901.20	45.46	0.23	45.69	68.20	-22.51	Peak	Vertical
	12447.80	45.67	1.62	47.29	74.00	-26.71	Peak	Vertical
*	14215.80	44.65	3.56	48.21	68.20	-19.99	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 149
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8267.50	49.93	-1.59	48.34	74.00	-25.66	Peak	Horizontal
*	9911.40	47.68	0.21	47.89	68.20	-20.31	Peak	Horizontal
	12512.40	48.29	1.37	49.66	74.00	-24.34	Peak	Horizontal
*	13554.50	47.09	3.33	50.42	68.20	-17.78	Peak	Horizontal
	8175.70	48.70	-1.61	47.09	74.00	-26.91	Peak	Vertical
*	9853.60	47.86	0.42	48.28	68.20	-19.92	Peak	Vertical
	12393.40	47.37	1.40	48.78	74.00	-25.22	Peak	Vertical
*	14360.30	45.77	4.93	50.69	68.20	-17.51	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 157
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8252.20	49.61	-1.52	48.09	74.00	-25.91	Peak	Horizontal
*	9821.30	48.44	0.17	48.61	68.20	-19.59	Peak	Horizontal
	12473.30	47.91	1.59	49.50	74.00	-24.50	Peak	Horizontal
*	13763.60	46.85	3.30	50.16	68.20	-18.04	Peak	Horizontal
	8221.60	48.97	-1.63	47.35	74.00	-26.65	Peak	Vertical
*	10152.80	47.70	0.43	48.13	68.20	-20.07	Peak	Vertical
	11708.30	48.68	0.33	49.02	74.00	-24.98	Peak	Vertical
*	13564.70	47.00	2.91	49.91	68.20	-18.29	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT20 - Channel 165
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8111.10	48.33	-1.44	46.89	74.00	-27.11	Peak	Horizontal
*	10018.50	48.48	0.07	48.55	68.20	-19.65	Peak	Horizontal
	12449.50	48.33	1.62	49.95	74.00	-24.05	Peak	Horizontal
*	13552.80	46.48	3.42	49.90	68.20	-18.30	Peak	Horizontal
	8333.80	48.90	-1.52	47.38	74.00	-26.62	Peak	Vertical
*	10016.80	47.99	0.09	48.08	68.20	-20.12	Peak	Vertical
	12415.50	47.32	1.51	48.84	74.00	-25.16	Peak	Vertical
*	13770.40	46.68	3.35	50.03	68.20	-18.17	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 102
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8095.80	48.50	-1.71	46.79	74.00	-27.21	Peak	Horizontal
*	10302.40	48.64	0.53	49.17	68.20	-19.03	Peak	Horizontal
	12447.80	47.25	1.62	48.88	74.00	-25.12	Peak	Horizontal
*	13926.80	46.89	3.46	50.35	68.20	-17.85	Peak	Horizontal
	8459.60	48.42	-1.39	47.03	74.00	-26.97	Peak	Vertical
*	9727.80	48.72	-0.04	48.68	68.20	-19.52	Peak	Vertical
	12186.00	48.56	0.43	48.99	74.00	-25.01	Peak	Vertical
*	14280.40	46.53	4.32	50.84	68.20	-17.36	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 110
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8473.20	49.31	-1.49	47.82	74.00	-26.18	Peak	Horizontal
*	10032.10	47.89	-0.01	47.88	68.20	-20.32	Peak	Horizontal
	12412.10	47.73	1.47	49.20	74.00	-24.80	Peak	Horizontal
*	14244.70	46.17	4.01	50.18	68.20	-18.02	Peak	Horizontal
	8131.50	48.07	-1.58	46.49	74.00	-27.51	Peak	Vertical
*	9748.20	48.55	0.01	48.56	68.20	-19.64	Peak	Vertical
	12548.10	47.21	1.93	49.15	74.00	-24.85	Peak	Vertical
*	14282.10	46.28	4.25	50.53	68.20	-17.67	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 134
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8172.30	48.49	-1.59	46.90	74.00	-27.10	Peak	Horizontal
*	9936.90	47.80	0.31	48.11	68.20	-20.09	Peak	Horizontal
	11689.60	48.55	0.47	49.02	74.00	-24.98	Peak	Horizontal
*	13768.70	46.97	3.40	50.37	68.20	-17.83	Peak	Horizontal
	8170.60	48.44	-1.59	46.85	74.00	-27.15	Peak	Vertical
*	9702.30	48.29	-0.07	48.23	68.20	-19.97	Peak	Vertical
	12435.90	47.16	1.62	48.78	74.00	-25.22	Peak	Vertical
*	14339.90	45.47	4.34	49.81	68.20	-18.39	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 142
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8388.20	48.77	-1.53	47.24	74.00	-26.76	Peak	Horizontal
*	9829.80	47.65	0.25	47.90	68.20	-20.30	Peak	Horizontal
	11550.20	49.42	0.20	49.62	74.00	-24.38	Peak	Horizontal
*	13894.50	47.04	2.99	50.03	68.20	-18.17	Peak	Horizontal
	8362.70	48.59	-1.44	47.14	74.00	-26.86	Peak	Vertical
*	9704.00	48.03	-0.07	47.96	68.20	-20.24	Peak	Vertical
	12160.50	48.76	0.58	49.34	74.00	-24.66	Peak	Vertical
*	14428.30	45.15	4.80	49.95	68.20	-18.25	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 151
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8185.90	48.70	-1.72	46.98	74.00	-27.02	Peak	Horizontal
*	10122.20	47.93	0.37	48.30	68.20	-19.90	Peak	Horizontal
	12378.10	47.54	1.36	48.90	74.00	-25.10	Peak	Horizontal
*	13812.90	46.86	3.19	50.05	68.20	-18.15	Peak	Horizontal
	8281.10	48.75	-1.63	47.12	74.00	-26.88	Peak	Vertical
*	9853.60	48.22	0.42	48.64	68.20	-19.56	Peak	Vertical
	12425.70	47.52	1.62	49.13	74.00	-24.87	Peak	Vertical
*	14365.40	45.32	4.88	50.20	68.20	-18.00	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT40 - Channel 159
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8376.30	48.69	-1.58	47.11	74.00	-26.89	Peak	Horizontal
*	10521.70	48.43	0.49	48.92	68.20	-19.28	Peak	Horizontal
	11699.80	48.56	0.45	49.00	74.00	-25.00	Peak	Horizontal
*	13658.20	46.95	2.74	49.69	68.20	-18.51	Peak	Horizontal
	8157.00	48.54	-1.59	46.95	74.00	-27.05	Peak	Vertical
*	10057.60	48.49	0.11	48.60	68.20	-19.60	Peak	Vertical
	12439.30	47.13	1.62	48.75	74.00	-25.25	Peak	Vertical
*	14339.90	45.67	4.34	50.01	68.20	-18.19	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 106
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8112.80	48.61	-1.44	47.17	74.00	-26.83	Peak	Horizontal
*	9933.50	47.53	0.26	47.79	68.20	-20.41	Peak	Horizontal
	11694.70	48.71	0.51	49.23	74.00	-24.77	Peak	Horizontal
*	14346.70	45.00	4.39	49.39	68.20	-18.81	Peak	Horizontal
	8243.70	47.84	-1.48	46.36	74.00	-27.64	Peak	Vertical
*	10152.80	48.13	0.43	48.57	68.20	-19.63	Peak	Vertical
	12252.30	47.70	0.97	48.67	74.00	-25.33	Peak	Vertical
*	13729.60	46.72	3.02	49.74	68.20	-18.46	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 122
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8189.30	48.75	-1.76	46.99	74.00	-27.01	Peak	Horizontal
*	10098.40	47.73	0.31	48.04	68.20	-20.16	Peak	Horizontal
	12211.50	47.88	0.64	48.53	74.00	-25.47	Peak	Horizontal
*	13620.80	47.23	2.78	50.01	68.20	-18.19	Peak	Horizontal
	8129.80	48.44	-1.55	46.89	74.00	-27.11	Peak	Vertical
*	9675.10	47.88	-0.09	47.79	68.20	-20.41	Peak	Vertical
	12118.00	48.58	0.73	49.31	74.00	-24.69	Peak	Vertical
*	13780.60	47.55	3.05	50.60	68.20	-17.60	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 138
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8238.60	48.13	-1.49	46.64	74.00	-27.36	Peak	Horizontal
*	10222.50	48.69	0.32	49.01	68.20	-19.19	Peak	Horizontal
	12260.80	47.39	0.99	48.38	74.00	-25.62	Peak	Horizontal
*	13549.40	46.55	3.59	50.13	68.20	-18.07	Peak	Horizontal
	8262.40	48.91	-1.57	47.34	74.00	-26.66	Peak	Vertical
*	10412.90	47.56	0.41	47.96	68.20	-20.24	Peak	Vertical
	12444.40	46.96	1.62	48.58	74.00	-25.42	Peak	Vertical
*	14234.50	46.50	4.02	50.53	68.20	-17.67	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT80 - Channel 155
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		


Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8157.00	47.39	-1.59	45.80	74.00	-28.20	Peak	Horizontal
*	9858.70	46.76	0.41	47.16	68.20	-21.04	Peak	Horizontal
	12408.70	45.09	1.43	46.52	74.00	-27.48	Peak	Horizontal
*	13760.20	44.69	3.16	47.85	68.20	-20.35	Peak	Horizontal
	8400.10	46.21	-1.44	44.77	74.00	-29.23	Peak	Vertical
*	10161.30	45.94	0.43	46.36	68.20	-21.84	Peak	Vertical
	12459.70	45.04	1.62	46.66	74.00	-27.34	Peak	Vertical
*	14283.80	44.08	4.19	48.28	68.20	-19.92	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-10-27	Test Mode	802.11be-EHT160-Channel 114
Model No.	OAW-AP1561		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8437.50	46.58	-1.28	45.30	74.00	-28.70	Peak	Horizontal
*	10219.10	45.85	0.29	46.14	68.20	-22.06	Peak	Horizontal
	11626.70	47.87	-0.12	47.75	74.00	-26.25	Peak	Horizontal
*	13547.70	44.66	3.67	48.33	68.20	-19.87	Peak	Horizontal
	8437.50	46.58	-1.28	45.30	74.00	-28.70	Peak	Vertical
*	10384.00	46.34	0.56	46.90	68.20	-21.30	Peak	Vertical
	11555.30	46.97	0.20	47.17	74.00	-26.83	Peak	Vertical
*	14219.20	44.41	3.71	48.12	68.20	-20.08	Peak	Vertical
Note 1: "*" is not in restricted band								
Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)								
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The Result of Radiated Emission below 1 GHz:

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5785 MHz		

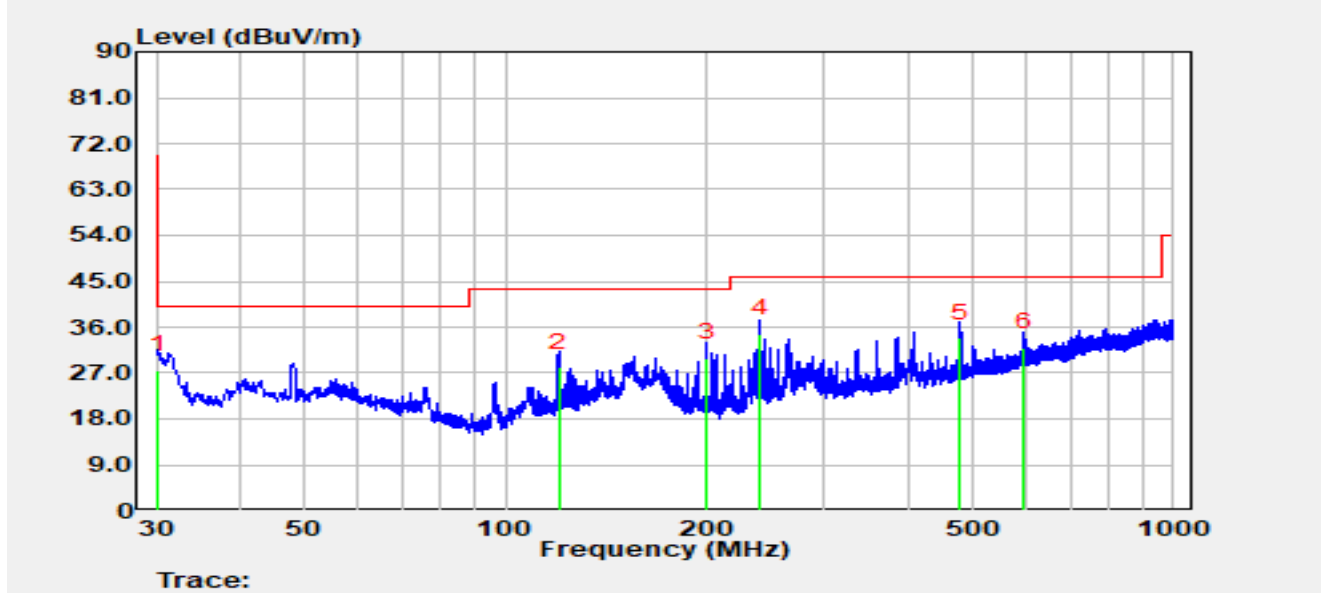


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		30.194	10.40	17.11	27.51	-12.49	40.00	QP
2		120.016	11.90	16.21	28.11	-15.39	43.50	QP
3		200.041	14.90	15.09	29.99	-13.51	43.50	QP
4	*	240.005	18.20	16.46	34.66	-11.34	46.00	QP
5		479.983	11.00	22.95	33.95	-12.05	46.00	QP
6		598.032	6.10	25.83	31.93	-14.07	46.00	QP

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	SIP-AC3	Test Date	2025-10-31
Temperature	21.0 °C	Humidity	61.3%
Limit	FCC_Part 15.209_RSE(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5785 MHz		

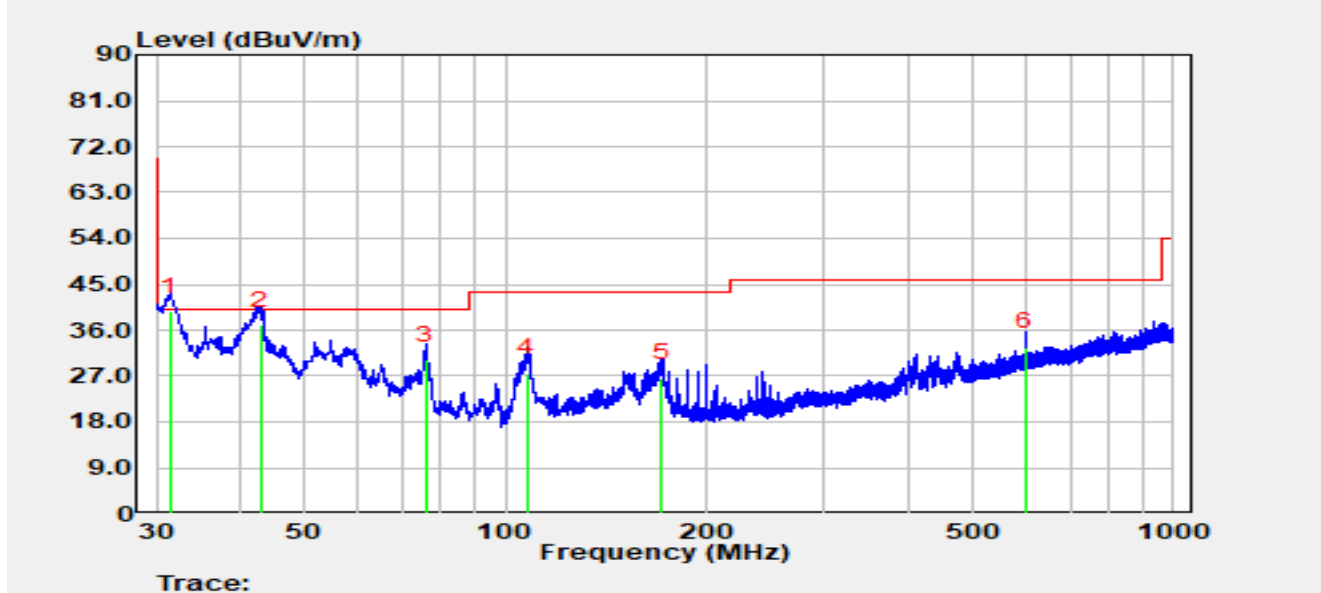

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	31.455	22.60	17.02	39.62	-0.38	40.00	QP
2		42.998	18.90	18.06	36.96	-3.04	40.00	QP
3		75.978	15.20	14.91	30.11	-9.89	40.00	QP
4		107.891	12.70	14.83	27.53	-15.97	43.50	QP
5		171.620	8.90	17.68	26.58	-16.92	43.50	QP
6		599.972	6.90	25.86	32.76	-13.24	46.00	QP


Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

WLAN Config 1:

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

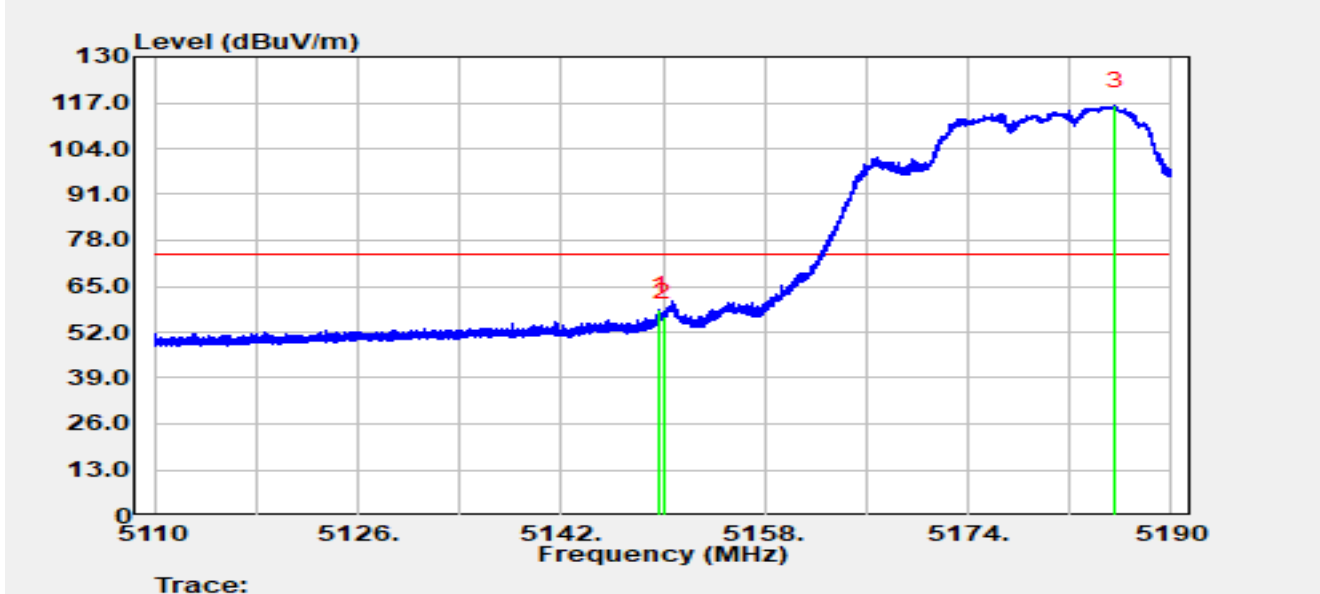


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.744	58.89	-0.69	58.20	-15.80	74.00	Peak
2		5150.000	56.79	-0.54	56.25	-17.75	74.00	Peak
3		5185.552	78.14	37.93	116.07	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

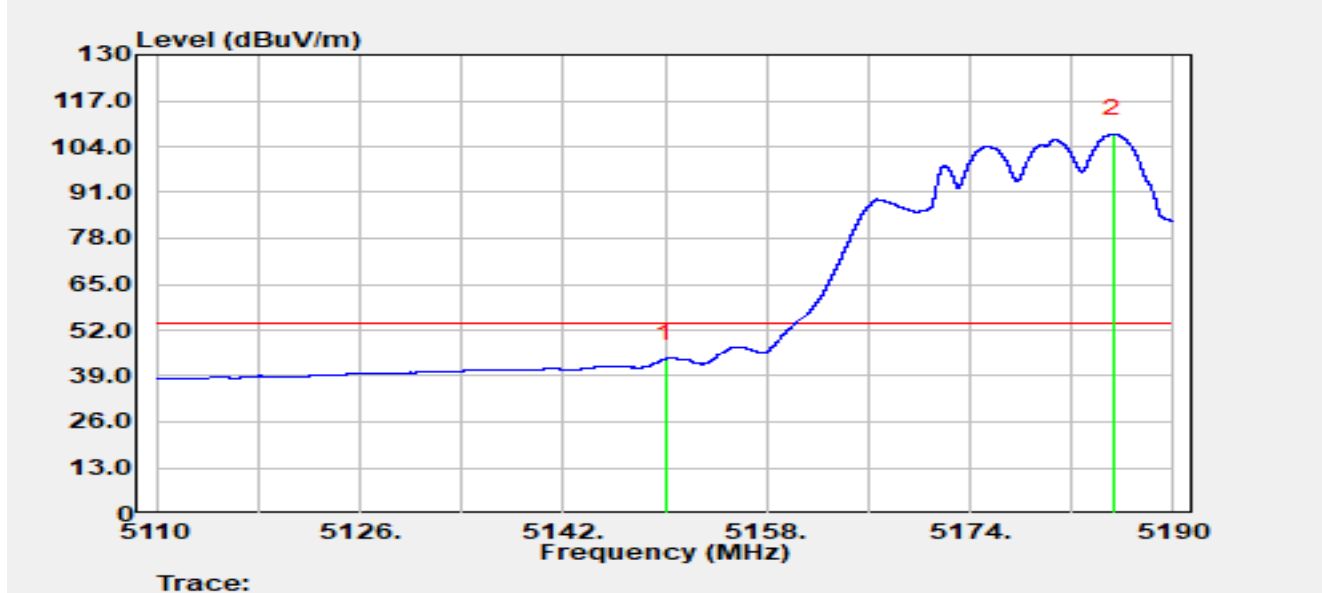


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	44.24	-0.54	43.70	-10.30	54.00	Average
2		5185.240	69.50	38.10	107.60	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

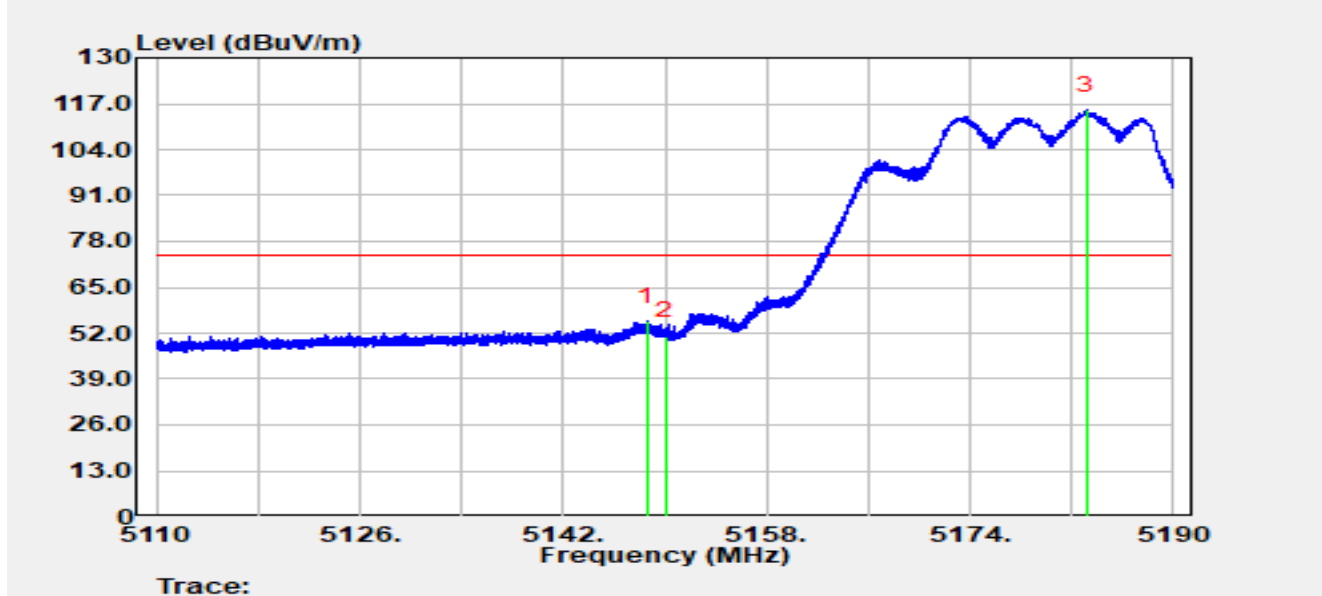


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.584	56.36	-1.05	55.31	-18.69	74.00	Peak
2		5150.000	51.65	-0.54	51.11	-22.89	74.00	Peak
3		5183.136	73.86	41.21	115.07	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

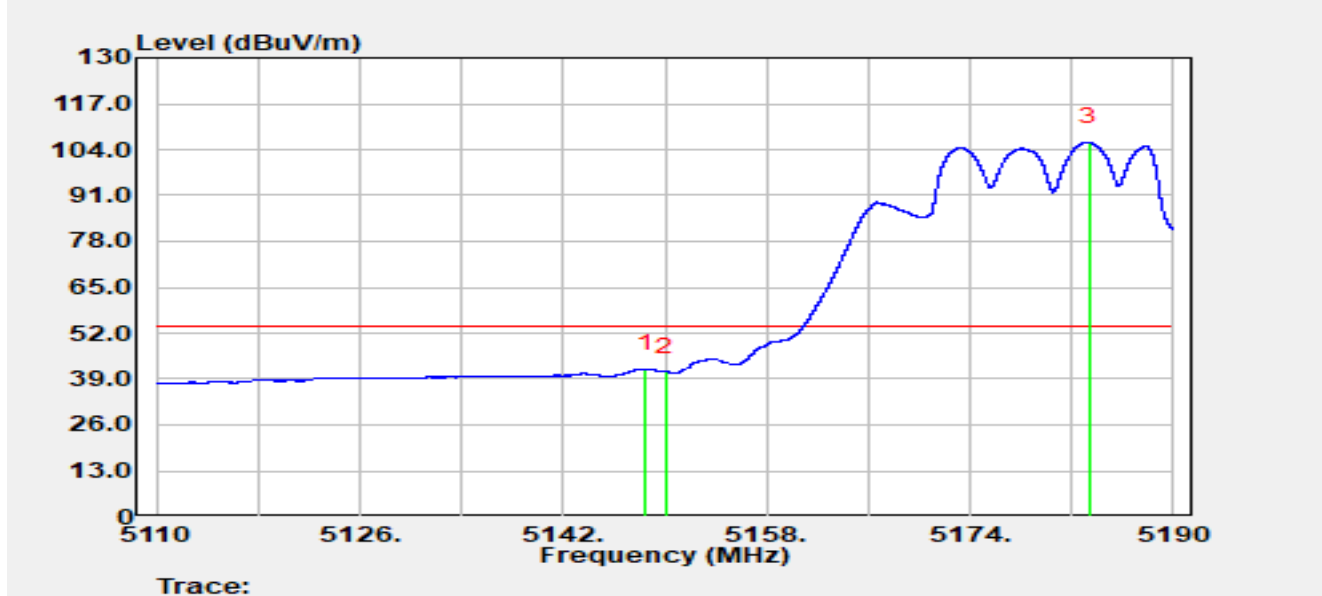


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.488	42.78	-1.04	41.74	-12.26	54.00	Average
2		5150.000	41.61	-0.54	41.07	-12.93	54.00	Average
3		5183.336	65.23	40.83	106.05	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

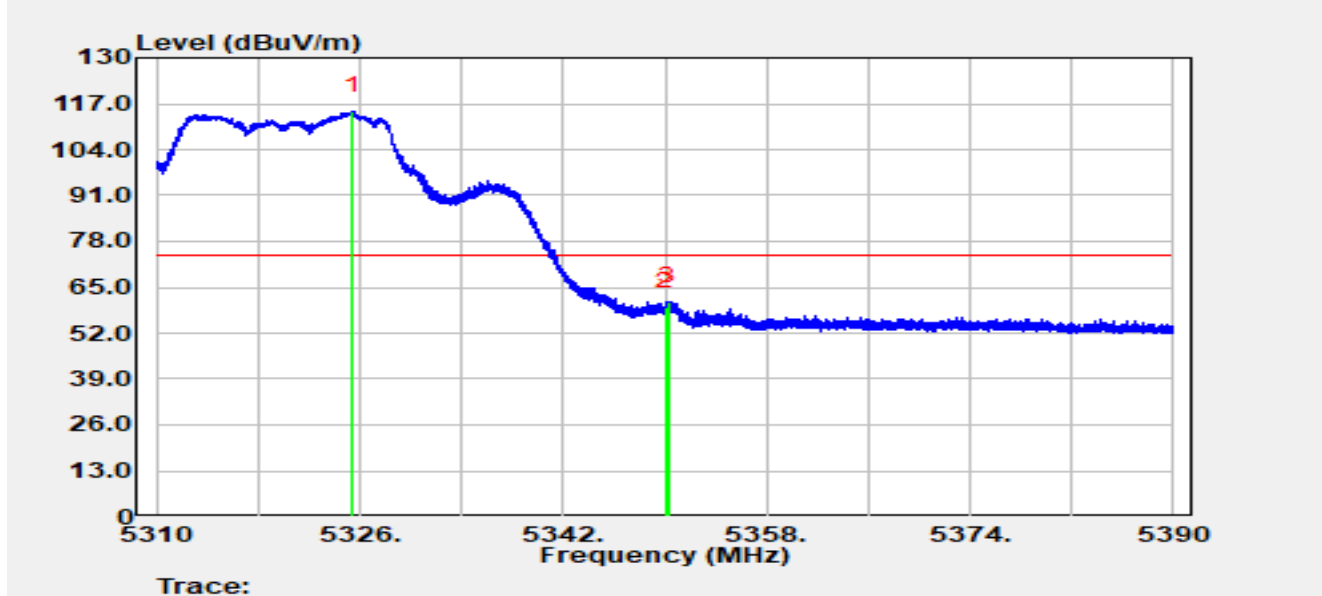


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.480	72.92	41.90	114.81	N/A	N/A	Peak
2		5350.000	57.16	2.28	59.44	-14.56	74.00	Peak
3	*	5350.272	58.82	2.14	60.96	-13.04	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

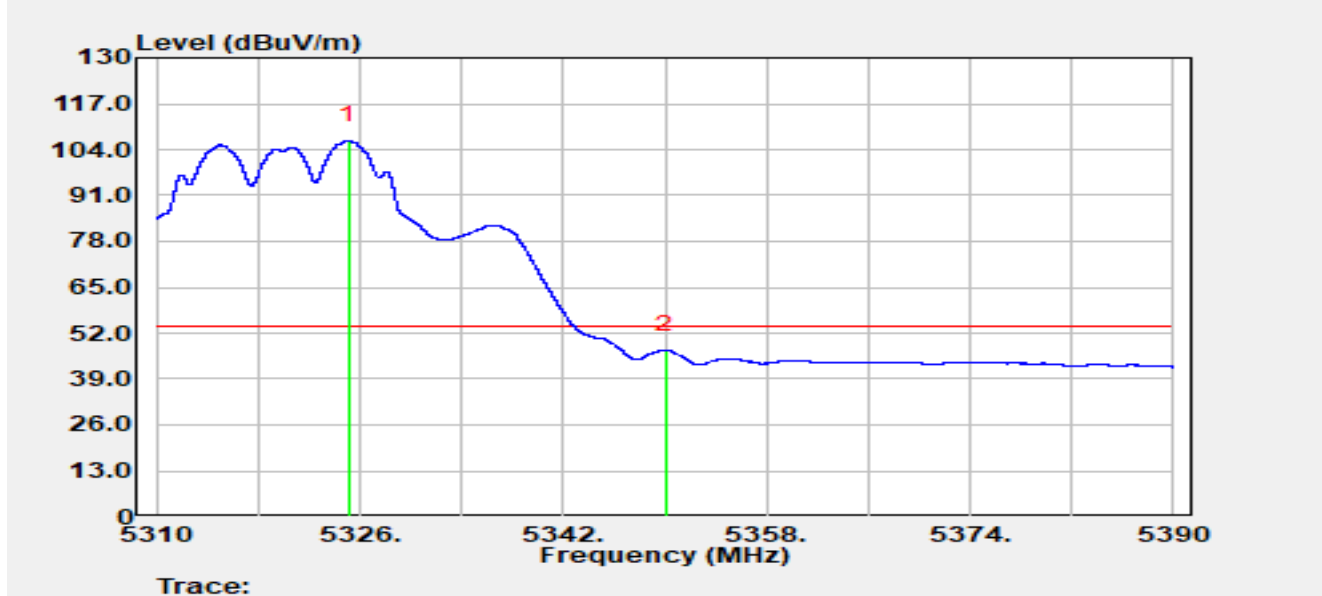


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.136	64.24	42.24	106.49	N/A	N/A	Average
2	*	5350.000	44.97	2.28	47.26	-6.74	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

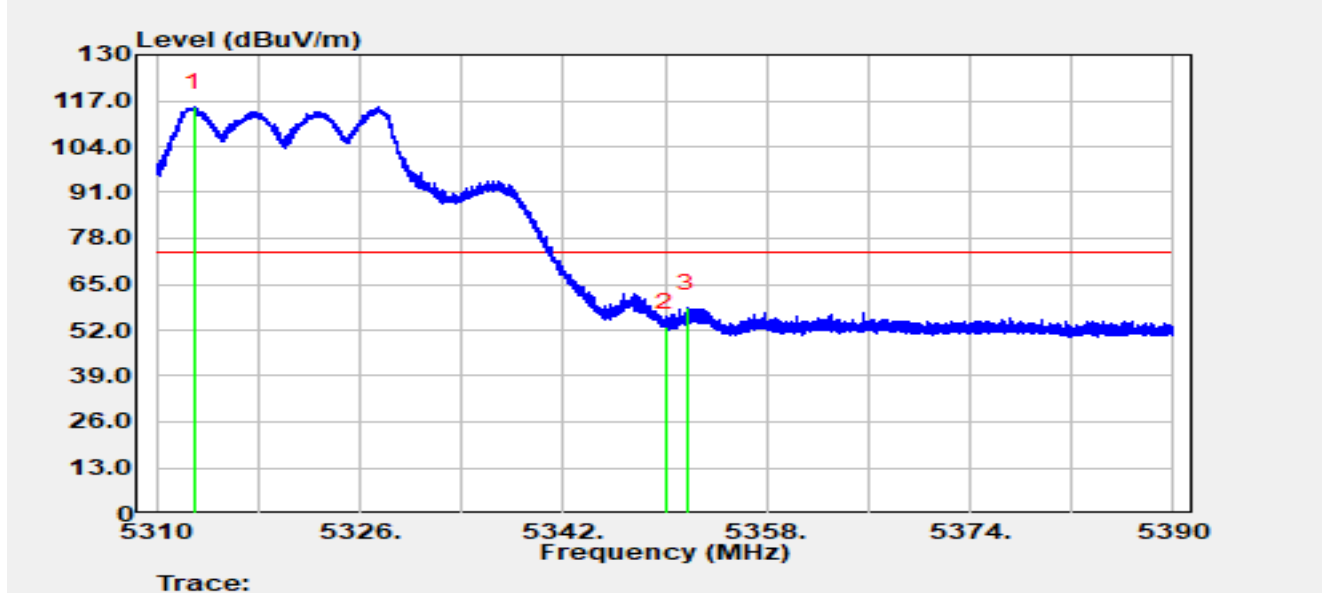


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.952	66.93	48.22	115.16	N/A	N/A	Peak
2		5350.000	50.46	2.28	52.74	-21.26	74.00	Peak
3	*	5351.744	57.14	1.10	58.24	-15.76	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

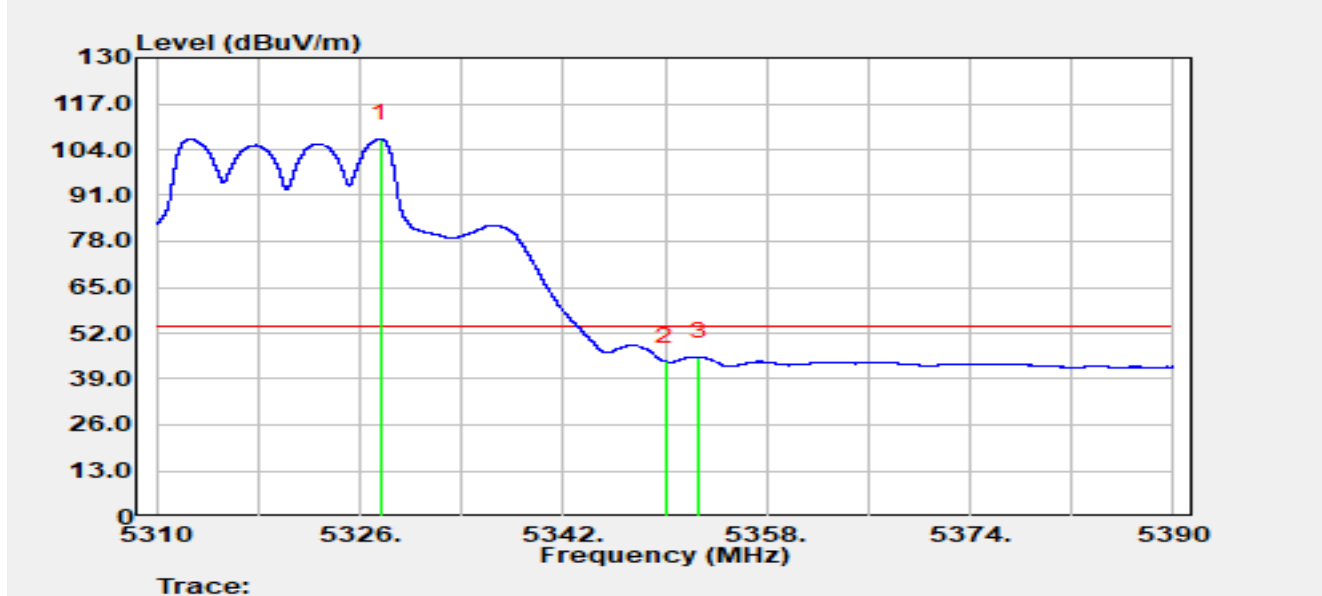


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.576	65.20	41.85	107.05	N/A	N/A	Average
2		5350.000	41.72	2.28	44.00	-10.00	54.00	Average
3	*	5352.712	44.70	0.51	45.21	-8.79	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

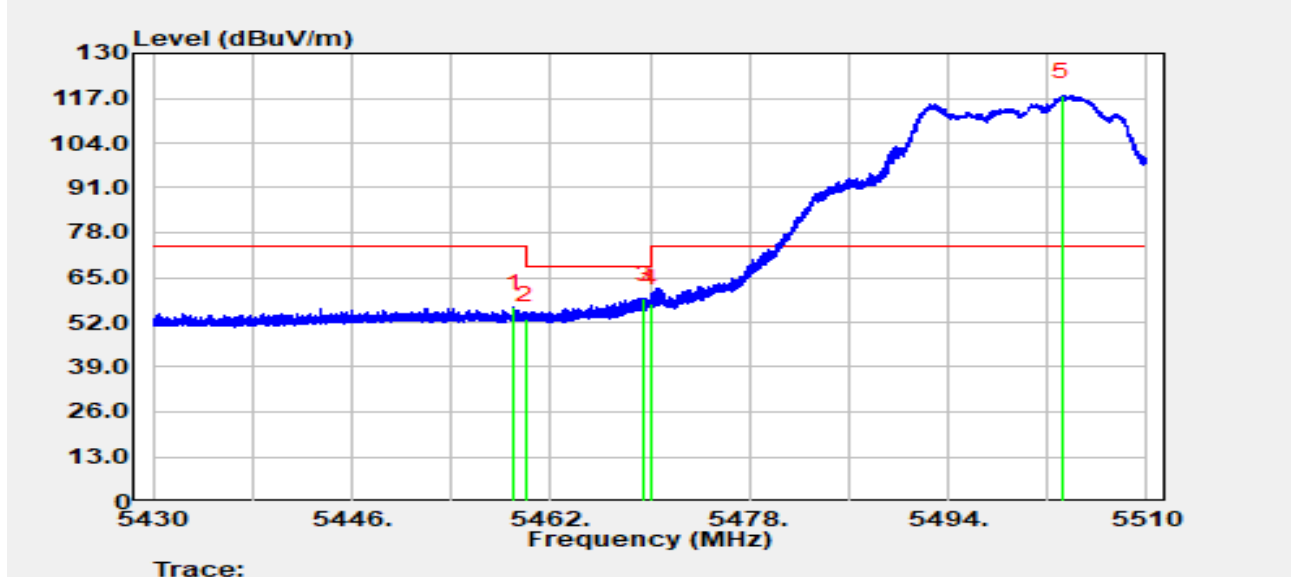


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.048	57.18	-0.80	56.38	-17.62	74.00	Peak
2		5460.000	53.62	-0.69	52.93	-15.27	68.20	Peak
3	*	5469.512	57.88	0.85	58.73	-9.47	68.20	Peak
4		5470.000	56.63	1.00	57.63	-10.57	68.20	Peak
5		5503.128	72.79	44.92	117.71	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

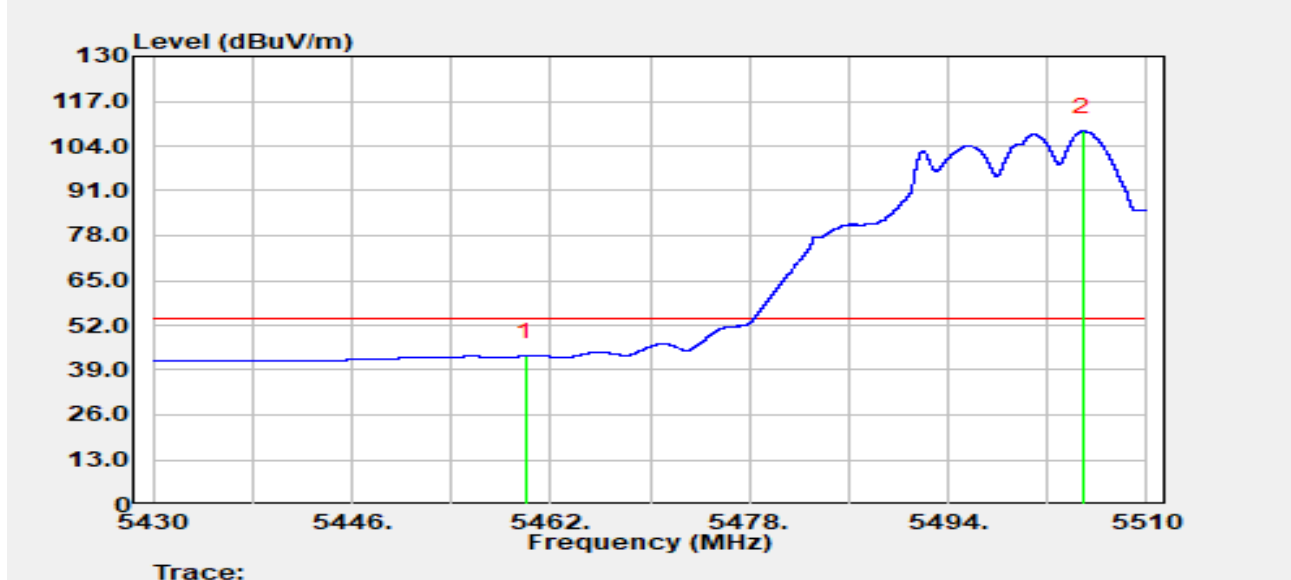


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	43.82	-0.69	43.12	-10.88	54.00	Average
2		5504.816	61.77	46.62	108.39	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

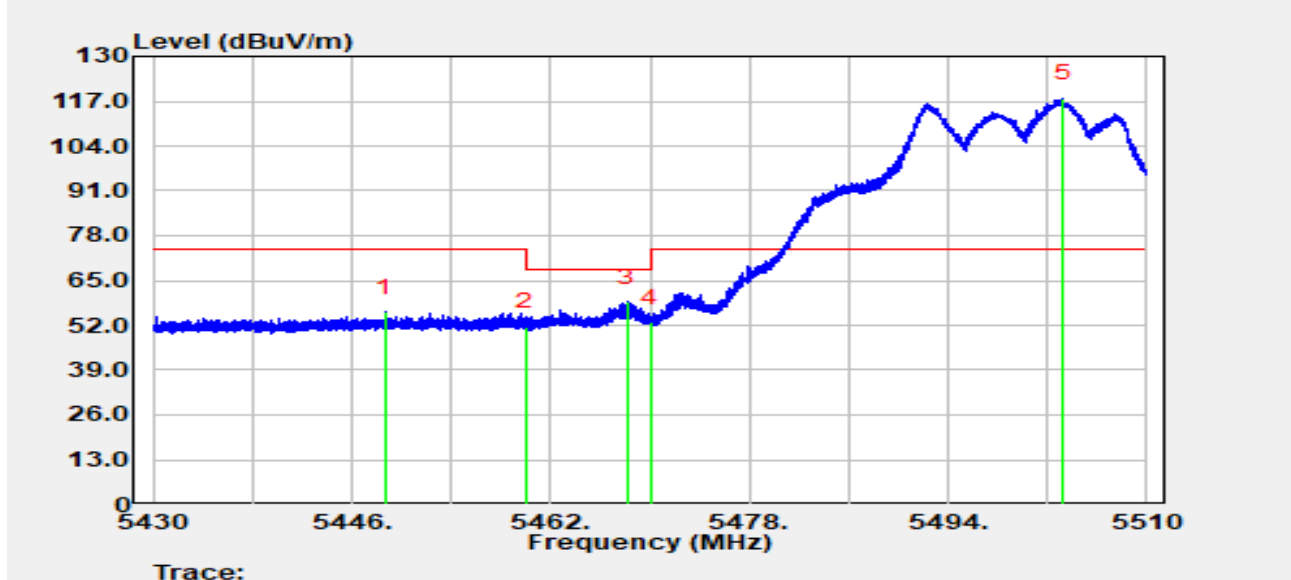


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.664	57.19	-1.36	55.83	-18.17	74.00	Peak
2		5460.000	52.40	-0.69	51.71	-16.49	68.20	Peak
3	*	5468.184	58.24	0.42	58.66	-9.54	68.20	Peak
4		5470.000	51.95	1.00	52.95	-15.25	68.20	Peak
5		5503.240	72.77	45.14	117.91	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

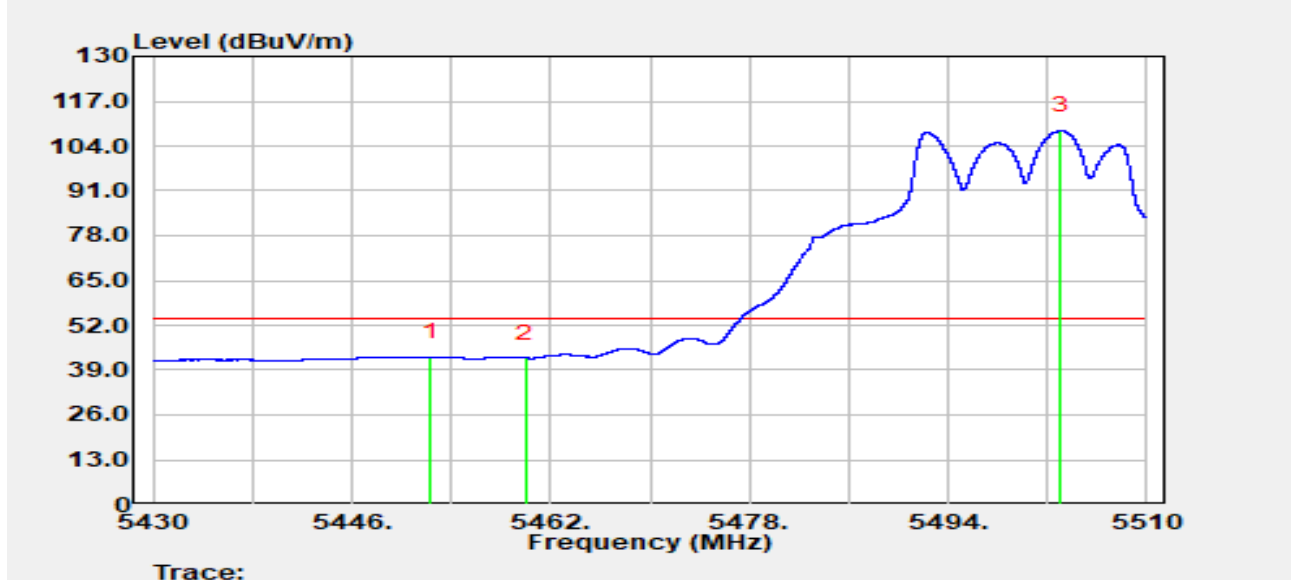


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5452.320	44.03	-1.15	42.88	-11.12	54.00	Average
2		5460.000	43.18	-0.69	42.49	-11.51	54.00	Average
3		5503.088	63.76	44.83	108.59	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

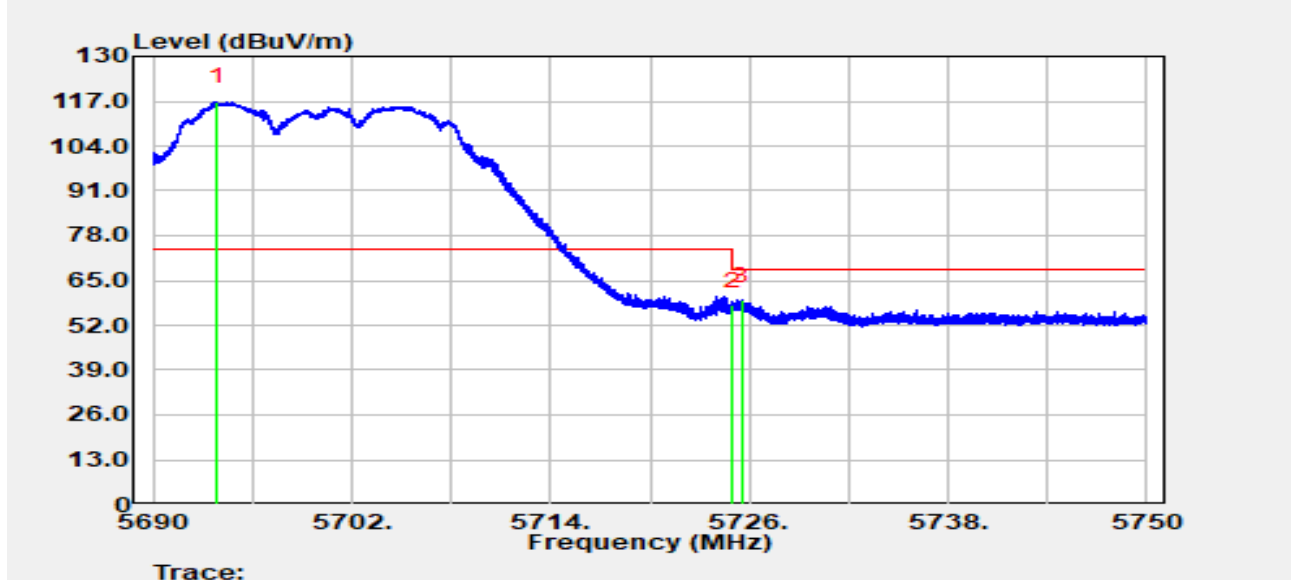


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5693.846	72.87	44.07	116.94	N/A	N/A	Peak
2		5725.000	56.68	1.01	57.69	-10.51	68.20	Peak
3	*	5725.538	58.57	0.71	59.28	-8.92	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

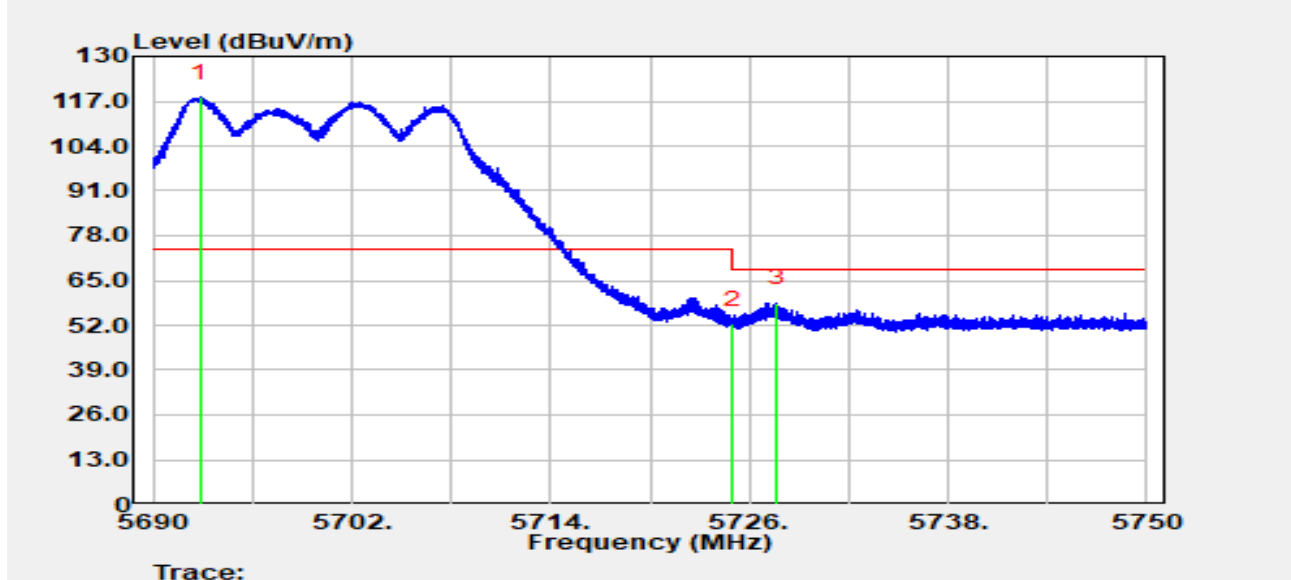


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.886	74.34	43.84	118.18	N/A	N/A	Peak
2		5725.000	51.34	1.01	52.34	-15.86	68.20	Peak
3	*	5727.692	58.77	-0.16	58.61	-9.59	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

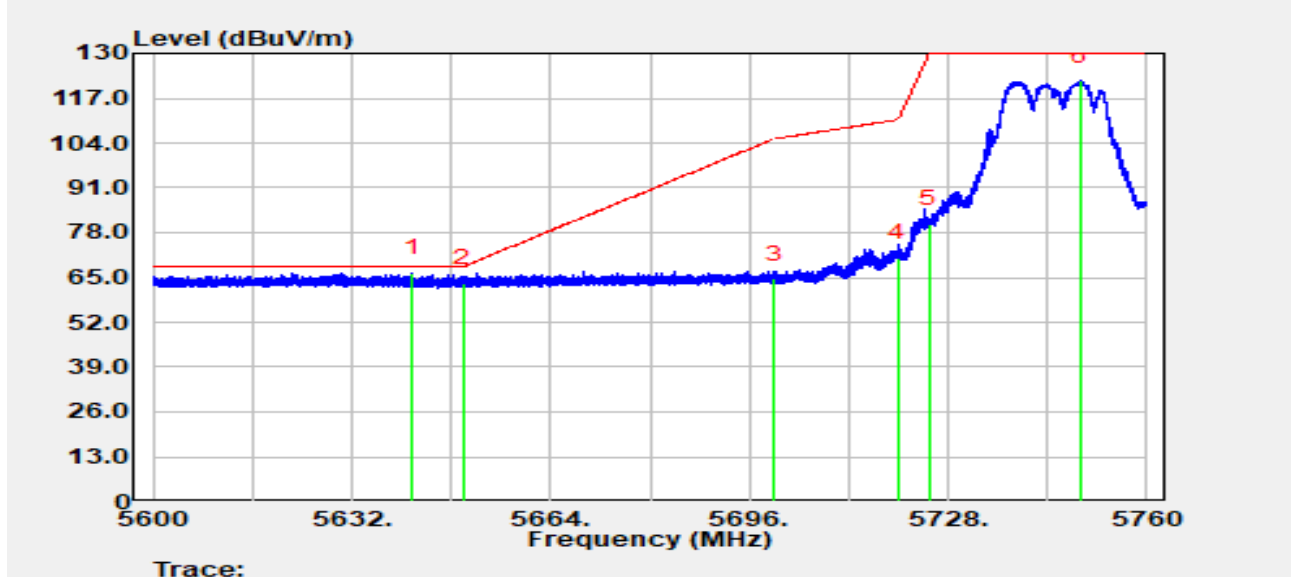


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.696	69.96	-3.65	66.31	-1.89	68.20	Peak
2		5650.000	67.16	-3.65	63.52	-4.68	68.20	Peak
3		5700.000	68.11	-3.47	64.63	-40.57	105.20	Peak
4		5720.000	74.34	-3.45	70.89	-39.91	110.80	Peak
5		5725.000	84.04	-3.47	80.58	-49.42	130.00	Peak
6		5749.344	125.65	-3.65	122.00	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

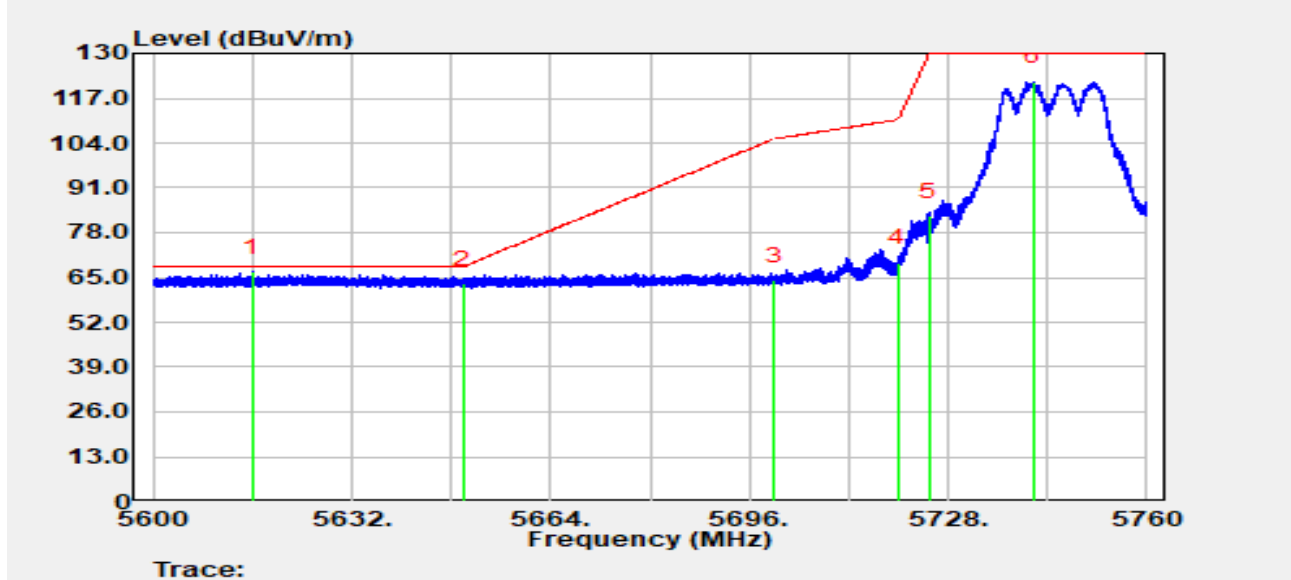


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5615.888	69.92	-3.43	66.49	-1.71	68.20	Peak
2		5650.000	66.89	-3.65	63.24	-4.96	68.20	Peak
3		5700.000	67.73	-3.47	64.25	-40.95	105.20	Peak
4		5720.000	72.65	-3.45	69.20	-41.60	110.80	Peak
5		5725.000	86.17	-3.47	82.70	-47.30	130.00	Peak
6		5741.760	125.32	-3.62	121.69	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

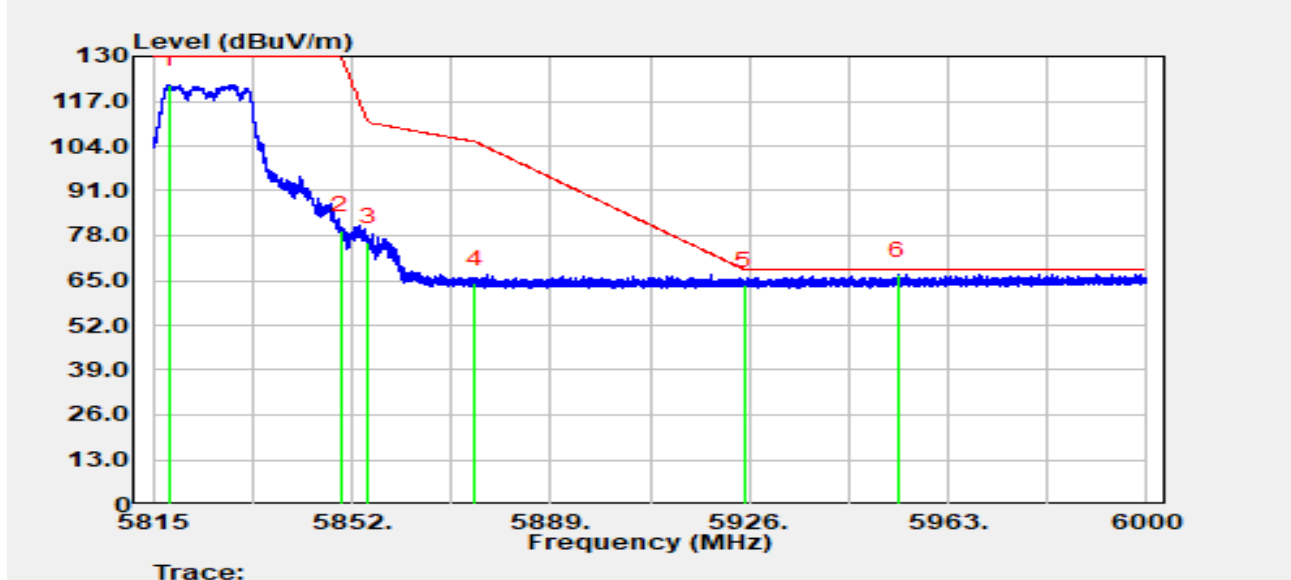


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.053	125.67	-3.80	121.87	N/A	N/A	Peak
2		5850.000	83.31	-3.75	79.56	-50.44	130.00	Peak
3		5855.000	79.99	-3.75	76.24	-34.56	110.80	Peak
4		5875.000	67.87	-3.82	64.05	-41.15	105.20	Peak
5		5925.000	67.30	-3.71	63.60	-4.60	68.20	Peak
6	*	5953.769	70.34	-3.67	66.66	-1.54	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

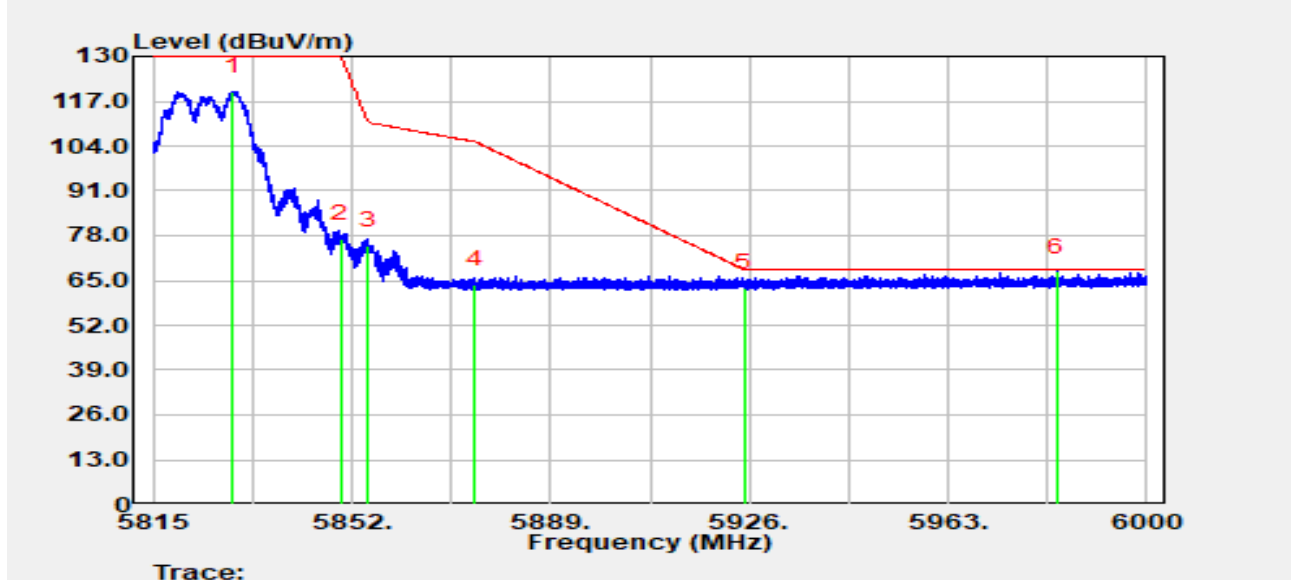


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5829.745	123.62	-3.74	119.89	N/A	N/A	Peak
2		5850.000	80.80	-3.75	77.05	-52.95	130.00	Peak
3		5855.000	78.84	-3.75	75.09	-35.71	110.80	Peak
4		5875.000	67.75	-3.82	63.93	-41.27	105.20	Peak
5		5925.000	66.56	-3.71	62.85	-5.35	68.20	Peak
6	*	5983.332	71.18	-3.67	67.51	-0.69	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

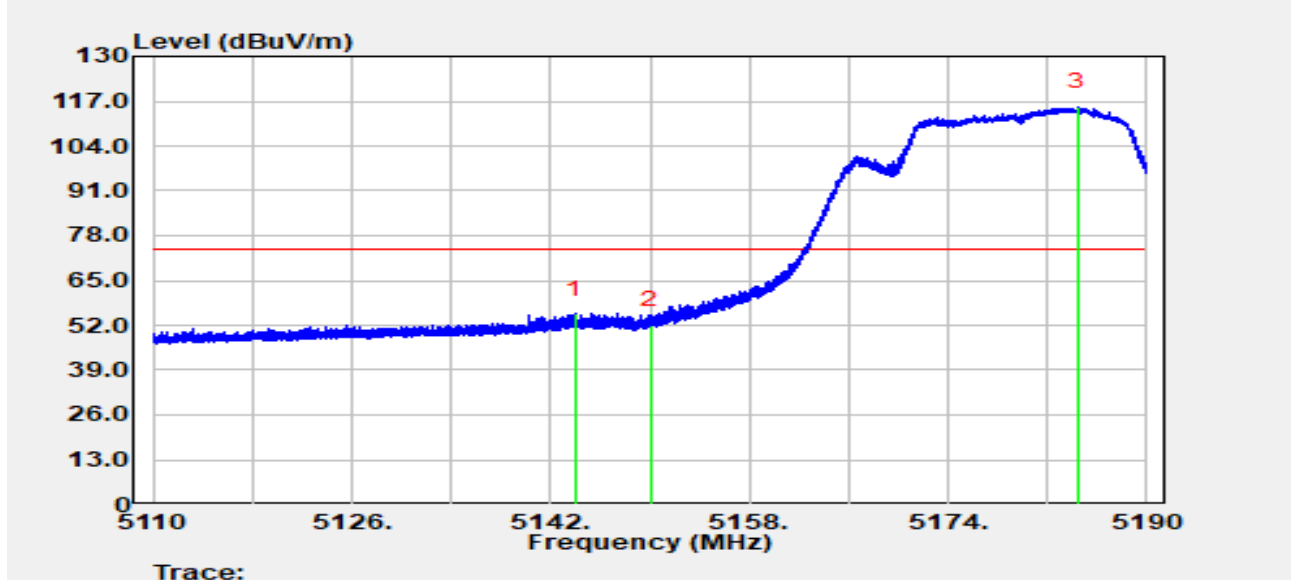


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.024	56.97	-1.59	55.38	-18.62	74.00	Peak
2		5150.000	52.72	-0.54	52.18	-21.82	74.00	Peak
3		5184.464	76.57	38.90	115.47	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

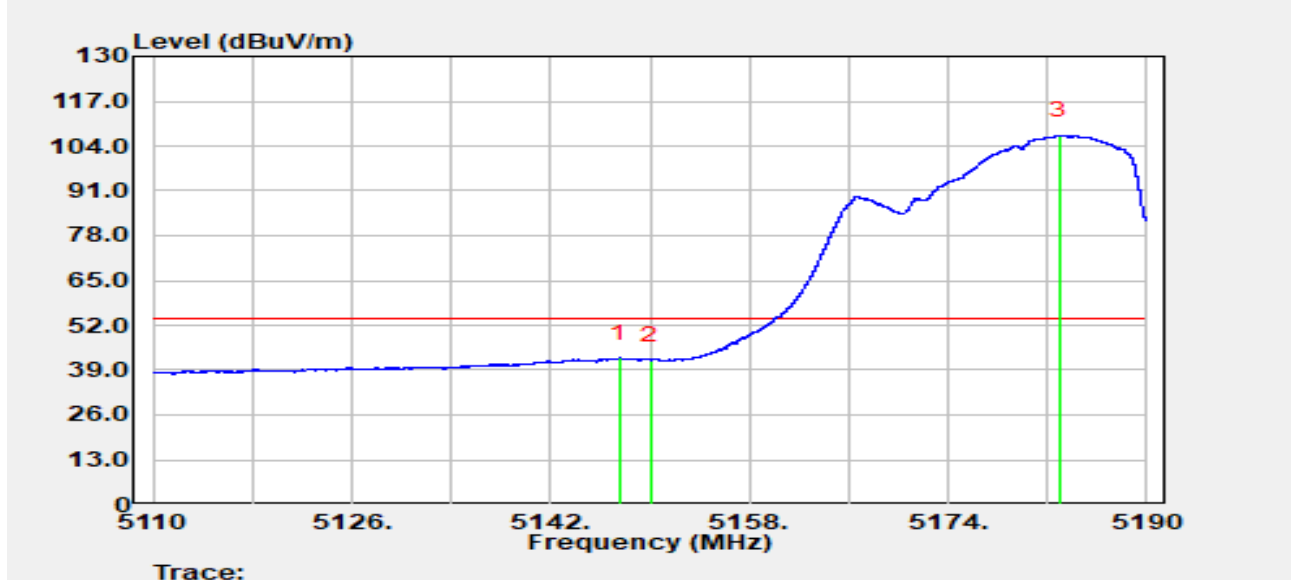


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.560	43.53	-1.04	42.49	-11.51	54.00	Average
2		5150.000	42.45	-0.54	41.91	-12.09	54.00	Average
3		5182.920	65.33	41.69	107.02	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

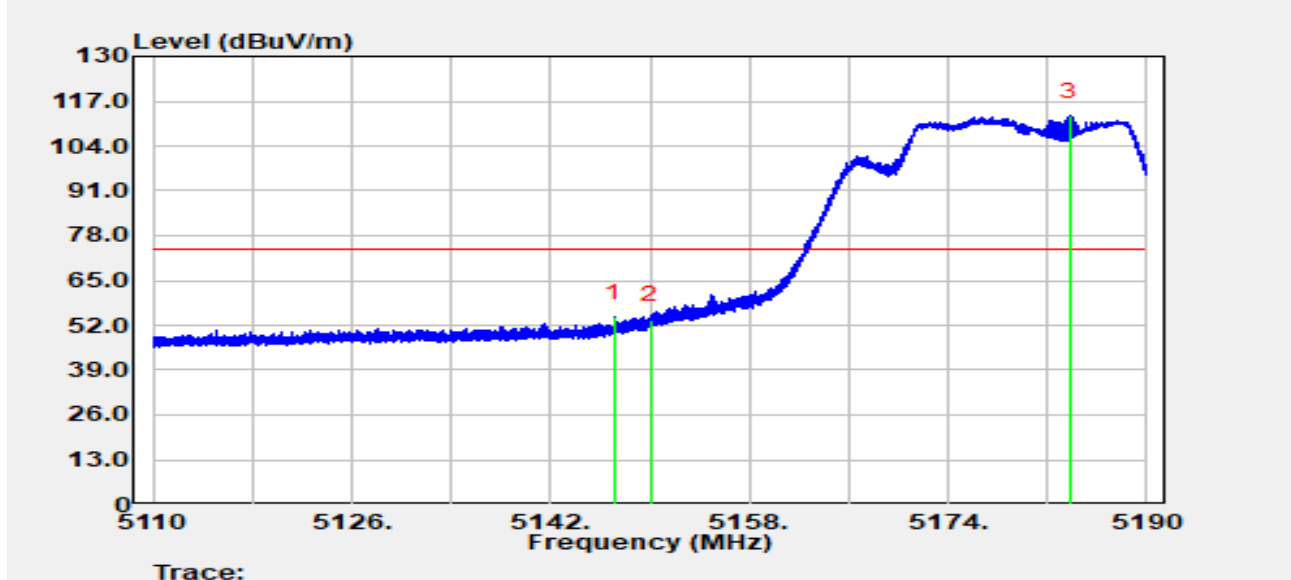


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.136	55.47	-1.13	54.34	-19.66	74.00	Peak
2		5150.000	54.05	-0.54	53.50	-20.50	74.00	Peak
3		5183.784	72.63	39.97	112.60	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

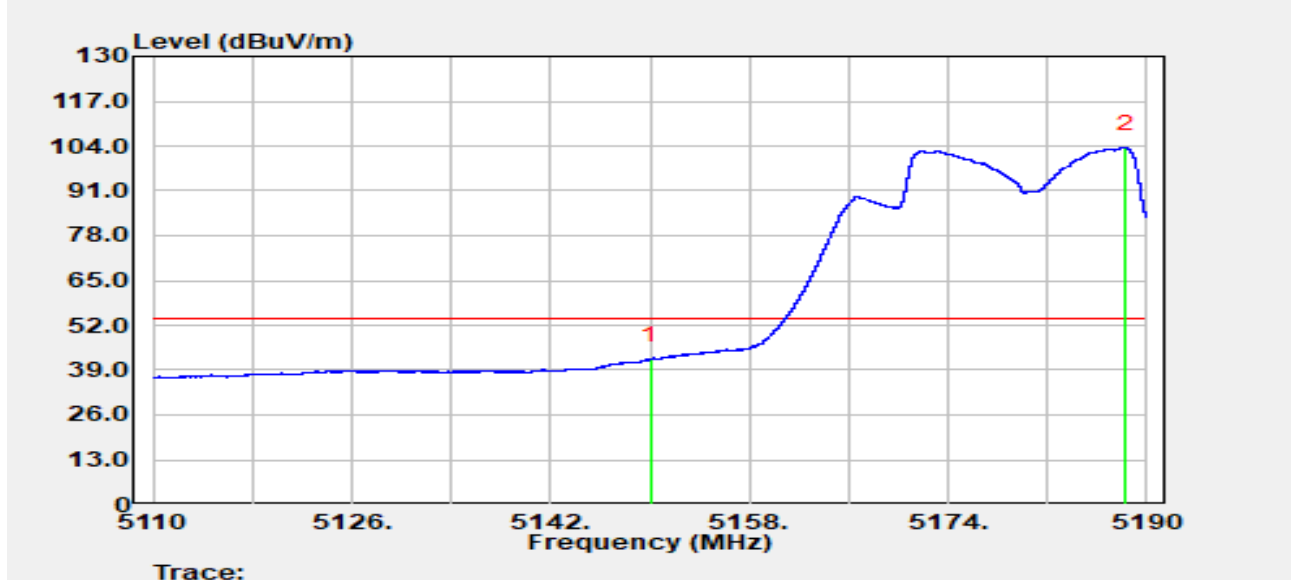


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	42.56	-0.54	42.02	-11.98	54.00	Average
2		5188.280	64.24	39.23	103.47	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

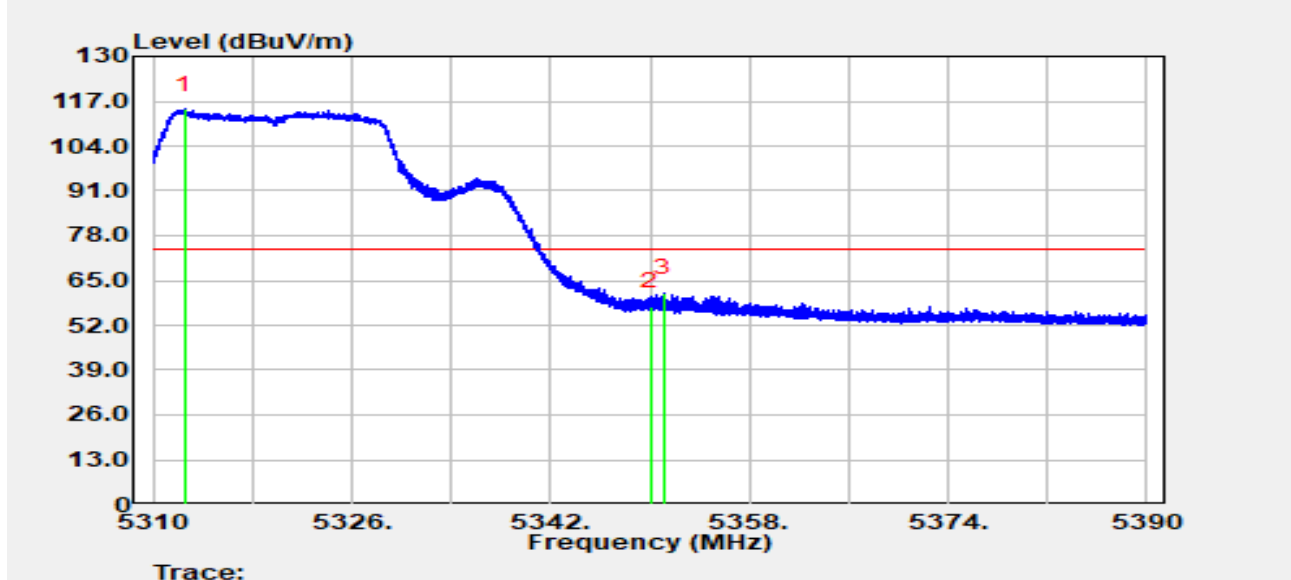


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.504	67.15	47.61	114.76	N/A	N/A	Peak
2		5350.000	55.31	2.28	57.59	-16.41	74.00	Peak
3	*	5351.144	59.99	1.54	61.53	-12.47	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

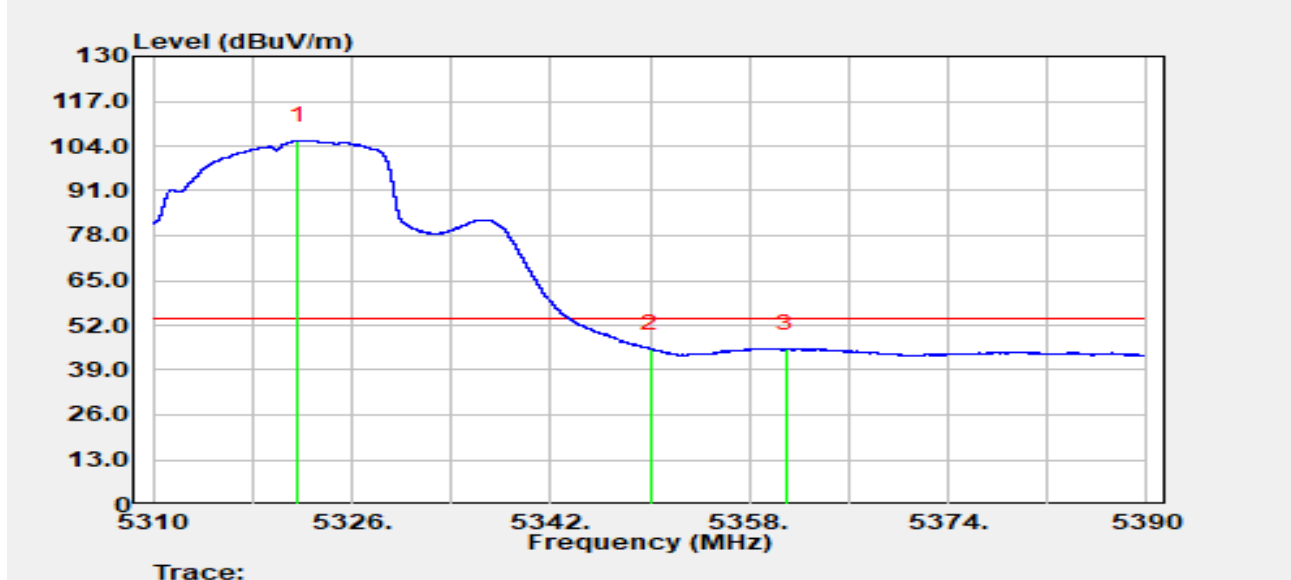


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.696	61.95	43.65	105.61	N/A	N/A	Average
2		5350.000	42.86	2.28	45.14	-8.86	54.00	Average
3	*	5360.936	46.19	-0.96	45.23	-8.77	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

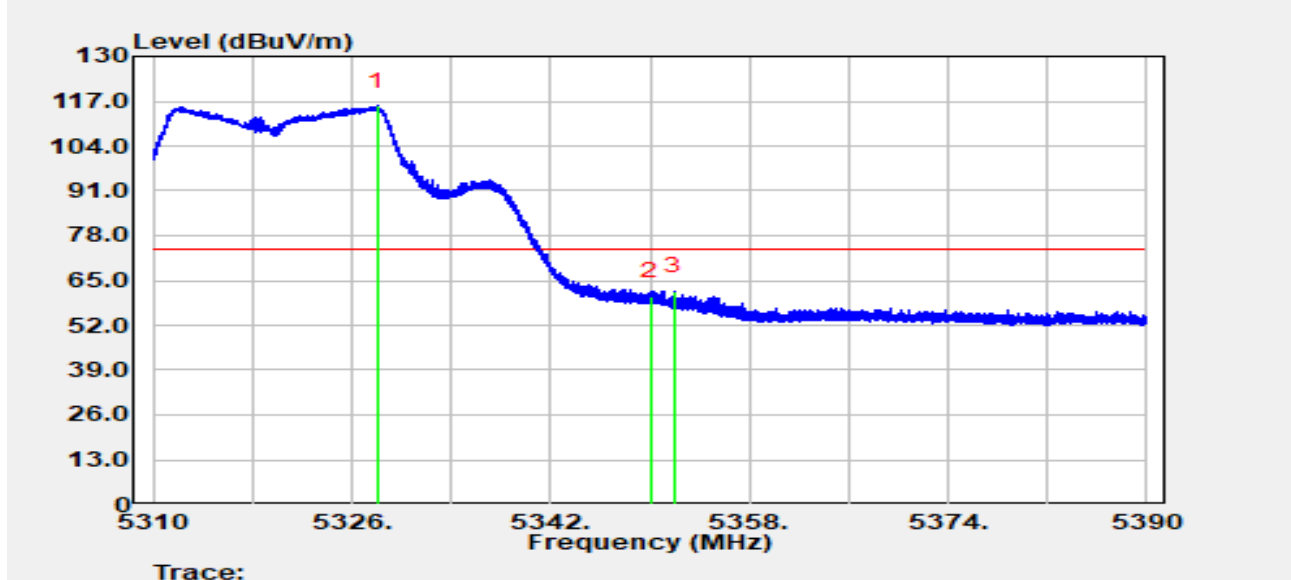


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.016	73.47	42.26	115.73	N/A	N/A	Peak
2		5350.000	58.19	2.28	60.47	-13.53	74.00	Peak
3	*	5351.928	61.00	0.96	61.96	-12.04	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5320 MHz		

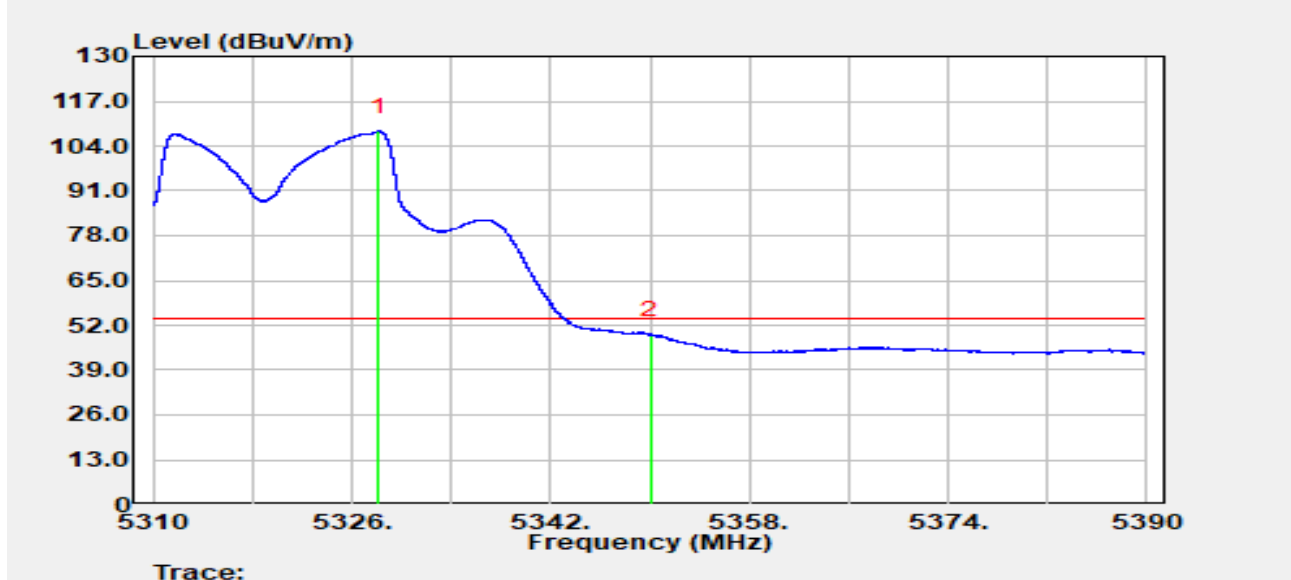


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.152	65.87	42.39	108.26	N/A	N/A	Average
2	*	5350.000	46.98	2.28	49.26	-4.74	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

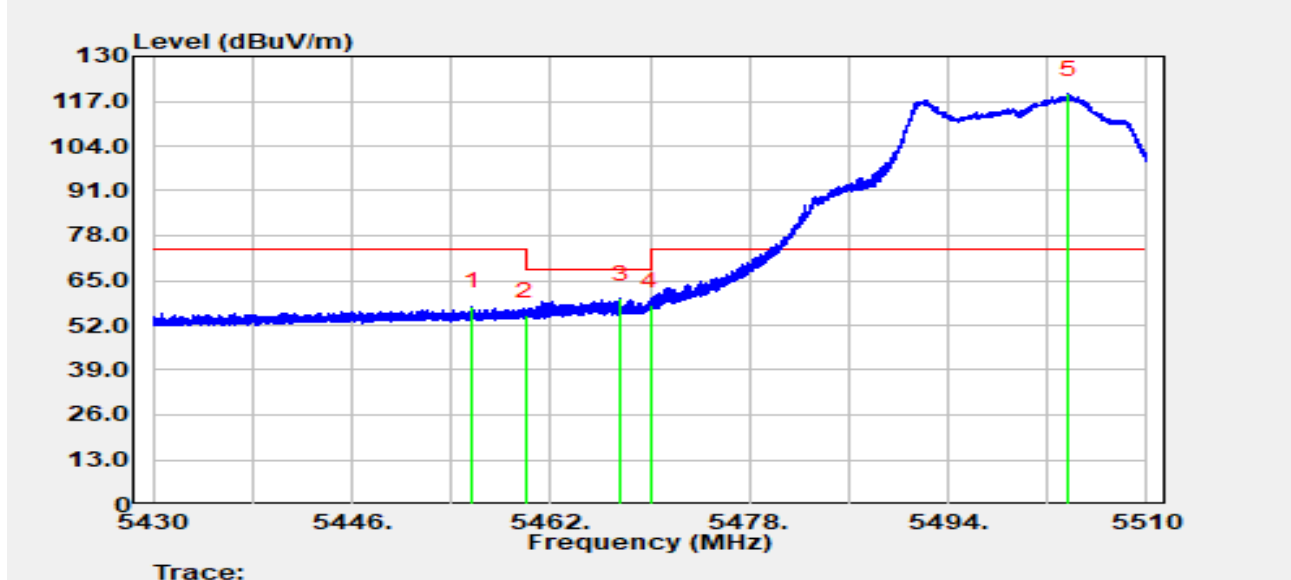


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.664	58.44	-1.00	57.44	-16.56	74.00	Peak
2		5460.000	55.40	-0.69	54.71	-13.49	68.20	Peak
3	*	5467.672	59.35	0.26	59.61	-8.59	68.20	Peak
4		5470.000	56.84	1.00	57.84	-10.36	68.20	Peak
5		5503.720	73.34	45.87	119.21	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

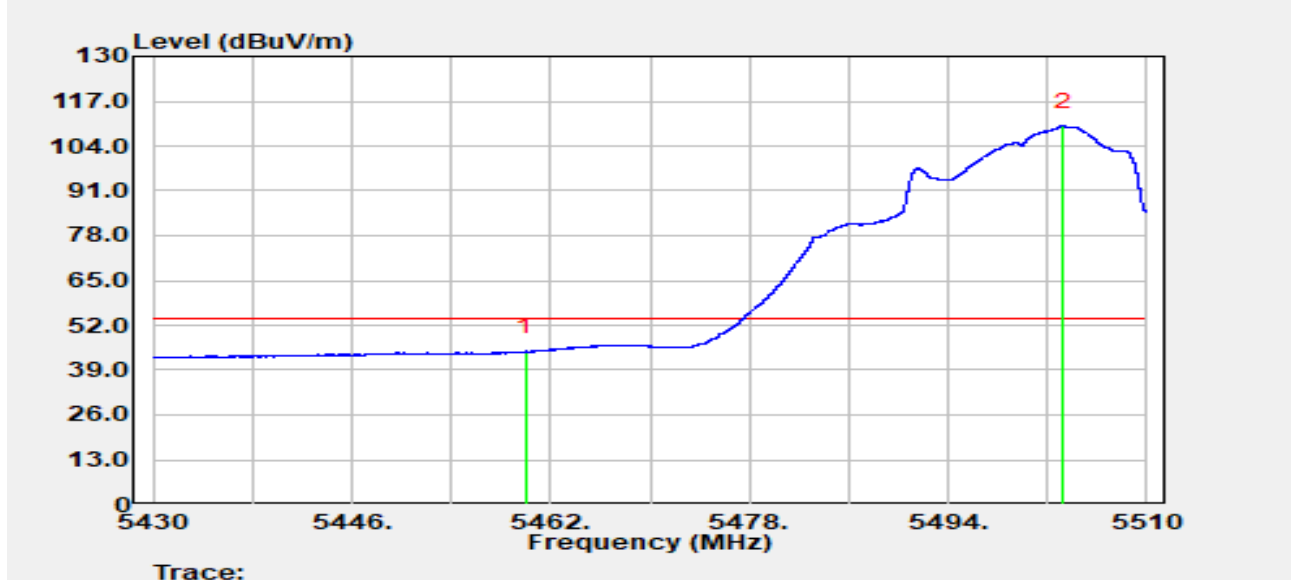


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	45.06	-0.69	44.37	-9.63	54.00	Average
2		5503.296	64.53	45.23	109.76	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

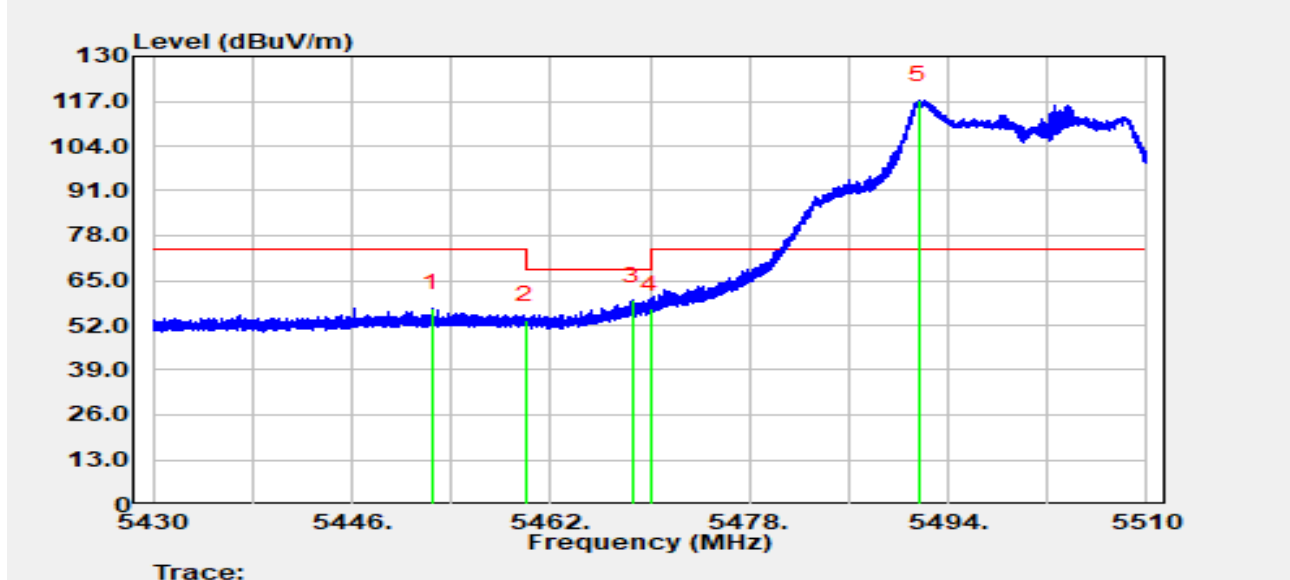


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.488	58.20	-1.13	57.06	-16.94	74.00	Peak
2		5460.000	54.29	-0.69	53.60	-14.60	68.20	Peak
3	*	5468.568	58.61	0.53	59.14	-9.06	68.20	Peak
4		5470.000	55.81	1.00	56.81	-11.39	68.20	Peak
5		5491.680	69.55	47.75	117.30	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5500 MHz		

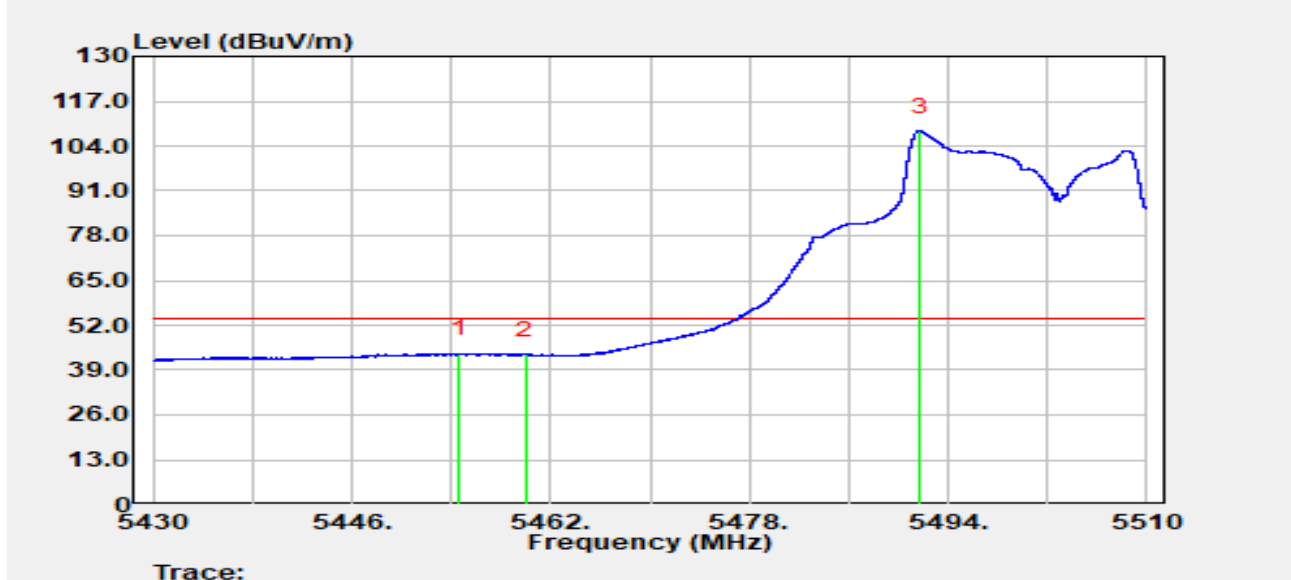


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5454.640	44.79	-1.04	43.75	-10.25	54.00	Average
2		5460.000	44.16	-0.69	43.47	-10.53	54.00	Average
3		5491.792	60.63	47.74	108.37	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

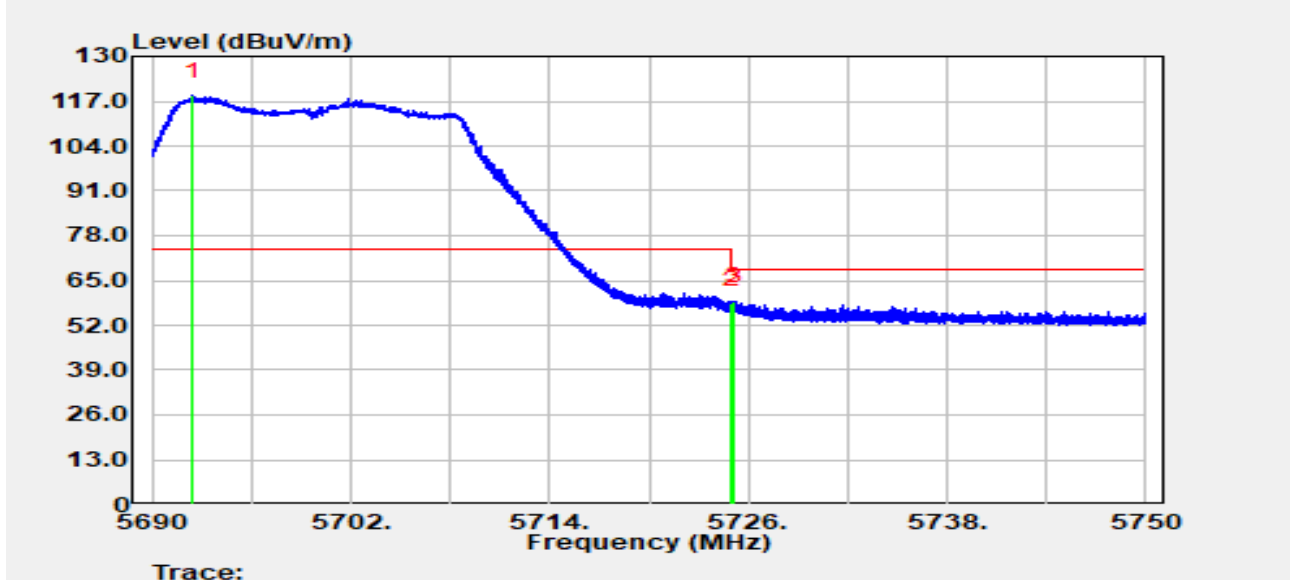


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.490	74.99	43.63	118.62	N/A	N/A	Peak
2		5725.000	57.34	1.01	58.34	-9.86	68.20	Peak
3	*	5725.160	58.18	0.91	59.10	-9.10	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5700 MHz		

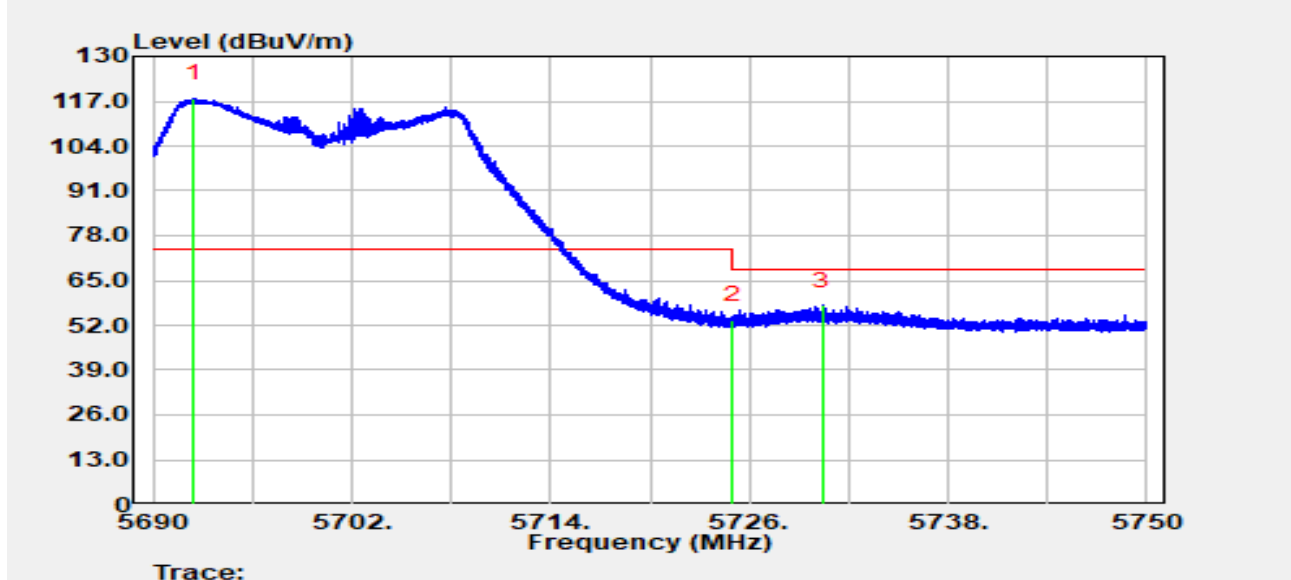


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.460	74.31	43.61	117.92	N/A	N/A	Peak
2		5725.000	52.71	1.01	53.71	-14.49	68.20	Peak
3	*	5730.410	58.49	-0.81	57.69	-10.51	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

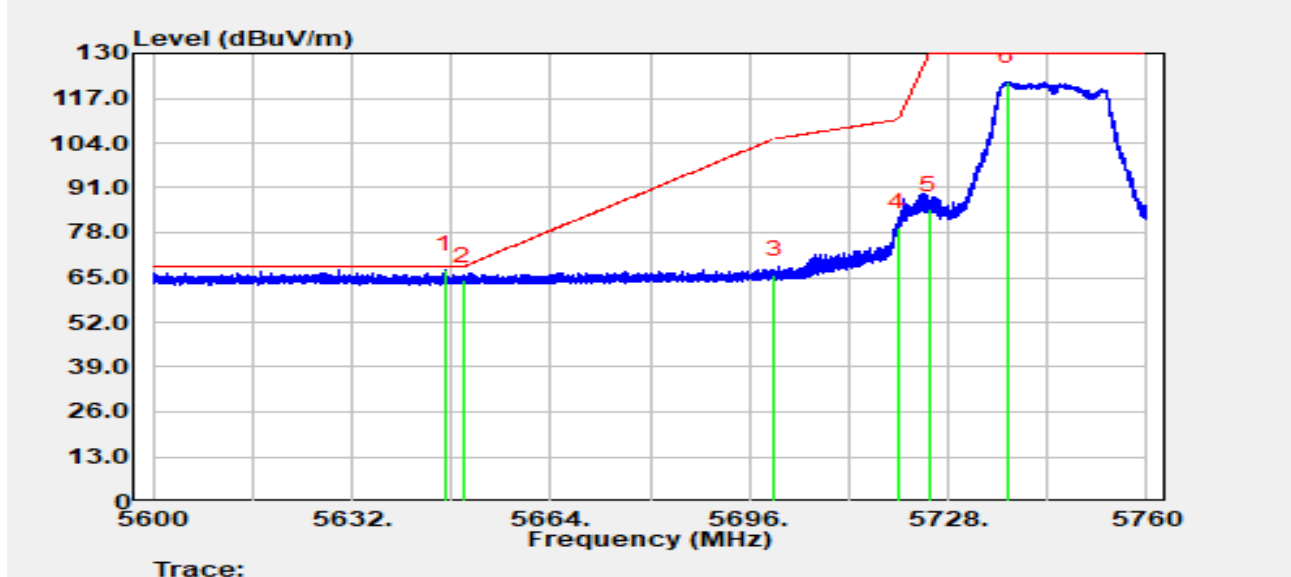


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.040	71.01	-3.65	67.36	-0.84	68.20	Peak
2		5650.000	67.87	-3.65	64.22	-3.98	68.20	Peak
3		5700.000	69.39	-3.47	65.91	-39.29	105.20	Peak
4		5720.000	83.12	-3.45	79.66	-31.14	110.80	Peak
5		5725.000	88.24	-3.47	84.77	-45.23	130.00	Peak
6		5737.504	125.30	-3.58	121.71	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5745 MHz		

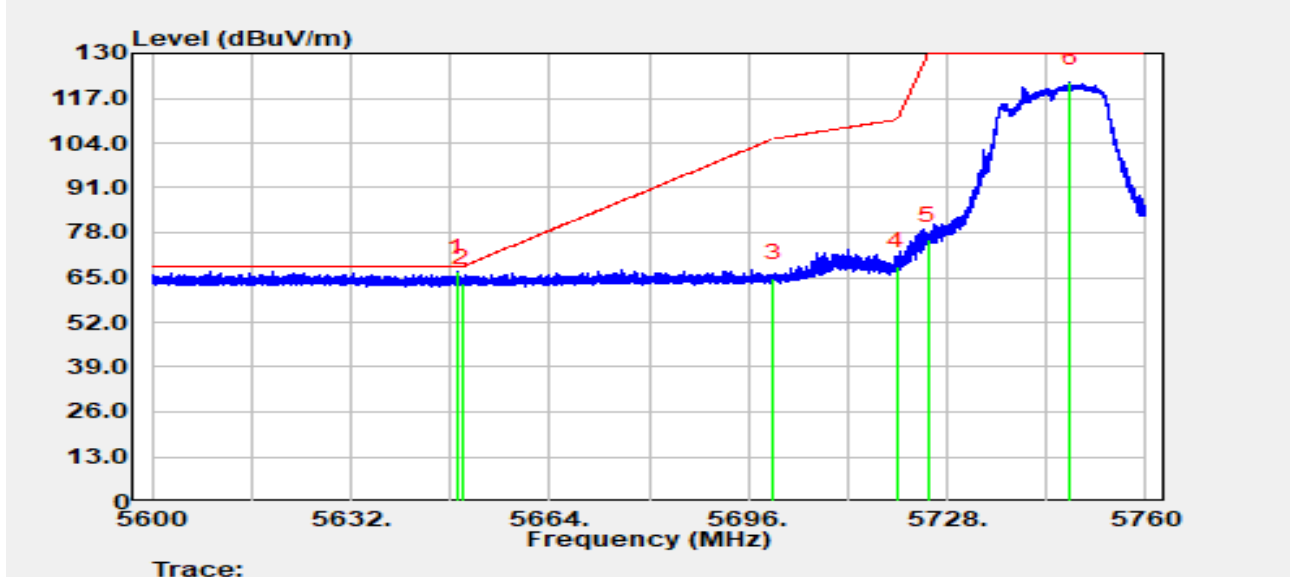


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5649.152	70.36	-3.65	66.72	-1.48	68.20	Peak
2		5650.000	67.04	-3.65	63.39	-4.81	68.20	Peak
3		5700.000	68.27	-3.47	64.79	-40.41	105.20	Peak
4		5720.000	71.79	-3.45	68.34	-42.46	110.80	Peak
5		5725.000	79.38	-3.47	75.91	-54.09	130.00	Peak
6		5747.888	125.24	-3.65	121.59	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

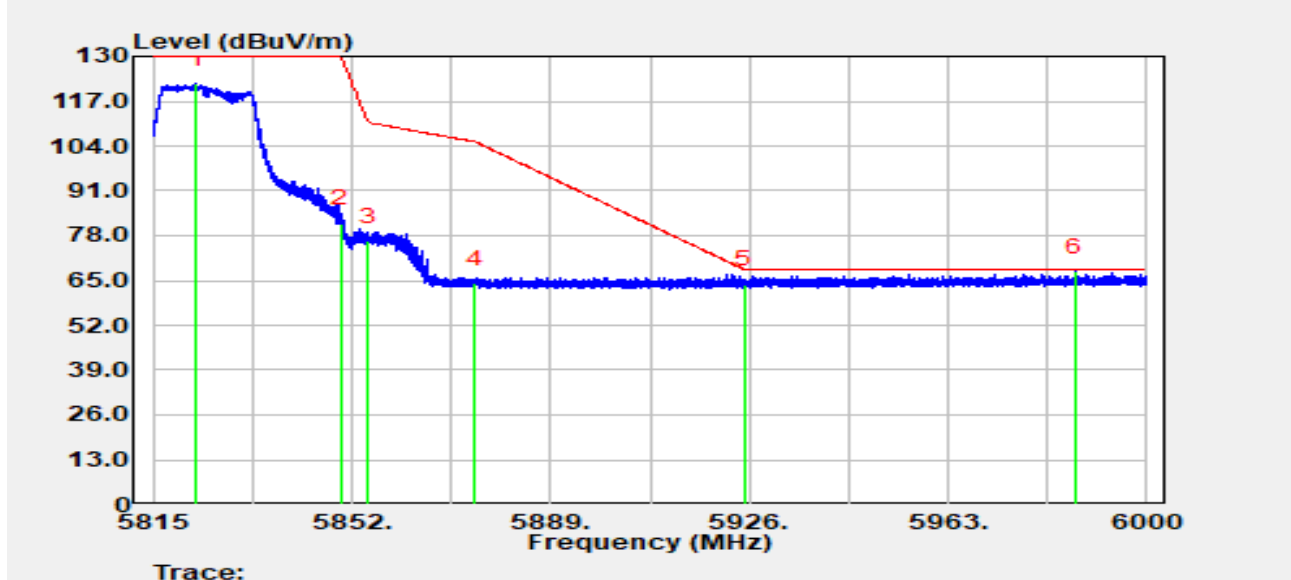


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.103	125.73	-3.77	121.97	N/A	N/A	Peak
2		5850.000	85.22	-3.75	81.47	-48.53	130.00	Peak
3		5855.000	80.18	-3.75	76.43	-34.37	110.80	Peak
4		5875.000	68.01	-3.82	64.19	-41.01	105.20	Peak
5		5925.000	67.48	-3.71	63.78	-4.42	68.20	Peak
6	*	5986.735	71.16	-3.68	67.48	-0.72	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT20 at 5825 MHz		

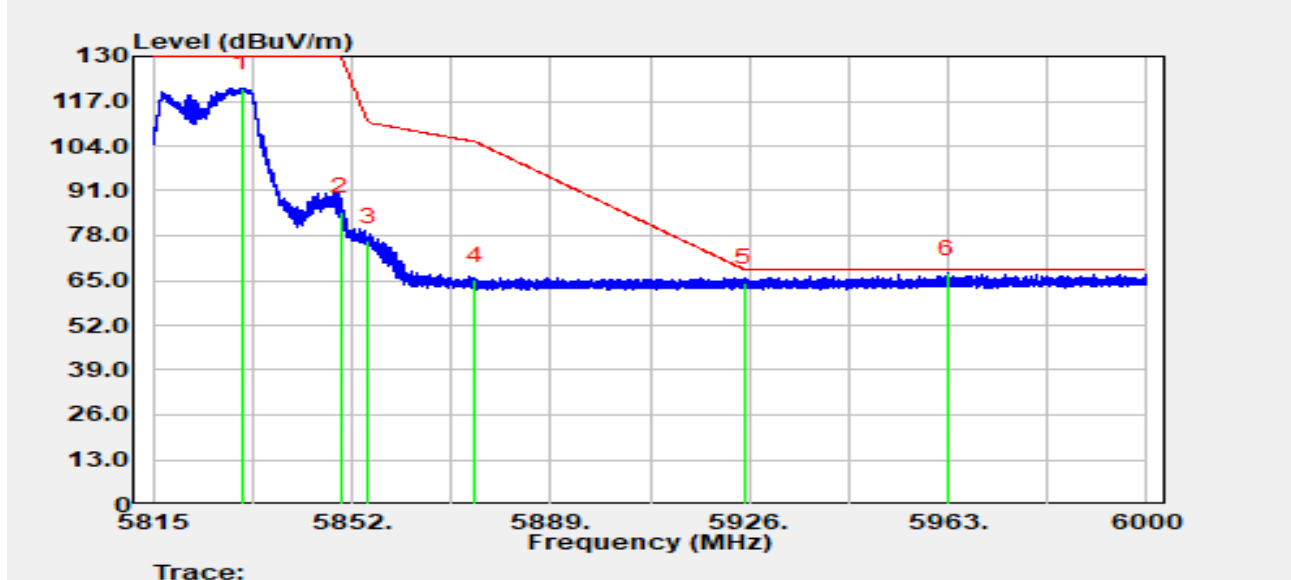


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5831.446	124.63	-3.74	120.89	N/A	N/A	Peak
2		5850.000	88.83	-3.75	85.07	-44.93	130.00	Peak
3		5855.000	80.16	-3.75	76.41	-34.39	110.80	Peak
4		5875.000	69.01	-3.82	65.18	-40.02	105.20	Peak
5		5925.000	68.16	-3.71	64.46	-3.74	68.20	Peak
6	*	5962.963	70.62	-3.64	66.98	-1.22	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

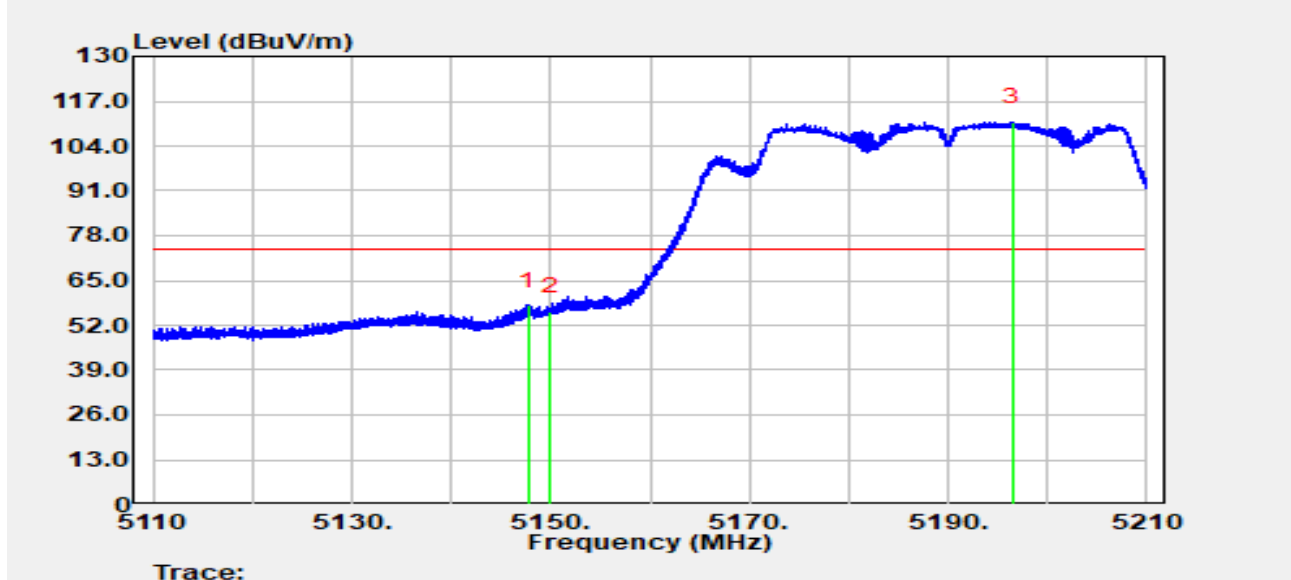


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.710	58.87	-1.00	57.86	-16.14	74.00	Peak
2		5150.000	56.60	-0.54	56.06	-17.94	74.00	Peak
3		5196.430	73.90	37.11	111.02	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

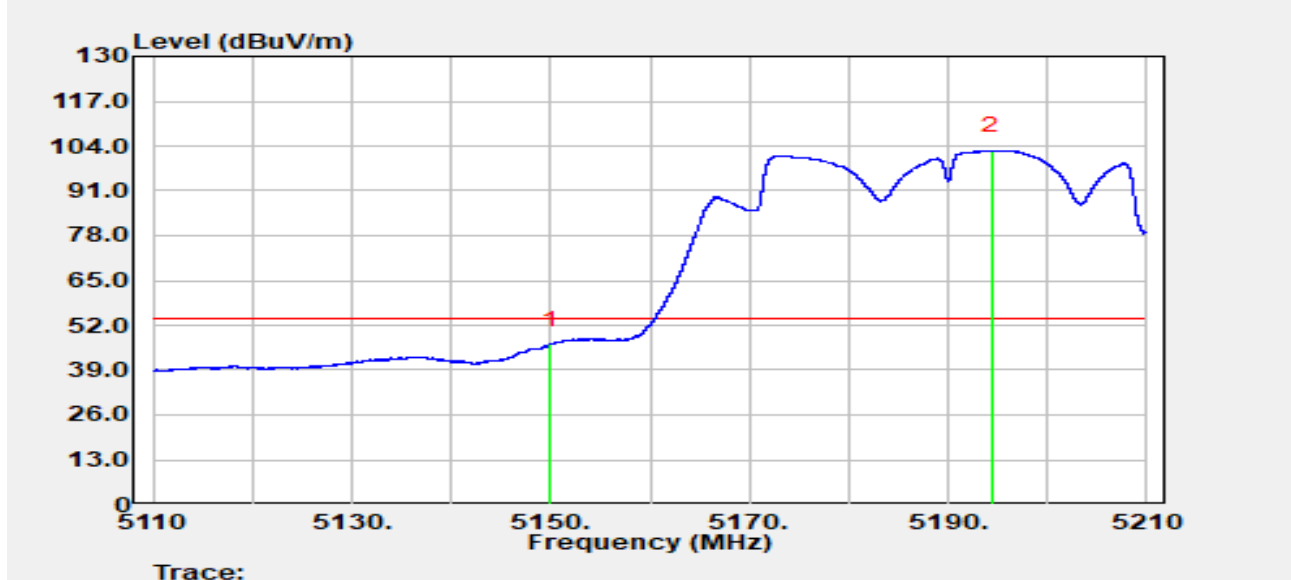


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	46.95	-0.54	46.40	-7.60	54.00	Average
2		5194.390	65.10	37.61	102.70	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

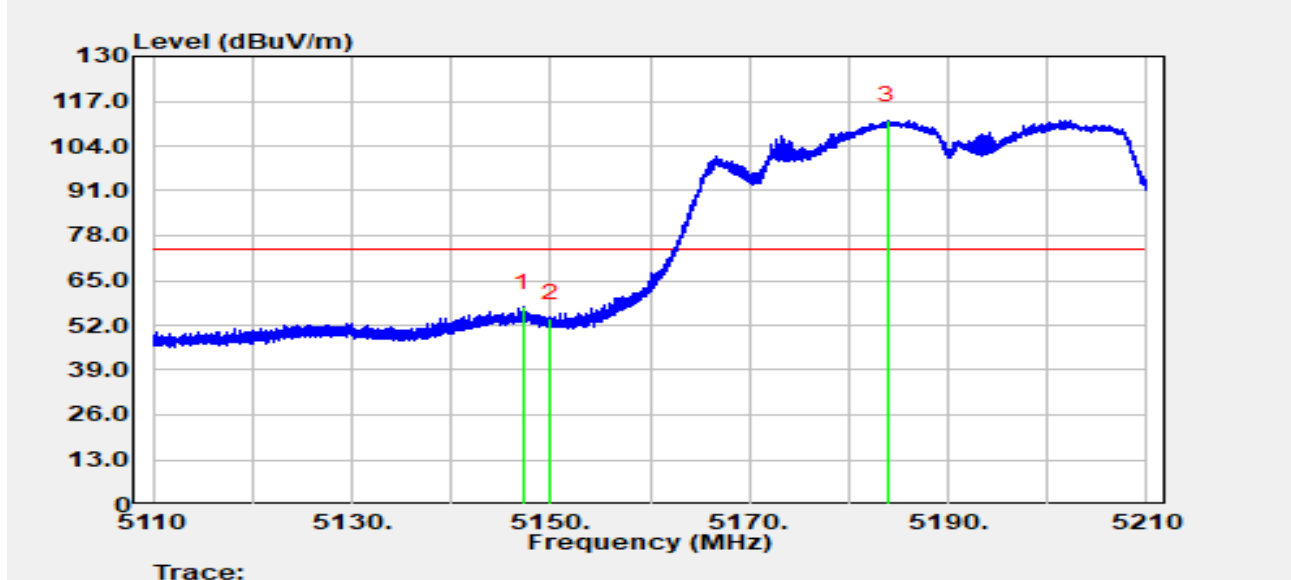


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.270	58.32	-1.10	57.22	-16.78	74.00	Peak
2		5150.000	54.51	-0.54	53.97	-20.03	74.00	Peak
3		5183.960	71.96	39.63	111.59	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5190 MHz		

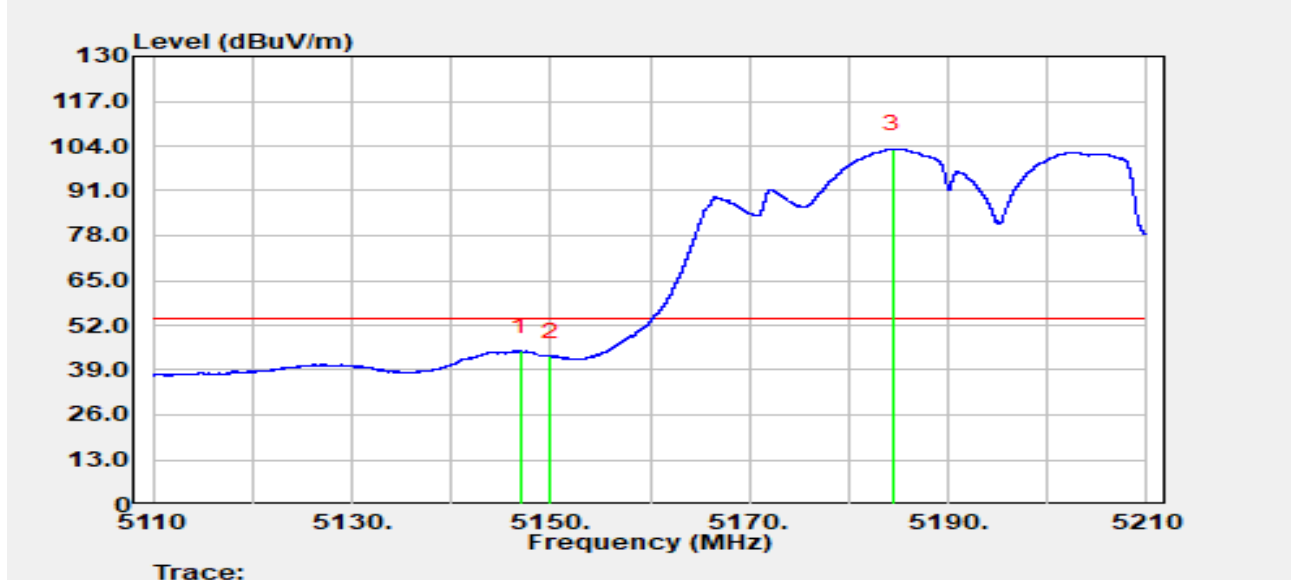


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.980	45.65	-1.17	44.48	-9.52	54.00	Average
2		5150.000	43.61	-0.54	43.06	-10.94	54.00	Average
3		5184.440	64.11	38.93	103.03	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

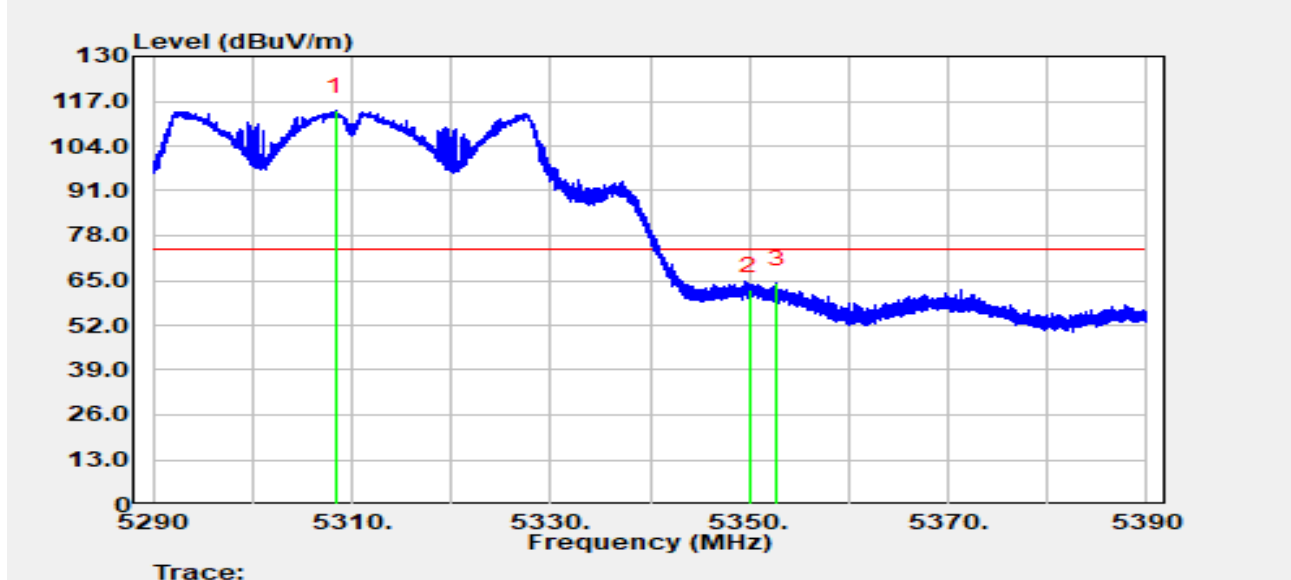


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.360	71.88	42.27	114.15	N/A	N/A	Peak
2		5350.000	59.87	2.28	62.15	-11.85	74.00	Peak
3	*	5352.720	63.70	0.51	64.21	-9.79	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

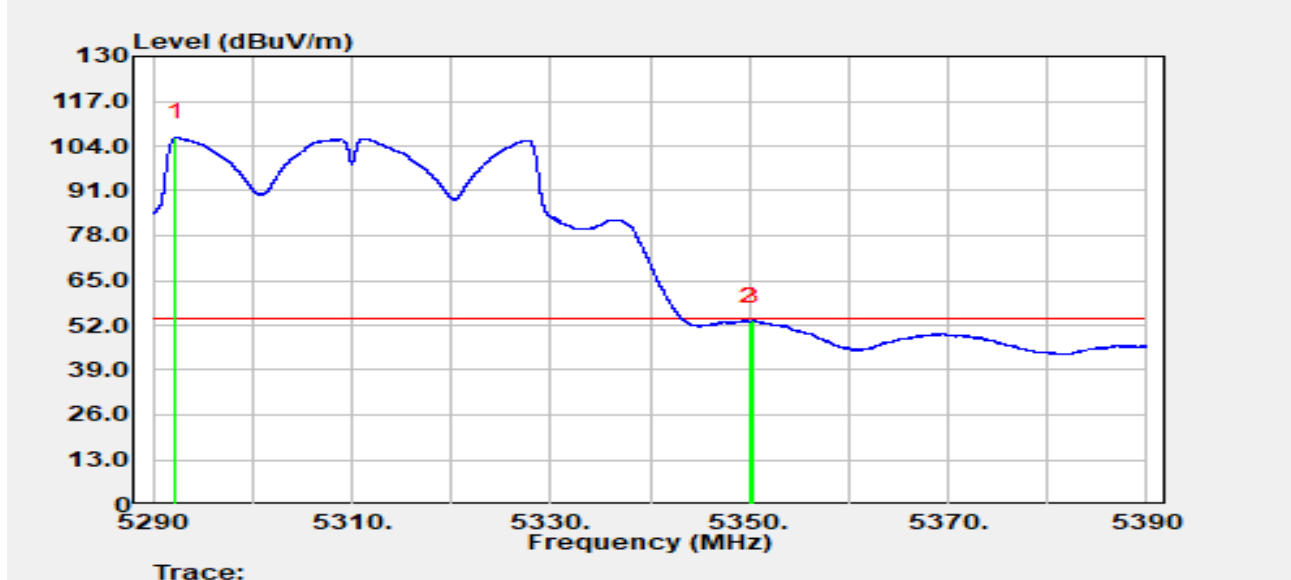


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5292.310	65.44	41.02	106.46	N/A	N/A	Average
2		5350.000	50.79	2.28	53.07	-0.93	54.00	Average
3	*	5350.310	51.22	2.12	53.34	-0.66	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

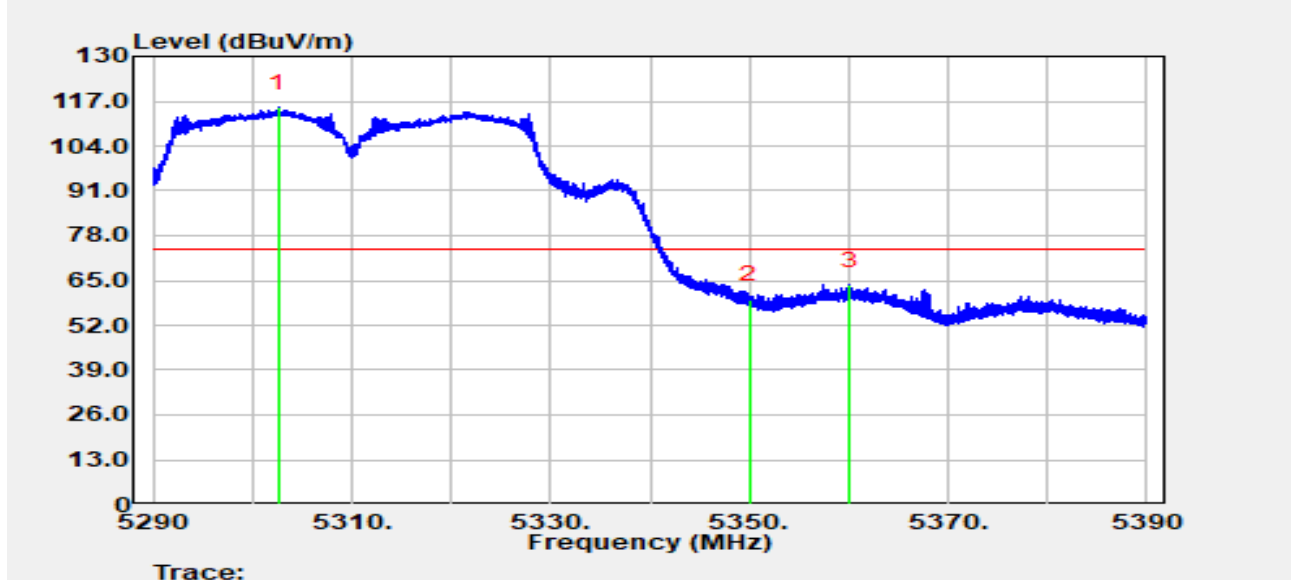


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5302.670	71.67	43.56	115.24	N/A	N/A	Peak
2		5350.000	57.24	2.28	59.52	-14.48	74.00	Peak
3	*	5360.130	64.55	-0.83	63.72	-10.28	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5310 MHz		

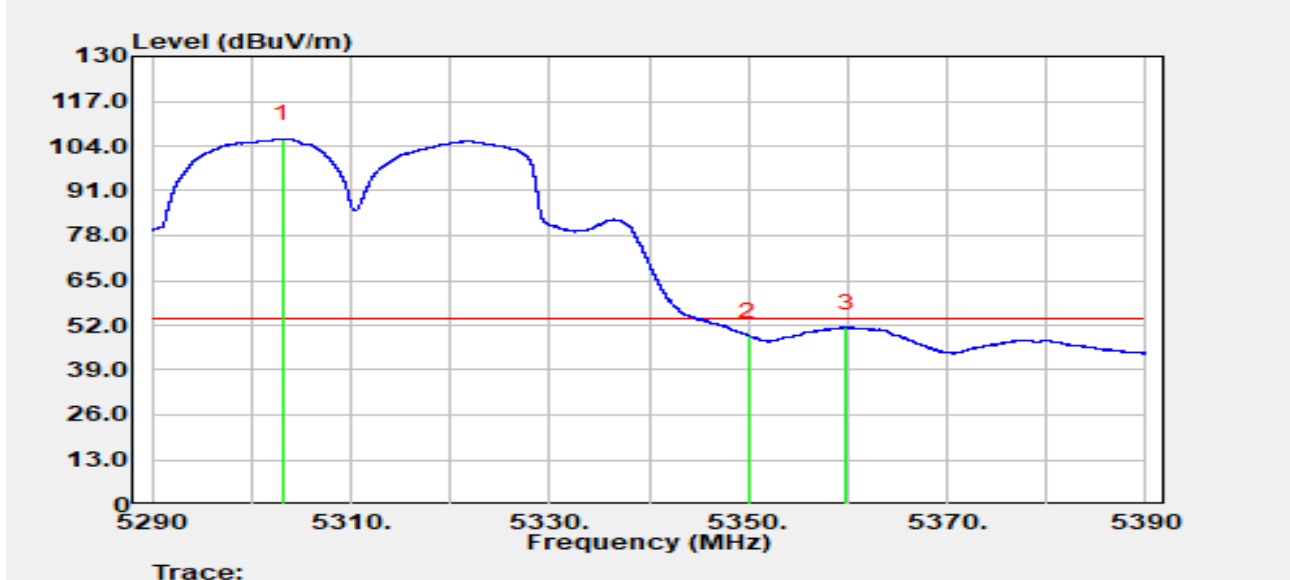


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5303.190	62.94	43.14	106.08	N/A	N/A	Average
2		5350.000	46.71	2.28	48.99	-5.01	54.00	Average
3	*	5359.880	52.22	-0.81	51.41	-2.59	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

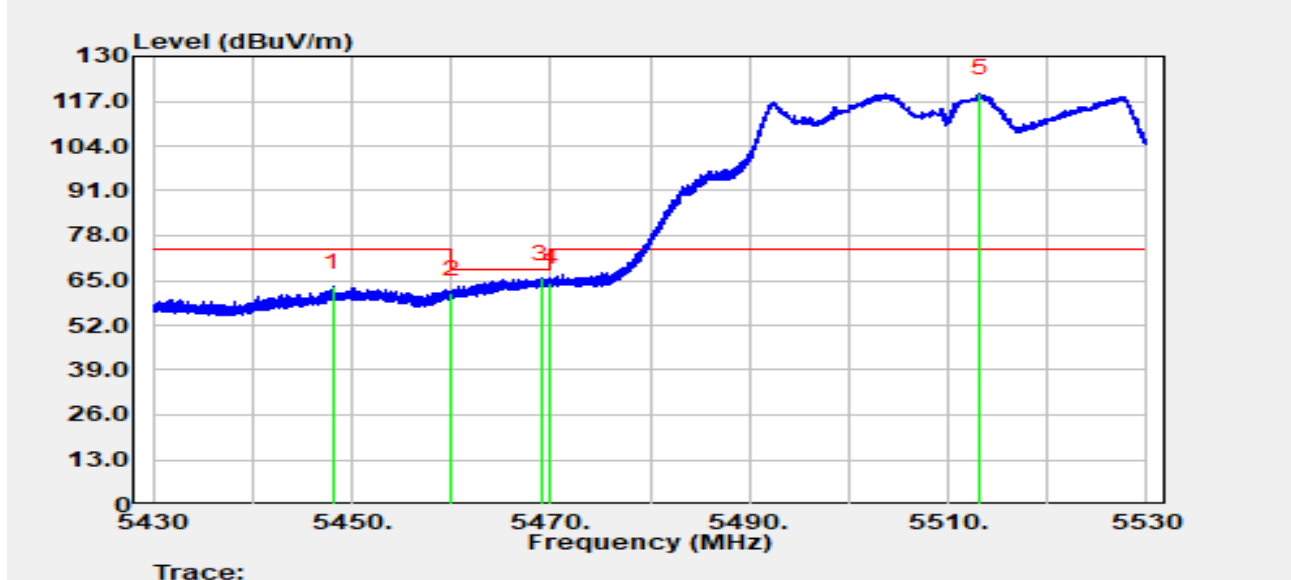


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5448.110	64.47	-1.42	63.05	-10.95	74.00	Peak
2		5460.000	61.91	-0.69	61.22	-6.98	68.20	Peak
3	*	5469.080	64.79	0.72	65.51	-2.69	68.20	Peak
4		5470.000	63.28	1.00	64.28	-3.92	68.20	Peak
5		5513.230	74.91	44.34	119.25	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

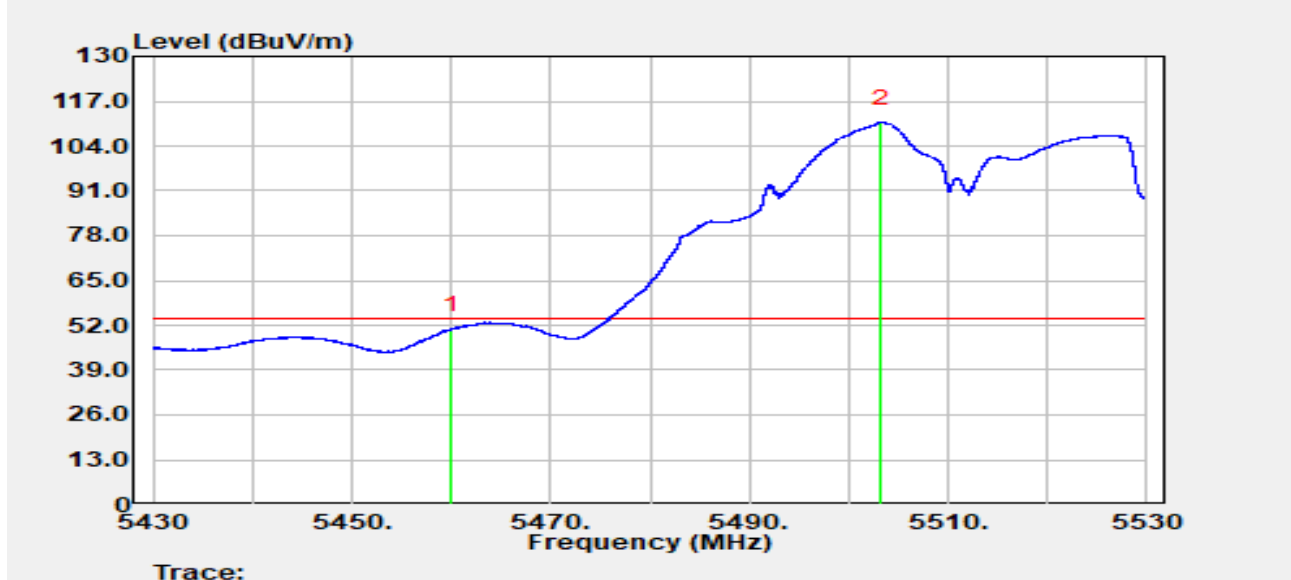


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.000	51.46	-0.69	50.76	-3.24	54.00	Average
2		5503.200	65.70	45.07	110.77	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

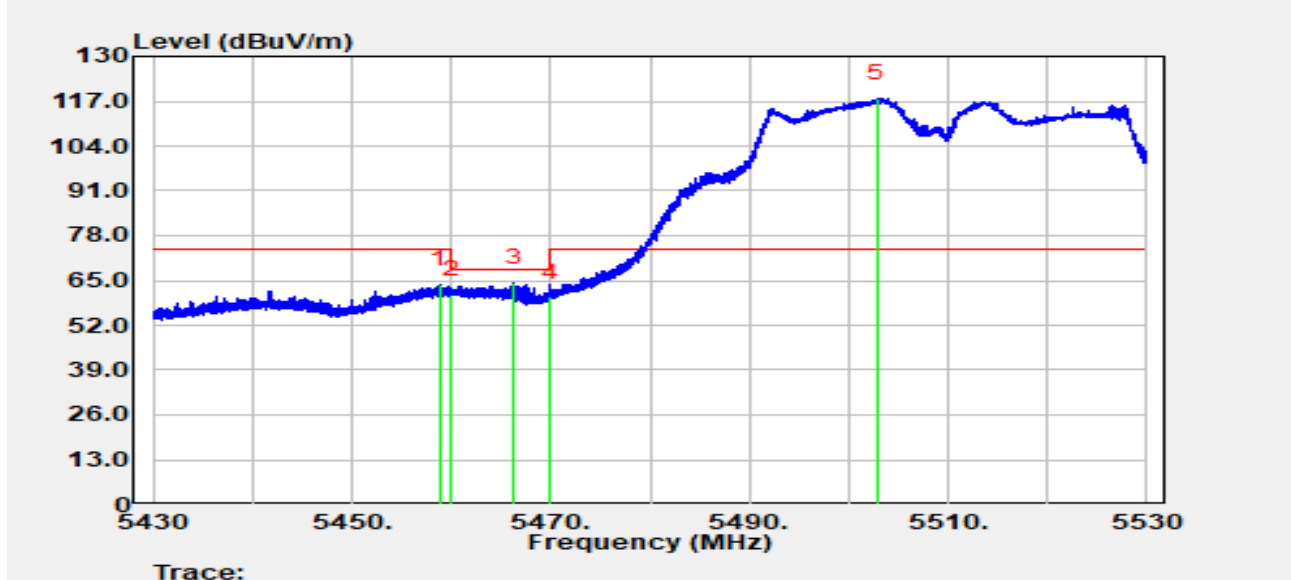


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.880	64.69	-0.82	63.88	-10.12	74.00	Peak
2		5460.000	61.59	-0.69	60.90	-7.30	68.20	Peak
3	*	5466.370	64.50	-0.02	64.48	-3.72	68.20	Peak
4		5470.000	59.15	1.00	60.15	-8.05	68.20	Peak
5		5502.850	73.53	44.32	117.85	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5510 MHz		

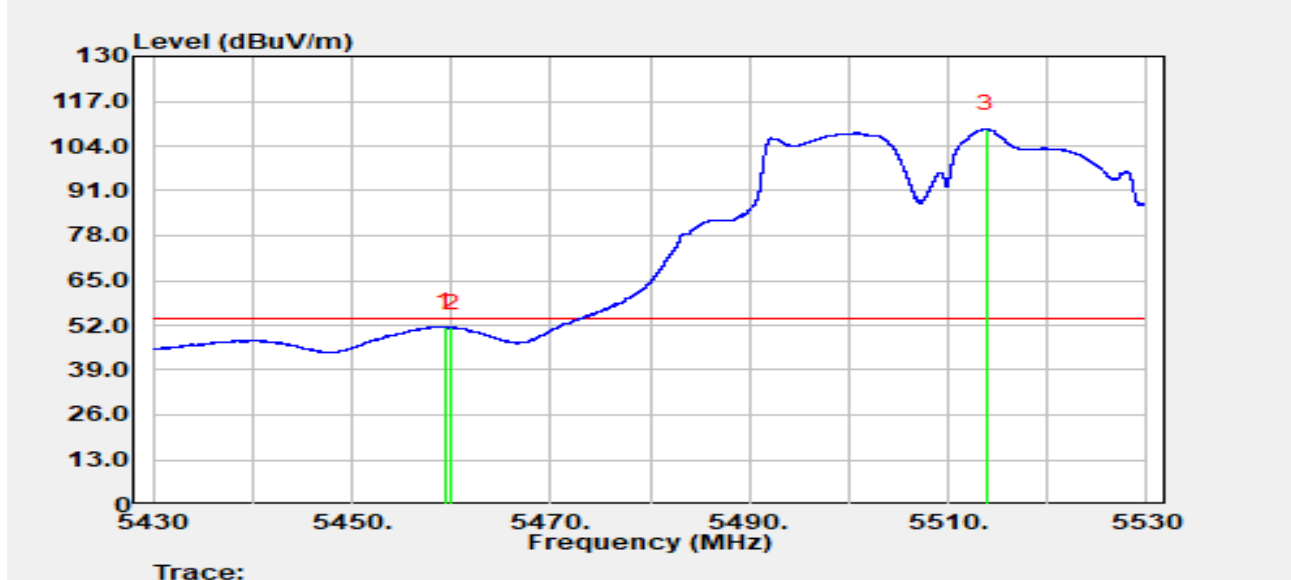


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.330	52.45	-0.77	51.68	-2.32	54.00	Average
2		5460.000	52.01	-0.69	51.32	-2.68	54.00	Average
3		5513.830	64.18	44.84	109.02	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

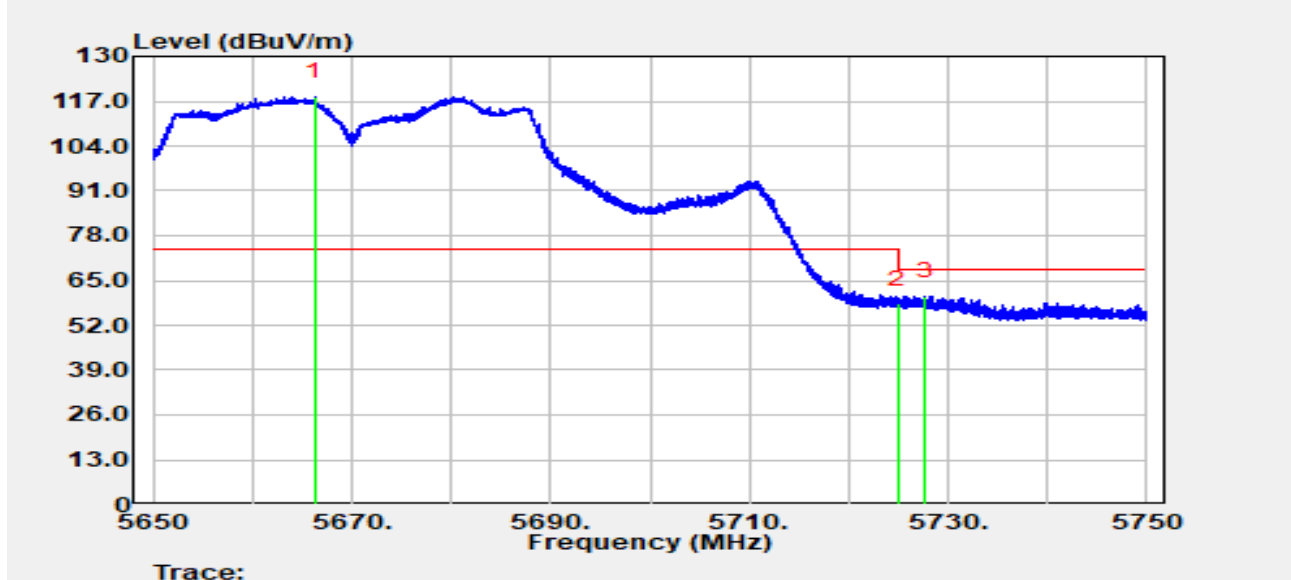


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.330	72.12	46.16	118.28	N/A	N/A	Peak
2		5725.000	57.27	1.01	58.27	-9.93	68.20	Peak
3	*	5727.740	60.75	-0.18	60.57	-7.63	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5670 MHz		

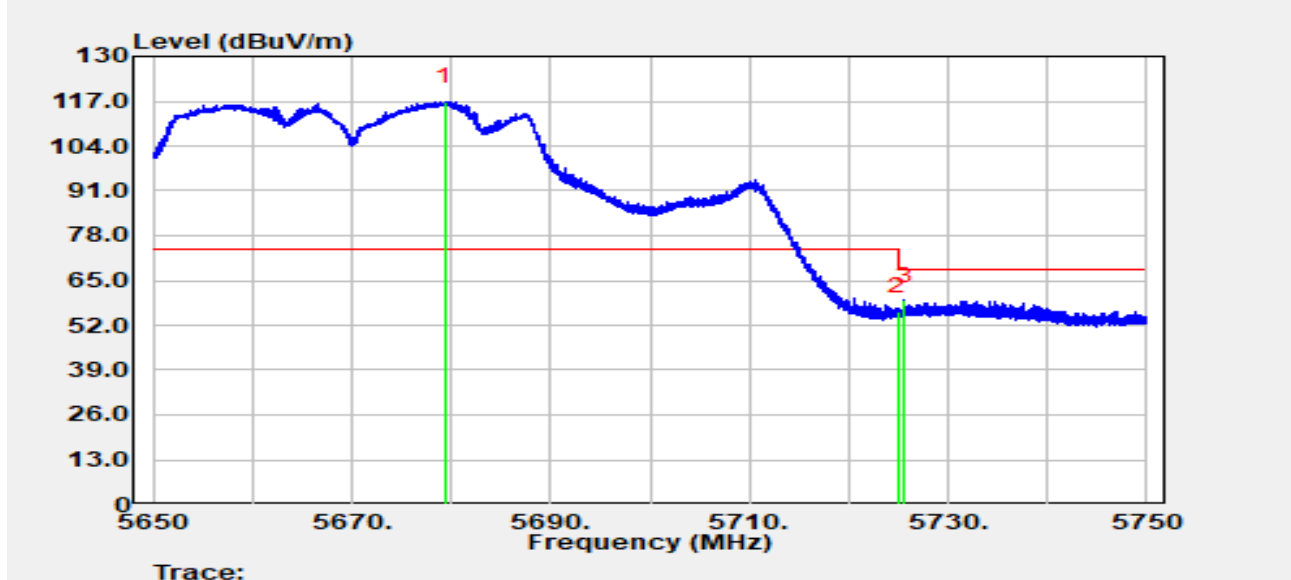


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.430	71.69	45.22	116.91	N/A	N/A	Peak
2		5725.000	55.00	1.01	56.00	-12.20	68.20	Peak
3	*	5725.580	58.54	0.68	59.22	-8.98	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

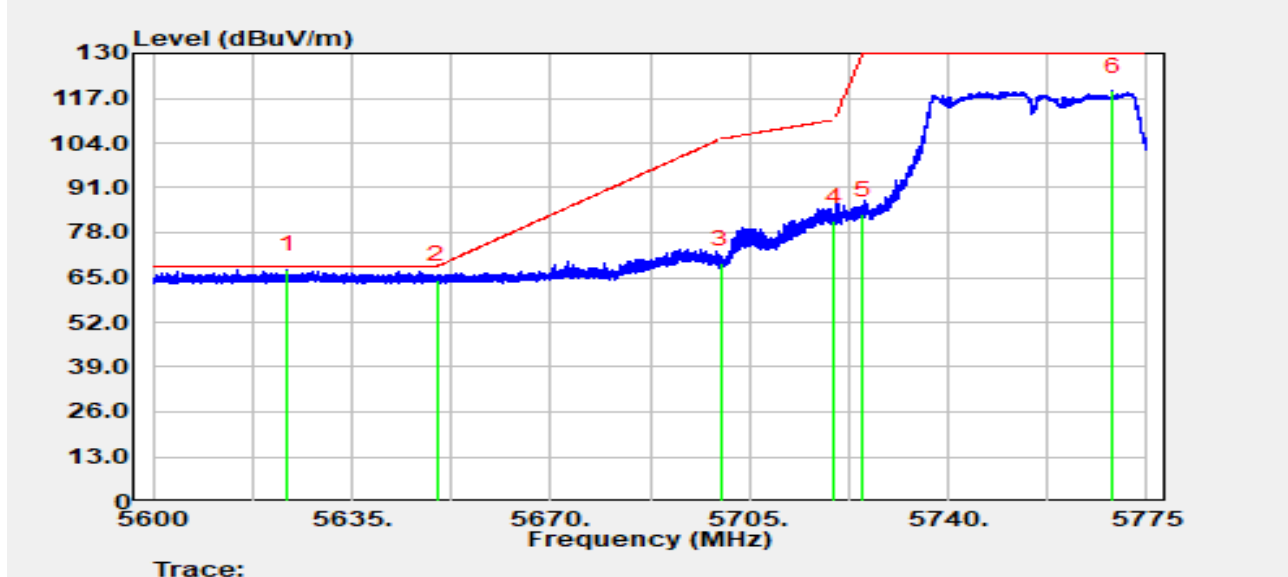


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5623.607	70.65	-3.35	67.31	-0.89	68.20	Peak
2		5650.000	67.97	-3.65	64.32	-3.88	68.20	Peak
3		5700.000	72.59	-3.47	69.12	-36.08	105.20	Peak
4		5720.000	84.72	-3.45	81.27	-29.53	110.80	Peak
5		5725.000	86.79	-3.47	83.32	-46.68	130.00	Peak
6		5769.067	122.83	-3.67	119.15	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5755 MHz		

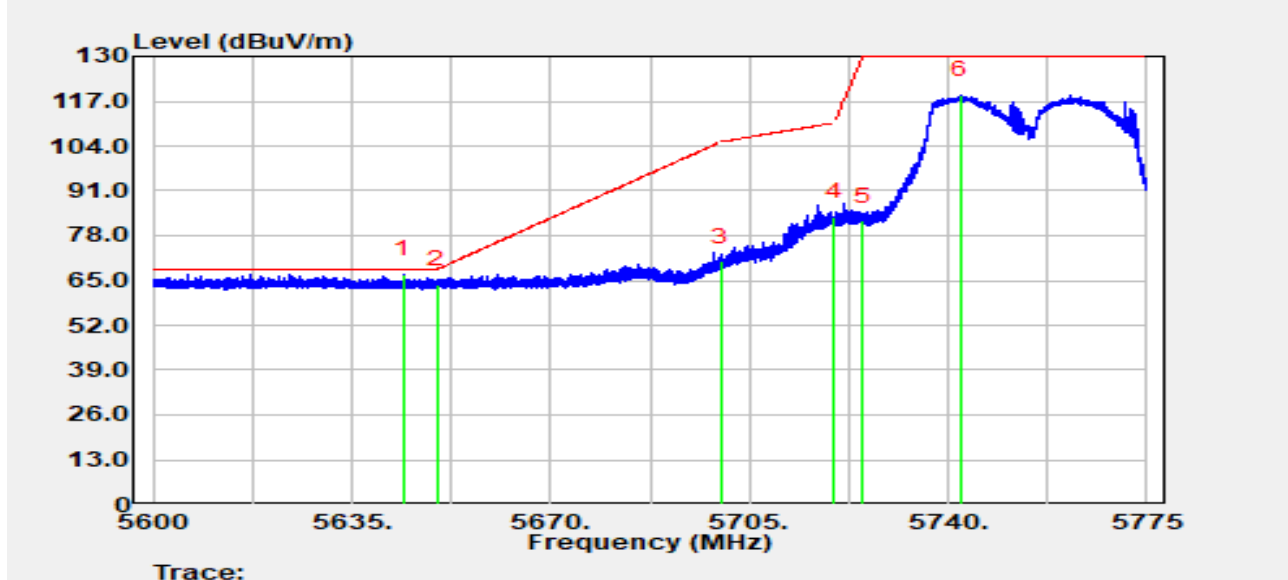


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.135	70.43	-3.65	66.78	-1.42	68.20	Peak
2		5650.000	67.57	-3.65	63.92	-4.28	68.20	Peak
3		5700.000	73.92	-3.47	70.44	-34.76	105.20	Peak
4		5720.000	87.07	-3.45	83.62	-27.18	110.80	Peak
5		5725.000	85.65	-3.47	82.18	-47.82	130.00	Peak
6		5742.118	122.57	-3.63	118.94	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

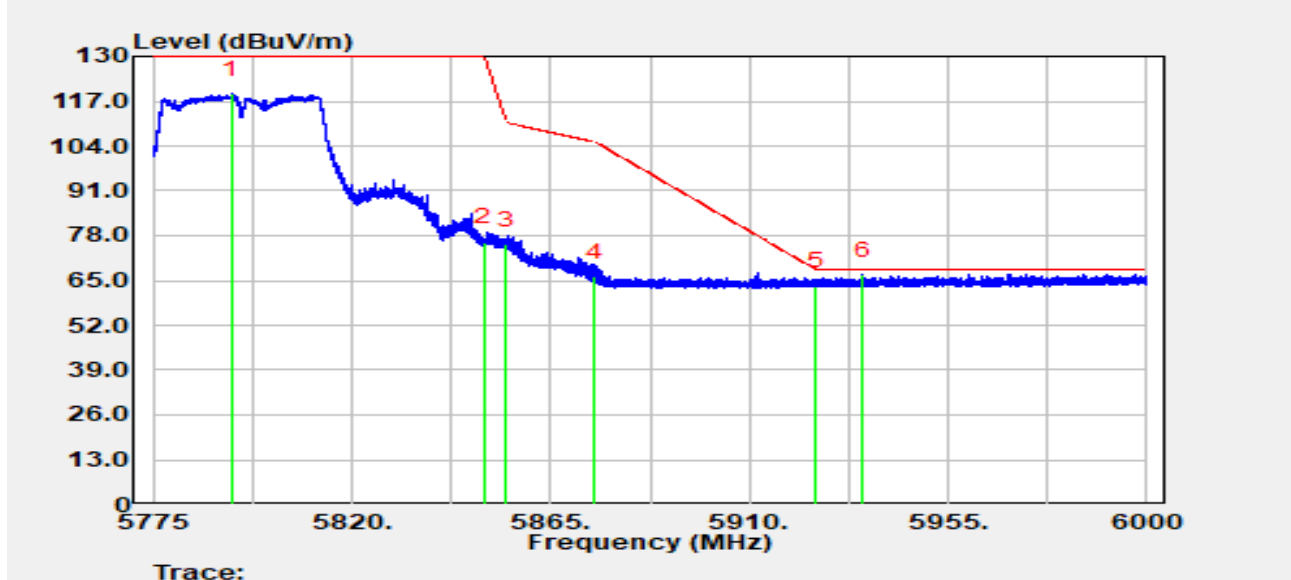


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5792.820	122.89	-3.69	119.20	N/A	N/A	Peak
2		5850.000	79.97	-3.75	76.21	-53.79	130.00	Peak
3		5855.010	79.21	-3.75	75.46	-35.34	110.80	Peak
4		5875.000	69.93	-3.82	66.11	-39.09	105.20	Peak
5		5925.000	67.09	-3.71	63.39	-4.81	68.20	Peak
6	*	5935.538	70.34	-3.68	66.66	-1.54	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT40 at 5795 MHz		

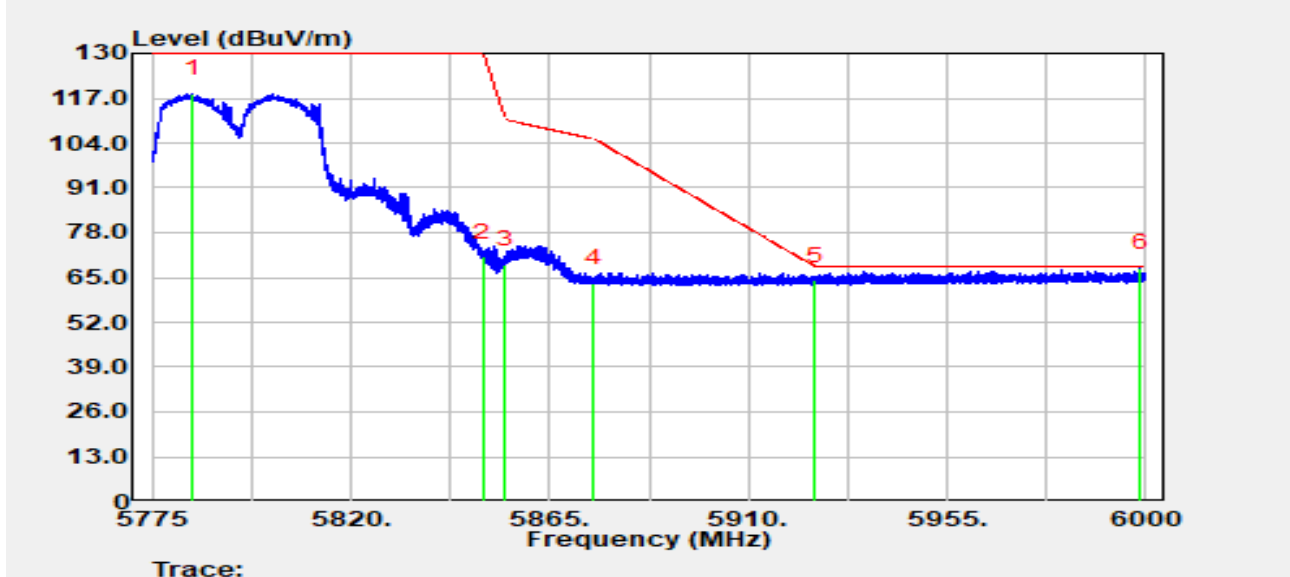


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5784.090	121.95	-3.69	118.26	N/A	N/A	Peak
2		5850.000	74.80	-3.75	71.05	-58.95	130.00	Peak
3		5855.000	72.51	-3.75	68.76	-42.04	110.80	Peak
4		5875.000	67.21	-3.82	63.39	-41.81	105.20	Peak
5		5925.000	67.83	-3.71	64.13	-4.07	68.20	Peak
6	*	5998.627	71.43	-3.72	67.70	-0.50	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

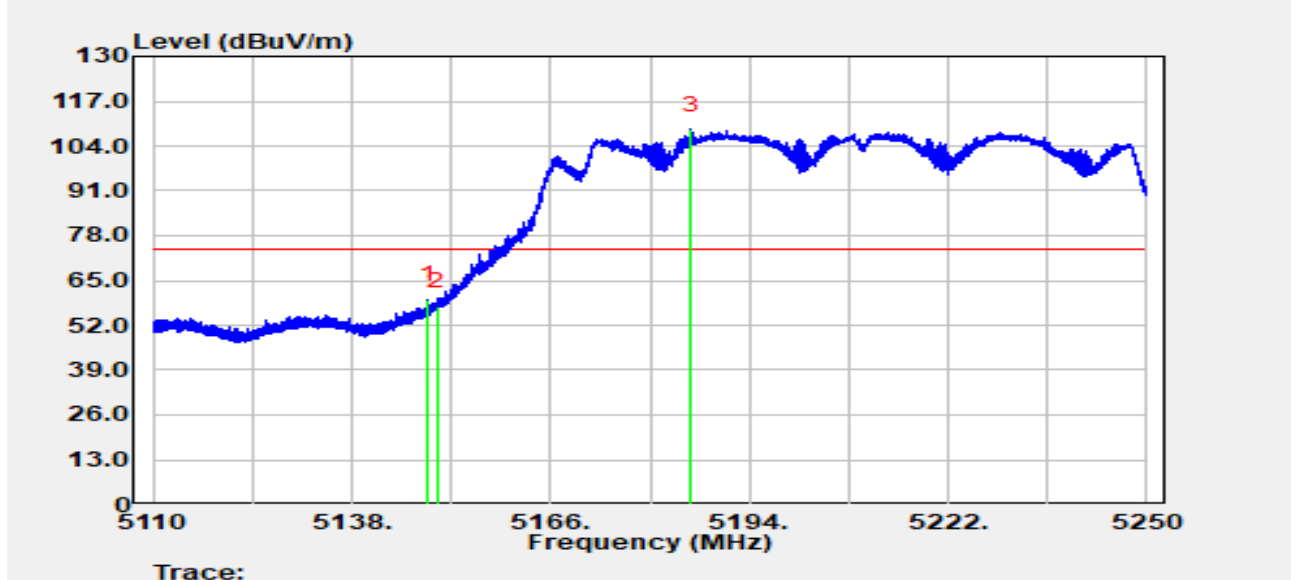


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.654	60.53	-1.06	59.47	-14.53	74.00	Peak
2		5150.000	58.13	-0.54	57.59	-16.41	74.00	Peak
3		5185.824	70.88	37.82	108.70	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

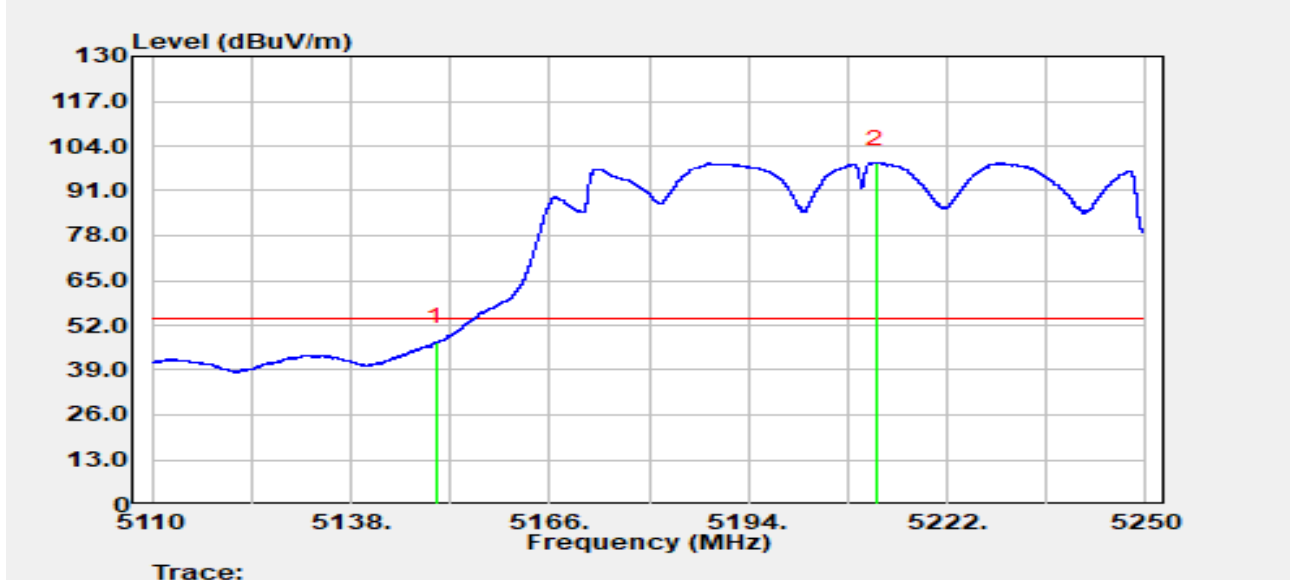


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	47.65	-0.54	47.10	-6.90	54.00	Average
2		5211.976	61.44	37.65	99.09	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

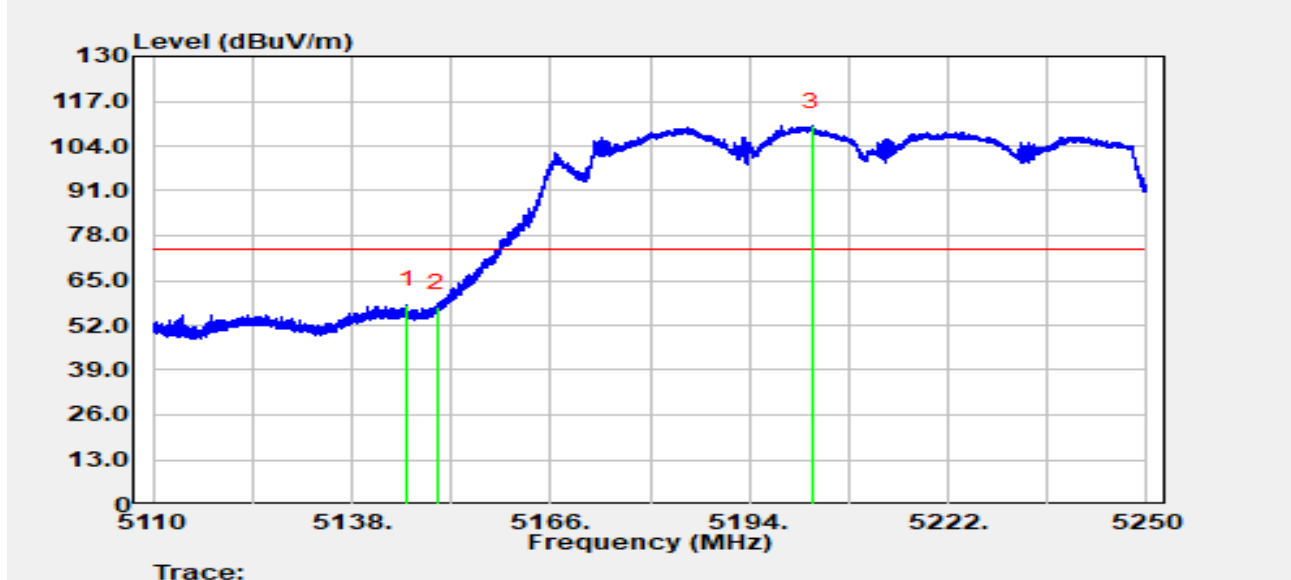


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.826	59.62	-1.71	57.91	-16.09	74.00	Peak
2		5150.000	57.71	-0.54	57.17	-16.83	74.00	Peak
3		5202.806	65.82	44.03	109.85	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5210 MHz		

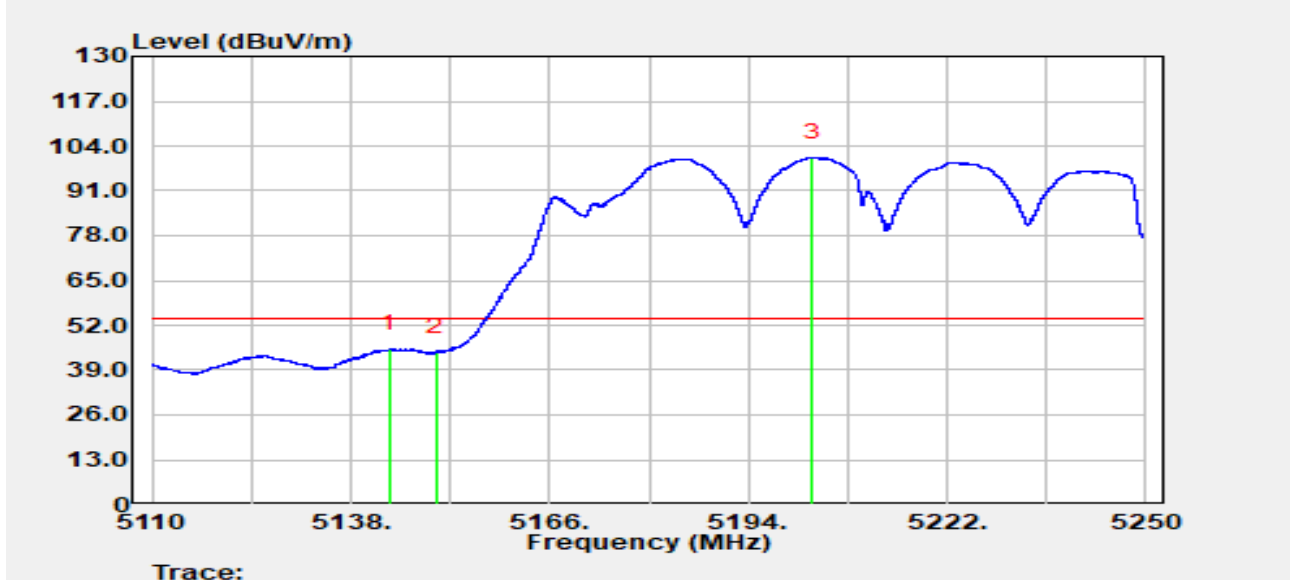


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.446	46.71	-1.56	45.15	-8.85	54.00	Average
2		5150.000	44.87	-0.54	44.32	-9.68	54.00	Average
3		5202.932	56.54	44.18	100.72	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

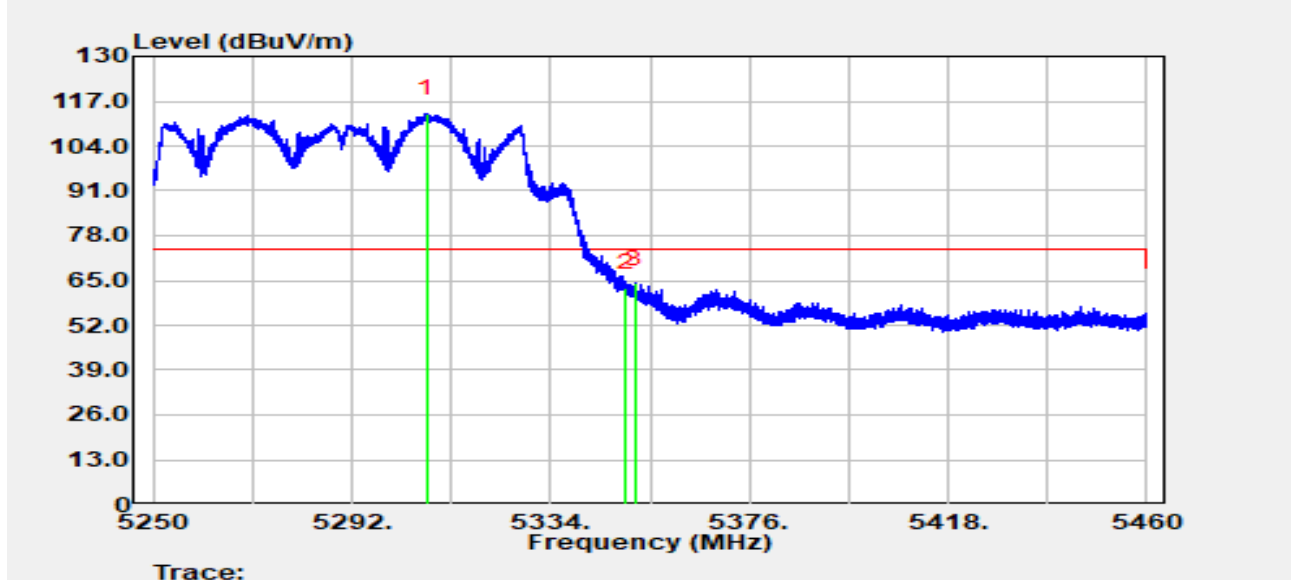


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.729	71.36	42.12	113.48	N/A	N/A	Peak
2		5350.000	60.60	2.28	62.88	-11.12	74.00	Peak
3	*	5351.871	63.05	1.01	64.06	-9.94	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

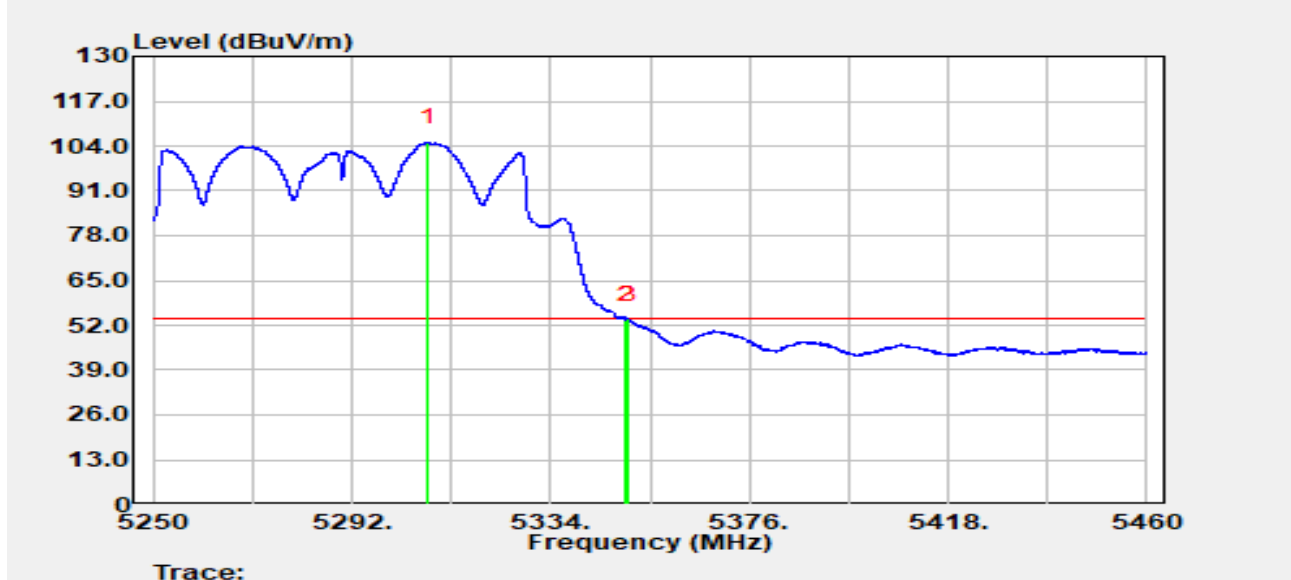


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5308.128	62.80	42.21	105.02	N/A	N/A	Average
2		5350.000	51.39	2.28	53.68	-0.32	54.00	Average
3	*	5350.401	51.82	2.06	53.87	-0.13	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

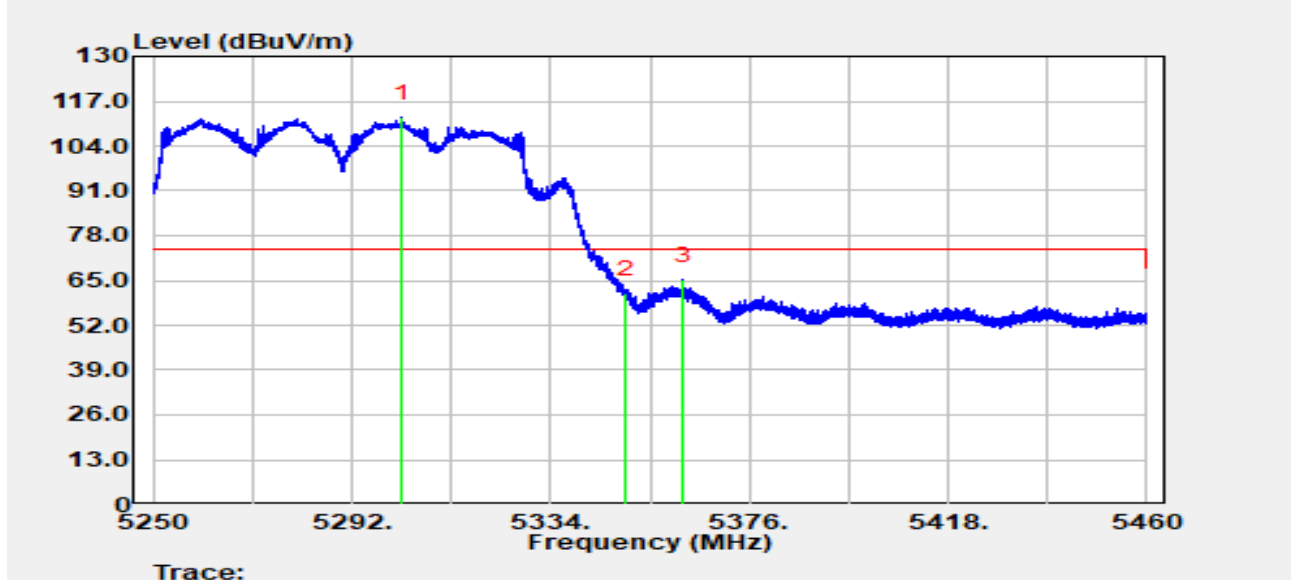


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5302.689	68.56	43.55	112.11	N/A	N/A	Peak
2		5350.000	58.96	2.28	61.24	-12.76	74.00	Peak
3	*	5361.972	66.23	-1.08	65.15	-8.85	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5290 MHz		

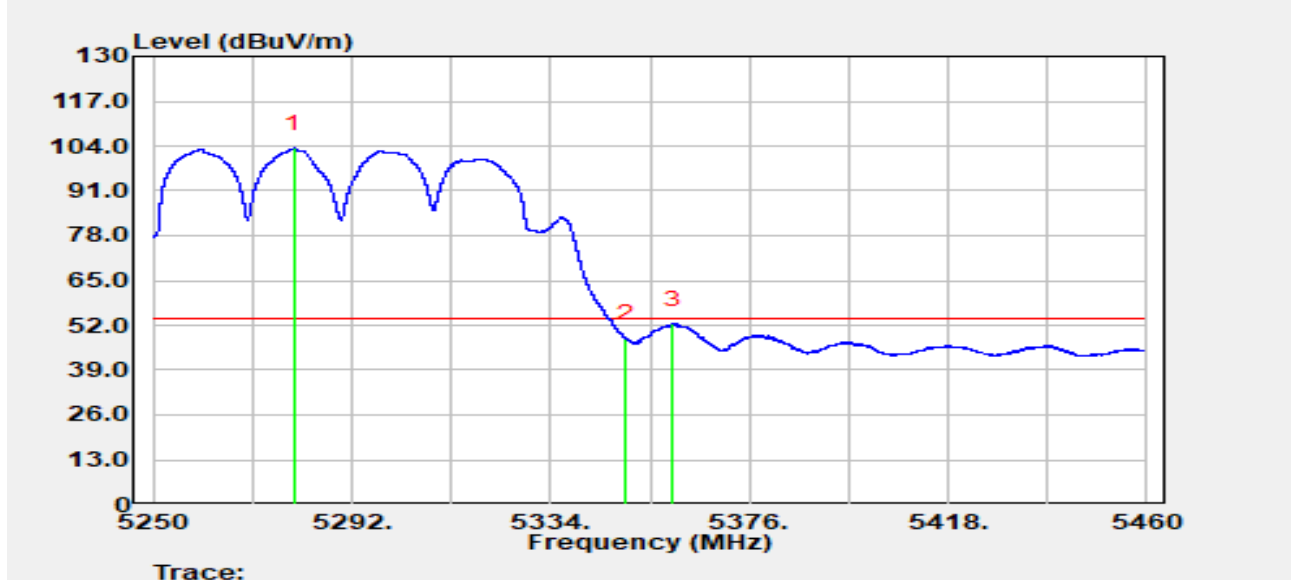


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5279.862	55.78	47.51	103.29	N/A	N/A	Average
2		5350.000	45.91	2.28	48.19	-5.81	54.00	Average
3	*	5359.746	53.23	-0.80	52.43	-1.57	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

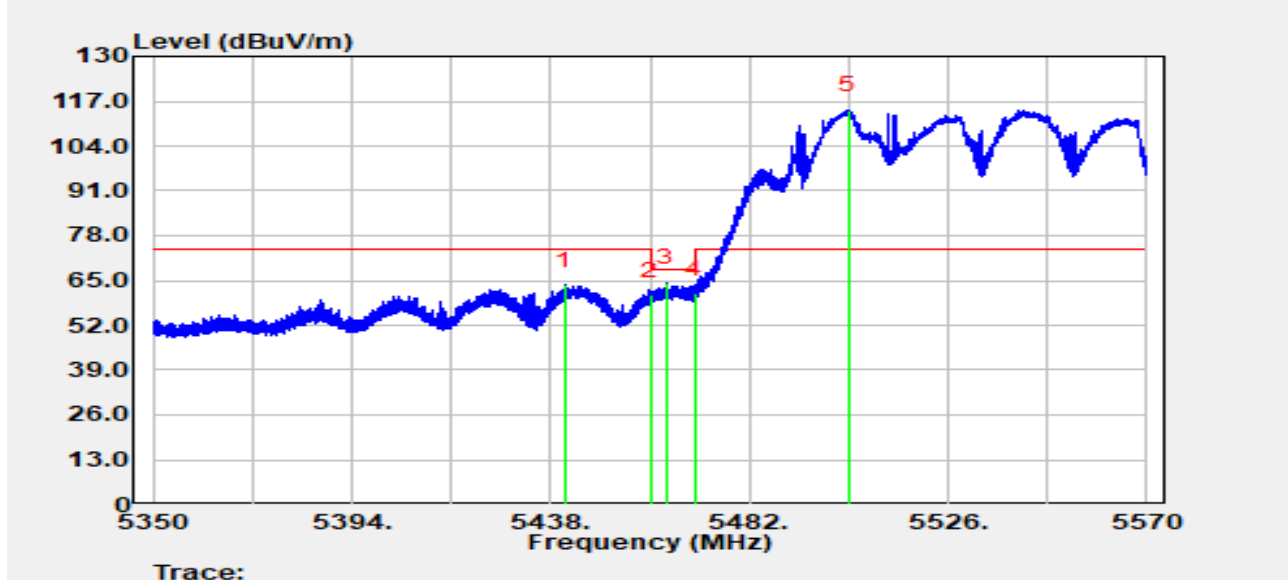


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5441.036	65.39	-1.72	63.67	-10.33	74.00	Peak
2		5460.000	61.37	-0.69	60.68	-7.52	68.20	Peak
3	*	5463.740	64.84	-0.42	64.42	-3.78	68.20	Peak
4		5470.000	60.16	1.00	61.16	-7.04	68.20	Peak
5		5504.000	68.34	46.19	114.53	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

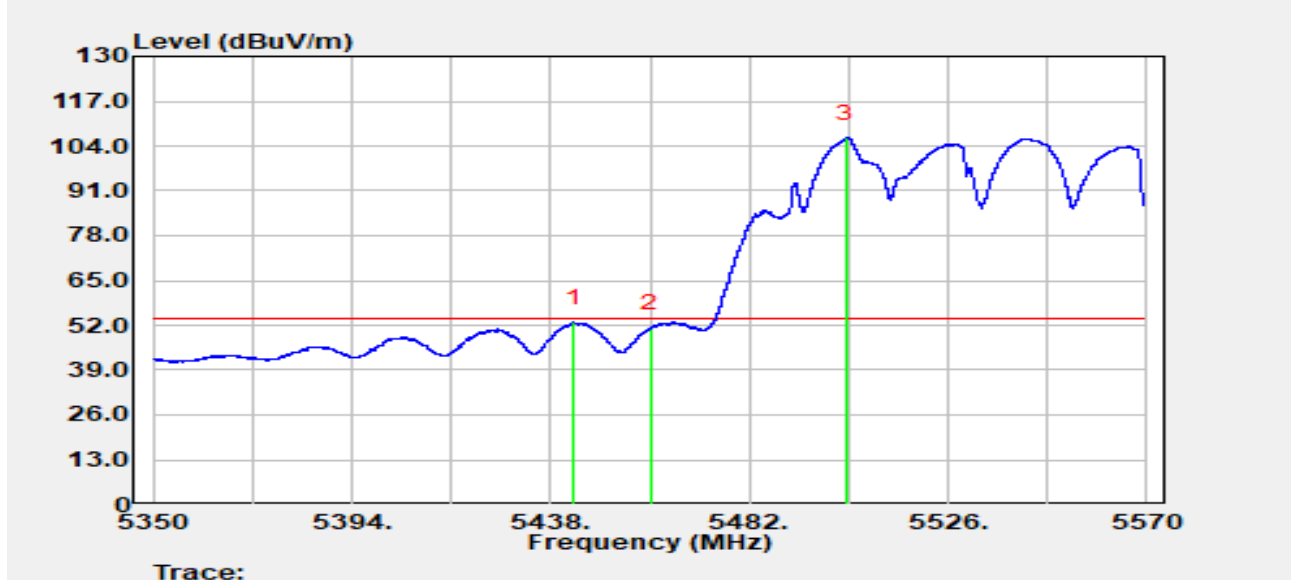


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5443.236	54.45	-1.63	52.83	-1.17	54.00	Average
2		5460.000	51.74	-0.69	51.05	-2.95	54.00	Average
3		5503.406	60.87	45.41	106.28	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

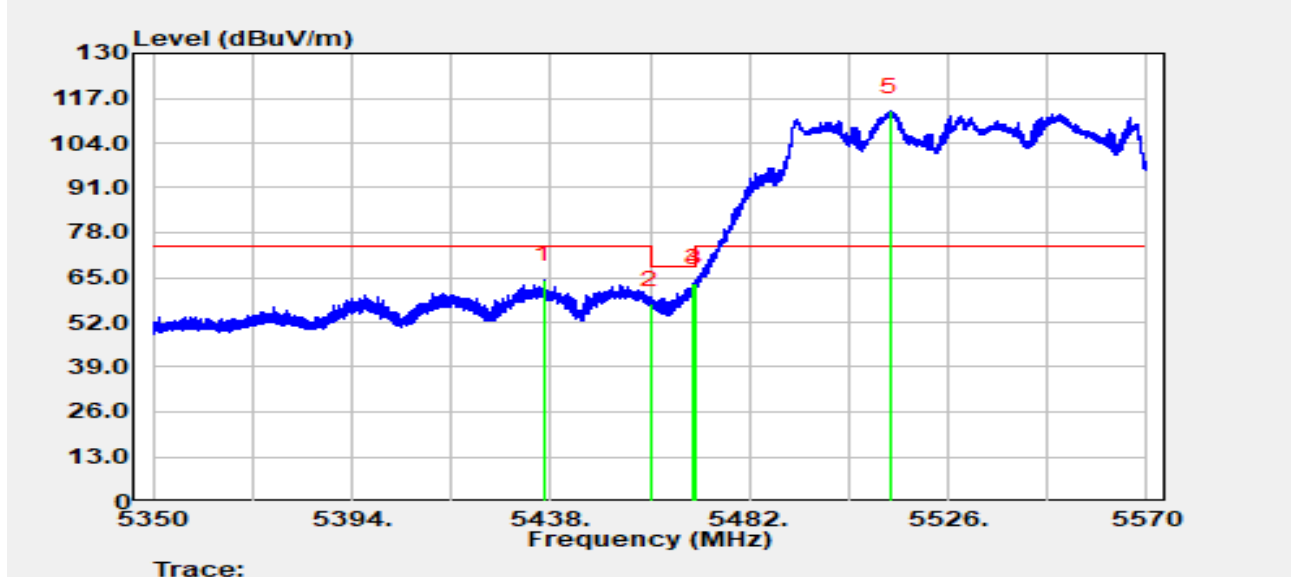


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.460	66.25	-1.87	64.38	-9.62	74.00	Peak
2		5460.000	58.06	-0.69	57.37	-10.83	68.20	Peak
3	*	5469.636	62.49	0.88	63.36	-4.84	68.20	Peak
4		5470.000	62.30	1.00	63.30	-4.90	68.20	Peak
5		5513.218	68.86	44.33	113.19	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5530 MHz		

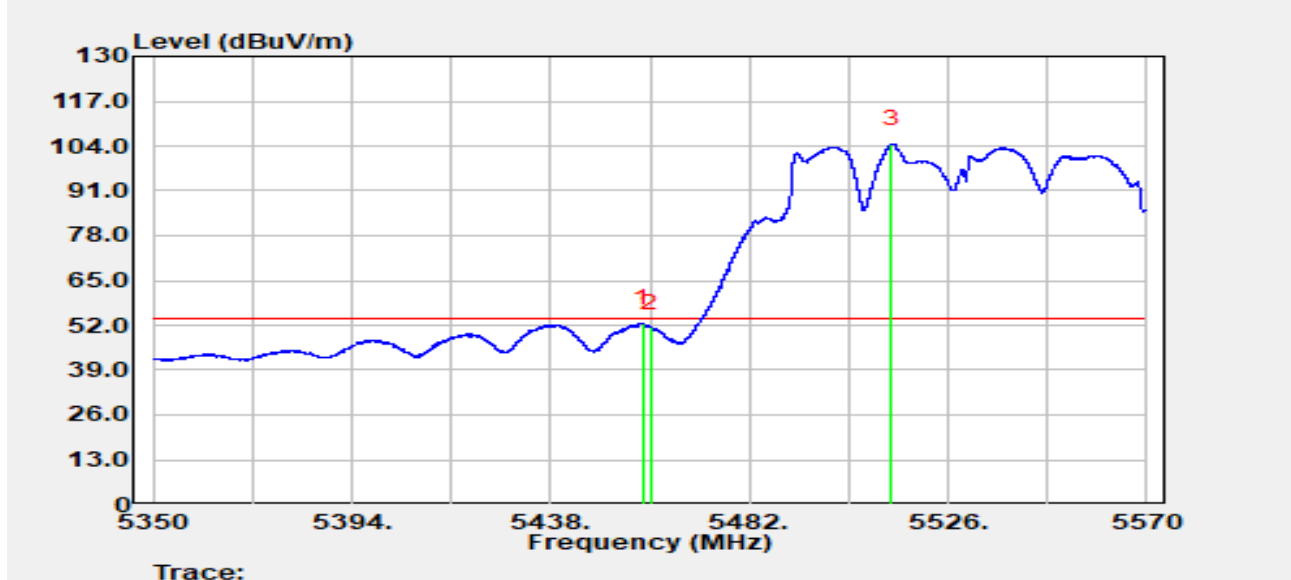


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5458.284	53.45	-0.80	52.65	-1.35	54.00	Average
2		5460.000	52.19	-0.69	51.50	-2.50	54.00	Average
3		5513.592	59.89	44.75	104.64	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

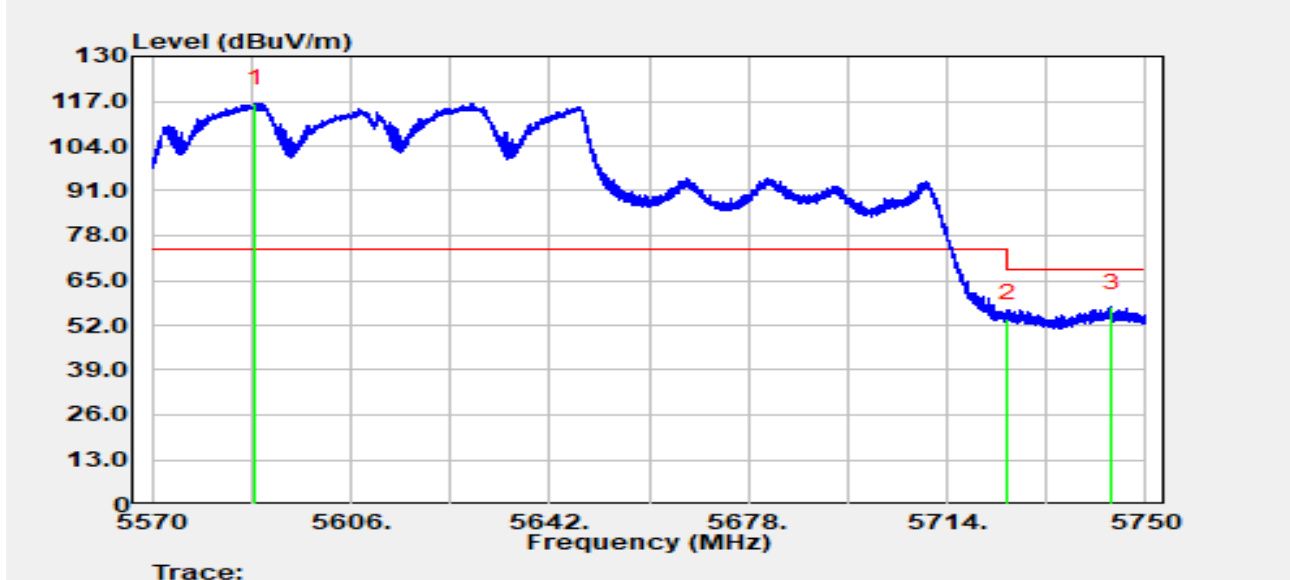


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5588.756	70.54	45.90	116.44	N/A	N/A	Peak
2		5725.000	53.19	1.01	54.20	-14.00	68.20	Peak
3	*	5743.808	59.07	-1.91	57.16	-11.04	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5610 MHz		

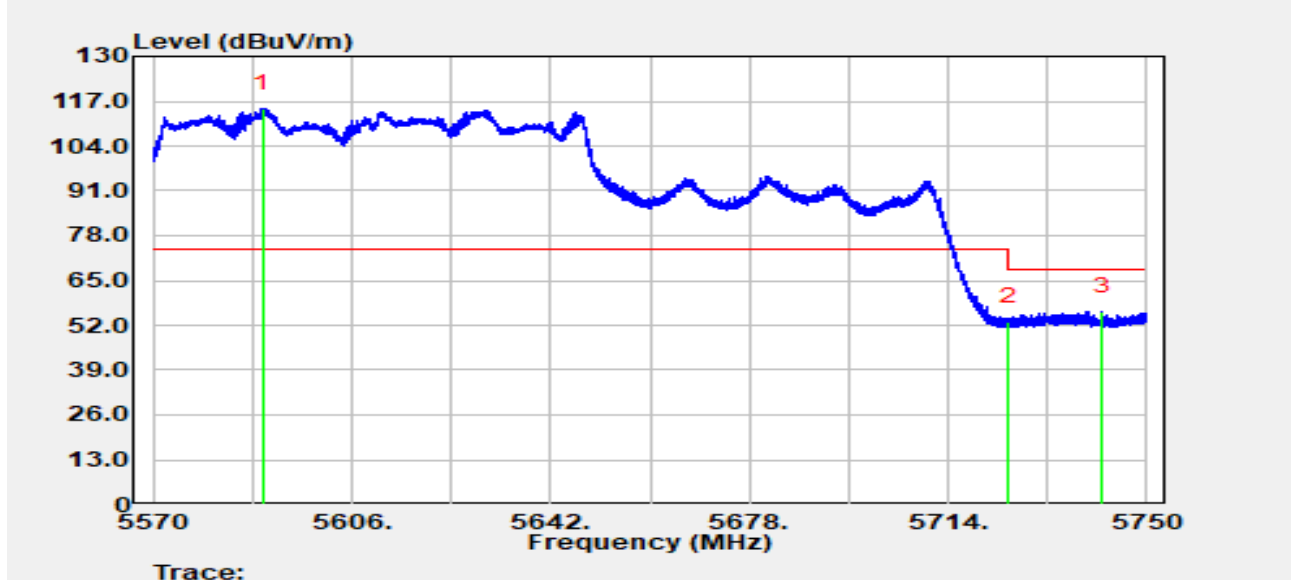


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5589.764	67.56	47.36	114.92	N/A	N/A	Peak
2		5725.000	52.09	1.01	53.09	-15.11	68.20	Peak
3	*	5741.882	57.92	-1.79	56.13	-12.07	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

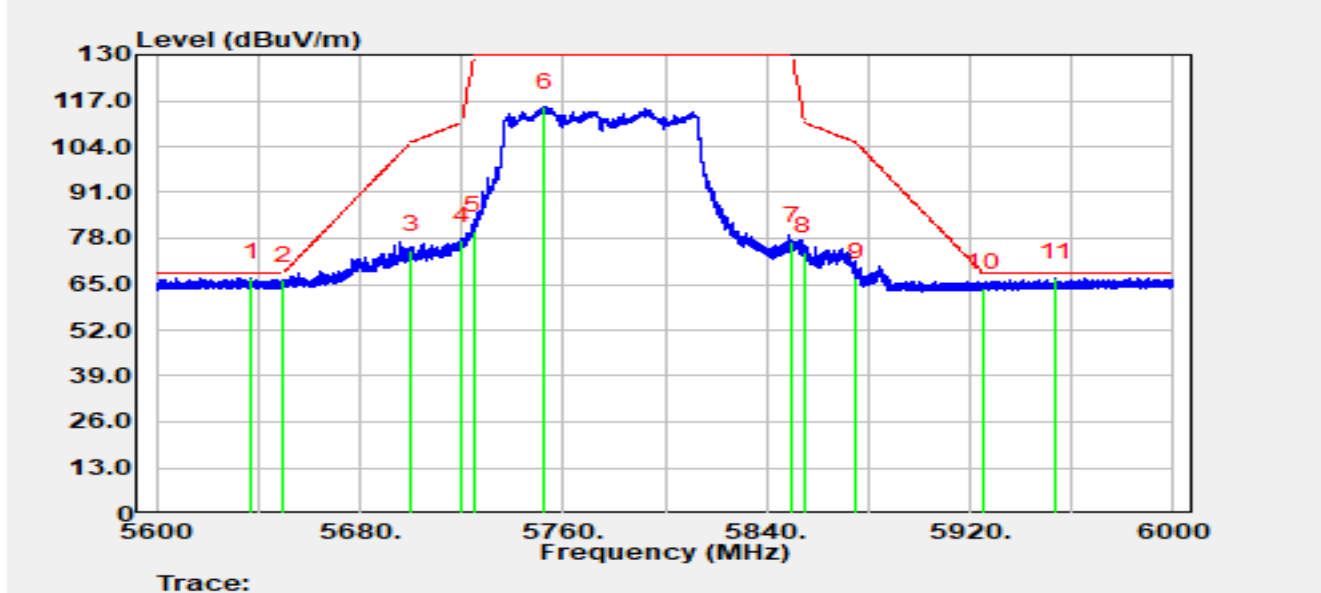


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.560	70.51	-3.59	66.93	-1.27	68.20	Peak
2		5650.000	69.64	-3.65	65.99	-2.21	68.20	Peak
3		5700.000	78.07	-3.47	74.60	-30.60	105.20	Peak
4		5720.000	80.80	-3.45	77.35	-33.45	110.80	Peak
5		5725.000	83.66	-3.47	80.19	-49.81	130.00	Peak
6		5752.840	118.85	-3.65	115.19	N/A	N/A	Peak
7		5850.000	80.87	-3.75	77.12	-52.88	130.00	Peak
8		5855.000	78.04	-3.75	74.29	-36.51	110.80	Peak
9		5875.000	70.76	-3.82	66.93	-38.27	105.20	Peak
10		5925.000	67.60	-3.71	63.89	-4.31	68.20	Peak
11		5953.600	70.52	-3.67	66.85	-1.35	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT80 at 5775 MHz		

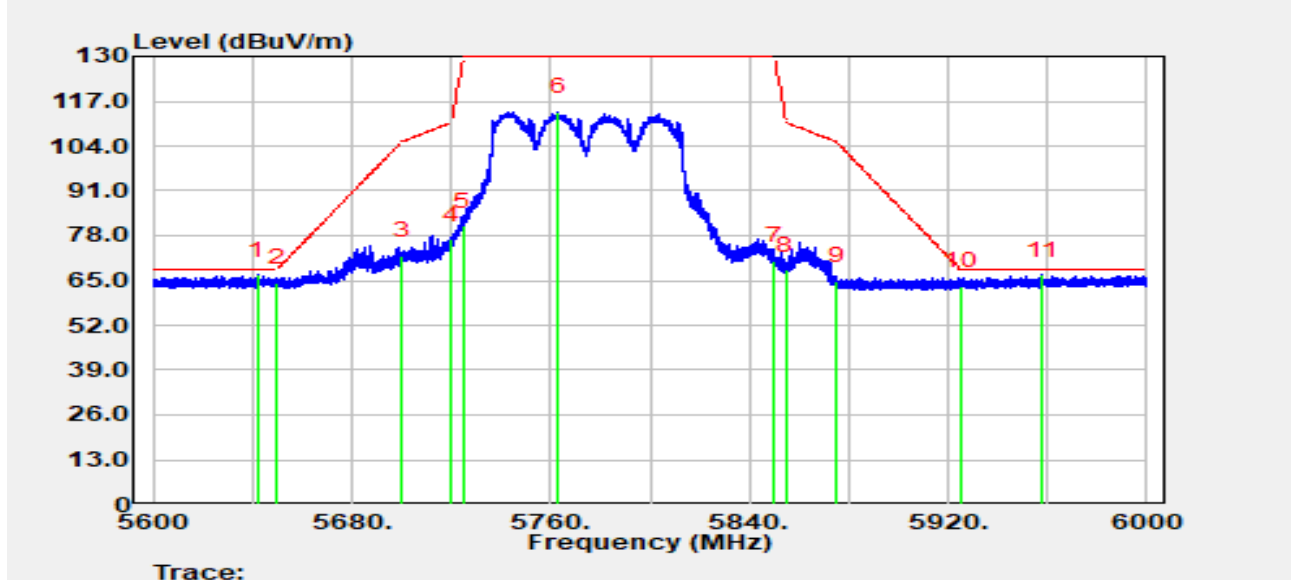


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.120	70.33	-3.65	66.68	-1.52	68.20	Peak
2		5650.000	68.10	-3.65	64.46	-3.74	68.20	Peak
3		5700.000	75.59	-3.47	72.12	-33.08	105.20	Peak
4		5720.000	80.34	-3.45	76.89	-33.91	110.80	Peak
5		5725.000	84.27	-3.47	80.80	-49.20	130.00	Peak
6		5762.960	117.70	-3.66	114.05	N/A	N/A	Peak
7		5850.000	74.55	-3.75	70.80	-59.20	130.00	Peak
8		5855.000	71.90	-3.75	68.15	-42.65	110.80	Peak
9		5875.000	68.70	-3.82	64.88	-40.32	105.20	Peak
10		5925.000	67.10	-3.71	63.39	-4.81	68.20	Peak
11		5958.000	70.26	-3.66	66.61	-1.59	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

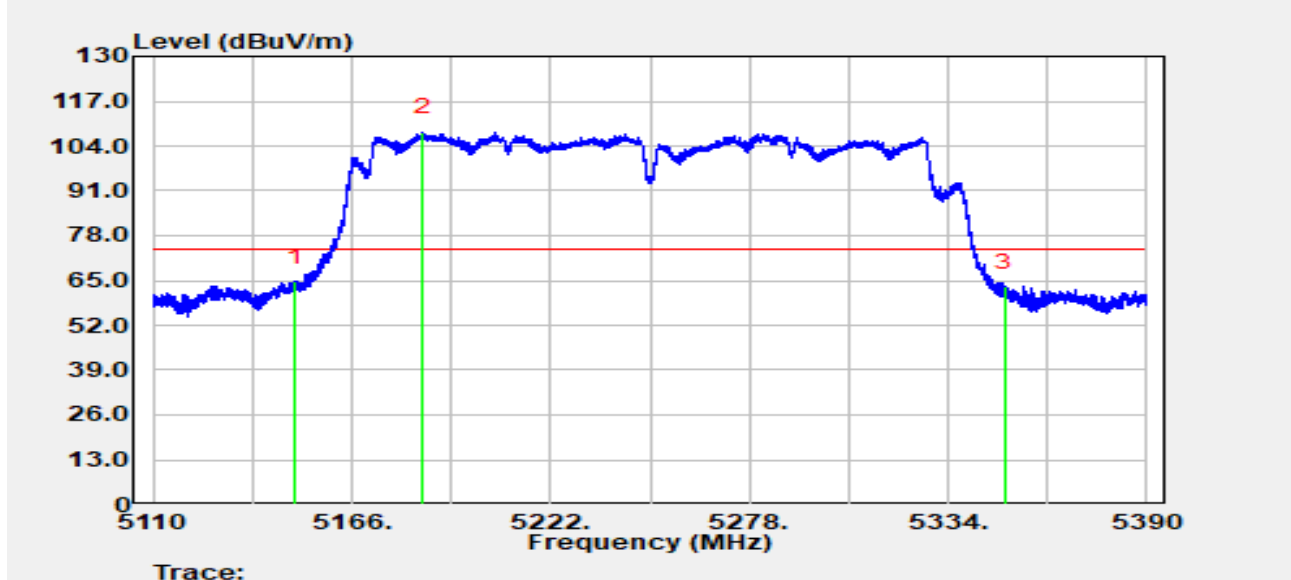


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	65.12	-0.54	64.58	-9.42	74.00	Peak
2		5185.936	70.18	37.77	107.95	N/A	N/A	Peak
3		5350.000	61.00	2.28	63.28	-10.72	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

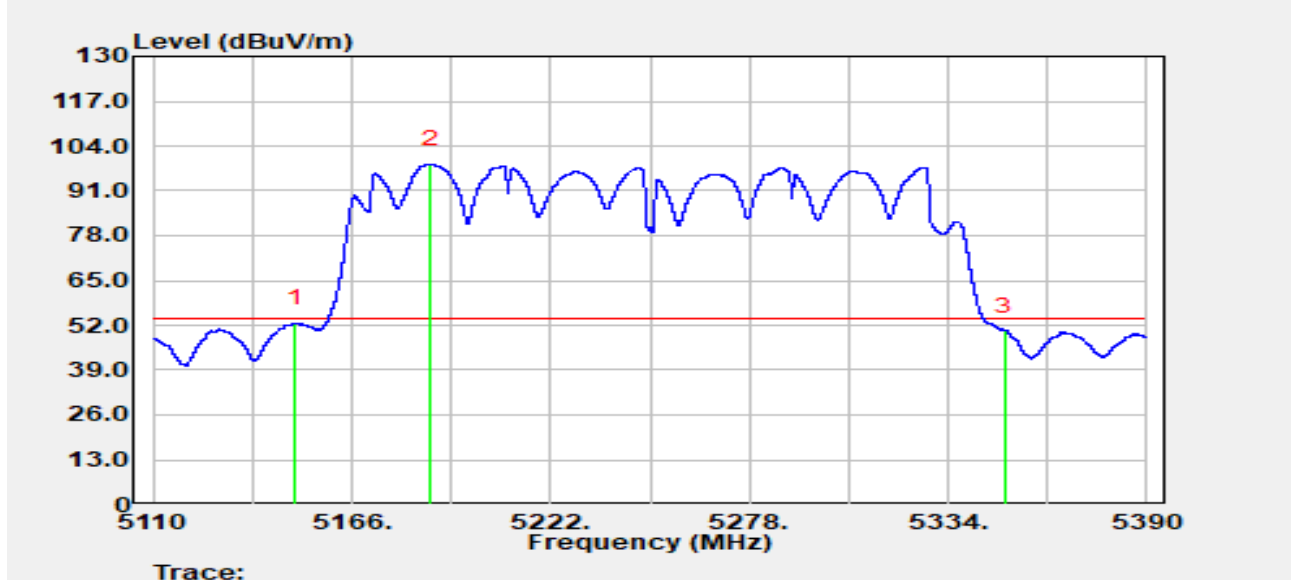


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.23	-0.54	52.69	-1.31	54.00	Average
2		5188.204	59.68	39.12	98.80	N/A	N/A	Average
3		5350.000	48.23	2.28	50.51	-3.49	54.00	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

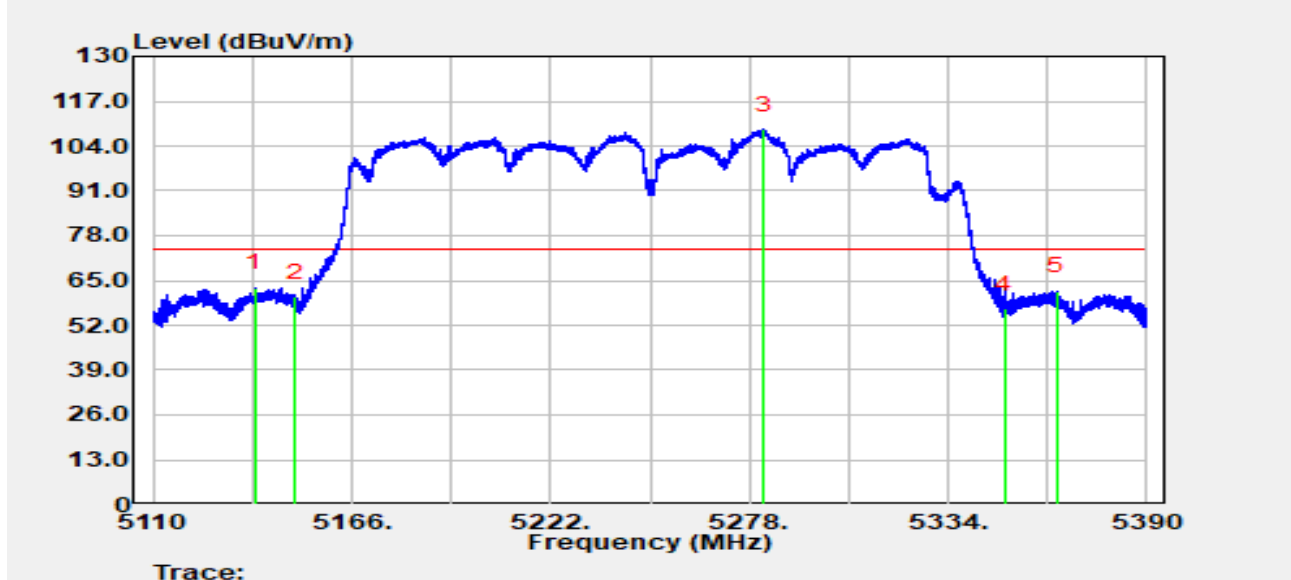


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.812	65.39	-2.37	63.02	-10.98	74.00	Peak
2		5150.000	60.64	-0.54	60.10	-13.90	74.00	Peak
3		5281.948	58.23	50.67	108.90	N/A	N/A	Peak
4		5350.000	54.57	2.28	56.85	-17.15	74.00	Peak
5		5364.548	63.30	-1.31	61.98	-12.02	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5250 MHz		

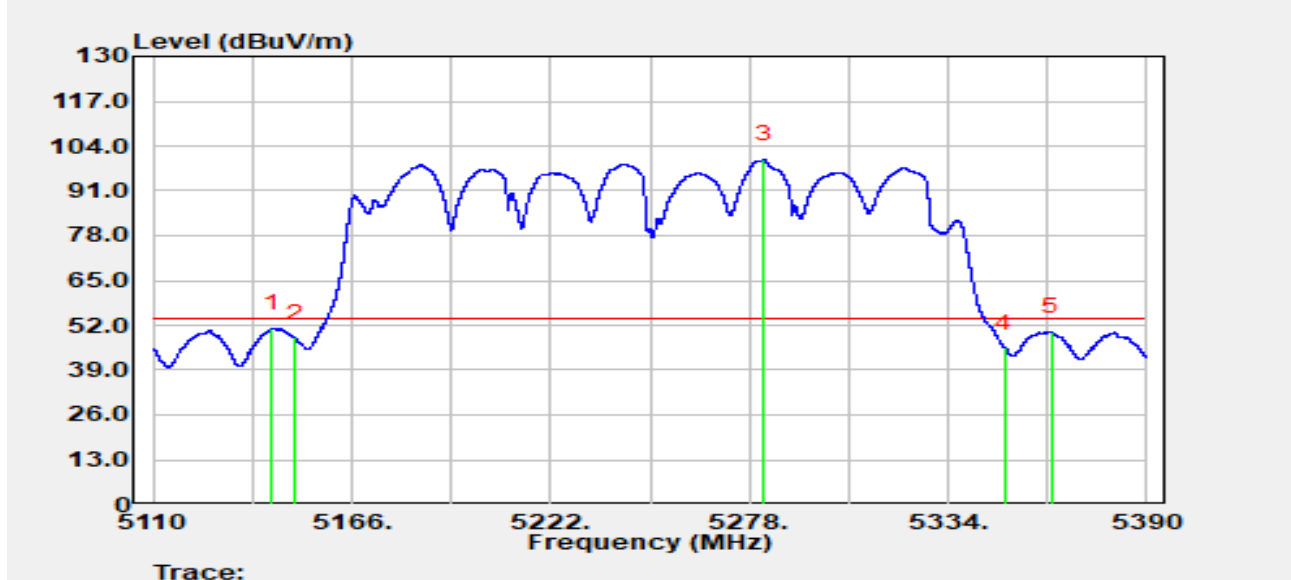


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.516	52.77	-1.53	51.24	-2.76	54.00	Average
2		5150.000	48.99	-0.54	48.45	-5.55	54.00	Average
3		5282.060	49.24	50.87	100.11	N/A	N/A	Average
4		5350.000	43.24	2.28	45.52	-8.48	54.00	Average
5		5363.008	51.37	-1.13	50.24	-3.76	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

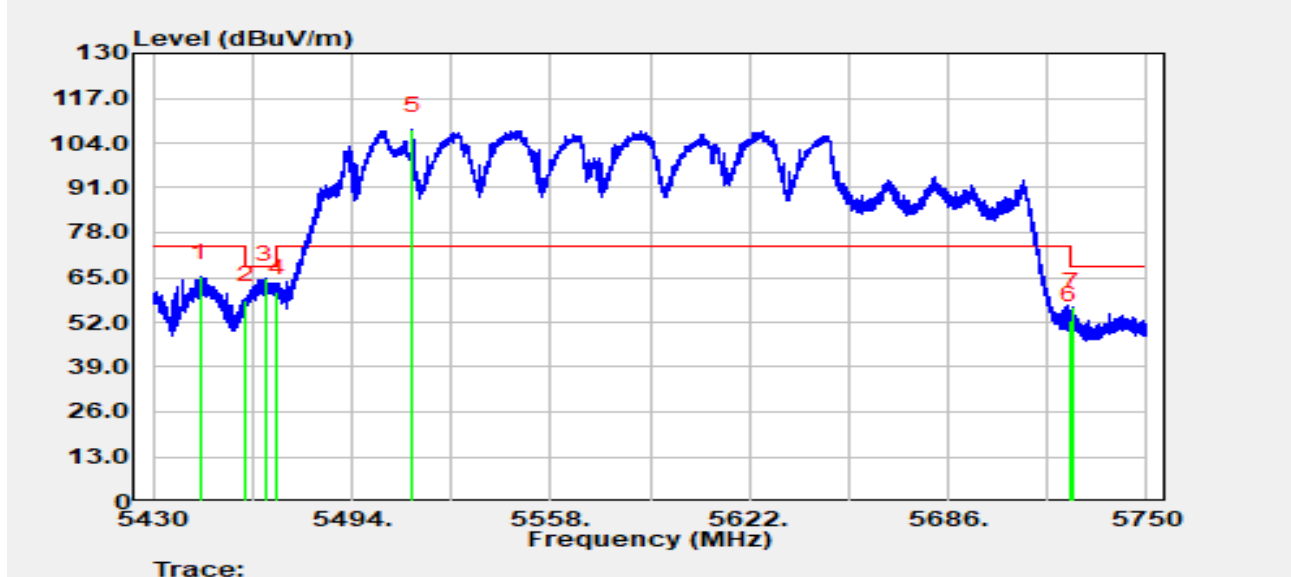


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5445.264	66.56	-1.54	65.02	-8.98	74.00	Peak
2		5460.000	59.18	-0.69	58.49	-9.71	68.20	Peak
3	*	5466.352	64.64	-0.02	64.62	-3.58	68.20	Peak
4		5470.000	59.71	1.00	60.71	-7.49	68.20	Peak
5		5513.360	63.28	44.49	107.77	N/A	N/A	Peak
6		5725.000	51.63	1.01	52.64	-15.56	68.20	Peak
7		5726.000	56.20	0.44	56.64	-11.56	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

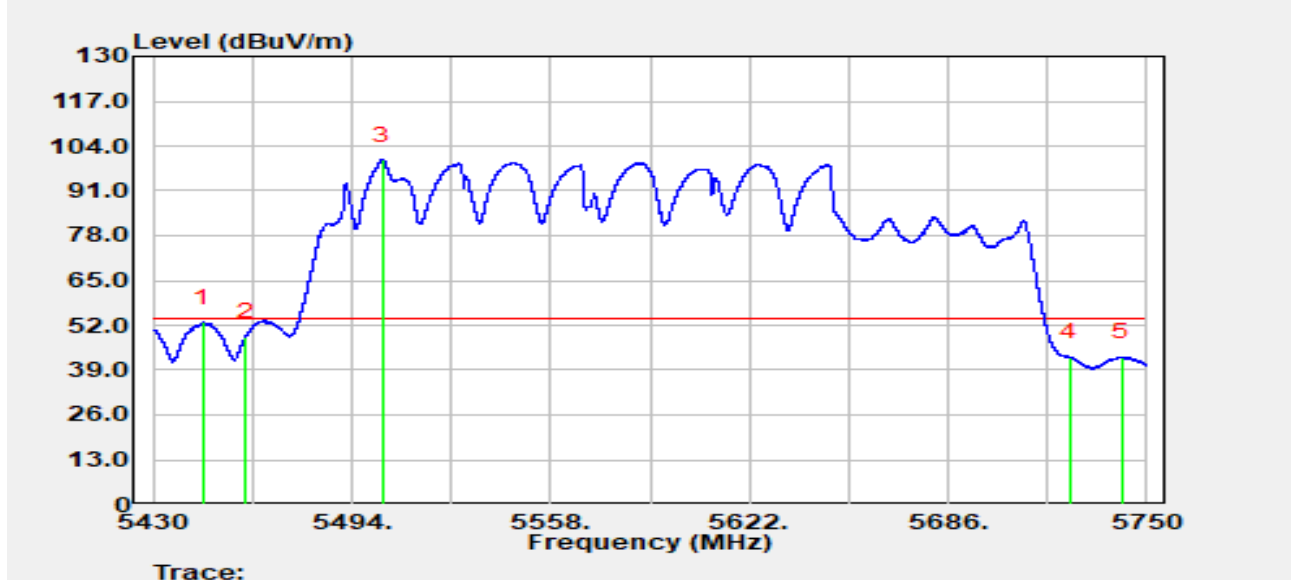


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5446.224	54.40	-1.51	52.89	-1.11	54.00	Average
2		5460.000	49.44	-0.69	48.75	-5.25	54.00	Average
3		5503.760	53.99	45.91	99.90	N/A	N/A	Average
4		5725.000	41.76	1.01	42.76	-11.24	54.00	Average
5		5741.968	44.61	-1.80	42.81	-11.19	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

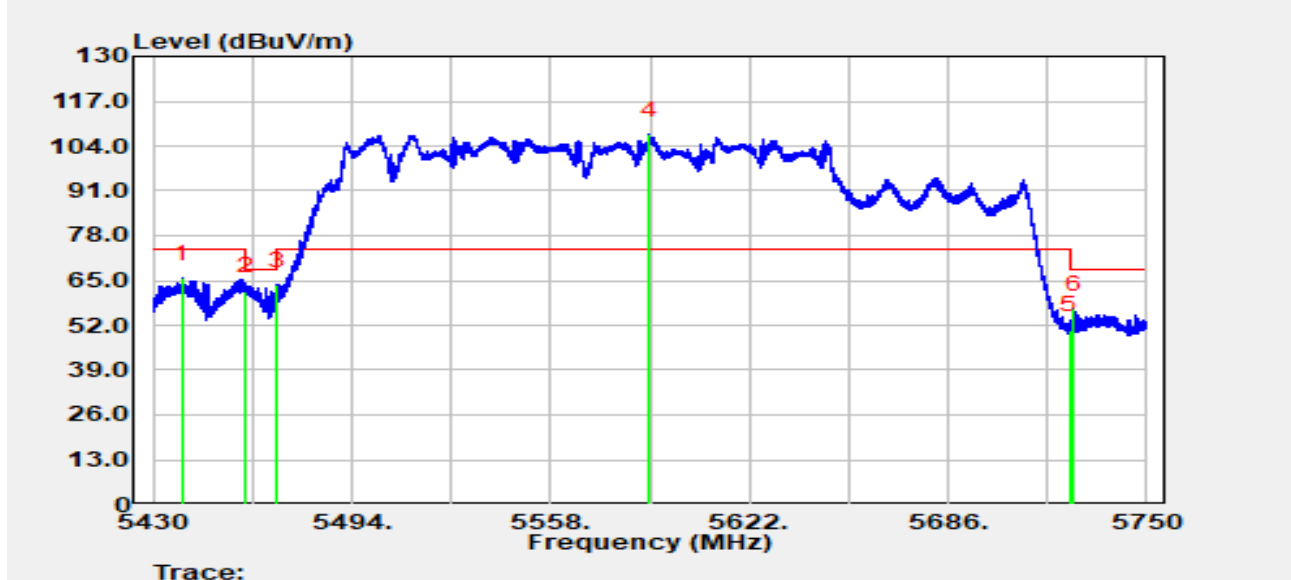


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5439.280	67.46	-1.79	65.67	-8.33	74.00	Peak
2		5460.000	62.61	-0.69	61.92	-6.28	68.20	Peak
3	*	5470.000	62.70	1.00	63.70	-4.50	68.20	Peak
4		5589.936	59.62	47.64	107.26	N/A	N/A	Peak
5		5725.000	49.66	1.01	50.66	-17.54	68.20	Peak
6		5726.320	56.45	0.34	56.79	-11.41	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-10-27
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11ac-VHT160 at 5570 MHz		

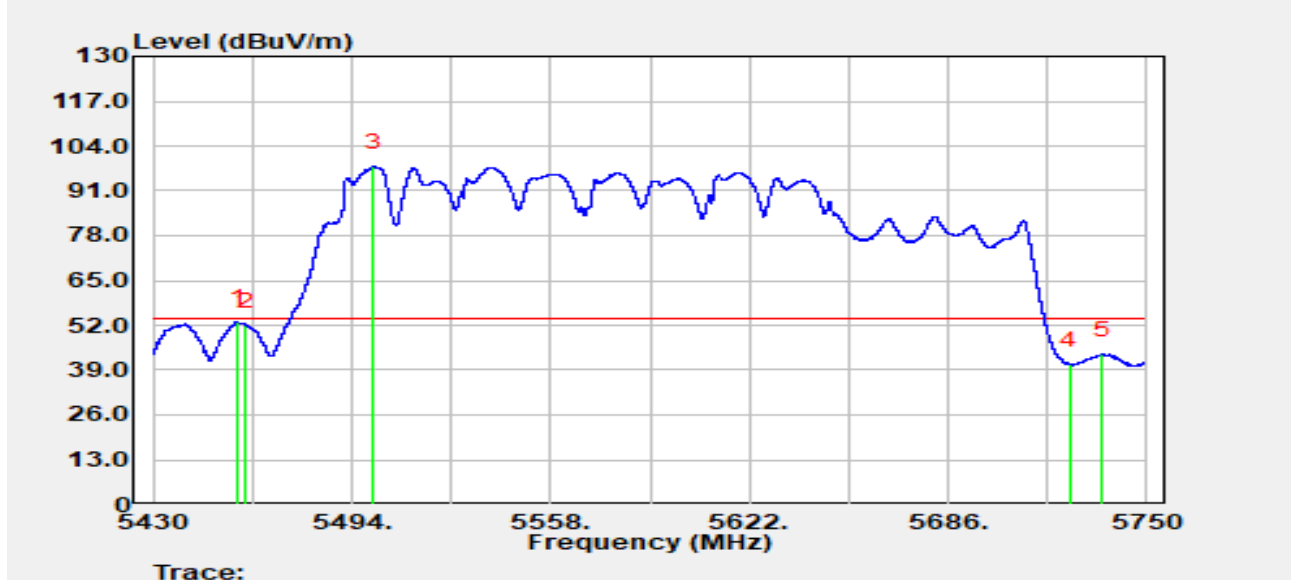


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.168	53.80	-0.90	52.89	-1.11	54.00	Average
2		5460.000	52.64	-0.69	51.95	-2.05	54.00	Average
3		5501.104	56.19	41.76	97.95	N/A	N/A	Average
4		5725.000	39.62	1.01	40.63	-13.37	54.00	Average
5		5735.696	44.87	-1.41	43.47	-10.53	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

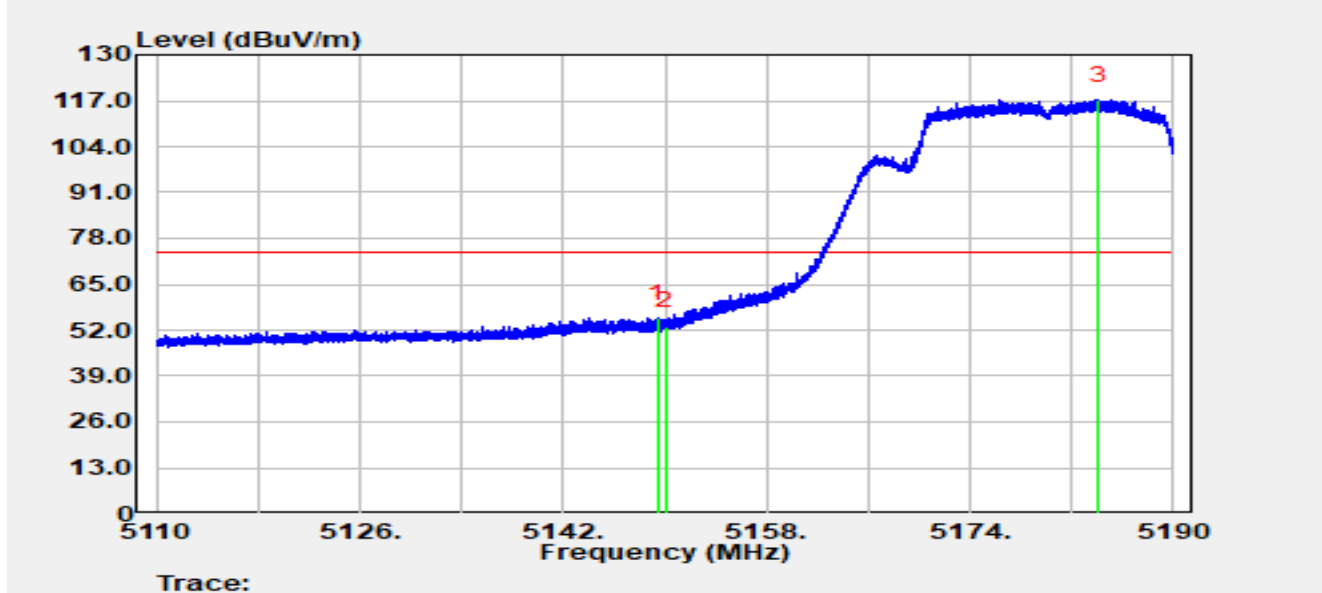


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.464	56.10	-0.85	55.25	-18.75	74.00	Peak
2		5150.000	53.63	-0.54	53.09	-20.91	74.00	Peak
3		5184.088	77.80	39.39	117.19	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

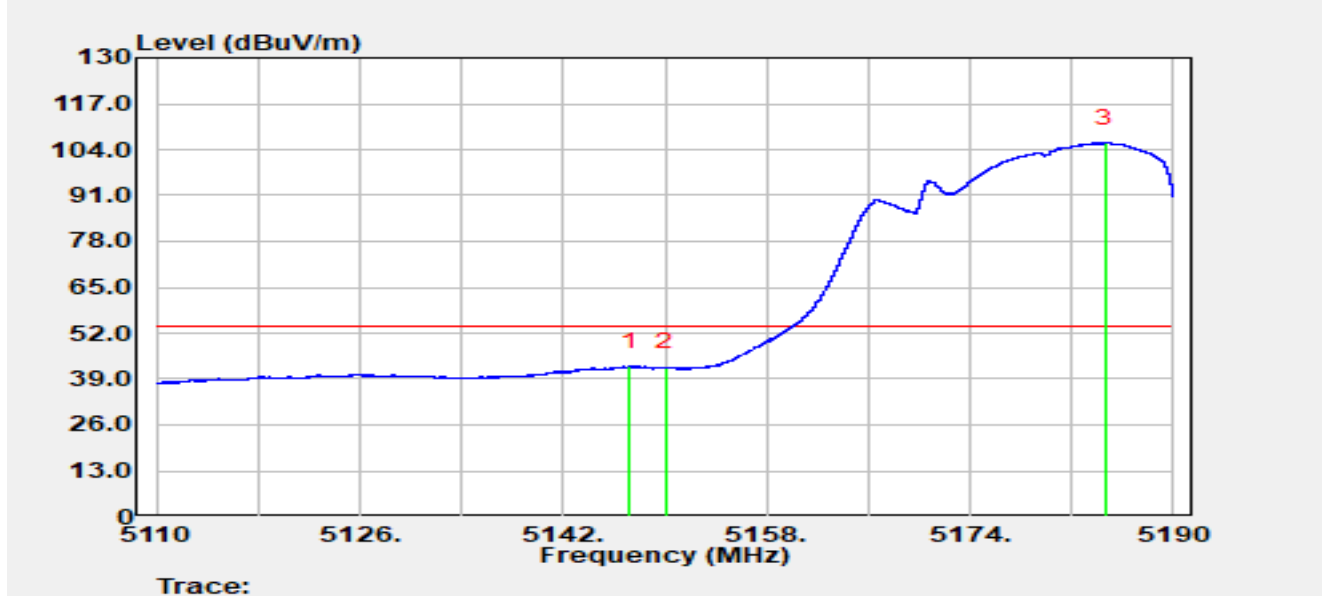


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.224	43.68	-1.11	42.57	-11.43	54.00	Average
2		5150.000	42.78	-0.54	42.24	-11.76	54.00	Average
3		5184.680	67.13	38.68	105.81	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

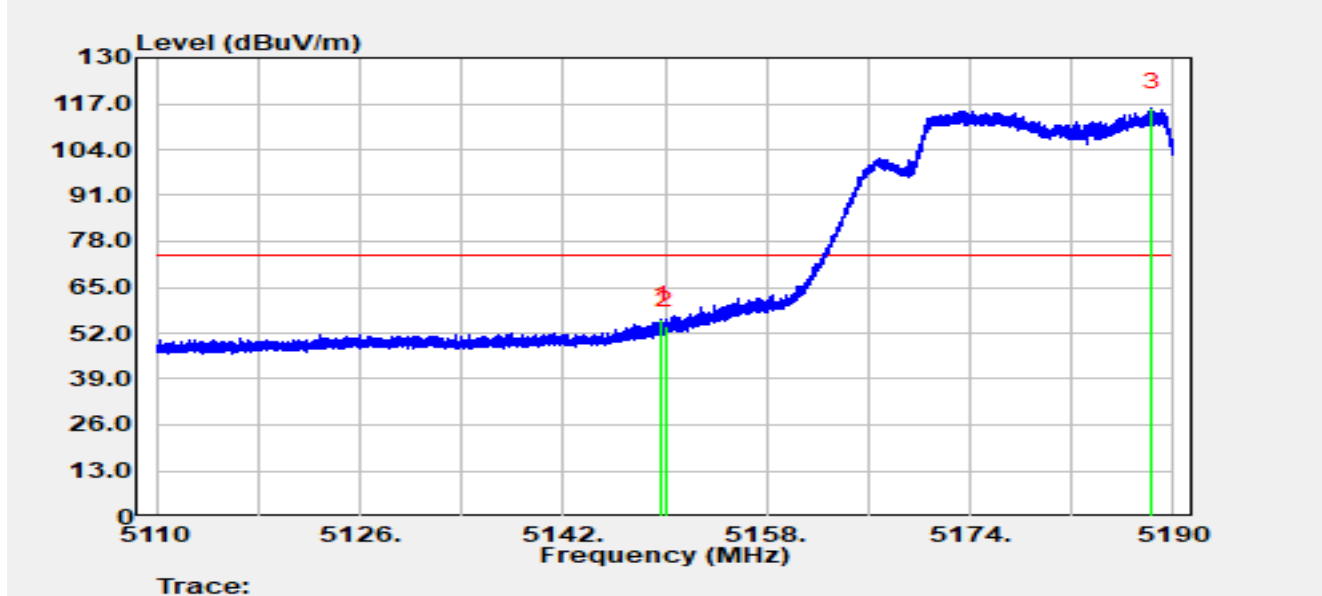


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.720	56.38	-0.70	55.68	-18.32	74.00	Peak
2		5150.000	54.59	-0.54	54.05	-19.95	74.00	Peak
3		5188.328	76.57	39.30	115.87	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5180 MHz		

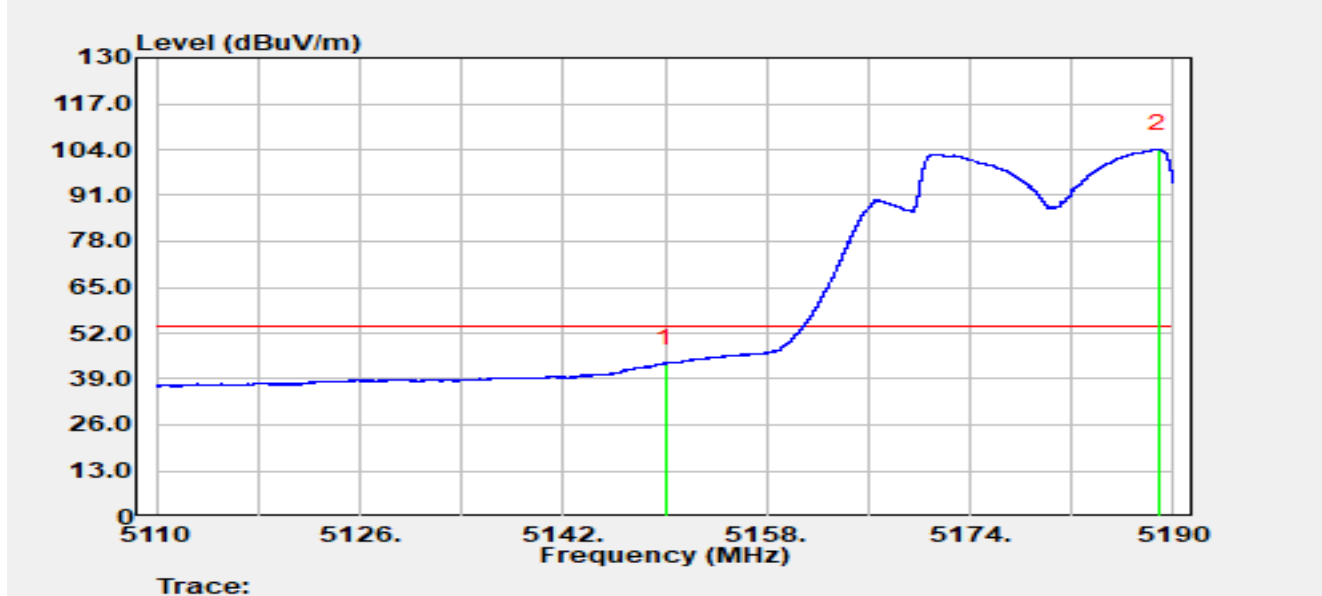


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	43.94	-0.54	43.40	-10.60	54.00	Average
2		5188.864	64.04	40.04	104.07	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

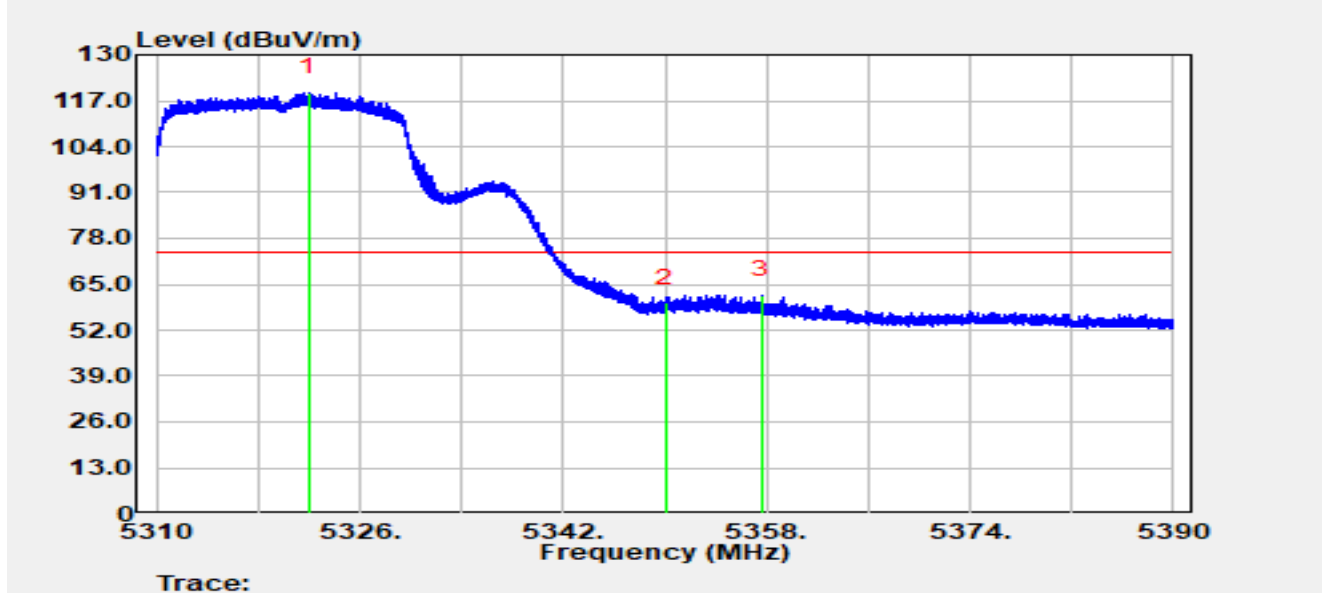


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.928	75.68	43.62	119.29	N/A	N/A	Peak
2		5350.000	57.40	2.28	59.68	-14.32	74.00	Peak
3	*	5357.640	62.51	-0.50	62.01	-11.99	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

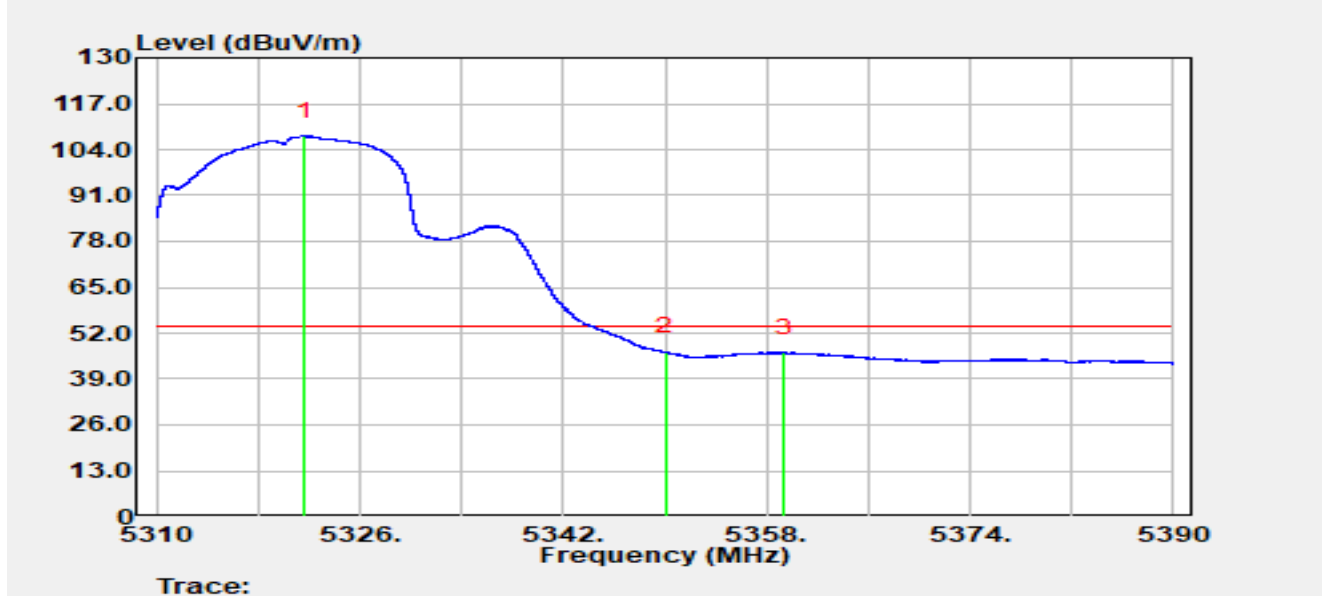


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.656	64.21	43.65	107.86	N/A	N/A	Average
2		5350.000	44.35	2.28	46.63	-7.37	54.00	Average
3	*	5359.352	47.31	-0.77	46.53	-7.47	54.00	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

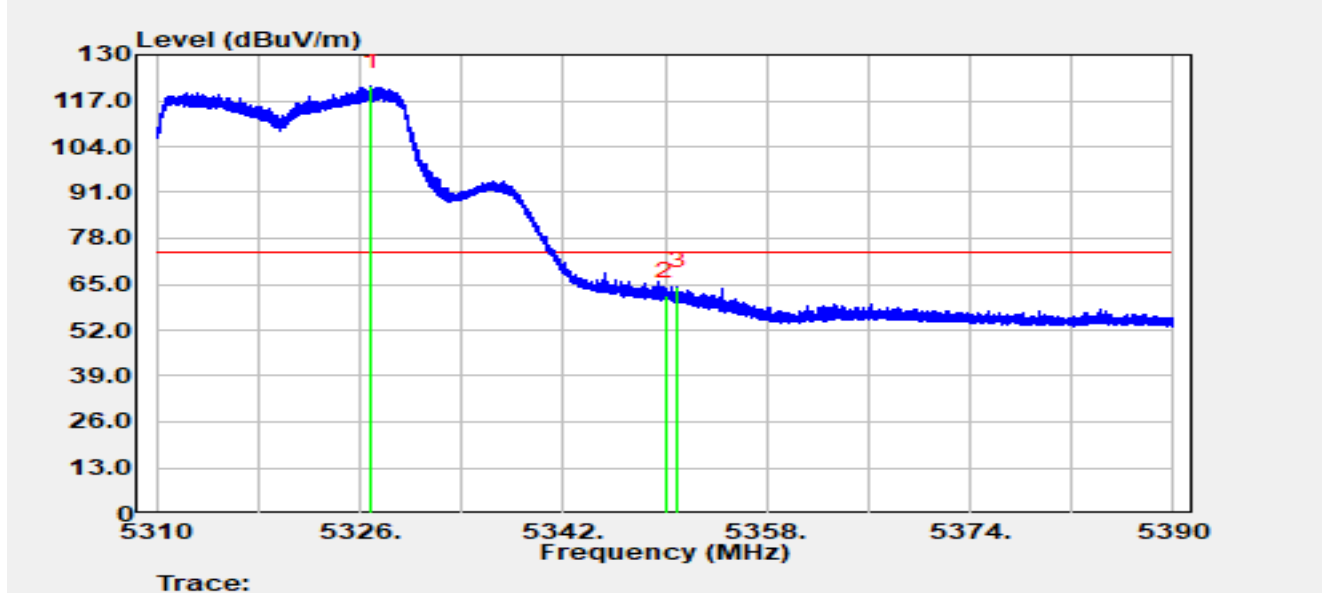


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.856	79.72	41.43	121.14	N/A	N/A	Peak
2		5350.000	59.35	2.28	61.63	-12.37	74.00	Peak
3	*	5351.040	62.80	1.61	64.41	-9.59	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5320 MHz		

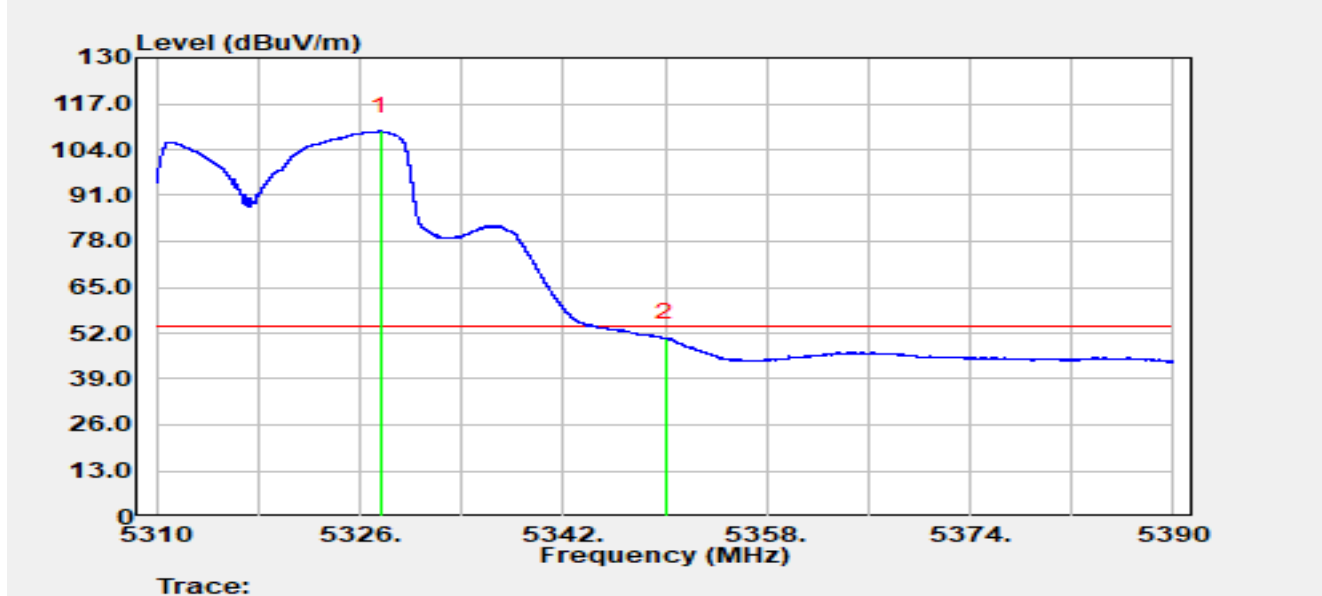


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.632	67.32	41.90	109.22	N/A	N/A	Average
2	*	5350.000	48.26	2.28	50.54	-3.46	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

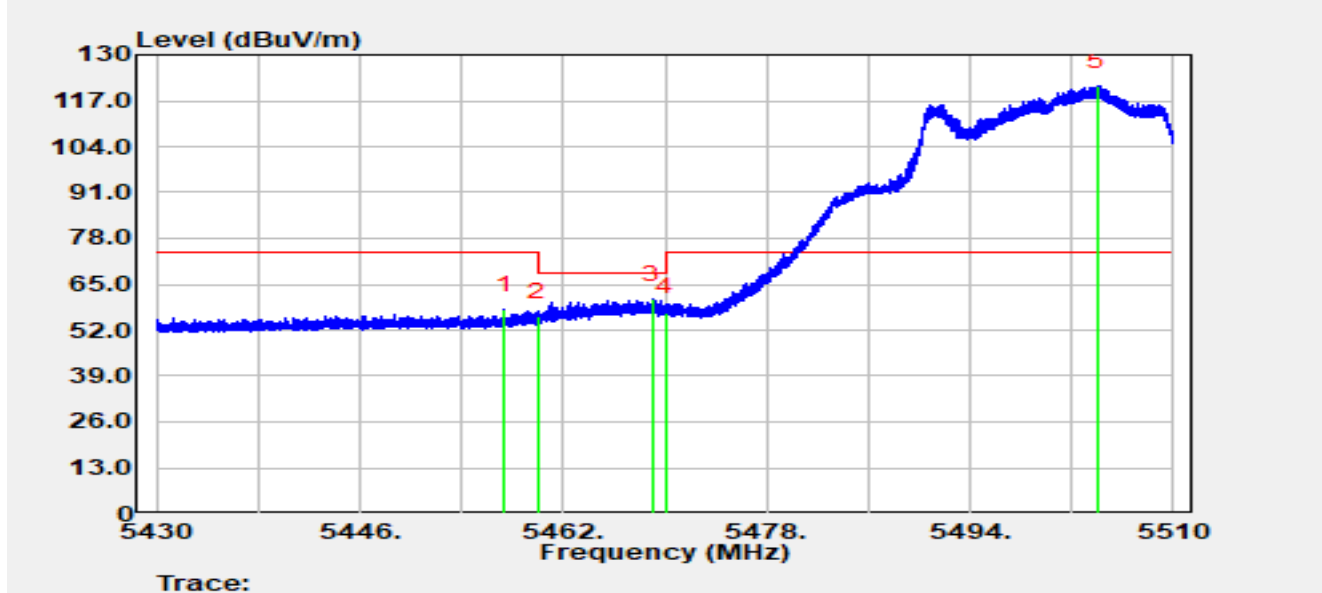


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.416	58.70	-0.91	57.79	-16.21	74.00	Peak
2		5460.000	56.48	-0.69	55.78	-12.42	68.20	Peak
3	*	5468.976	60.11	0.67	60.77	-7.43	68.20	Peak
4		5470.000	56.00	1.00	57.00	-11.20	68.20	Peak
5		5503.984	74.97	46.17	121.14	N/A	N/A	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

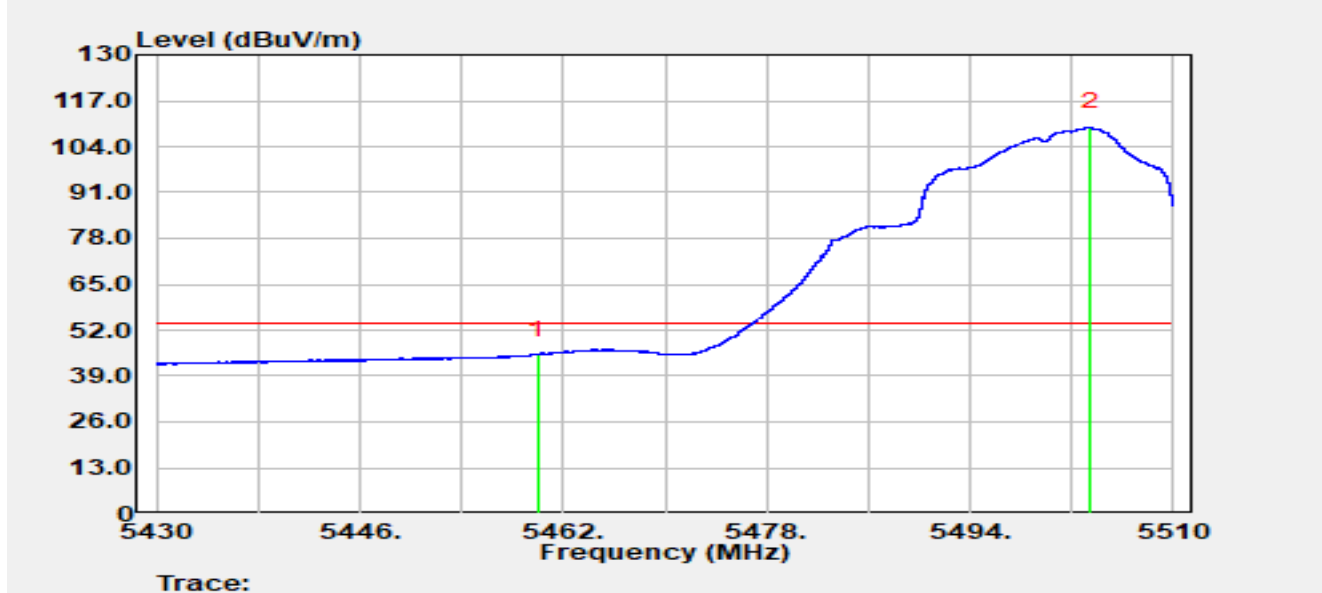


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	45.80	-0.69	45.11	-8.89	54.00	Average
2		5503.456	63.93	45.49	109.42	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

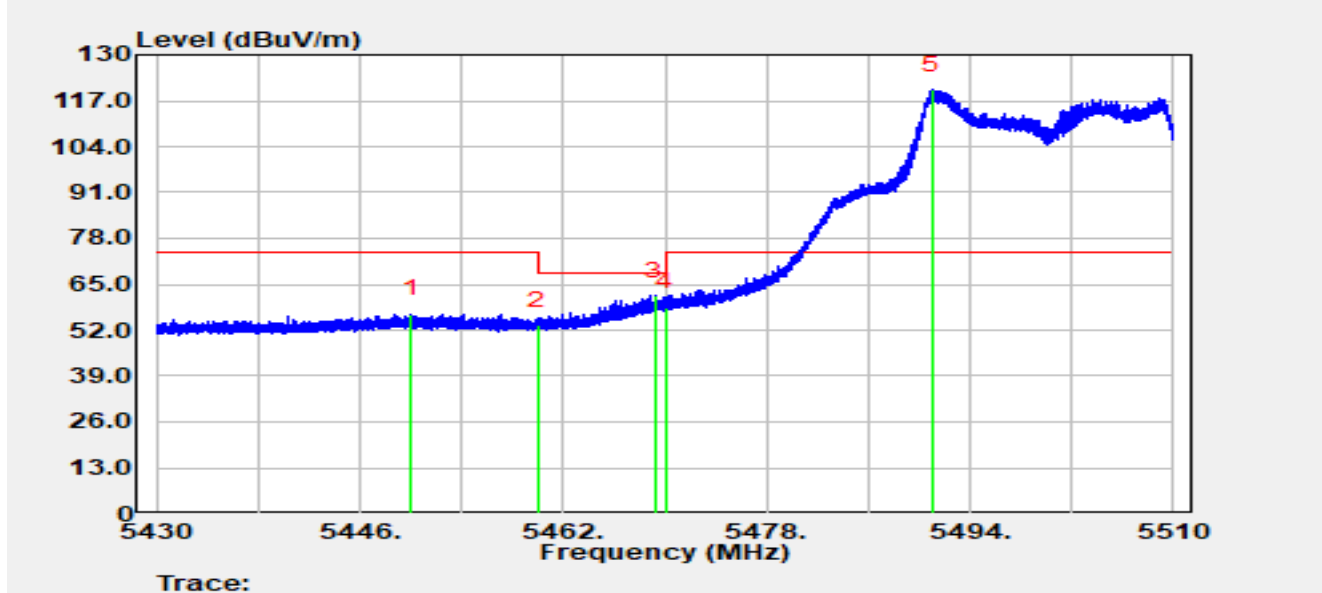


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5450.024	57.90	-1.27	56.63	-17.37	74.00	Peak
2		5460.000	53.97	-0.69	53.27	-14.93	68.20	Peak
3	*	5469.240	60.95	0.79	61.74	-6.46	68.20	Peak
4		5470.000	57.51	1.00	58.51	-9.69	68.20	Peak
5		5491.024	72.76	47.27	120.03	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5500 MHz		

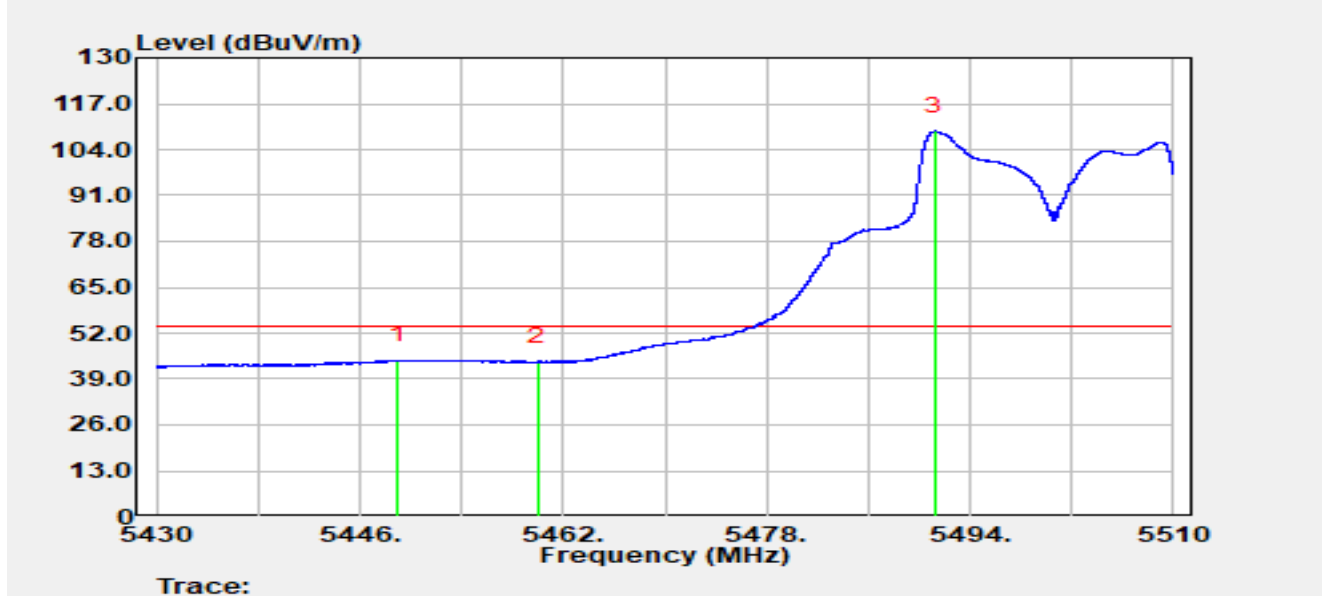


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5449.008	45.74	-1.36	44.37	-9.63	54.00	Average
2		5460.000	44.58	-0.69	43.88	-10.12	54.00	Average
3		5491.192	61.67	47.49	109.15	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

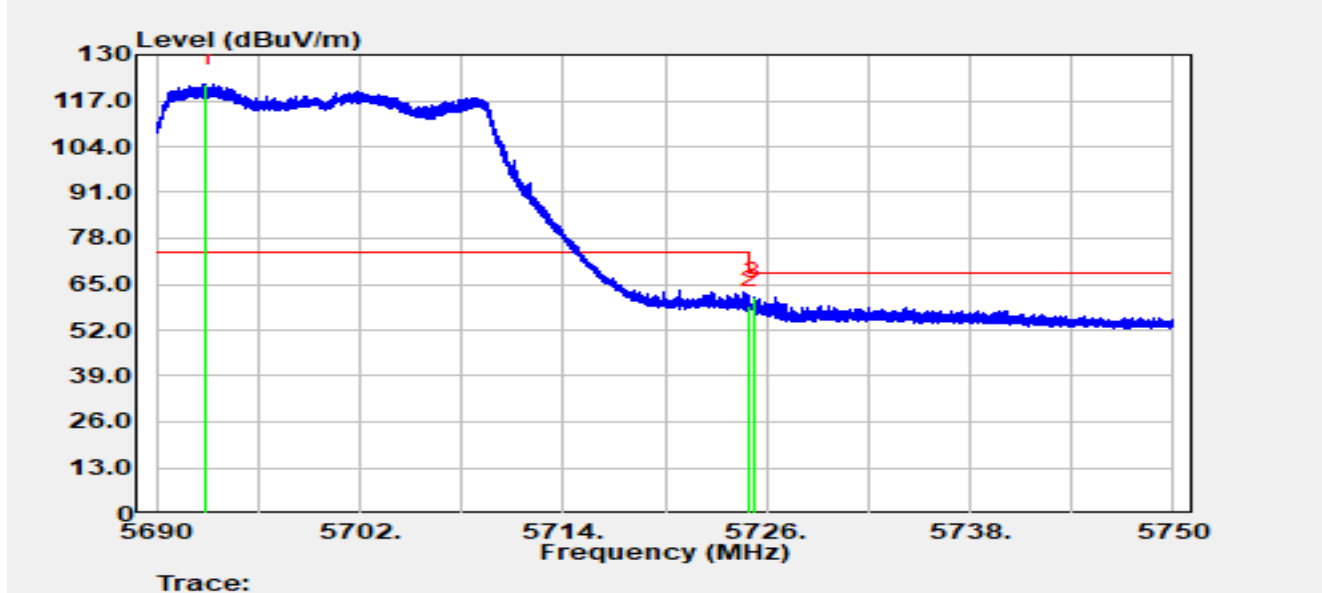


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5692.892	78.04	43.84	121.89	N/A	N/A	Peak
2		5725.000	57.92	1.01	58.92	-9.28	68.20	Peak
3	*	5725.262	60.63	0.86	61.48	-6.72	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5700 MHz		

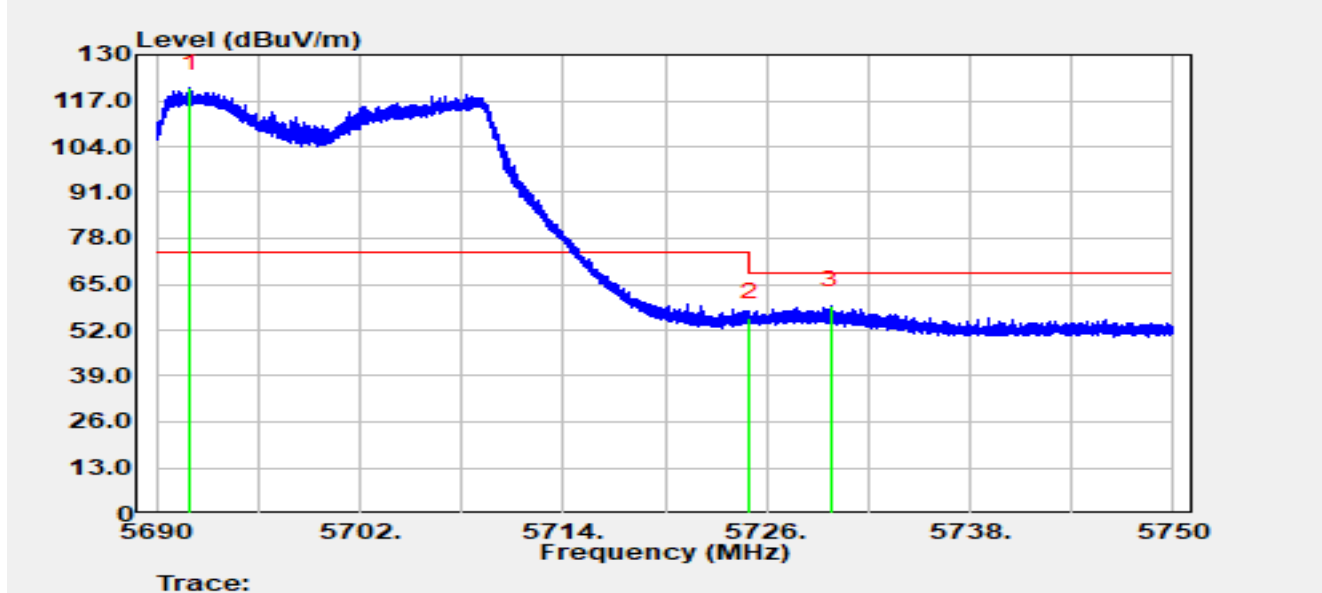


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5691.974	77.31	43.23	120.54	N/A	N/A	Peak
2		5725.000	54.62	1.01	55.62	-12.58	68.20	Peak
3	*	5729.780	59.78	-0.73	59.05	-9.15	68.20	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

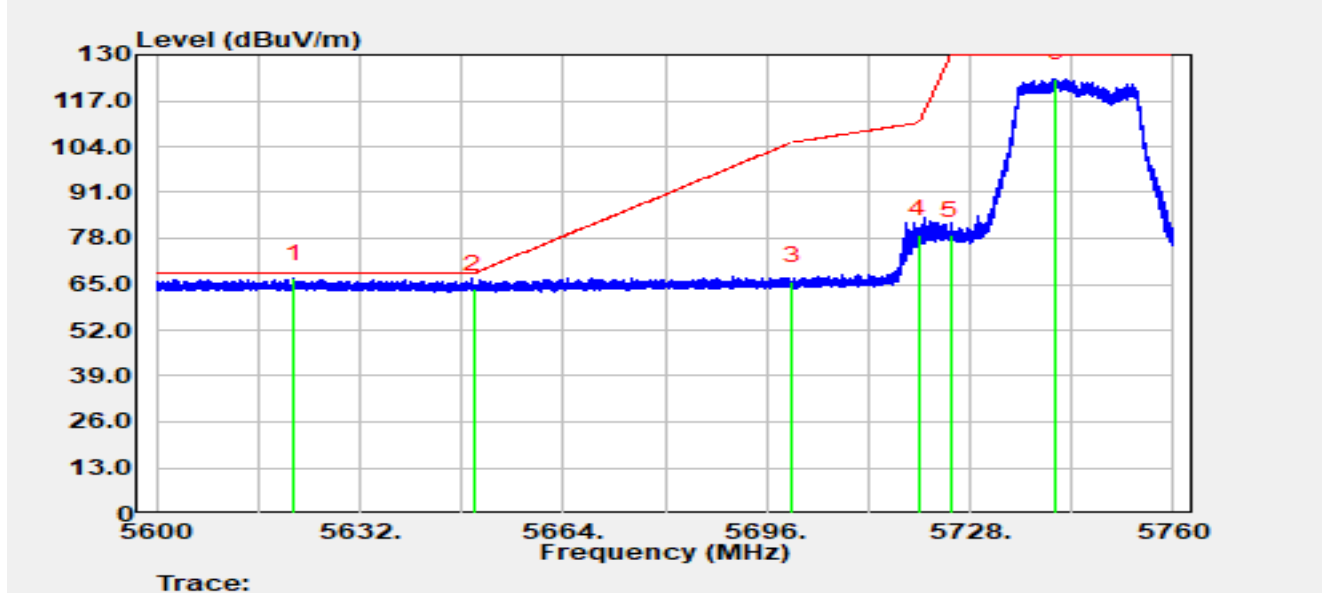


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5621.552	69.92	-3.37	66.55	-1.65	68.20	Peak
2		5650.000	67.19	-3.65	63.54	-4.66	68.20	Peak
3		5700.000	69.33	-3.47	65.86	-39.34	105.20	Peak
4		5720.000	82.46	-3.45	79.00	-31.80	110.80	Peak
5		5725.000	82.39	-3.47	78.92	-51.08	130.00	Peak
6		5741.552	126.96	-3.62	123.34	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5745 MHz		

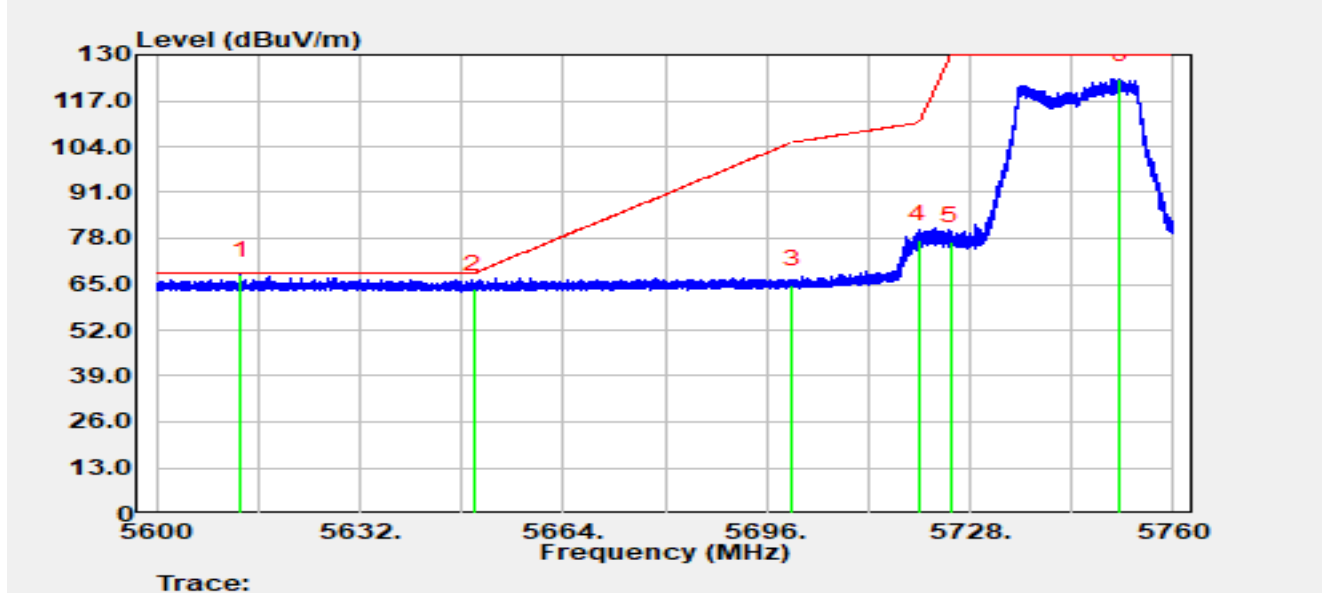


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.216	70.95	-3.46	67.49	-0.71	68.20	Peak
2		5650.000	67.29	-3.65	63.64	-4.56	68.20	Peak
3		5700.000	68.47	-3.47	65.00	-40.20	105.20	Peak
4		5720.000	81.16	-3.45	77.71	-33.09	110.80	Peak
5		5725.000	80.52	-3.47	77.05	-52.95	130.00	Peak
6		5751.600	126.77	-3.65	123.12	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

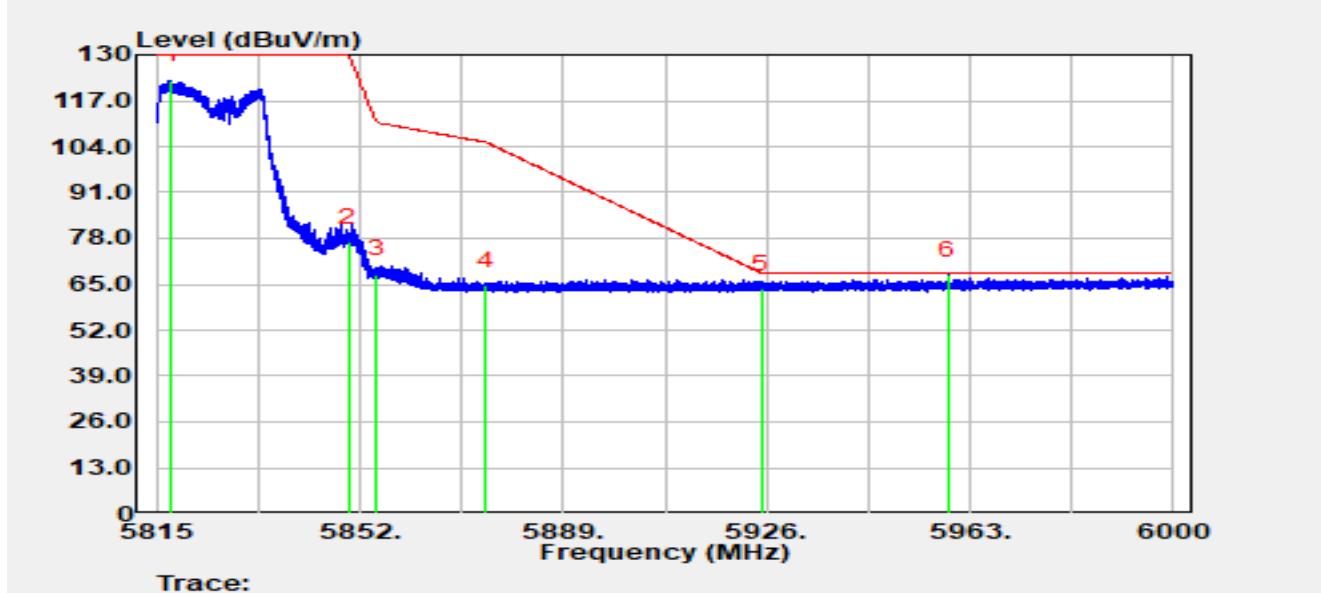


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5817.683	126.62	-3.80	122.82	N/A	N/A	Peak
2		5850.000	80.68	-3.75	76.93	-53.07	130.00	Peak
3		5855.000	71.55	-3.75	67.80	-43.00	110.80	Peak
4		5875.000	68.50	-3.82	64.67	-40.53	105.20	Peak
5		5925.000	67.42	-3.71	63.71	-4.49	68.20	Peak
6	*	5958.967	71.15	-3.65	67.50	-0.70	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 5825 MHz		

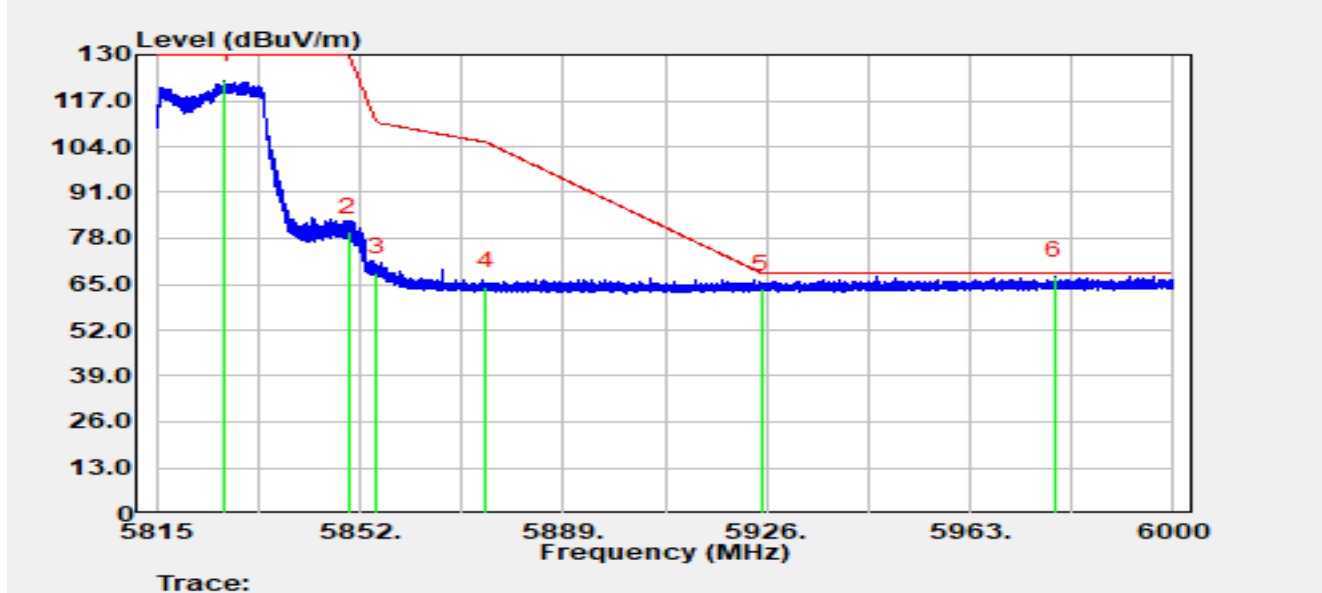


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.303	126.43	-3.74	122.69	N/A	N/A	Peak
2		5850.000	83.59	-3.75	79.84	-50.16	130.00	Peak
3		5855.000	72.14	-3.75	68.39	-42.41	110.80	Peak
4		5875.000	68.23	-3.82	64.41	-40.79	105.20	Peak
5		5925.000	67.31	-3.71	63.60	-4.60	68.20	Peak
6	*	5978.263	71.00	-3.66	67.34	-0.86	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

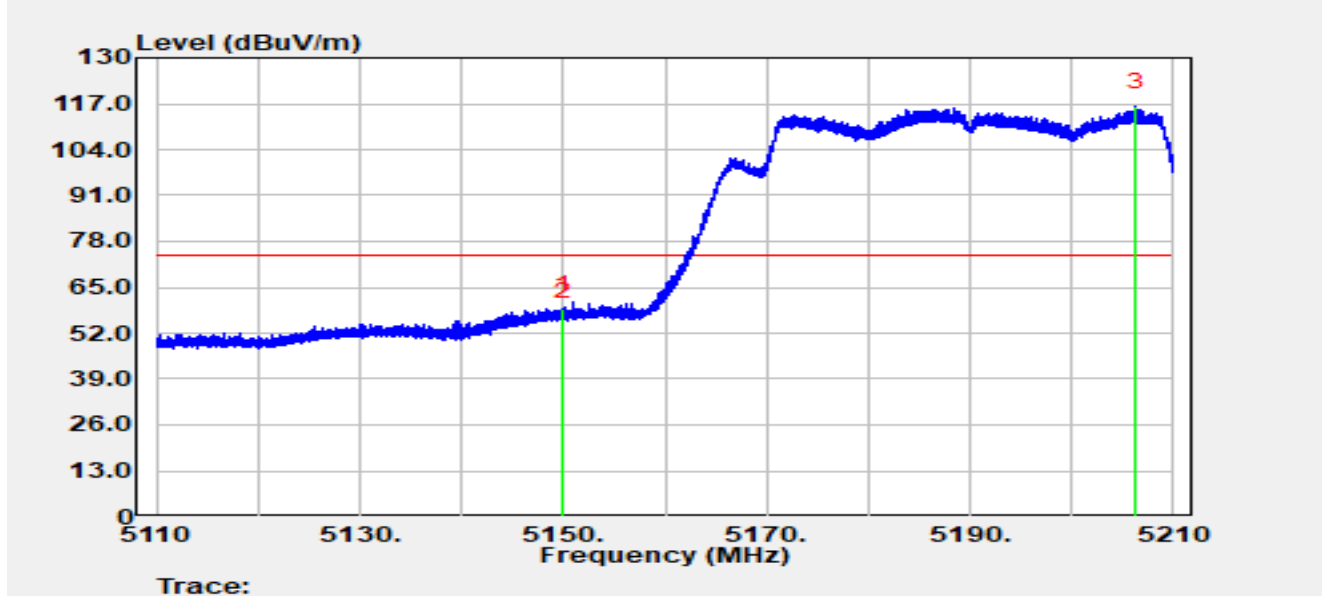


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.920	59.38	-0.59	58.79	-15.21	74.00	Peak
2		5150.000	57.32	-0.54	56.78	-17.22	74.00	Peak
3		5206.310	73.58	42.57	116.16	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

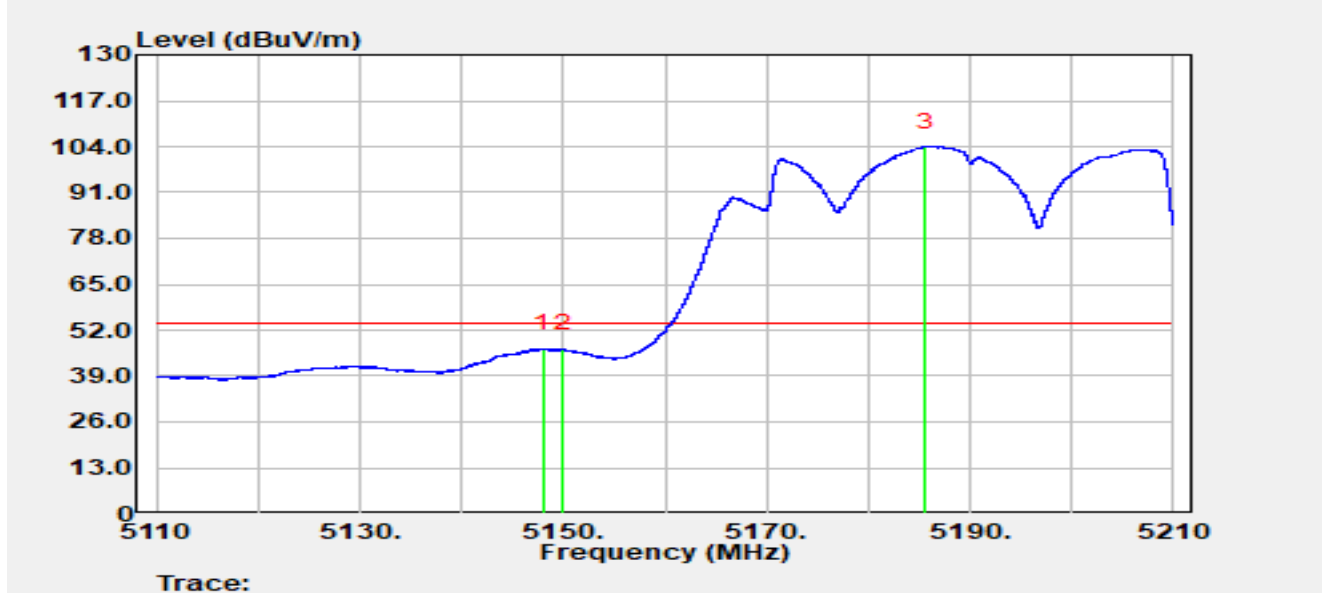


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.070	47.73	-0.98	46.75	-7.25	54.00	Average
2		5150.000	47.24	-0.54	46.70	-7.30	54.00	Average
3		5185.600	66.05	37.91	103.97	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

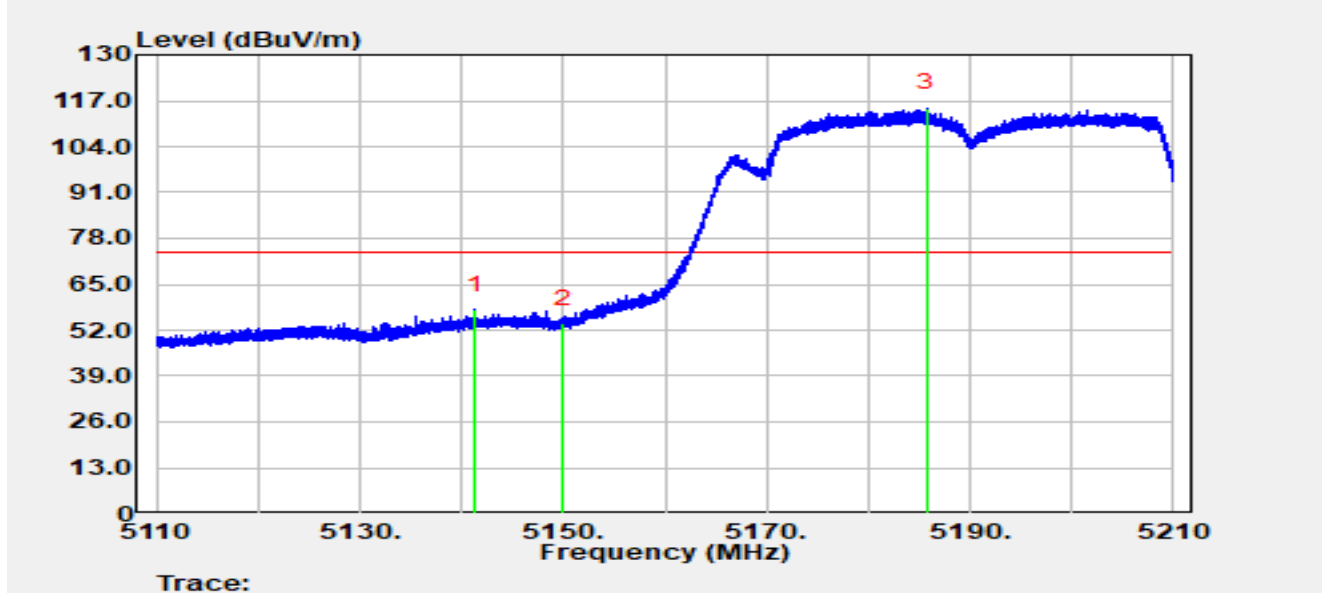


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5141.290	59.45	-1.74	57.71	-16.29	74.00	Peak
2		5150.000	54.32	-0.54	53.78	-20.22	74.00	Peak
3		5185.710	76.98	37.87	114.84	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5190 MHz		

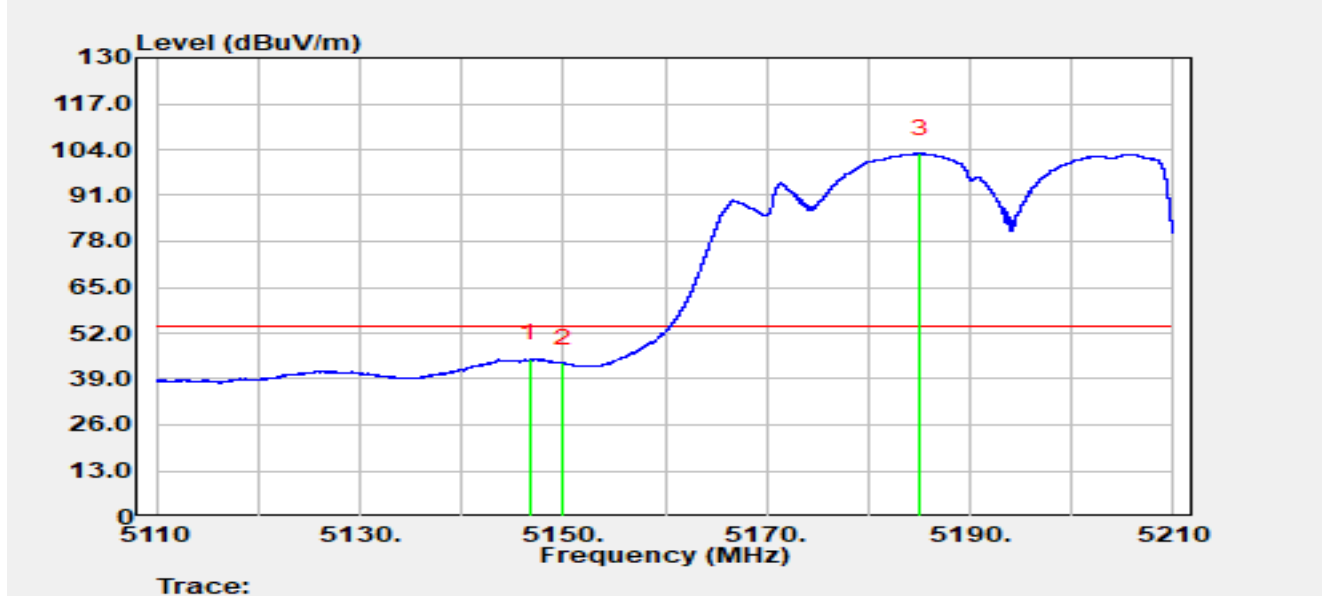


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.770	45.94	-1.22	44.72	-9.28	54.00	Average
2		5150.000	44.03	-0.54	43.49	-10.51	54.00	Average
3		5185.060	64.62	38.28	102.90	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

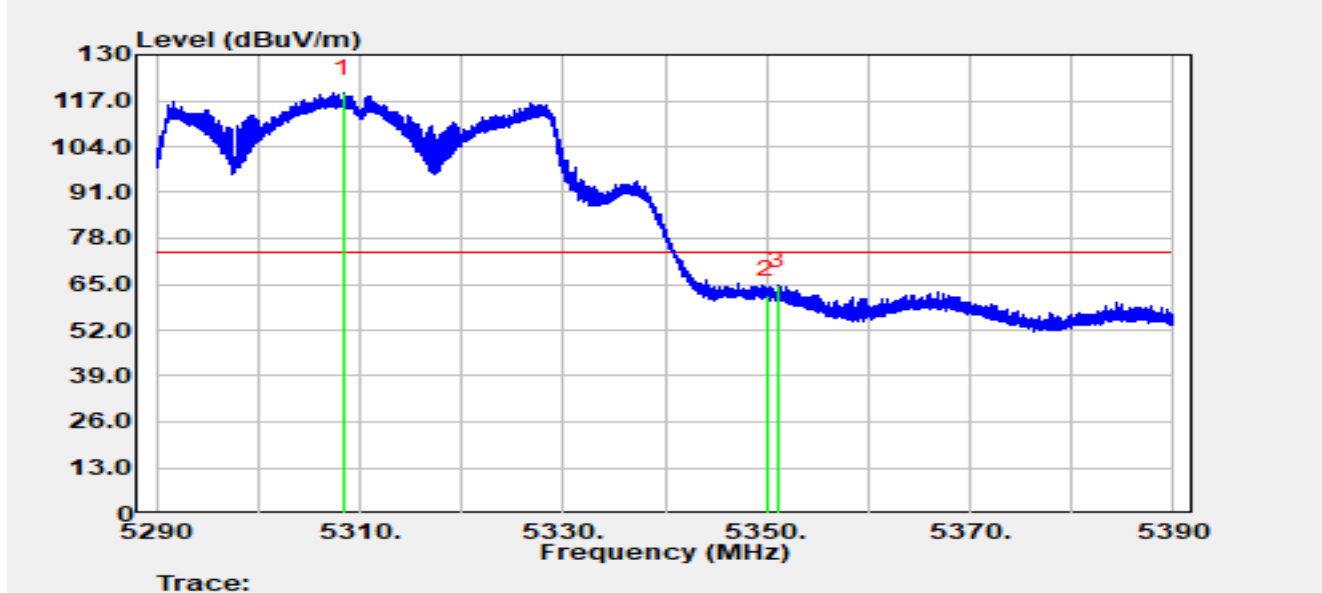


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.390	76.90	42.28	119.18	N/A	N/A	Peak
2		5350.000	59.68	2.28	61.96	-12.04	74.00	Peak
3	*	5351.130	63.14	1.55	64.69	-9.31	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

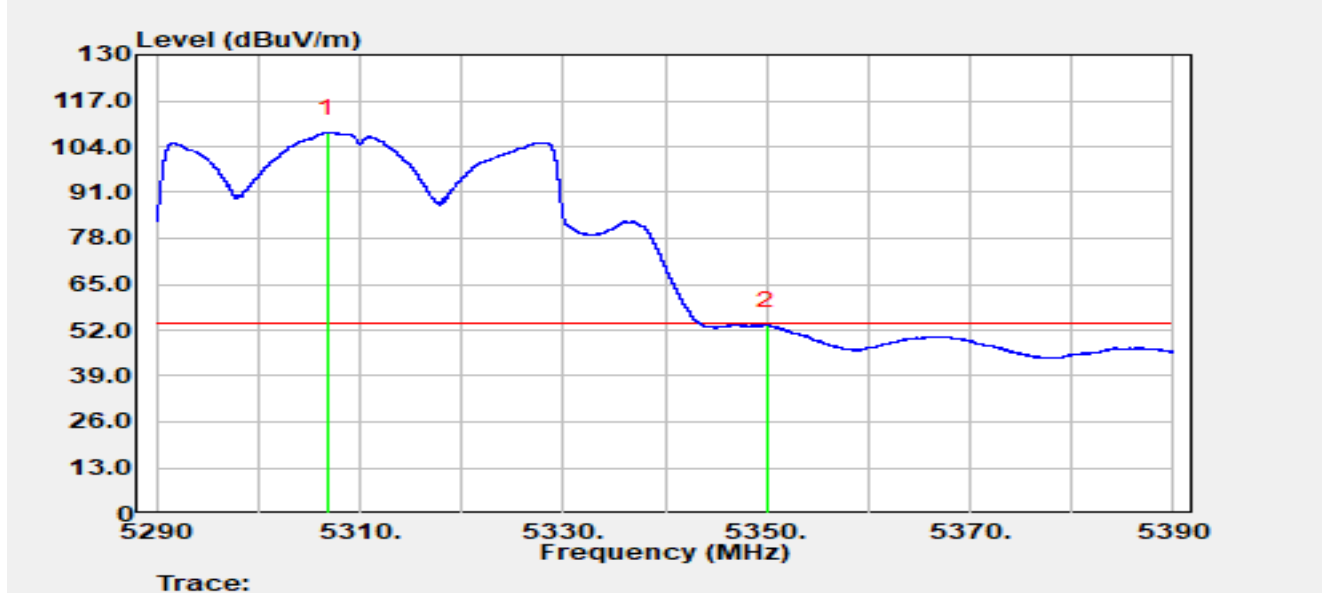


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5306.850	65.75	42.11	107.86	N/A	N/A	Average
2	*	5350.000	51.07	2.28	53.36	-0.64	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

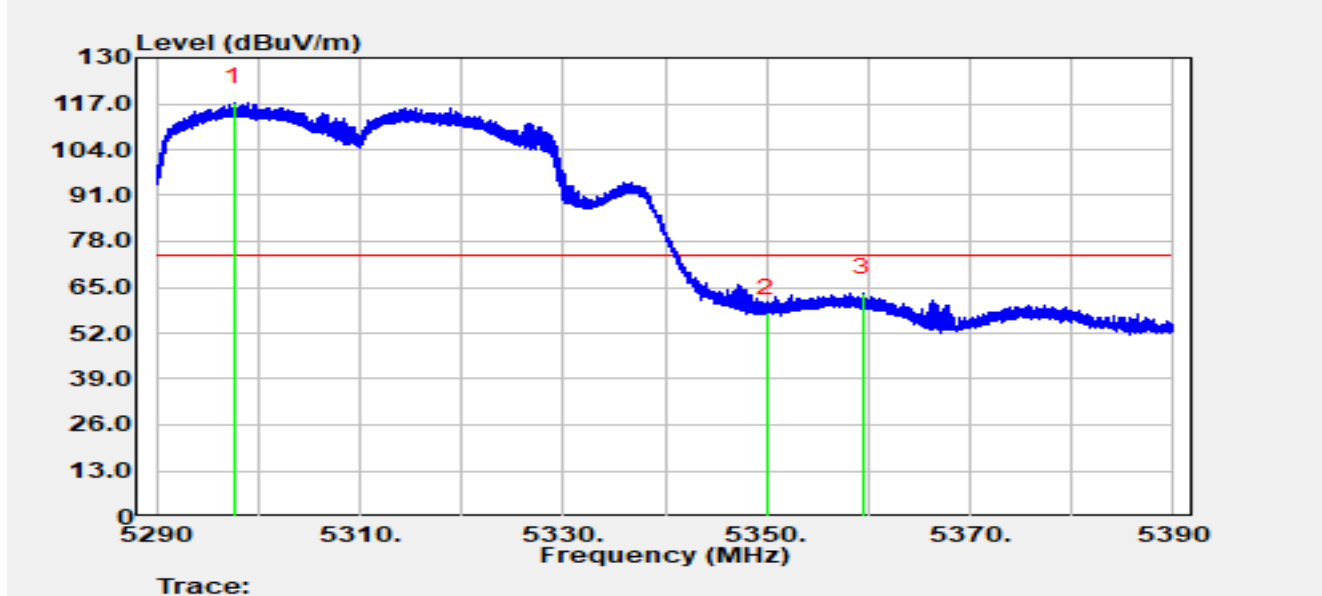


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.680	72.27	45.15	117.42	N/A	N/A	Peak
2		5350.000	55.59	2.28	57.87	-16.13	74.00	Peak
3	*	5359.430	64.13	-0.78	63.35	-10.65	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5310 MHz		

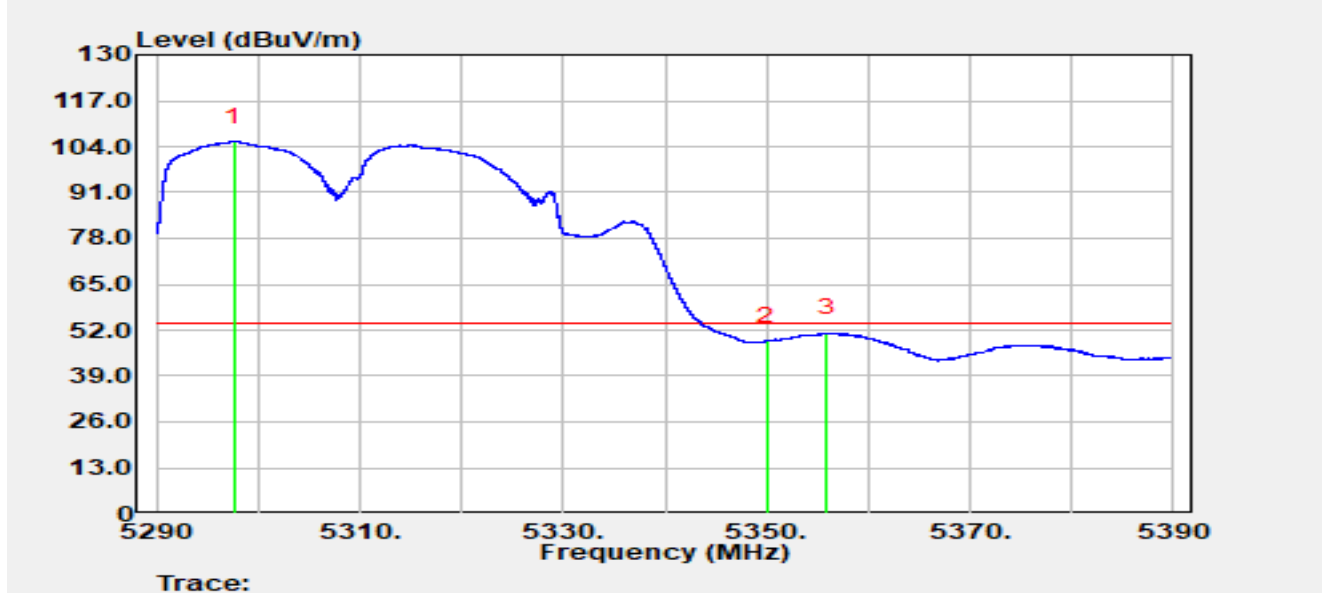


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5297.670	60.30	45.14	105.44	N/A	N/A	Average
2		5350.000	46.67	2.28	48.95	-5.05	54.00	Average
3	*	5355.870	51.41	-0.21	51.21	-2.79	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

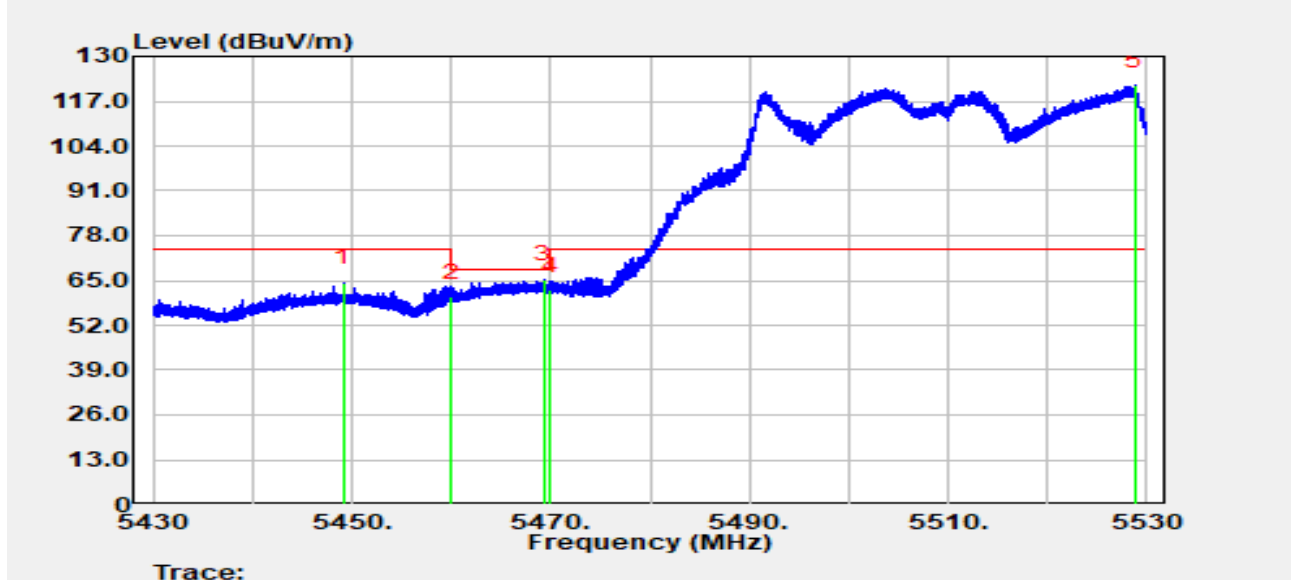


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5449.150	65.65	-1.38	64.27	-9.73	74.00	Peak
2		5460.000	60.86	-0.69	60.16	-8.04	68.20	Peak
3	*	5469.340	64.44	0.81	65.25	-2.95	68.20	Peak
4		5470.000	61.27	1.00	62.27	-5.93	68.20	Peak
5		5528.760	72.93	48.61	121.54	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

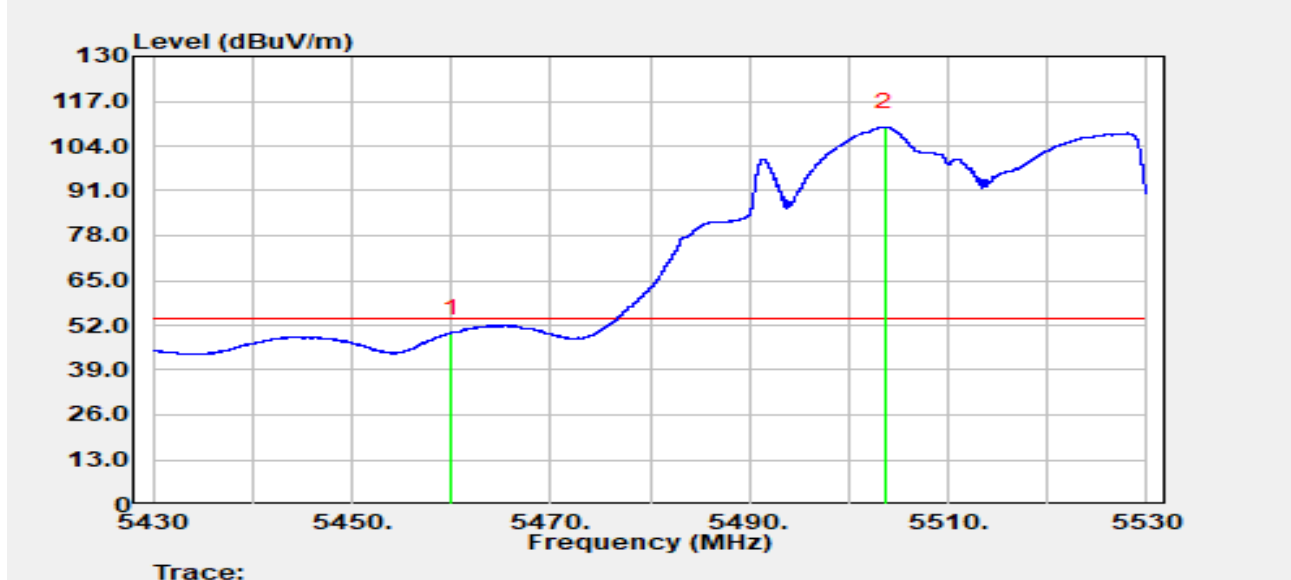


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5460.000	50.48	-0.69	49.79	-4.21	54.00	Average
2		5503.580	63.83	45.69	109.53	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

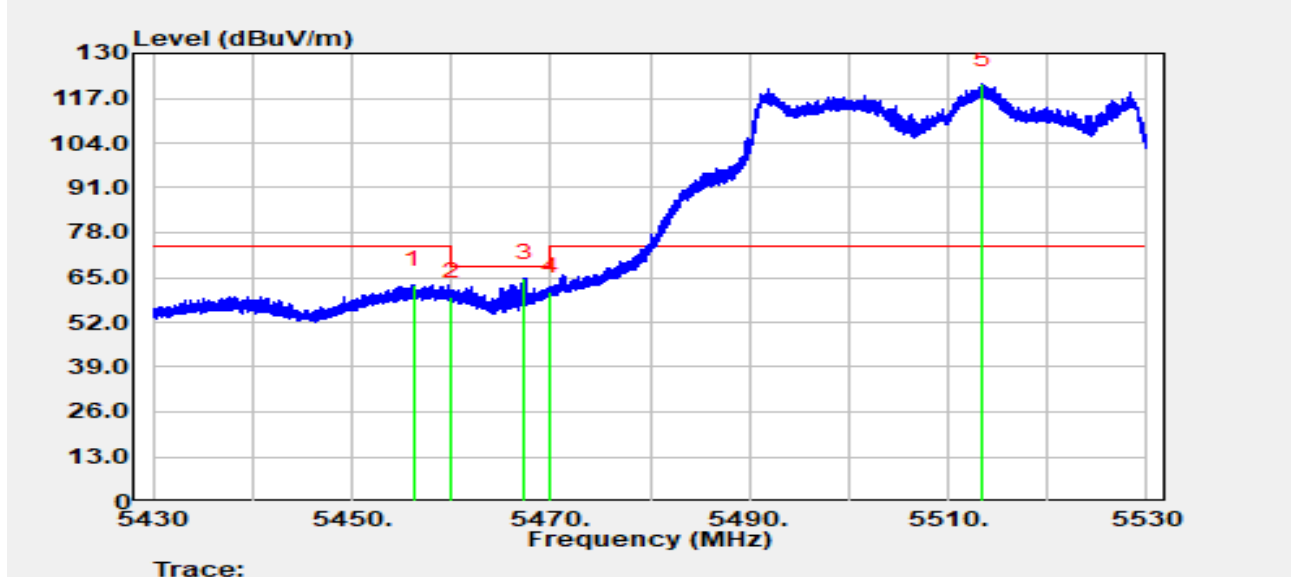


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.220	63.91	-0.99	62.92	-11.08	74.00	Peak
2		5460.000	60.16	-0.69	59.47	-8.73	68.20	Peak
3	*	5467.380	64.79	0.20	64.99	-3.21	68.20	Peak
4		5470.000	59.88	1.00	60.88	-7.32	68.20	Peak
5		5513.450	76.43	44.59	121.02	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5510 MHz		

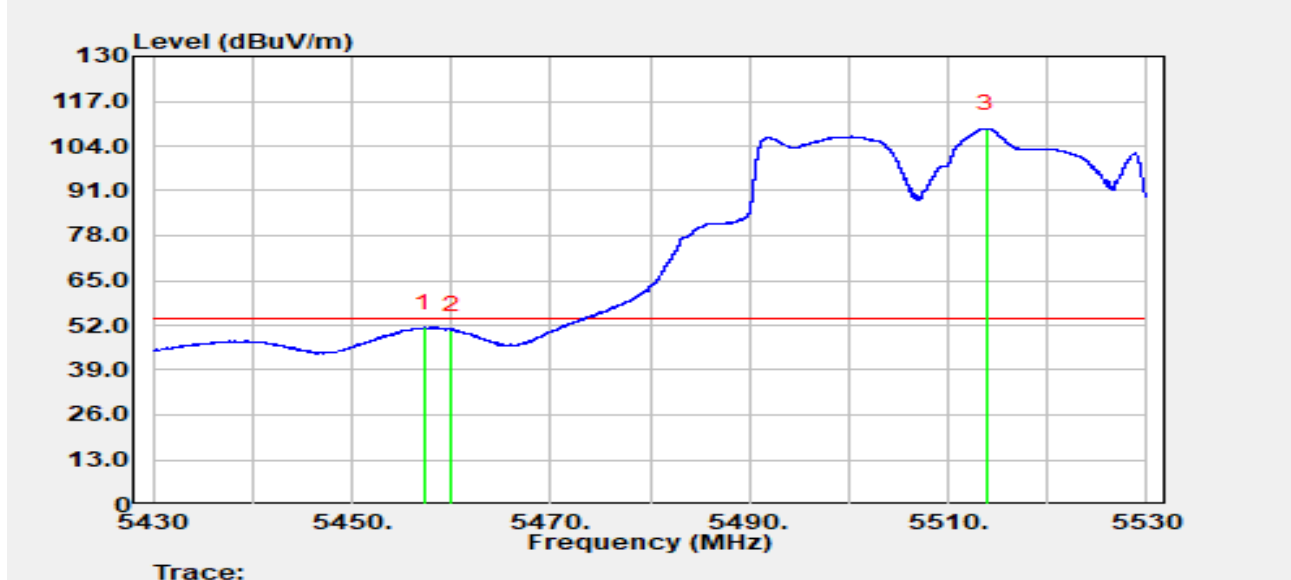


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.300	52.33	-0.91	51.42	-2.58	54.00	Average
2		5460.000	51.34	-0.69	50.65	-3.35	54.00	Average
3		5513.850	64.28	44.85	109.12	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

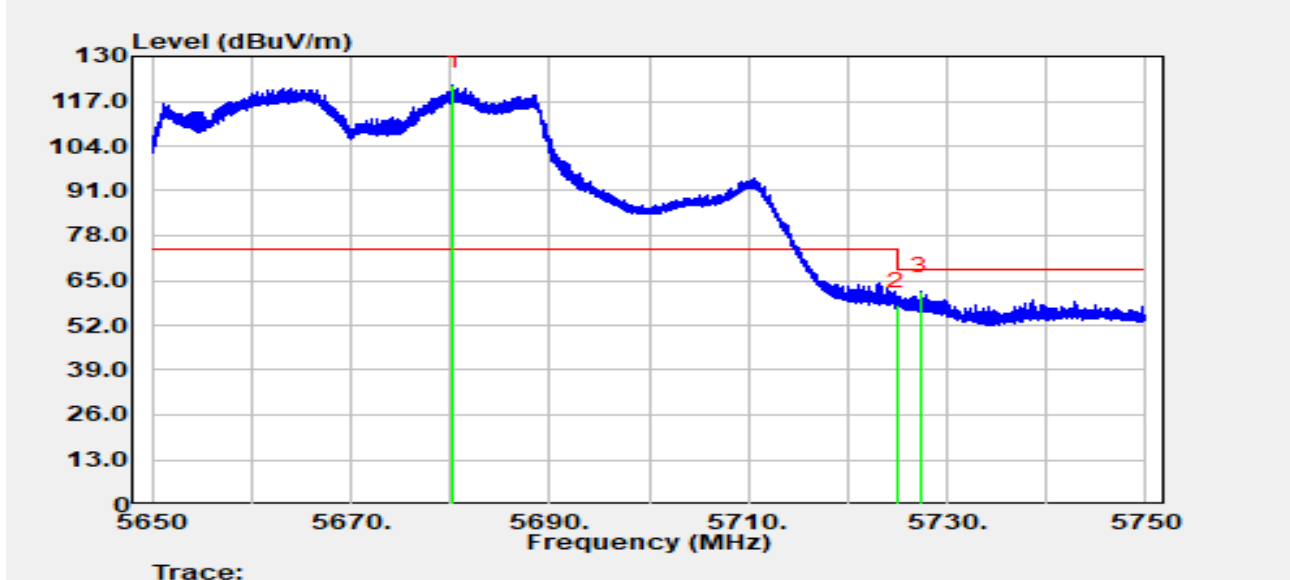


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5680.350	75.00	46.53	121.54	N/A	N/A	Peak
2		5725.000	56.73	1.01	57.74	-10.46	68.20	Peak
3	*	5727.360	61.97	-0.08	61.90	-6.30	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5670 MHz		

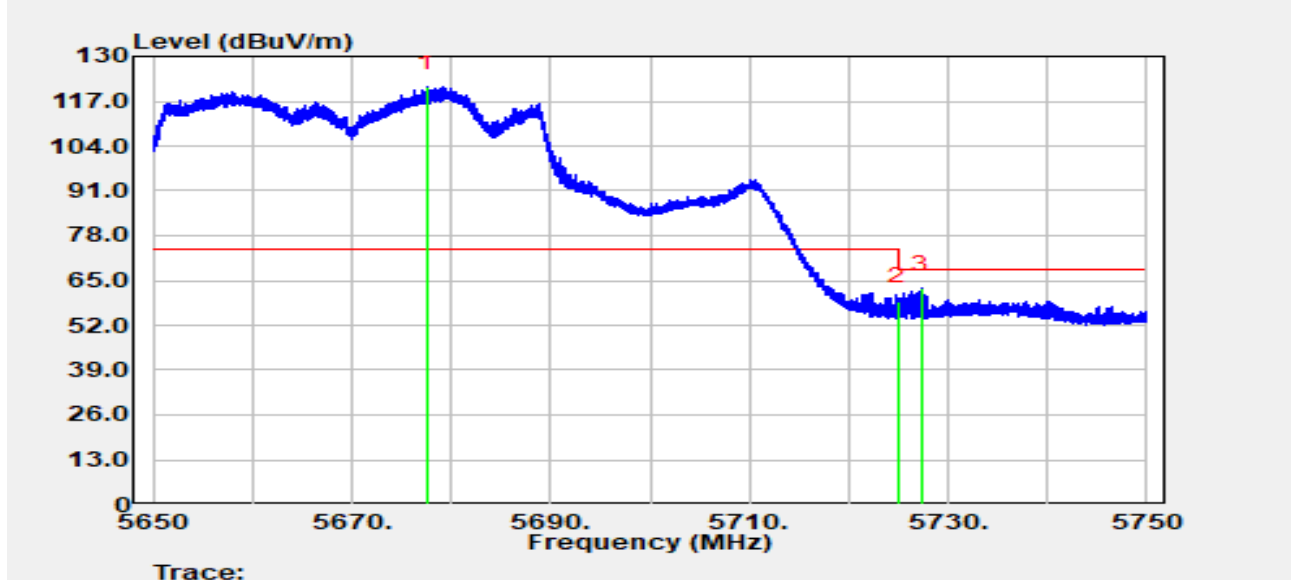


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5677.580	78.65	42.48	121.13	N/A	N/A	Peak
2		5725.000	57.92	1.01	58.93	-9.27	68.20	Peak
3	*	5727.260	62.68	-0.06	62.62	-5.58	68.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

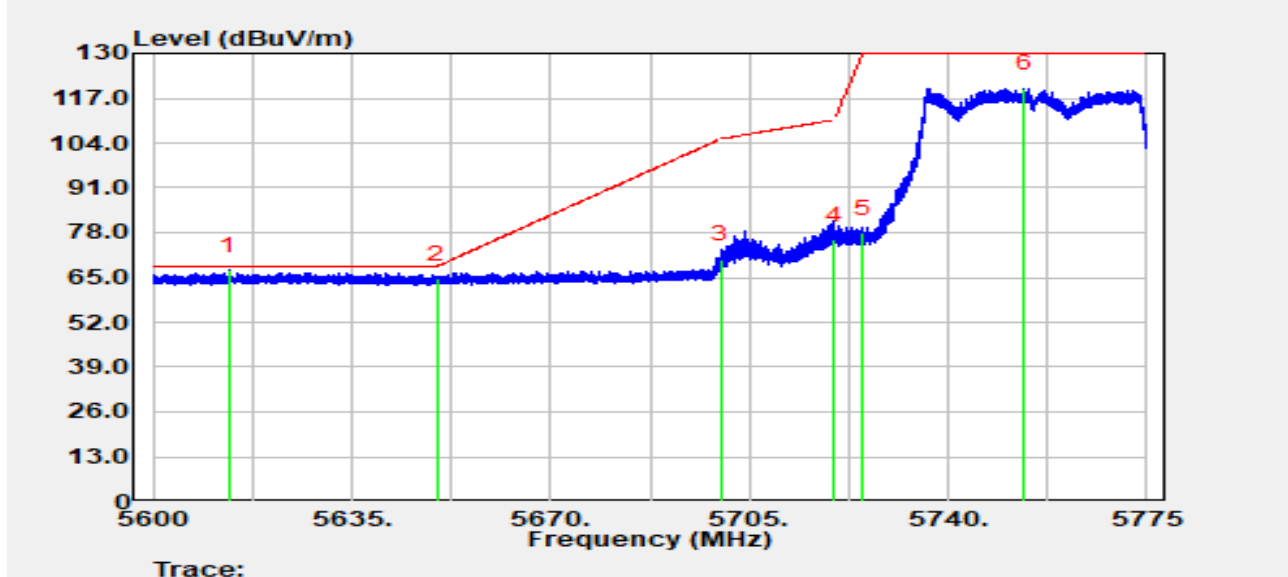


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.353	70.60	-3.46	67.14	-1.06	68.20	Peak
2		5650.000	68.23	-3.65	64.58	-3.62	68.20	Peak
3		5700.000	73.81	-3.47	70.33	-34.87	105.20	Peak
4		5720.000	79.29	-3.45	75.83	-34.97	110.80	Peak
5		5725.000	81.47	-3.47	78.00	-52.00	130.00	Peak
6		5753.300	123.55	-3.65	119.90	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5755 MHz		

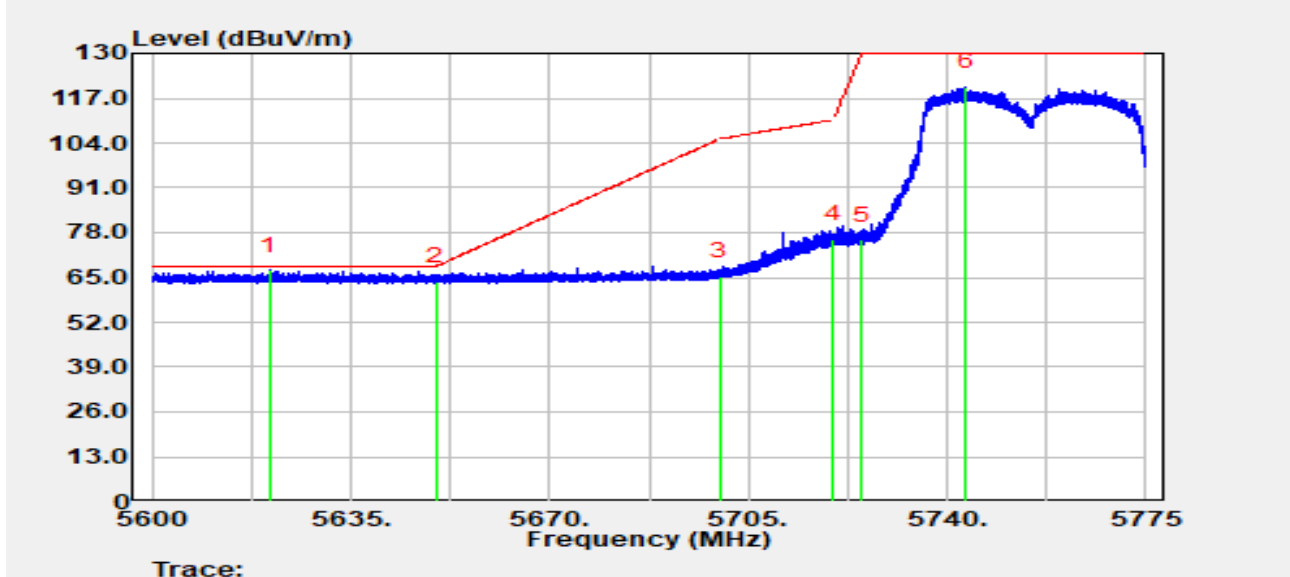


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5620.580	70.36	-3.38	66.98	-1.22	68.20	Peak
2		5650.000	67.51	-3.65	63.87	-4.33	68.20	Peak
3		5700.000	68.77	-3.47	65.30	-39.90	105.20	Peak
4		5720.000	79.71	-3.45	76.26	-34.54	110.80	Peak
5		5725.000	79.42	-3.47	75.95	-54.05	130.00	Peak
6		5743.395	123.88	-3.64	120.24	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

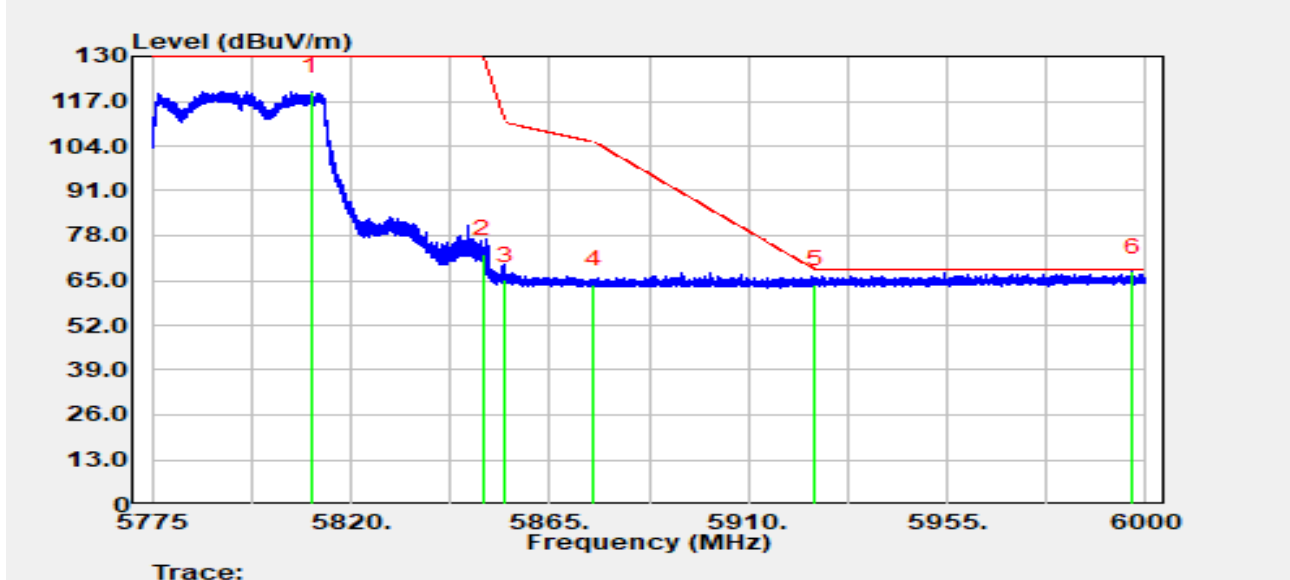


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5811.158	123.61	-3.84	119.77	N/A	N/A	Peak
2		5850.000	76.38	-3.75	72.62	-57.38	130.00	Peak
3		5855.000	68.90	-3.75	65.15	-45.65	110.80	Peak
4		5875.000	67.60	-3.82	63.78	-41.42	105.20	Peak
5		5925.000	67.59	-3.71	63.88	-4.32	68.20	Peak
6	*	5996.940	71.21	-3.72	67.49	-0.71	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	22.4°C	Humidity	62.6%
Limit	FCC_Part 15.407_Band Edge(3m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 5795 MHz		

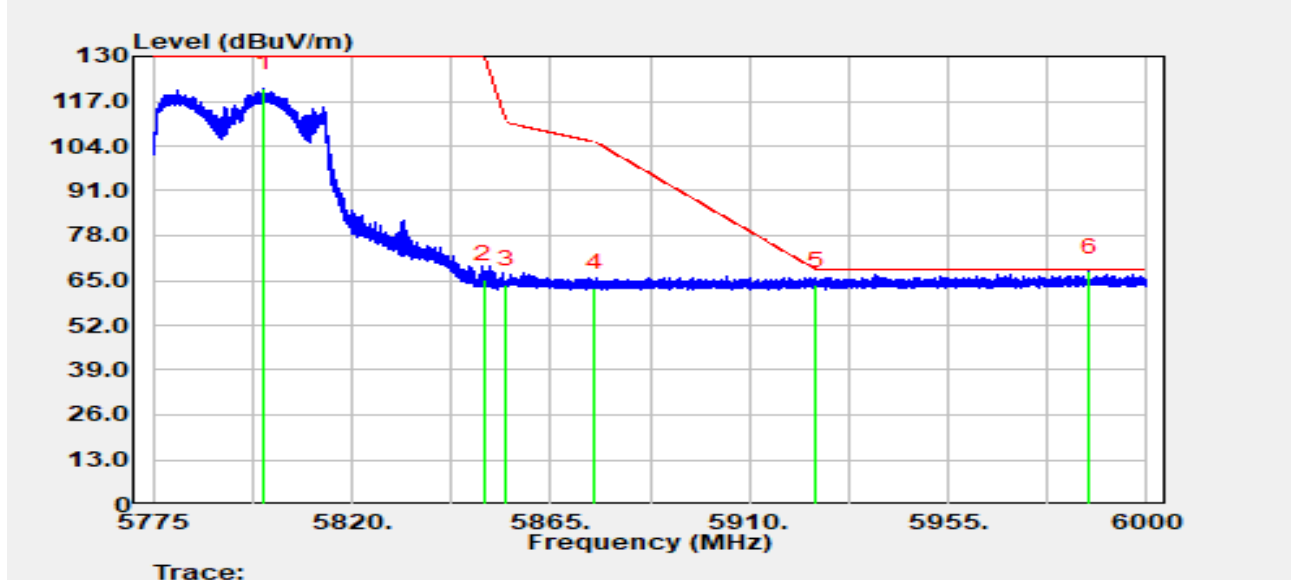


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5799.975	124.46	-3.74	120.71	N/A	N/A	Peak
2		5850.000	69.20	-3.75	65.45	-64.55	130.00	Peak
3		5855.000	67.64	-3.75	63.89	-46.91	110.80	Peak
4		5875.000	66.82	-3.82	63.00	-42.20	105.20	Peak
5		5925.000	67.36	-3.71	63.66	-4.54	68.20	Peak
6	*	5987.063	71.24	-3.68	67.56	-0.64	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

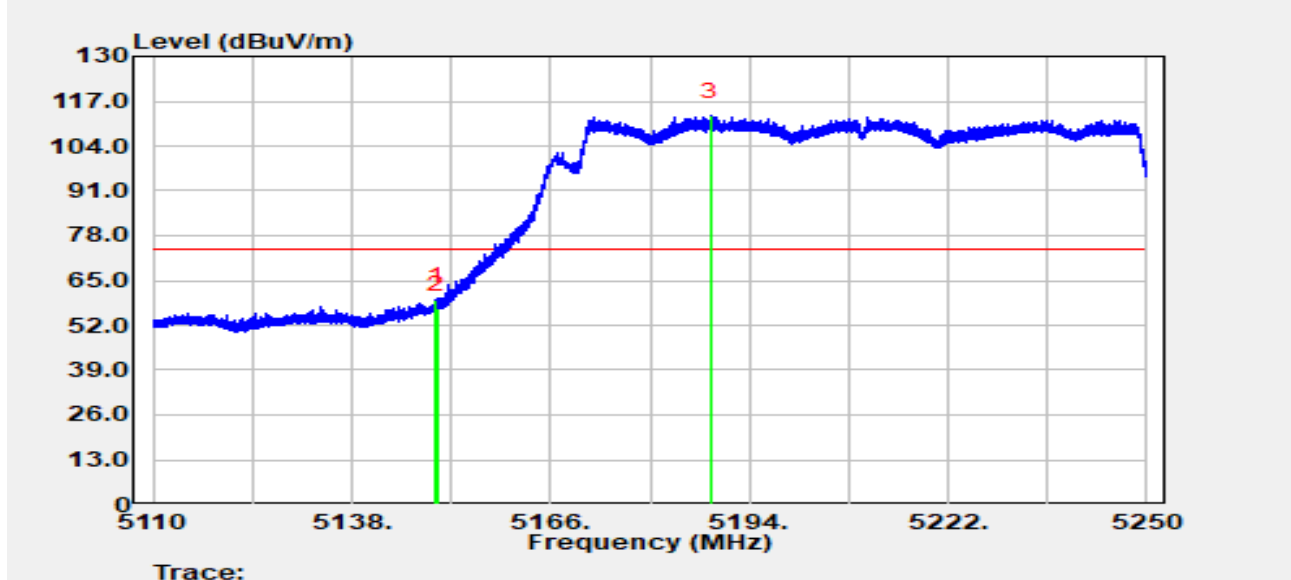


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5149.816	59.95	-0.65	59.30	-14.70	74.00	Peak
2		5150.000	57.37	-0.54	56.83	-17.17	74.00	Peak
3		5188.540	73.05	39.61	112.65	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

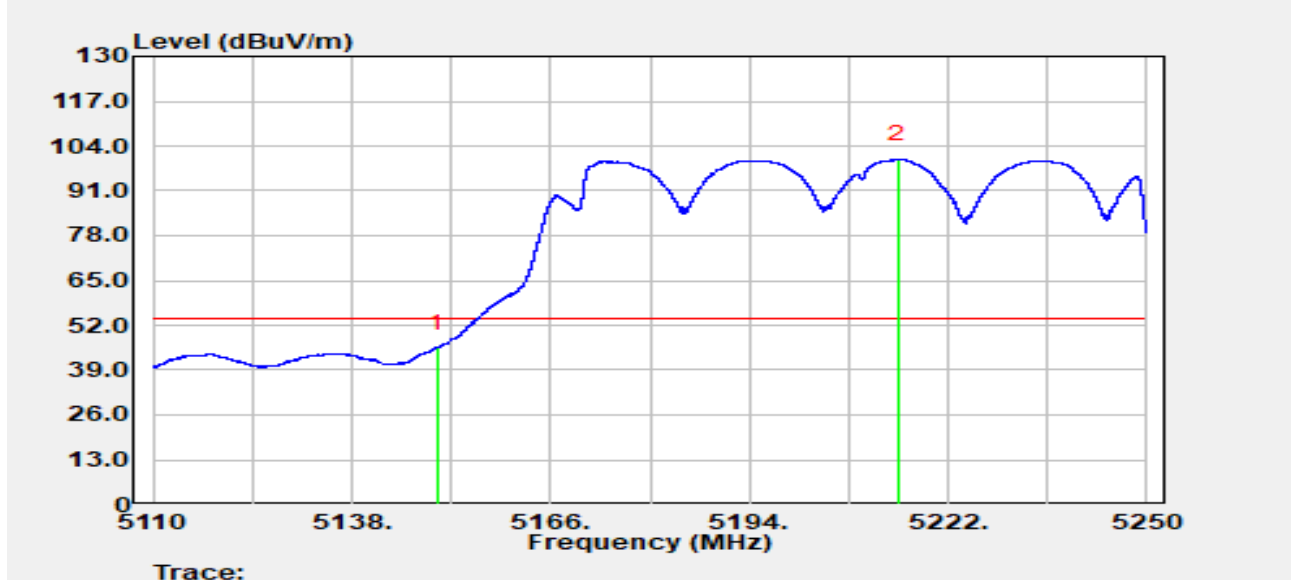


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	46.05	-0.54	45.50	-8.50	54.00	Average
2		5215.000	60.76	39.38	100.15	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

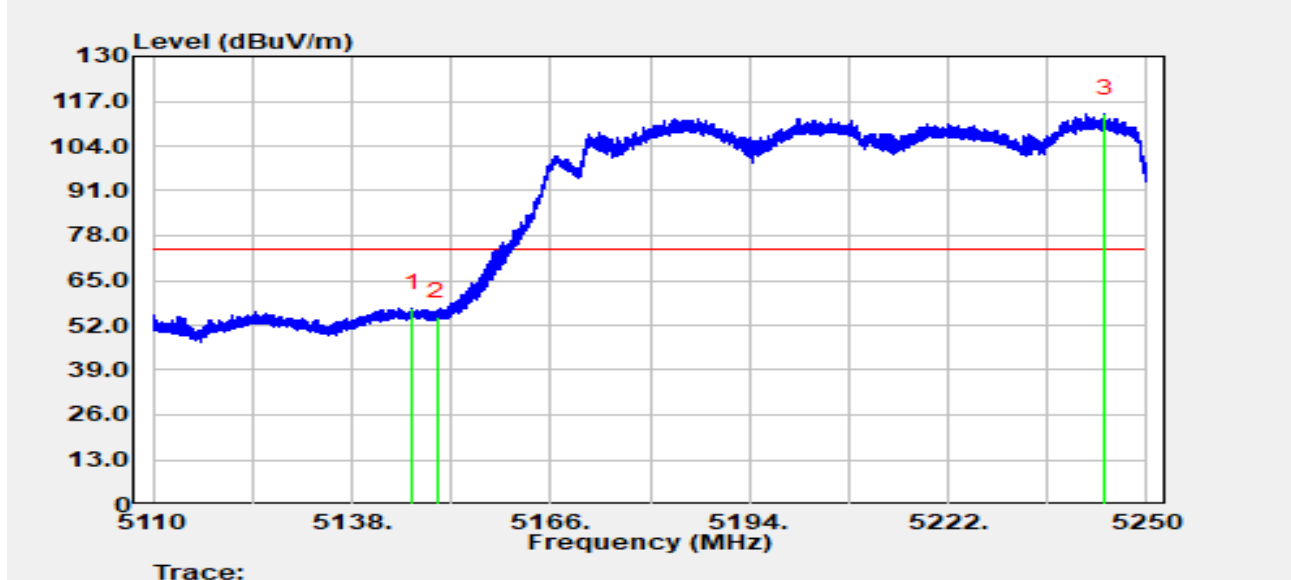


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.456	58.31	-1.39	56.93	-17.07	74.00	Peak
2		5150.000	55.09	-0.54	54.55	-19.45	74.00	Peak
3		5244.092	70.38	43.18	113.56	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.6°C	Humidity	62.2%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5210 MHz		

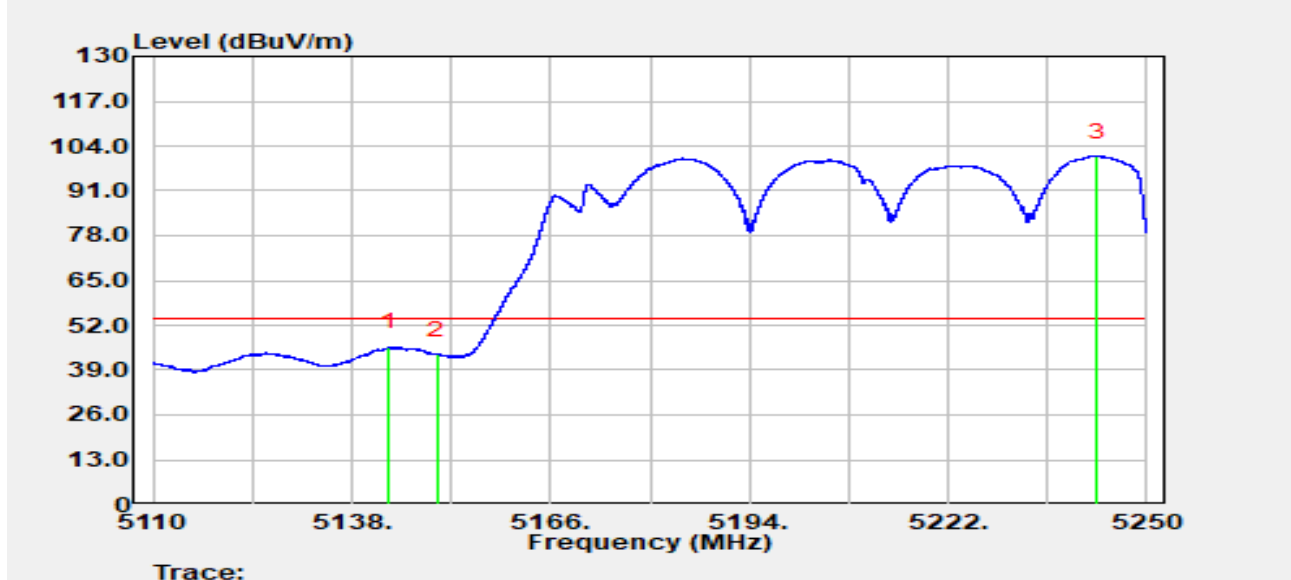


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5143.292	47.27	-1.63	45.64	-8.36	54.00	Average
2		5150.000	44.09	-0.54	43.55	-10.45	54.00	Average
3		5242.958	56.04	44.99	101.03	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

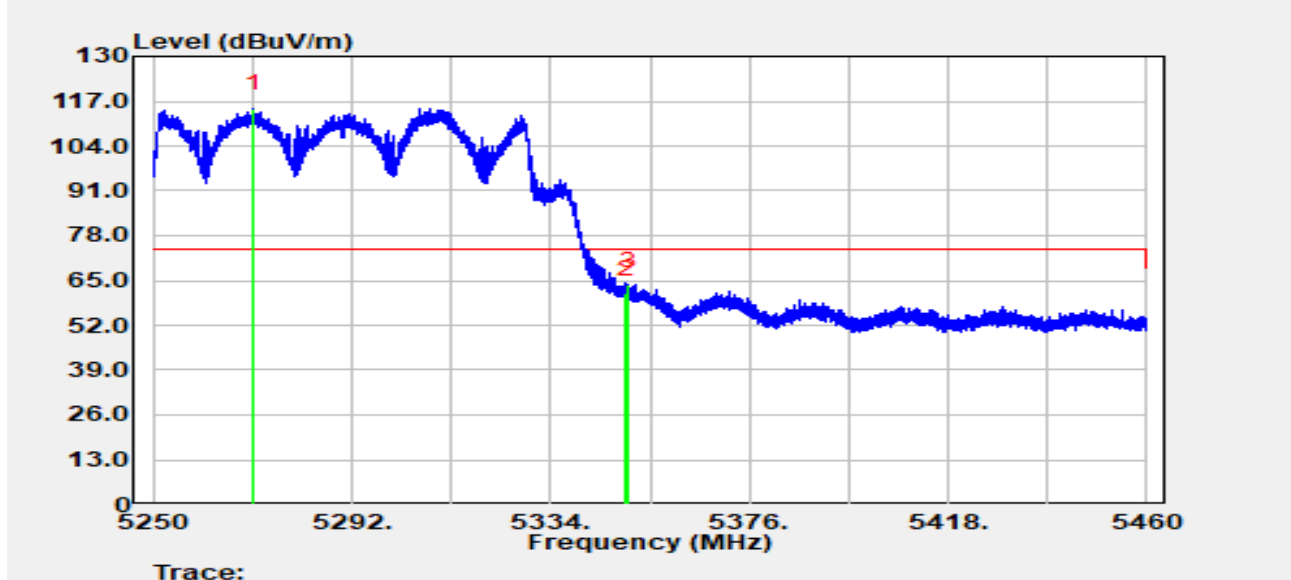


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5271.294	74.37	40.43	114.80	N/A	N/A	Peak
2		5350.000	58.96	2.28	61.24	-12.76	74.00	Peak
3	*	5350.401	61.54	2.06	63.60	-10.40	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

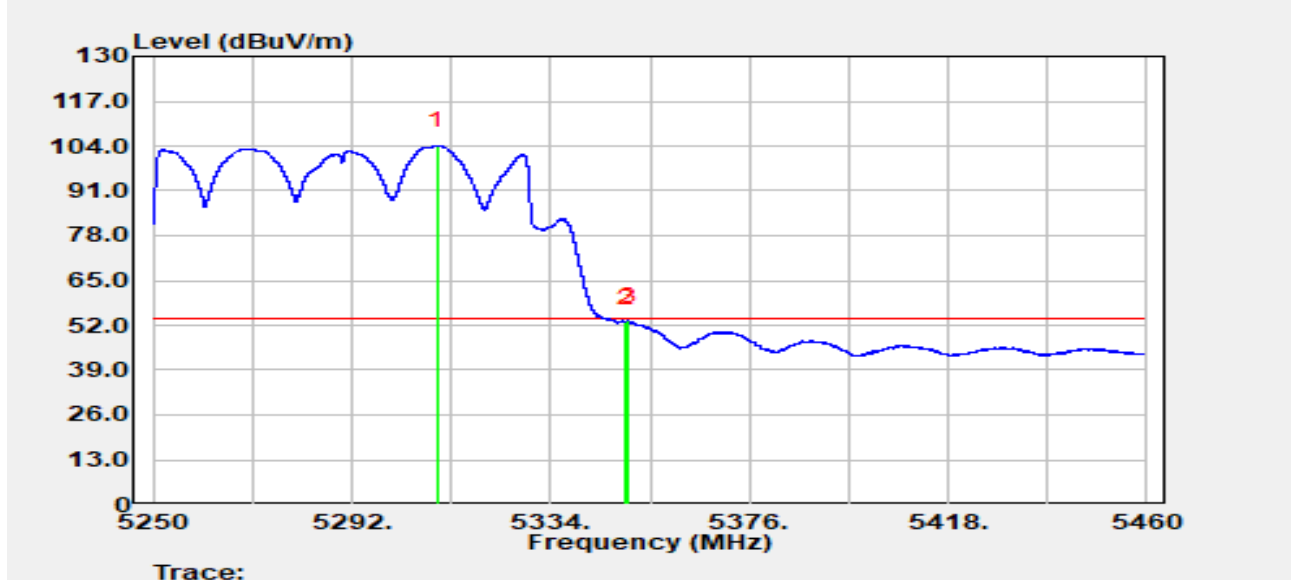


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5310.102	60.07	44.10	104.17	N/A	N/A	Average
2		5350.000	50.60	2.28	52.88	-1.12	54.00	Average
3	*	5350.338	51.19	2.10	53.29	-0.71	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

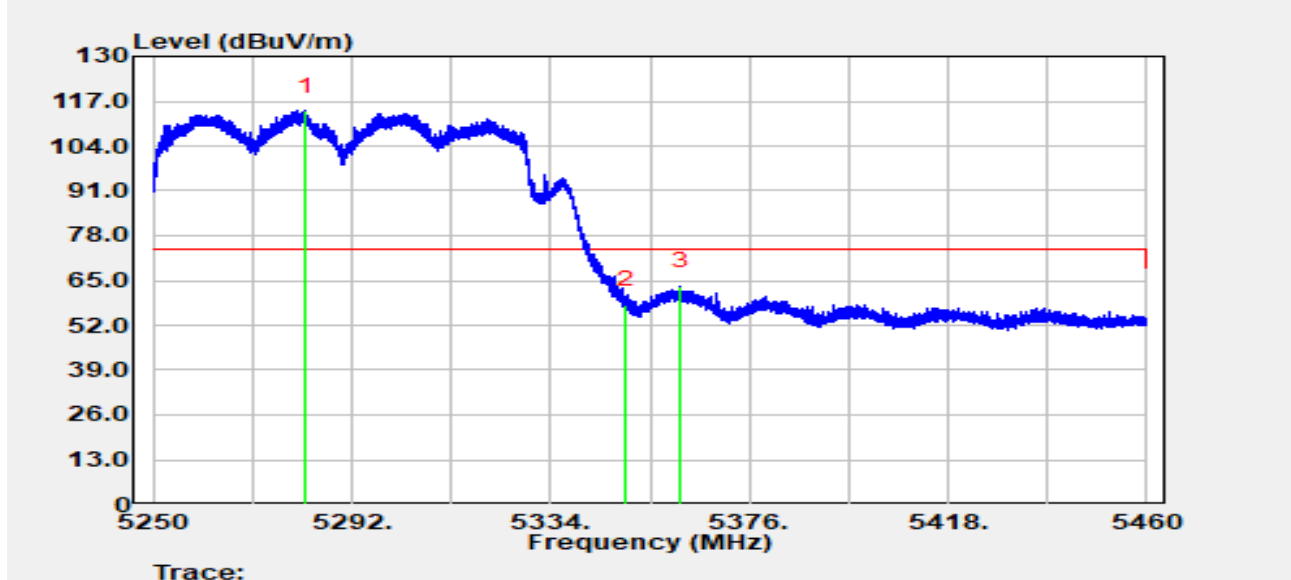


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.382	63.32	50.84	114.17	N/A	N/A	Peak
2		5350.000	55.63	2.28	57.91	-16.09	74.00	Peak
3	*	5361.342	64.49	-1.03	63.46	-10.54	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5290 MHz		

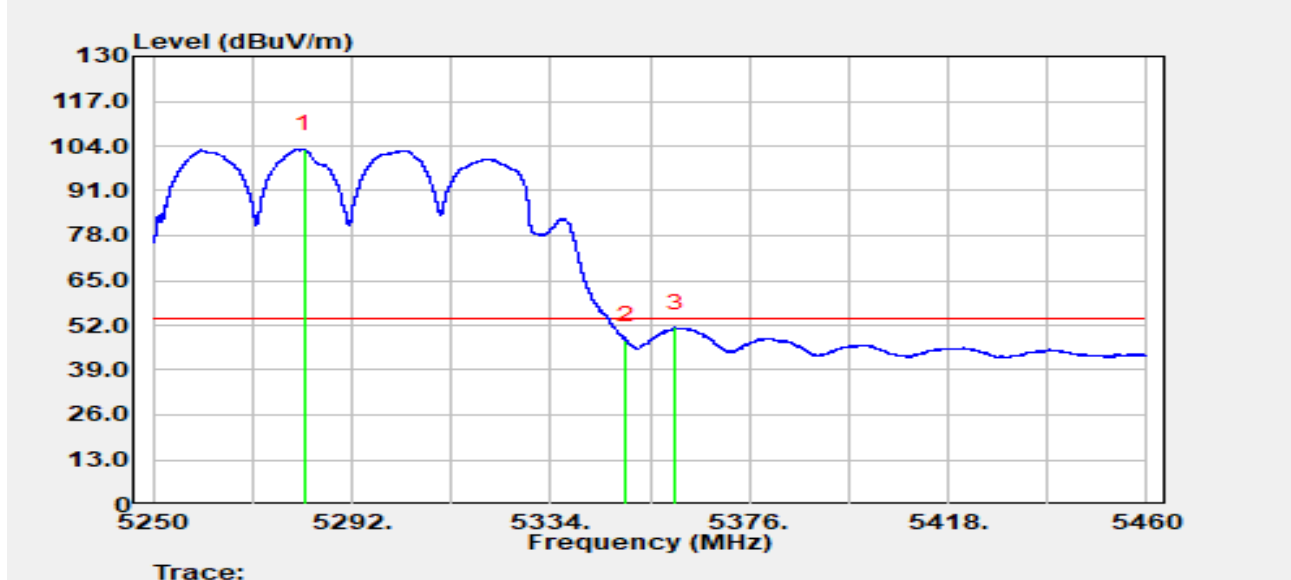


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5282.067	52.21	50.88	103.09	N/A	N/A	Average
2		5350.000	45.40	2.28	47.68	-6.32	54.00	Average
3	*	5360.397	52.21	-0.87	51.34	-2.66	54.00	Average

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

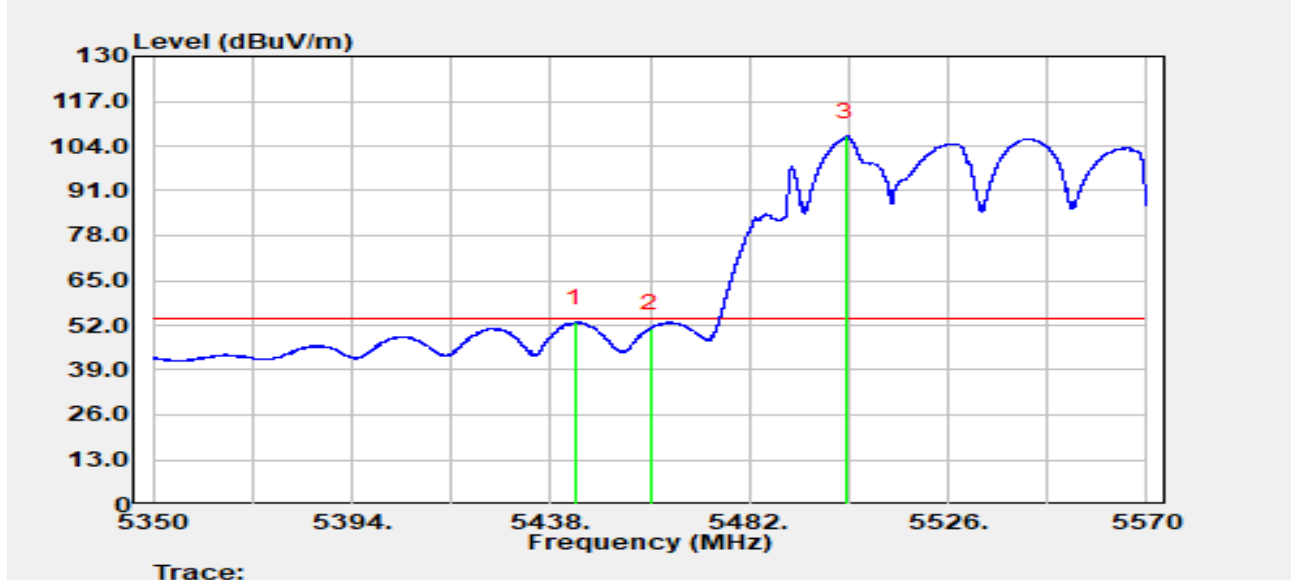


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5443.478	54.44	-1.62	52.82	-1.18	54.00	Average
2		5460.000	51.89	-0.69	51.20	-2.80	54.00	Average
3		5503.450	61.33	45.48	106.81	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

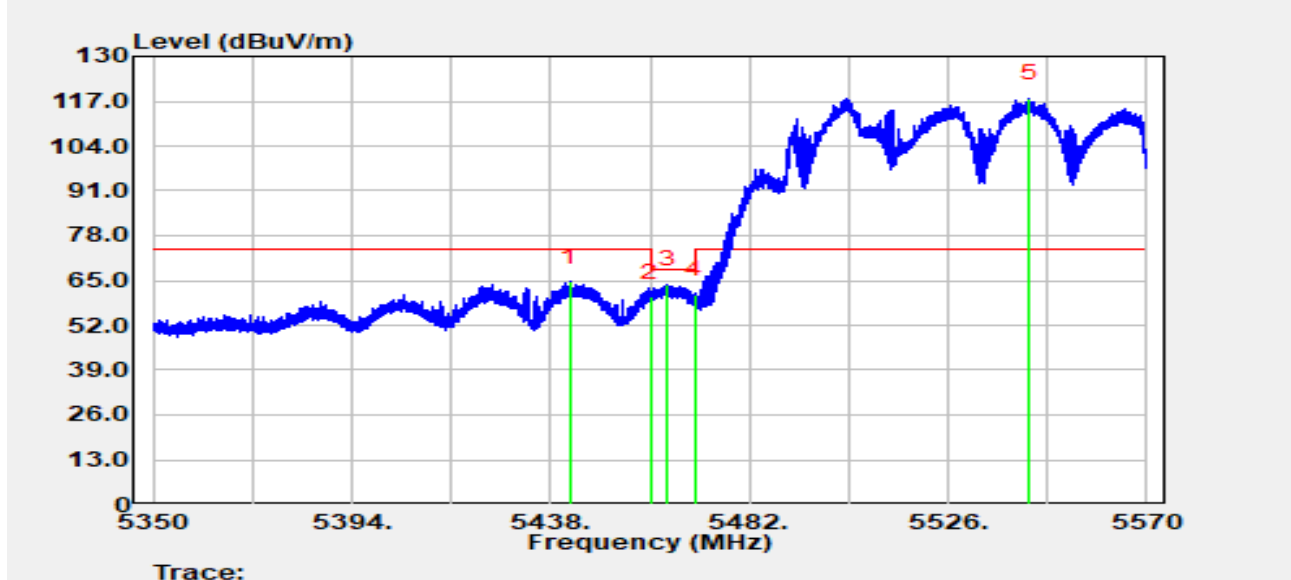


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5442.356	66.35	-1.67	64.67	-9.33	74.00	Peak
2		5460.000	60.92	-0.69	60.23	-7.97	68.20	Peak
3	*	5463.894	64.39	-0.40	63.99	-4.21	68.20	Peak
4		5470.000	60.01	1.00	61.01	-7.19	68.20	Peak
5		5544.106	75.93	41.97	117.90	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2025-11-06
Temperature	21.3°C	Humidity	57.0%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 5530 MHz		

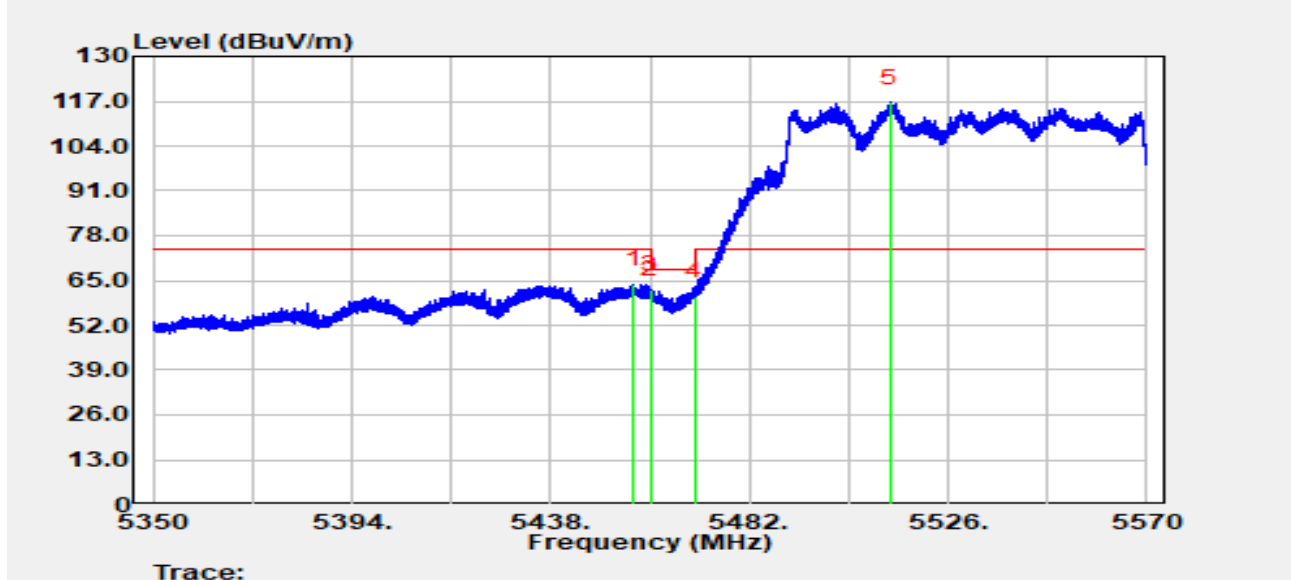

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.524	64.98	-0.98	64.00	-10.00	74.00	Peak
2		5460.000	61.66	-0.69	60.96	-7.24	68.20	Peak
3	*	5460.286	63.10	-0.72	62.38	-5.82	68.20	Peak
4		5470.000	59.45	1.00	60.45	-7.75	68.20	Peak
5		5513.086	72.41	44.16	116.57	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).