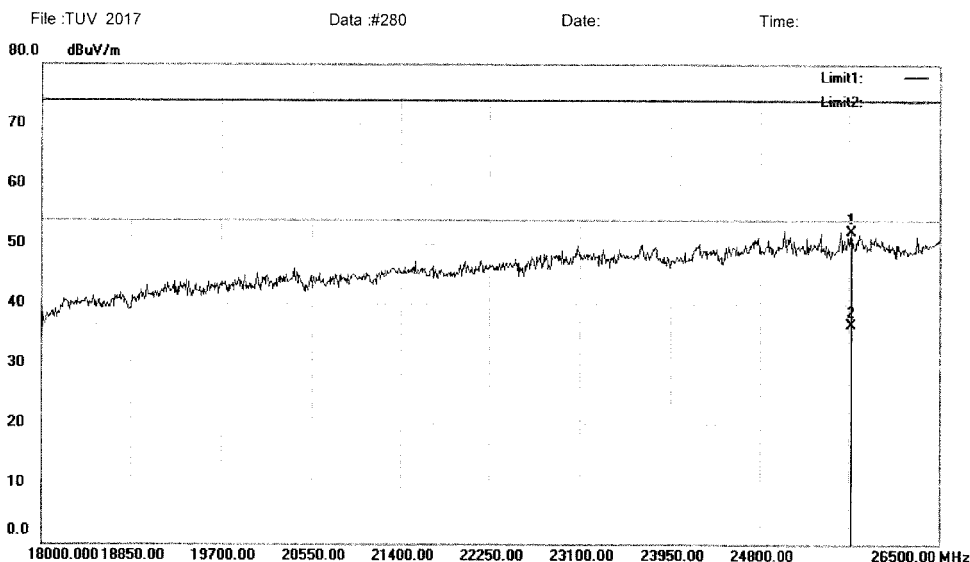


Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5600
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25675.50	88.34	-36.19	52.15	74.00	-21.85	peak		
2	*	25675.50	72.79	-36.19	36.60	54.00	-17.40	AVG		

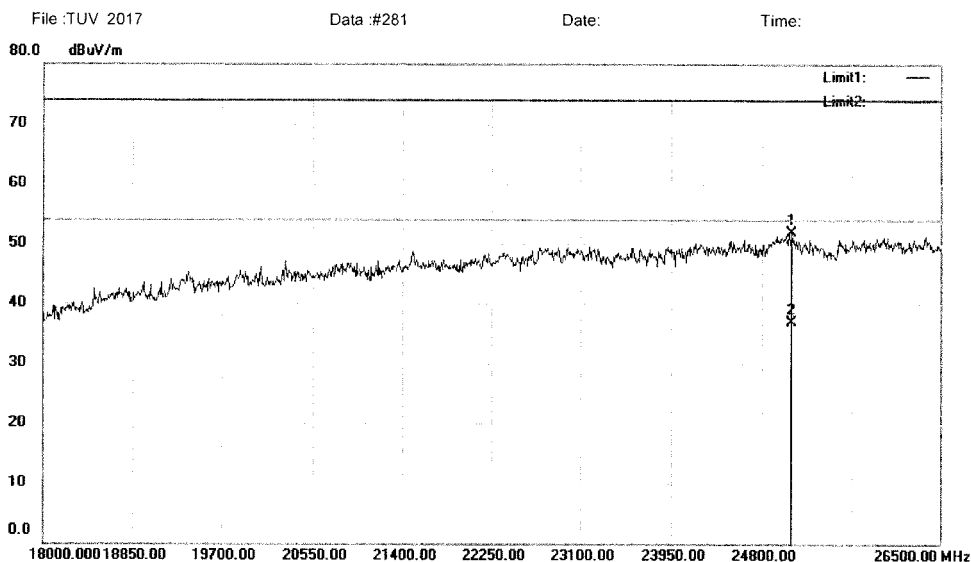
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #280

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5600
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25080.50	88.73	-36.91	51.82	74.00	-22.18	peak		
2	*	25080.50	73.81	-36.91	36.90	54.00	-17.10	AVG		

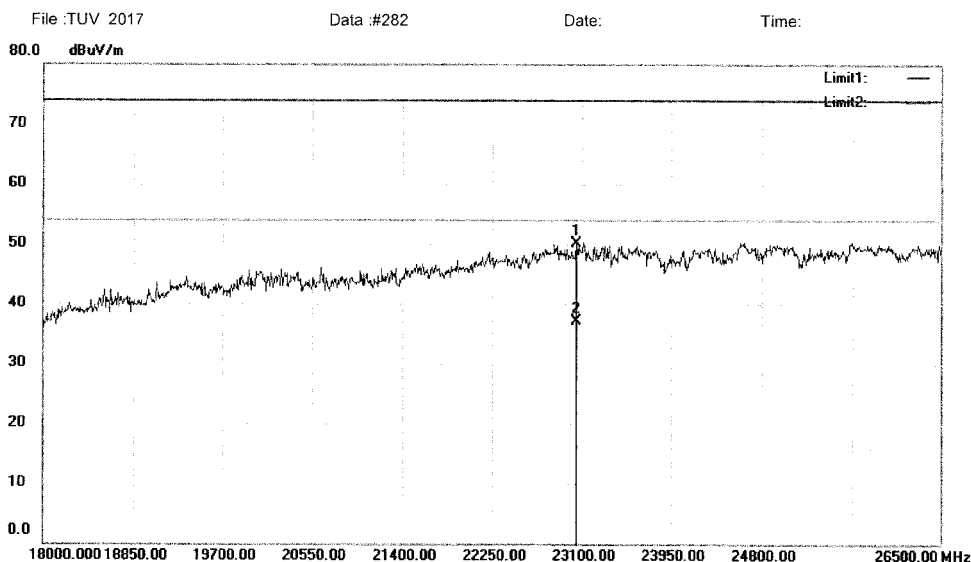
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#281

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23049.00	88.14	-38.13	50.01	74.00	-23.99	peak		
2	*	23049.00	75.33	-38.13	37.20	54.00	-16.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

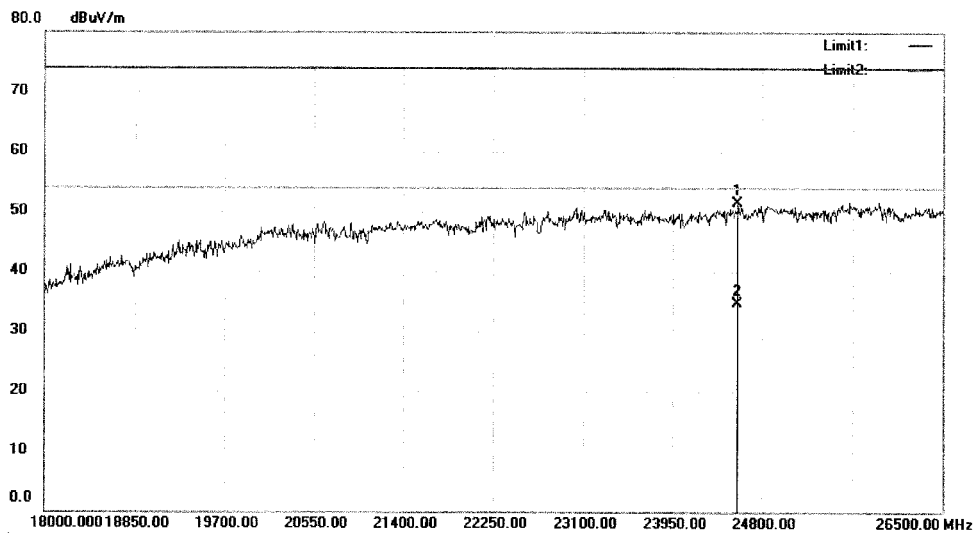
File :TUV 2017\Data :#282

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV 2017 Data :#283 Date: Time:



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24570.50	88.57	-37.06	51.51	74.00	-22.49	peak		
2	*	24570.50	71.86	-37.06	34.80	54.00	-19.20	AVG		

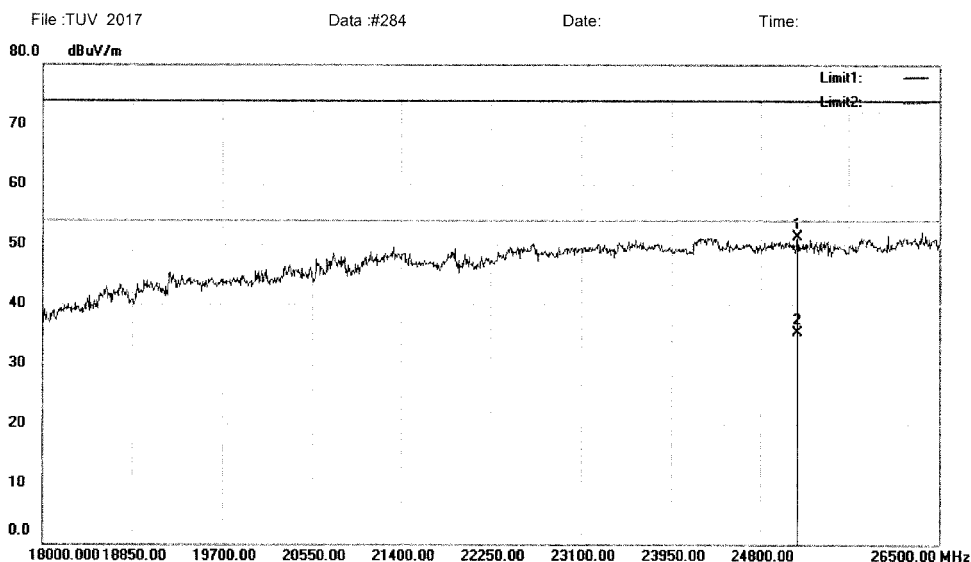
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017Data :#283

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25157.00	88.04	-36.82	51.22	74.00	-22.78	peak		
2	*	25157.00	72.12	-36.82	35.30	54.00	-18.70	AVG		

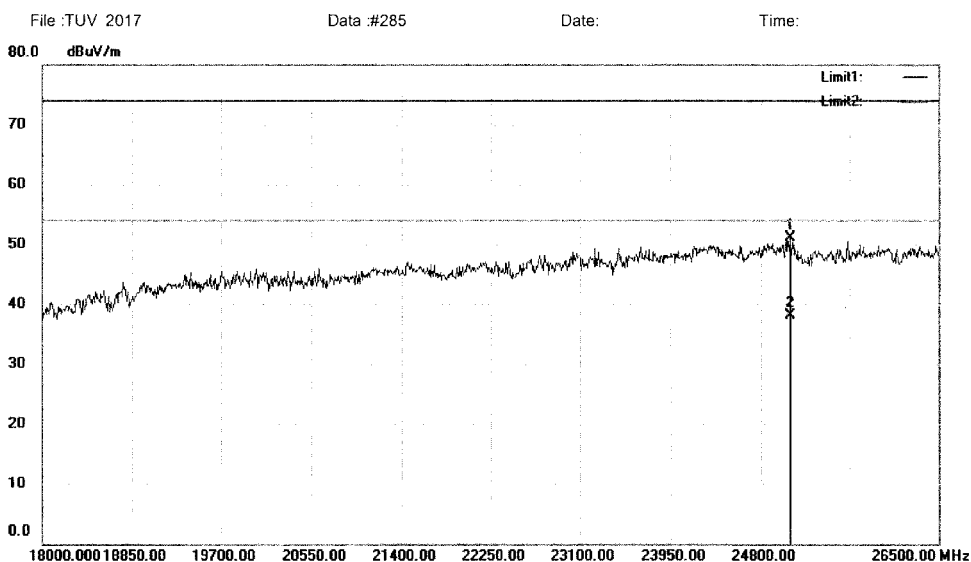
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#284

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25072.00	88.02	-36.92	51.10	74.00	-22.90	peak		
2	*	25072.00	75.02	-36.92	38.10	54.00	-15.90	AVG		

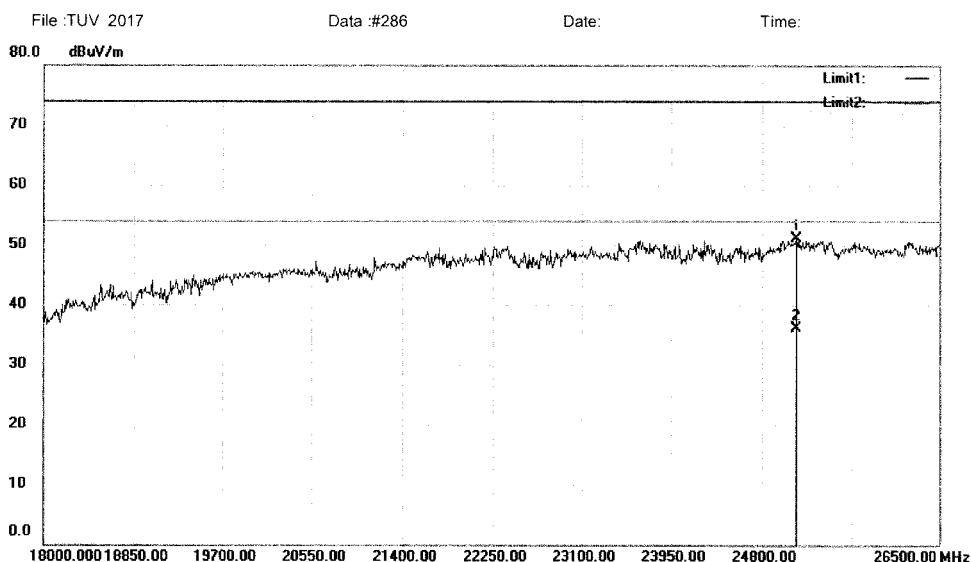
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#285

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25123.00	88.03	-36.86	51.17	74.00	-22.83	peak		
2	*	25123.00	73.06	-36.86	36.20	54.00	-17.80	AVG		

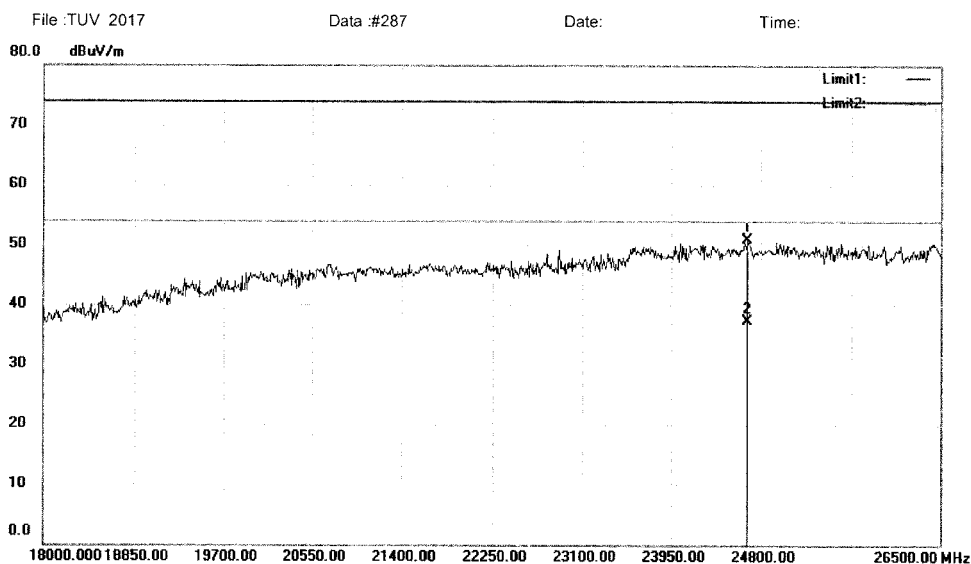
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#286

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24672.50	87.94	-37.05	50.89	74.00	-23.11	peak		
2	*	24672.50	74.35	-37.05	37.30	54.00	-16.70	AVG		

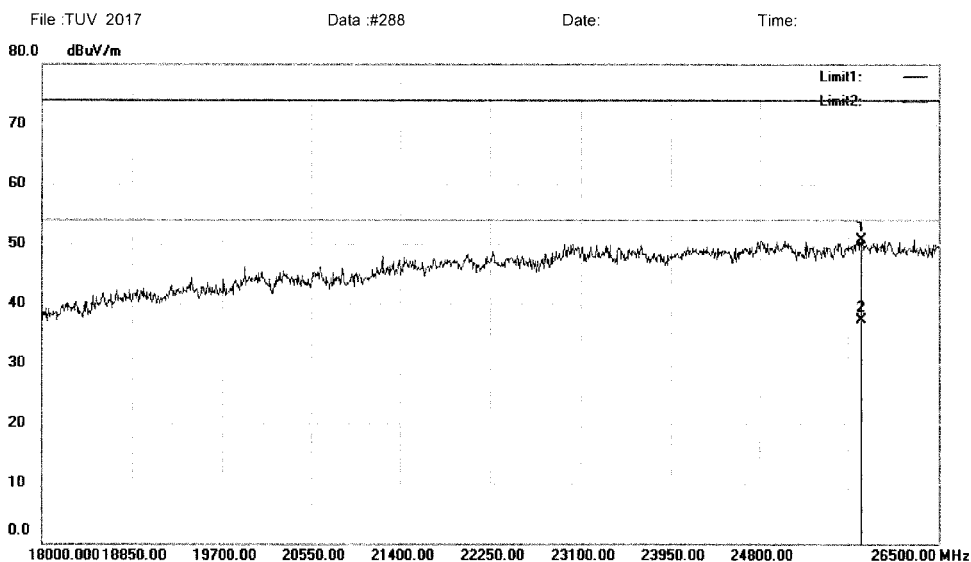
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#287

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25777.50	86.73	-36.06	50.67	74.00	-23.33	peak		
2	*	25777.50	73.46	-36.06	37.40	54.00	-16.60	AVG		

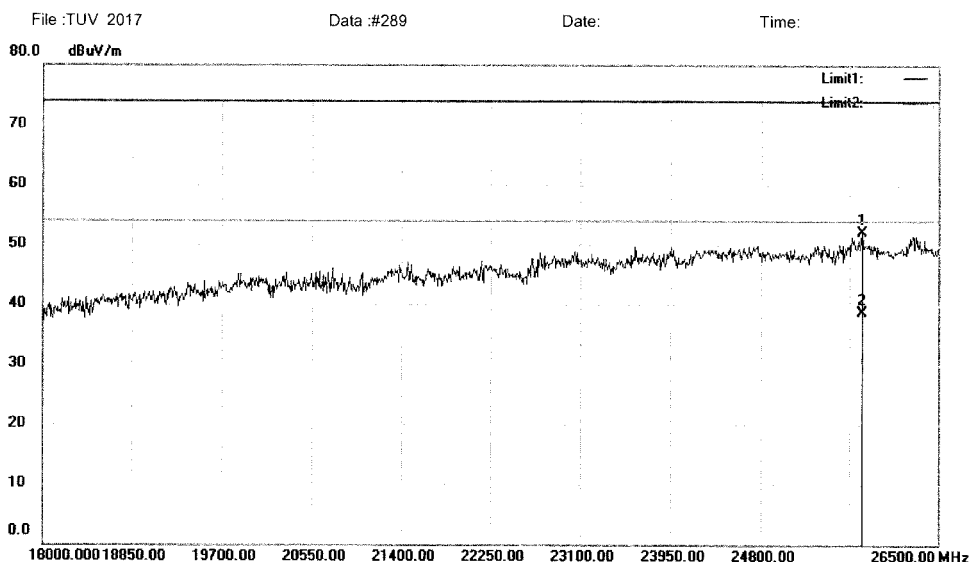
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#288

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25777.50	88.08	-36.06	52.02	74.00	-21.98	peak		
2	*	25777.50	74.76	-36.06	38.70	54.00	-15.30	AVG		

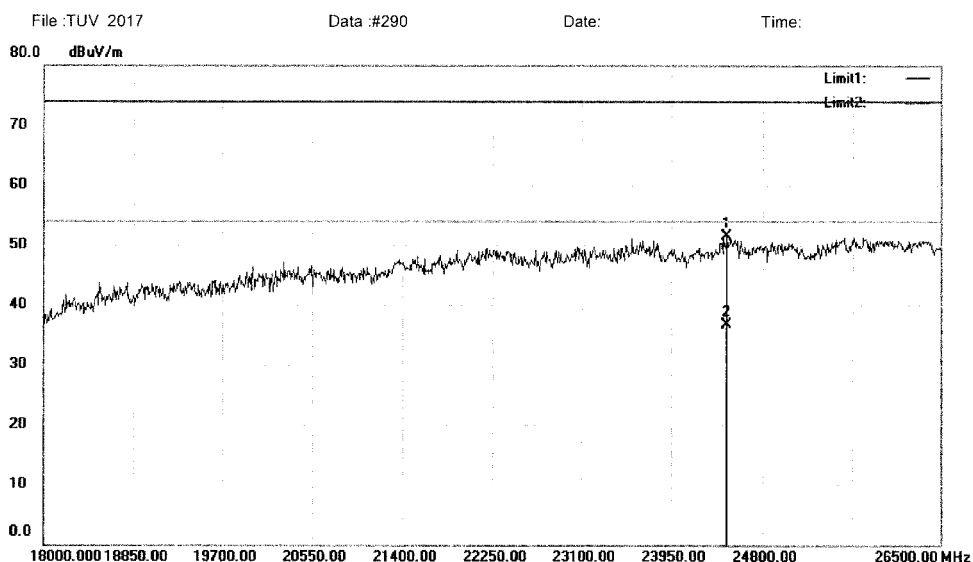
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#289

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C

Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24468.50	88.54	-37.07	51.47	74.00	-22.53	peak		
2	*	24468.50	73.77	-37.07	36.70	54.00	-17.30	AVG		

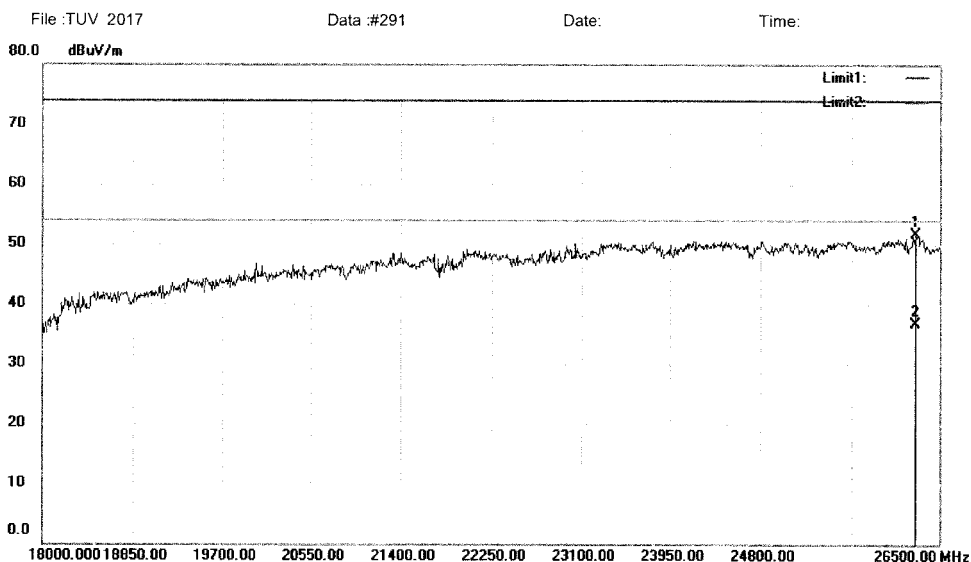
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#290

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		26262.00	87.19	-35.47	51.72	74.00	-22.28	peak		
2	*	26262.00	72.27	-35.47	36.80	54.00	-17.20	AVG		

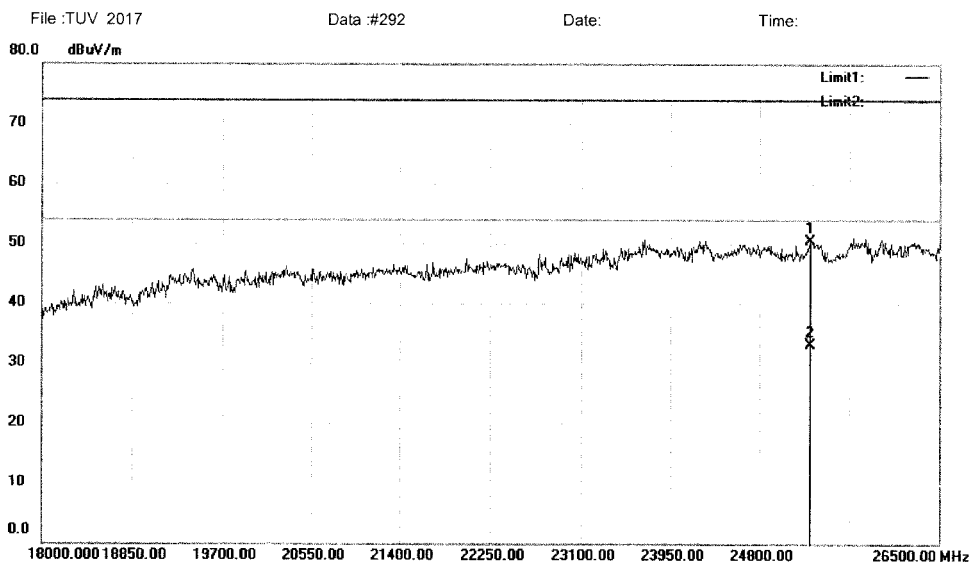
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#291

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25284.50	87.24	-36.66	50.58	74.00	-23.42	peak		
2	*	25284.50	69.86	-36.66	33.20	54.00	-20.80	AVG		

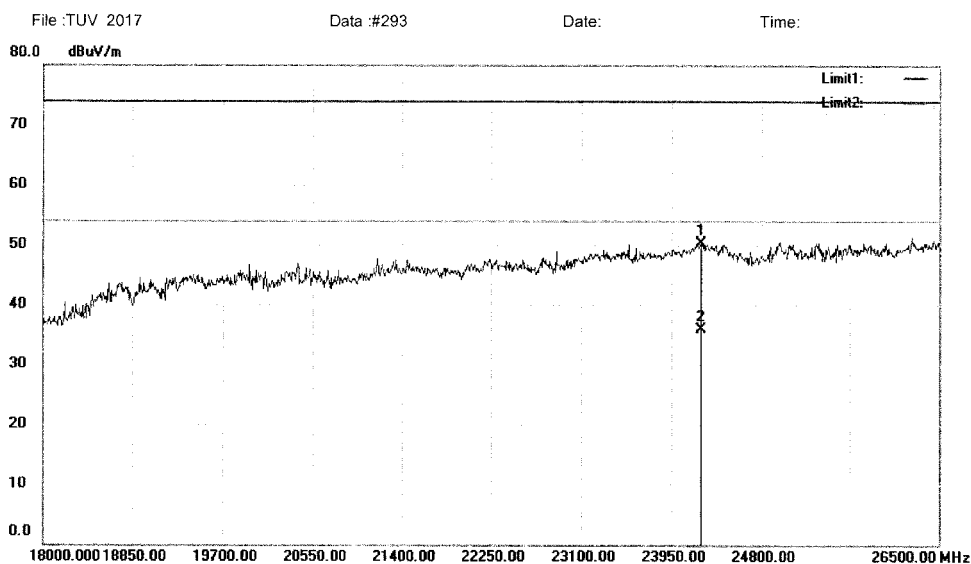
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#292

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24222.00	87.44	-37.10	50.34	74.00	-23.66	peak		
2	*	24222.00	73.00	-37.10	35.90	54.00	-18.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

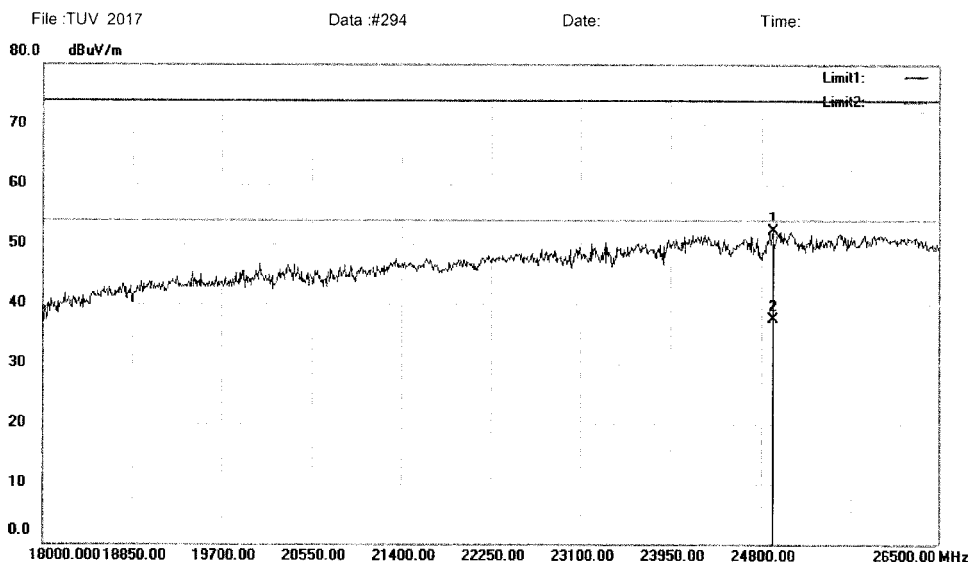
File: TUV 2017\Data: #293

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11nHT40 5270
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24902.00	89.35	-37.02	52.33	74.00	-21.67	peak		
2	*	24902.00	74.52	-37.02	37.50	54.00	-16.50	AVG		

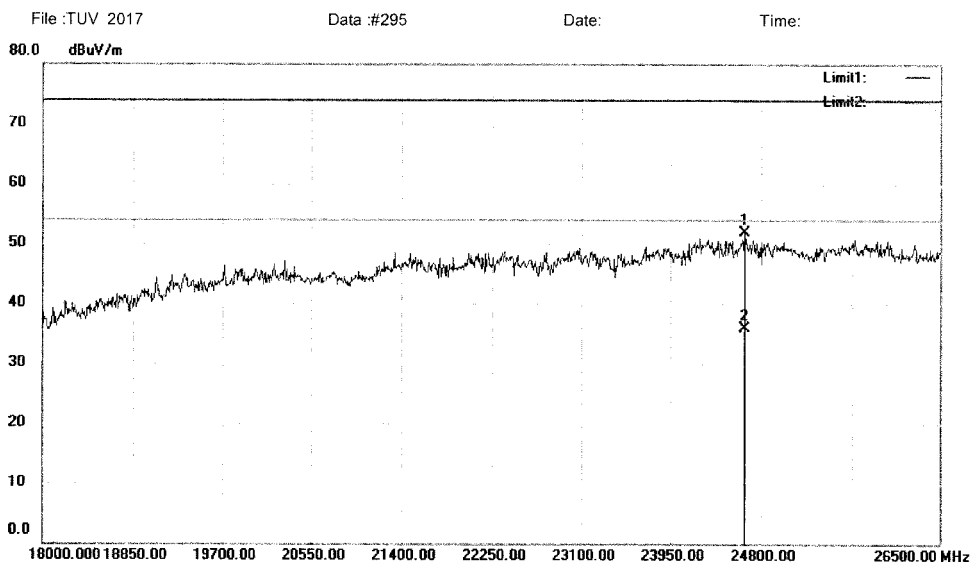
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017>Data: #294

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5270
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24647.00	88.87	-37.05	51.82	74.00	-22.18	peak		
2	*	24647.00	72.95	-37.05	35.90	54.00	-18.10	AVG		

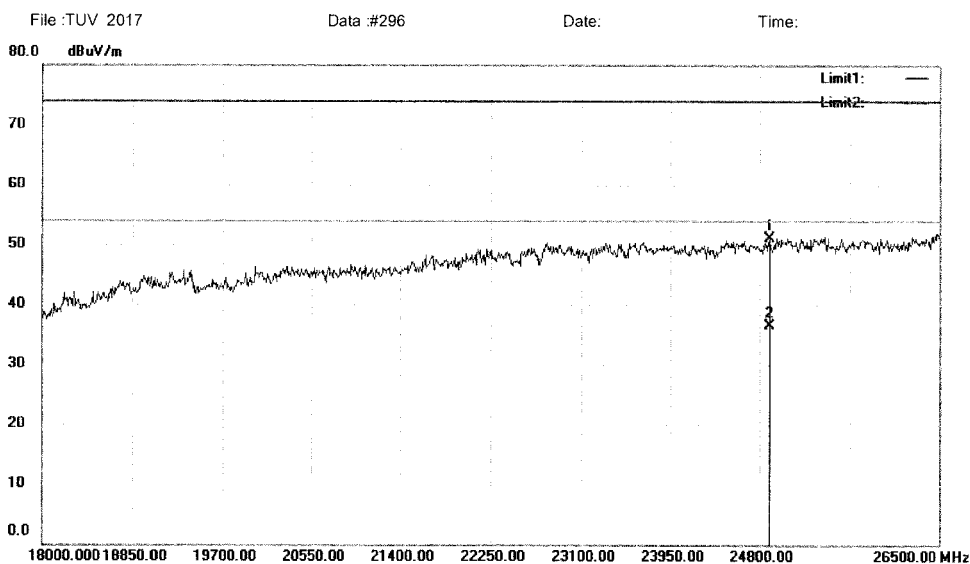
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#295

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24893.50	88.10	-37.02	51.08	74.00	-22.92	peak		
2	*	24893.50	73.62	-37.02	36.60	54.00	-17.40	AVG		

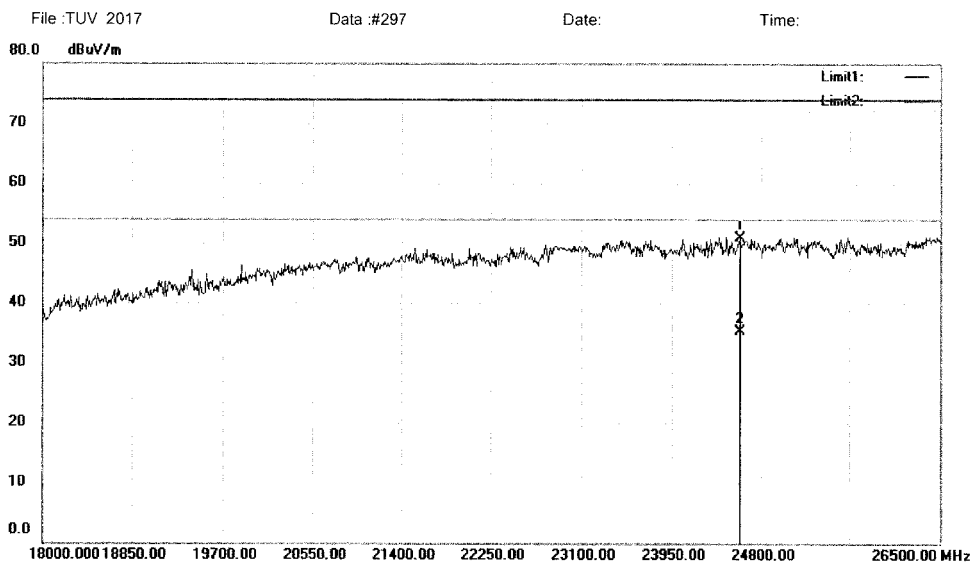
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017Data: #296

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24596.00	87.96	-37.06	50.90	74.00	-23.10	peak		
2	*	24596.00	72.36	-37.06	35.30	54.00	-18.70	AVG		

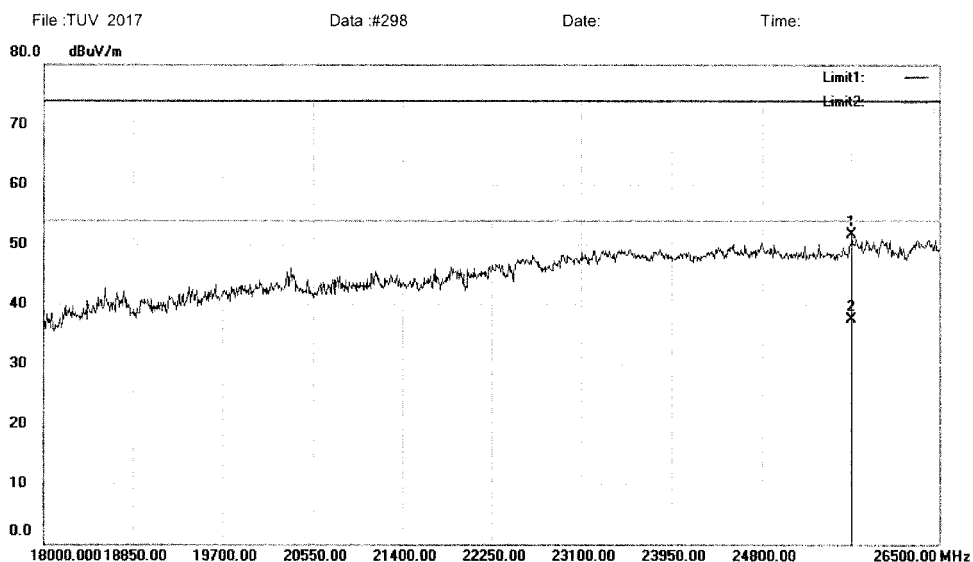
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#297

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5510
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25658.50	87.88	-36.21	51.67	74.00	-22.33	peak		
2	*	25658.50	73.71	-36.21	37.50	54.00	-16.50	AVG		

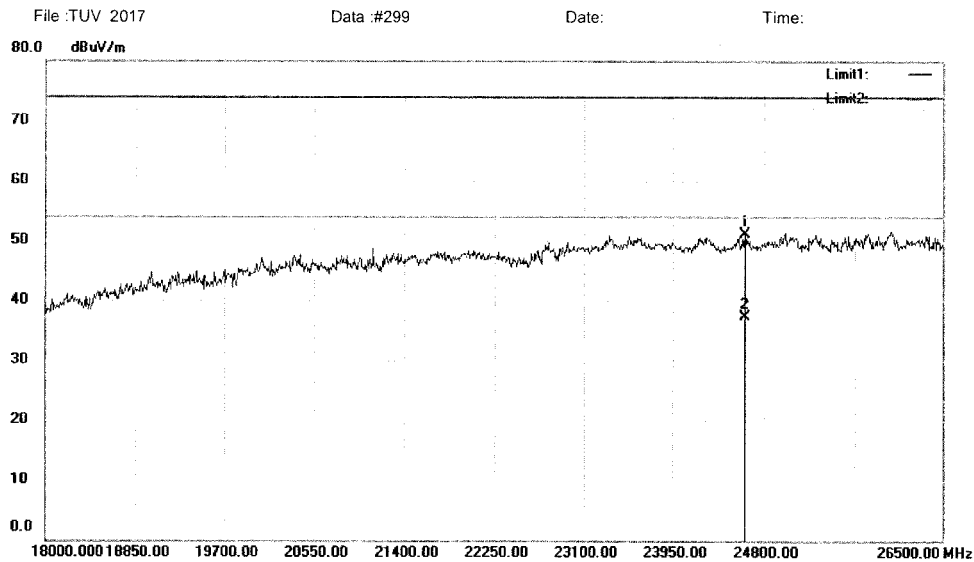
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #298

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5510
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24621.50	88.19	-37.06	51.13	74.00	-22.87	peak		
2	*	24621.50	74.36	-37.06	37.30	54.00	-16.70	AVG		

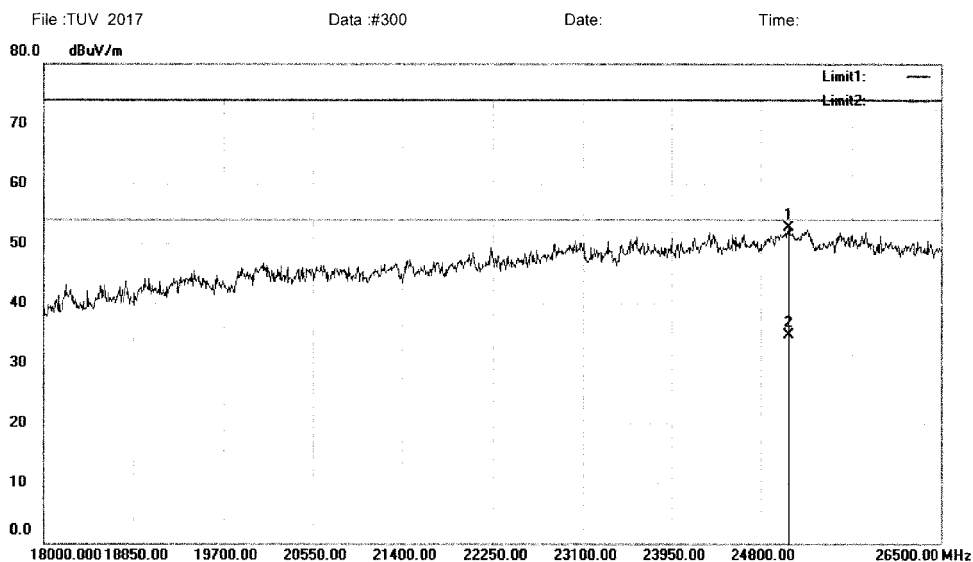
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017Data :#299

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5590
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25063.50	89.72	-36.93	52.79	74.00	-21.21	peak		
2	*	25063.50	71.63	-36.93	34.70	54.00	-19.30	AVG		

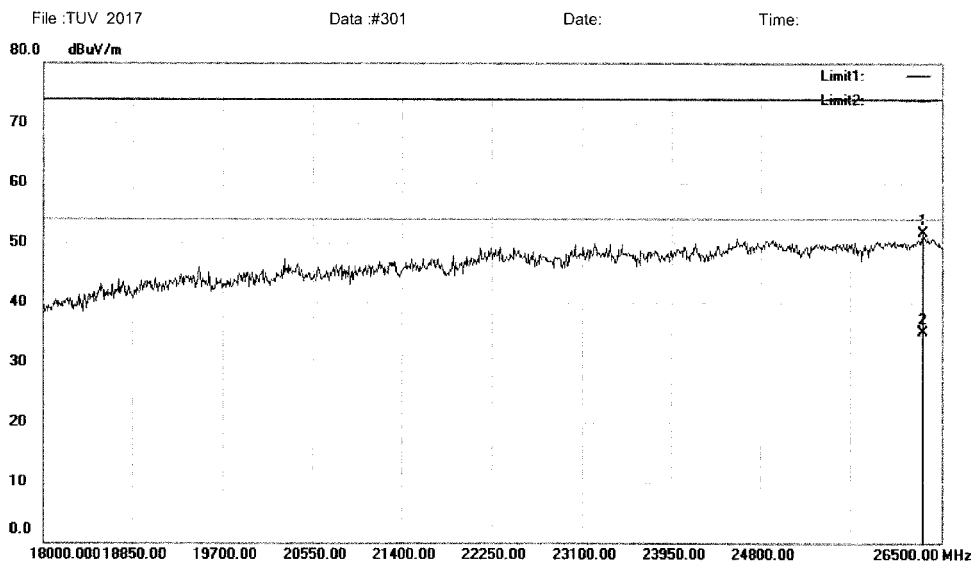
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#300

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5590
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		26321.50	87.02	-35.40	51.62	74.00	-22.38	peak		
2	*	26321.50	70.60	-35.40	35.20	54.00	-18.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

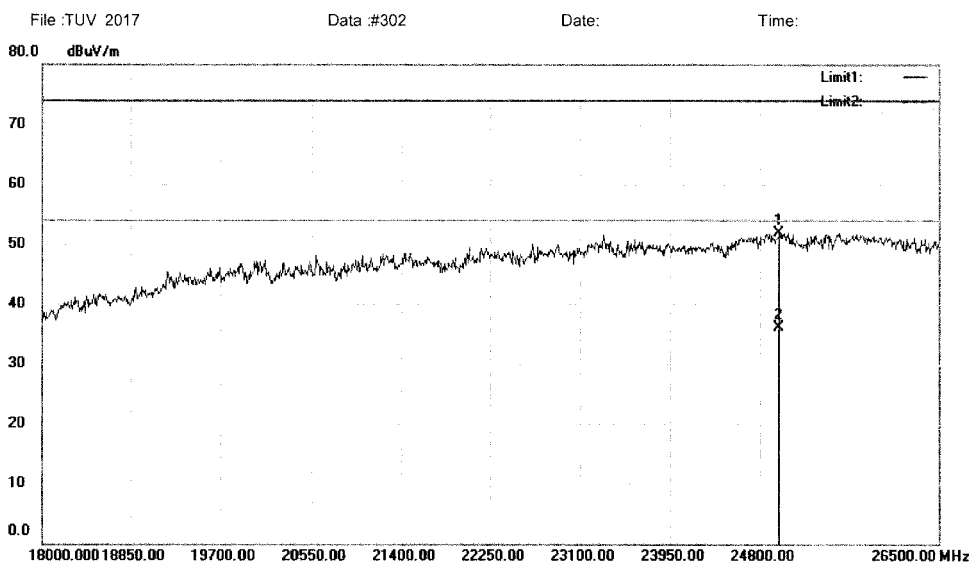
File :TUV 2017\Data :#301

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode:11nHT40 5670
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24978.50	88.88	-37.01	51.87	74.00	-22.13	peak		
2	*	24978.50	73.21	-37.01	36.20	54.00	-17.80	AVG		

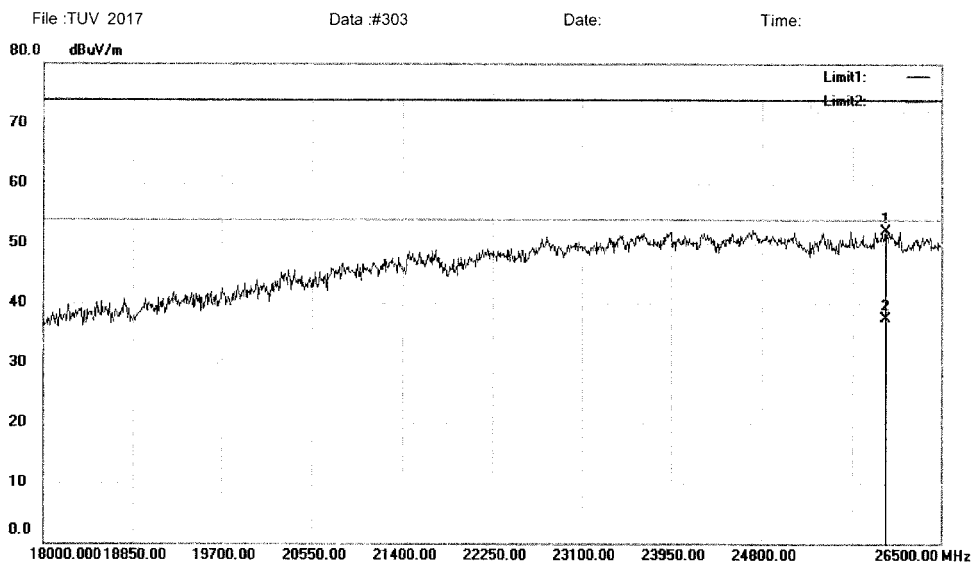
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017Data :#302

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5670
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25973.00	88.01	-35.82	52.19	74.00	-21.81	peak		
2	*	25973.00	73.42	-35.82	37.60	54.00	-16.40	AVG		

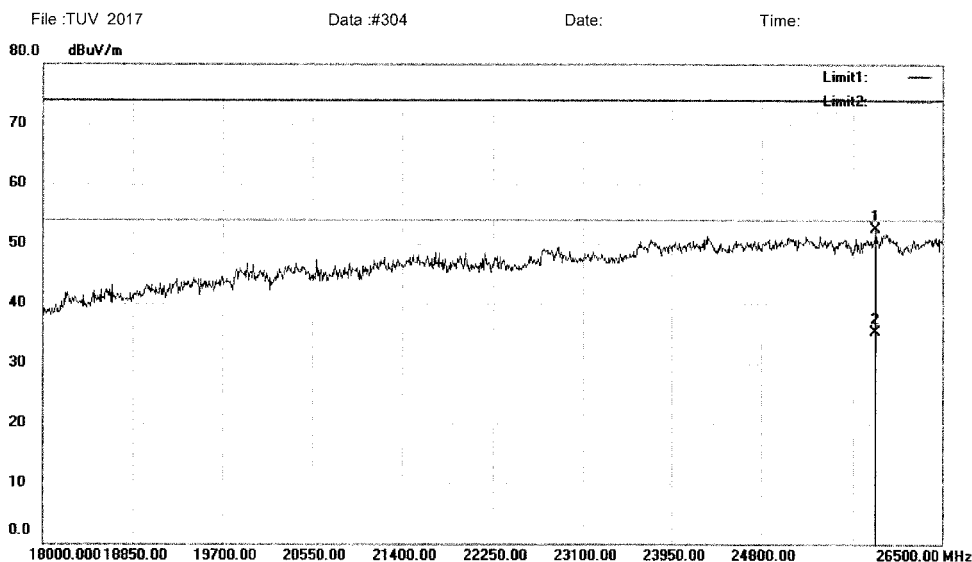
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017Data :#303

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25862.50	88.47	-35.96	52.51	74.00	-21.49	peak		
2	*	25862.50	71.26	-35.96	35.30	54.00	-18.70	AVG		

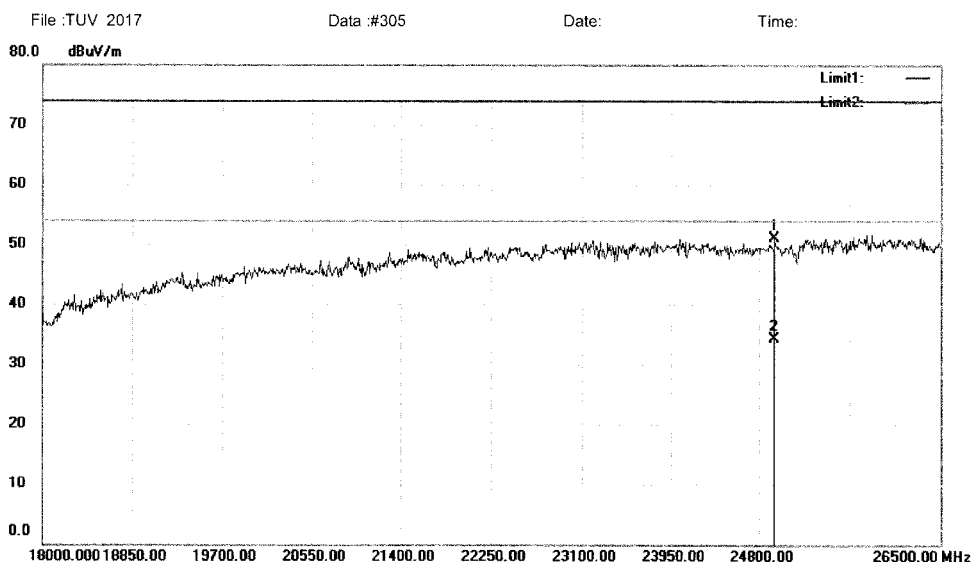
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #304

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24944.50	88.10	-37.02	51.08	74.00	-22.92	peak		
2	*	24944.50	71.32	-37.02	34.30	54.00	-19.70	AVG		

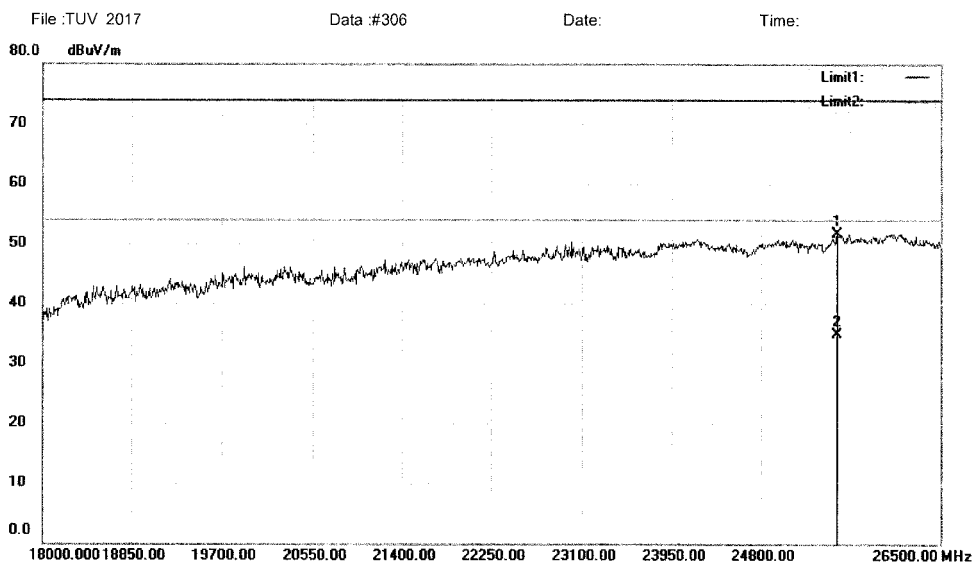
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #305

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25531.00	88.13	-36.36	51.77	74.00	-22.23	peak		
2	*	25531.00	71.26	-36.36	34.90	54.00	-19.10	AVG		

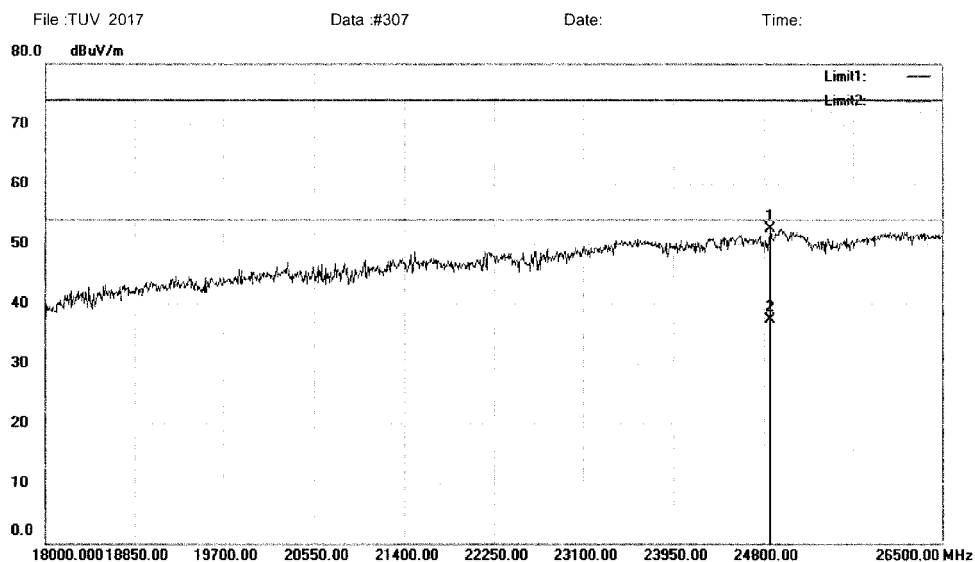
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#306

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24859.50	89.45	-37.03	52.42	74.00	-21.58	peak		
2	*	24859.50	74.43	-37.03	37.40	54.00	-16.60	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

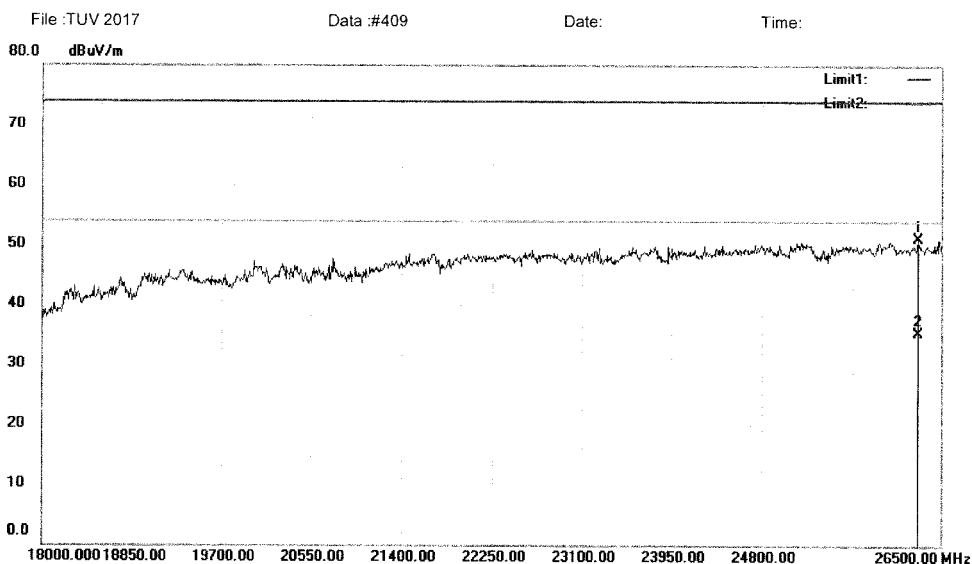
File :TUV 2017\Data :#307

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5180
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		26279.00	86.48	-35.45	51.03	74.00	-22.97	peak		
2	*	26279.00	70.75	-35.45	35.30	54.00	-18.70	AVG		

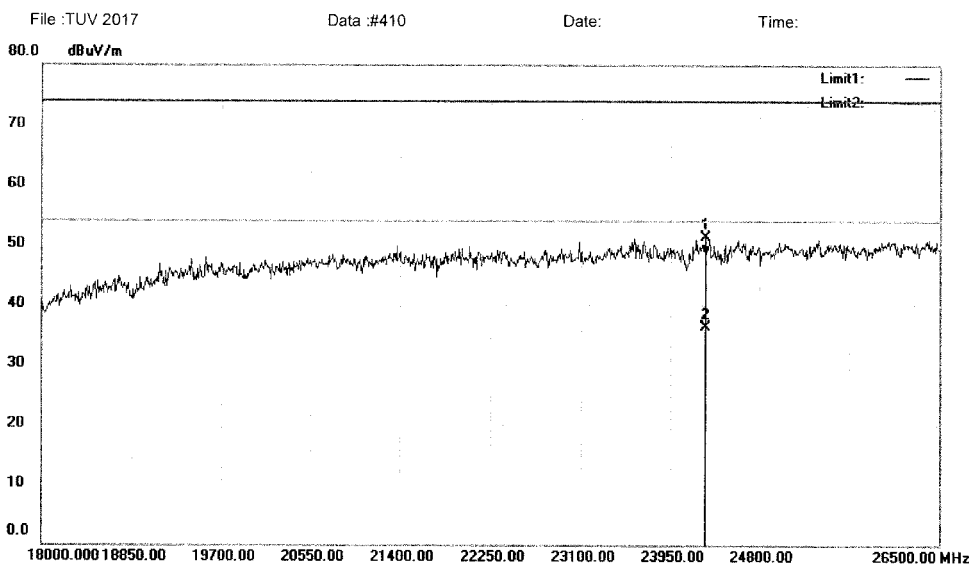
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#409

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24281.50	88.32	-37.10	51.22	74.00	-22.78	peak		
2	*	24281.50	73.50	-37.10	36.40	54.00	-17.60	AVG		

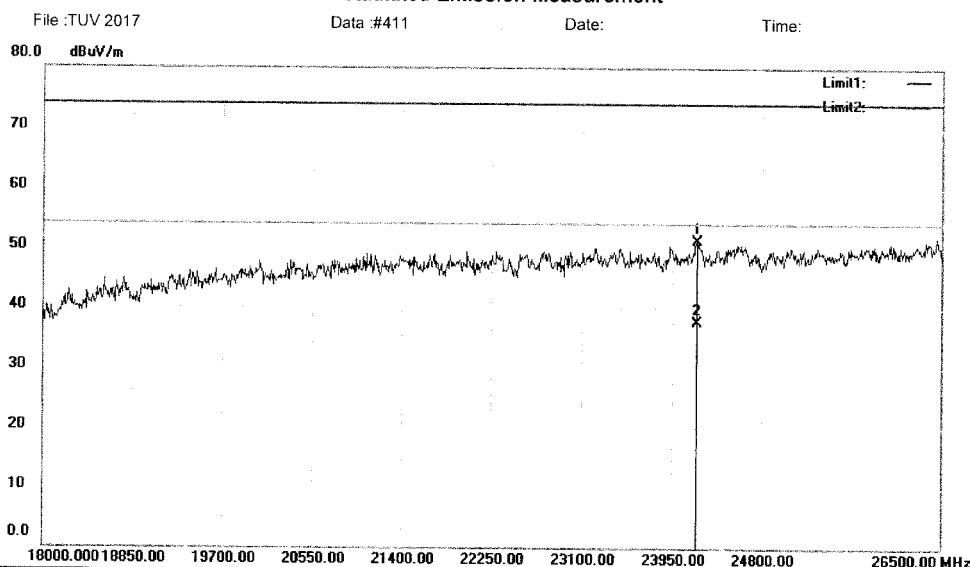
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#410

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24179.50	88.18	-37.11	51.07	74.00	-22.93	peak		
2	*	24179.50	74.61	-37.11	37.50	54.00	-16.50	AVG		

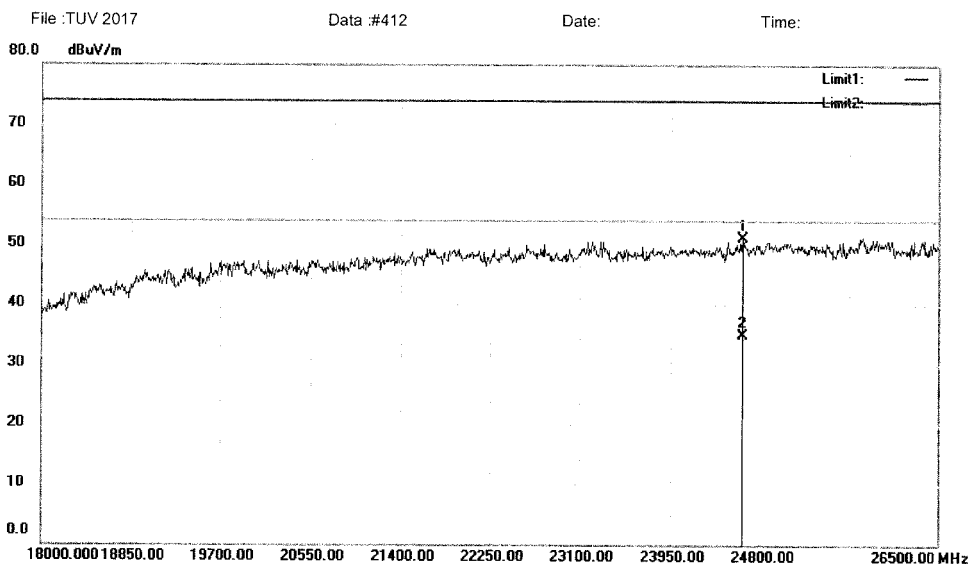
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017Data :#411

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5200
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24621.50	88.19	-37.06	51.13	74.00	-22.87	peak		
2	*	24621.50	71.96	-37.06	34.90	54.00	-19.10	AVG		

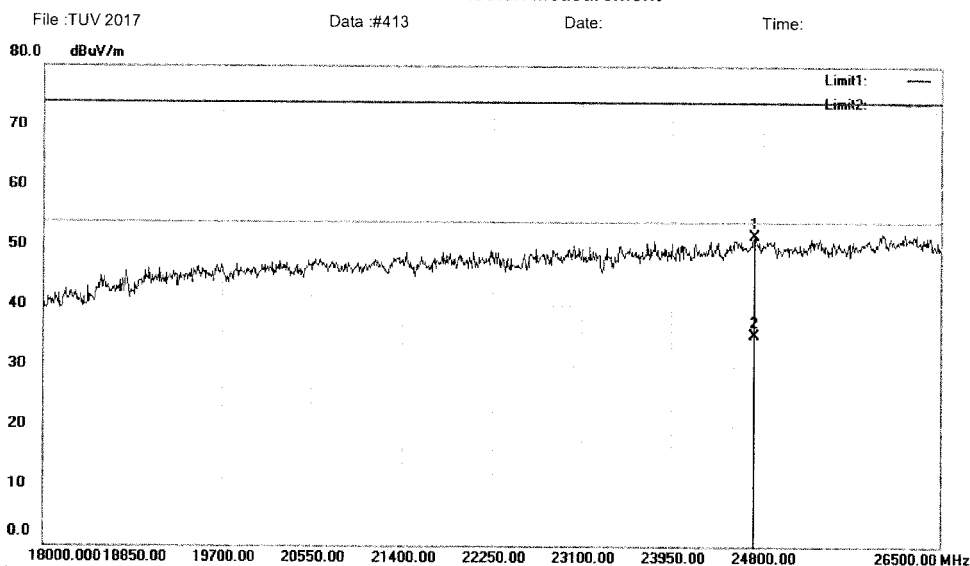
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017\Data : #412

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5240
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		24723.50	88.74	-37.04	51.70	74.00	-22.30	peak		
2	*	24723.50	72.14	-37.04	35.10	54.00	-18.90	AVG		

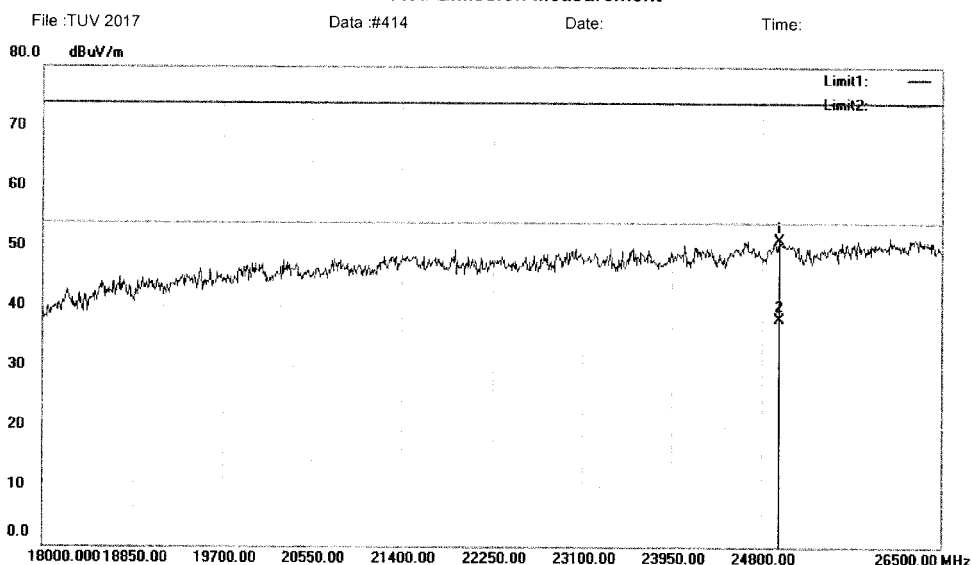
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #413

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5240
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24961.50	88.16	-37.01	51.15	74.00	-22.85	peak		
2	*	24961.50	74.91	-37.01	37.90	54.00	-16.10	AVG		

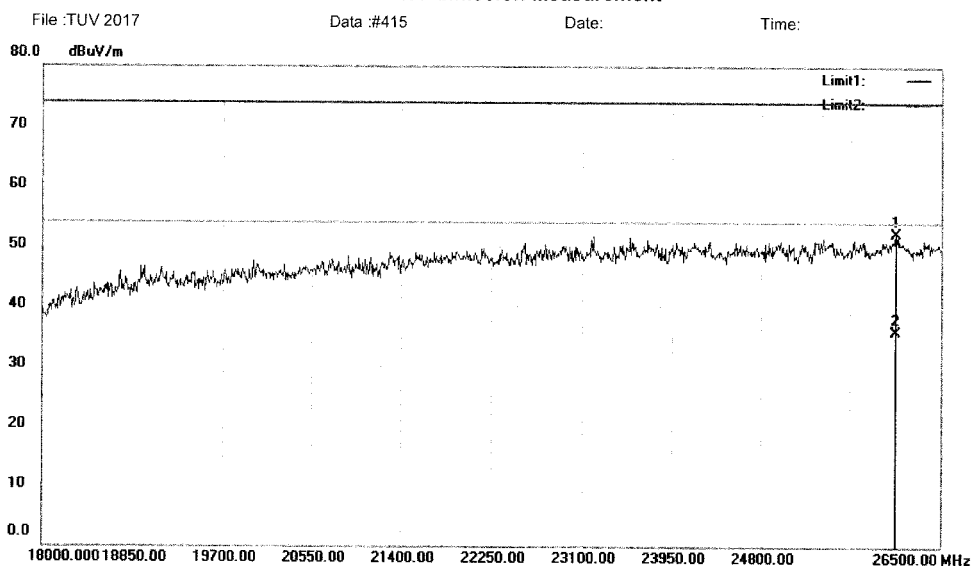
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#414

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5260
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		26075.00	87.74	-35.70	52.04	74.00	-21.96	peak		
2	*	26075.00	71.40	-35.70	35.70	54.00	-18.30	AVG		

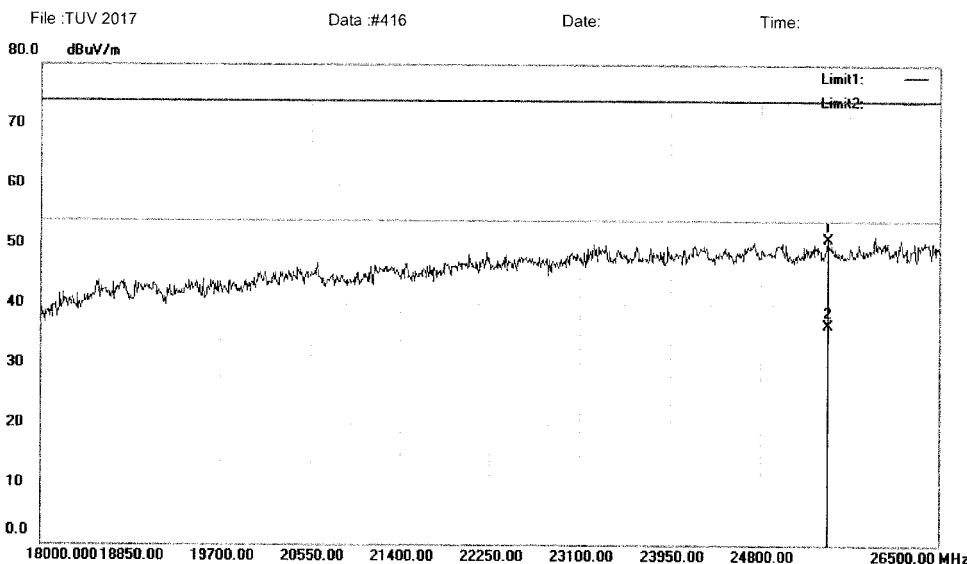
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#415

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5260
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25446.00	87.41	-36.47	50.94	74.00	-23.06	peak		
2	*	25446.00	73.07	-36.47	36.60	54.00	-17.40	AVG		

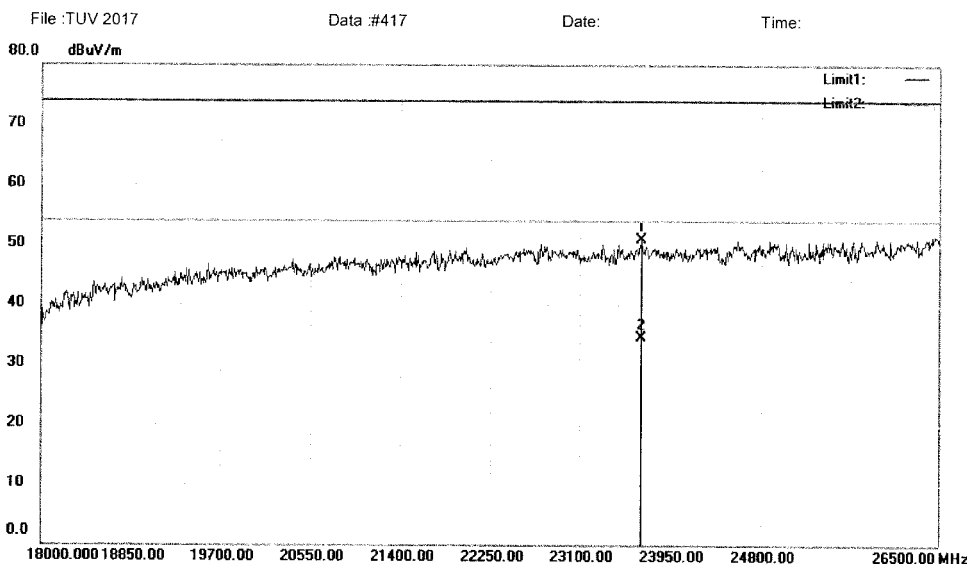
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017 Data : #416

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5280
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23686.50	88.38	-37.46	50.92	74.00	-23.08	peak		
2	*	23686.50	72.06	-37.46	34.60	54.00	-19.40	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

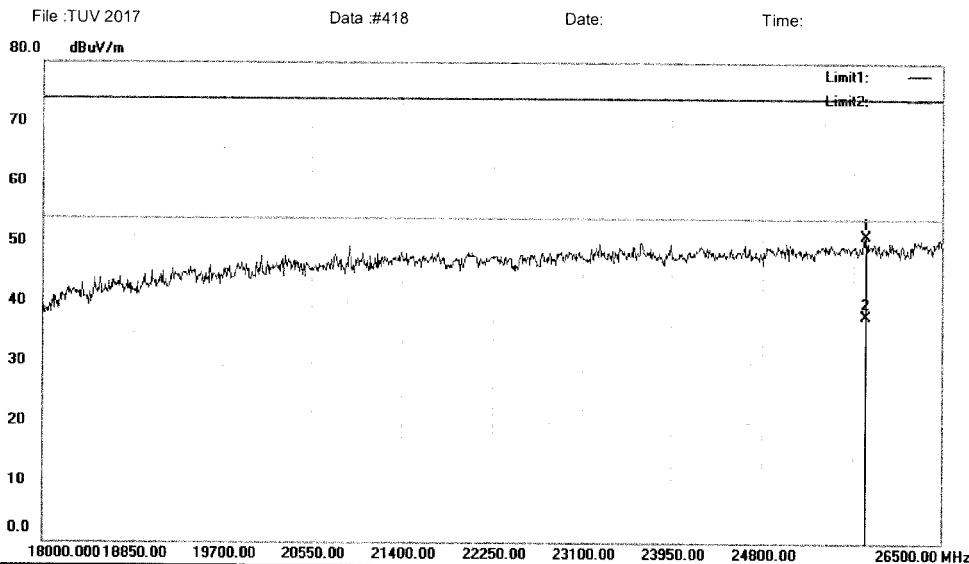
File: TUV 2017\Data: #417

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5280
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		25769.00	87.17	-36.07	51.10	74.00	-22.90	peak		
2	*	25769.00	73.87	-36.07	37.80	54.00	-16.20	AVG		

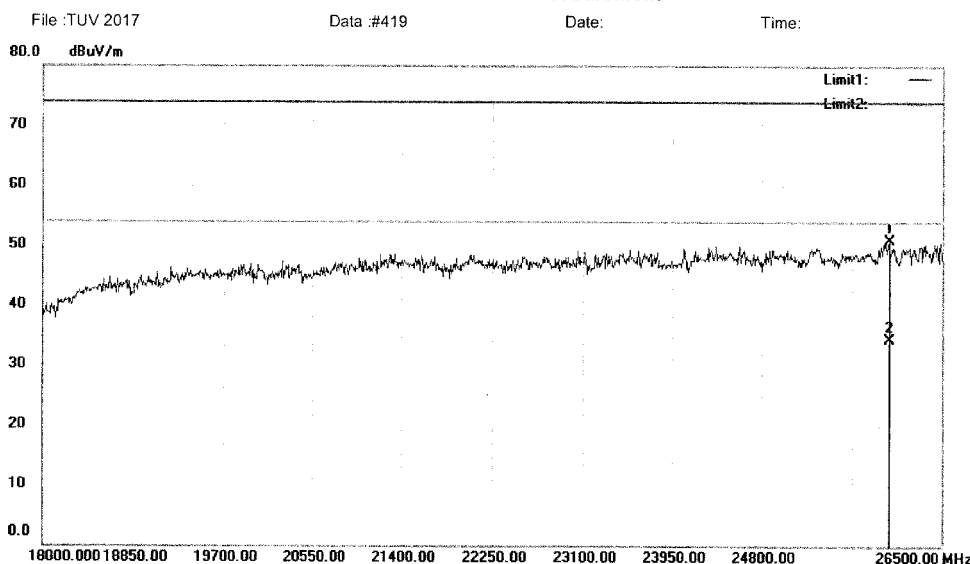
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #418

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5320
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25990.00	86.70	-35.80	50.90	74.00	-23.10	peak		
2	*	25990.00	70.20	-35.80	34.40	54.00	-19.60	AVG		

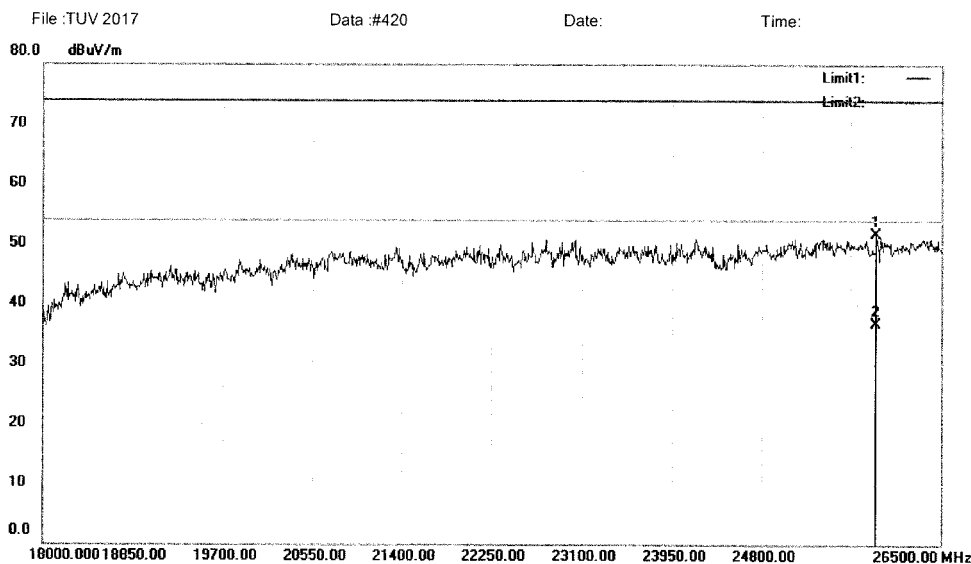
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017\Data : #419

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5320
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25896.50	87.54	-35.92	51.62	74.00	-22.38	peak		
2	*	25896.50	72.72	-35.92	36.80	54.00	-17.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

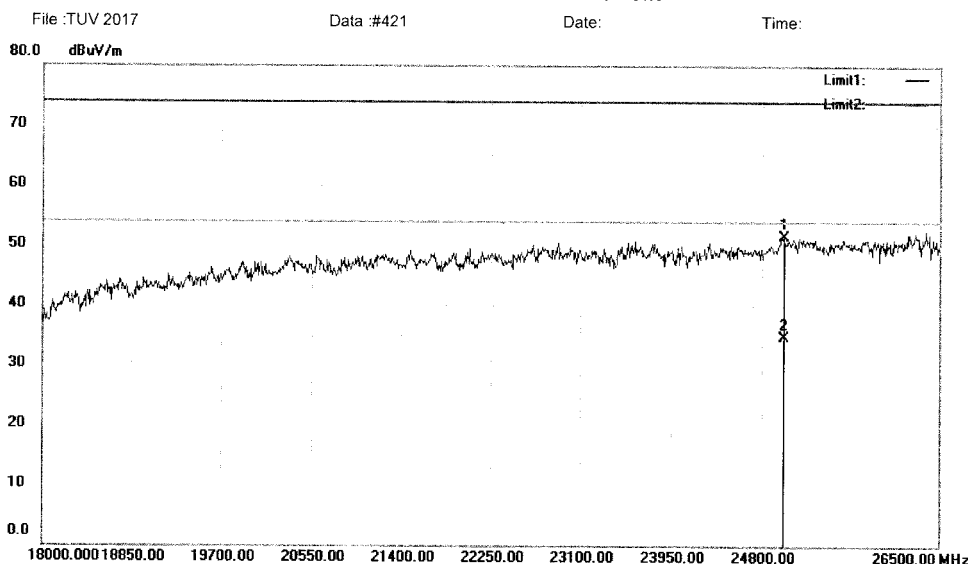
File :TUV 2017\Data :#420

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5500
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25004.00	88.59	-37.01	51.58	74.00	-22.42	peak		
2	*	25004.00	71.81	-37.01	34.80	54.00	-19.20	AVG		

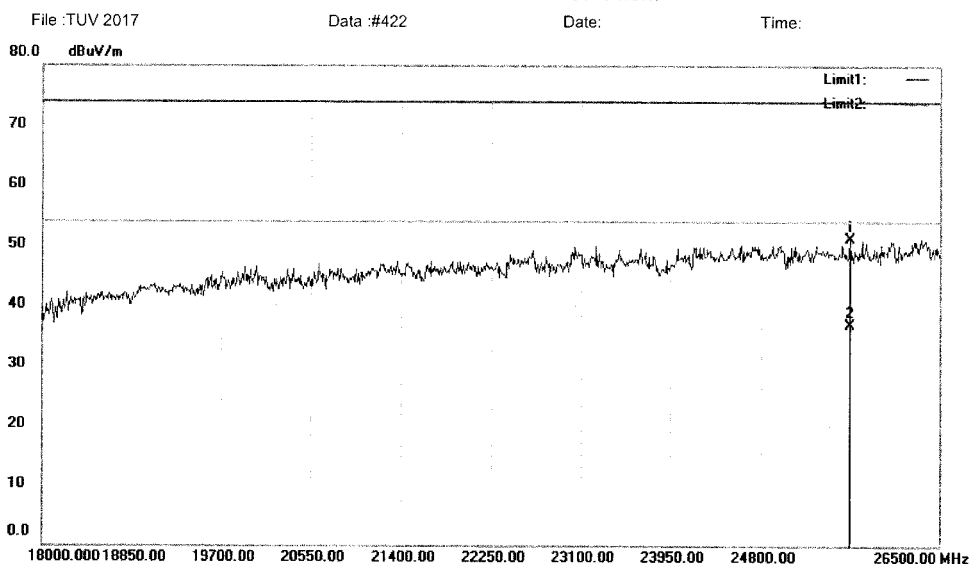
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#421

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5500
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		25633.00	87.32	-36.24	51.08	74.00	-22.92	peak		
2	*	25633.00	72.94	-36.24	36.70	54.00	-17.30	AVG		

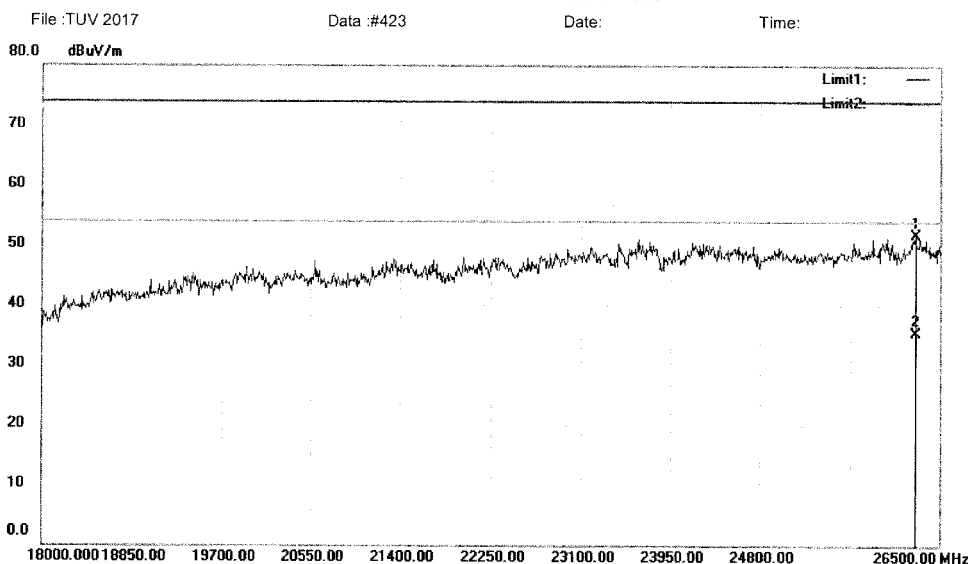
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #422

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5600
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		26262.00	87.11	-35.47	51.64	74.00	-22.36	peak		
2	*	26262.00	70.77	-35.47	35.30	54.00	-18.70	AVG		

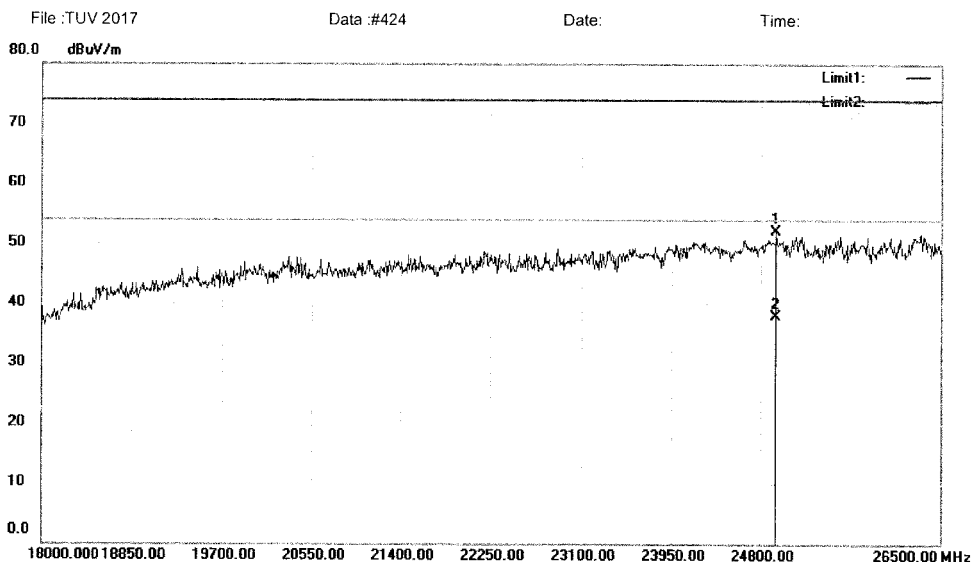
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#423

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5600
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24944.50	89.10	-37.02	52.08	74.00	-21.92	peak		
2	*	24944.50	74.92	-37.02	37.90	54.00	-16.10	AVG		

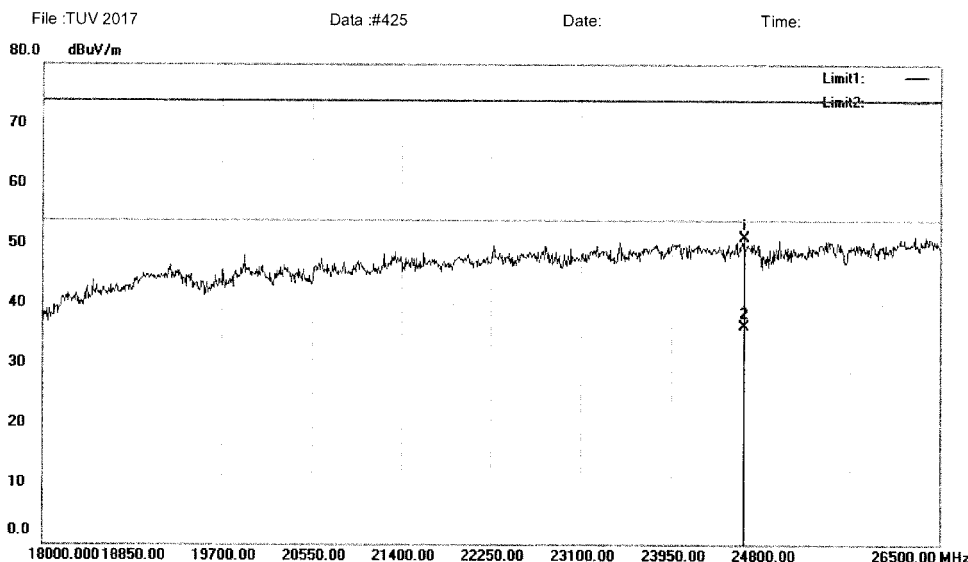
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #424

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24630.00	88.11	-37.05	51.06	74.00	-22.94	peak		
2	*	24630.00	73.45	-37.05	36.40	54.00	-17.60	AVG		

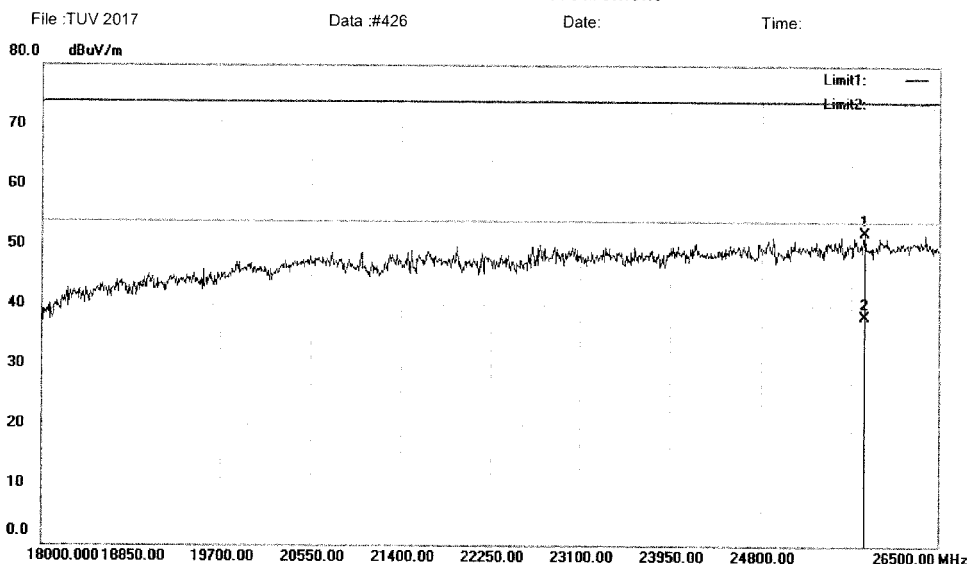
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #425

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5700
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25777.50	88.08	-36.06	52.02	74.00	-21.98	peak		
2	*	25777.50	74.26	-36.06	38.20	54.00	-15.80	AVG		

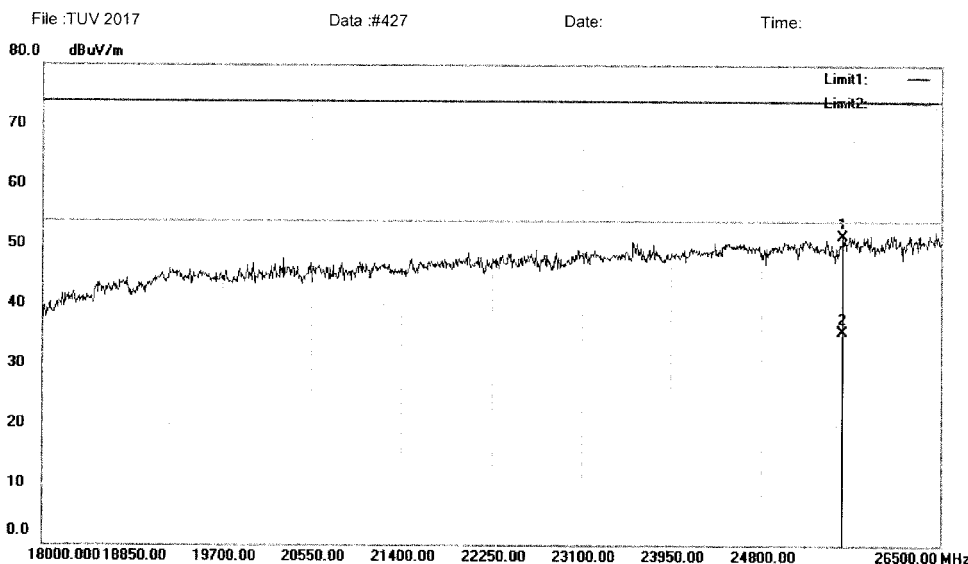
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#426

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25556.50	87.80	-36.33	51.47	74.00	-22.53	peak		
2	*	25556.50	71.83	-36.33	35.50	54.00	-18.50	AVG		

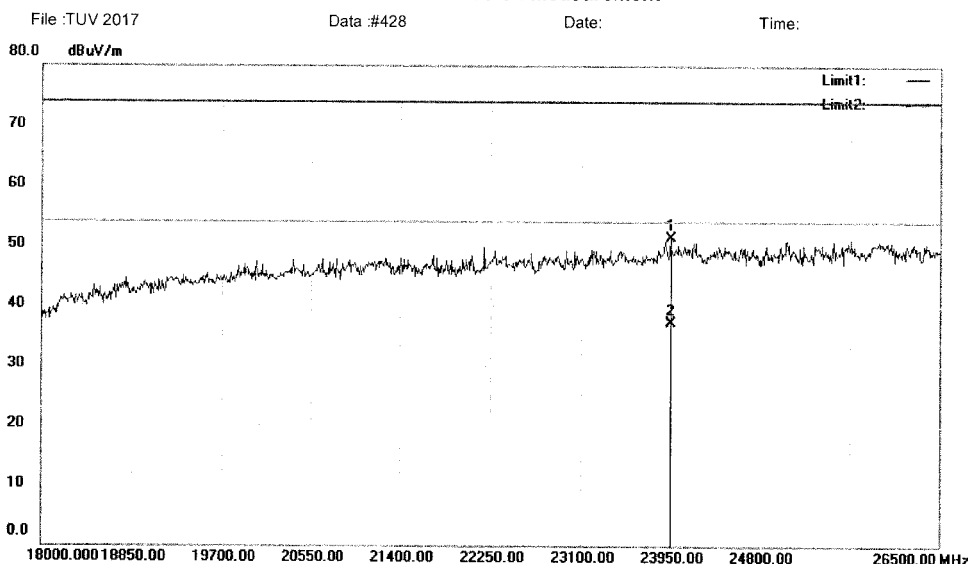
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#427

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5745
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23950.00	88.58	-37.18	51.40	74.00	-22.60	peak		
2	*	23950.00	74.28	-37.18	37.10	54.00	-16.90	AVG		

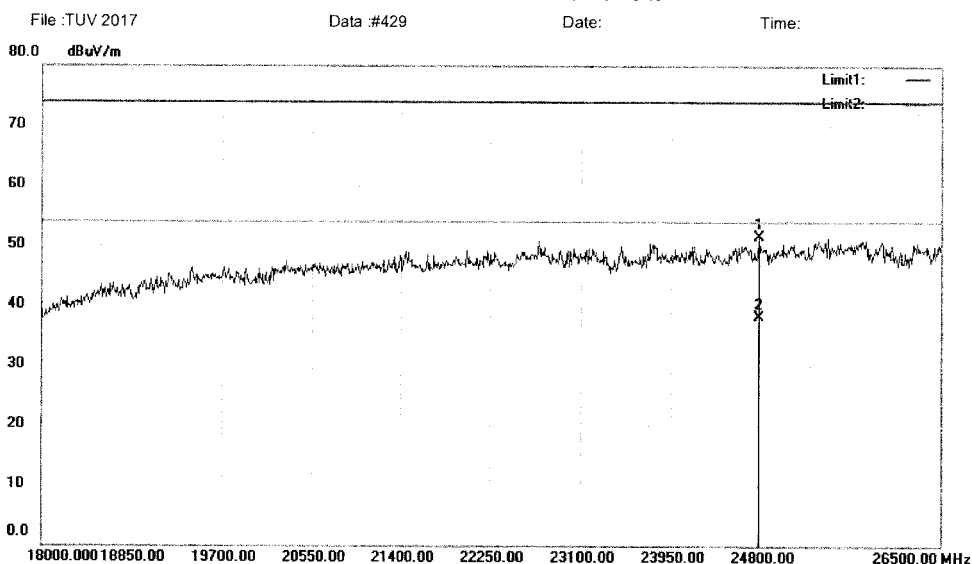
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #428

Page: 1

Shenzhen EMIK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5785
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24783.00	88.47	-37.04	51.43	74.00	-22.57	peak		
2	*	24783.00	75.24	-37.04	38.20	54.00	-15.80	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

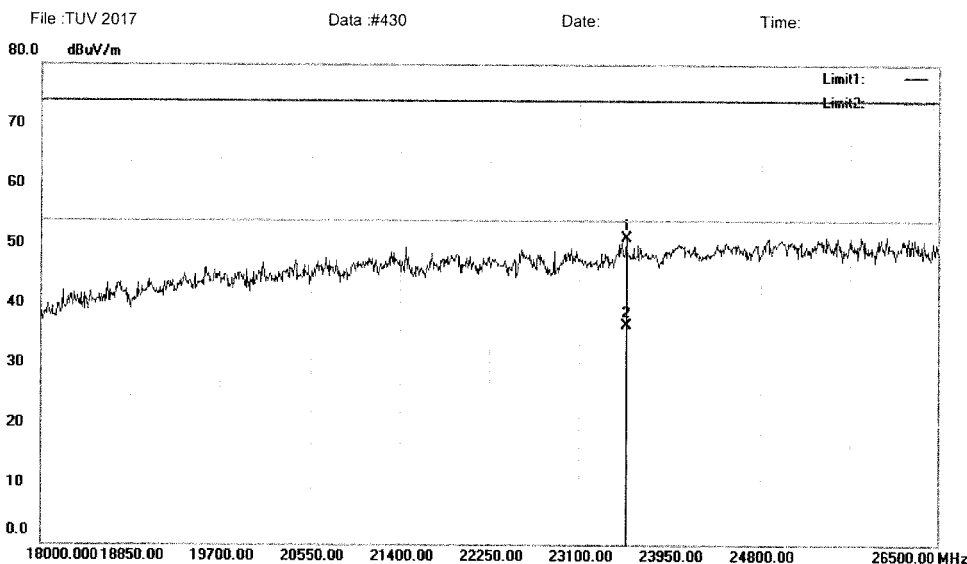
File: TUV 2017\Data: #429

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5785
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		23542.00	88.66	-37.61	51.05	74.00	-22.95	peak		
2	*	23542.00	74.21	-37.61	36.60	54.00	-17.40	AVG		

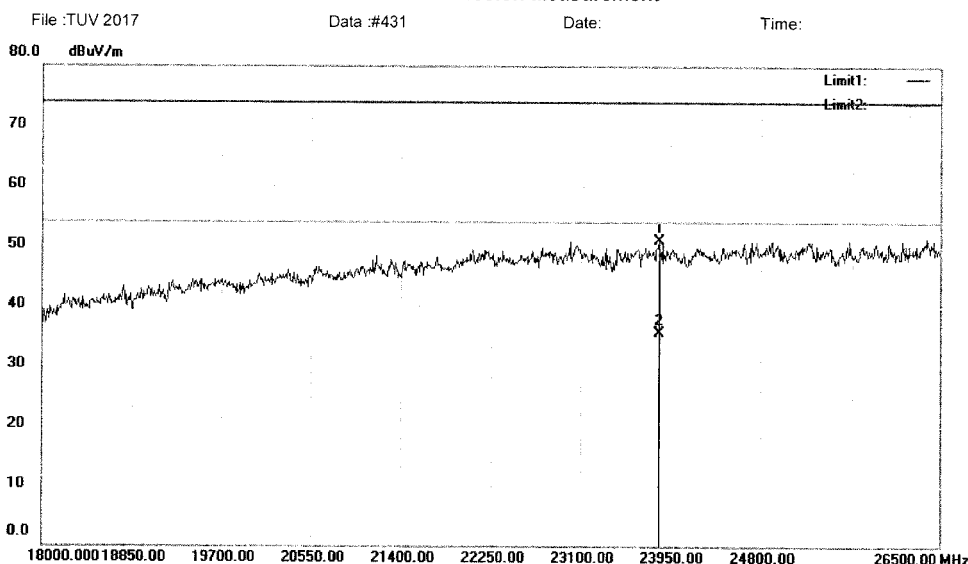
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017 Data: #430

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5825
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23848.00	88.29	-37.29	51.00	74.00	-23.00	peak		
2	*	23848.00	72.79	-37.29	35.50	54.00	-18.50	AVG		

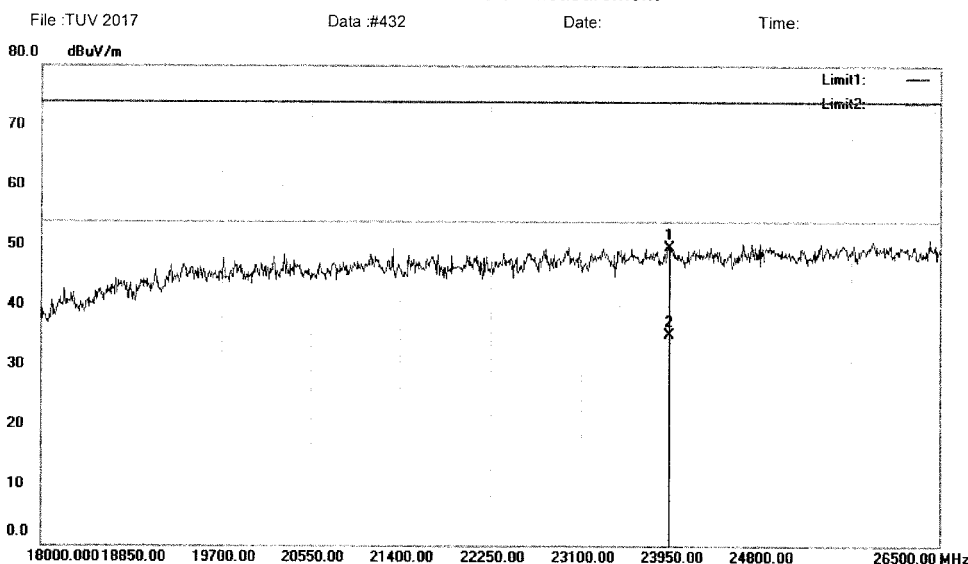
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#431

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac20 5825
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		23941.50	86.96	-37.19	49.77	74.00	-24.23	peak		
2	*	23941.50	72.39	-37.19	35.20	54.00	-18.80	AVG		

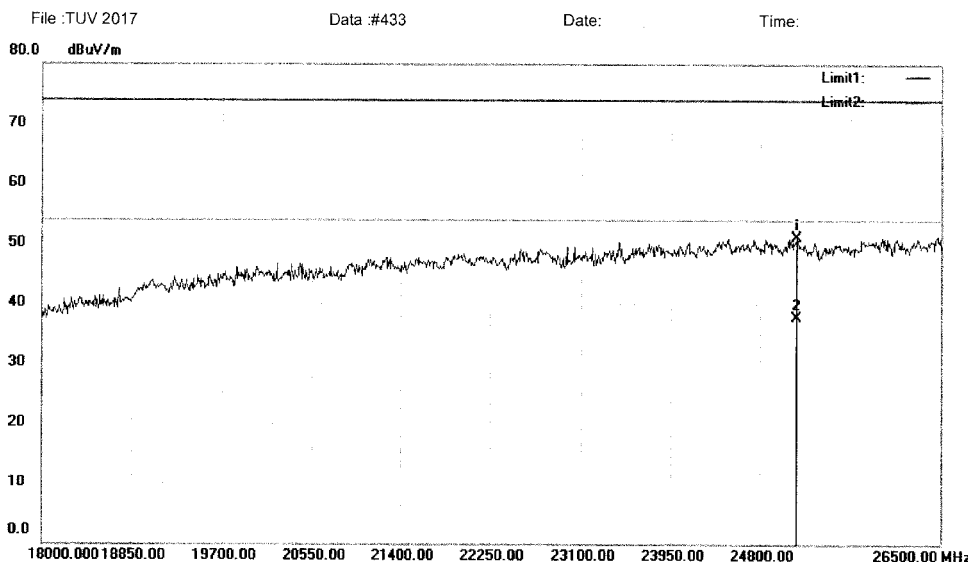
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #432

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25148.50	87.94	-36.83	51.11	74.00	-22.89	peak		
2	*	25148.50	74.63	-36.83	37.80	54.00	-16.20	AVG		

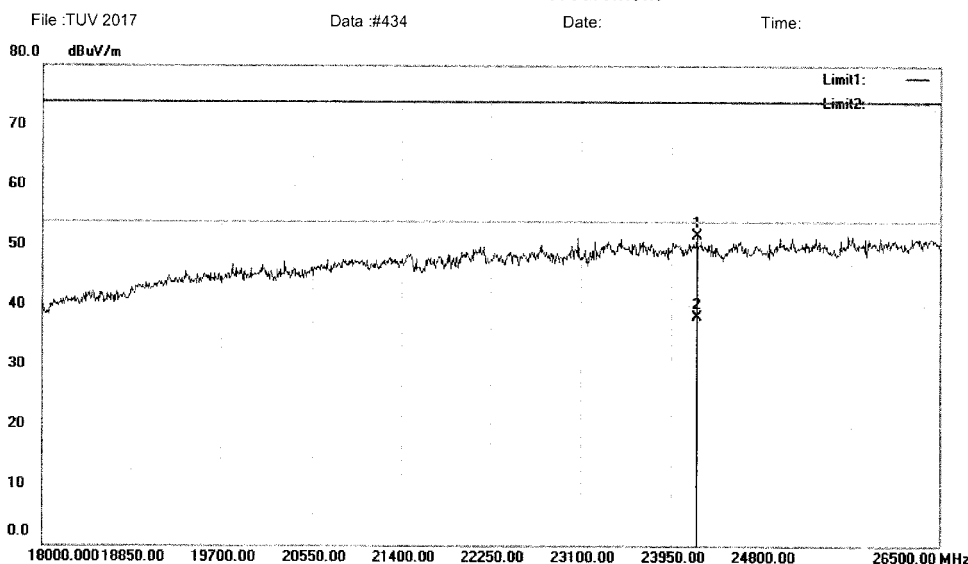
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#433

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24188.00	88.82	-37.11	51.71	74.00	-22.29	peak		
2	*	24188.00	75.31	-37.11	38.20	54.00	-15.80	AVG		

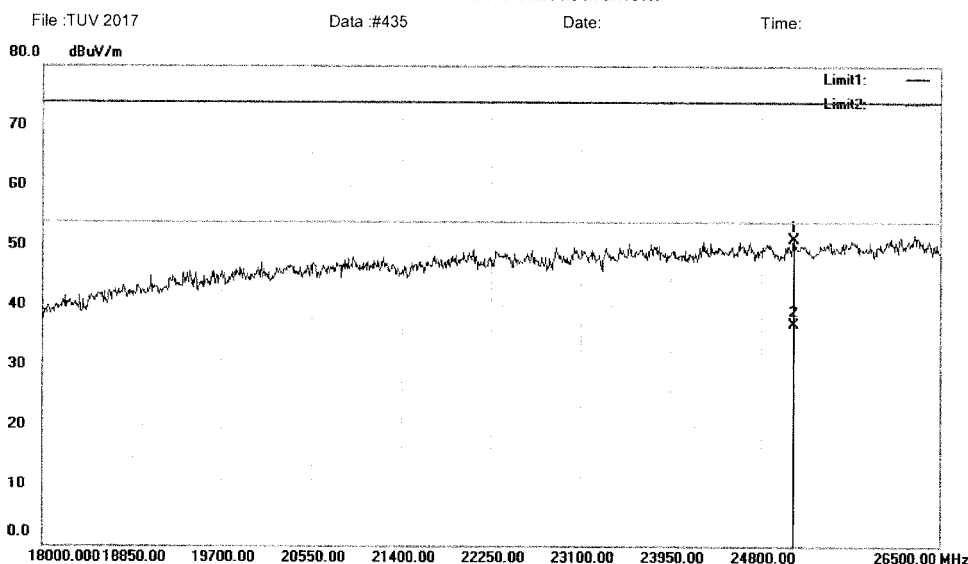
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #434

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25097.50	87.97	-36.89	51.08	74.00	-22.92	peak		
2	*	25097.50	73.79	-36.89	36.90	54.00	-17.10	AVG		

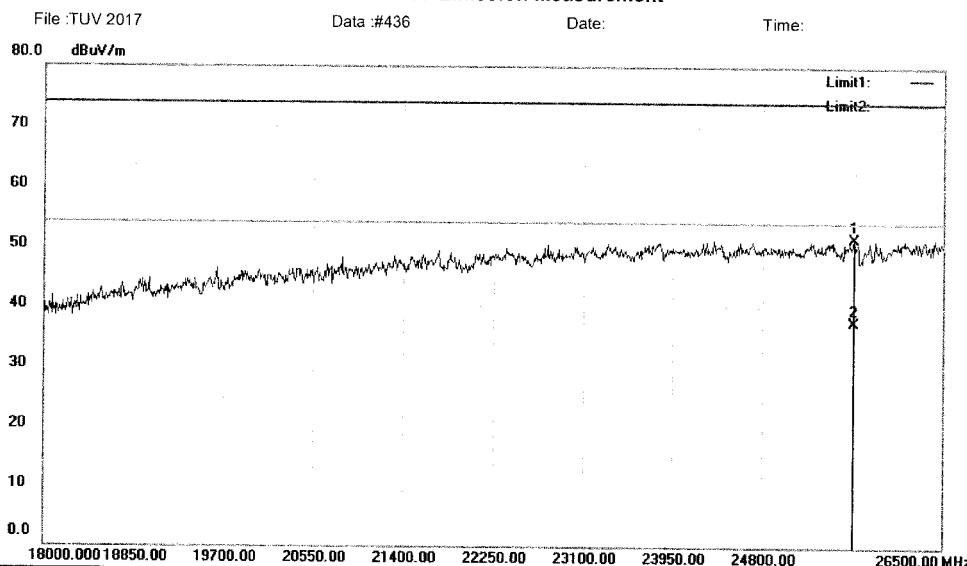
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #435

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25641.50	87.48	-36.23	51.25	74.00	-22.75	peak		
2	*	25641.50	73.63	-36.23	37.40	54.00	-16.60	AVG		

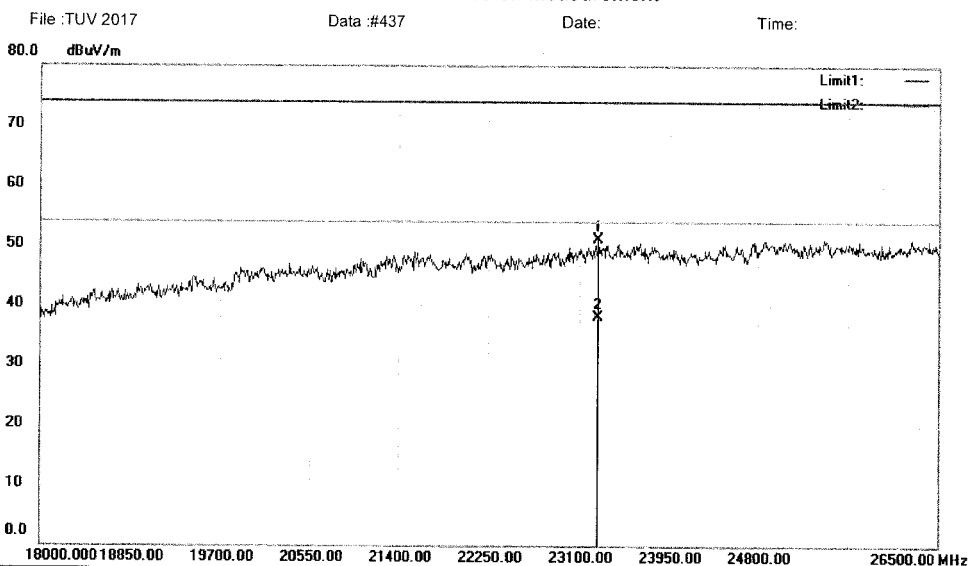
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017>Data :#436

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5270
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23278.50	89.08	-37.89	51.19	74.00	-22.81	peak		
2	*	23278.50	76.09	-37.89	38.20	54.00	-15.80	AVG		

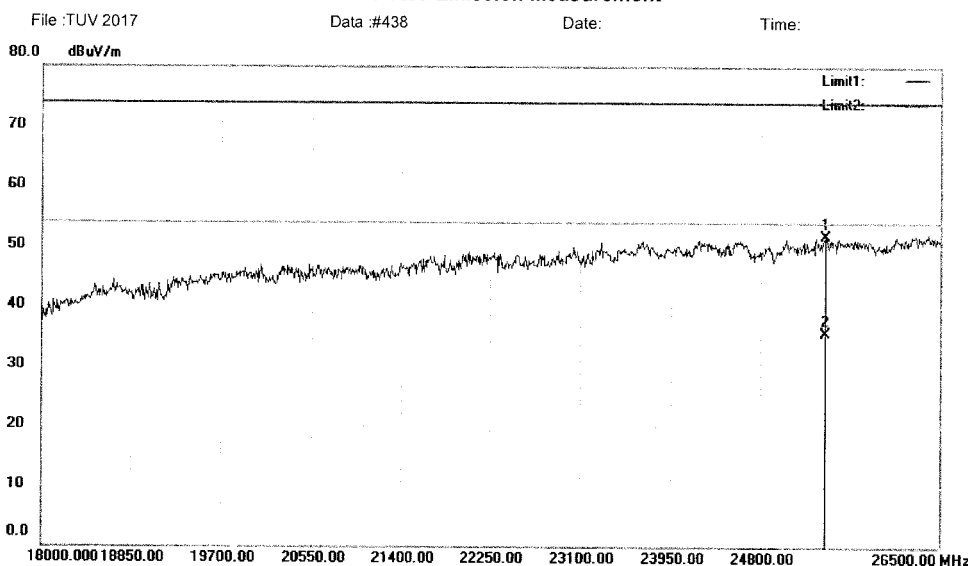
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#437

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5270
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25420.50	88.15	-36.50	51.65	74.00	-22.35	peak		
2	*	25420.50	72.00	-36.50	35.50	54.00	-18.50	AVG		

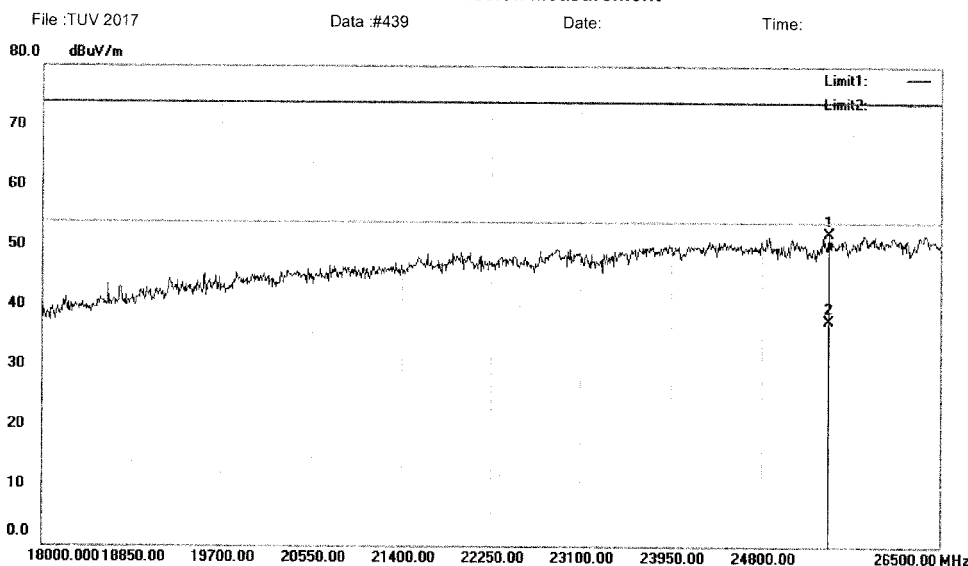
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017>Data: #438

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25429.00	88.58	-36.49	52.09	74.00	-21.91	peak		
2	*	25429.00	74.09	-36.49	37.60	54.00	-16.40	AVG		

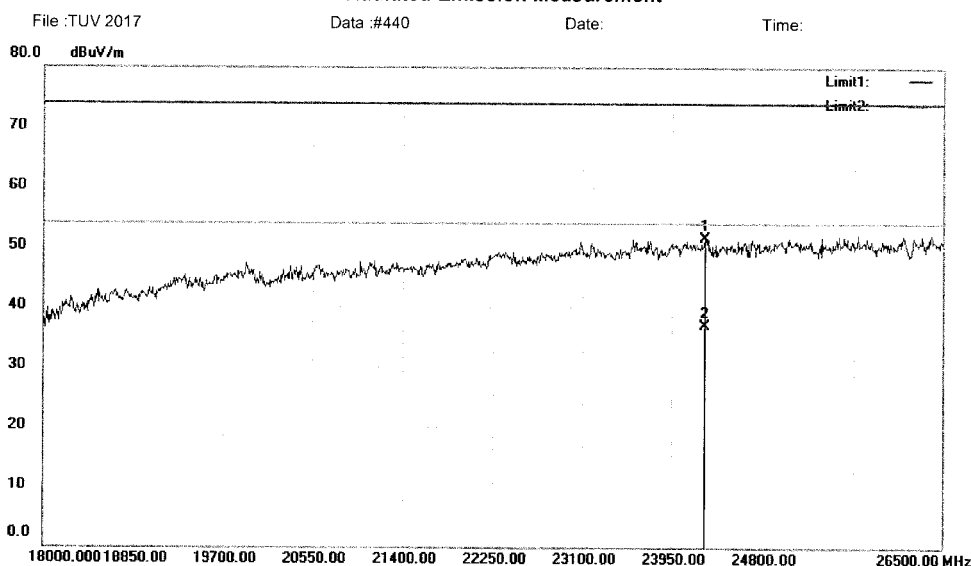
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017 Data: #439

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5310
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24256.00	88.52	-37.10	51.42	74.00	-22.58	peak		
2	*	24256.00	74.00	-37.10	36.90	54.00	-17.10	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

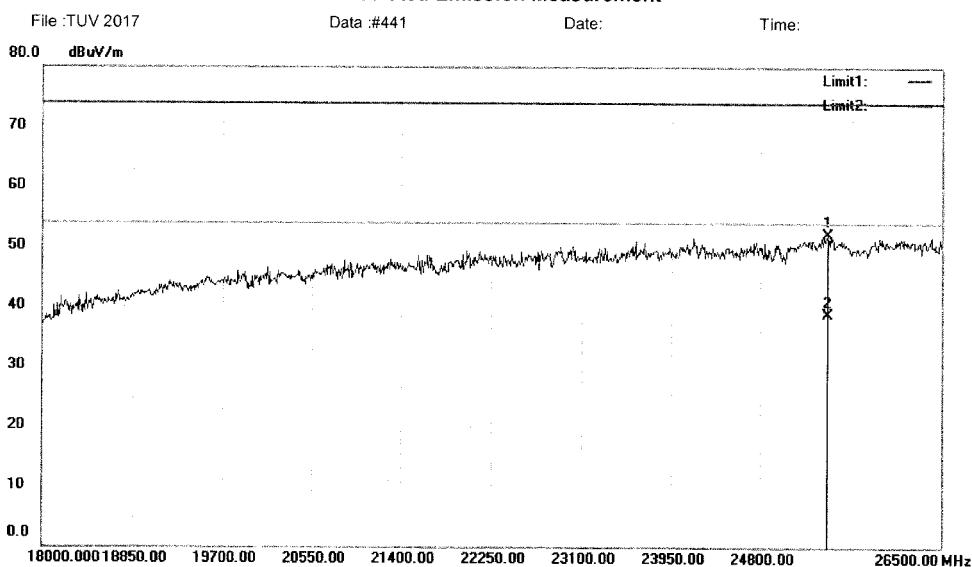
File :TUV 2017\Data :#440

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac40 5510
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25429.00	88.64	-36.49	52.15	74.00	-21.85	peak		
2	*	25429.00	75.29	-36.49	38.80	54.00	-15.20	AVG		

*:Maximum data x:Over limit !:over margin

Operator: KK

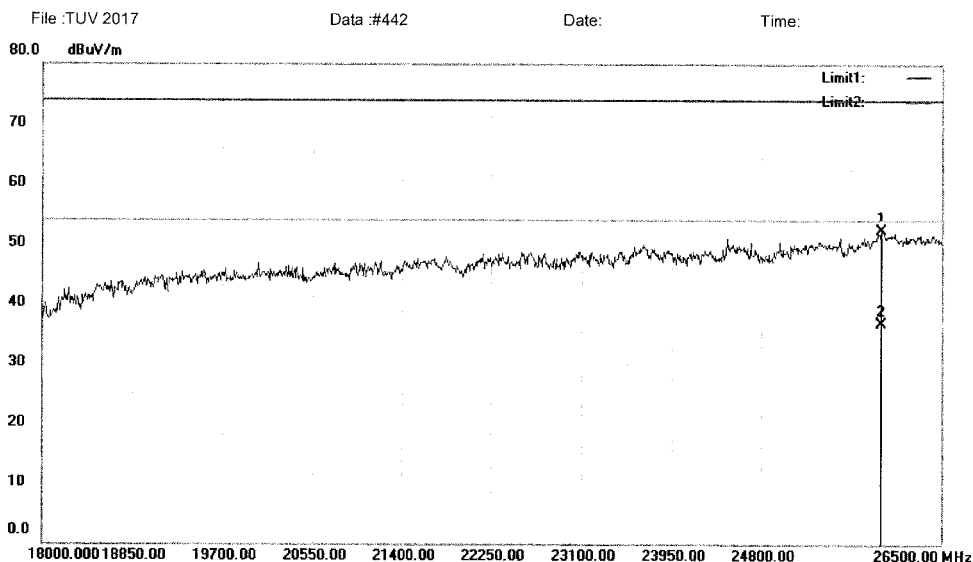
File: TUV 2017\Data: #441

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode:11ac40 5510
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25939.00	88.19	-35.86	52.33	74.00	-21.67	peak		
2	*	25939.00	72.66	-35.86	36.80	54.00	-17.20	AVG		

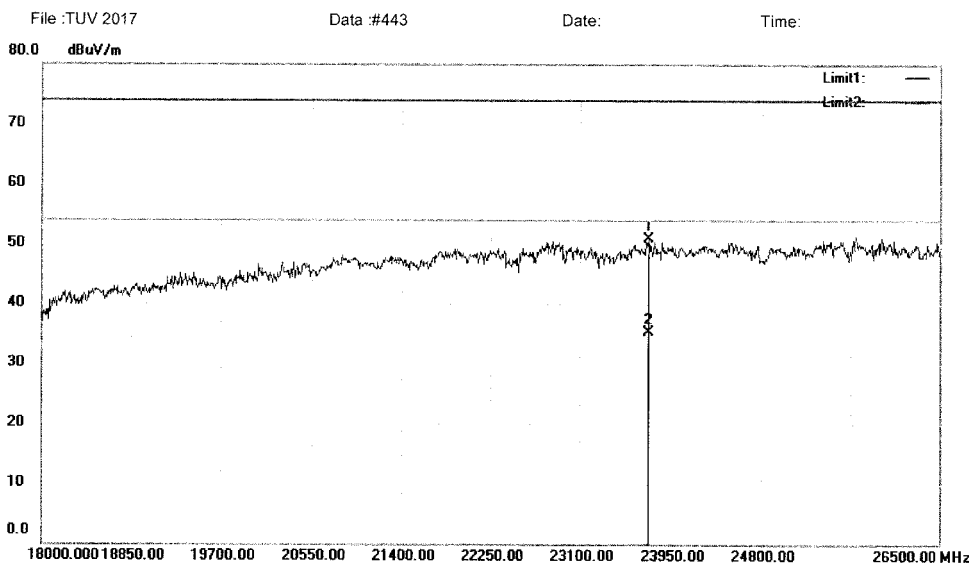
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#442

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5590
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		23737.50	88.23	-37.41	50.82	74.00	-23.18	peak		
2	*	23737.50	72.71	-37.41	35.30	54.00	-18.70	AVG		

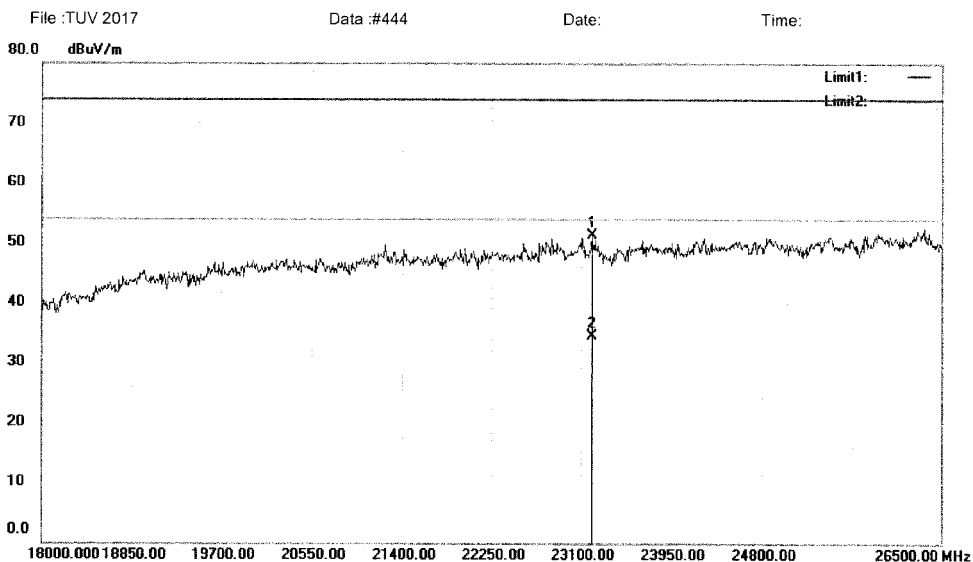
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#443

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5590
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23202.00	89.26	-37.97	51.29	74.00	-22.71	peak		
2	*	23202.00	72.57	-37.97	34.60	54.00	-19.40	AVG		

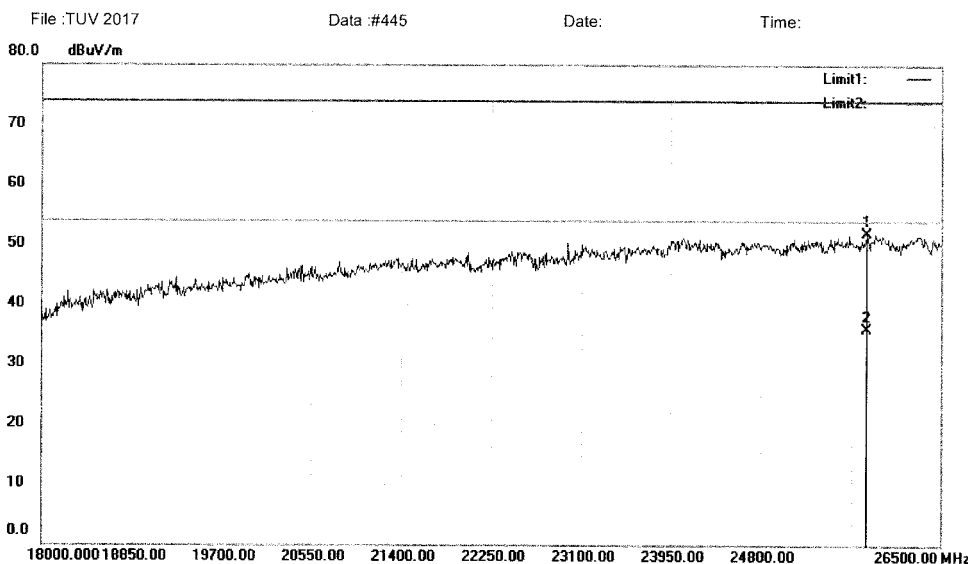
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#444

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5670
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25794.50	87.94	-36.04	51.90	74.00	-22.10	peak		
2	*	25794.50	71.94	-36.04	35.90	54.00	-18.10	AVG		

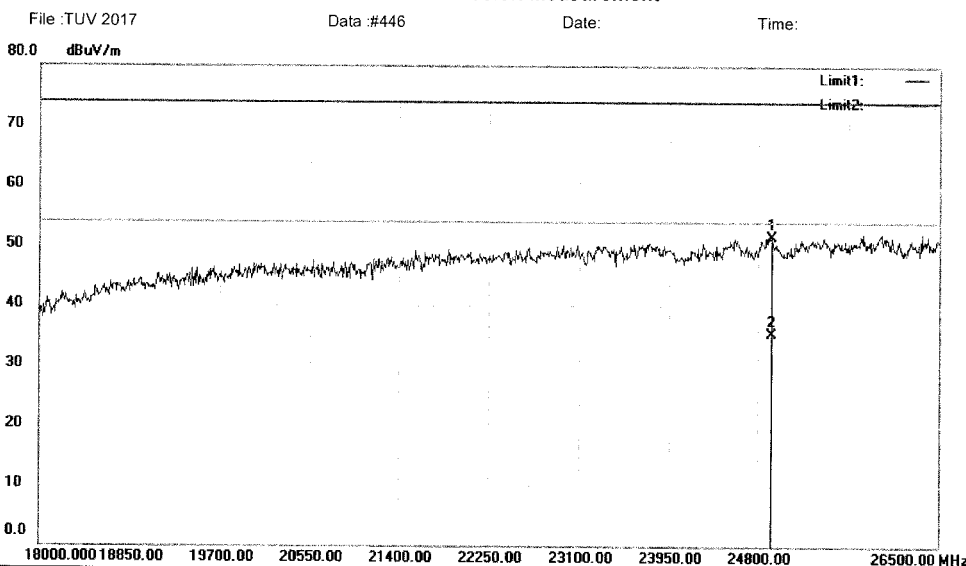
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#445

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5670
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		24927.50	88.44	-37.02	51.42	74.00	-22.58	peak		
2	*	24927.50	72.42	-37.02	35.40	54.00	-18.60	AVG		

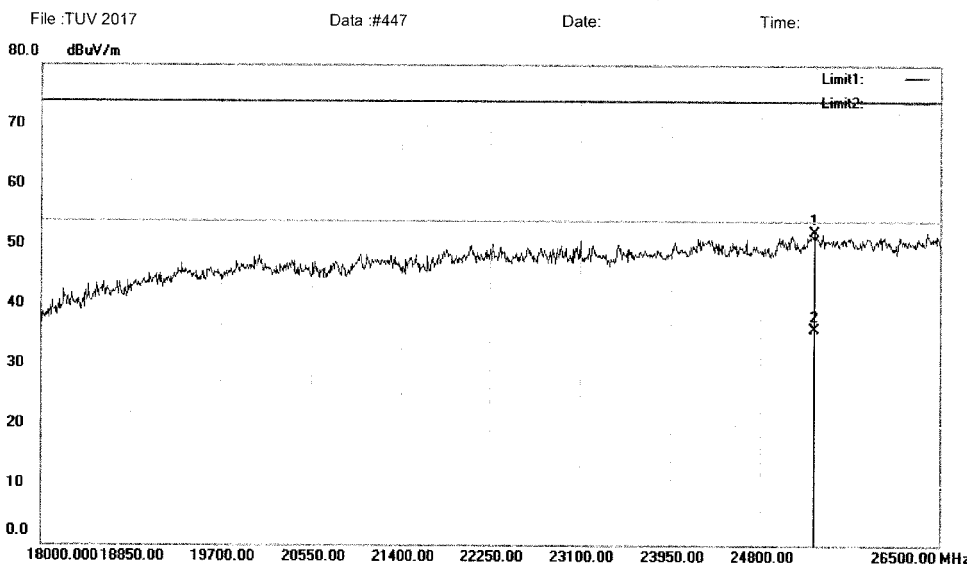
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#446

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5755
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		25318.50	88.71	-36.62	52.09	74.00	-21.91	peak		
2	*	25318.50	72.52	-36.62	35.90	54.00	-18.10	AVG		

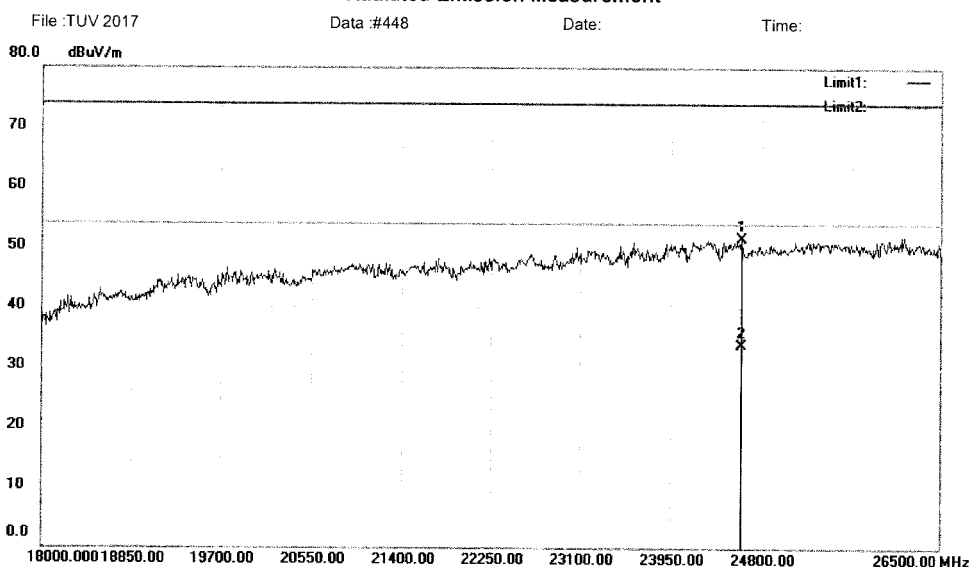
*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV 2017\Data : #447

Page: 1

Shenzhen EMTek Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site: 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5755
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24613.00	88.61	-37.06	51.55	74.00	-22.45	peak		
2	*	24613.00	70.86	-37.06	33.80	54.00	-20.20	AVG		

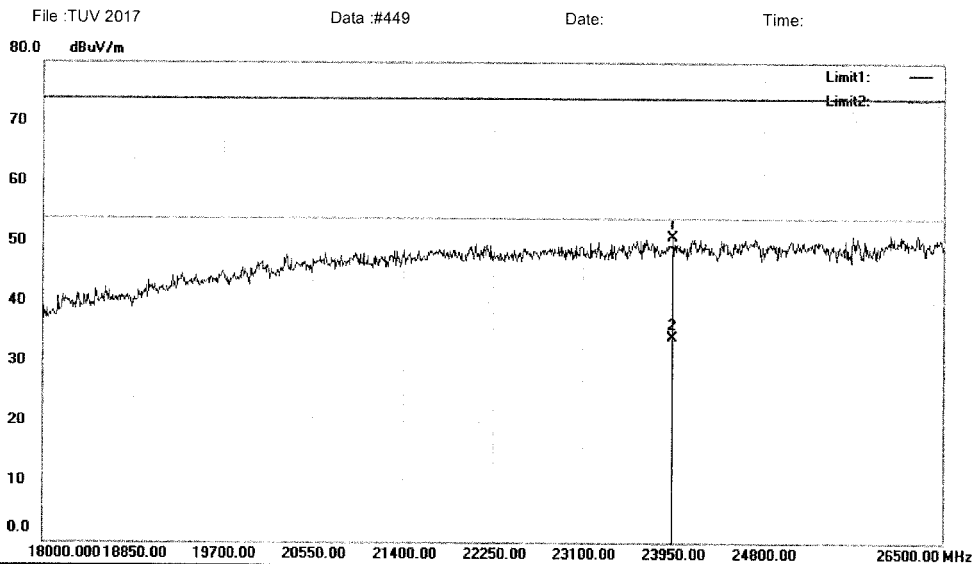
*: Maximum data x: Over limit !: over margin

Operator: KK

File: TUV 2017>Data: #448

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23958.50	88.09	-37.17	50.92	74.00	-23.08	peak		
2	*	23958.50	71.27	-37.17	34.10	54.00	-19.90	AVG		

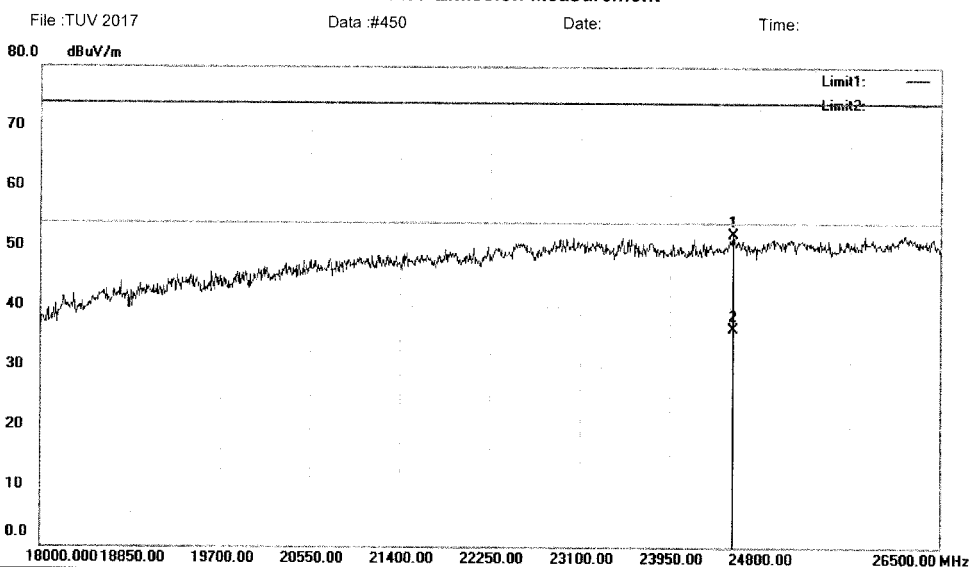
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017Data :#449

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5795
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24553.50	89.17	-37.06	52.11	74.00	-21.89	peak		
2	*	24553.50	73.46	-37.06	36.40	54.00	-17.60	AVG		

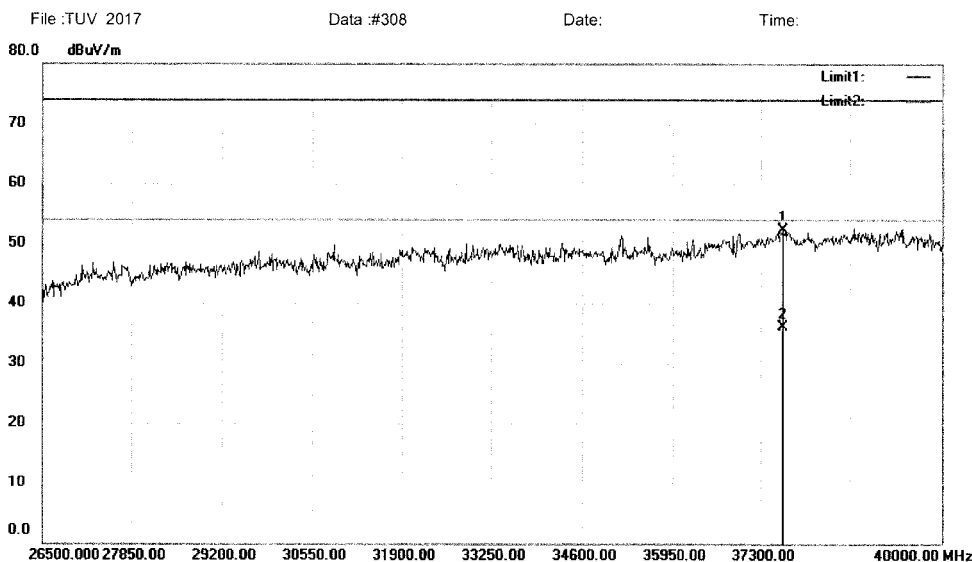
*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV 2017\Data: #450

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		37624.00	88.92	-36.63	52.29	74.00	-21.71	peak		
2	*	37624.00	72.73	-36.63	36.10	54.00	-17.90	AVG		

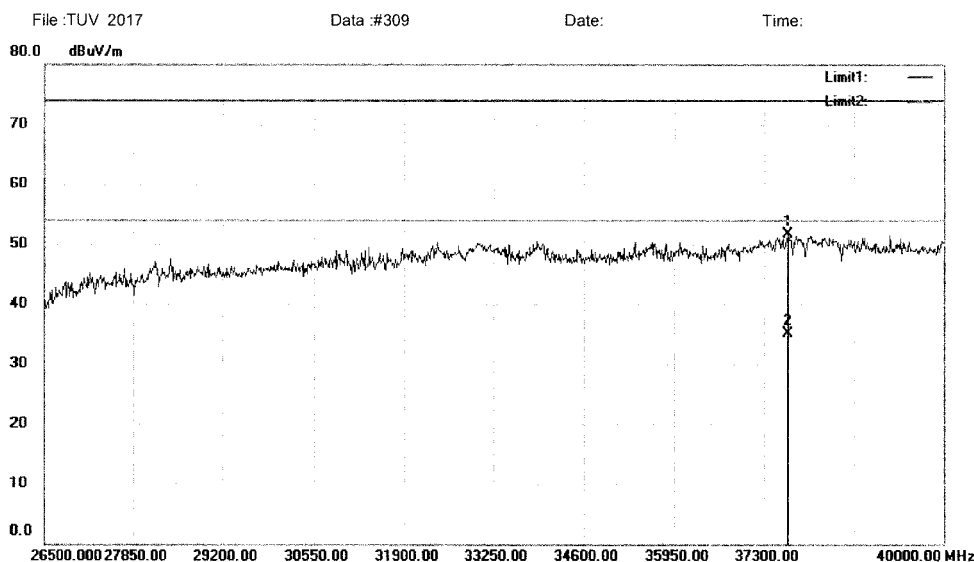
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#308

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		37651.00	88.28	-36.61	51.67	74.00	-22.33	peak		
2	*	37651.00	71.81	-36.61	35.20	54.00	-18.80	AVG		

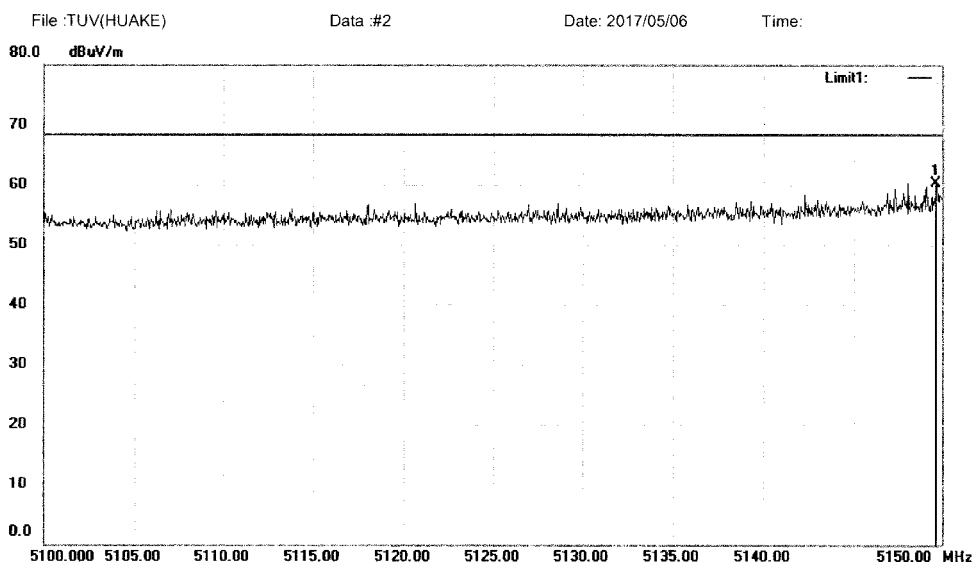
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV 2017\Data :#309

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11a(5180MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5149.650	59.45	0.82	60.27	68.23	-7.96	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#2

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

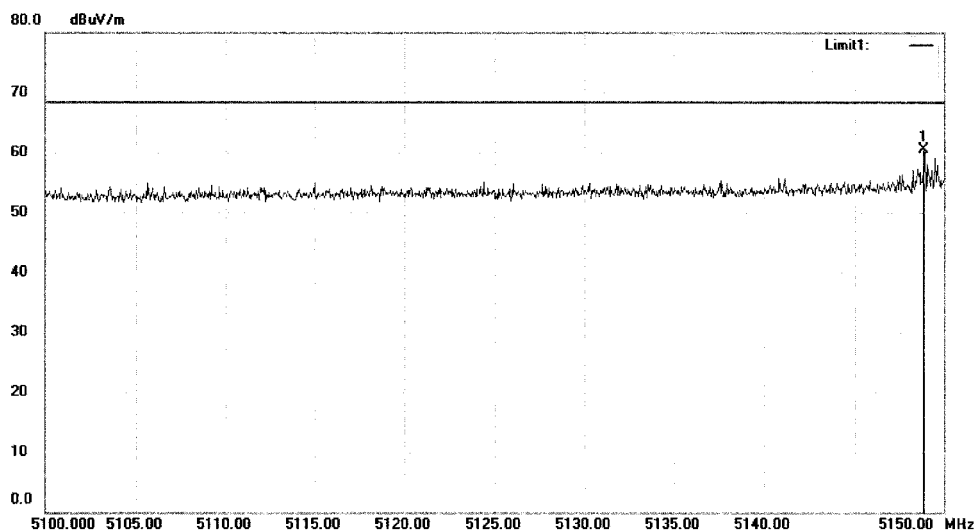

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#1

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5180MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5148.850	59.74	0.81	60.55	68.23	-7.68	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#1

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

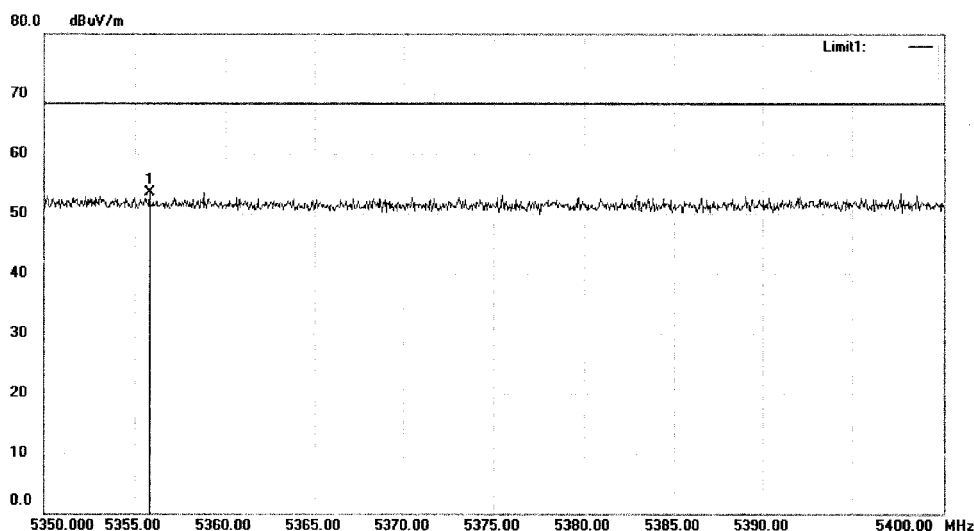

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#4

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5355.800	52.35	1.21	53.56	68.23	-14.67	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#4

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

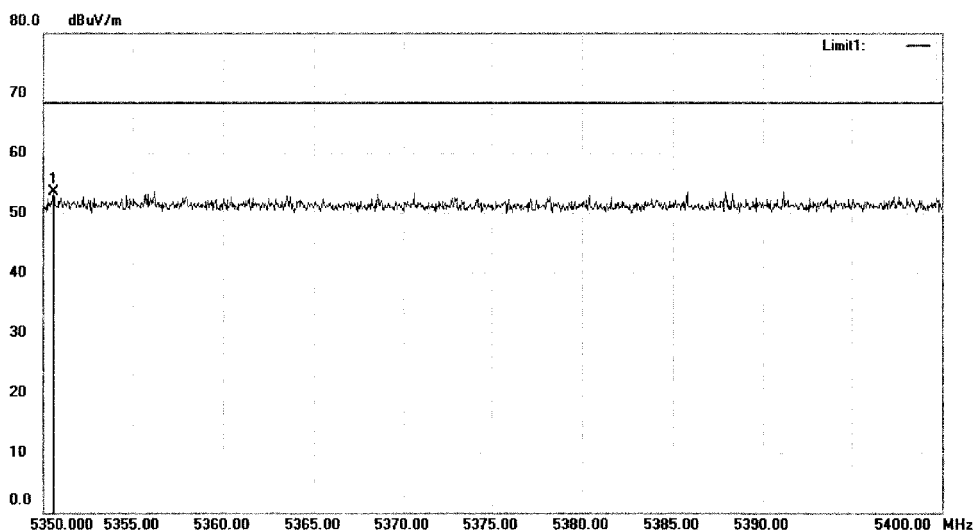

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#3

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.550	52.31	1.20	53.51	68.23	-14.72	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#3

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

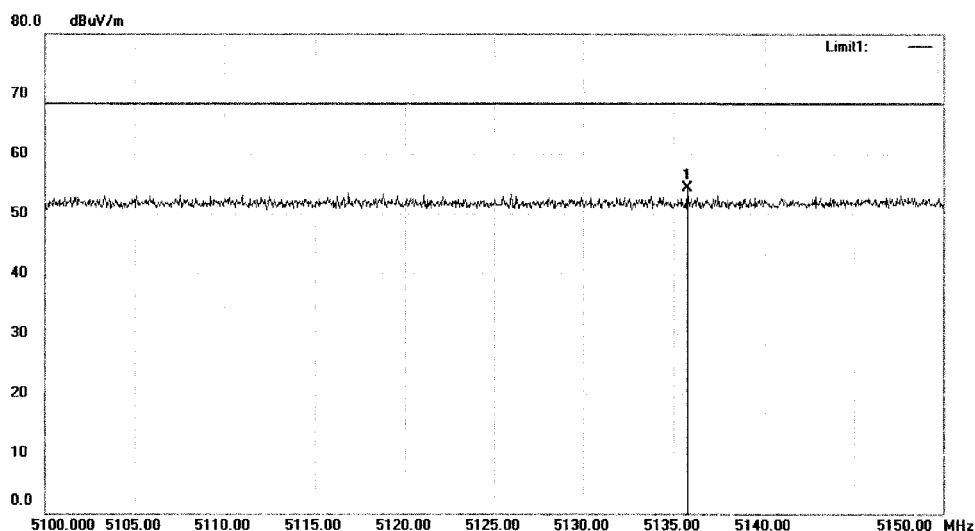

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#6

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5260MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5135.750	53.43	0.78	54.21	68.23	-14.02	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#6

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

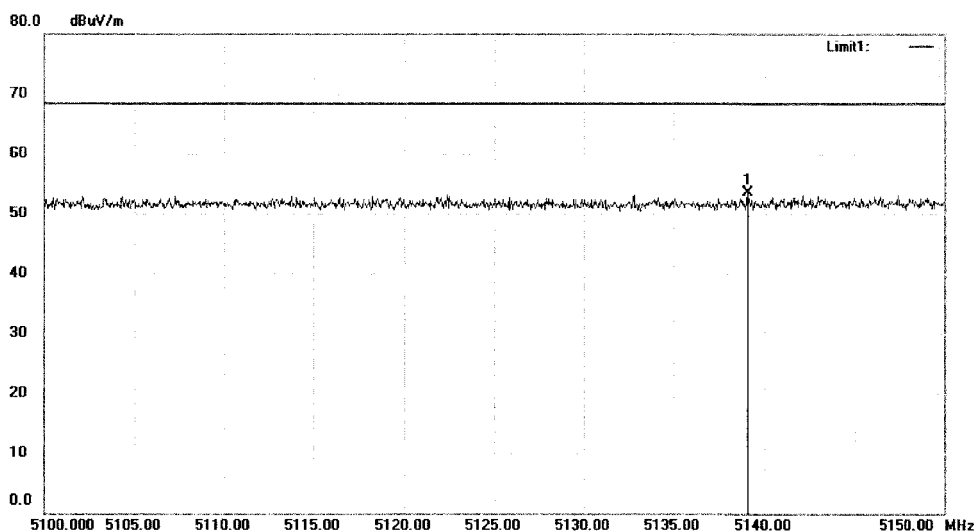

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#5

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5260MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5139.100	52.64	0.80	53.44	68.23	-14.79	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#5

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

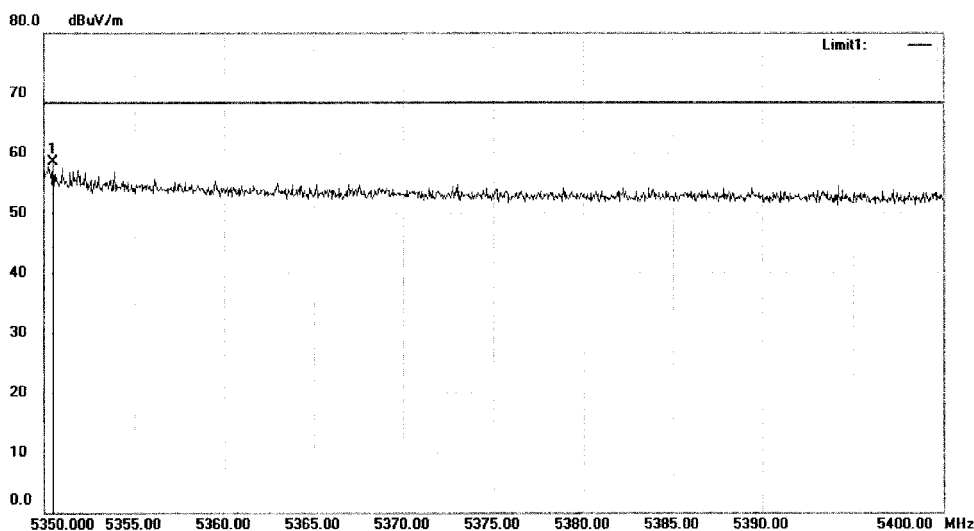

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#8

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5320MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.500	57.23	1.20	58.43	68.23	-9.80	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#8

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



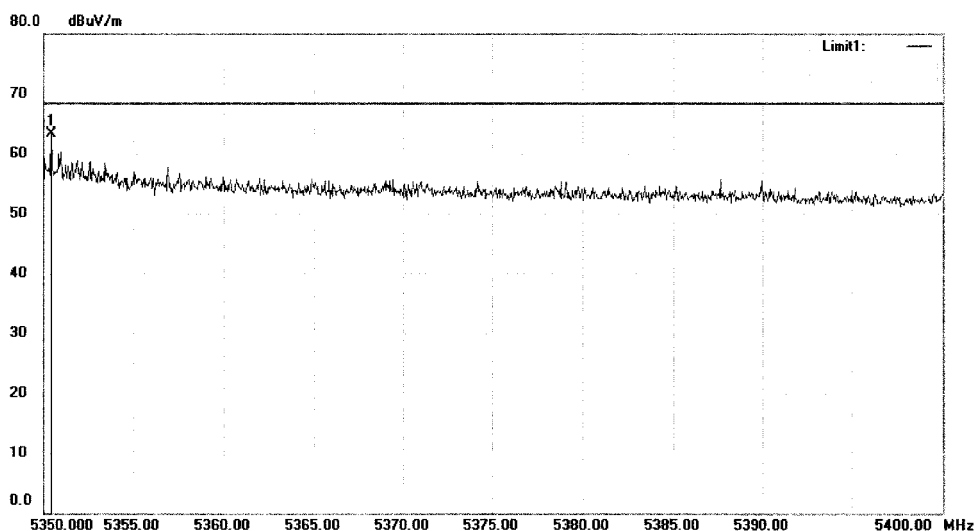
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#7

Date: 2017/05/06

Time:



Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5320MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.450	62.08	1.20	63.28	68.23	-4.95	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#7

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



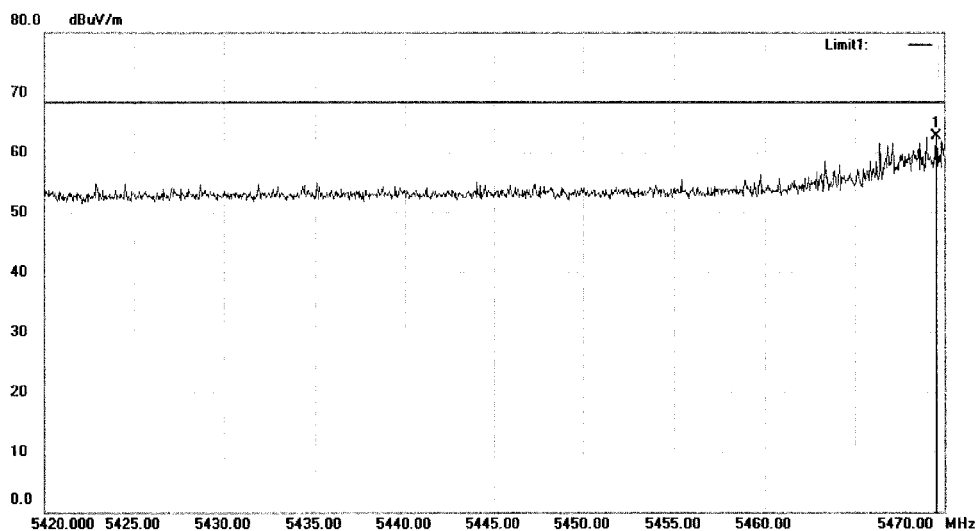
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#10

Date: 2017/05/06

Time:



Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5469.550	61.32	1.43	62.75	68.23	-5.48	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#10

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

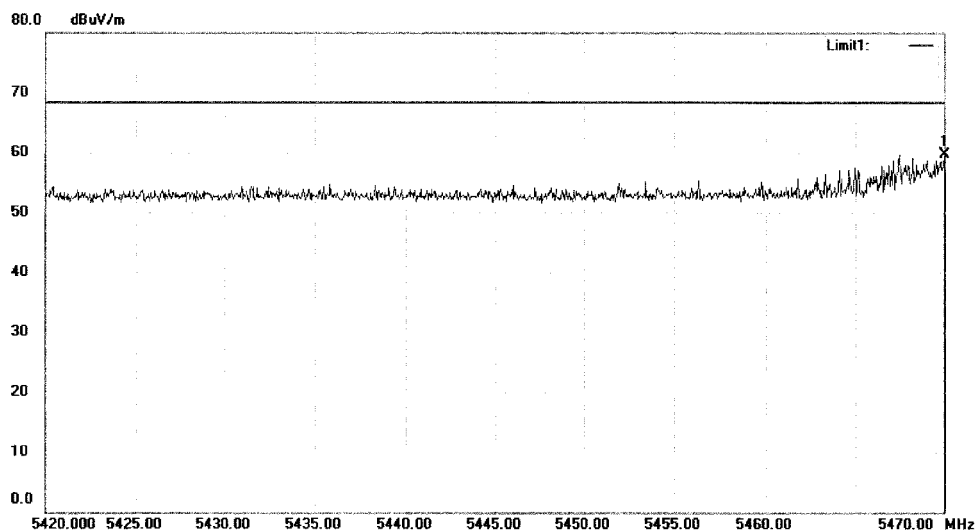

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#9

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5470.000	58.35	1.43	59.78	68.23	-8.45 peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#9

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

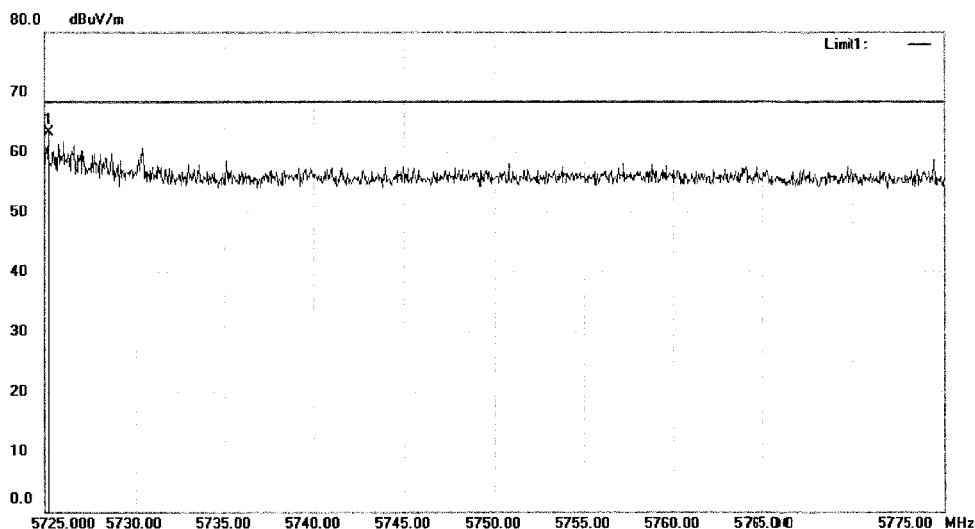

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#11

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5700MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.200	61.31	1.92	63.23	68.23	-5.00	peak		

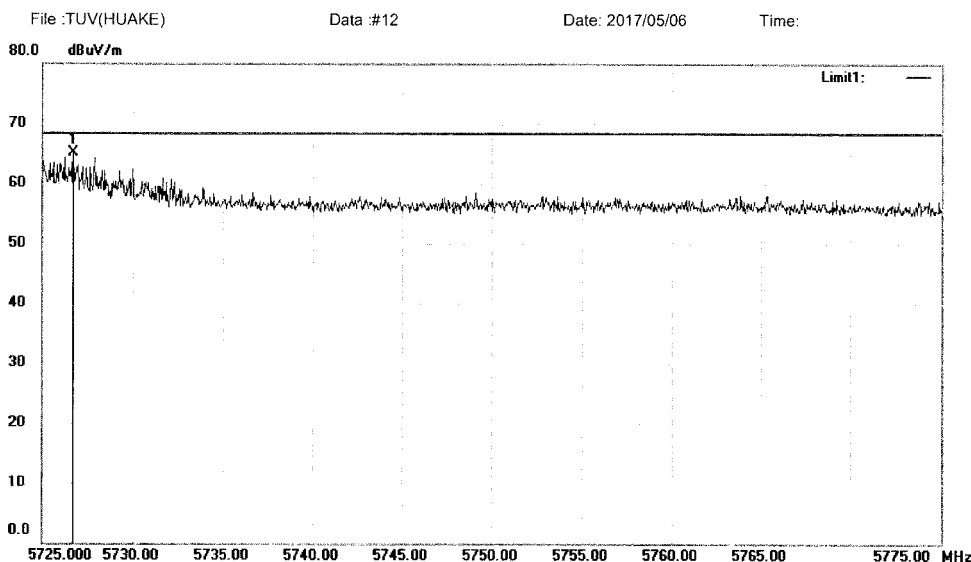
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#11

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11a(5700MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5726.700	63.14	1.92	65.06	68.23	-3.17	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#12

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

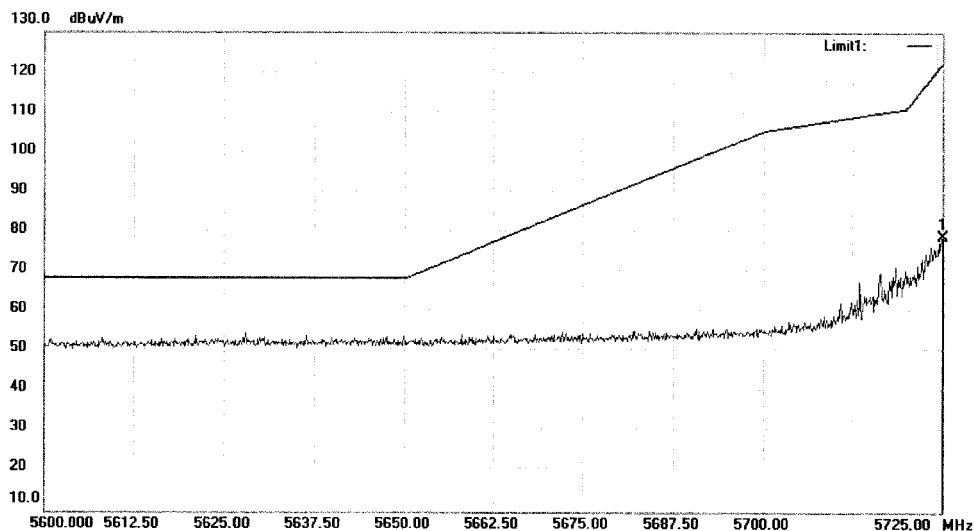

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#14

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5745MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5725.000	76.87	1.92	78.79	122.23	-43.44	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#14

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

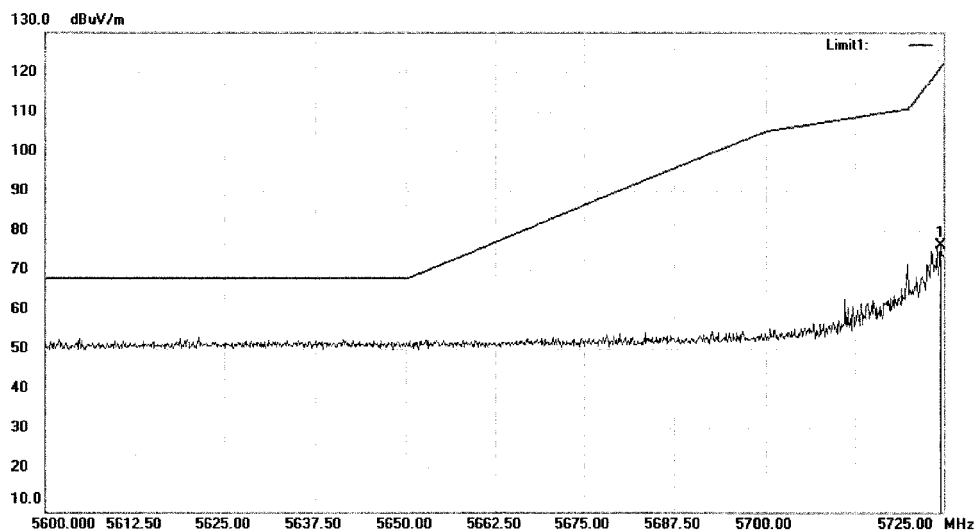

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#13

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11a(5745MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5724.500	74.94	1.92	76.86	121.09	-44.23	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#13

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

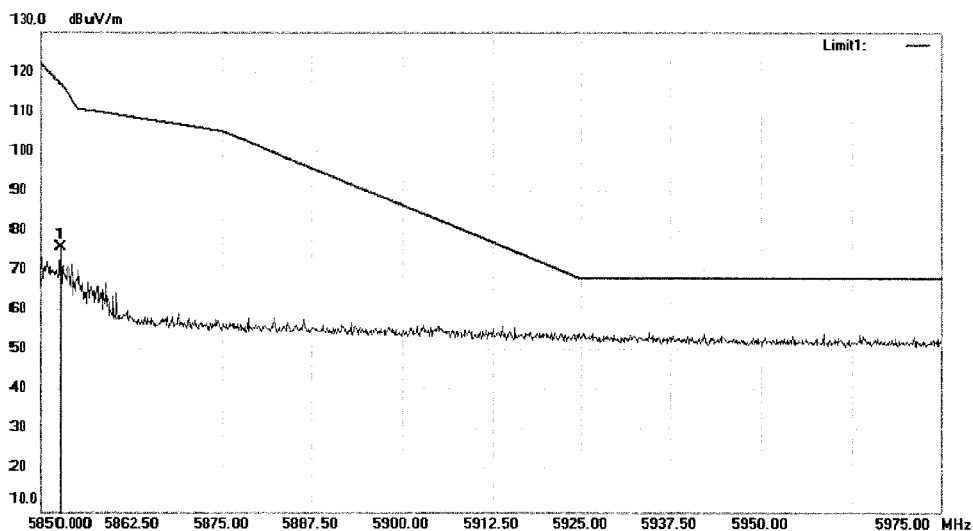

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#16

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5825MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5852.250	74.00	2.17	76.17	117.10	-40.93 peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#16

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

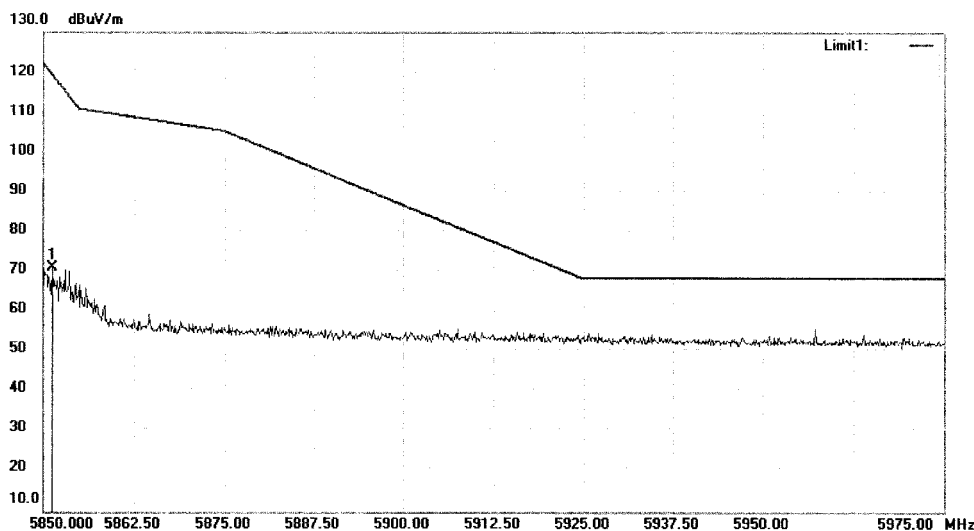

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#15

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11a(5825MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5851.250	68.83	2.17	71.00	119.38	-48.38	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#15

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

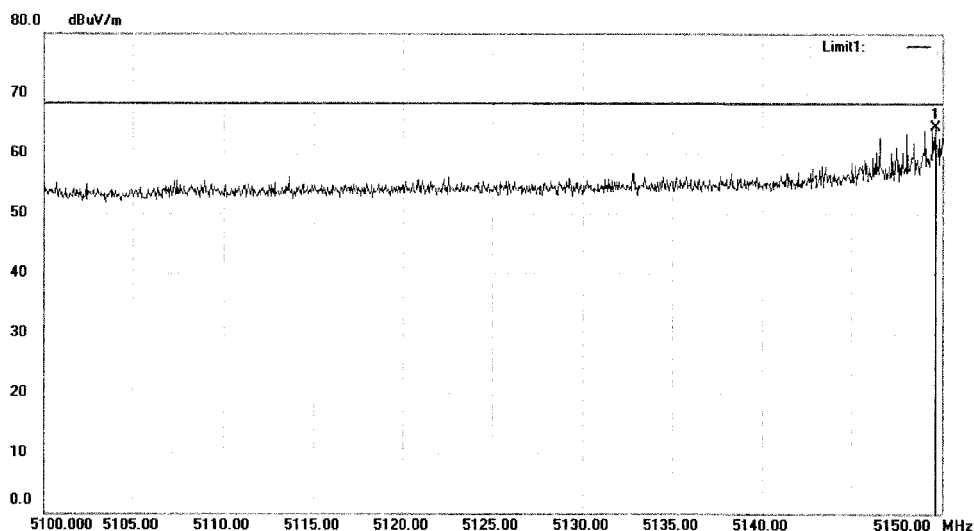

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#29

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5180MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5149.600	63.62	0.82	64.44	68.23	-3.79	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#29

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

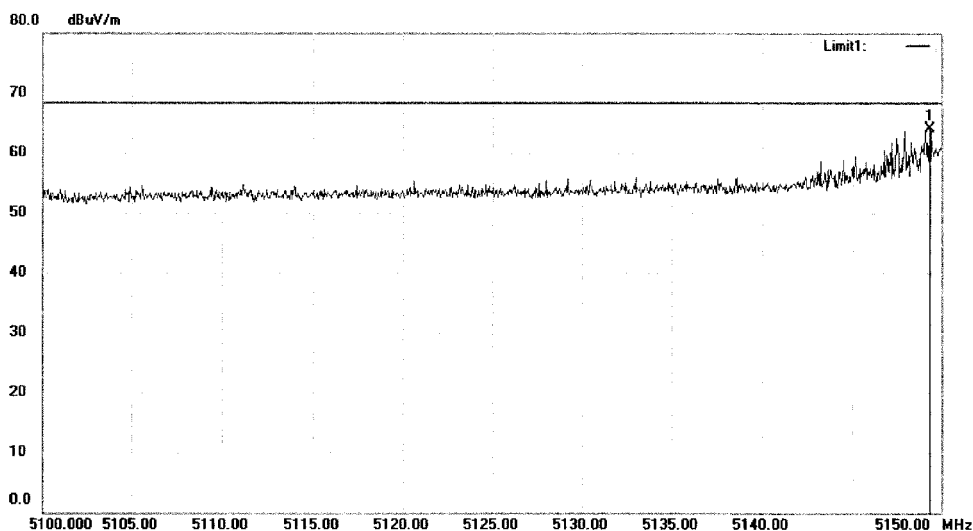

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#30

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5180MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5149.350	63.31	0.81	64.12	68.23	-4.11	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#30

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

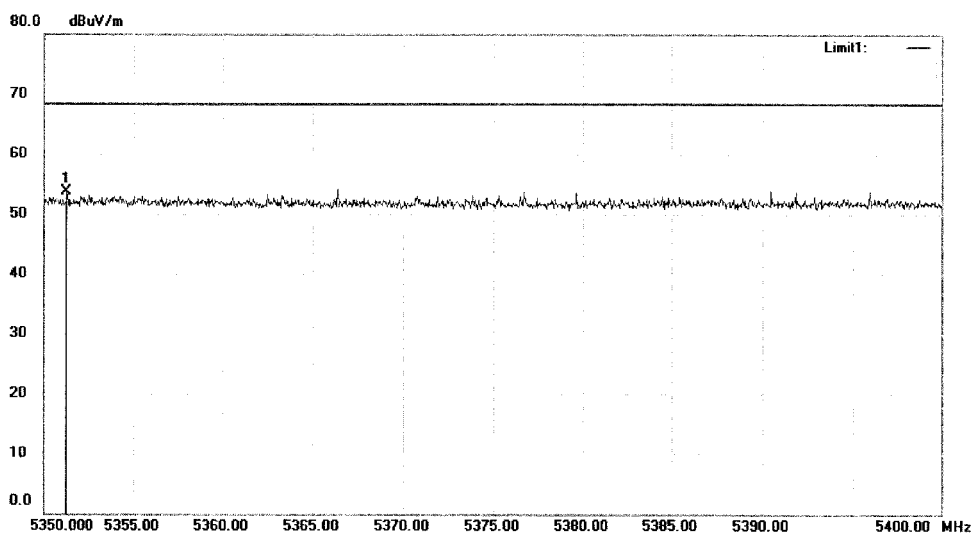

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#32

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5351.250	52.41	1.20	53.61	68.23	-14.62	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#32

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

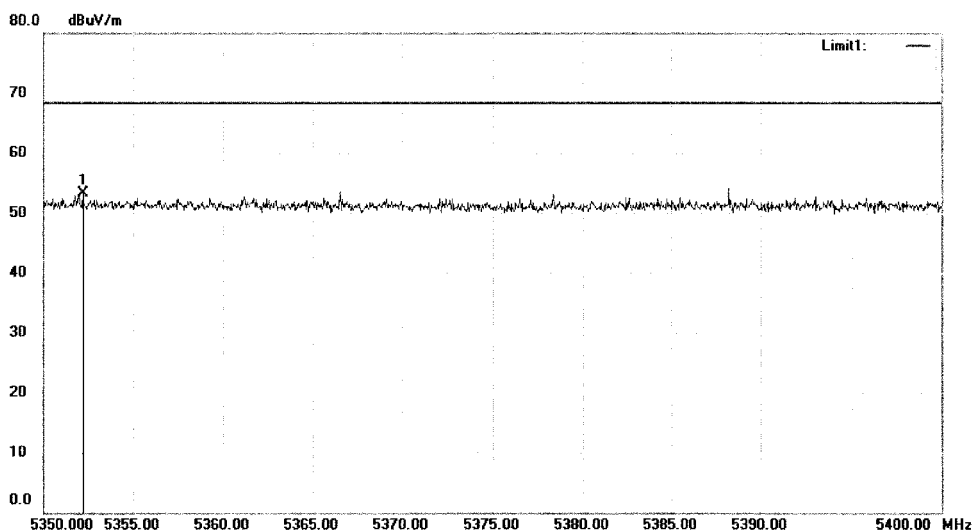

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#31

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT20(5240MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5352.200	52.07	1.20	53.27	68.23	-14.96	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#31

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

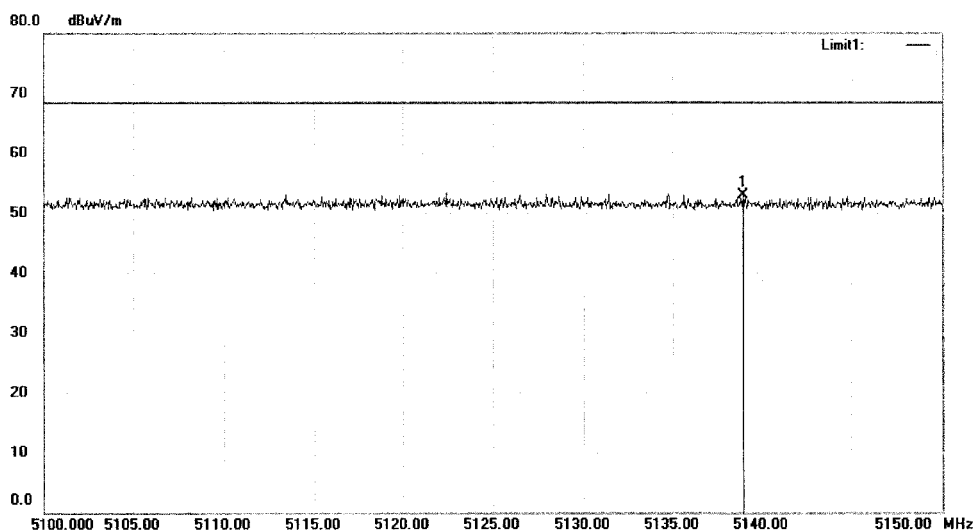

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#28

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5260MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5138.950	52.17	0.80	52.97	68.23	-15.26	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#28

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

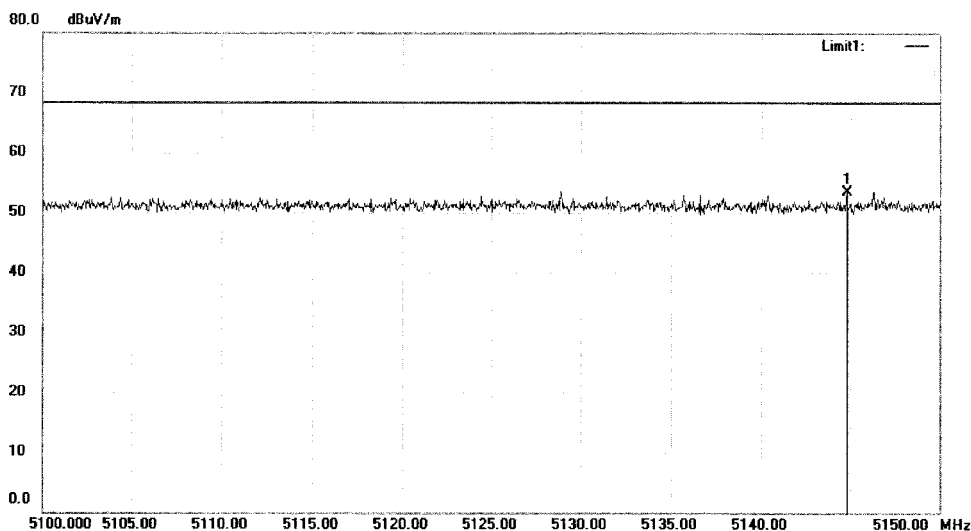

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#27

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5260MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5144.800	52.73	0.80	53.53	68.23	-14.70	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#27

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

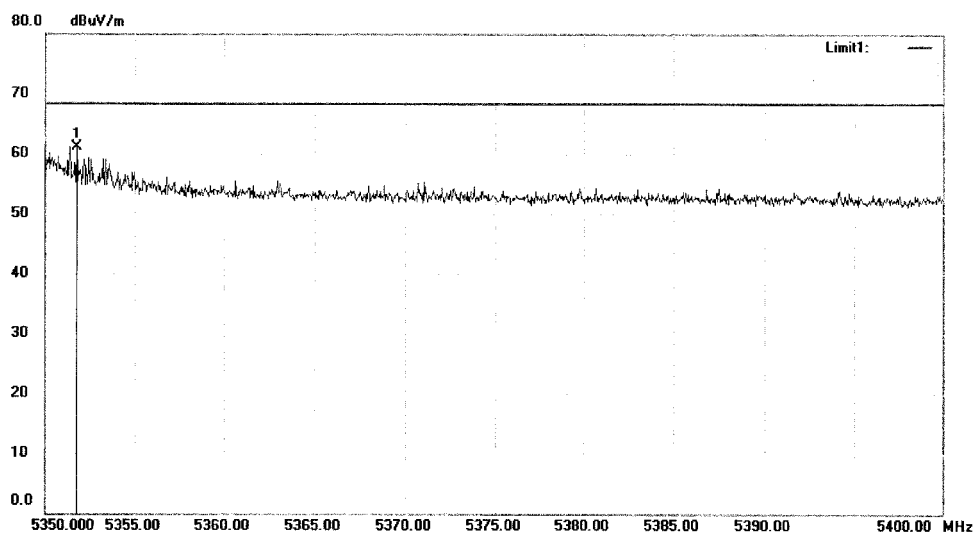

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#26

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5320MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5351.750	59.89	1.20	61.09	68.23	-7.14	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#26

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

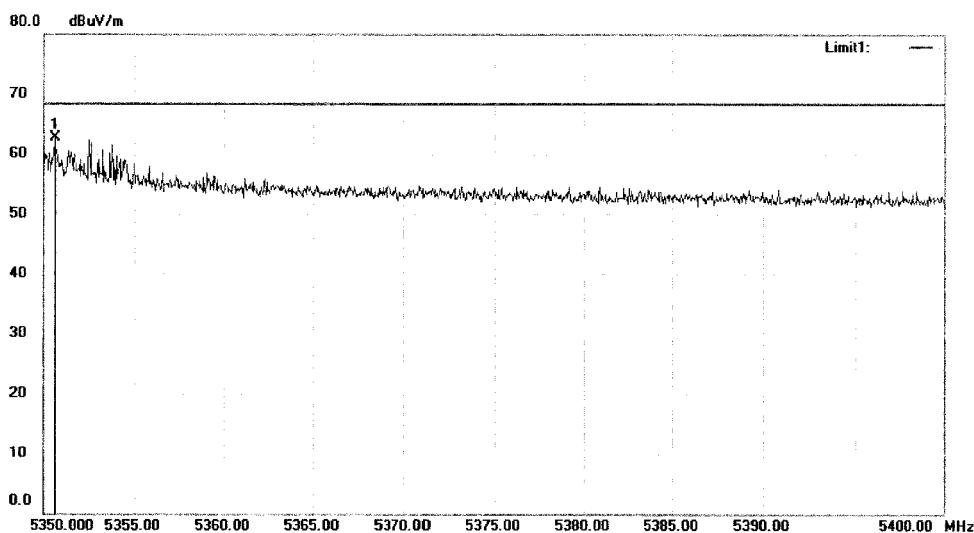

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#25

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5320MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5350.600	61.53	1.20	62.73	68.23	-5.50	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

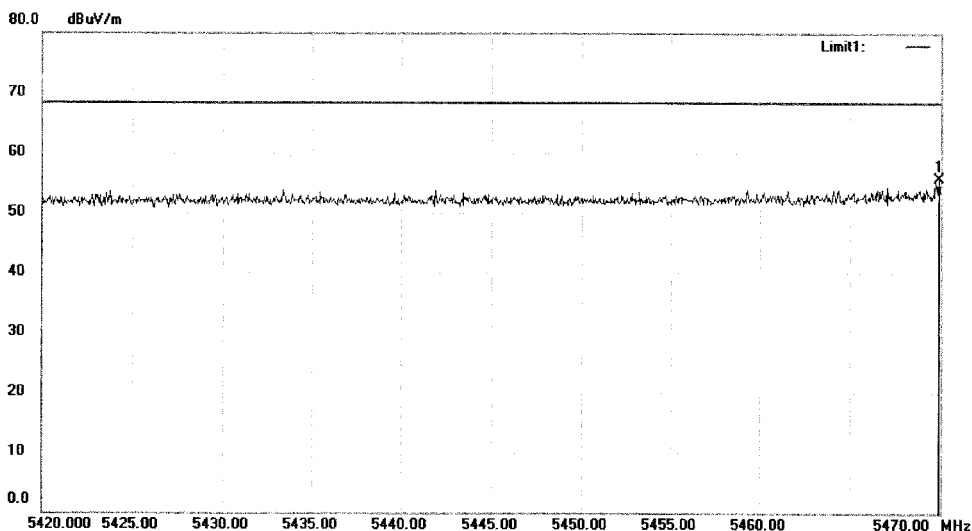
File :TUV(HUAKE)\Data :#25

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV(HUAKE) Data: #24 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20(5500MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5469.900	54.22	1.43	55.65	68.23	-12.58	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#24

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

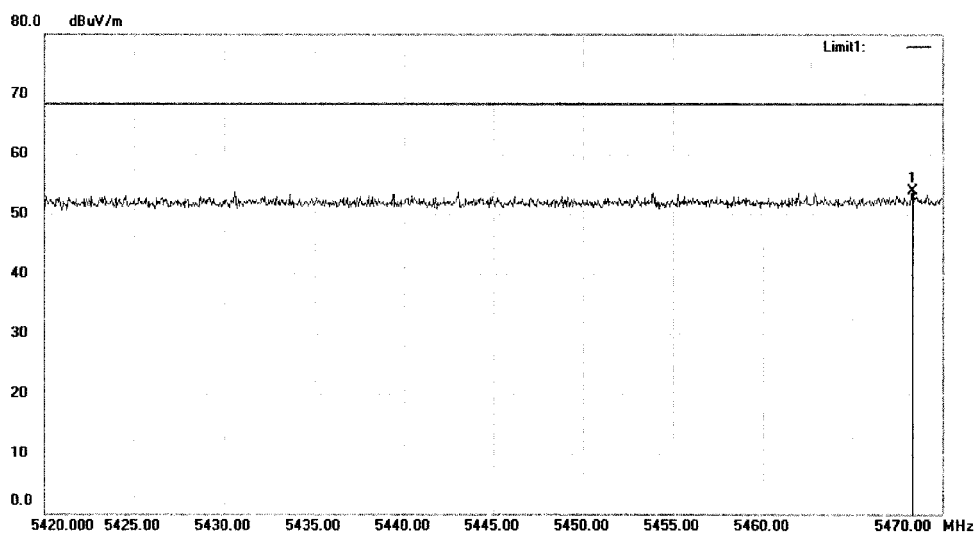

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#23

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5500MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5468.350	52.40	1.43	53.83	68.23	-14.40	peak	

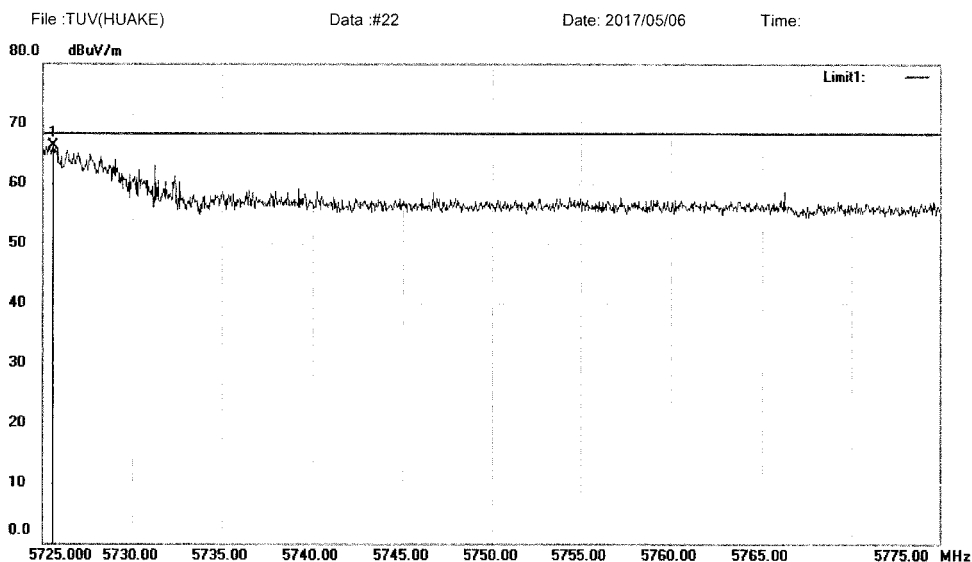
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#23

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT20(5700MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5725.550	64.46	1.92	66.38	68.23	-1.85	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#22

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

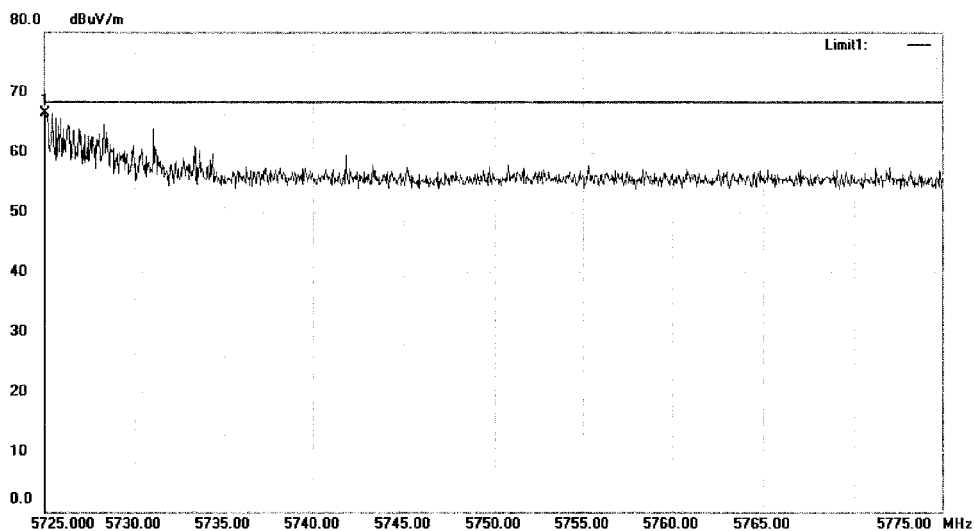

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#21

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5700MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5725.050	64.54	1.92	66.46	68.23	-1.77 peak		

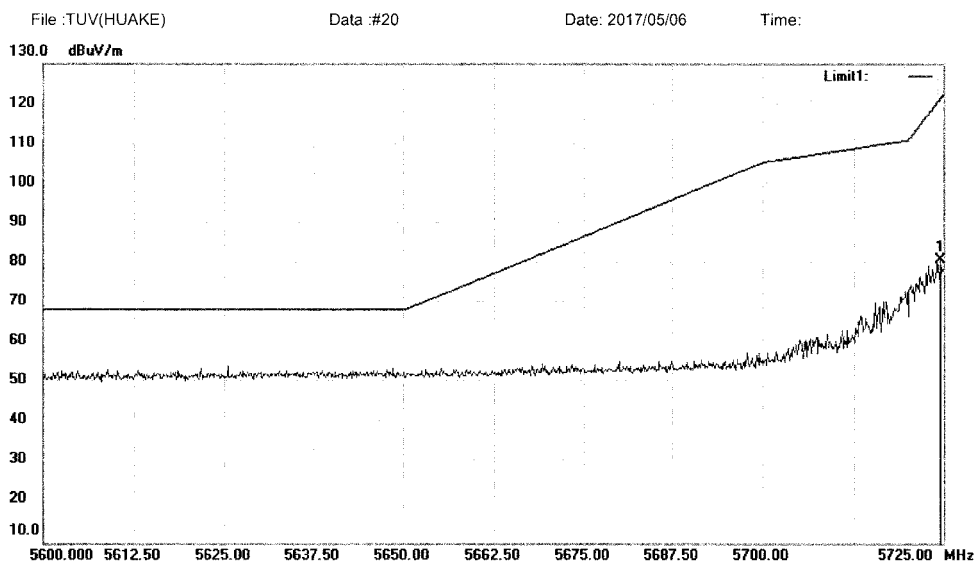
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#21

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C B4 (Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20(5745MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5724.625	79.16	1.92	81.08	121.38	-40.30	peak	

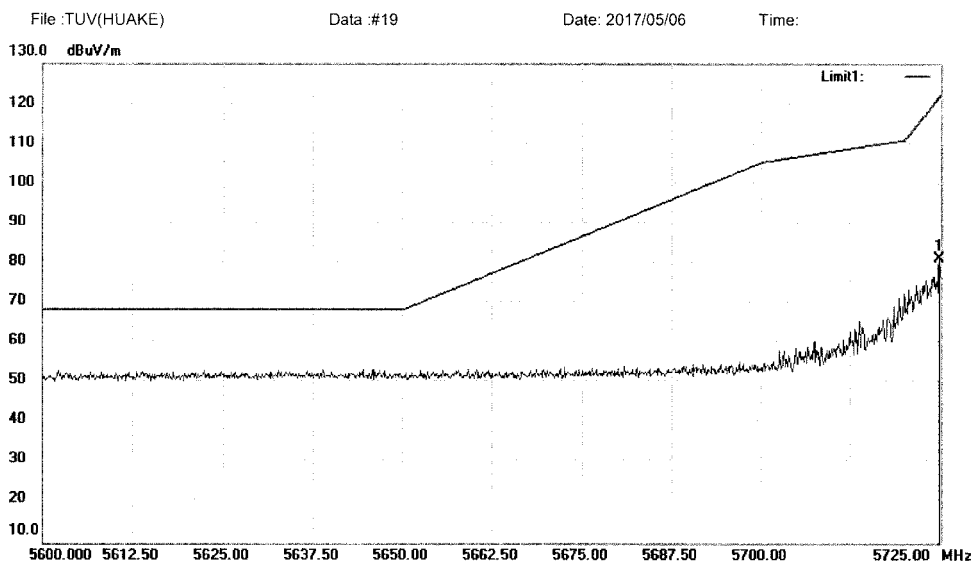
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#20

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C B4 (Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT20(5745MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5724.750	79.43	1.92	81.35	121.66	-40.31	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #19

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

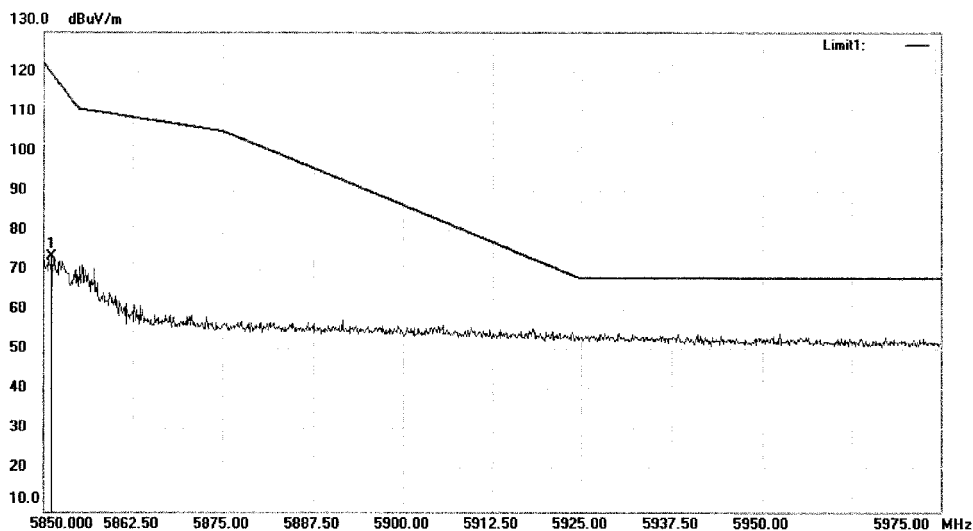

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#17

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5825MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5851.125	71.47	2.17	73.64	119.67	-46.03	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#17

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

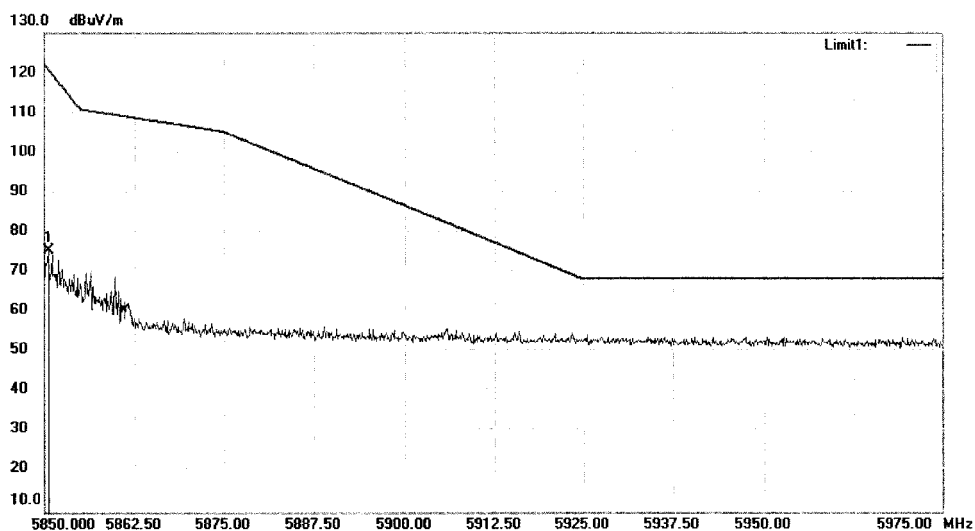

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#18

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT20(5825MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5850.500	73.41	2.16	75.57	121.09	-45.52	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#18

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

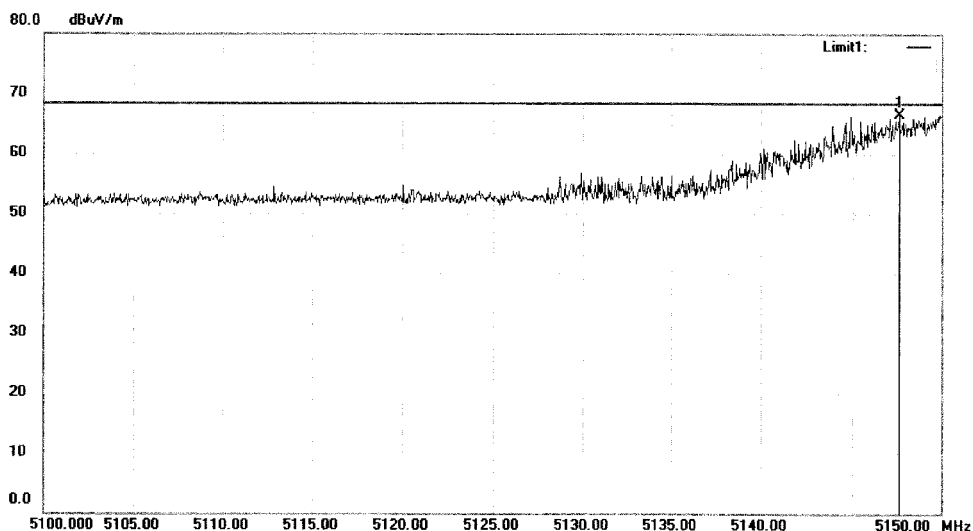

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#36

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5190MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5147.600	65.79	0.81	66.60	68.23	-1.63	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

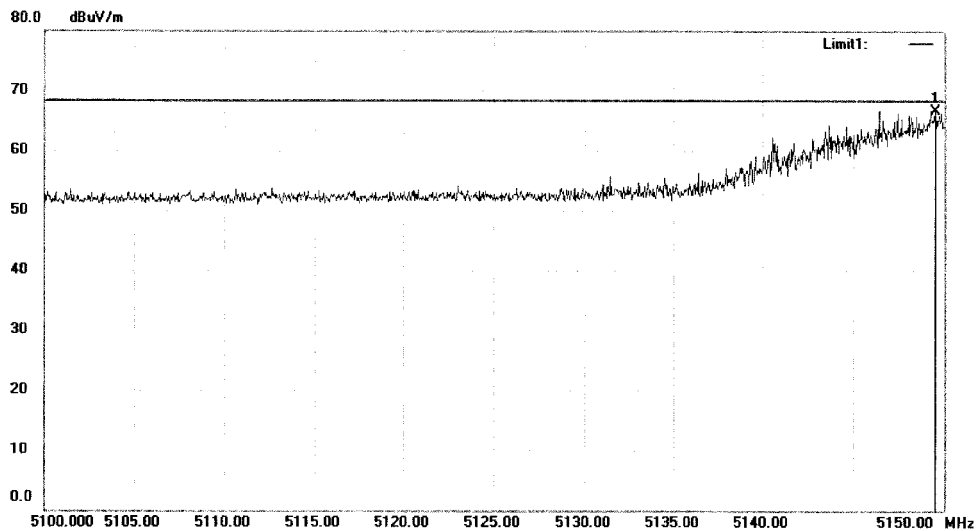
File :TUV(HUAKE)\Data :#36

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File: TUV(HUAKE) Data: #35 Date: 2017/05/06 Time:



Site: 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40(5190MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5149.500	65.88	0.82	66.70	68.23	-1.53	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

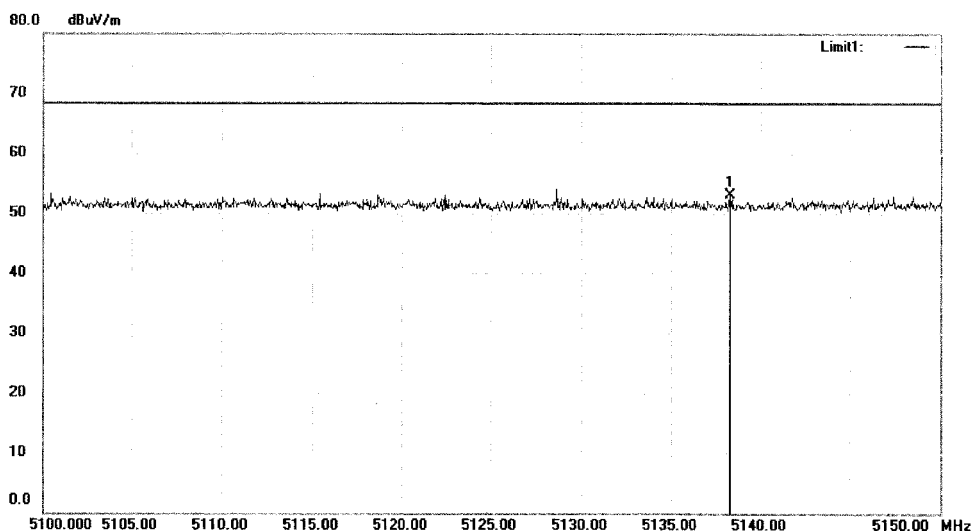
File: TUV(HUAKE)\Data: #35

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV(HUAKE) Data :#37 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40(5270MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5138.300	52.33	0.80	53.13	68.23	-15.10	peak		Comment

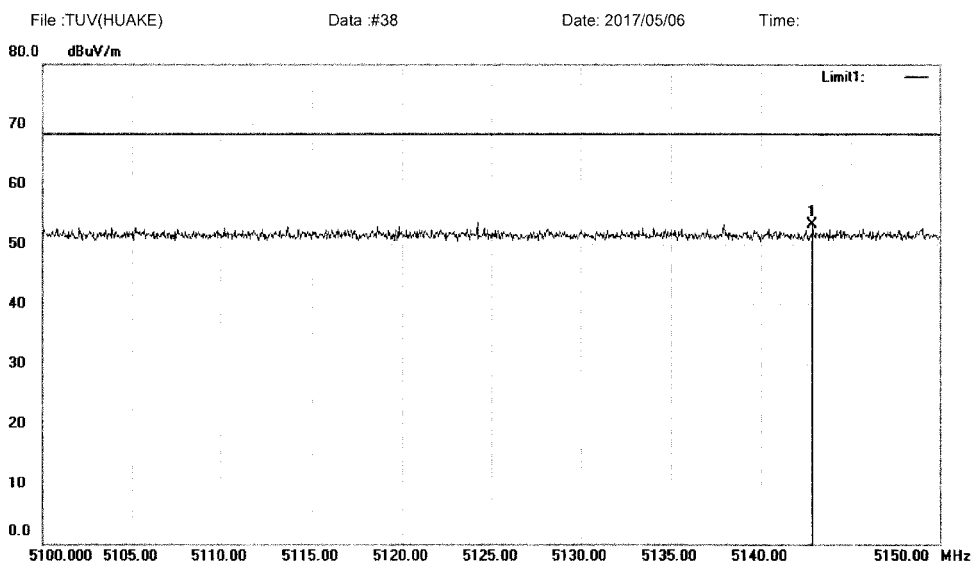
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#37

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40(5270MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5142.850	52.55	0.80	53.35	68.23	-14.88	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #38

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

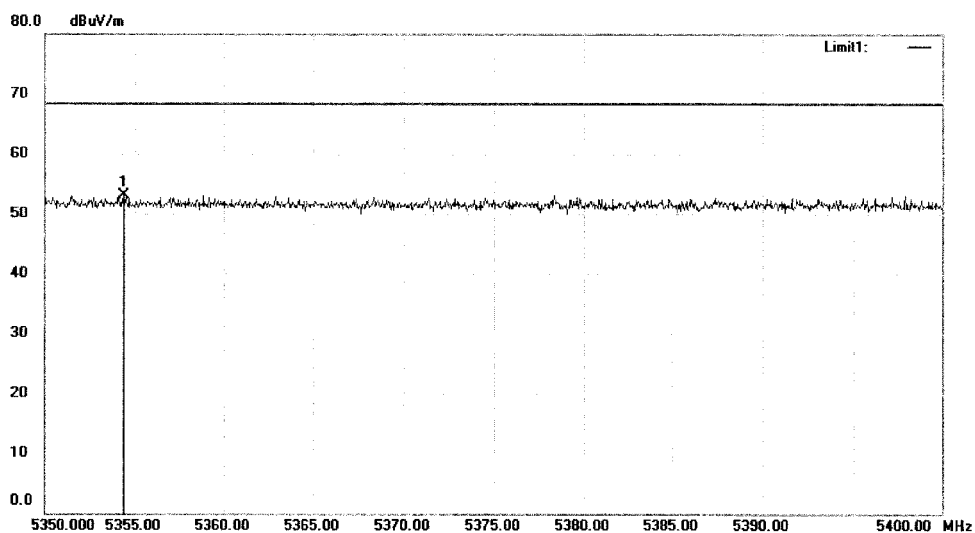

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#33

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5230MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5354.350	51.95	1.21	53.16	68.23	-15.07	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#33

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

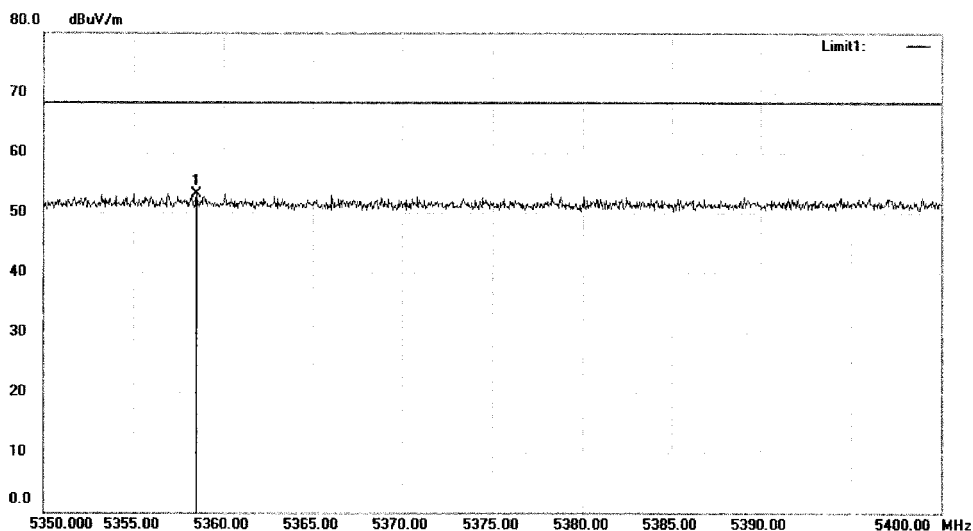

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#34

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5230MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5358.500	51.92	1.22	53.14	68.23	-15.09	peak		Comment

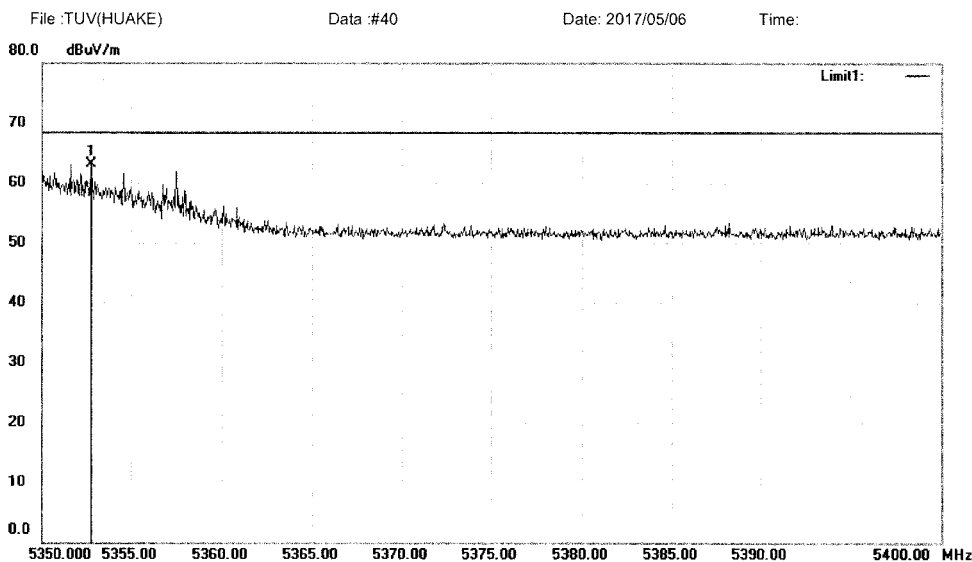
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#34

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40(5310MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5352.750	61.92	1.20	63.12	68.23	-5.11	peak	

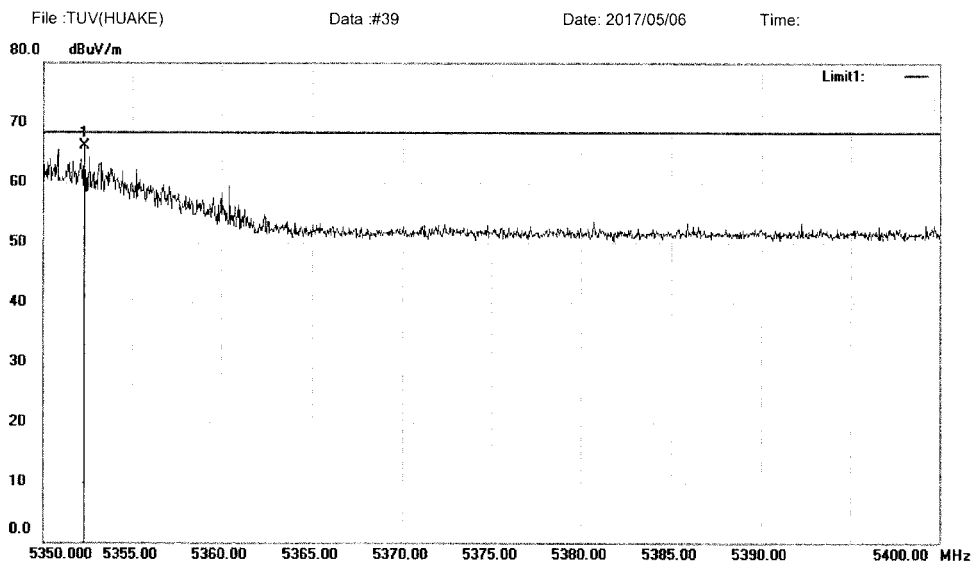
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#40

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40(5310MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree Comment
1	*	5352.300	64.82	1.20	66.02	68.23	-2.21	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#39

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

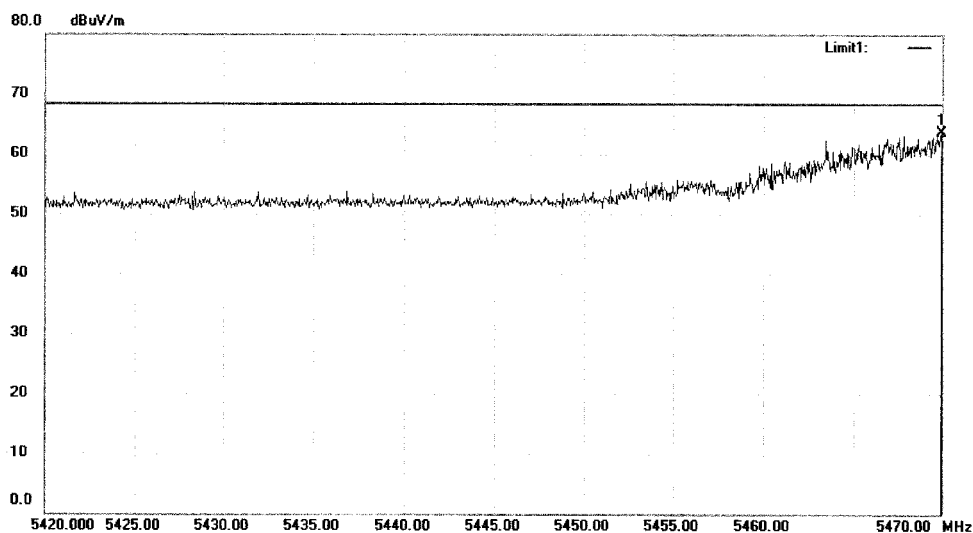

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#42

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5510MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5469.950	62.20	1.43	63.63	68.23	-4.60	peak		Comment

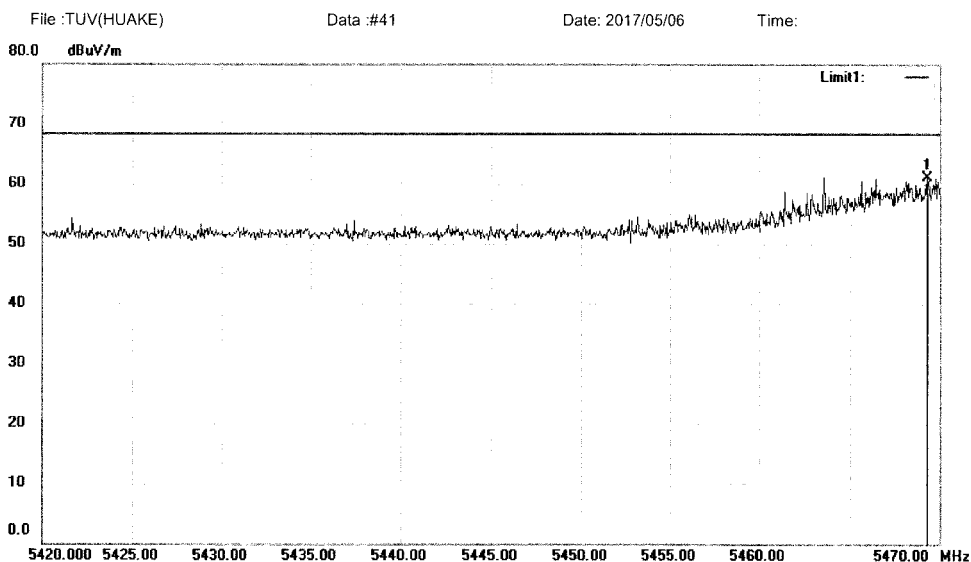
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#42

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40(5510MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5469.300	59.63	1.43	61.06	68.23	-7.17	peak		Comment

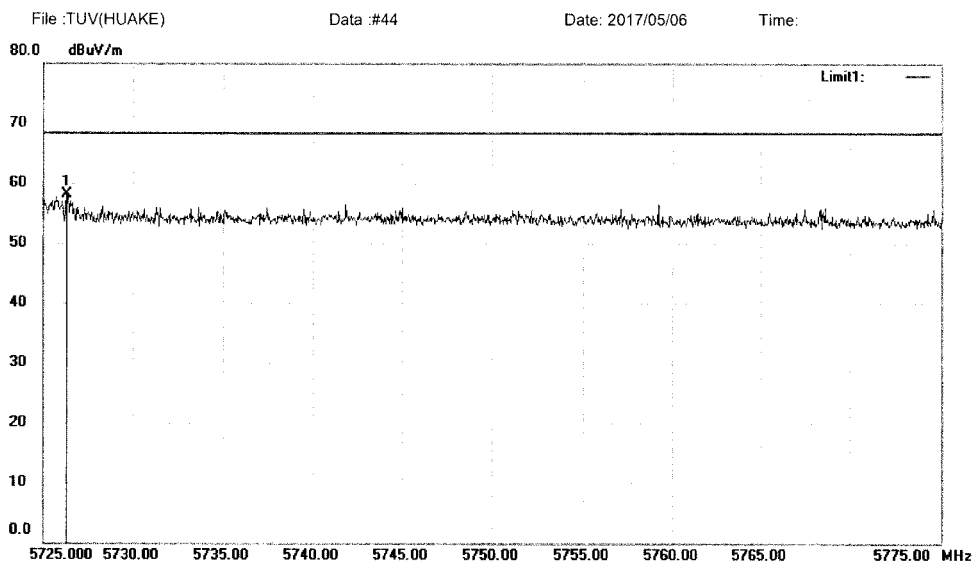
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#41

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11nHT40(5670MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree	Comment
1	*	5726.300	56.12	1.92	58.04	68.23	-10.19	peak		

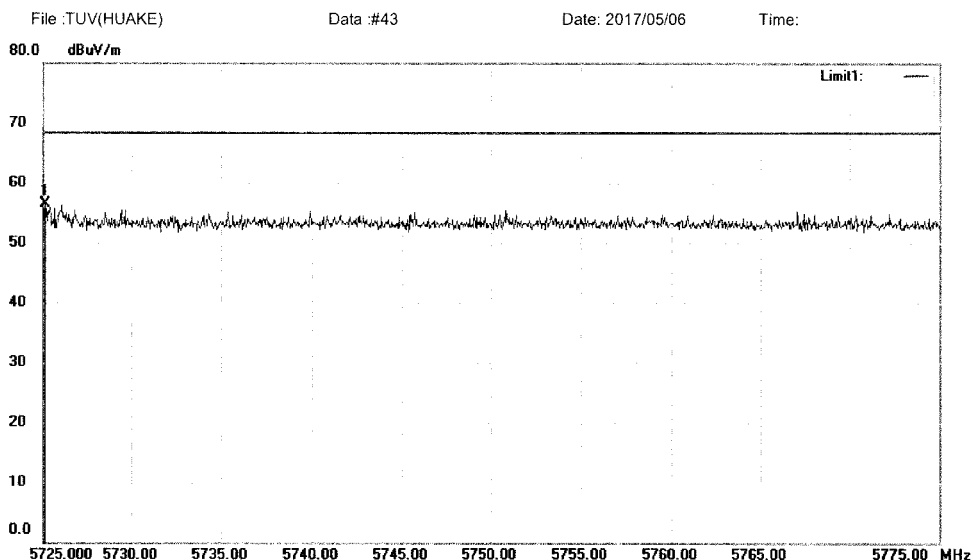
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#44

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40(5670MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.100	54.68	1.92	56.60	68.23	-11.63	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#43

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



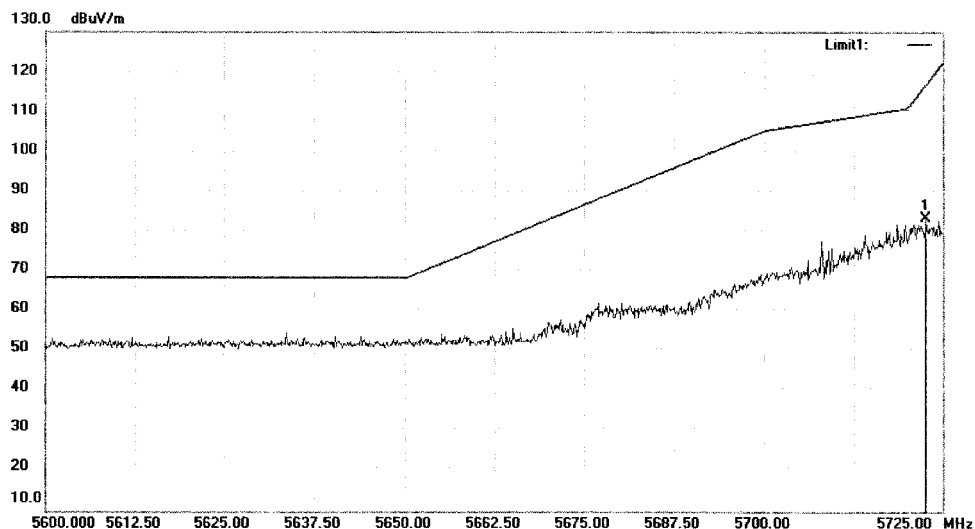
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#46

Date: 2017/05/06

Time:



Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11nHT40(5755MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5722.625	81.37	1.92	83.29	116.81	-33.52	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#46

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

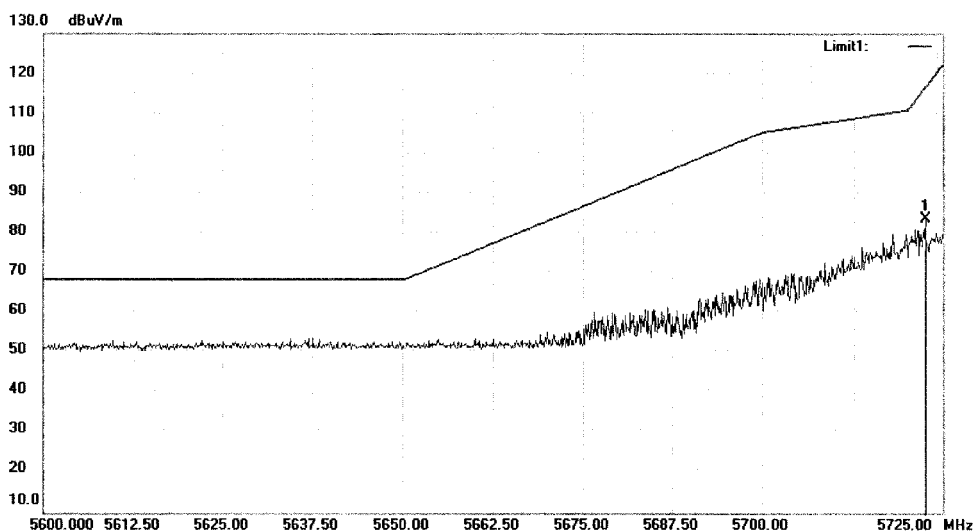

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#45

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5755MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5722.500	81.69	1.92	83.61	116.53	-32.92	peak	

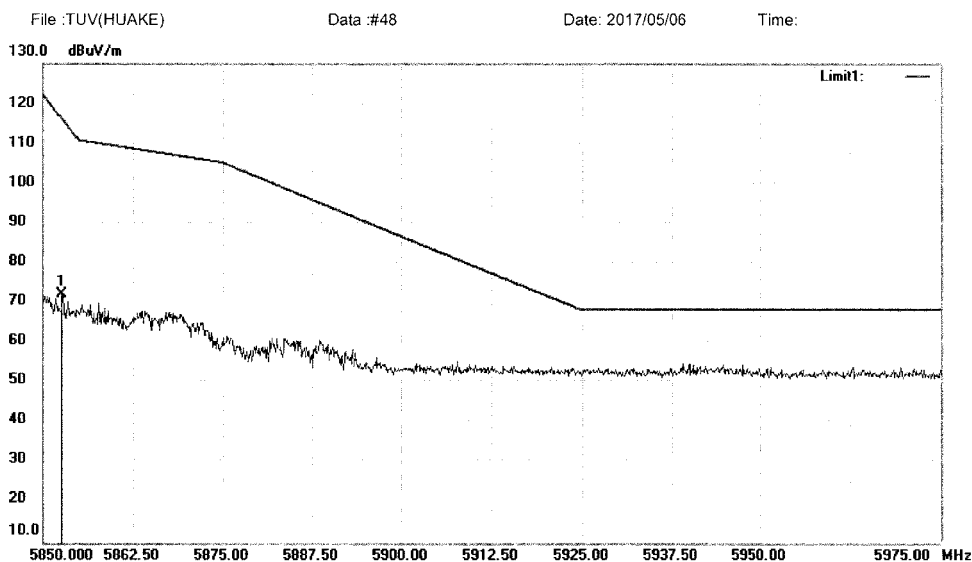
*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#45

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C B4 (Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11nHT40(5795MHz)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5852.625	70.07	2.17	72.24	116.25	-44.01	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #48

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

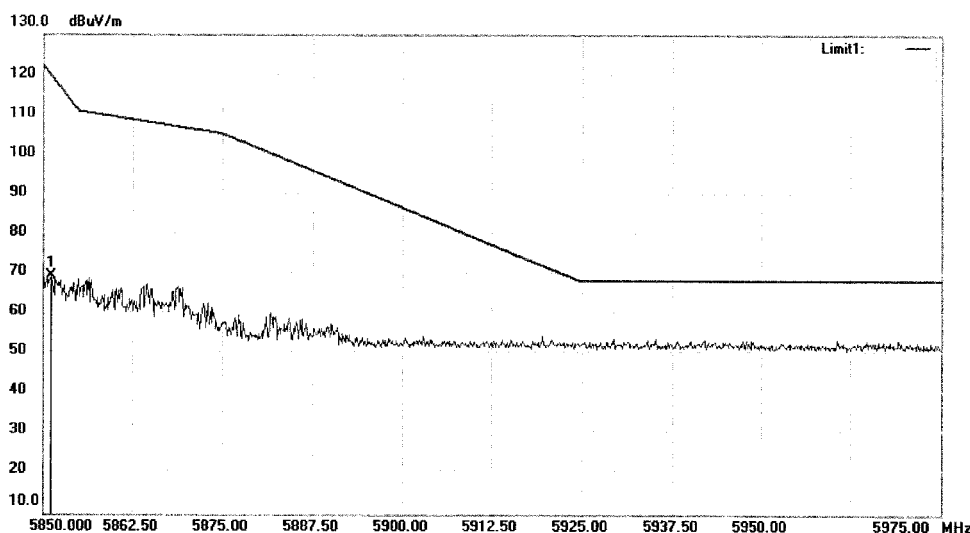

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#47

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11nHT40(5795MHz)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5851.000	67.34	2.17	69.51	119.95	-50.44	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

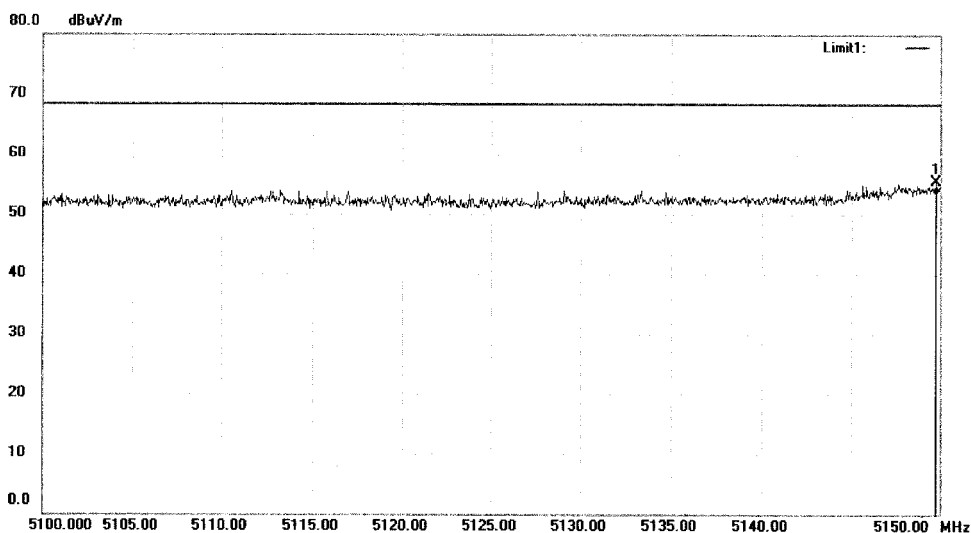
File :TUV(HUAKE)\Data :#47

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV(HUAKE) Data :#121 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac20 5180
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5149.750	54.65	0.82	55.47	68.23	-12.76	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#121

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

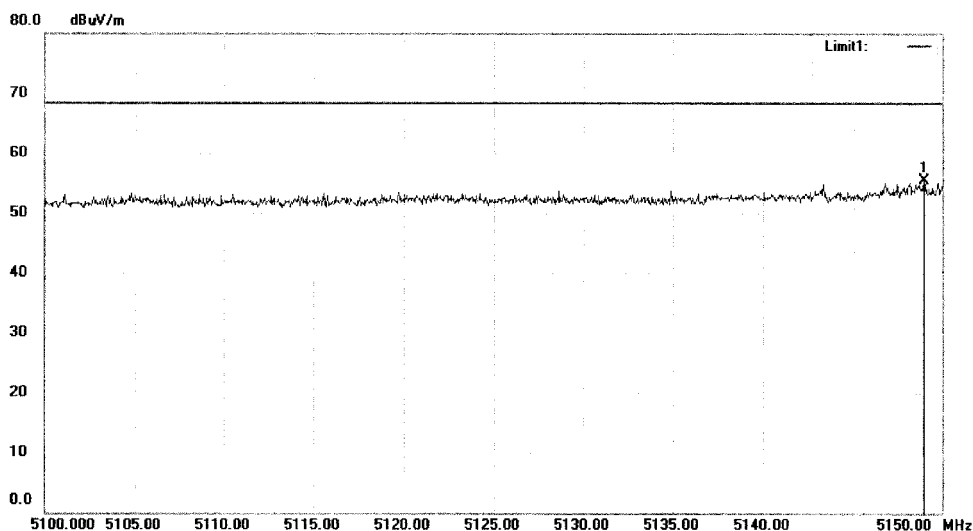

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#122

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5180

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5148.950	54.69	0.81	55.50	68.23	-12.73	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#122

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

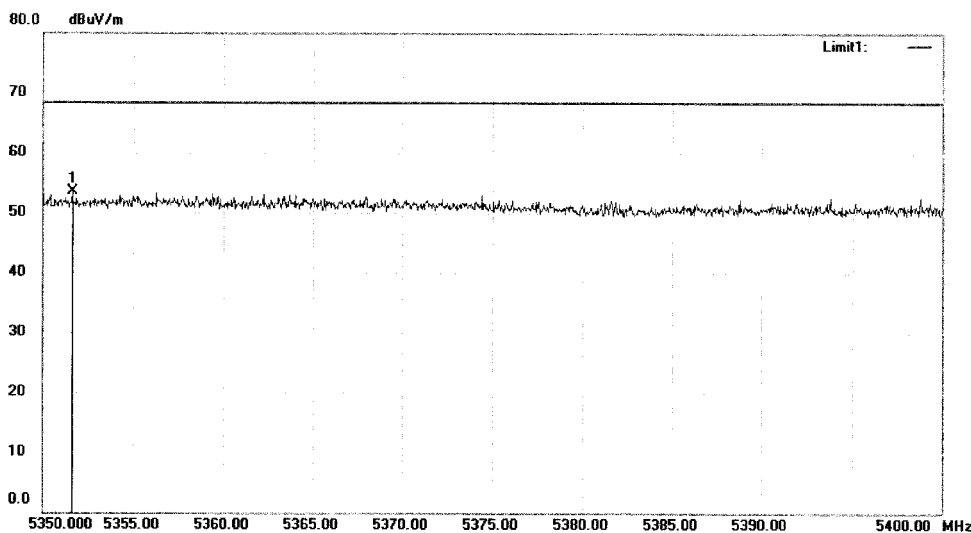

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#124

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector cm	degree Comment
1	*	5351.600	52.38	1.20	53.58	68.23	-14.65	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#124

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

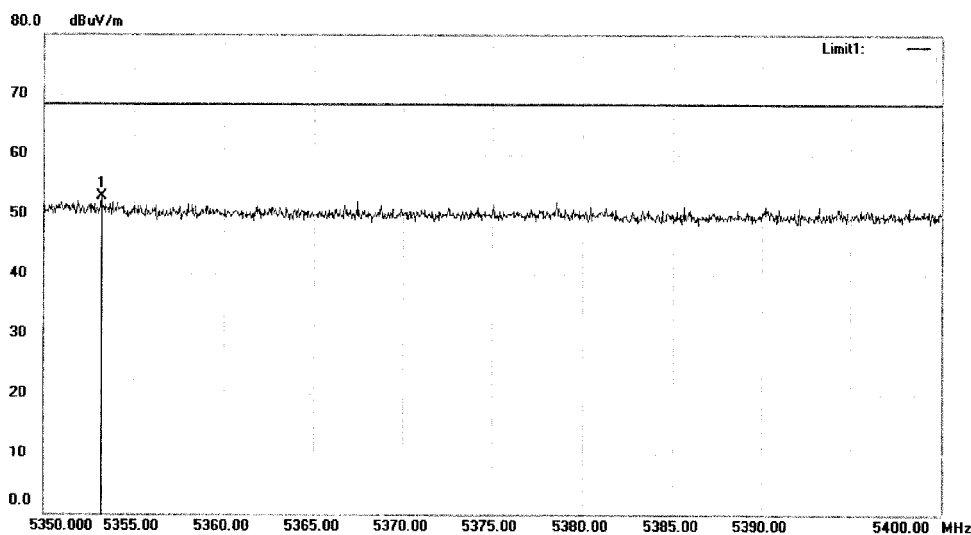

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#123

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5353.200	51.63	1.20	52.83	68.23	-15.40	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#123

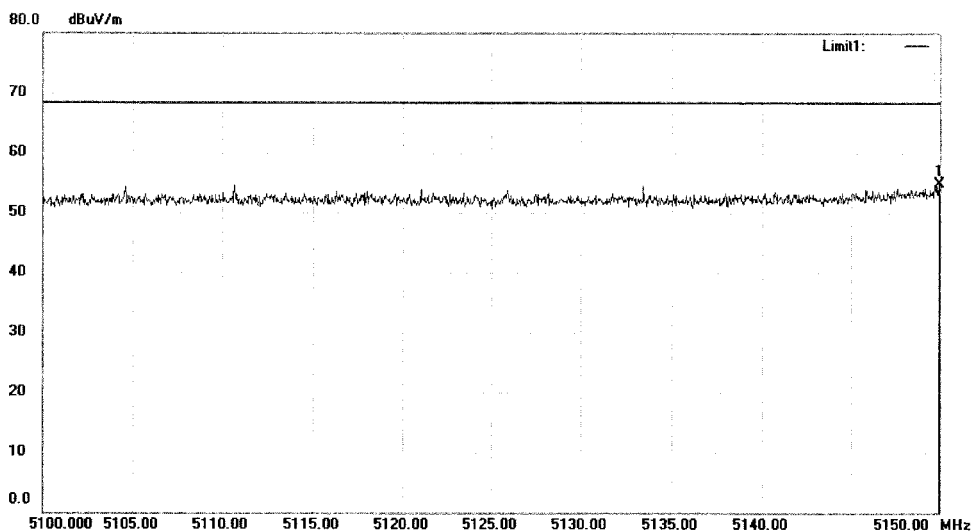
Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV(HUAKE) Data :#126 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode:11ac20 5260
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5149.950	54.06	0.82	54.88	68.23	-13.35	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#126

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

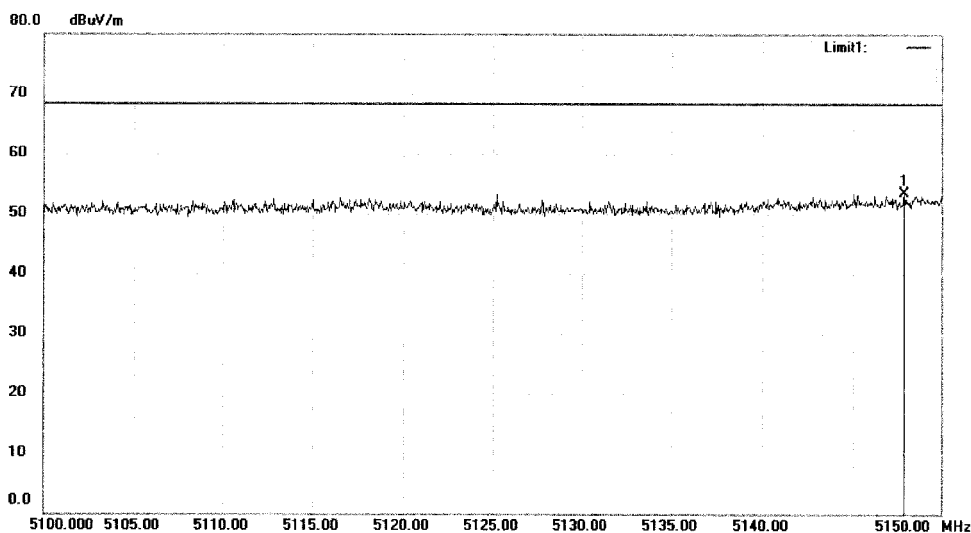

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#125

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5260

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5147.900	52.79	0.81	53.60	68.23	-14.63	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#125

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



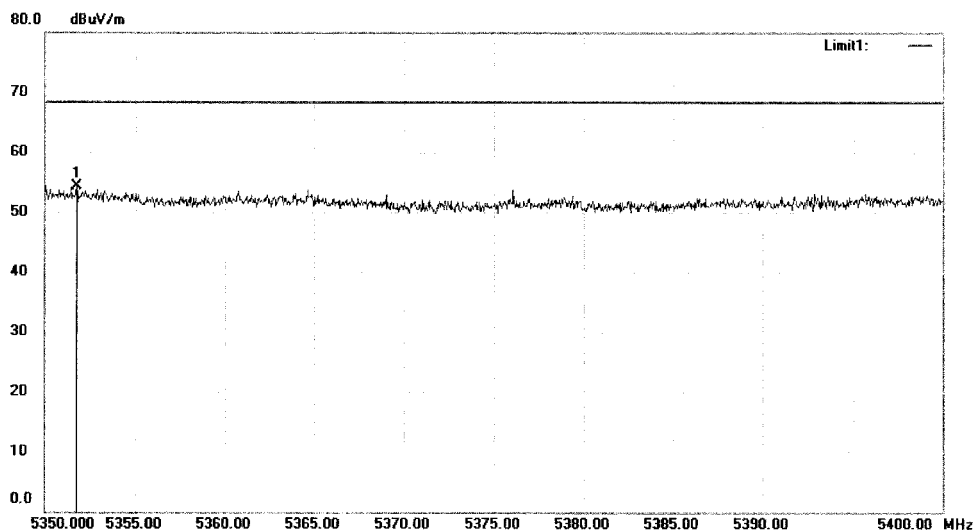
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #128

Date: 2017/05/06

Time:



Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5320

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5351.750	53.10	1.20	54.30	68.23	-13.93	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #128

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

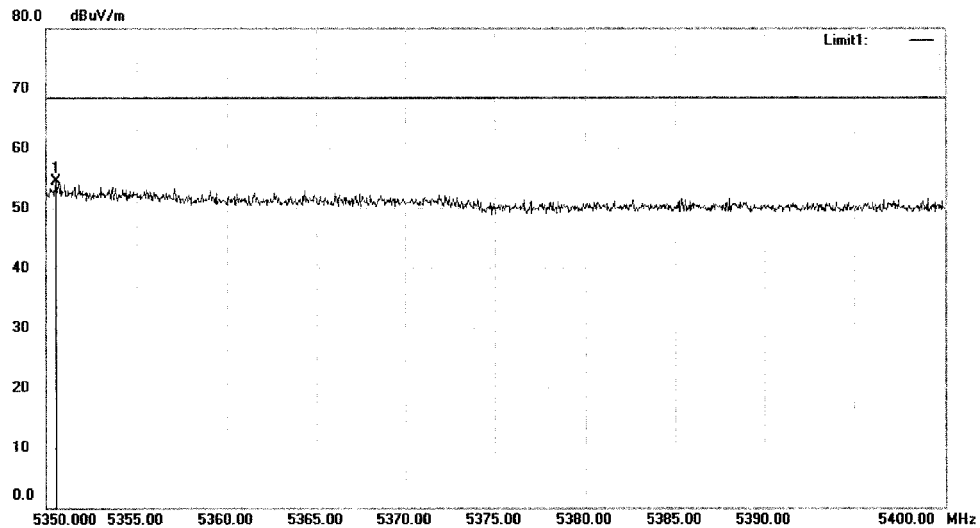
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#127

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5320

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5350.550	53.34	1.20	54.54	68.23	-13.69	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#127

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



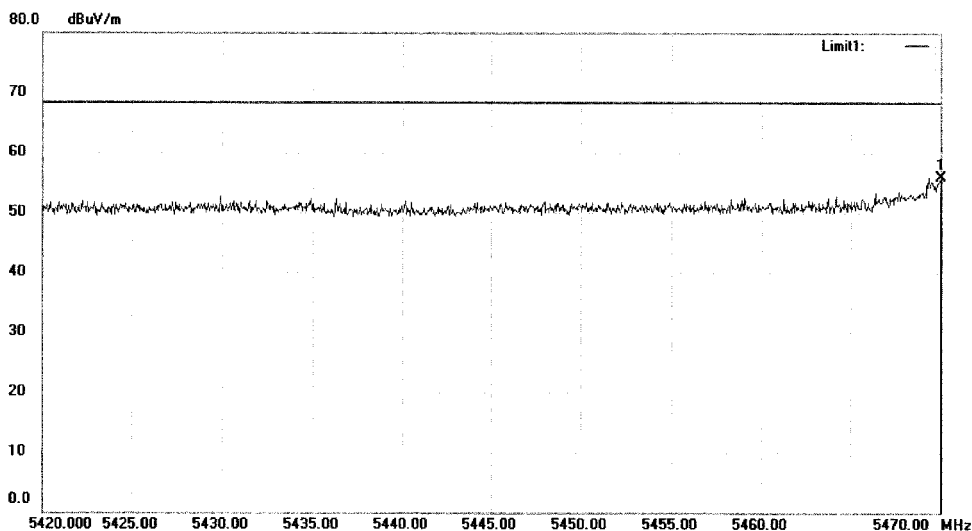
Radiated Emission Measurement

File :TUV(HUAKE)

Data :#130

Date: 2017/05/06

Time:



Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5500

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5470.000	54.56	1.43	55.99	68.23	-12.24	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#130

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

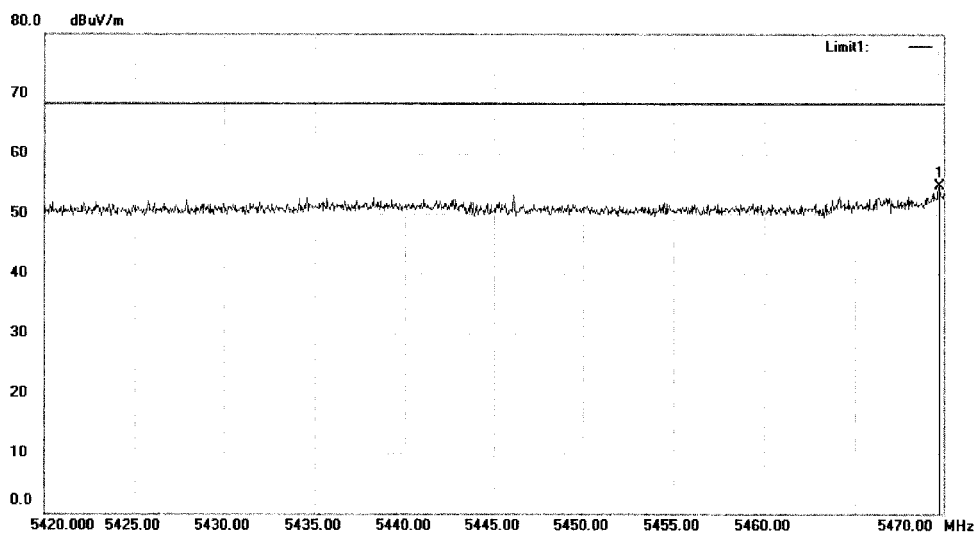

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#129

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5500

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5469.750	53.36	1.43	54.79	68.23	-13.44	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

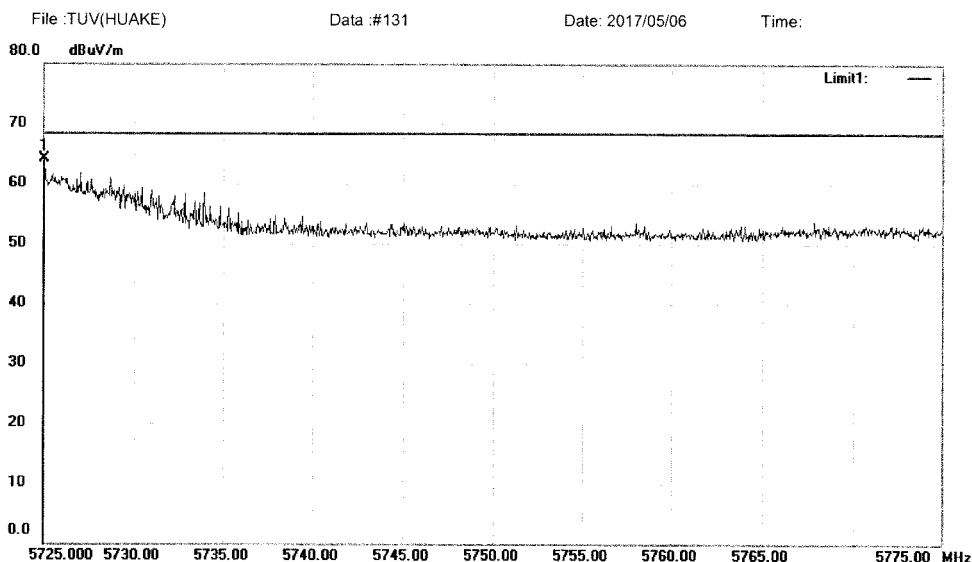
File :TUV(HUAKE)\Data :#129

Page: 1

Shenzhen EMTEK Co., Ltd.
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
EUT: Tablet PC
M/N: NS-P11A8100
Mode: 11ac20 5700
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1	*	5725.050	62.17	1.92	64.09	68.23	-4.14	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #131

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

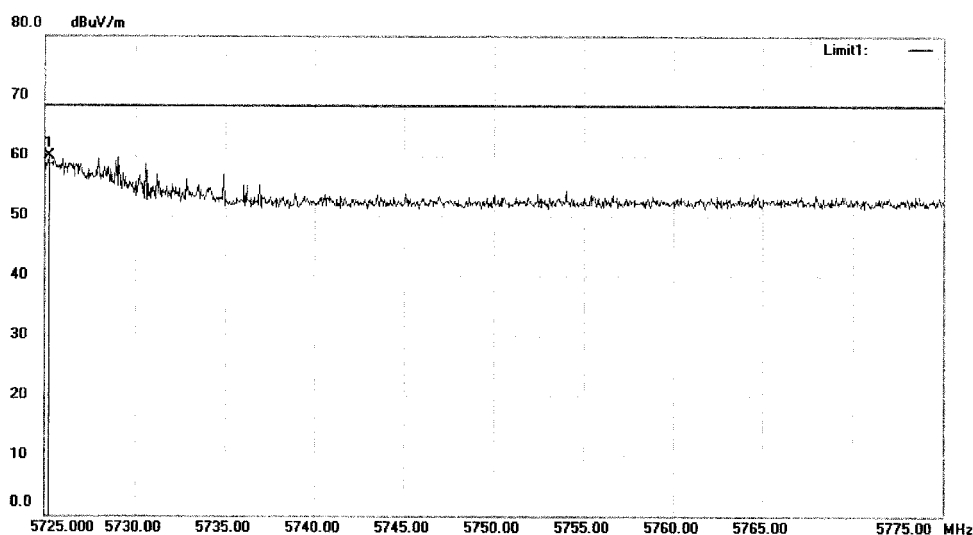

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#132

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5700

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5725.200	58.07	1.92	59.99	68.23	-8.24	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#132

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

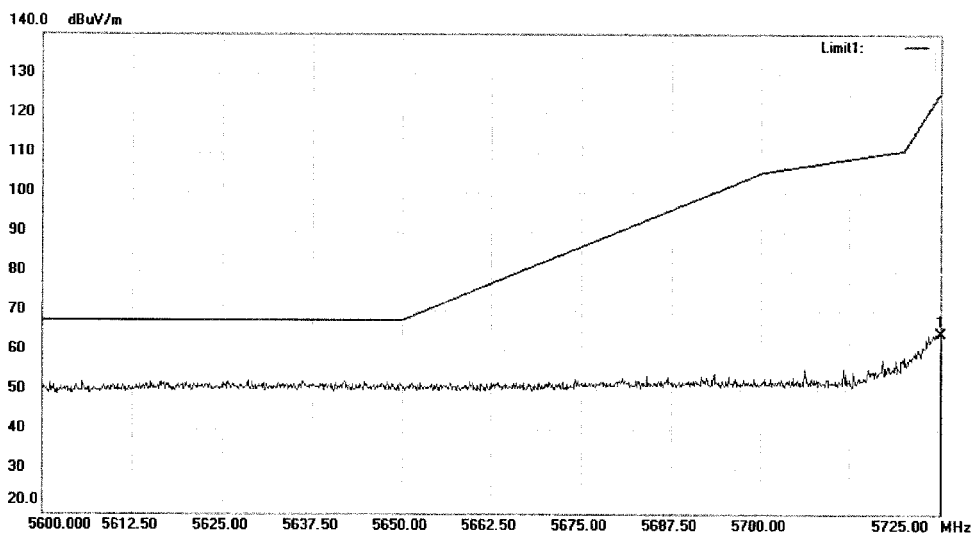

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#133

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5725.000	62.95	1.92	64.87	125.23	-60.36	peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#133

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

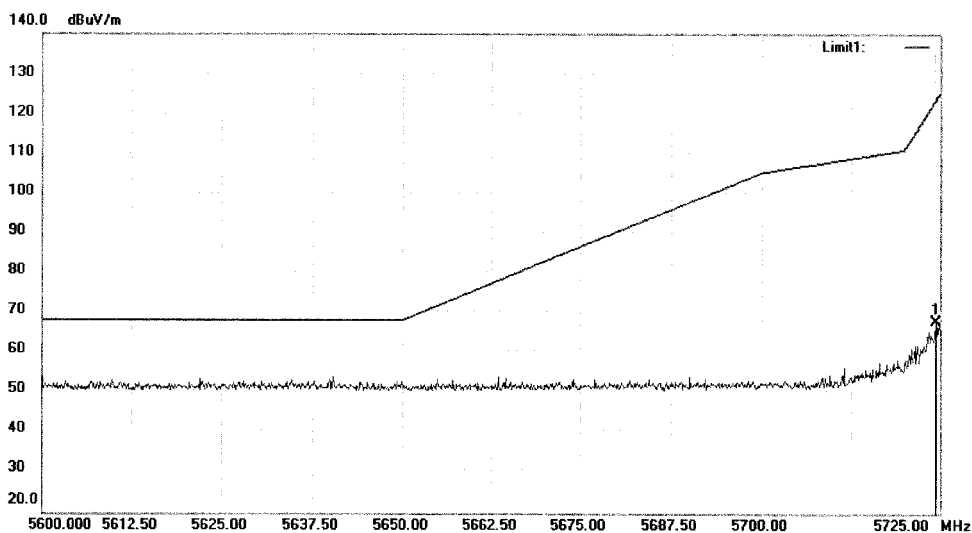

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#134

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5745

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5724.375	65.90	1.92	67.82	123.43	-55.61 peak		

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#134

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

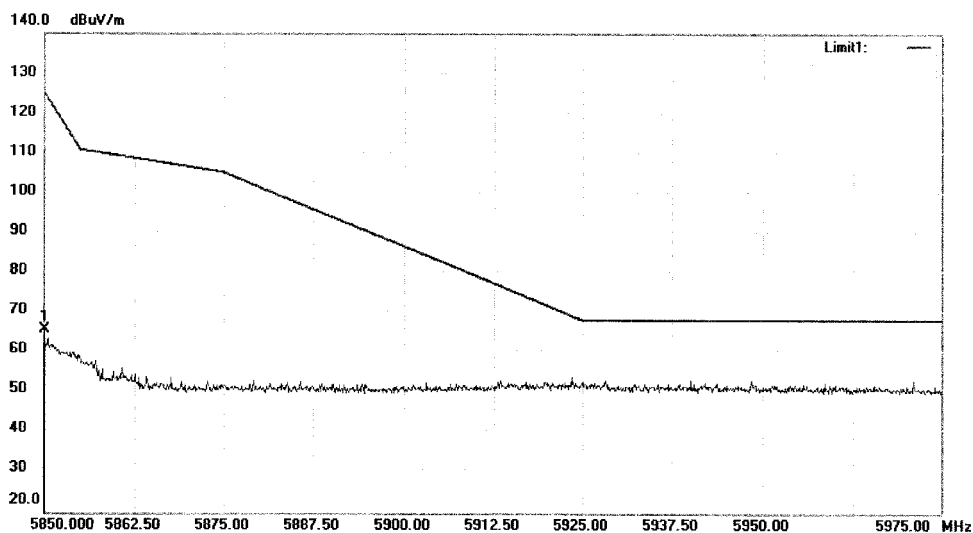
Radiated Emission Measurement

File: TUV(HUAKE)

Data: #135

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Horizontal**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode: 11ac20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5850.000	63.61	2.16	65.77	125.23	-59.46	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV(HUAKE)\Data: #135

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

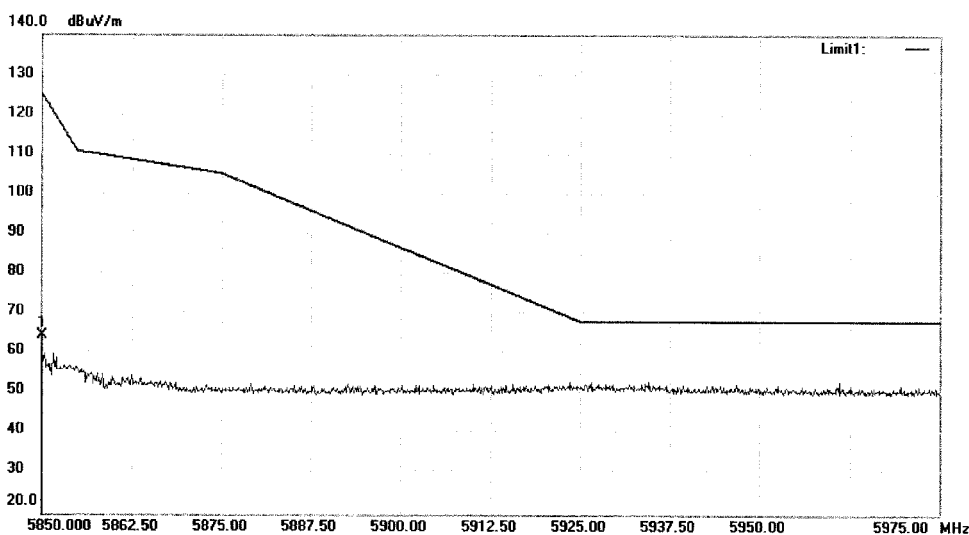

Radiated Emission Measurement

File :TUV(HUAKE)

Data :#136

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C B4 (Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac20 5825

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5850.000	62.48	2.16	64.64	125.23	-60.59	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

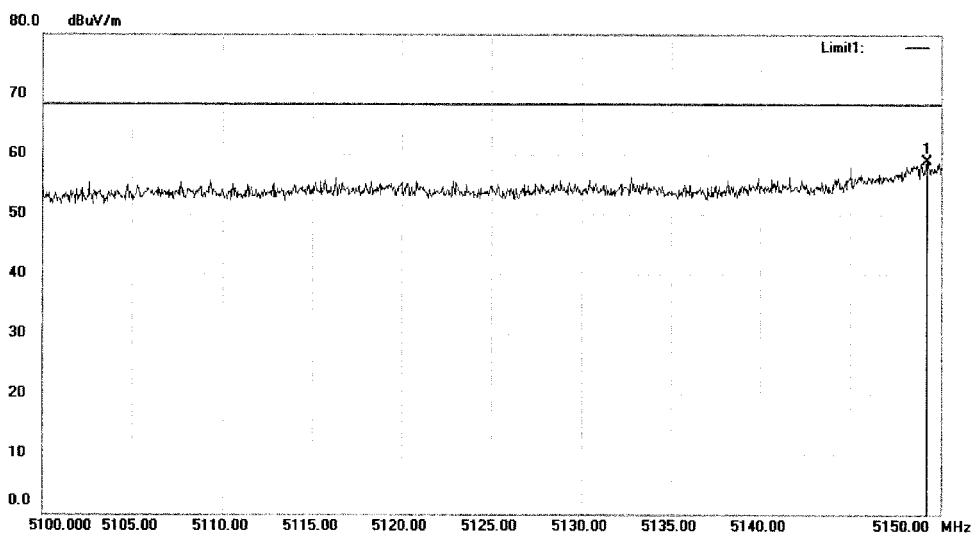
File :TUV(HUAKE)\Data :#136

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File :TUV(HUAKE) Data :#152 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode:11ac40 5190
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5149.200	58.17	0.81	58.98	68.23	-9.25	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV(HUAKE)\Data :#152

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

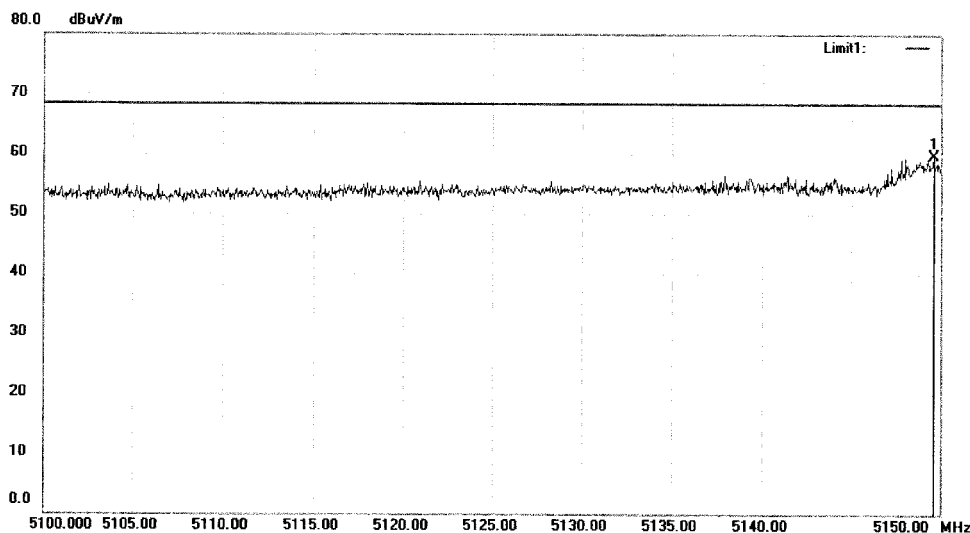

Radiated Emission Measurement

File :TUV(HUAKE)

Data #151

Date: 2017/05/06

Time:



Site 3m Chamber #1

 Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15C(Bandedge)Peak

Power: AC 120V/60Hz

Humidity: 50 %

EUT: Tablet PC

M/N: NS-P11A8100

Mode:11ac40 5190

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	5149.600	58.79	0.82	59.61	68.23	-8.62	peak		Comment

*:Maximum data x:Over limit !:over margin

Operator: KK

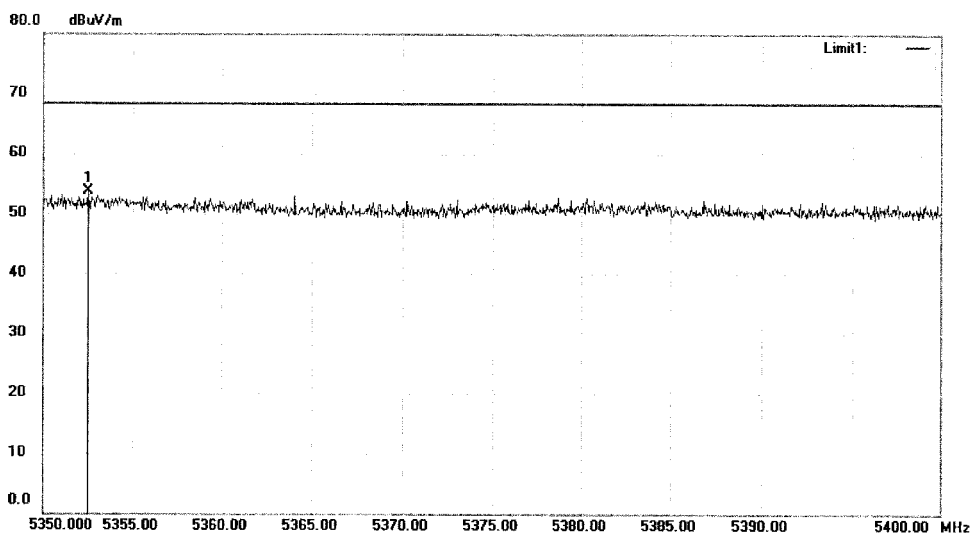
File :TUV(HUAKE)\Data :#151

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV(HUAKE) Data : #150 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5352.500	52.53	1.20	53.73	68.23	-14.50	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

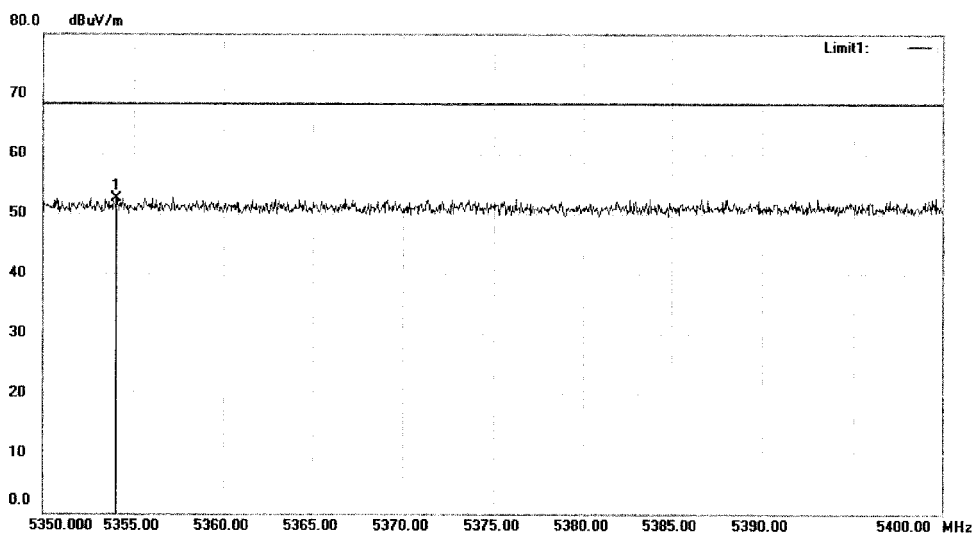
File : TUV(HUAKE)\Data : #150

Page: 1

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


Radiated Emission Measurement

File : TUV(HUAKE) Data : #149 Date: 2017/05/06 Time:



Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15C(Bandedge)Peak Power: AC 120V/60Hz Humidity: 50 %
 EUT: Tablet PC
 M/N: NS-P11A8100
 Mode: 11ac40 5230
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	5354.050	51.36	1.20	52.56	68.23	-15.67	peak	

*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV(HUAKE)\Data : #149

Page: 1