


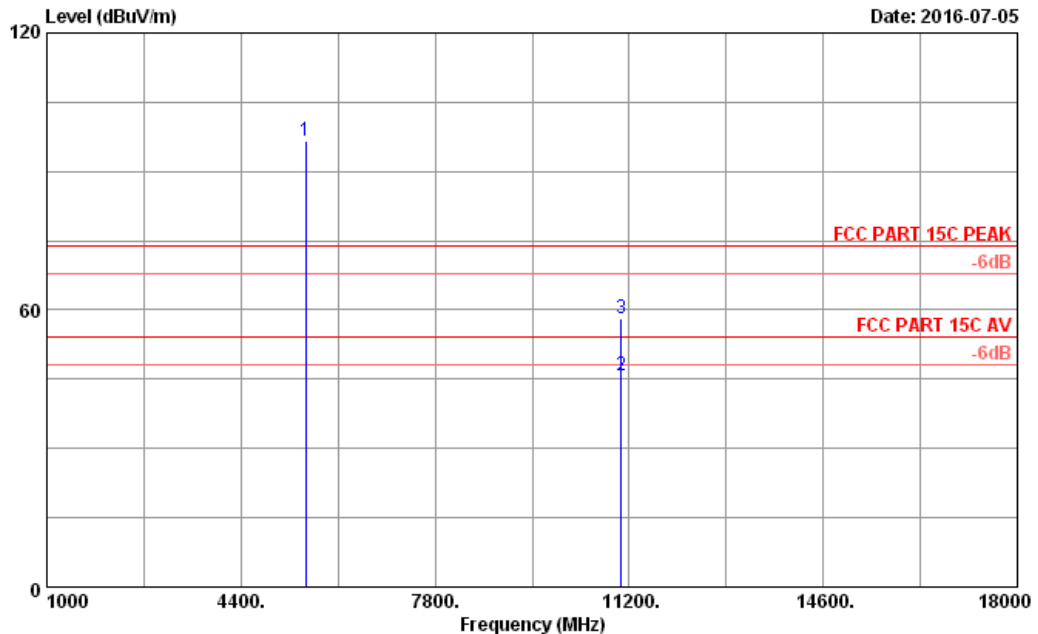

No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 96**
**File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


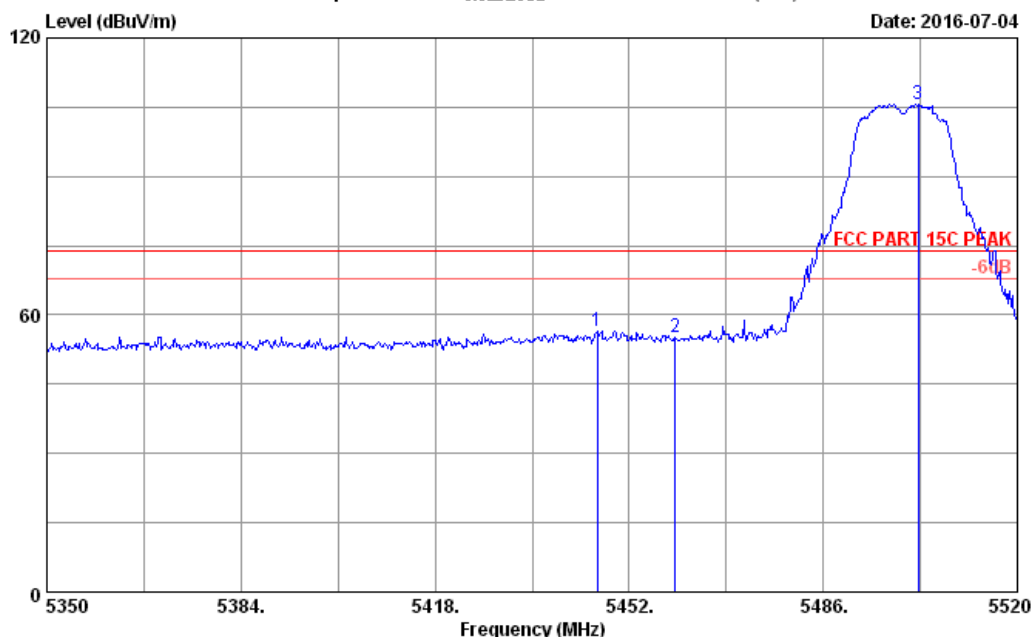
Site no. : 3m Chamber Data no. : 96  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5530.000       | 34.42                    | 11.95                 | 35.45                 | 85.69             | 96.61                         | 74.00              | -22.61         | Peak    |
| 2   | 11060.000      | 38.66                    | 13.45                 | 36.11                 | 29.64             | 45.64                         | 54.00              | 8.36           | Average |
| 3   | 11060.000      | 38.66                    | 13.45                 | 36.11                 | 42.25             | 58.25                         | 74.00              | 15.75          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 5**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-04**


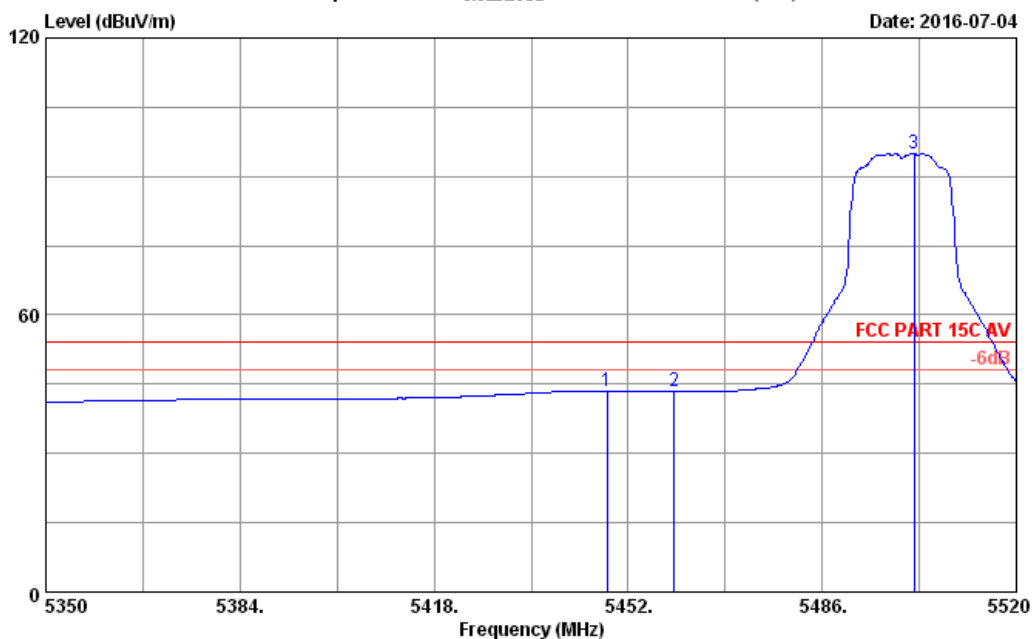
Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5446.390       | 34.30                    | 11.94                 | 35.48                 | 45.83             | 56.59                         | 74.00              | 17.41          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 44.19             | 54.99                         | 74.00              | 19.01          | Peak   |
| 3   | 5502.660       | 34.40                    | 11.95                 | 35.45                 | 94.72             | 105.62                        | 74.00              | -31.62         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 6**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-04**


Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5448.260       | 34.31                    | 11.94                 | 35.48                 | 32.68             | 43.45                         | 54.00              | 10.55          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 32.53             | 43.33                         | 54.00              | 10.67          | Average |
| 3   | 5502.150       | 34.40                    | 11.95                 | 35.45                 | 83.91             | 94.81                         | 54.00              | -40.81         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Ant Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 7

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-04

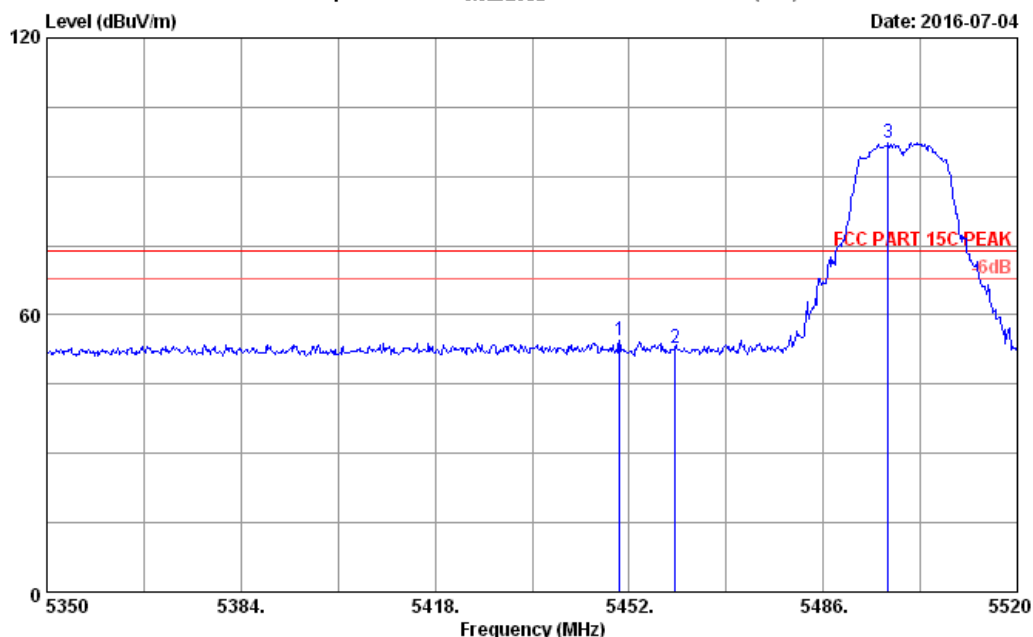


Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5450.300       | 34.31                    | 11.94                 | 35.48                 | 43.59             | 54.36                         | 74.00              | 19.64          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.96             | 52.76                         | 74.00              | 21.24          | Peak   |
| 3   | 5497.390       | 34.40                    | 11.95                 | 35.45                 | 86.41             | 97.31                         | 74.00              | -23.31         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

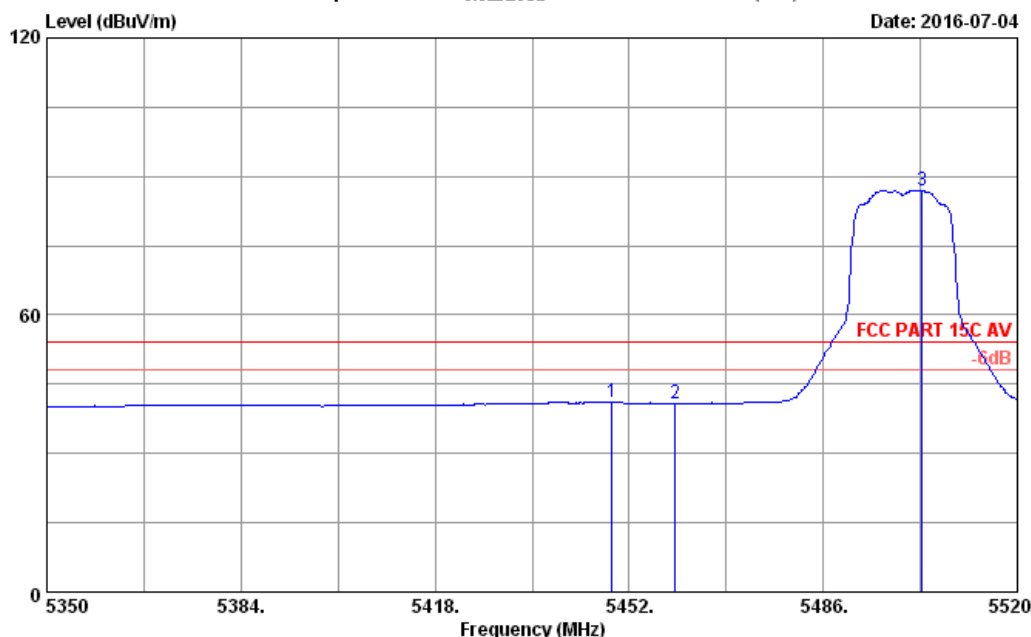**Data: 8**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-04**


Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5448.940       | 34.31                    | 11.94                 | 35.48                 | 30.25             | 41.02                         | 54.00              | 12.98          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 30.06             | 40.86                         | 54.00              | 13.14          | Average |
| 3   | 5503.340       | 34.40                    | 11.95                 | 35.45                 | 75.90             | 86.80                         | 54.00              | -32.80         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 17

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

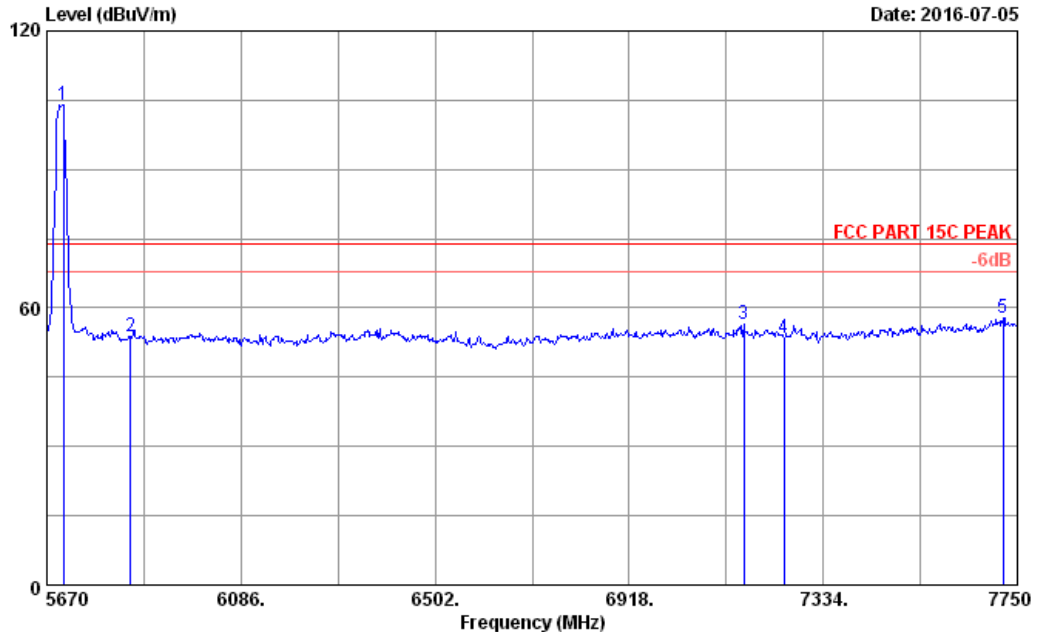


Site no. : 3m Chamber Data no. : 17  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5705.360       | 34.52                    | 11.97                 | 35.45                 | 92.99             | 104.03                        | 74.00              | -30.03         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.70             | 53.84                         | 74.00              | 20.16          | Peak   |
| 3   | 7163.440       | 35.89                    | 12.41                 | 35.55                 | 43.66             | 56.41                         | 74.00              | 17.59          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.31             | 53.33                         | 74.00              | 20.67          | Peak   |
| 5   | 7718.800       | 36.83                    | 12.77                 | 35.54                 | 43.65             | 57.71                         | 74.00              | 16.29          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

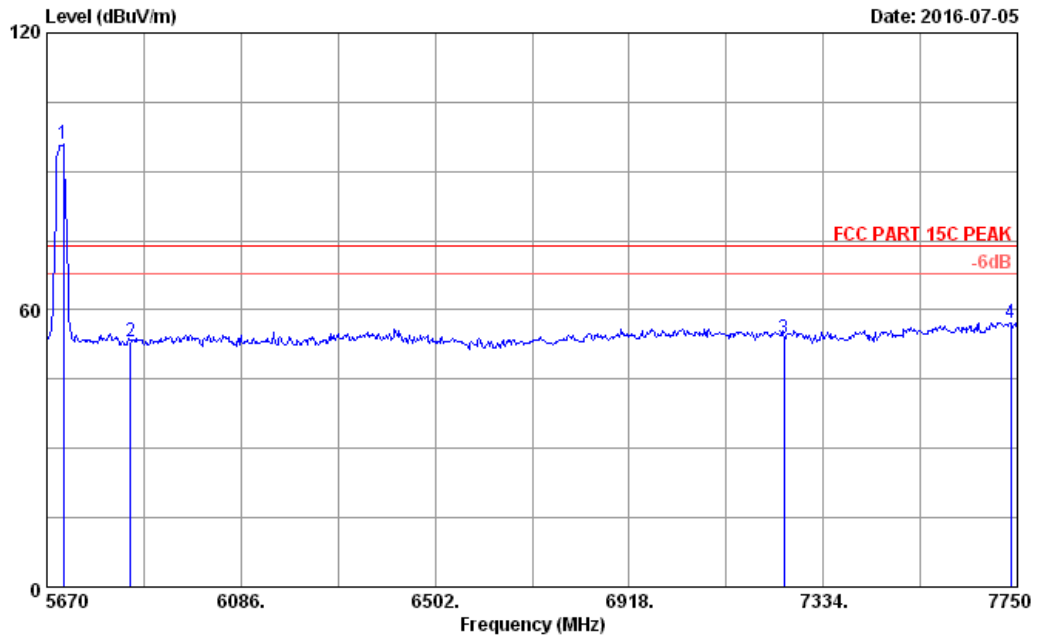**Data: 18**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


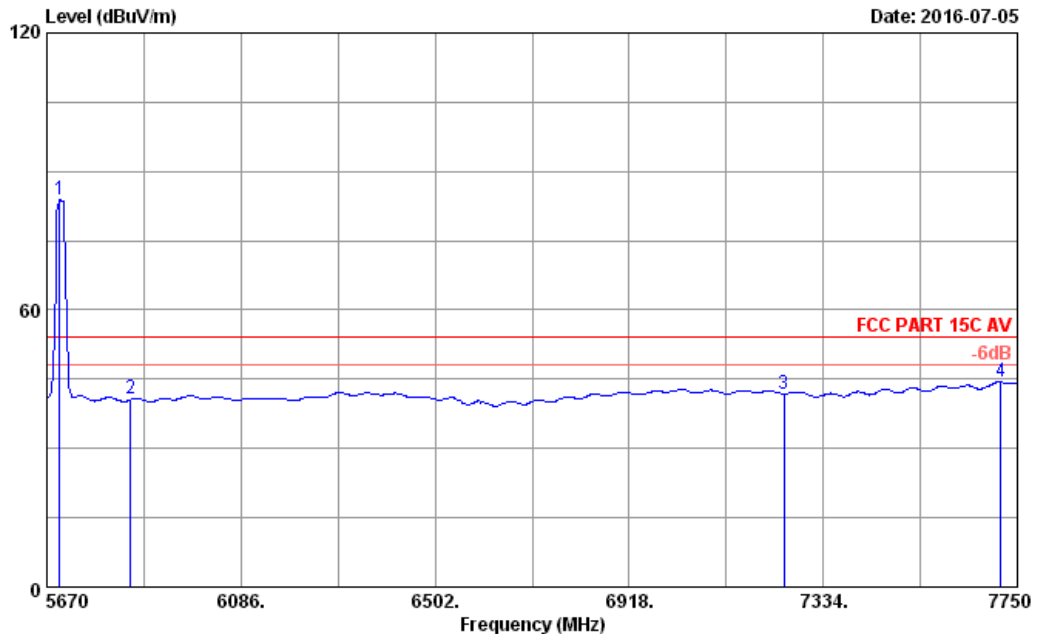
Site no. : 3m Chamber Data no. : 18  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5705.360       | 34.52                    | 11.97                 | 35.45                 | 84.76             | 95.80                         | 74.00              | -21.80         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 41.99             | 53.13                         | 74.00              | 20.87          | Peak   |
| 3   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.73             | 53.75                         | 74.00              | 20.25          | Peak   |
| 4   | 7735.440       | 36.84                    | 12.77                 | 35.53                 | 43.23             | 57.31                         | 74.00              | 16.69          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 19**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 19  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 72.86             | 83.90                         | 54.00              | -29.90         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.49             | 40.63                         | 54.00              | 13.37          | Average |
| 3   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.81             | 41.83                         | 54.00              | 12.17          | Average |
| 4   | 7714.640       | 36.83                    | 12.77                 | 35.54                 | 30.27             | 44.33                         | 54.00              | 9.67           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 20

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

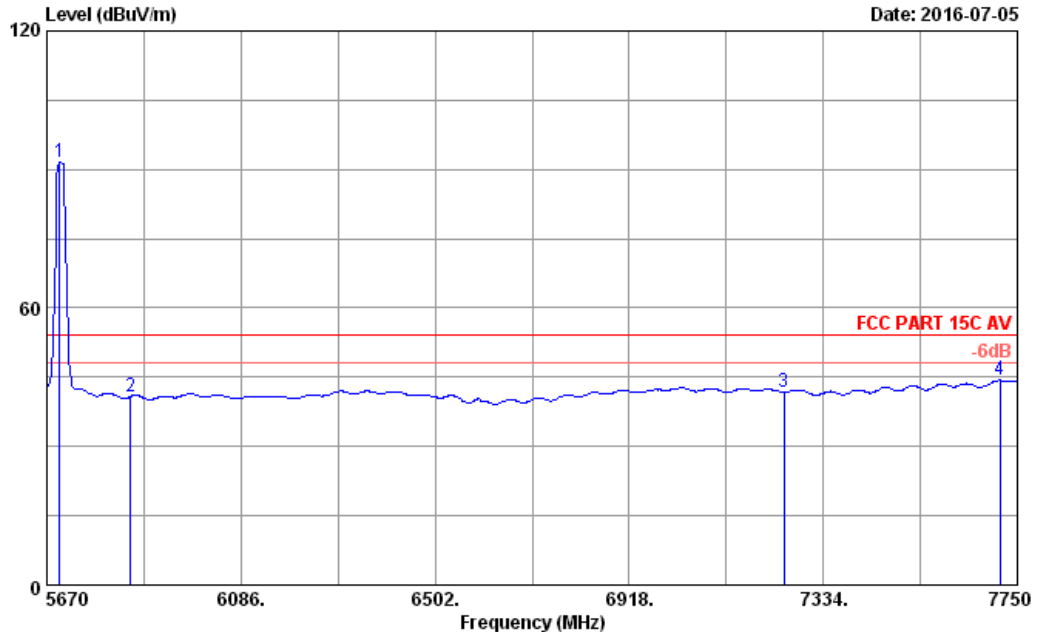


Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 80.60             | 91.64                         | 54.00              | -37.64         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.69             | 40.83                         | 54.00              | 13.17          | Average |
| 3   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.78             | 41.80                         | 54.00              | 12.20          | Average |
| 4   | 7712.560       | 36.83                    | 12.77                 | 35.54                 | 30.27             | 44.33                         | 54.00              | 9.67           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

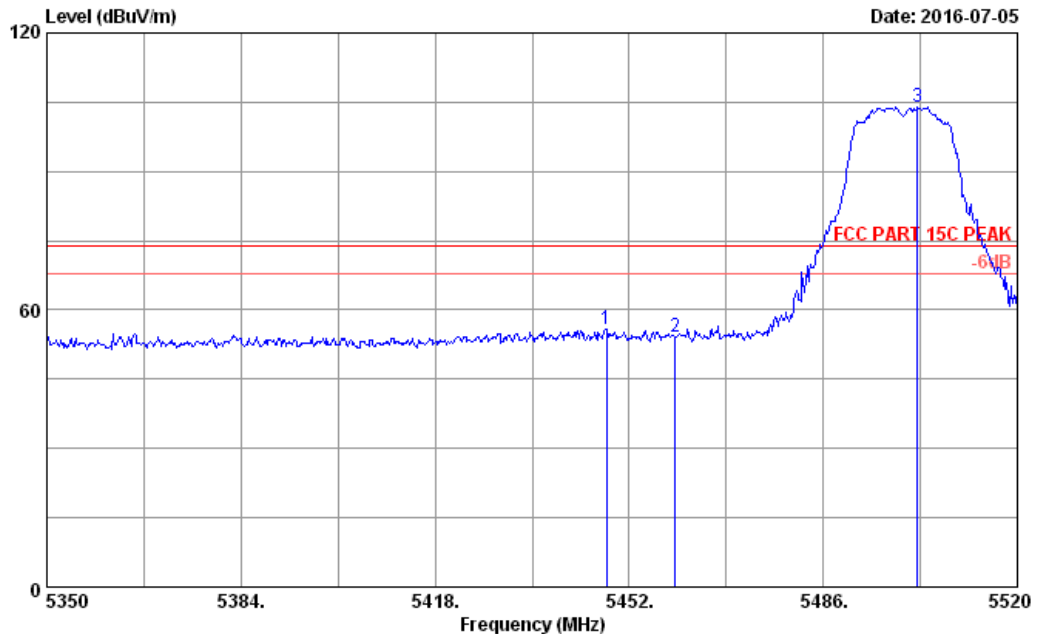**Data: 25**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


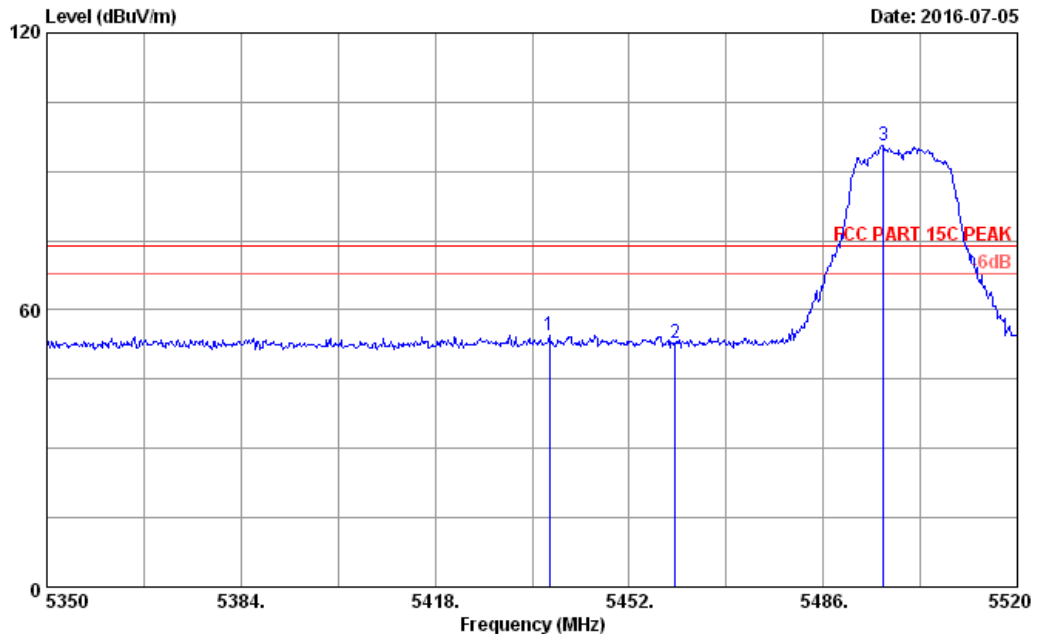
Site no. : 3m Chamber Data no. : 25  
Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.6%  
Engineer : zack\_zhu  
EUT : 11.6'' windows tablet  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx  
M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5448.090       | 34.31                    | 11.94                 | 35.48                 | 45.19             | 55.96                         | 74.00              | 18.04          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 43.37             | 54.17                         | 74.00              | 19.83          | Peak   |
| 3   | 5502.490       | 34.40                    | 11.95                 | 35.45                 | 93.01             | 103.91                        | 74.00              | -29.91         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 26**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5438.060       | 34.29                    | 11.94                 | 35.48                 | 43.89             | 54.64                         | 74.00              | 19.36          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.89             | 52.69                         | 74.00              | 21.31          | Peak   |
| 3   | 5496.540       | 34.39                    | 11.95                 | 35.45                 | 84.84             | 95.73                         | 74.00              | -21.73         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 27

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

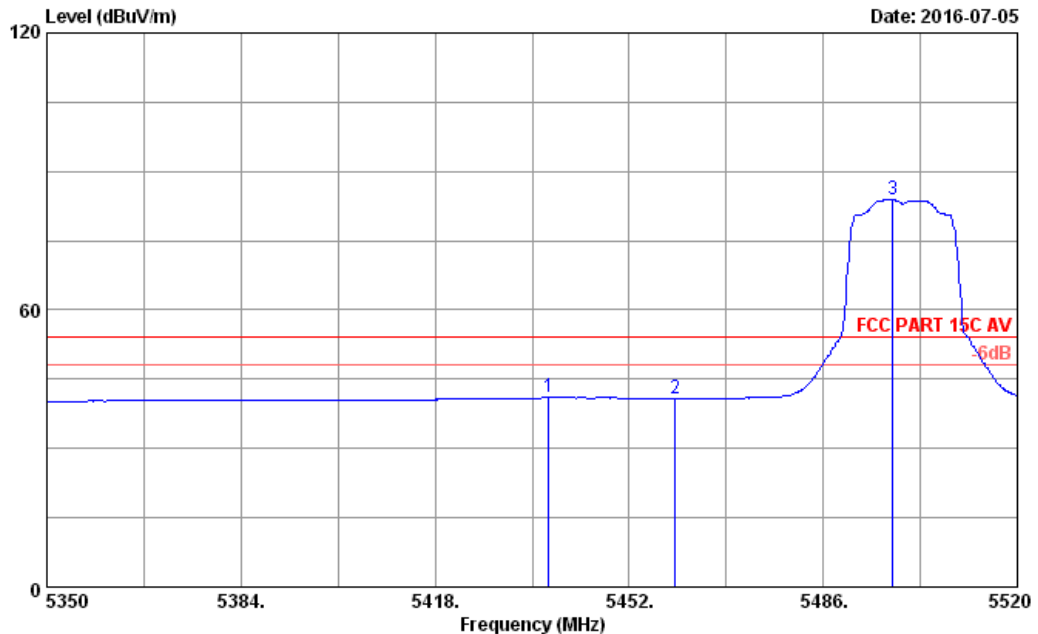

Site no. : 3m Chamber Data no. : 27  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5437.890       | 34.29                    | 11.94                 | 35.48                 | 30.31             | 41.06                         | 54.00              | 12.94          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 30.01             | 40.81                         | 54.00              | 13.19          | Average |
| 3   | 5498.240       | 34.40                    | 11.95                 | 35.45                 | 72.92             | 83.82                         | 54.00              | -29.82         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 28

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

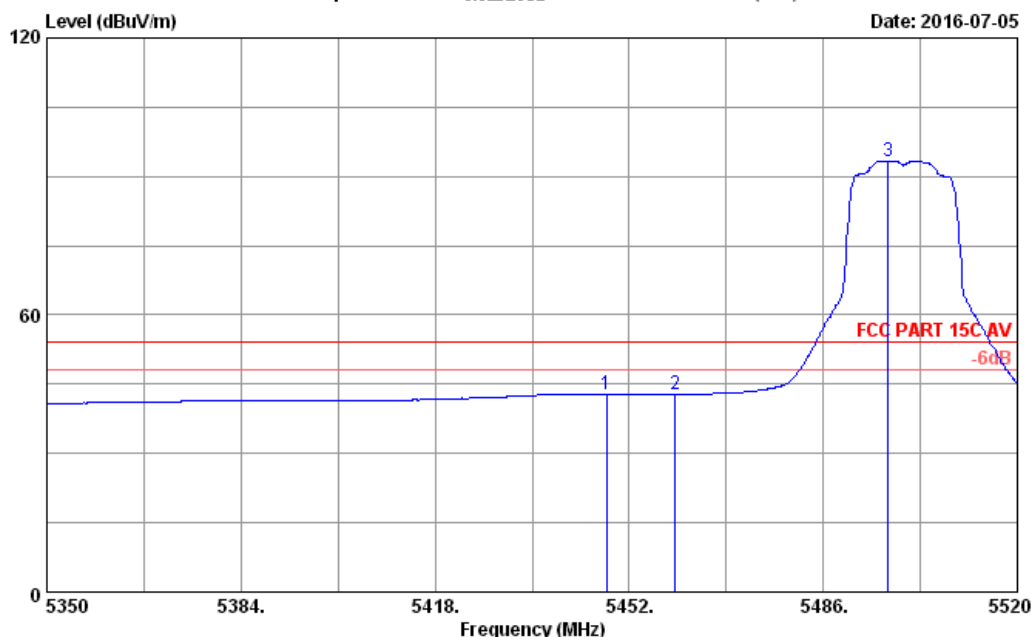

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5448.090       | 34.31                    | 11.94                 | 35.48                 | 32.13             | 42.90                         | 54.00              | 11.10          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 31.98             | 42.78                         | 54.00              | 11.22          | Average |
| 3   | 5497.390       | 34.40                    | 11.95                 | 35.45                 | 82.46             | 93.36                         | 54.00              | -39.36         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 37

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

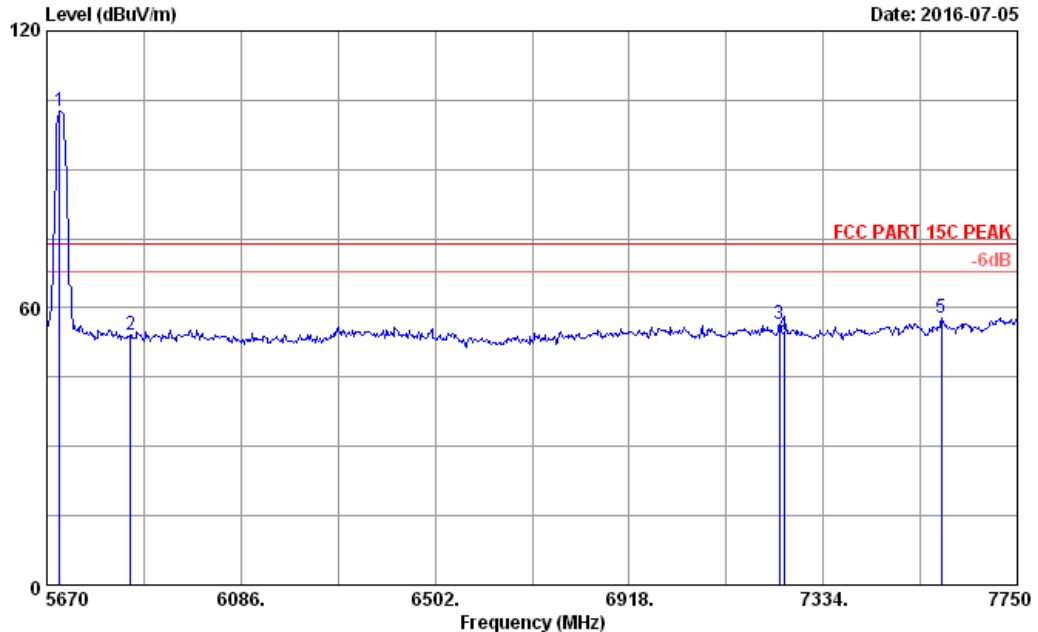

Site no. : 3m Chamber Data no. : 37  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 91.70             | 102.74                        | 74.00              | -28.74         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 43.09             | 54.23                         | 74.00              | 19.77          | Peak   |
| 3   | 7240.400       | 36.08                    | 12.47                 | 35.56                 | 43.51             | 56.50                         | 74.00              | 17.50          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.29             | 54.31                         | 74.00              | 19.69          | Peak   |
| 5   | 7587.760       | 36.75                    | 12.72                 | 35.58                 | 43.90             | 57.79                         | 74.00              | 16.21          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 38

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

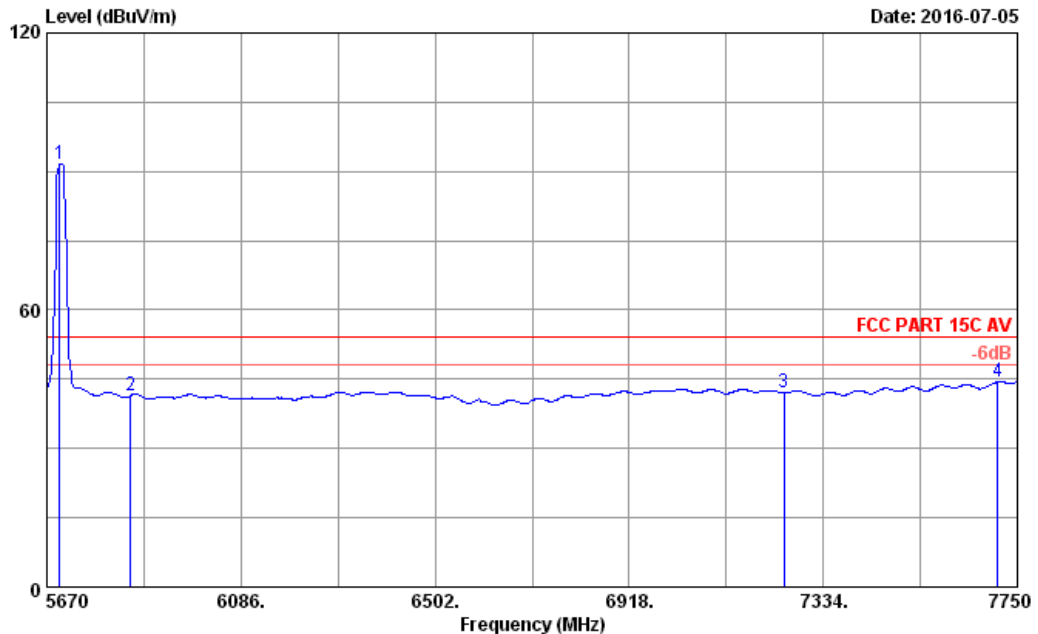

Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 80.47             | 91.51                         | 54.00              | -37.51         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 30.28             | 41.42                         | 54.00              | 12.58          | Average |
| 3   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 29.00             | 42.02                         | 54.00              | 11.98          | Average |
| 4   | 7708.400       | 36.83                    | 12.77                 | 35.54                 | 30.40             | 44.46                         | 54.00              | 9.54           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 39

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

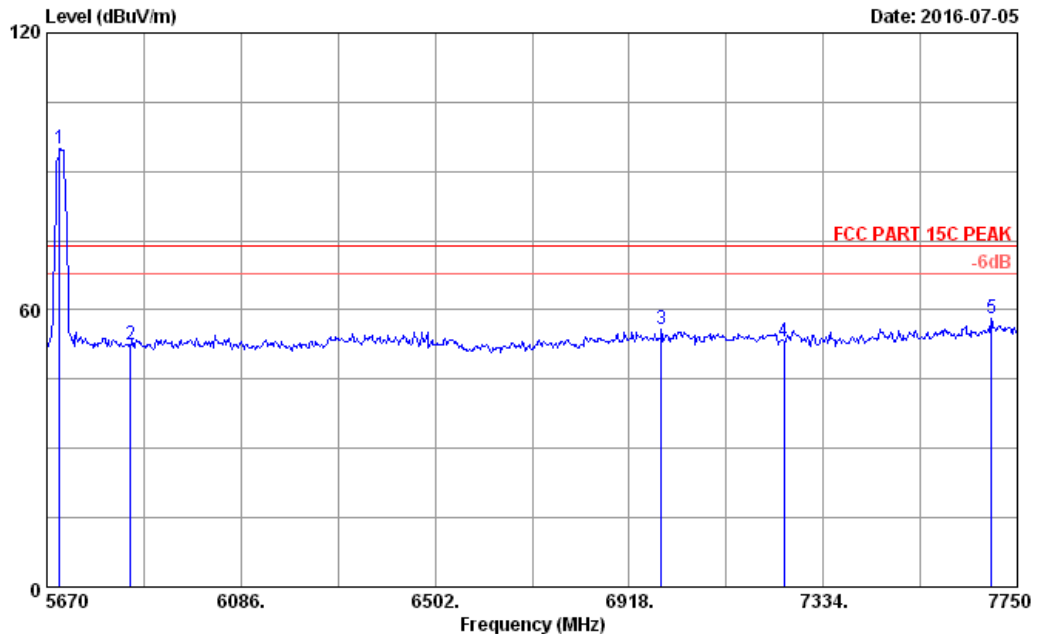

Site no. : 3m Chamber Data no. : 39  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 84.00             | 95.04                         | 74.00              | -21.04         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 41.45             | 52.59                         | 74.00              | 21.41          | Peak   |
| 3   | 6986.640       | 35.48                    | 12.26                 | 35.51                 | 43.65             | 55.88                         | 74.00              | 18.12          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.21             | 53.23                         | 74.00              | 20.77          | Peak   |
| 5   | 7693.840       | 36.82                    | 12.76                 | 35.55                 | 44.04             | 58.07                         | 74.00              | 15.93          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Ant Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 40

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

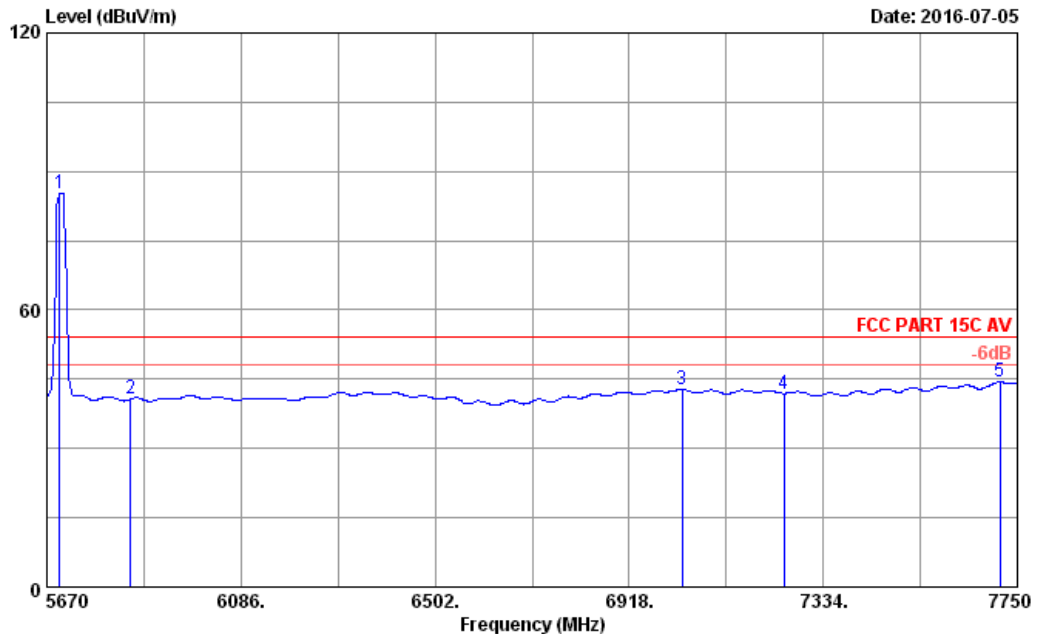


Site no. : 3m Chamber Data no. : 40  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 74.16             | 85.20                         | 54.00              | -31.20         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.58             | 40.72                         | 54.00              | 13.28          | Average |
| 3   | 7032.400       | 35.58                    | 12.30                 | 35.53                 | 30.38             | 42.73                         | 54.00              | 11.27          | Peak    |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.92             | 41.94                         | 54.00              | 12.06          | Average |
| 5   | 7712.560       | 36.83                    | 12.77                 | 35.54                 | 30.28             | 44.34                         | 54.00              | 9.66           | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

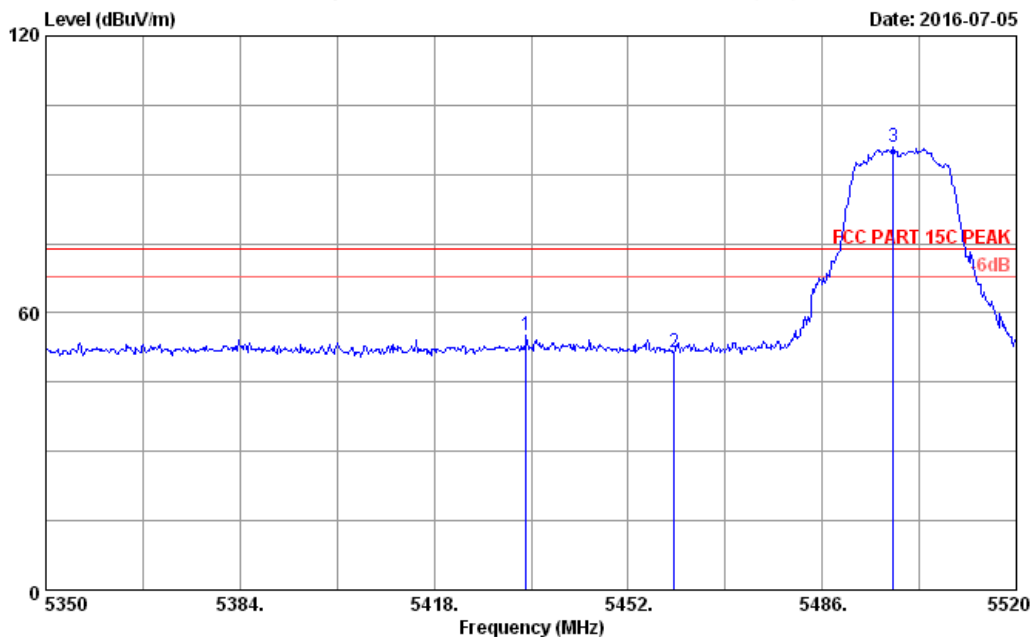**Data: 57**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


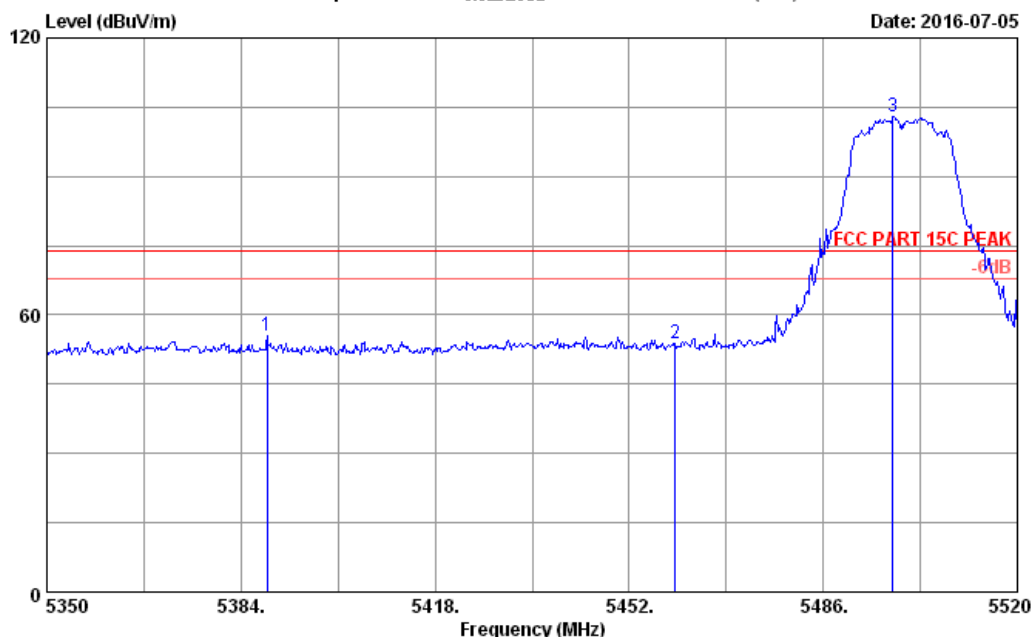
Site no. : 3m Chamber Data no. : 57  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5434.150       | 34.28                    | 11.94                 | 35.49                 | 44.37             | 55.10                         | 74.00              | 18.90          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 40.65             | 51.45                         | 74.00              | 22.55          | Peak   |
| 3   | 5498.410       | 34.40                    | 11.95                 | 35.45                 | 84.91             | 95.81                         | 74.00              | -21.81         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

**Data: 58**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 58  
Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK  
Env. / Ins. : 23.4°C/52.6%  
Engineer : zack\_zhu  
EUT : 11.6'' windows tablet  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx  
M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5388.590       | 34.20                    | 11.93                 | 35.51                 | 44.83             | 55.45                         | 74.00              | 18.55          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 43.04             | 53.84                         | 74.00              | 20.16          | Peak   |
| 3   | 5498.240       | 34.40                    | 11.95                 | 35.45                 | 92.05             | 102.95                        | 74.00              | -28.95         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 59

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

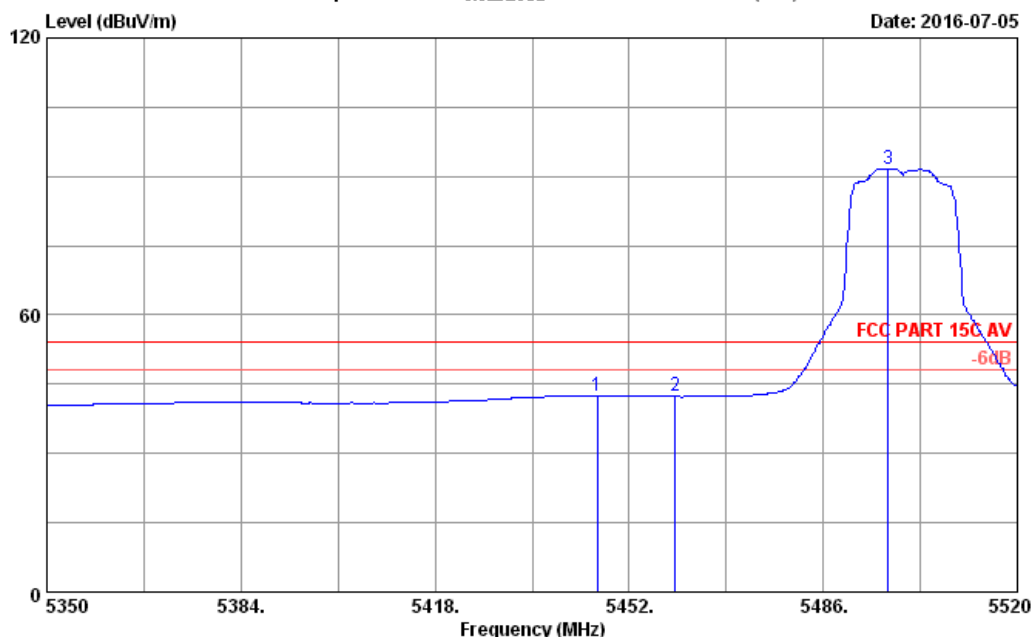

Site no. : 3m Chamber Data no. : 59  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5446.390       | 34.30                    | 11.94                 | 35.48                 | 31.73             | 42.49                         | 54.00              | 11.51          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 31.54             | 42.34                         | 54.00              | 11.66          | Average |
| 3   | 5497.390       | 34.40                    | 11.95                 | 35.45                 | 80.72             | 91.62                         | 54.00              | -37.62         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 60

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

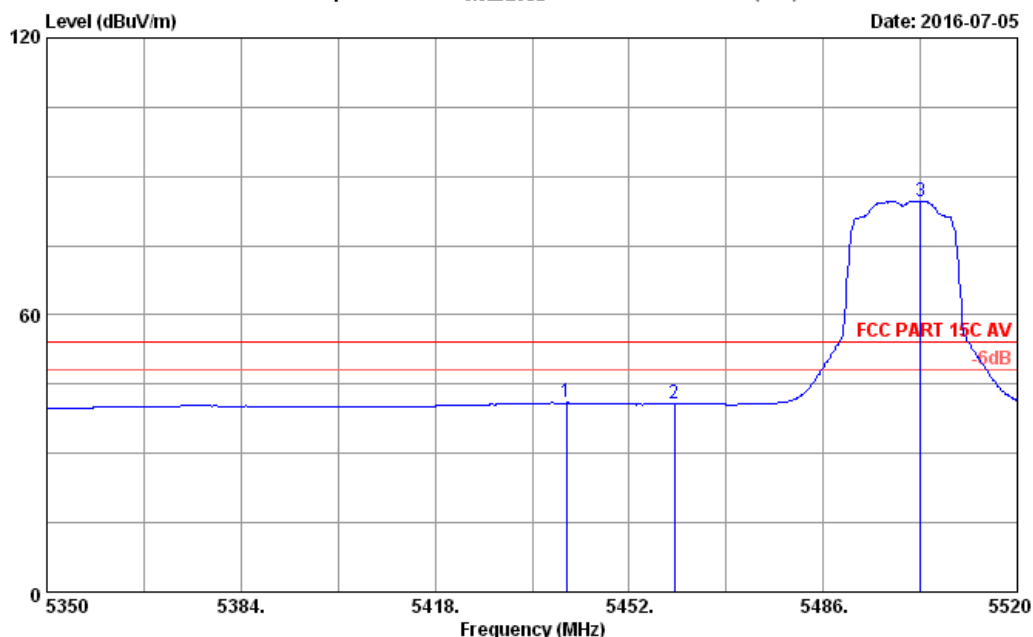

Site no. : 3m Chamber Data no. : 60  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT20 CH100 5500MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5440.950       | 34.29                    | 11.94                 | 35.48                 | 30.22             | 40.97                         | 54.00              | 13.03          | Average |
| 2   | 5459.990       | 34.33                    | 11.94                 | 35.47                 | 29.88             | 40.68                         | 54.00              | 13.32          | Average |
| 3   | 5503.000       | 34.40                    | 11.95                 | 35.45                 | 73.67             | 84.57                         | 54.00              | -30.57         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 41

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

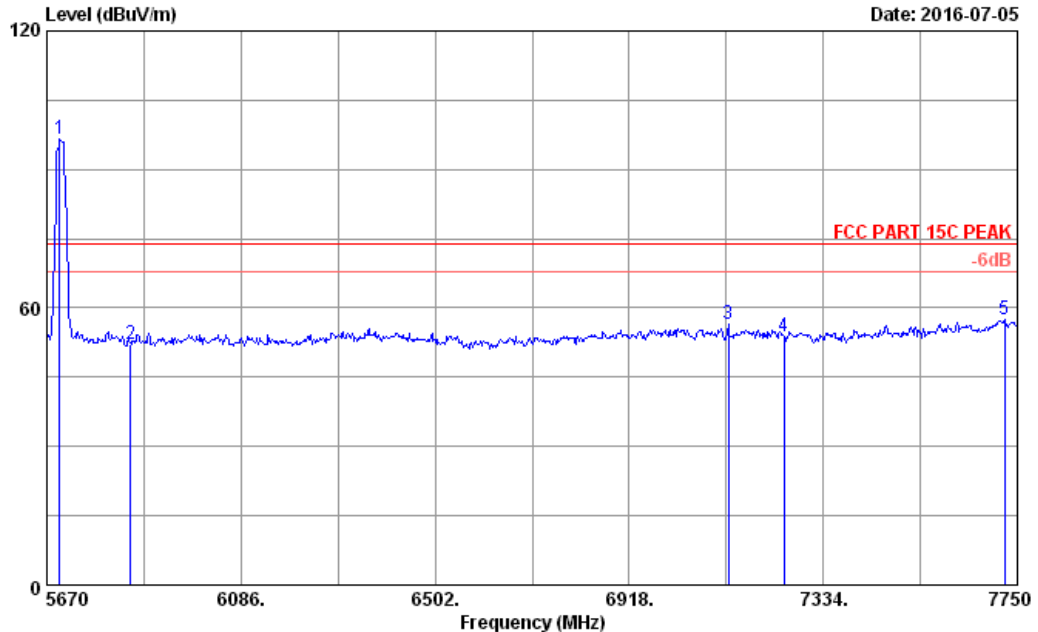

Site no. : 3m Chamber Data no. : 41  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 85.59             | 96.63                         | 74.00              | -22.63         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 40.99             | 52.13                         | 74.00              | 21.87          | Peak   |
| 3   | 7130.160       | 35.81                    | 12.38                 | 35.54                 | 43.69             | 56.34                         | 74.00              | 17.66          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.96             | 53.98                         | 74.00              | 20.02          | Peak   |
| 5   | 7722.960       | 36.83                    | 12.77                 | 35.54                 | 43.42             | 57.48                         | 74.00              | 16.52          | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 42

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

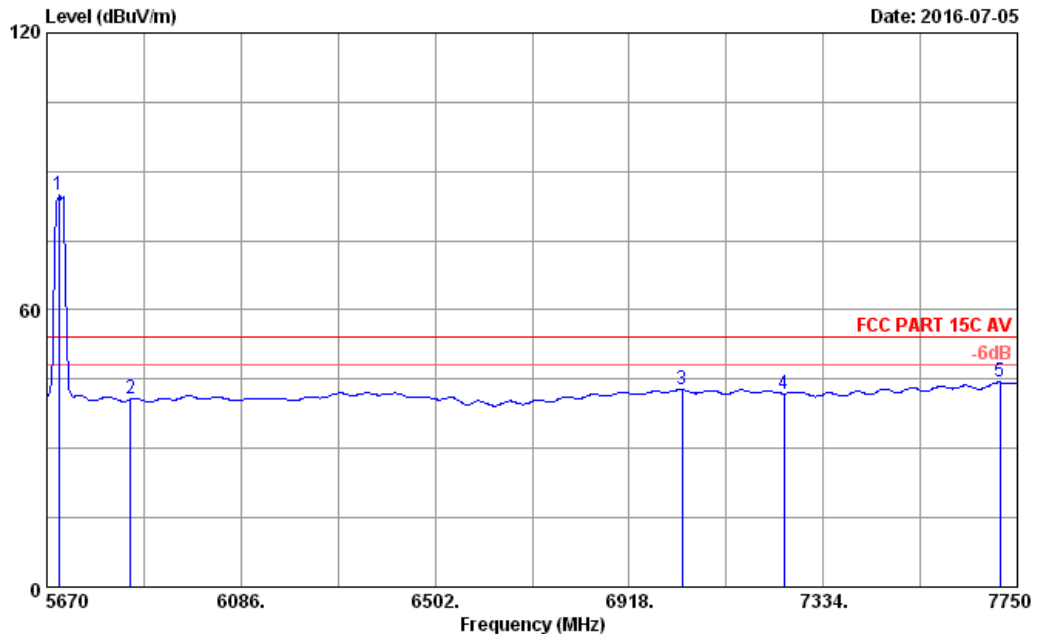

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 42         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C AV                       |           |              |
| Env. / Ins.  | : 23.4°C/52.6%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11ac VHT20 CH140 5700MHz Tx   |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5694.960       | 34.52                    | 11.97                 | 35.45                 | 73.86             | 84.90                         | 54.00              | -30.90         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.61             | 40.75                         | 54.00              | 13.25          | Average |
| 3   | 7032.400       | 35.58                    | 12.30                 | 35.53                 | 30.33             | 42.68                         | 54.00              | 11.32          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.88             | 41.90                         | 54.00              | 12.10          | Average |
| 5   | 7712.560       | 36.83                    | 12.77                 | 35.54                 | 30.26             | 44.32                         | 54.00              | 9.68           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor

2. The emission levels that are 20dB below the official  
limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 43

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

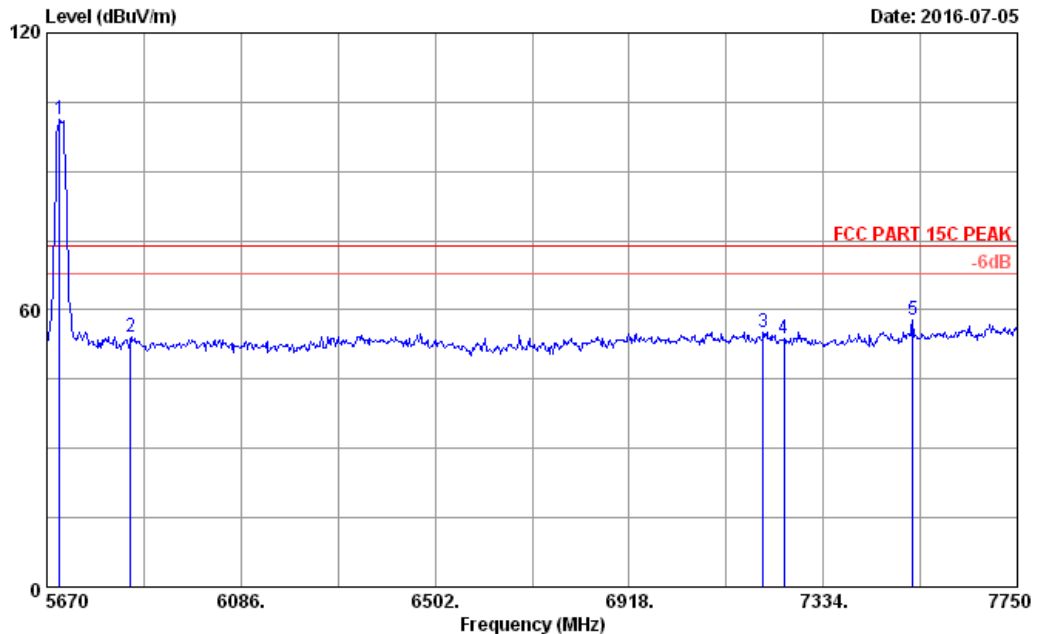

Site no. : 3m Chamber Data no. : 43  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5697.040       | 34.52                    | 11.97                 | 35.45                 | 90.18             | 101.22                        | 74.00              | -27.22         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 43.18             | 54.32                         | 74.00              | 19.68          | Peak   |
| 3   | 7205.040       | 35.99                    | 12.44                 | 35.55                 | 42.40             | 55.28                         | 74.00              | 18.72          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.86             | 53.88                         | 74.00              | 20.12          | Peak   |
| 5   | 7525.360       | 36.72                    | 12.70                 | 35.59                 | 43.94             | 57.77                         | 74.00              | 16.23          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 44

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

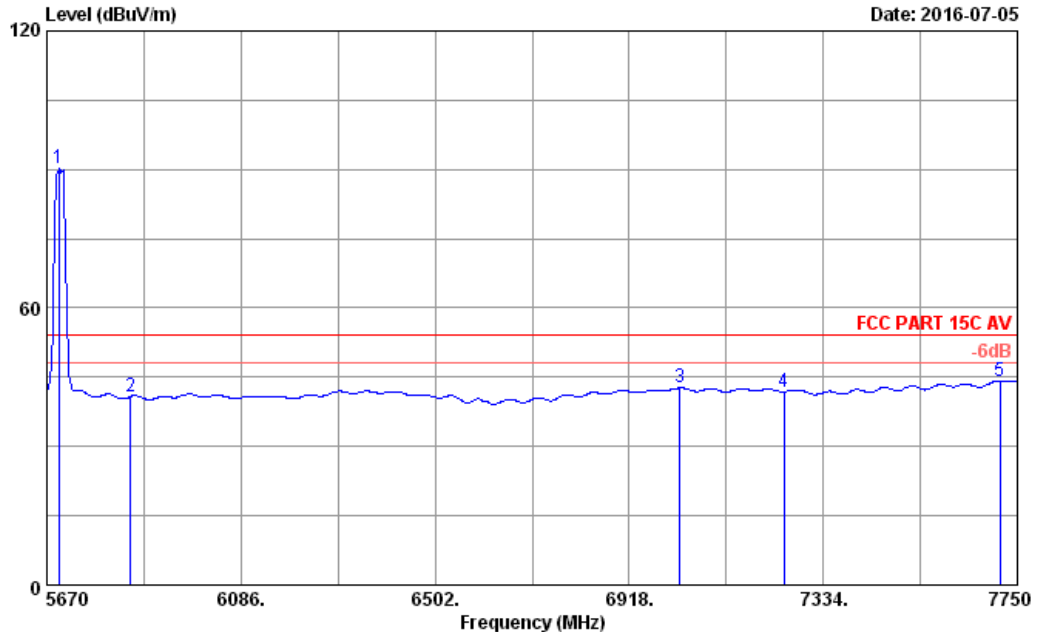

Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT20 CH140 5700MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5694.960       | 34.52                    | 11.97                 | 35.45                 | 79.23             | 90.27                         | 54.00              | -36.27         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.70             | 40.84                         | 54.00              | 13.16          | Average |
| 3   | 7026.160       | 35.56                    | 12.29                 | 35.52                 | 30.33             | 42.66                         | 54.00              | 11.34          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.85             | 41.87                         | 54.00              | 12.13          | Average |
| 5   | 7712.560       | 36.83                    | 12.77                 | 35.54                 | 30.22             | 44.28                         | 54.00              | 9.72           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 65

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

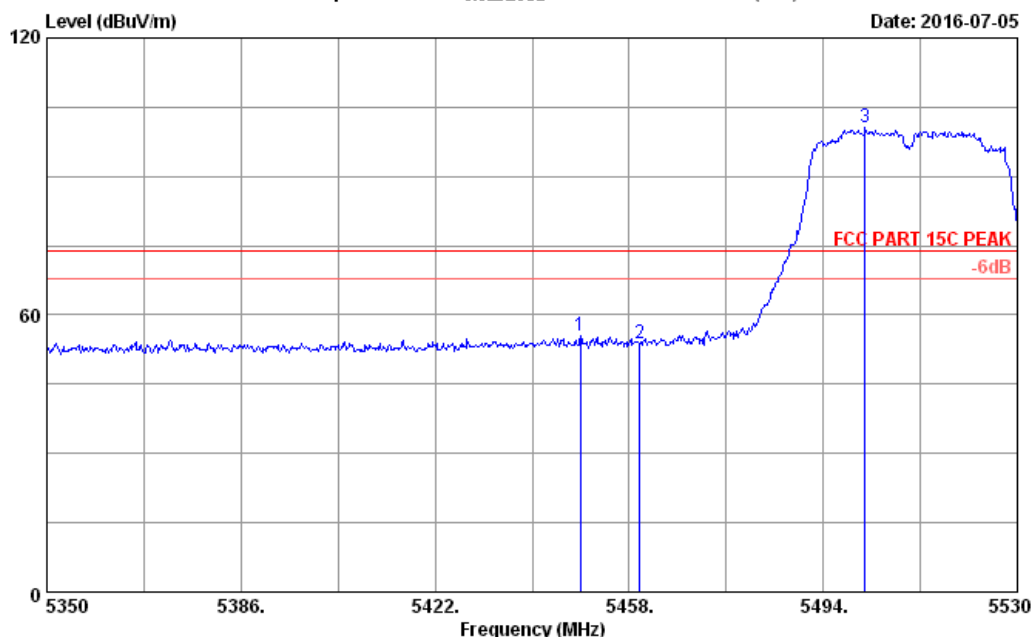

Site no. : 3m Chamber Data no. : 65  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH102 5510MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5449.000       | 34.31                    | 11.94                 | 35.48                 | 44.64             | 55.41                         | 74.00              | 18.59          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 43.09             | 53.89                         | 74.00              | 20.11          | Peak   |
| 3   | 5501.740       | 34.40                    | 11.95                 | 35.45                 | 89.57             | 100.47                        | 74.00              | -26.47         | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 66

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

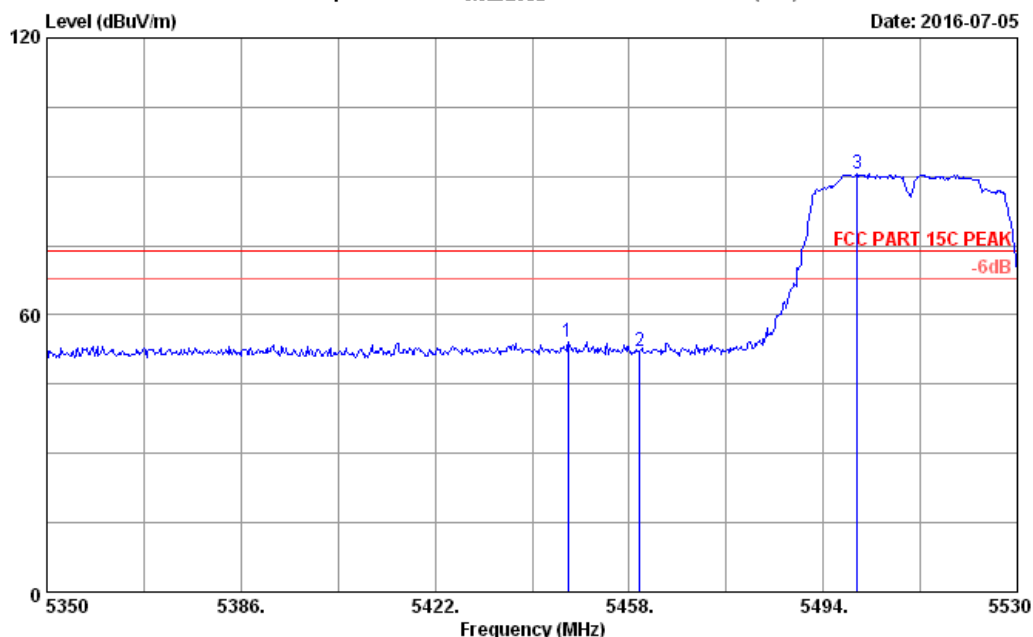

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 66         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.6%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT40 CH102 5510MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5446.660       | 34.30                    | 11.94                 | 35.48                 | 43.32             | 54.08                         | 74.00              | 19.92          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.44             | 52.24                         | 74.00              | 21.76          | Peak   |
| 3   | 5500.300       | 34.40                    | 11.95                 | 35.45                 | 79.70             | 90.60                         | 74.00              | -16.60         | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 67

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

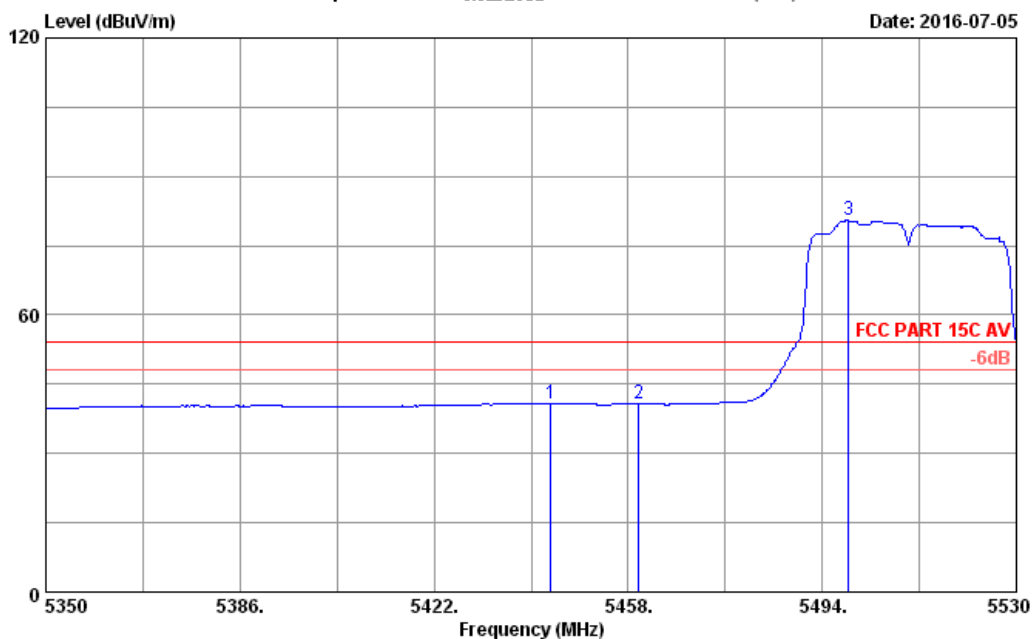


|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 67         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C AV                       |           |              |
| Env. / Ins.  | : 23.4°C/52.6%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT40 CH102 5510MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5443.600       | 34.30                    | 11.94                 | 35.48                 | 30.16             | 40.92                         | 54.00              | 13.08          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.95             | 40.75                         | 54.00              | 13.25          | Average |
| 3   | 5498.860       | 34.40                    | 11.95                 | 35.45                 | 69.54             | 80.44                         | 54.00              | -26.44         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

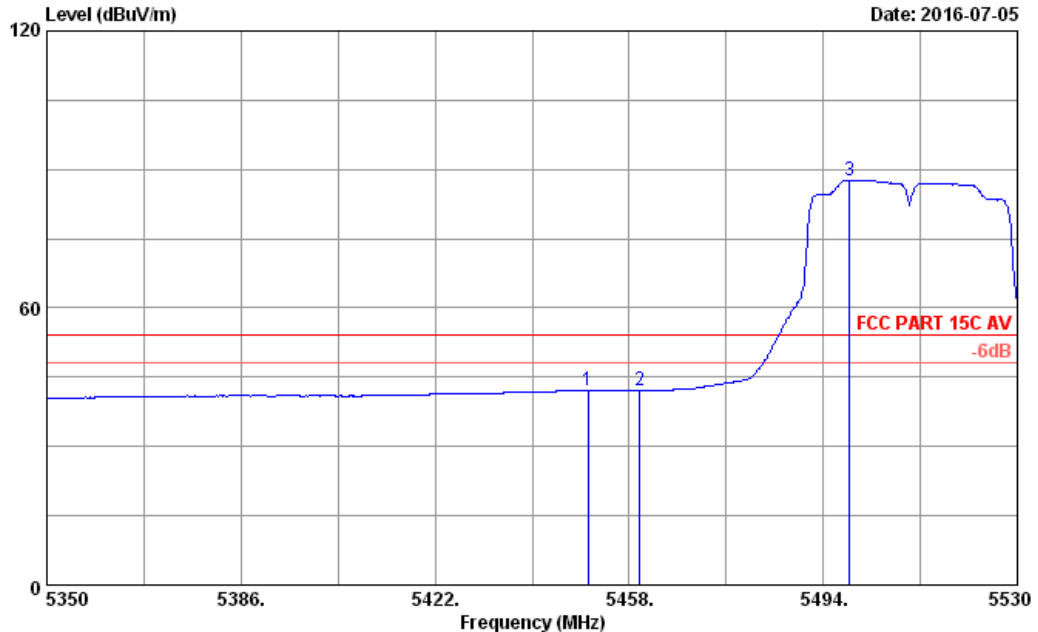**Data: 68**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


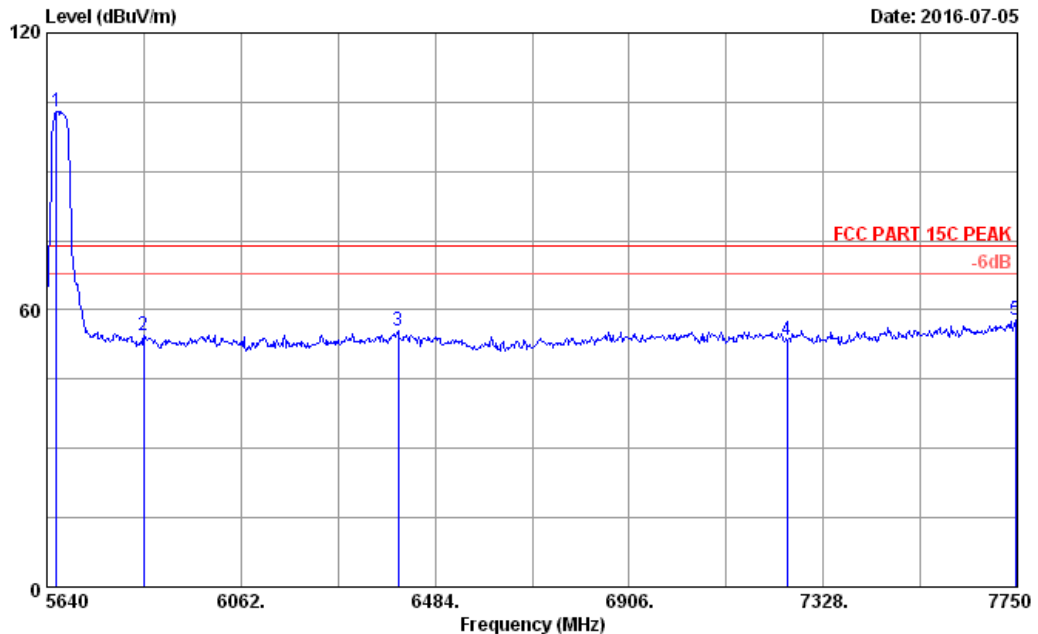
Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH102 5510MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5450.440       | 34.31                    | 11.94                 | 35.48                 | 31.41             | 42.18                         | 54.00              | 11.82          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 31.28             | 42.08                         | 54.00              | 11.92          | Average |
| 3   | 5498.860       | 34.40                    | 11.95                 | 35.45                 | 76.78             | 87.68                         | 54.00              | -33.68         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 73**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 73  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5661.100       | 34.50                    | 11.96                 | 35.45                 | 91.97             | 102.98                        | 74.00              | -28.98         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 43.50             | 54.64                         | 74.00              | 19.36          | Peak   |
| 3   | 6403.820       | 34.78                    | 12.06                 | 35.35                 | 43.99             | 55.48                         | 74.00              | 18.52          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.45             | 53.47                         | 74.00              | 20.53          | Peak   |
| 5   | 7745.780       | 36.85                    | 12.78                 | 35.53                 | 43.58             | 57.68                         | 74.00              | 16.32          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 74

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

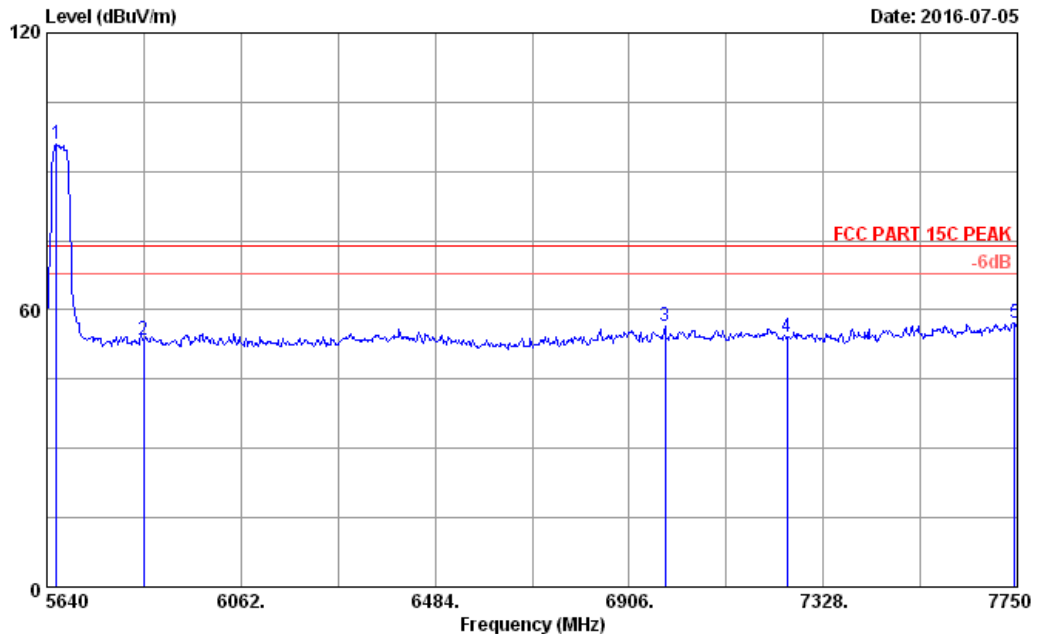

Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5661.100       | 34.50                    | 11.96                 | 35.45                 | 84.89             | 95.90                         | 74.00              | -21.90         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.22             | 53.36                         | 74.00              | 20.64          | Peak   |
| 3   | 6984.070       | 35.48                    | 12.26                 | 35.51                 | 44.34             | 56.57                         | 74.00              | 17.43          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.29             | 54.31                         | 74.00              | 19.69          | Peak   |
| 5   | 7743.670       | 36.85                    | 12.78                 | 35.53                 | 43.10             | 57.20                         | 74.00              | 16.80          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 75

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

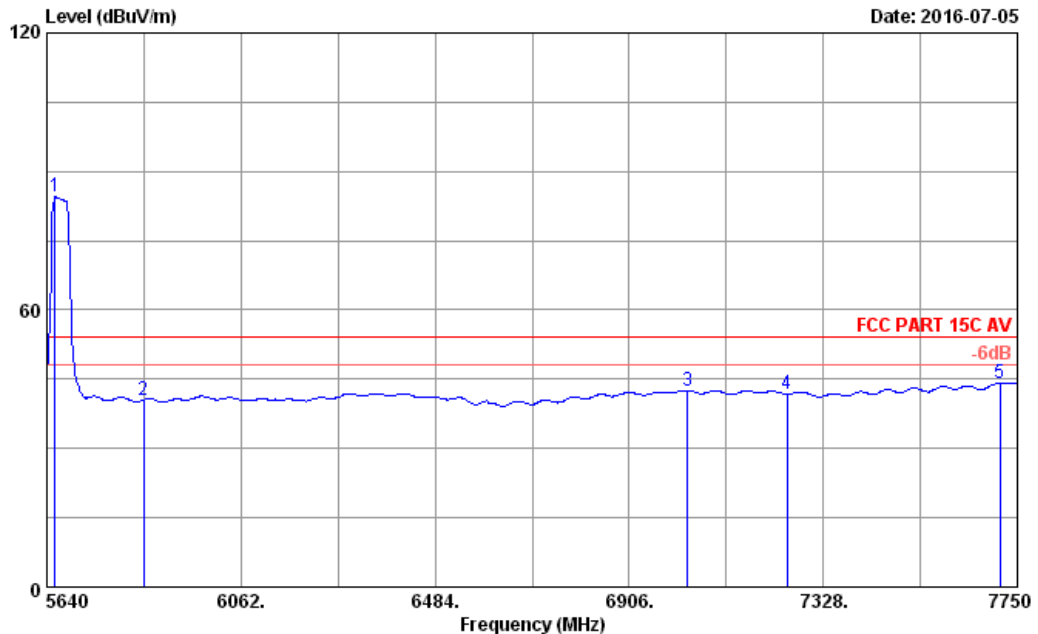


Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5656.880       | 34.49                    | 11.96                 | 35.45                 | 73.45             | 84.45                         | 54.00              | -30.45         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.44             | 40.58                         | 54.00              | 13.42          | Average |
| 3   | 7032.600       | 35.58                    | 12.30                 | 35.53                 | 30.24             | 42.59                         | 54.00              | 11.41          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.78             | 41.80                         | 54.00              | 12.20          | Average |
| 5   | 7712.020       | 36.83                    | 12.77                 | 35.54                 | 30.18             | 44.24                         | 54.00              | 9.76           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

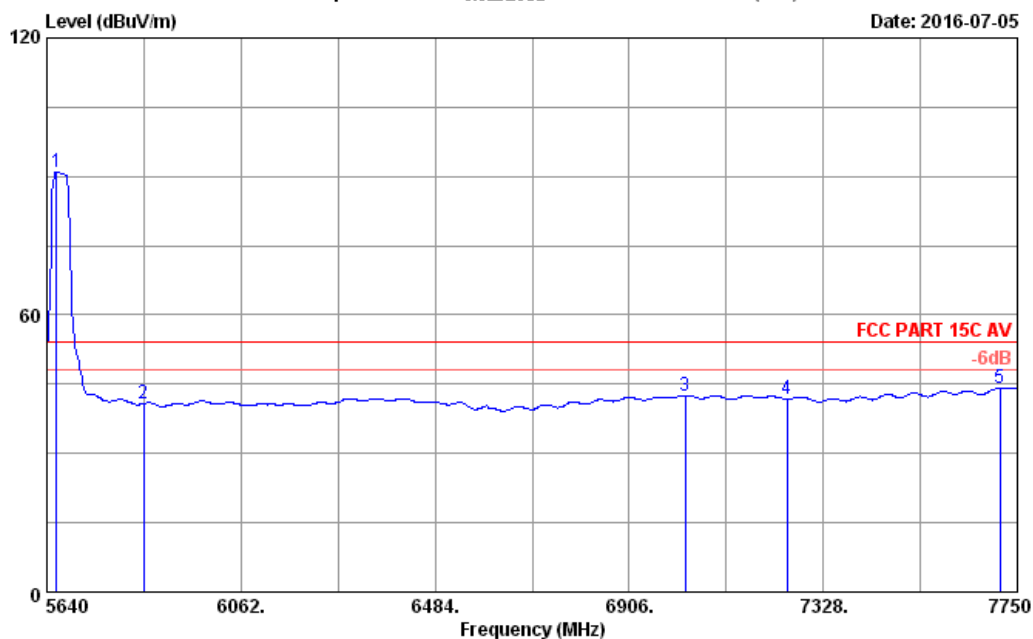**Data: 76**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH134 5670MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5661.100       | 34.50                    | 11.96                 | 35.45                 | 79.81             | 90.82                         | 54.00              | -36.82         | Average |
| 2   | 5851.000       | 34.61                    | 11.98                 | 35.45                 | 29.64             | 40.78                         | 54.00              | 13.22          | Average |
| 3   | 7028.380       | 35.57                    | 12.29                 | 35.52                 | 30.25             | 42.59                         | 54.00              | 11.41          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.78             | 41.80                         | 54.00              | 12.20          | Average |
| 5   | 7712.020       | 36.83                    | 12.77                 | 35.54                 | 30.17             | 44.23                         | 54.00              | 9.77           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 81

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

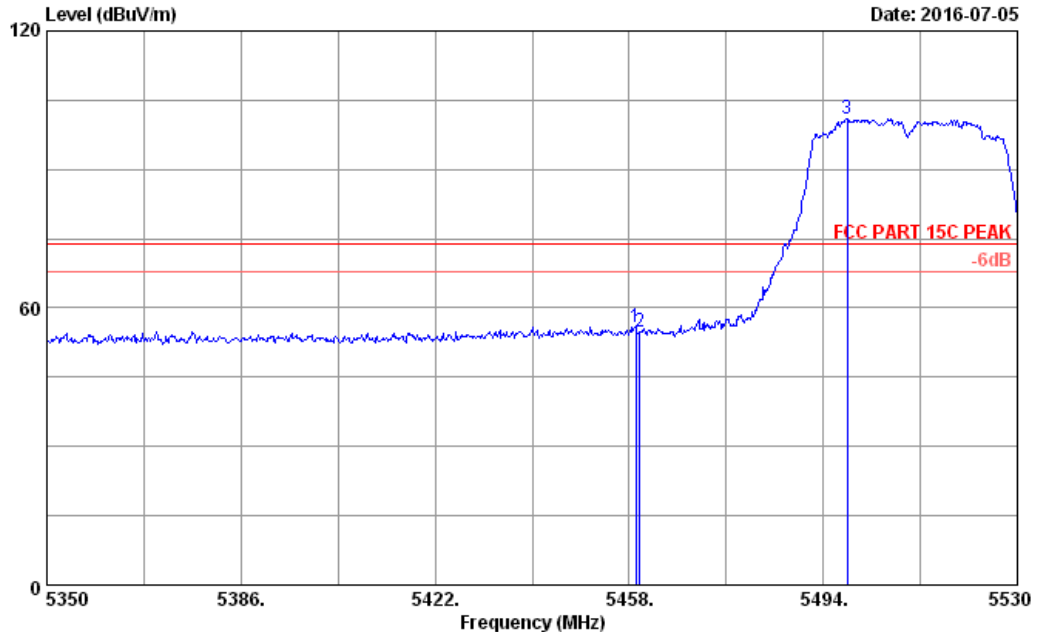


Site no. : 3m Chamber Data no. : 81  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5459.260       | 34.33                    | 11.94                 | 35.47                 | 45.07             | 55.87                         | 74.00              | 18.13          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 43.92             | 54.72                         | 74.00              | 19.28          | Peak   |
| 3   | 5498.500       | 34.40                    | 11.95                 | 35.45                 | 90.01             | 100.91                        | 74.00              | -26.91         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

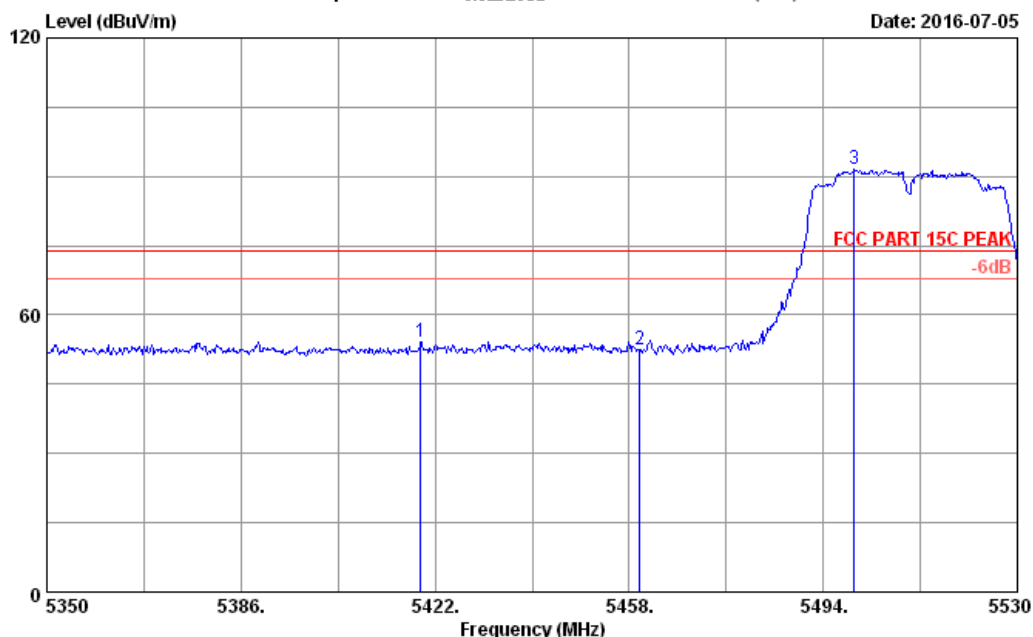**Data: 82**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


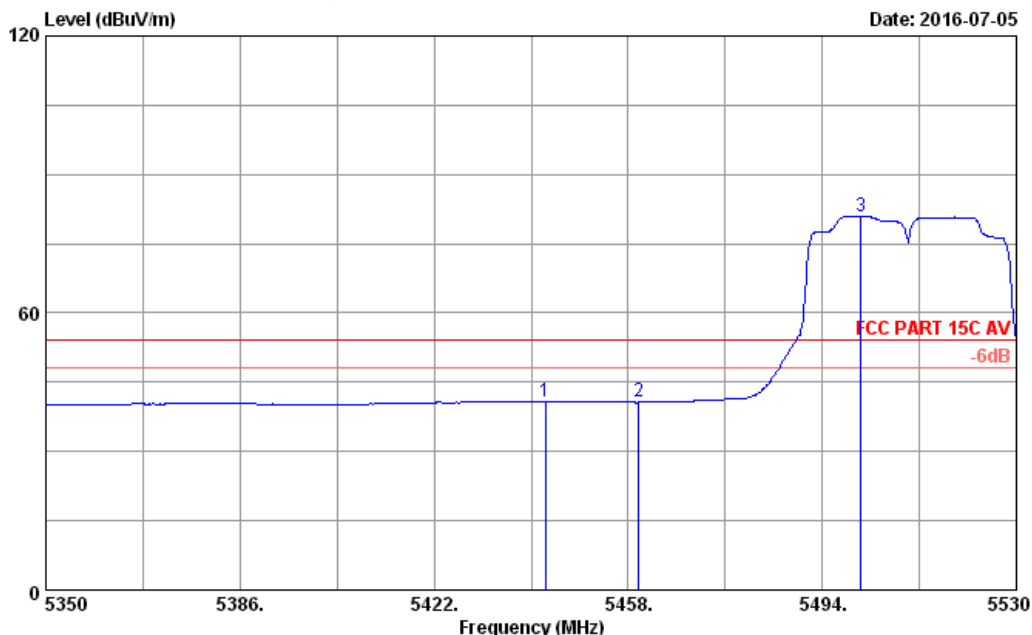
Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5419.300       | 34.25                    | 11.94                 | 35.49                 | 43.55             | 54.25                         | 74.00              | 19.75          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.73             | 52.53                         | 74.00              | 21.47          | Peak   |
| 3   | 5499.760       | 34.40                    | 11.95                 | 35.45                 | 80.79             | 91.69                         | 74.00              | -17.69         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 83**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


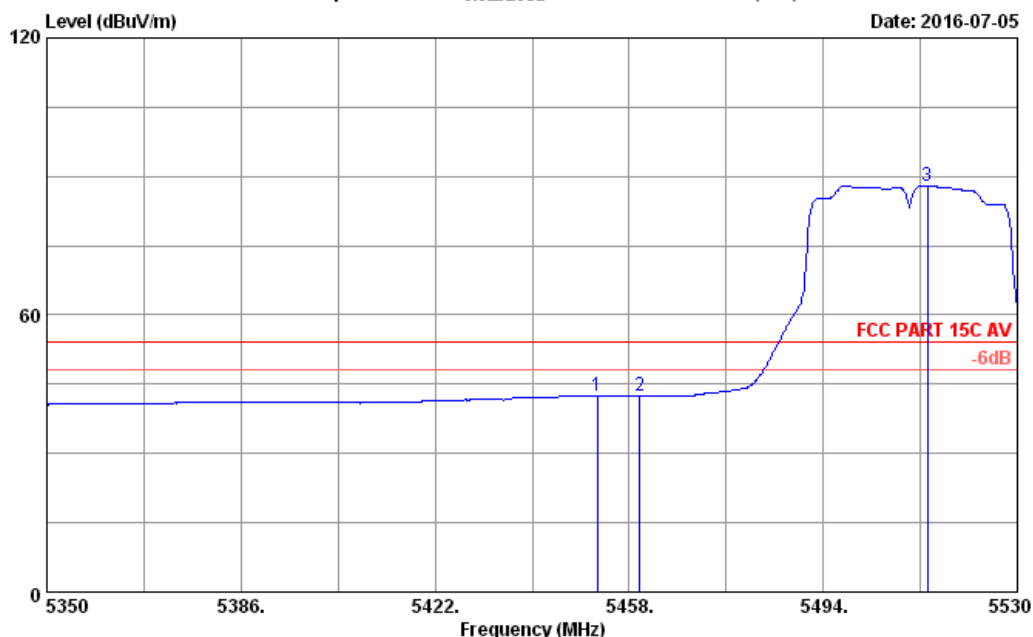
Site no. : 3m Chamber Data no. : 83  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5442.700       | 34.30                    | 11.94                 | 35.48                 | 30.04             | 40.80                         | 54.00              | 13.20          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.83             | 40.63                         | 54.00              | 13.37          | Average |
| 3   | 5501.200       | 34.40                    | 11.95                 | 35.45                 | 70.11             | 81.01                         | 54.00              | -27.01         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Ant Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 84**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 84  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH102 5510MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5452.060       | 34.31                    | 11.94                 | 35.48                 | 31.76             | 42.53                         | 54.00              | 11.47          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 31.60             | 42.40                         | 54.00              | 11.60          | Average |
| 3   | 5513.260       | 34.41                    | 11.95                 | 35.45                 | 77.02             | 87.93                         | 54.00              | -33.93         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 89

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

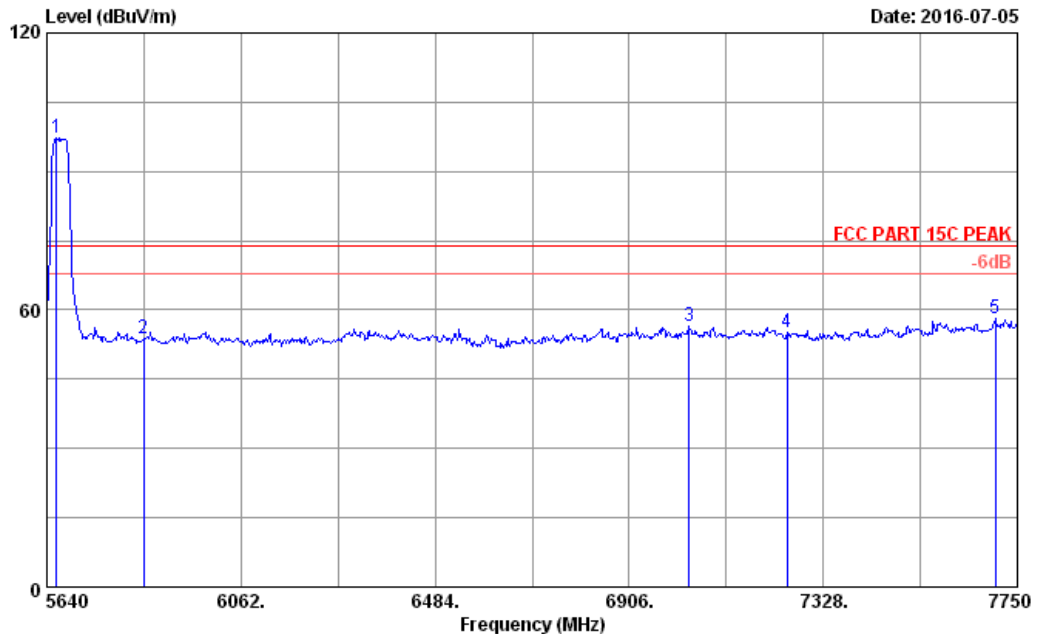

Site no. : 3m Chamber Data no. : 89  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5661.100       | 34.50                    | 11.96                 | 35.45                 | 86.16             | 97.17                         | 74.00              | -23.17         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.57             | 53.71                         | 74.00              | 20.29          | Peak   |
| 3   | 7036.820       | 35.59                    | 12.30                 | 35.53                 | 44.25             | 56.61                         | 74.00              | 17.39          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 42.19             | 55.21                         | 74.00              | 18.79          | Peak   |
| 5   | 7701.470       | 36.82                    | 12.76                 | 35.54                 | 43.99             | 58.03                         | 74.00              | 15.97          | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 90

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

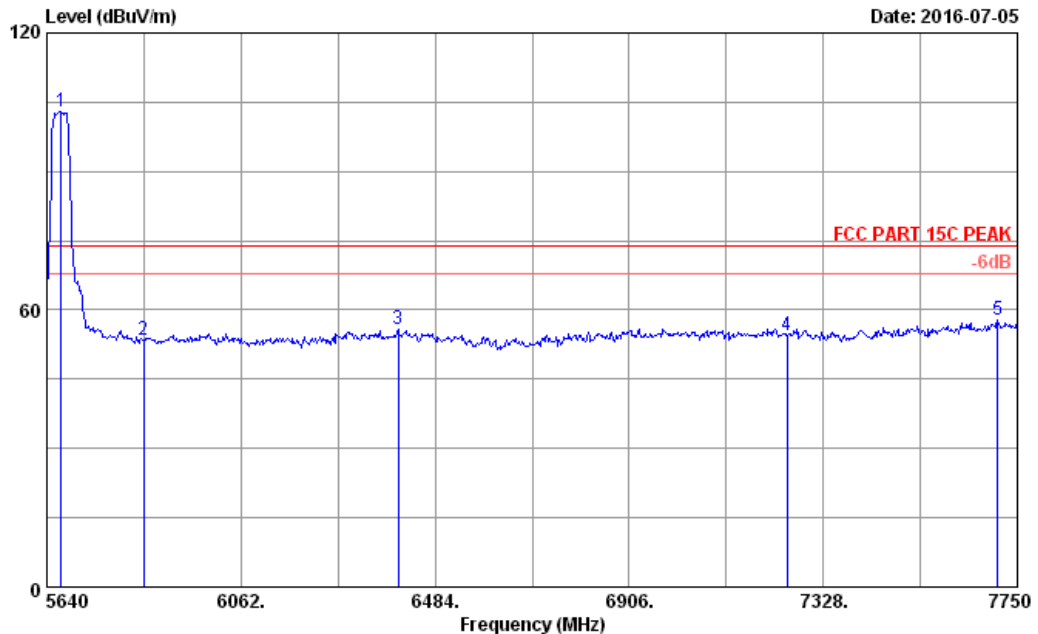

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 90       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.6%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11ac VHT40 CH134 5670MHz Tx   |           |            |
|              | M/N: NS-P11W7100                        |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5671.650       | 34.50                    | 11.96                 | 35.45                 | 92.01             | 103.02                        | 74.00              | -29.02         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.31             | 53.45                         | 74.00              | 20.55          | Peak   |
| 3   | 6403.820       | 34.78                    | 12.06                 | 35.35                 | 44.39             | 55.88                         | 74.00              | 18.12          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.62             | 54.64                         | 74.00              | 19.36          | Peak   |
| 5   | 7707.800       | 36.82                    | 12.76                 | 35.54                 | 43.89             | 57.93                         | 74.00              | 16.07          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 91

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

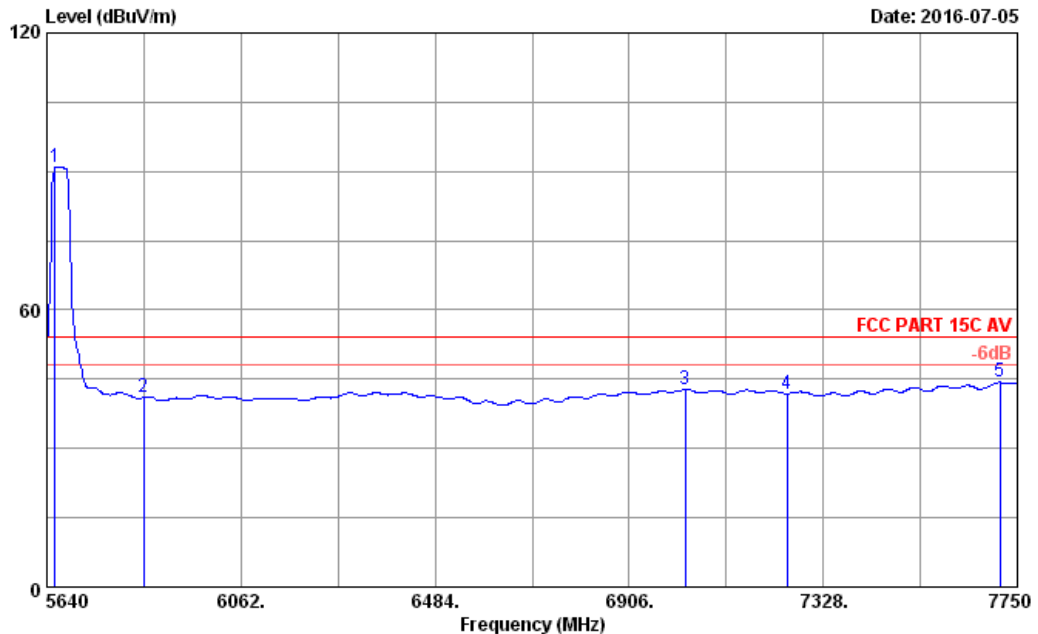

Site no. : 3m Chamber Data no. : 91  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5656.880       | 34.49                    | 11.96                 | 35.45                 | 80.02             | 91.02                         | 54.00              | -37.02         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.94             | 41.08                         | 54.00              | 12.92          | Average |
| 3   | 7028.380       | 35.57                    | 12.29                 | 35.52                 | 30.37             | 42.71                         | 54.00              | 11.29          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.89             | 41.91                         | 54.00              | 12.09          | Average |
| 5   | 7712.020       | 36.83                    | 12.77                 | 35.54                 | 30.26             | 44.32                         | 54.00              | 9.68           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 92

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

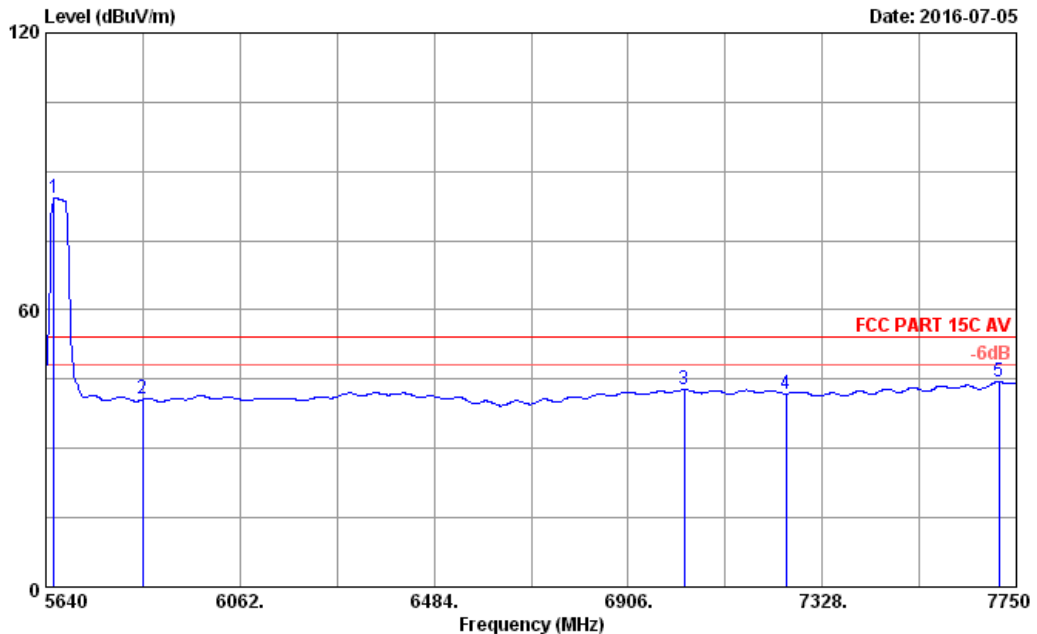

Site no. : 3m Chamber Data no. : 92  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT40 CH134 5670MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5656.880       | 34.49                    | 11.96                 | 35.45                 | 73.25             | 84.25                         | 54.00              | -30.25         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.55             | 40.69                         | 54.00              | 13.31          | Average |
| 3   | 7028.380       | 35.57                    | 12.29                 | 35.52                 | 30.37             | 42.71                         | 54.00              | 11.29          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.89             | 41.91                         | 54.00              | 12.09          | Average |
| 5   | 7712.020       | 36.83                    | 12.77                 | 35.54                 | 30.28             | 44.34                         | 54.00              | 9.66           | Average |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 97

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

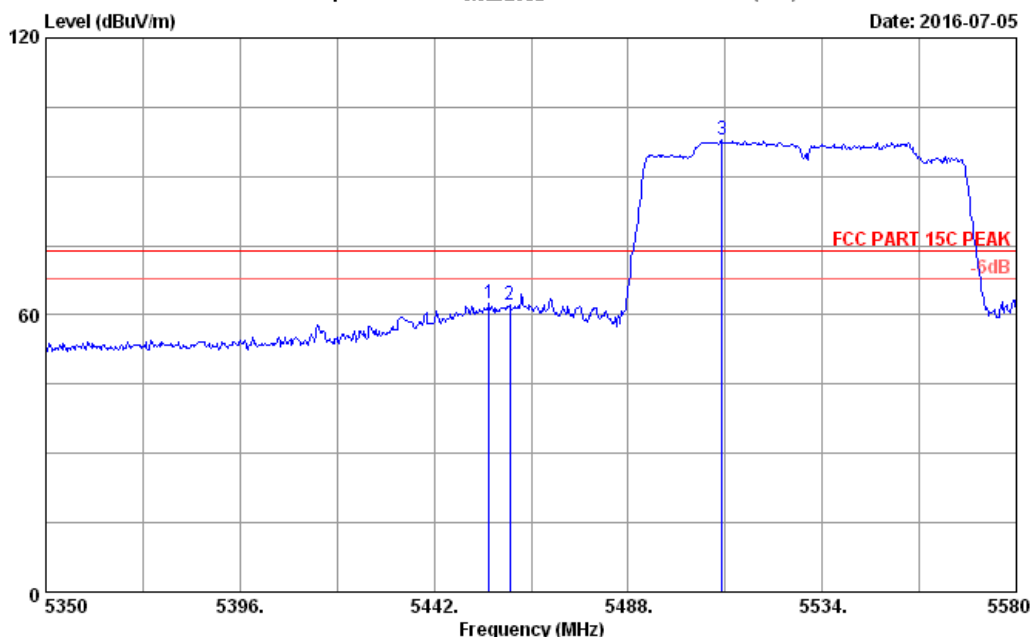


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 97       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.6%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11ac VHT80 CH106 5530MHz Tx   |           |            |
|              | M/N:NS-P11W7100                         |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5455.110       | 34.32                    | 11.94                 | 35.47                 | 51.71             | 62.50                         | 74.00              | 11.50          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 51.25             | 62.05                         | 74.00              | 11.95          | Peak   |
| 3   | 5510.310       | 34.41                    | 11.95                 | 35.45                 | 86.91             | 97.82                         | 74.00              | -23.82         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

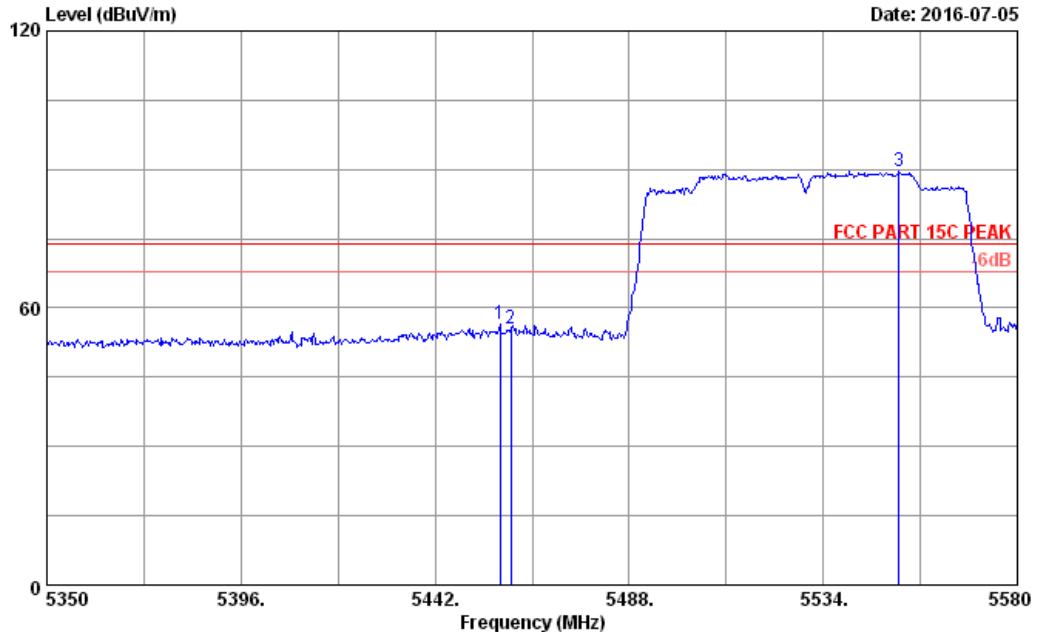**Data: 98**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


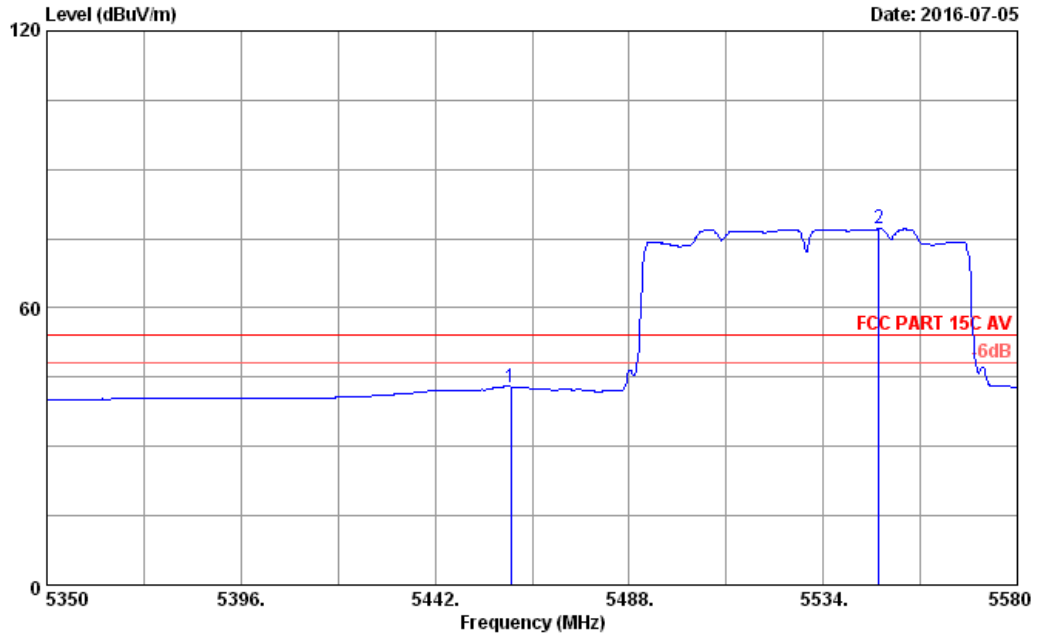
Site no. : 3m Chamber Data no. : 98  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5457.410       | 34.32                    | 11.94                 | 35.47                 | 45.75             | 56.54                         | 74.00              | 17.46          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 44.81             | 55.61                         | 74.00              | 18.39          | Peak   |
| 3   | 5551.940       | 34.43                    | 11.95                 | 35.45                 | 78.64             | 89.57                         | 74.00              | -15.57         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 99**
**File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


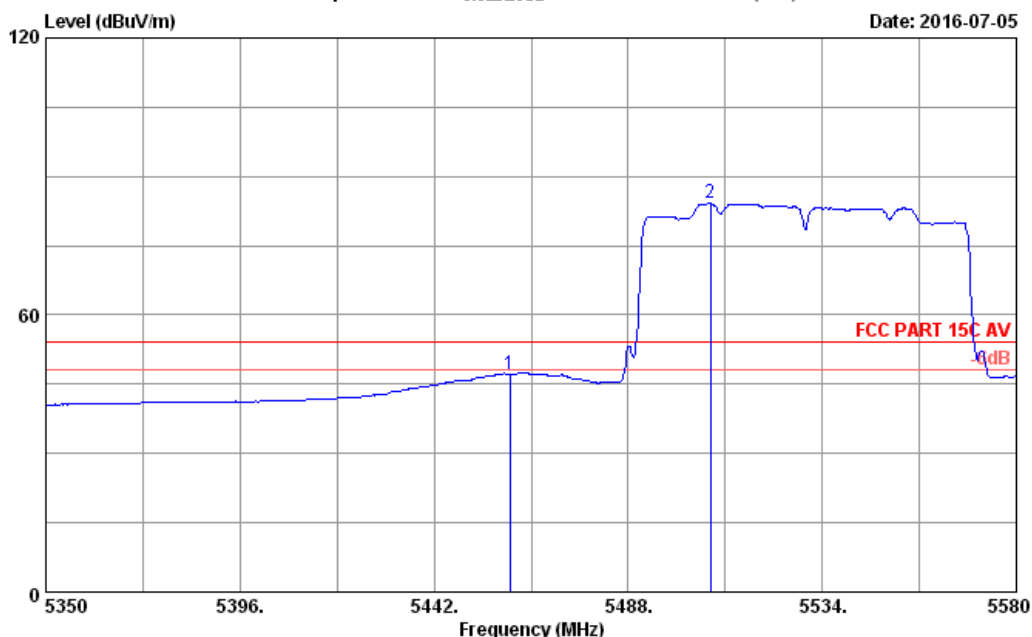
Site no. : 3m Chamber Data no. : 99  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 32.11             | 42.91                         | 54.00              | 11.09          | Average |
| 2   | 5547.110       | 34.43                    | 11.95                 | 35.45                 | 66.19             | 77.12                         | 54.00              | -23.12         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 100**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 36.36             | 47.16                         | 54.00              | 6.84           | Average |
| 2   | 5507.550       | 34.40                    | 11.95                 | 35.45                 | 73.23             | 84.13                         | 54.00              | -30.13         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 101

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

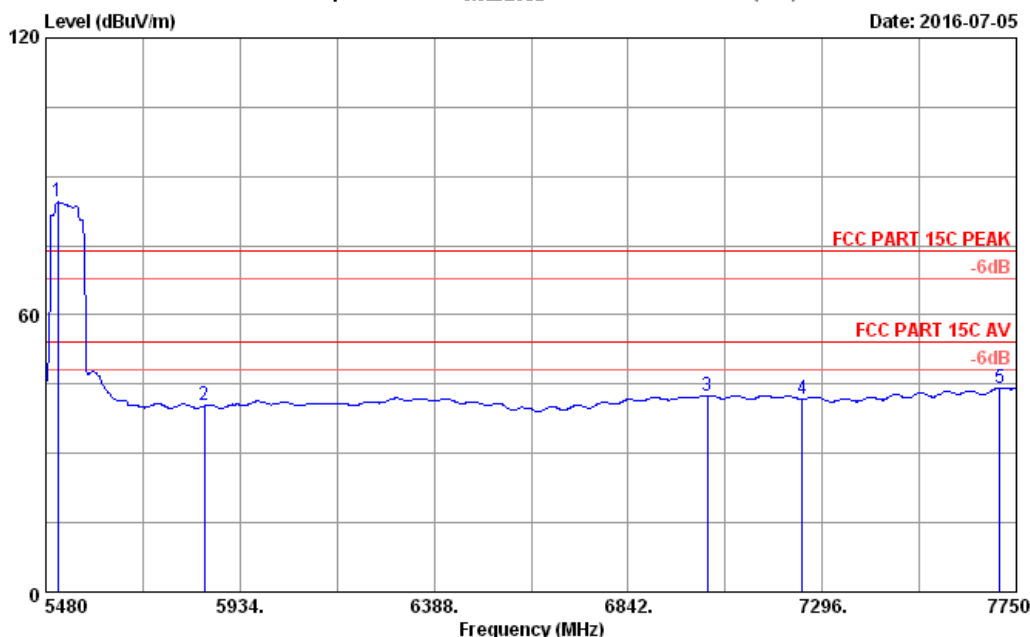

Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5507.240       | 34.40                    | 11.95                 | 35.45                 | 73.63             | 84.53                         | 74.00              | -10.53         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.24             | 40.38                         | 74.00              | 33.62          | Peak   |
| 3   | 7028.140       | 35.57                    | 12.29                 | 35.52                 | 30.28             | 42.62                         | 74.00              | 31.38          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.77             | 41.79                         | 74.00              | 32.21          | Peak   |
| 5   | 7711.410       | 36.83                    | 12.77                 | 35.54                 | 30.19             | 44.25                         | 74.00              | 29.75          | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 102

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

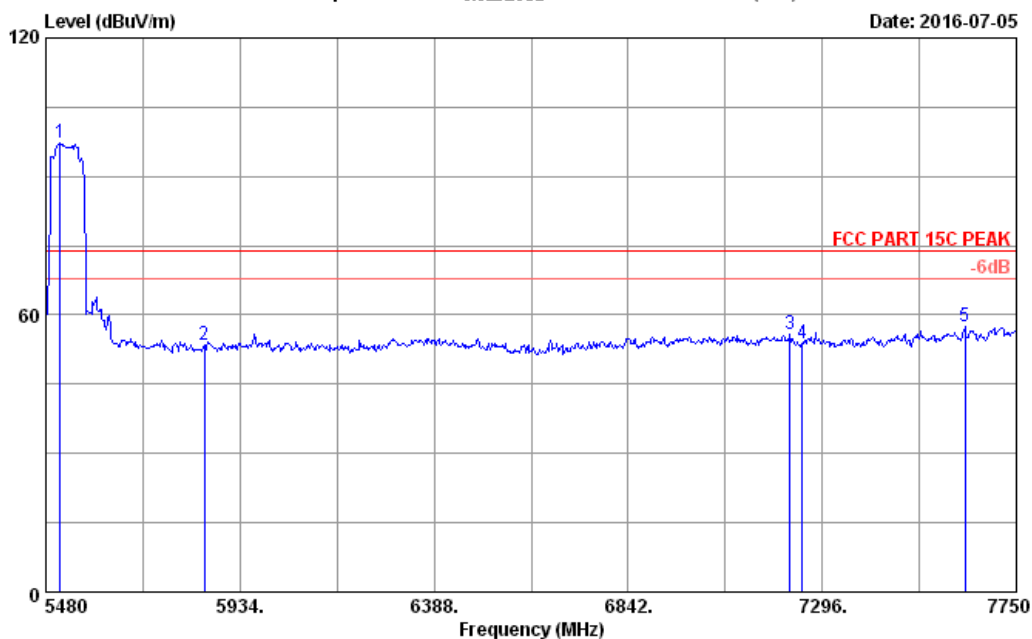

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 102      |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.6%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11ac VHT80 CH106 5530MHz Tx   |           |            |
|              | M/N:NS-P11W7100                         |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBUV) | Emission<br>Level<br>(dBUV/m) | Limits<br>(dBUV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5514.050       | 34.41                    | 11.95                 | 35.45                 | 86.27             | 97.18                         | 74.00              | -23.18         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.45             | 53.59                         | 74.00              | 20.41          | Peak   |
| 3   | 7221.090       | 36.03                    | 12.46                 | 35.56                 | 42.92             | 55.85                         | 74.00              | 18.15          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.93             | 53.95                         | 74.00              | 20.05          | Peak   |
| 5   | 7629.690       | 36.78                    | 12.74                 | 35.56                 | 43.66             | 57.62                         | 74.00              | 16.38          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
- Amp Factor

2. The emission levels that are 20dB below the official  
limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 103

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

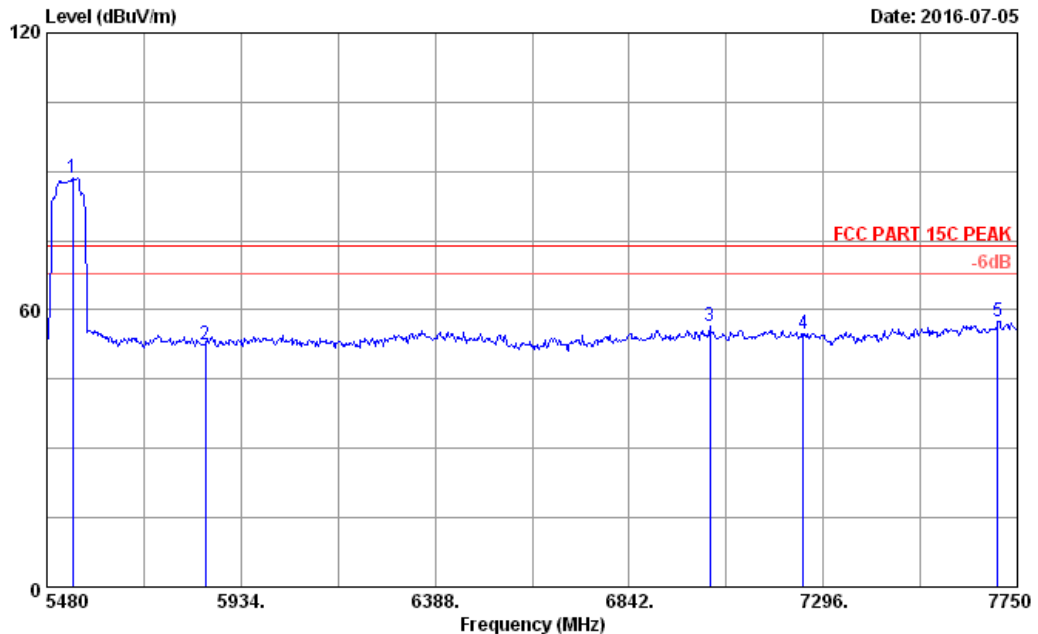

Site no. : 3m Chamber Data no. : 103  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5541.290       | 34.42                    | 11.95                 | 35.45                 | 77.58             | 88.50                         | 74.00              | -14.50         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 41.46             | 52.60                         | 74.00              | 21.40          | Peak   |
| 3   | 7030.410       | 35.57                    | 12.30                 | 35.52                 | 44.02             | 56.37                         | 74.00              | 17.63          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.75             | 54.77                         | 74.00              | 19.23          | Peak   |
| 5   | 7704.600       | 36.82                    | 12.76                 | 35.54                 | 43.47             | 57.51                         | 74.00              | 16.49          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 104

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 3.EM6 (104)

Date: 2016-07-05

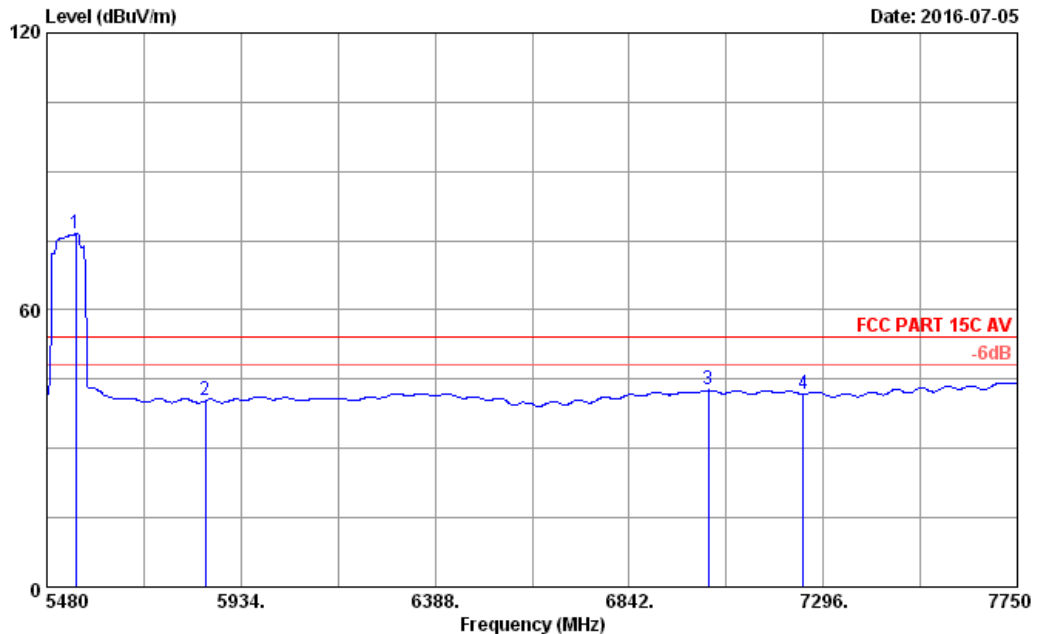

Site no. : 3m Chamber Data no. : 104  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.6%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH106 5530MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5548.100       | 34.43                    | 11.95                 | 35.45                 | 65.52             | 76.45                         | 54.00              | -22.45         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.27             | 40.41                         | 54.00              | 13.59          | Average |
| 3   | 7028.140       | 35.57                    | 12.29                 | 35.52                 | 30.29             | 42.63                         | 54.00              | 11.37          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.78             | 41.80                         | 54.00              | 12.20          | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 13

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-06

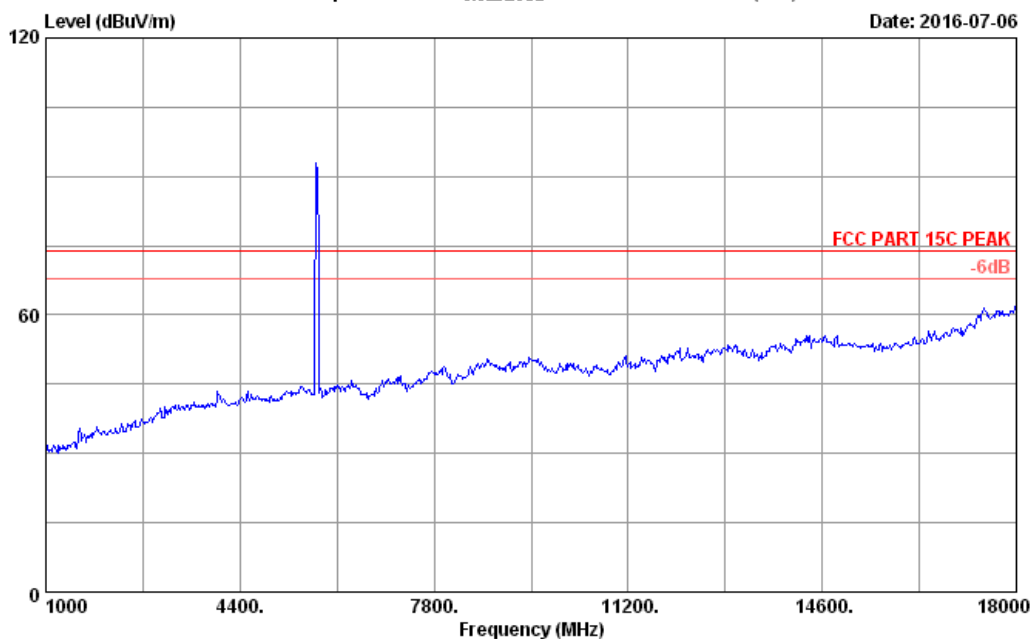

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 13         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11a CH149 5745MHz Tx          |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

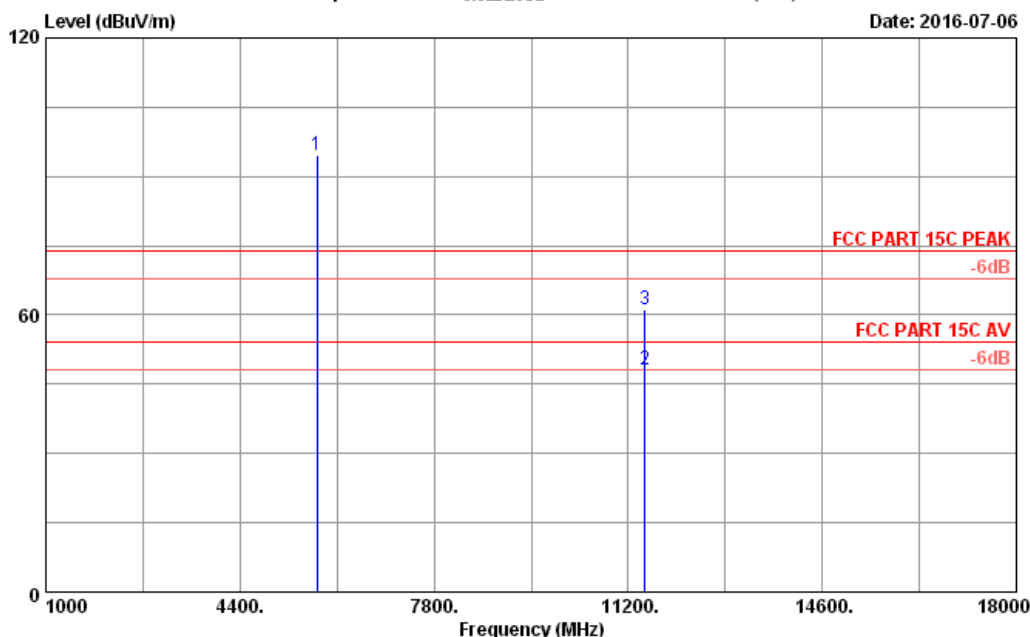**Data: 14**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5745.000       | 34.55                    | 11.97                 | 35.45                 | 83.43             | 94.50                         | 74.00              | -20.50         | Peak    |
| 2   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 30.85             | 48.07                         | 54.00              | 5.93           | Average |
| 3   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 43.88             | 61.10                         | 74.00              | 12.90          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 15

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-06

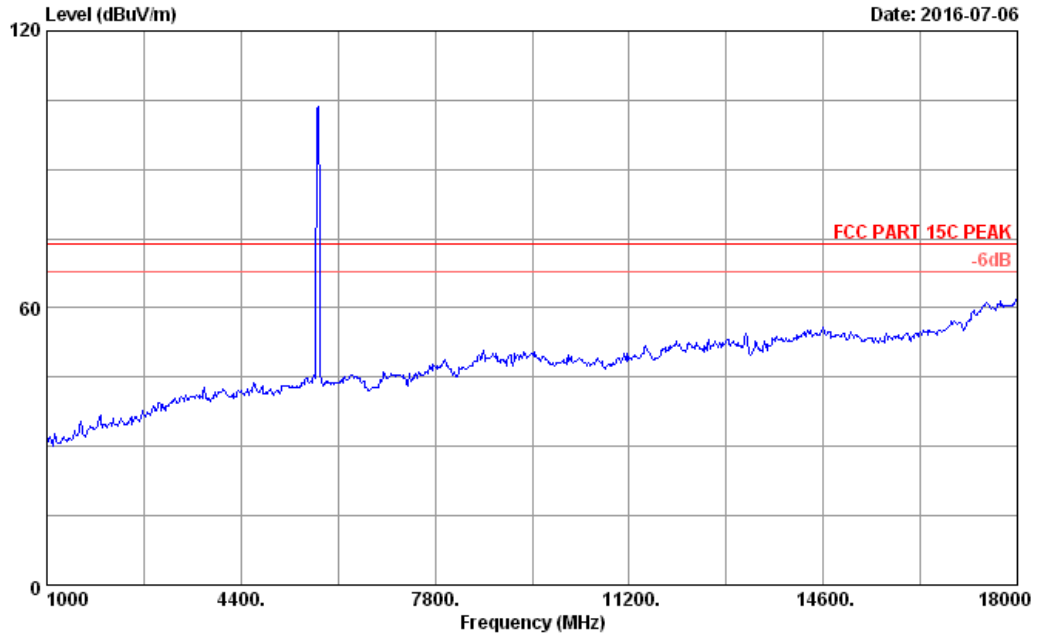

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 15       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11a CH149 5745MHz Tx          |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

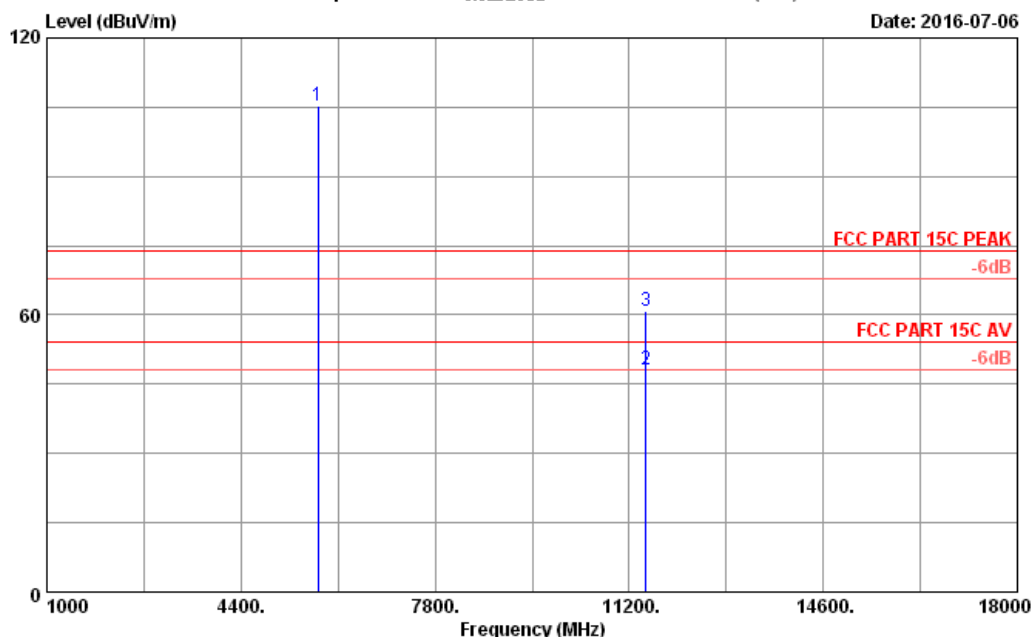**Data: 16**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5745.000       | 34.55                    | 11.97                 | 35.45                 | 94.32             | 105.39                        | 74.00              | -31.39         | Peak    |
| 2   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 30.81             | 48.03                         | 54.00              | 5.97           | Average |
| 3   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 43.57             | 60.79                         | 74.00              | 13.21          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 21

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

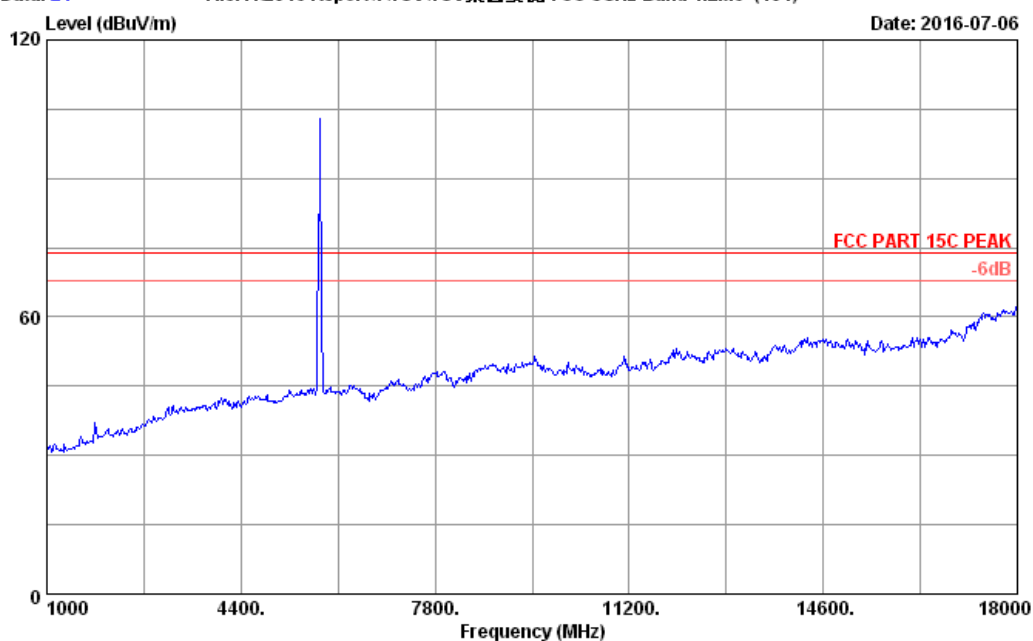


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 21       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11a CH157 5785MHz Tx          |           |            |
|              | M/N:NS-P11W7100                         |           |            |


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 22

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

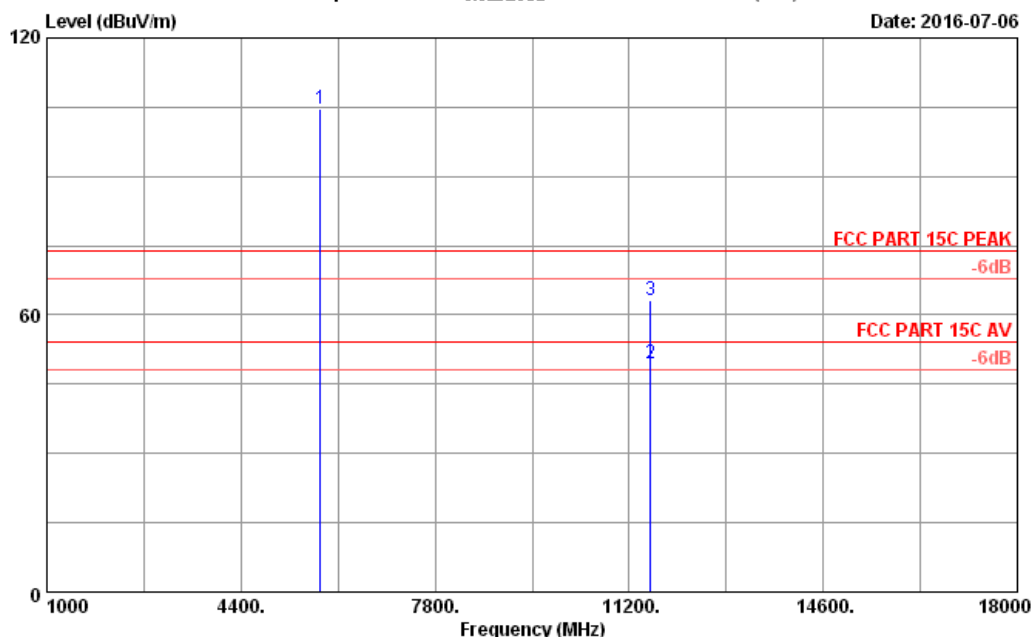

Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH157 5785MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5785.000       | 34.57                    | 11.97                 | 35.45                 | 93.60             | 104.69                        | 74.00              | -30.69         | Peak    |
| 2   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 32.03             | 49.32                         | 54.00              | 4.68           | Average |
| 3   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 46.00             | 63.29                         | 74.00              | 10.71          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 23

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-06

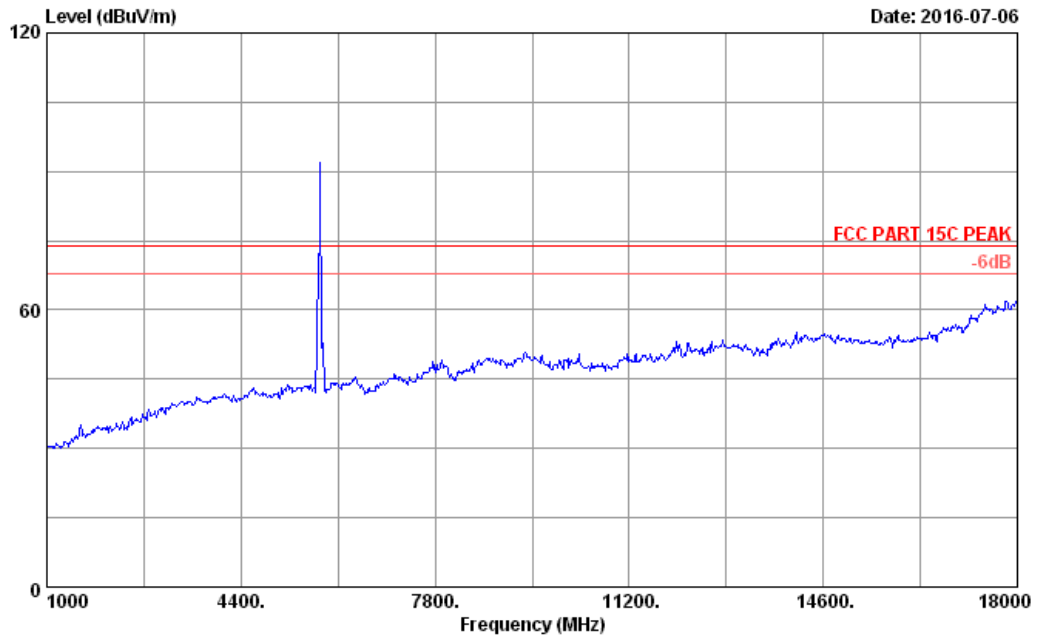

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 23         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11a CH157 5785MHz Tx          |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

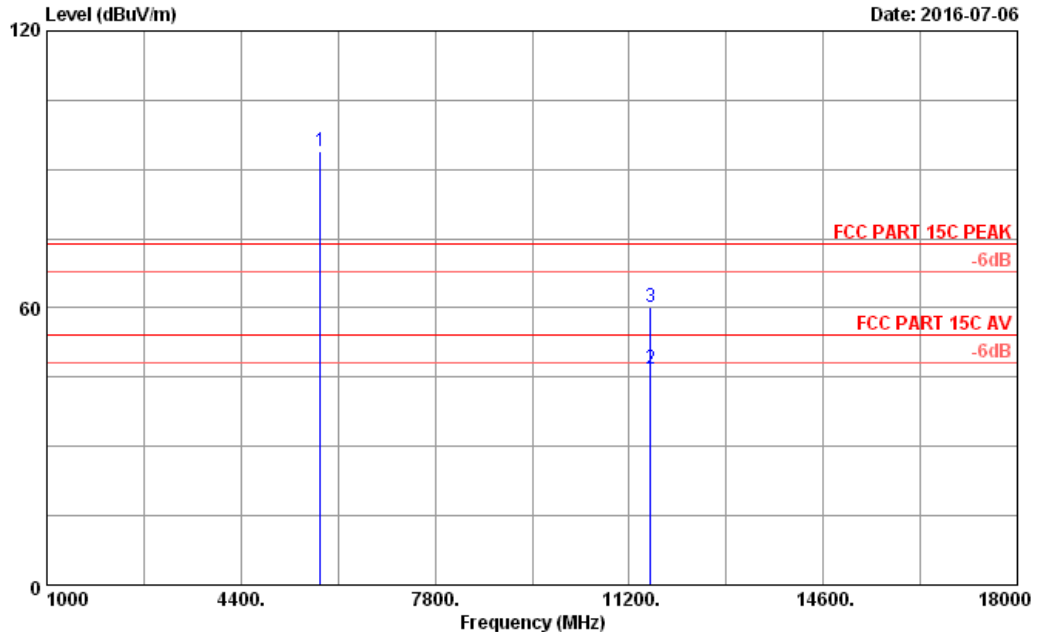**Data: 24**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH157 5785MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5785.000       | 34.57                    | 11.97                 | 35.45                 | 82.75             | 93.84                         | 74.00              | -19.84         | Peak    |
| 2   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 29.64             | 46.93                         | 54.00              | 7.07           | Average |
| 3   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 42.81             | 60.10                         | 74.00              | 13.90          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 25

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-06

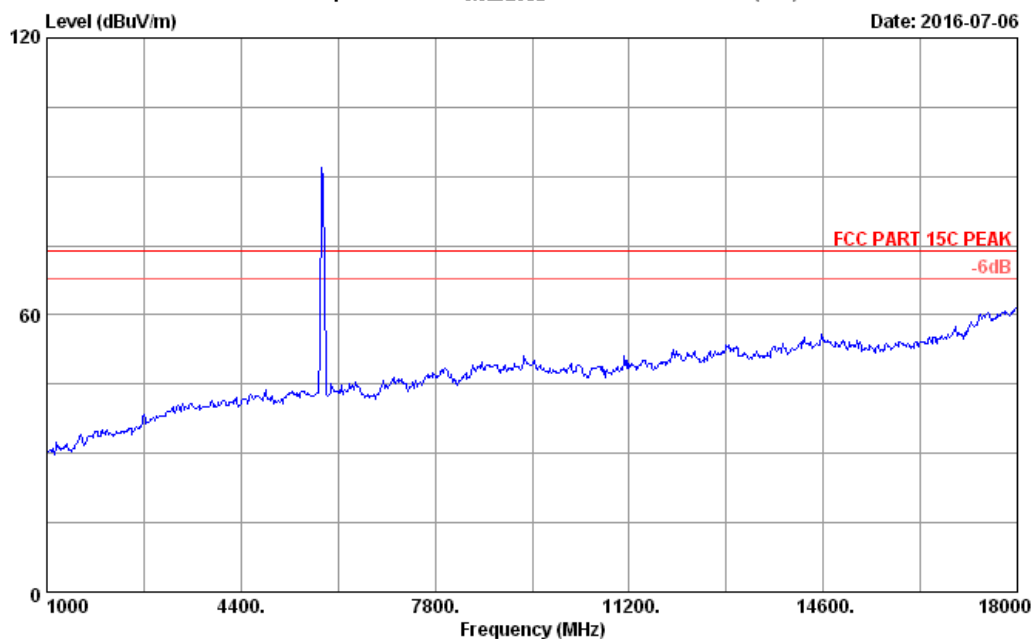

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 25         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6" windows tablet                  |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11a CH165 5825MHz Tx          |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

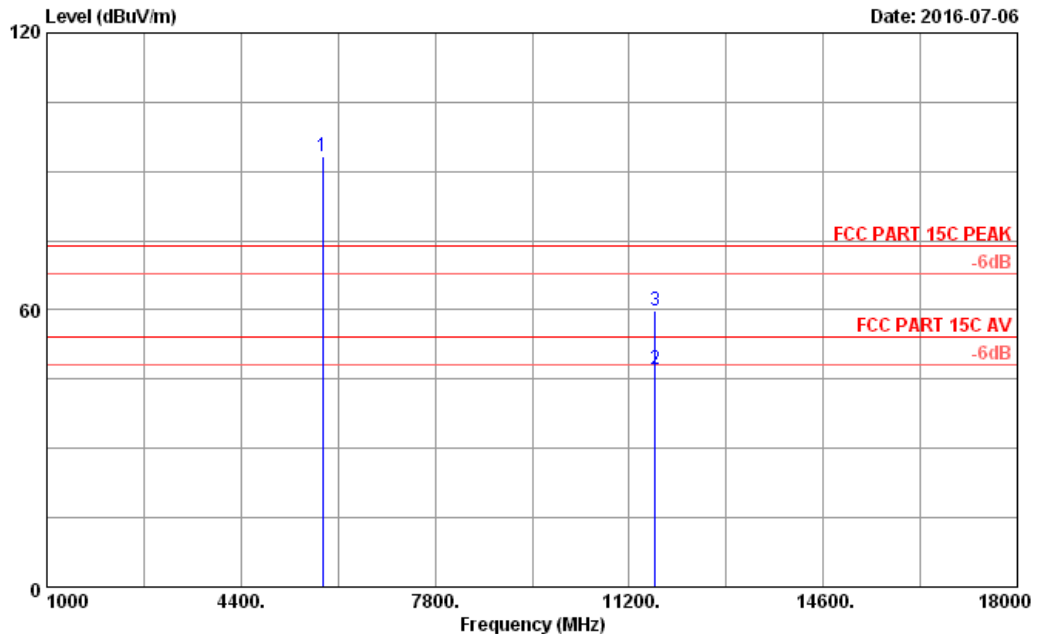**Data: 26**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5825.000       | 34.60                    | 11.98                 | 35.45                 | 82.18             | 93.31                         | 74.00              | -19.31         | Peak    |
| 2   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 29.81             | 47.15                         | 54.00              | 6.85           | Average |
| 3   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 42.59             | 59.93                         | 74.00              | 14.07          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 27

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

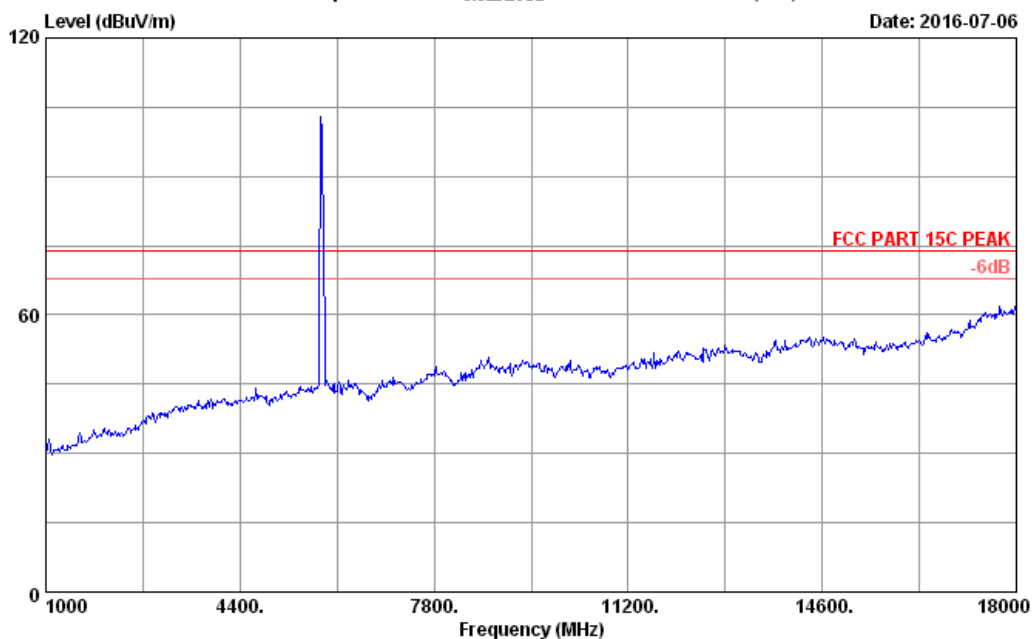


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 27       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11a CH165 5825MHz Tx          |           |            |
|              | M/N:NS-P11W7100                         |           |            |


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 28

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

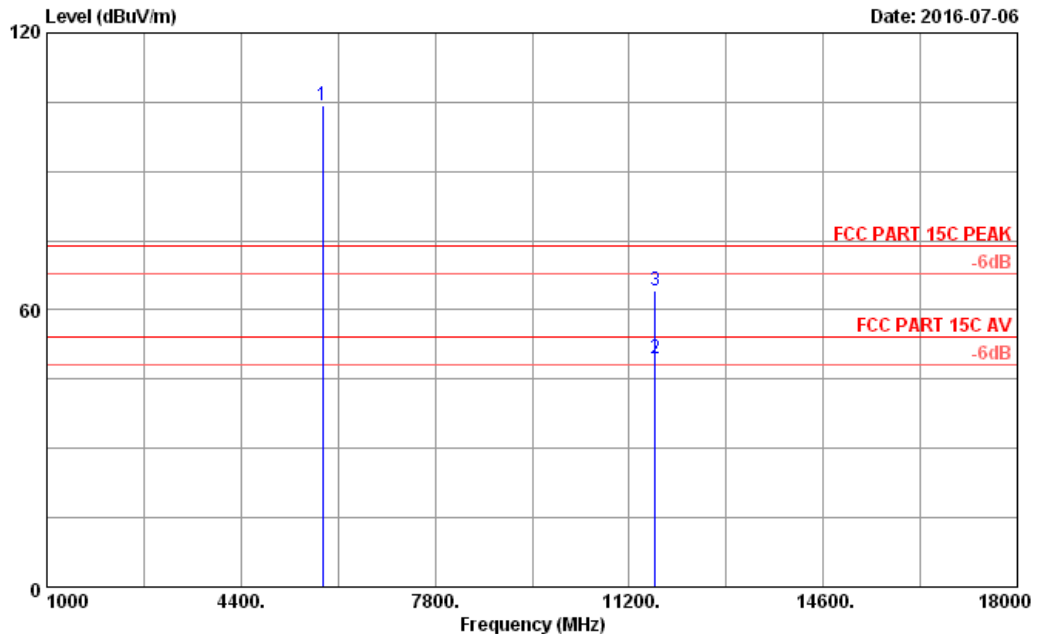

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5825.000       | 34.60                    | 11.98                 | 35.45                 | 93.19             | 104.32                        | 74.00              | -30.32         | Peak    |
| 2   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 32.02             | 49.36                         | 54.00              | 4.64           | Average |
| 3   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 46.68             | 64.02                         | 74.00              | 9.98           | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 33

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

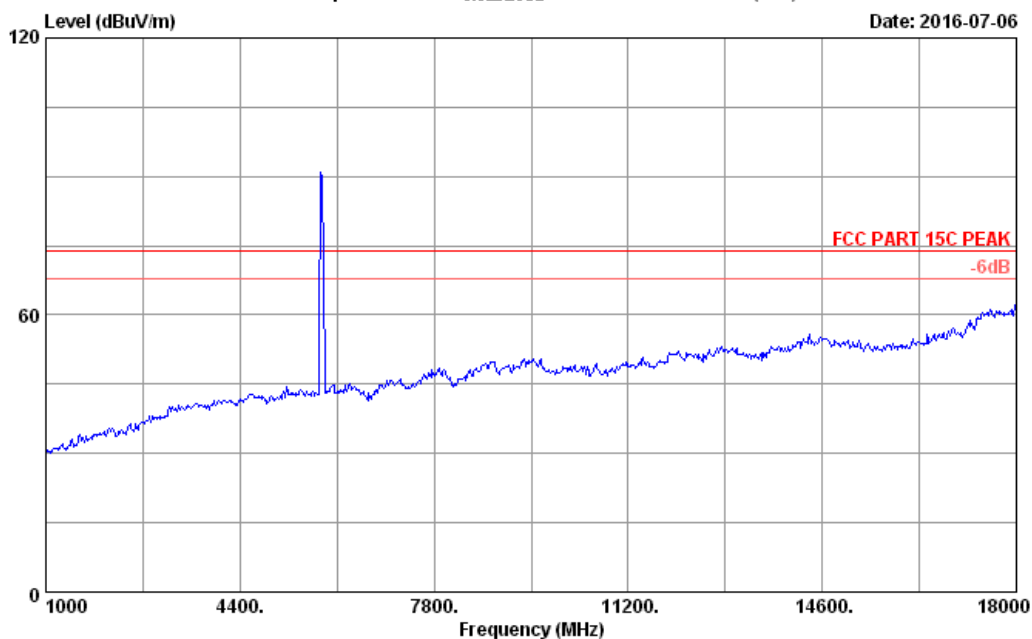


|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 33         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT20 CH165 5825MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 34

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

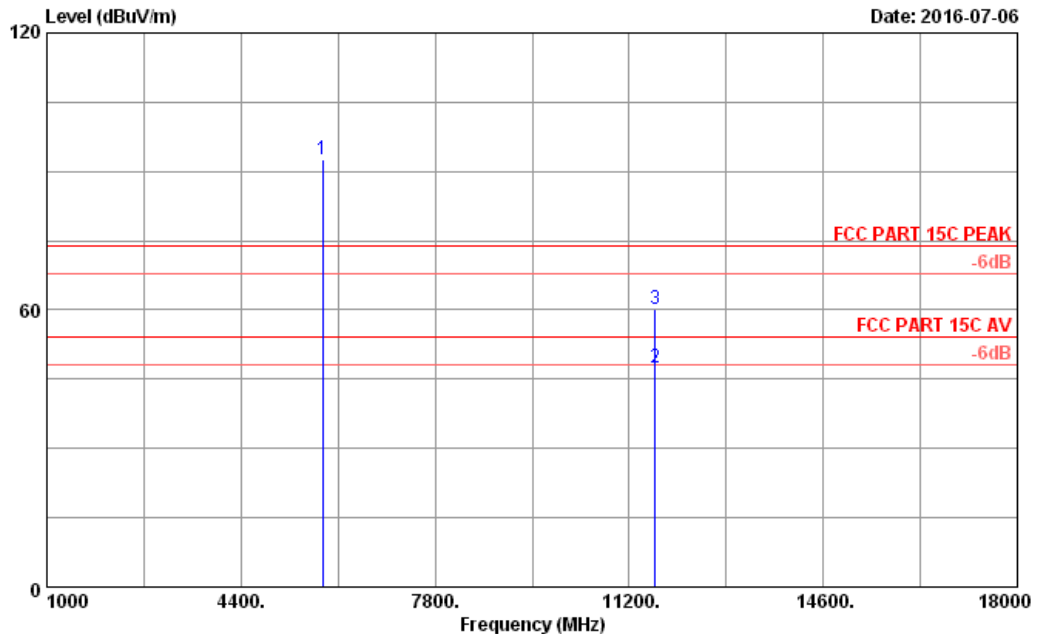

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 34         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT20 CH165 5825MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |


| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5825.000       | 34.60                    | 11.98                 | 35.45                 | 81.32             | 92.45                         | 74.00              | -18.45         | Peak    |
| 2   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 30.03             | 47.37                         | 54.00              | 6.63           | Average |
| 3   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 42.77             | 60.11                         | 74.00              | 13.89          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor

2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

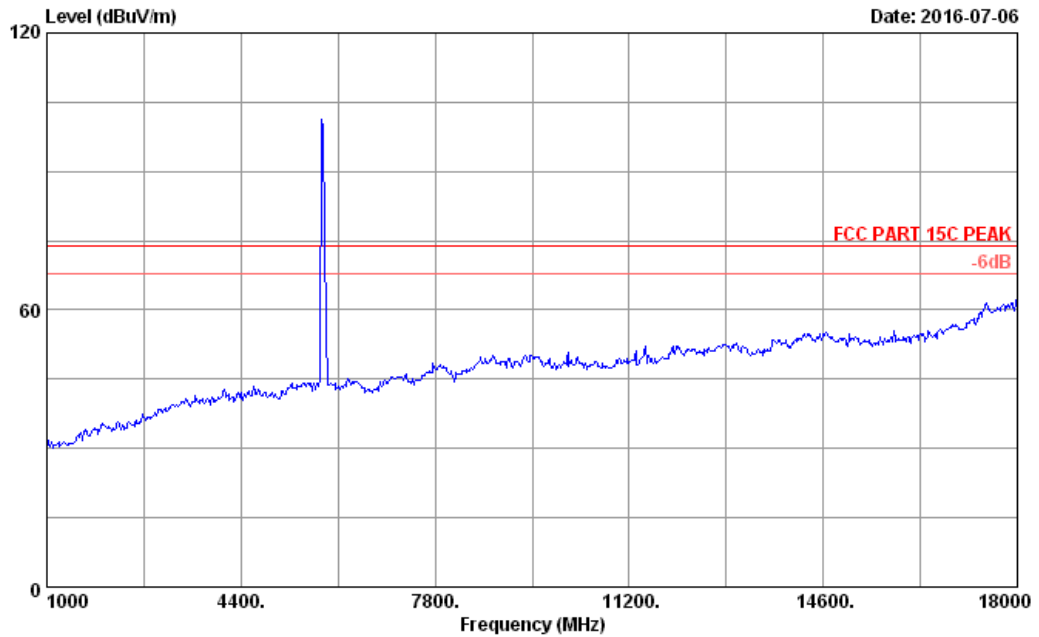**Data: 35**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 35       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT20 CH165 5825MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

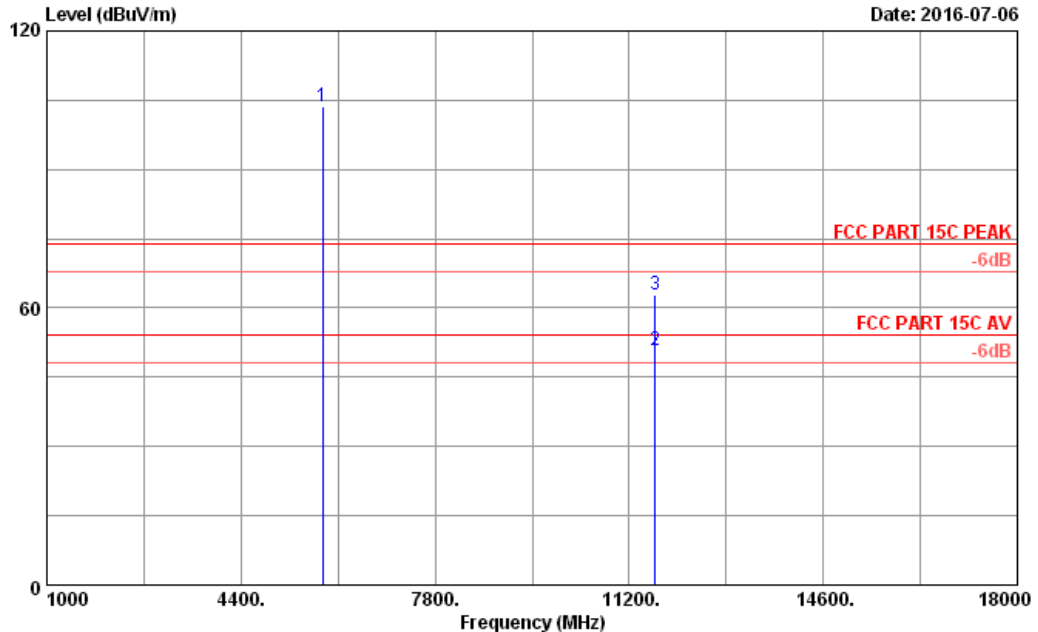**Data: 36**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5825.000       | 34.60                    | 11.98                 | 35.45                 | 92.47             | 103.60                        | 74.00              | -29.60         | Peak    |
| 2   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 33.32             | 50.66                         | 54.00              | 3.34           | Average |
| 3   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 45.50             | 62.84                         | 74.00              | 11.16          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 41

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

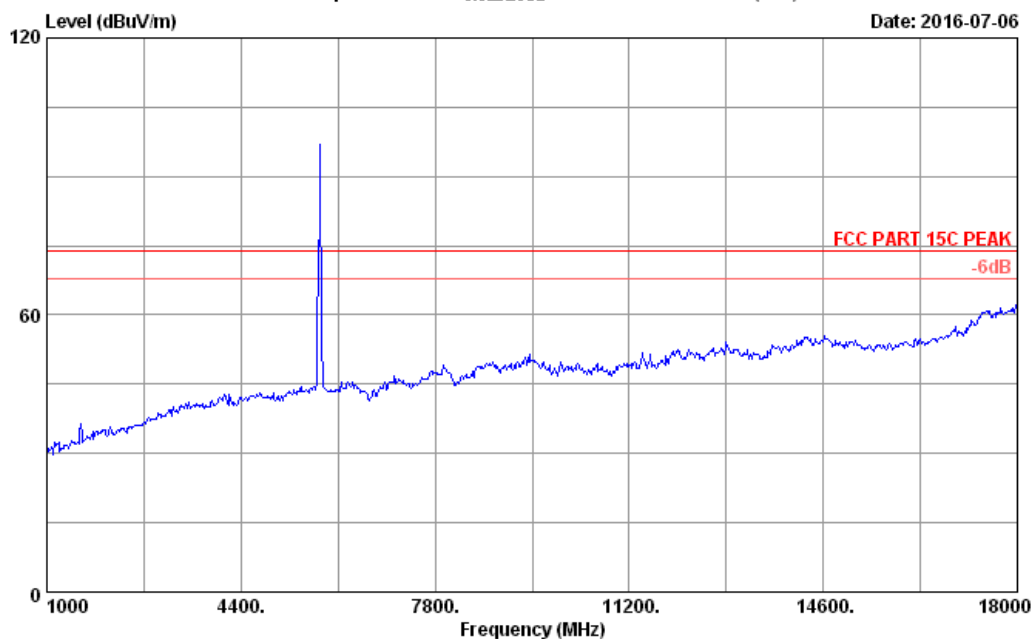

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 41       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT20 CH157 5785MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 42

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

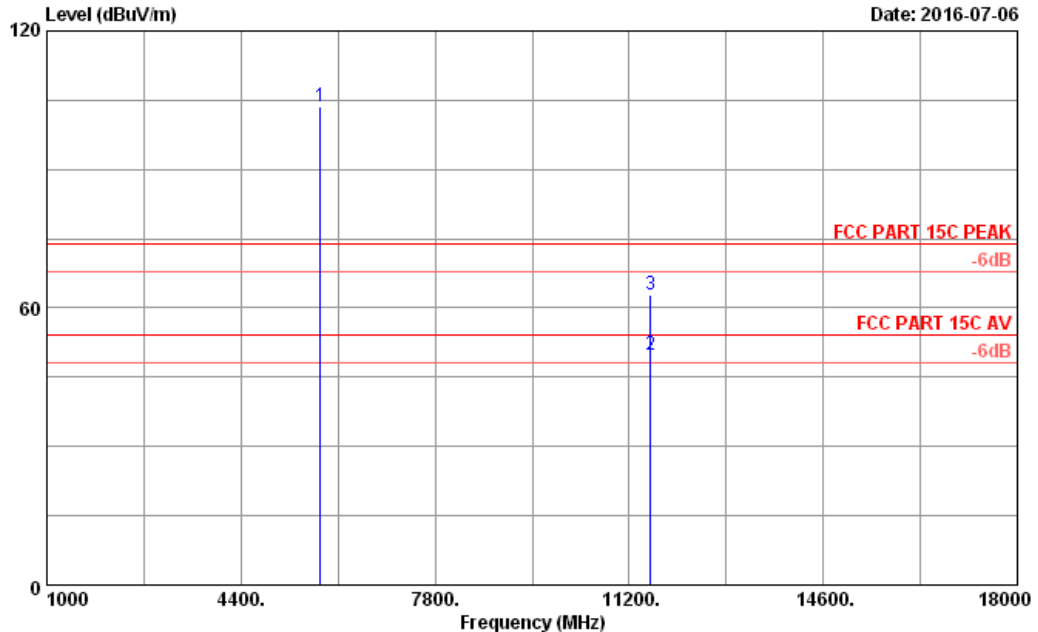

Site no. : 3m Chamber Data no. : 42  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5785.000       | 34.57                    | 11.97                 | 35.45                 | 92.65             | 103.74                        | 74.00              | -29.74         | Peak    |
| 2   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 32.48             | 49.77                         | 54.00              | 4.23           | Average |
| 3   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 45.59             | 62.88                         | 74.00              | 11.12          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 43

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-06

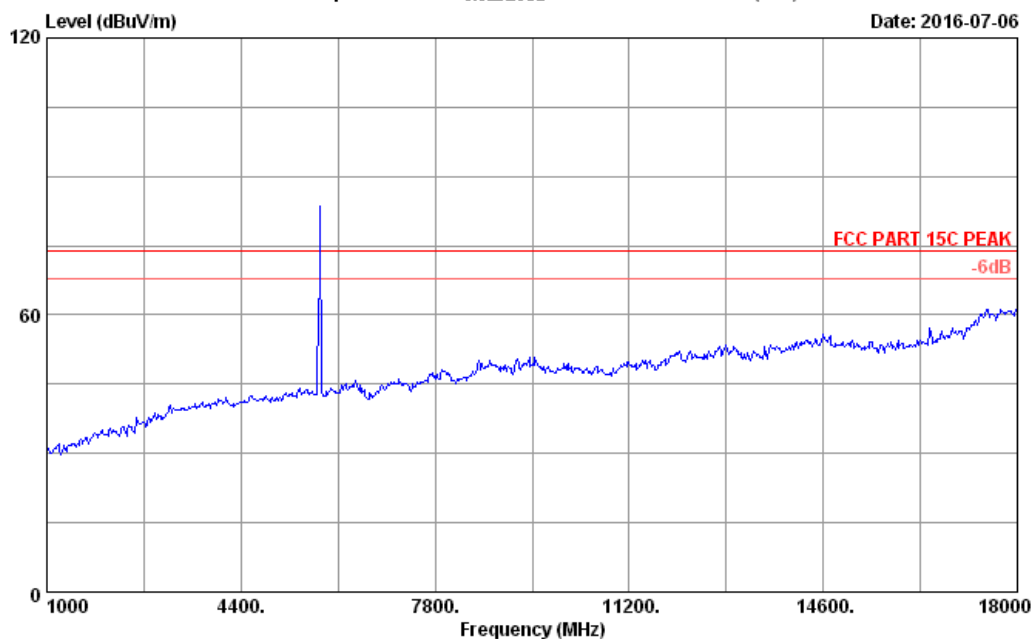

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 43         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT20 CH157 5785MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

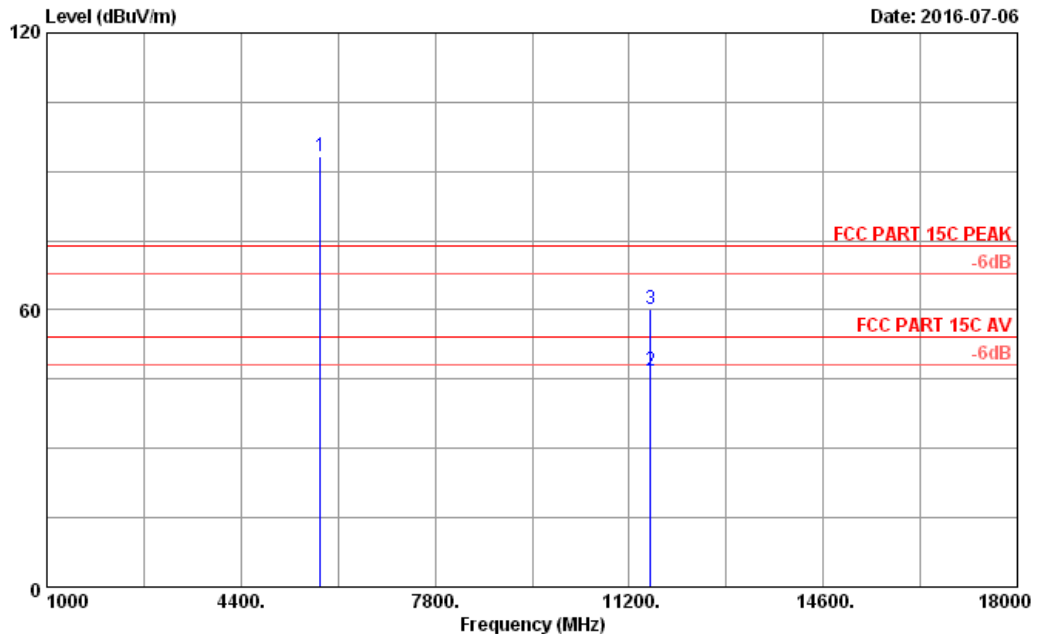**Data: 44**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH157 5785MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5785.000       | 34.57                    | 11.97                 | 35.45                 | 82.24             | 93.33                         | 74.00              | -19.33         | Peak    |
| 2   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 29.59             | 46.88                         | 54.00              | 7.12           | Average |
| 3   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 42.88             | 60.17                         | 74.00              | 13.83          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 45

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-06

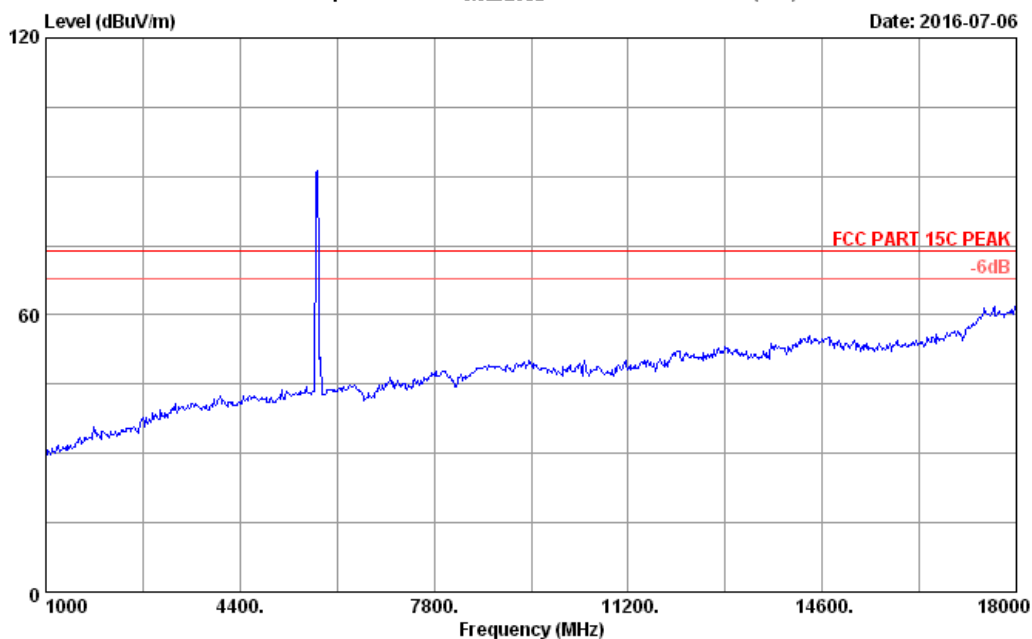

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 45         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6" windows tablet                  |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT20 CH149 5745MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

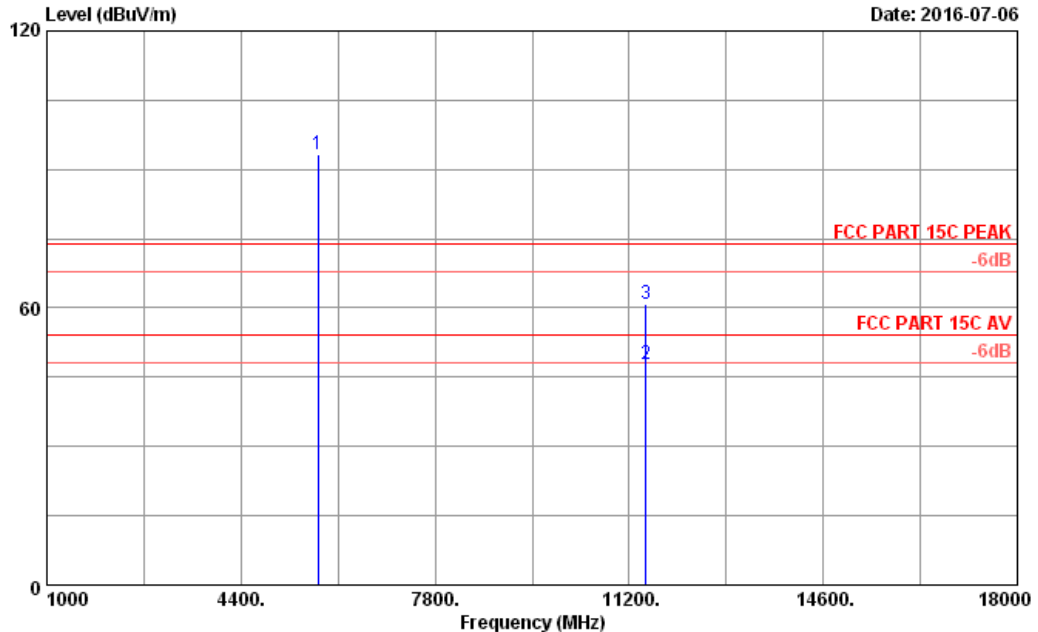**Data: 46**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5745.000       | 34.55                    | 11.97                 | 35.45                 | 82.23             | 93.30                         | 74.00              | -19.30         | Peak    |
| 2   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 30.58             | 47.80                         | 54.00              | 6.20           | Average |
| 3   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 43.53             | 60.75                         | 74.00              | 13.25          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 47

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

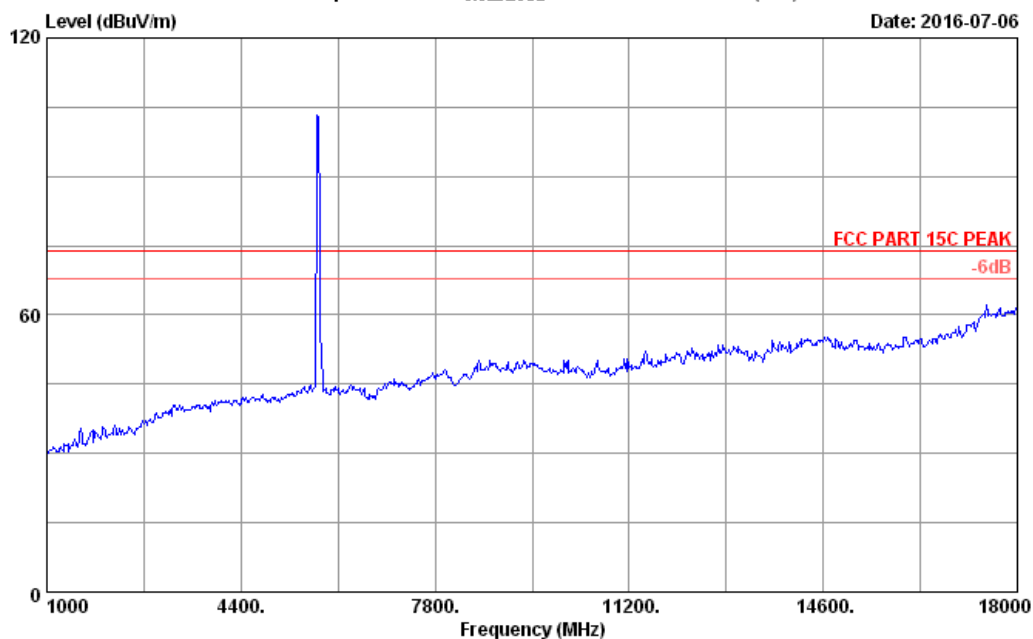


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 47       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT20 CH149 5745MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 48

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

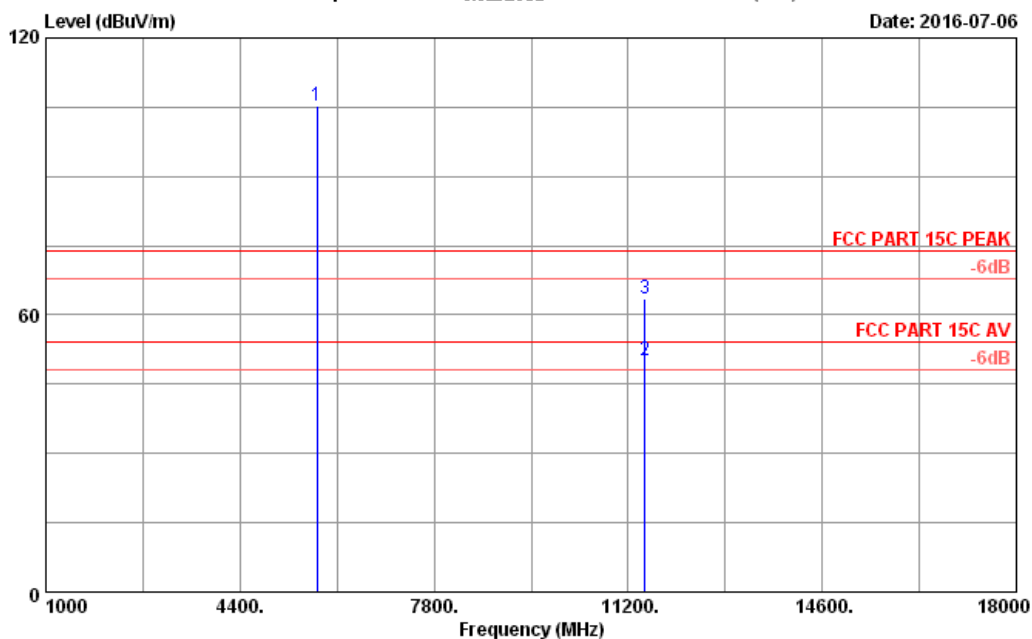

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 48       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT20 CH149 5745MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5745.000       | 34.55                    | 11.97                 | 35.45                 | 94.10             | 105.17                        | 74.00              | -31.17         | Peak    |
| 2   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 32.95             | 50.17                         | 54.00              | 3.83           | Average |
| 3   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 46.29             | 63.51                         | 74.00              | 10.49          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor

2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 57

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

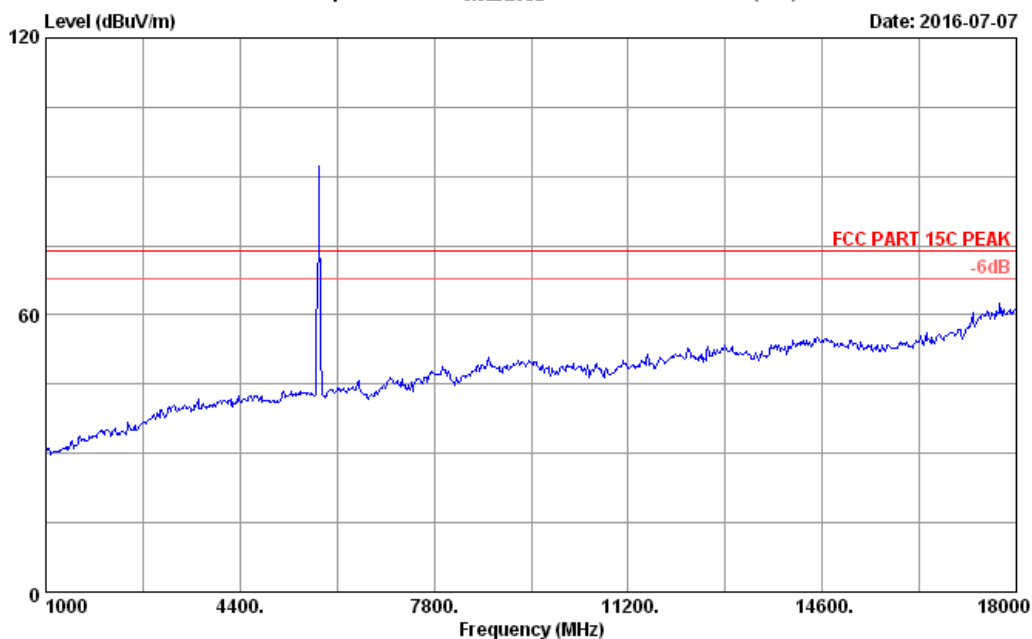

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 57         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT20 CH157 5785MHz Tx    |           |              |
|              | M/N: NS-P11W7100                        |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

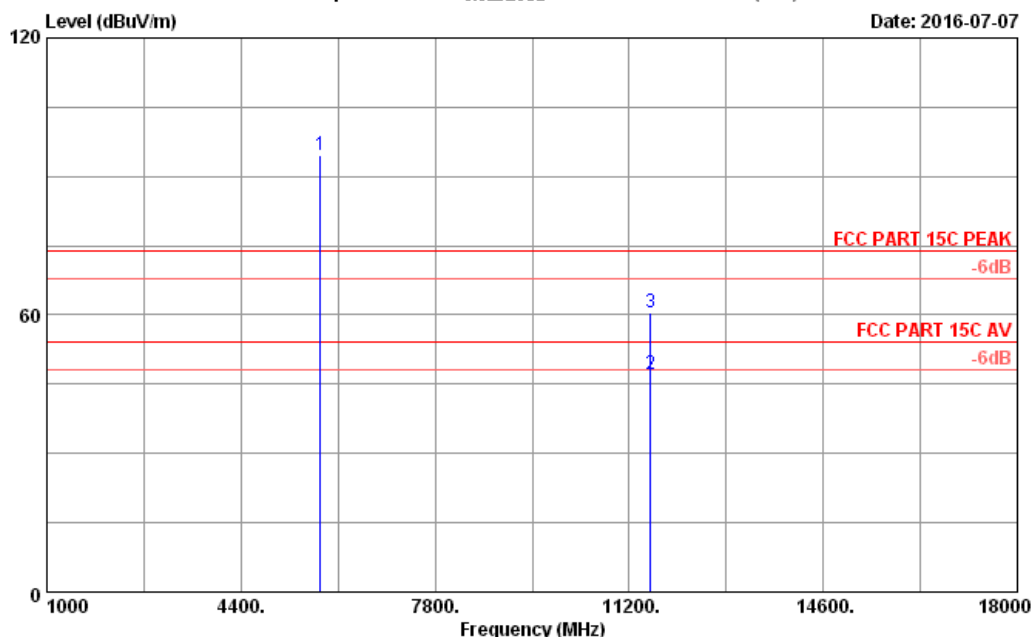**Data: 58**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH157 5785MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5785.000       | 34.57                    | 11.97                 | 35.45                 | 83.42             | 94.51                         | 74.00              | -20.51         | Peak    |
| 2   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 29.68             | 46.97                         | 54.00              | 7.03           | Average |
| 3   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 43.06             | 60.35                         | 74.00              | 13.65          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 59

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

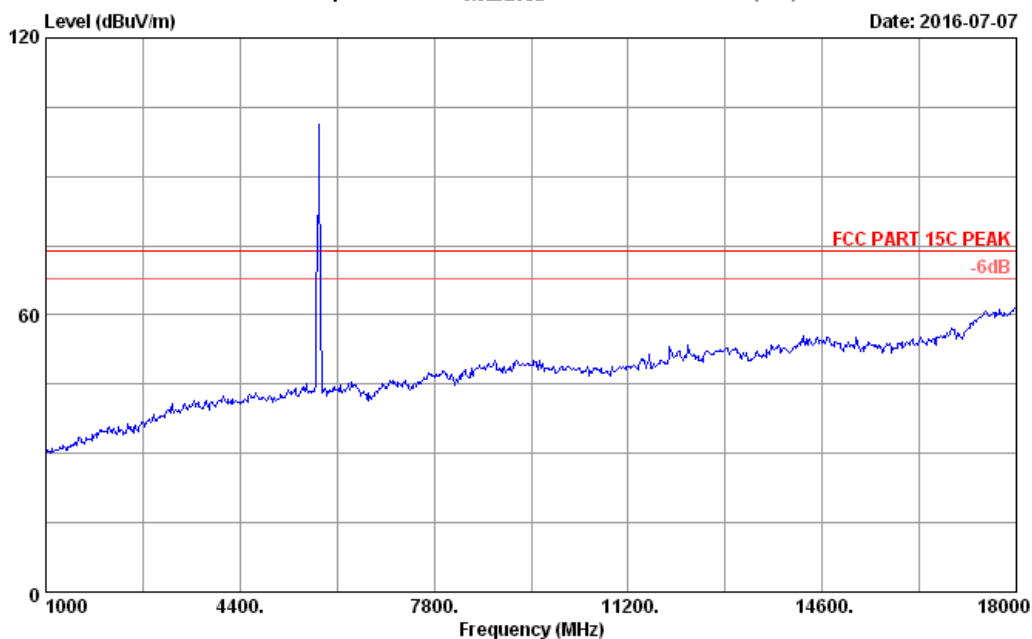


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 59       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11acVHT20 CH157 5785MHz Tx    |           |            |
|              | M/N:NS-P11W7100                         |           |            |


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 60

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

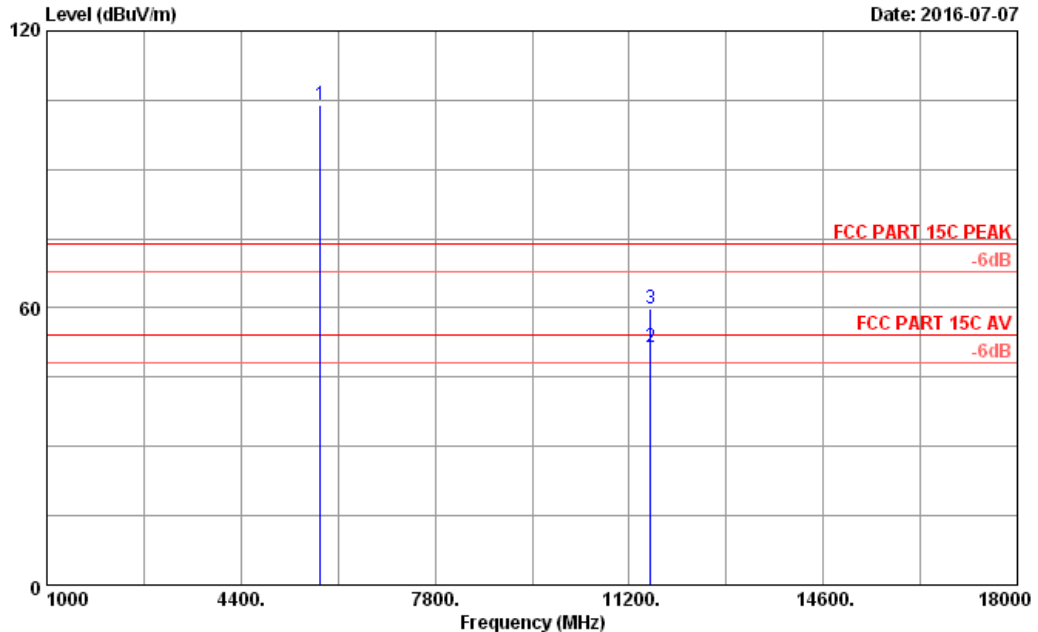

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 60       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11acVHT20 CH157 5785MHz Tx    |           |            |
|              | M/N: NS-P11W7100                        |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5785.000       | 34.57                    | 11.97                 | 35.45                 | 92.74             | 103.83                        | 74.00              | -29.83         | Peak    |
| 2   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 34.12             | 51.41                         | 54.00              | 2.59           | Average |
| 3   | 11570.000      | 39.14                    | 13.50                 | 35.35                 | 42.57             | 59.86                         | 74.00              | 14.14          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 61

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

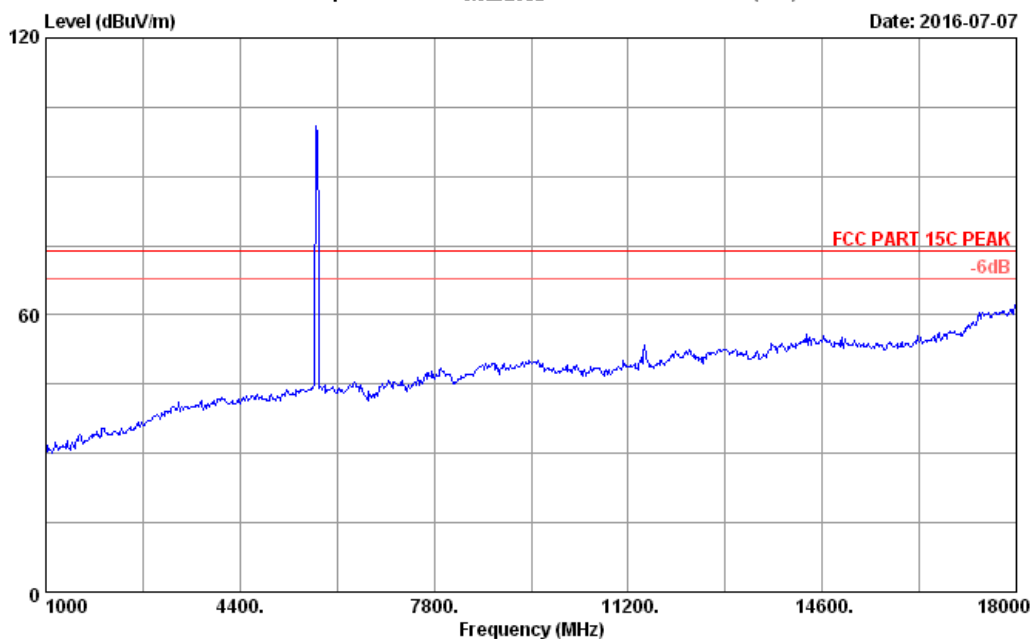

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 61       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11acVHT20 CH149 5745MHz Tx    |           |            |
|              | M/N:NS-P11W7100                         |           |            |




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 62

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

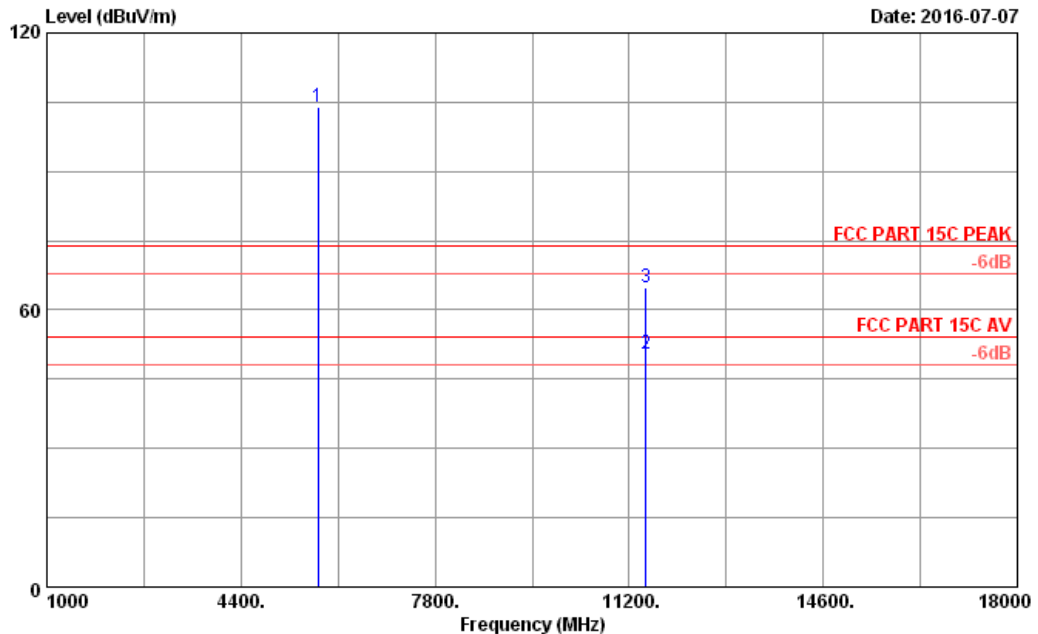


Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5745.000       | 34.55                    | 11.97                 | 35.45                 | 92.87             | 103.94                        | 74.00              | -29.94         | Peak    |
| 2   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 33.29             | 50.51                         | 54.00              | 3.49           | Average |
| 3   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 47.57             | 64.79                         | 74.00              | 9.21           | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

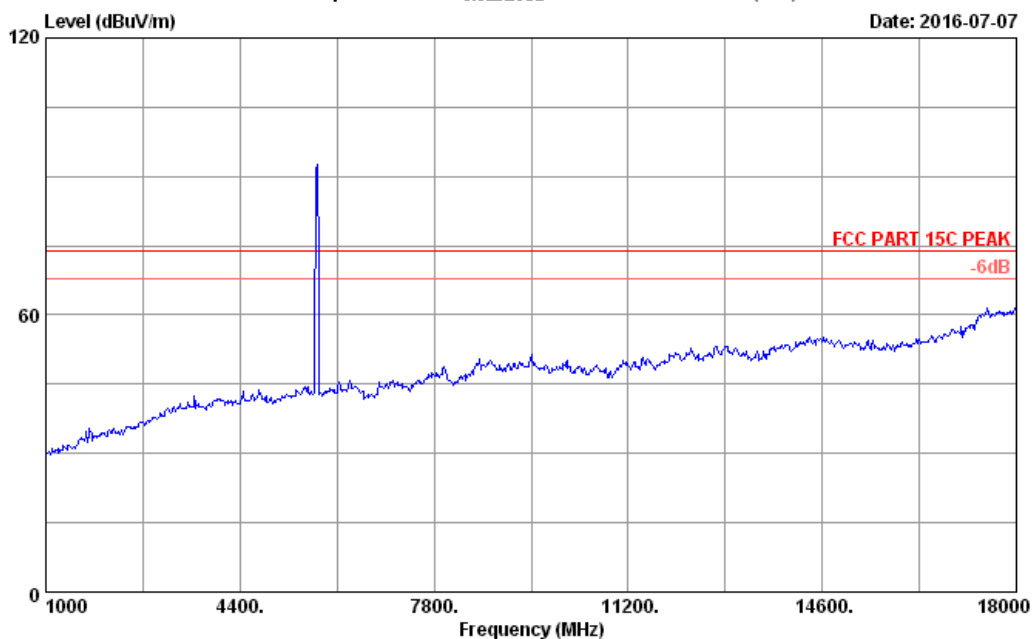**Data: 63**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 63         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT20 CH149 5745MHz Tx    |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

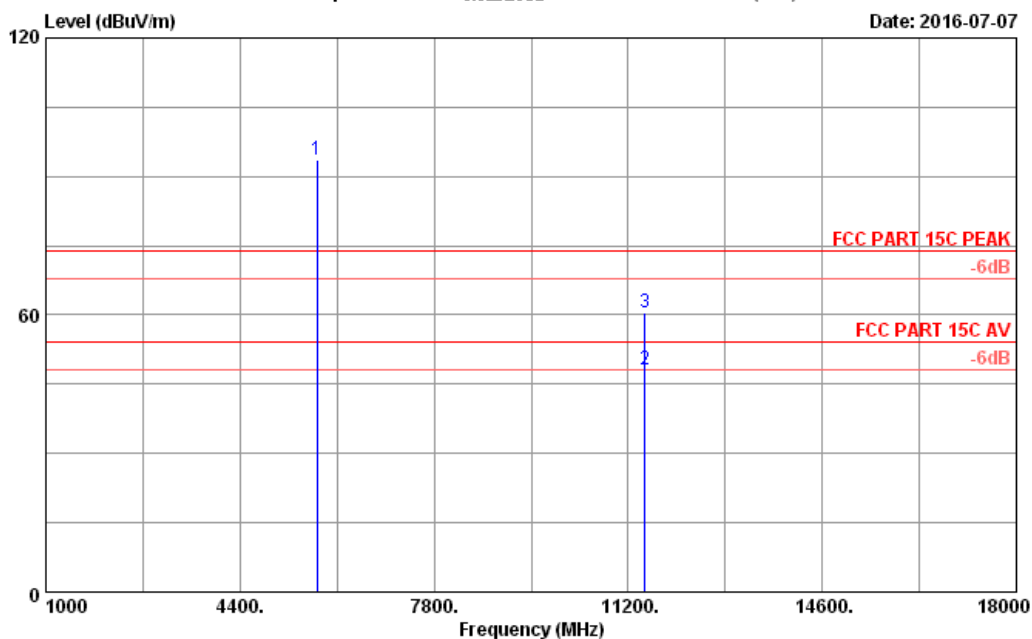**Data: 64**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


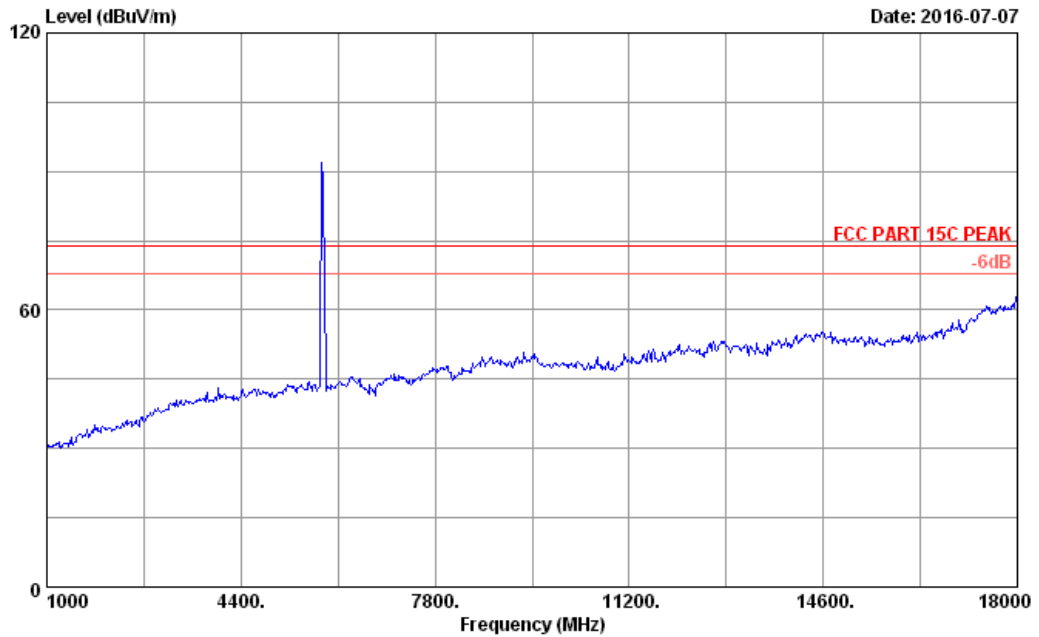
Site no. : 3m Chamber Data no. : 64  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5745.000       | 34.55                    | 11.97                 | 35.45                 | 82.37             | 93.44                         | 74.00              | -19.44         | Peak    |
| 2   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 30.76             | 47.98                         | 54.00              | 6.02           | Average |
| 3   | 11490.000      | 39.09                    | 13.49                 | 35.36                 | 43.31             | 60.53                         | 74.00              | 13.47          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 65**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 65         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT20 CH165 5825MHz Tx    |           |              |
|              | M/N:NS-P11W7100                         |           |              |




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 66

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

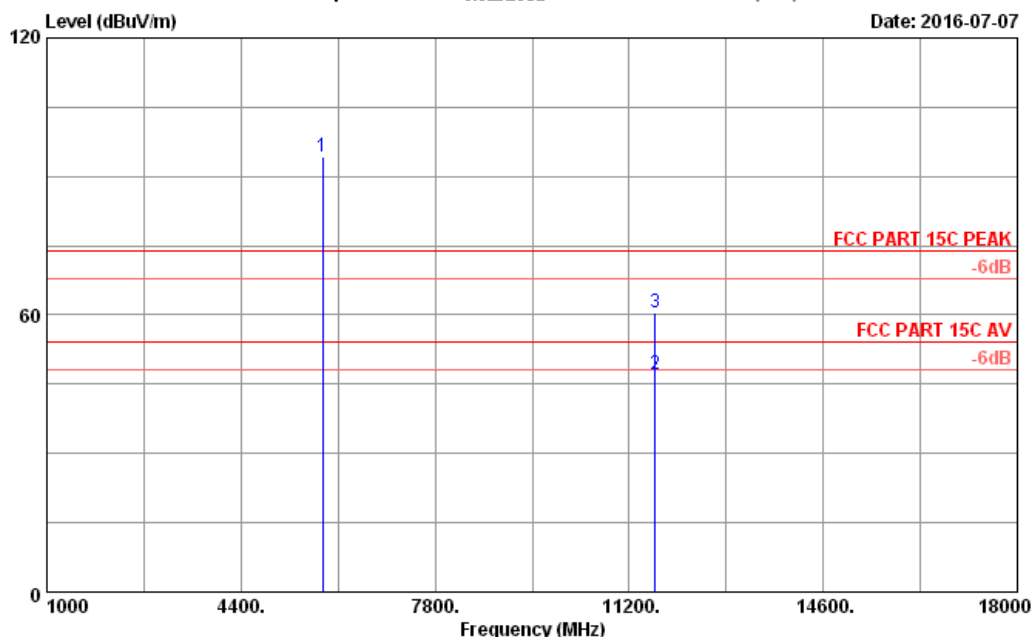

Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5825.000       | 34.60                    | 11.98                 | 35.45                 | 83.26             | 94.39                         | 74.00              | -20.39         | Peak    |
| 2   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 29.95             | 47.29                         | 54.00              | 6.71           | Average |
| 3   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 43.01             | 60.35                         | 74.00              | 13.65          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 67

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

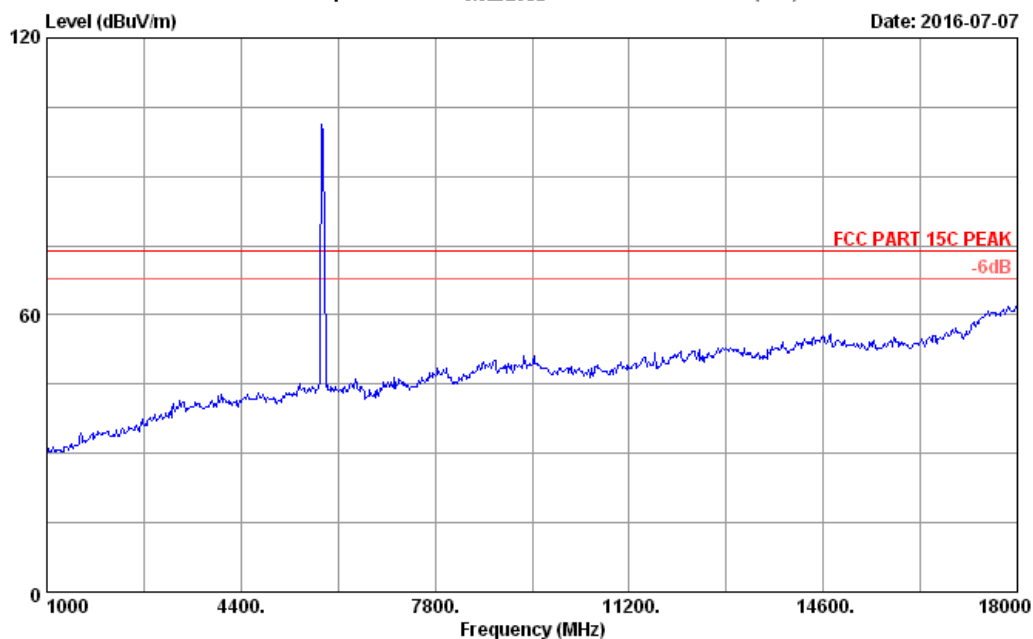

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 67       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11acVHT20 CH165 5825MHz Tx    |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

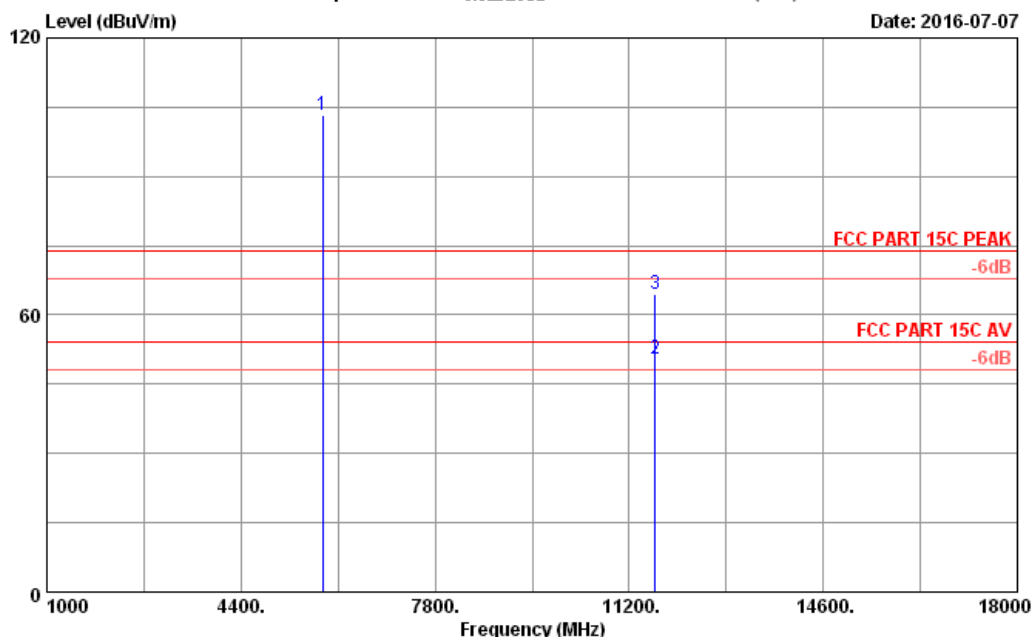**Data: 68**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5825.000       | 34.60                    | 11.98                 | 35.45                 | 92.28             | 103.41                        | 74.00              | -29.41         | Peak    |
| 2   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 33.06             | 50.40                         | 54.00              | 3.60           | Average |
| 3   | 11650.000      | 39.19                    | 13.52                 | 35.37                 | 47.29             | 64.63                         | 74.00              | 9.37           | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 73

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

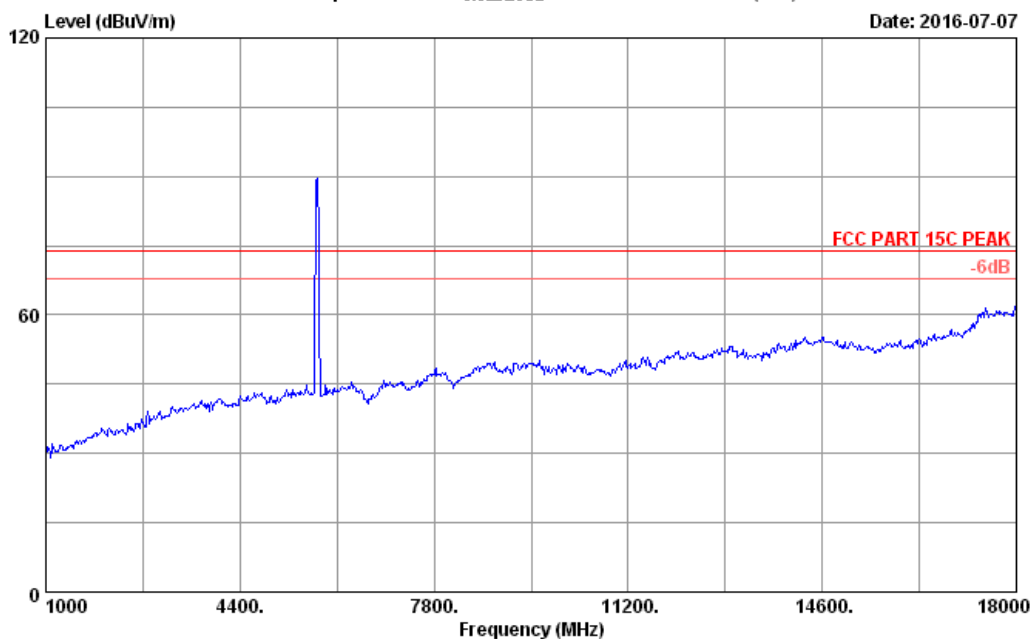

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 73         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6" windows tablet                  |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT40 CH151 5755MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

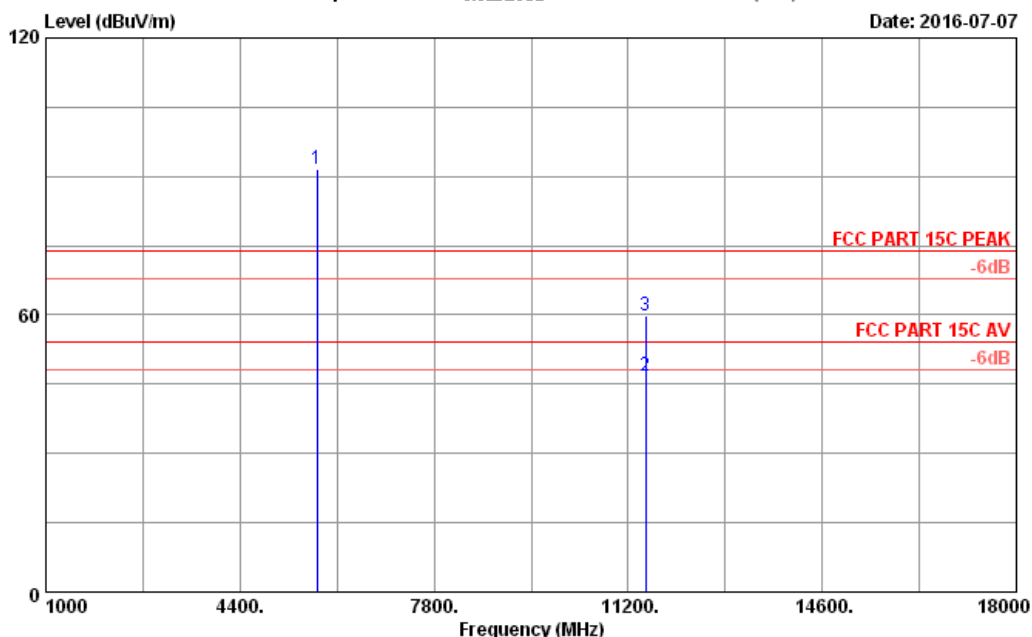**Data: 74**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5755.000       | 34.55                    | 11.97                 | 35.45                 | 80.64             | 91.71                         | 74.00              | -17.71         | Peak    |
| 2   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 29.58             | 46.84                         | 54.00              | 7.16           | Average |
| 3   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 42.43             | 59.69                         | 74.00              | 14.31          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 75

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

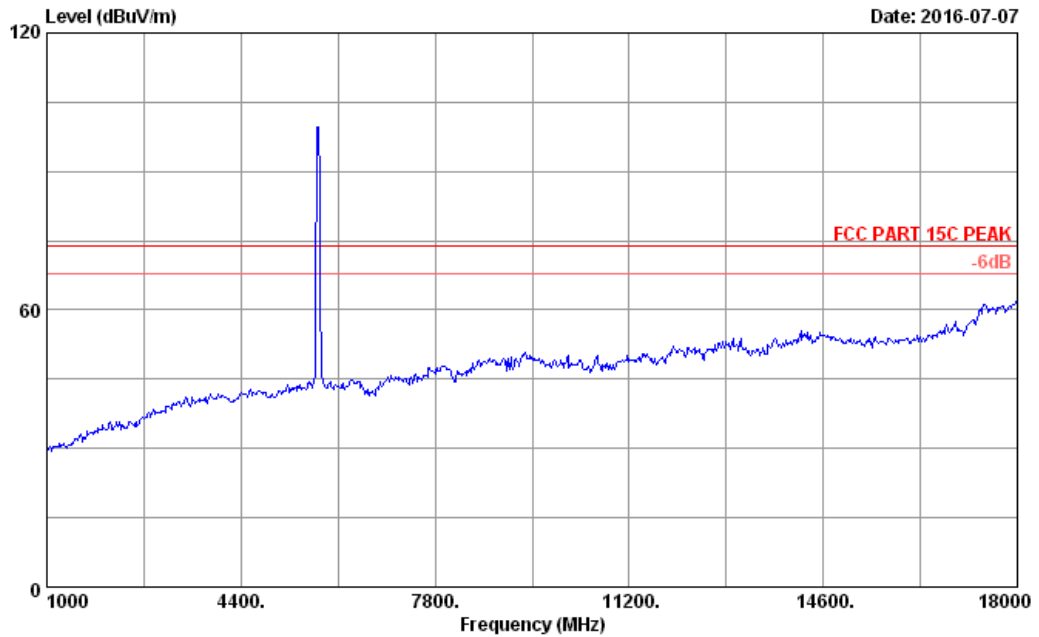


|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 75       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT40 CH151 5755MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 76

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

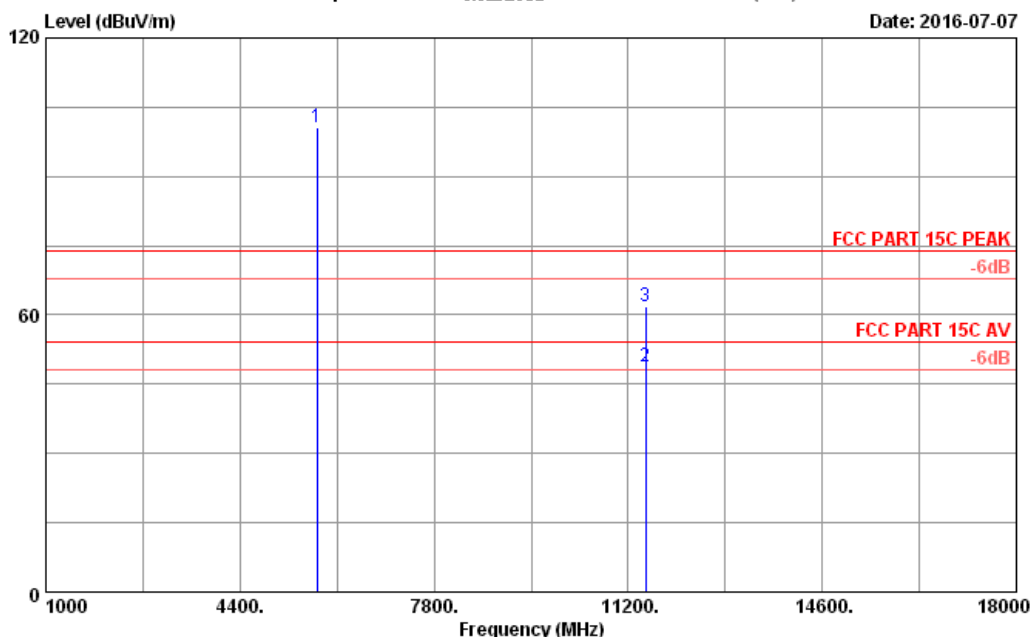

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 76       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT40 CH151 5755MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5755.000       | 34.55                    | 11.97                 | 35.45                 | 89.61             | 100.68                        | 74.00              | -26.68         | Peak    |
| 2   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 31.64             | 48.90                         | 54.00              | 5.10           | Average |
| 3   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 44.44             | 61.70                         | 74.00              | 12.30          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 81

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

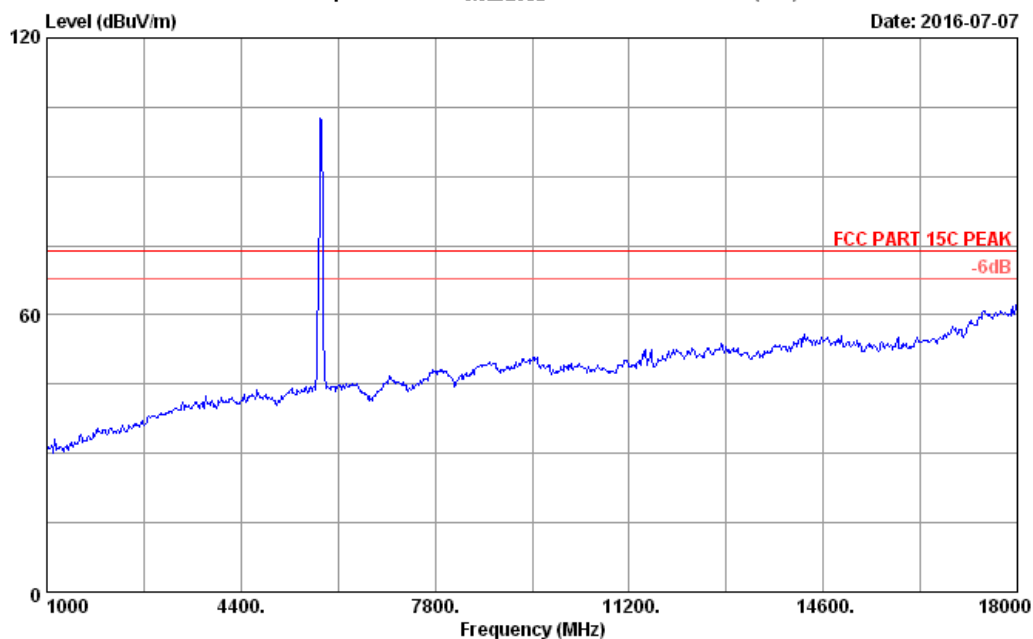

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 81       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT40 CH159 5795MHz Tx      |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

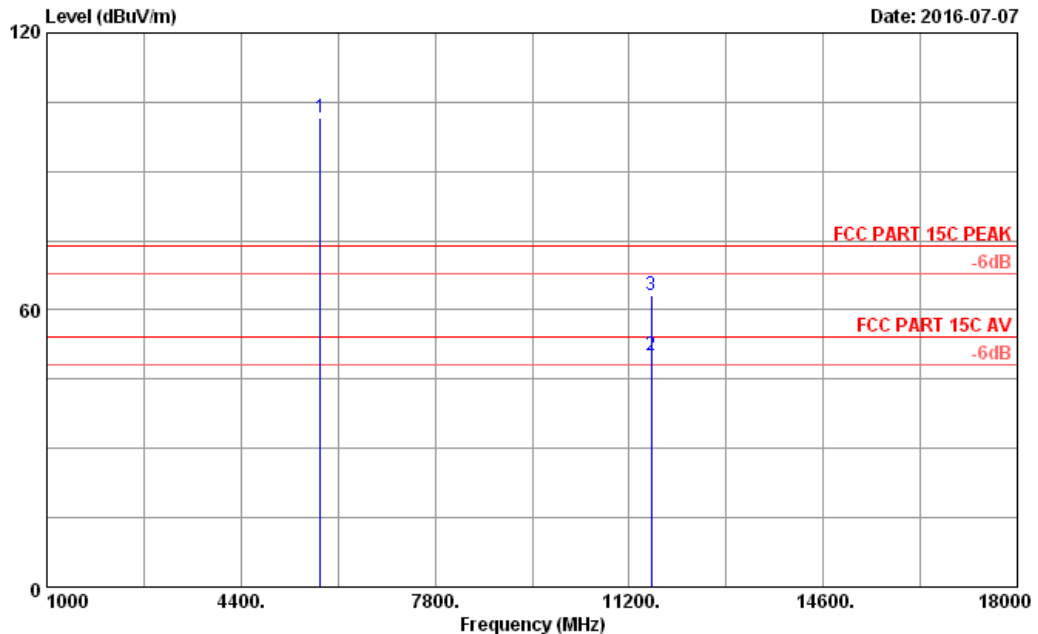**Data: 82**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


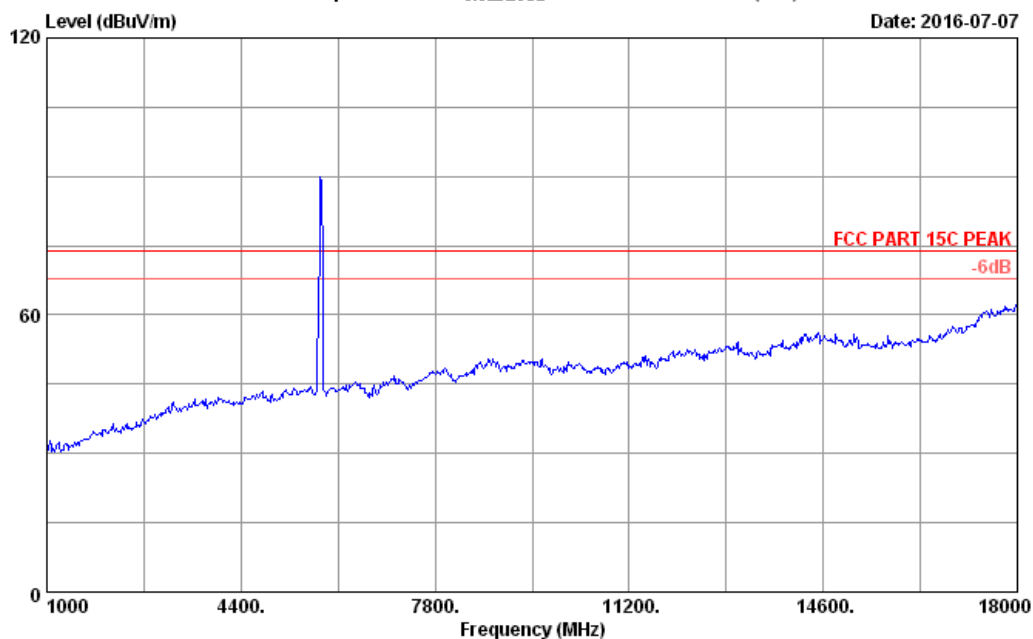
Site no. : 3m Chamber Data no. : 82  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5795.000       | 34.58                    | 11.97                 | 35.45                 | 90.38             | 101.48                        | 74.00              | -27.48         | Peak    |
| 2   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 32.89             | 50.19                         | 54.00              | 3.81           | Average |
| 3   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 45.99             | 63.29                         | 74.00              | 10.71          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 83**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 83         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11nHT40 CH159 5795MHz Tx      |           |              |
|              | M/N:NS-P11W7100                         |           |              |




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 84

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

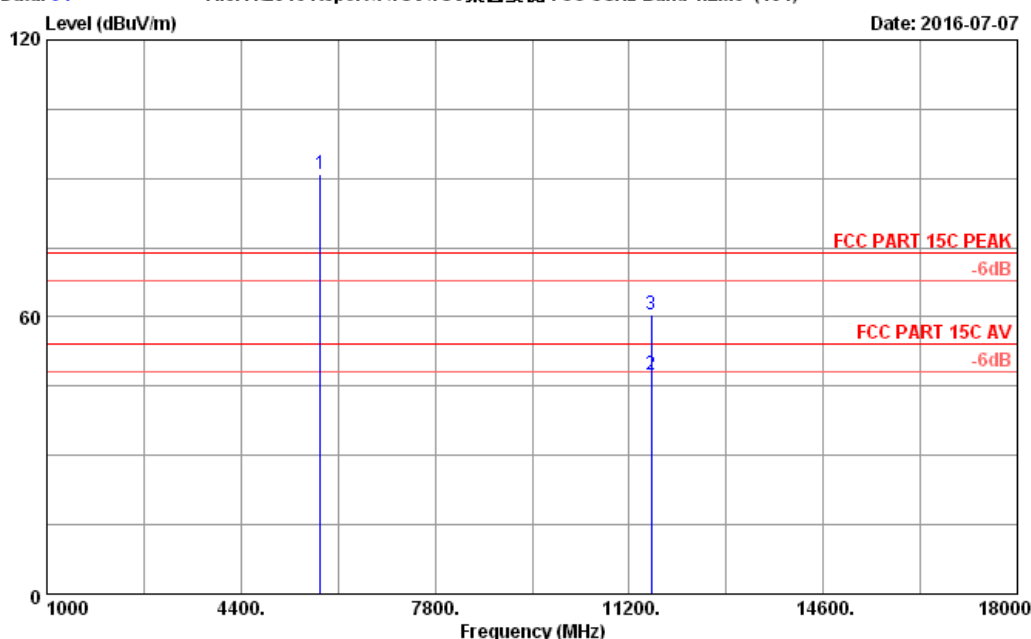

Site no. : 3m Chamber Data no. : 84  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5795.000       | 34.58                    | 11.97                 | 35.45                 | 79.93             | 91.03                         | 74.00              | -17.03         | Peak    |
| 2   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 30.07             | 47.37                         | 54.00              | 6.63           | Average |
| 3   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 43.26             | 60.56                         | 74.00              | 13.44          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 89

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

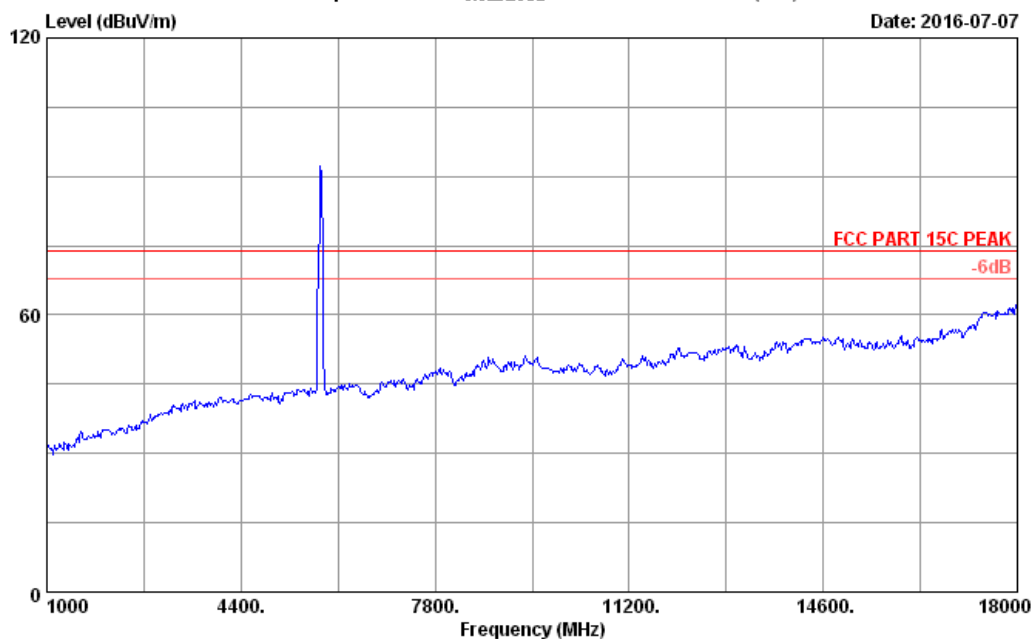

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 89         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT40 CH159 5795MHz Tx    |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

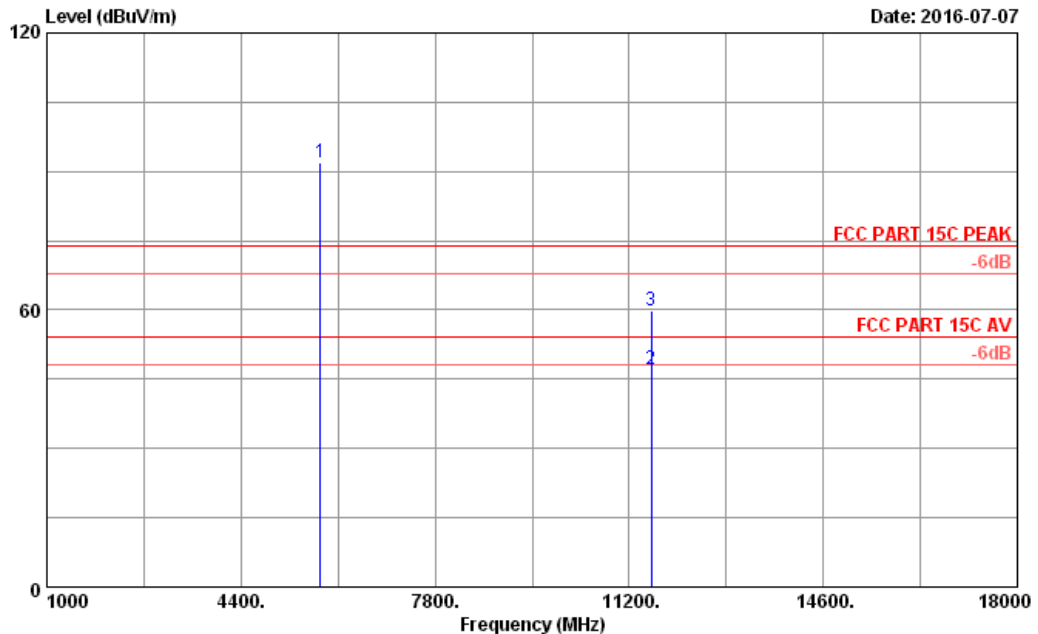**Data: 90**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 90  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5795.000       | 34.58                    | 11.97                 | 35.45                 | 80.66             | 91.76                         | 74.00              | -17.76         | Peak    |
| 2   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 29.94             | 47.24                         | 54.00              | 6.76           | Average |
| 3   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 42.57             | 59.87                         | 74.00              | 14.13          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 91

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

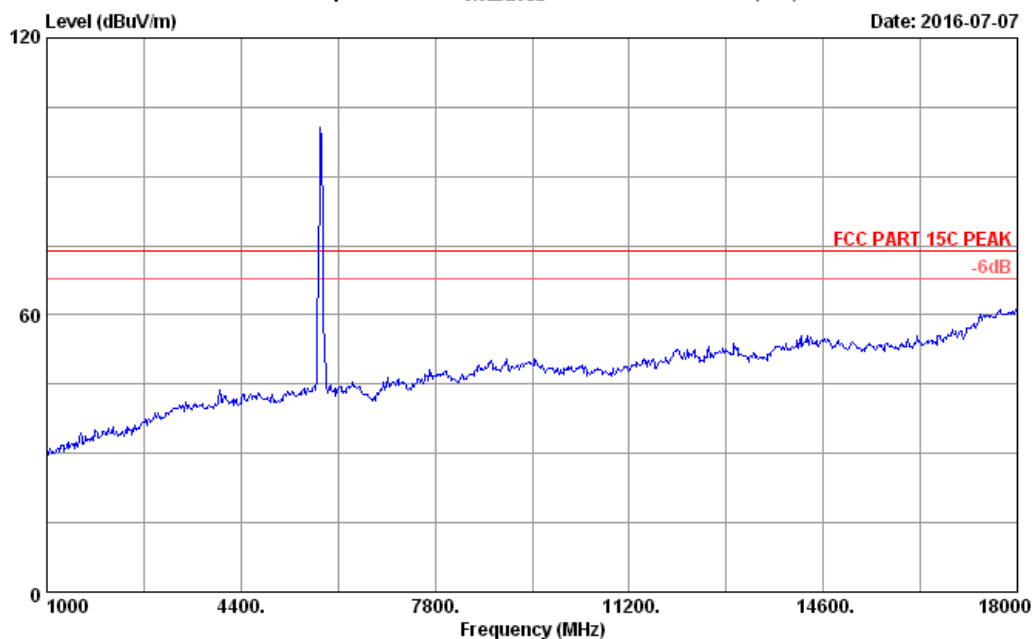

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 91       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11acVHT40 CH159 5795MHz Tx    |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

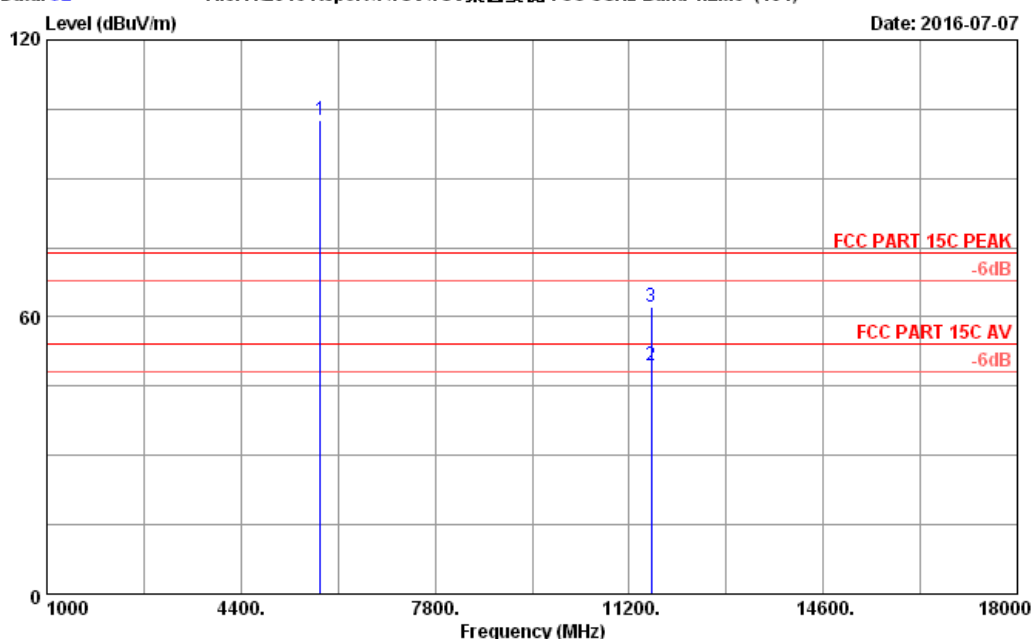**Data: 92**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 92  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5795.000       | 34.58                    | 11.97                 | 35.45                 | 91.55             | 102.65                        | 74.00              | -28.65         | Peak    |
| 2   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 32.10             | 49.40                         | 54.00              | 4.60           | Average |
| 3   | 11590.000      | 39.15                    | 13.51                 | 35.36                 | 44.91             | 62.21                         | 74.00              | 11.79          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 97

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

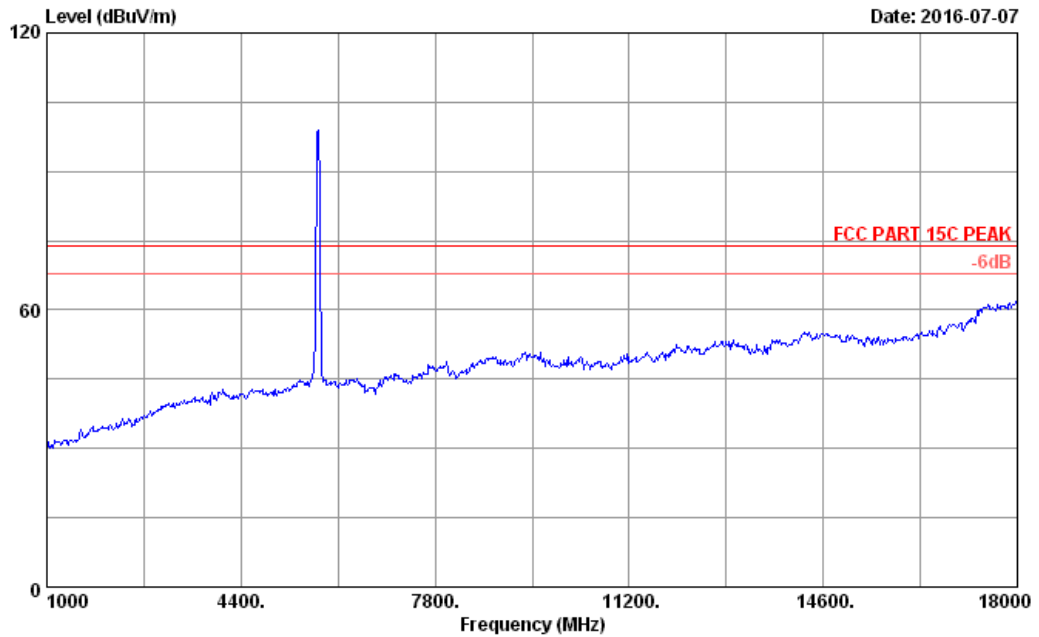

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 97       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6" windows tablet                  |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11acVHT40 CH151 5755MHz Tx    |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

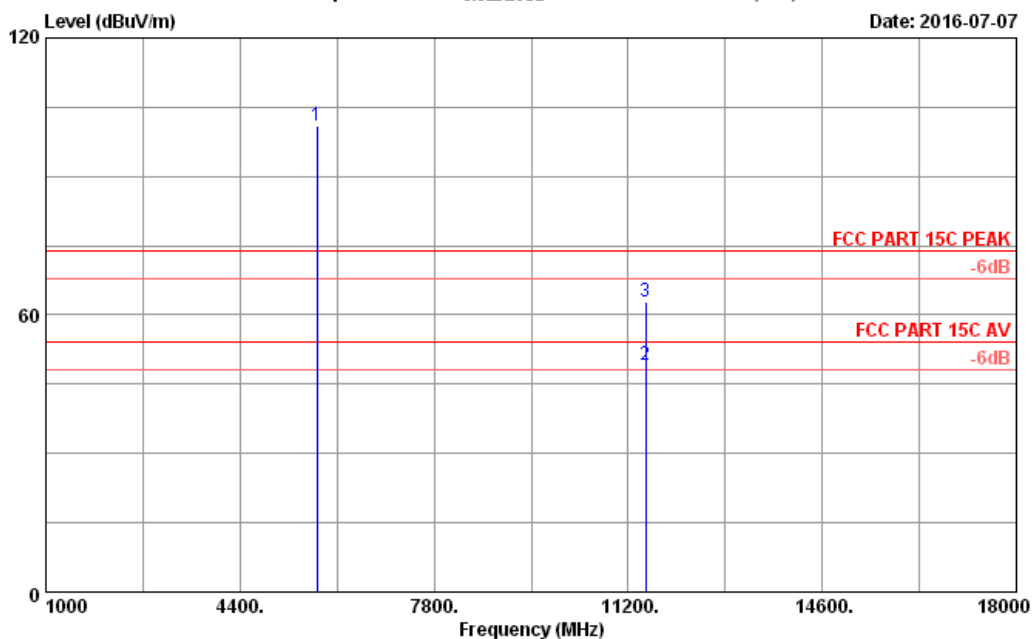**Data: 98**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 98  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5755.000       | 34.55                    | 11.97                 | 35.45                 | 89.81             | 100.88                        | 74.00              | -26.88         | Peak    |
| 2   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 31.86             | 49.12                         | 54.00              | 4.88           | Average |
| 3   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 45.46             | 62.72                         | 74.00              | 11.28          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Noutou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 99

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-07

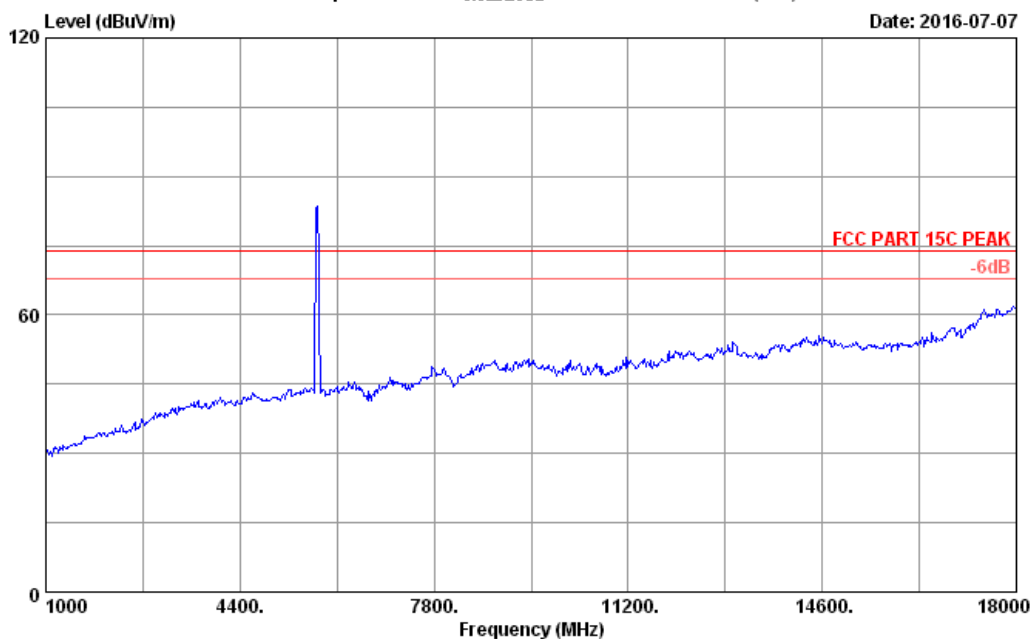

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 99         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT40 CH151 5755MHz Tx    |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

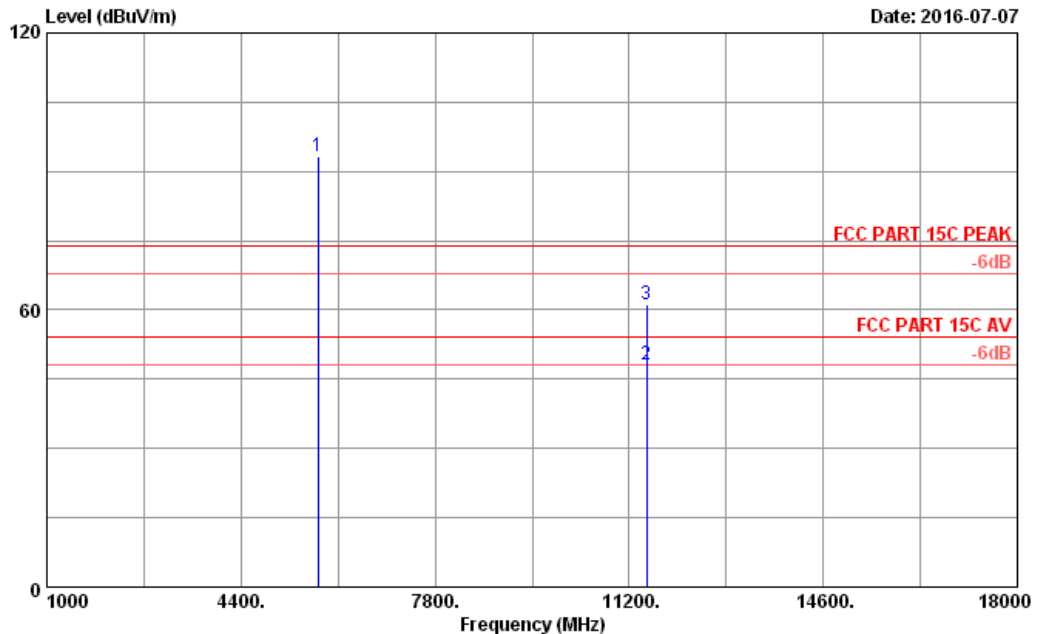**Data: 100**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


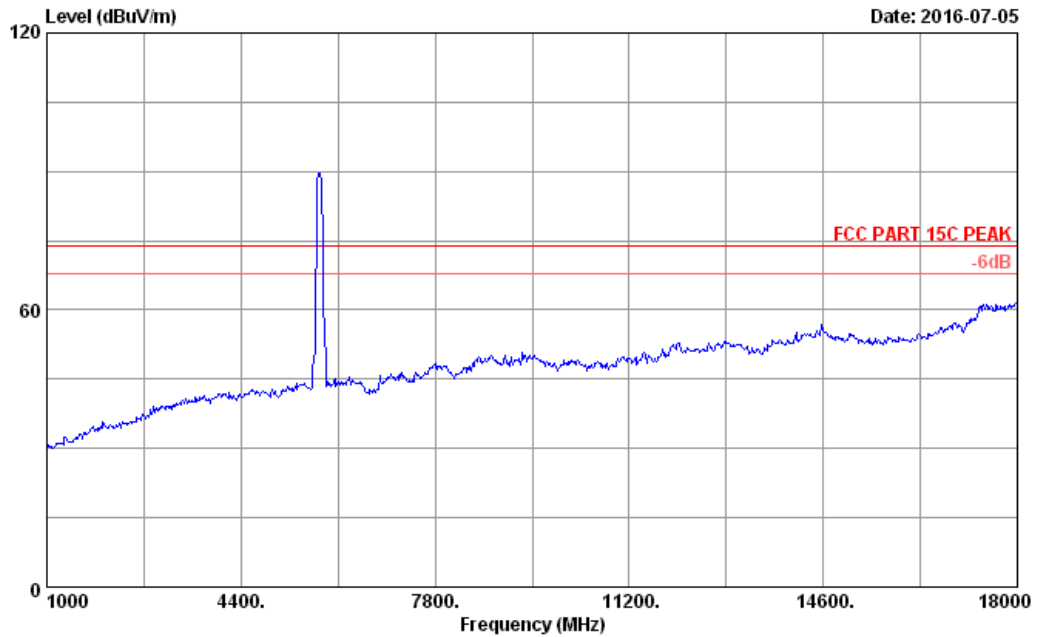
Site no. : 3m Chamber Data no. : 100  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5755.000       | 34.55                    | 11.97                 | 35.45                 | 82.07             | 93.14                         | 74.00              | -19.14         | Peak    |
| 2   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 30.77             | 48.03                         | 54.00              | 5.97           | Average |
| 3   | 11510.000      | 39.11                    | 13.49                 | 35.34                 | 43.79             | 61.05                         | 74.00              | 12.95          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 1**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-05**


|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 1          |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6" windows tablet                  |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11ac VHT80 CH155 5775MHz Tx   |           |              |
|              | M/N:NS-P11W7100                         |           |              |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

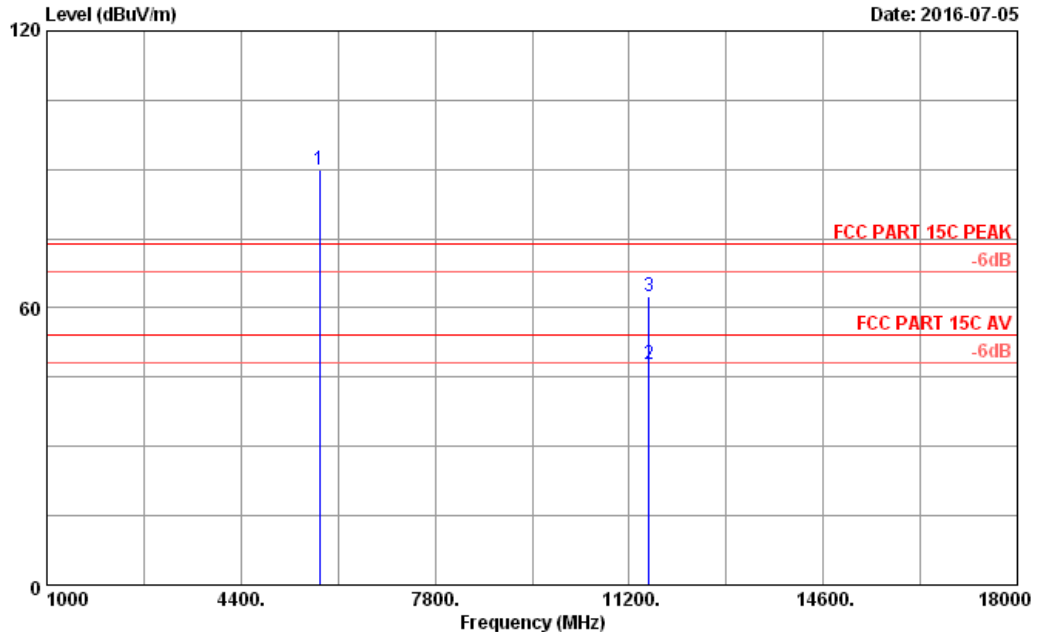**Data: 2**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5775.000       | 34.57                    | 11.97                 | 35.45                 | 78.86             | 89.95                         | 74.00              | -15.95         | Peak    |
| 2   | 11550.000      | 39.13                    | 13.50                 | 35.35                 | 30.45             | 47.73                         | 54.00              | 6.27           | Average |
| 3   | 11550.000      | 39.13                    | 13.50                 | 35.35                 | 45.31             | 62.59                         | 74.00              | 11.41          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 3

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)


Date: 2016-07-05

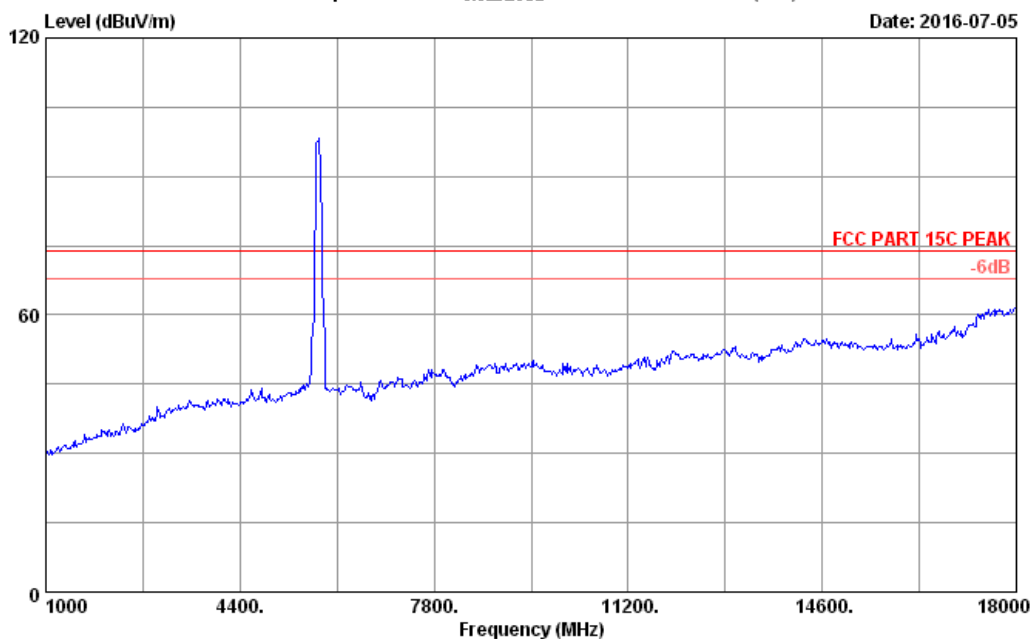

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 3        |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C PEAK                     |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11ac VHT80 CH155 5775MHz Tx   |           |            |
|              | M/N:NS-P11W7100                         |           |            |



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

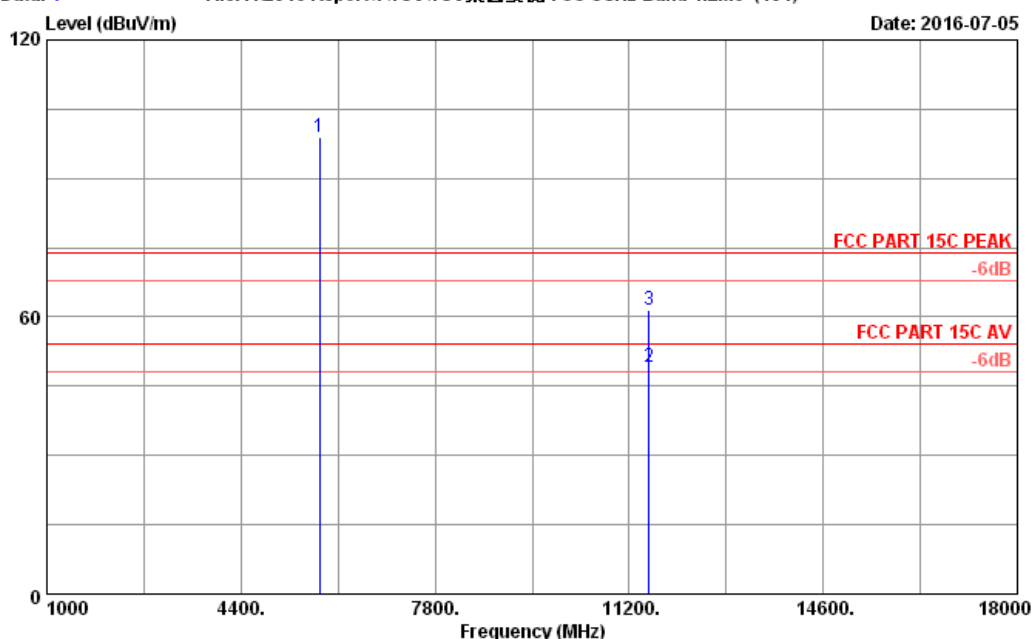**Data: 4**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-05**


Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5775.000       | 34.57                    | 11.97                 | 35.45                 | 87.98             | 99.07                         | 74.00              | -25.07         | Peak    |
| 2   | 11550.000      | 39.13                    | 13.50                 | 35.35                 | 31.76             | 49.04                         | 54.00              | 4.96           | Average |
| 3   | 11550.000      | 39.13                    | 13.50                 | 35.35                 | 44.38             | 61.66                         | 74.00              | 12.34          | Peak    |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 17

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

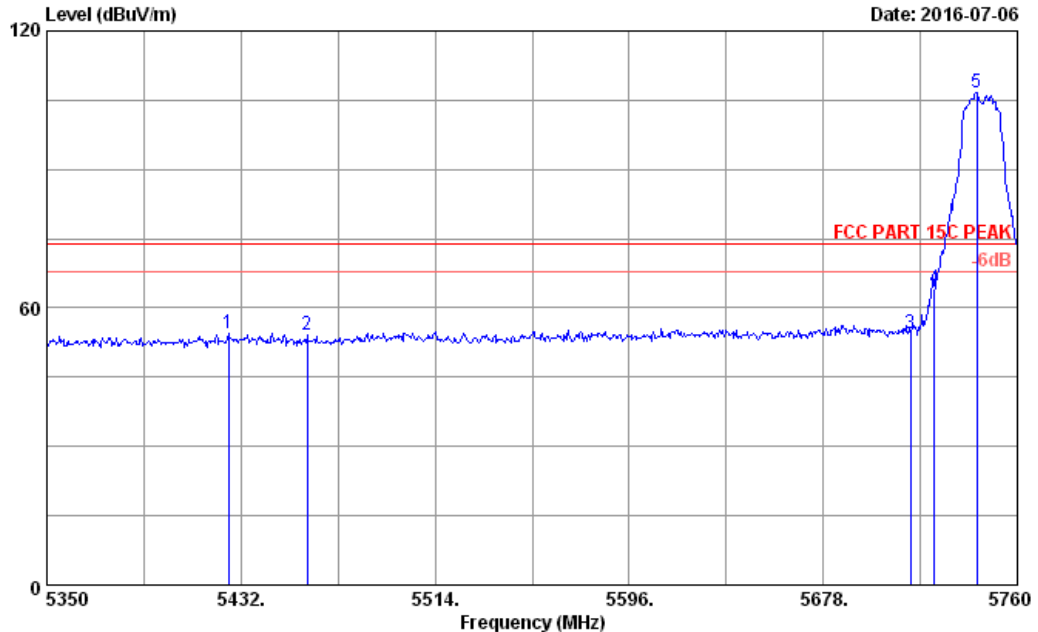

Site no. : 3m Chamber Data no. : 17  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5426.670       | 34.27                    | 11.94                 | 35.49                 | 43.90             | 54.62                         | 74.00              | 19.38          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 43.25             | 54.05                         | 74.00              | 19.95          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 43.56             | 54.61                         | 74.00              | 19.39          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 53.19             | 64.24                         | 74.00              | 9.76           | Peak   |
| 5   | 5742.780       | 34.55                    | 11.97                 | 35.45                 | 95.51             | 106.58                        | 74.00              | -32.58         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 18

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

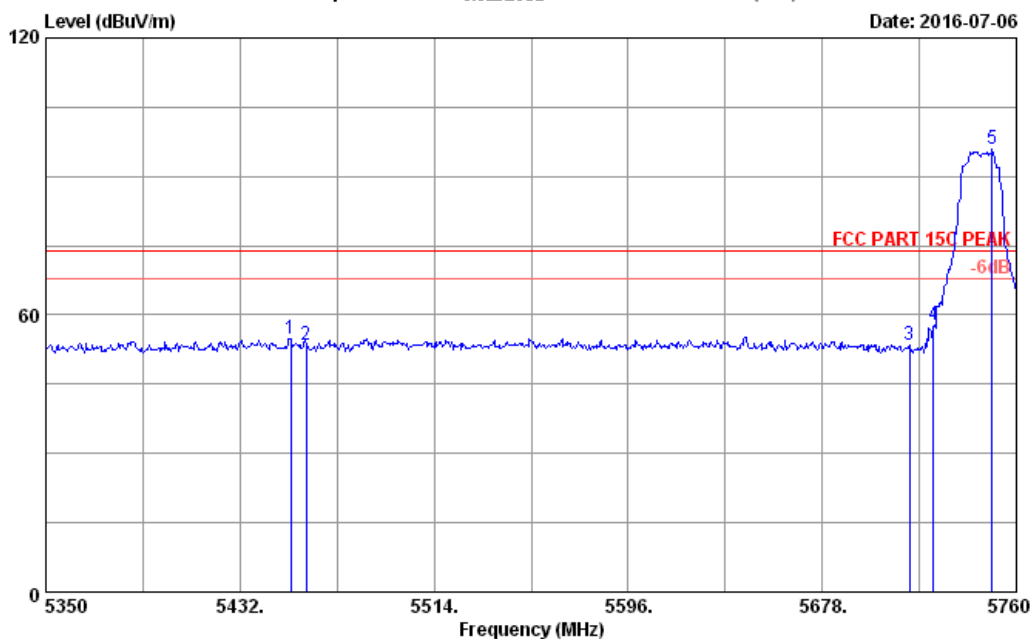

Site no. : 3m Chamber Data no. : 18  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5453.320       | 34.32                    | 11.94                 | 35.48                 | 44.20             | 54.98                         | 74.00              | 19.02          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 42.70             | 53.50                         | 74.00              | 20.50          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 42.58             | 53.63                         | 74.00              | 20.37          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 46.87             | 57.92                         | 74.00              | 16.08          | Peak   |
| 5   | 5749.750       | 34.55                    | 11.97                 | 35.45                 | 84.71             | 95.78                         | 74.00              | -21.78         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 19

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

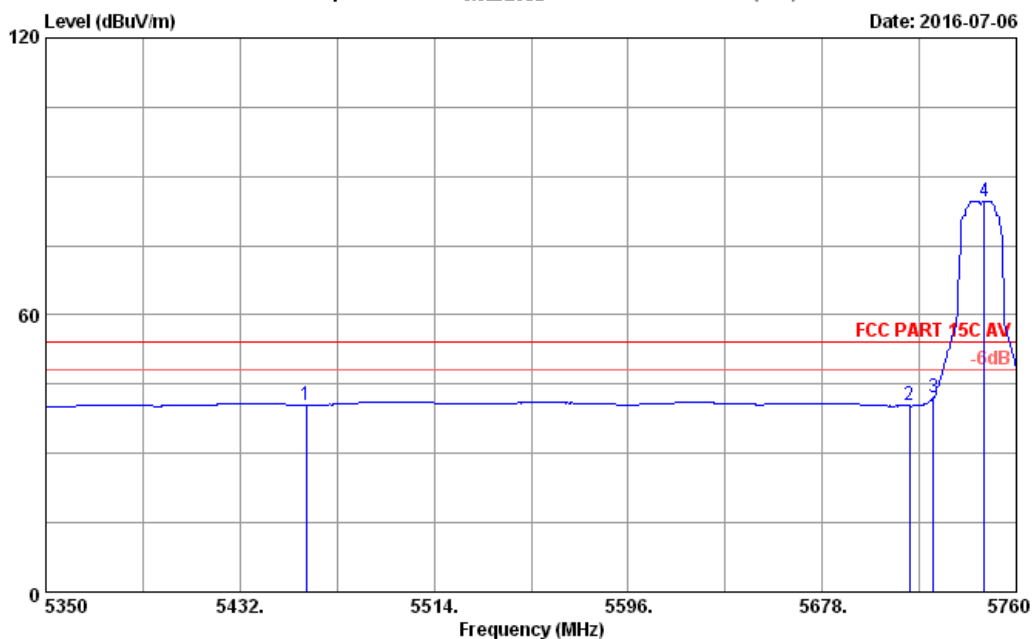

Site no. : 3m Chamber Data no. : 19  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.70             | 40.50                         | 54.00              | 13.50          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 29.23             | 40.28                         | 54.00              | 13.72          | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 31.20             | 42.25                         | 54.00              | 11.75          | Average |
| 4   | 5746.470       | 34.55                    | 11.97                 | 35.45                 | 73.63             | 84.70                         | 54.00              | -30.70         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 20

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

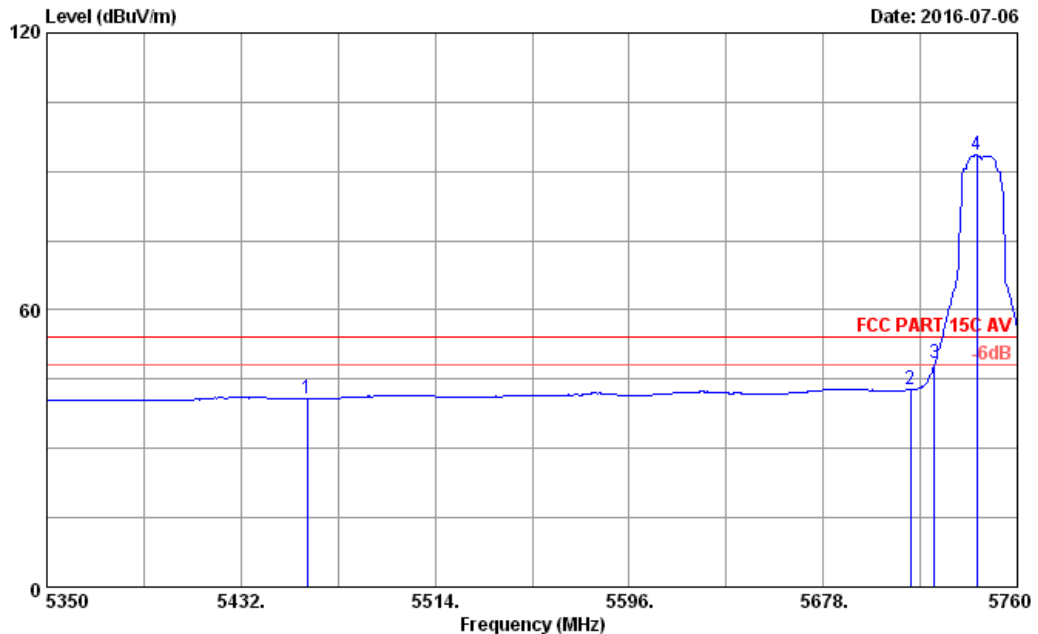

Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.96             | 40.76                         | 54.00              | 13.24          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 31.71             | 42.76                         | 54.00              | 11.24          | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 37.29             | 48.34                         | 54.00              | 5.66           | Average |
| 4   | 5742.780       | 34.55                    | 11.97                 | 35.45                 | 82.41             | 93.48                         | 54.00              | -39.48         | Average |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 29

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

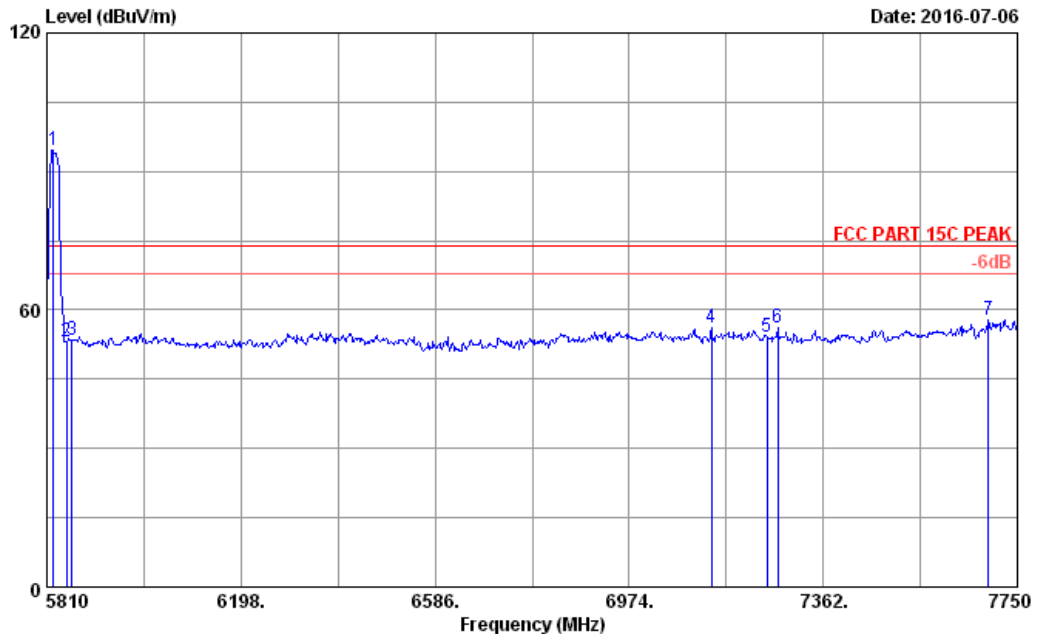

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 29         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11a CH165 5825MHz Tx          |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 83.45             | 94.57                         | 74.00              | -20.57         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.10             | 53.24                         | 74.00              | 20.76          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 42.35             | 53.50                         | 74.00              | 20.50          | Peak   |
| 4   | 7138.900       | 35.83                    | 12.39                 | 35.54                 | 43.47             | 56.15                         | 74.00              | 17.85          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.24             | 54.26                         | 74.00              | 19.74          | Peak   |
| 6   | 7270.820       | 36.15                    | 12.50                 | 35.56                 | 42.91             | 56.00                         | 74.00              | 18.00          | Peak   |
| 7   | 7691.800       | 36.82                    | 12.76                 | 35.55                 | 43.78             | 57.81                         | 74.00              | 16.19          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Ant Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 30

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

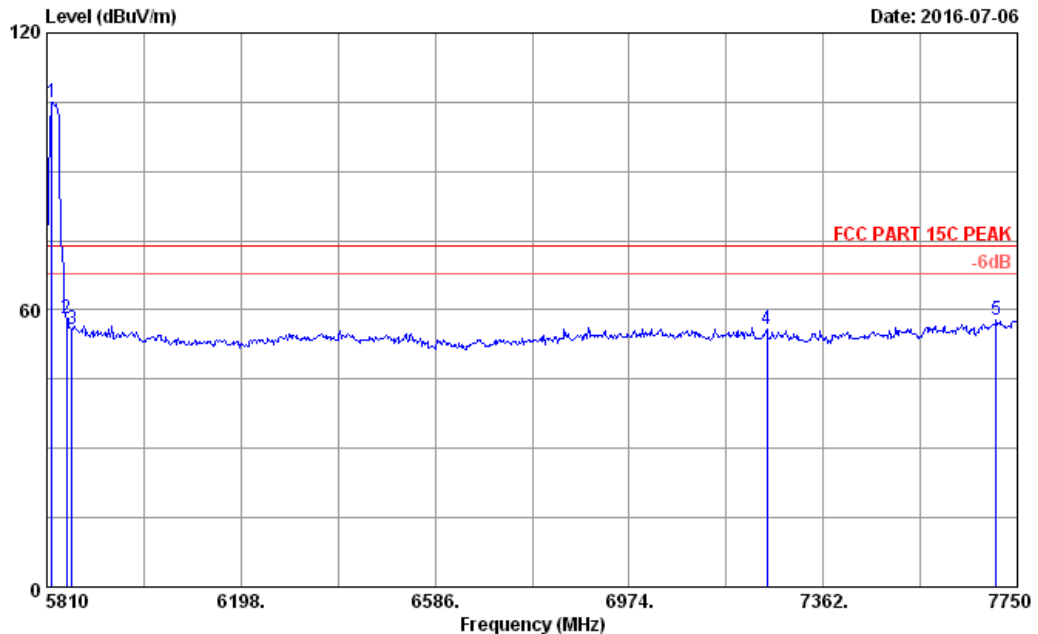

Site no. : 3m Chamber Data no. : 30  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5819.700       | 34.59                    | 11.98                 | 35.45                 | 93.78             | 104.90                        | 74.00              | -30.90         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 46.90             | 58.04                         | 74.00              | 15.96          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 44.72             | 55.87                         | 74.00              | 18.13          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 42.93             | 55.95                         | 74.00              | 18.05          | Peak   |
| 5   | 7707.320       | 36.82                    | 12.76                 | 35.54                 | 43.67             | 57.71                         | 74.00              | 16.29          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 31

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

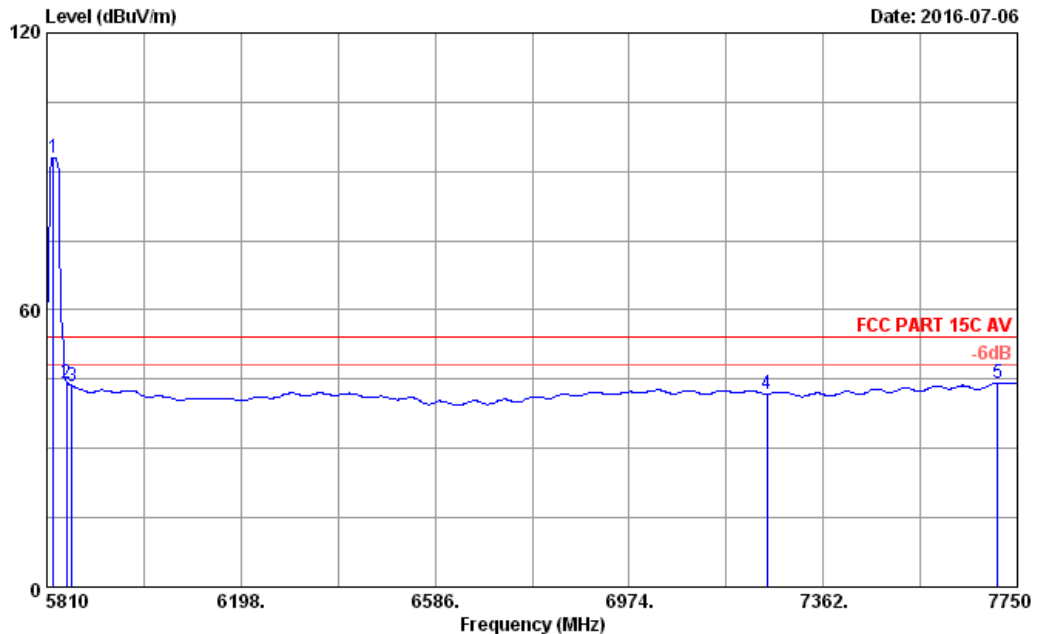

Site no. : 3m Chamber Data no. : 31  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11a CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 81.97             | 93.09                         | 54.00              | -39.09         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 33.07             | 44.21                         | 54.00              | 9.79           | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 32.45             | 43.60                         | 54.00              | 10.40          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.83             | 41.85                         | 54.00              | 12.15          | Average |
| 5   | 7711.200       | 36.83                    | 12.77                 | 35.54                 | 30.22             | 44.28                         | 54.00              | 9.72           | Average |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 32

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

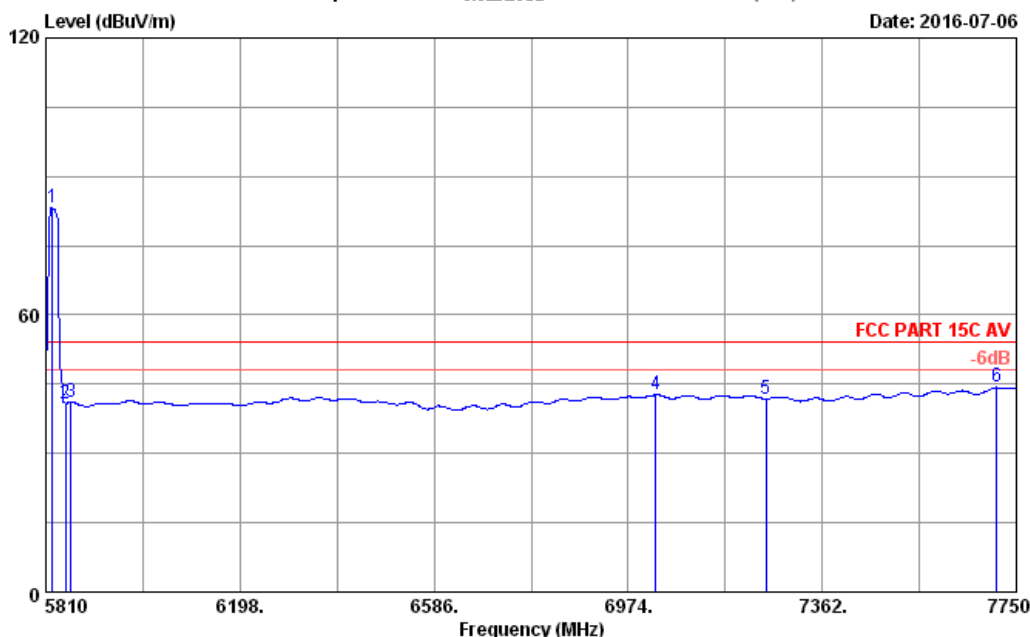

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 32         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C AV                       |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11a CH165 5825MHz Tx          |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 72.14             | 83.26                         | 54.00              | -29.26         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.76             | 40.90                         | 54.00              | 13.10          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 29.90             | 41.05                         | 54.00              | 12.95          | Average |
| 4   | 7028.320       | 35.57                    | 12.29                 | 35.52                 | 30.31             | 42.65                         | 54.00              | 11.35          | Average |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.83             | 41.85                         | 54.00              | 12.15          | Average |
| 6   | 7711.200       | 36.83                    | 12.77                 | 35.54                 | 30.23             | 44.29                         | 54.00              | 9.71           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 49

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

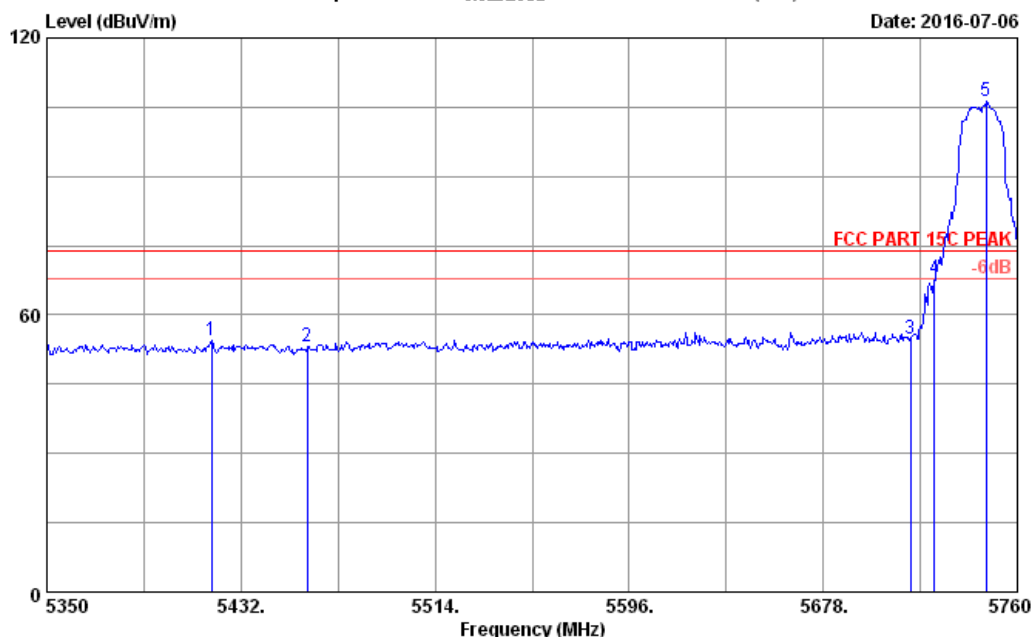

Site no. : 3m Chamber Data no. : 49  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5419.700       | 34.26                    | 11.94                 | 35.49                 | 43.62             | 54.33                         | 74.00              | 19.67          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 42.49             | 53.29                         | 74.00              | 20.71          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 43.93             | 54.98                         | 74.00              | 19.02          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 56.85             | 67.90                         | 74.00              | 6.10           | Peak   |
| 5   | 5746.880       | 34.55                    | 11.97                 | 35.45                 | 95.26             | 106.33                        | 74.00              | -32.33         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 50

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

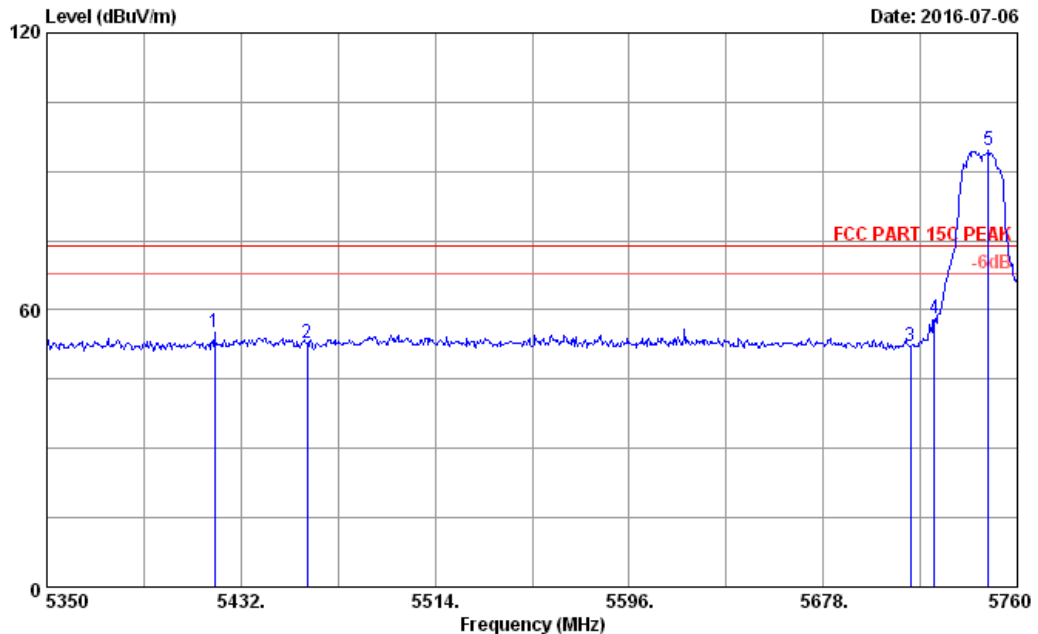

Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5420.930       | 34.26                    | 11.94                 | 35.49                 | 44.60             | 55.31                         | 74.00              | 18.69          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 42.08             | 52.88                         | 74.00              | 21.12          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 40.94             | 51.99                         | 74.00              | 22.01          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 47.05             | 58.10                         | 74.00              | 15.90          | Peak   |
| 5   | 5747.700       | 34.55                    | 11.97                 | 35.45                 | 83.37             | 94.44                         | 74.00              | -20.44         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 51

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

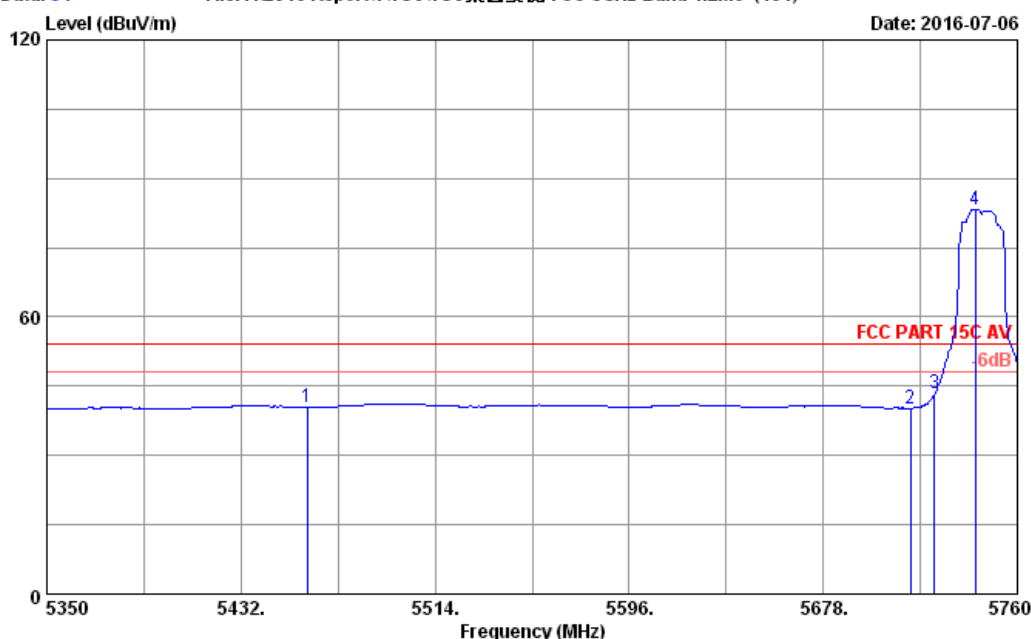

Site no. : 3m Chamber Data no. : 51  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.64             | 40.44                         | 54.00              | 13.56          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 29.21             | 40.26                         | 54.00              | 13.74          | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 32.34             | 43.39                         | 54.00              | 10.61          | Average |
| 4   | 5742.370       | 34.55                    | 11.97                 | 35.45                 | 72.14             | 83.21                         | 54.00              | -29.21         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 52

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

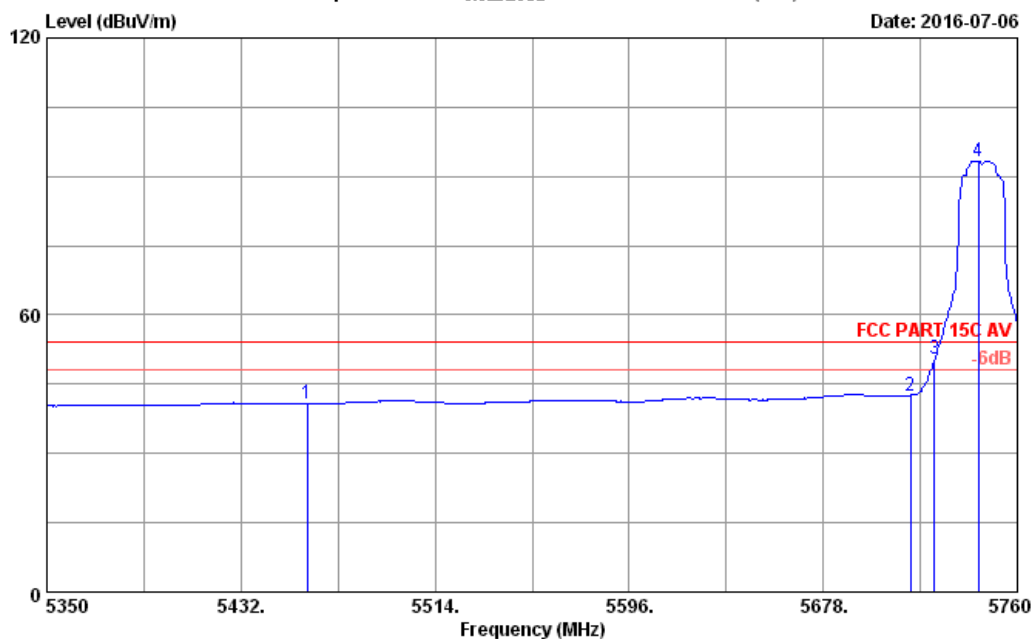

Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.87             | 40.67                         | 54.00              | 13.33          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 31.55             | 42.60                         | 54.00              | 11.40          | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 39.33             | 50.38                         | 54.00              | 3.62           | Average |
| 4   | 5743.600       | 34.55                    | 11.97                 | 35.45                 | 82.19             | 93.26                         | 54.00              | -39.26         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 37

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

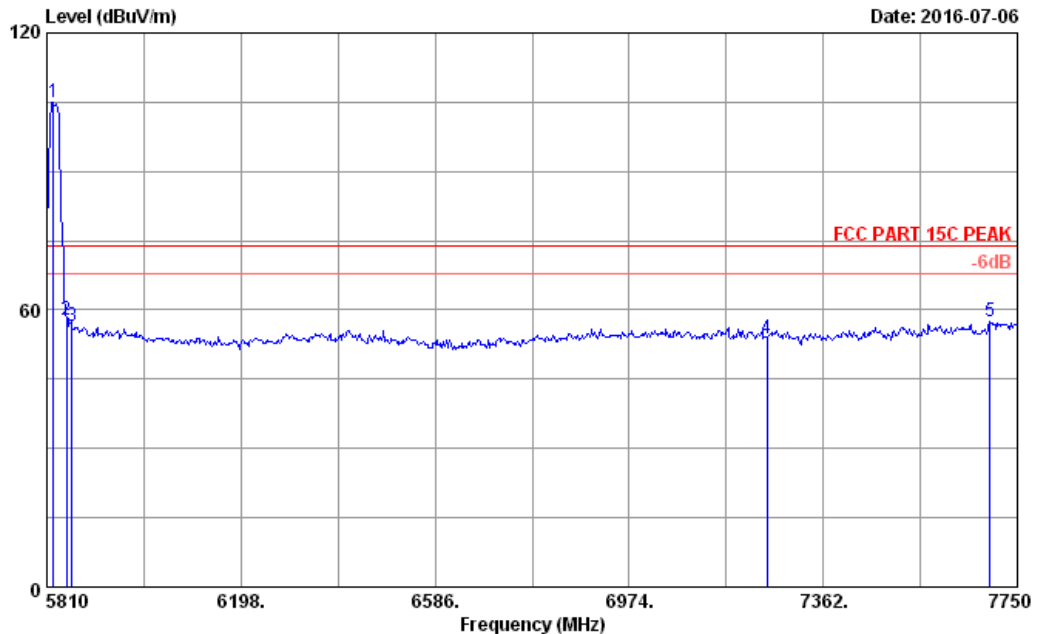

Site no. : 3m Chamber Data no. : 37  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 93.89             | 105.01                        | 74.00              | -31.01         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 46.54             | 57.68                         | 74.00              | 16.32          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 45.48             | 56.63                         | 74.00              | 17.37          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.95             | 53.97                         | 74.00              | 20.03          | Peak   |
| 5   | 7695.680       | 36.82                    | 12.76                 | 35.55                 | 43.35             | 57.38                         | 74.00              | 16.62          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 38

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

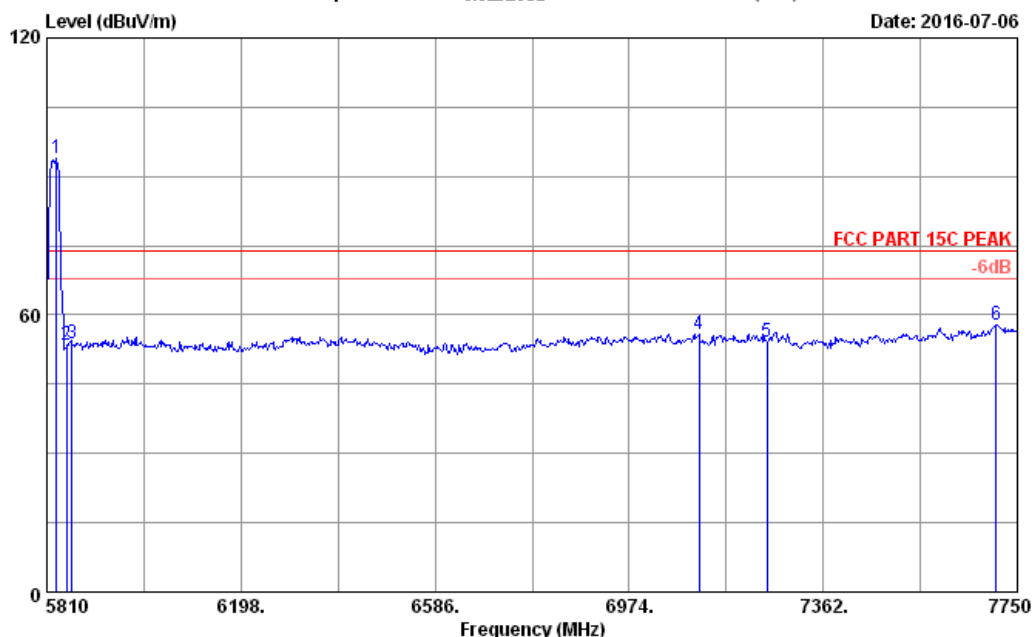

Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5829.400       | 34.60                    | 11.98                 | 35.45                 | 82.92             | 94.05                         | 74.00              | -20.05         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.30             | 53.44                         | 74.00              | 20.56          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 42.75             | 53.90                         | 74.00              | 20.10          | Peak   |
| 4   | 7113.680       | 35.77                    | 12.37                 | 35.54                 | 43.34             | 55.94                         | 74.00              | 18.06          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.28             | 54.30                         | 74.00              | 19.70          | Peak   |
| 6   | 7707.320       | 36.82                    | 12.76                 | 35.54                 | 43.89             | 57.93                         | 74.00              | 16.07          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 39

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-06

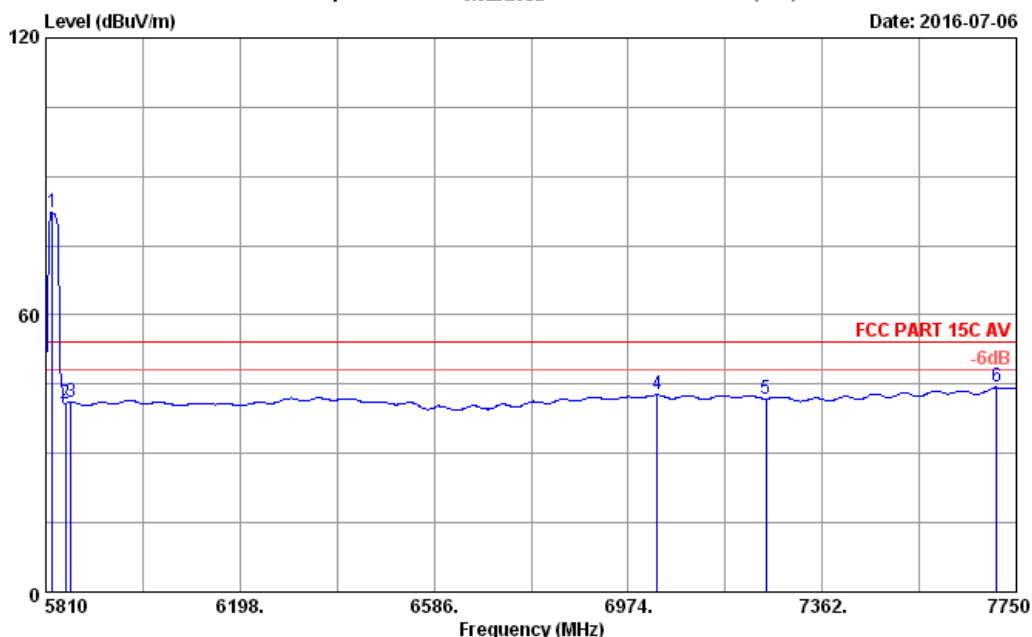


Site no. : 3m Chamber Data no. : 39  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 71.08             | 82.20                         | 54.00              | -28.20         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.76             | 40.90                         | 54.00              | 13.10          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 29.93             | 41.08                         | 54.00              | 12.92          | Average |
| 4   | 7032.200       | 35.58                    | 12.30                 | 35.53                 | 30.29             | 42.64                         | 54.00              | 11.36          | Average |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.84             | 41.86                         | 54.00              | 12.14          | Average |
| 6   | 7711.200       | 36.83                    | 12.77                 | 35.54                 | 30.24             | 44.30                         | 54.00              | 9.70           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

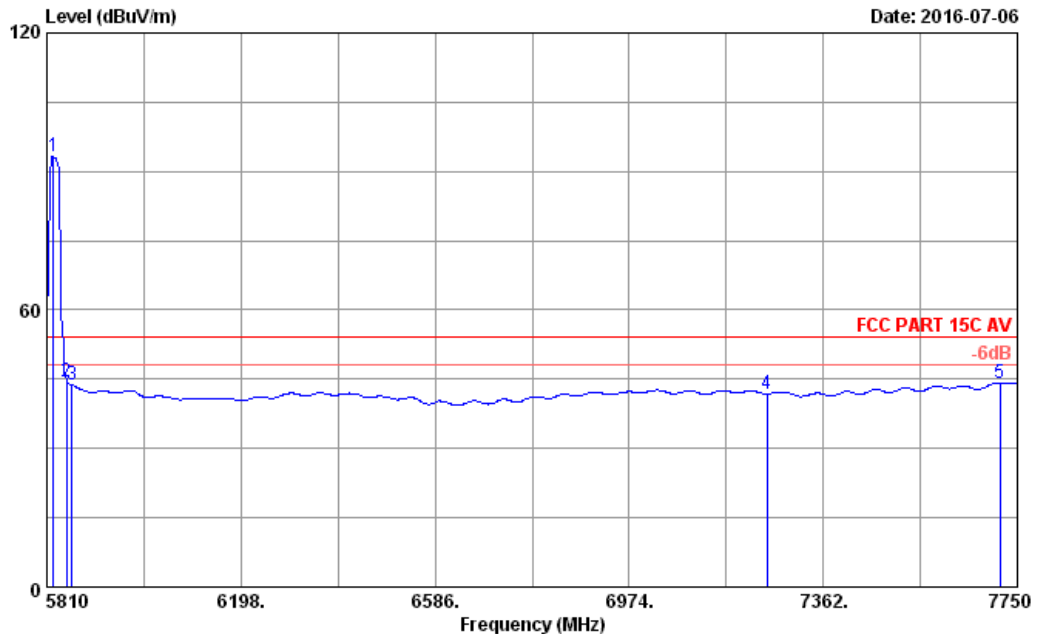**Data: 40**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-06**


Site no. : 3m Chamber Data no. : 40  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 82.09             | 93.21                         | 54.00              | -39.21         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 33.33             | 44.47                         | 54.00              | 9.53           | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 32.59             | 43.74                         | 54.00              | 10.26          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.83             | 41.85                         | 54.00              | 12.15          | Average |
| 5   | 7715.080       | 36.83                    | 12.77                 | 35.54                 | 30.21             | 44.27                         | 54.00              | 9.73           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 53

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

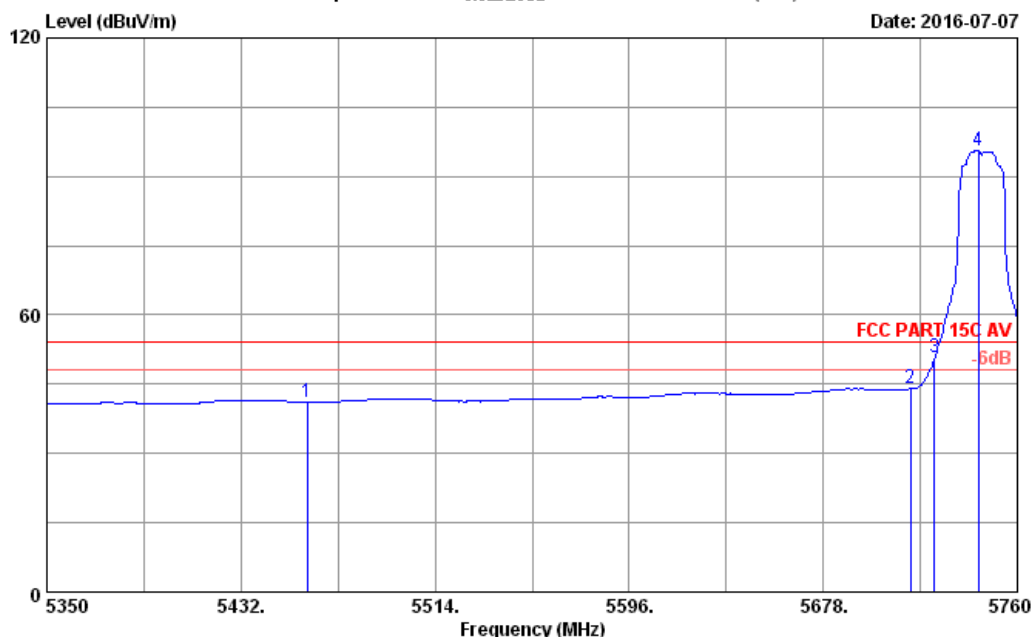

Site no. : 3m Chamber Data no. : 53  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH149 5745MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 30.34             | 41.14                         | 54.00              | 12.86          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 32.99             | 44.04                         | 54.00              | 9.96           | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 39.59             | 50.64                         | 54.00              | 3.36           | Average |
| 4   | 5743.600       | 34.55                    | 11.97                 | 35.45                 | 84.44             | 95.51                         | 54.00              | -41.51         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 54

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

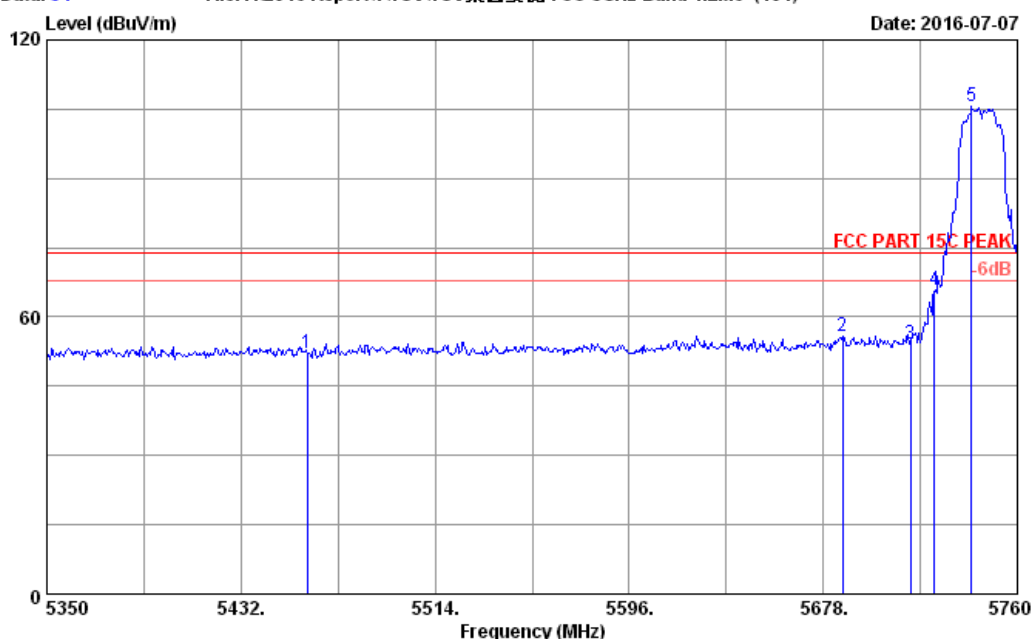

Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.29             | 52.09                         | 74.00              | 21.91          | Peak   |
| 2   | 5686.200       | 34.51                    | 11.96                 | 35.45                 | 44.89             | 55.91                         | 74.00              | 18.09          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 43.23             | 54.28                         | 74.00              | 19.72          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 54.86             | 65.91                         | 74.00              | 8.09           | Peak   |
| 5   | 5740.730       | 34.54                    | 11.97                 | 35.45                 | 94.43             | 105.49                        | 74.00              | -31.49         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 55

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

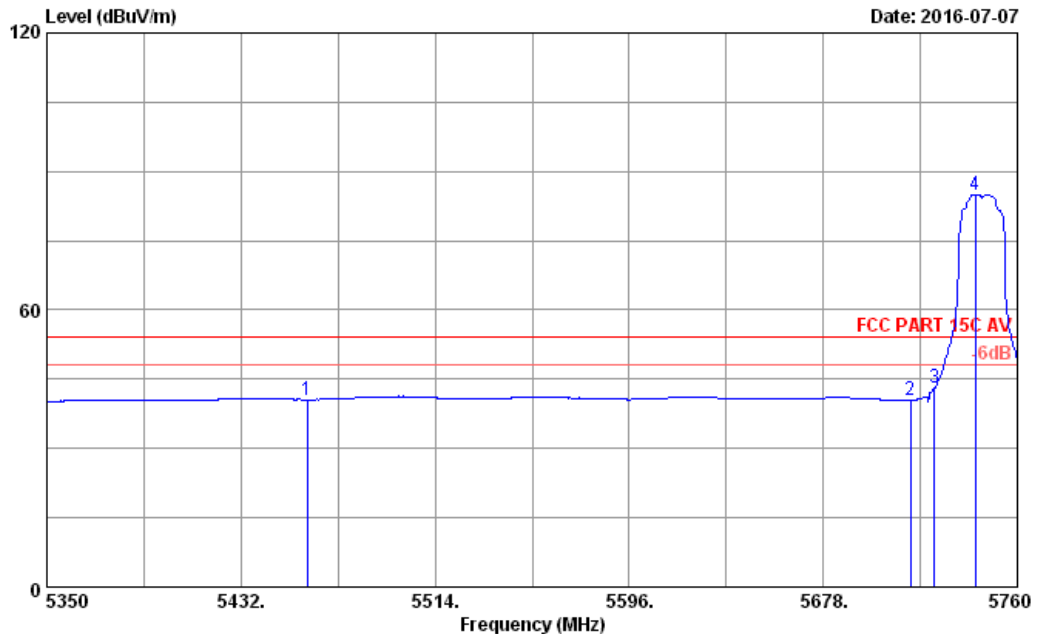

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.78             | 40.58                         | 54.00              | 13.42          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 29.45             | 40.50                         | 54.00              | 13.50          | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 32.21             | 43.26                         | 54.00              | 10.74          | Average |
| 4   | 5742.370       | 34.55                    | 11.97                 | 35.45                 | 73.90             | 84.97                         | 54.00              | -30.97         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 56

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

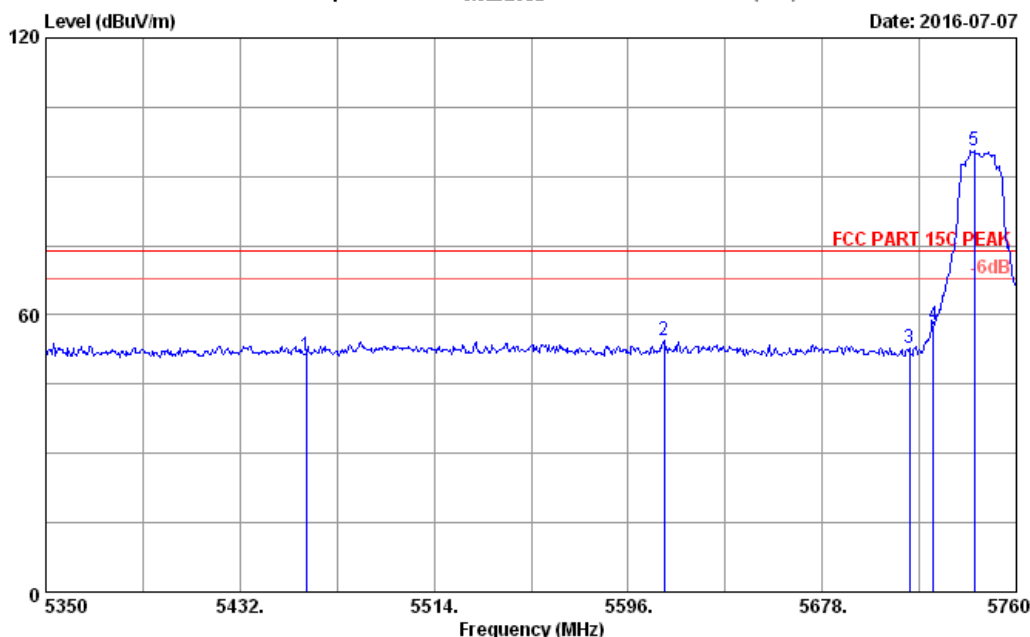


Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH149 5745MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 40.49             | 51.29                         | 74.00              | 22.71          | Peak   |
| 2   | 5611.170       | 34.47                    | 11.96                 | 35.45                 | 43.59             | 54.57                         | 74.00              | 19.43          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 41.88             | 52.93                         | 74.00              | 21.07          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 46.93             | 57.98                         | 74.00              | 16.02          | Peak   |
| 5   | 5742.370       | 34.55                    | 11.97                 | 35.45                 | 84.60             | 95.67                         | 74.00              | -21.67         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

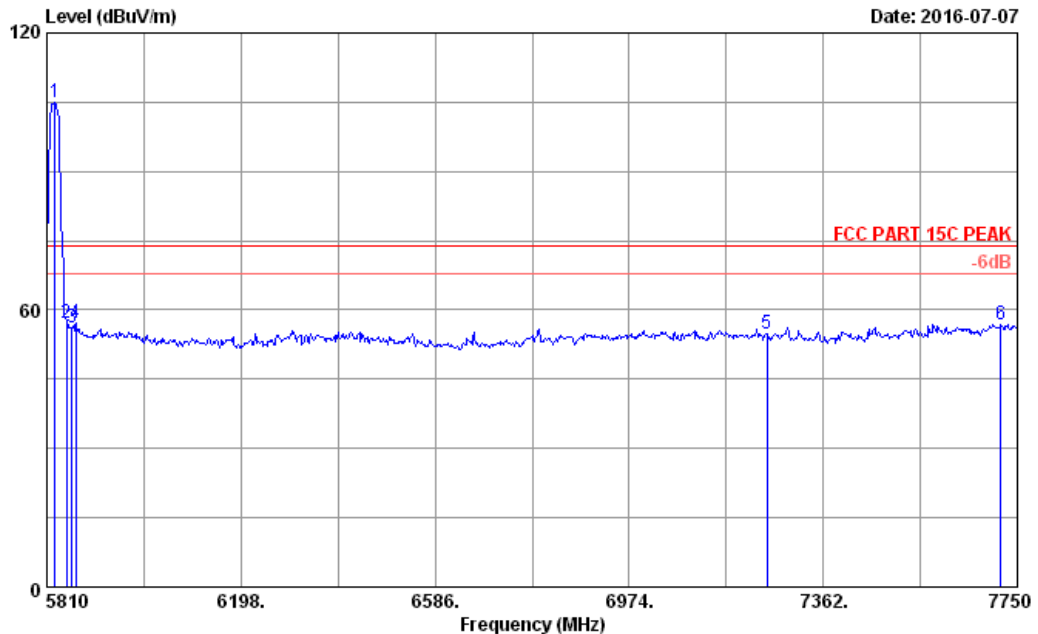**Data: 69**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


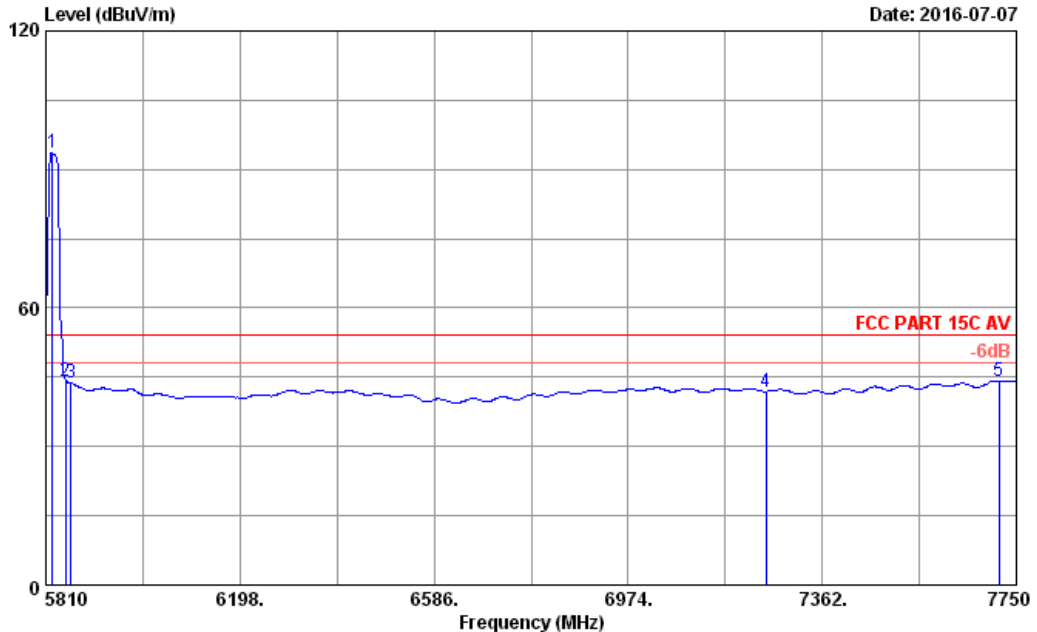
Site no. : 3m Chamber Data no. : 69  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5825.520       | 34.60                    | 11.98                 | 35.45                 | 93.85             | 104.98                        | 74.00              | -30.98         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 45.95             | 57.09                         | 74.00              | 16.91          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 45.01             | 56.16                         | 74.00              | 17.84          | Peak   |
| 4   | 5868.200       | 34.62                    | 11.98                 | 35.45                 | 46.08             | 57.23                         | 74.00              | 16.77          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.92             | 54.94                         | 74.00              | 19.06          | Peak   |
| 6   | 7717.020       | 36.83                    | 12.77                 | 35.54                 | 42.85             | 56.91                         | 74.00              | 17.09          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

**Data: 70**
**File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)**
**Date: 2016-07-07**


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT20 CH165 5825MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 82.37             | 93.49                         | 54.00              | -39.49         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 33.04             | 44.18                         | 54.00              | 9.82           | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 32.57             | 43.72                         | 54.00              | 10.28          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.91             | 41.93                         | 54.00              | 12.07          | Average |
| 5   | 7715.080       | 36.83                    | 12.77                 | 35.54                 | 30.22             | 44.28                         | 54.00              | 9.72           | Average |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 71

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

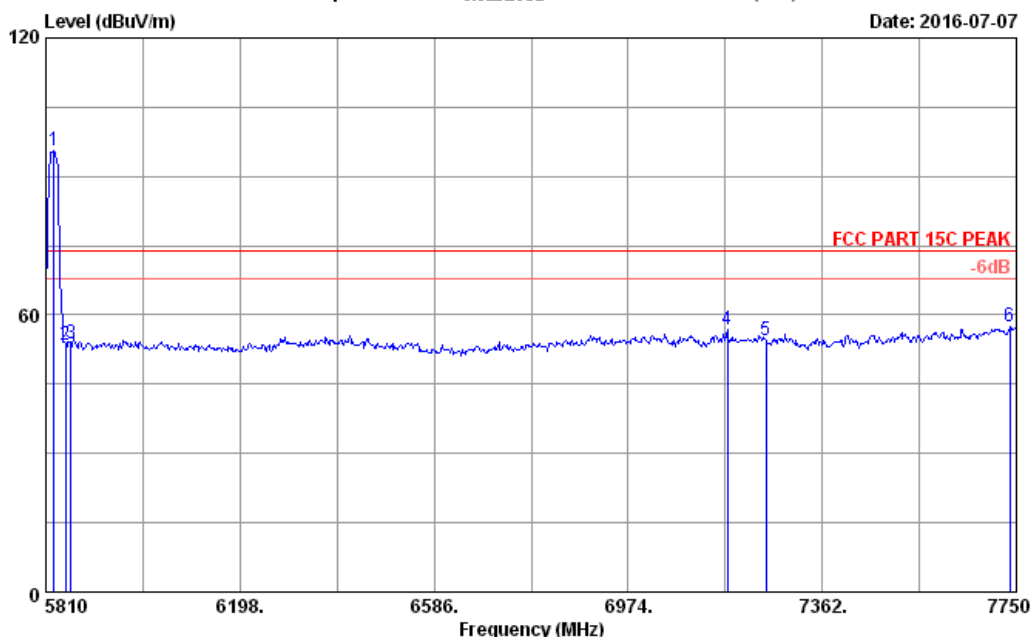

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 71         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C PEAK                     |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT20 CH165 5825MHz Tx    |           |              |
|              | M/N: NS-P11W7100                        |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5825.520       | 34.60                    | 11.98                 | 35.45                 | 84.39             | 95.52                         | 74.00              | -21.52         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.36             | 53.50                         | 74.00              | 20.50          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 42.53             | 53.68                         | 74.00              | 20.32          | Peak   |
| 4   | 7171.880       | 35.91                    | 12.41                 | 35.55                 | 43.95             | 56.72                         | 74.00              | 17.28          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.31             | 54.33                         | 74.00              | 19.67          | Peak   |
| 6   | 7736.420       | 36.84                    | 12.78                 | 35.53                 | 43.28             | 57.37                         | 74.00              | 16.63          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor


2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 72

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

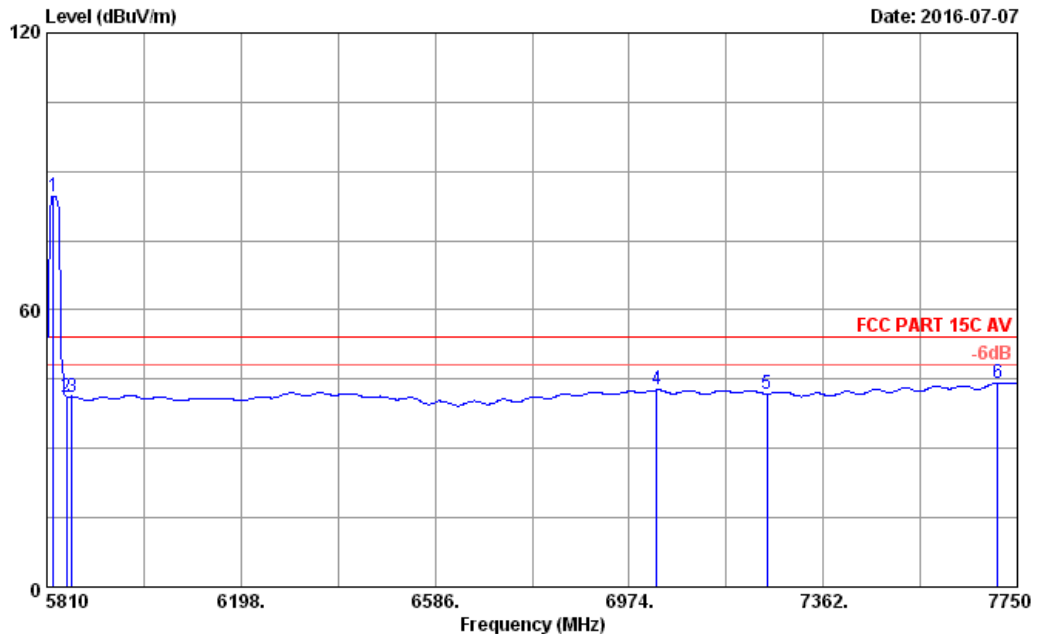

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 72         |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C AV                       |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11acVHT20 CH165 5825MHz Tx    |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5823.580       | 34.59                    | 11.98                 | 35.45                 | 73.61             | 84.73                         | 54.00              | -30.73         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 30.08             | 41.22                         | 54.00              | 12.78          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 30.13             | 41.28                         | 54.00              | 12.72          | Average |
| 4   | 7028.320       | 35.57                    | 12.29                 | 35.52                 | 30.31             | 42.65                         | 54.00              | 11.35          | Average |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.84             | 41.86                         | 54.00              | 12.14          | Average |
| 6   | 7711.200       | 36.83                    | 12.77                 | 35.54                 | 30.20             | 44.26                         | 54.00              | 9.74           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 77

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

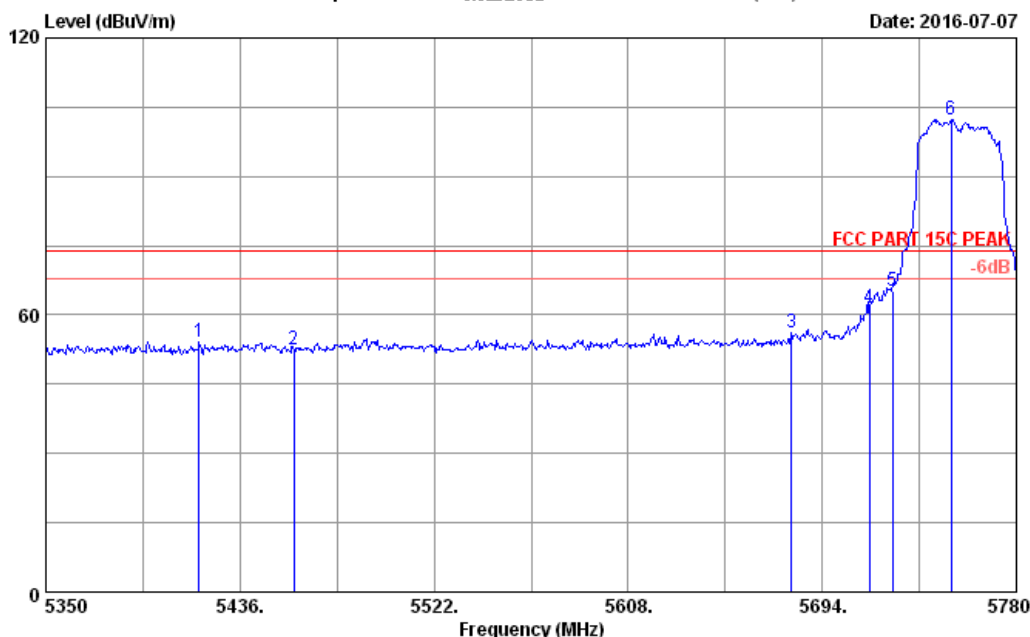

Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5417.940       | 34.25                    | 11.94                 | 35.49                 | 43.44             | 54.14                         | 74.00              | 19.86          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.83             | 52.63                         | 74.00              | 21.37          | Peak   |
| 3   | 5680.240       | 34.51                    | 11.96                 | 35.45                 | 45.16             | 56.18                         | 74.00              | 17.82          | Peak   |
| 4   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 50.57             | 61.62                         | 74.00              | 12.38          | Peak   |
| 5   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 54.28             | 65.33                         | 74.00              | 8.67           | Peak   |
| 6   | 5751.190       | 34.55                    | 11.97                 | 35.45                 | 91.27             | 102.34                        | 74.00              | -28.34         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 78

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

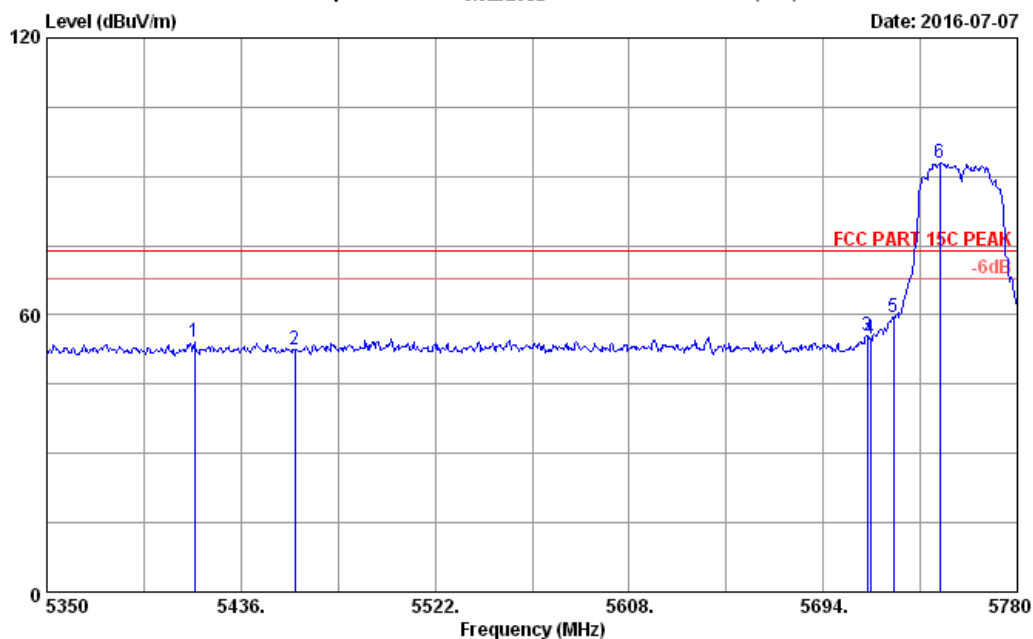

Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5415.360       | 34.25                    | 11.94                 | 35.50                 | 43.35             | 54.04                         | 74.00              | 19.96          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.70             | 52.50                         | 74.00              | 21.50          | Peak   |
| 3   | 5713.350       | 34.53                    | 11.97                 | 35.45                 | 44.45             | 55.50                         | 74.00              | 18.50          | Peak   |
| 4   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 43.79             | 54.84                         | 74.00              | 19.16          | Peak   |
| 5   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 48.45             | 59.50                         | 74.00              | 14.50          | Peak   |
| 6   | 5745.600       | 34.55                    | 11.97                 | 35.45                 | 81.76             | 92.83                         | 74.00              | -18.83         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 79

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

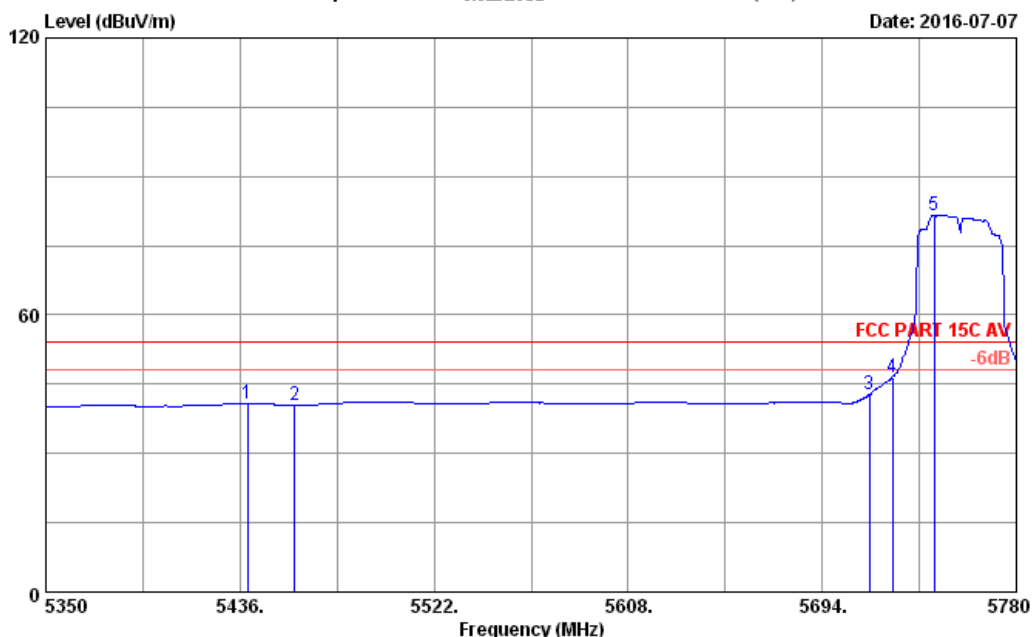

Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5439.440       | 34.29                    | 11.94                 | 35.48                 | 30.02             | 40.77                         | 54.00              | 13.23          | Average |
| 2   | 5460.080       | 34.33                    | 11.94                 | 35.47                 | 29.73             | 40.53                         | 54.00              | 13.47          | Average |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 31.73             | 42.78                         | 54.00              | 11.22          | Average |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 35.25             | 46.30                         | 54.00              | 7.70           | Average |
| 5   | 5743.450       | 34.55                    | 11.97                 | 35.45                 | 70.52             | 81.59                         | 54.00              | -27.59         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 80

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

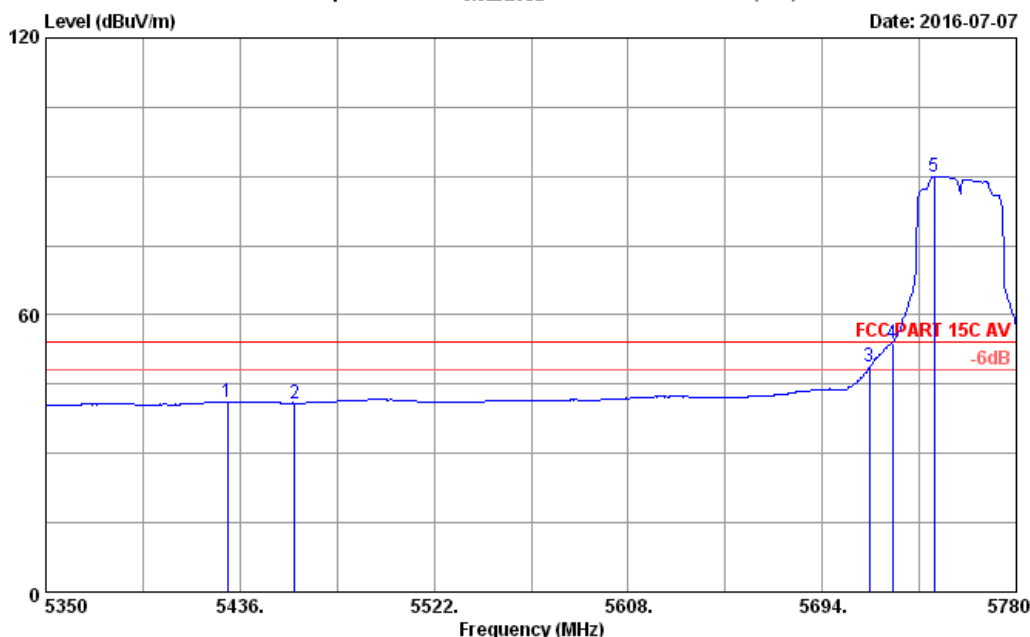

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5430.410       | 34.27                    | 11.94                 | 35.49                 | 30.47             | 41.19                         | 54.00              | 12.81          | Average |
| 2   | 5460.080       | 34.33                    | 11.94                 | 35.47                 | 30.13             | 40.93                         | 54.00              | 13.07          | Average |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 37.70             | 48.75                         | 54.00              | 5.25           | Average |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 42.81             | 53.86                         | 54.00              | 0.14           | Average |
| 5   | 5743.450       | 34.55                    | 11.97                 | 35.45                 | 79.01             | 90.08                         | 54.00              | -36.08         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 85

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

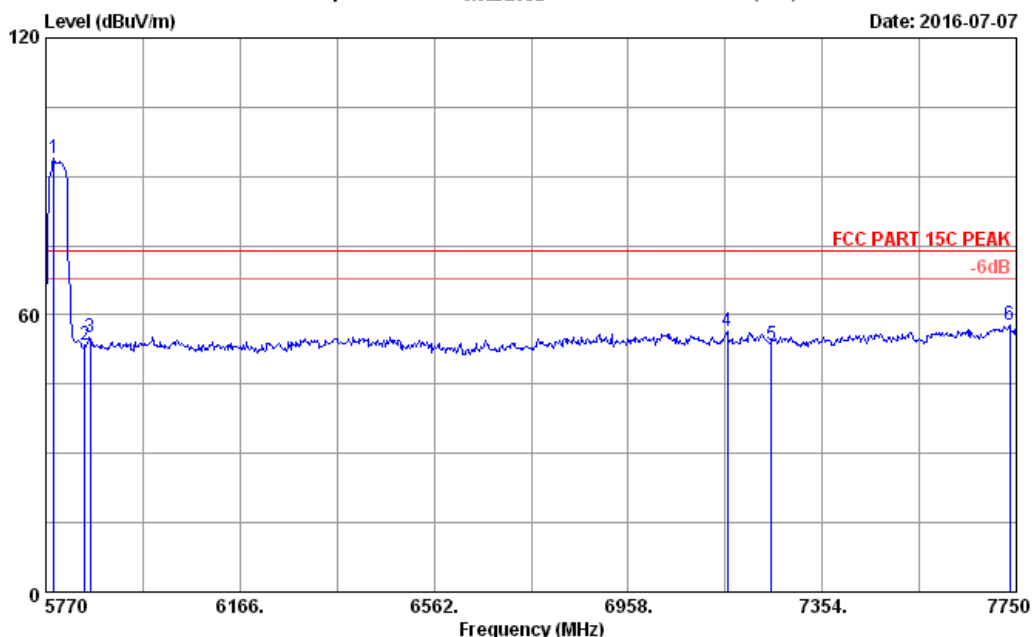

Site no. : 3m Chamber Data no. : 85  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5785.840       | 34.57                    | 11.97                 | 35.45                 | 82.72             | 93.81                         | 74.00              | -19.81         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.23             | 53.37                         | 74.00              | 20.63          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 44.08             | 55.23                         | 74.00              | 18.77          | Peak   |
| 4   | 7159.960       | 35.88                    | 12.40                 | 35.55                 | 43.60             | 56.33                         | 74.00              | 17.67          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.59             | 53.61                         | 74.00              | 20.39          | Peak   |
| 6   | 7736.140       | 36.84                    | 12.78                 | 35.53                 | 43.76             | 57.85                         | 74.00              | 16.15          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 86

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

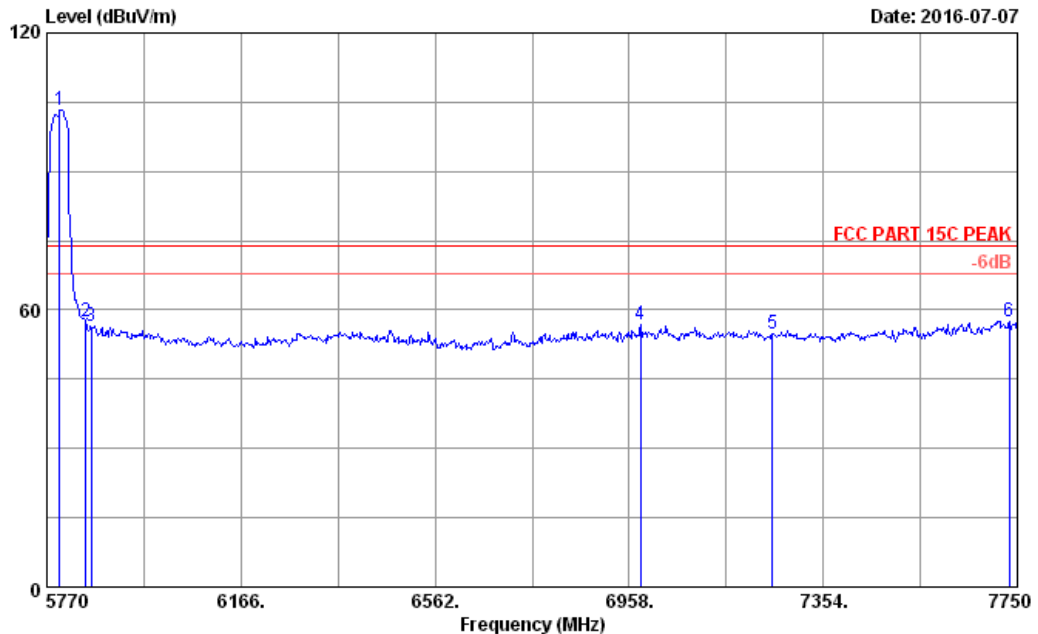

Site no. : 3m Chamber Data no. : 86  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5795.740       | 34.58                    | 11.97                 | 35.45                 | 92.28             | 103.38                        | 74.00              | -29.38         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 46.29             | 57.43                         | 74.00              | 16.57          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 45.29             | 56.44                         | 74.00              | 17.56          | Peak   |
| 4   | 6981.760       | 35.47                    | 12.26                 | 35.51                 | 44.45             | 56.67                         | 74.00              | 17.33          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.74             | 54.76                         | 74.00              | 19.24          | Peak   |
| 6   | 7734.160       | 36.84                    | 12.77                 | 35.53                 | 43.47             | 57.55                         | 74.00              | 16.45          | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 87

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

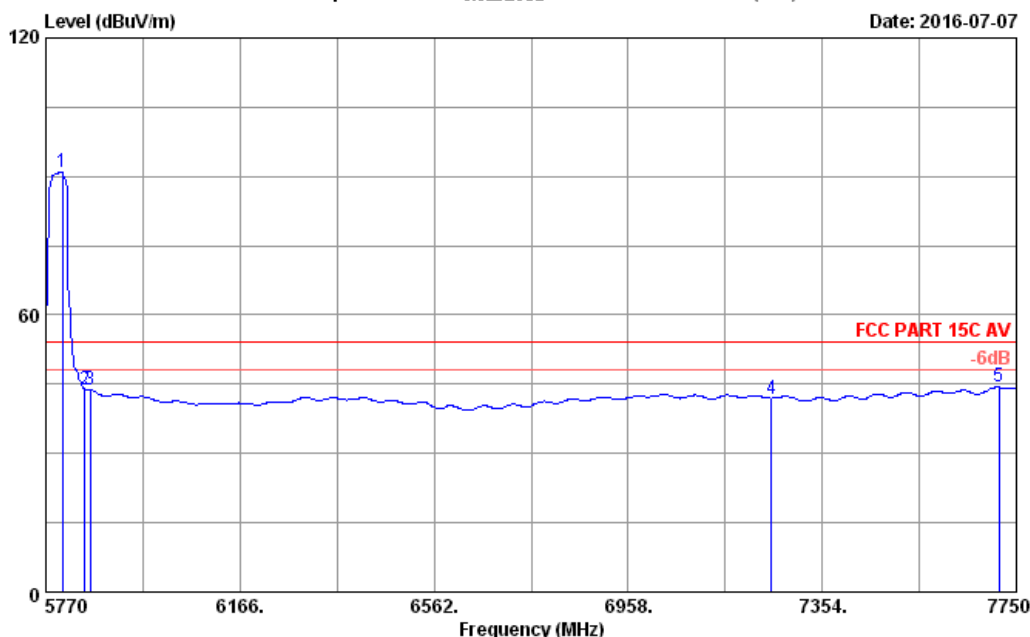

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 87       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C AV                       |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11nHT40 CH159 5795MHz Tx      |           |            |
|              | M/N: NS-P11W7100                        |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5803.660       | 34.58                    | 11.97                 | 35.45                 | 79.83             | 90.93                         | 54.00              | -36.93         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 32.78             | 43.92                         | 54.00              | 10.08          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 32.69             | 43.84                         | 54.00              | 10.16          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.93             | 41.95                         | 54.00              | 12.05          | Average |
| 5   | 7714.360       | 36.83                    | 12.77                 | 35.54                 | 30.27             | 44.33                         | 54.00              | 9.67           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 88

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

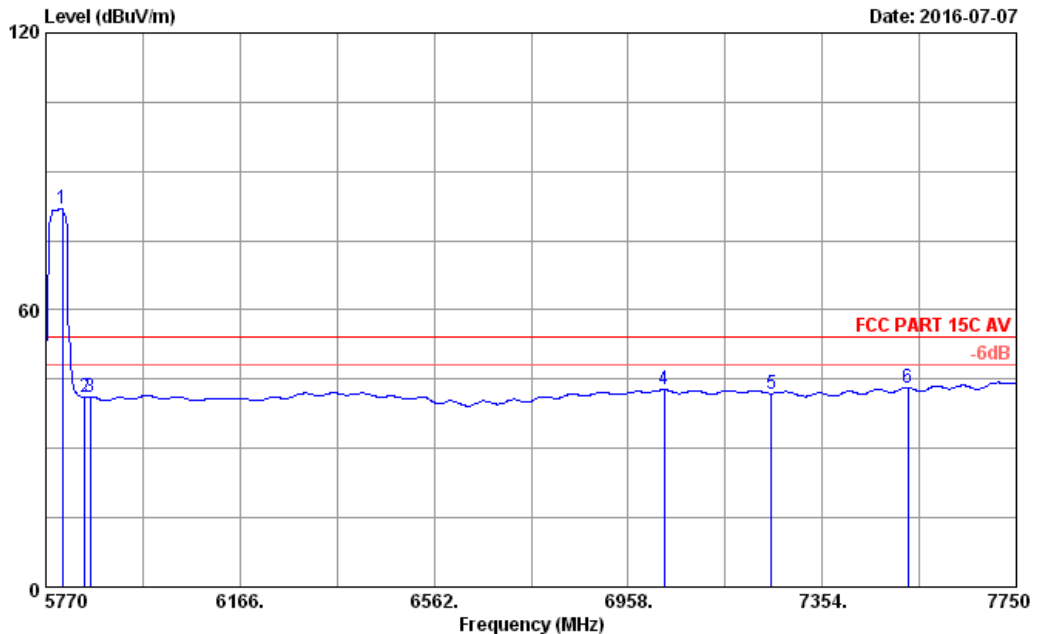

Site no. : 3m Chamber Data no. : 88  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5803.660       | 34.58                    | 11.97                 | 35.45                 | 70.72             | 81.82                         | 54.00              | -27.82         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.92             | 41.06                         | 54.00              | 12.94          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 30.07             | 41.22                         | 54.00              | 12.78          | Average |
| 4   | 7031.260       | 35.58                    | 12.30                 | 35.53                 | 30.34             | 42.69                         | 54.00              | 11.31          | Average |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.88             | 41.90                         | 54.00              | 12.10          | Average |
| 6   | 7528.240       | 36.72                    | 12.70                 | 35.59                 | 29.39             | 43.22                         | 54.00              | 10.78          | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 101

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

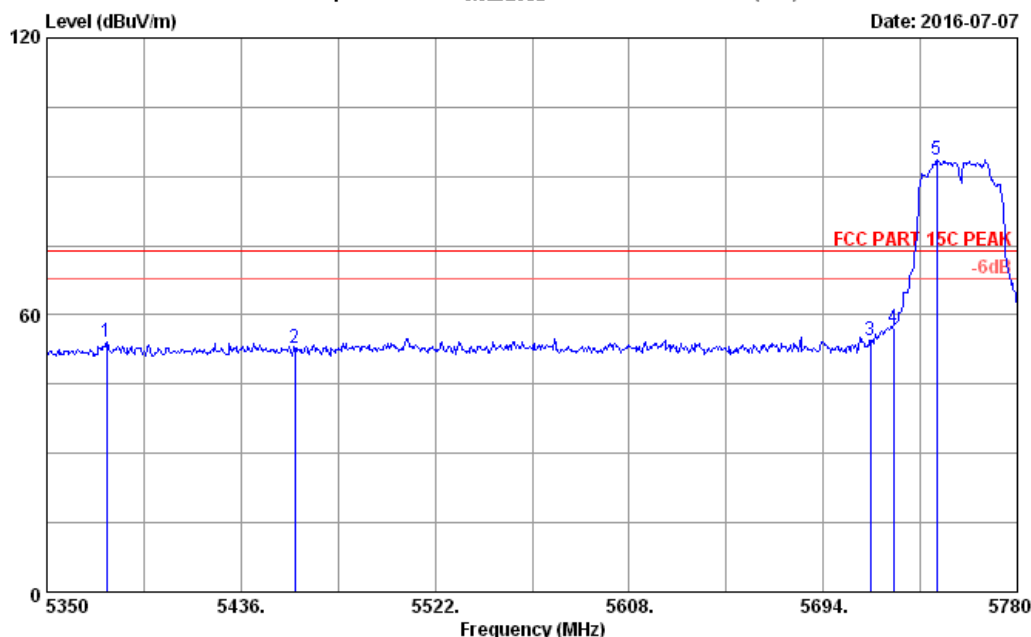

Site no. : 3m Chamber Data no. : 101  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5376.660       | 34.18                    | 11.93                 | 35.52                 | 43.53             | 54.12                         | 74.00              | 19.88          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.96             | 52.76                         | 74.00              | 21.24          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 43.37             | 54.42                         | 74.00              | 19.58          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 46.23             | 57.28                         | 74.00              | 16.72          | Peak   |
| 5   | 5744.310       | 34.55                    | 11.97                 | 35.45                 | 82.62             | 93.69                         | 74.00              | -19.69         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 102

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

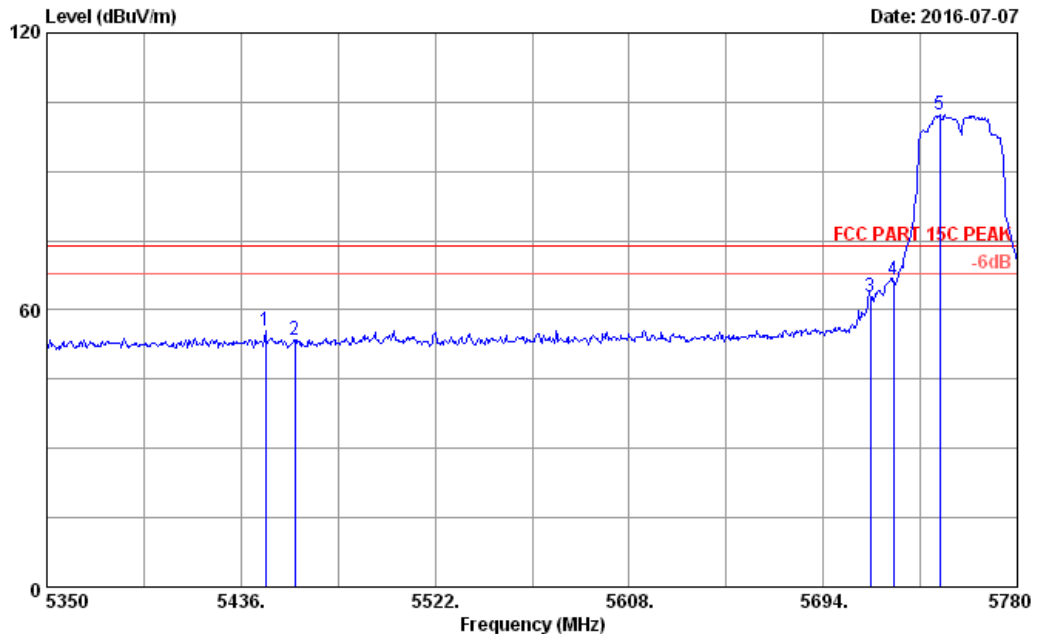

Site no. : 3m Chamber Data no. : 102  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5446.750       | 34.30                    | 11.94                 | 35.48                 | 44.72             | 55.48                         | 74.00              | 18.52          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 42.70             | 53.50                         | 74.00              | 20.50          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 51.90             | 62.95                         | 74.00              | 11.05          | Peak   |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 55.57             | 66.62                         | 74.00              | 7.38           | Peak   |
| 5   | 5745.600       | 34.55                    | 11.97                 | 35.45                 | 91.34             | 102.41                        | 74.00              | -28.41         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 103

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

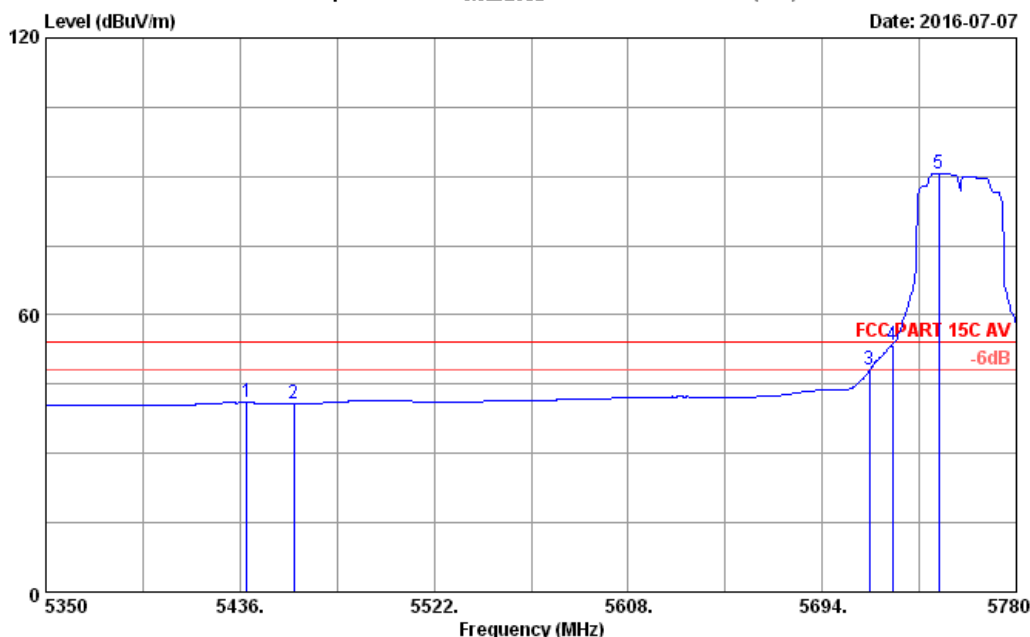

Site no. : 3m Chamber Data no. : 103  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5439.010       | 34.29                    | 11.94                 | 35.48                 | 30.27             | 41.02                         | 54.00              | 12.98          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.95             | 40.75                         | 54.00              | 13.25          | Average |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 37.06             | 48.11                         | 54.00              | 5.89           | Average |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 42.28             | 53.33                         | 54.00              | 0.67           | Average |
| 5   | 5745.600       | 34.55                    | 11.97                 | 35.45                 | 79.65             | 90.72                         | 54.00              | -36.72         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 104

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

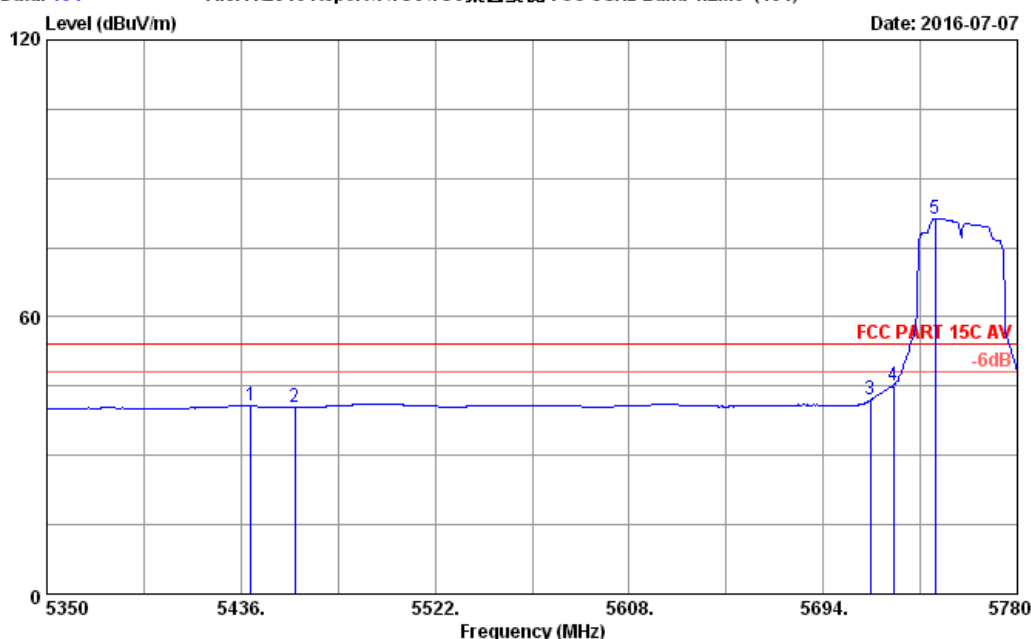

Site no. : 3m Chamber Data no. : 104  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH151 5755MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5440.300       | 34.29                    | 11.94                 | 35.48                 | 29.92             | 40.67                         | 54.00              | 13.33          | Average |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.64             | 40.44                         | 54.00              | 13.56          | Average |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 30.99             | 42.04                         | 54.00              | 11.96          | Average |
| 4   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 33.95             | 45.00                         | 54.00              | 9.00           | Average |
| 5   | 5743.450       | 34.55                    | 11.97                 | 35.45                 | 70.18             | 81.25                         | 54.00              | -27.25         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 93

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

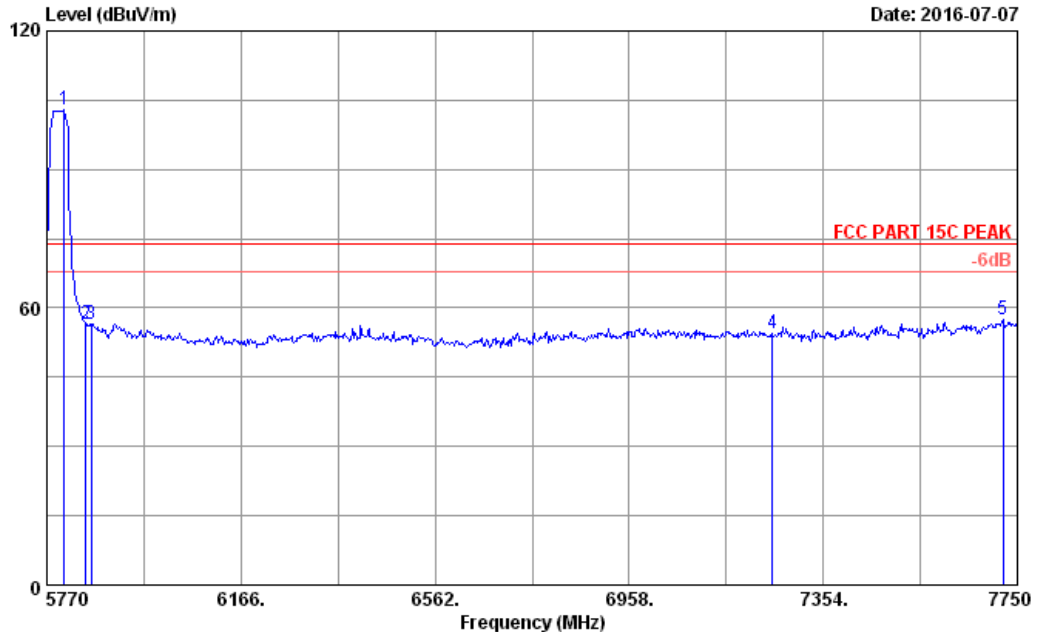

Site no. : 3m Chamber Data no. : 93  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5805.640       | 34.58                    | 11.97                 | 35.45                 | 91.97             | 103.07                        | 74.00              | -29.07         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 45.29             | 56.43                         | 74.00              | 17.57          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 45.18             | 56.33                         | 74.00              | 17.67          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 41.50             | 54.52                         | 74.00              | 19.48          | Peak   |
| 5   | 7720.300       | 36.83                    | 12.77                 | 35.54                 | 43.29             | 57.35                         | 74.00              | 16.65          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 94

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

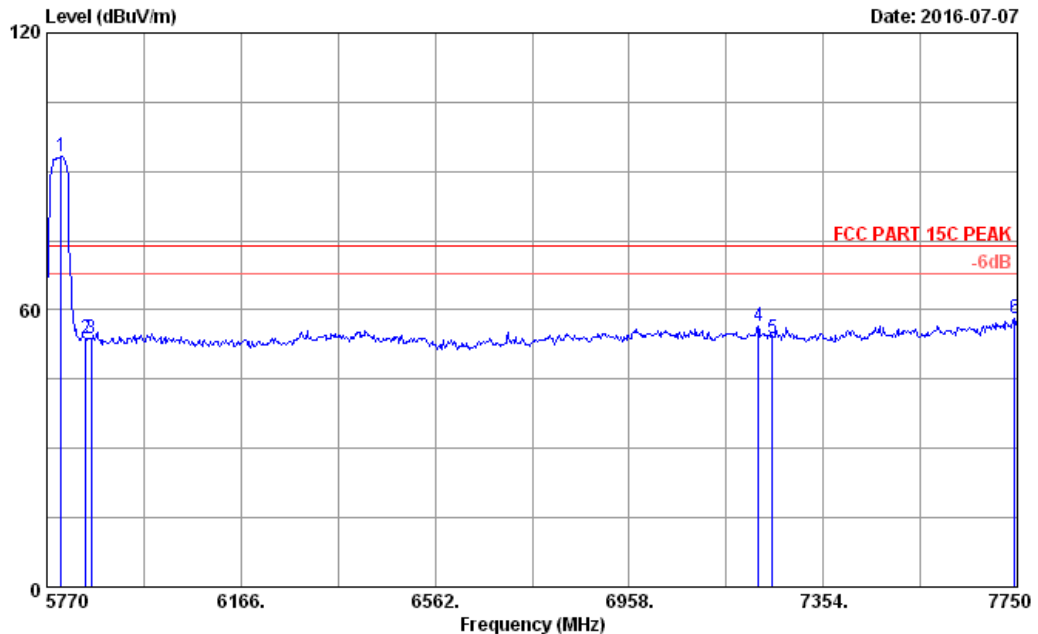

Site no. : 3m Chamber Data no. : 94  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5799.700       | 34.58                    | 11.97                 | 35.45                 | 82.25             | 93.35                         | 74.00              | -19.35         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 42.68             | 53.82                         | 74.00              | 20.18          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 42.59             | 53.74                         | 74.00              | 20.26          | Peak   |
| 4   | 7221.340       | 36.03                    | 12.46                 | 35.56                 | 43.56             | 56.49                         | 74.00              | 17.51          | Peak   |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.66             | 53.68                         | 74.00              | 20.32          | Peak   |
| 6   | 7744.060       | 36.85                    | 12.78                 | 35.53                 | 44.14             | 58.24                         | 74.00              | 15.76          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 95

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

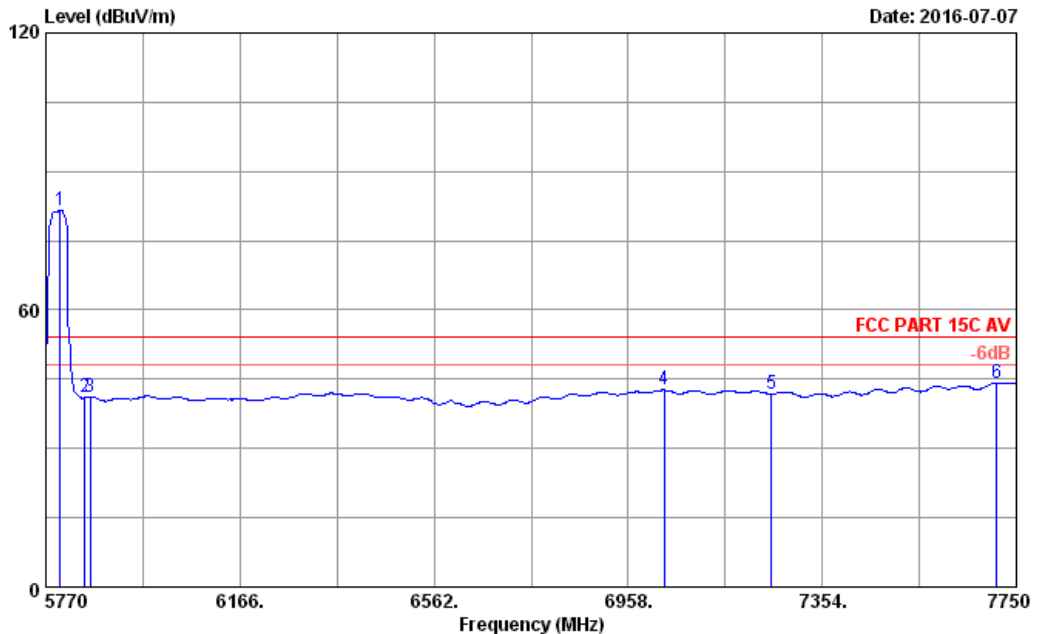

Site no. : 3m Chamber Data no. : 95  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH159 5795MHz Tx  
 M/N:NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5799.700       | 34.58                    | 11.97                 | 35.45                 | 70.40             | 81.50                         | 54.00              | -27.50         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 29.81             | 40.95                         | 54.00              | 13.05          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 30.00             | 41.15                         | 54.00              | 12.85          | Average |
| 4   | 7031.260       | 35.58                    | 12.30                 | 35.53                 | 30.30             | 42.65                         | 54.00              | 11.35          | Average |
| 5   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.80             | 41.82                         | 54.00              | 12.18          | Average |
| 6   | 7710.400       | 36.83                    | 12.77                 | 35.54                 | 30.21             | 44.27                         | 54.00              | 9.73           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 96

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-07

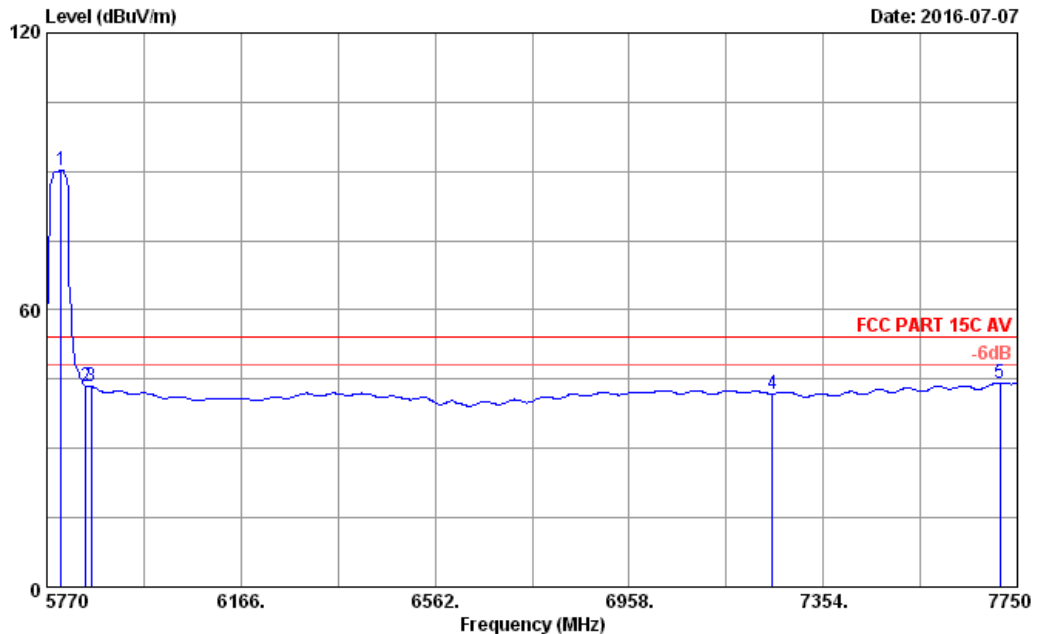

Site no. : 3m Chamber Data no. : 96  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11acVHT40 CH159 5795MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5799.700       | 34.58                    | 11.97                 | 35.45                 | 79.12             | 90.22                         | 54.00              | -36.22         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 32.34             | 43.48                         | 54.00              | 10.52          | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 32.33             | 43.48                         | 54.00              | 10.52          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.79             | 41.81                         | 54.00              | 12.19          | Average |
| 5   | 7714.360       | 36.83                    | 12.77                 | 35.54                 | 30.17             | 44.23                         | 54.00              | 9.77           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 5

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

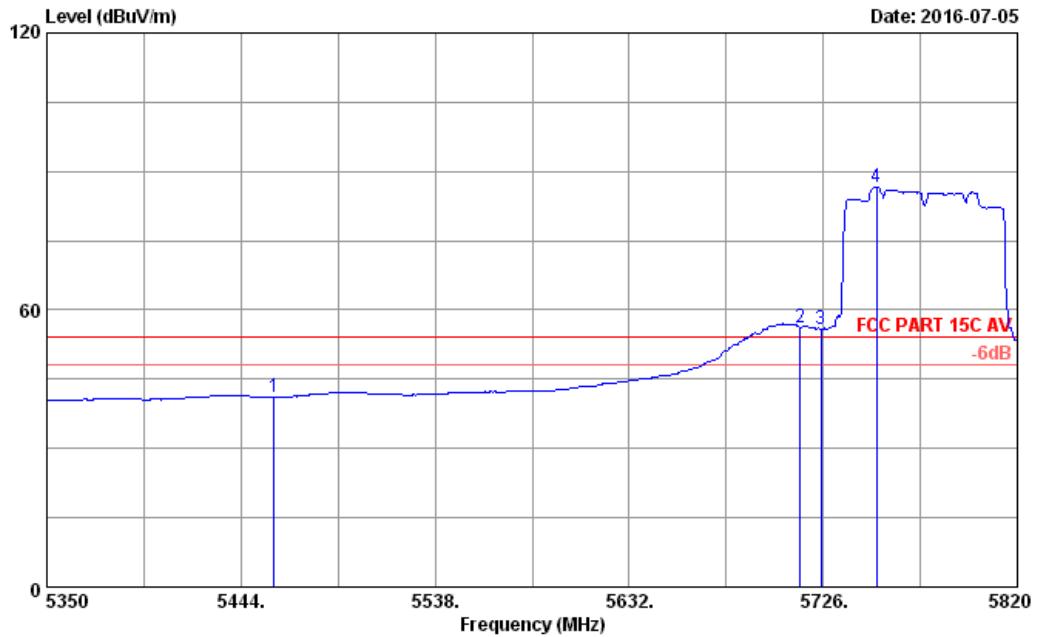

Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 30.34             | 41.14                         | 54.00              | 12.86          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 45.12             | 56.17                         | 54.00              | -2.17          | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 44.64             | 55.69                         | 54.00              | -1.69          | Average |
| 4   | 5751.850       | 34.55                    | 11.97                 | 35.45                 | 75.42             | 86.49                         | 54.00              | -32.49         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 6

File: F:\2016 Report\TUV\TUV莱茵委测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

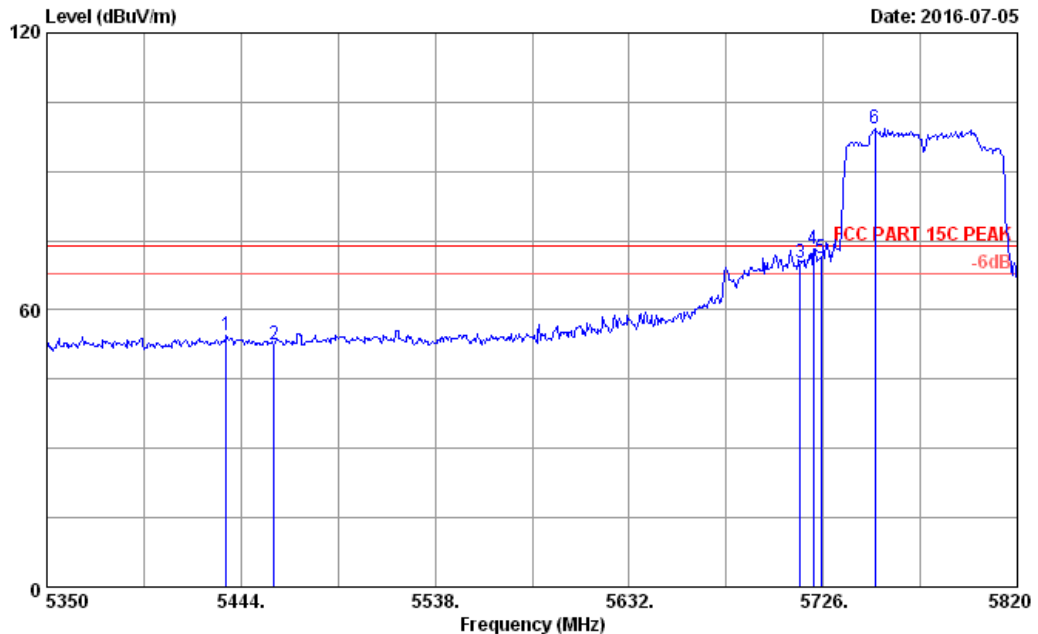

Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5436.950       | 34.29                    | 11.94                 | 35.48                 | 43.66             | 54.41                         | 74.00              | 19.59          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.75             | 52.55                         | 74.00              | 21.45          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 59.11             | 70.16                         | 74.00              | 3.84           | Peak   |
| 4   | 5721.300       | 34.53                    | 11.97                 | 35.45                 | 62.30             | 73.35                         | 74.00              | 0.65           | Peak   |
| 5   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 60.01             | 71.06                         | 74.00              | 2.94           | Peak   |
| 6   | 5750.910       | 34.55                    | 11.97                 | 35.45                 | 88.07             | 99.14                         | 74.00              | -25.14         | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 7

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

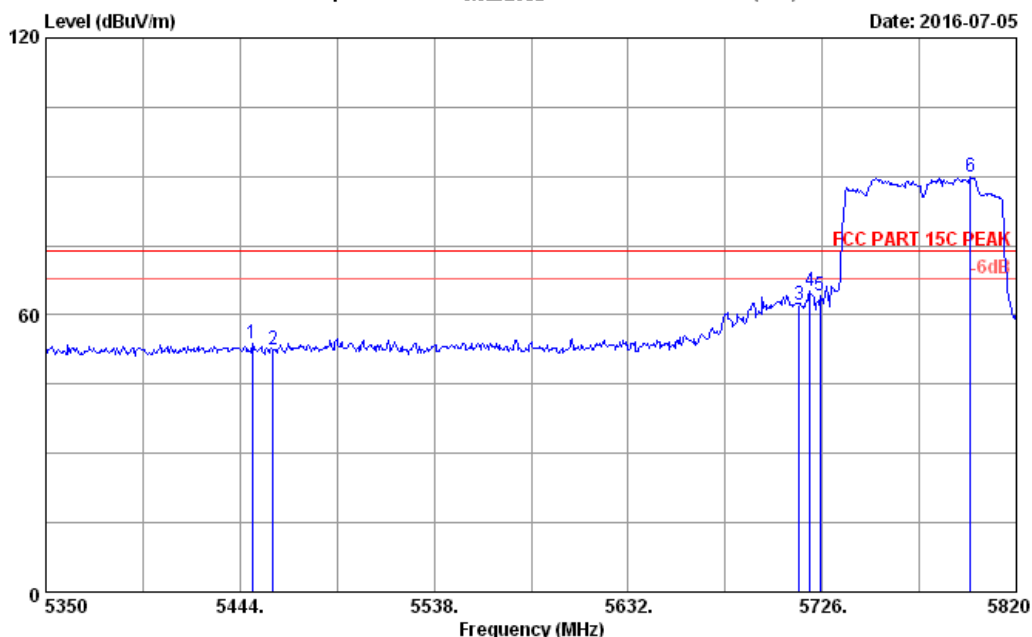

Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5450.110       | 34.31                    | 11.94                 | 35.48                 | 42.88             | 53.65                         | 74.00              | 20.35          | Peak   |
| 2   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 41.58             | 52.38                         | 74.00              | 21.62          | Peak   |
| 3   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 51.14             | 62.19                         | 74.00              | 11.81          | Peak   |
| 4   | 5719.890       | 34.53                    | 11.97                 | 35.45                 | 54.02             | 65.07                         | 74.00              | 8.93           | Peak   |
| 5   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 52.97             | 64.02                         | 74.00              | 9.98           | Peak   |
| 6   | 5797.910       | 34.58                    | 11.97                 | 35.45                 | 78.65             | 89.75                         | 74.00              | -15.75         | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 8

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

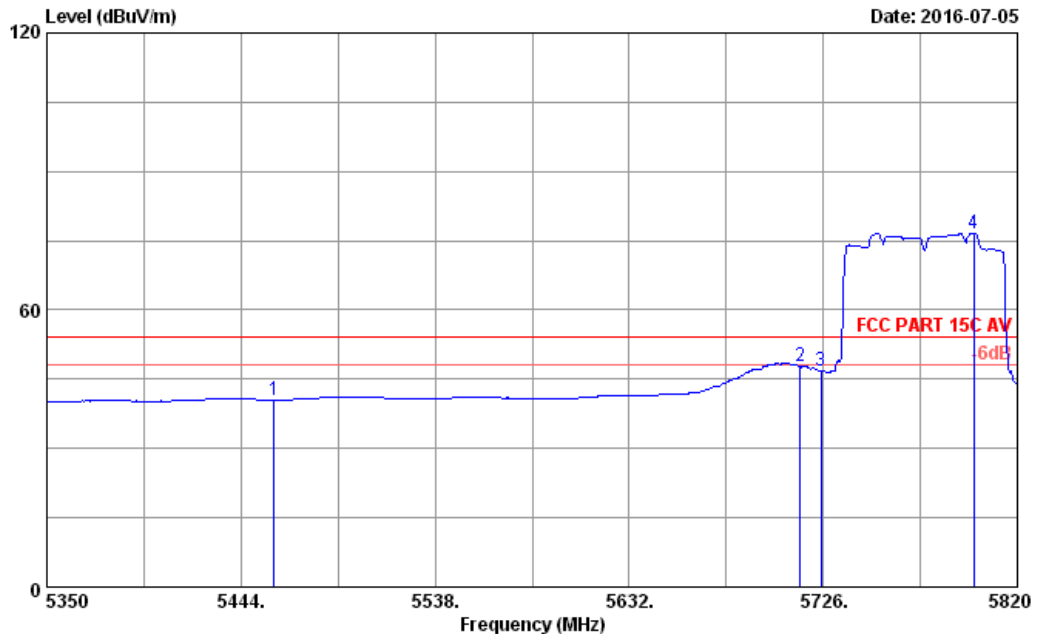

|              |                                         |           |              |
|--------------|-----------------------------------------|-----------|--------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 8          |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : HORIZONTAL |
| Limit        | : FCC PART 15C AV                       |           |              |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |              |
| Engineer     | : zack_zhu                              |           |              |
| EUT          | : 11.6'' windows tablet                 |           |              |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |              |
| Test Mode    | : IEEE802.11ac VHT80 CH155 5775MHz Tx   |           |              |
|              | M/N:NS-P11W7100                         |           |              |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5460.000       | 34.33                    | 11.94                 | 35.47                 | 29.71             | 40.51                         | 54.00              | 13.49          | Average |
| 2   | 5715.000       | 34.53                    | 11.97                 | 35.45                 | 36.64             | 47.69                         | 54.00              | 6.31           | Average |
| 3   | 5725.000       | 34.53                    | 11.97                 | 35.45                 | 35.59             | 46.64                         | 54.00              | 7.36           | Average |
| 4   | 5798.850       | 34.58                    | 11.97                 | 35.45                 | 65.54             | 76.64                         | 54.00              | -22.64         | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor

2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 9

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

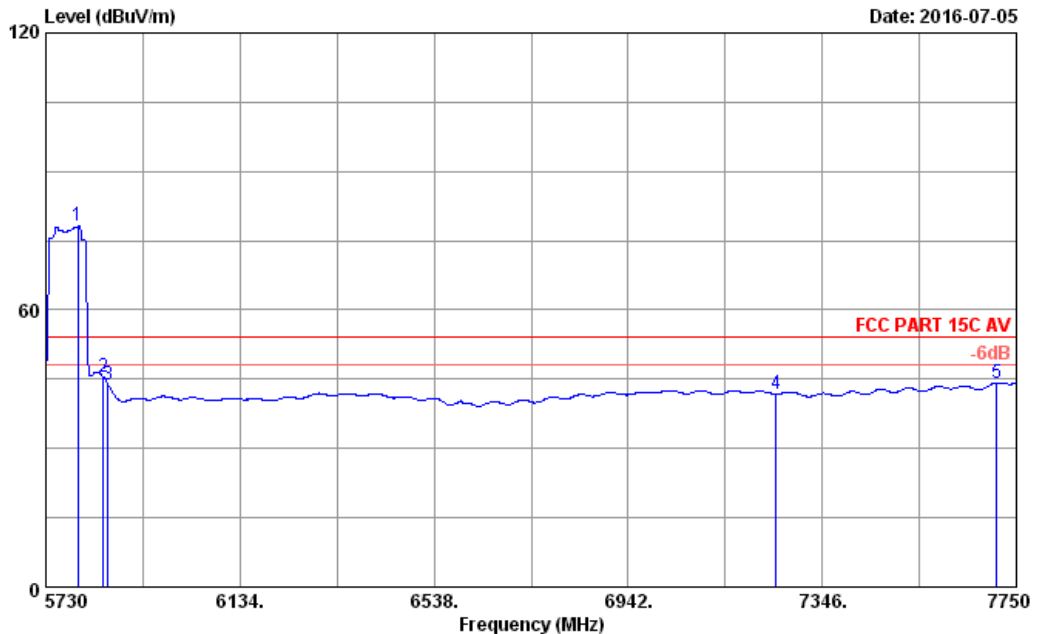

Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5796.660       | 34.58                    | 11.97                 | 35.45                 | 67.17             | 78.27                         | 54.00              | -24.27         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 34.45             | 45.59                         | 54.00              | 8.41           | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 32.67             | 43.82                         | 54.00              | 10.18          | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.80             | 41.82                         | 54.00              | 12.18          | Average |
| 5   | 7709.600       | 36.83                    | 12.77                 | 35.54                 | 30.15             | 44.21                         | 54.00              | 9.79           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 10

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

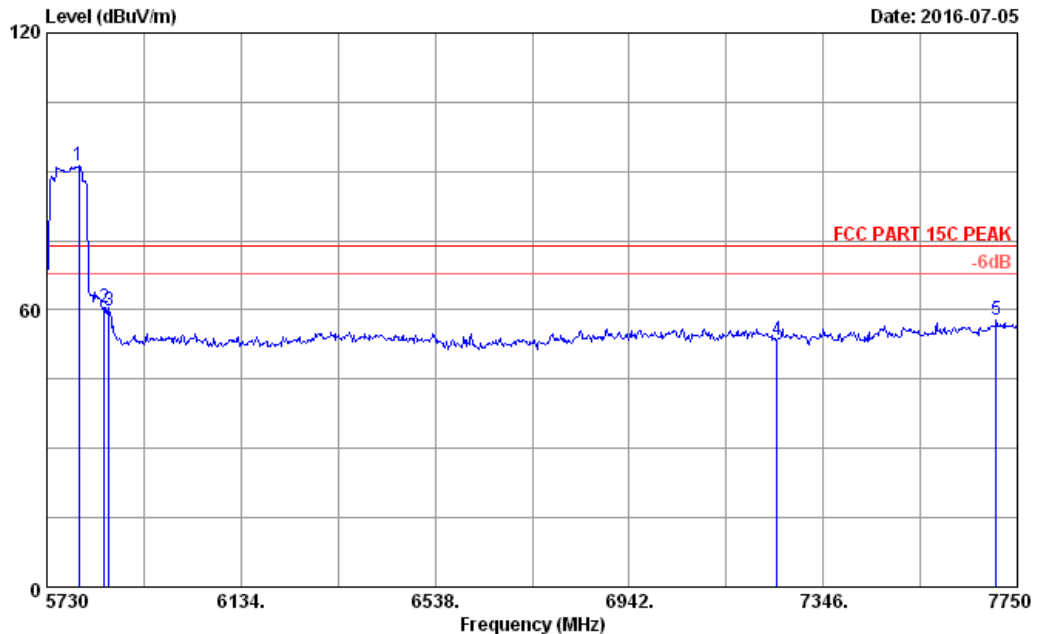

Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5796.660       | 34.58                    | 11.97                 | 35.45                 | 80.11             | 91.21                         | 74.00              | -17.21         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 49.27             | 60.41                         | 74.00              | 13.59          | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 48.82             | 59.97                         | 74.00              | 14.03          | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.38             | 53.40                         | 74.00              | 20.60          | Peak   |
| 5   | 7705.560       | 36.82                    | 12.76                 | 35.54                 | 43.64             | 57.68                         | 74.00              | 16.32          | Peak   |


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 11

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

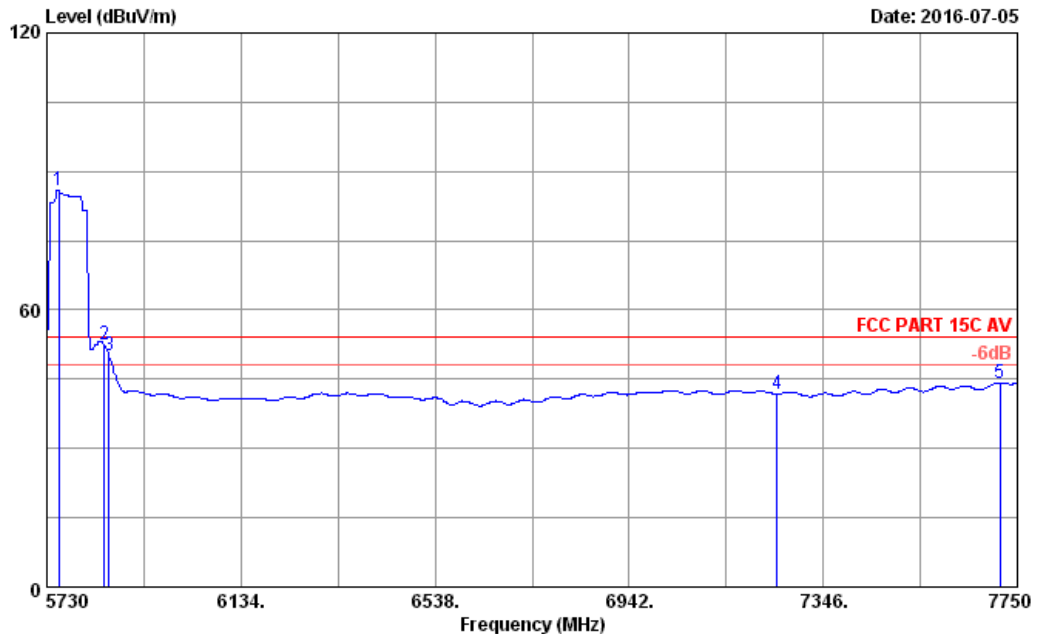

|              |                                         |           |            |
|--------------|-----------------------------------------|-----------|------------|
| Site no.     | : 3m Chamber                            | Data no.  | : 11       |
| Dis. / Ant.  | : 3m 2015 3115-4877                     | Ant. pol. | : VERTICAL |
| Limit        | : FCC PART 15C AV                       |           |            |
| Env. / Ins.  | : 23.4°C/52.8%                          |           |            |
| Engineer     | : zack_zhu                              |           |            |
| EUT          | : 11.6'' windows tablet                 |           |            |
| Power rating | : DC 5V From Adapter Input AC 120V/60Hz |           |            |
| Test Mode    | : IEEE802.11ac VHT80 CH155 5775MHz Tx   |           |            |
|              | M/N:NS-P11W7100                         |           |            |

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark  |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|---------|
| 1   | 5754.240       | 34.55                    | 11.97                 | 35.45                 | 74.80             | 85.87                         | 54.00              | -31.87         | Average |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 41.27             | 52.41                         | 54.00              | 1.59           | Average |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 38.91             | 50.06                         | 54.00              | 3.94           | Average |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 28.79             | 41.81                         | 54.00              | 12.19          | Average |
| 5   | 7713.640       | 36.83                    | 12.77                 | 35.54                 | 30.14             | 44.20                         | 54.00              | 9.80           | Average |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Noutou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 12

File: F:\2016 Report\TUV\TUV莱茵检测-FCC-5GHz-Band 4.EM6 (104)

Date: 2016-07-05

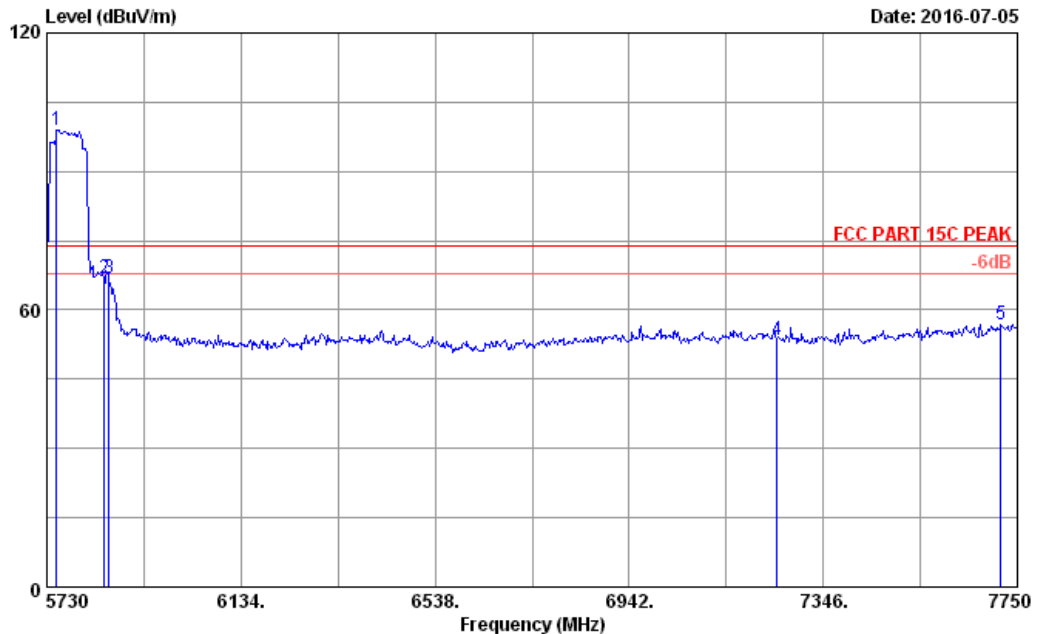

Site no. : 3m Chamber Data no. : 12  
 Dis. / Ant. : 3m 2015 3115-4877 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 23.4°C/52.8%  
 Engineer : zack\_zhu  
 EUT : 11.6'' windows tablet  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11ac VHT80 CH155 5775MHz Tx  
 M/N: NS-P11W7100

| No. | Freq.<br>(MHz) | Ant.<br>Factor<br>(dB/m) | Cable<br>Loss<br>(dB) | AMP<br>factor<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV/m) | Limits<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|----------------|--------------------------|-----------------------|-----------------------|-------------------|-------------------------------|--------------------|----------------|--------|
| 1   | 5750.200       | 34.55                    | 11.97                 | 35.45                 | 87.95             | 99.02                         | 74.00              | -25.02         | Peak   |
| 2   | 5850.000       | 34.61                    | 11.98                 | 35.45                 | 55.71             | 66.85                         | 74.00              | 7.15           | Peak   |
| 3   | 5860.000       | 34.62                    | 11.98                 | 35.45                 | 55.71             | 66.86                         | 74.00              | 7.14           | Peak   |
| 4   | 7250.000       | 36.10                    | 12.48                 | 35.56                 | 40.41             | 53.43                         | 74.00              | 20.57          | Peak   |
| 5   | 7715.660       | 36.83                    | 12.77                 | 35.54                 | 42.90             | 56.96                         | 74.00              | 17.04          | Peak   |

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 - Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

**Prüfbericht - Nr.: 50050527 010**

Test Report No.

**Seite 454 von 479**

Page 454 of 479

### 5.1.8 Dynamic Frequency Selection


**RESULT:****Pass**

|                   |   |                                                                  |
|-------------------|---|------------------------------------------------------------------|
| Date of testing   | : | 2016-07-05                                                       |
| Test standard     | : | FCC part 15.407(h)(2)<br>RSS-247 clause 6.3<br>KDB905462 D02 v02 |
| Basic standard    | : | ANSI C63.10: 2013                                                |
| Limits            | : | FCC part 15.407(h)(2)(iii)                                       |
| Kind of test site | : | Shield room                                                      |


**Test setup**

|                      |   |                     |
|----------------------|---|---------------------|
| Test Channel         | : | All channel         |
| Operation mode       | : | B.1, C.1 (802.11ac) |
| Ambient temperature  | : | 23.4°C              |
| Relative humidity    | : | 53.3%               |
| Atmospheric pressure | : | 102.6kPa            |


For details refer to following test plot.

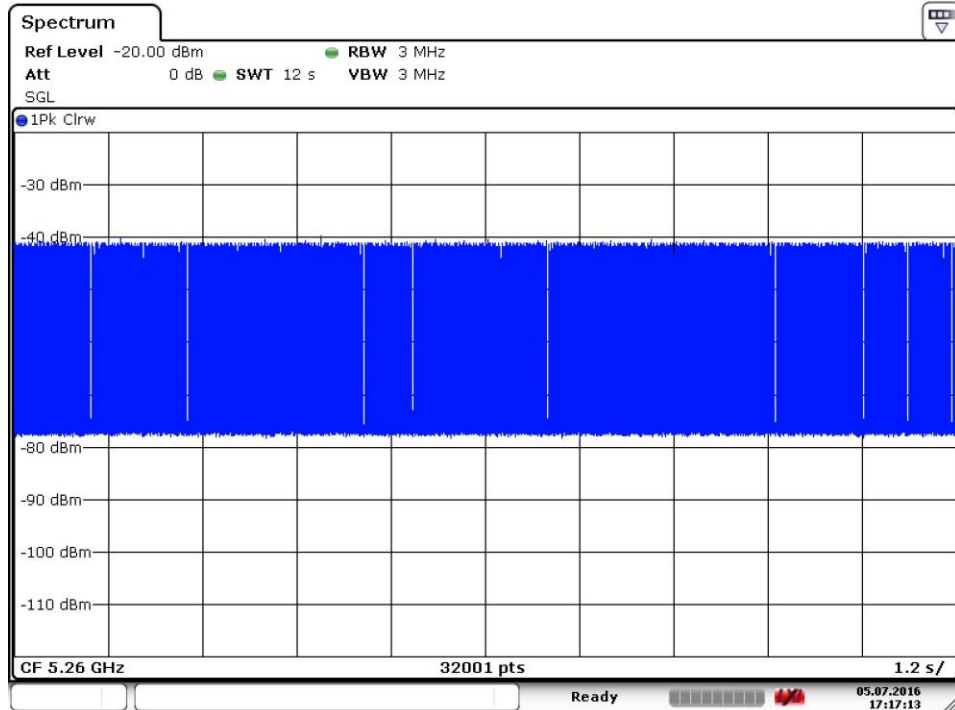**Table 28: Test result of Dynamic Frequency Selection of 802.11ac VHT20, 5260MHz**


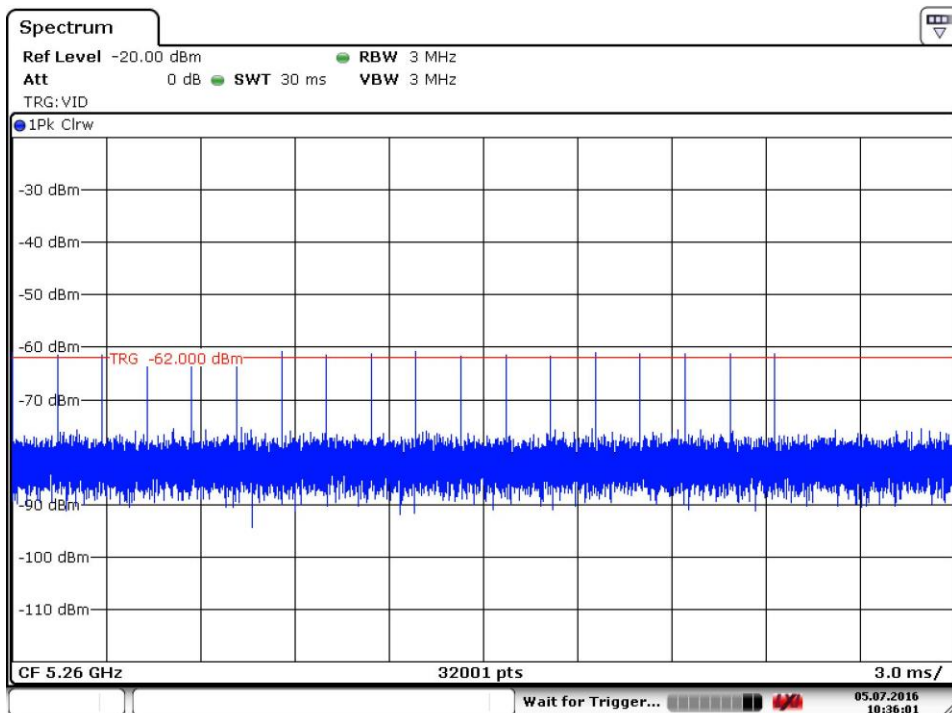
Date: 5.JUL.2016 17:17:14

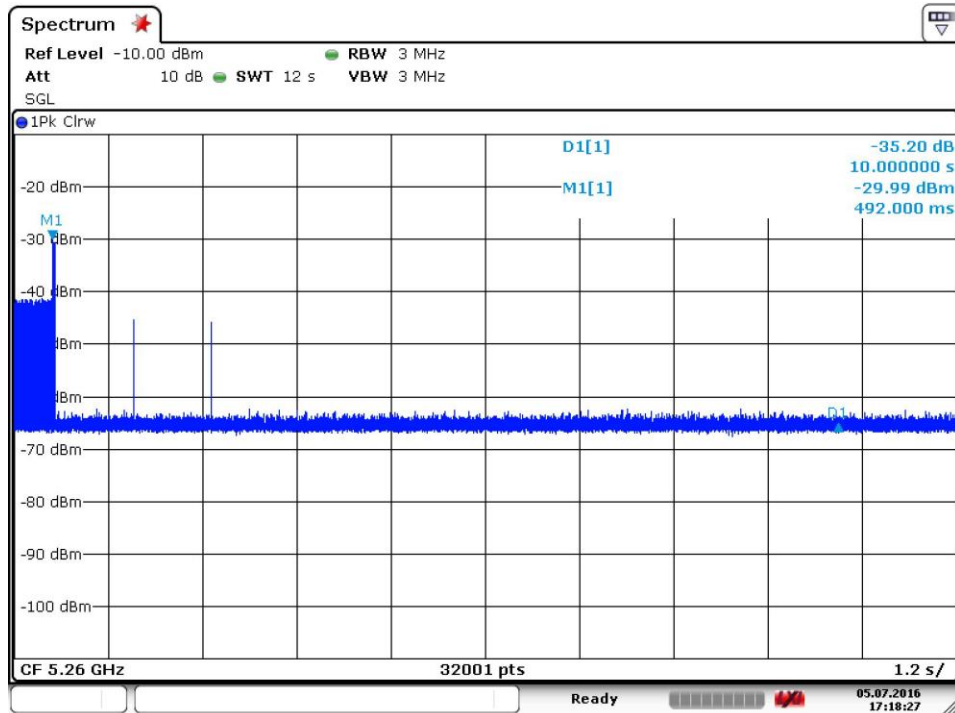


Date: 5.JUL.2016 17:18:27

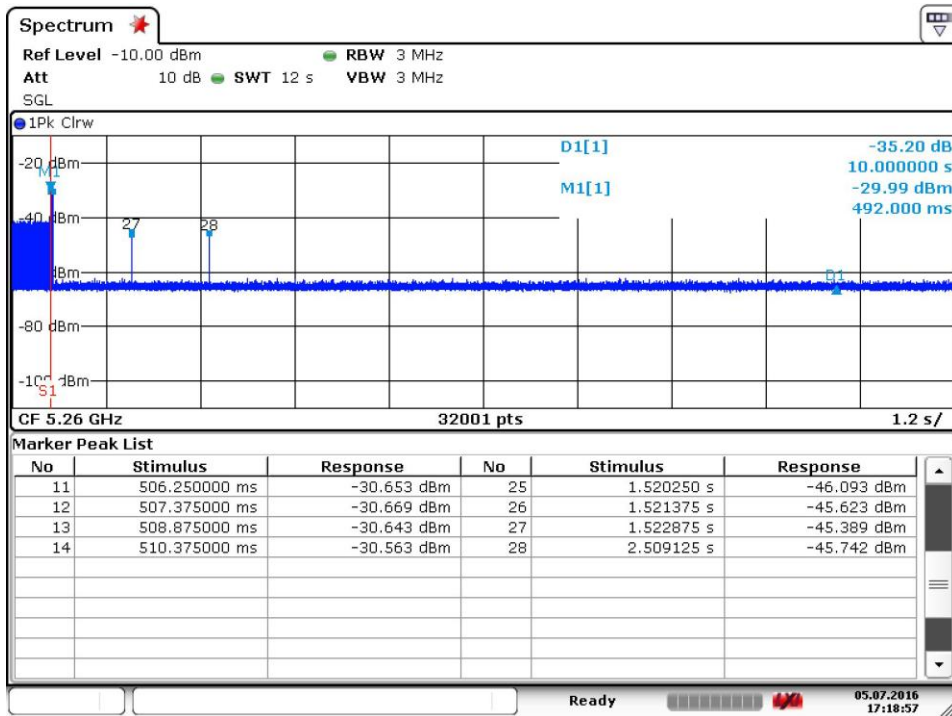


Date: 5.JUL.2016 17:18:57



Date: 5.JUL.2016 10:36:00

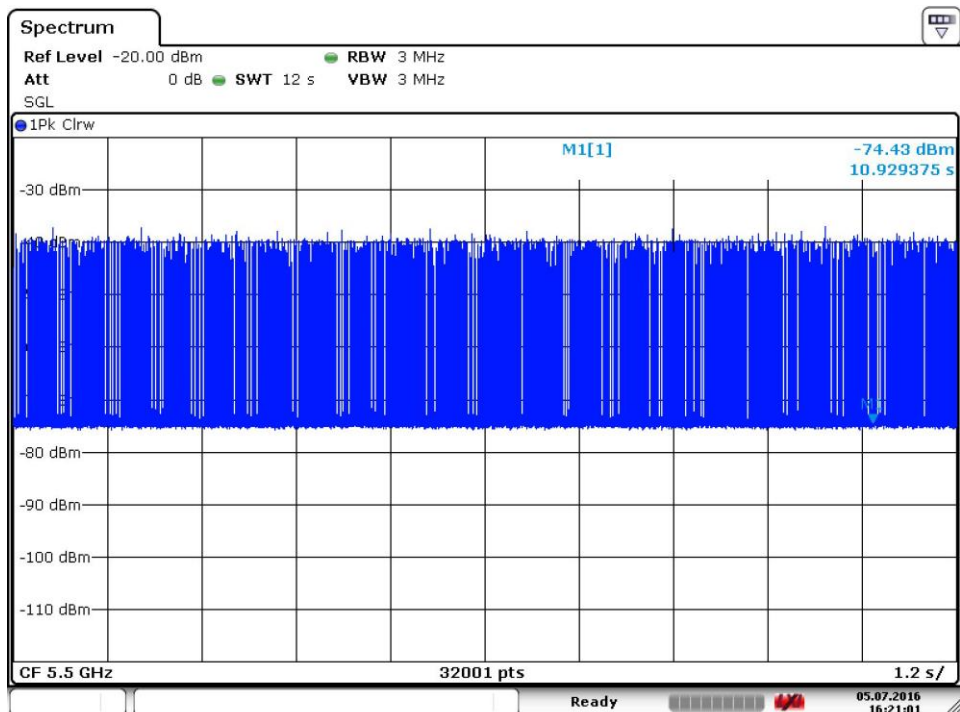
**Table 29: Test result of Dynamic Frequency Selection of 802.11ac VHT20, 5500MHz**


Date: 5.JUL.2016 16:21:01

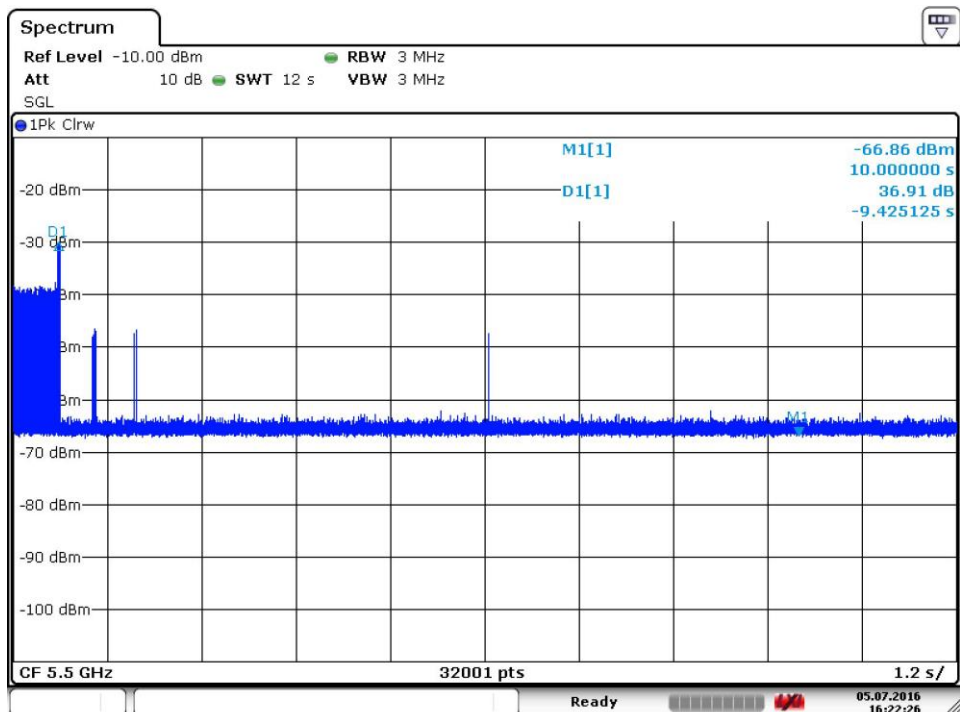


Date: 5.JUL.2016 16:22:26


Date: 5.JUL.2016 10:37:25

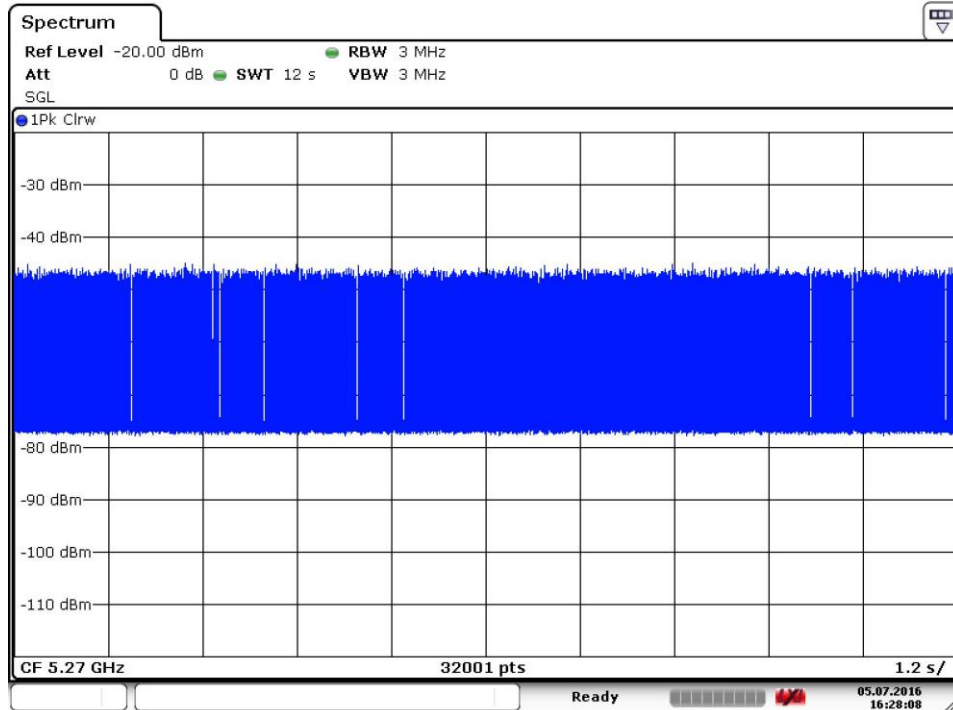**Table 30: Test result of Dynamic Frequency Selection of 802.11ac VHT40, 5270MHz**


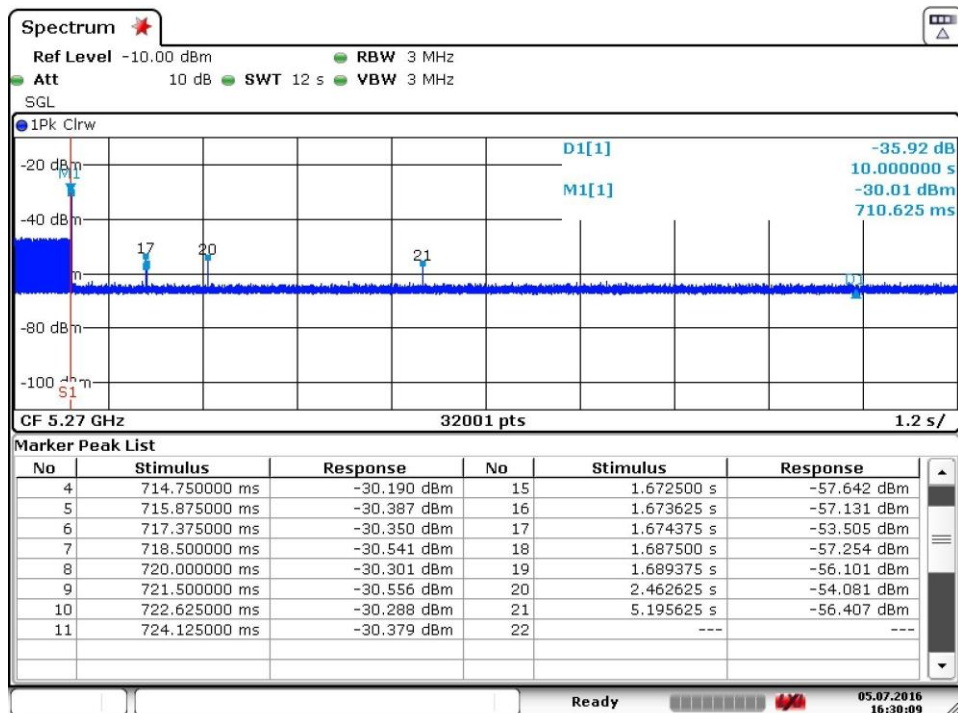
Date: 5.JUL.2016 16:28:08

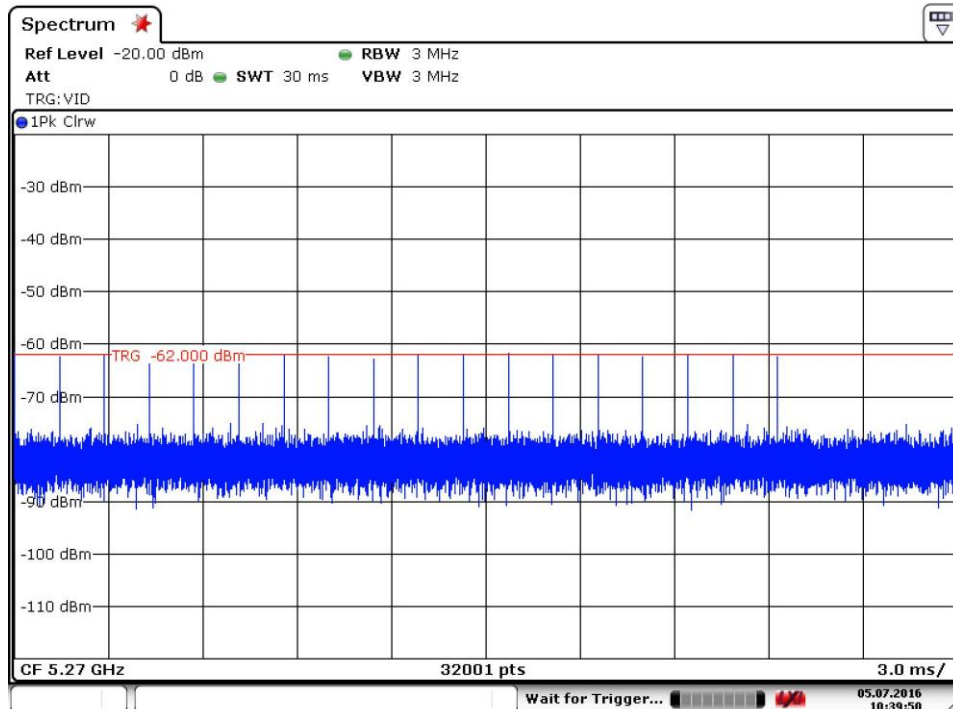

Date: 5.JUL.2016 10:39:50

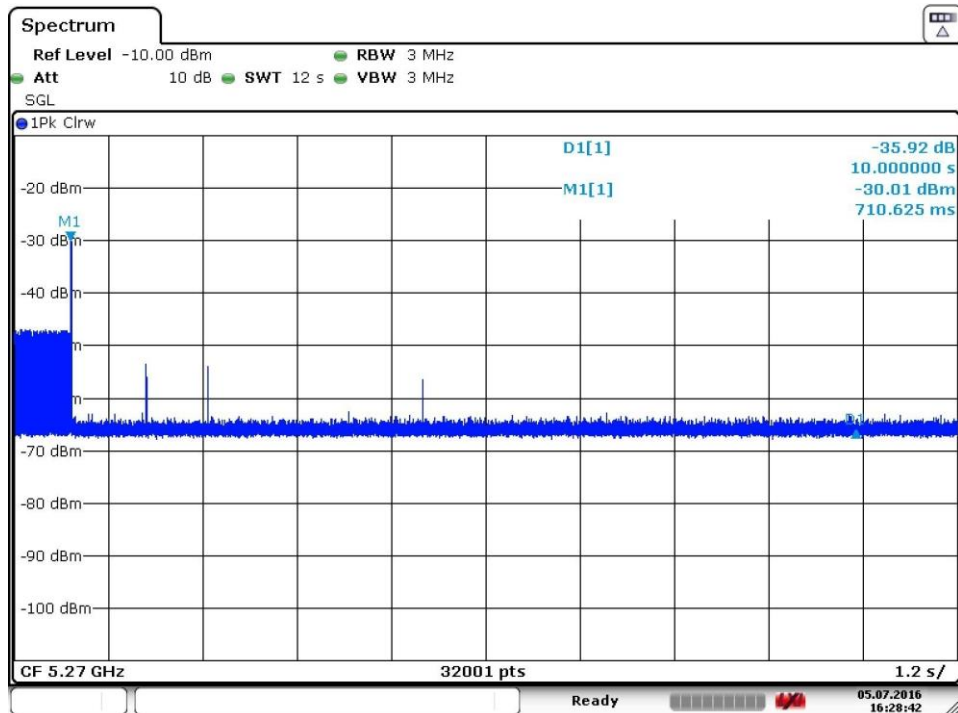


Date: 5.JUL.2016 16:28:43




Date: 5.JUL.2016 16:30:09


| Marker Peak List |               |             |    |            |             |
|------------------|---------------|-------------|----|------------|-------------|
| No               | Stimulus      | Response    | No | Stimulus   | Response    |
| 4                | 714.750000 ms | -30.190 dBm | 15 | 1.672500 s | -57.642 dBm |
| 5                | 715.875000 ms | -30.387 dBm | 16 | 1.673625 s | -57.131 dBm |
| 6                | 717.375000 ms | -30.350 dBm | 17 | 1.674375 s | -53.505 dBm |
| 7                | 718.500000 ms | -30.541 dBm | 18 | 1.687500 s | -57.254 dBm |
| 8                | 720.000000 ms | -30.301 dBm | 19 | 1.689375 s | -56.101 dBm |
| 9                | 721.500000 ms | -30.556 dBm | 20 | 2.462625 s | -54.081 dBm |
| 10               | 722.625000 ms | -30.288 dBm | 21 | 5.195625 s | -56.407 dBm |
| 11               | 724.125000 ms | -30.379 dBm | 22 | ---        | ---         |

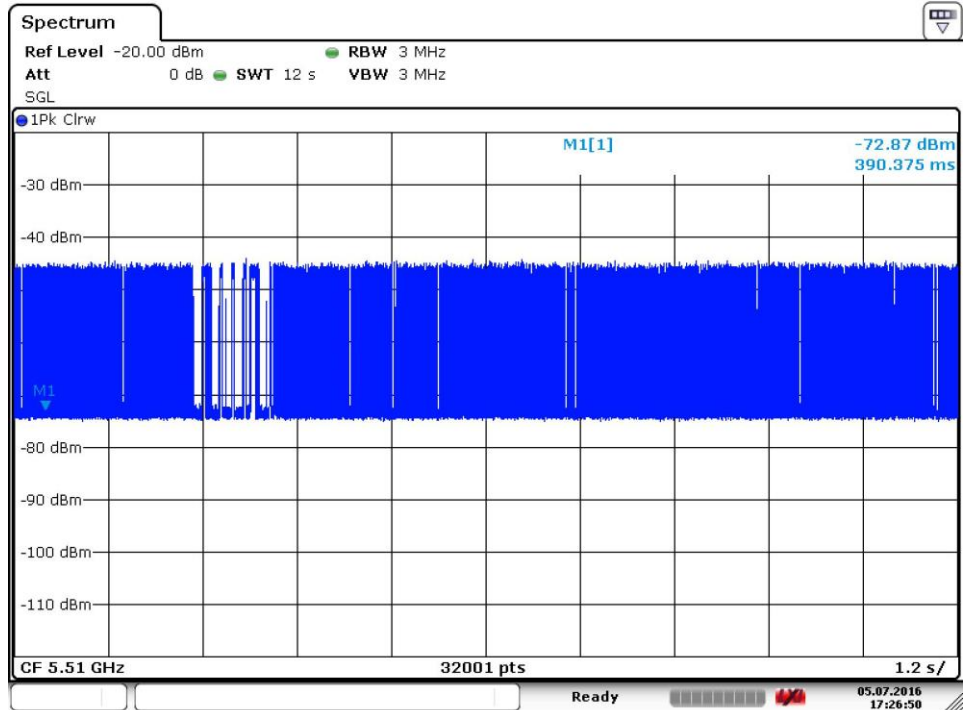**Table 31: Test result of Dynamic Frequency Selection of 802.11ac VHT40, 5510MHz**


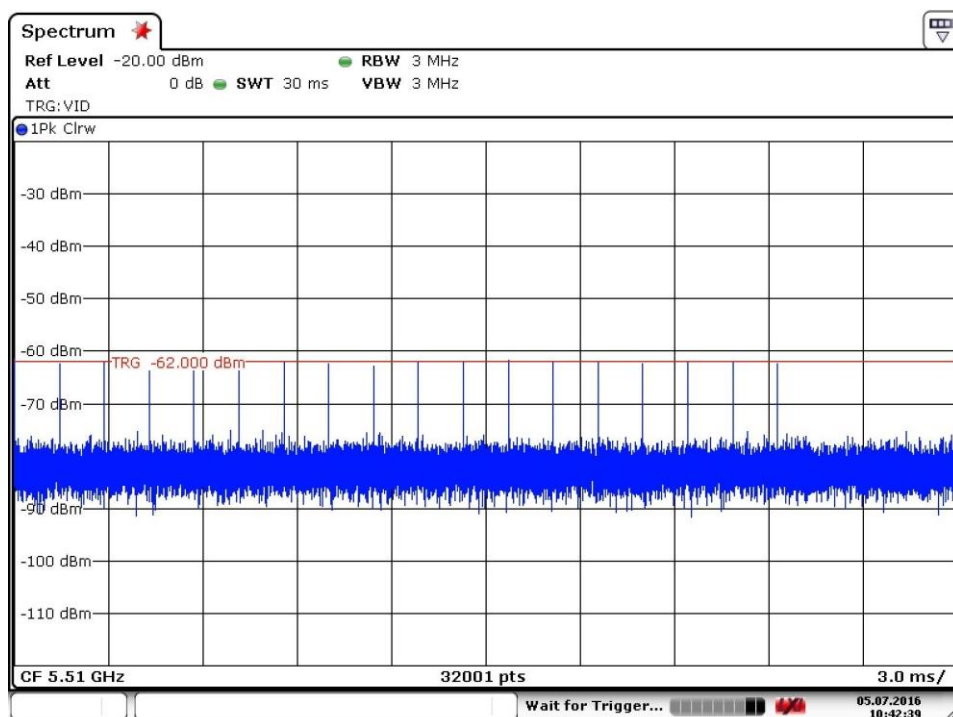
Date: 5.JUL.2016 17:26:51

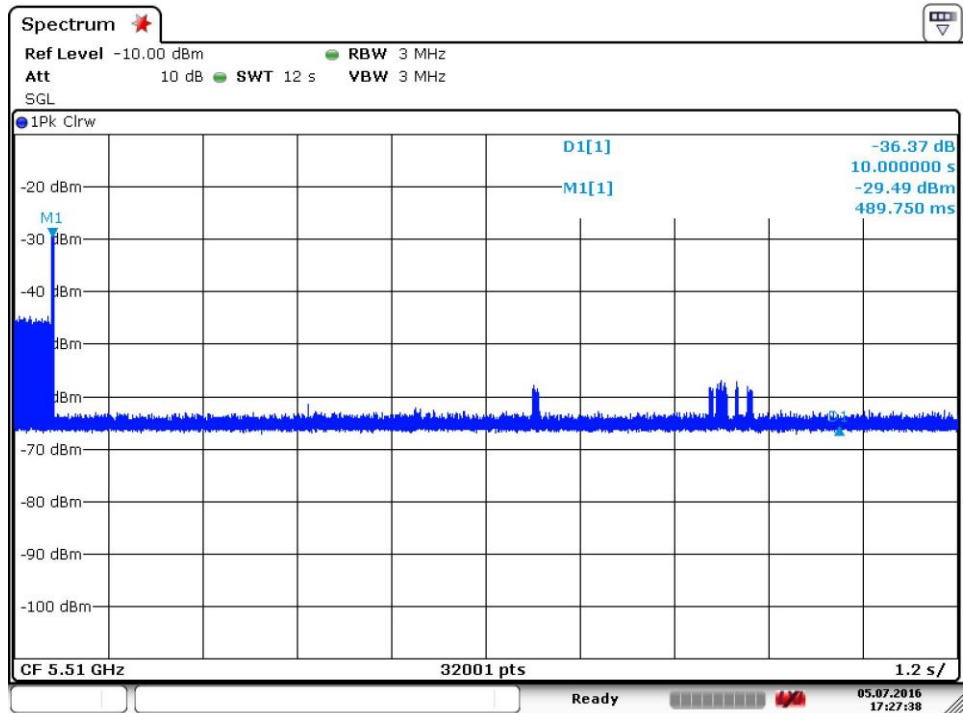


Date: 5.JUL.2016 17:27:38

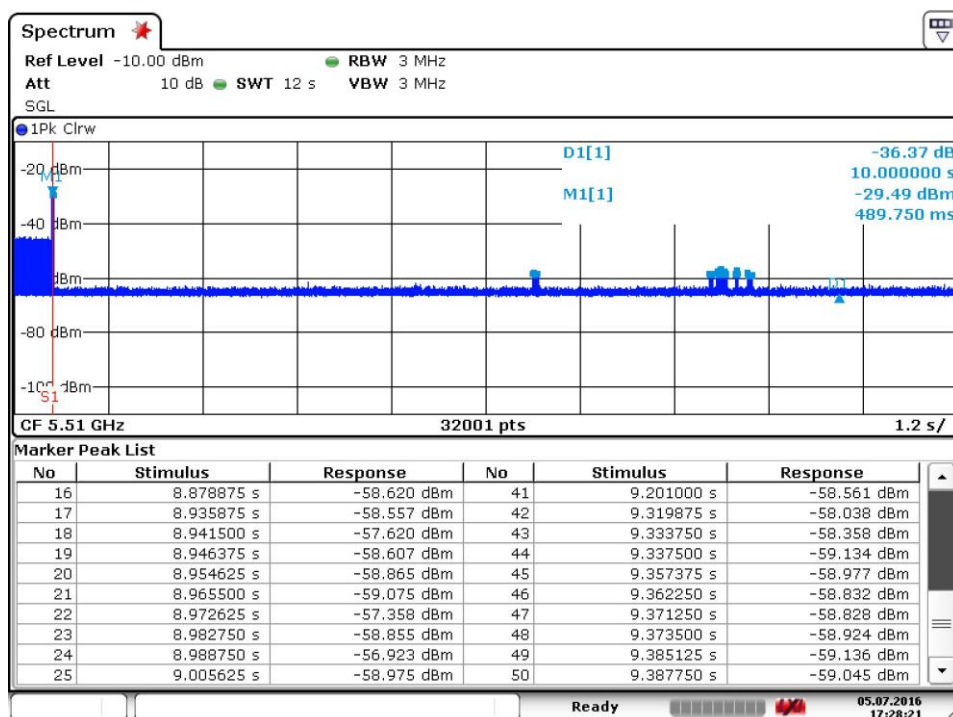


Date: 5.JUL.2016 17:28:21




Date: 5.JUL.2016 10:42:39

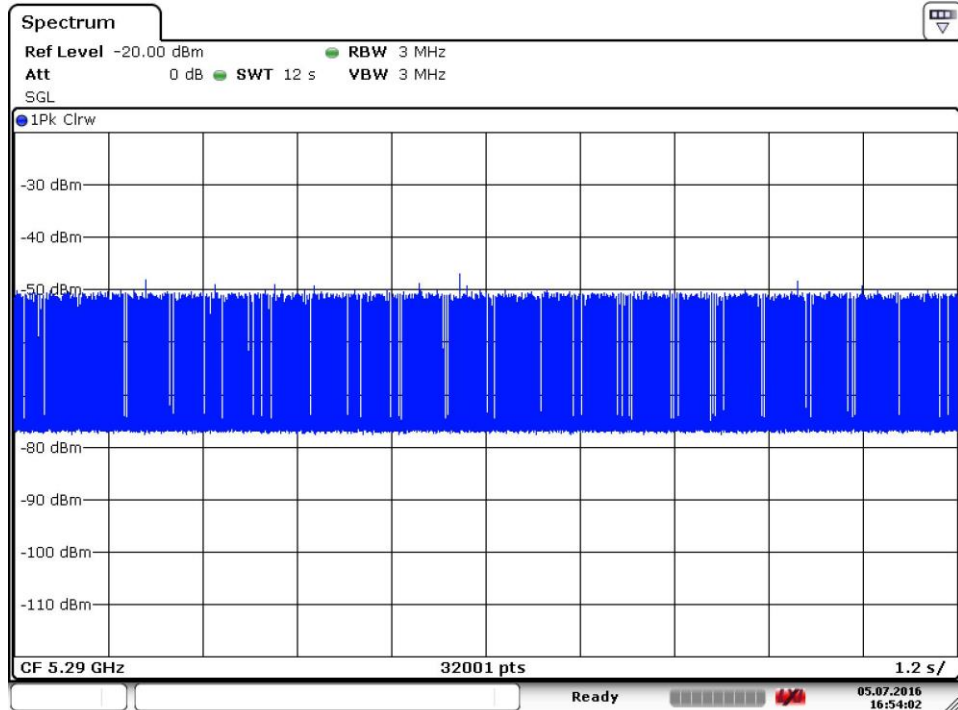**Table 32: Test result of Dynamic Frequency Selection of 802.11ac VHT80, 5290MHz**


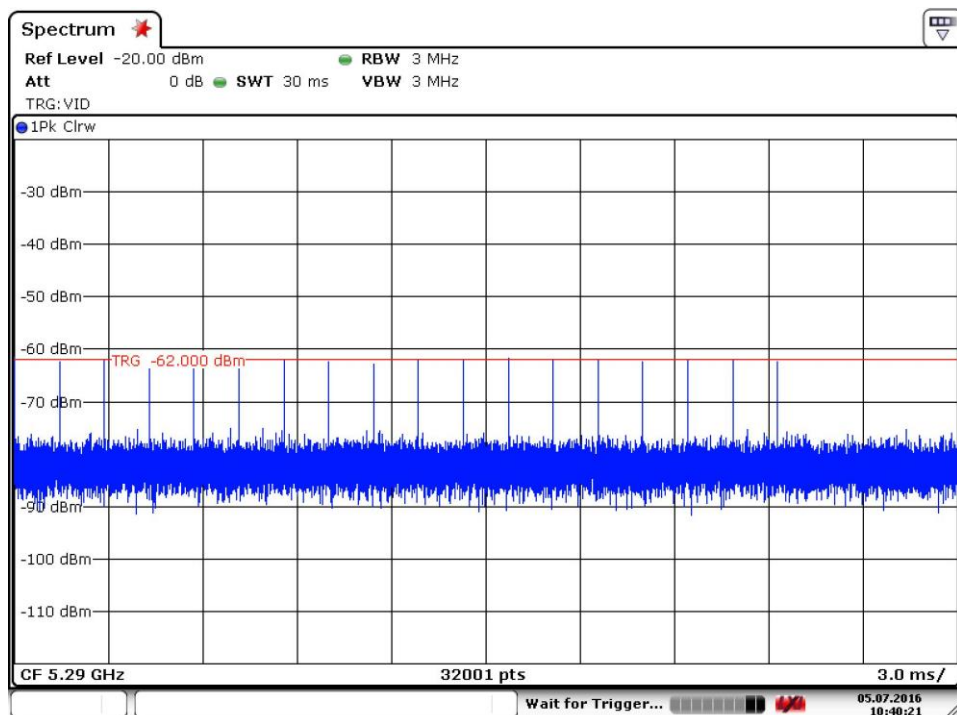
Date: 5.JUL.2016 16:54:02

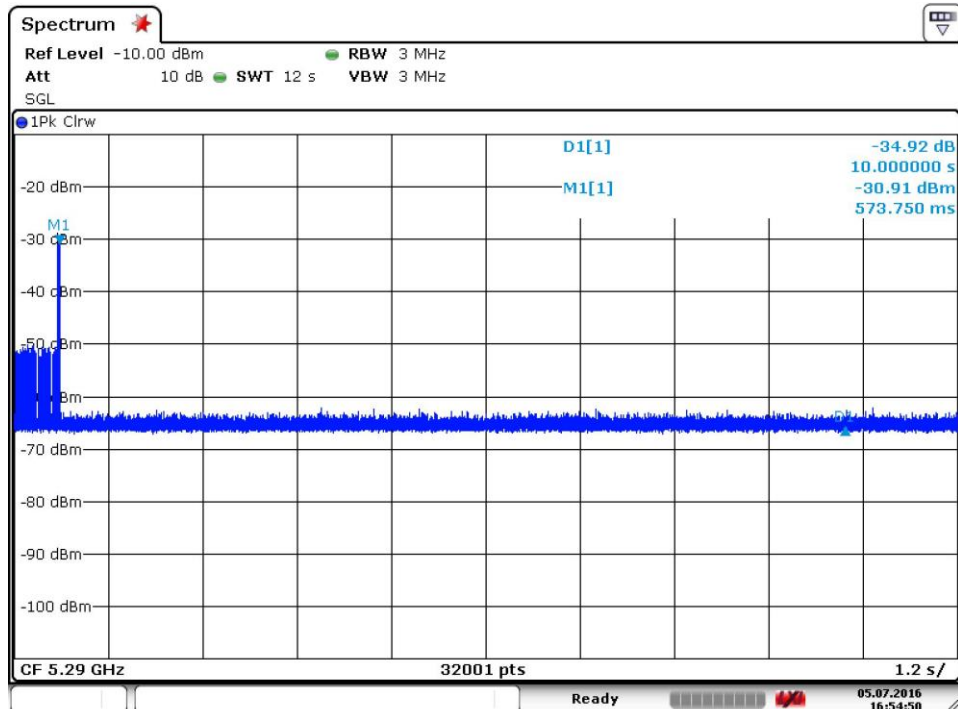


Date: 5.JUL.2016 16:54:50

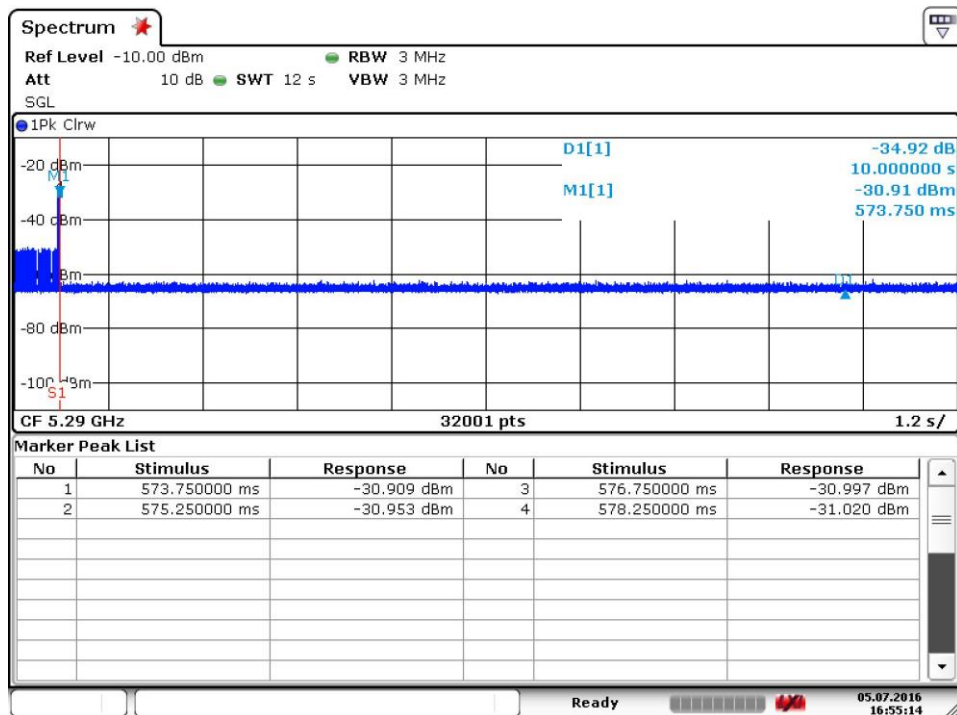


Date: 5.JUL.2016 16:55:14




Date: 5.JUL.2016 10:40:22

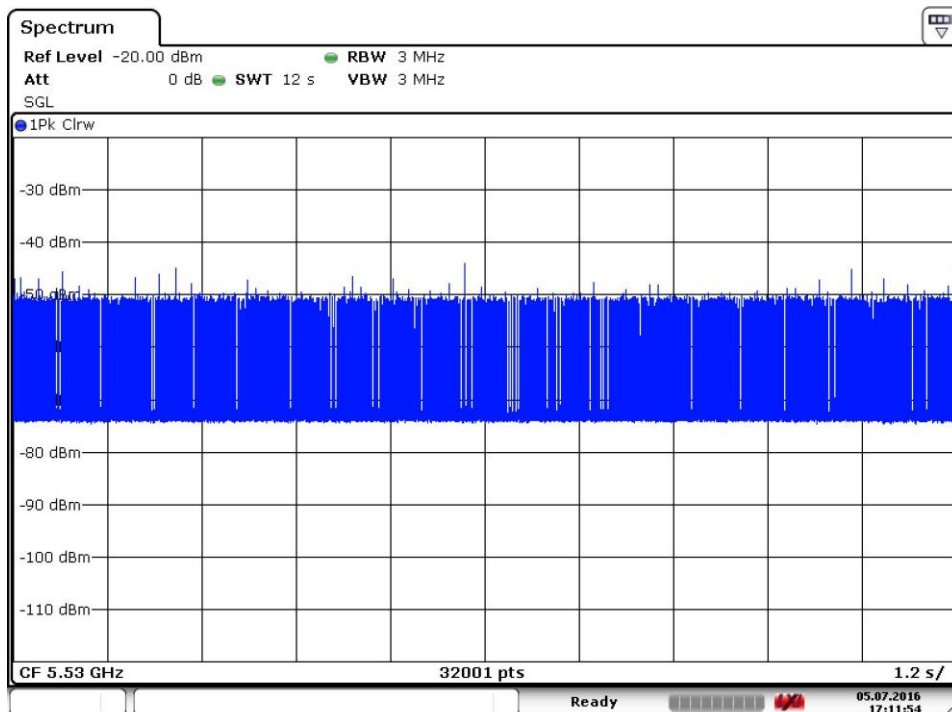**Table 33: Test result of Dynamic Frequency Selection of 802.11ac VHT80, 5530MHz**


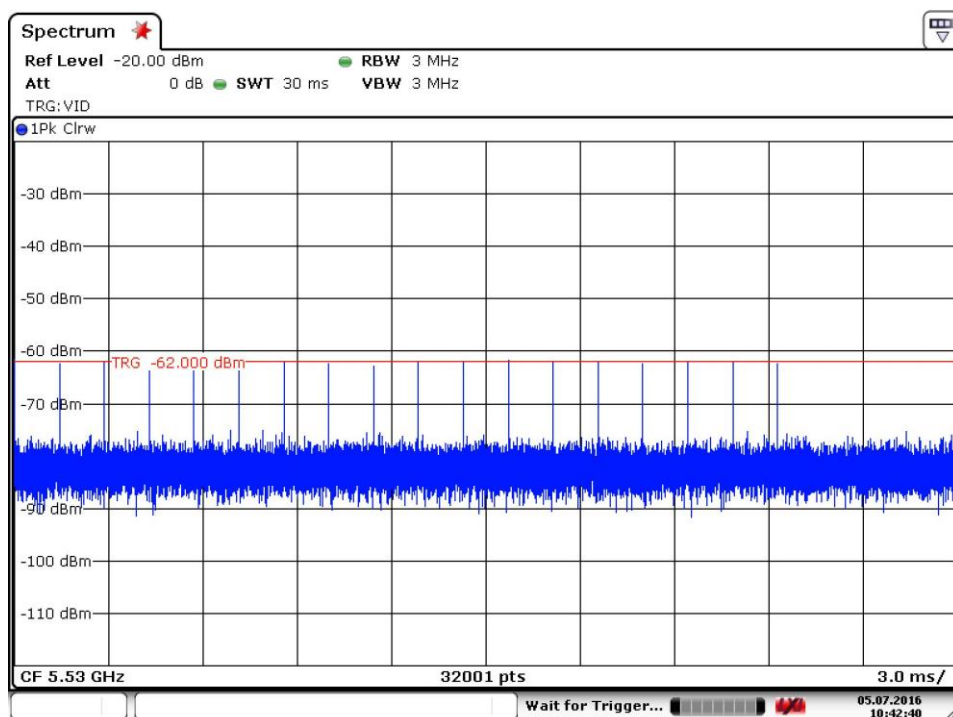
Date: 5.JUL.2016 17:11:54

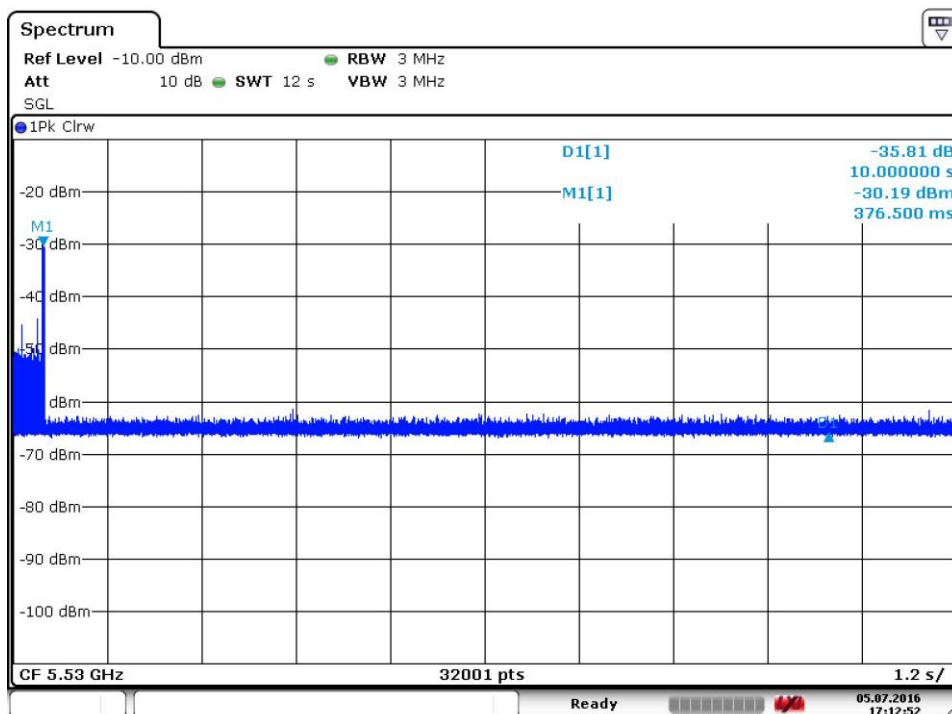

Date: 5.JUL.2016 17:12:53

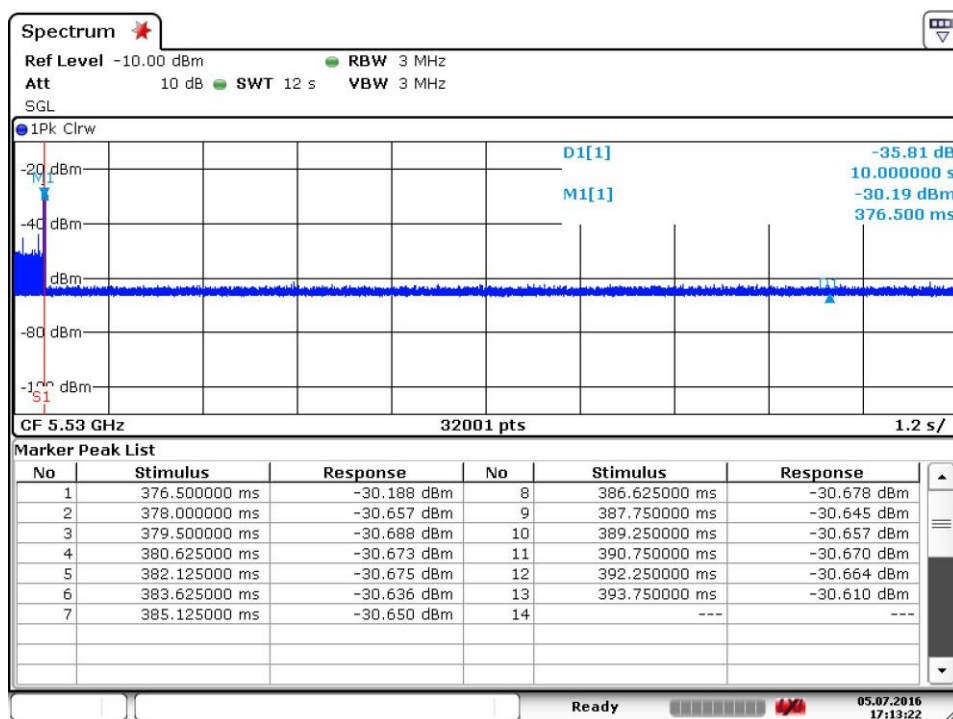

Date: 5.JUL.2016 17:13:22



Date: 5.JUL.2016 10:42:41

**Prüfbericht - Nr.: 50050527 010**

Test Report No.

Seite 467 von 479

Page 467 of 479

**5.1.9 Conducted emissions****RESULT:****Pass**

|                   |   |                                                                |
|-------------------|---|----------------------------------------------------------------|
| Date of testing   | : | 2016-07-08                                                     |
| Test standard     | : | FCC Part 15.207<br>FCC part 15.407(b)(6)<br>RSS-Gen Clause 8.8 |
| Basic standard    | : | ANSI C63.10: 2013                                              |
| Frequency range   | : | 0.15 – 30MHz                                                   |
| Limits            | : | FCC Part 15.207                                                |
| Kind of test site | : | Shield room                                                    |


**Test setup**

|                      |   |                    |
|----------------------|---|--------------------|
| Input Voltage        | : | AC 120V, 60Hz      |
| Operation Mode       | : | A.1, B.1, C.1, D.1 |
| Earthing             | : | Not Connected      |
| Ambient temperature  | : | 24.2°C             |
| Relative humidity    | : | 53%                |
| Atmospheric pressure | : | 101kPa             |

For details refer to following test plot.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

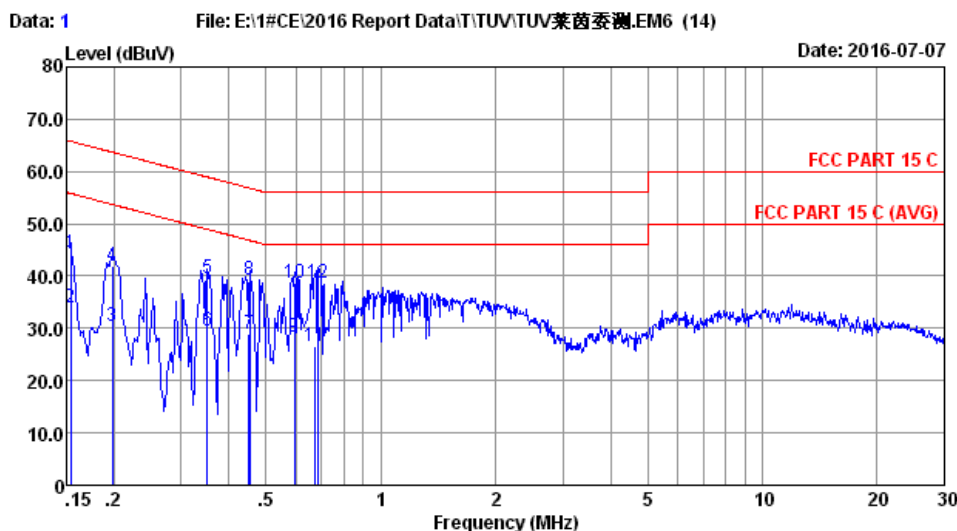

Site no :1# Conduction Data No :1  
Dis./Lisn :2015 ESH2-Z5 LINE LISN phase:  
Limit :FCC PART 15 C  
Env./Ins. :24.2°C/53% Engineer :Evan  
EUT :11.6" windows tablet M/N:NS-P11W7100  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :TX Mode WIFI 5G(Band1)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.154         | 0.12                   | 0.02                  | 44.17             | 44.31                       | 65.78            | 21.47          | QP      |
| 2  | 0.154         | 0.12                   | 0.02                  | 33.89             | 34.03                       | 55.78            | 21.75          | Average |
| 3  | 0.198         | 0.12                   | 0.02                  | 30.16             | 30.30                       | 53.72            | 23.42          | Average |
| 4  | 0.198         | 0.12                   | 0.02                  | 41.78             | 41.92                       | 63.71            | 21.79          | QP      |
| 5  | 0.350         | 0.13                   | 0.02                  | 39.27             | 39.42                       | 58.96            | 19.54          | QP      |
| 6  | 0.351         | 0.17                   | 0.02                  | 29.46             | 29.65                       | 48.94            | 19.29          | Average |
| 7  | 0.451         | 0.43                   | 0.03                  | 28.47             | 28.93                       | 46.85            | 17.92          | Average |
| 8  | 0.454         | 0.43                   | 0.03                  | 38.69             | 39.15                       | 56.80            | 17.65          | QP      |
| 9  | 0.595         | 0.14                   | 0.04                  | 28.11             | 28.29                       | 46.00            | 17.71          | Average |
| 10 | 0.595         | 0.14                   | 0.04                  | 38.51             | 38.69                       | 56.00            | 17.31          | QP      |
| 11 | 0.671         | 0.15                   | 0.04                  | 26.31             | 26.50                       | 46.00            | 19.50          | Average |
| 12 | 0.683         | 0.15                   | 0.04                  | 38.48             | 38.67                       | 56.00            | 17.33          | QP      |


Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.


 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Nantou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 2

File: E:\1#CE\2016 Report Data\TUV\TUV莱茵EM6 (14)

Date: 2016-07-07

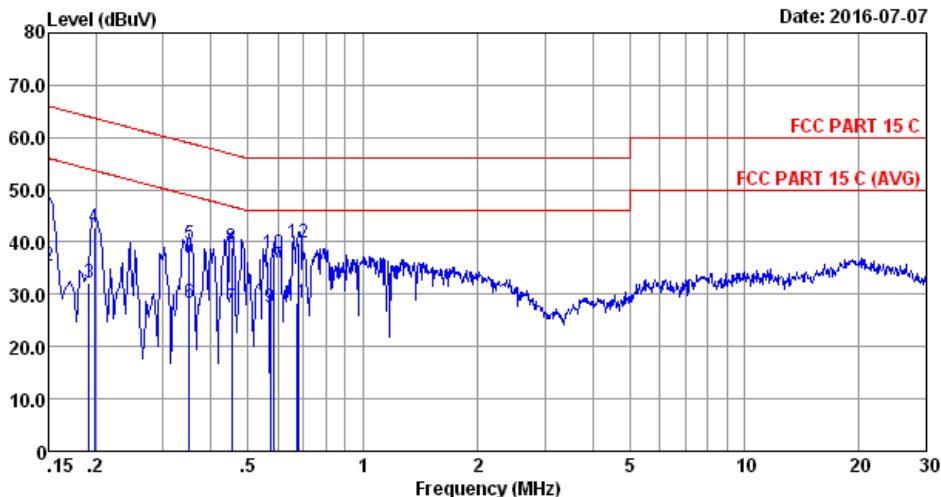

|              |                                        |             |       |
|--------------|----------------------------------------|-------------|-------|
| Site no      | :1# Conduction                         | Data No     | :2    |
| Dis./Lisn    | :2015 ESH2-25 NEUTRAL                  | LISN phase: |       |
| Limit        | :FCC PART 15 C                         |             |       |
| Env./Ins.    | :24.2°C/53%                            | Engineer    | :Evan |
| EUT          | :11.6" windows tablet M/N:NS-P11W7100  |             |       |
| Power Rating | :DC 5V From Adapter Input AC 120V/60Hz |             |       |
| Test Mode    | :TX Mode WIFI 5G(Band1)                |             |       |

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.150         | 0.12                   | 0.02                  | 46.48             | 46.62                       | 66.00            | 19.38          | QP      |
| 2  | 0.150         | 0.12                   | 0.02                  | 35.14             | 35.28                       | 55.98            | 20.70          | Average |
| 3  | 0.191         | 0.12                   | 0.02                  | 32.17             | 32.31                       | 53.98            | 21.67          | Average |
| 4  | 0.198         | 0.12                   | 0.02                  | 42.55             | 42.69                       | 63.71            | 21.02          | QP      |
| 5  | 0.350         | 0.13                   | 0.02                  | 39.44             | 39.59                       | 58.96            | 19.37          | QP      |
| 6  | 0.352         | 0.13                   | 0.02                  | 28.15             | 28.30                       | 48.92            | 20.62          | Average |
| 7  | 0.453         | 0.14                   | 0.03                  | 27.16             | 27.33                       | 46.83            | 19.50          | Average |
| 8  | 0.454         | 0.14                   | 0.03                  | 38.73             | 38.90                       | 56.80            | 17.90          | QP      |
| 9  | 0.571         | 0.15                   | 0.04                  | 27.16             | 27.35                       | 46.00            | 18.65          | Average |
| 10 | 0.585         | 0.15                   | 0.04                  | 37.63             | 37.82                       | 56.00            | 18.18          | QP      |
| 11 | 0.675         | 0.15                   | 0.04                  | 28.17             | 28.36                       | 46.00            | 17.64          | Average |
| 12 | 0.679         | 0.15                   | 0.04                  | 39.79             | 39.98                       | 56.00            | 16.02          | QP      |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.




No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Nantou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

Data: 3

File: E:\1#CE\2016 Report Data\TUV\TUV莱茵测试\EM6 (14)

Date: 2016-07-07

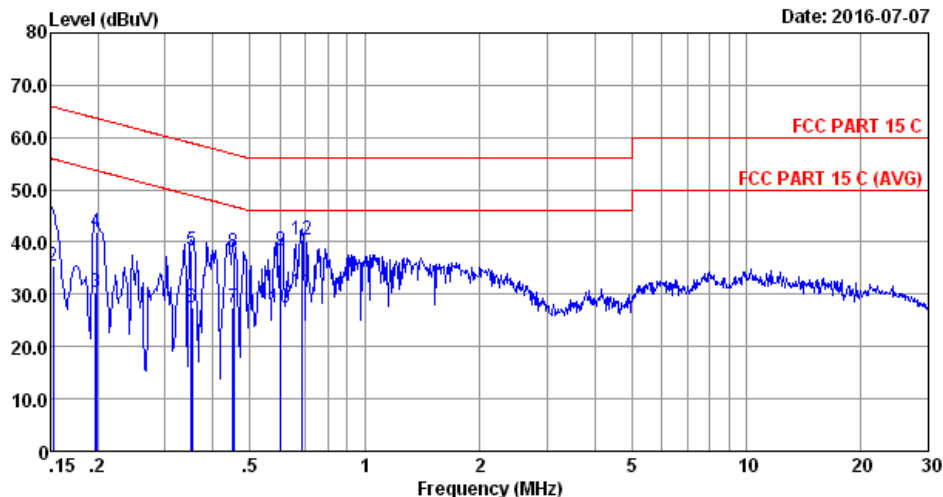


Site no :1# Conduction Data No :3  
 Dis./Lisn :2015 ESH2-25 NEUTRAL LISN phase:  
 Limit :FCC PART 15 C  
 Env./Ins. :24.2°C/53% Engineer :Evan  
 EUT :11.6" windows tablet M/N:NS-P11W7100  
 Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode :TX Mode WIFI 5G(Band2)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.150         | 0.12                   | 0.02                  | 45.07             | 45.21                       | 66.00            | 20.79          | QP      |
| 2  | 0.152         | 0.12                   | 0.02                  | 35.17             | 35.31                       | 55.86            | 20.55          | Average |
| 3  | 0.197         | 0.12                   | 0.02                  | 30.14             | 30.28                       | 53.73            | 23.45          | Average |
| 4  | 0.198         | 0.12                   | 0.02                  | 41.65             | 41.79                       | 63.71            | 21.92          | QP      |
| 5  | 0.352         | 0.13                   | 0.02                  | 38.17             | 38.32                       | 58.92            | 20.60          | QP      |
| 6  | 0.352         | 0.13                   | 0.02                  | 27.17             | 27.32                       | 48.92            | 21.60          | Average |
| 7  | 0.451         | 0.14                   | 0.03                  | 27.17             | 27.34                       | 46.85            | 19.51          | Average |
| 8  | 0.454         | 0.14                   | 0.03                  | 37.88             | 38.05                       | 56.80            | 18.75          | QP      |
| 9  | 0.601         | 0.15                   | 0.04                  | 38.28             | 38.47                       | 56.00            | 17.53          | QP      |
| 10 | 0.601         | 0.15                   | 0.04                  | 27.16             | 27.35                       | 46.00            | 18.65          | Average |
| 11 | 0.681         | 0.15                   | 0.04                  | 30.17             | 30.36                       | 46.00            | 15.64          | Average |
| 12 | 0.683         | 0.15                   | 0.04                  | 40.29             | 40.48                       | 56.00            | 15.52          | QP      |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.




No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

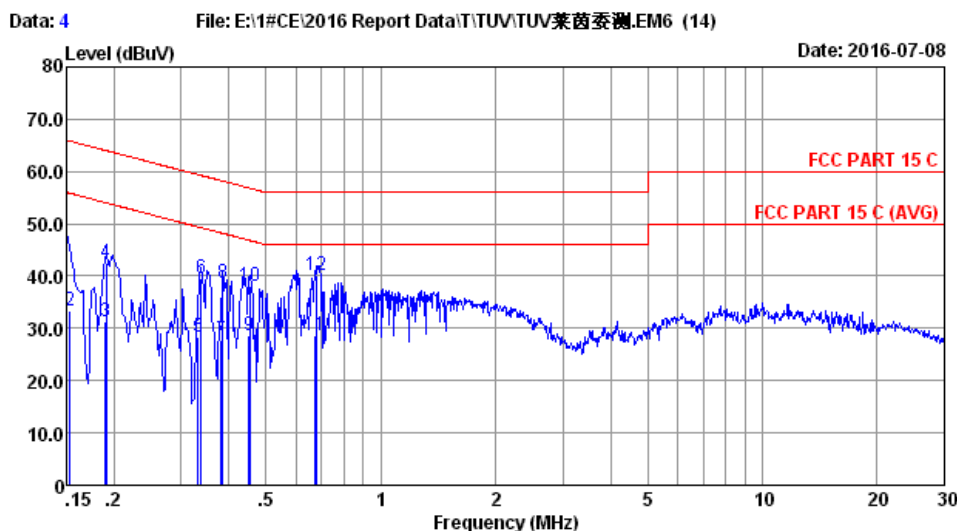

Site no :1# Conduction Data No :4  
Dis./Lisn :2015 ESH2-Z5 LINE LISN phase:  
Limit :FCC PART 15 C  
Env./Ins. :24.2°C/53% Engineer :Evan  
EUT :11.6" windows tablet M/N:NS-P11W7100  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :TX Mode WIFI 5G(Band2)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.150         | 0.12                   | 0.02                  | 44.84             | 44.98                       | 66.00            | 21.02          | QP      |
| 2  | 0.153         | 0.12                   | 0.02                  | 33.16             | 33.30                       | 55.83            | 22.53          | Average |
| 3  | 0.190         | 0.12                   | 0.02                  | 31.02             | 31.16                       | 54.03            | 22.87          | Average |
| 4  | 0.190         | 0.12                   | 0.02                  | 42.30             | 42.44                       | 64.02            | 21.58          | QP      |
| 5  | 0.332         | 0.13                   | 0.02                  | 28.17             | 28.32                       | 49.41            | 21.09          | Average |
| 6  | 0.337         | 0.13                   | 0.02                  | 39.41             | 39.56                       | 59.27            | 19.71          | QP      |
| 7  | 0.381         | 0.56                   | 0.03                  | 27.16             | 27.75                       | 48.25            | 20.50          | Average |
| 8  | 0.385         | 0.60                   | 0.03                  | 38.00             | 38.63                       | 58.17            | 19.54          | QP      |
| 9  | 0.451         | 0.43                   | 0.03                  | 28.16             | 28.62                       | 46.85            | 18.23          | Average |
| 10 | 0.454         | 0.43                   | 0.03                  | 37.56             | 38.02                       | 56.80            | 18.78          | QP      |
| 11 | 0.671         | 0.15                   | 0.04                  | 28.46             | 28.65                       | 46.00            | 17.35          | Average |
| 12 | 0.675         | 0.15                   | 0.04                  | 39.84             | 40.03                       | 56.00            | 15.97          | QP      |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.

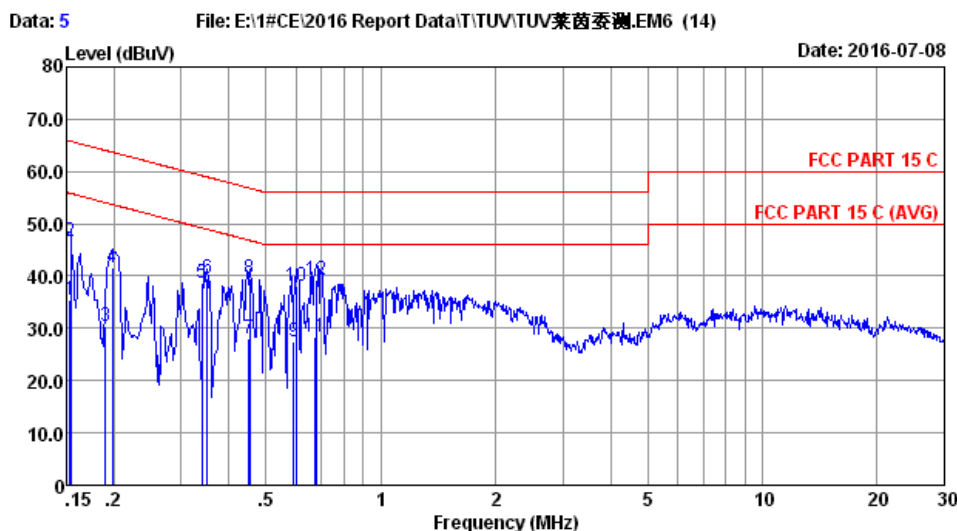
 No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Nantou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057


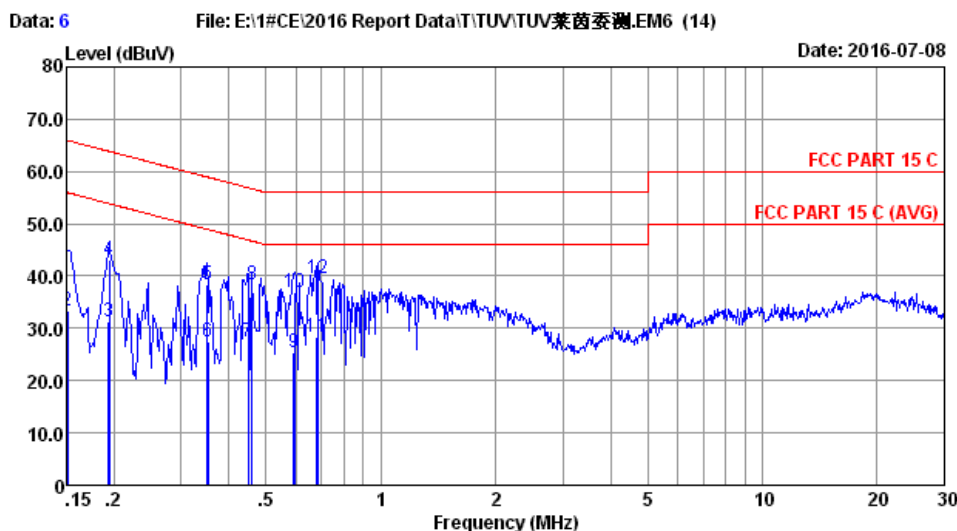
Site no :1# Conduction Data No :5  
 Dis./Lisn :2015 ESH2-Z5 LINE LISN phase:  
 Limit :FCC PART 15 C  
 Env./Ins. :24.2°C/53% Engineer :Evan  
 EUT :11.6" windows tablet M/N:NS-P11W7100  
 Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode :TX Mode WIFI 5G(Band3)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.153         | 0.12                   | 0.02                  | 35.17             | 35.31                       | 55.81            | 20.50          | Average |
| 2  | 0.154         | 0.12                   | 0.02                  | 46.37             | 46.51                       | 65.78            | 19.27          | QP      |
| 3  | 0.190         | 0.12                   | 0.02                  | 30.17             | 30.31                       | 54.04            | 23.73          | Average |
| 4  | 0.198         | 0.12                   | 0.02                  | 41.57             | 41.71                       | 63.71            | 22.00          | QP      |
| 5  | 0.340         | 0.13                   | 0.02                  | 38.47             | 38.62                       | 49.20            | 10.58          | Average |
| 6  | 0.350         | 0.13                   | 0.02                  | 39.27             | 39.42                       | 58.96            | 19.54          | QP      |
| 7  | 0.451         | 0.43                   | 0.03                  | 27.49             | 27.95                       | 46.85            | 18.90          | Average |
| 8  | 0.454         | 0.43                   | 0.03                  | 38.99             | 39.45                       | 56.80            | 17.35          | QP      |
| 9  | 0.590         | 0.14                   | 0.04                  | 27.14             | 27.32                       | 46.00            | 18.68          | Average |
| 10 | 0.598         | 0.14                   | 0.04                  | 38.01             | 38.19                       | 56.00            | 17.81          | QP      |
| 11 | 0.671         | 0.15                   | 0.04                  | 28.16             | 28.35                       | 46.00            | 17.65          | Average |
| 12 | 0.675         | 0.15                   | 0.04                  | 39.14             | 39.33                       | 56.00            | 16.67          | QP      |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Nantou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057




Site no :1# Conduction Data No :6  
 Dis./Lisn :2015 ESH2-25 NEUTRAL LISN phase:  
 Limit :FCC PART 15 C  
 Env./Ins. :24.2°C/53% Engineer :Evan  
 EUT :11.6" windows tablet M/N:NS-P11W7100  
 Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode :TX Mode WIFI 5G(Band3)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.150         | 0.12                   | 0.02                  | 42.85             | 42.99                       | 66.00            | 23.01          | QP      |
| 2  | 0.151         | 0.12                   | 0.02                  | 33.17             | 33.31                       | 55.93            | 22.62          | Average |
| 3  | 0.193         | 0.12                   | 0.02                  | 31.02             | 31.16                       | 53.89            | 22.73          | Average |
| 4  | 0.194         | 0.12                   | 0.02                  | 42.89             | 43.03                       | 63.84            | 20.81          | QP      |
| 5  | 0.350         | 0.13                   | 0.02                  | 38.27             | 38.42                       | 58.96            | 20.54          | QP      |
| 6  | 0.352         | 0.13                   | 0.02                  | 27.17             | 27.32                       | 48.92            | 21.60          | Average |
| 7  | 0.450         | 0.14                   | 0.03                  | 27.15             | 27.32                       | 46.88            | 19.56          | Average |
| 8  | 0.459         | 0.14                   | 0.03                  | 38.32             | 38.49                       | 56.71            | 18.22          | QP      |
| 9  | 0.590         | 0.15                   | 0.04                  | 25.16             | 25.35                       | 46.00            | 20.65          | Average |
| 10 | 0.595         | 0.15                   | 0.04                  | 36.65             | 36.84                       | 56.00            | 19.16          | QP      |
| 11 | 0.680         | 0.15                   | 0.04                  | 28.17             | 28.36                       | 46.00            | 17.64          | Average |
| 12 | 0.686         | 0.15                   | 0.04                  | 39.32             | 39.51                       | 56.00            | 16.49          | QP      |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou,ShenZhen,GuangDong,China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

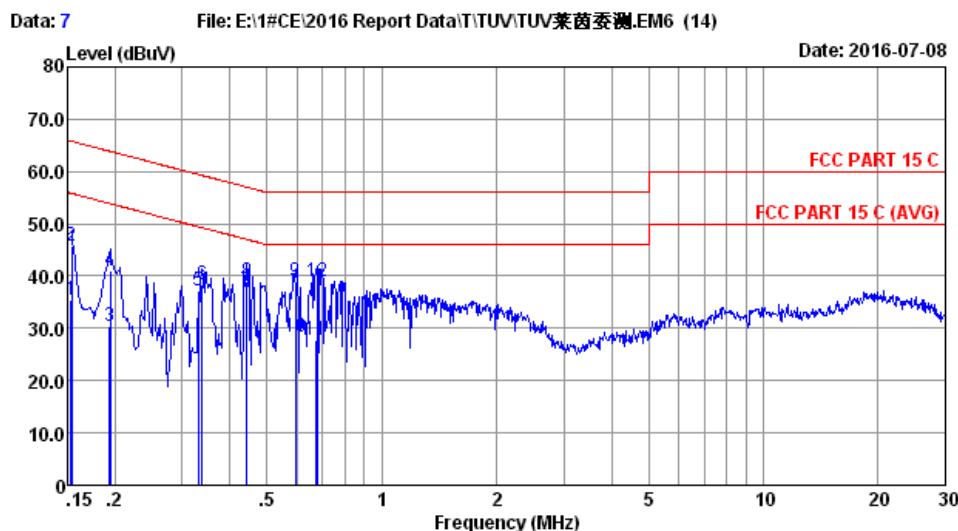


Site no :1# Conduction Data No :7  
Dis./Lisn :2015 ESH2-25 NEUTRAL LISN phase:  
Limit :FCC PART 15 C  
Env./Ins. :24.2°C/53% Engineer :Evan  
EUT :11.6" windows tablet M/N:NS-P11W7100  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :TX Mode WIFI 5G(Band4)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.153         | 0.12                   | 0.02                  | 35.17             | 35.31                       | 55.83            | 20.52          | Average |
| 2  | 0.154         | 0.12                   | 0.02                  | 45.50             | 45.64                       | 65.78            | 20.14          | QP      |
| 3  | 0.193         | 0.12                   | 0.02                  | 30.17             | 30.31                       | 53.89            | 23.58          | Average |
| 4  | 0.194         | 0.12                   | 0.02                  | 40.91             | 41.05                       | 63.84            | 22.79          | QP      |
| 5  | 0.330         | 0.13                   | 0.02                  | 37.17             | 37.32                       | 49.45            | 12.13          | Average |
| 6  | 0.337         | 0.13                   | 0.02                  | 38.13             | 38.28                       | 59.27            | 20.99          | QP      |
| 7  | 0.441         | 0.14                   | 0.03                  | 37.16             | 37.33                       | 47.04            | 9.71           | Average |
| 8  | 0.442         | 0.14                   | 0.03                  | 38.94             | 39.11                       | 57.02            | 17.91          | QP      |
| 9  | 0.595         | 0.15                   | 0.04                  | 38.89             | 39.08                       | 56.00            | 16.92          | QP      |
| 10 | 0.598         | 0.15                   | 0.04                  | 28.16             | 28.35                       | 46.00            | 17.65          | Average |
| 11 | 0.671         | 0.15                   | 0.04                  | 27.50             | 27.69                       | 46.00            | 18.31          | Average |
| 12 | 0.679         | 0.15                   | 0.04                  | 38.77             | 38.96                       | 56.00            | 17.04          | QP      |

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.



No.6 Ke Feng Road,Block 52,  
 ShenZhen Science & Industry Park  
 Nantou,ShenZhen,GuangDong,China  
 Tel:+86-755-26639495-7  
 Fax:+86-755-26632877  
 Postcode:518057

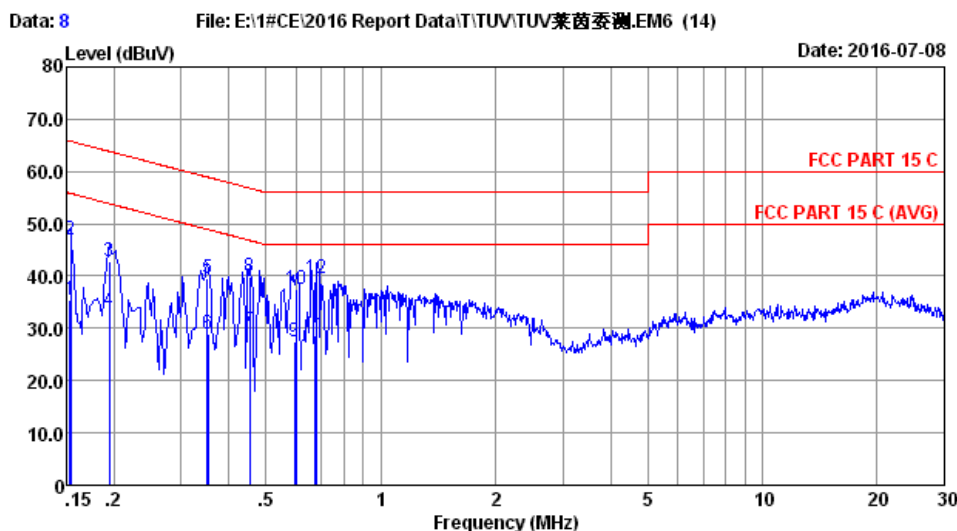

Site no :1# Conduction Data No :8  
 Dis./Lisn :2015 ESH2-Z5 LINE LISN phase:  
 Limit :FCC PART 15 C  
 Env./Ins. :24.2°C/53% Engineer :Evan  
 EUT :11.6" windows tablet M/N:NS-P11W7100  
 Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode :TX Mode WIFI 5G(Band4)

| No | Freq<br>(MHz) | LISN<br>Factor<br>(dB) | Cable<br>Loss<br>(dB) | Reading<br>(dBuV) | Emission<br>Level<br>(dBuV) | Limits<br>(dBuV) | Margin<br>(dB) | Remark  |
|----|---------------|------------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1  | 0.153         | 0.12                   | 0.02                  | 35.17             | 35.31                       | 55.81            | 20.50          | Average |
| 2  | 0.154         | 0.12                   | 0.02                  | 46.73             | 46.87                       | 65.78            | 18.91          | QP      |
| 3  | 0.194         | 0.12                   | 0.02                  | 42.81             | 42.95                       | 63.84            | 20.89          | QP      |
| 4  | 0.195         | 0.12                   | 0.02                  | 33.17             | 33.31                       | 53.84            | 20.53          | Average |
| 5  | 0.350         | 0.13                   | 0.02                  | 39.28             | 39.43                       | 58.96            | 19.53          | QP      |
| 6  | 0.352         | 0.17                   | 0.02                  | 28.66             | 28.85                       | 48.92            | 20.07          | Average |
| 7  | 0.453         | 0.43                   | 0.03                  | 29.16             | 29.62                       | 46.82            | 17.20          | Average |
| 8  | 0.454         | 0.43                   | 0.03                  | 39.40             | 39.86                       | 56.80            | 16.94          | QP      |
| 9  | 0.593         | 0.14                   | 0.04                  | 27.16             | 27.34                       | 46.00            | 18.66          | Average |
| 10 | 0.598         | 0.14                   | 0.04                  | 37.38             | 37.56                       | 56.00            | 18.44          | QP      |
| 11 | 0.672         | 0.15                   | 0.04                  | 28.47             | 28.66                       | 46.00            | 17.34          | Average |
| 12 | 0.675         | 0.15                   | 0.04                  | 39.45             | 39.64                       | 56.00            | 16.36          | QP      |


Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector.  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

## 6. Photographs of the Test Set-Up

**Photograph 1: Set-up for Conducted Emissions**




**Photograph 2: Set-up for Spurious Emissions for 30 - 1000MHz**

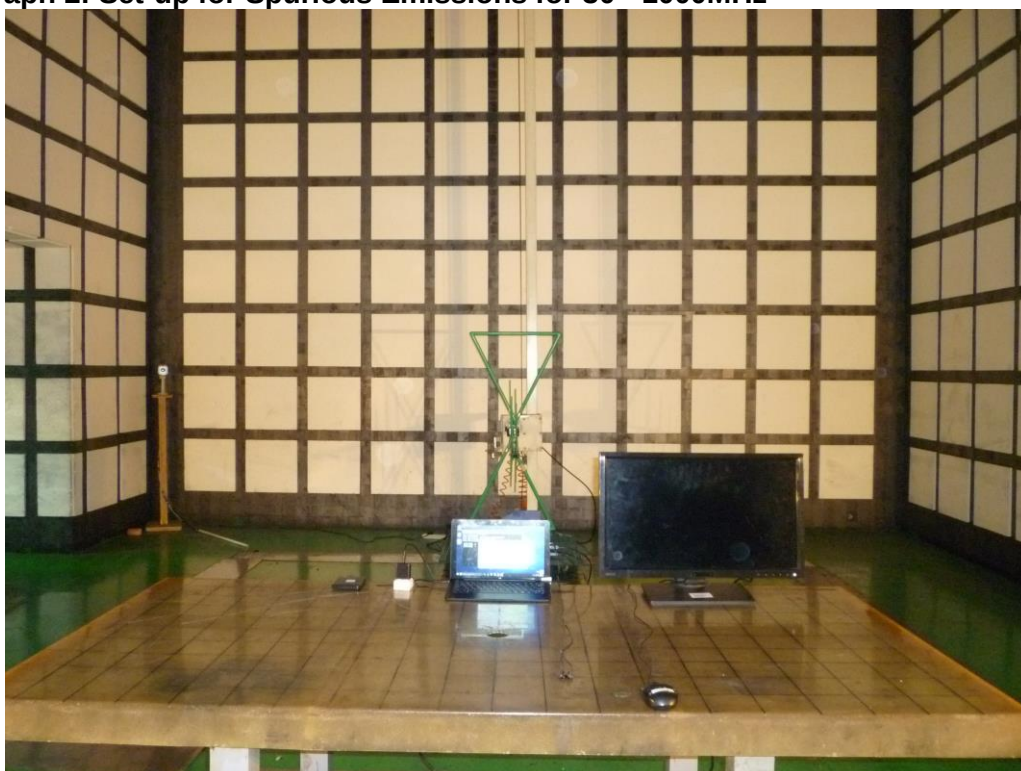

**Photograph 3: Set-up for Spurious Emissions for 1 - 18GHz**



**Photograph 4: Set-up for Dynamic Frequency Selection**

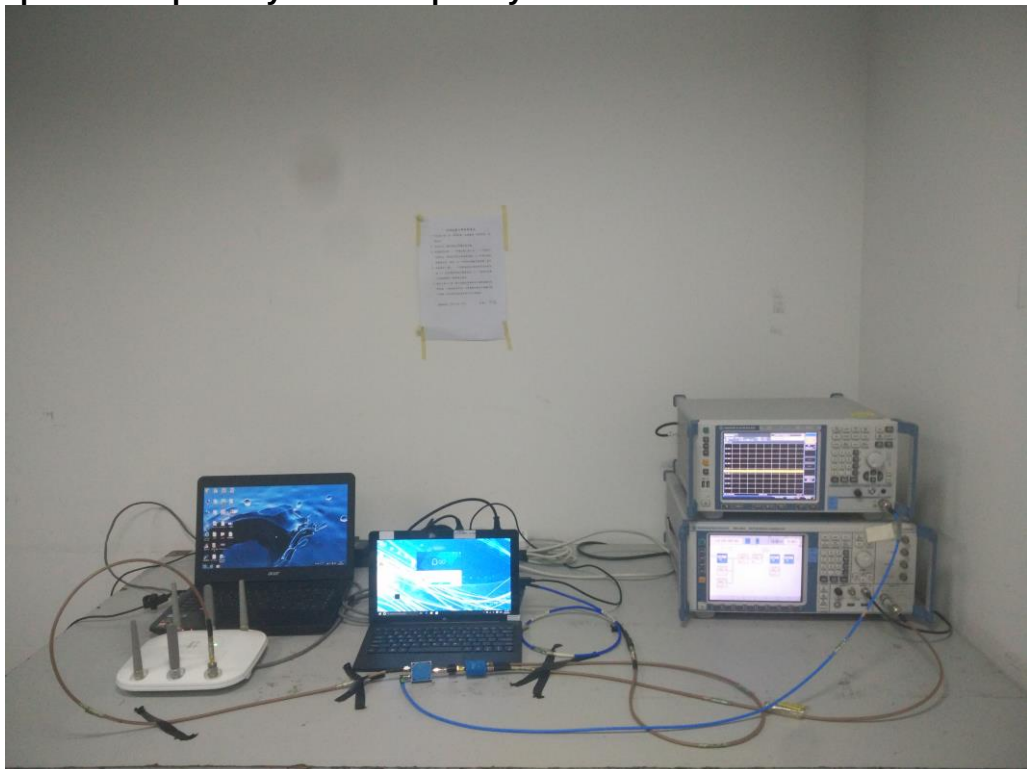

## 7. List of Tables

|                                                                                       |     |
|---------------------------------------------------------------------------------------|-----|
| Table 1: List of Test and Measurement Equipment.....                                  | 5   |
| Table 2: Measurement Uncertainty .....                                                | 7   |
| Table 3: Technical Specification of EUT .....                                         | 9   |
| Table 4: Technical Specification of 5GHz, 802.11a/n.....                              | 9   |
| Table 5: Technical Specification of 5GHz, 802.11ac.....                               | 10  |
| Table 6: List of WLAN Channel of 5GHz 802.11a/n .....                                 | 10  |
| Table 7: List of WLAN Channel of 5GHz 802.11ac .....                                  | 11  |
| Table 8: Test result of Peak Output Power of Band U-NII-1 .....                       | 17  |
| Table 9: Test result of Peak Output Power of Band U-NII-2A.....                       | 18  |
| Table 10: Test result of Peak Output Power of Band U-NII-2C.....                      | 18  |
| Table 11: Test result of Peak Output Power of Band U-NII-3 .....                      | 19  |
| Table 12: Test result of 26dB Bandwidth Band U-NII-1.....                             | 20  |
| Table 13: Test result of 26dB Bandwidth of Band U-NII-2A.....                         | 20  |
| Table 14: Test result of 26dB Bandwidth of Band U-NII-2C .....                        | 21  |
| Table 15: Test result of 26dB Bandwidth of Band U-NII-3.....                          | 21  |
| Table 16: Test result of 99% Bandwidth Band U-NII-1 .....                             | 22  |
| Table 17: Test result of 99% Bandwidth of Band U-NII-2A.....                          | 22  |
| Table 18: Test result of 99% Bandwidth of Band U-NII-2C.....                          | 23  |
| Table 19: Test result of 99% Bandwidth of Band U-NII-3 .....                          | 23  |
| Table 20: Test result of 6dB Bandwidth Band U-NII-1.....                              | 24  |
| Table 21: Test result of 6dB Bandwidth of Band U-NII-2A.....                          | 24  |
| Table 22: Test result of 6dB Bandwidth of Band U-NII-2C .....                         | 25  |
| Table 23: Test result of 6dB Bandwidth of Band U-NII-3.....                           | 25  |
| Table 24: Test result of power spectral density of Band U-NII-1.....                  | 26  |
| Table 25: Test result of power spectral density of Band U-NII-2A .....                | 27  |
| Table 26: Test result of power spectral density of Band U-NII-2C .....                | 27  |
| Table 27: Test result of power spectral density of Band U-NII-3.....                  | 28  |
| Table 28: Test result of Dynamic Frequency Selection of 802.11ac VHT20, 5260MHz ..... | 455 |
| Table 29: Test result of Dynamic Frequency Selection of 802.11ac VHT20, 5500MHz ..... | 457 |
| Table 30: Test result of Dynamic Frequency Selection of 802.11ac VHT40, 5270MHz ..... | 459 |
| Table 31: Test result of Dynamic Frequency Selection of 802.11ac VHT40, 5510MHz ..... | 461 |
| Table 32: Test result of Dynamic Frequency Selection of 802.11ac VHT80, 5290MHz ..... | 463 |
| Table 33: Test result of Dynamic Frequency Selection of 802.11ac VHT80, 5530MHz ..... | 465 |

**Prüfbericht - Nr.: 50050527 010**

Test Report No.

**Seite 479 von 479**

Page 479 of 479

## 8. List of Photographs

|                                                                    |     |
|--------------------------------------------------------------------|-----|
| Photograph 1: Set-up for Conducted Emissions .....                 | 476 |
| Photograph 2: Set-up for Spurious Emissions for 30 - 1000MHz ..... | 476 |
| Photograph 3: Set-up for Spurious Emissions for 1 - 18GHz .....    | 477 |
| Photograph 4: Set-up for Dynamic Frequency Selection.....          | 477 |