

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:20MHz; Channel:High

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2905.33	43.42	27.76	4.85	37.13	38.90	54.00	-15.10	HORIZONTAL
2	2905.33	48.54	27.76	4.85	37.13	44.02	74.00	-29.98	HORIZONTAL
3	3768.51	38.84	28.87	7.71	36.92	38.50	54.00	-15.50	HORIZONTAL
4	3768.51	44.61	28.87	7.71	36.92	44.27	74.00	-29.73	HORIZONTAL
5	4924.72	40.80	31.01	7.49	36.95	42.35	54.00	-11.65	HORIZONTAL
6	4924.72	46.88	31.01	7.49	36.95	48.43	74.00	-25.57	HORIZONTAL
7	7386.02	38.99	35.85	7.42	36.92	45.34	54.00	-8.66	HORIZONTAL
8	7386.02	43.65	35.85	7.42	36.92	50.00	74.00	-24.00	HORIZONTAL
9	9848.18	38.44	37.82	8.46	37.09	47.63	54.00	-6.37	HORIZONTAL
10	9848.18	45.15	37.82	8.46	37.09	54.34	74.00	-19.66	HORIZONTAL
11	12310.75	34.40	39.03	11.10	36.97	47.56	54.00	-6.44	HORIZONTAL
12	12310.75	45.34	39.03	11.10	36.97	58.50	74.00	-15.50	HORIZONTAL

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:20MHz; Channel:High

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2905.33	40.03	27.76	4.85	37.13	35.51	54.00	-18.49	VERTICAL
2	2905.33	46.71	27.76	4.85	37.13	42.19	74.00	-31.81	VERTICAL
3	3347.37	41.27	27.90	5.57	36.98	37.76	54.00	-16.24	VERTICAL
4	3347.37	48.23	27.90	5.57	36.98	44.72	74.00	-29.28	VERTICAL
5	4924.49	38.36	31.01	7.49	36.95	39.91	54.00	-14.09	VERTICAL
6	4924.49	46.52	31.01	7.49	36.95	48.07	74.00	-25.93	VERTICAL
7	7386.98	36.35	35.85	7.42	36.92	42.70	54.00	-11.30	VERTICAL
8	7386.98	43.71	35.85	7.42	36.92	50.06	74.00	-23.94	VERTICAL
9	9848.40	37.53	37.82	8.46	37.09	46.72	54.00	-7.28	VERTICAL
10	9848.40	44.36	37.82	8.46	37.09	53.55	74.00	-20.45	VERTICAL
11	12310.53	35.18	39.03	11.10	36.97	48.34	54.00	-5.66	VERTICAL
12	12310.53	42.62	39.03	11.10	36.97	55.78	74.00	-18.22	VERTICAL

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	51.30	43.49	12.93	0.60	24.90	32.12	40.00	-7.88	HORIZONTAL
2	68.87	35.47	10.90	0.71	25.50	21.58	40.00	-18.42	HORIZONTAL
3	101.64	50.65	9.71	0.85	27.19	34.02	43.50	-9.48	HORIZONTAL
4	155.91	38.29	13.36	1.24	28.11	24.78	43.50	-18.72	HORIZONTAL
5	197.89	51.89	11.30	1.20	28.35	36.04	43.50	-7.46	HORIZONTAL
6	250.30	46.57	12.57	1.61	29.14	31.61	46.00	-14.39	HORIZONTAL

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2905.33	42.72	27.76	4.85	37.13	38.20	54.00	-15.80	HORIZONTAL
2	2905.33	50.10	27.76	4.85	37.13	45.58	74.00	-28.42	HORIZONTAL
3	3703.72	38.02	28.52	7.24	36.93	36.85	54.00	-17.15	HORIZONTAL
4	3703.72	44.78	28.52	7.24	36.93	43.61	74.00	-30.39	HORIZONTAL
5	4844.77	38.81	30.88	6.31	36.94	39.06	54.00	-14.94	HORIZONTAL
6	4844.77	45.35	30.88	6.31	36.94	45.60	74.00	-28.40	HORIZONTAL
7	7266.88	36.88	35.60	7.36	36.92	42.92	54.00	-11.08	HORIZONTAL
8	7266.88	43.41	35.60	7.36	36.92	49.45	74.00	-24.55	HORIZONTAL
9	9688.69	36.45	37.61	8.25	37.08	45.23	54.00	-8.77	HORIZONTAL
10	9688.69	44.71	37.61	8.25	37.08	53.49	74.00	-20.51	HORIZONTAL
11	12110.75	35.66	39.37	10.82	37.12	48.73	54.00	-5.27	HORIZONTAL
12	12110.75	44.60	39.37	10.82	37.12	57.67	74.00	-16.33	HORIZONTAL



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002

Page: 53 of 101

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	55.61	43.59	12.49	0.59	25.10	31.57	40.00	-8.43	VERTICAL
2	66.50	43.74	11.18	0.68	25.44	30.16	40.00	-9.84	VERTICAL
3	98.83	52.86	9.46	0.85	27.10	36.07	43.50	-7.43	VERTICAL
4	183.20	47.14	12.52	1.32	28.11	32.87	43.50	-10.63	VERTICAL
5	218.31	49.87	11.49	1.02	28.70	33.68	46.00	-12.32	VERTICAL
6	355.43	41.15	15.59	1.99	29.52	29.21	46.00	-16.79	VERTICAL

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:Low

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2939.12	43.20	27.82	4.77	37.10	38.69	54.00	-15.31	VERTICAL
2	2939.12	47.32	27.82	4.77	37.10	42.81	74.00	-31.19	VERTICAL
3	3289.82	40.26	27.90	5.72	36.99	36.89	54.00	-17.11	VERTICAL
4	3289.82	46.26	27.90	5.72	36.99	42.89	74.00	-31.11	VERTICAL
5	4844.24	40.39	30.88	6.31	36.94	40.64	54.00	-13.36	VERTICAL
6	4844.24	44.53	30.88	6.31	36.94	44.78	74.00	-29.22	VERTICAL
7	7266.21	37.94	35.60	7.36	36.92	43.98	54.00	-10.02	VERTICAL
8	7266.21	42.18	35.60	7.36	36.92	48.22	74.00	-25.78	VERTICAL
9	9688.91	37.32	37.61	8.25	37.08	46.10	54.00	-7.90	VERTICAL
10	9688.91	43.48	37.61	8.25	37.08	52.26	74.00	-21.74	VERTICAL
11	12110.74	34.32	39.37	10.82	37.12	47.39	54.00	-6.61	VERTICAL
12	12110.74	44.46	39.37	10.82	37.12	57.53	74.00	-16.47	VERTICAL



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002

Page: 54 of 101

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:middle

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	3159.36	40.23	27.90	5.76	37.02	36.87	54.00	-17.13	HORIZONTAL
2	3159.36	46.20	27.90	5.76	37.02	42.84	74.00	-31.16	HORIZONTAL
3	3969.77	40.14	29.44	7.32	36.90	40.00	54.00	-14.00	HORIZONTAL
4	3969.77	45.47	29.44	7.32	36.90	45.33	74.00	-28.67	HORIZONTAL
5	4884.55	42.20	30.95	6.86	36.95	43.06	54.00	-10.94	HORIZONTAL
6	4884.55	48.29	30.95	6.86	36.95	49.15	74.00	-24.85	HORIZONTAL
7	7326.02	38.88	35.74	7.39	36.92	45.09	54.00	-8.91	HORIZONTAL
8	7326.02	43.87	35.74	7.39	36.92	50.08	74.00	-23.92	HORIZONTAL
9	9768.76	38.95	37.74	8.37	37.09	47.97	54.00	-6.03	HORIZONTAL
10	9768.76	46.63	37.74	8.37	37.09	55.65	74.00	-18.35	HORIZONTAL
11	12210.96	34.30	39.21	10.98	37.06	47.43	54.00	-6.57	HORIZONTAL
12	12210.96	42.73	39.21	10.98	37.06	55.86	74.00	-18.14	HORIZONTAL

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:middle

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2905.33	40.78	27.76	4.85	37.13	36.26	54.00	-17.74	VERTICAL
2	2905.33	46.72	27.76	4.85	37.13	42.20	74.00	-31.80	VERTICAL
3	3901.52	38.61	29.30	7.56	36.91	38.56	54.00	-15.44	VERTICAL
4	3901.52	45.86	29.30	7.56	36.91	45.81	74.00	-28.19	VERTICAL
5	4884.05	40.77	30.95	6.86	36.95	41.63	54.00	-12.37	VERTICAL
6	4884.05	46.77	30.95	6.86	36.95	47.63	74.00	-26.37	VERTICAL
7	7326.03	37.98	35.74	7.39	36.92	44.19	54.00	-9.81	VERTICAL
8	7326.03	43.20	35.74	7.39	36.92	49.41	74.00	-24.59	VERTICAL
9	9768.92	38.11	37.74	8.37	37.09	47.13	54.00	-6.87	VERTICAL
10	9768.92	45.25	37.74	8.37	37.09	54.27	74.00	-19.73	VERTICAL
11	12210.15	35.57	39.21	10.98	37.06	48.70	54.00	-5.30	VERTICAL
12	12210.15	42.15	39.21	10.98	37.06	55.28	74.00	-18.72	VERTICAL

Mode:a; Polarization:Horizontal; Modulation:n; bandwidth:40MHz; Channel:High

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2905.33	42.33	27.76	4.85	37.13	37.81	54.00	-16.19	HORIZONTAL
2	2905.33	49.07	27.76	4.85	37.13	44.55	74.00	-29.45	HORIZONTAL
3	3768.51	38.12	28.87	7.71	36.92	37.78	54.00	-16.22	HORIZONTAL
4	3768.51	44.36	28.87	7.71	36.92	44.02	74.00	-29.98	HORIZONTAL
5	4904.31	38.30	30.97	7.07	36.95	39.39	54.00	-14.61	HORIZONTAL
6	4904.31	46.22	30.97	7.07	36.95	47.31	74.00	-26.69	HORIZONTAL
7	7356.17	37.33	35.78	7.40	36.92	43.59	54.00	-10.41	HORIZONTAL
8	7356.17	43.13	35.78	7.40	36.92	49.39	74.00	-24.61	HORIZONTAL
9	9806.15	37.89	37.79	8.41	37.09	47.00	54.00	-7.00	HORIZONTAL
10	9806.15	44.97	37.79	8.41	37.09	54.08	74.00	-19.92	HORIZONTAL
11	12260.71	32.78	39.15	11.02	37.03	45.92	54.00	-8.08	HORIZONTAL
12	12260.71	43.74	39.15	11.02	37.03	56.88	74.00	-17.12	HORIZONTAL

Mode:a; Polarization:Vertical; Modulation:n; bandwidth:40MHz; Channel:High

	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBm	dB/m	dB	dB	dBm	dBm	dB	
1	2782.06	40.00	27.46	4.71	37.25	34.92	54.00	-19.08	VERTICAL
2	2782.06	45.96	27.46	4.71	37.25	40.88	74.00	-33.12	VERTICAL
3	3347.37	42.31	27.90	5.57	36.98	38.80	54.00	-15.20	VERTICAL
4	3347.37	48.38	27.90	5.57	36.98	44.87	74.00	-29.13	VERTICAL
5	4904.28	40.16	30.97	7.07	36.95	41.25	54.00	-12.75	VERTICAL
6	4904.28	43.73	30.97	7.07	36.95	44.82	74.00	-29.18	VERTICAL
7	7356.64	39.47	35.78	7.40	36.92	45.73	54.00	-8.27	VERTICAL
8	7356.64	44.75	35.78	7.40	36.92	51.01	74.00	-22.99	VERTICAL
9	9806.25	38.53	37.79	8.41	37.09	47.64	54.00	-6.36	VERTICAL
10	9806.25	43.38	37.79	8.41	37.09	52.49	74.00	-21.51	VERTICAL
11	12260.13	35.47	39.15	11.02	37.03	48.61	54.00	-5.39	VERTICAL
12	12260.13	44.22	39.15	11.02	37.03	57.36	74.00	-16.64	VERTICAL




8 Appendix


8.1 Appendix 15.247

1.6dB Bandwidth


Test Mode	Test Channel	Ant	OBW[MHz]	EBW[MHz]	Limit	Verdict
11B	2412	Ant1	15.141	9.359	0.5	PASS
11B	2442	Ant1	15.018	9.337	0.5	PASS
11B	2462	Ant1	14.859	9.361	0.5	PASS
11G	2412	Ant1	16.417	15.11	0.5	PASS
11G	2442	Ant1	16.397	15.11	0.5	PASS
11G	2462	Ant1	16.398	15.11	0.5	PASS
11N20SISO	2412	Ant1	17.555	16.01	0.5	PASS
11N20SISO	2442	Ant1	17.547	16.01	0.5	PASS
11N20SISO	2462	Ant1	17.556	16.03	0.5	PASS
11N40SISO	2422	Ant1	35.897	35.11	0.5	PASS
11N40SISO	2442	Ant1	35.913	35.11	0.5	PASS
11N40SISO	2452	Ant1	35.939	35.11	0.5	PASS

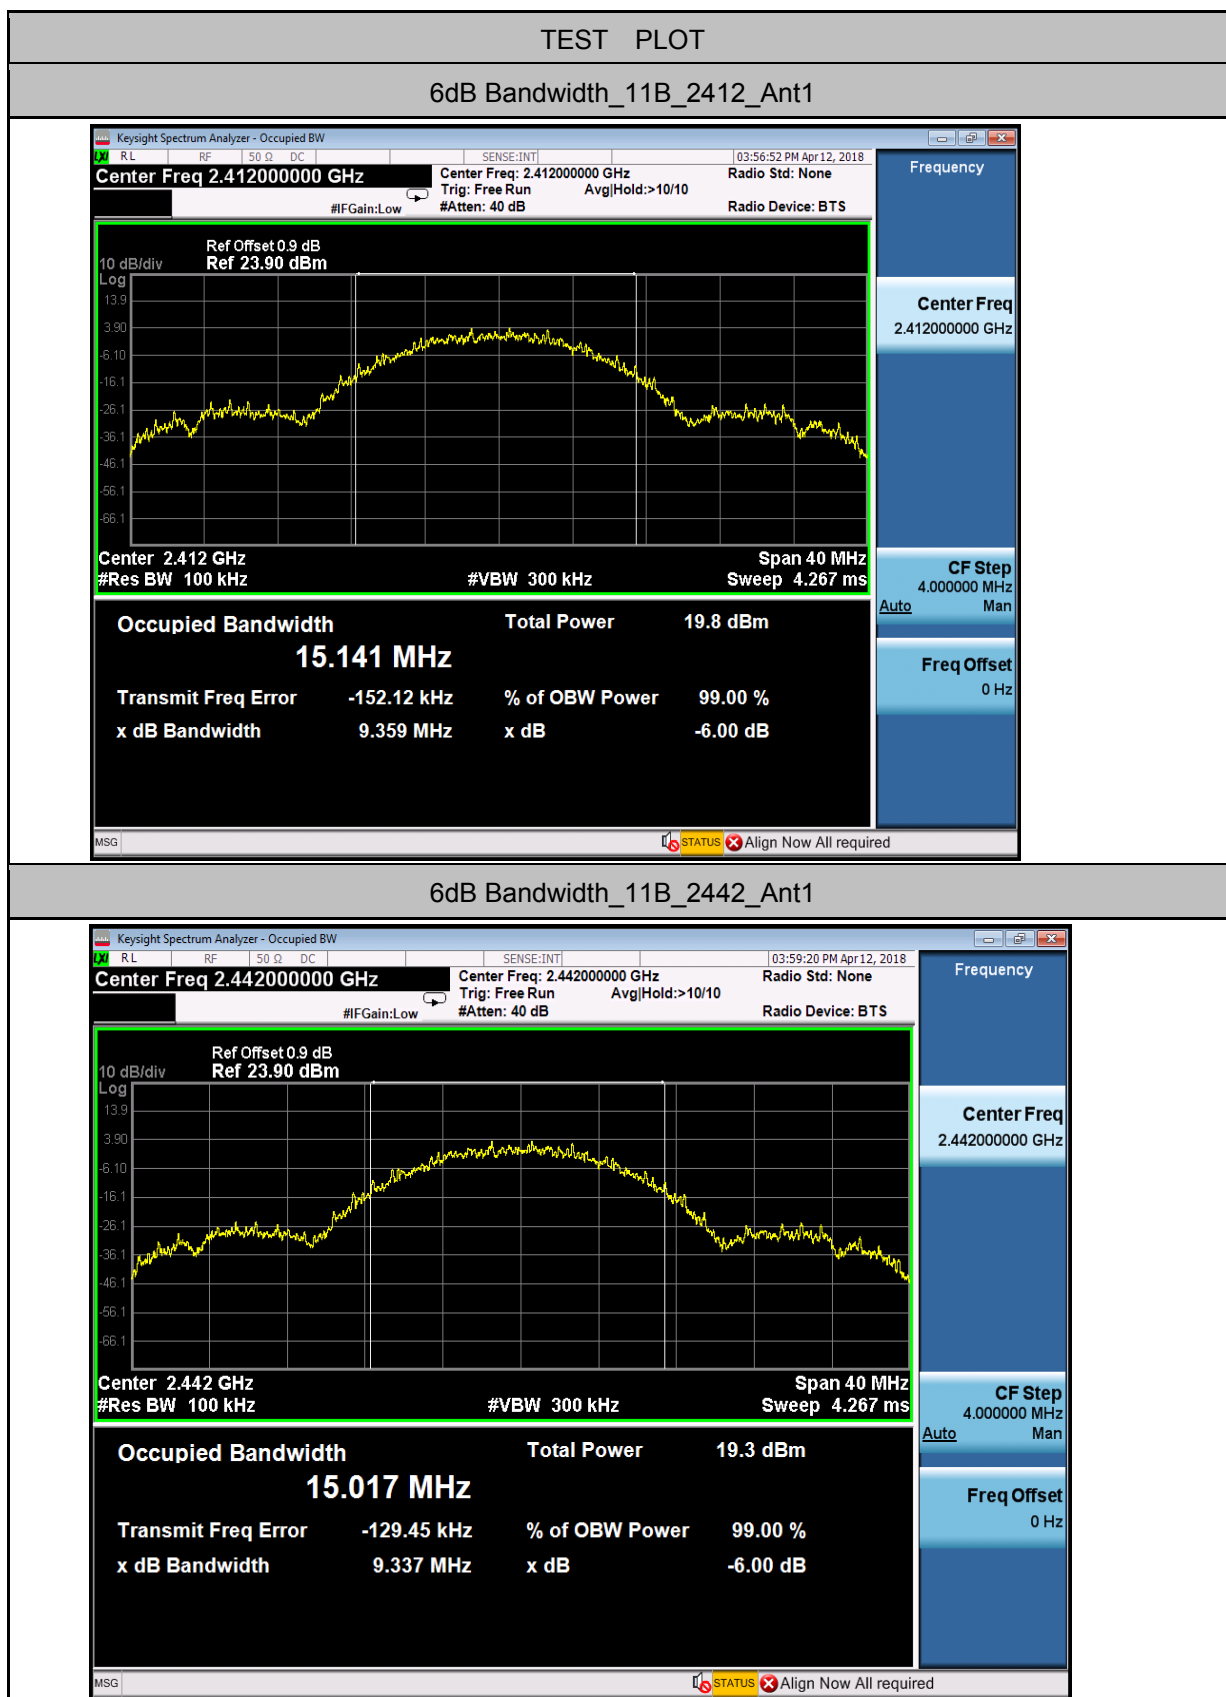


6dB Bandwidth_11B_2462_Ant1

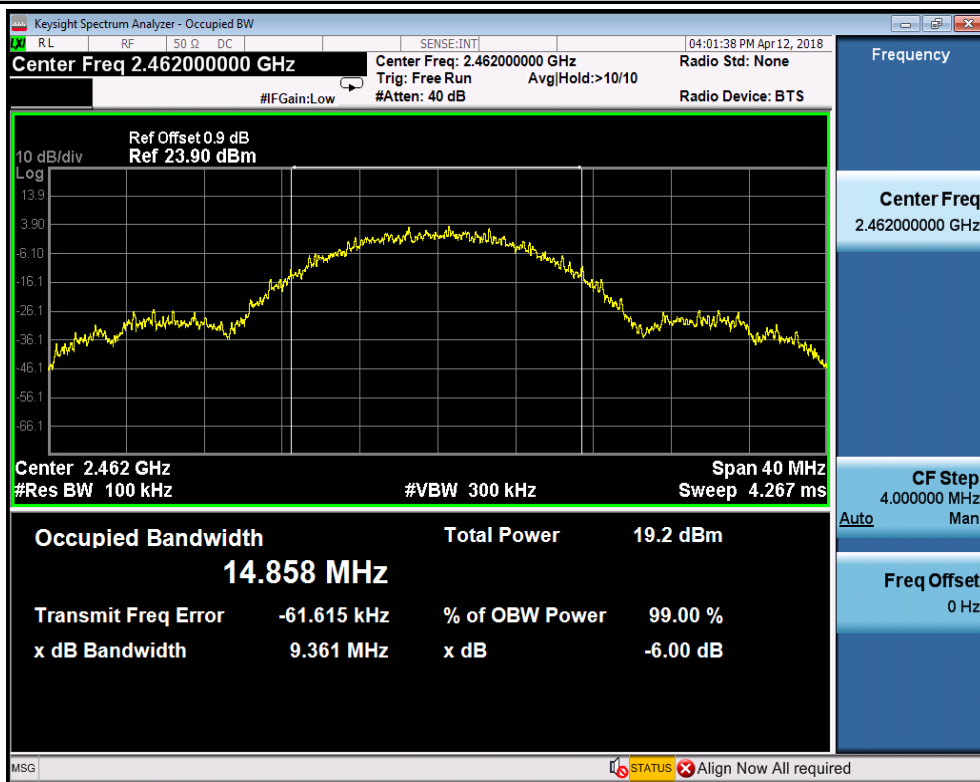


6dB Bandwidth_11G_2412_Ant1

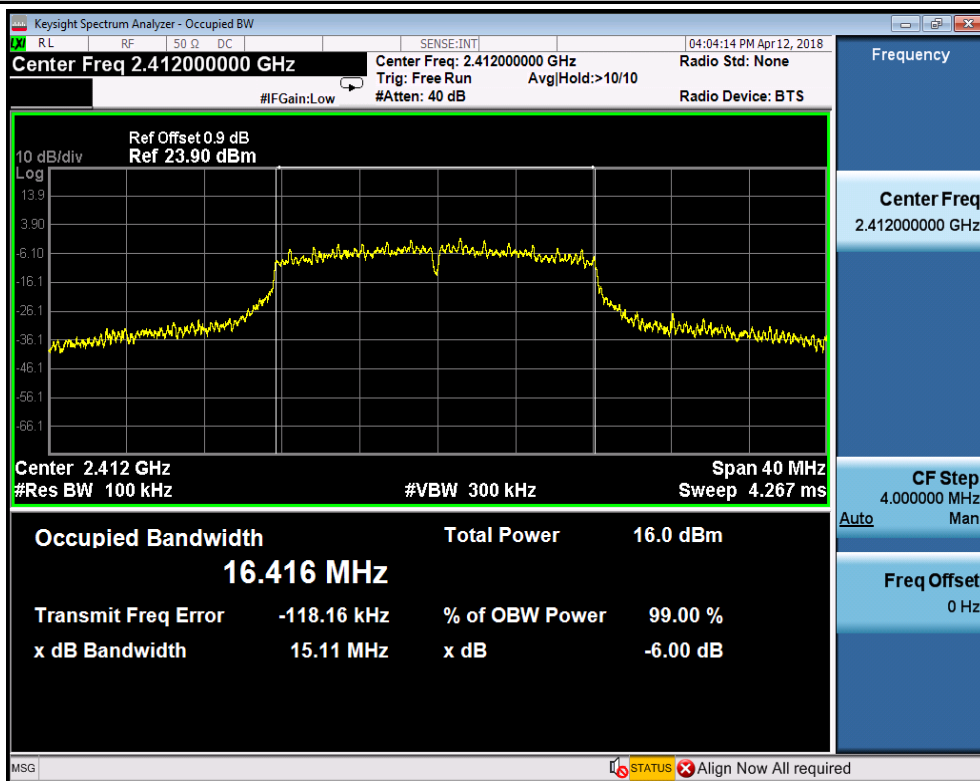


6dB Bandwidth_11G_2442_Ant1

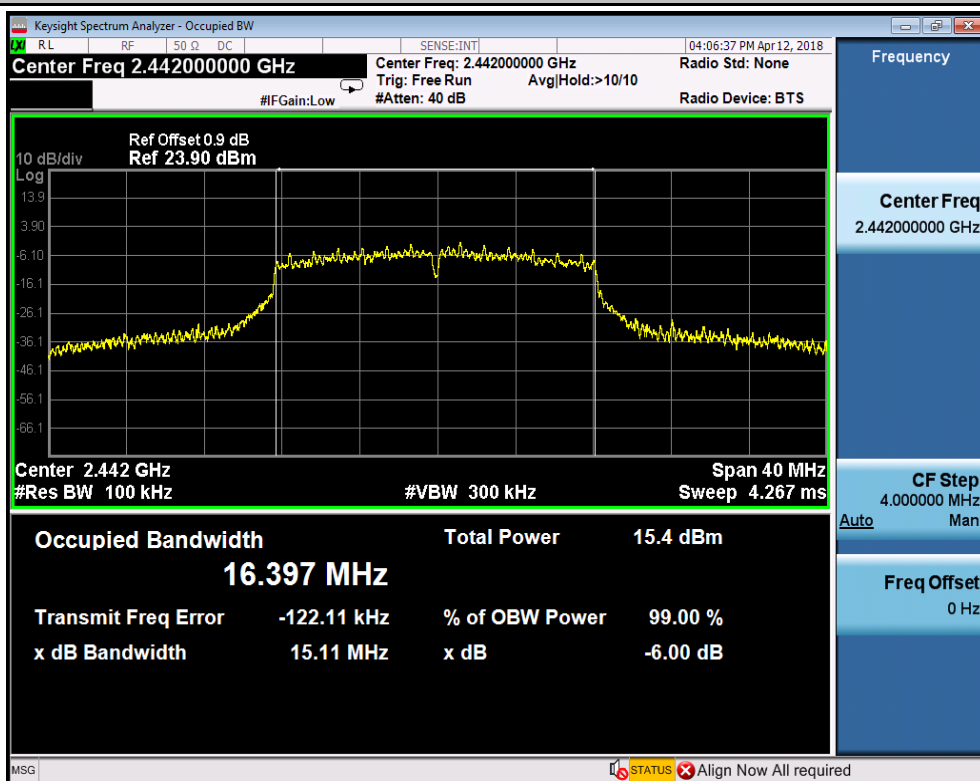


6dB Bandwidth_11G_2462_Ant1

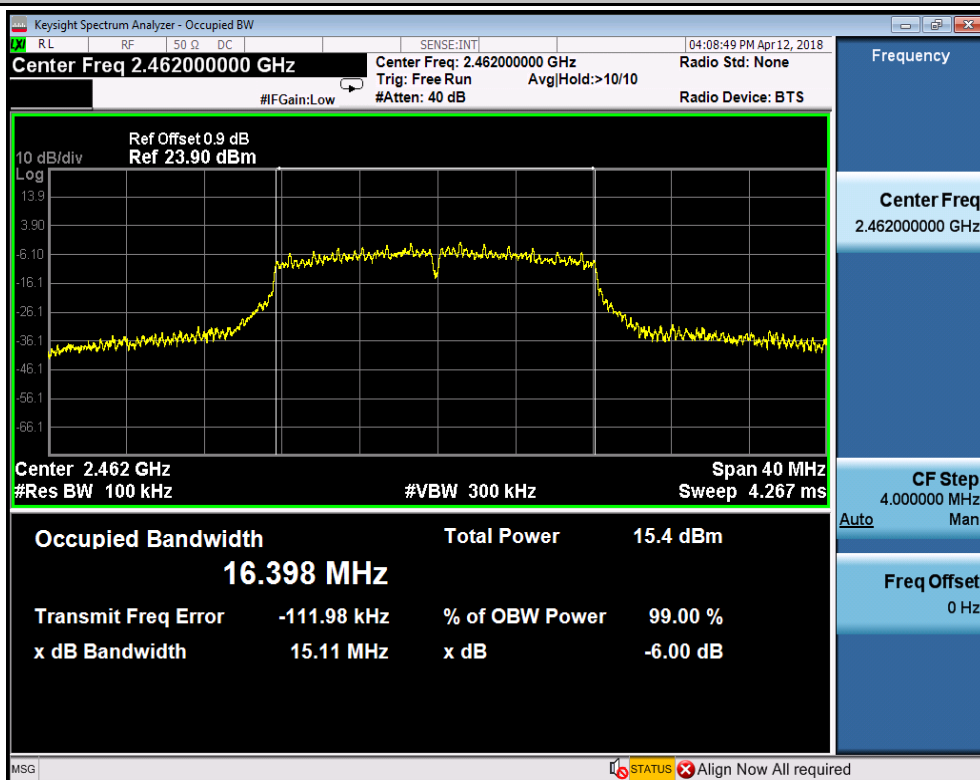

6dB Bandwidth_11N20SISO_2412_Ant1

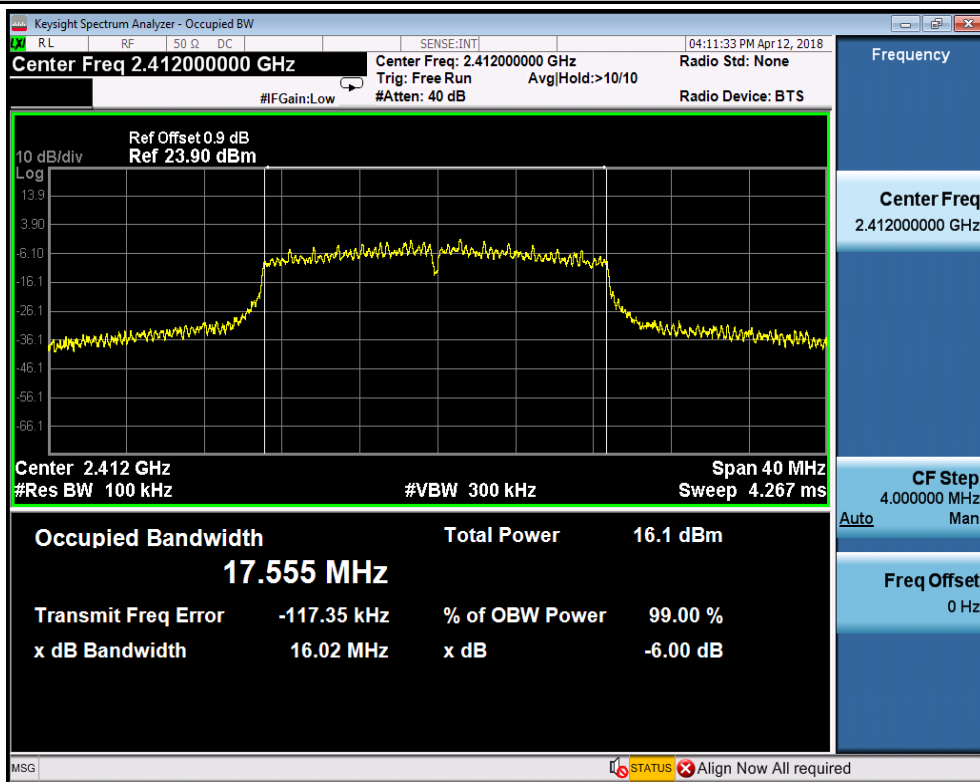

6dB Bandwidth_11N20SISO_2442_Ant1

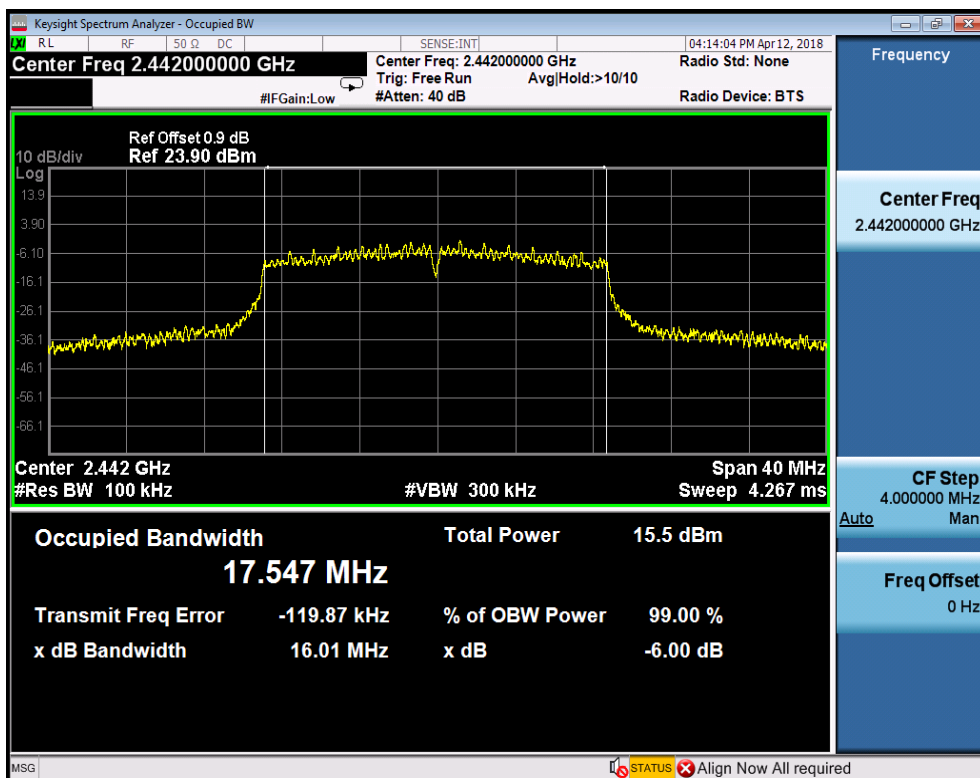





SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM180200096002
Page: 61 of 101


6dB Bandwidth_11N20SISO_2462_Ant1

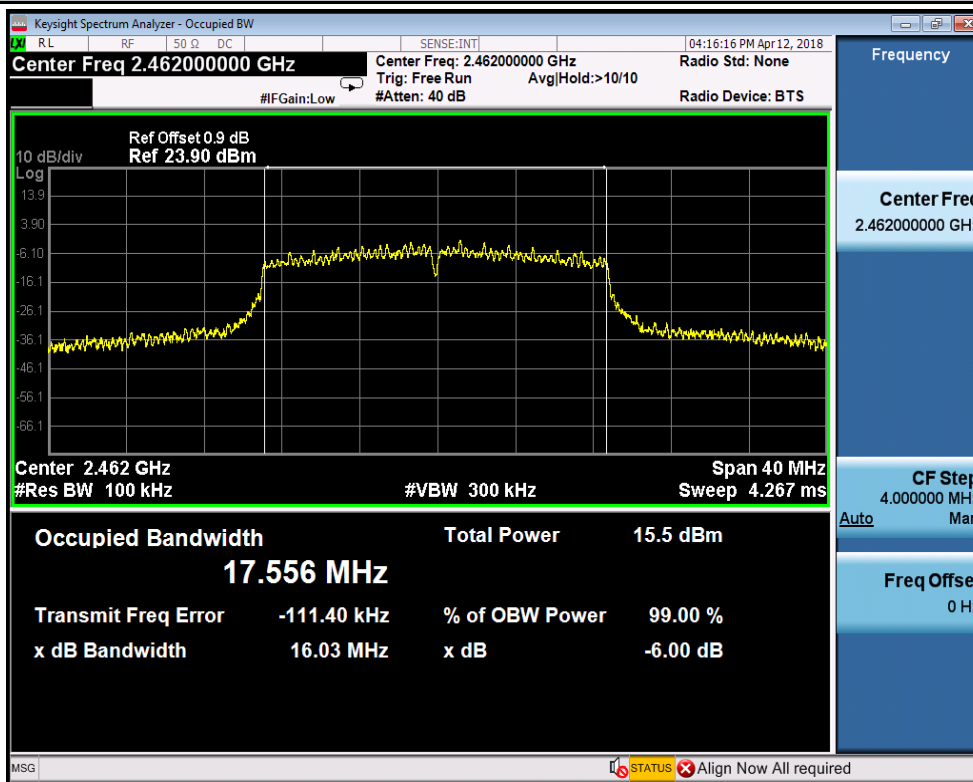


6dB Bandwidth_11N40SISO_2422_Ant1

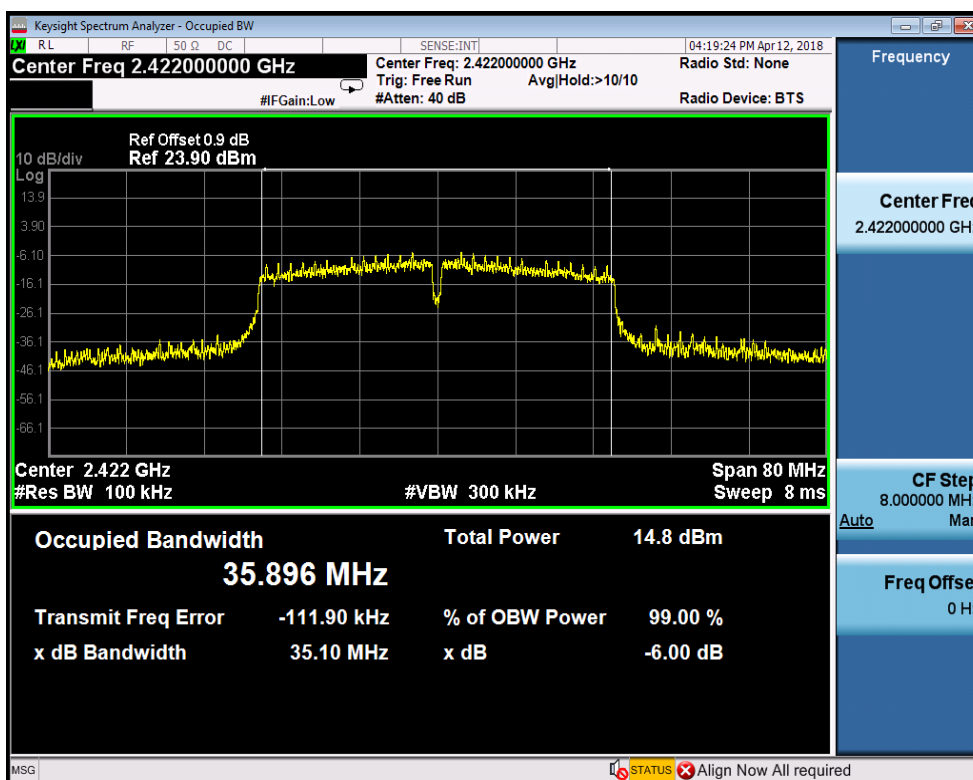

6dB Bandwidth_11N40SISO_2442_Ant1

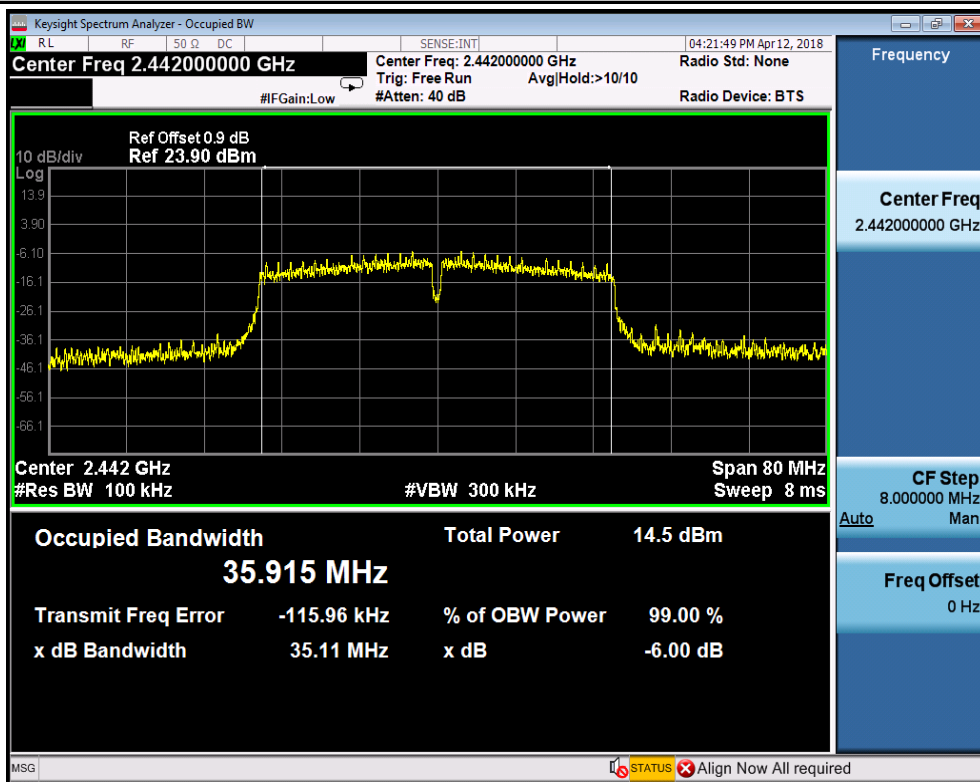

6dB Bandwidth_11N40SISO_2452_Ant1

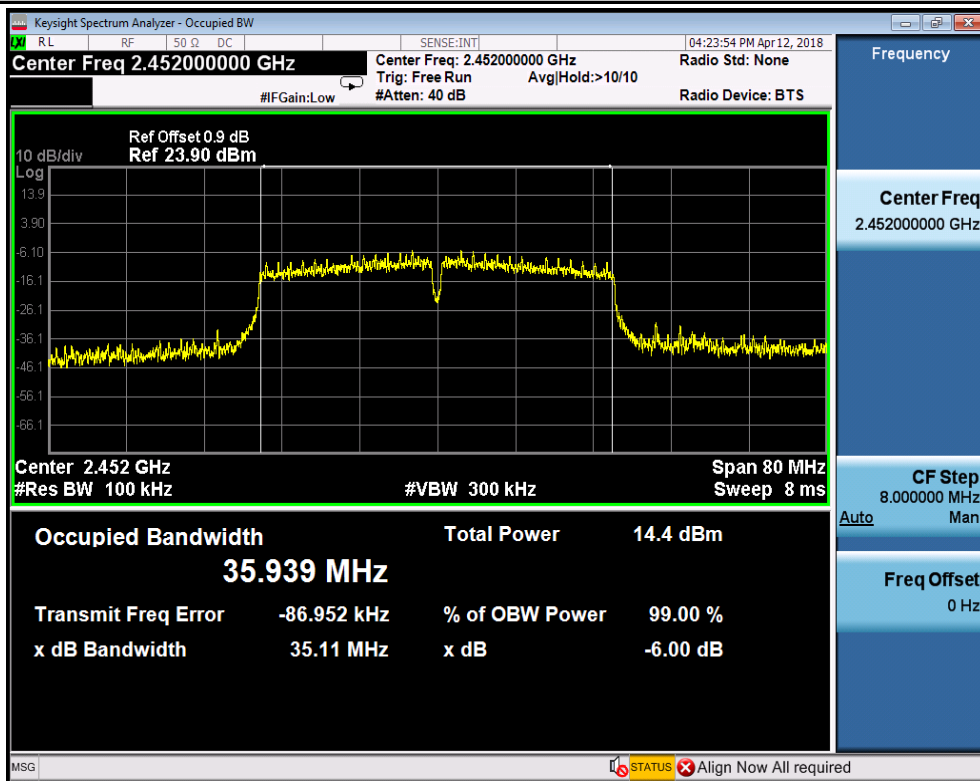



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002
Page: 63 of 101


2. Maximum conducted output power


Test Mode	Test Channel	Ant	Power[dBm]	Limit[dBm]	Verdict
11B	2412	Ant1	18.26	30	PASS
11B	2442	Ant1	17.69	30	PASS
11B	2462	Ant1	17.59	30	PASS
11G	2412	Ant1	16.58	30	PASS
11G	2442	Ant1	15.95	30	PASS
11G	2462	Ant1	15.89	30	PASS
11N20SISO	2412	Ant1	16.58	30	PASS
11N20SISO	2442	Ant1	16.07	30	PASS
11N20SISO	2462	Ant1	16.14	30	PASS
11N40SISO	2422	Ant1	15.3	30	PASS
11N40SISO	2442	Ant1	15.05	30	PASS
11N40SISO	2452	Ant1	14.98	30	PASS




SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002
Page: 64 of 101

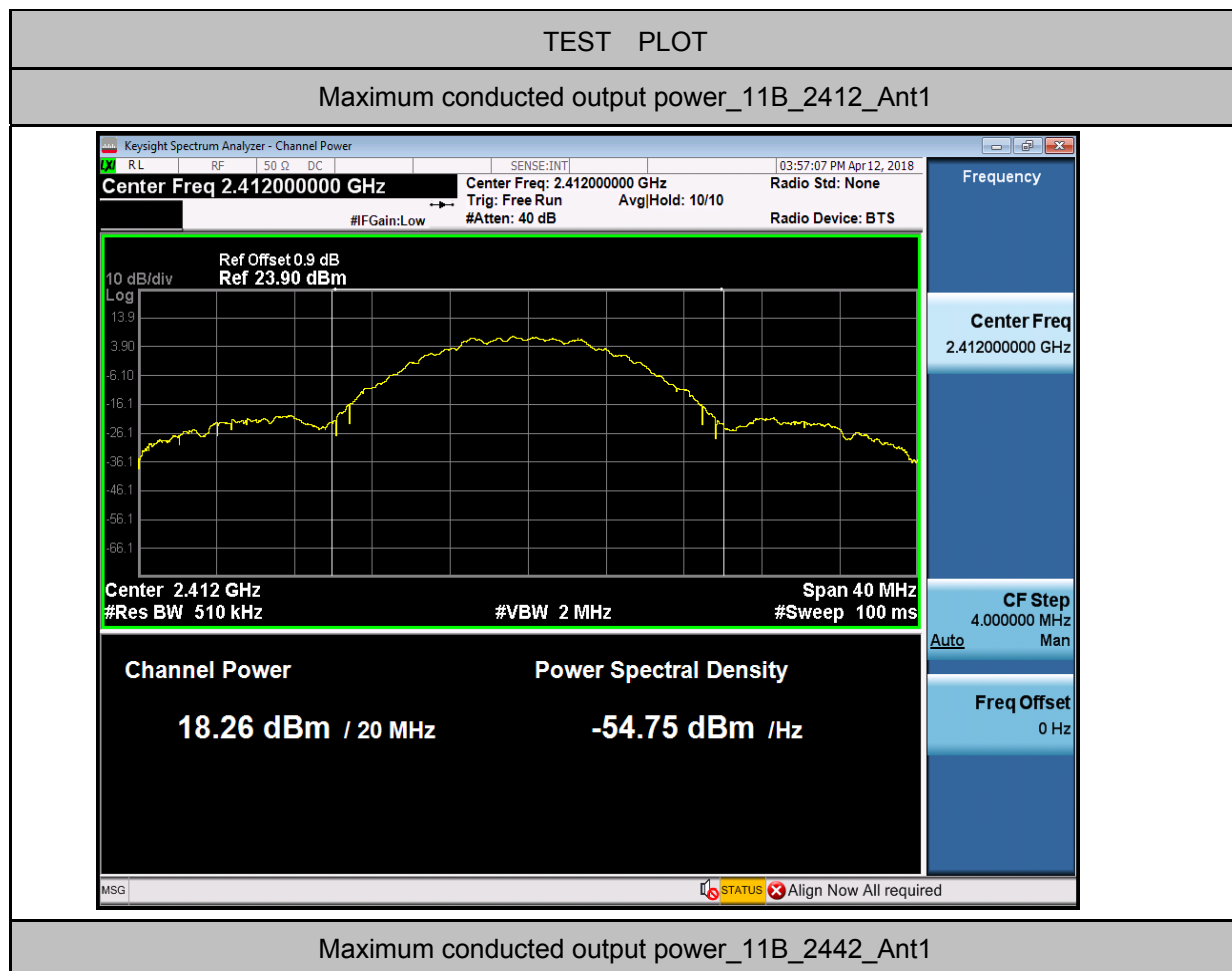


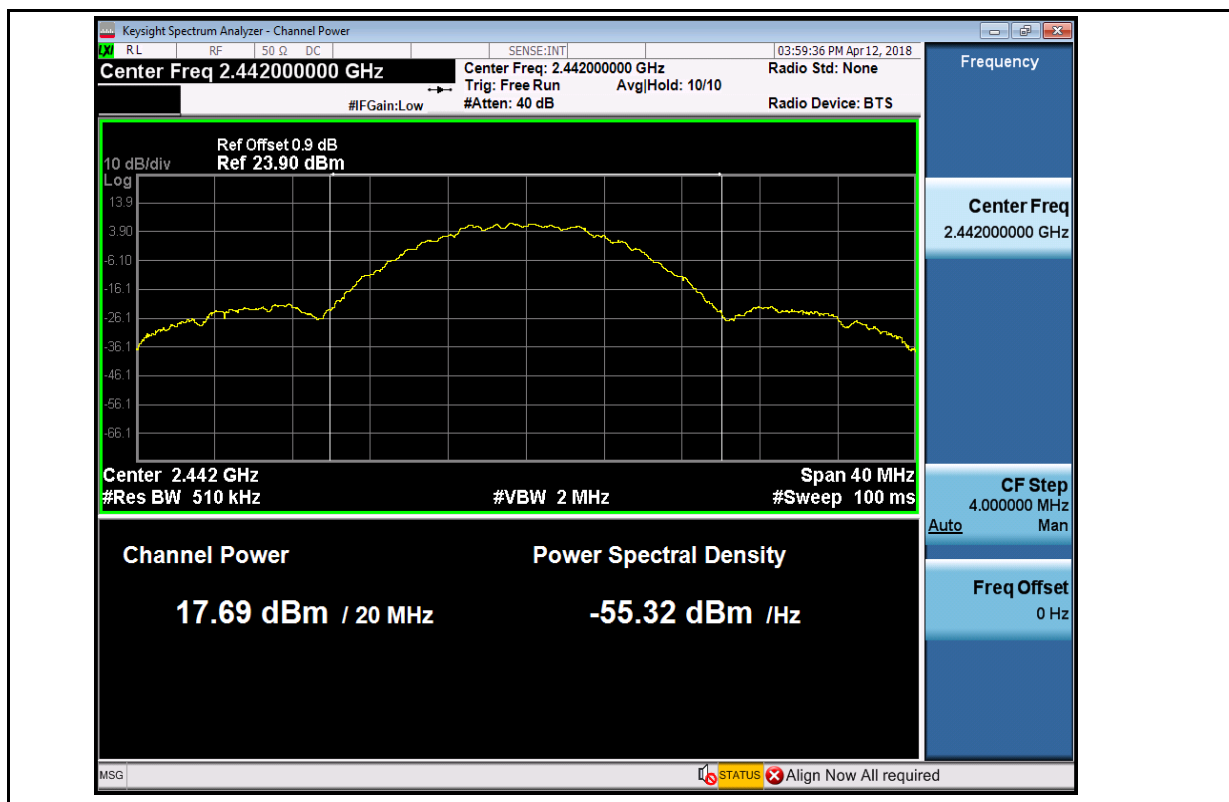


Maximum conducted output power_11B_2462_Ant1

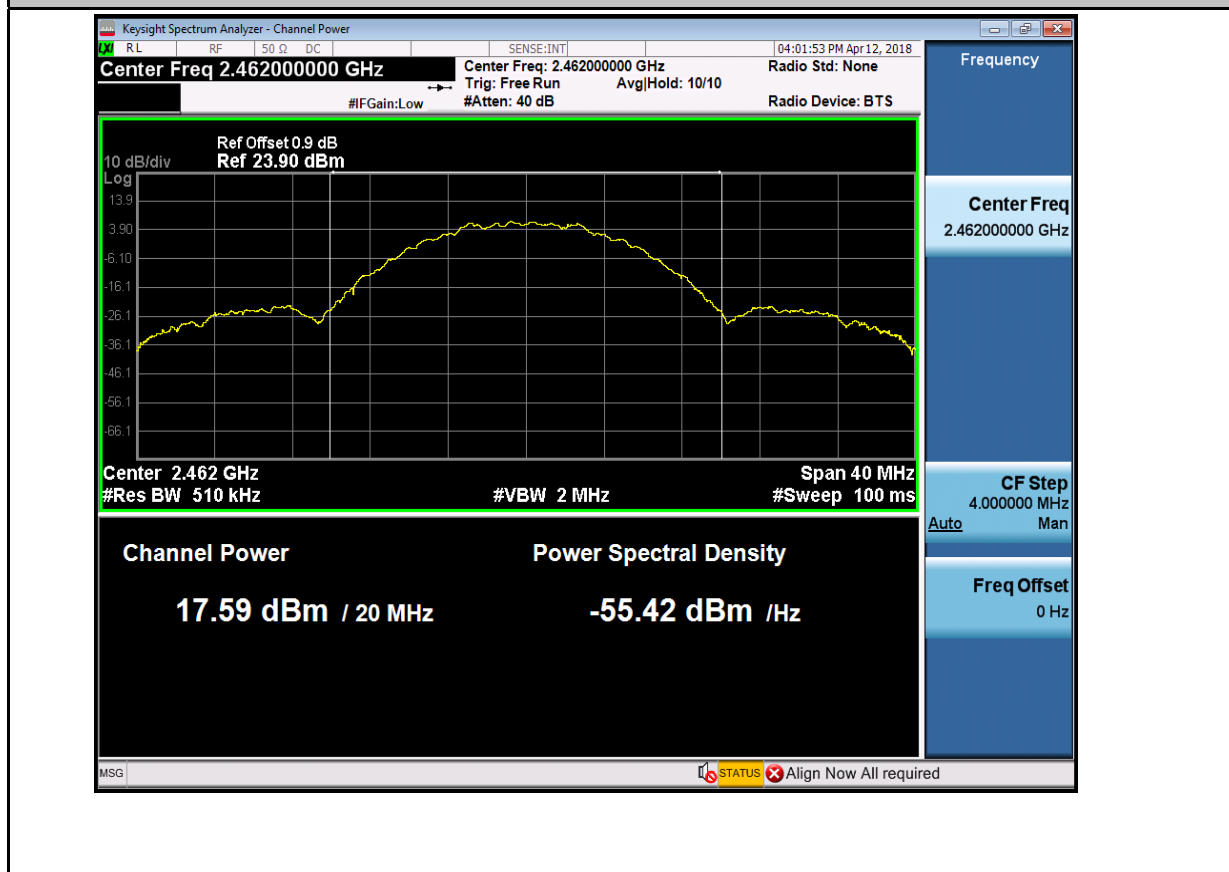

Maximum conducted output power_11G_2412_Ant1

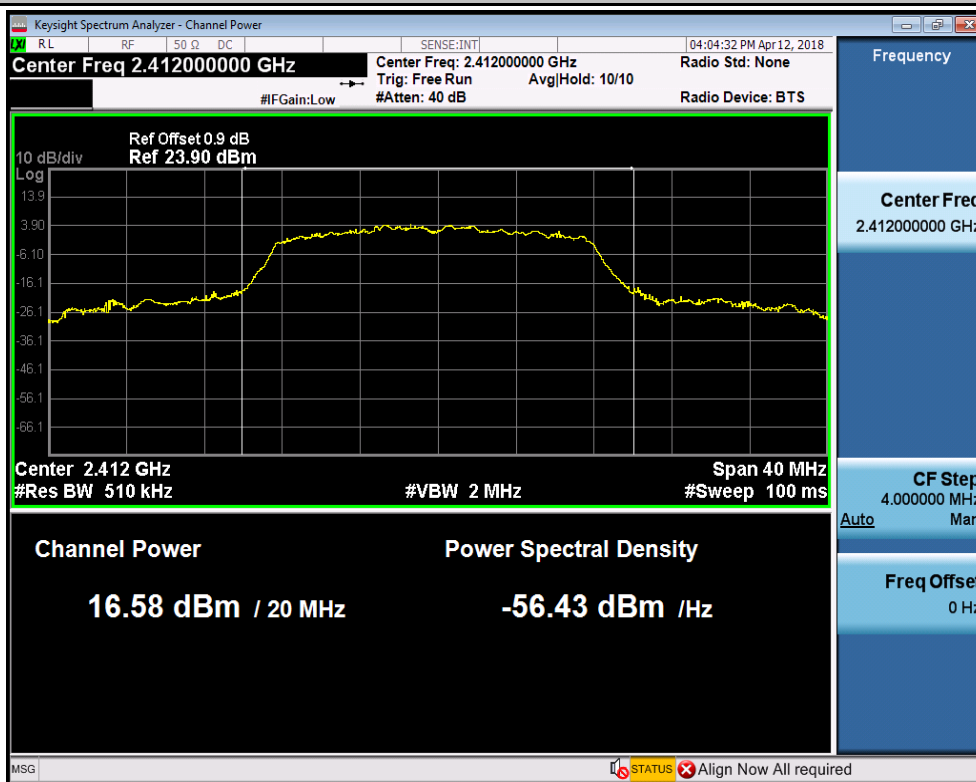

Maximum conducted output power_11G_2442_Ant1

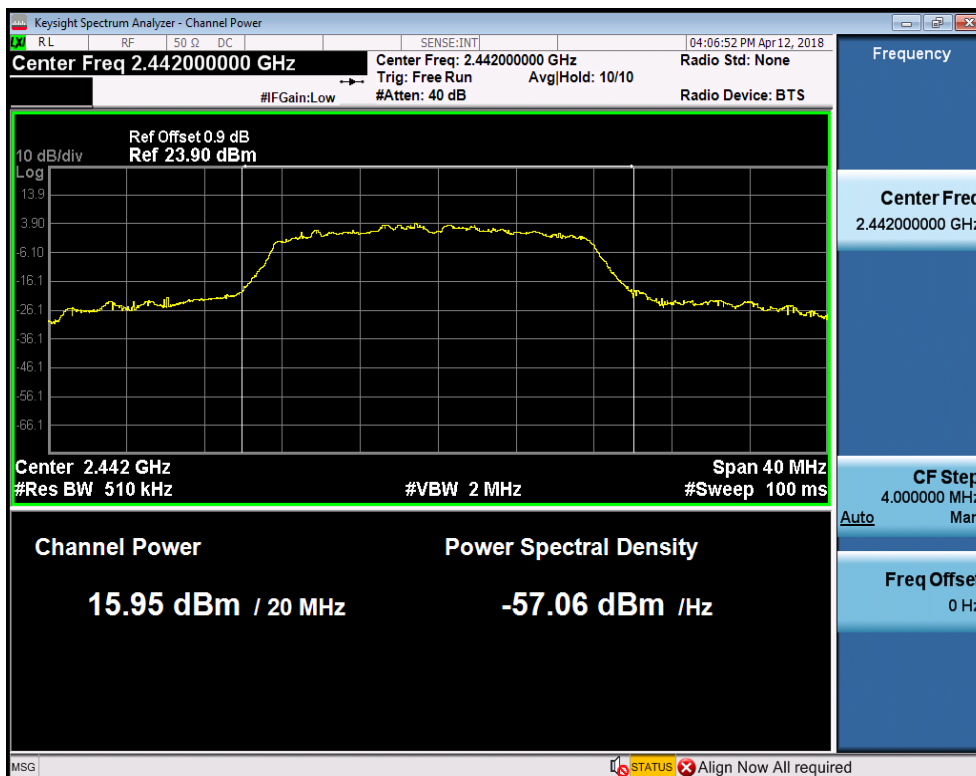





SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002
Page: 67 of 101


Maximum conducted output power_11G_2462_Ant1

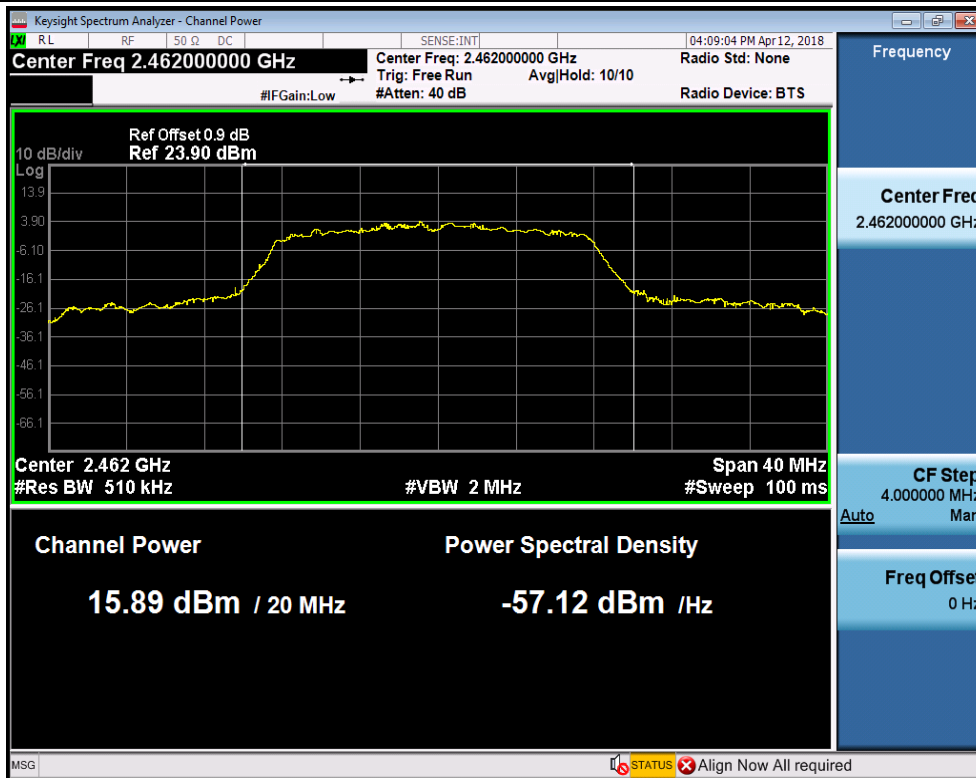


Maximum conducted output power_11N20SISO_2412_Ant1

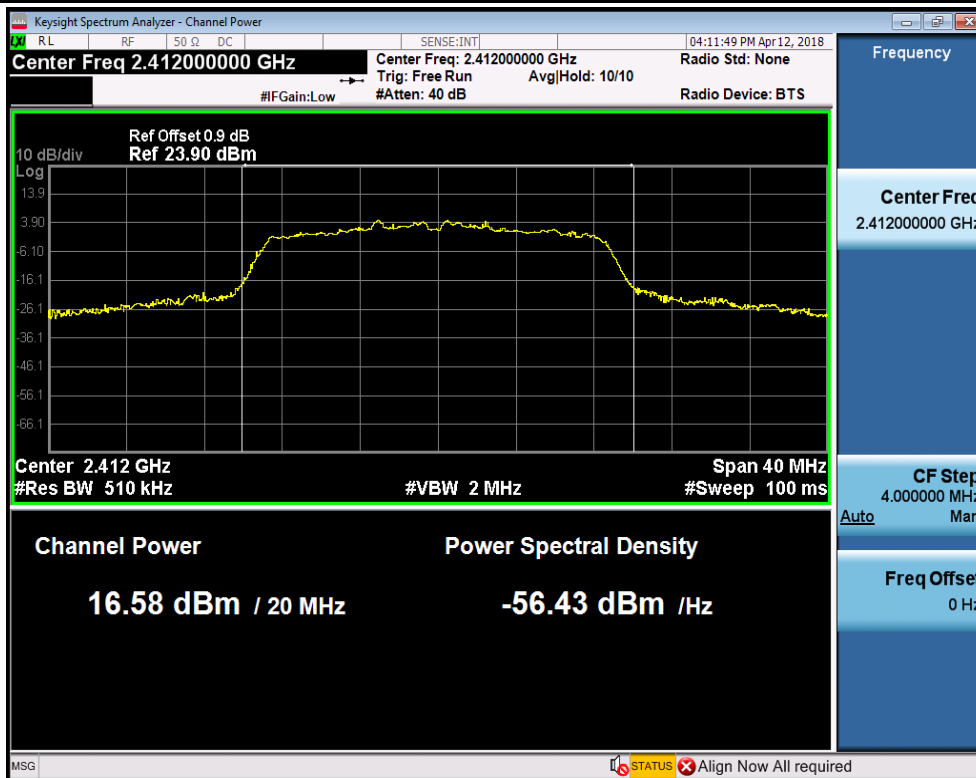

Maximum conducted output power_11N20SISO_2442_Ant1

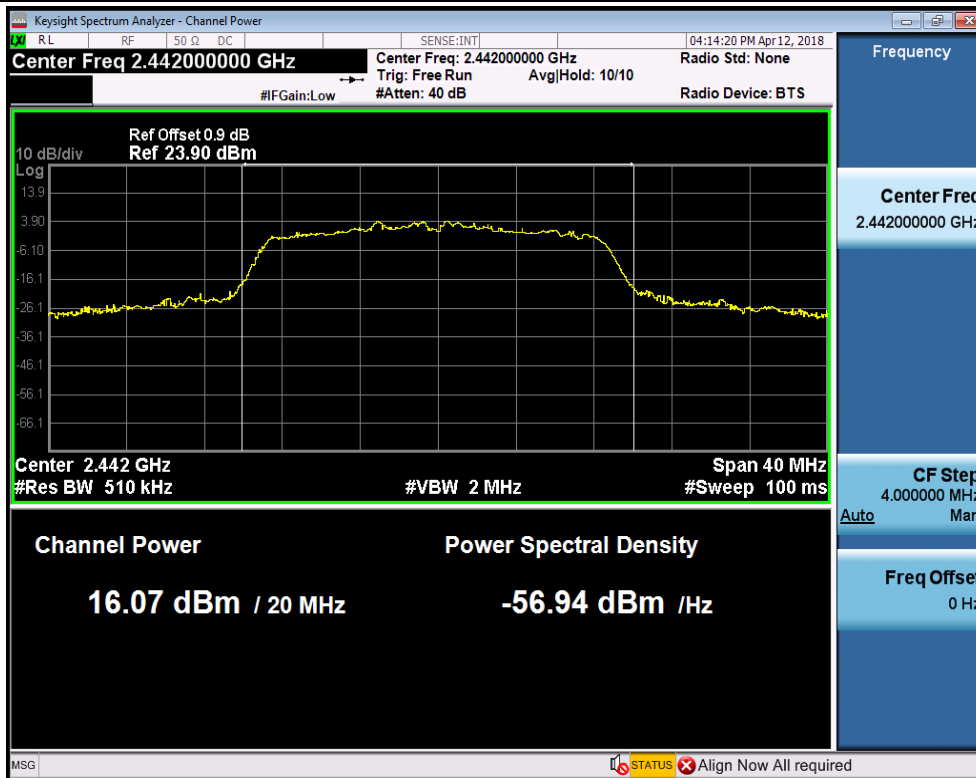

Maximum conducted output power_11N20SISO_2462_Ant1

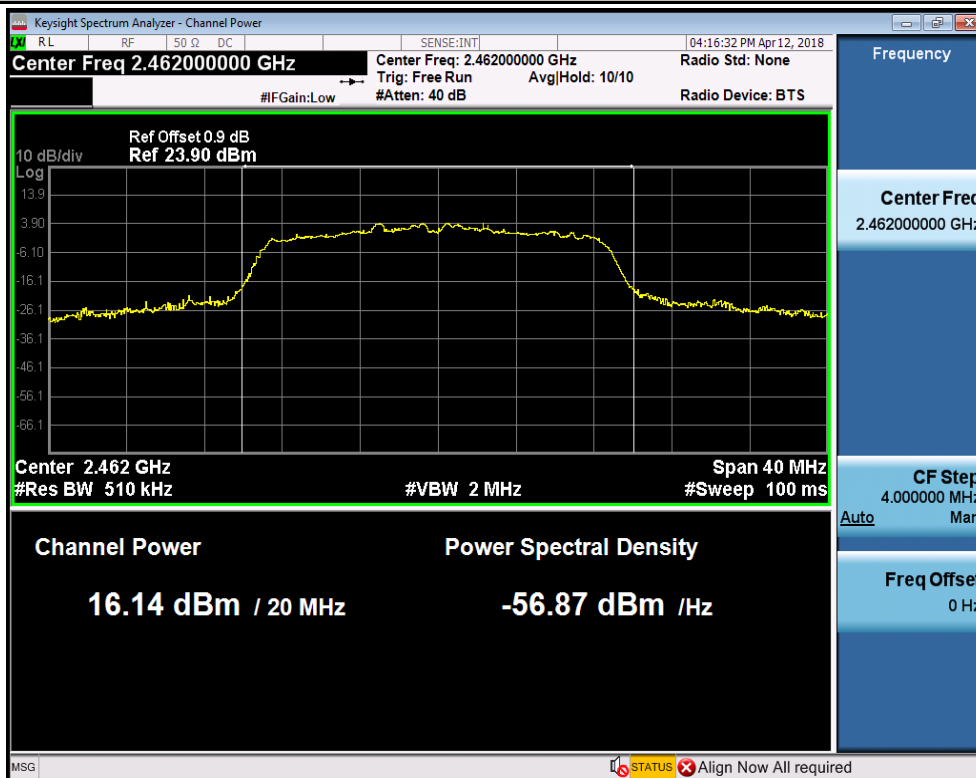




SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002
Page: 69 of 101

Maximum conducted output power_11N40SISO_2422_Ant1

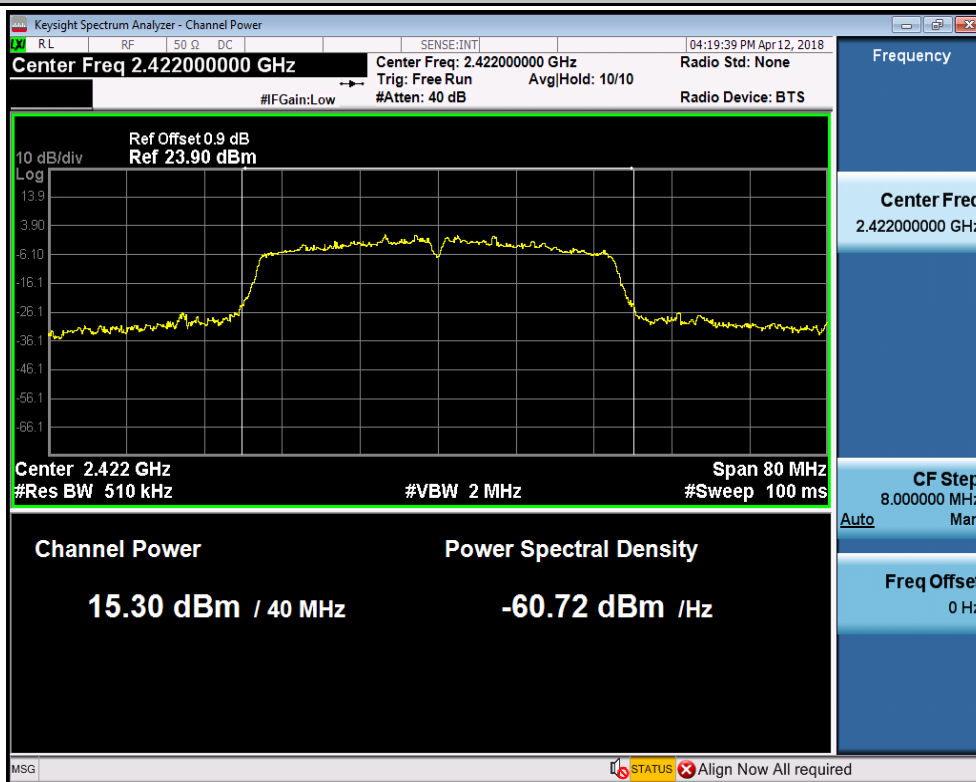

Maximum conducted output power_11N40SISO_2442_Ant1






SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM180200096002
Page: 70 of 101

Maximum conducted output power_11N40SISO_2452_Ant1

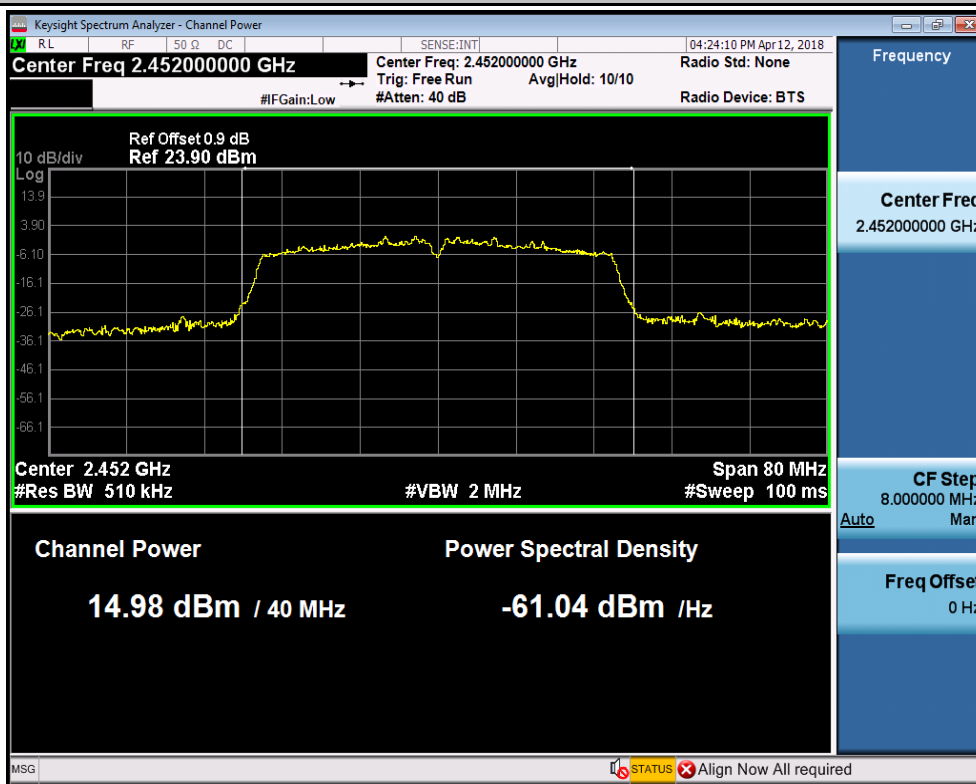


3. Maximum Peak power spectral density


Test Mode	Test Channel	Ant	Result	Limit[dBm/3kHz]	Verdict
11B	2412	Ant1	-11.28	8.00	PASS
11B	2442	Ant1	-11.842	8.00	PASS
11B	2462	Ant1	-12.027	8.00	PASS
11G	2412	Ant1	-16.825	8.00	PASS
11G	2442	Ant1	-17.929	8.00	PASS
11G	2462	Ant1	-19.068	8.00	PASS
11N20SISO	2412	Ant1	-16.064	8.00	PASS
11N20SISO	2442	Ant1	-17.075	8.00	PASS
11N20SISO	2462	Ant1	-17.348	8.00	PASS
11N40SISO	2422	Ant1	-20.037	8.00	PASS
11N40SISO	2442	Ant1	-21.848	8.00	PASS
11N40SISO	2452	Ant1	-21.776	8.00	PASS

TEST PLOT


Maximum Peak power spectral density_11B_2412_Ant1

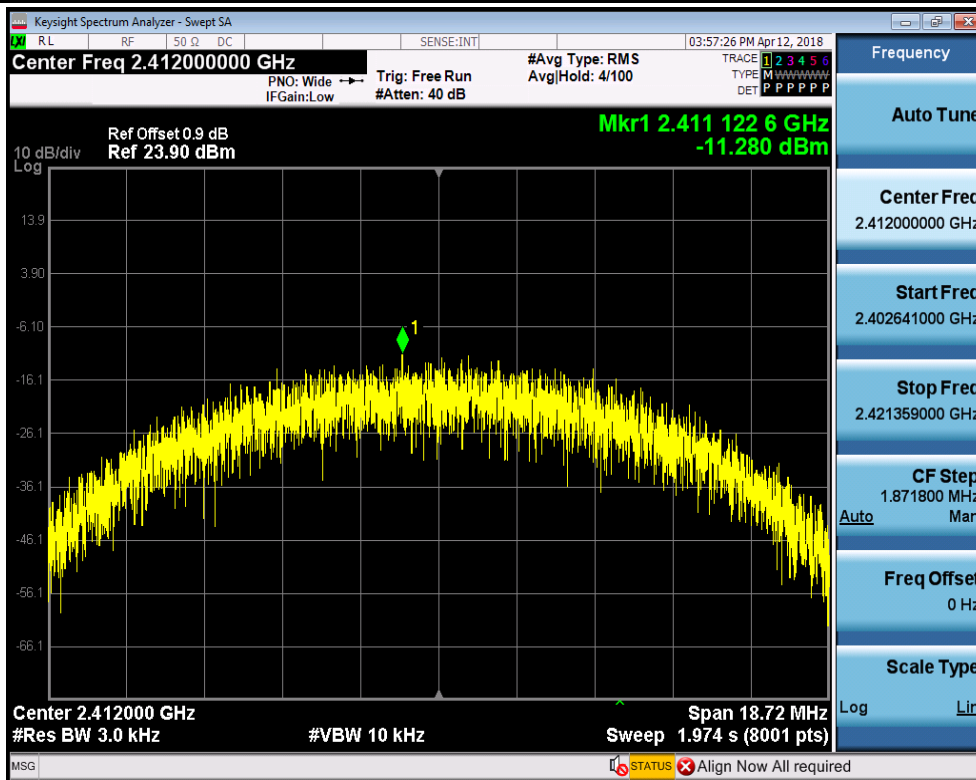


Maximum Peak power spectral density_11B_2442_Ant1

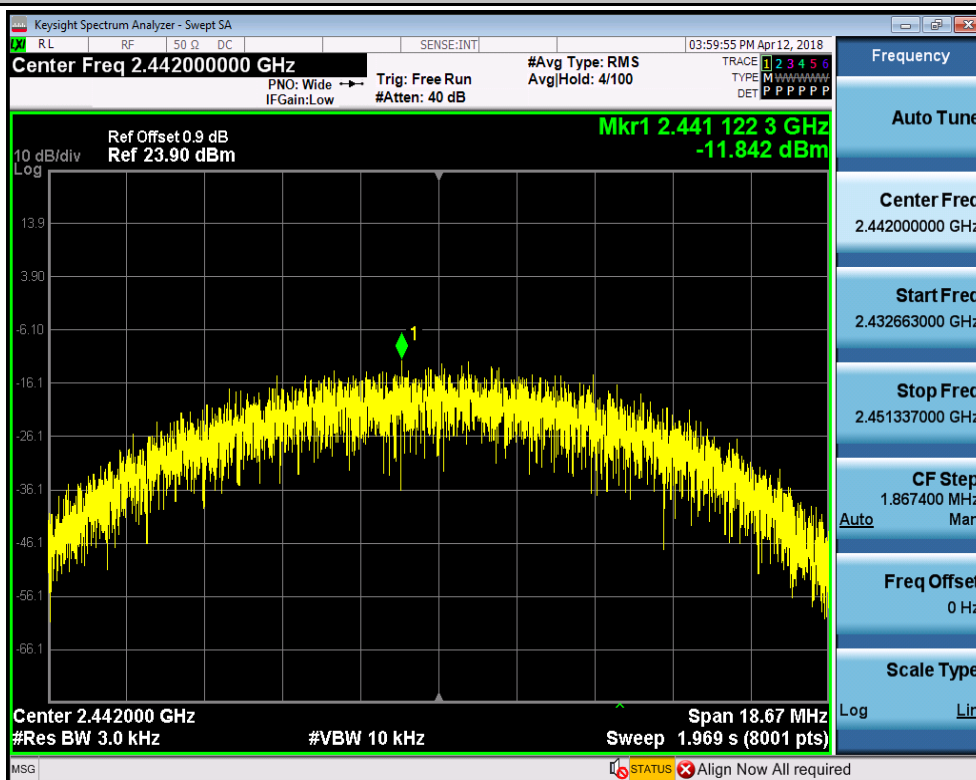


Maximum Peak power spectral density_11B_2462_Ant1

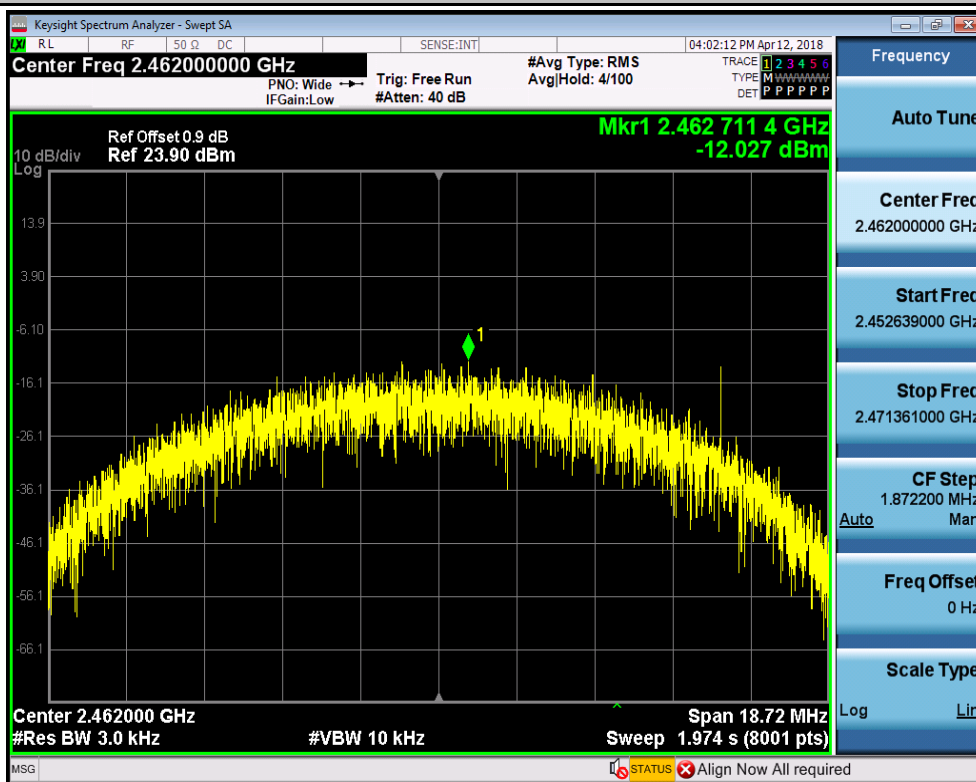


Maximum Peak power spectral density_11G_2412_Ant1

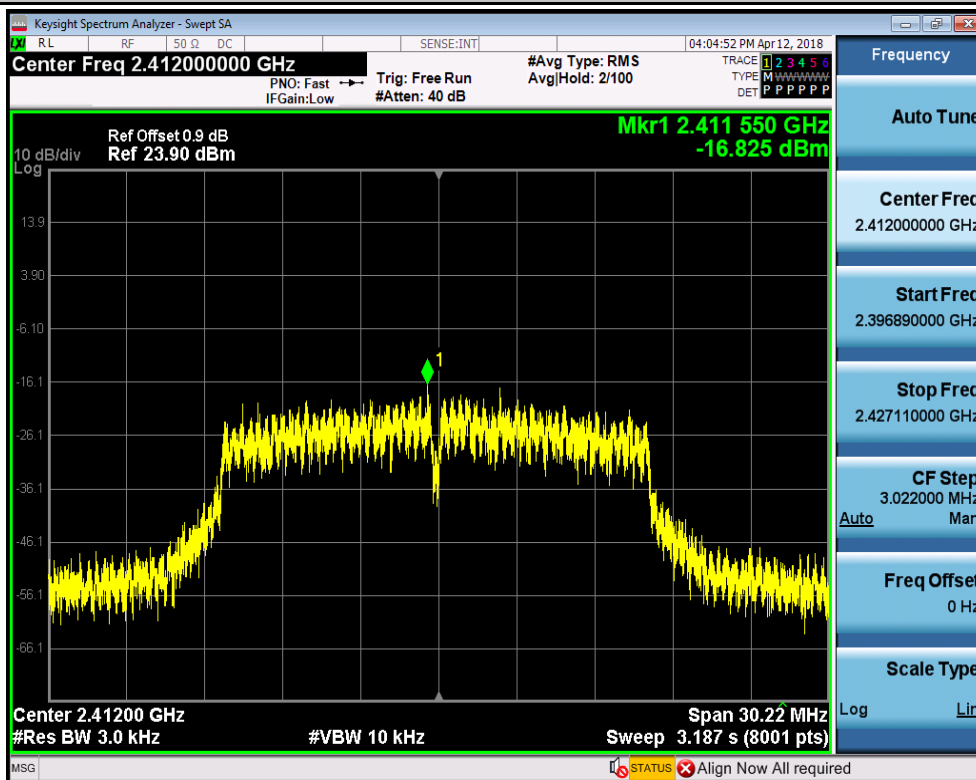


Maximum Peak power spectral density_11G_2442_Ant1

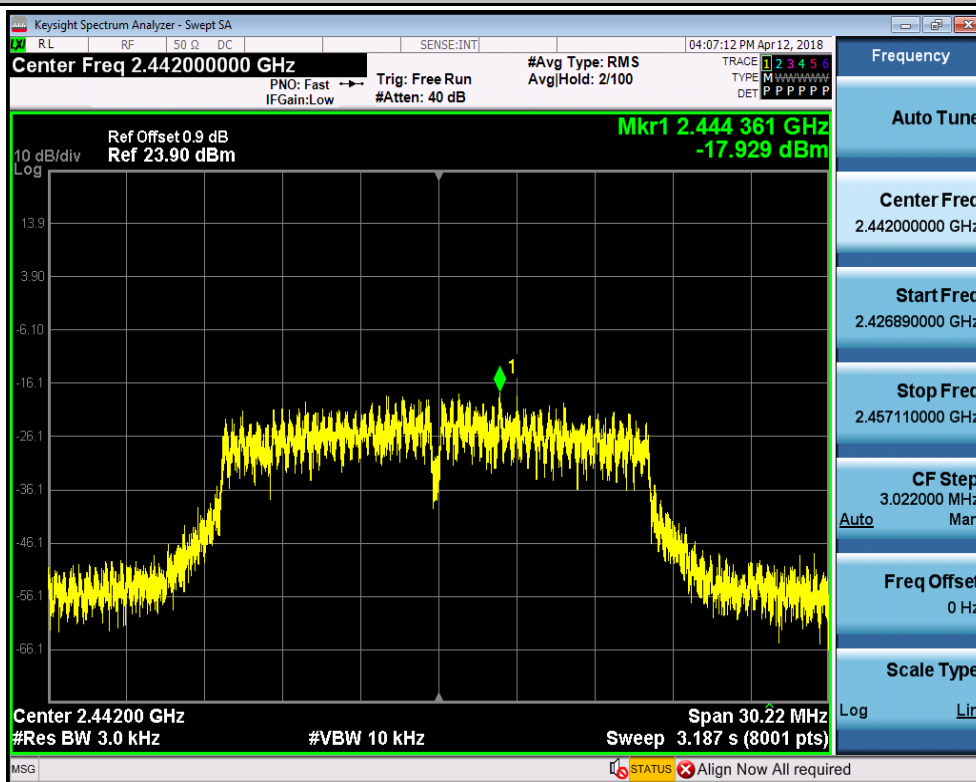


Maximum Peak power spectral density_11G_2462_Ant1

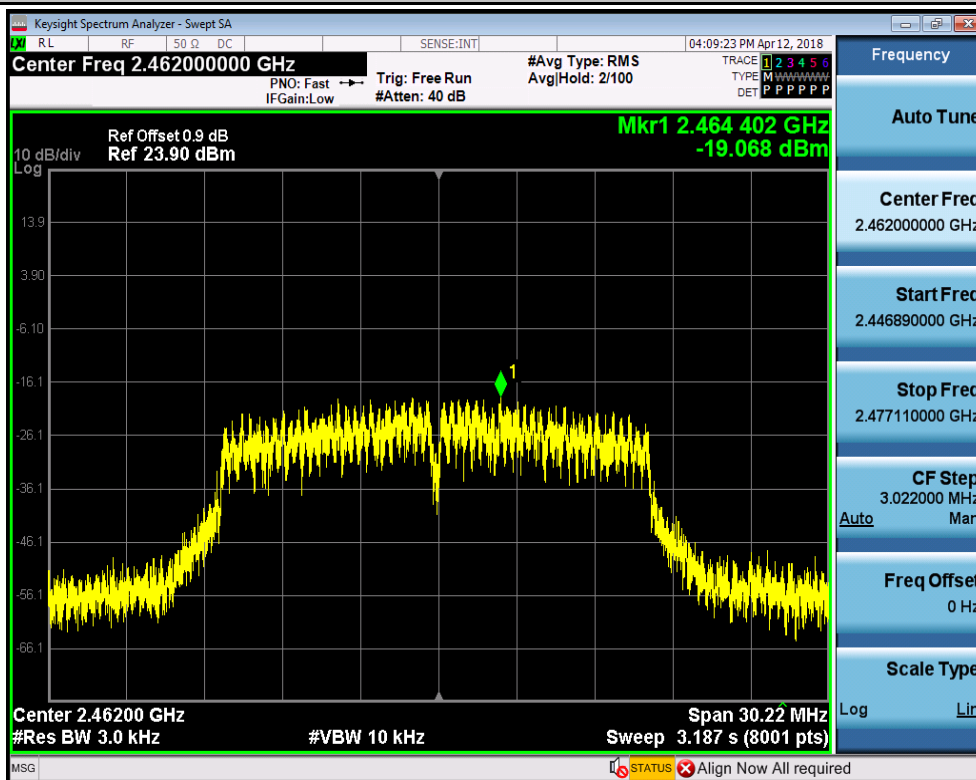

Maximum Peak power spectral density_11N20SISO_2412_Ant1

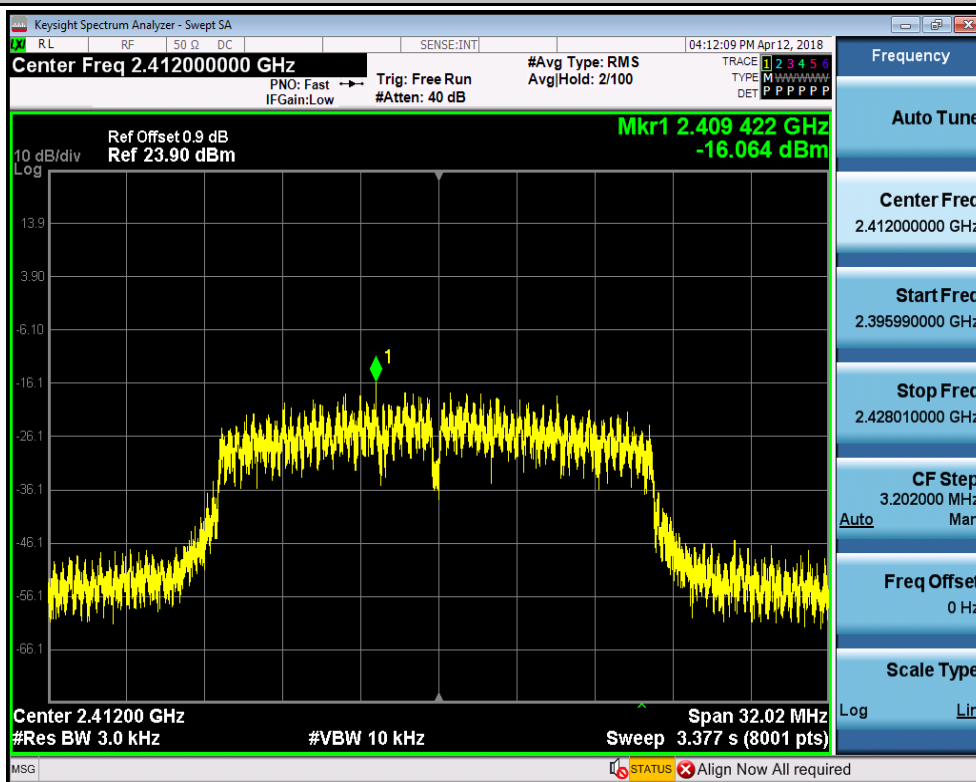

Maximum Peak power spectral density_11N20SISO_2442_Ant1

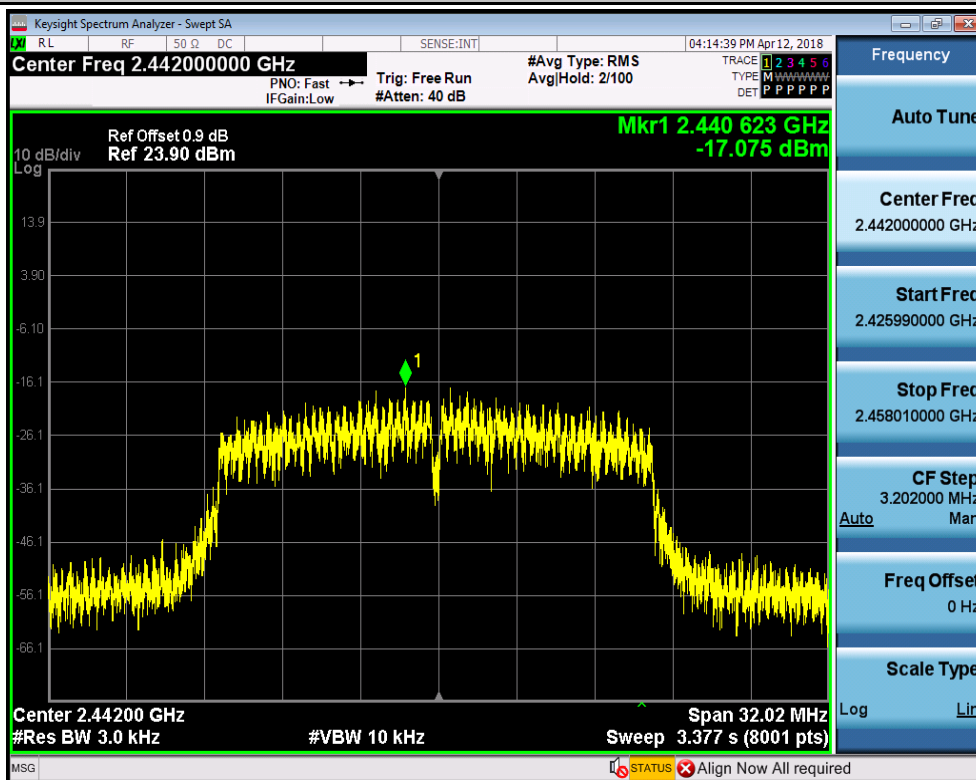





SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002
Page: 75 of 101


Maximum Peak power spectral density_11N20SISO_2462_Ant1

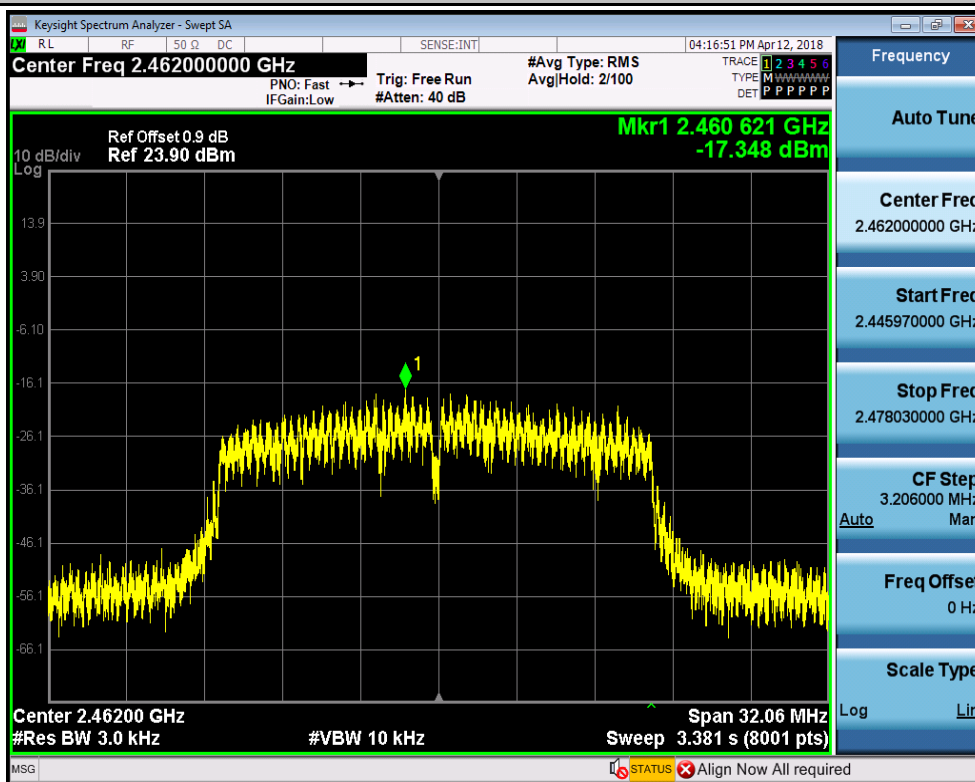


Maximum Peak power spectral density_11N40SISO_2422_Ant1

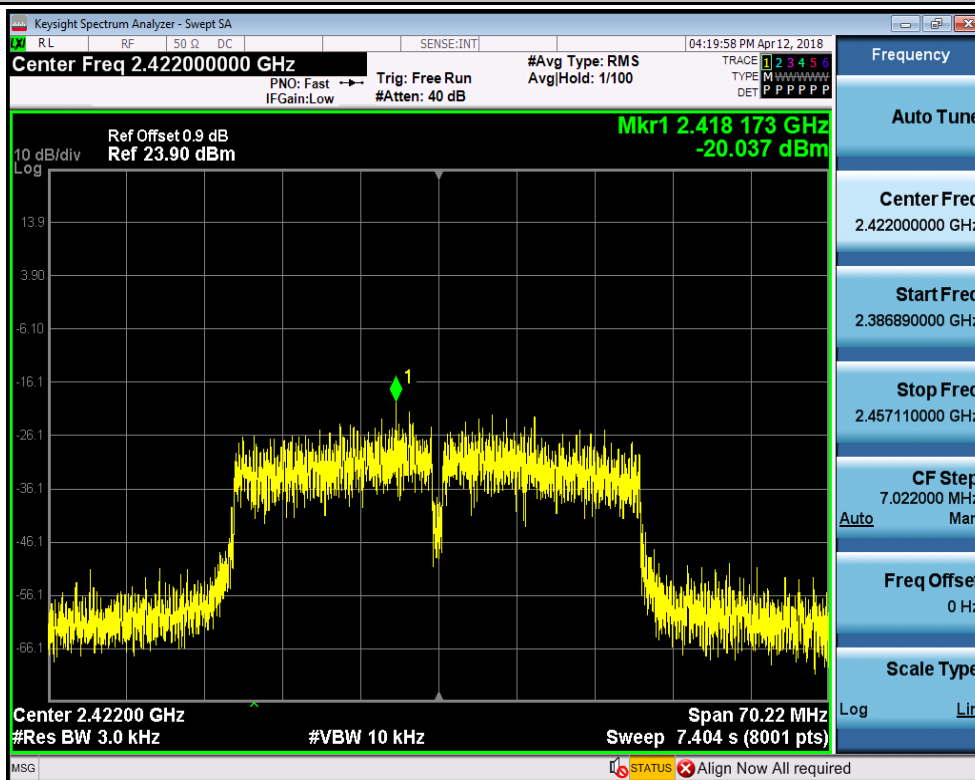

Maximum Peak power spectral density_11N40SISO_2442_Ant1

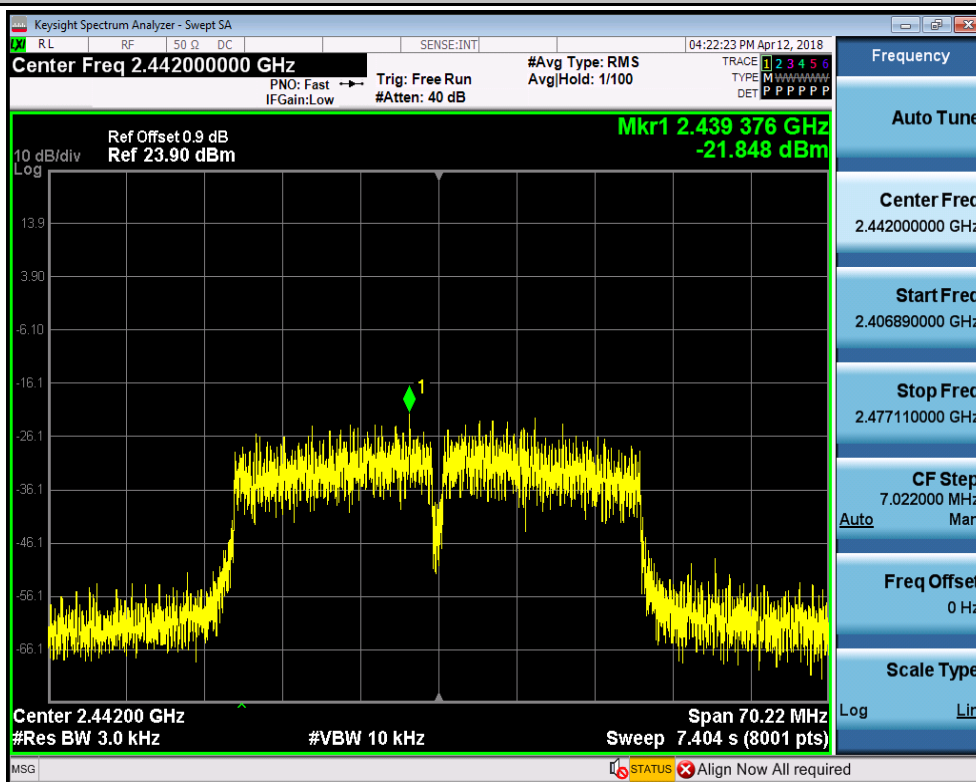

Maximum Peak power spectral density_11N40SISO_2452_Ant1

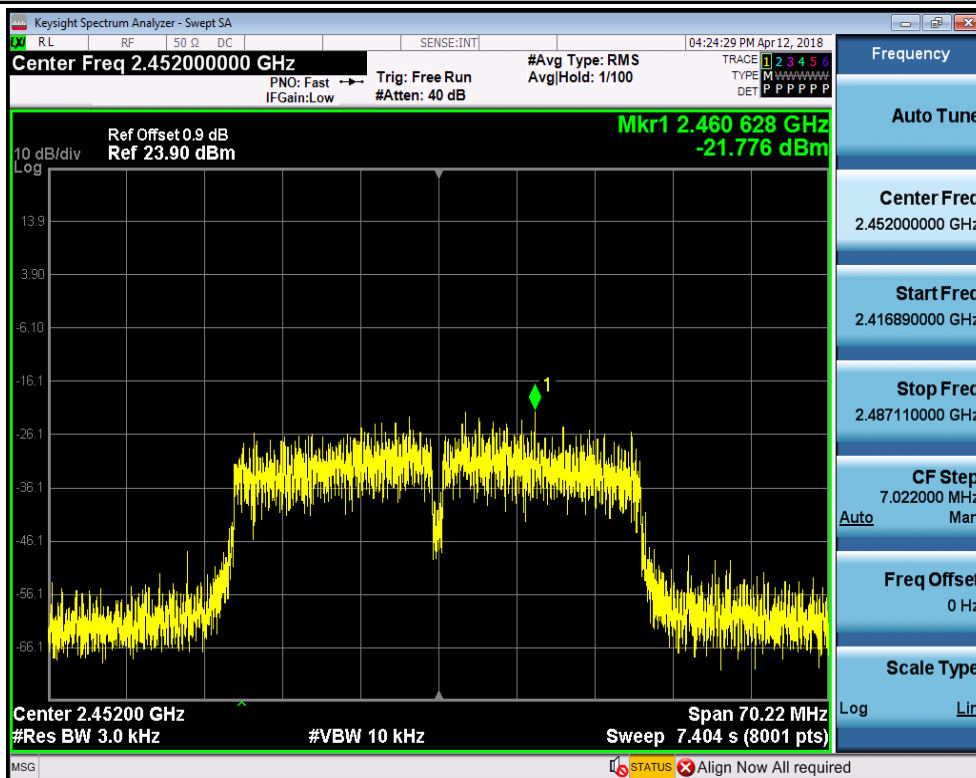




4.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Ant	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	2412	Ant1	4.009	-40.677	-15.99	PASS
11B	2462	Ant1	3.255	-44.133	-16.75	PASS
11G	2412	Ant1	-0.888	-38.099	-20.89	PASS
11G	2462	Ant1	-1.607	-35.666	-21.61	PASS
11N20SISO	2412	Ant1	-0.887	-37.158	-20.89	PASS
11N20SISO	2462	Ant1	-1.567	-37.161	-21.57	PASS
11N40SISO	2422	Ant1	-4.953	-37.054	-24.95	PASS
11N40SISO	2452	Ant1	-5.394	-34.699	-25.39	PASS

TEST PLOT


Band-edge for RF Conducted Emissions_11B_2412_Ant1

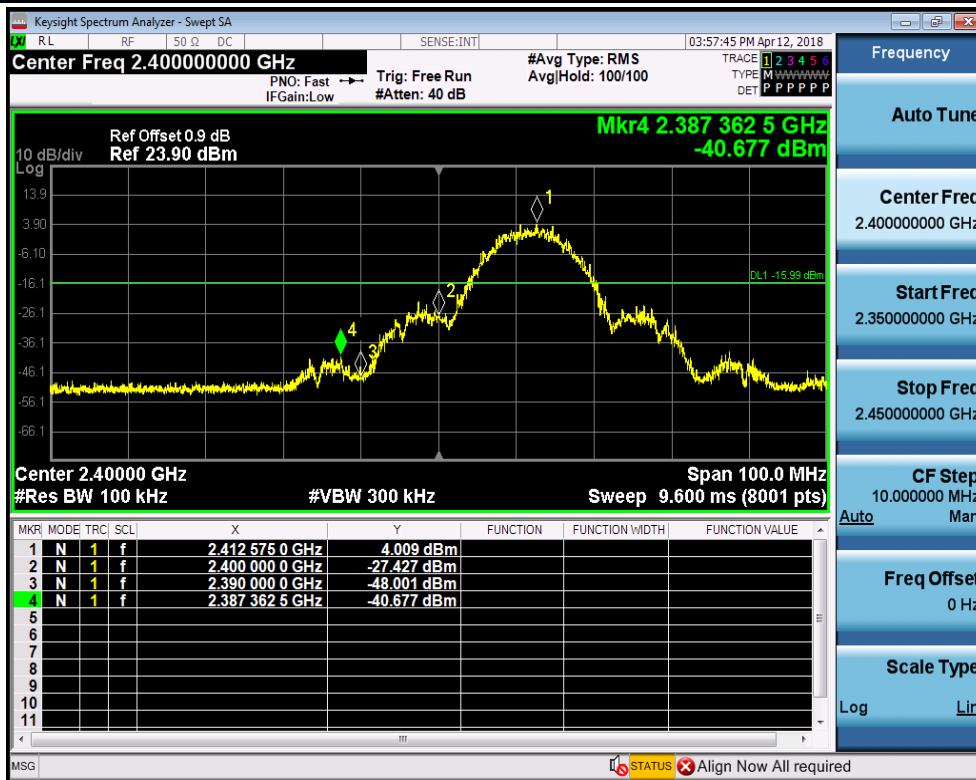


Band-edge for RF Conducted Emissions_11B_2462_Ant1




Band-edge for RF Conducted Emissions_11G_2412_Ant1

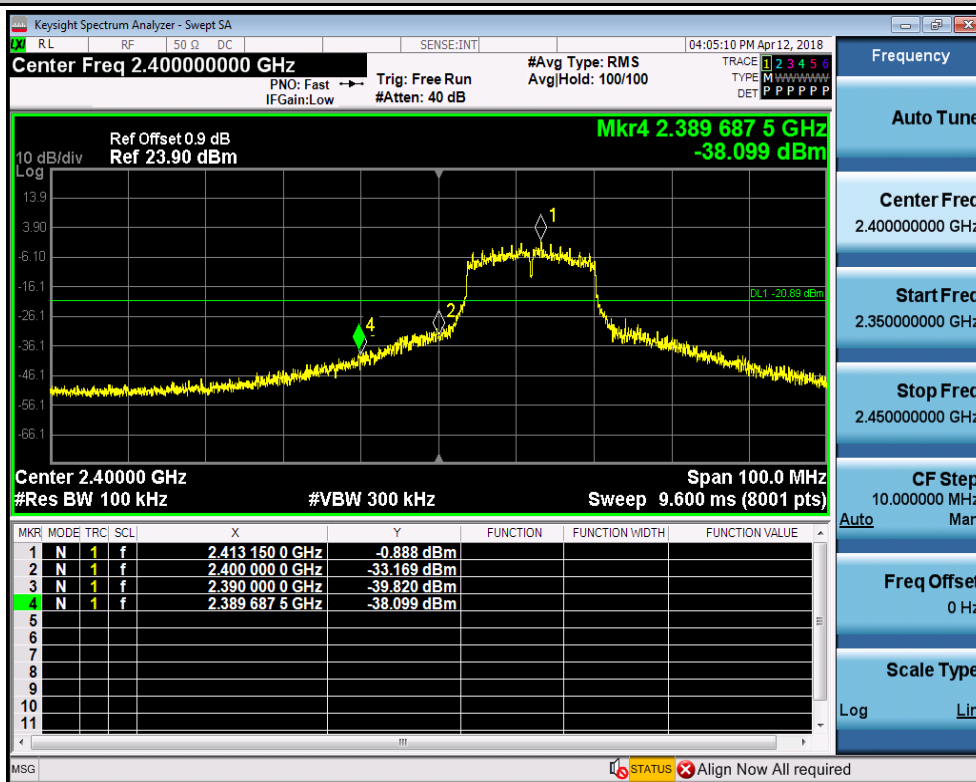


Band-edge for RF Conducted Emissions_11G_2462_Ant1

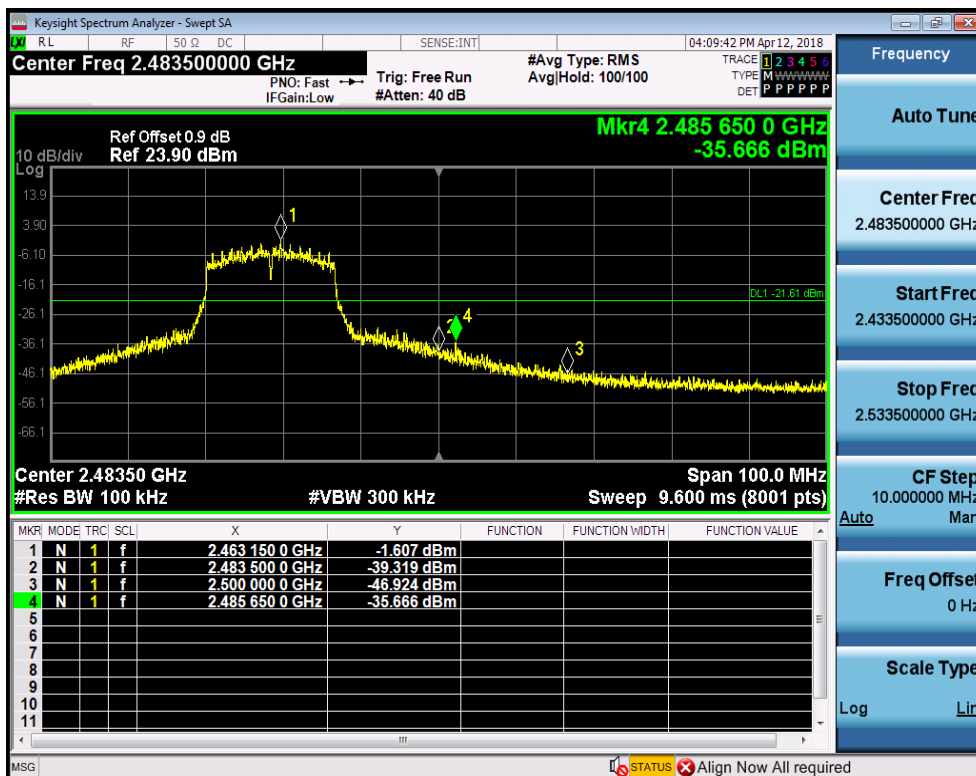


Band-edge for RF Conducted Emissions_11N20SISO_2412_Ant1

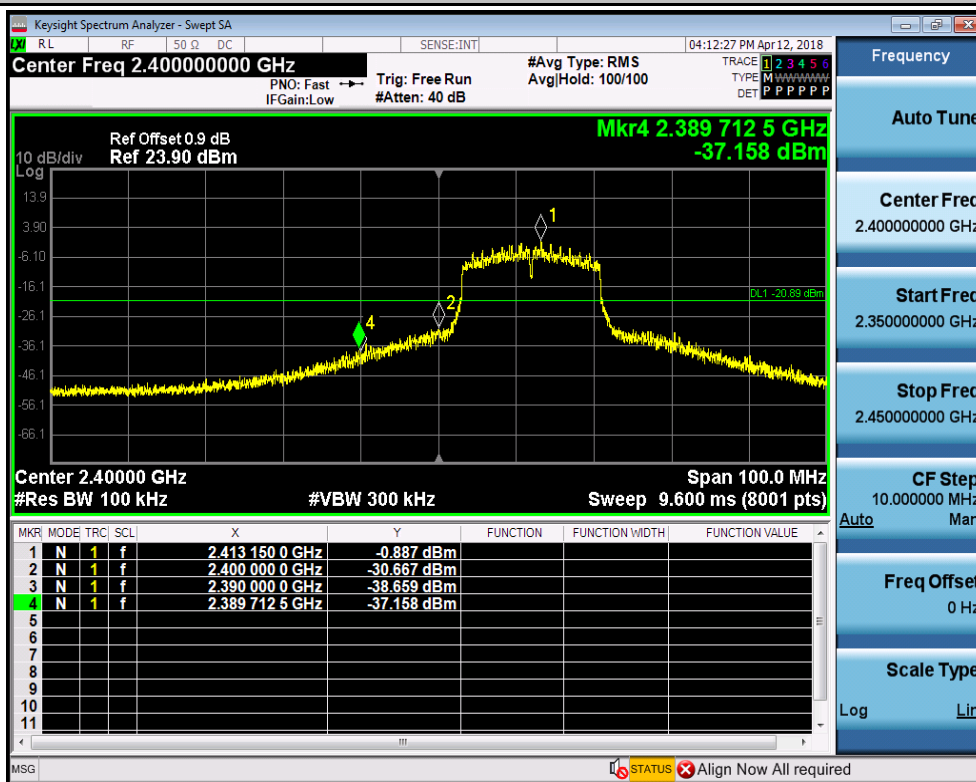


Band-edge for RF Conducted Emissions_11N20SISO_2462_Ant1

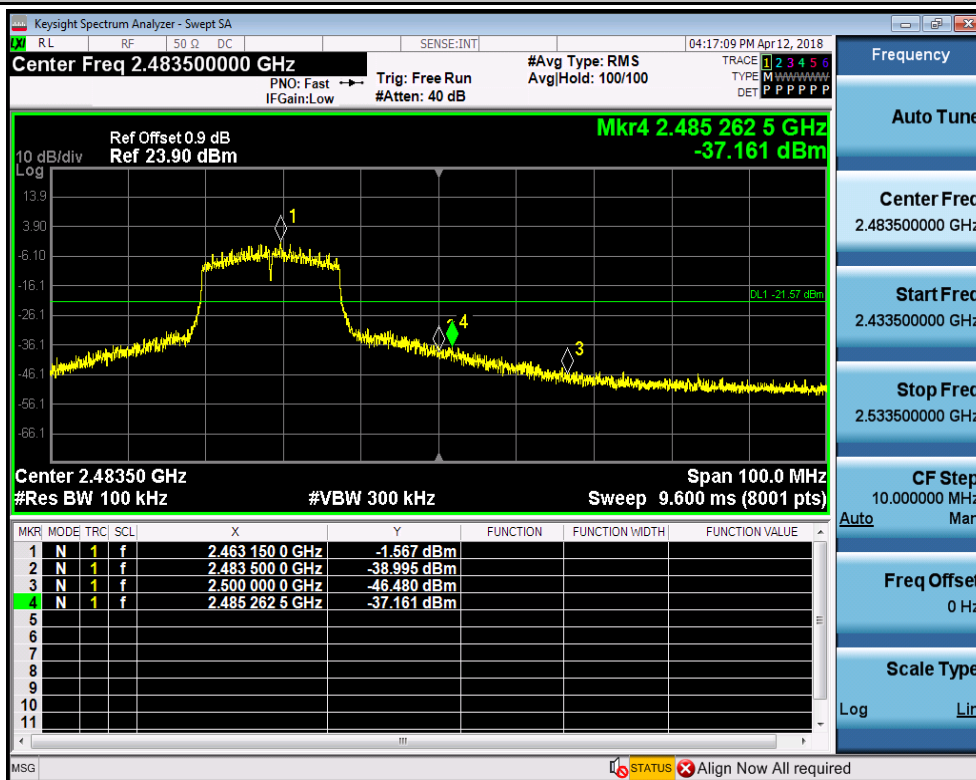

Band-edge for RF Conducted Emissions_11N40SISO_2422_Ant1

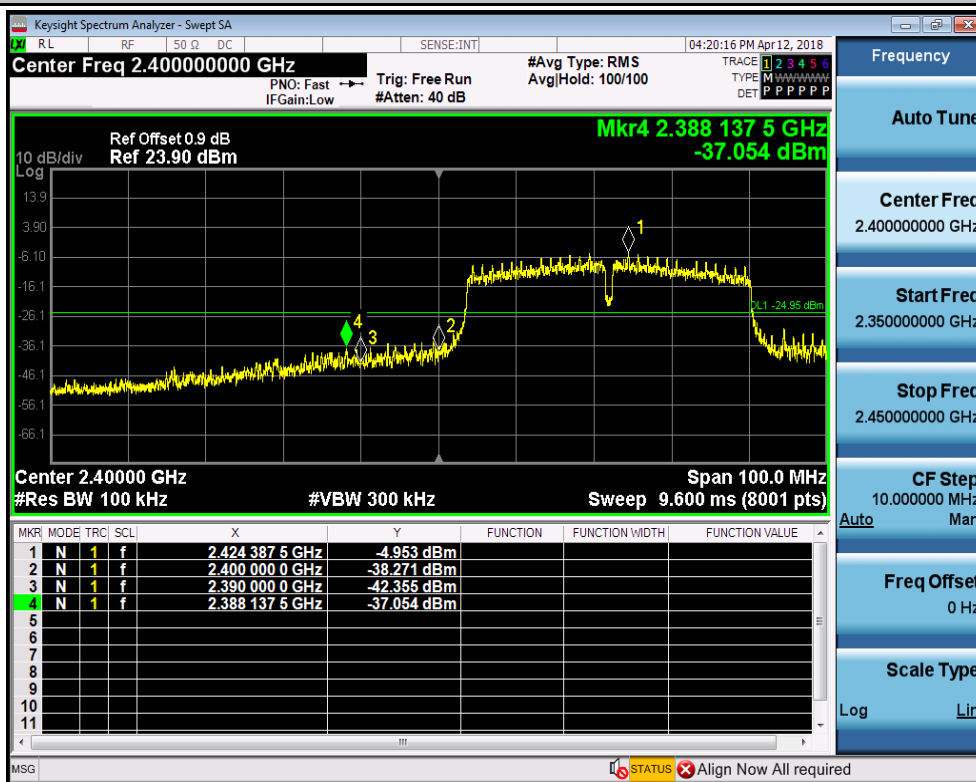

Band-edge for RF Conducted Emissions_11N40SISO_2452_Ant1

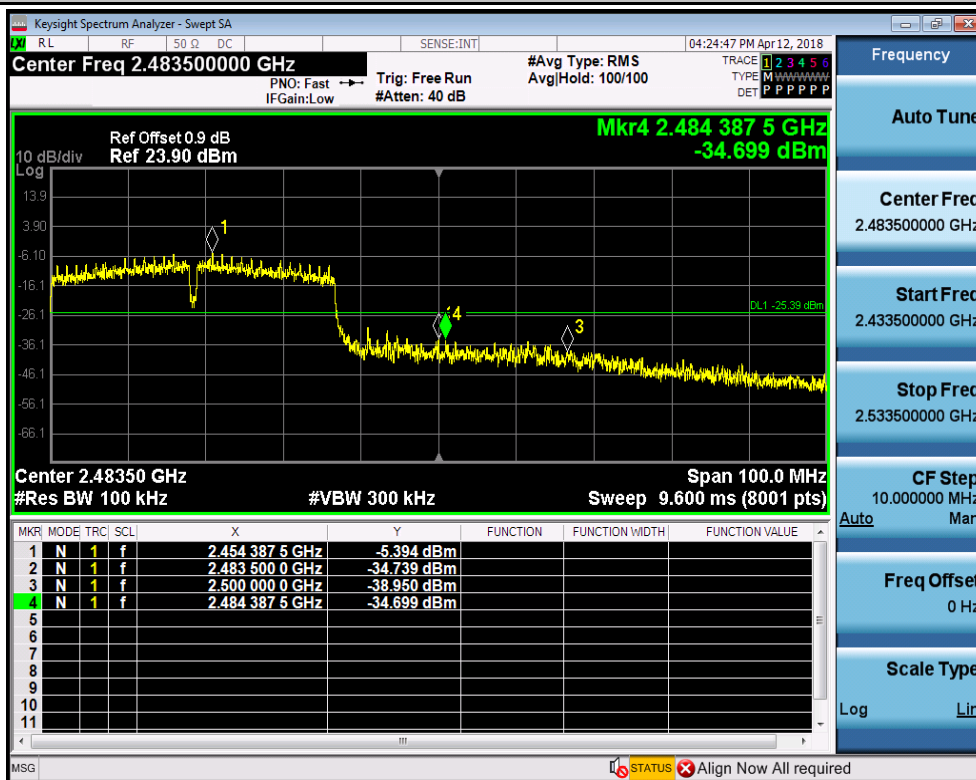

5.RF Conducted Spurious Emissions

Test Mode	Test Channel	Ant	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	2412	Ant1	30	10000	100	300	4.035	-47.487	<-15.965	PASS
11B	2412	Ant1	10000	26000	100	300	4.035	-51.665	<-15.965	PASS
11B	2442	Ant1	30	10000	100	300	3.463	-50.470	<-16.537	PASS
11B	2442	Ant1	10000	26000	100	300	3.463	-51.181	<-16.537	PASS
11B	2462	Ant1	30	10000	100	300	3.328	-52.015	<-16.672	PASS
11B	2462	Ant1	10000	26000	100	300	3.328	-51.737	<-16.672	PASS
11G	2412	Ant1	30	10000	100	300	-0.982	-54.091	<-20.982	PASS
11G	2412	Ant1	10000	26000	100	300	-0.982	-52.361	<-20.982	PASS
11G	2442	Ant1	30	10000	100	300	-1.511	-54.103	<-21.511	PASS
11G	2442	Ant1	10000	26000	100	300	-1.511	-51.935	<-21.511	PASS
11G	2462	Ant1	30	10000	100	300	-1.659	-53.849	<-21.659	PASS
11G	2462	Ant1	10000	26000	100	300	-1.659	-52.643	<-21.659	PASS
11N20SISO	2412	Ant1	30	10000	100	300	-0.999	-47.041	<-20.999	PASS
11N20SISO	2412	Ant1	10000	26000	100	300	-0.999	-52.065	<-20.999	PASS
11N20SISO	2442	Ant1	30	10000	100	300	-1.652	-53.874	<-21.652	PASS
11N20SISO	2442	Ant1	10000	26000	100	300	-1.652	-52.155	<-21.652	PASS
11N20SISO	2462	Ant1	30	10000	100	300	-1.565	-54.235	<-21.565	PASS
11N20SISO	2462	Ant1	10000	26000	100	300	-1.565	-52.026	<-21.565	PASS
11N40SISO	2422	Ant1	30	10000	100	300	-4.951	-54.636	<-24.951	PASS



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180200096002


Page: 83 of 101

11N40SISO	2422	Ant1	10000	26000	100	300	-4.951	-51.882	<- 24.951	PASS
11N40SISO	2442	Ant1	30	10000	100	300	-5.303	-53.713	<- 25.303	PASS
11N40SISO	2442	Ant1	10000	26000	100	300	-5.303	-52.159	<- 25.303	PASS
11N40SISO	2452	Ant1	30	10000	100	300	-5.454	-54.084	<- 25.454	PASS
11N40SISO	2452	Ant1	10000	26000	100	300	-5.454	-51.336	<- 25.454	PASS


TEST PLOT

RF Conducted Spurious Emissions_11B_2412_Ant1


Pref

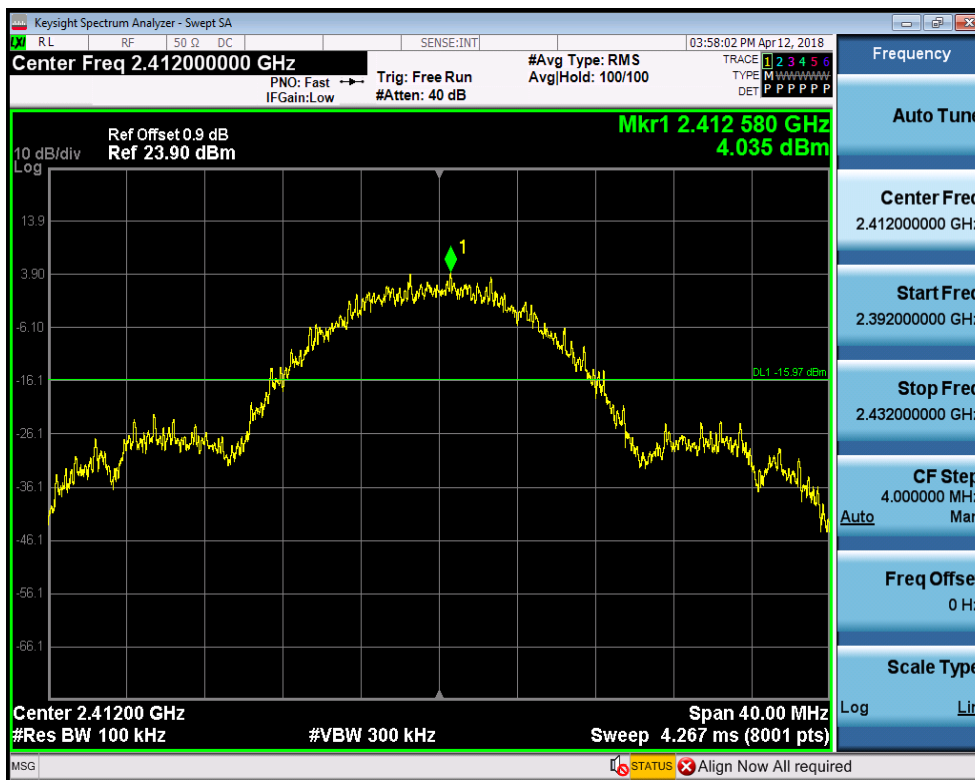

CSE_1

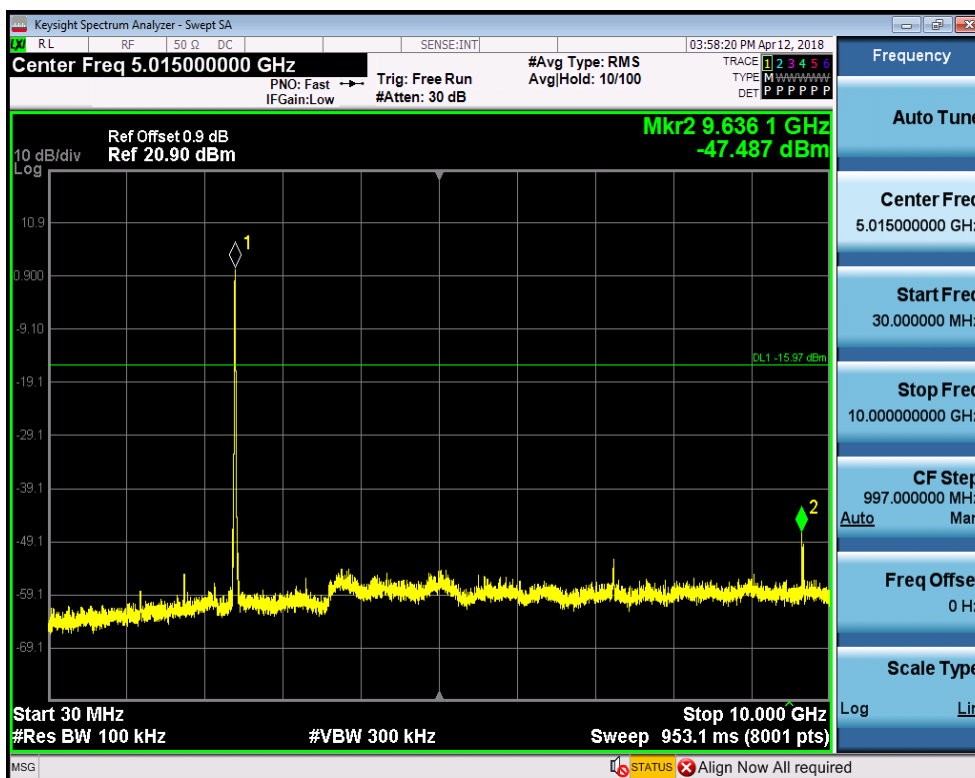

CSE_2

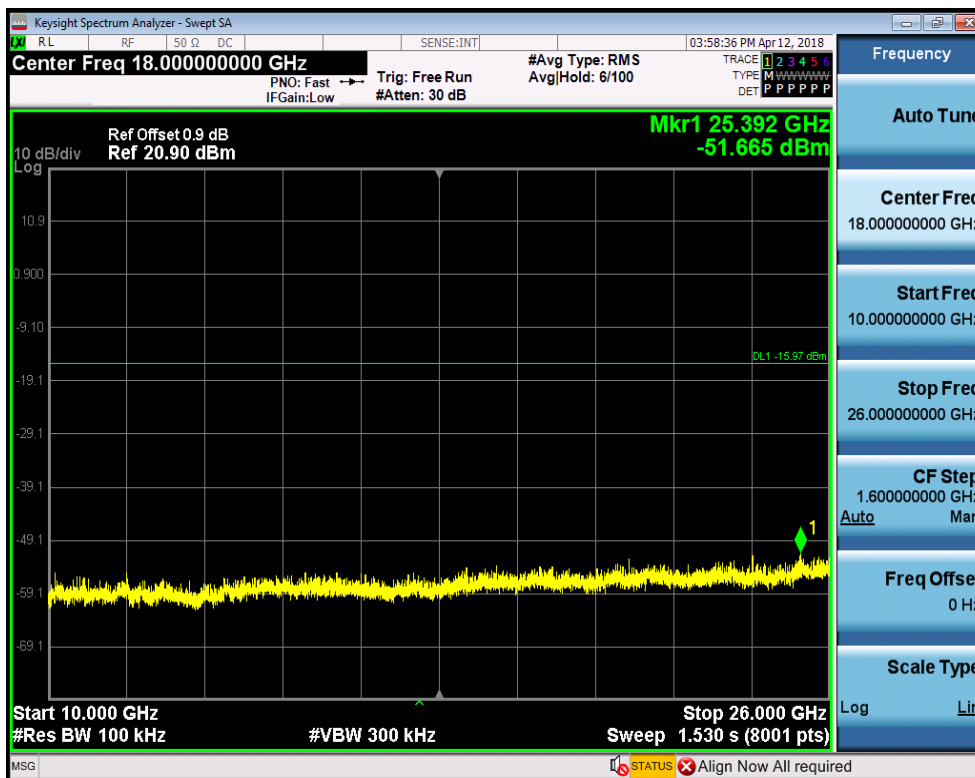


RF Conducted Spurious Emissions_11B_2442_Ant1


Pref



CSE_1

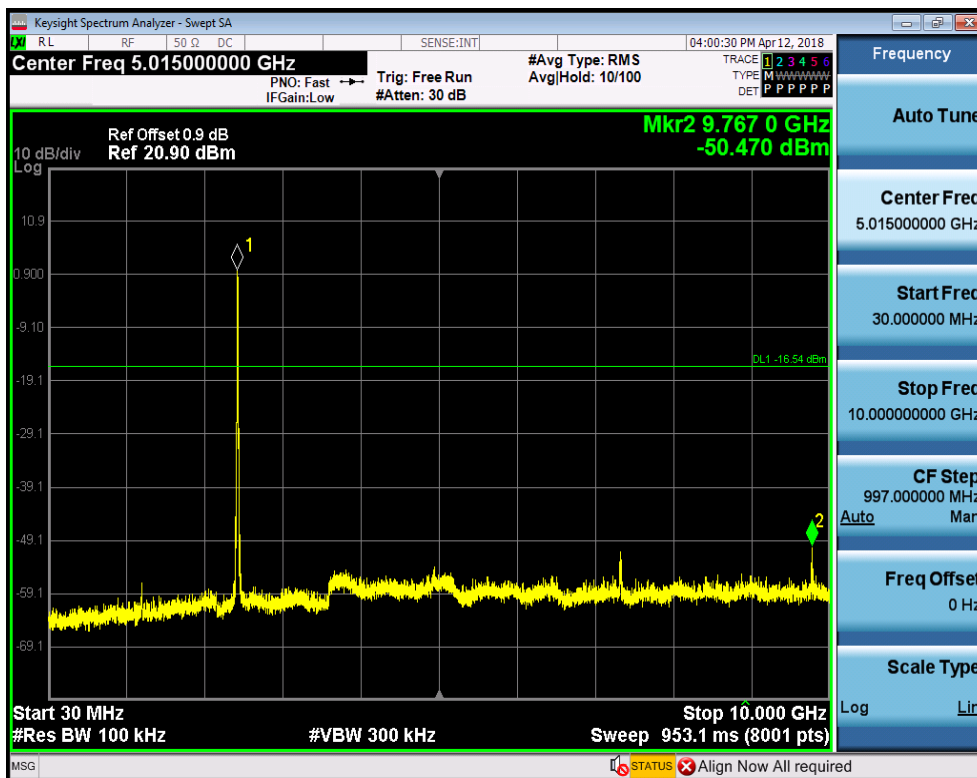


CSE_2

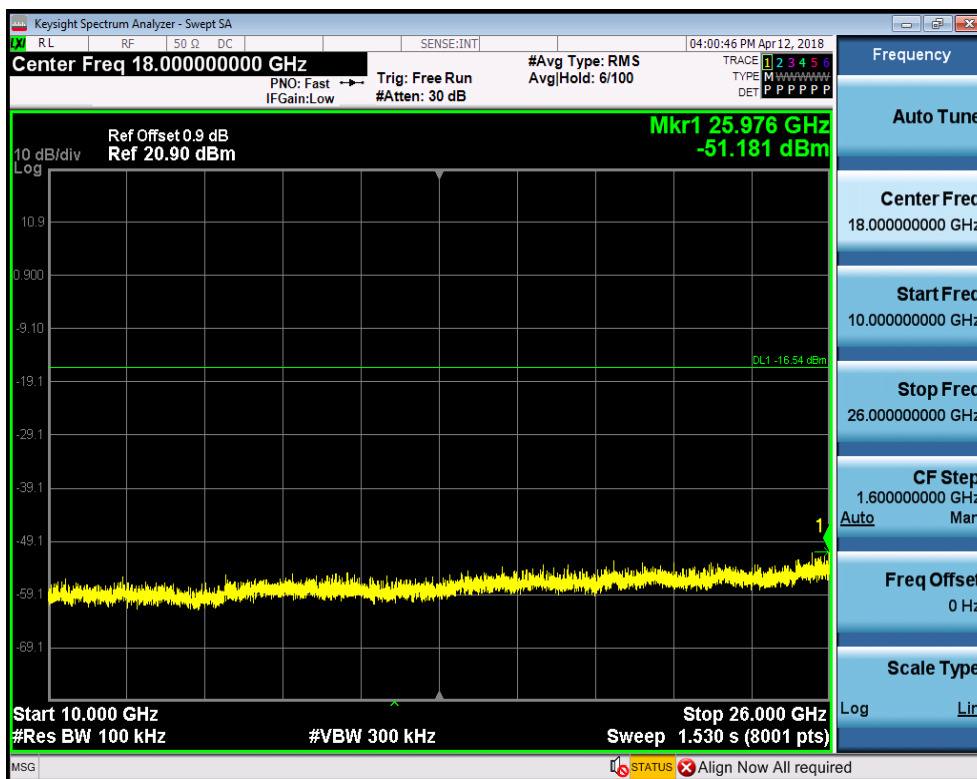


RF Conducted Spurious Emissions_11B_2462_Ant1


Pref

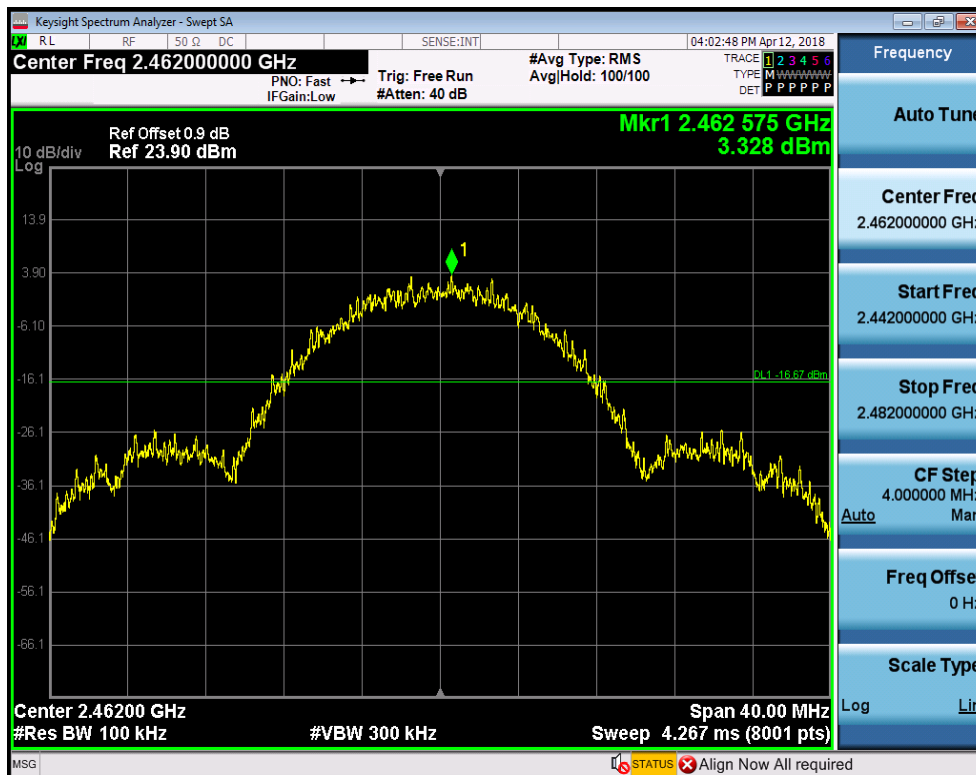

CSE_1

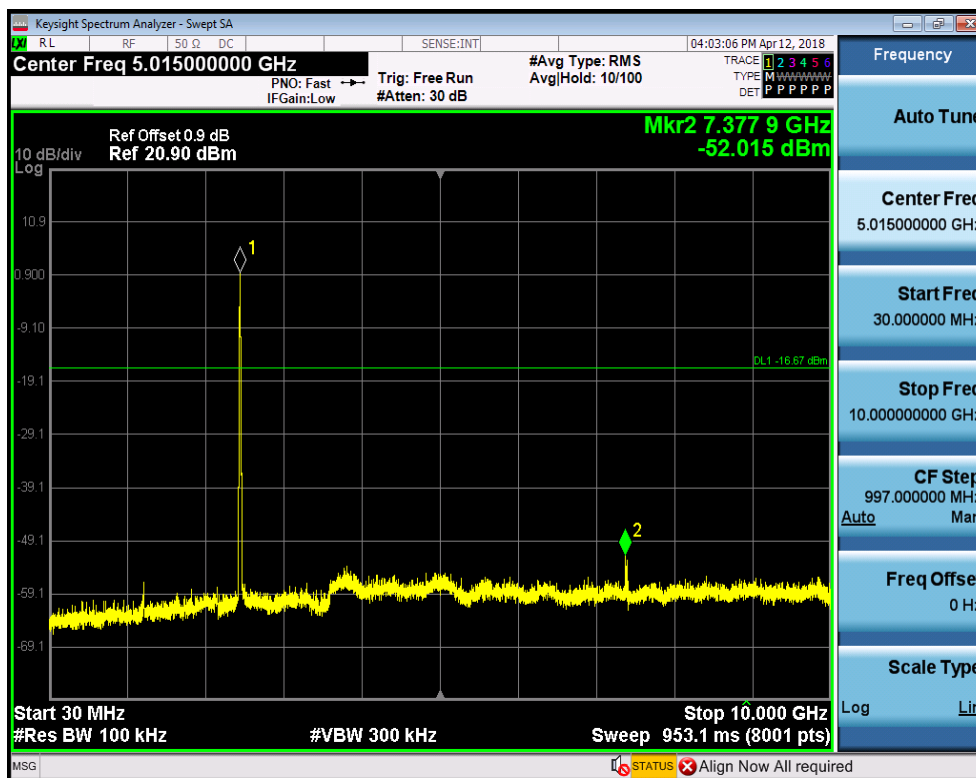


CSE_2

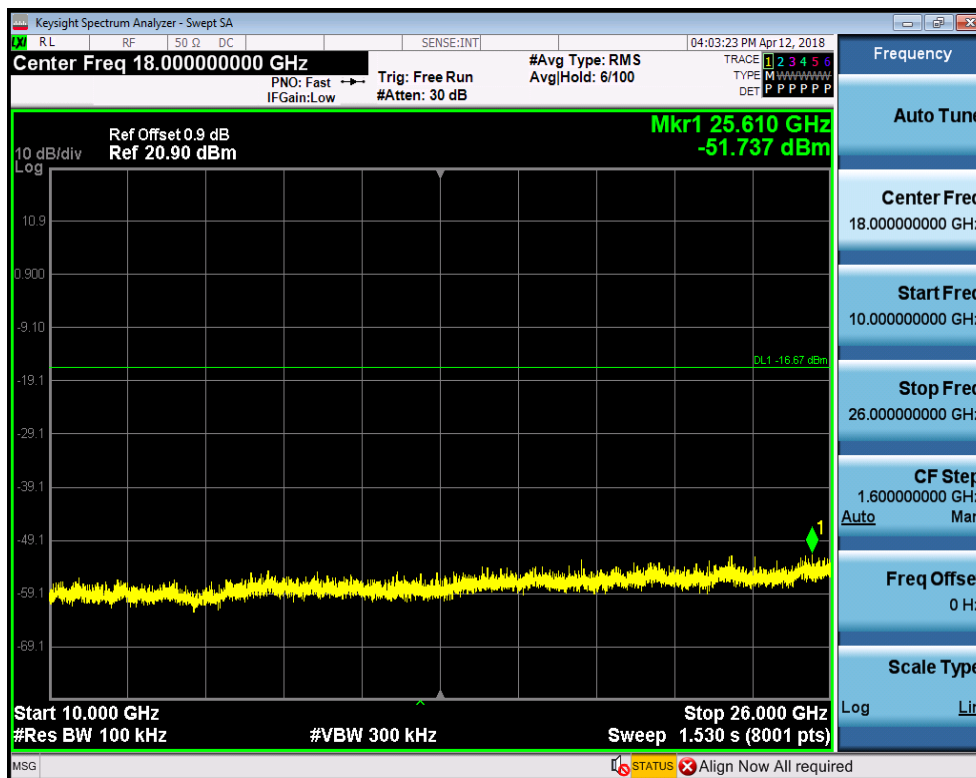


RF Conducted Spurious Emissions_11G_2412_Ant1


Pref

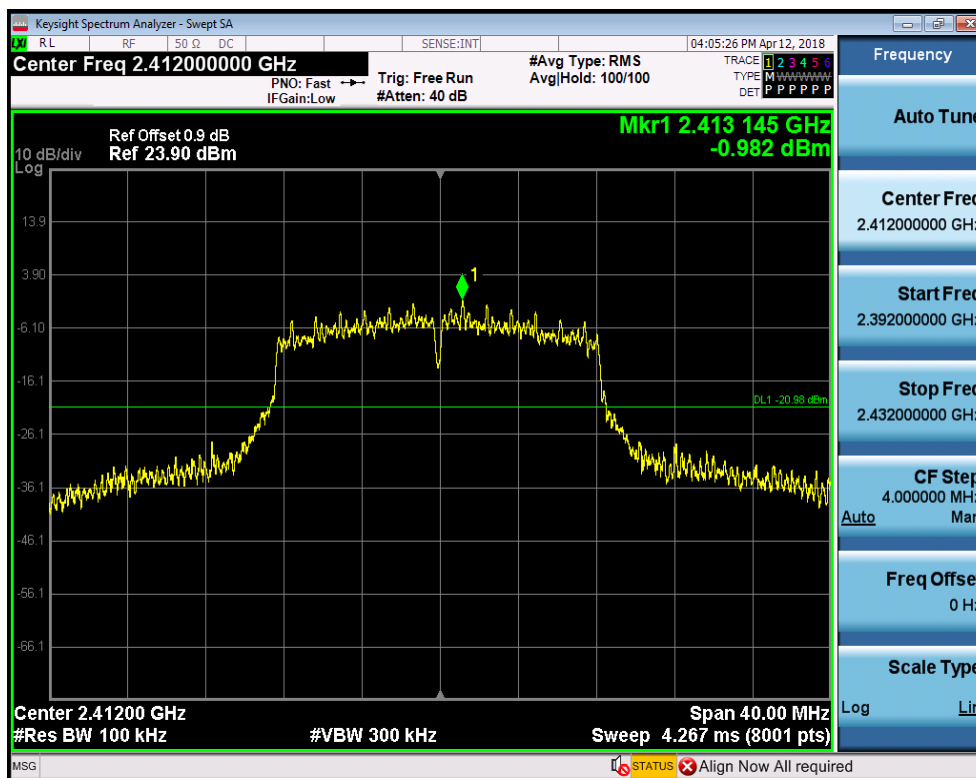

CSE_1

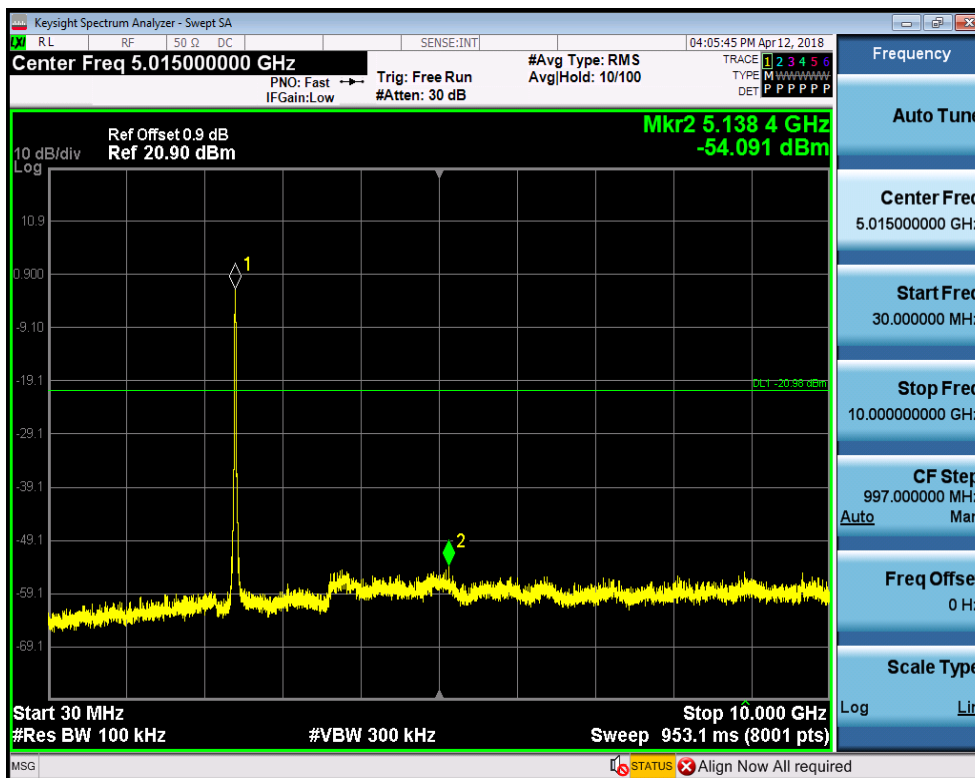


CSE_2

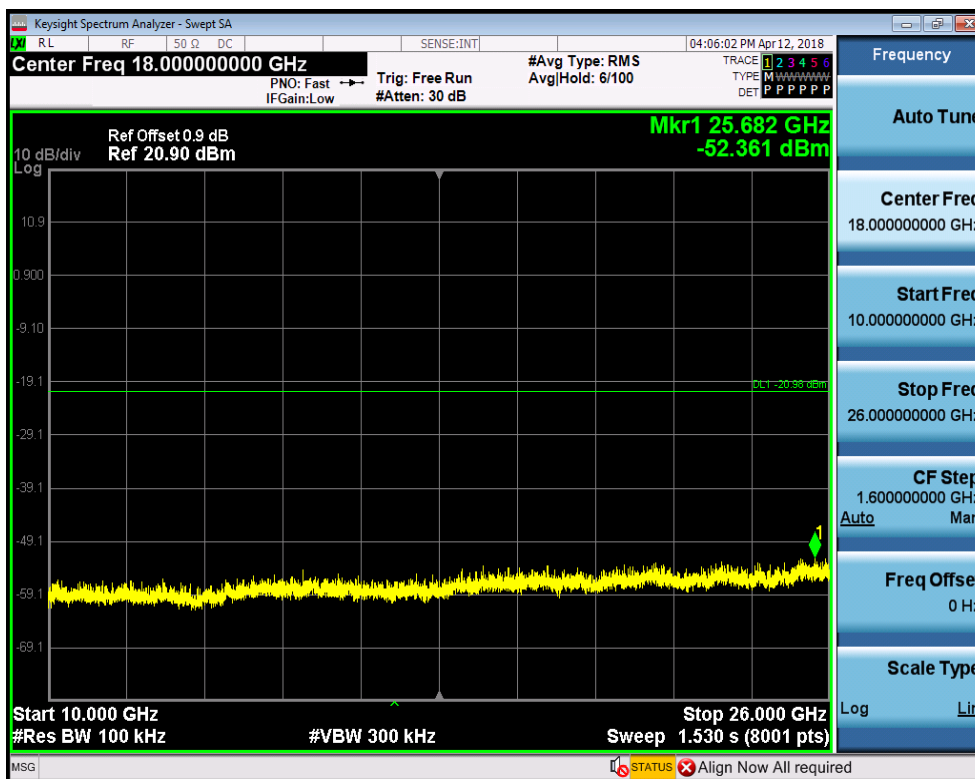


RF Conducted Spurious Emissions_11G_2442_Ant1


Pref

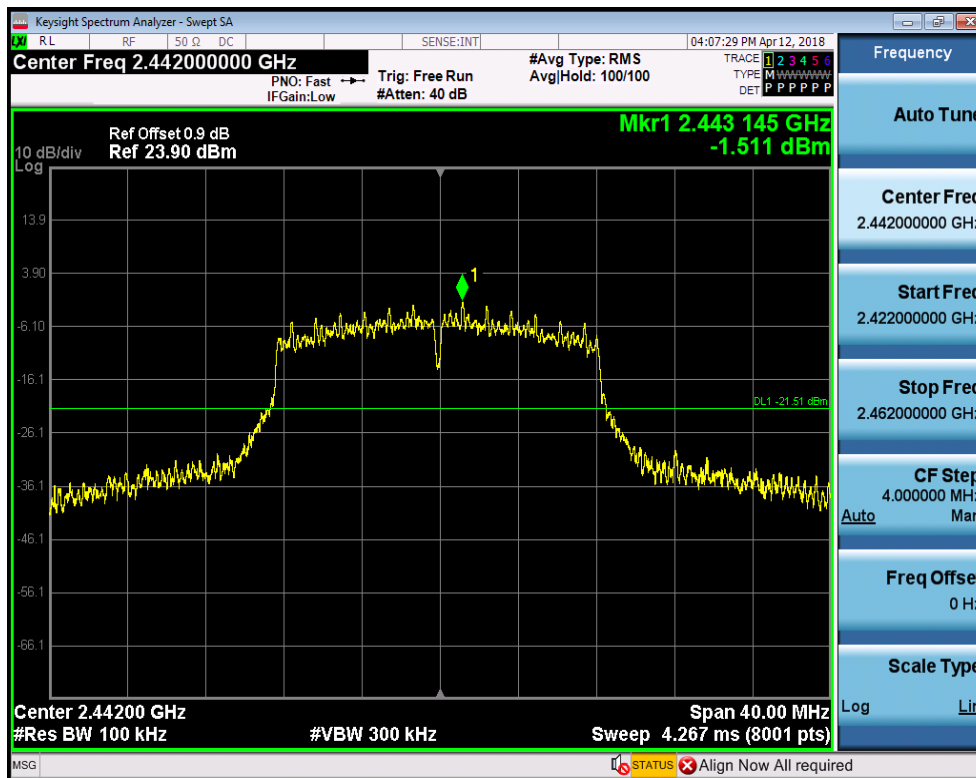

CSE_1

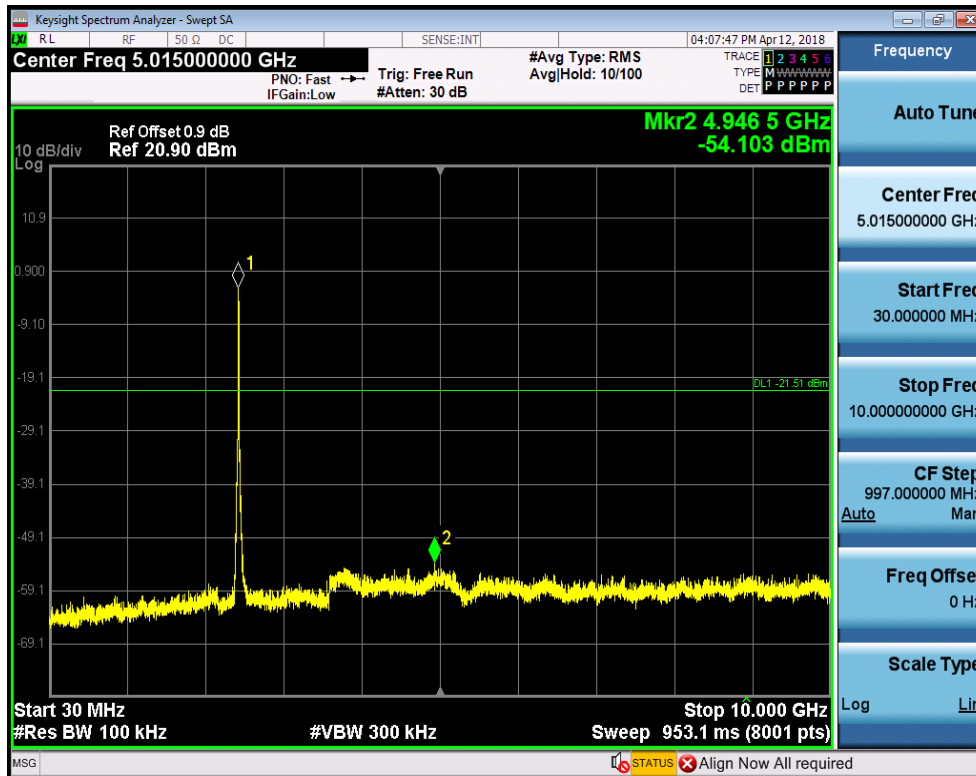


CSE_2

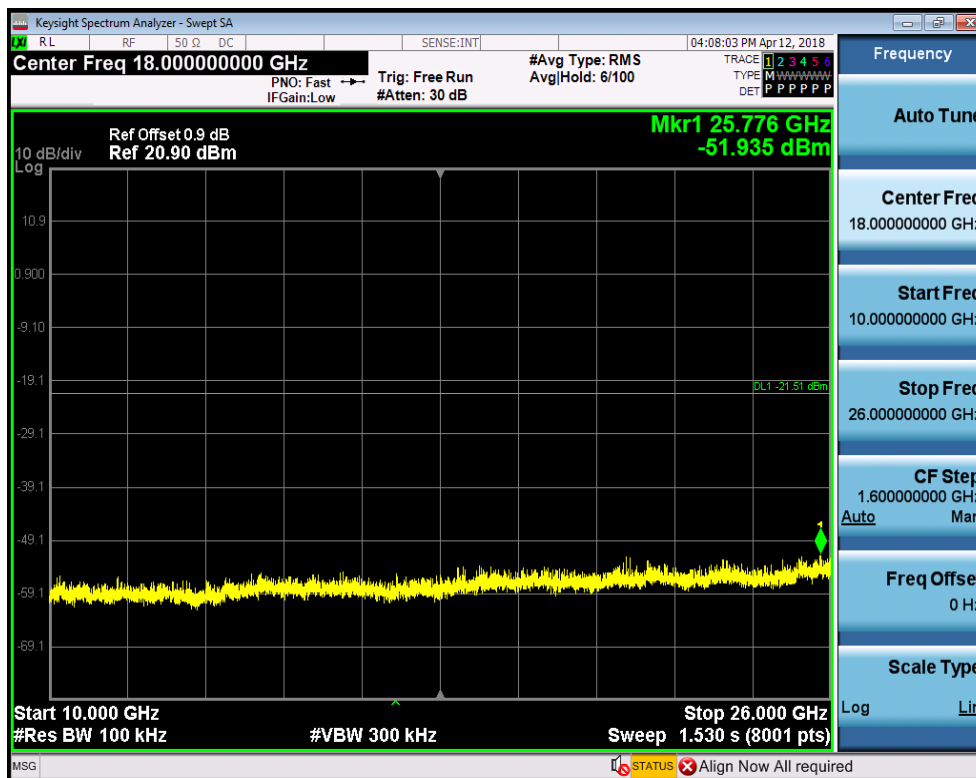


RF Conducted Spurious Emissions_11G_2462_Ant1


Pref

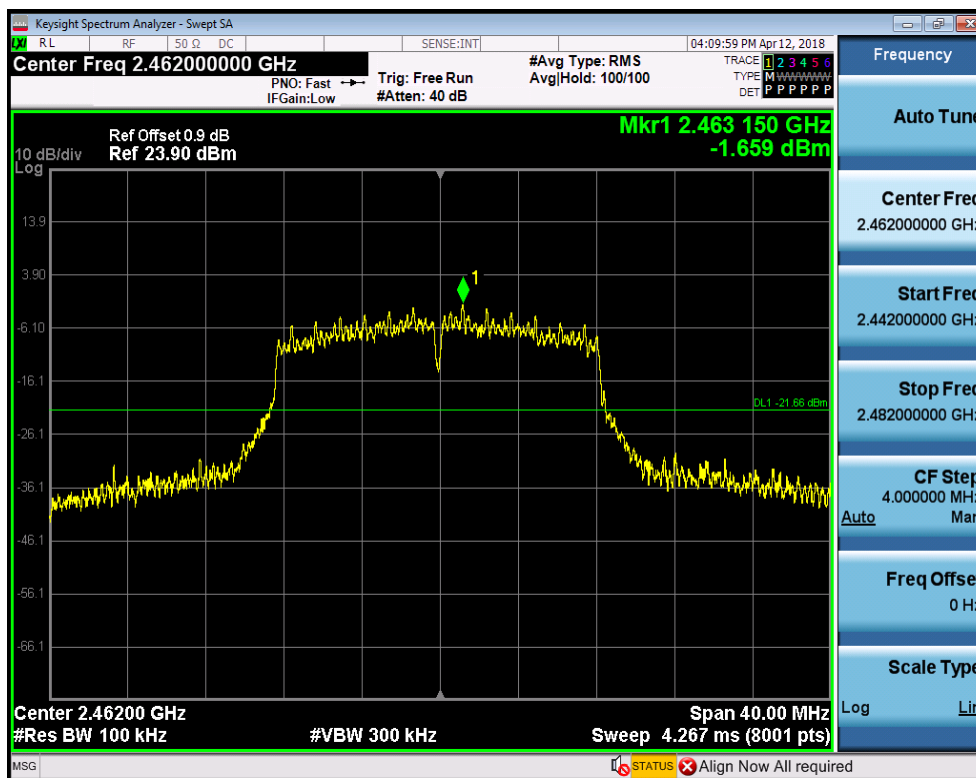

CSE_1

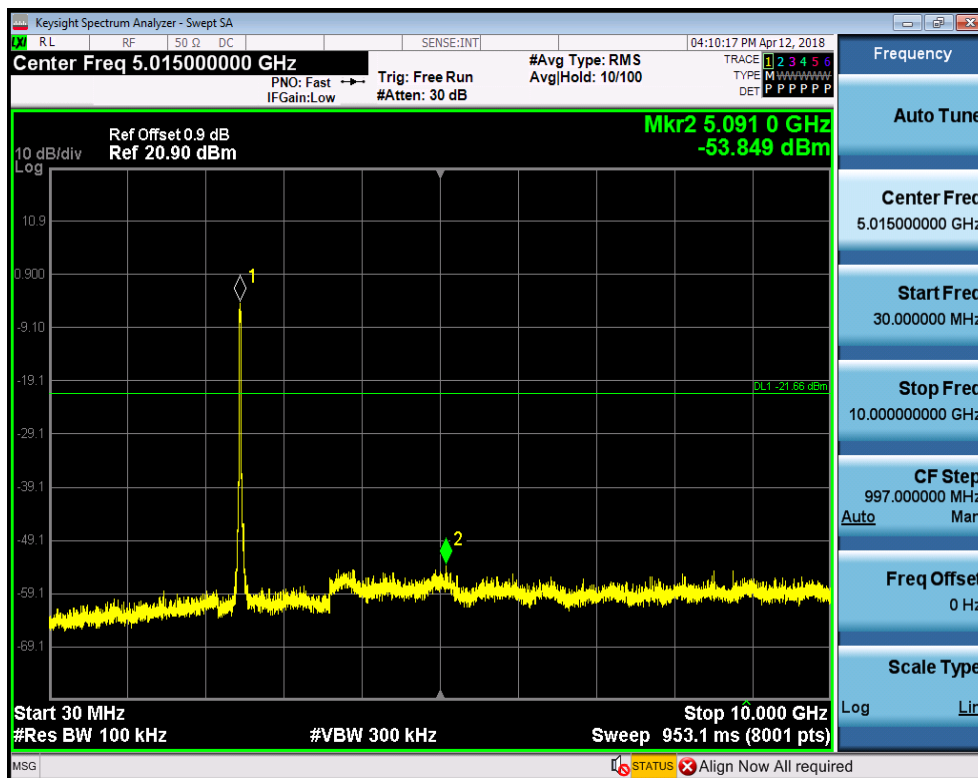


CSE_2

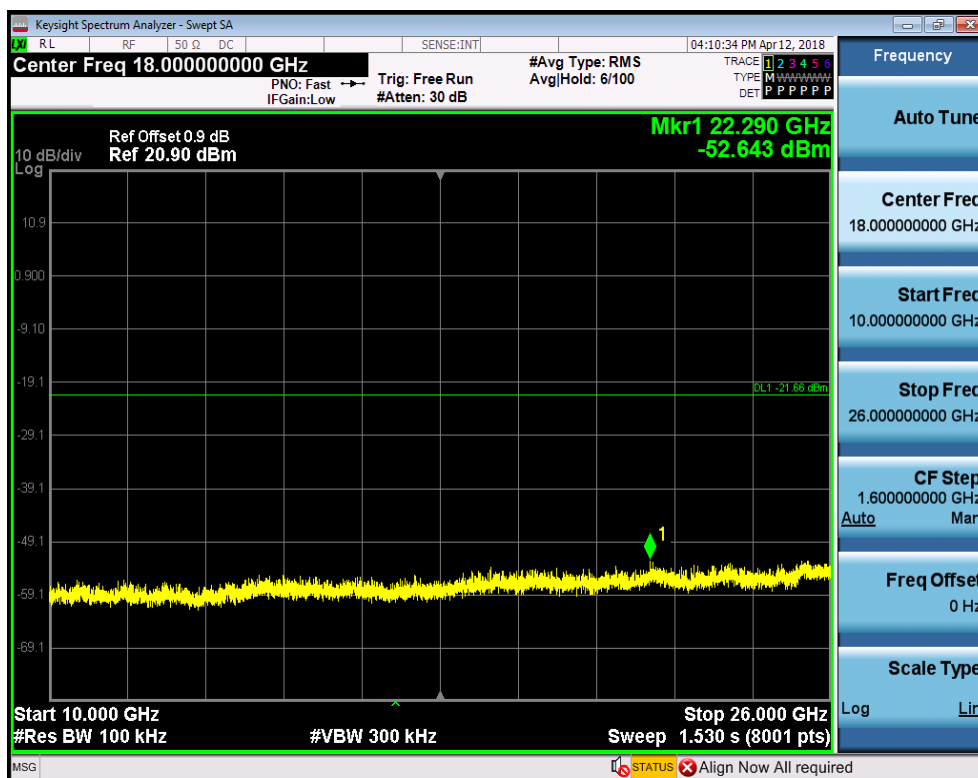


RF Conducted Spurious Emissions_11N20SISO_2412_Ant1


Pref

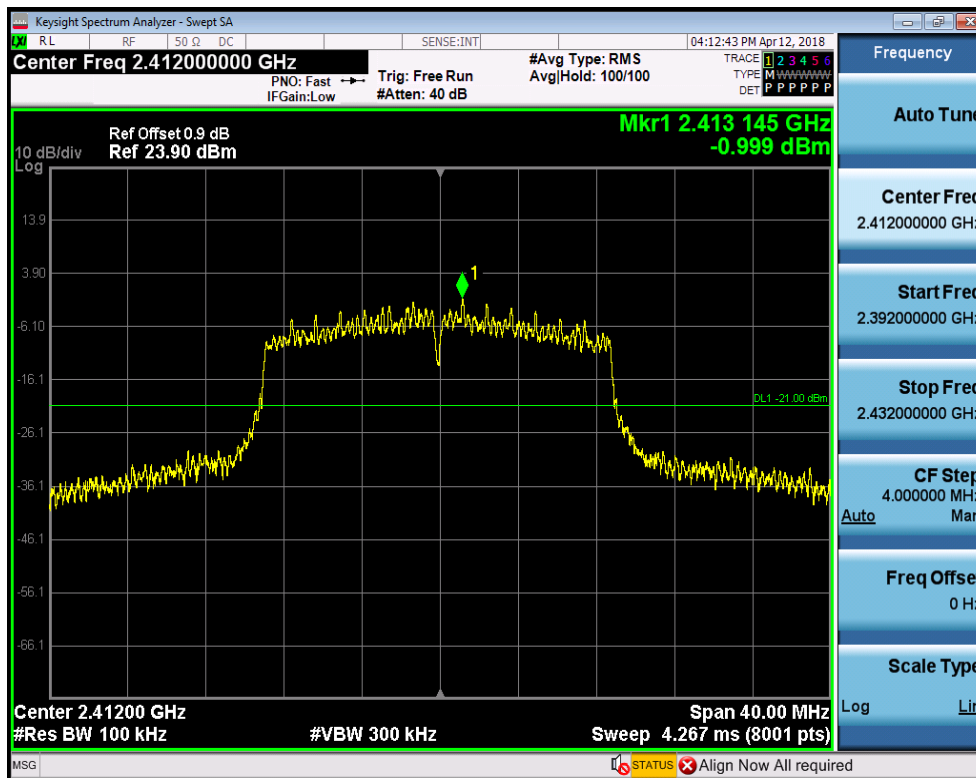

CSE_1

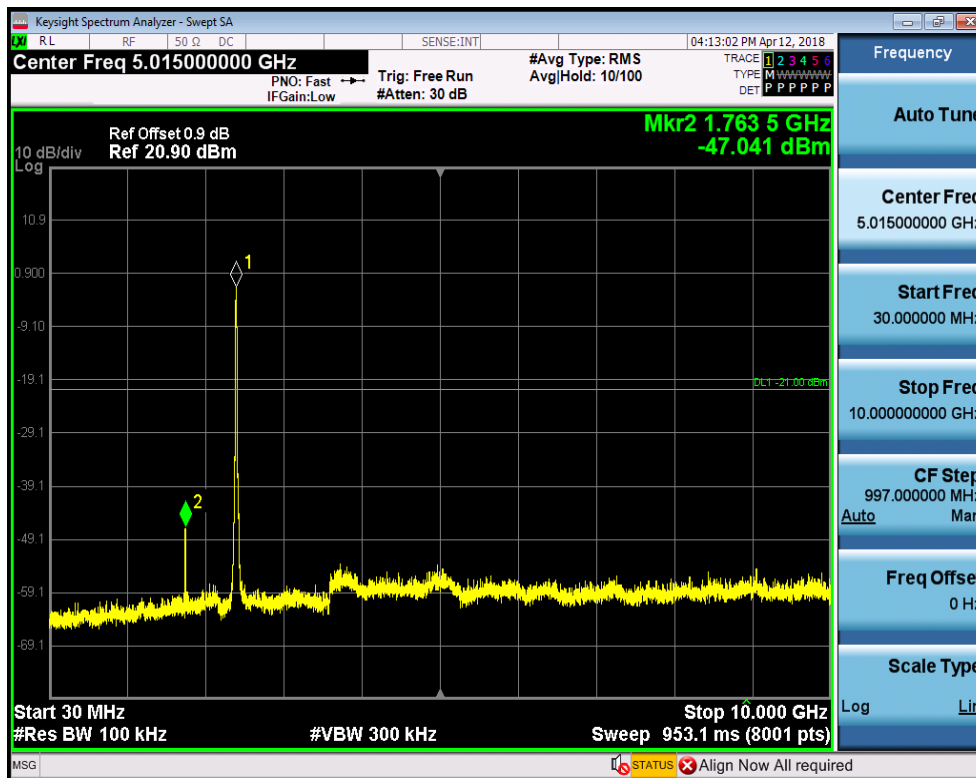


CSE_2

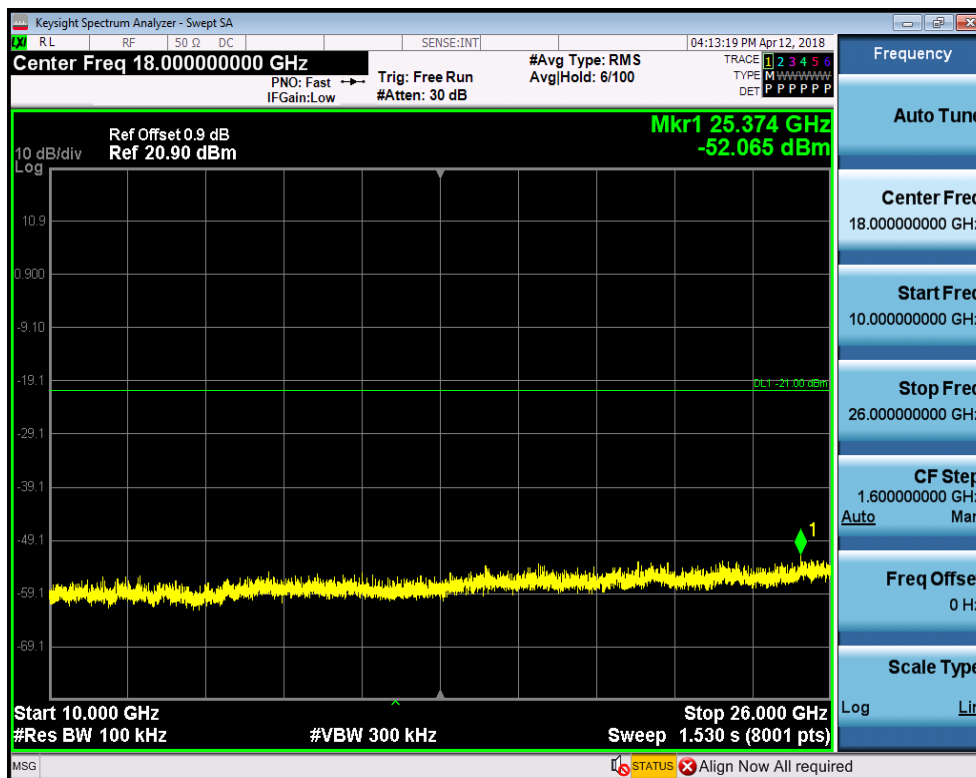


RF Conducted Spurious Emissions_11N20SISO_2442_Ant1


Pref

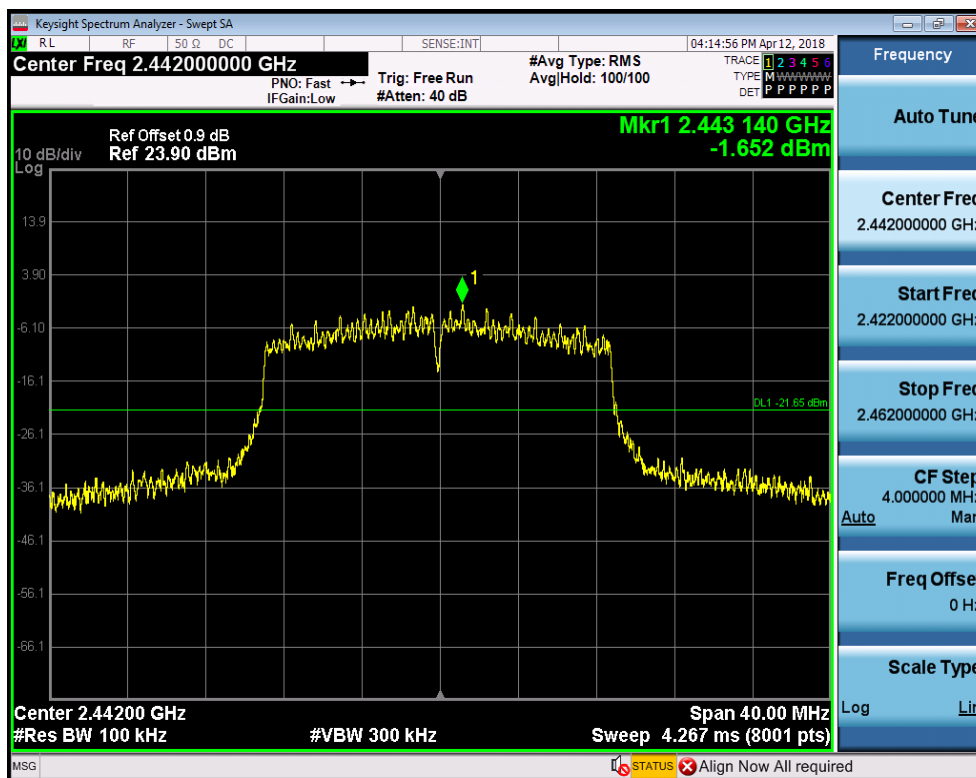

CSE_1

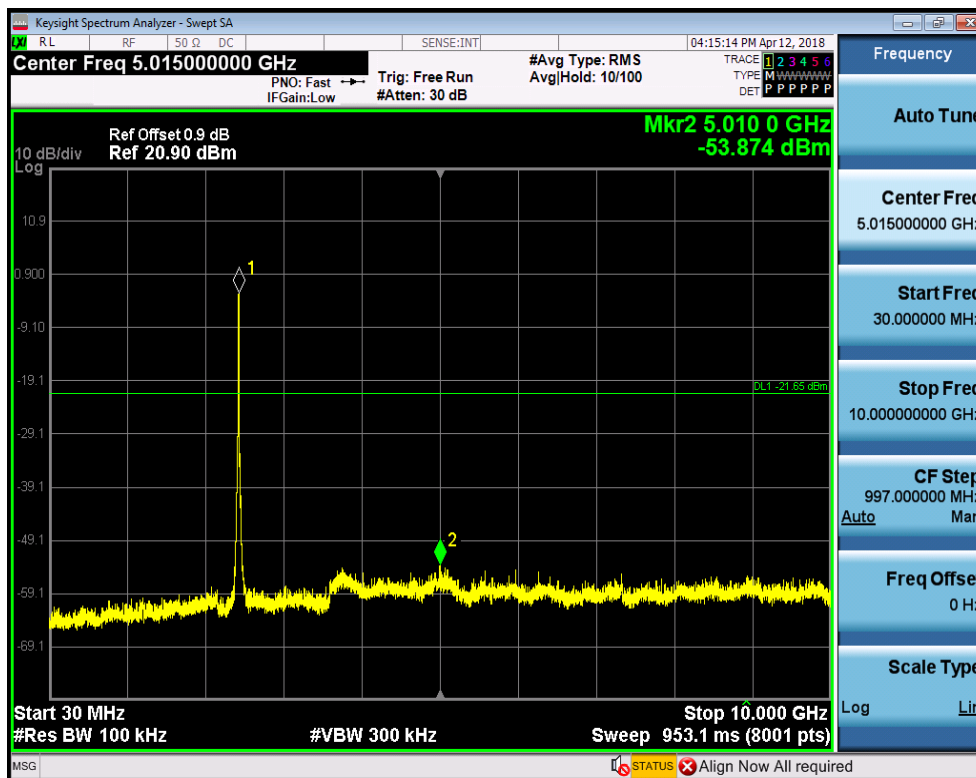


CSE_2

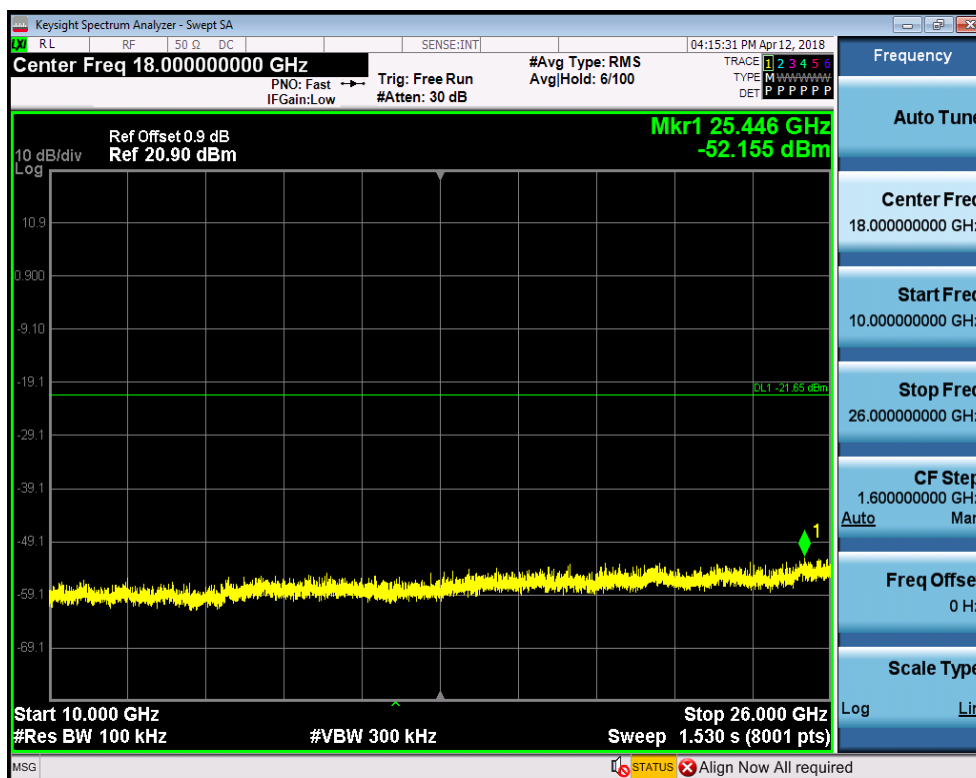


RF Conducted Spurious Emissions_11N20SISO_2462_Ant1

Pref

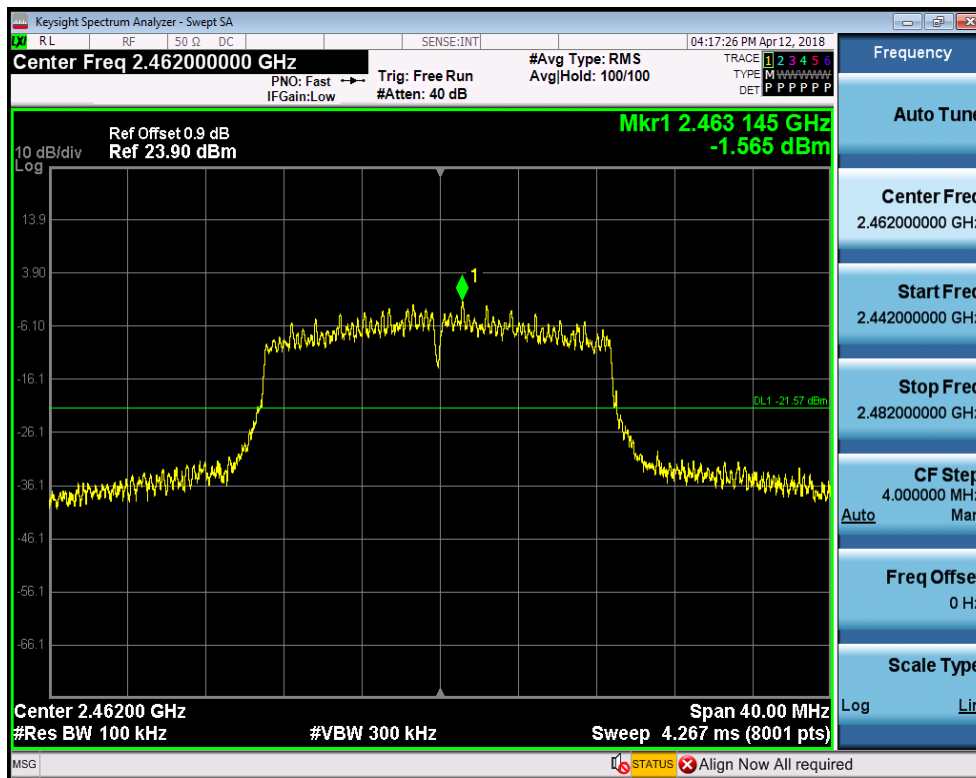

CSE_1

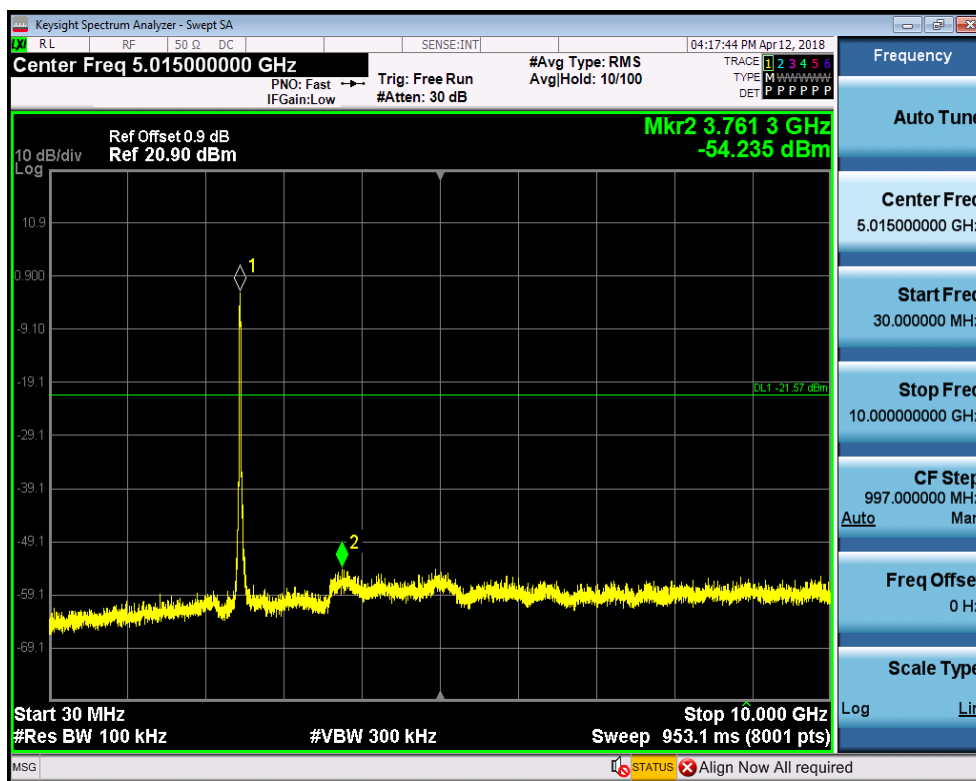


CSE_2




RF Conducted Spurious Emissions_11N40SISO_2422_Ant1


Pref

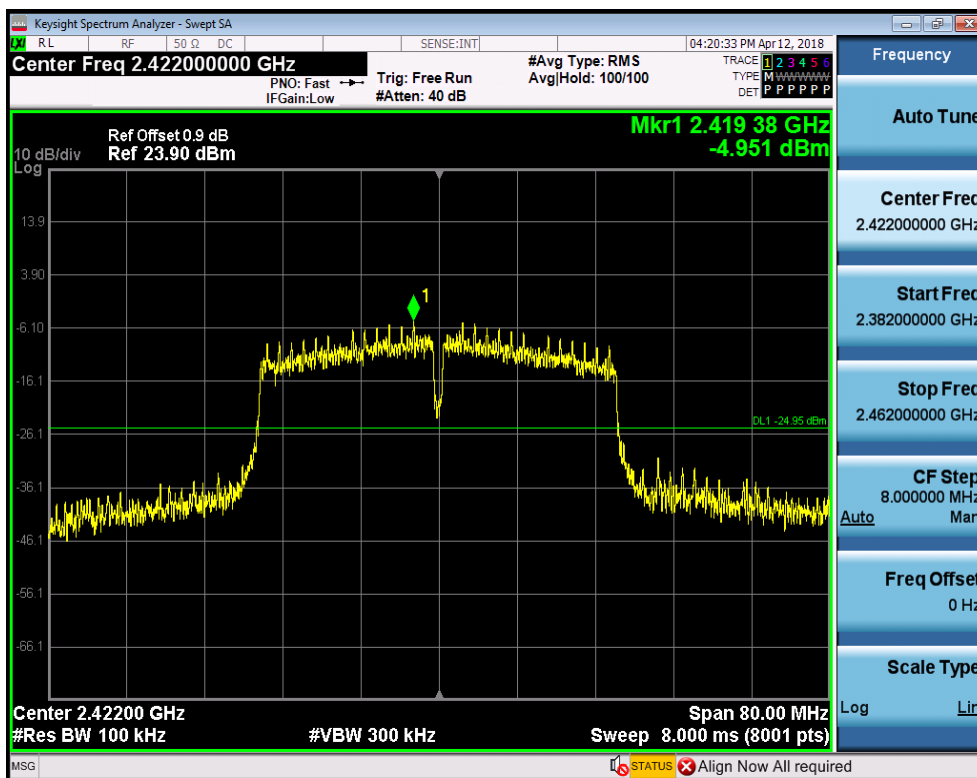

CSE_1

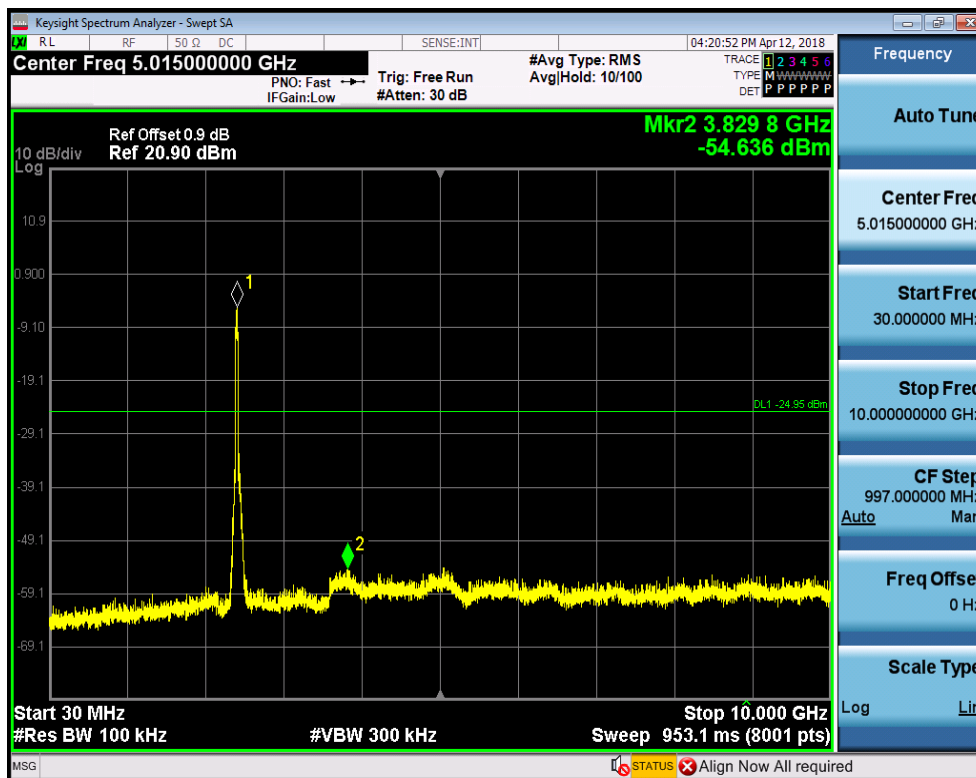


CSE_2

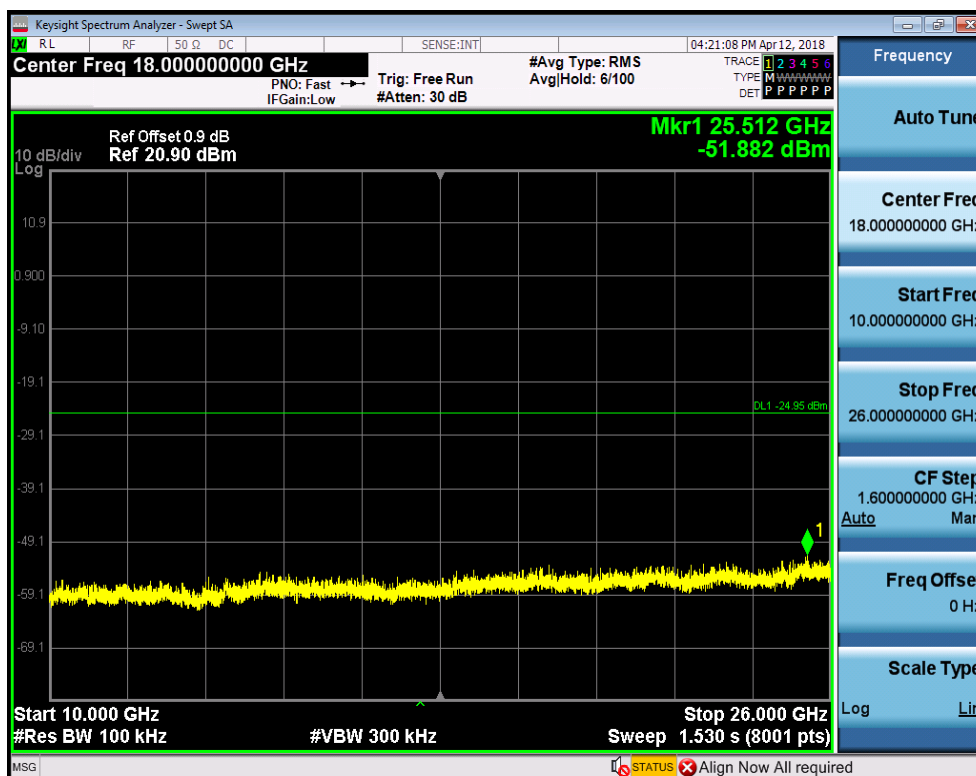


RF Conducted Spurious Emissions_11N40SISO_2442_Ant1


Pref

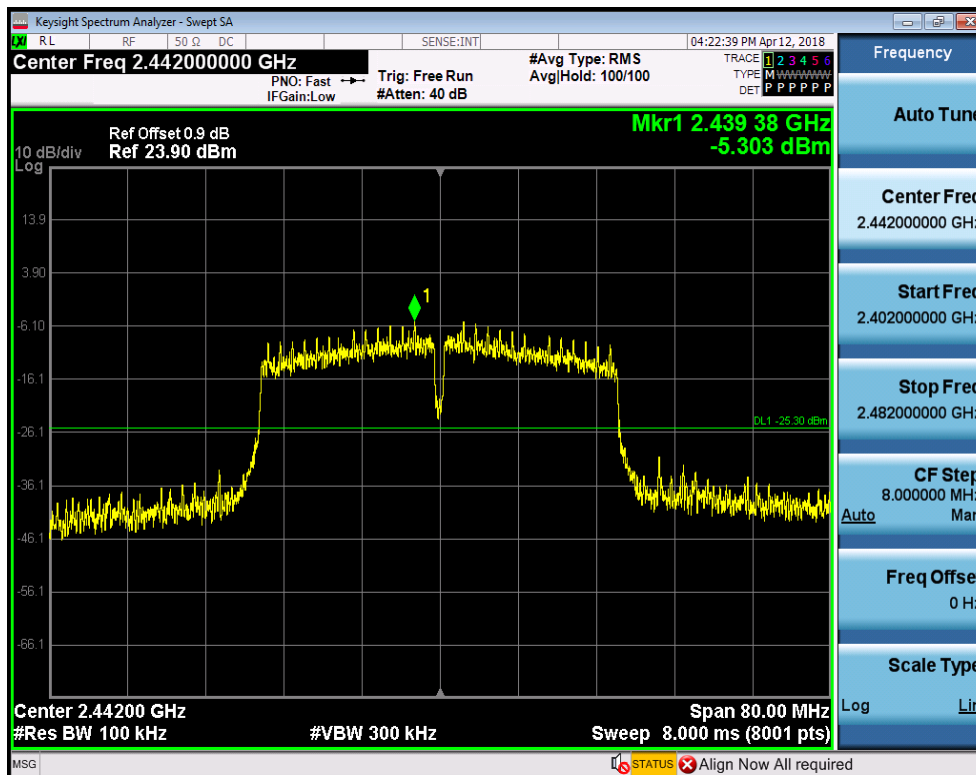

CSE_1

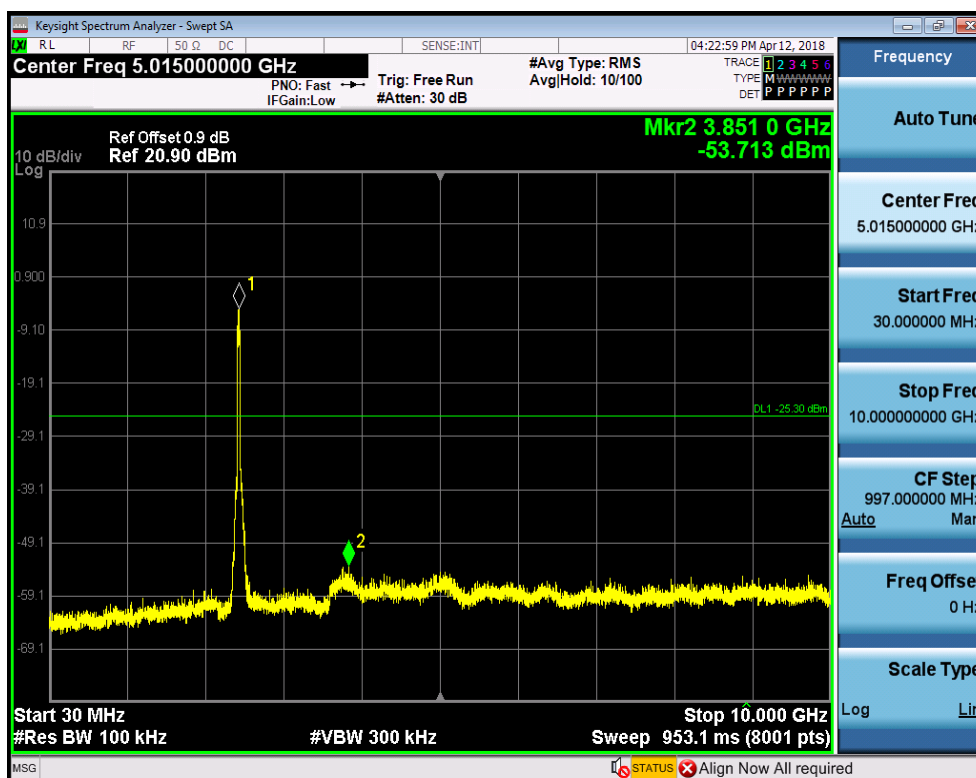


CSE_2

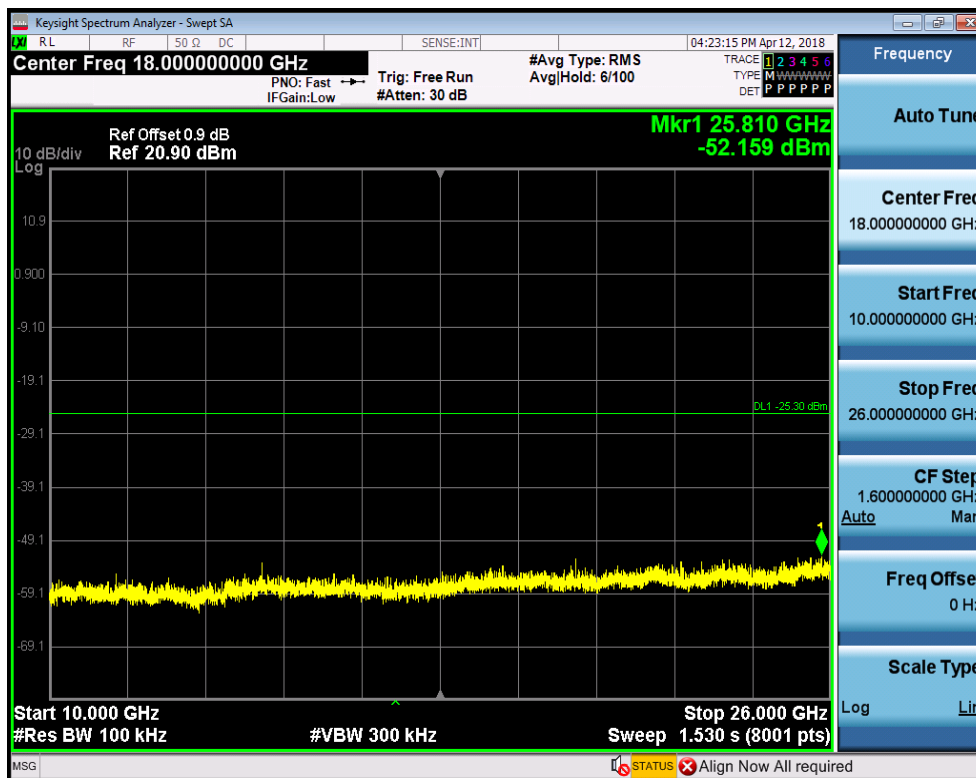


RF Conducted Spurious Emissions_11N40SISO_2452_Ant1


Pref

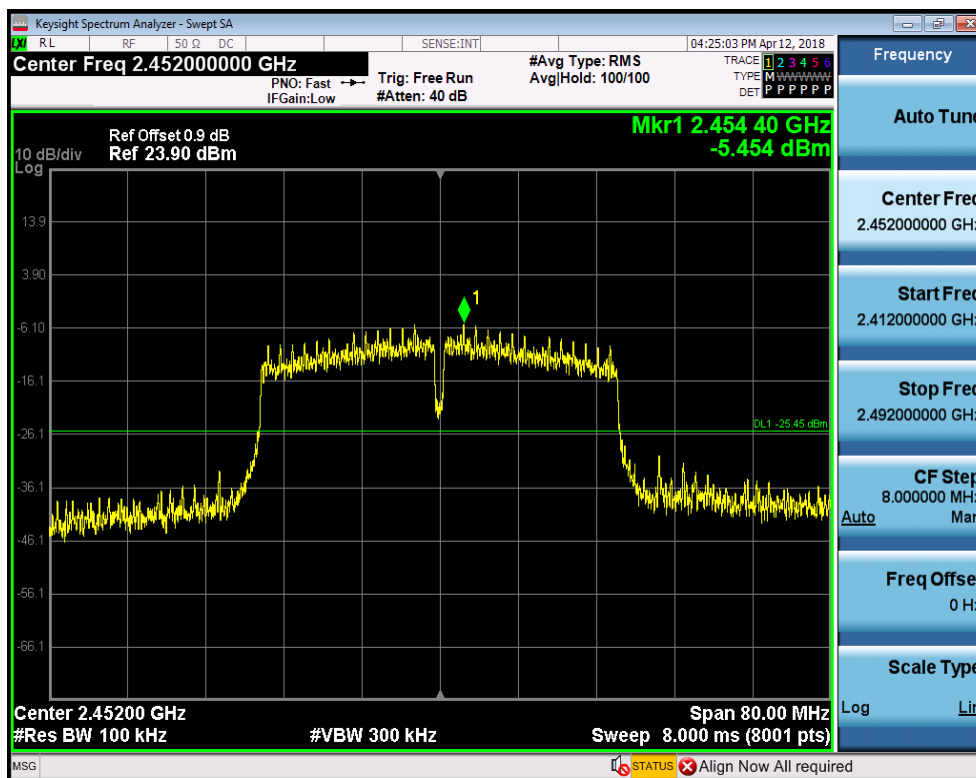

CSE_1

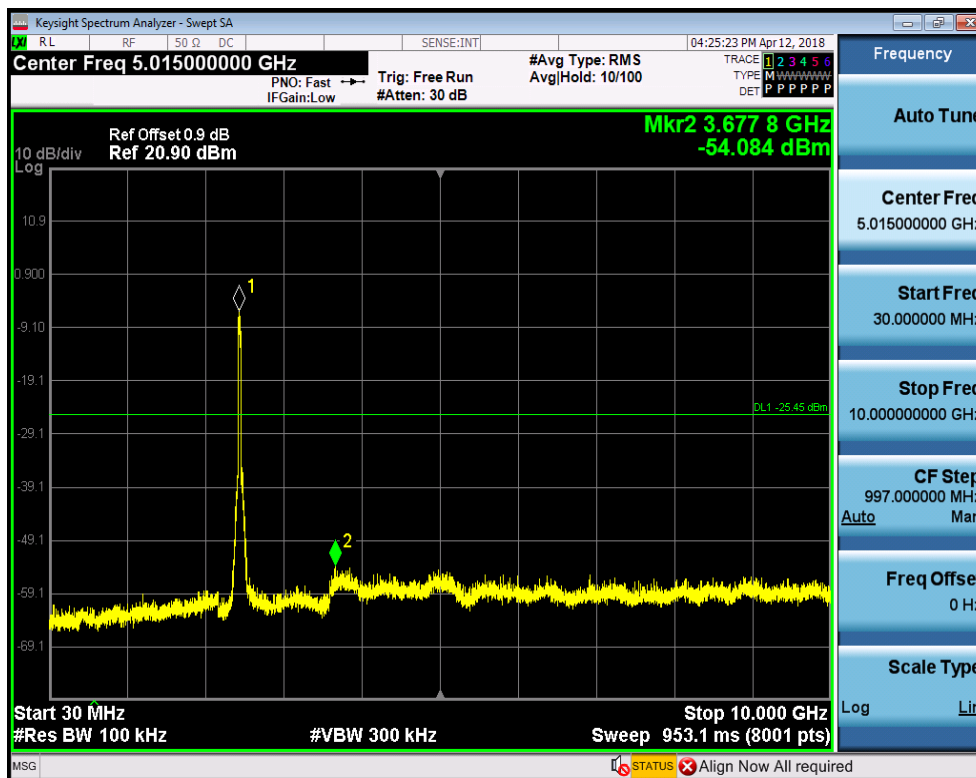

CSE_2

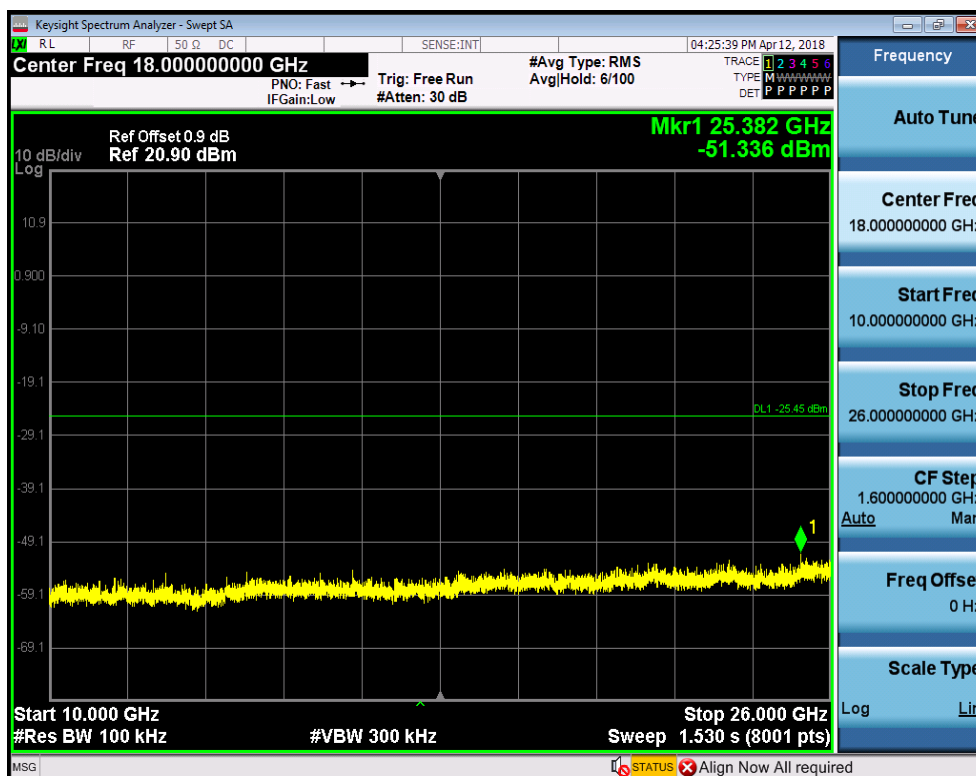

--End of Report--