

FCC PART 15 SUBPART C TEST REPORT

for

CSP Gateway Box

Model No.: MF0200

FCC ID: 2AID8CSPBOXMF0200A

of

Applicant: Mentor Graphics Corporation

**Address: 8005 S.W Boeckman Rd. Wilsonville Oregon 97070
United States**

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

A2LA Accredited No.: 2732.01



Report No.: W6M21604-15762-C-1


6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wts@wts-lab.com



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES	2
1.2	TESTING LABORATORY	3
1.2.1	<i>Location</i>	3
1.2.2	<i>Details of accreditation status</i>	3
1.3	DETAILS OF APPROVAL HOLDER	3
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS	6
2	TECHNICAL TEST	7
2.1	SUMMARY OF TEST RESULTS	7
2.2	TEST ENVIRONMENT	7
2.3	TEST EQUIPMENT LIST	8
2.4	GENERAL TEST PROCEDURE	10
3	TEST RESULTS (ENCLOSURE)	12
3.1	PEAK OUTPUT POWER (TRANSMITTER)	13
3.2	RF EXPOSURE COMPLIANCE REQUIREMENTS	23
3.3	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	24
3.4	SPURIOUS EMISSIONS (TX)	25
3.5	CARRIER FREQUENCY SEPARATION	27
3.6	NUMBER OF HOPPING FREQUENCIES	30
3.6.1	<i>Pseudorandom Frequency Hopping Sequence</i>	32
3.6.2	<i>Coordination of hopping sequences to other transmitters</i>	32
3.6.3	<i>System Receiver Hopping Capability</i>	32
3.7	TIME OF OCCUPANCY (DWELL TIME)	33
3.8	20dB BANDWIDTH	39
3.8.1	<i>System Receiver Input Bandwidth</i>	42
3.9	MINIMUM 6 DB BANDWIDTH	43
3.10	RADIATED EMISSION ON THE BAND EDGE	50
3.11	PEAK POWER SPECTRAL DENSITY	57
3.12	RADIATED EMISSION FROM DIGITAL PART	63
3.13	POWER LINE CONDUCTED EMISSION	64
	Appendix	



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.


Specific Conditions:


Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

Tester:

July 21, 2016	Spencer Yang	
_____	_____	_____
Date	WTS-Lab. Name	Signature

Technical responsibility for area of testing:

July 21, 2016	Kevin Wang	
_____	_____	_____
Date	WTS Name	Signature



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

1.2 Testing laboratory

1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,
Wanli Dist., New Taipei City 207,
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1, IC 5107A-1

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

1.3 Details of approval holder

Name: Mentor Graphics Corporation

Street: 8005 S.W Boeckman Rd.

Town: Wilsonville Oregon 97070

Country: United States

Telephone: +1(408) 963-8731

Fax: +1(408) 384-5034



Registration number: W6M21604-15762-C-1

FCC ID: 2AID8CSPBOXMF0200A

1.4 Application details

Date of receipt of test item: May 10, 2016
Date of test: from May 10, 2016 to July 21, 2016

1.5 General information of Test item

Type of test item: CSP Gateway Box
Model Number: MF0200
Brand Name: Mentor Graphics
Multi-listing model number: ./.
Photos: see Appendix

Technical data

Frequency band: 2.412 GHz-2.462 GHz, 2.402 GHz-2.480 GHz

802.11b, g, n 20MHz

Frequency (ch 1): 2.412 GHz
Frequency (ch 6): 2.437 GHz
Frequency (ch 11): 2.462 GHz

Bluetooth Normal, EDR

Frequency (ch 0): 2.402 GHz
Frequency (ch 39): 2.441 GHz
Frequency (ch 78): 2.480 GHz

Bluetooth Low Energy

Frequency (ch 0): 2.402 GHz
Frequency (ch 19): 2.440 GHz
Frequency (ch 39): 2.480 GHz

Number of Channels: 802.11b, g, n 20MHz: 11 channels
Bluetooth 2.0: 79 channels
Bluetooth 4.0: 40 channels

Operation modes: Duplex
Modulation Type: DSSS/OFDM、GFSK、 $\pi/4$ DQPSK、8DPSK
Fixed point-to-point operation: Yes / No
Type of Antenna: Dipole antenna
Antenna gain: 2 dBi



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

Power supply: Adapter (I/P: 100-240V~ 50/60Hz, 0.6A Max.
O/P: 12V, 2.0A)

Emission designator: 802.11b: DSSS: 13M9G1D
802.11g: OFDM: 16M6D1D
802.11n 20MHz: OFDM: 17M8D1D
Bluetooth (Normal): 901KF1D
Bluetooth (EDR): 1M24G1D
Bluetooth Low Energy: 907KG1D

Host device: none

Classification :

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input checked="" type="checkbox"/>
Modular Radio Device	<input type="checkbox"/>

Transmitter

Unom

Mode A (802.11b)

Power (ch 1 or A): Conducted: 7.46 dBm
Power (ch 6 or B): Conducted: 7.70 dBm
Power (ch 11 or C): Conducted: 7.64 dBm

Mode B (802.11g)

Power (ch 1 or A): Conducted: -6.83 dBm
Power (ch 6 or B): Conducted: -6.65 dBm
Power (ch 11 or C): Conducted: -6.73 dBm

Mode C (802.11n 20 MHz)

Power (ch 1 or A): Conducted: -7.98 dBm
Power (ch 6 or B): Conducted: -7.72 dBm
Power (ch 11 or C): Conducted: -7.43 dBm

Mode D (Bluetooth Normal mode)


Power (ch 0 or A): Conducted: 5.70 dBm
Power (ch 39 or B): Conducted: 6.56 dBm
Power (ch 78 or C): Conducted: 6.36 dBm

Mode E (Bluetooth EDR mode)

Power (ch 0 or A): Conducted: 3.79 dBm
Power (ch 39 or B): Conducted: 4.57 dBm
Power (ch 78 or C): Conducted: 4.05 dBm

Mode F (Bluetooth Low Energy mode)

Power (ch 0 or A): Conducted: 5.12 dBm
Power (ch 19 or B): Conducted: 5.82 dBm
Power (ch 39 or C): Conducted: 4.47 dBm




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

Manufacturer: (if applicable)

Name:	First International Computer, Inc.
Street:	8F., No. 300, Yang Guang St., NeiHu,
Town:	Taipei,
Country:	Taiwan, 114

1.6 Test standards

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2015-10)



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

or

The deviations as specified in 2.5 were ascertained in the course of the tests performed.

2.2 Test environment

Temperature: 23 °C
Relative humidity content: 20 ... 75 %
Air pressure: 86 ... 103 kPa
Power supply: Adapter (I/P: 100-240V~ 50/60Hz, 0.6A Max.
O/P: 12V, 2.0A)
Extreme conditions parameters: ./.



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

2.3 Test Equipment List


No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2016/5/20	2017/5/19
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 008	HF-EICHLLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2016/7/12	2017/7/11
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2015/9/7	2016/9/6
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2016/5/20	2017/5/19
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2016/5/25	2017/5/24
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2016/7/4	2017/7/3
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2016/6/24	2017/6/23
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2016/6/29	2017/6/28
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2016/3/23	2017/3/22
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2016/1/25	2017/1/24
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2016/3/28	2017/3/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2016/4/14	2017/4/13
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2016/2/27	2017/2/26
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2016/2/25	2017/2/24
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2016/4/13	2017/4/12
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2015/9/6	2016/9/5
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2015/9/21	2016/9/20
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2016/2/25	2017/2/24
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2016/1/13	2017/1/12
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2016/5/23	2017/5/22
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2015/8/11	2016/8/10



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2015/8/11	2016/8/10
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2016/2/25	2017/2/24
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2015/8/11	2016/8/10
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2015/8/11	2016/8/10
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2016/4/13	2017/4/12
ETSTW-RE 143	Humidity Temperature Meter	TES-1260	110104623	TES	2015/9/9	2016/9/8
ETSTW-RE 147	Bi-log Hybrid Antenna	MCTD 2786B	BLB16M04005	ETC	2016/3/31	2017/3/30
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2016/5/4	2017/5/3
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2016/3/4	2017/3/3
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2016/2/3	2017/2/2
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2016/1/13	2017/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2016/1/13	2017/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2016/1/13	2017/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2016/1/13	2017/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2015/9/16	2016/9/15
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2015/9/11	2016/9/10
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2015/9/11	2016/9/10
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2016/2/24	2017/2/23
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2016/4/22	2017/4/21
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2016/4/7	2017/4/6
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2016/5/13	2017/5/12
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2015/9/21	2016/9/20
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2015/9/21	2016/9/20
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2016/2/25	2017/2/24
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 048	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2016/4/13	2017/4/12
ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2016/4/7	2017/4/6
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2016/4/13	2017/4/12
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz) METER READING + ACF + CABLE LOSS (to the receiver) = FS
33 20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m


The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent isotropically radiated Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.247	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Carrier Frequency Separation	15.247(a) (1)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequencies	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20 dB Bandwidth	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Minimum 6 dB Bandwidth	15.247(a)(2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band-edge Compliance of RF Emission	15.247(d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Peak Power Spectral Density	15.247(e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	15.109	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207(a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)


This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.
The power was measured with modulation (declared by the applicant).

Mode A

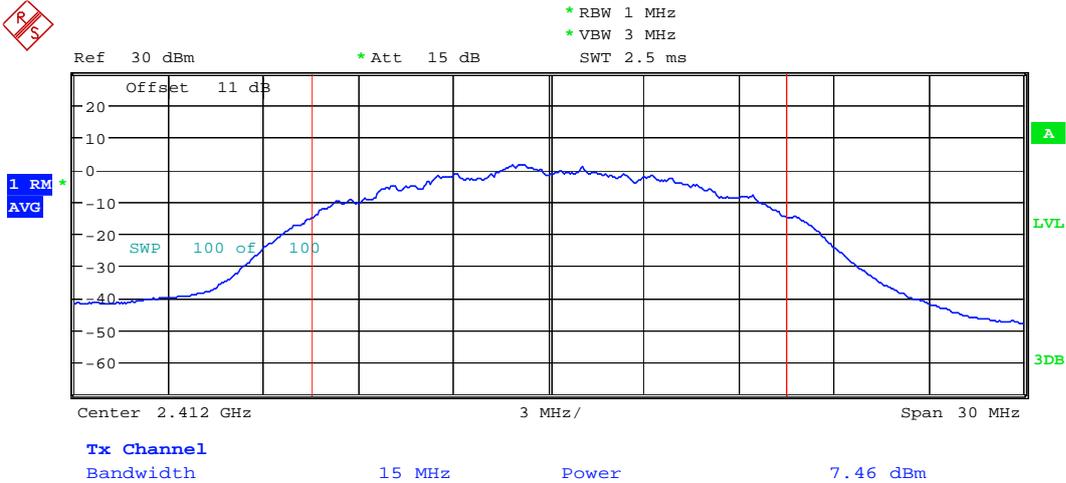


MAX OUTPUT POWER 802.11B CH01


Date: 17.MAY.2016 01:05:57




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

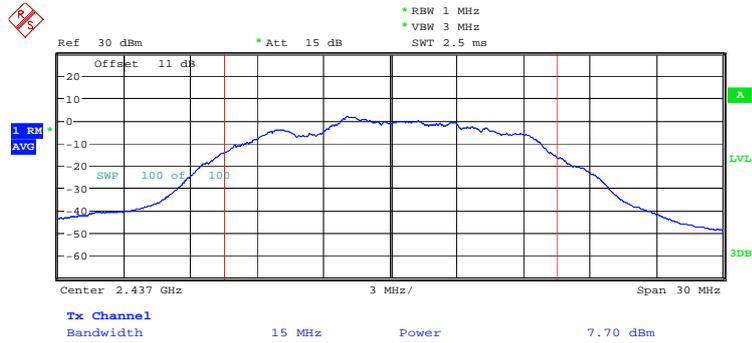

MAX OUTPUT POWER 802.11B CH06
Date: 17.MAY.2016 01:06:30

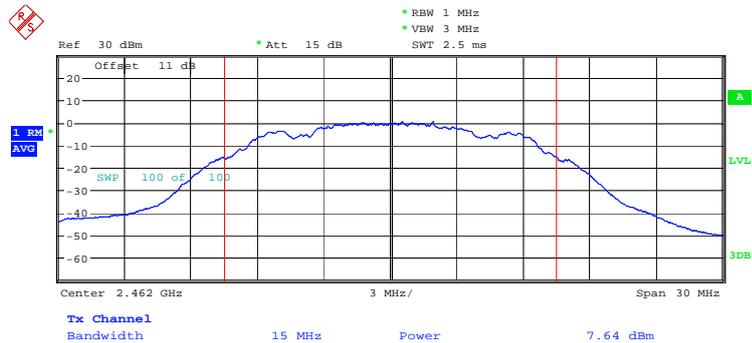


MAX OUTPUT POWER 802.11B CH11
Date: 17.MAY.2016 01:07:13




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


Mode B

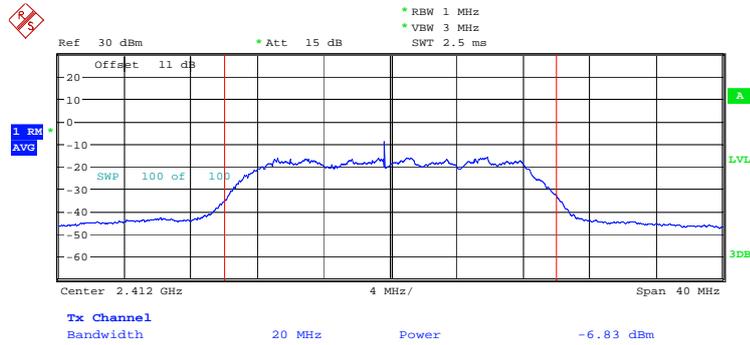


MAX OUTPUT POWER 802.11G CH01
Date: 17.MAY.2016 01:08:52

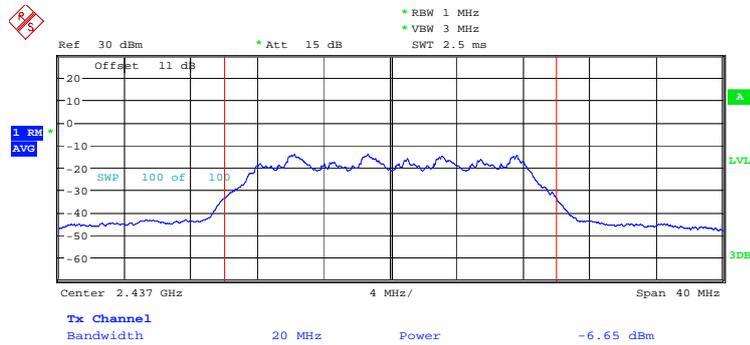

MAX OUTPUT POWER 802.11G CH06
Date: 17.MAY.2016 01:09:38




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

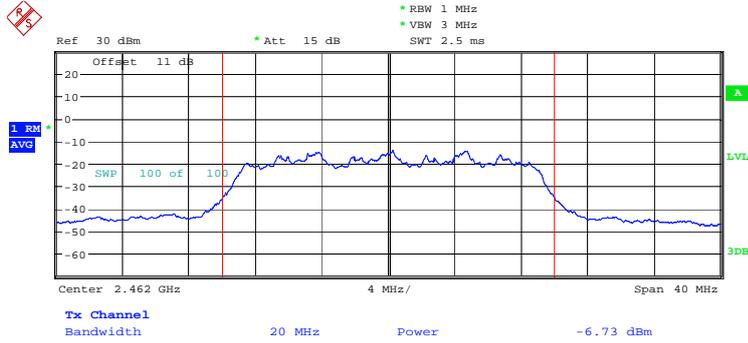


MAX OUTPUT POWER 802.11G CH11
Date: 17.MAY.2016 01:10:17

Mode C

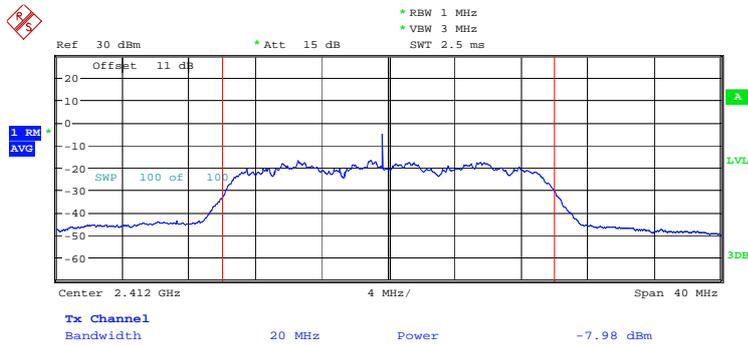


MAX OUTPUT POWER 802.11N 20MHZ CH01
Date: 17.MAY.2016 01:11:30




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

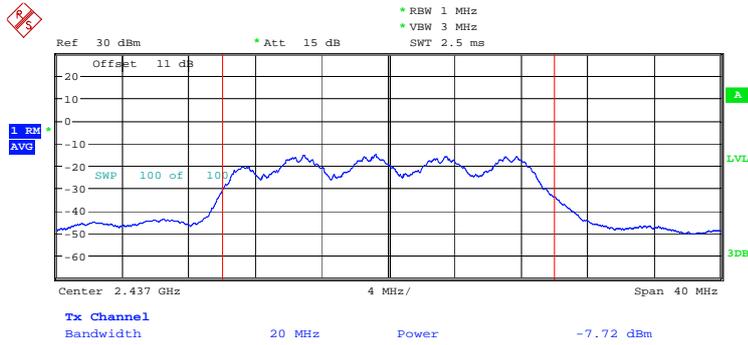

MAX OUTPUT POWER 802.11N 20MHZ CH06
Date: 17.MAY.2016 01:13:33

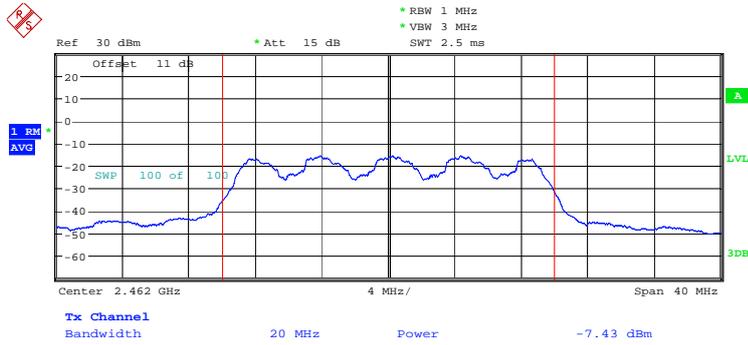


MAX OUTPUT POWER 802.11N 20MHZ CH11
Date: 17.MAY.2016 01:14:17




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


Mode D

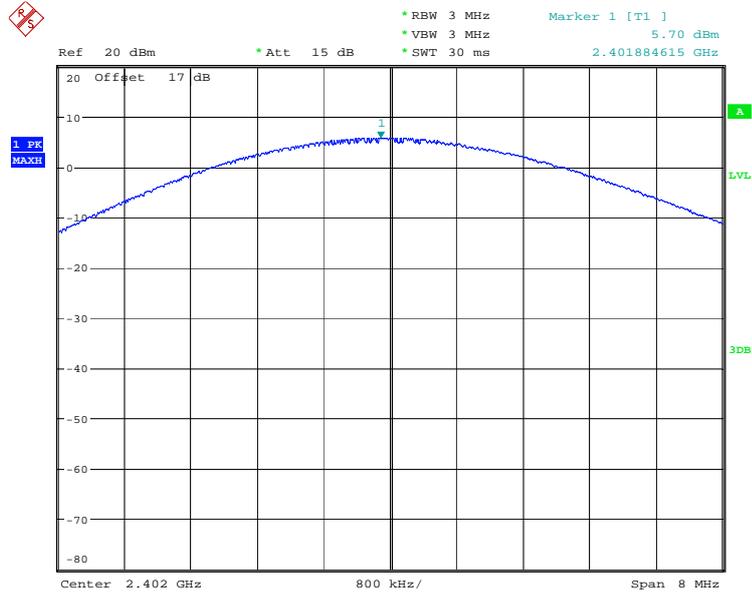


MAX OUTPUT POWER CH0
Date: 17.MAY.2016 00:23:55

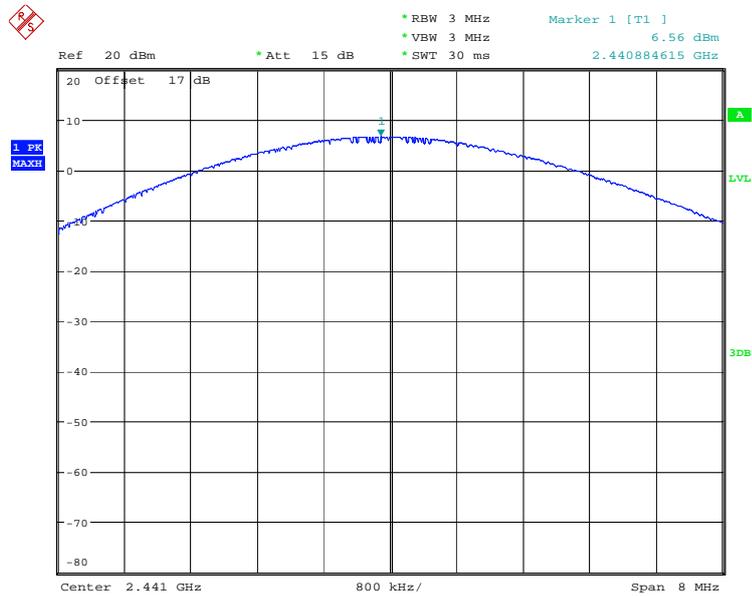

MAX OUTPUT POWER CH39
Date: 17.MAY.2016 00:24:27




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

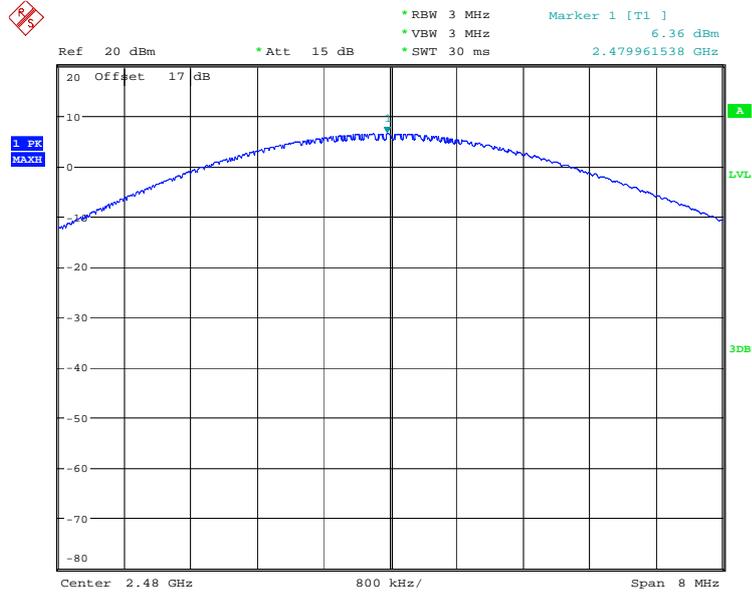


MAX OUTPUT POWER CH78
Date: 17.MAY.2016 00:24:47


Mode E

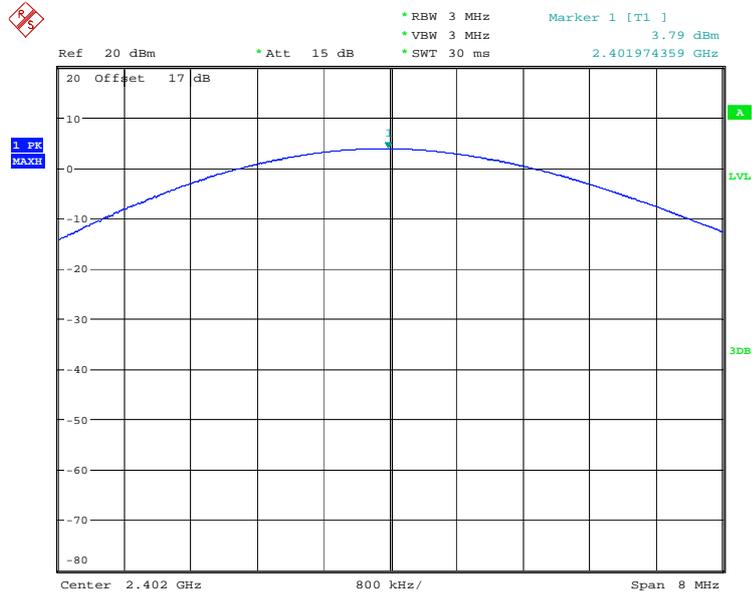


MAX OUTPUT POWER CH0 EDR MODE
Date: 17.MAY.2016 00:30:07




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

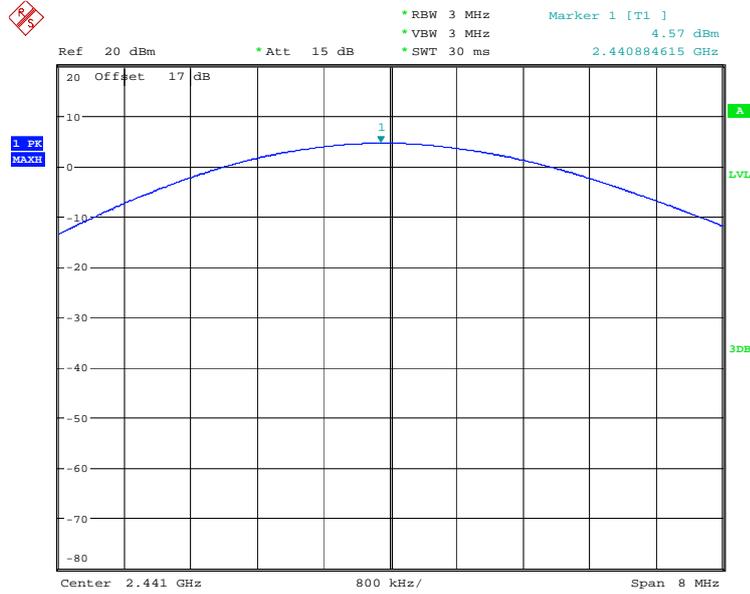

MAX OUTPUT POWER CH39 EDR MODE
Date: 17.MAY.2016 00:30:43

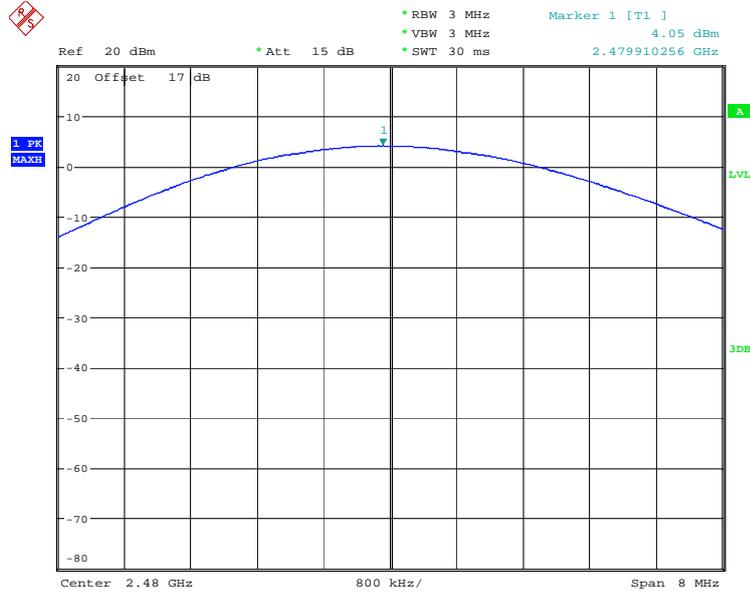


MAX OUTPUT POWER CH78 EDR MODE
Date: 17.MAY.2016 00:31:03




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


Mode F

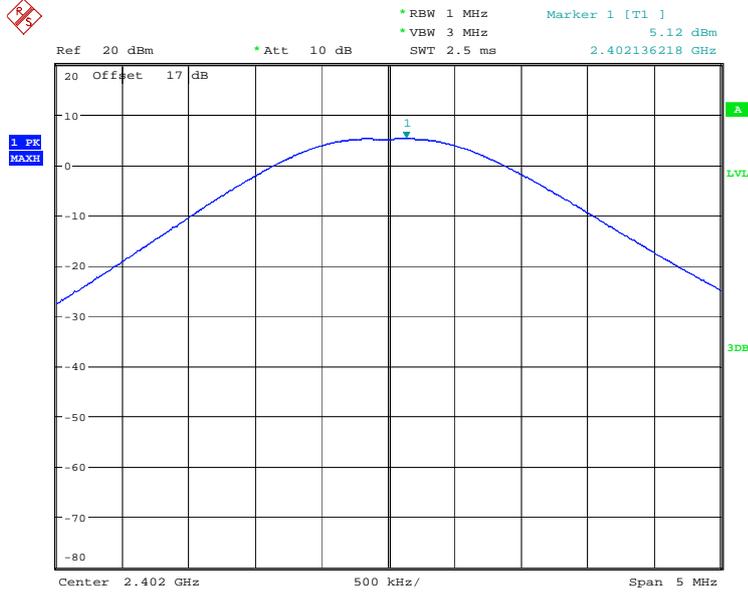


MAX OUTPUT POWER BT4.0 CH00
Date: 17.MAY.2016 00:50:25

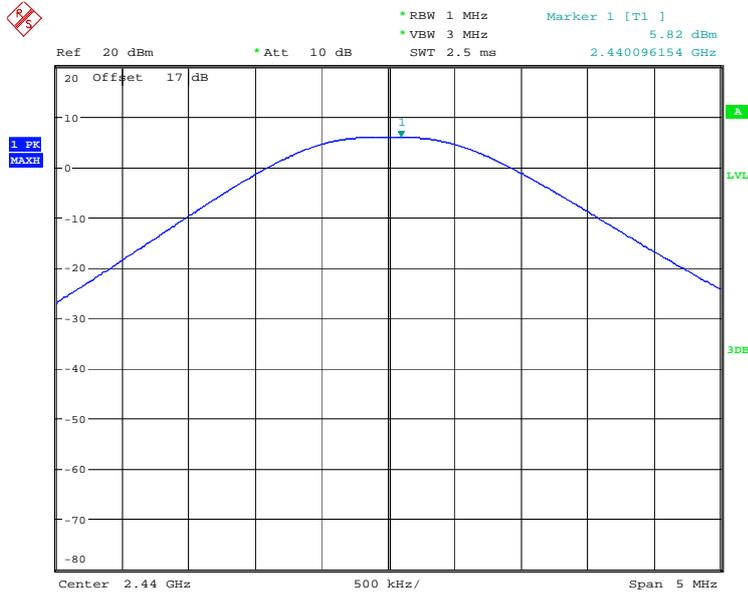

MAX OUTPUT POWER BT4.0 CH19
Date: 17.MAY.2016 00:51:19



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

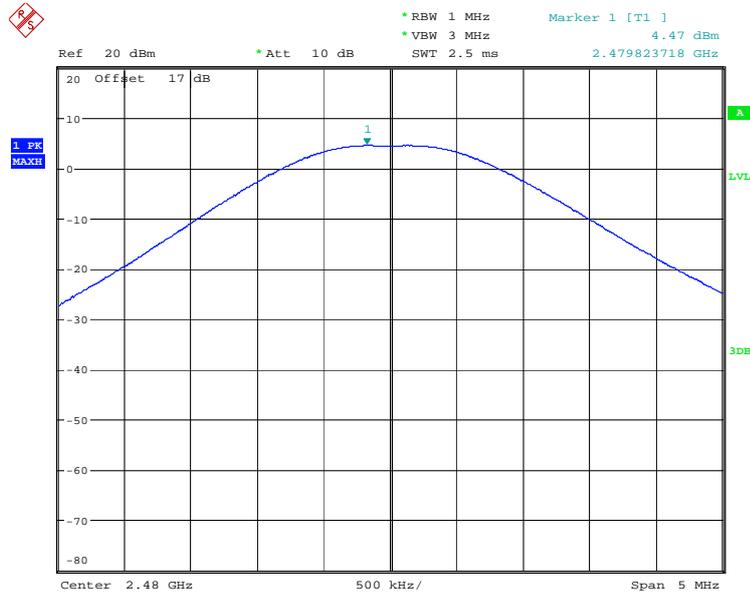


MAX OUTPUT POWER BT4.0 CH39
 Date: 17.MAY.2016 00:52:27

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050,
 ETSTW-RE 064



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

3.2 RF Exposure Compliance Requirements

FCC Rule: 15.247(b)(3)

Test exclusion = max. conducted output power

Test exclusion = 7.70 dBm (WLAN) / 6.56 dBm (BT2.0) / 5.82 dBm (BT4.0)

RESULT:

Test standard : FCC KDB Publication
 447498 D01 General RF Exposure Guidance v06

According to 447498 D01 General RF Exposure Guidance v06:

SAR evaluation, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The enclosure of the device provides ≥ 0.5 cm separation from the antenna elements to significant metal parts of the enclosure to minimize potential perturbations.

Frequency Band: 2400-2483.5 MHz

Maximum Power fed to Antenna: 5.8884 mW (WLAN) / 4.5290 mW (BT2.0) / 3.8194 mW (BT4.0)

Separation distances:


Radiator to user: > 5 mm

Distance prescribed in user manual: > 5 mm

MHz	5	10	15	20	25	mm
2450	10	19	29	38	48	SAR Test Exclusion Threshold (mW)

MHz	30	35	40	45	50	mm
2450	57	67	77	86	96	SAR Test Exclusion Threshold (mW)

MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
2450	96	196	296	396	496	596	696	796	896	996	1096	1196	1296	1396	1496	mW



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

3.3 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency \leq 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time}/ 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



Registration number: W6M21604-15762-C-1

FCC ID: 2AID8CSPBOXMF0200A

3.4 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

Test equipment used: ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018, ETSTW-RE 064

Note: No duty cycle correction was added to the reading of EUT.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:
 Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.
 In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Summary table with radiated data of the test plots

Model:	MF0200	Date:	--
Mode:	--	Temperature:	-- °C Engineer: --
Polarization:	Horizontal	Humidity:	-- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Measurement uncertainty for 3m measurement: 30-1000 MHz = ± 4.69 dB, 1-18 GHz = ± 4.78 dB, 18-40 GHz = ± 2.44 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
6. See attached diagrams in appendix.

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 030, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147, ETSTW-RE 088, ETSTW-RE 018, ETSTW-RE 064




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

3.5 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer). According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

Mode D, E

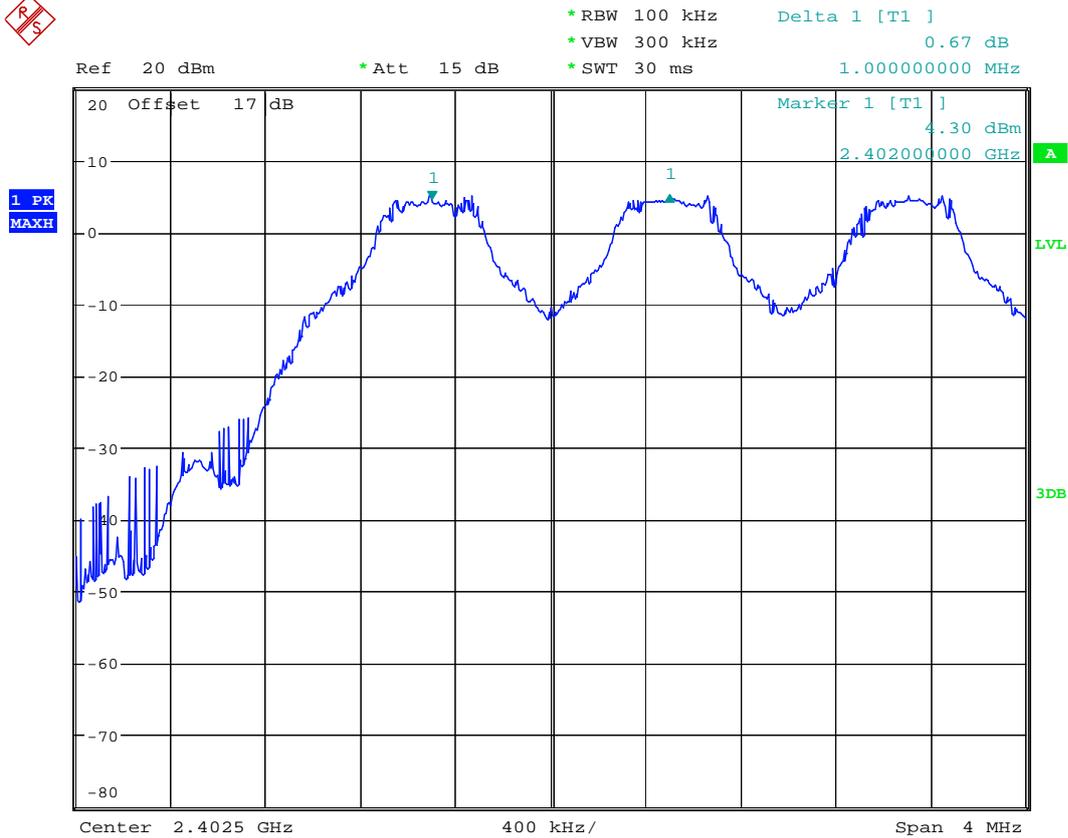


FREQUENCY SEPARATION CH0


Date: 17.MAY.2016 00:28:23



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

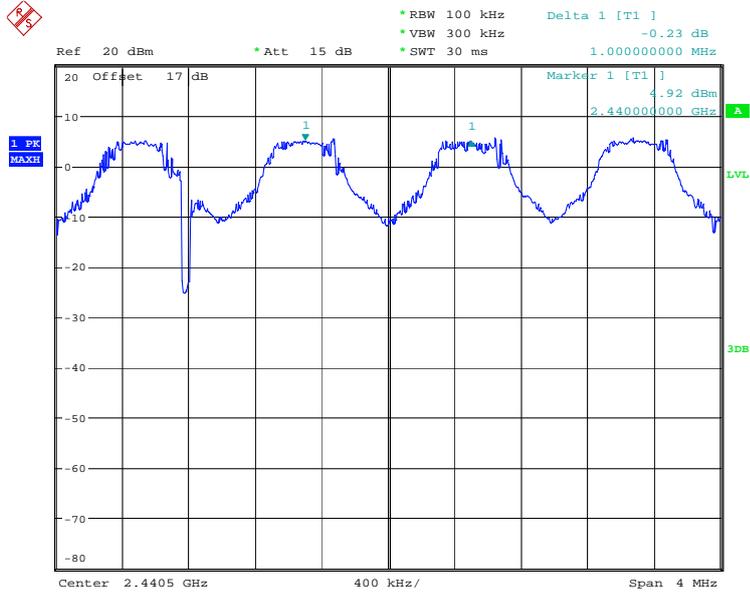

FREQUENCY SEPARATION CH39
Date: 17.MAY.2016 00:29:07

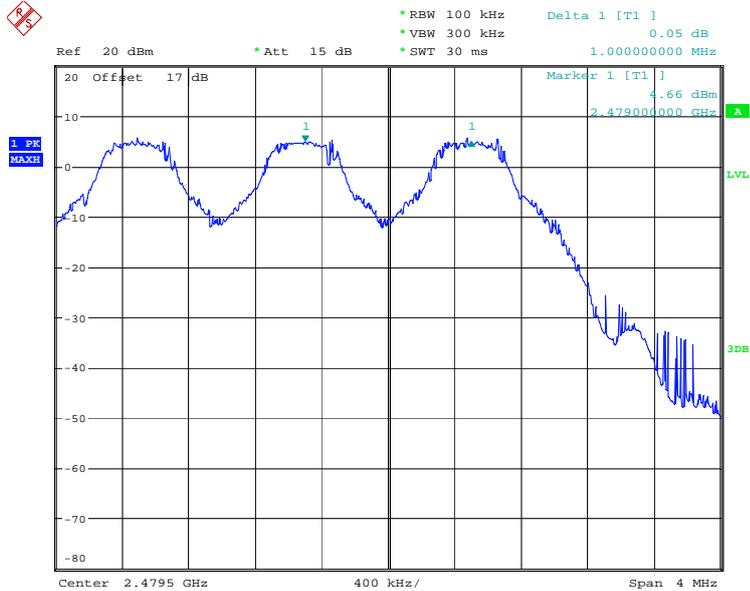

FREQUENCY SEPARATION CH78
Date: 17.MAY.2016 00:29:55




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

Limits:

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

3.6 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use at least 75 hopping frequencies.


For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

Mode D, E

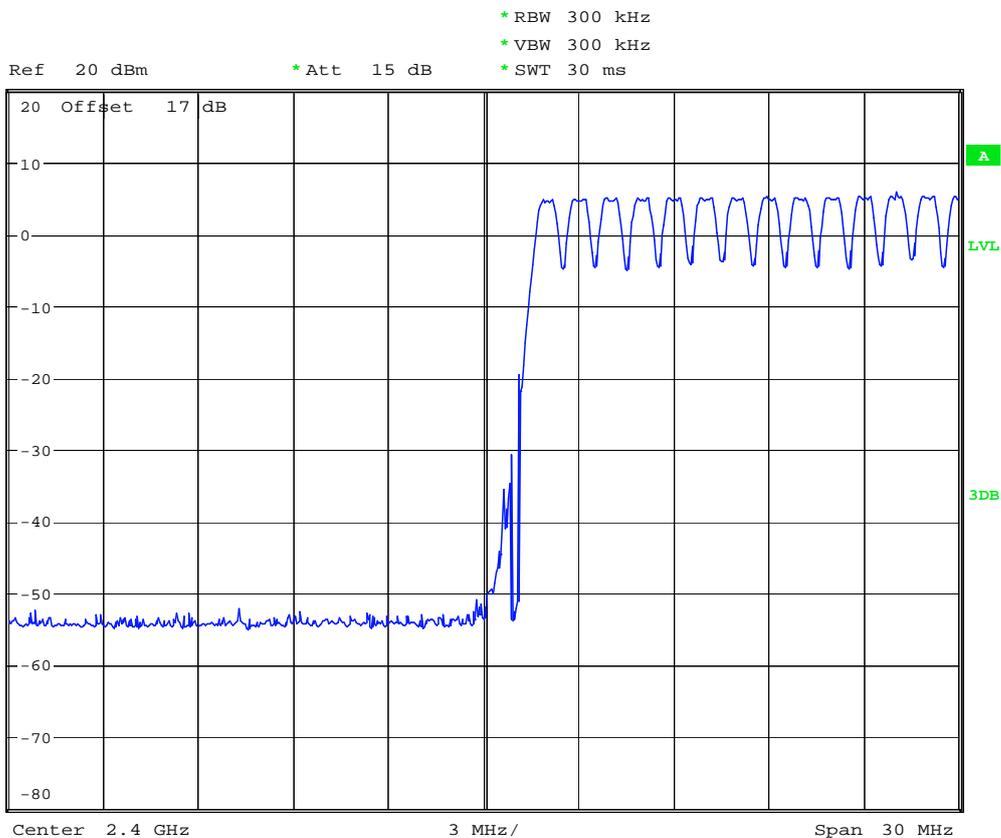


NUMBER OF HOPPING CH0-13


Date: 17.MAY.2016 00:25:43




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

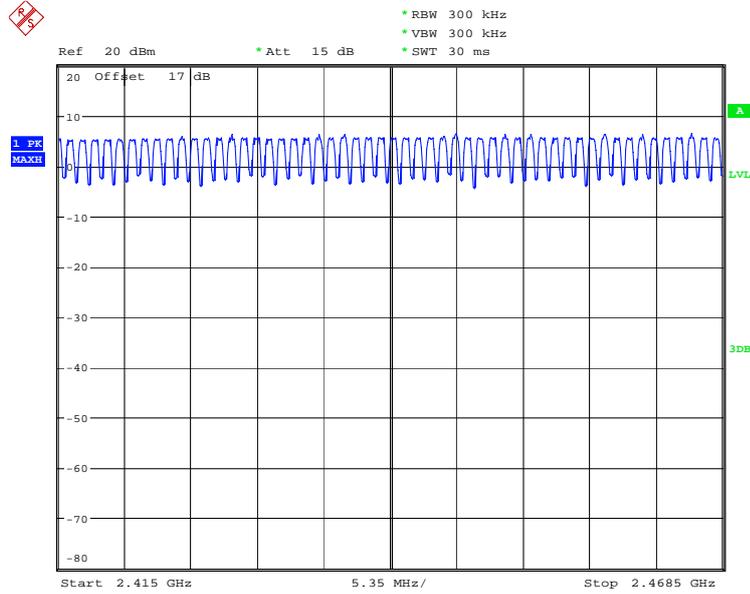

NUMBER OF HOPPING CH14-66
Date: 17.MAY.2016 00:27:31

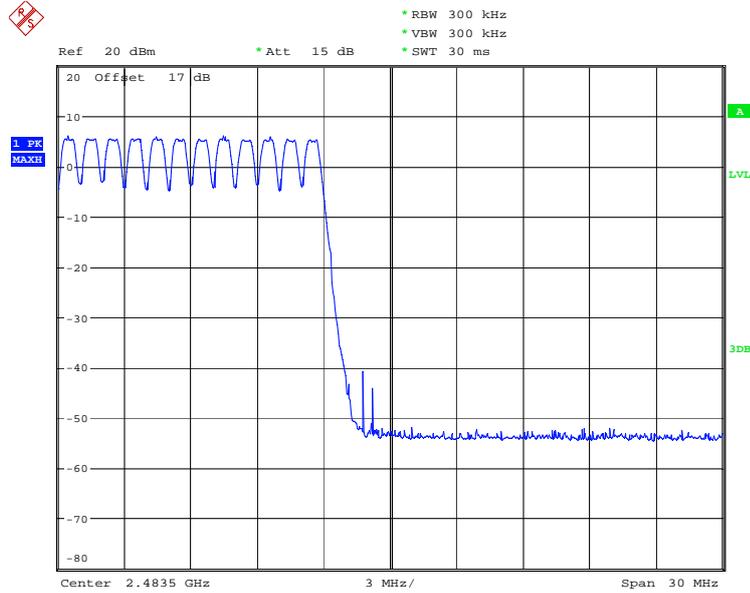

NUMBER OF HOPPING CH67-78
Date: 17.MAY.2016 00:26:23



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

Limits:

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

3.6.1 Pseudorandom Frequency Hopping Sequence

The generation of the hopping sequence is determined by the Bluetooth core specification and complies with the FCC requirements.

3.6.2 Coordination of hopping sequences to other transmitters

According to the Bluetooth core specification such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

3.6.3 System Receiver Hopping Capability

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


3.7 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.


For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Mode D, E

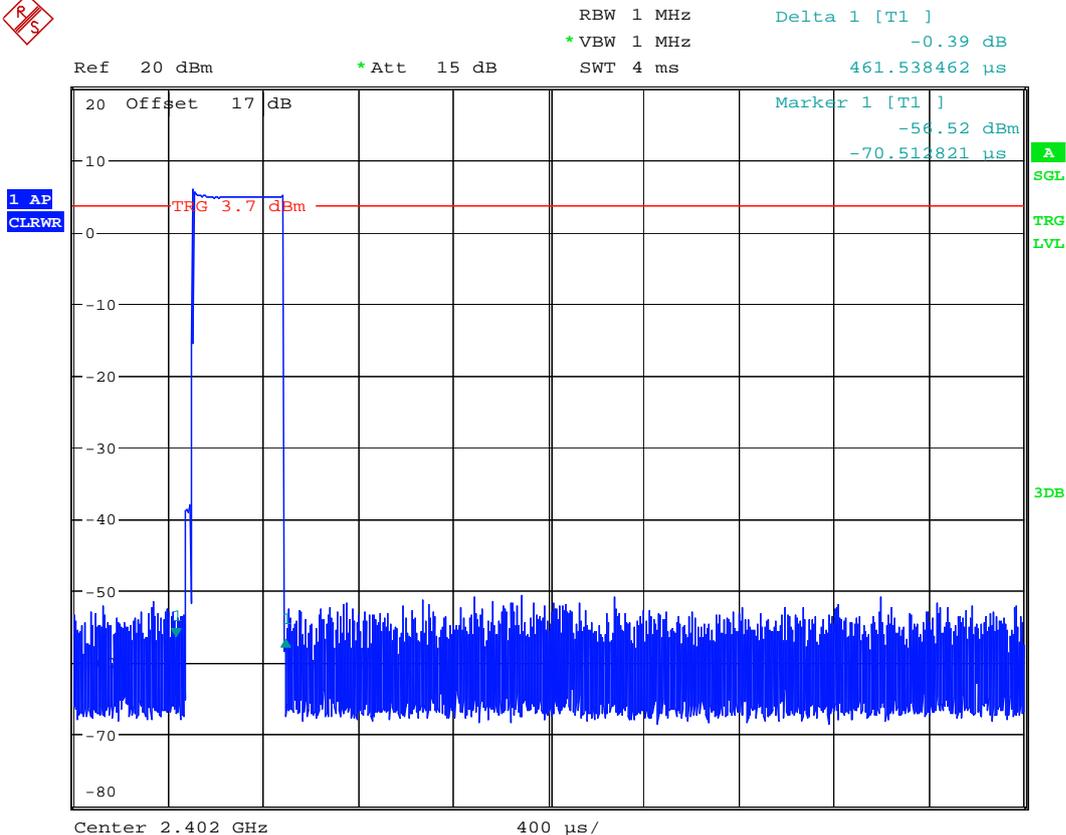


DWELL TIME CH0 DH1 (0.461ms * 320events = 147.52ms)


Date: 17.MAY.2016 00:39:23




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

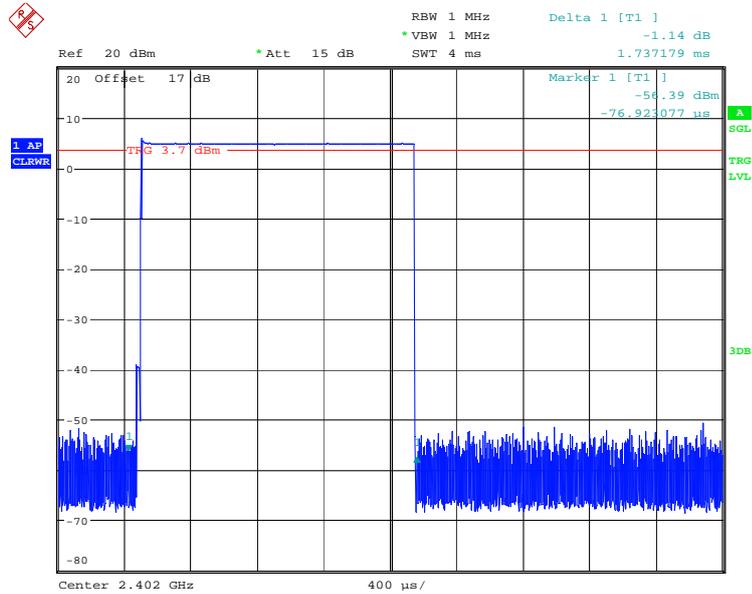


DWELL TIME CH0 DH3 (1.737ms * 160events = 277.92ms)
Date: 17.MAY.2016 00:45:27

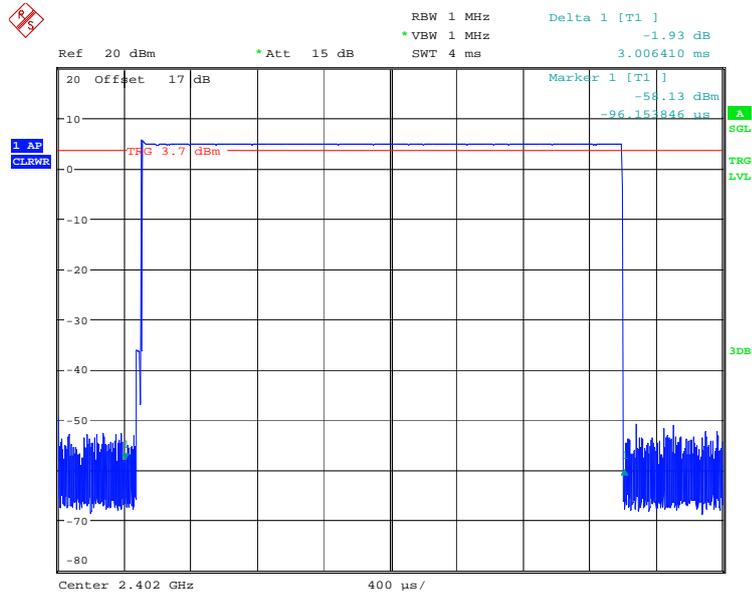


DWELL TIME CH0 DH5 (3.006ms * 106events = 318.636ms)
Date: 17.MAY.2016 00:47:14



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

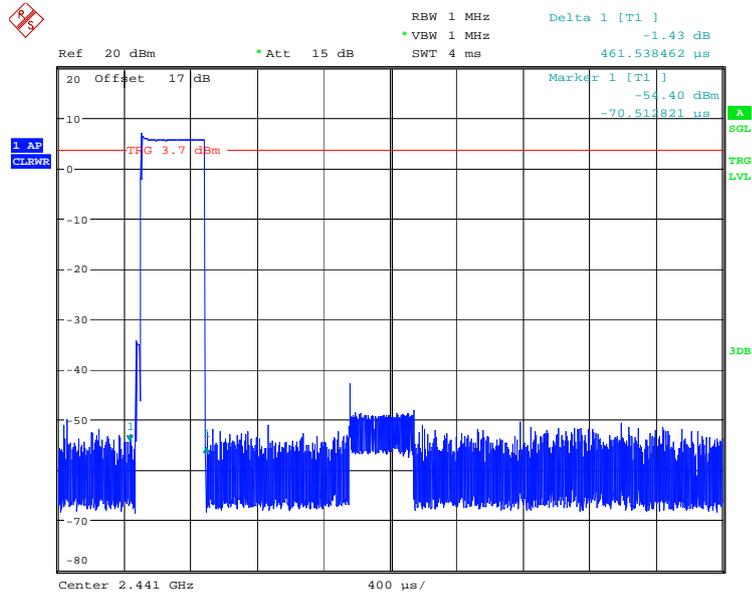


DWELL TIME CH39 DH1 (0.461ms * 320events = 147.52ms)
Date: 17.MAY.2016 00:41:12

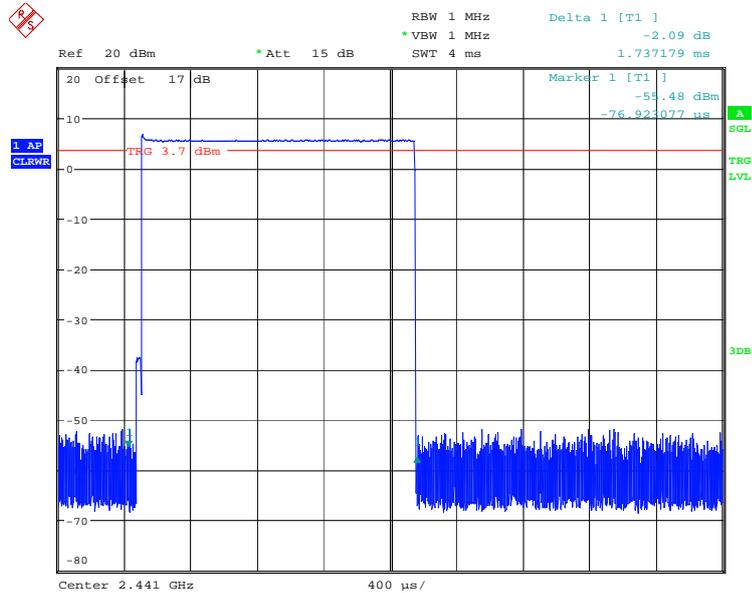


DWELL TIME CH39 DH3 (1.737ms * 160events = 277.92ms)
Date: 17.MAY.2016 00:45:11




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

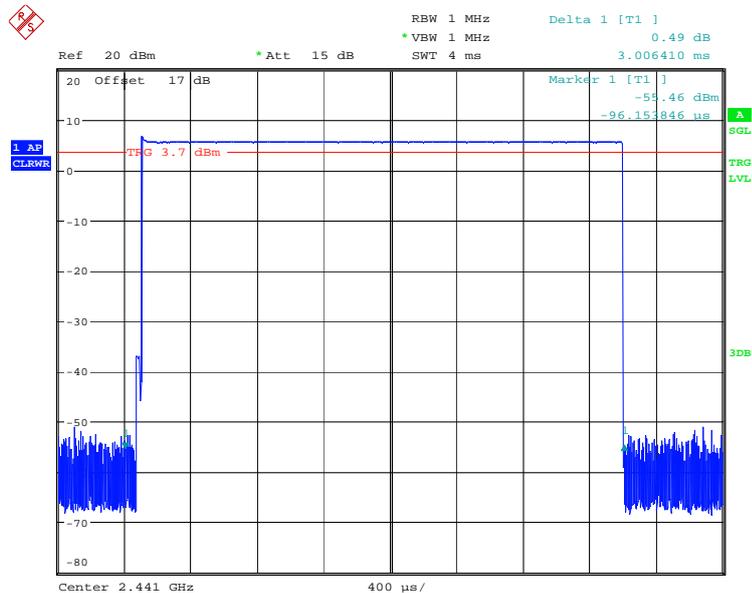


DWELL TIME CH39 DH5 (3.006ms * 106events = 318.636ms)
Date: 17.MAY.2016 00:47:46

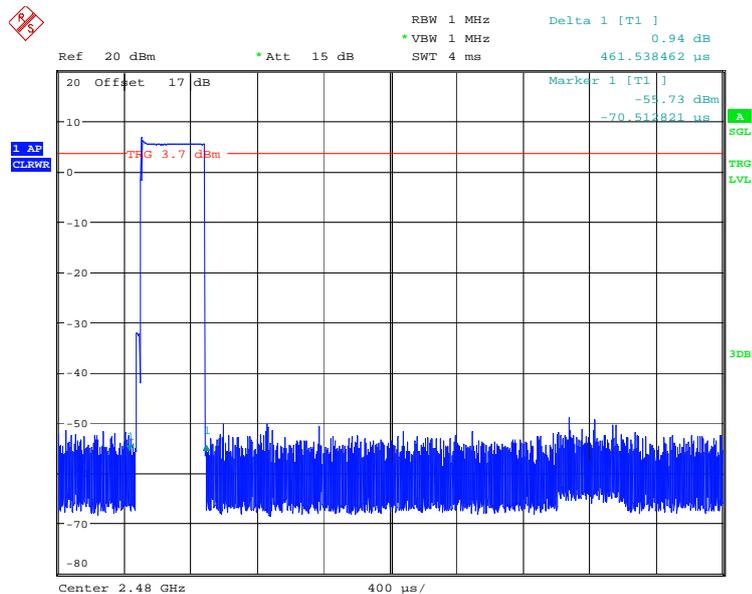


DWELL TIME CH78 DH1 (0.461ms * 320events = 147.52ms)
Date: 17.MAY.2016 00:41:40




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

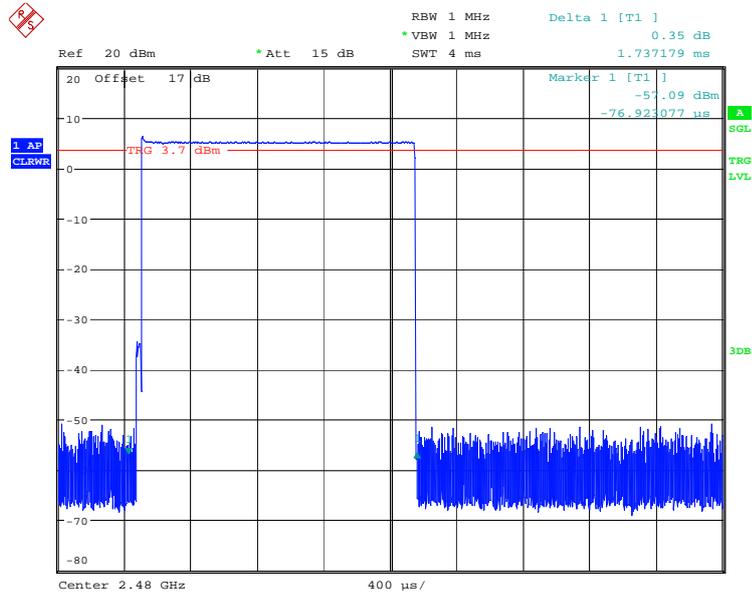

DWELL TIME CH78 DH3 (1.737ms * 160events = 277.92ms)
Date: 17.MAY.2016 00:44:46

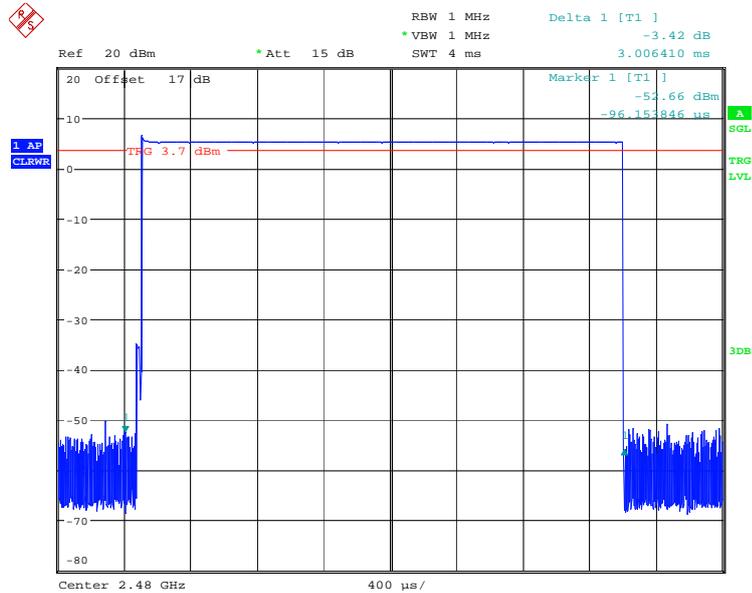

DWELL TIME CH78 DH5 (3.006ms * 106events = 318.636ms)
Date: 17.MAY.2016 00:48:21




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

Limits and measurement periods:

Frequency MHz	Number of channels	Measurement Periode	Limit
902 – 928	≥ 50	20 s	0.4 s
	$49 \geq 25$	10 s	0.4 s
2400 – 2483.5	≥ 15	0.4 s * number of used channels	0.4 s
5725- 5850	≥ 75	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


3.8 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

Mode D, E

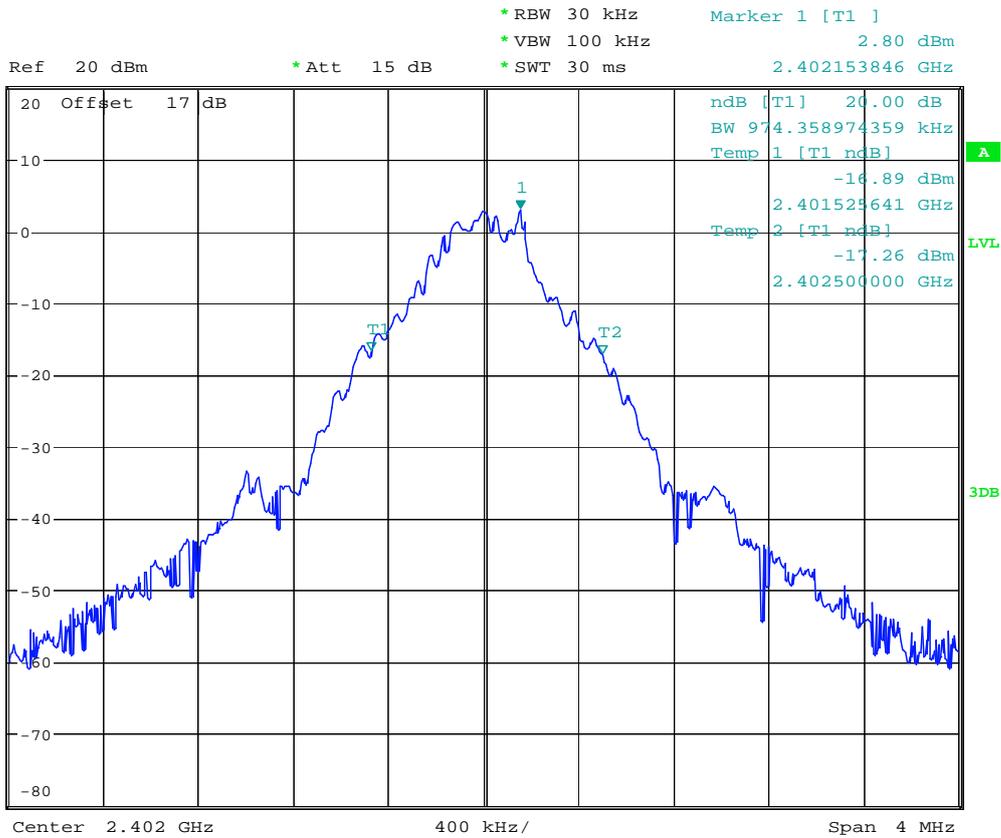


20DB BANDWIDTH CH0


Date: 17.MAY.2016 00:24:03




Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

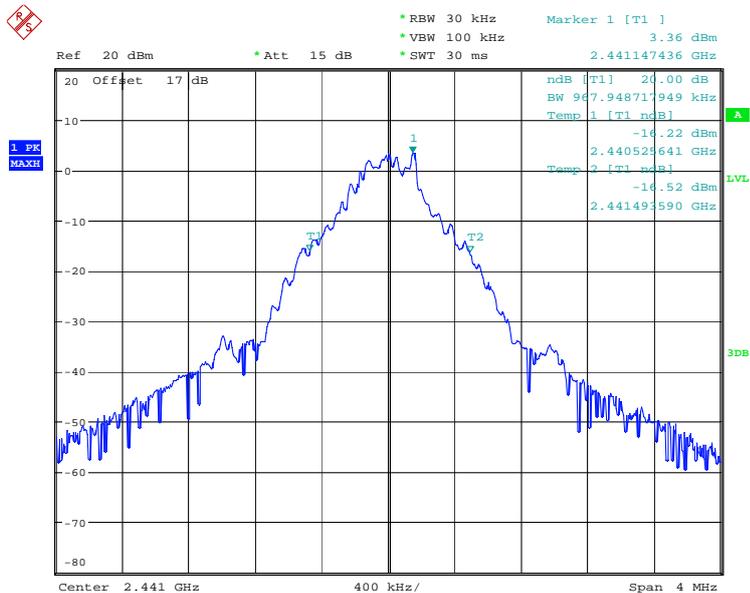


20DB BANDWIDTH CH39
 Date: 17.MAY.2016 00:24:35

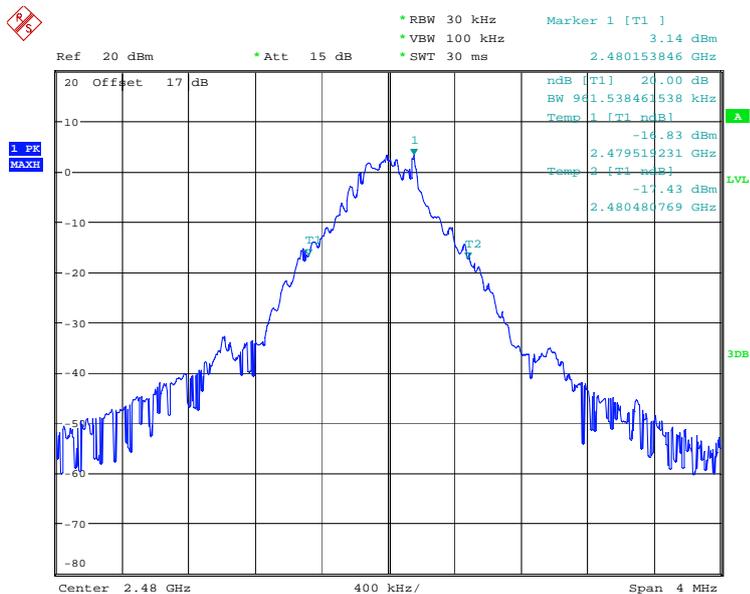


20DB BANDWIDTH CH78
 Date: 17.MAY.2016 00:24:55




Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

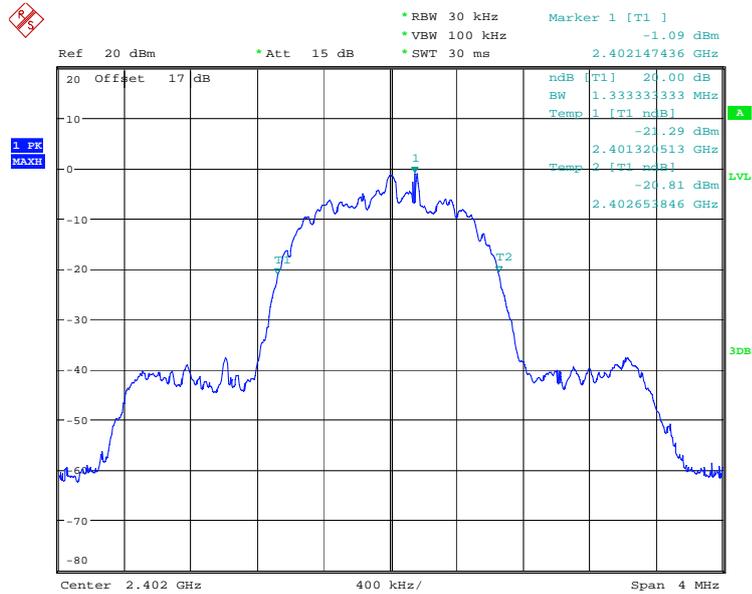


20DB BANDWIDTH CH0 EDR MODE
 Date: 17.MAY.2016 00:30:15

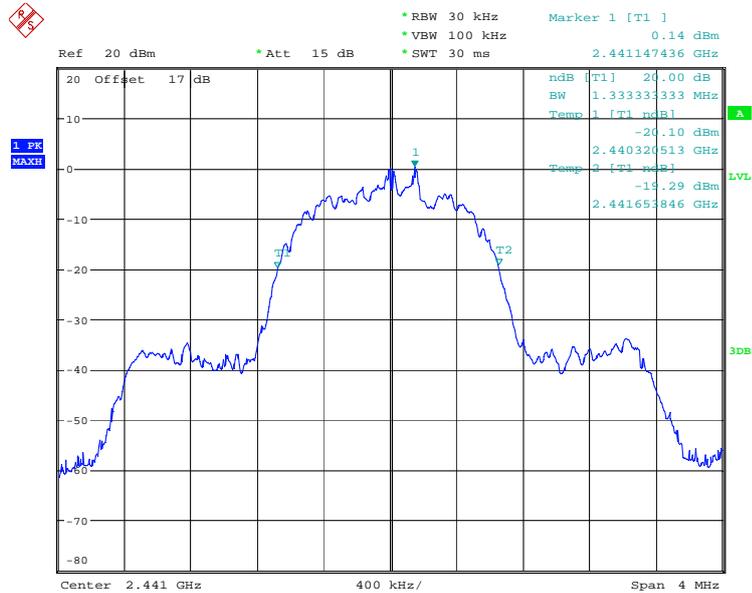

20DB BANDWIDTH CH39 EDR MODE
 Date: 17.MAY.2016 00:30:51



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

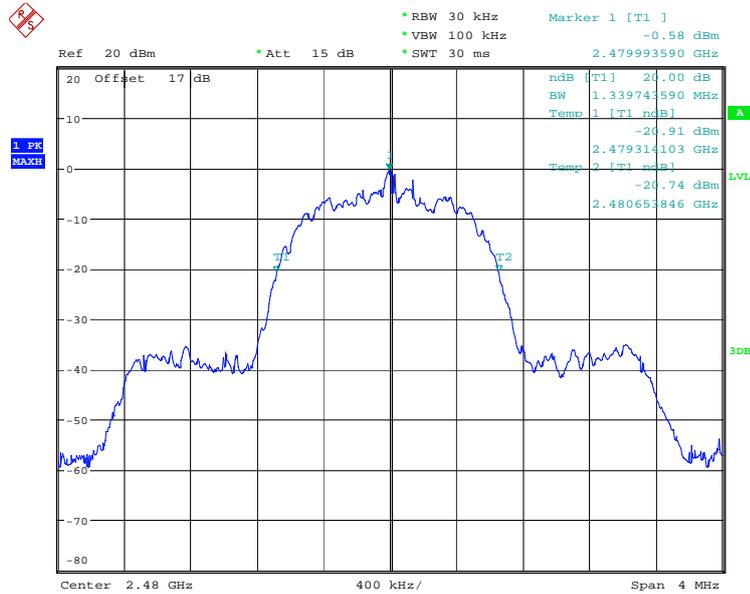

20DB BANDWIDTH CH78 EDR MODE
 Date: 17.MAY.2016 00:31:11


Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

3.8.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.




Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

3.9 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.


Mode A

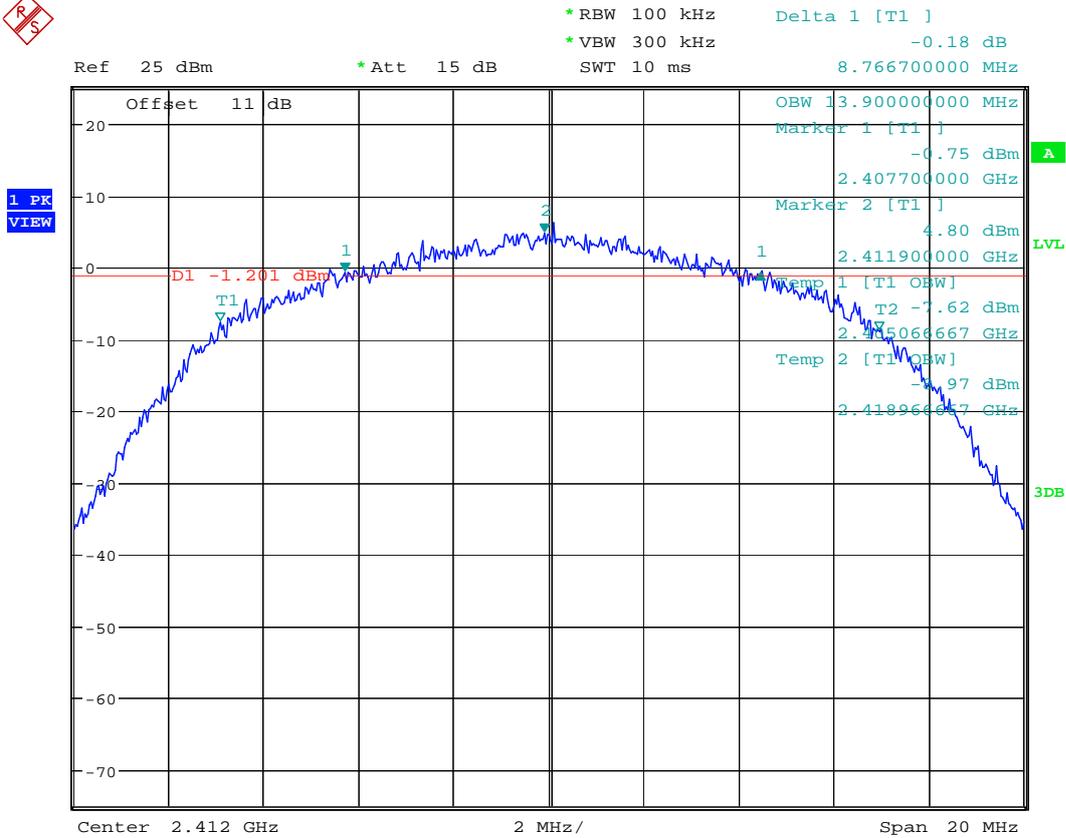


6DB BANDWIDTH 802.11B CH01
 Date: 17.MAY.2016 01:06:04



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

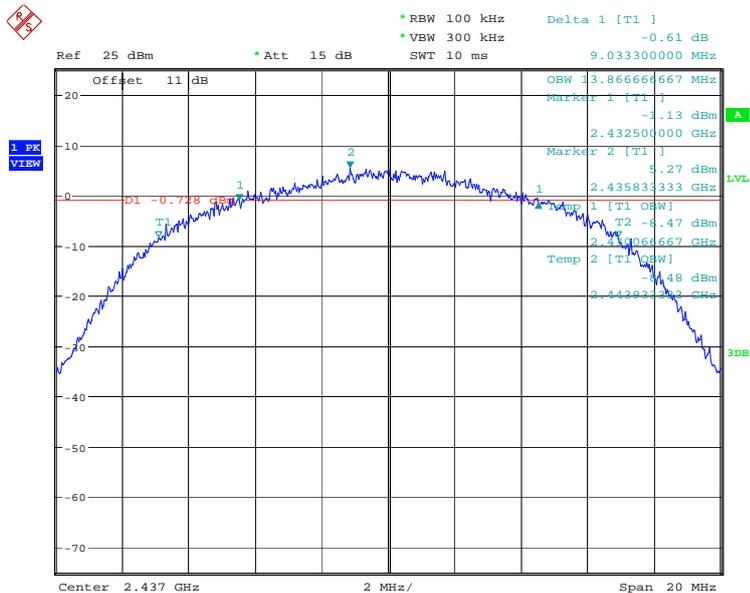

6DB BANDWIDTH 802.11B CH06
 Date: 17.MAY.2016 01:06:38

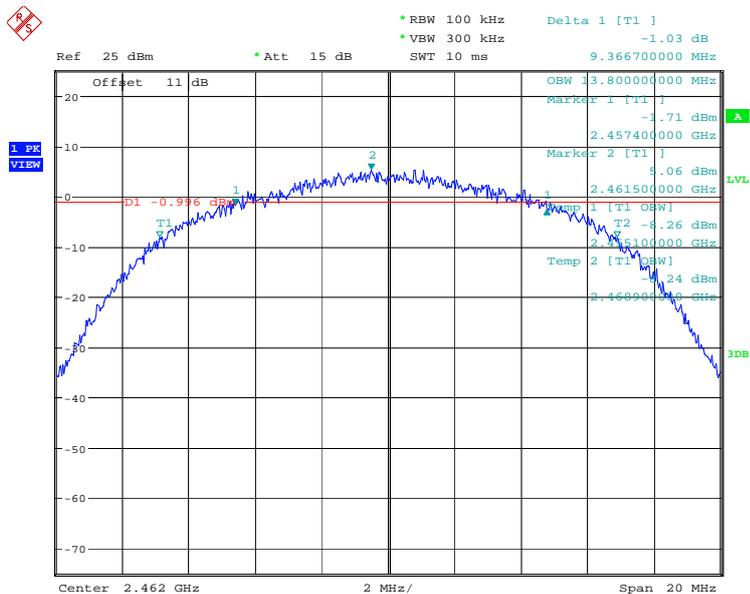


6DB BANDWIDTH 802.11B CH11
 Date: 17.MAY.2016 01:07:22




Registration number: W6M21604-15762-C-1

FCC ID: 2AID8CSPBOXMF0200A


Mode B

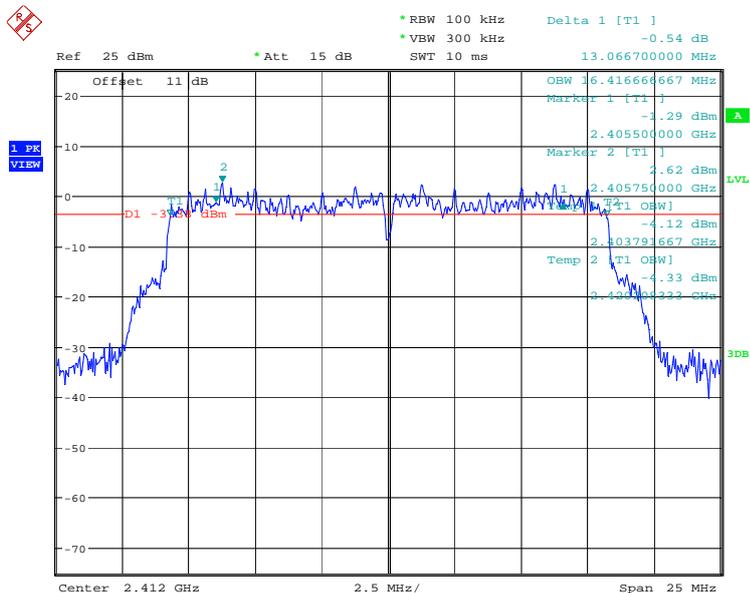


6DB BANDWIDTH 802.11G CH01
Date: 17.MAY.2016 01:09:00

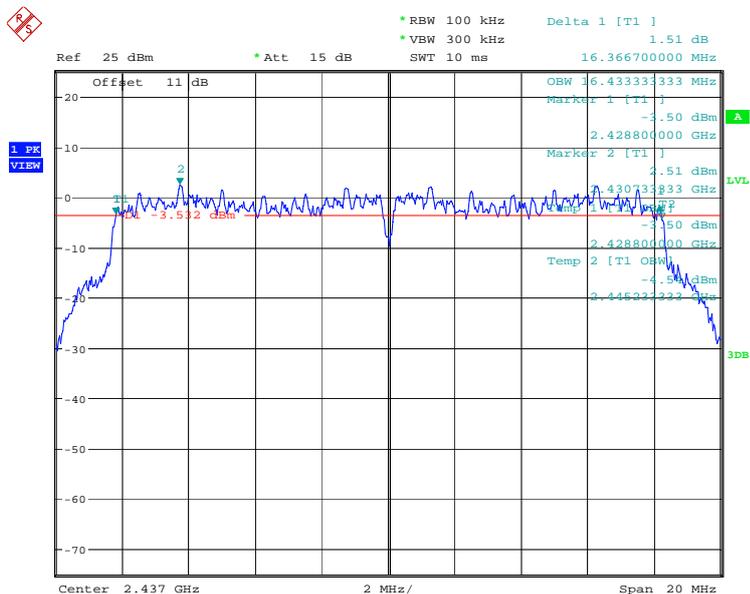

6DB BANDWIDTH 802.11G CH06
Date: 17.MAY.2016 01:09:46




Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

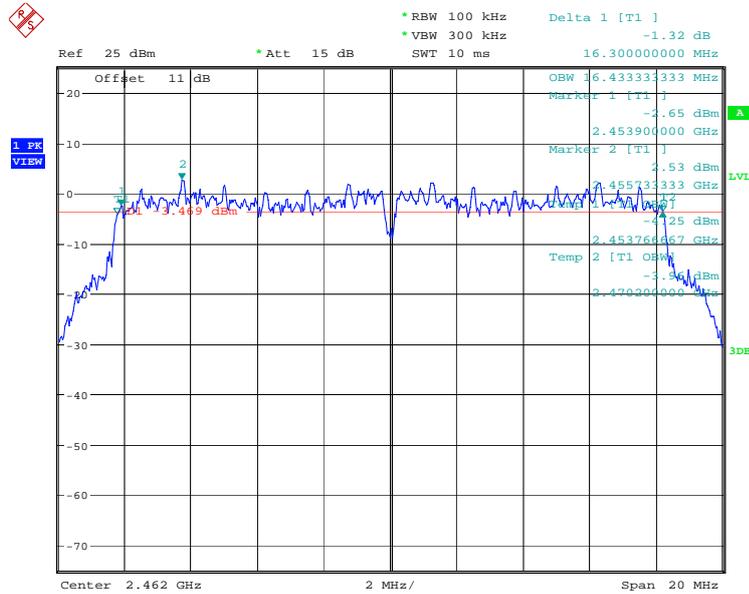


6DB BANDWIDTH 802.11G CH11
 Date: 17.MAY.2016 01:10:24

Mode C

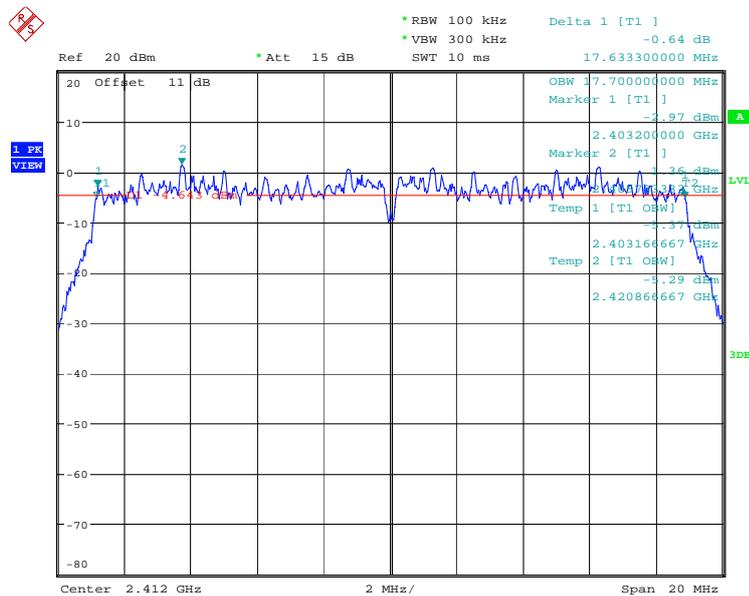


6DB BANDWIDTH 802.11N 20MHZ CH01
 Date: 17.MAY.2016 01:11:37




Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

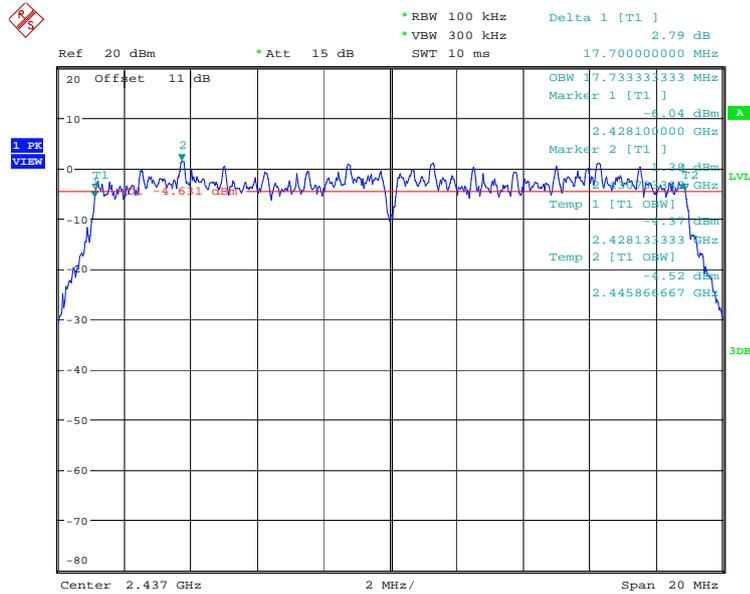

6DB BANDWIDTH 802.11N 20MHZ CH06
 Date: 17.MAY.2016 01:13:40

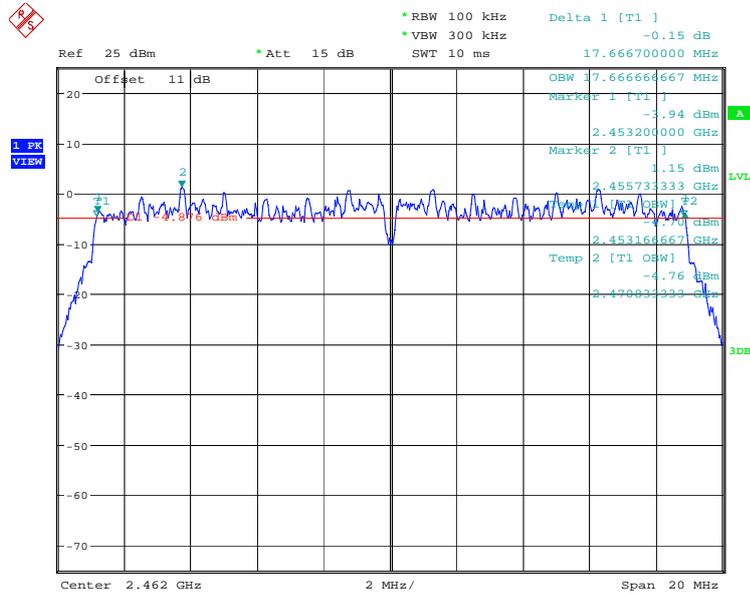


6DB BANDWIDTH 802.11N 20MHZ CH11
 Date: 17.MAY.2016 01:14:25




Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A


Mode F

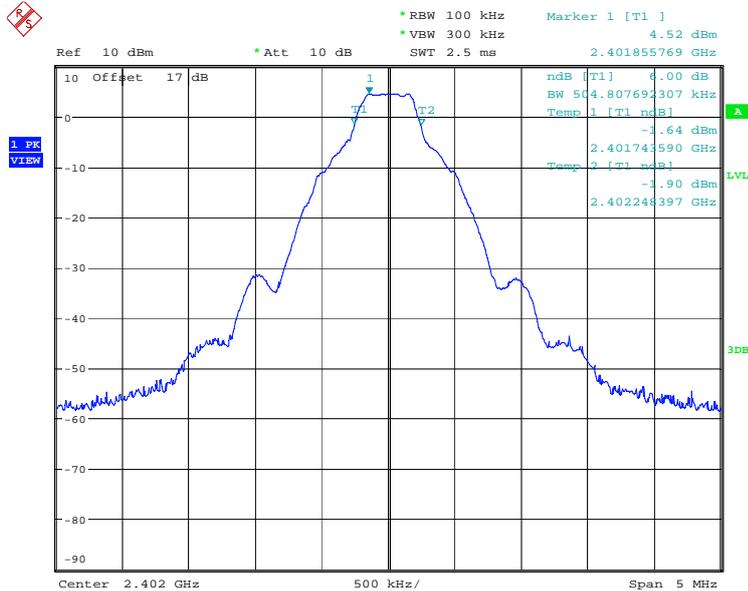


6DB BANDWIDTH BT4.0 CH00
 Date: 17.MAY.2016 00:50:35

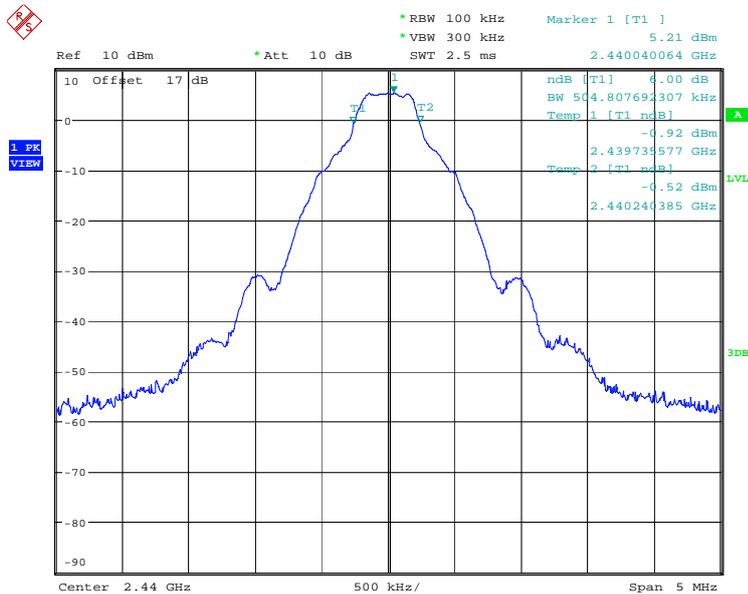

6DB BANDWIDTH BT4.0 CH19
 Date: 17.MAY.2016 00:51:29



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

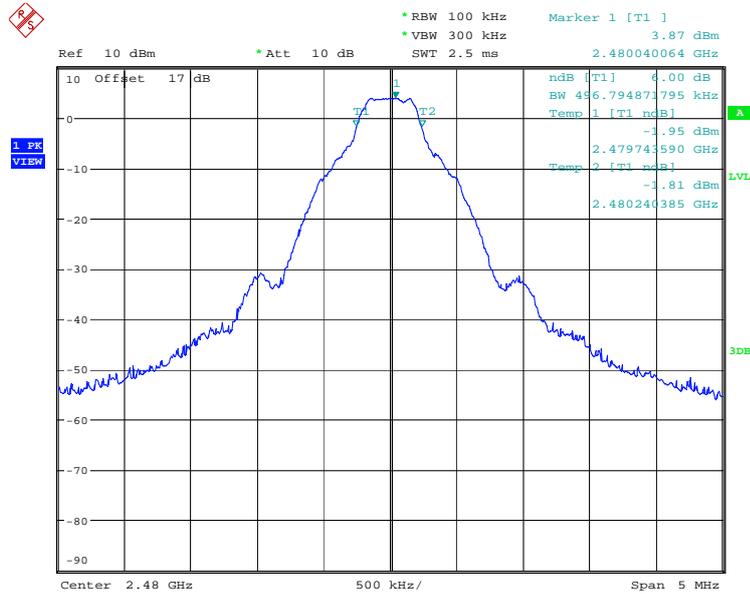


6DB BANDWIDTH BT4.0 CH39
 Date: 17.MAY.2016 00:52:37

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

3.10 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

Mode A

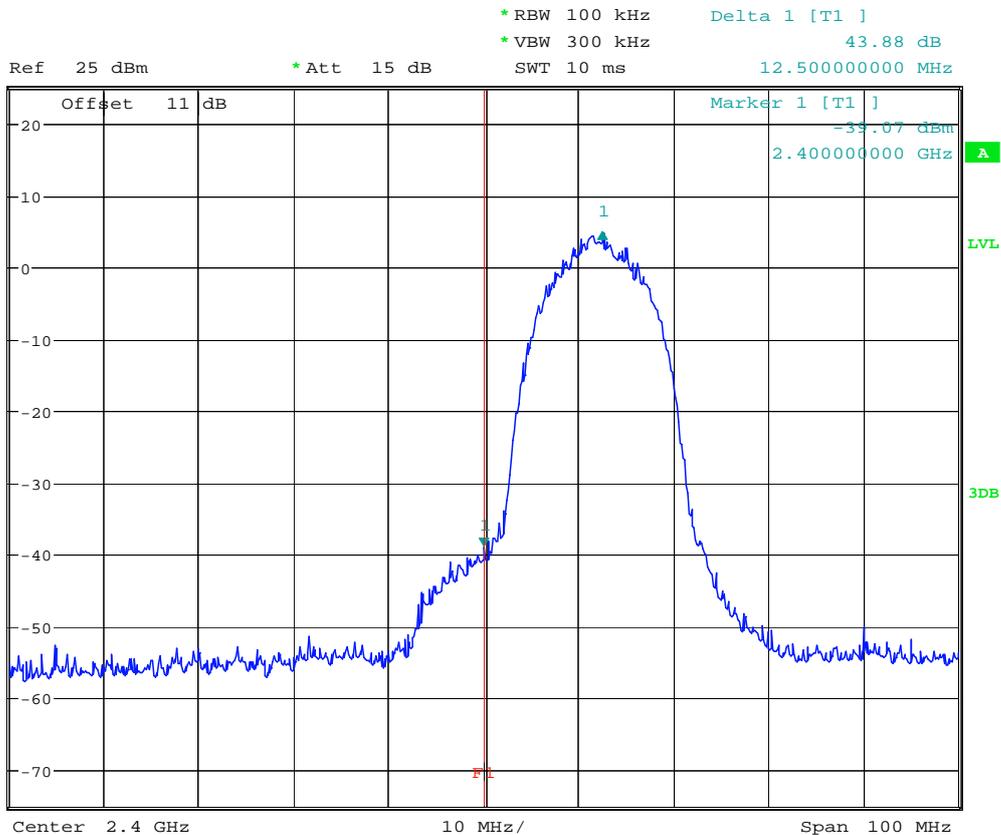


BANDEDGE 802.11B CH01

Date: 17.MAY.2016 01:06:15




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

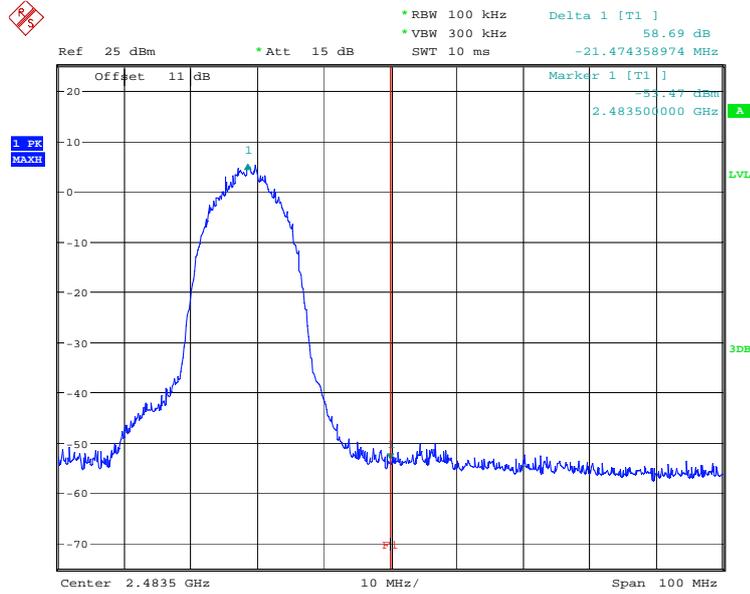

BANDEDGE 802.11B CH11
Date: 17.MAY.2016 01:07:35


Mode B

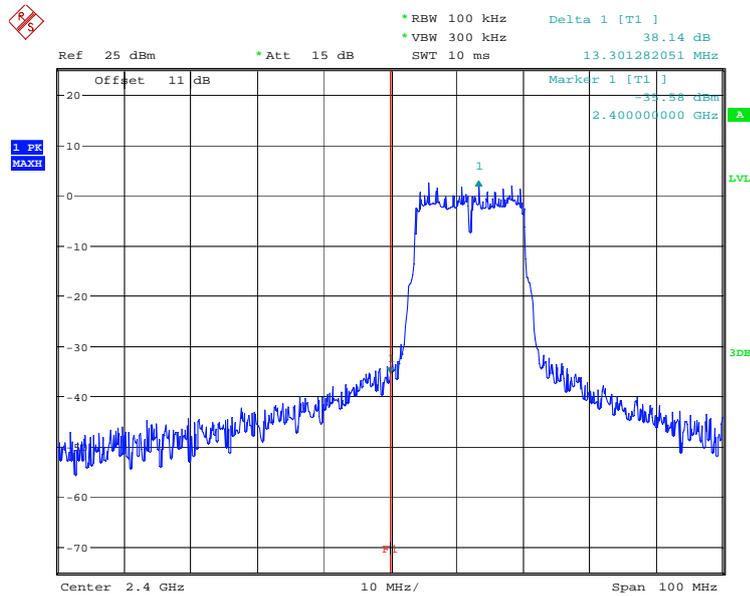

BANDEDGE 802.11G CH01
Date: 17.MAY.2016 01:09:12




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

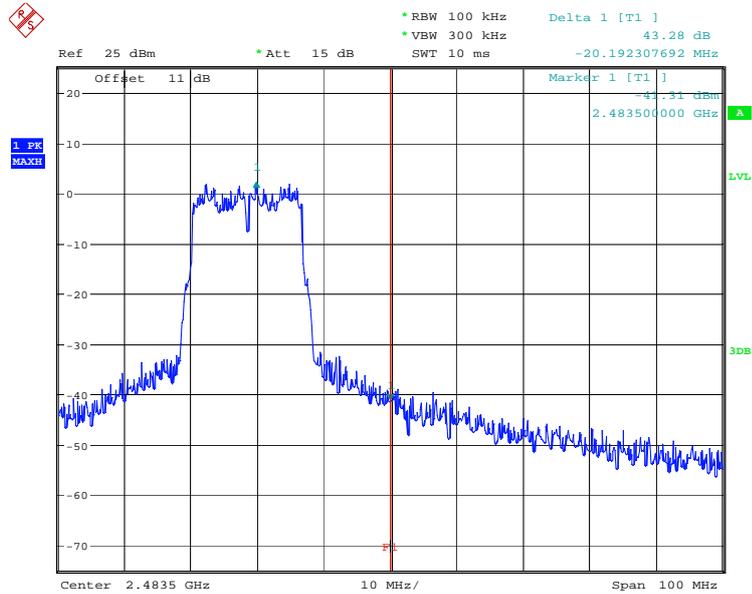


BANDEDGE 802.11G CH11
Date: 17.MAY.2016 01:10:36


Mode C

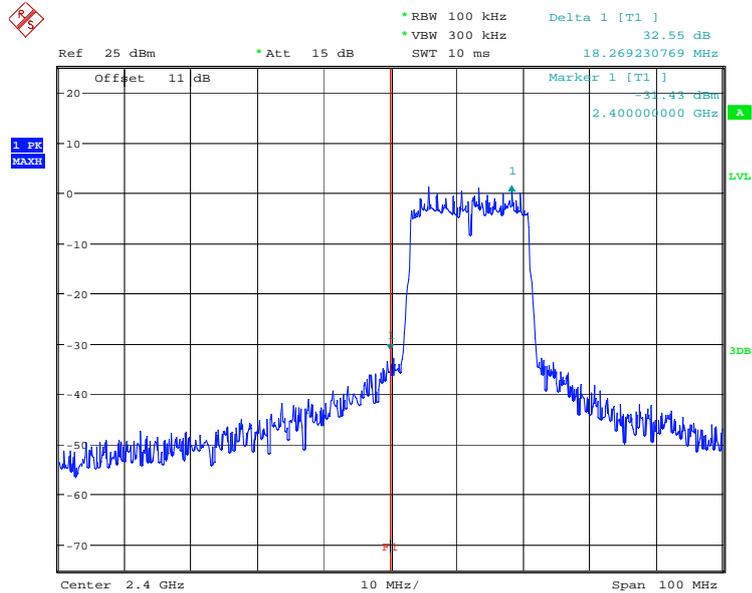

BANDEDGE 802.11N 20MHZ CH01
Date: 17.MAY.2016 01:11:48




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

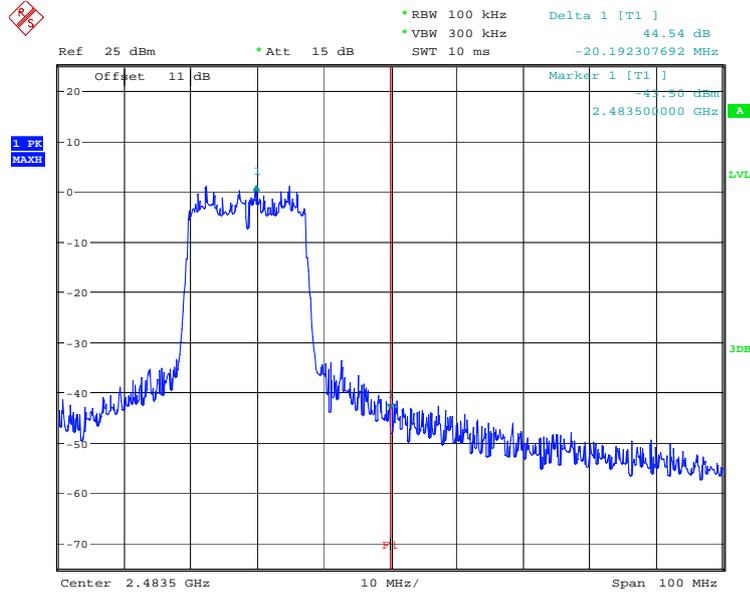

BANDEDGE 802.11N 20MHZ CH11
Date: 17.MAY.2016 01:14:41


Mode D, E

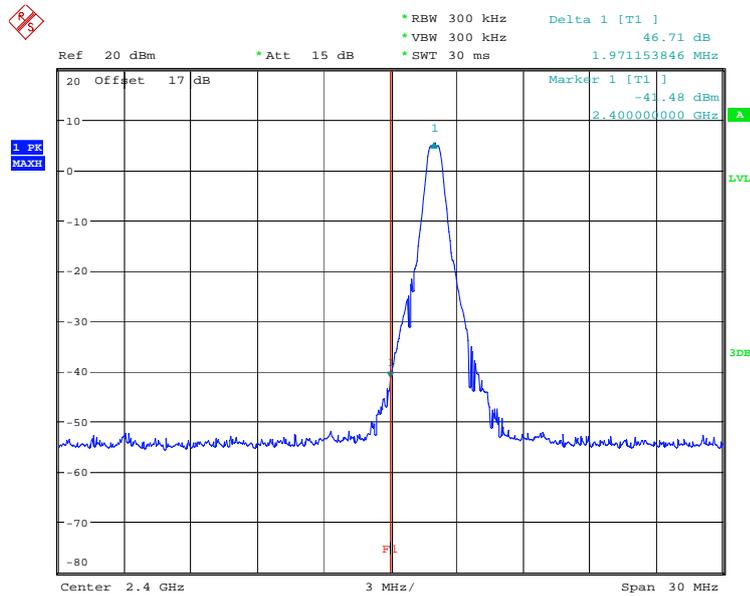


BANDEDGE CH0
Date: 17.MAY.2016 00:24:15




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

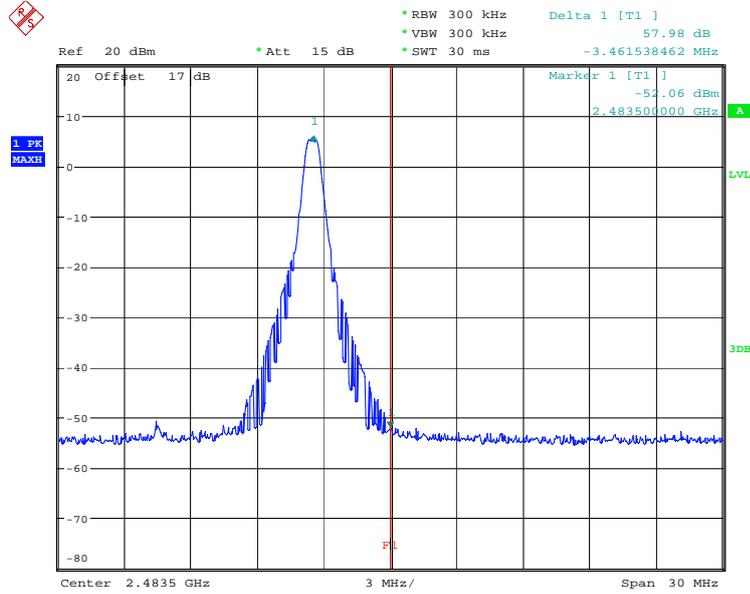


BANDEDGE CH78
Date: 17.MAY.2016 00:25:03

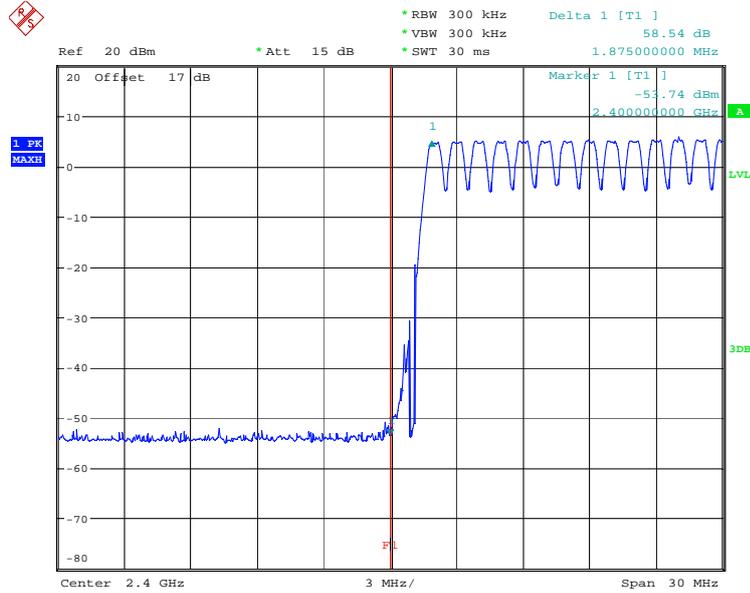

BANDEDGE CH0 HOPPING MODE
Date: 17.MAY.2016 00:25:44




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

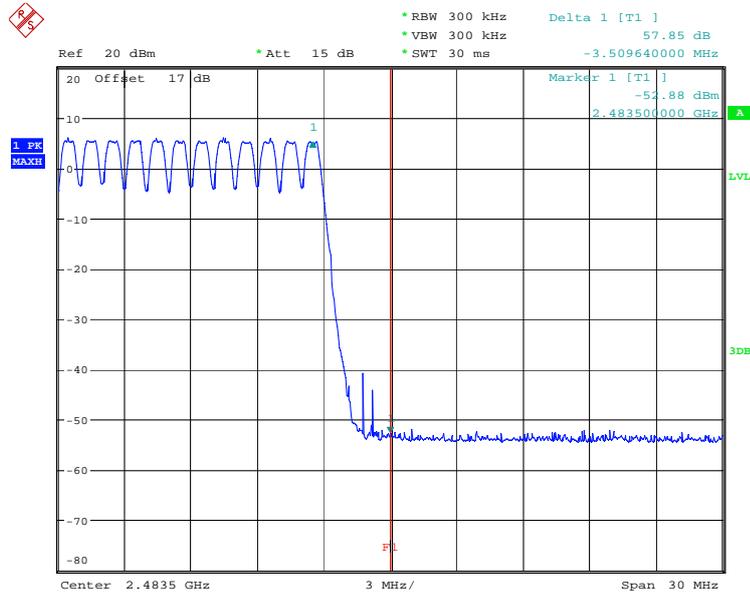


BANDEDGE CH78 HOPPING MODE
Date: 17.MAY.2016 00:26:24


Mode F

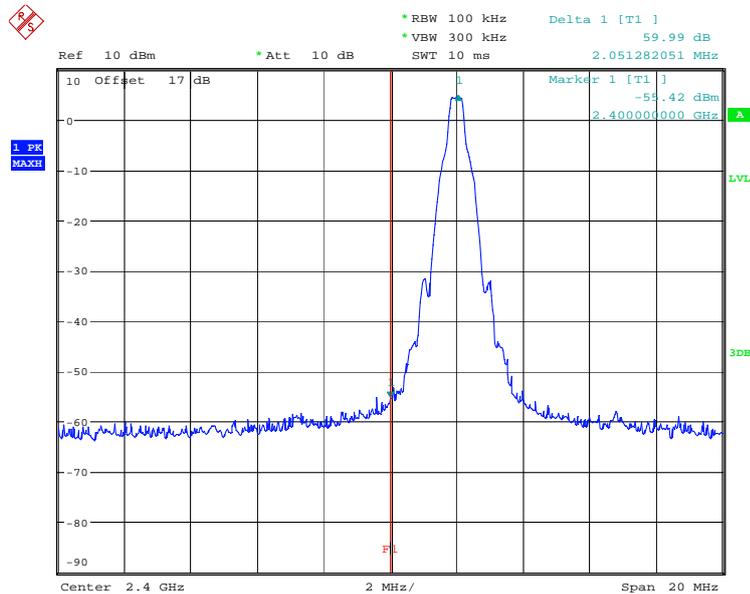

BANDEDGE BT4.0 CH00
Date: 17.MAY.2016 00:50:53



Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

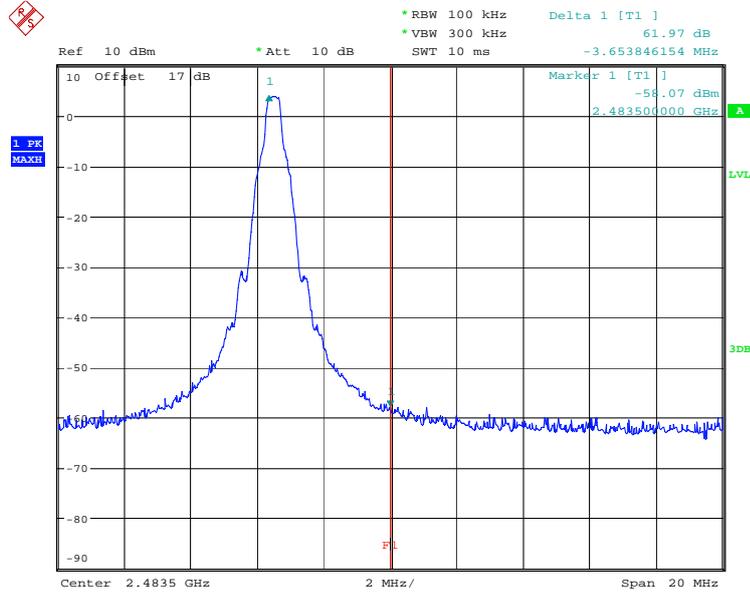


BANDEDGE BT4.0 CH39
 Date: 17.MAY.2016 00:52:55

Limit:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


3.11 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.
The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.


Mode A

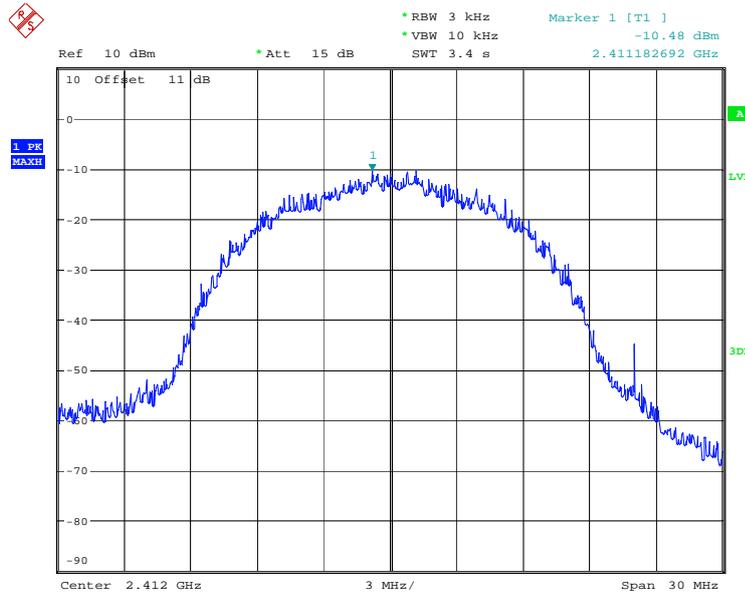


POWER DENSITY 802.11B CH01
Date: 17.MAY.2016 01:06:11

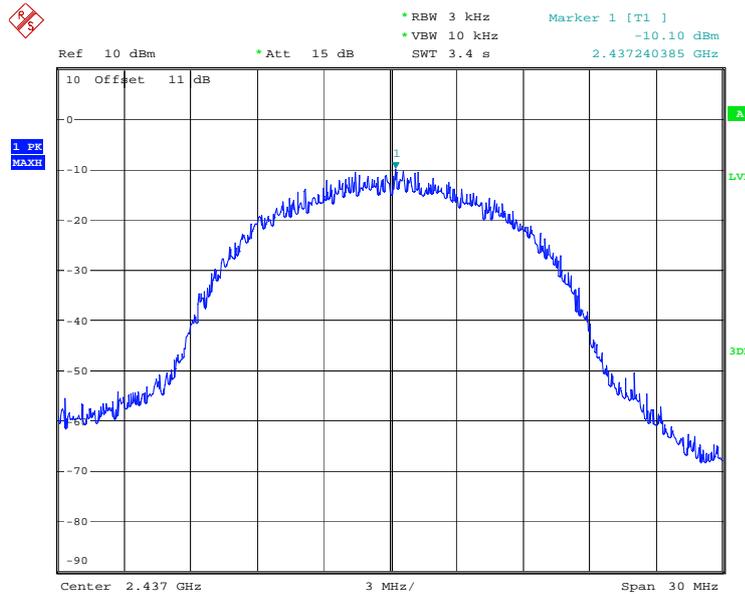

POWER DENSITY 802.11B CH06
Date: 17.MAY.2016 01:06:47




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

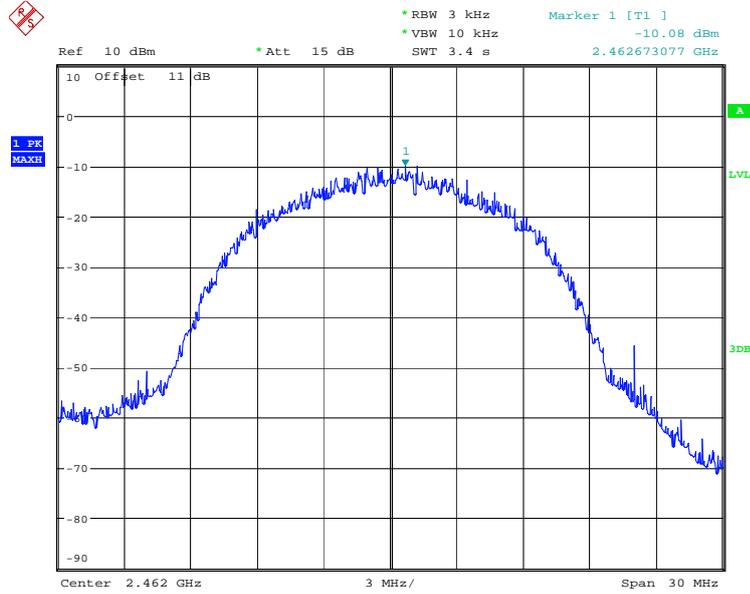


POWER DENSITY 802.11B CH11
Date: 17.MAY.2016 01:07:30


Mode B

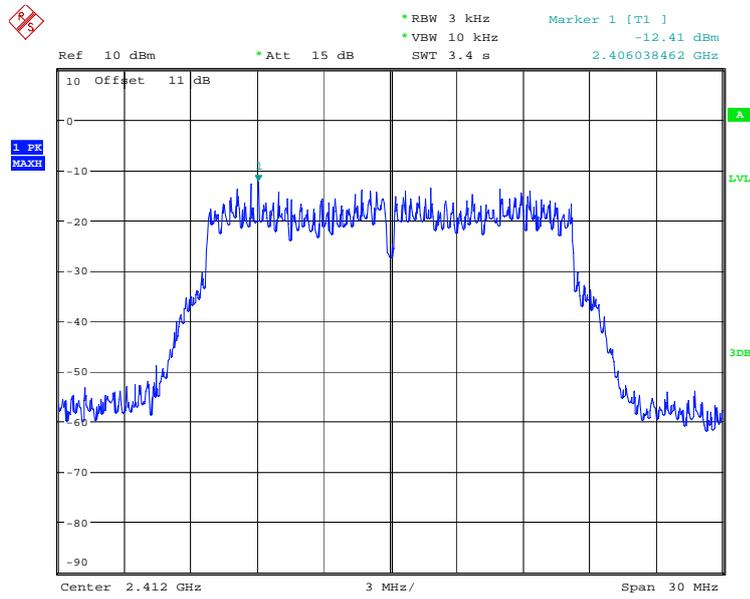


POWER DENSITY 802.11G CH01
Date: 17.MAY.2016 01:09:07




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

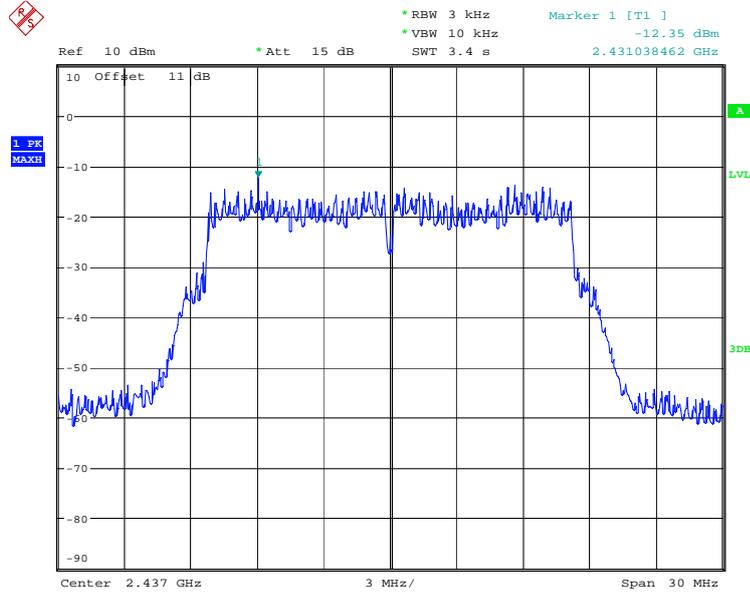

POWER DENSITY 802.11G CH06
Date: 17.MAY.2016 01:09:53

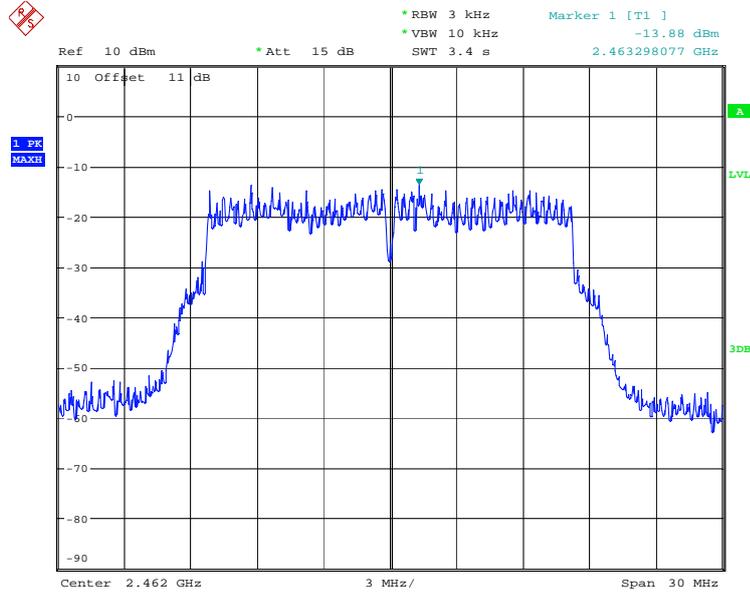


POWER DENSITY 802.11G CH11
Date: 17.MAY.2016 01:10:31




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A


Mode C

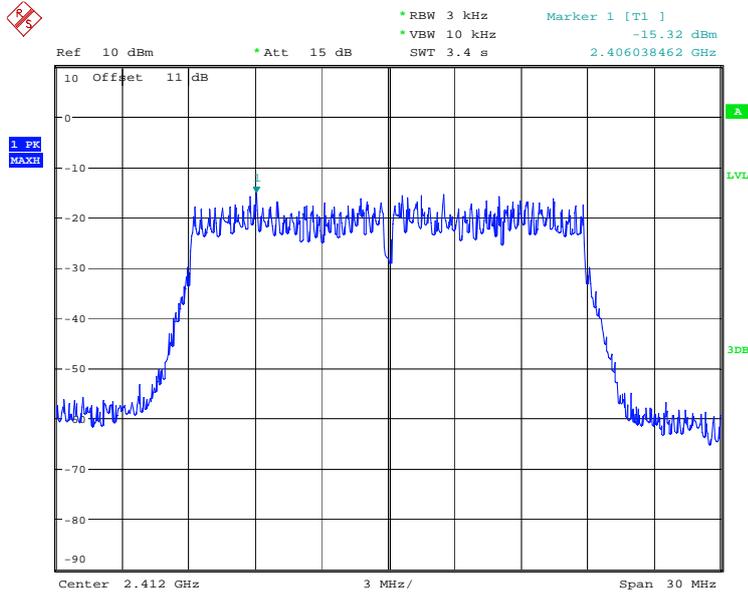


POWER DENSITY 802.11N 20MHZ CH01
Date: 17.MAY.2016 01:11:44

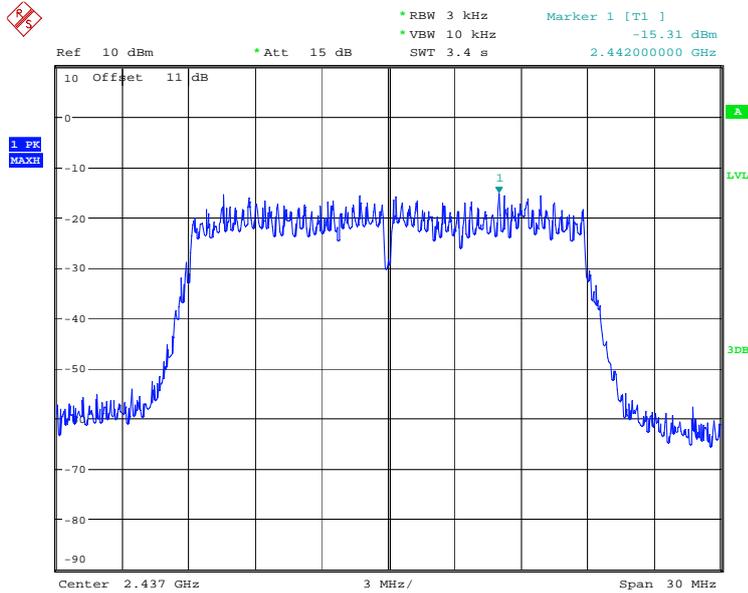

POWER DENSITY 802.11N 20MHZ CH06
Date: 17.MAY.2016 01:13:49




Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

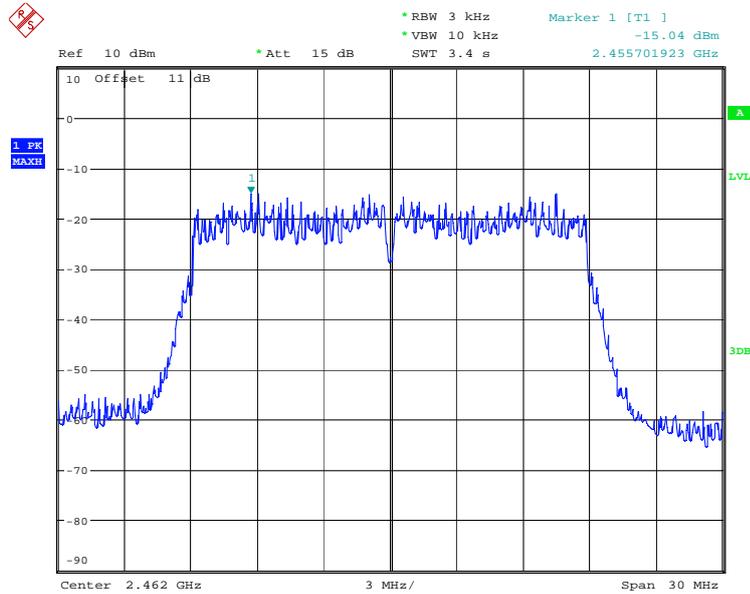


POWER DENSITY 802.11N 20MHZ CH11
Date: 17.MAY.2016 01:14:34

Mode F

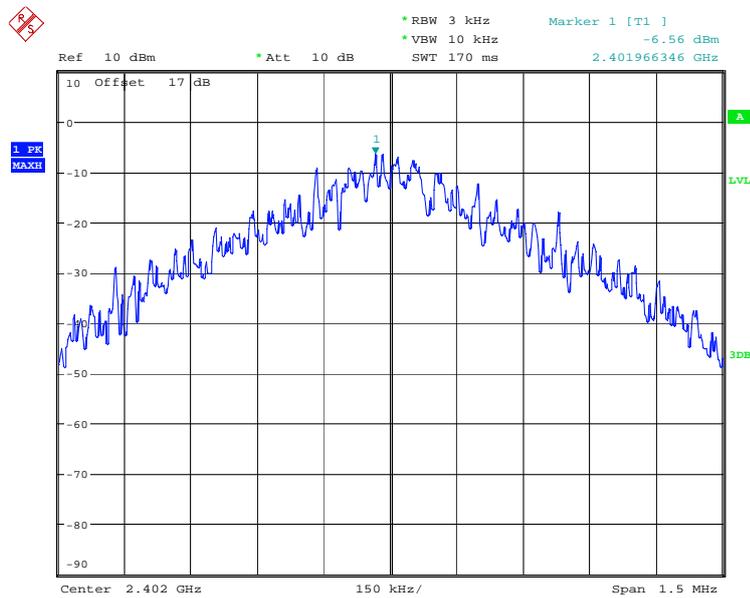


POWER DENSITY BT4.0 CH00
Date: 17.MAY.2016 00:50:45




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

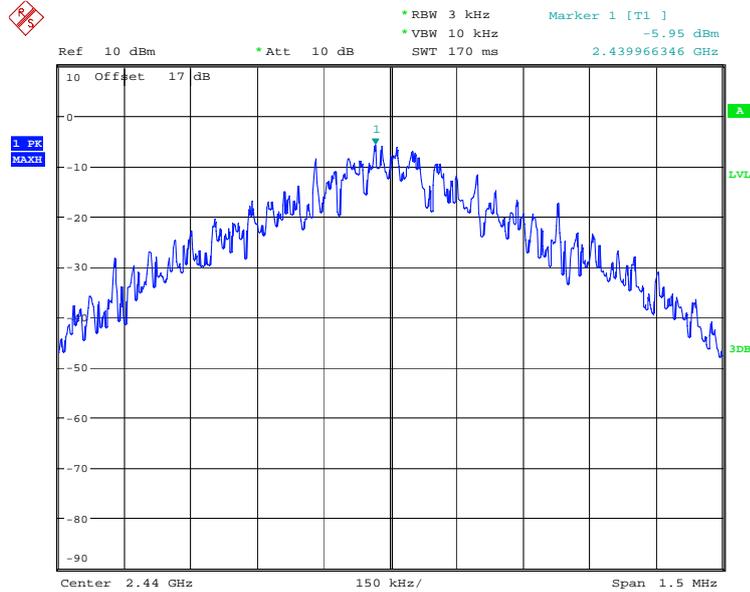

POWER DENSITY BT4.0 CH19
 Date: 17.MAY.2016 00:51:39

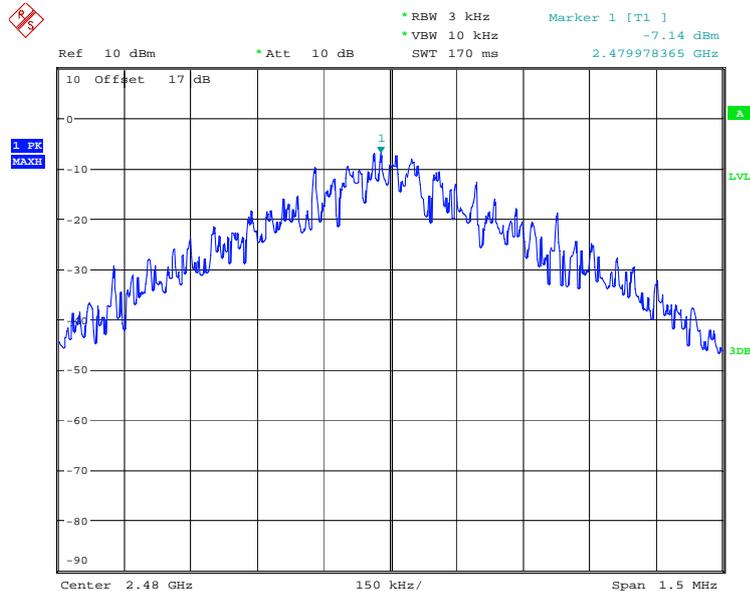


POWER DENSITY BT4.0 CH39
 Date: 17.MAY.2016 00:52:47

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

3.12 Radiated Emission from Digital Part

FCC Rule: 15.109

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 030, ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 062, ETSTW-RE 142, ETSTW-RE 147

Explanation: Please refer to part 15B test report no.: W6M21604-15762-P-15B.




Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

3.13 Power Line Conducted Emission


For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

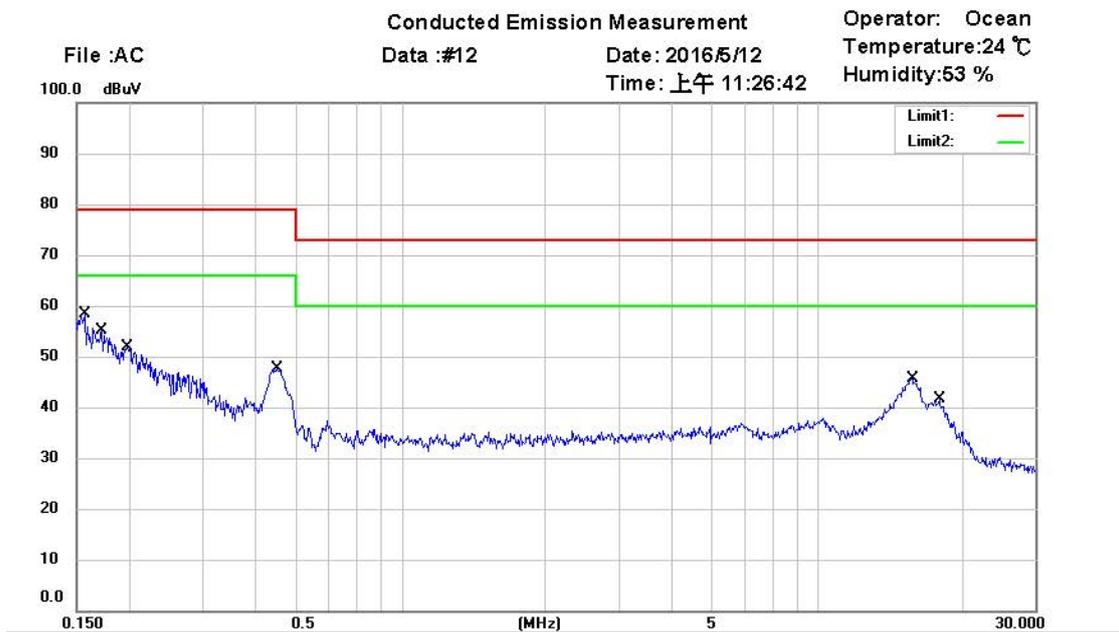


Site : Chamber_03
 Condition : FCC Part 15 Class A Conduction (QP) Phase: N
 EUT : W6M21604-15762 Power : 120Va.c.
 M/N:
 Test Mode : B124-122
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1565	39.14	QP	9.74	48.88	79.00	-30.12	
	0.1565	18.97	AVG	9.74	28.71	66.00	-37.29	
	0.1717	36.51	QP	9.74	46.25	79.00	-32.75	
	0.1717	18.71	AVG	9.74	28.45	66.00	-37.55	
	0.1976	33.54	QP	9.73	43.27	79.00	-35.73	
	0.1976	17.02	AVG	9.73	26.75	66.00	-39.25	
	0.4515	35.02	QP	9.73	44.75	79.00	-34.25	
	0.4515	27.96	AVG	9.73	37.69	66.00	-28.31	
	15.1500	30.09	QP	10.18	40.27	73.00	-32.73	
*	15.1500	24.27	AVG	10.18	34.45	60.00	-25.55	
	17.5875	25.29	QP	10.23	35.52	73.00	-37.48	
	17.5875	19.61	AVG	10.23	29.84	60.00	-30.16	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
 FCC ID: 2AID8CSPBOXMF0200A

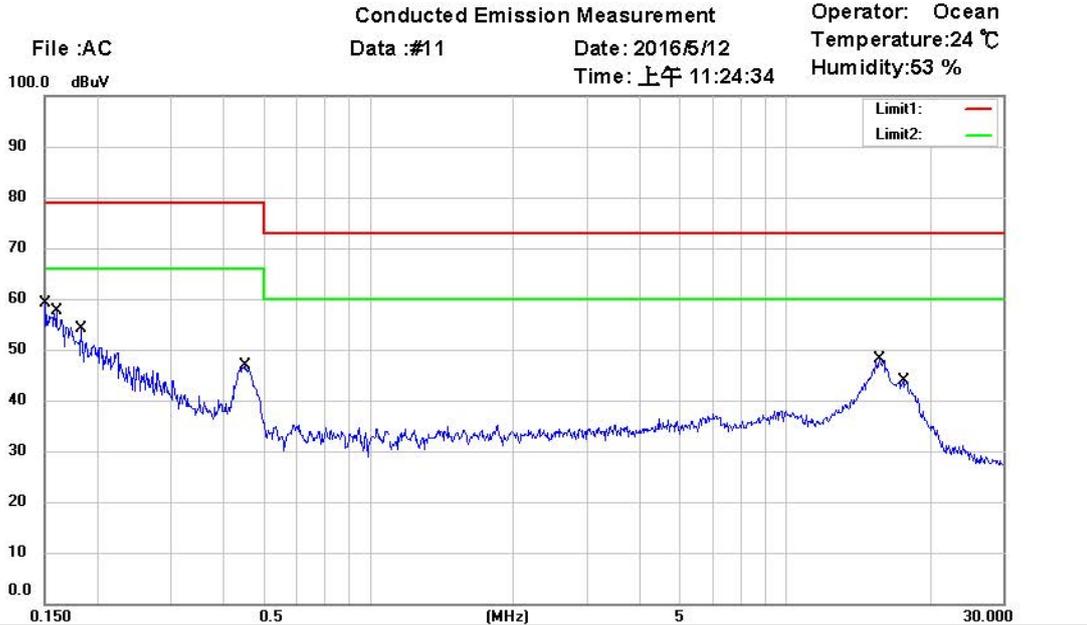

Site : Chamber_03
 Condition : FCC Part 15 Class A Conduction (QP) Phase: L1
 EUT : W6M21604-15762 Power : 120V.a.c.
 M/N:
 Test Mode : B124-122
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1502	41.71	QP	9.74	51.45	79.00	-27.55	
	0.1502	23.14	AVG	9.74	32.88	66.00	-33.12	
	0.1595	37.84	QP	9.74	47.58	79.00	-31.42	
	0.1595	20.25	AVG	9.74	29.99	66.00	-36.01	
	0.1830	34.12	QP	9.73	43.85	79.00	-35.15	
	0.1830	14.62	AVG	9.73	24.35	66.00	-41.65	
	0.4527	32.63	QP	9.73	42.36	79.00	-36.64	
	0.4527	25.70	AVG	9.73	35.43	66.00	-30.57	
	15.1375	32.05	QP	10.08	42.13	73.00	-30.87	
*	15.1375	26.24	AVG	10.08	36.32	60.00	-23.68	
	17.2750	28.31	QP	10.10	38.41	73.00	-34.59	
	17.2750	21.87	AVG	10.10	31.97	60.00	-28.03	

Note

1. The formula of measured value as: **Test Result = Reading + Correction Factor**
2. The **Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
3. Detector function in the form : **PK = Peak, QP = Quasi Peak, AV = Average**
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. **Measurement uncertainty = ±1.14 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
6. **Up Line: QP Limit Line, Down Line: Ave Limit Line.**



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21604-15762-C-1
FCC ID: 2AID8CSPBOXMF0200A

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 064, ETSTW-RE 045



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:47:47

Humidity:60 %

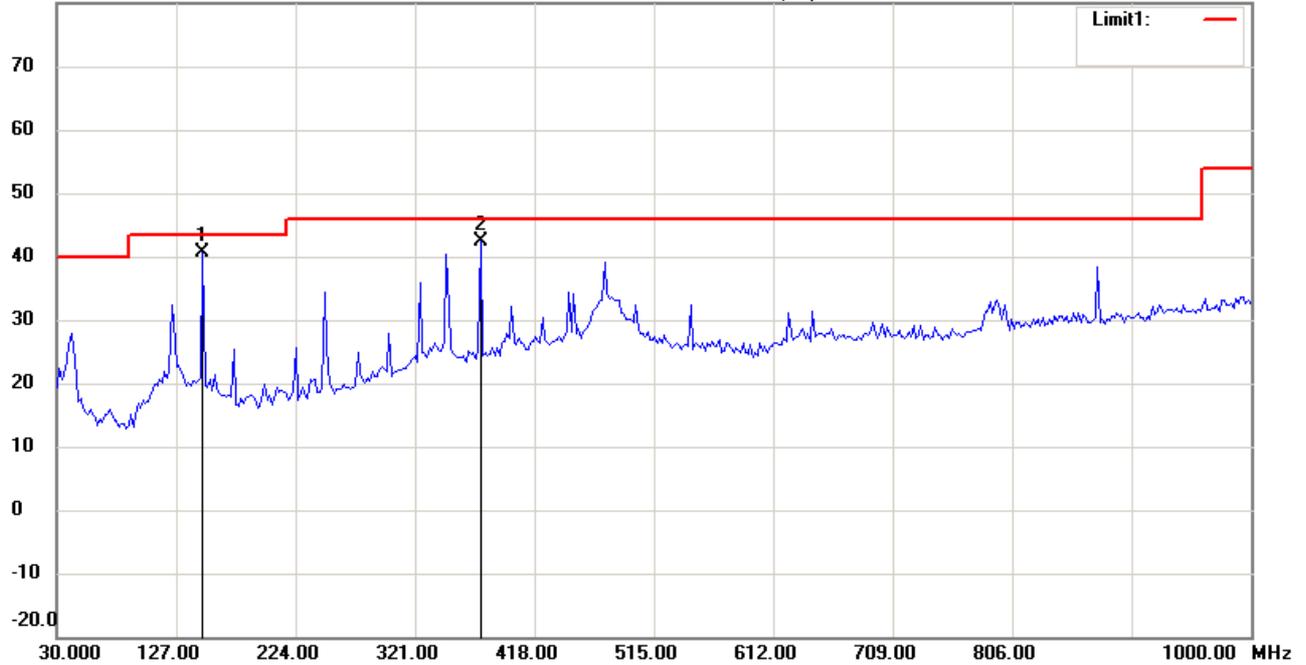

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	148.5772	48.13	peak	-7.51	40.62	43.50	100	100	-2.88	
	374.0681	46.44	peak	-4.14	42.30	46.00	100	190	-3.70	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:48:31

Humidity:60 %

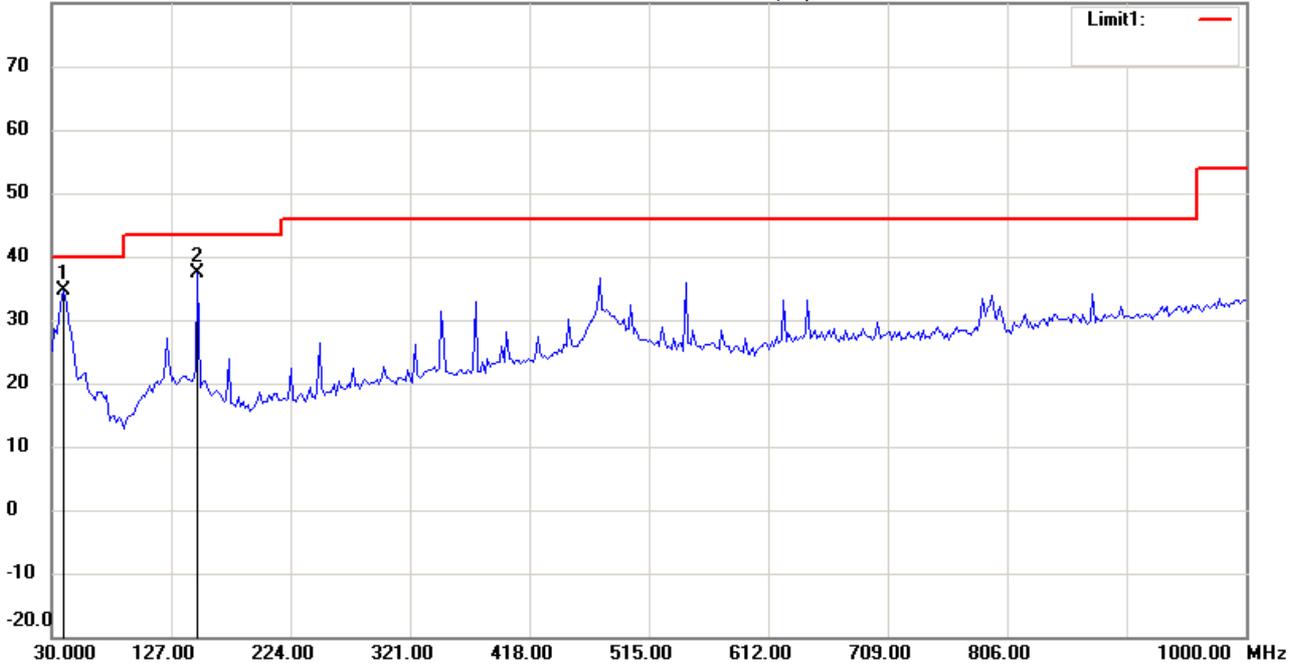

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.90	peak	-8.15	34.75	40.00	100	60	-5.25	
	148.5772	44.80	peak	-7.51	37.29	43.50	100	215	-6.21	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:10:31

Humidity:60 %

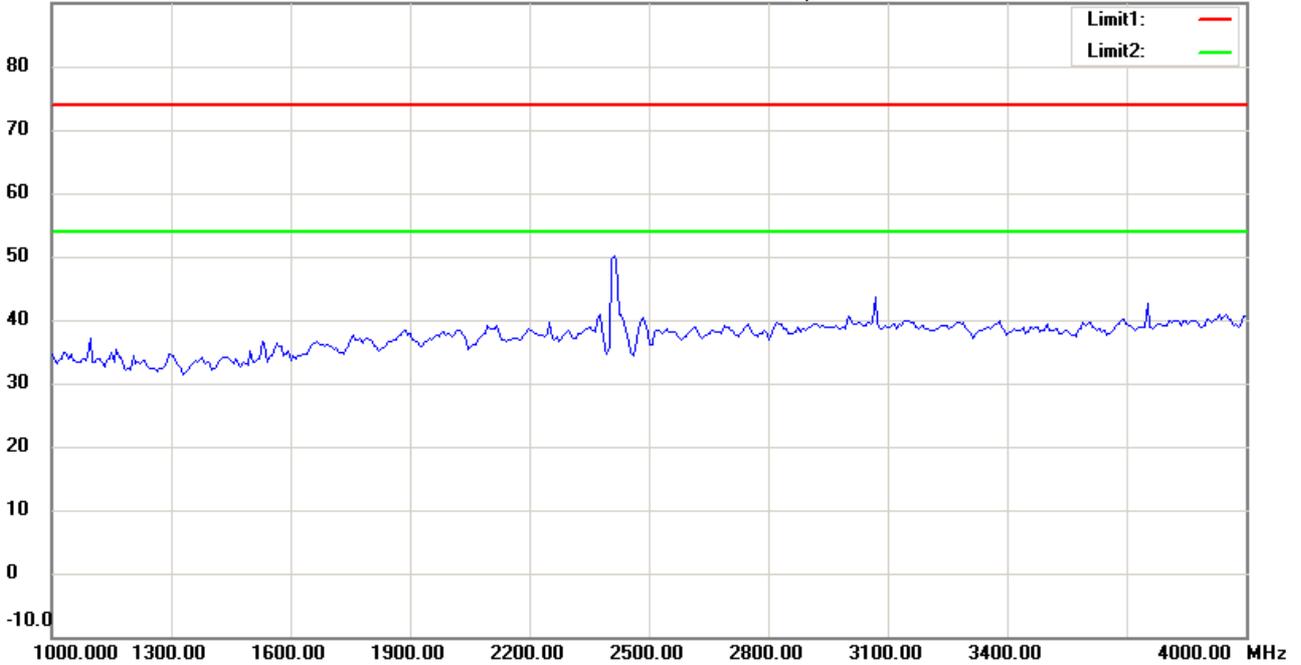

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:13:17

Humidity:60 %

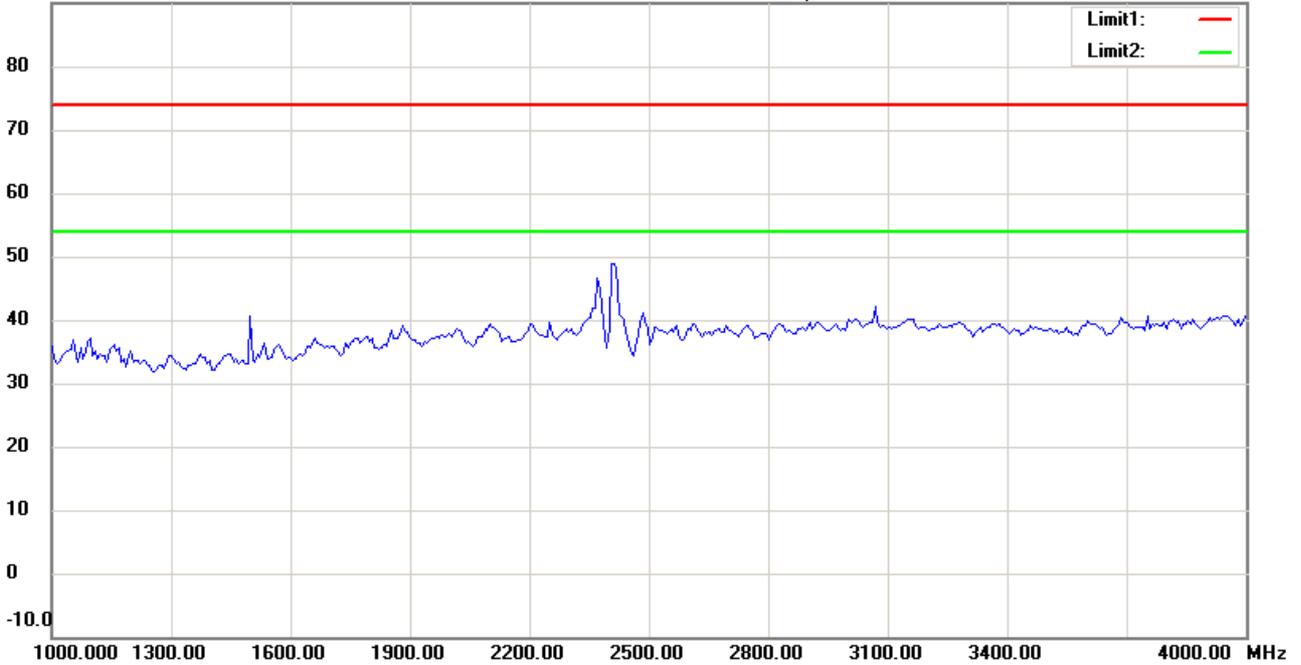

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:11:16

Humidity:60 %

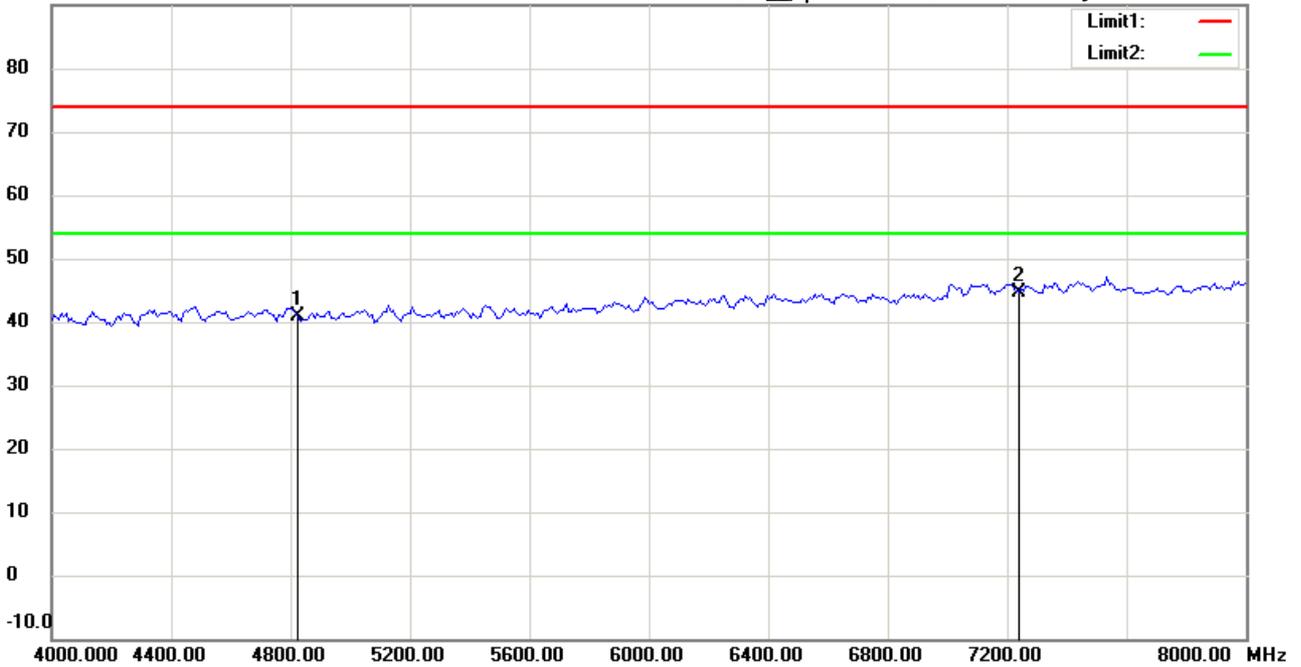

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.43	peak	-0.57	40.86	74.00	100	195	-33.14	
*	7236.000	40.43	peak	4.29	44.72	74.00	100	140	-29.28	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:14:03

Humidity:60 %

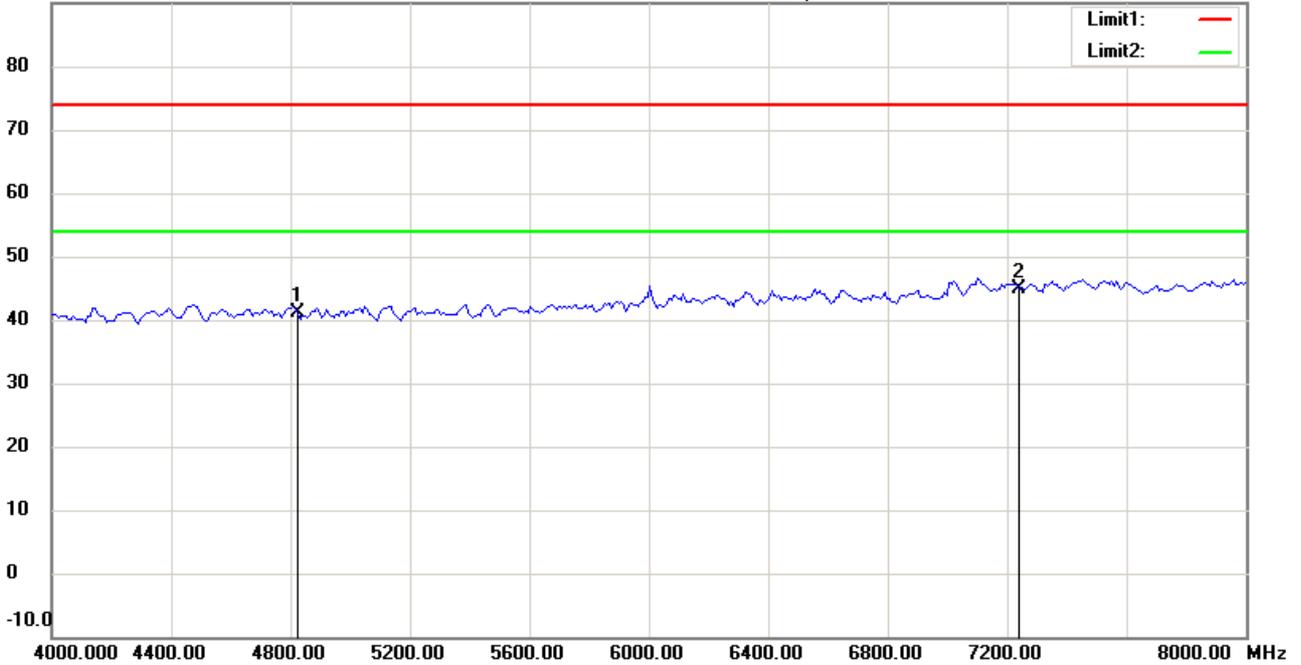

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	41.80	peak	-0.57	41.23	74.00	100	300	-32.77	
*	7236.000	40.48	peak	4.29	44.77	74.00	100	120	-29.23	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:12:08

Humidity:60 %

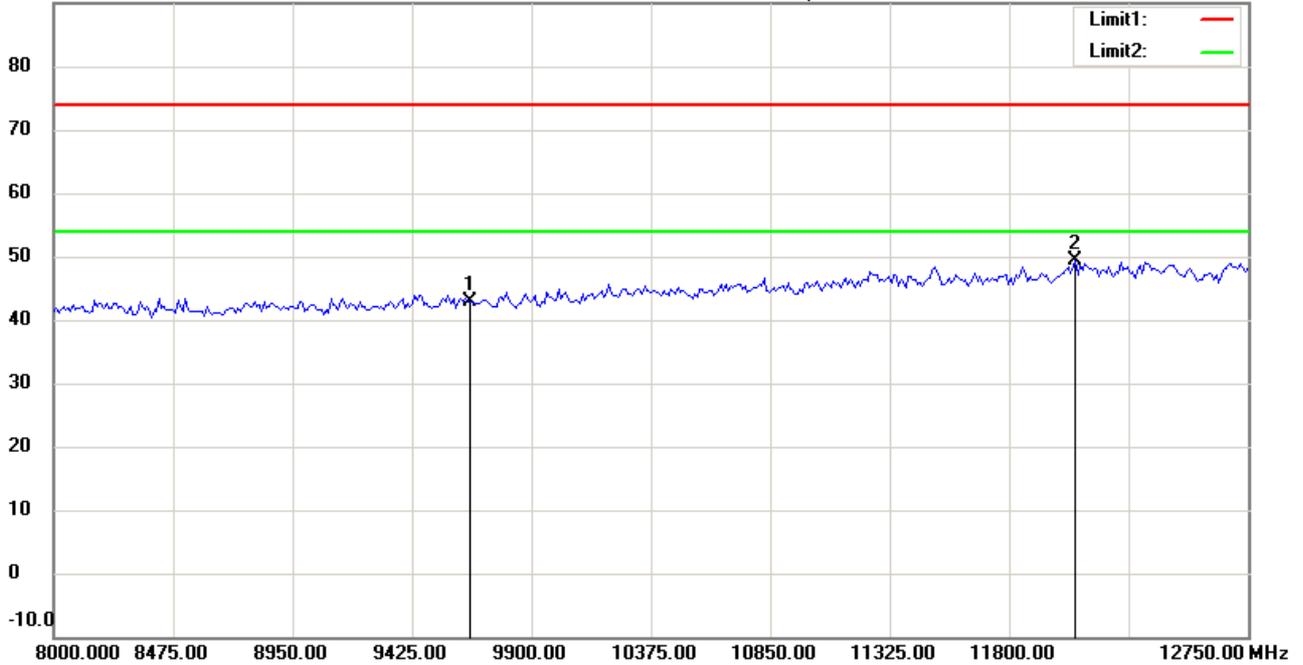

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.46	peak	7.51	42.97	74.00	100	335	-31.03	
*	12064.629	36.24	peak	13.25	49.49	74.00	100	250	-24.51	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:14:48

Humidity:60 %

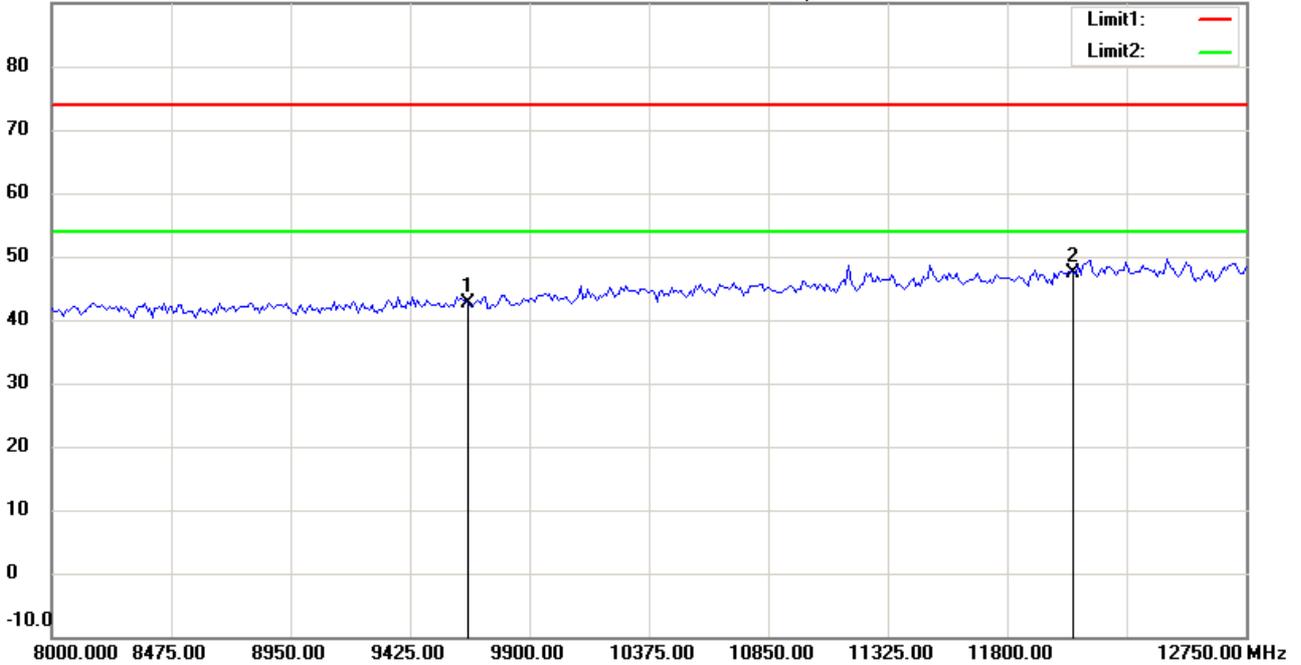

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.12	peak	7.51	42.63	74.00	100	215	-31.37	
*	12060.000	34.29	peak	13.18	47.47	74.00	100	80	-26.53	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:12:22

Humidity:60 %

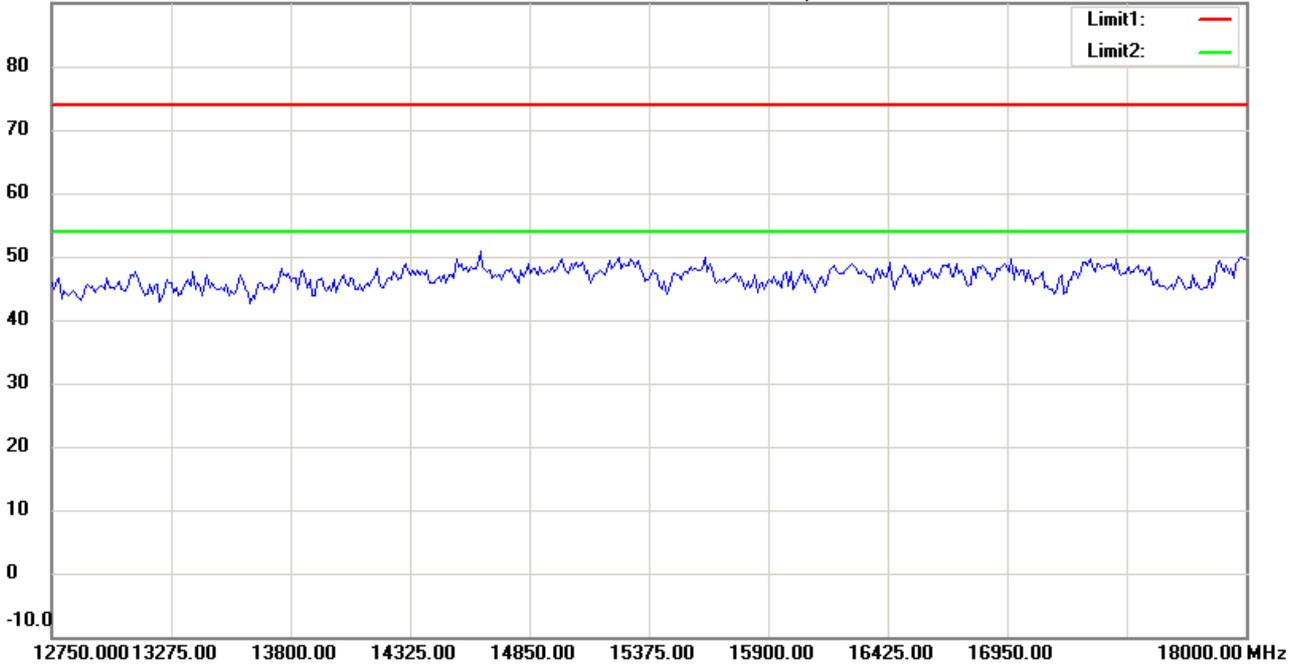

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:15:02

Humidity:60 %

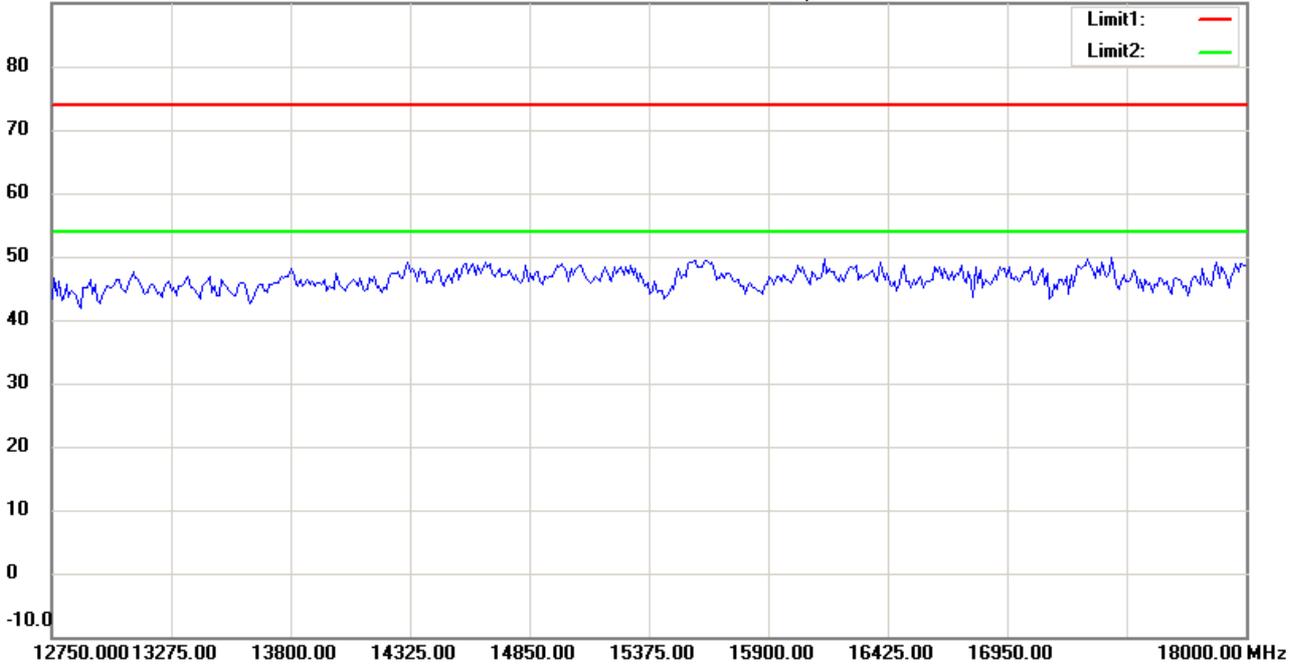

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:12:32

Humidity:60 %

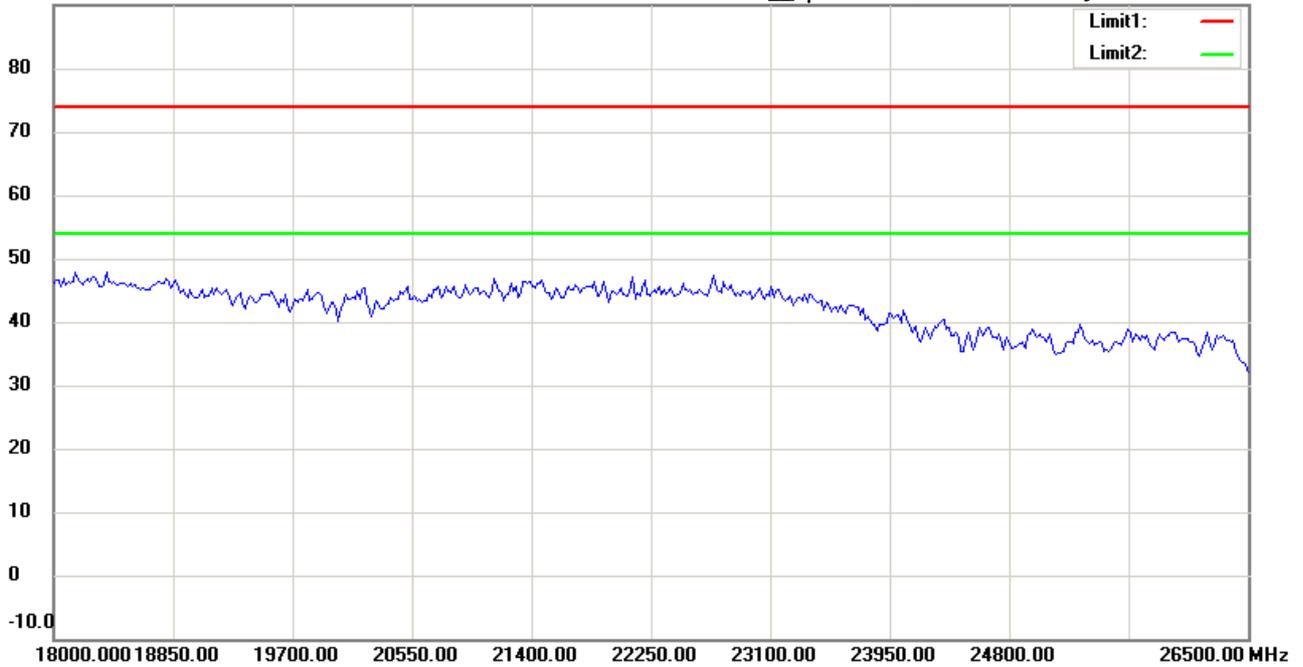

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 上午 12:15:12

Humidity:60 %

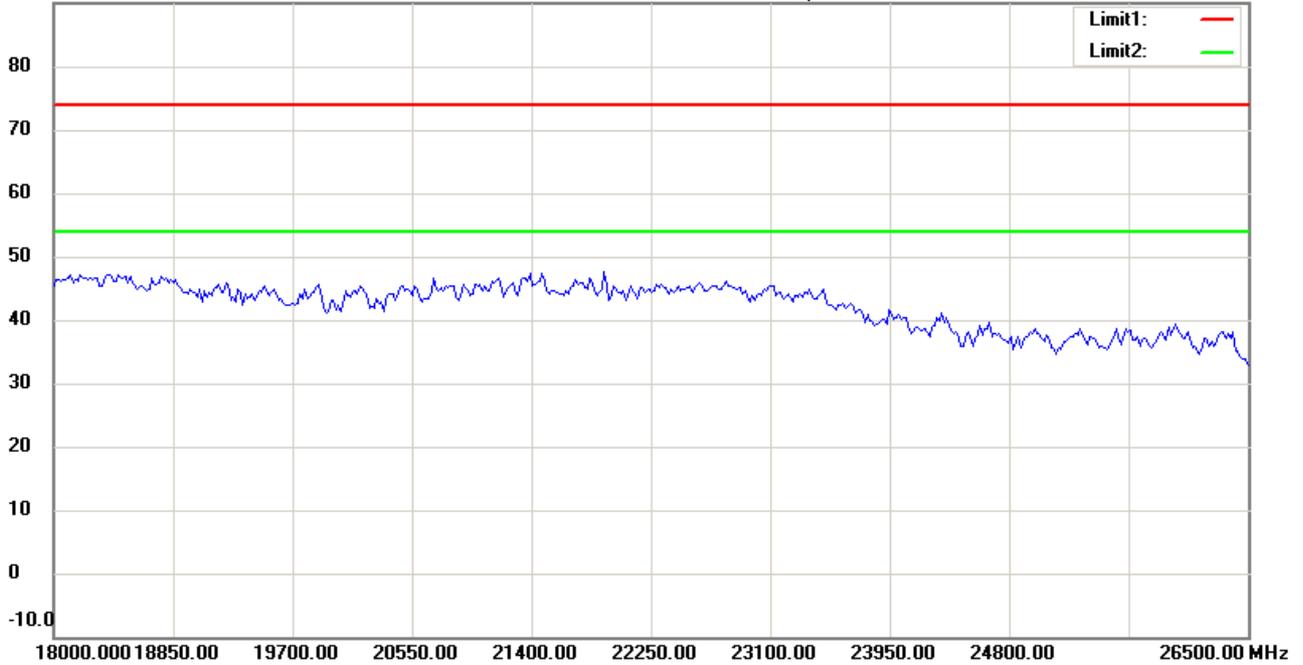

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:49:46

Humidity:60 %

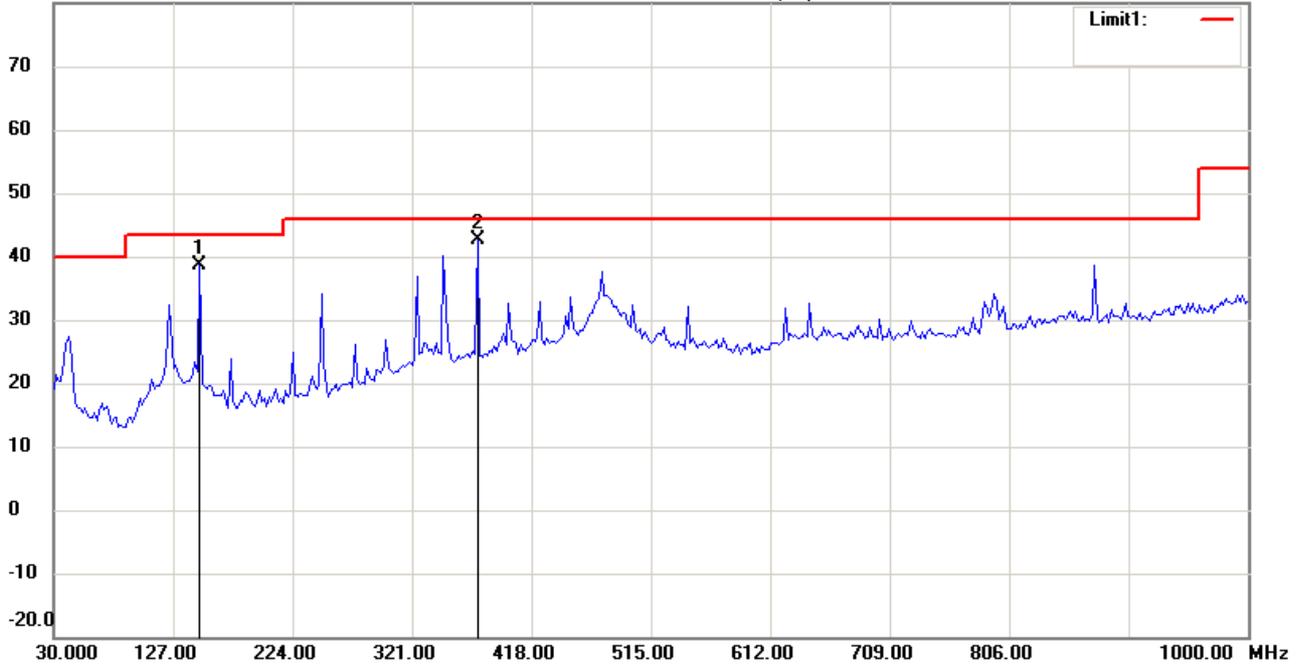

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	46.26	peak	-7.51	38.75	43.50	100	185	-4.75	
*	374.0681	46.89	peak	-4.14	42.75	46.00	100	245	-3.25	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:50:34

Humidity:60 %

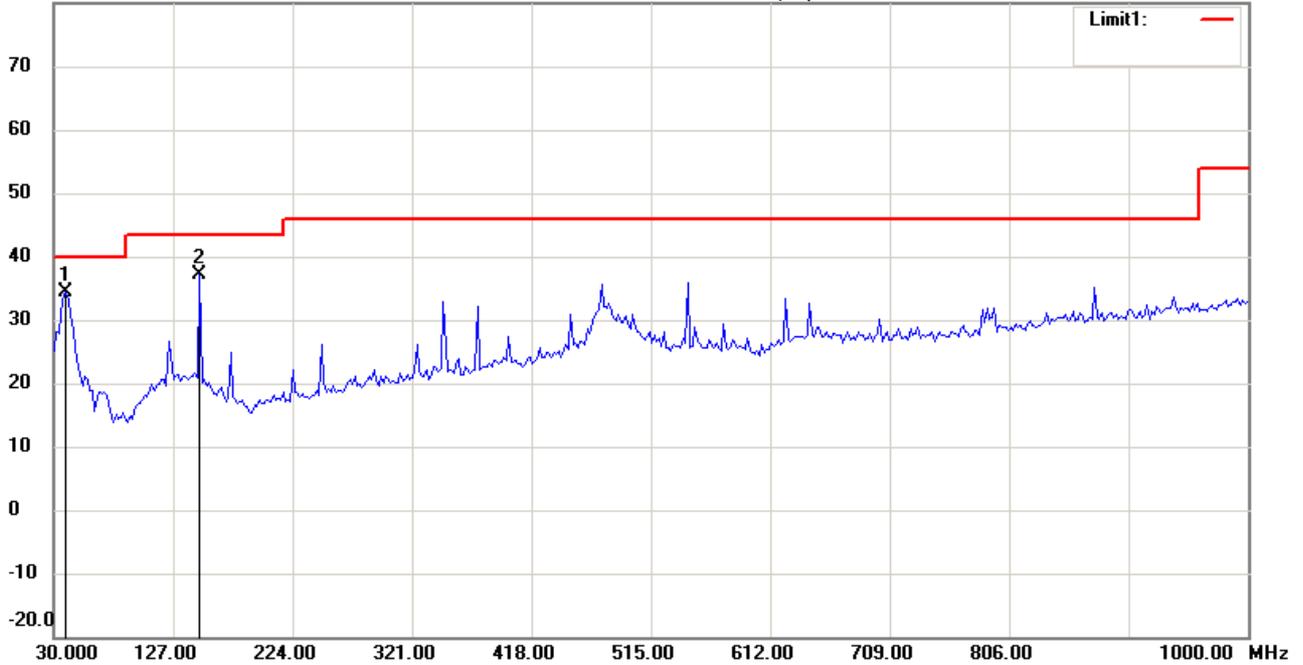

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Vertical

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.47	peak	-8.15	34.32	40.00	100	240	-5.68	
	148.5772	44.67	peak	-7.51	37.16	43.50	100	315	-6.34	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:09:25

Humidity:60 %

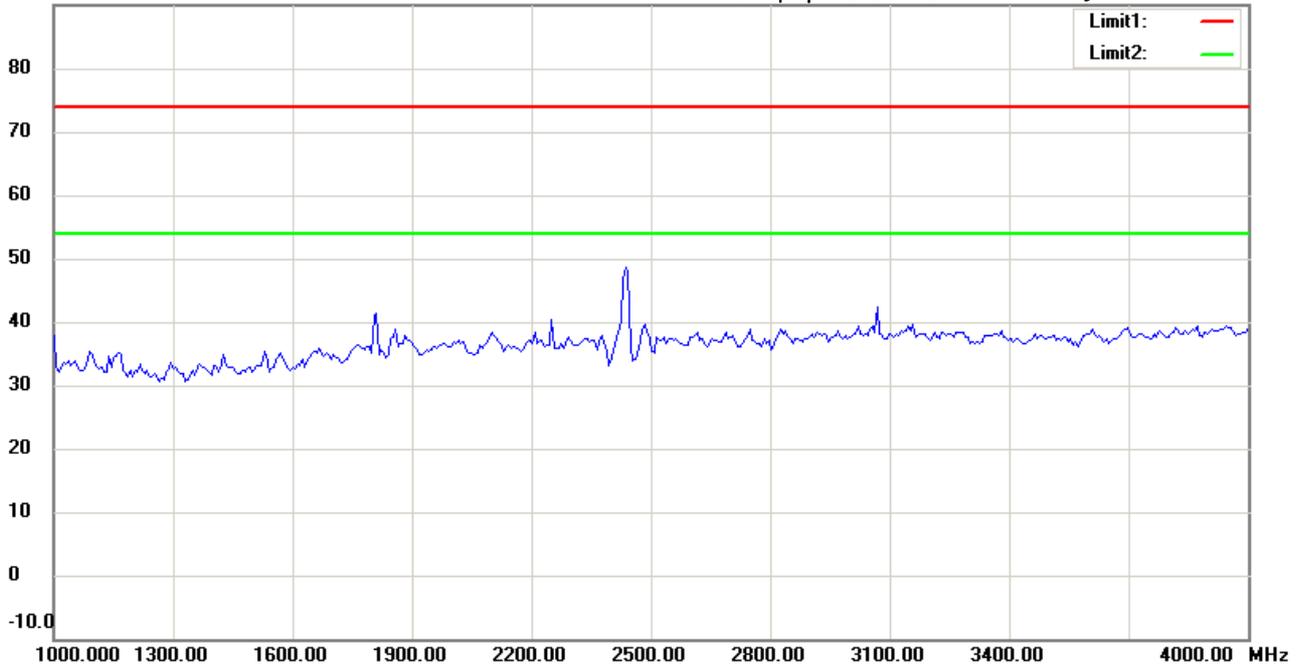

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:12:10

Humidity:60 %

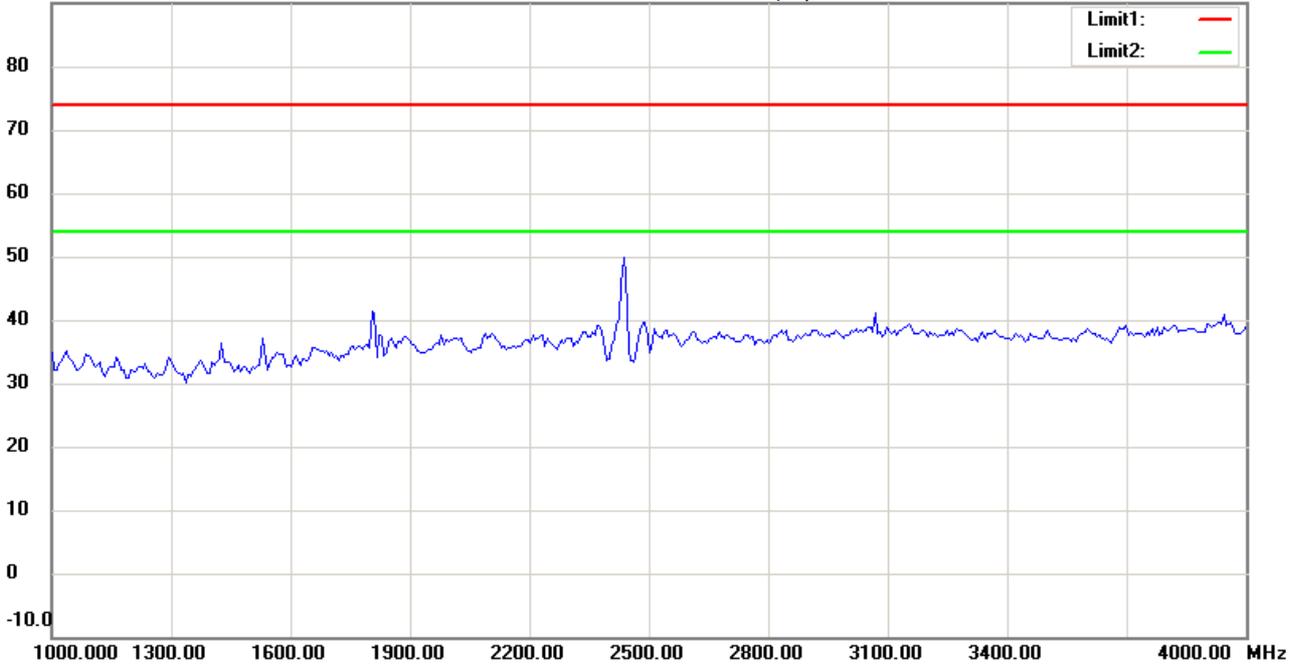

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:10:10

Humidity:60 %

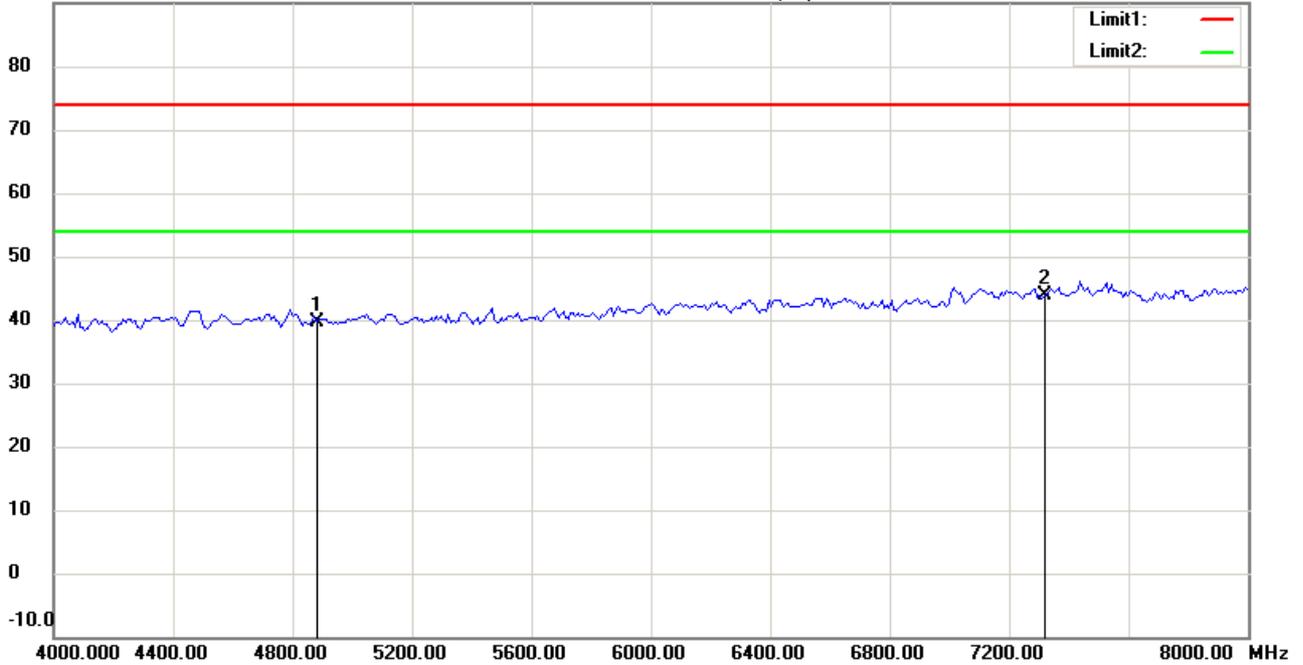

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	40.06	peak	-0.50	39.56	74.00	100	235	-34.44	
*	7311.000	39.38	peak	4.43	43.81	74.00	100	80	-30.19	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:12:56

Humidity:60 %

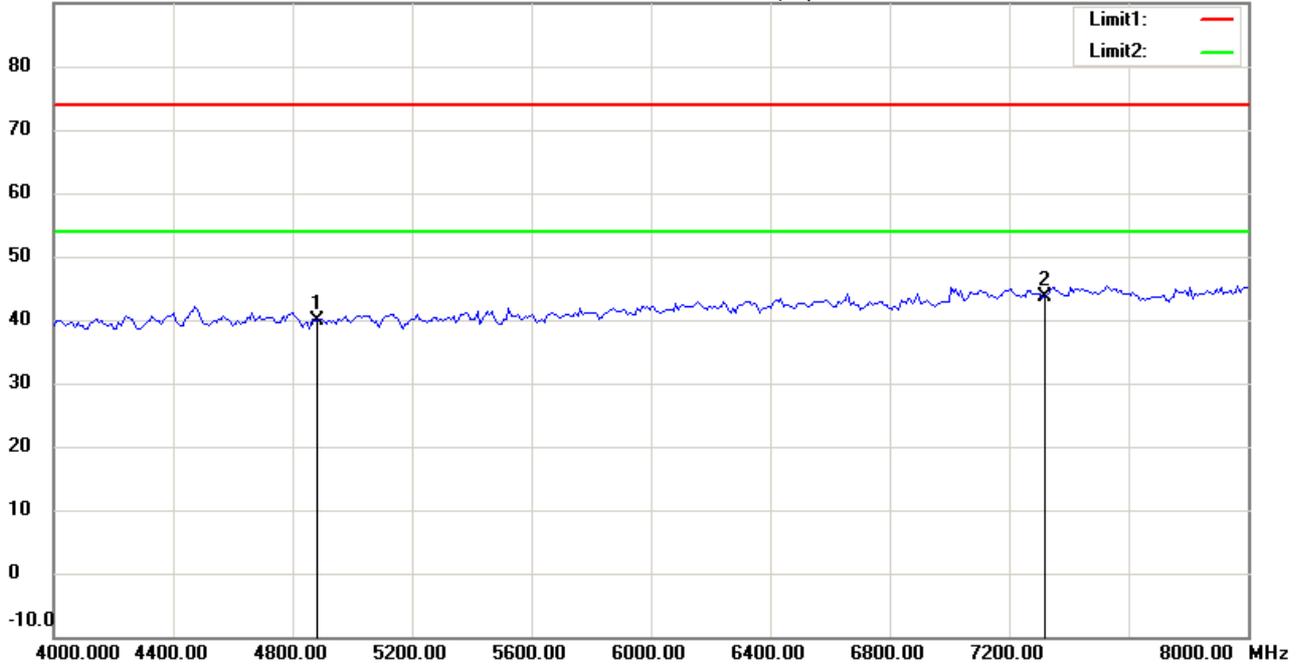

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	40.31	peak	-0.50	39.81	74.00	100	240	-34.19	
*	7311.000	39.21	peak	4.43	43.64	74.00	100	85	-30.36	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:11:02

Humidity:60 %

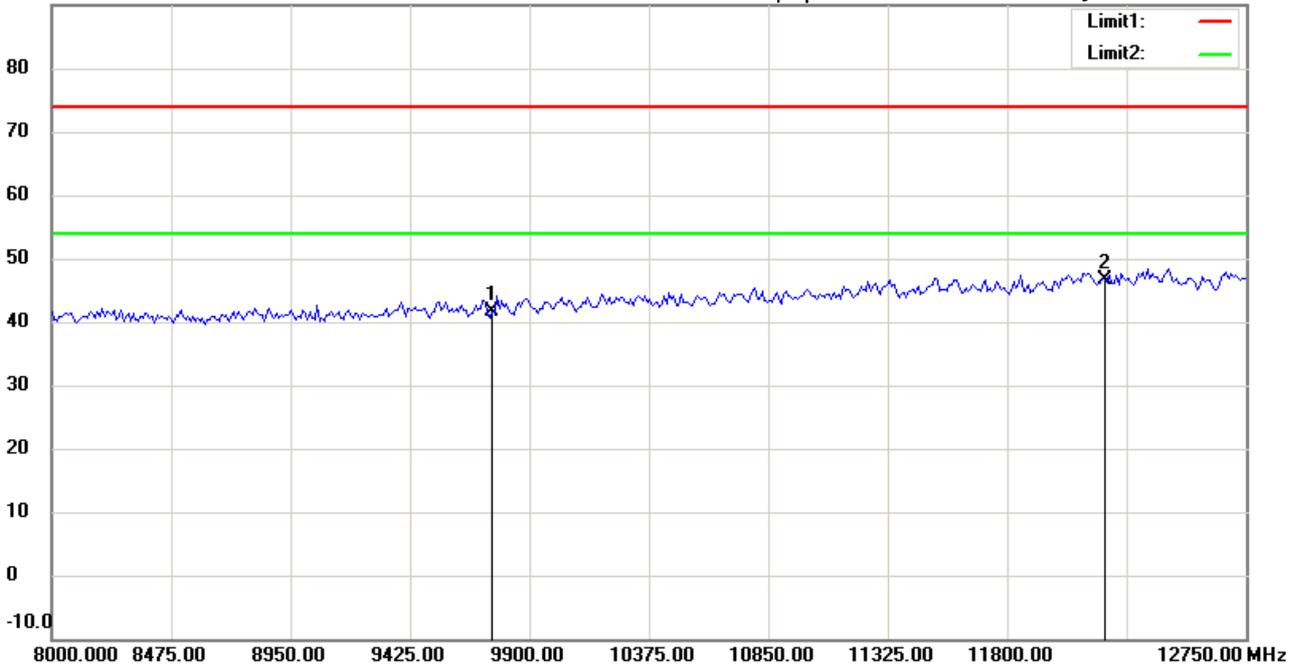

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.15	peak	7.49	41.64	74.00	100	105	-32.36	
*	12185.000	32.84	peak	13.82	46.66	74.00	100	40	-27.34	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:13:41

Humidity:60 %

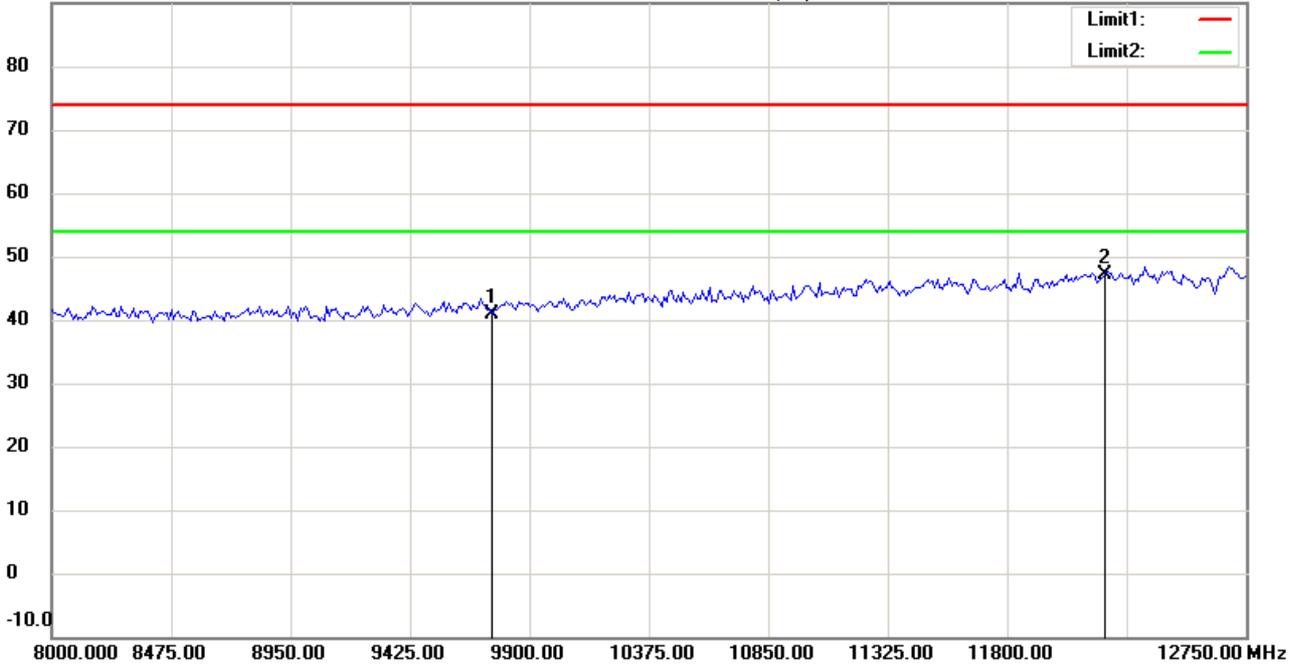

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	33.41	peak	7.49	40.90	74.00	100	165	-33.10	
*	12185.000	33.27	peak	13.82	47.09	74.00	100	110	-26.91	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:11:16

Humidity:60 %

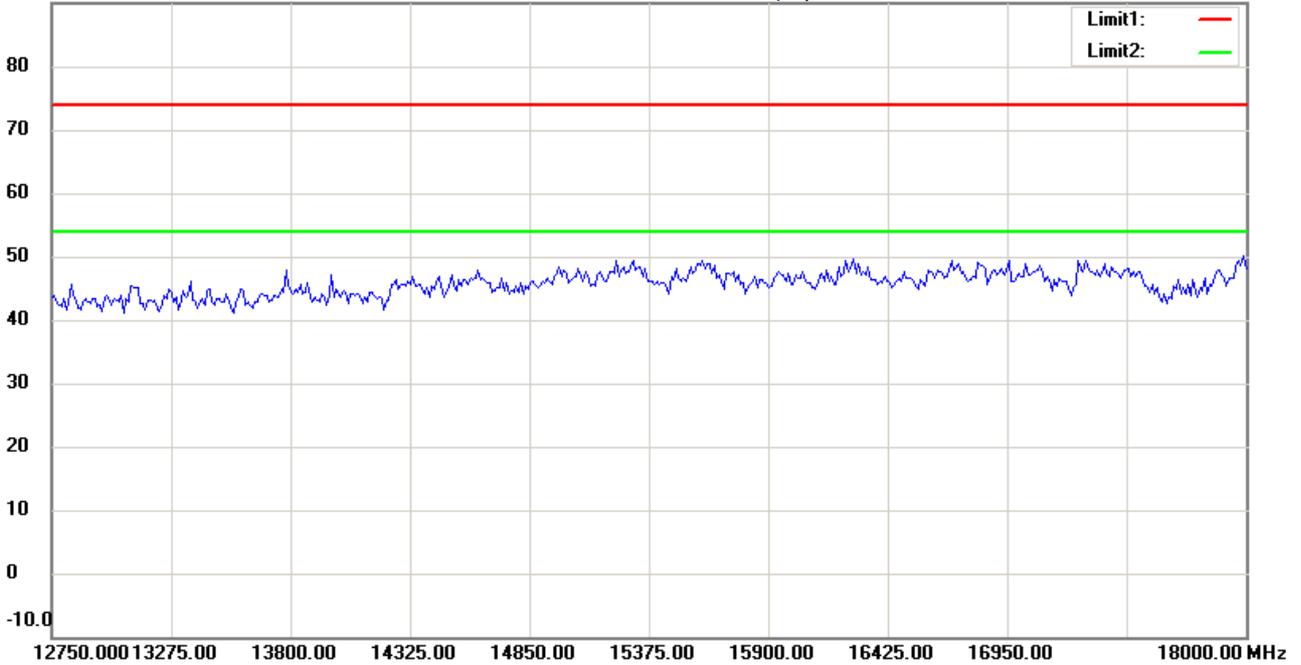

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:13:54

Humidity:60 %

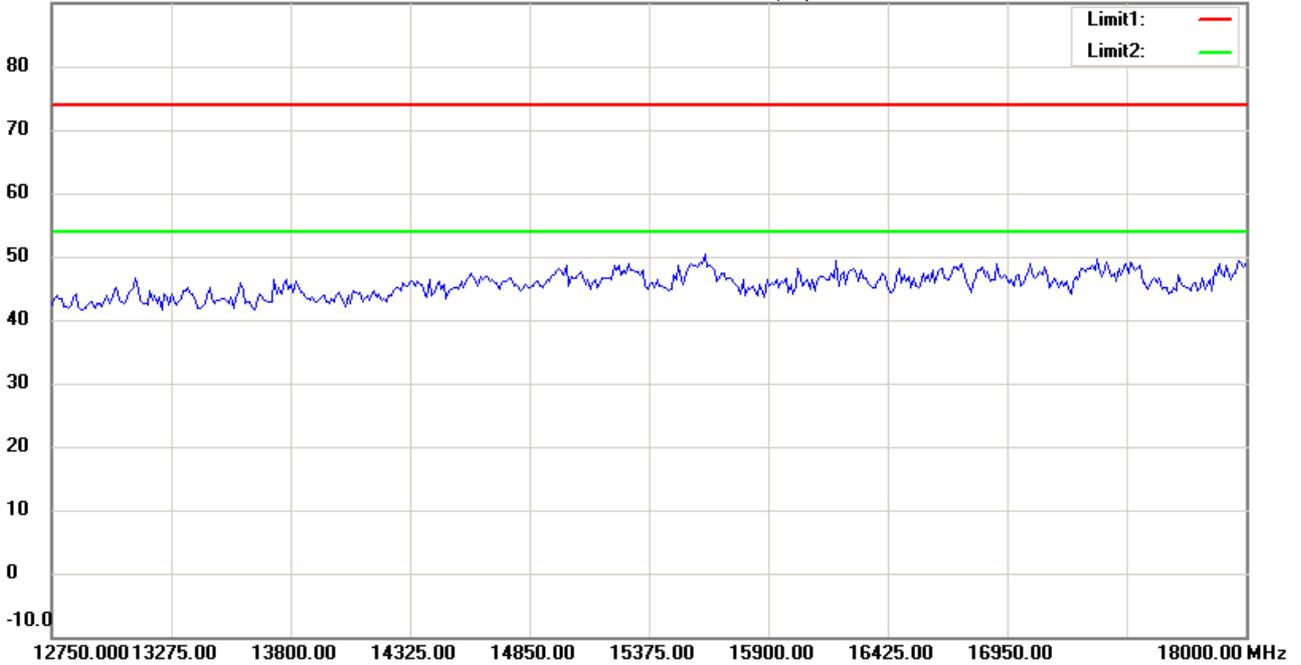

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:11:25

Humidity:60 %

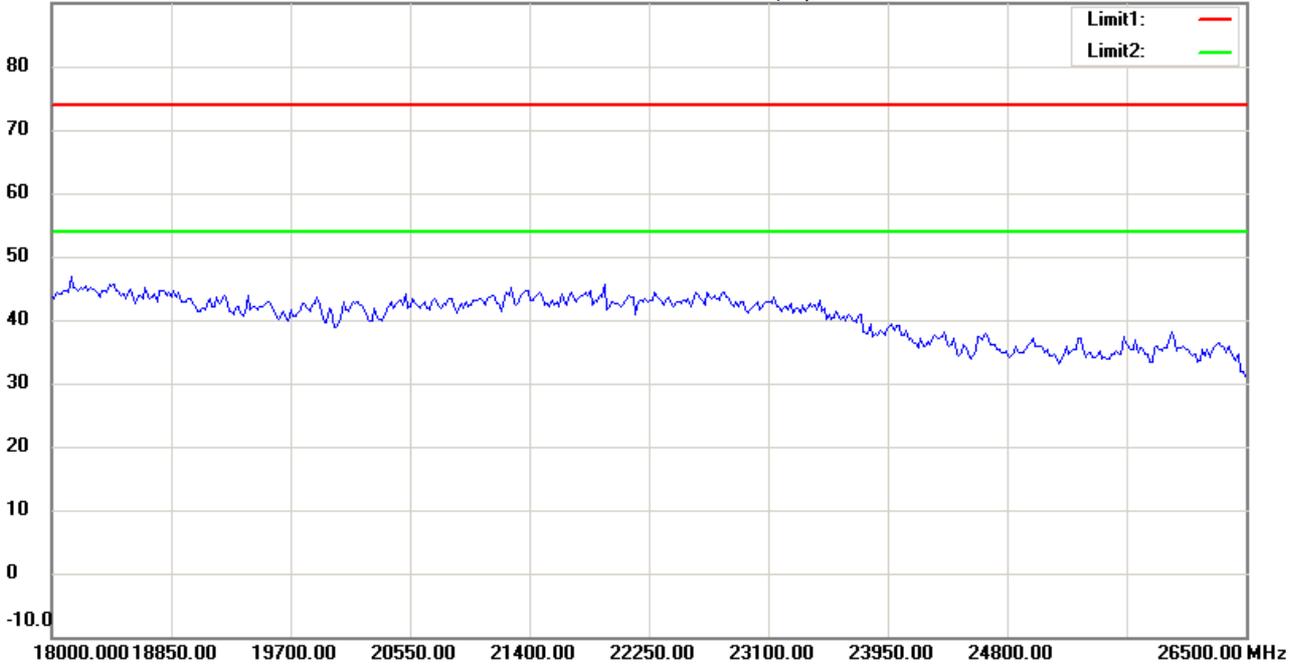

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:14:04

Humidity:60 %

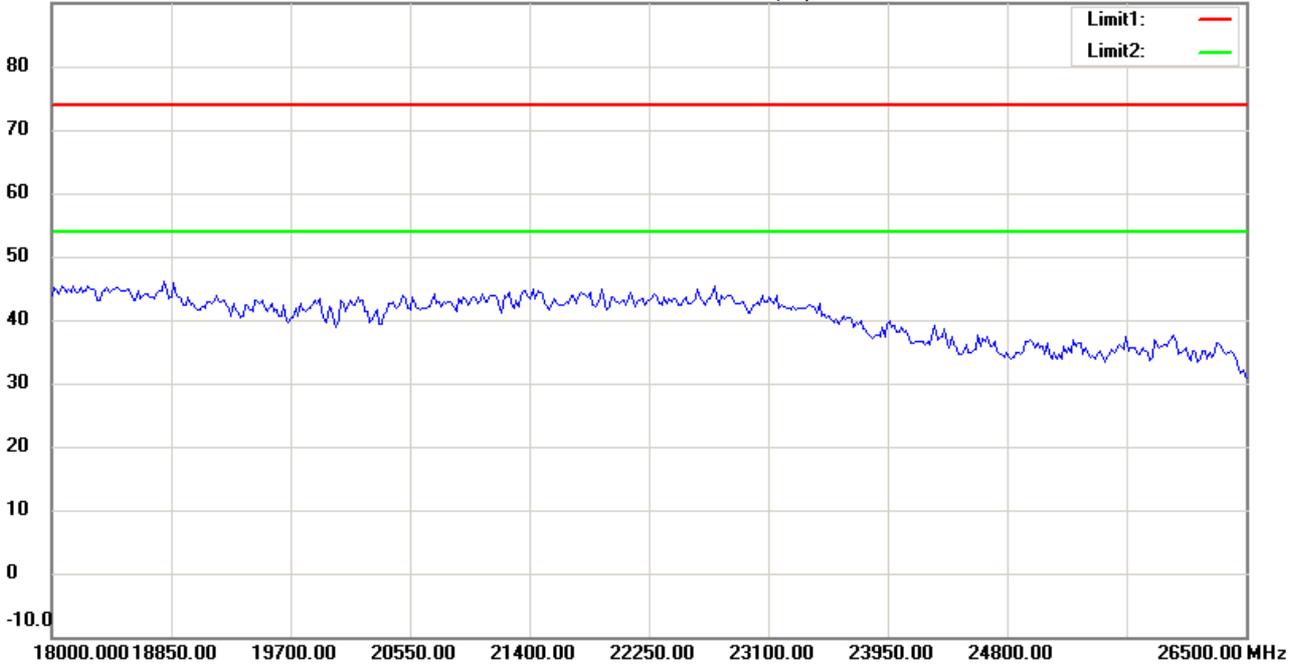

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:51:48

Humidity:60 %

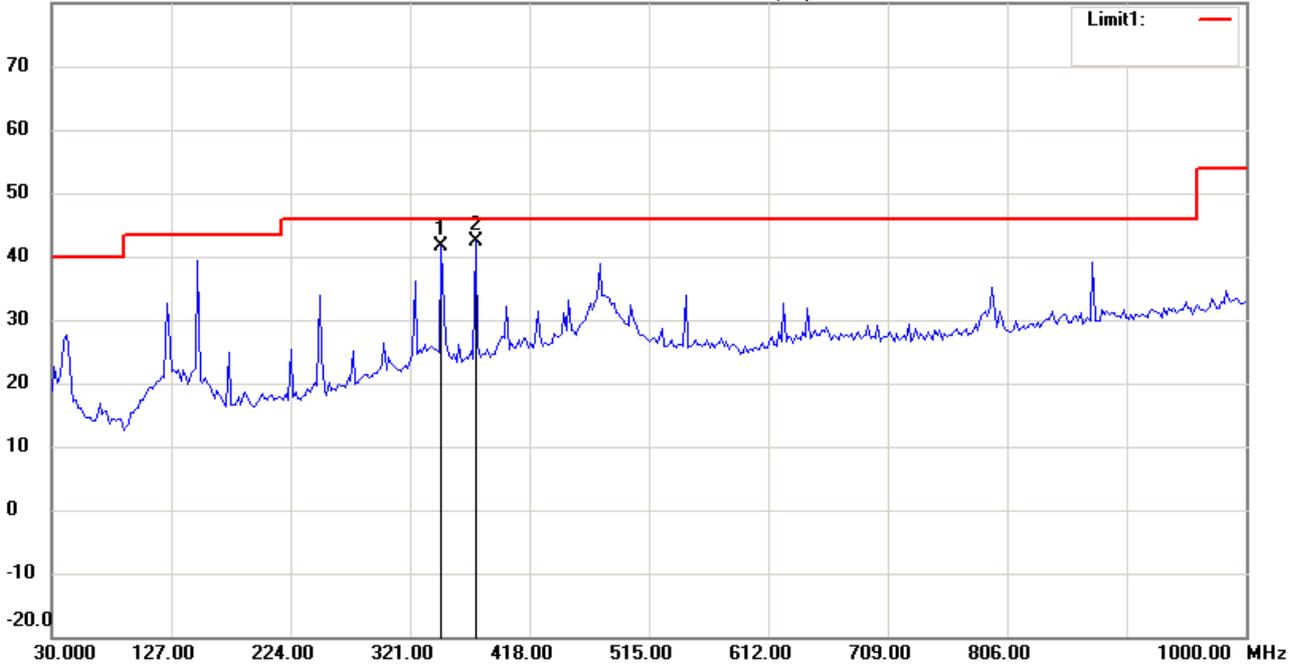

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	46.23	peak	-4.63	41.60	46.00	100	85	-4.40	
*	374.0681	46.50	peak	-4.14	42.36	46.00	100	240	-3.64	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:52:33

Humidity:60 %

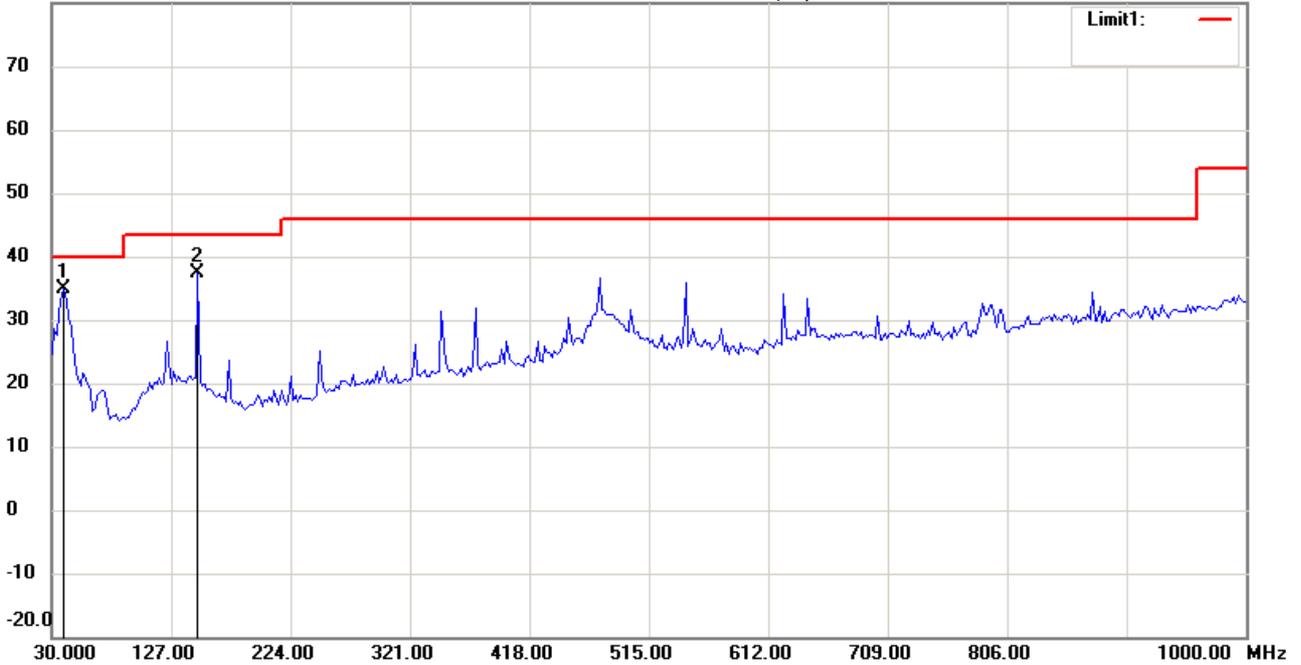

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	43.05	peak	-8.15	34.90	40.00	100	200	-5.10	
	148.5772	44.99	peak	-7.51	37.48	43.50	100	295	-6.02	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:17:51

Humidity:60 %

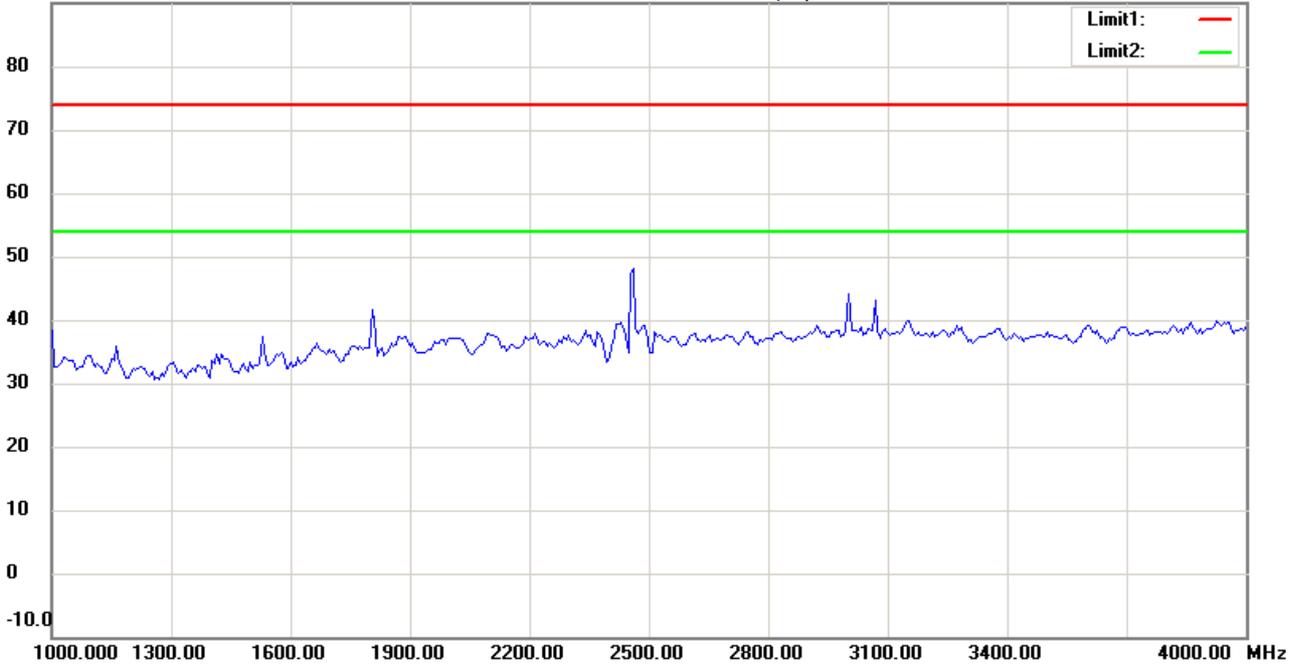

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:20:36

Humidity:60 %

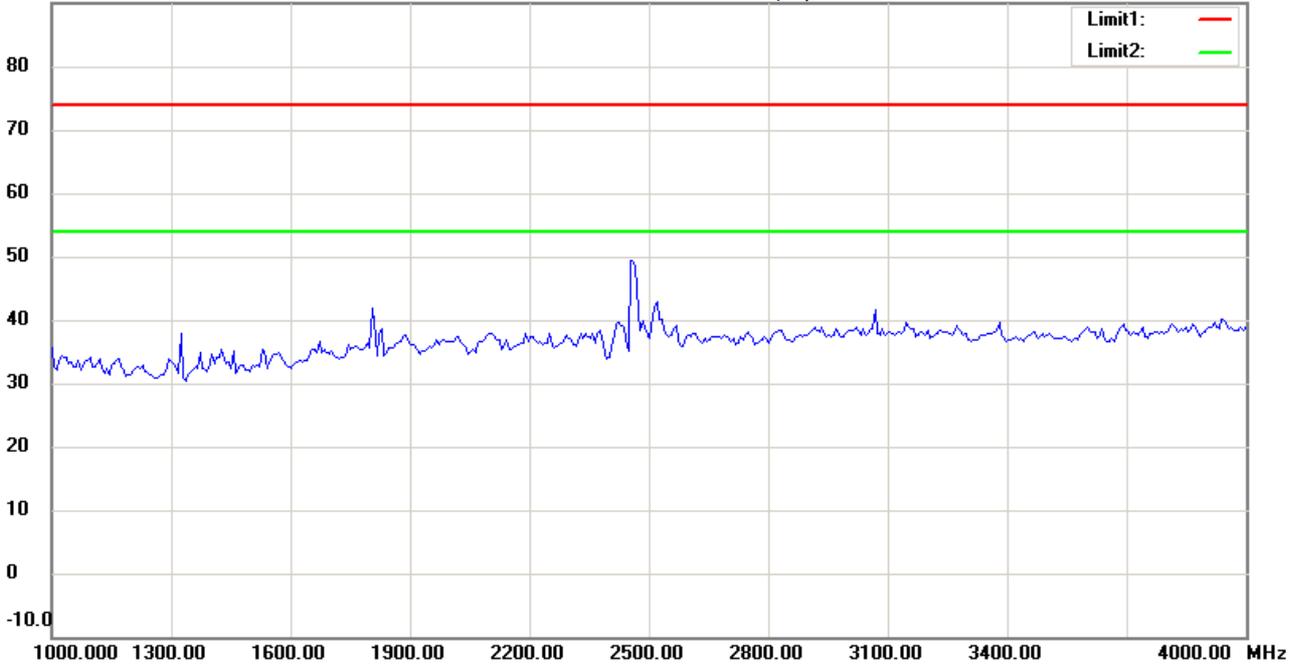

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:18:36

Humidity:60 %

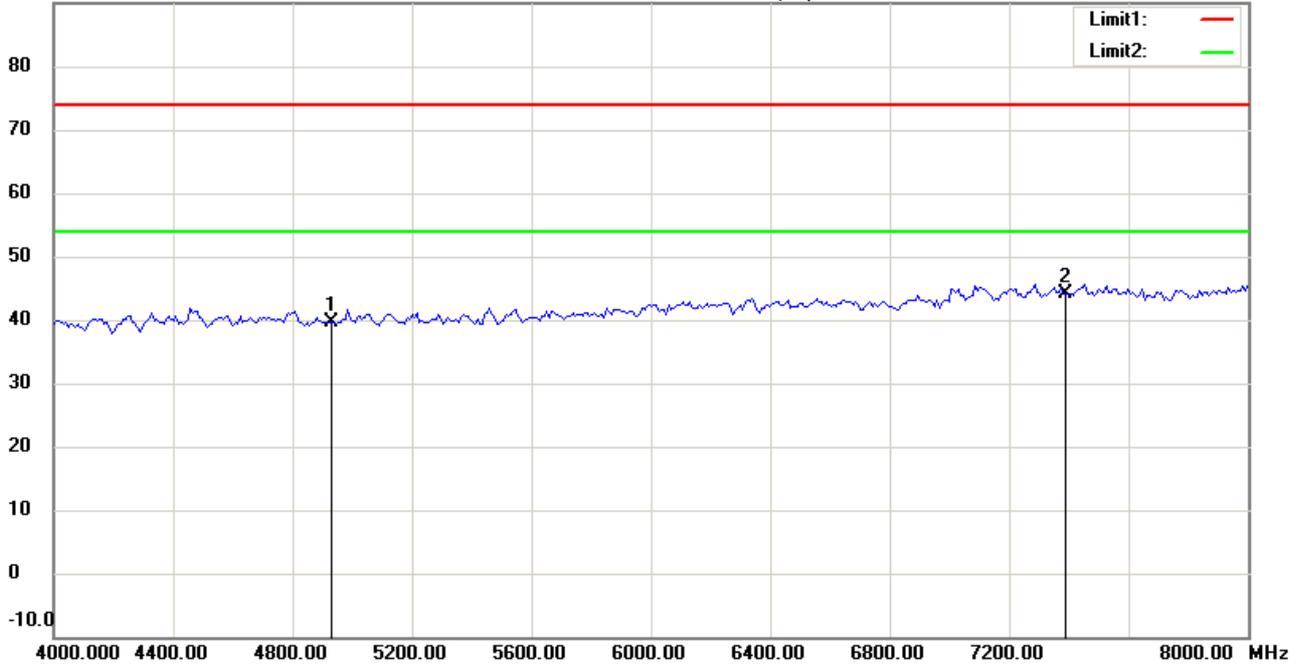

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	39.88	peak	-0.33	39.55	74.00	100	295	-34.45	
*	7386.000	39.12	peak	4.93	44.05	74.00	100	80	-29.95	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:21:22

Humidity:60 %

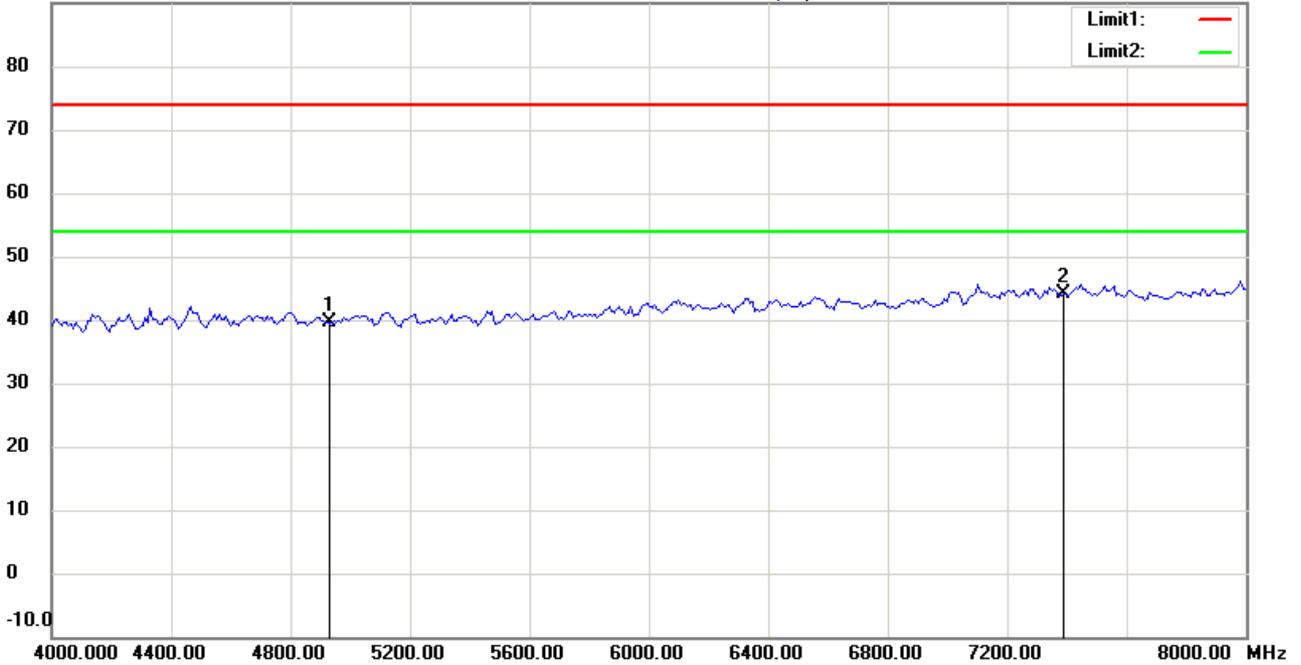

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	39.89	peak	-0.33	39.56	74.00	100	290	-34.44	
*	7386.000	39.27	peak	4.93	44.20	74.00	100	175	-29.80	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:19:27

Humidity:60 %

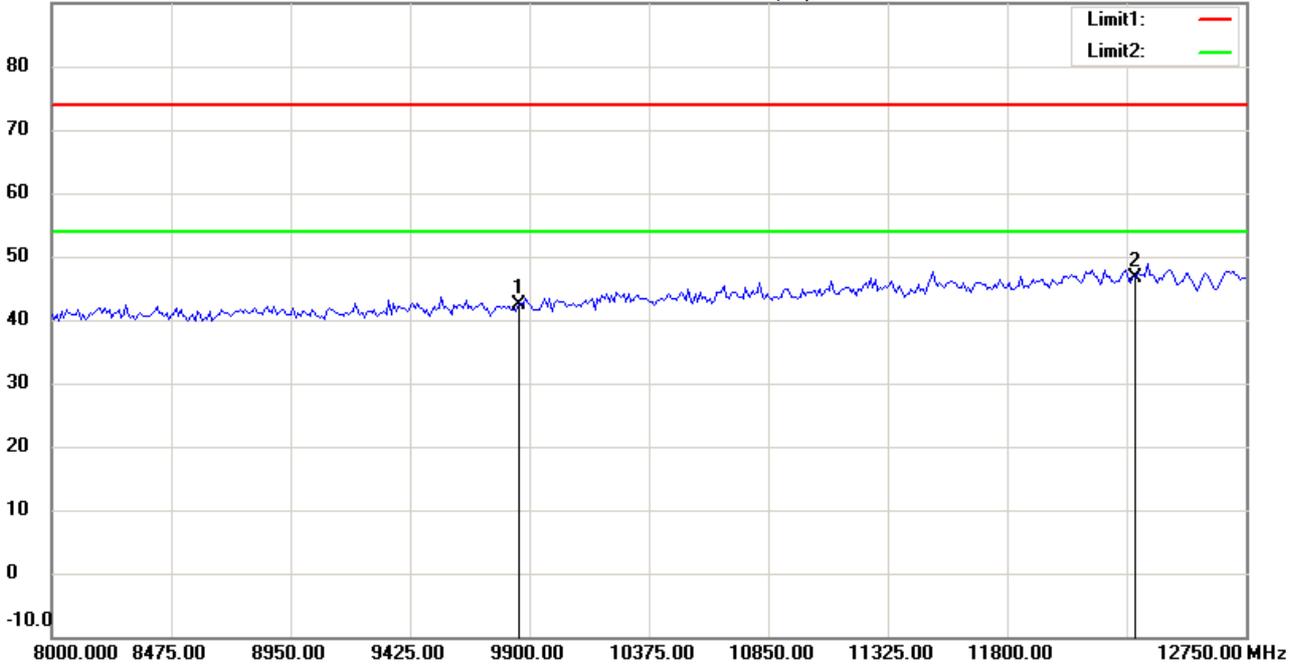

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.61	peak	7.68	42.29	74.00	100	115	-31.71	
*	12310.000	33.49	peak	13.25	46.74	74.00	100	40	-27.26	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:22:06

Humidity:60 %

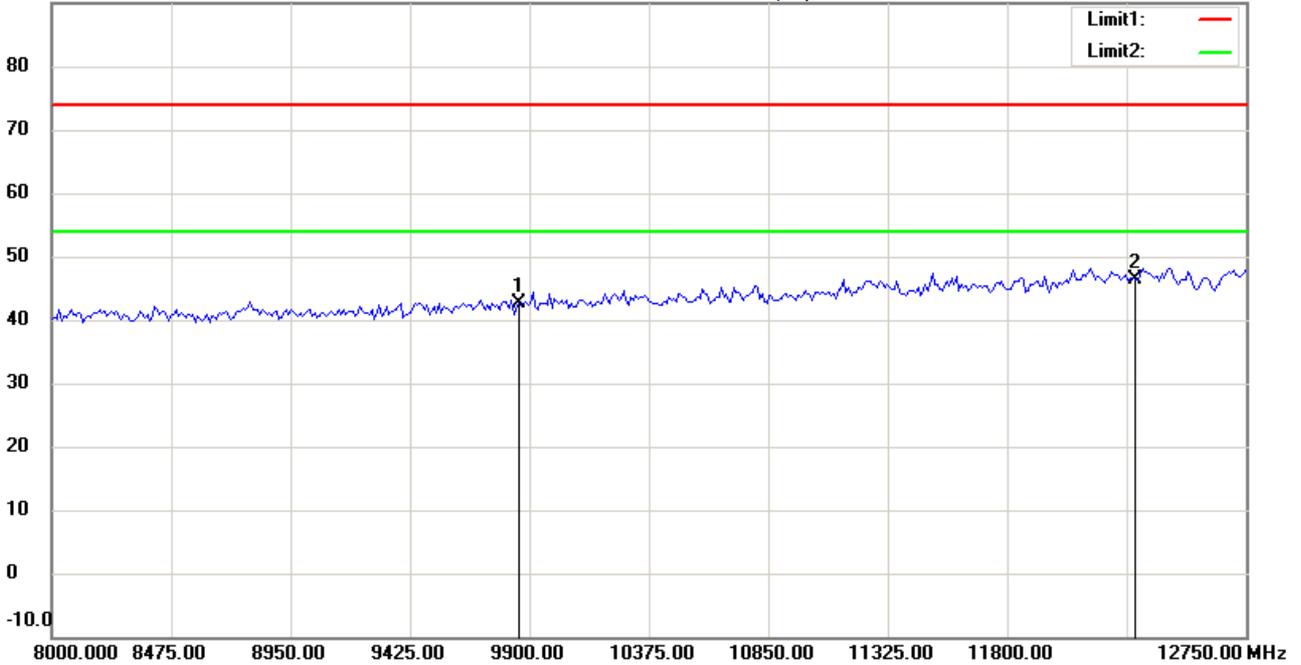

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.00	peak	7.68	42.68	74.00	100	205	-31.32	
*	12310.000	33.21	peak	13.25	46.46	74.00	100	55	-27.54	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:19:41

Humidity:60 %

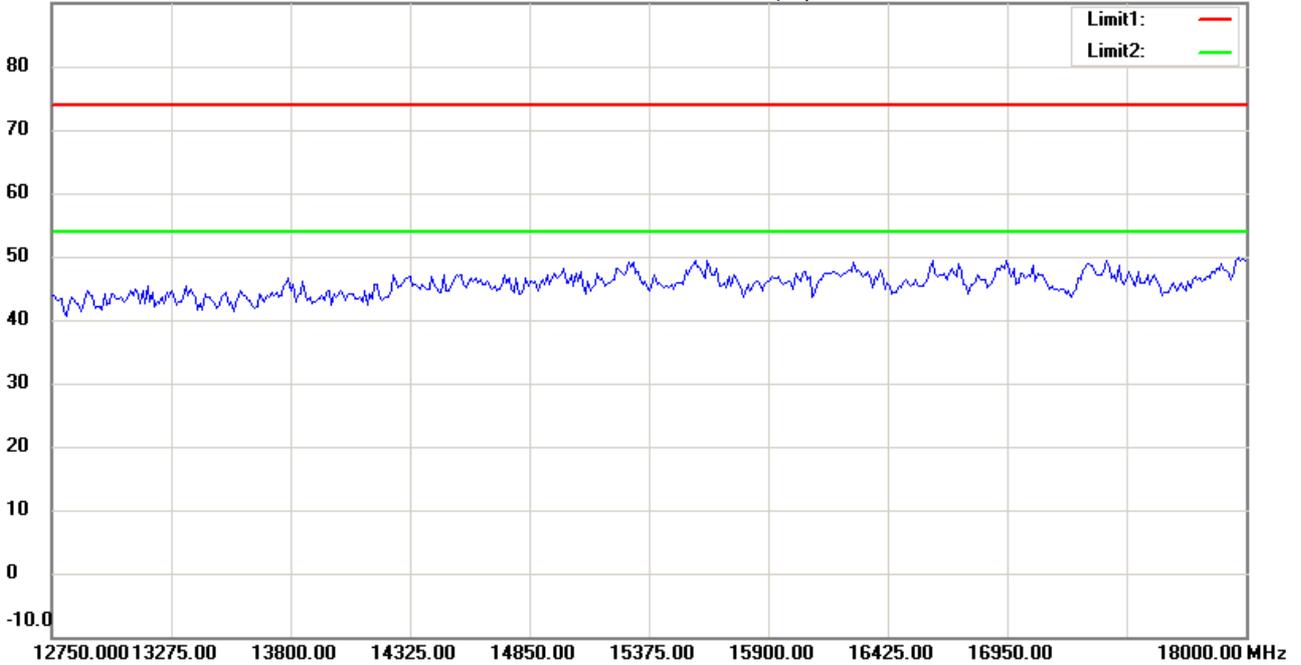

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11b CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:22:20

Humidity:60 %

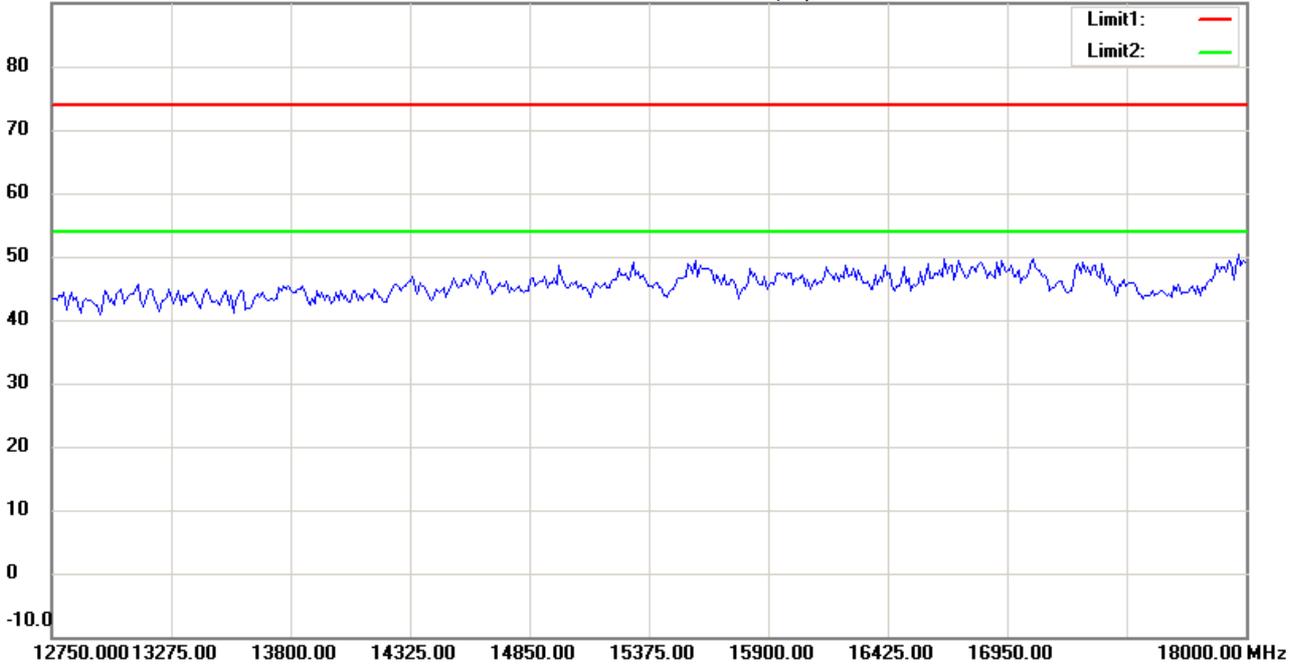

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:19:51

Humidity:60 %

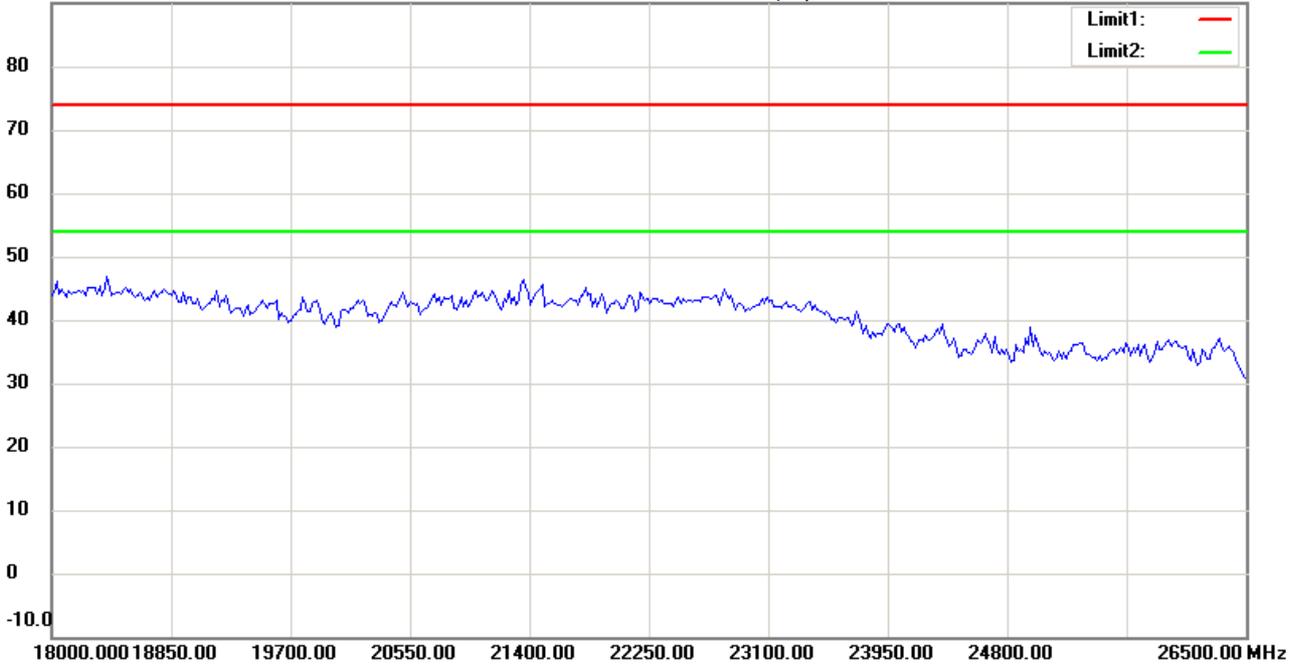

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:22:30

Humidity:60 %

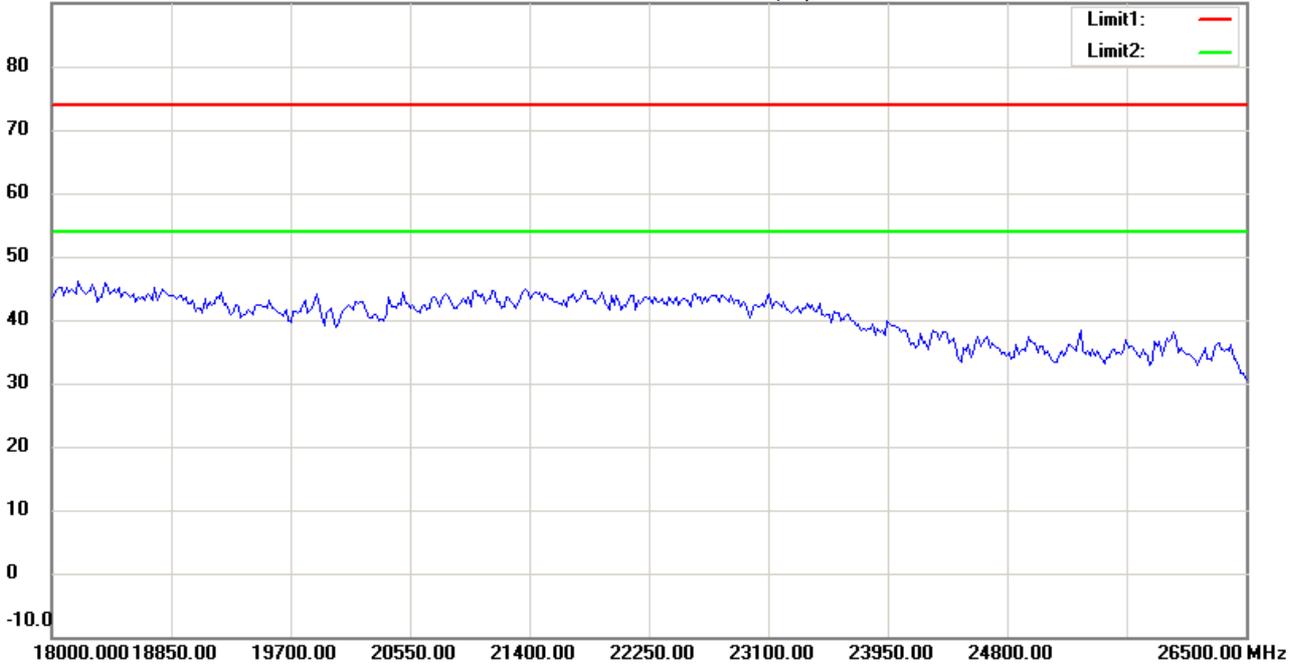

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:55:45

Humidity:60 %

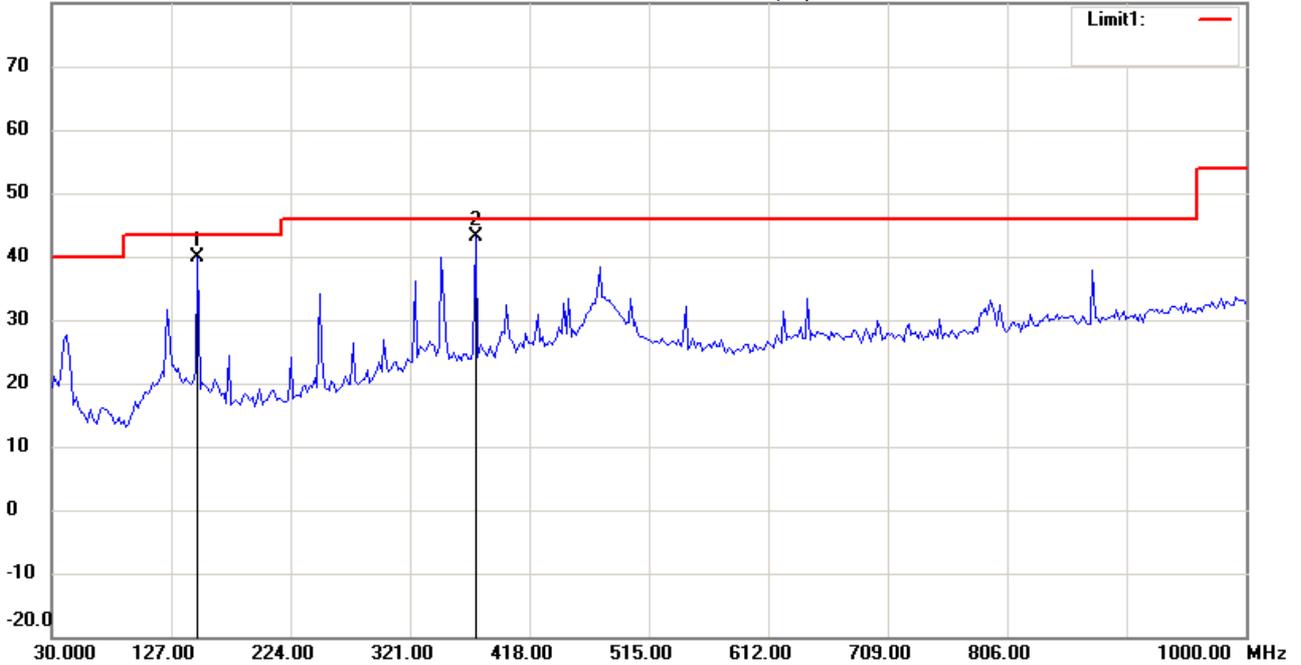

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	47.28	peak	-7.51	39.77	43.50	100	325	-3.73	
*	374.0681	47.30	peak	-4.14	43.16	46.00	100	150	-2.84	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:56:38

Humidity:60 %

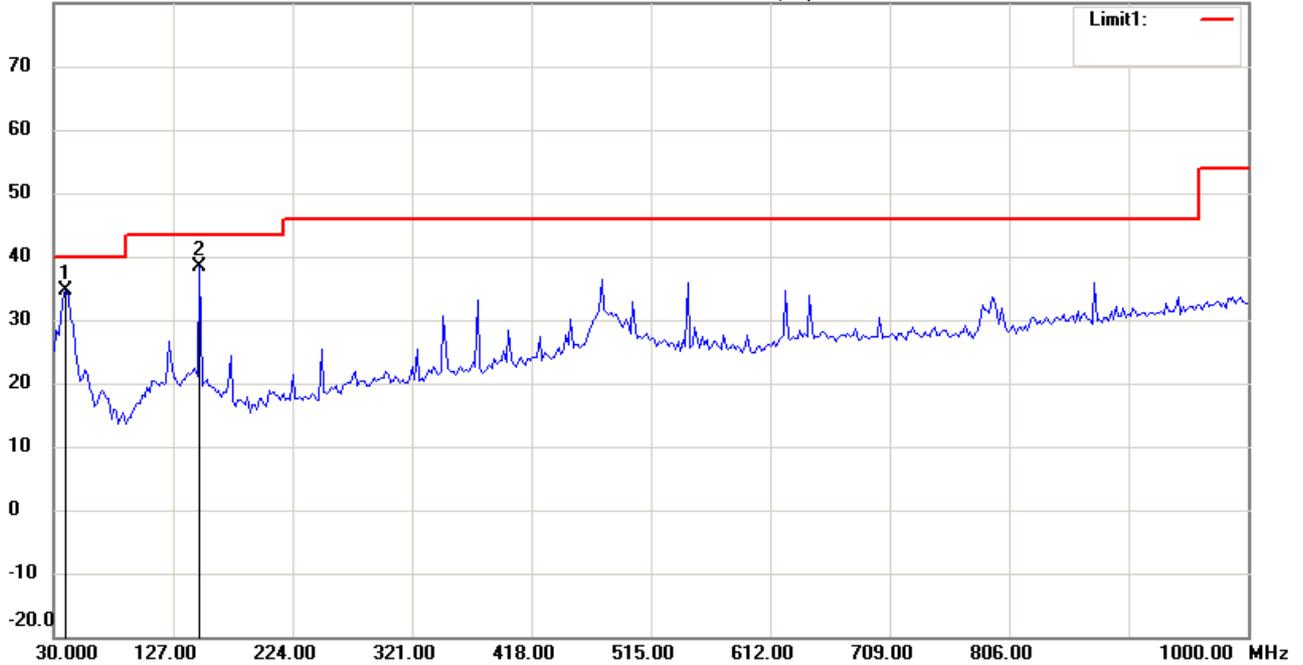

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	42.71	peak	-8.15	34.56	40.00	100	95	-5.44	
*	148.5772	45.91	peak	-7.51	38.40	43.50	100	200	-5.10	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:27:09

Humidity:60 %

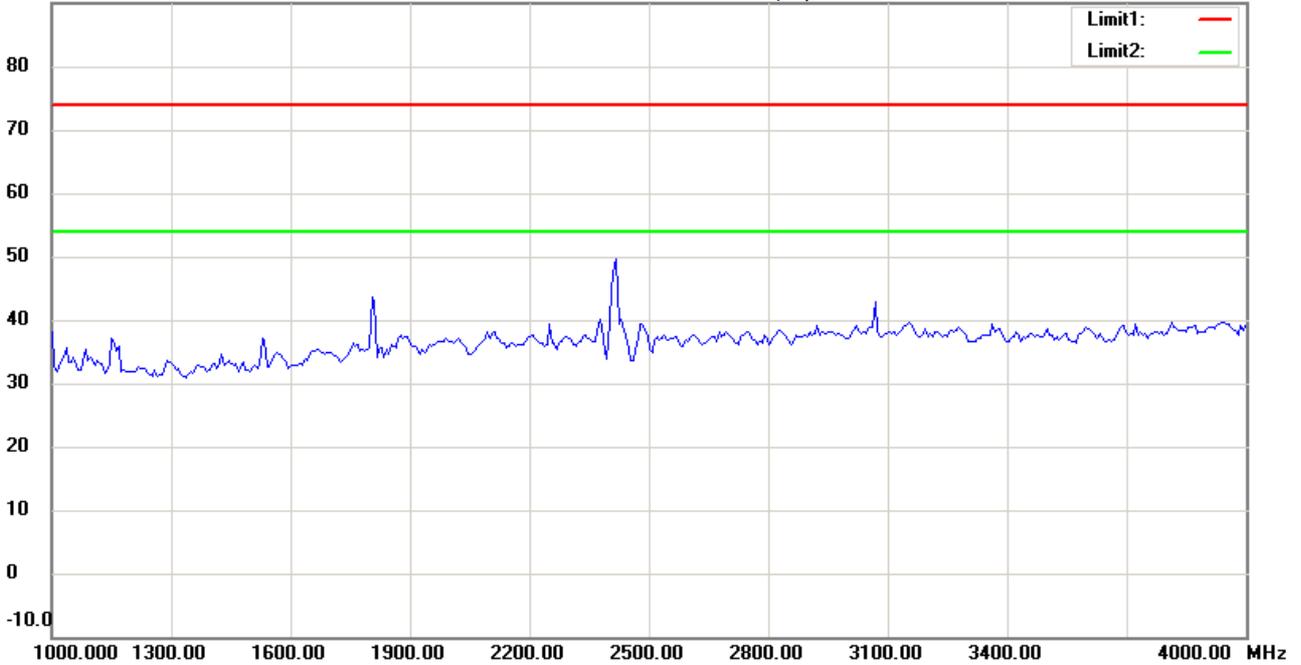

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:30:58

Humidity:60 %

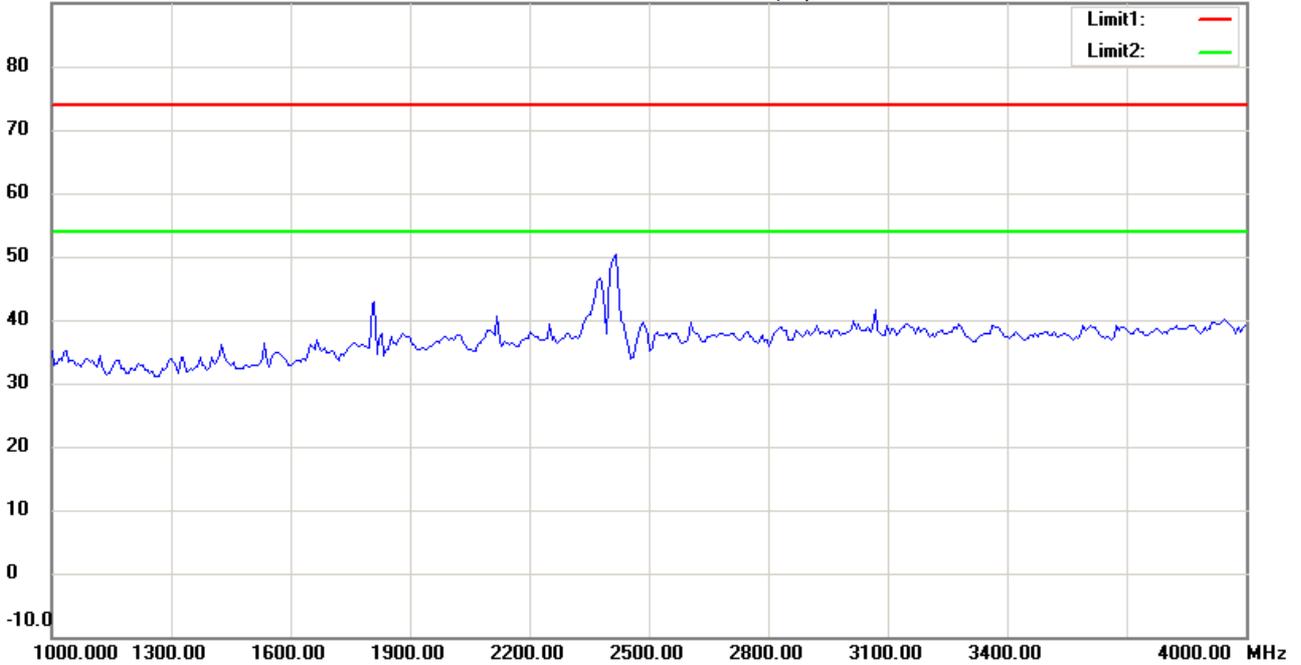

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:27:55

Humidity:60 %

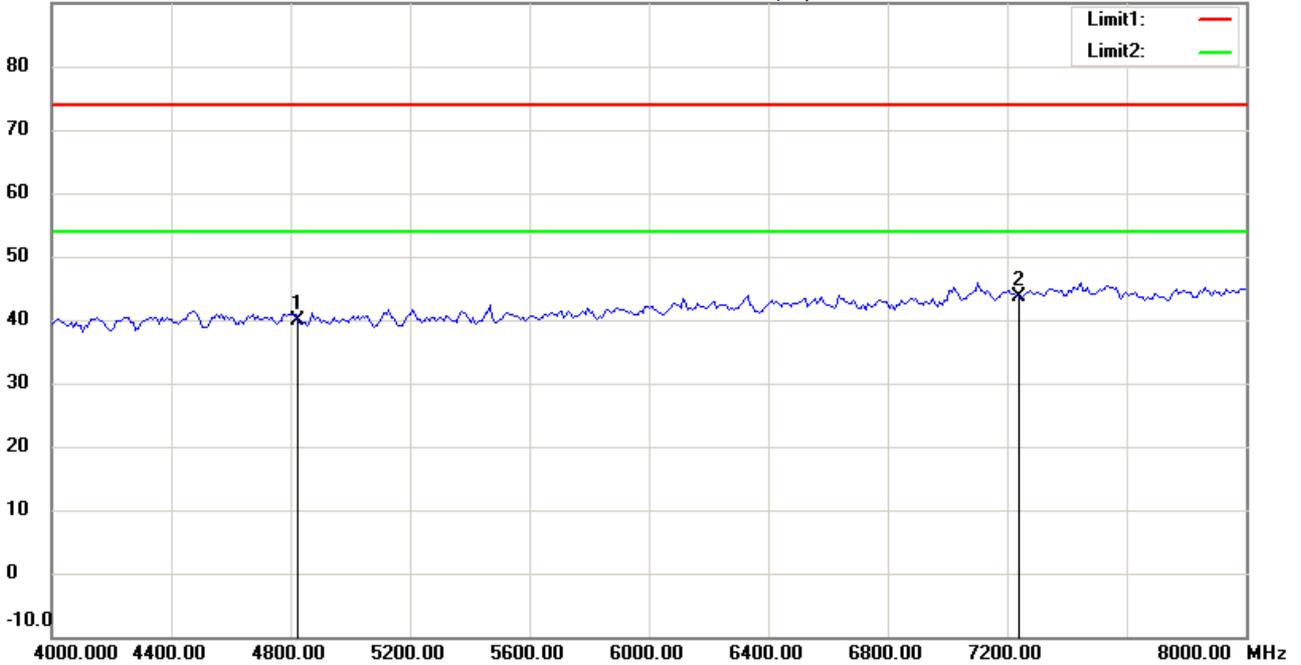

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.57	peak	-0.57	40.00	74.00	100	275	-34.00	
*	7236.000	39.24	peak	4.29	43.53	74.00	100	90	-30.47	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:31:44

Humidity:60 %

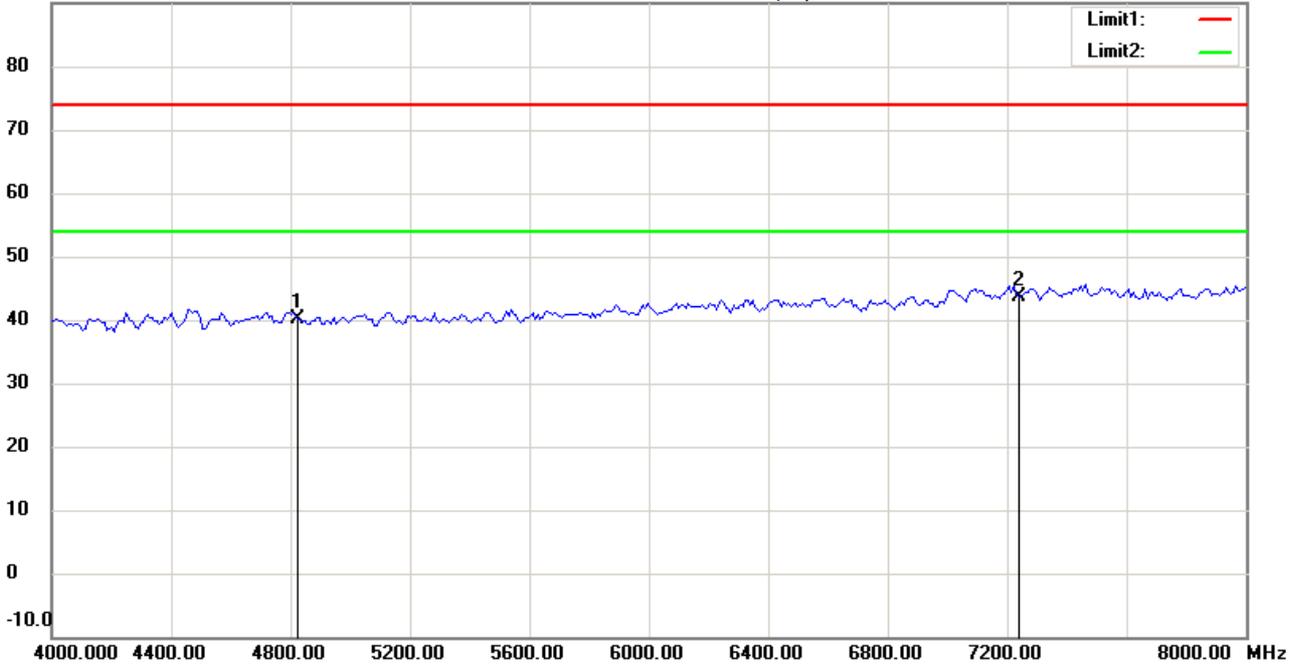

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.60	peak	-0.57	40.03	74.00	100	305	-33.97	
*	7236.000	39.31	peak	4.29	43.60	74.00	100	190	-30.40	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:28:46

Humidity:60 %

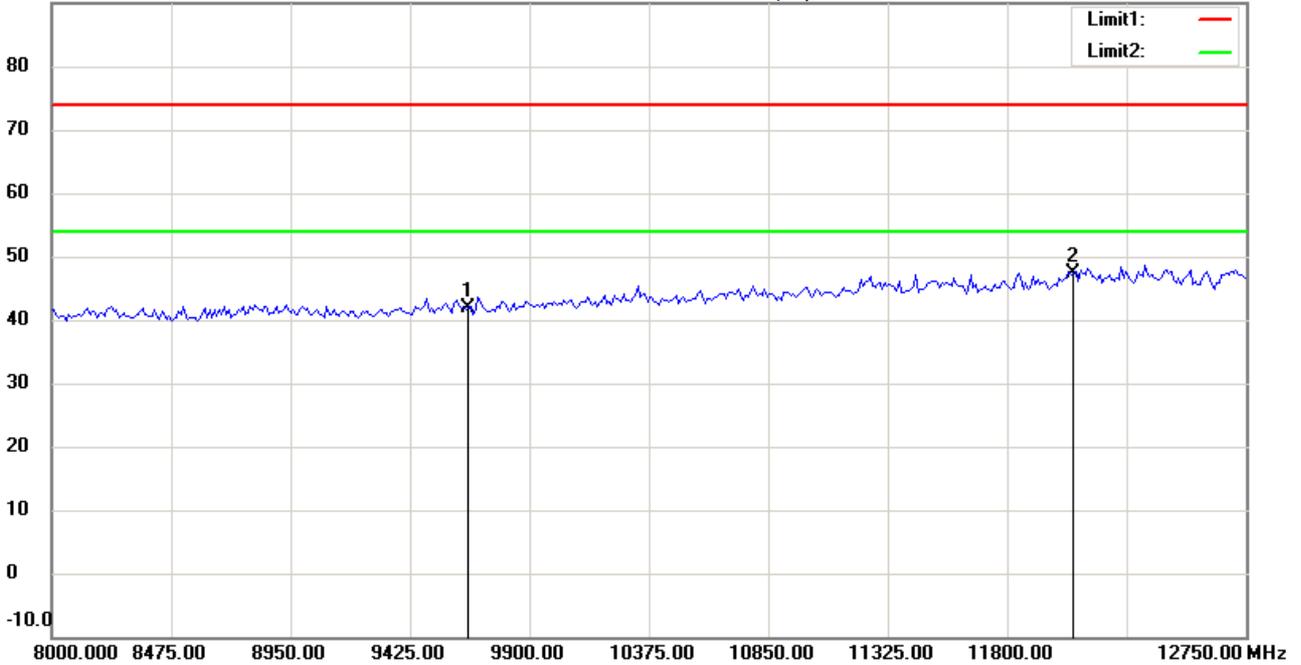

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.45	peak	7.51	41.96	74.00	100	105	-32.04	
*	12060.000	34.10	peak	13.18	47.28	74.00	100	45	-26.72	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:32:29

Humidity:60 %

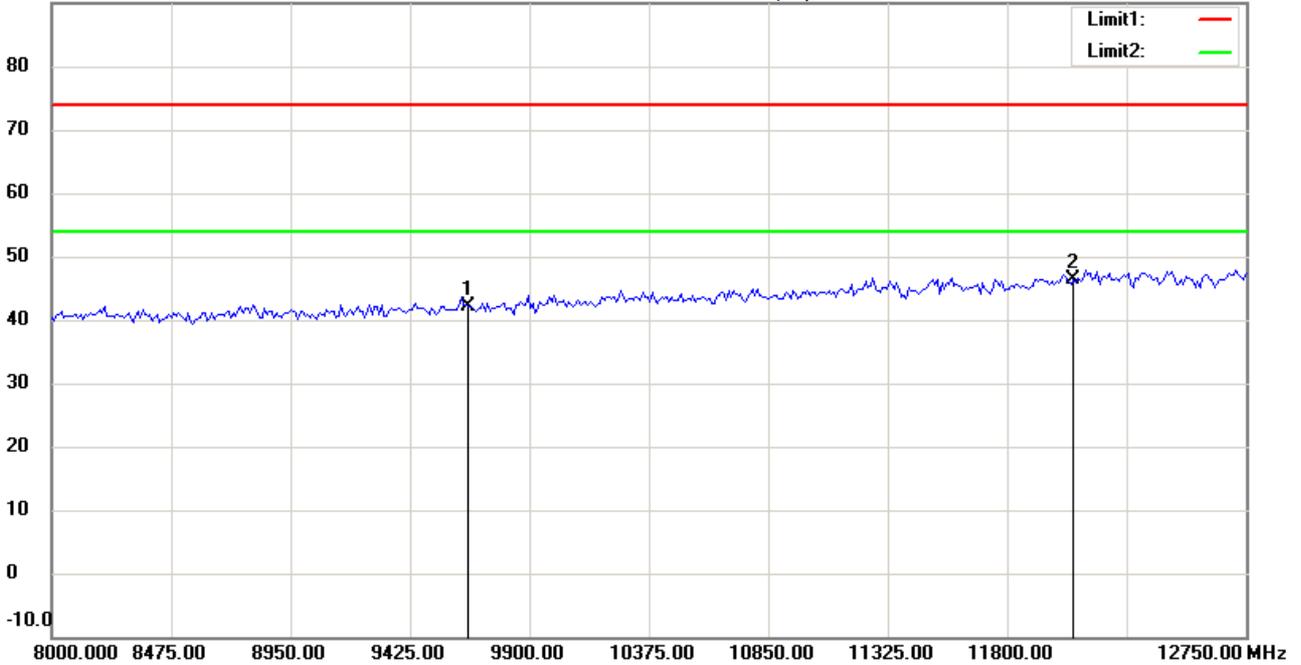

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.72	peak	7.51	42.23	74.00	100	280	-31.77	
*	12060.000	33.19	peak	13.18	46.37	74.00	100	245	-27.63	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:29:00

Humidity:60 %

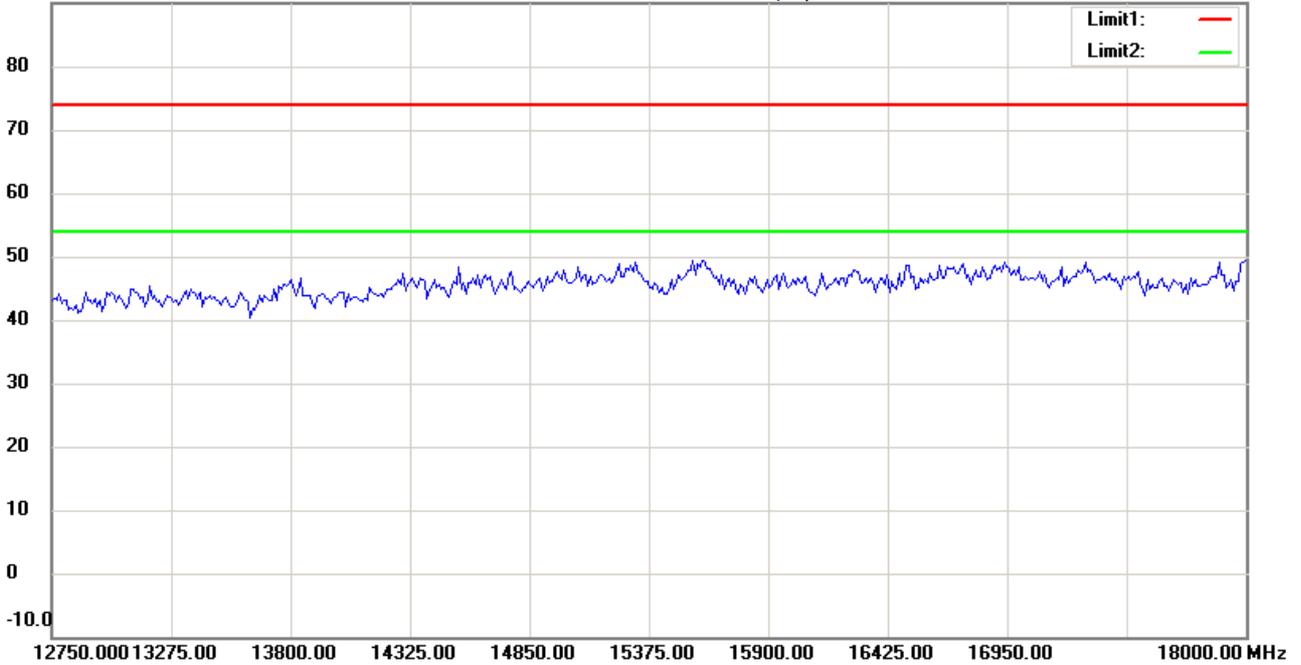

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:32:42

Humidity:60 %

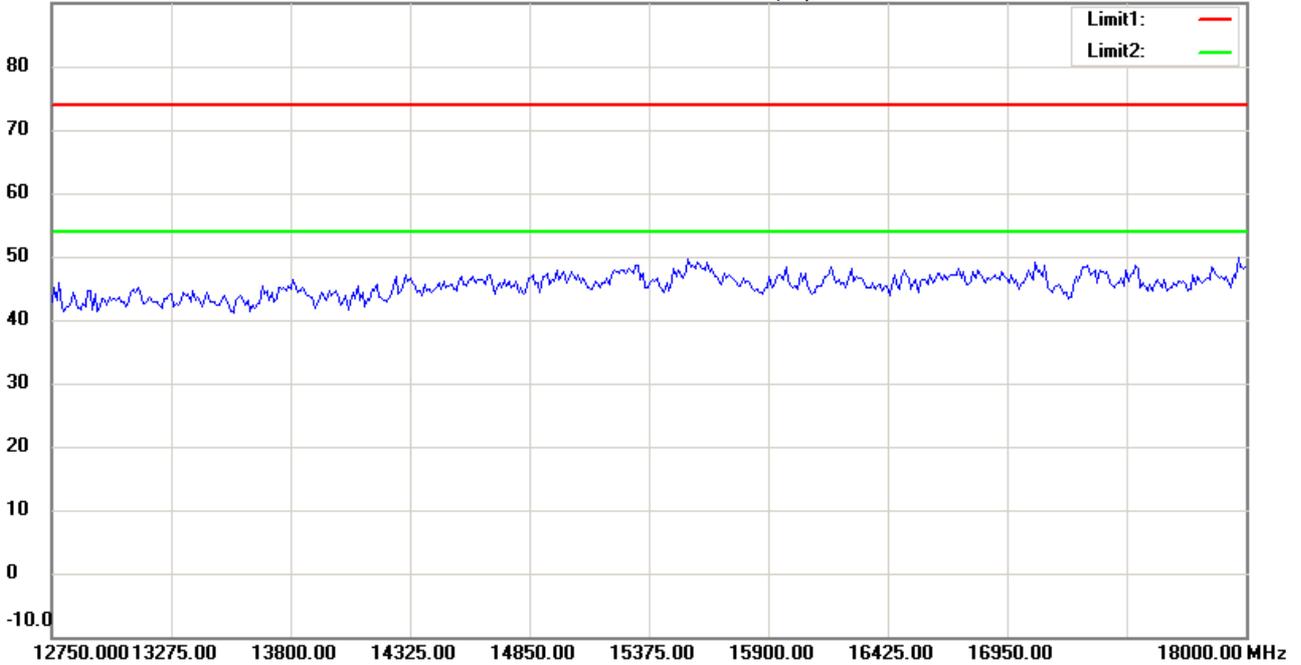

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:29:10

Humidity:60 %

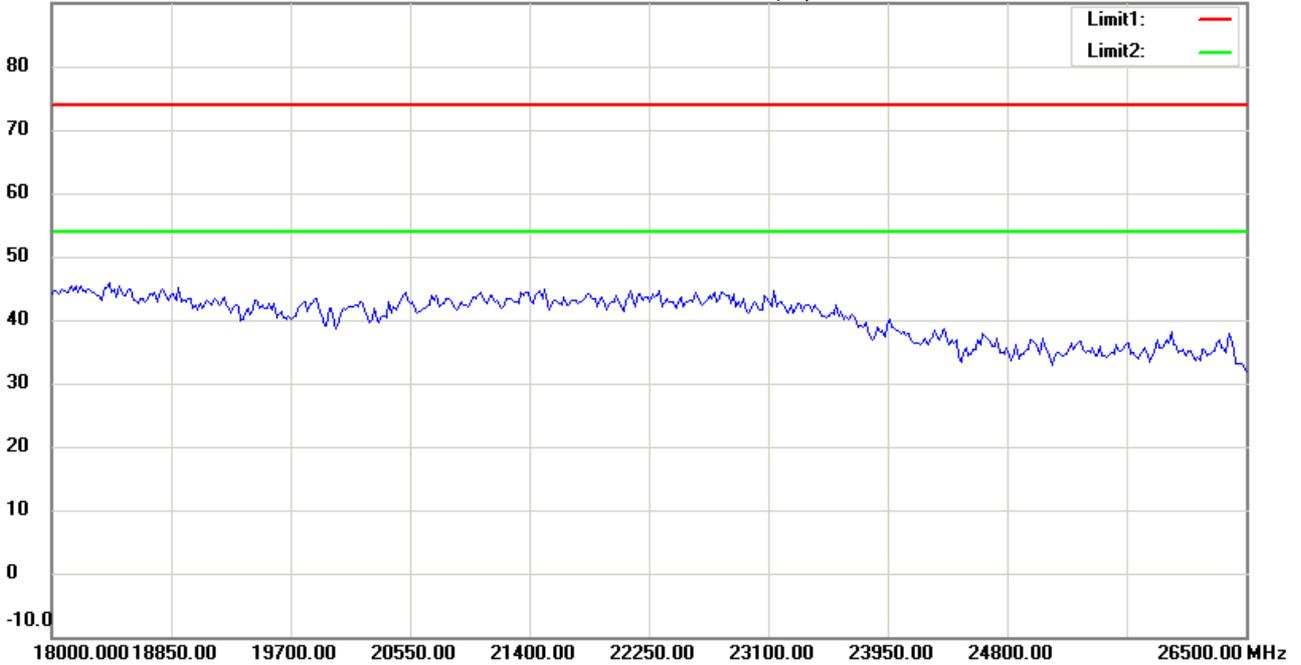

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:32:52

Humidity:60 %

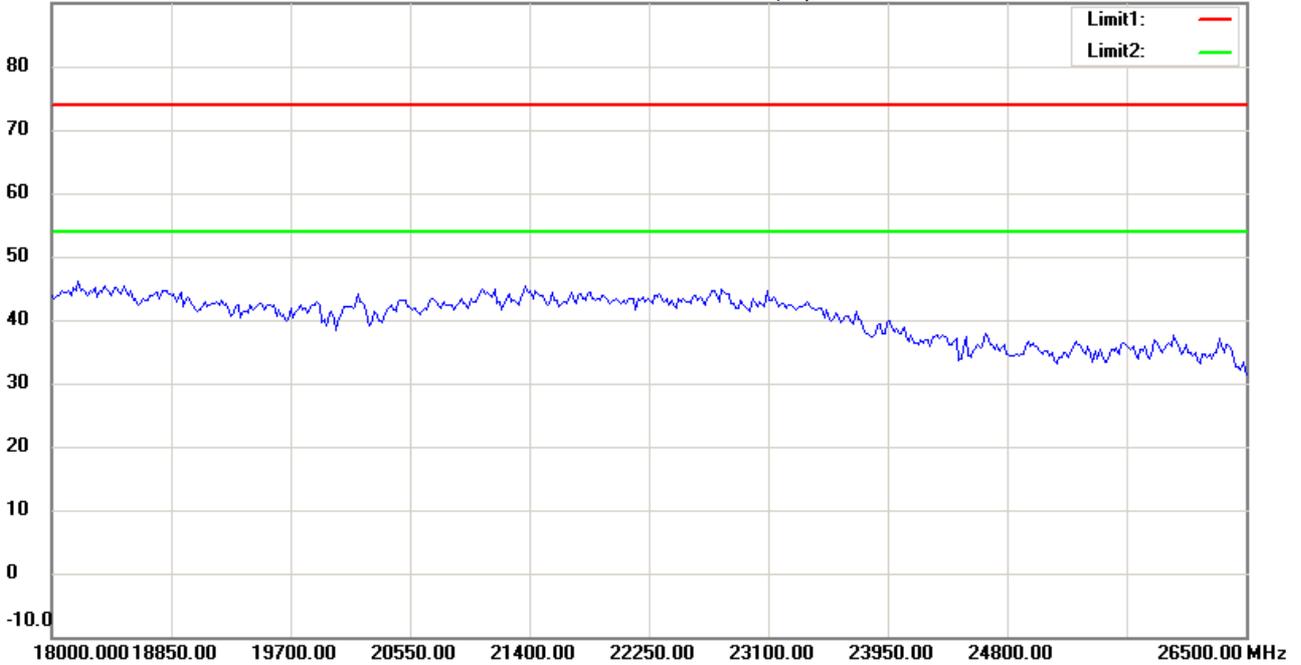

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:57:50

Humidity:60 %

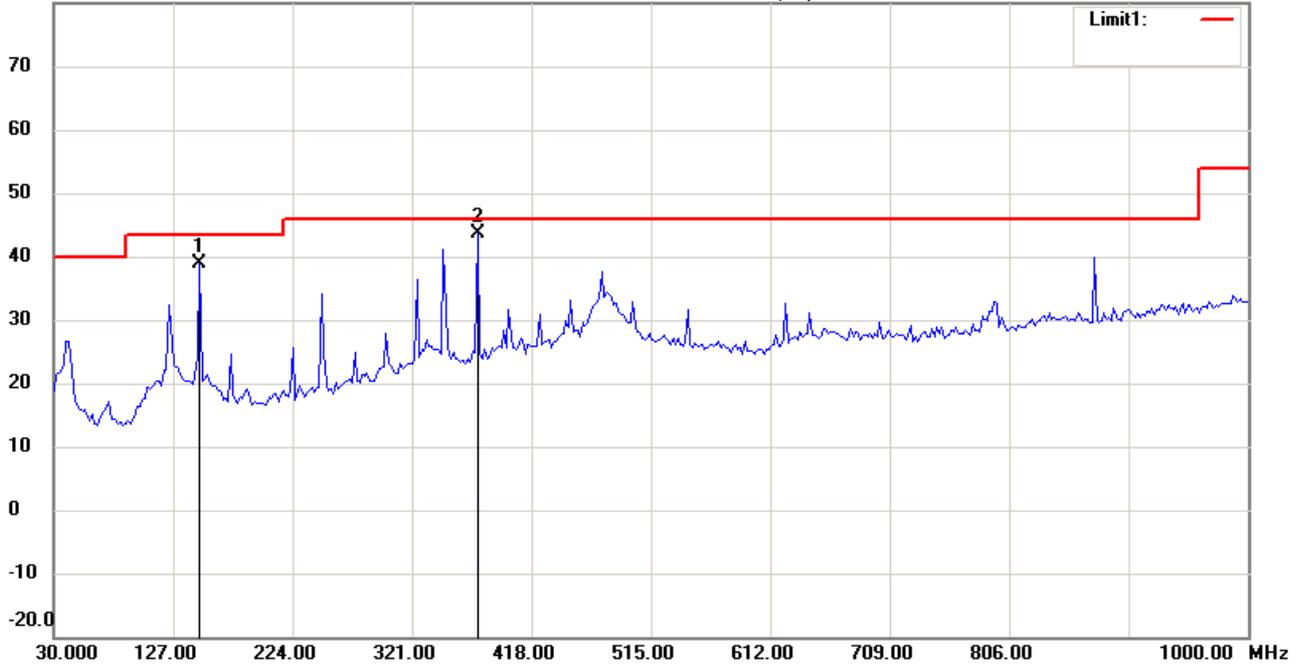

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	46.46	peak	-7.51	38.95	43.50	100	40	-4.55	
*	374.0681	47.84	peak	-4.14	43.70	46.00	100	115	-2.30	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:58:34

Humidity:60 %

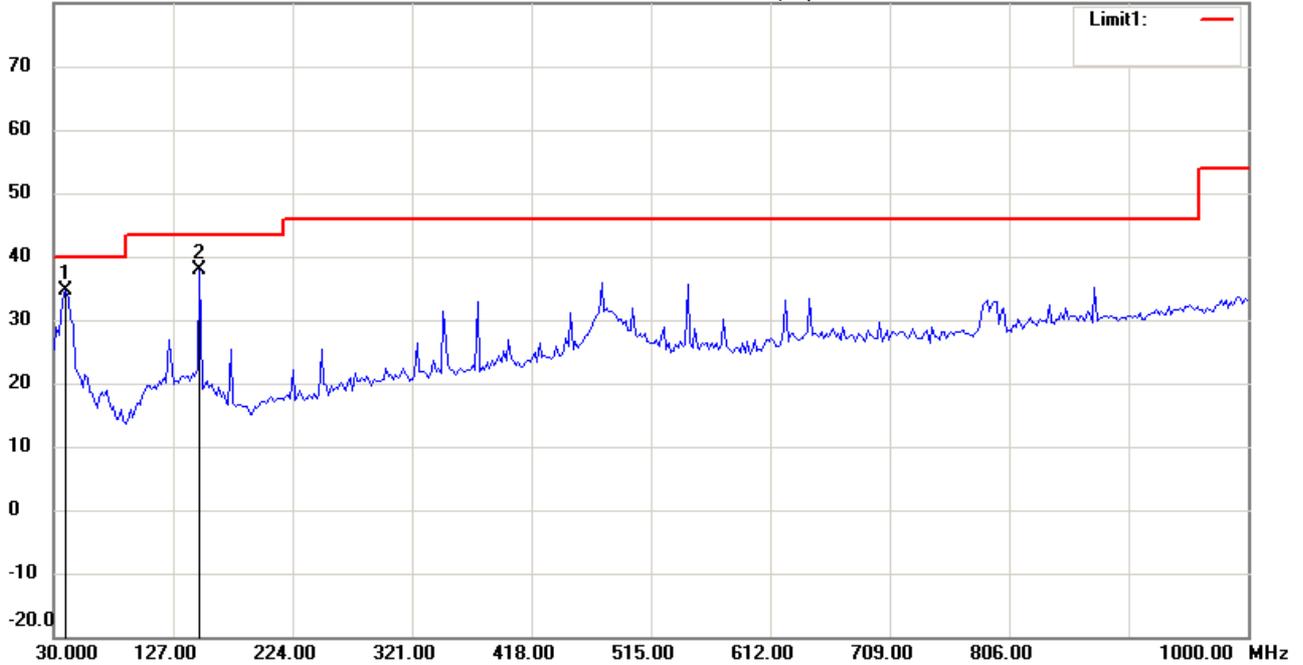

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.76	peak	-8.15	34.61	40.00	100	270	-5.39	
	148.5772	45.40	peak	-7.51	37.89	43.50	100	305	-5.61	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:37:39

Humidity:60 %

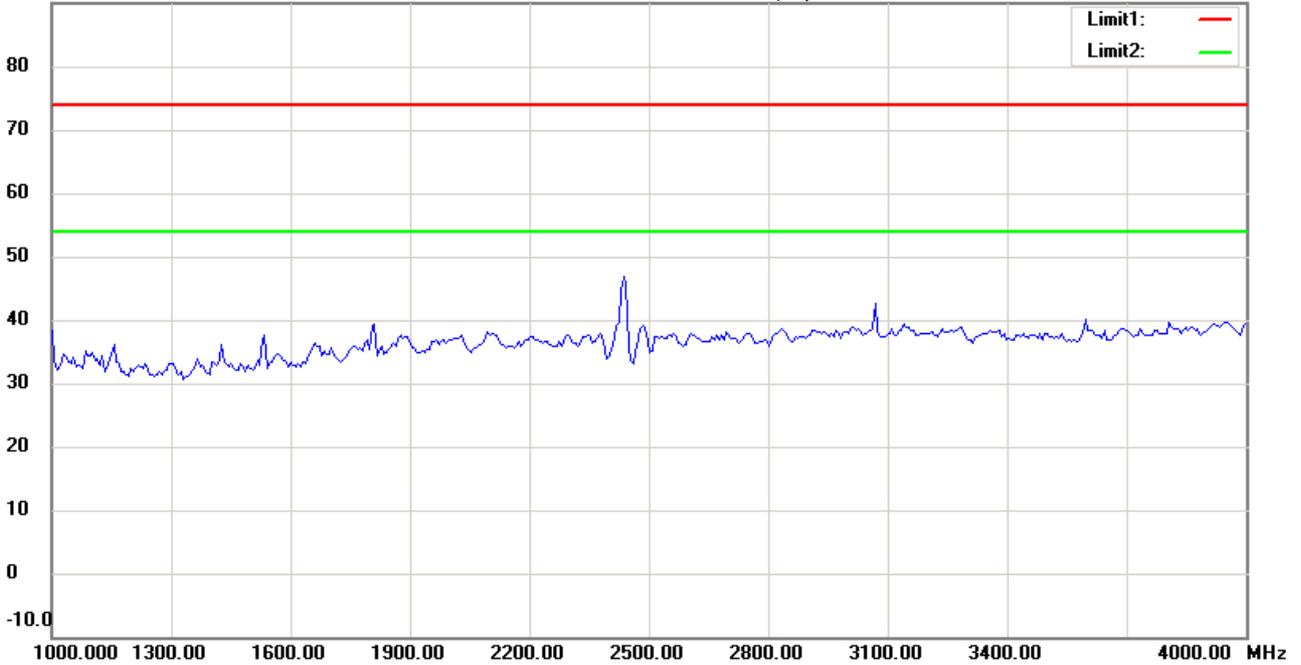

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:40:25

Humidity:60 %

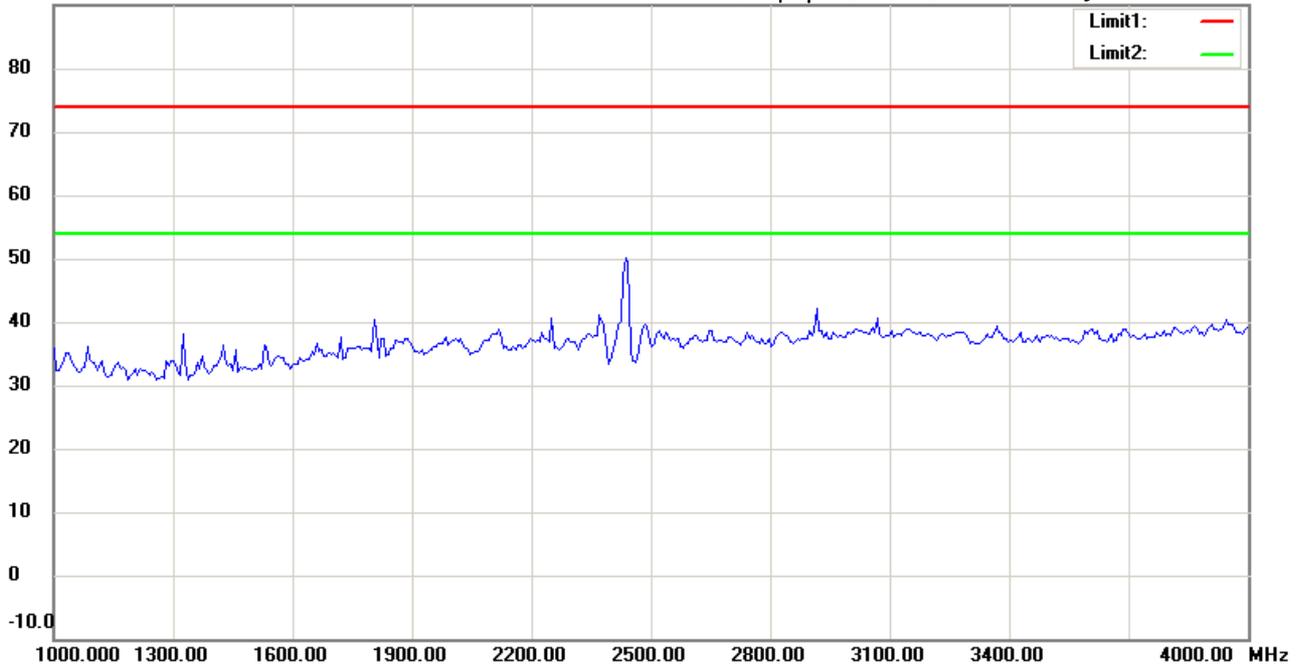

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:38:25

Humidity:60 %

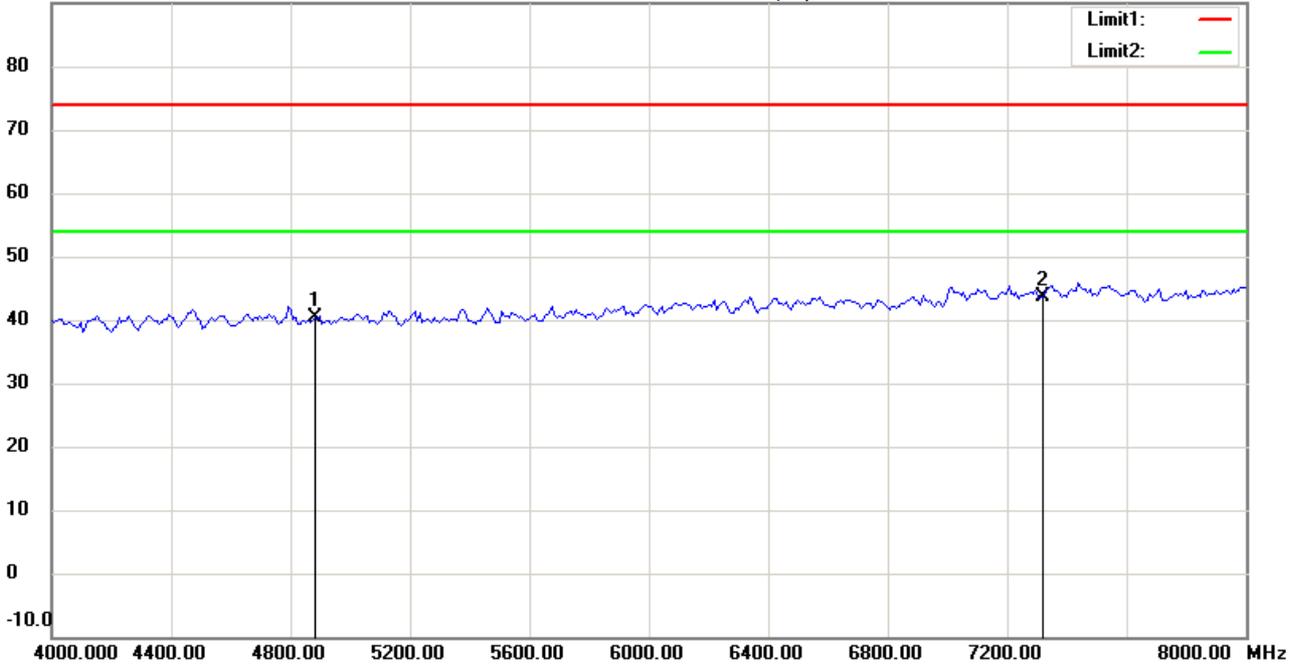

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	40.82	peak	-0.50	40.32	74.00	100	300	-33.68	
*	7311.000	39.27	peak	4.43	43.70	74.00	100	70	-30.30	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:41:10

Humidity:60 %

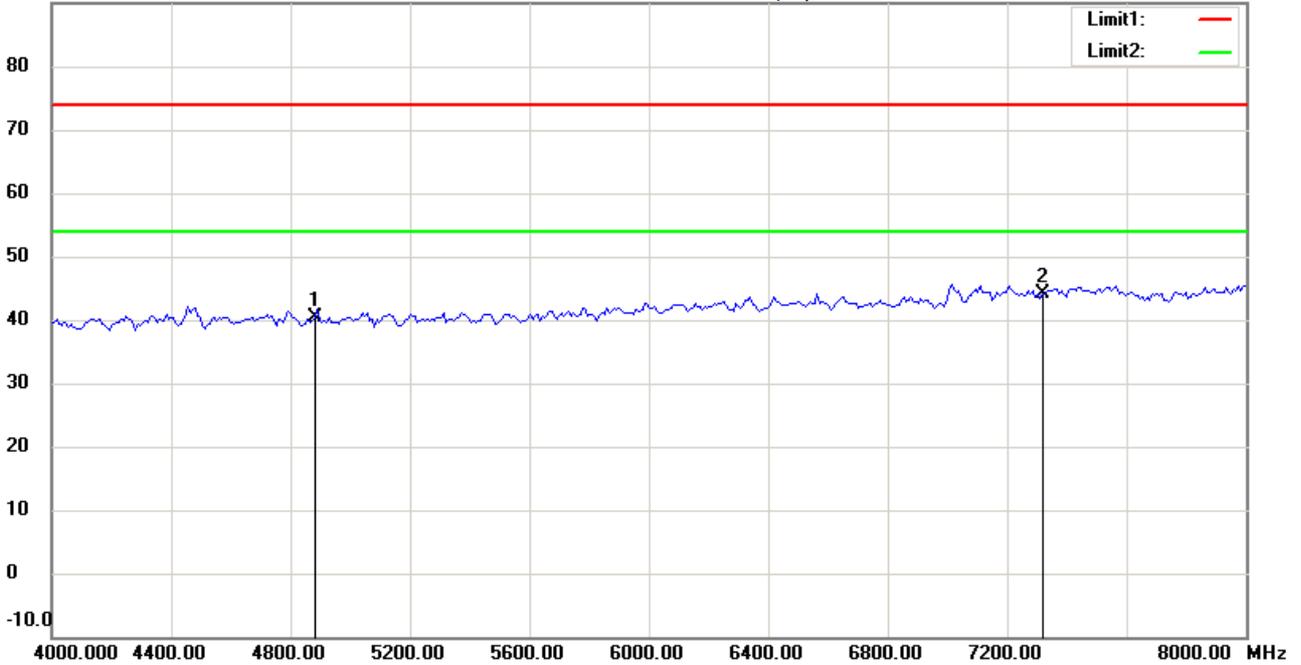

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	41.00	peak	-0.50	40.50	74.00	100	190	-33.50	
*	7311.000	39.78	peak	4.43	44.21	74.00	100	85	-29.79	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:39:16

Humidity:60 %

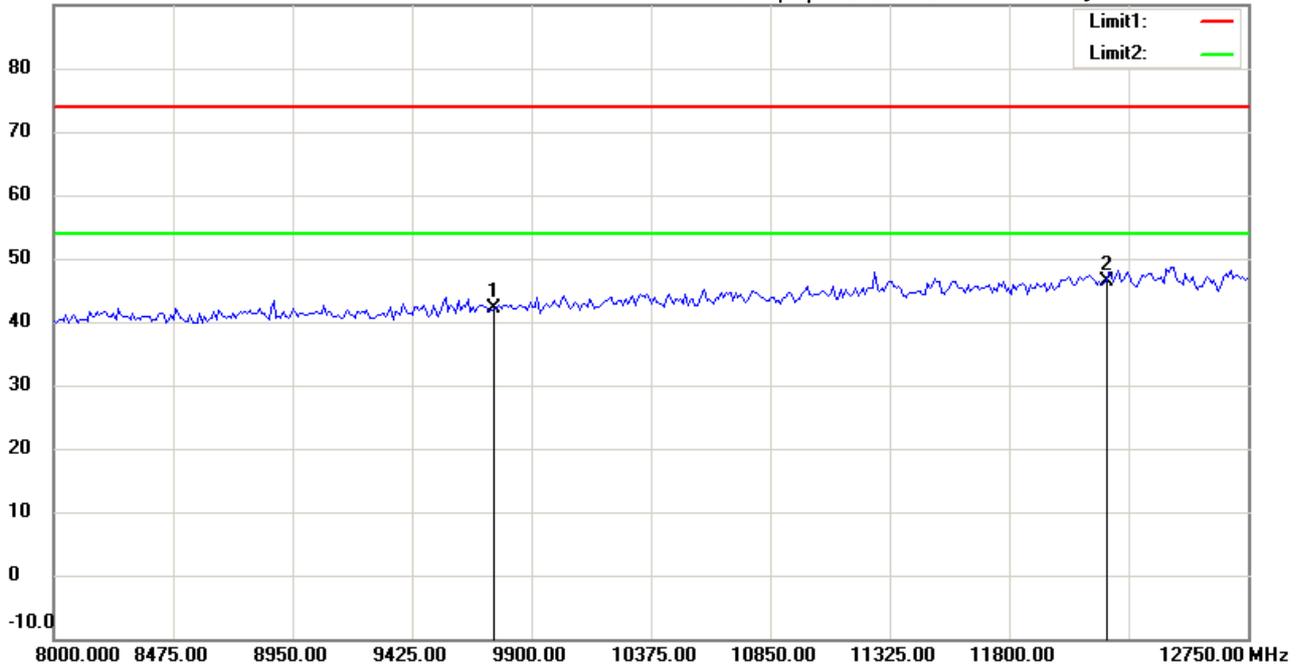

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.68	peak	7.49	42.17	74.00	100	95	-31.83	
*	12185.000	32.63	peak	13.82	46.45	74.00	100	125	-27.55	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:41:55

Humidity:60 %

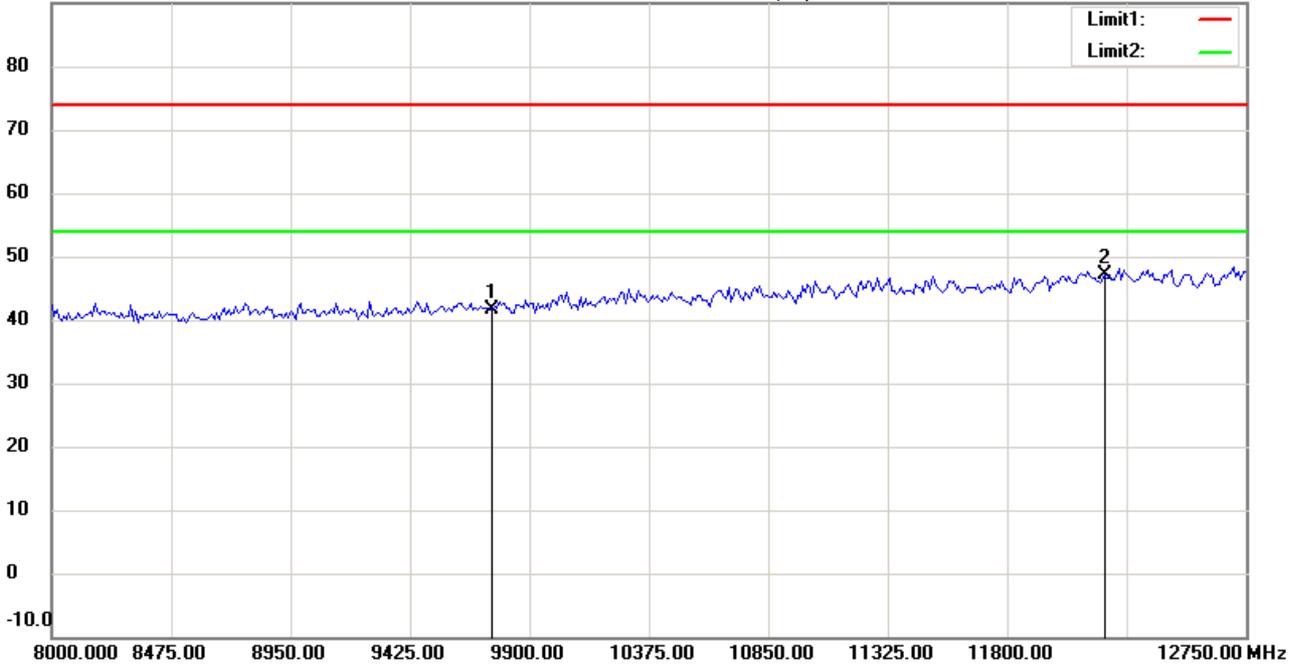

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.08	peak	7.49	41.57	74.00	100	235	-32.43	
*	12185.000	33.21	peak	13.82	47.03	74.00	100	60	-26.97	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:39:30

Humidity:60 %

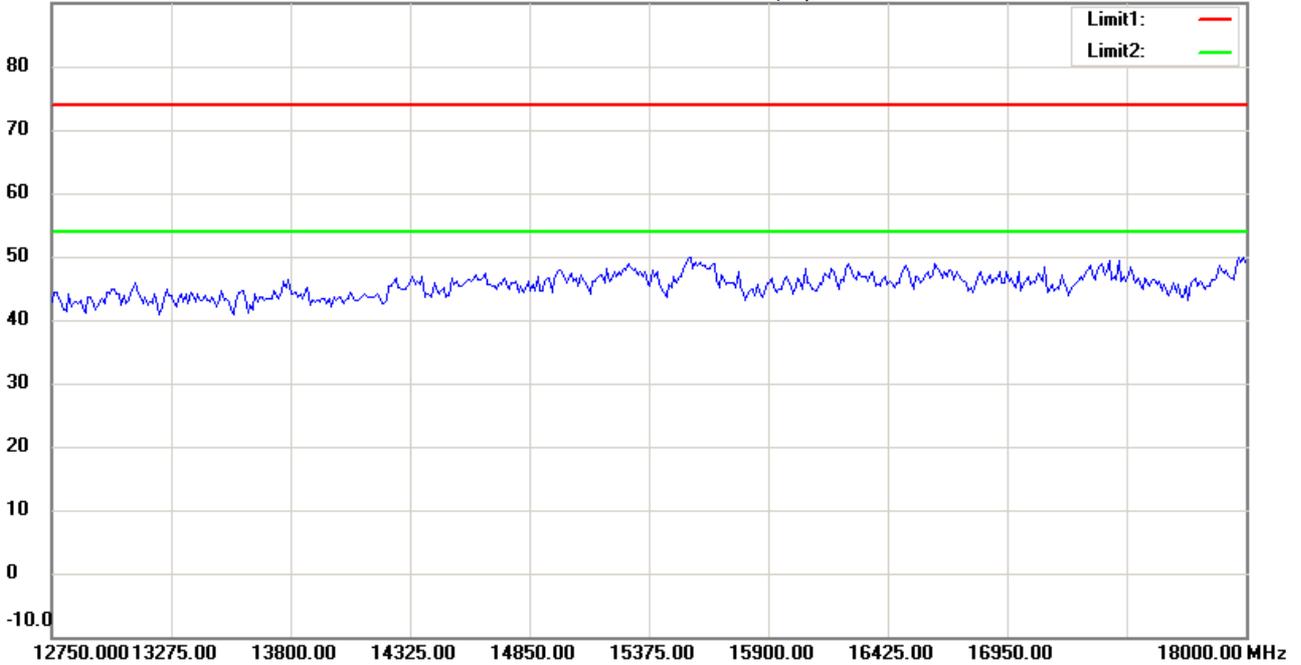

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:42:09

Humidity:60 %

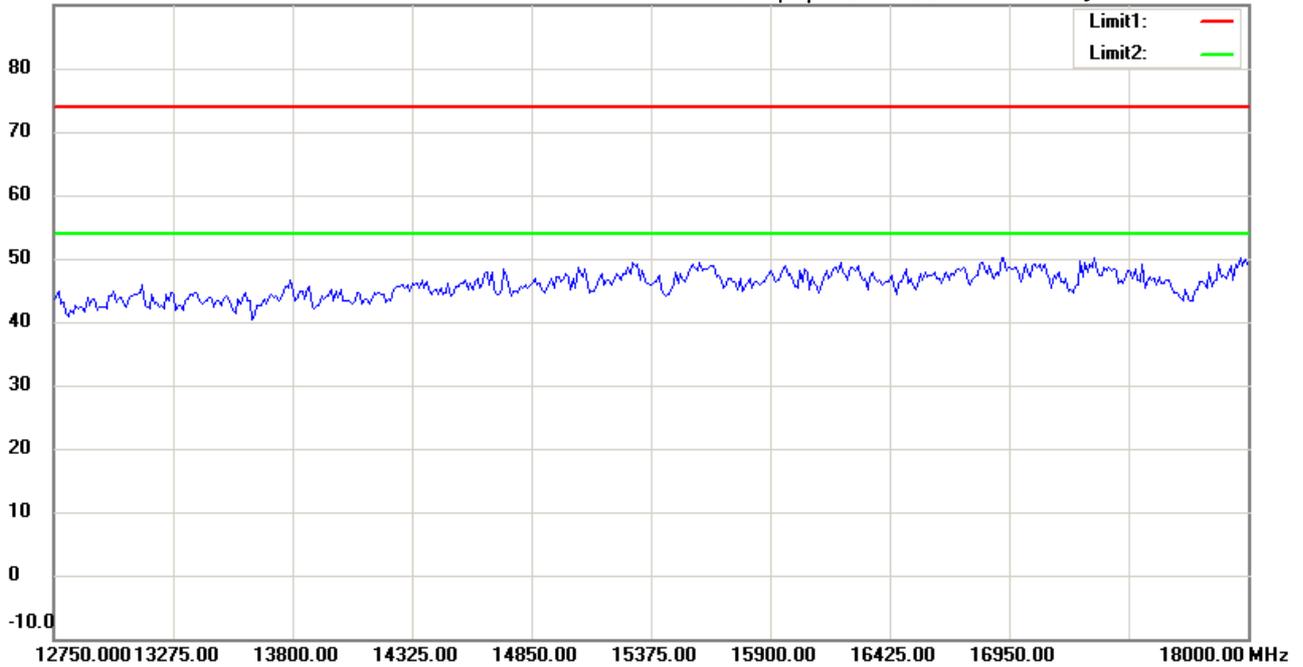

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:39:40

Humidity:60 %

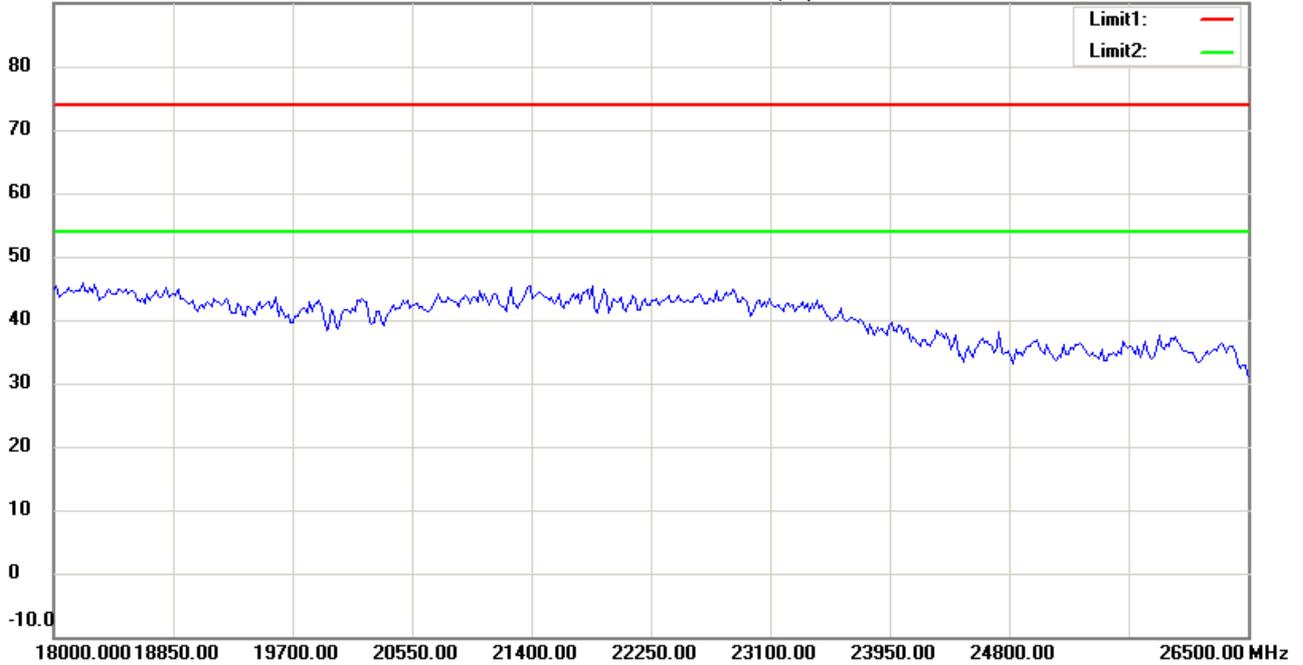

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:42:18

Humidity:60 %

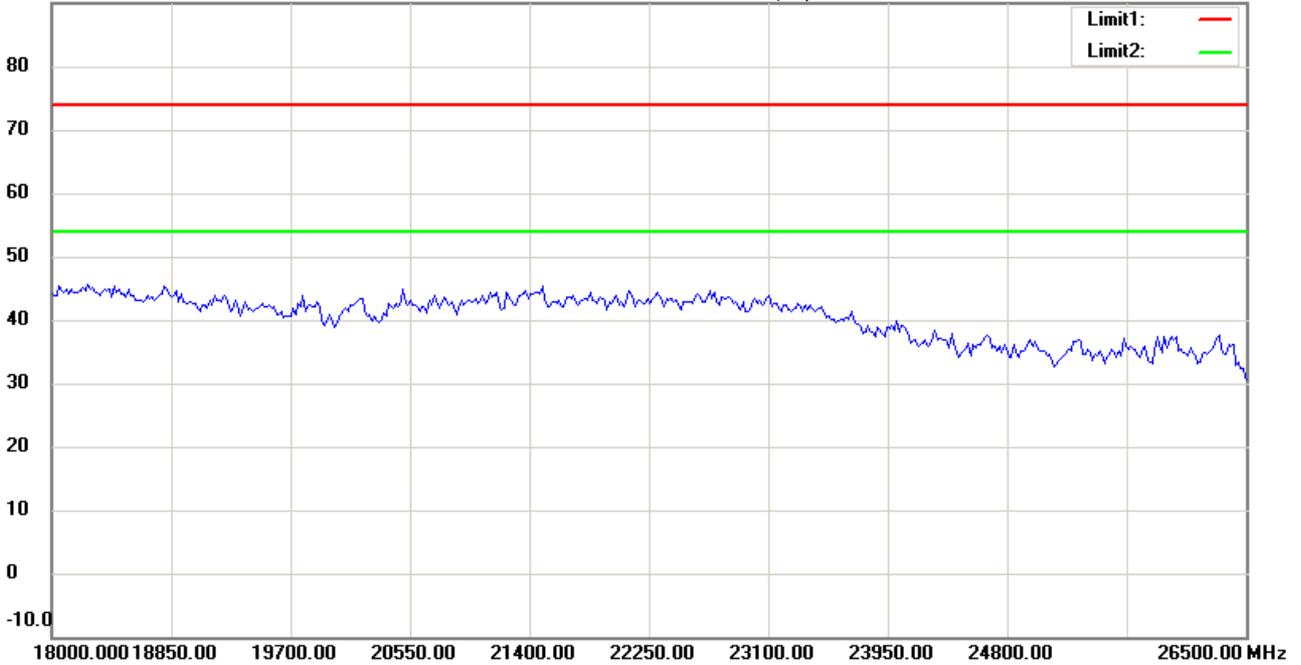

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:53:51

Humidity:60 %

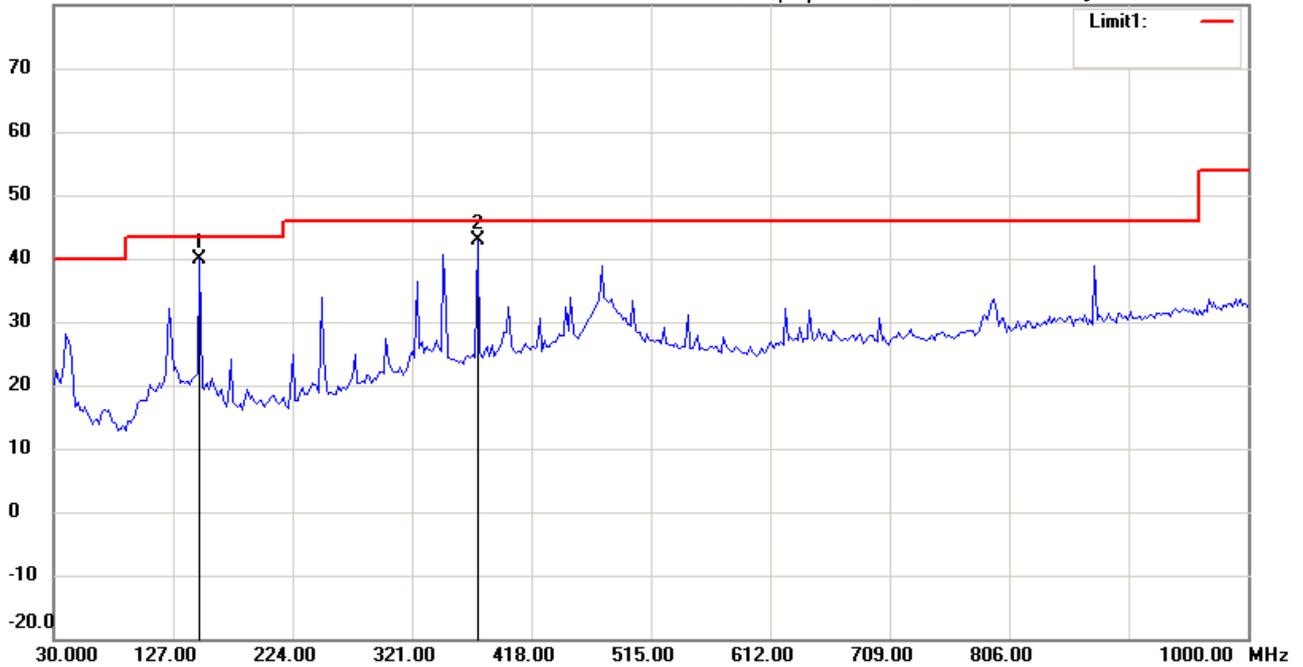

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	47.30	peak	-7.51	39.79	43.50	100	80	-3.71	
*	374.0681	46.97	peak	-4.14	42.83	46.00	100	255	-3.17	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:54:36

Humidity:60 %

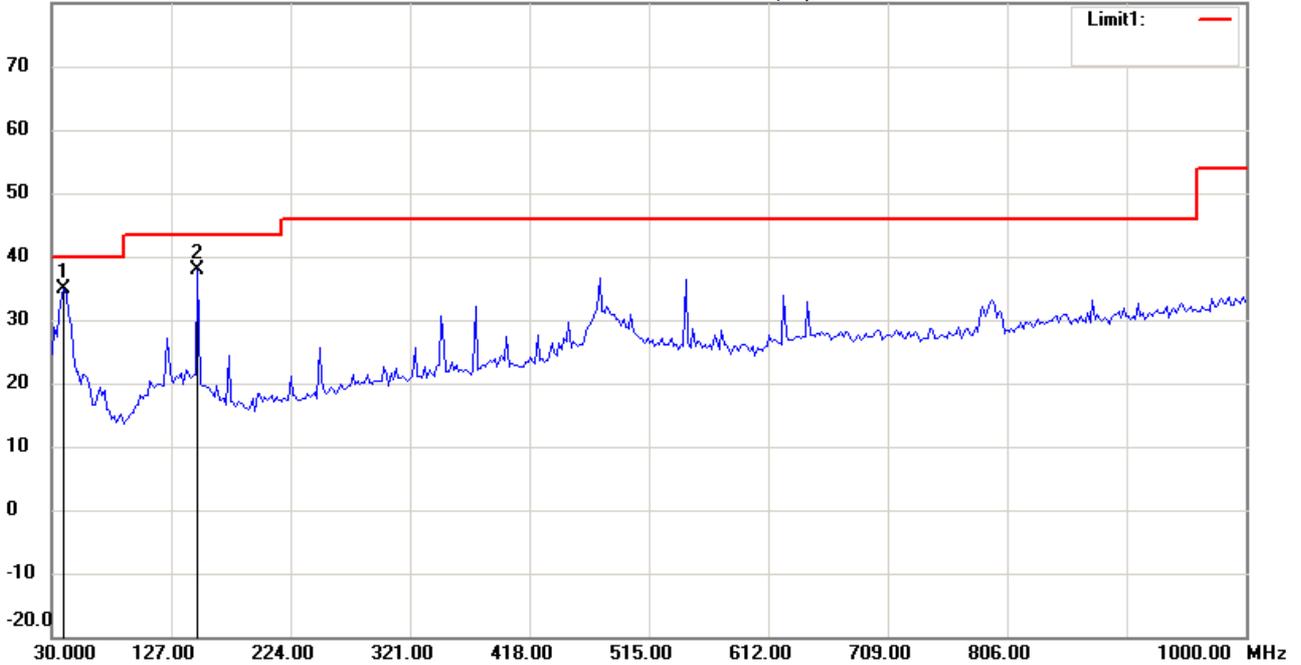

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.94	peak	-8.15	34.79	40.00	100	260	-5.21	
	148.5772	45.43	peak	-7.51	37.92	43.50	100	315	-5.58	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:46:06

Humidity:60 %

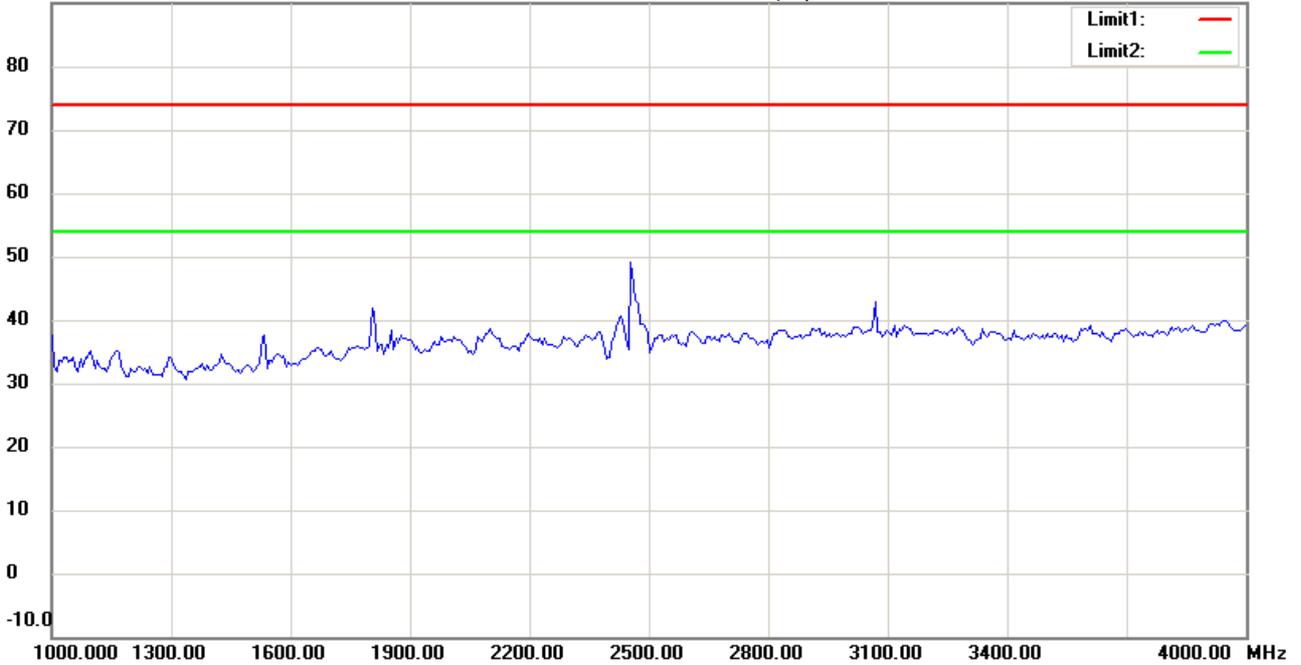

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:49:42

Humidity:60 %

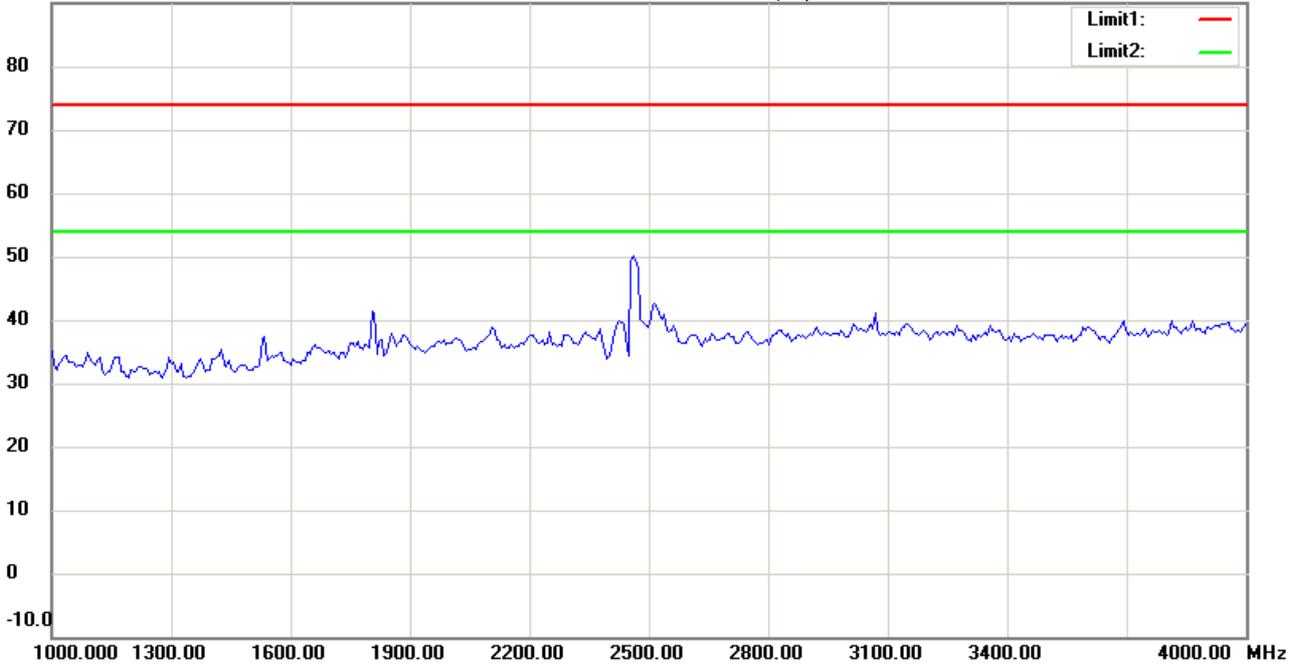

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:47:42

Humidity:60 %

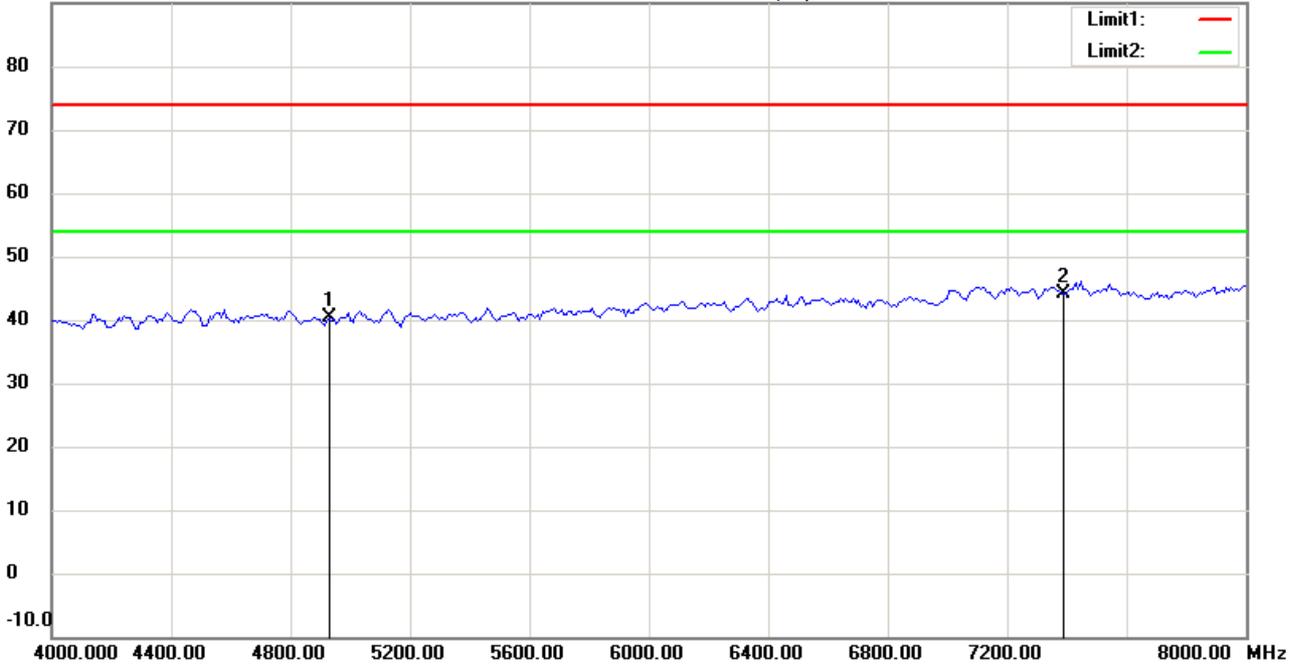

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.63	peak	-0.33	40.30	74.00	100	140	-33.70	
*	7386.000	39.16	peak	4.93	44.09	74.00	100	95	-29.91	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:50:28

Humidity:60 %

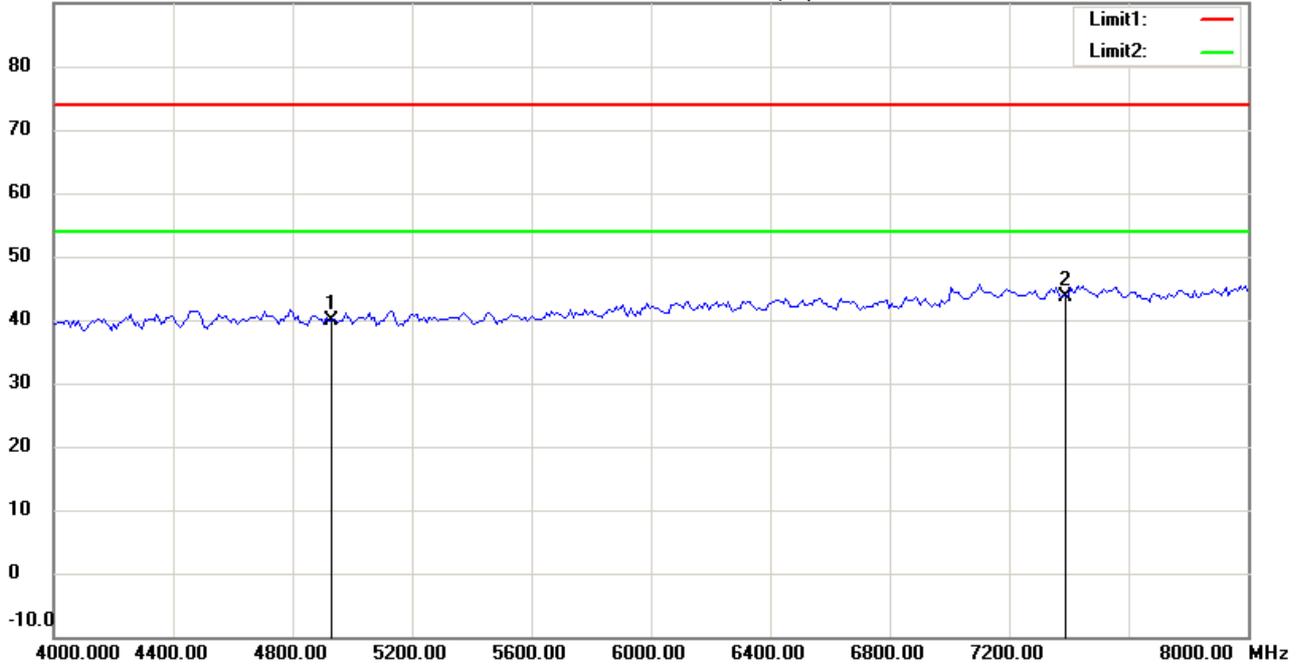

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.22	peak	-0.33	39.89	74.00	100	195	-34.11	
*	7386.000	38.63	peak	4.93	43.56	74.00	100	65	-30.44	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:48:33

Humidity:60 %

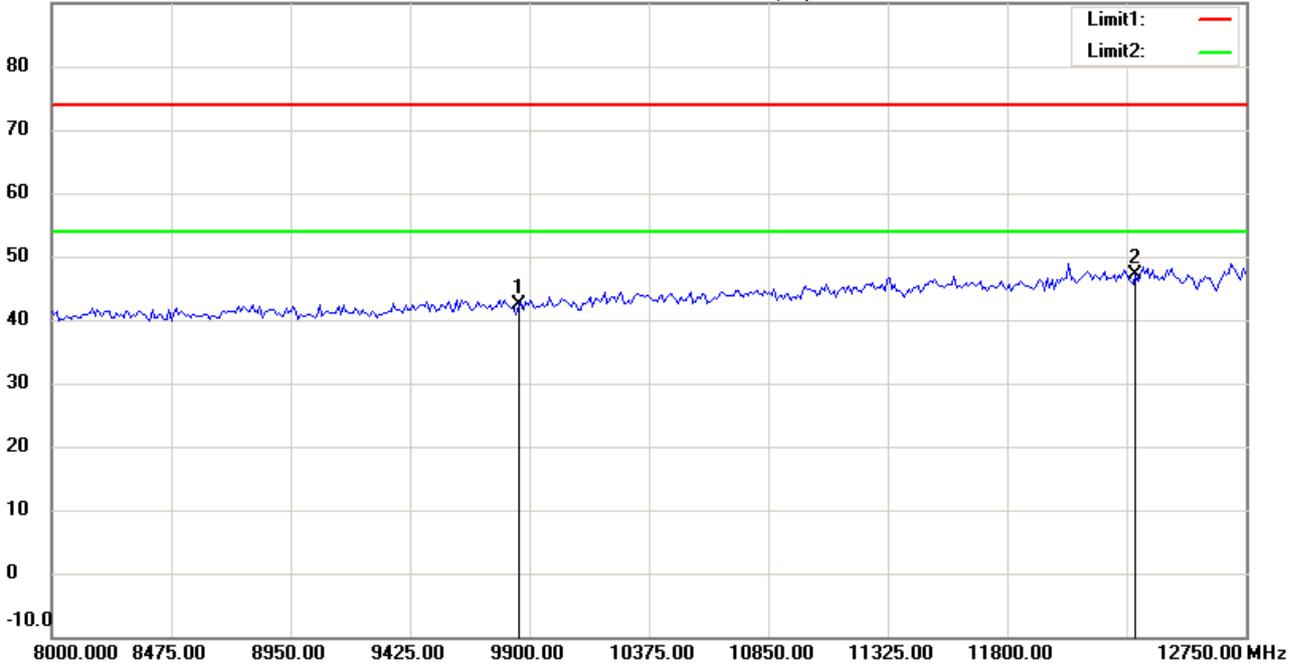

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.60	peak	7.68	42.28	74.00	100	135	-31.72	
*	12310.000	33.90	peak	13.25	47.15	74.00	100	240	-26.85	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:35

Humidity:60 %

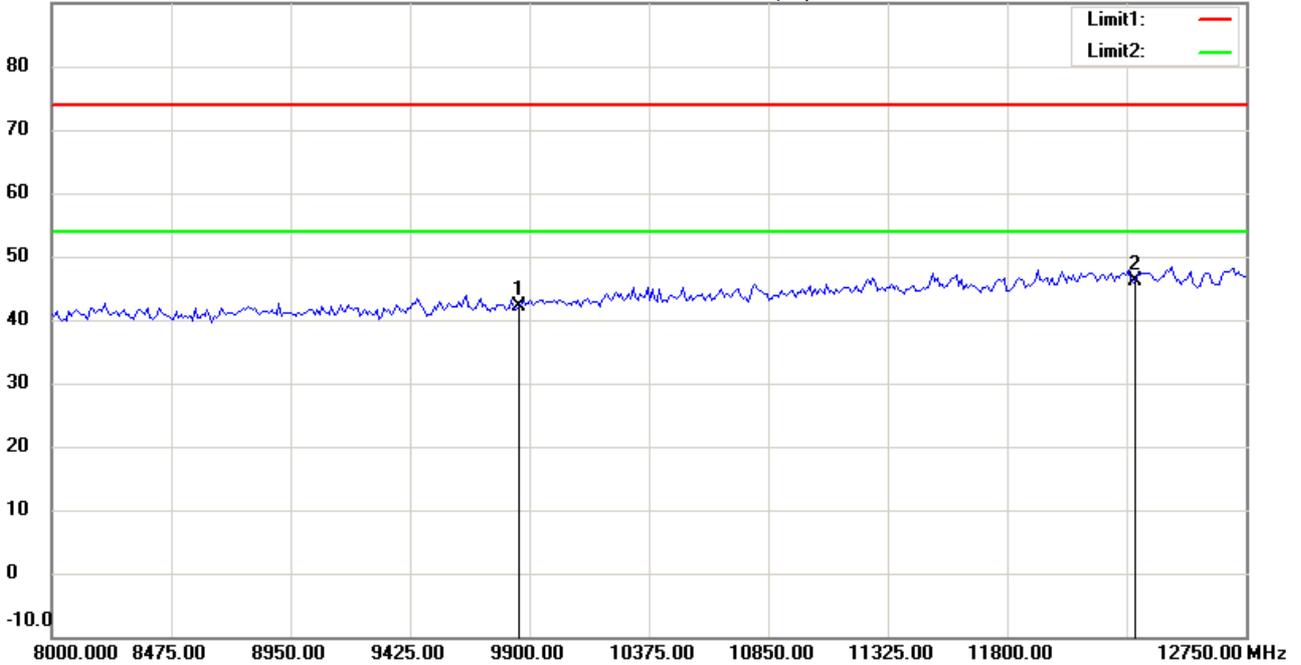

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11g CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.34	peak	7.68	42.02	74.00	100	110	-31.98	
*	12310.000	32.92	peak	13.25	46.17	74.00	100	25	-27.83	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:48:47

Humidity:60 %

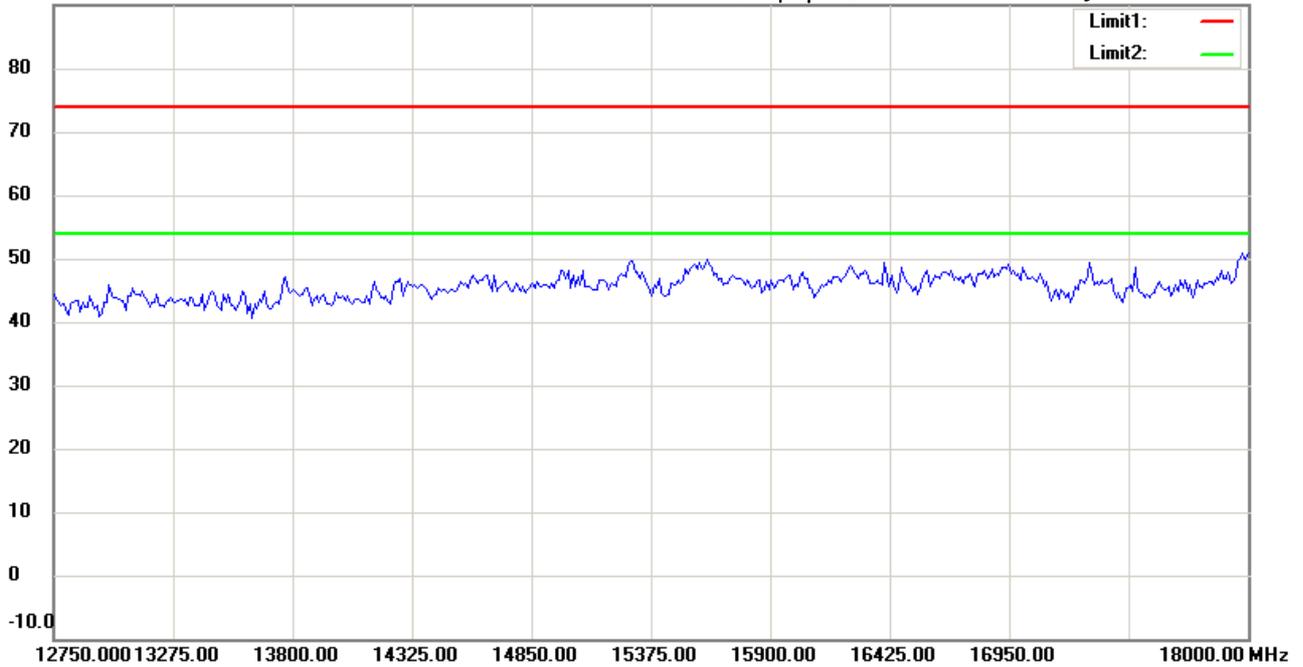

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:49

Humidity:60 %

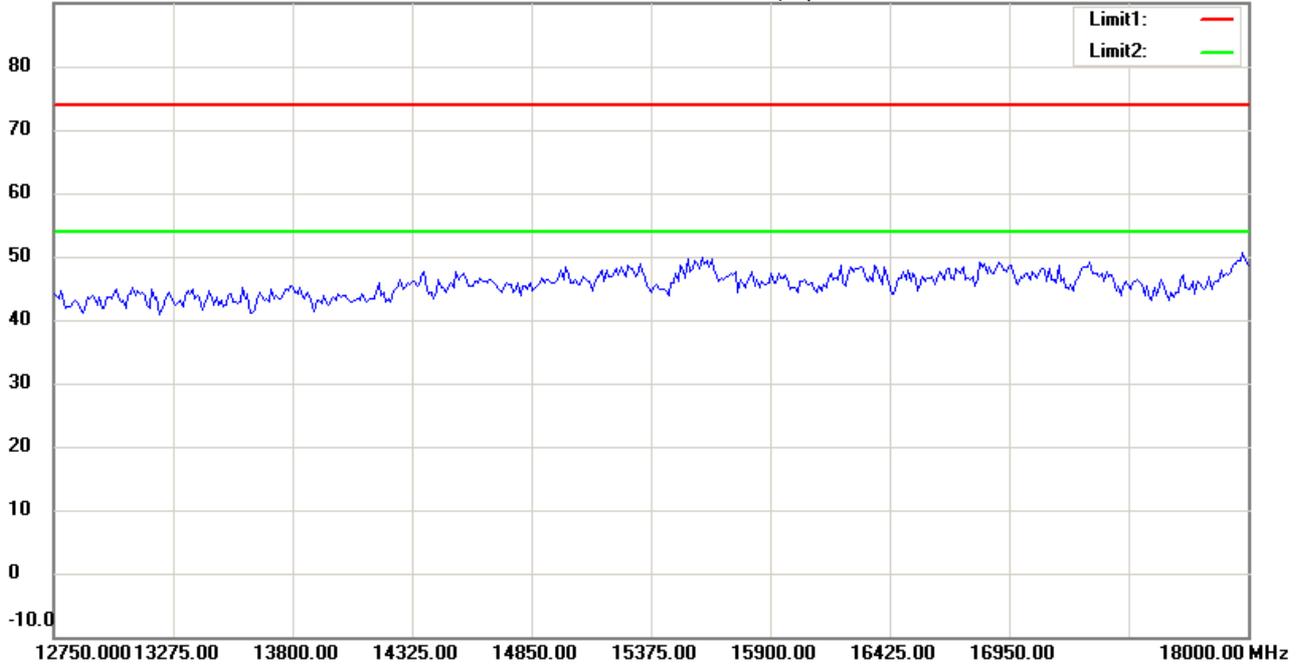

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:48:57

Humidity:60 %

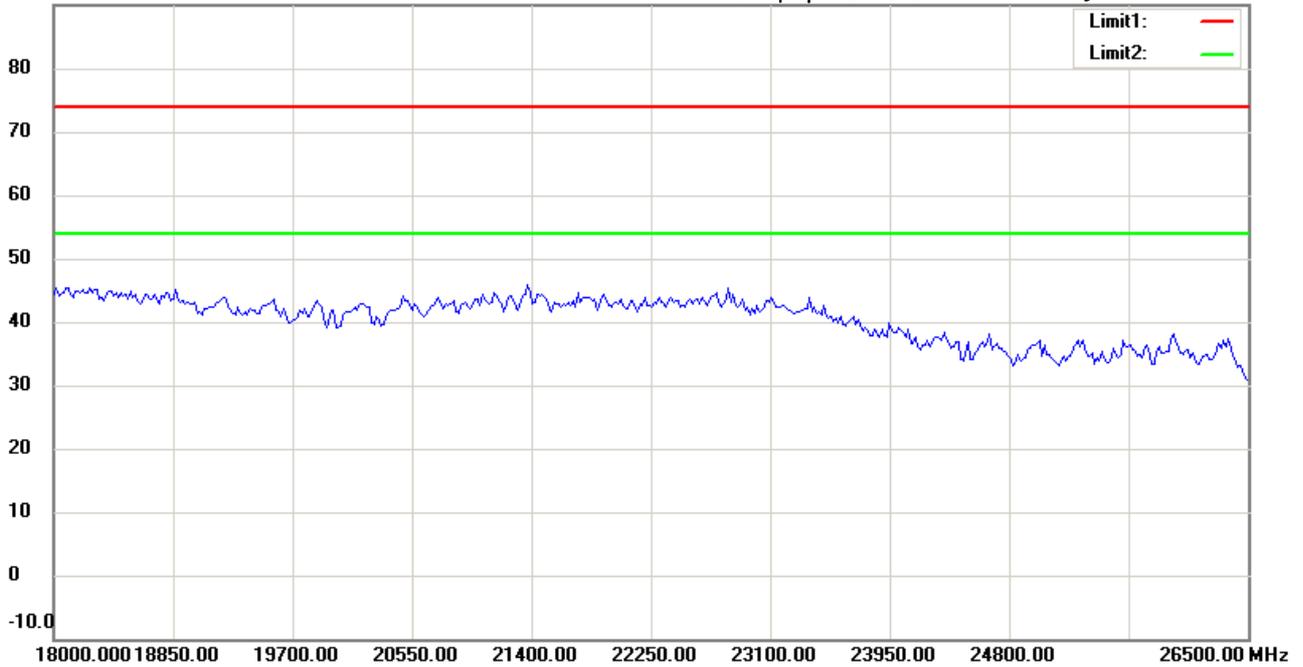

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:51:59

Humidity:60 %

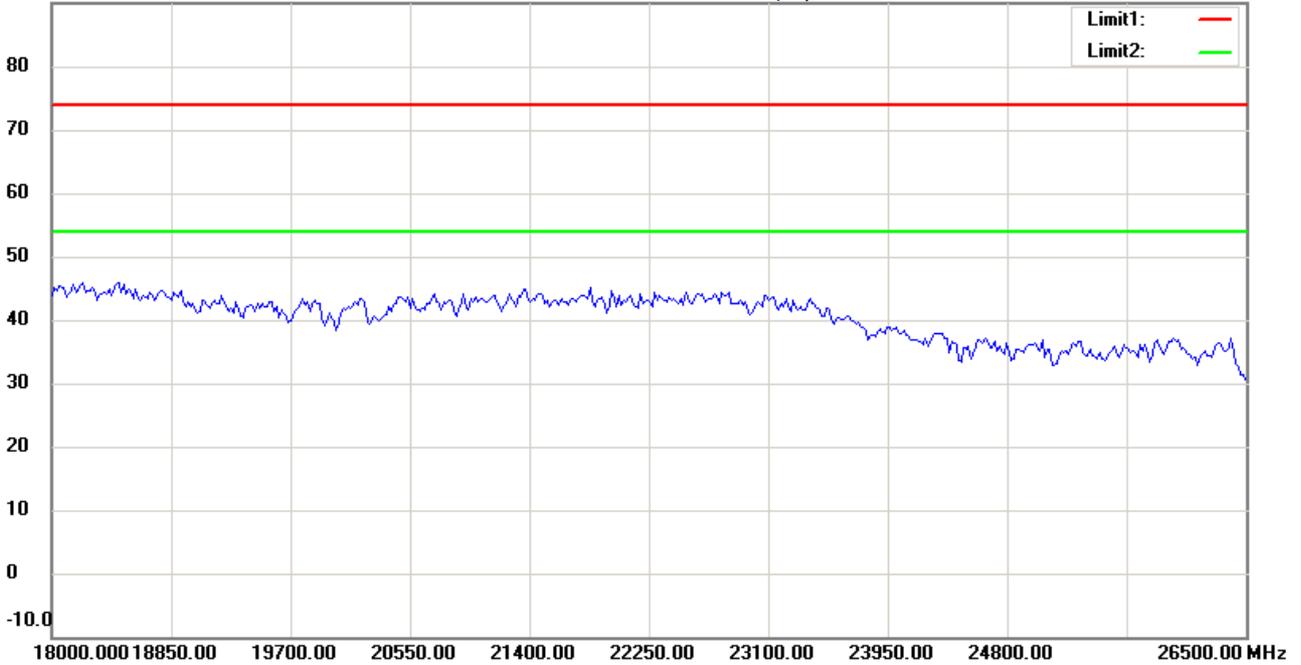

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 上午 12:02:43

Humidity:60 %

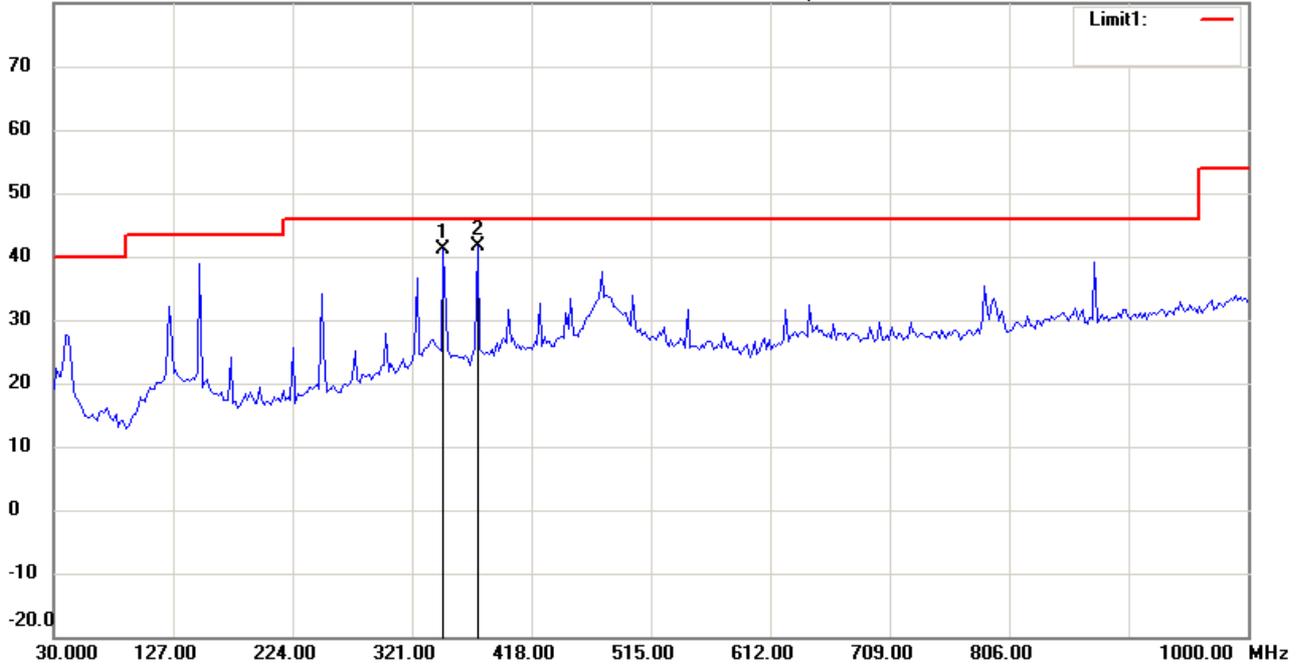

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH1

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	45.72	peak	-4.63	41.09	46.00	100	35	-4.91	
*	374.0681	45.89	peak	-4.14	41.75	46.00	100	100	-4.25	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 上午 12:03:27

Humidity:60 %

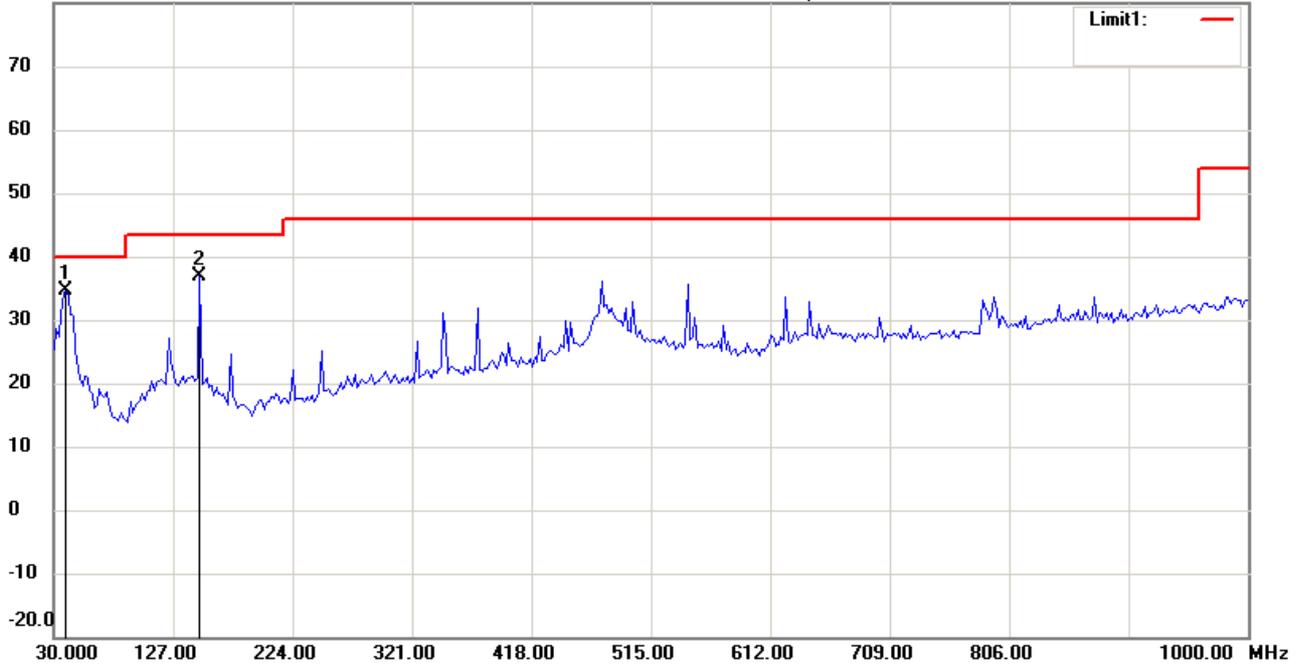

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH1

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.82	peak	-8.15	34.67	40.00	100	55	-5.33	
	148.5772	44.48	peak	-7.51	36.97	43.50	100	240	-6.53	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:57:08

Humidity:60 %

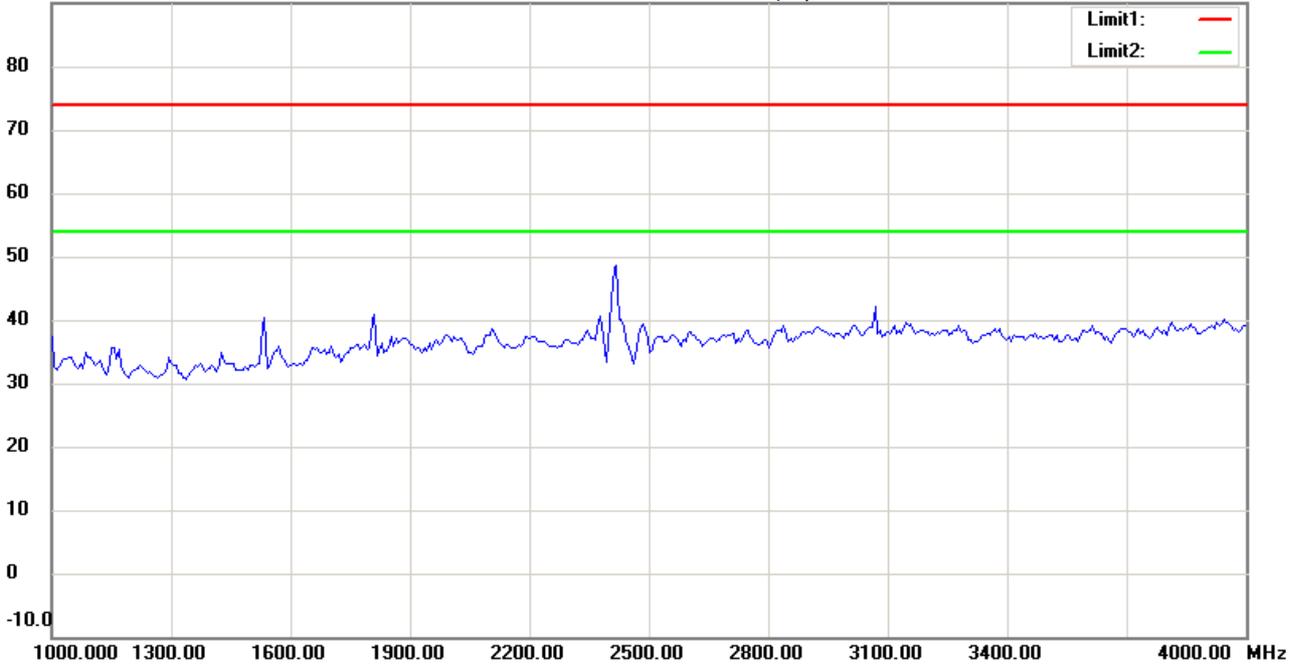

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH1

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:59:53

Humidity:60 %

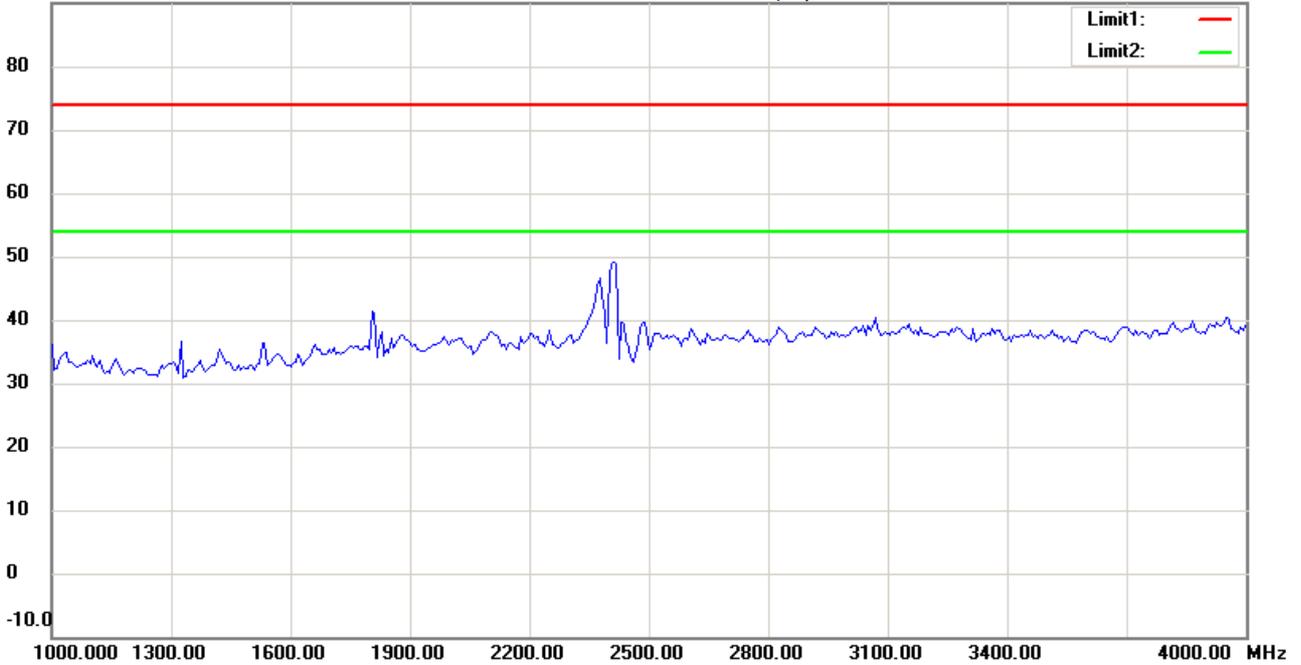

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH1

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:57:53

Humidity:60 %

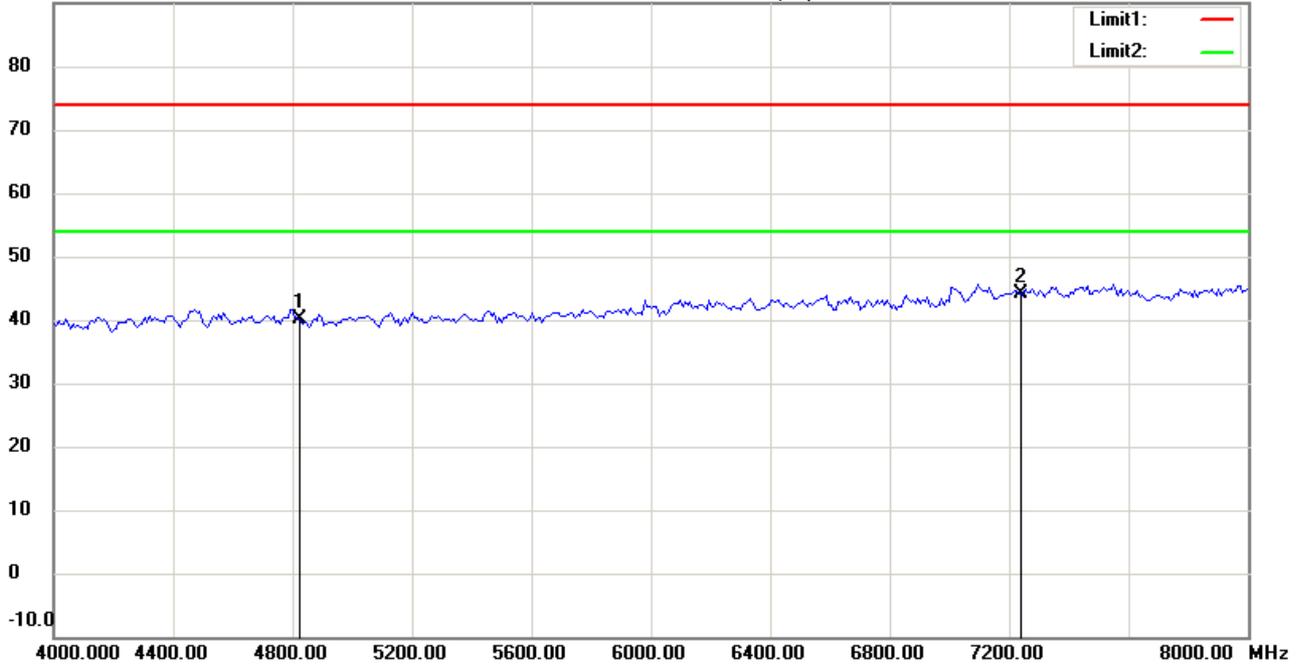

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.73	peak	-0.57	40.16	74.00	100	255	-33.84	
*	7236.000	39.77	peak	4.29	44.06	74.00	100	90	-29.94	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:00:39

Humidity:60 %

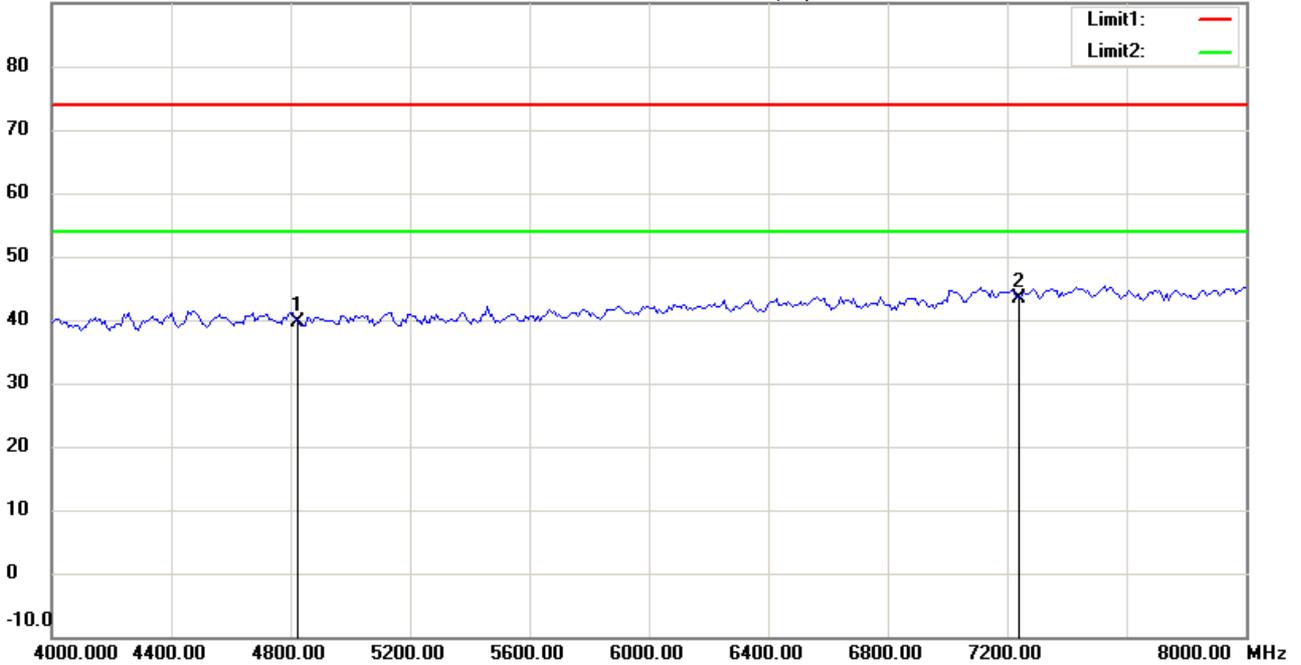

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	40.15	peak	-0.57	39.58	74.00	100	215	-34.42	
*	7236.000	39.11	peak	4.29	43.40	74.00	100	150	-30.60	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:58:45

Humidity:60 %

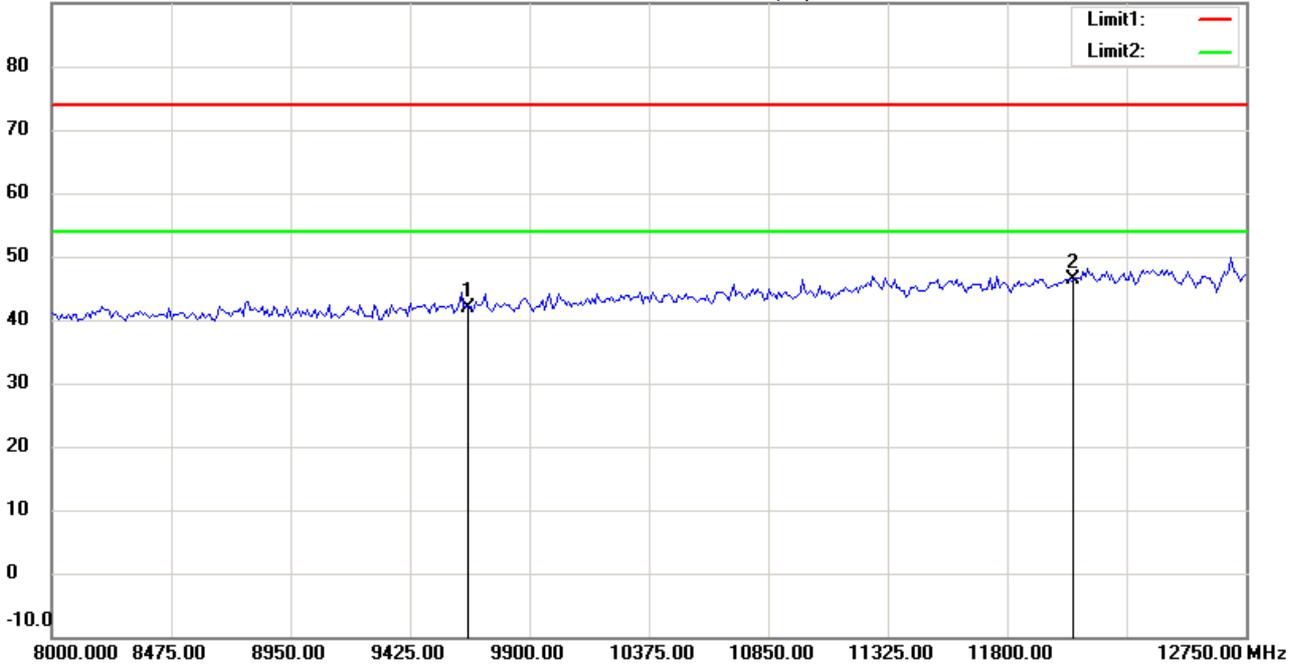

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.33	peak	7.51	41.84	74.00	100	320	-32.16	
*	12060.000	33.30	peak	13.18	46.48	74.00	100	175	-27.52	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:01:23

Humidity:60 %

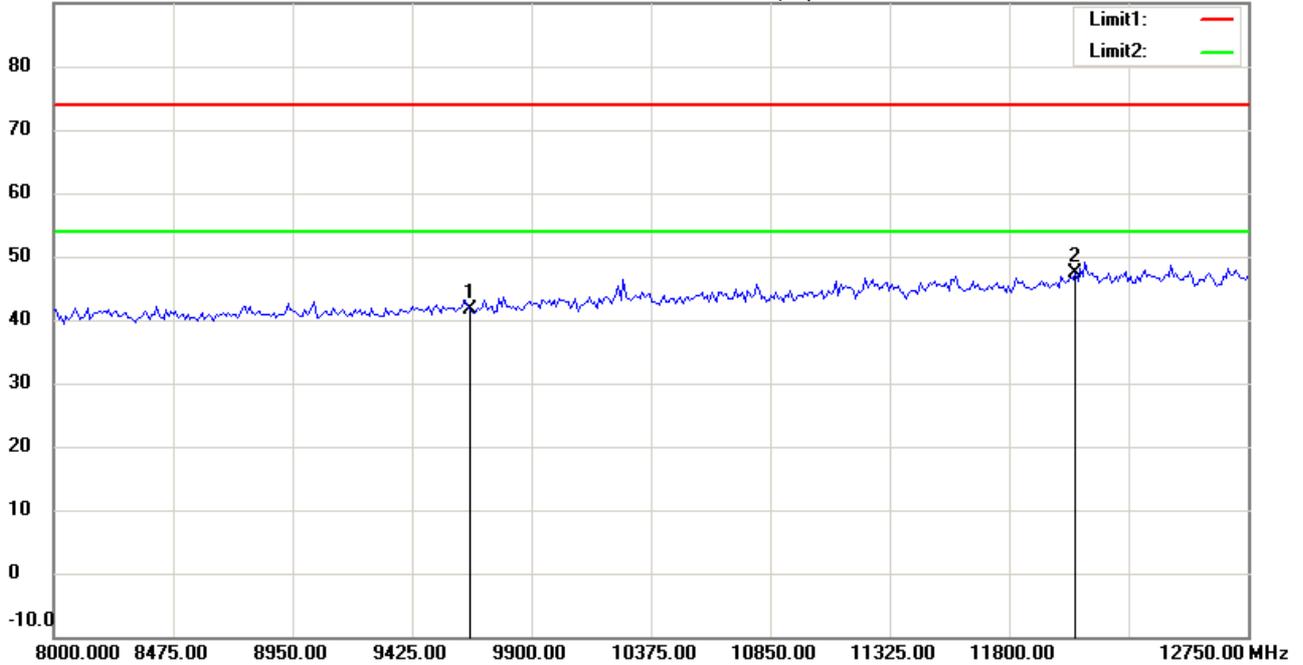

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.09	peak	7.51	41.60	74.00	100	120	-32.40	
*	12060.000	34.25	peak	13.18	47.43	74.00	100	55	-26.57	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:58:59

Humidity:60 %

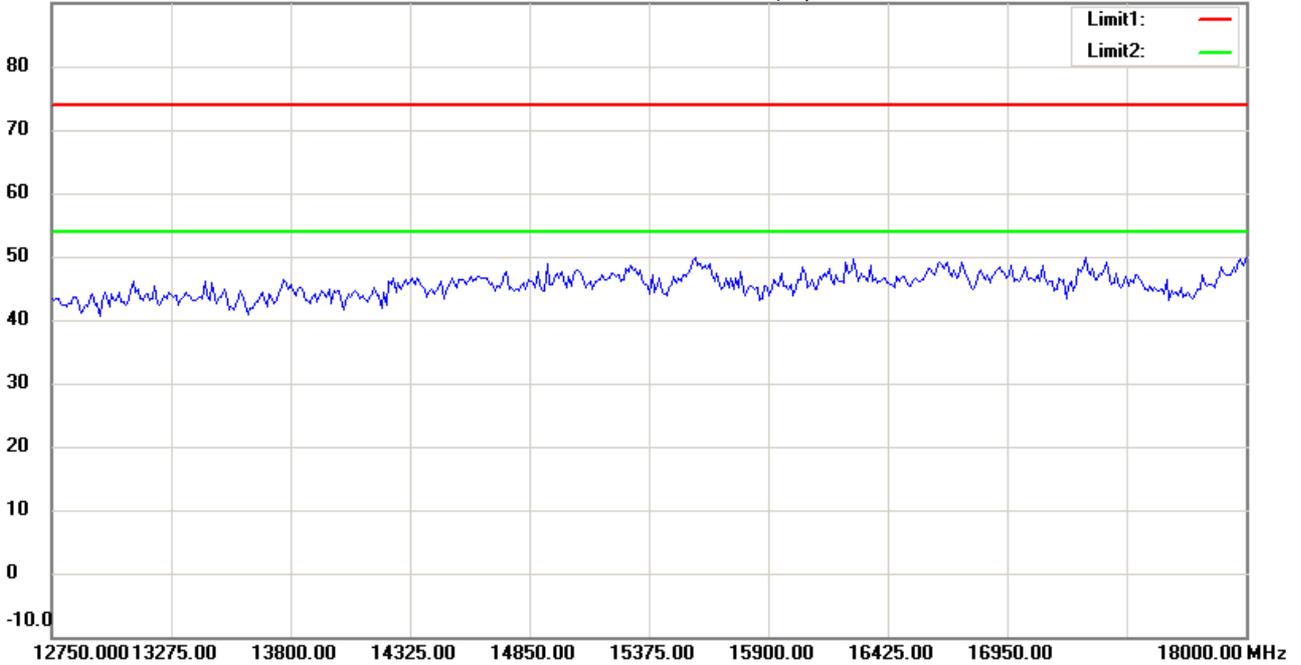

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:01:37

Humidity:60 %

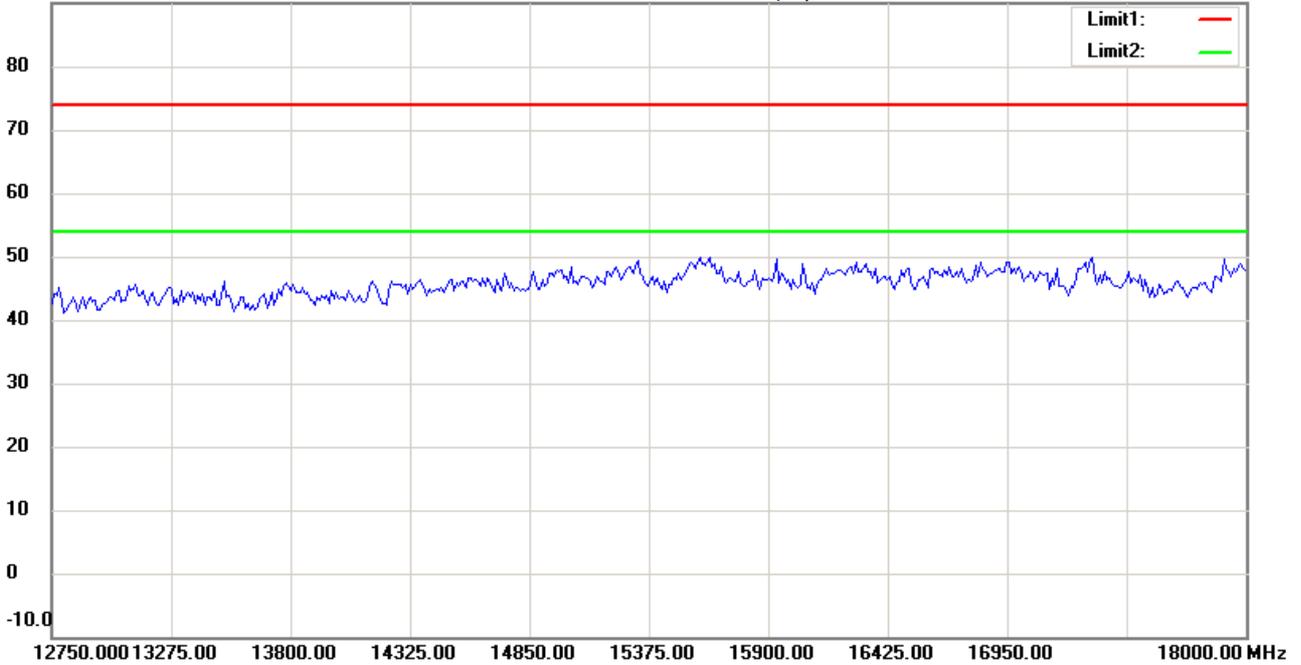

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH1

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 10:59:08

Humidity:60 %

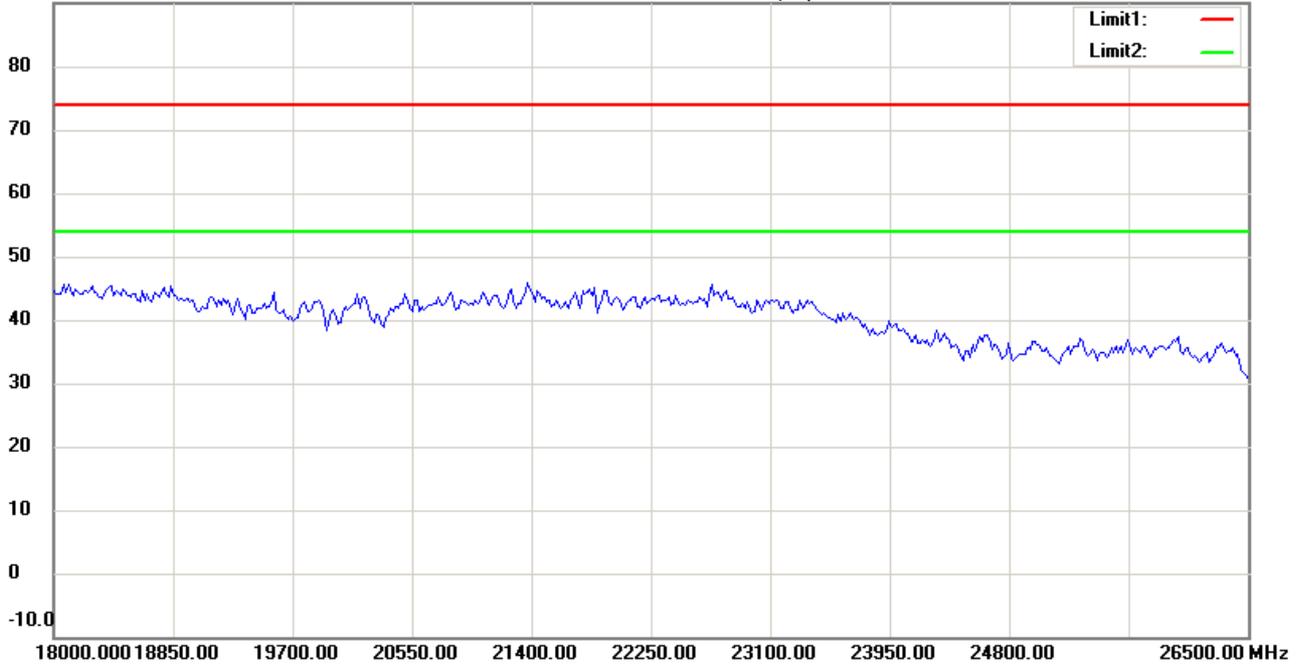

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH1

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:01:47

Humidity:60 %

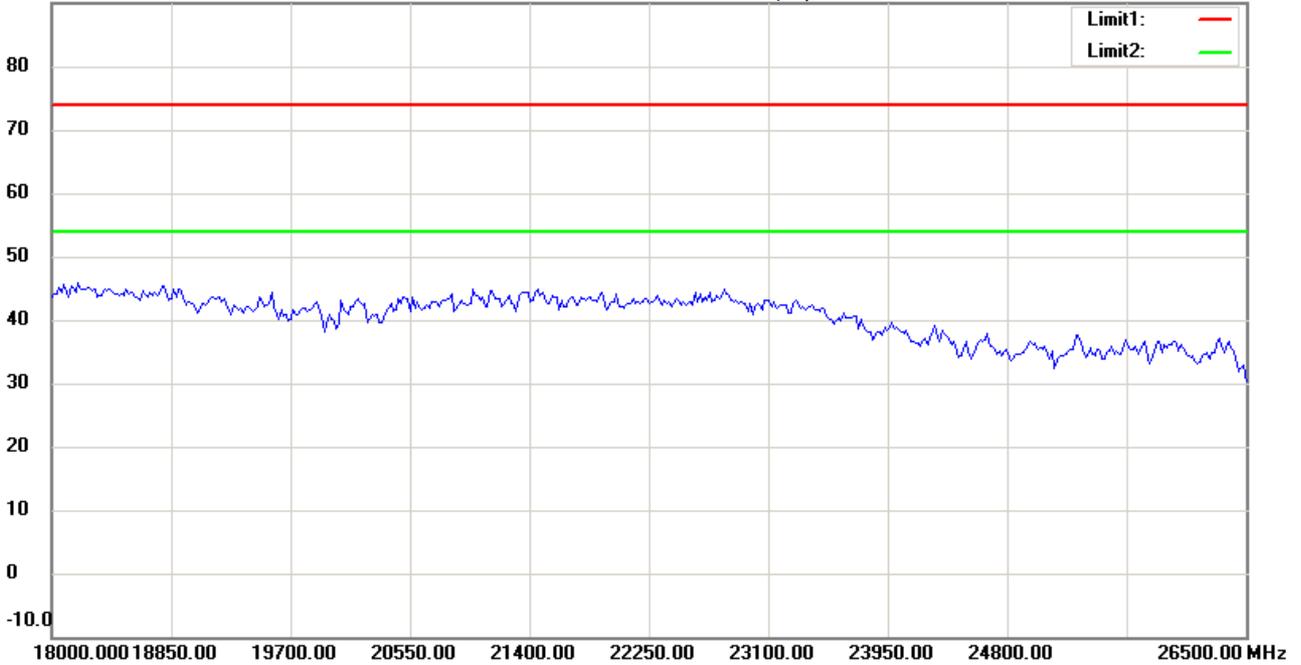

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH1

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:59:59

Humidity:60 %

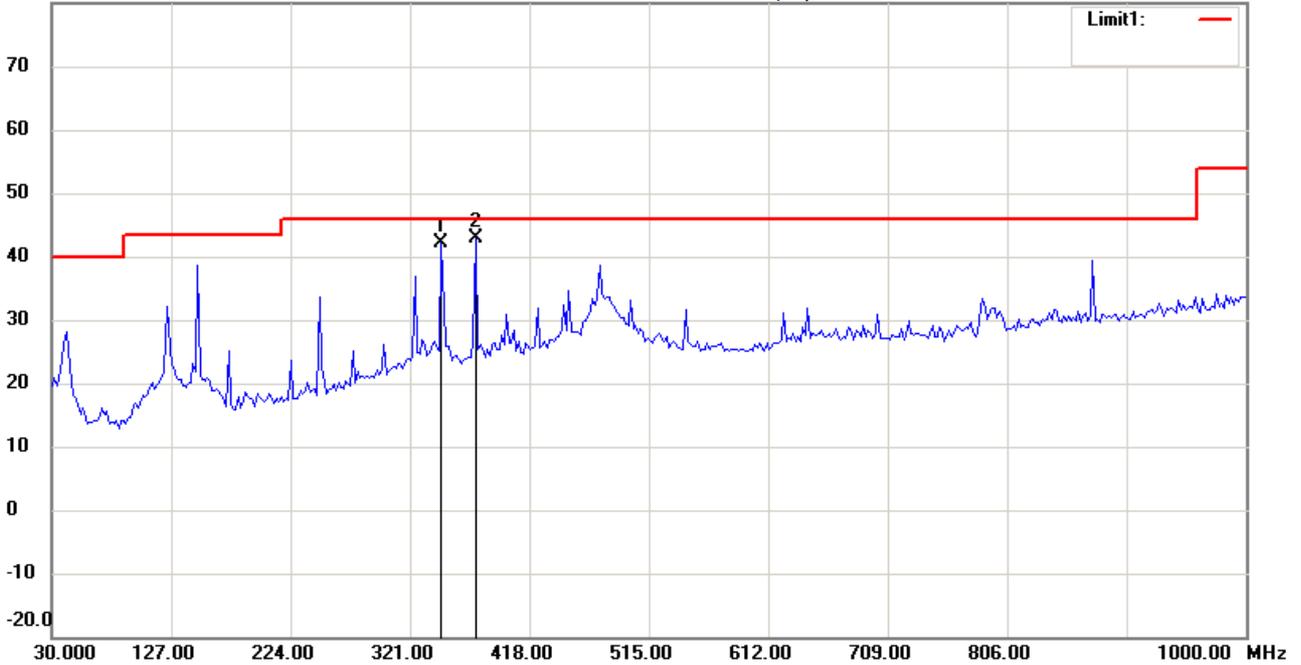

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	46.64	peak	-4.63	42.01	46.00	100	60	-3.99	
*	374.0681	47.08	peak	-4.14	42.94	46.00	100	280	-3.06	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 上午 12:01:20

Humidity:60 %

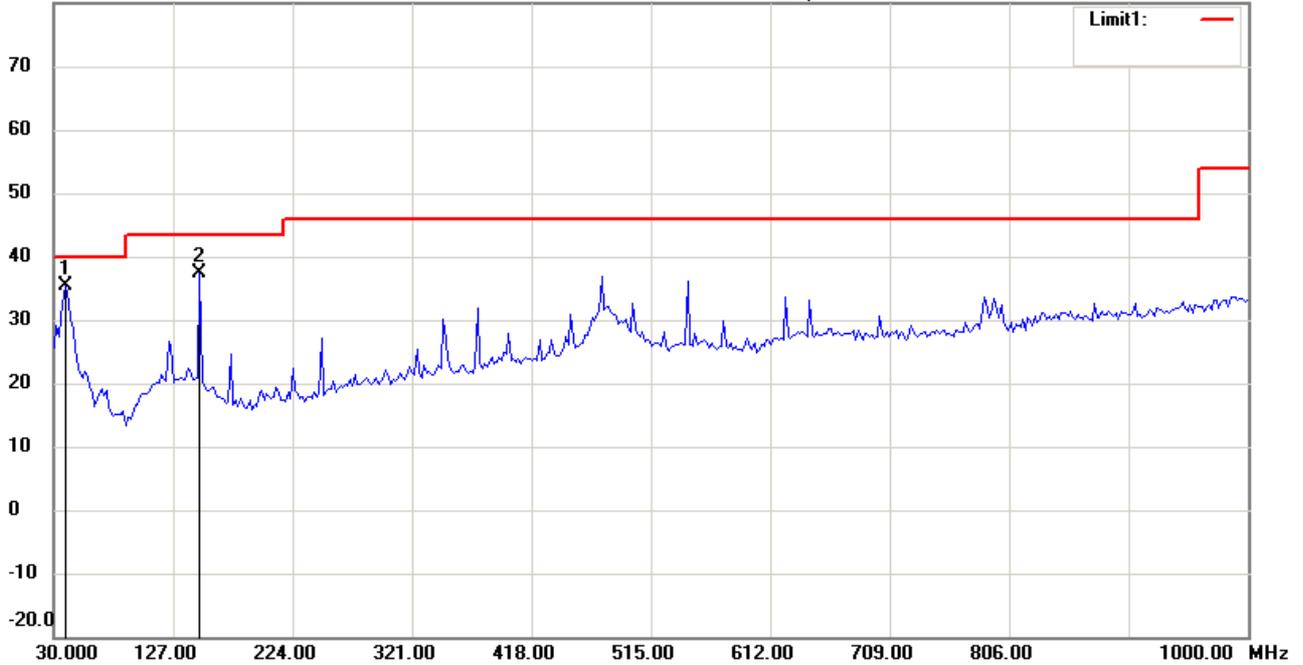

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH6

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	43.56	peak	-8.15	35.41	40.00	100	45	-4.59	
	148.5772	45.01	peak	-7.51	37.50	43.50	100	120	-6.00	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:06:37

Humidity:60 %

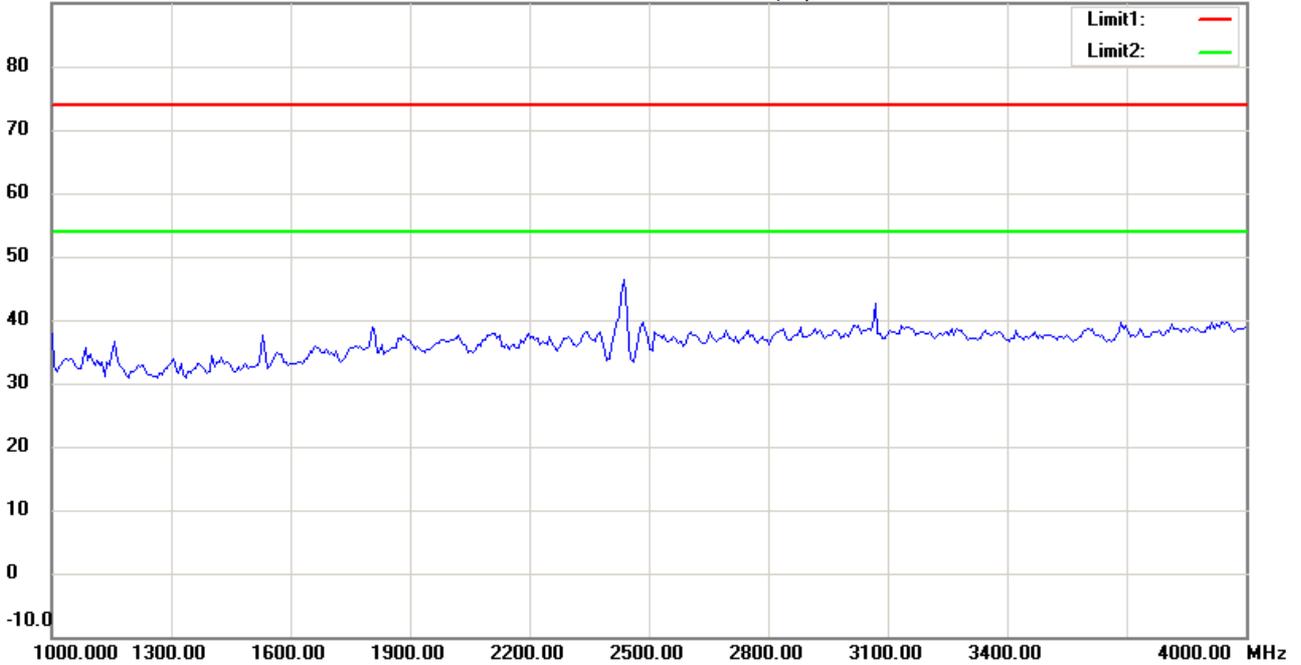

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:09:22

Humidity:60 %

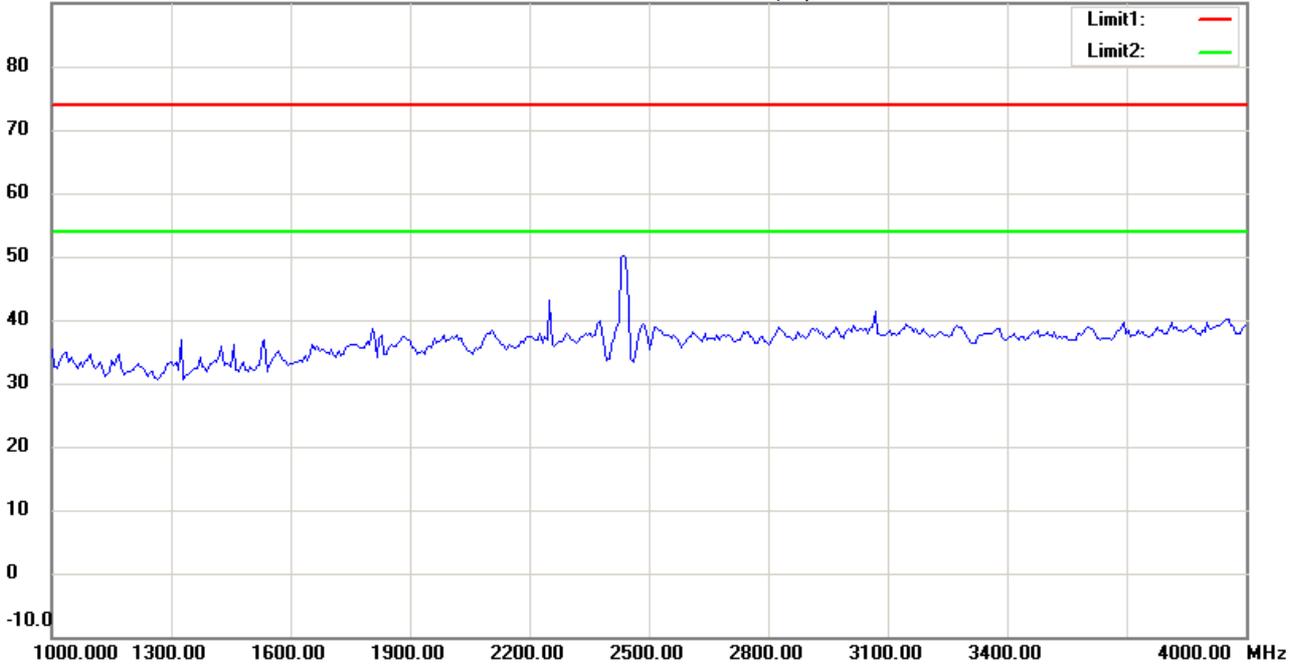

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH6

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:07:22

Humidity:60 %

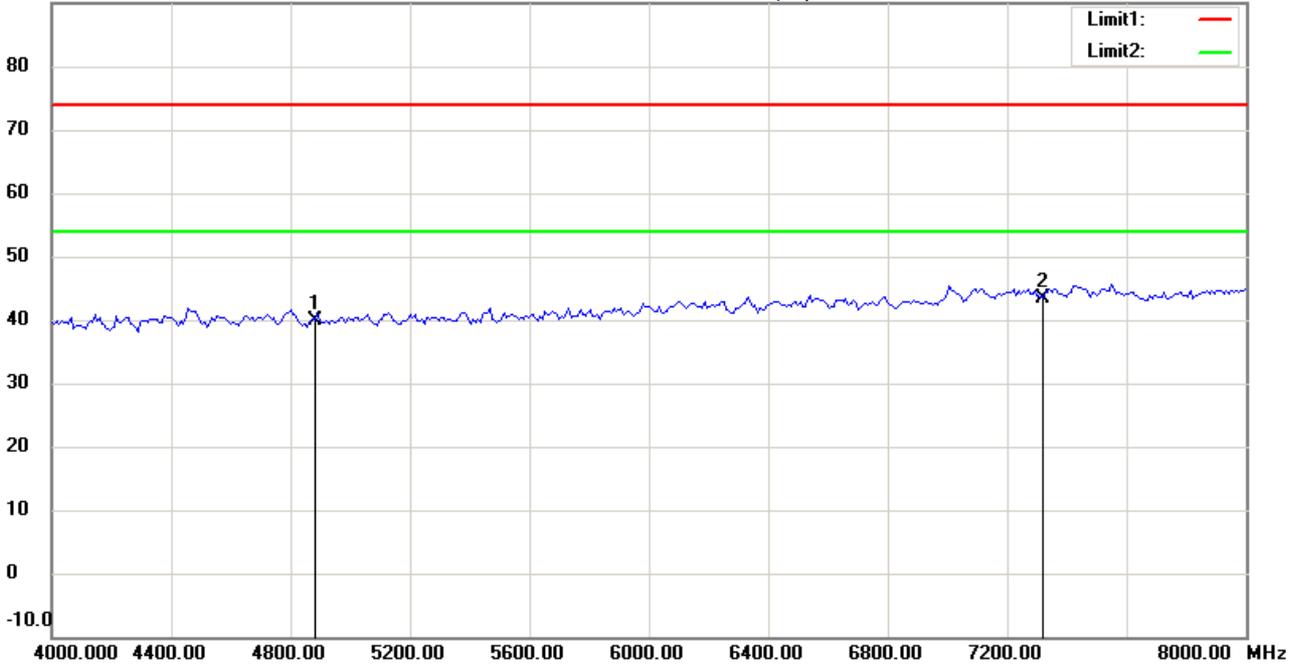

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	40.42	peak	-0.50	39.92	74.00	100	245	-34.08	
*	7311.000	39.00	peak	4.43	43.43	74.00	100	95	-30.57	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:10:08

Humidity:60 %

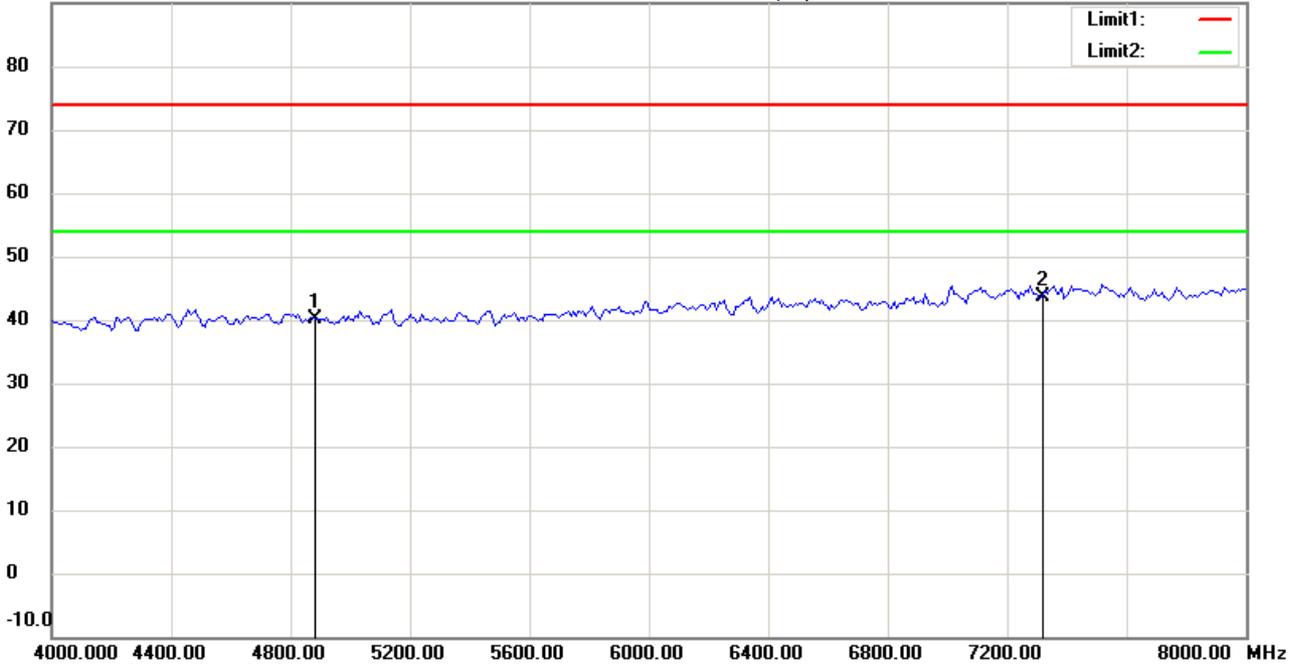

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	40.58	peak	-0.50	40.08	74.00	100	175	-33.92	
*	7311.000	39.26	peak	4.43	43.69	74.00	100	110	-30.31	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:08:13

Humidity:60 %

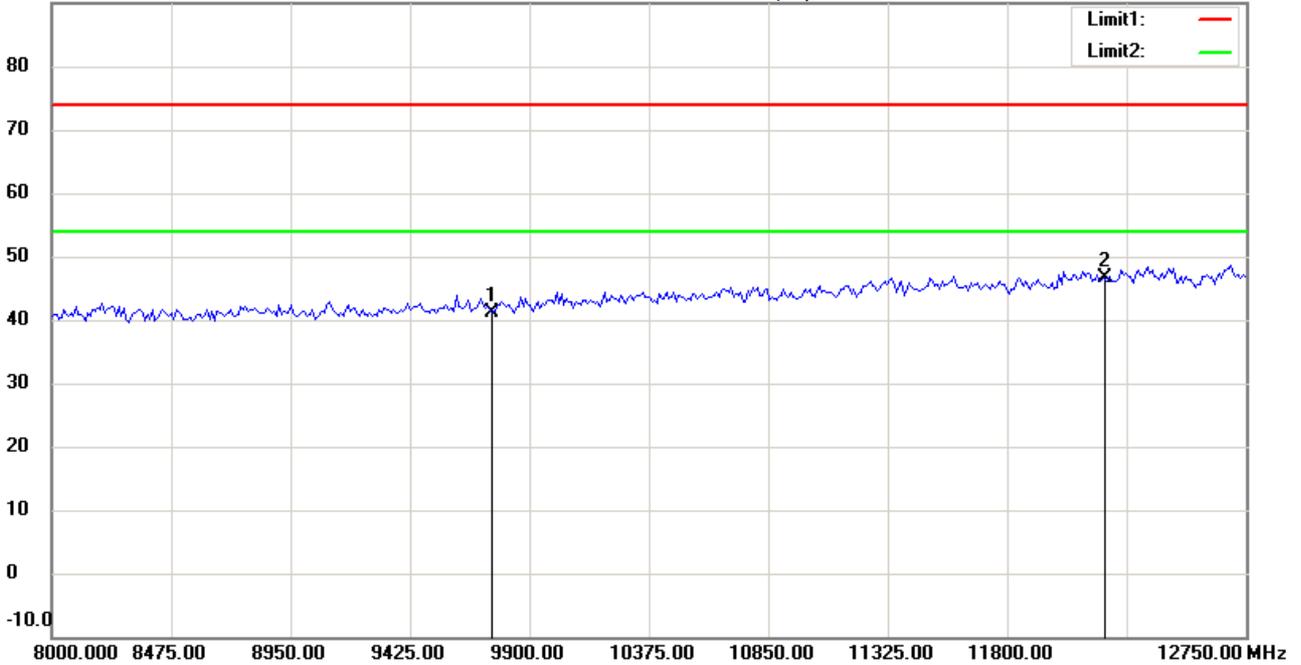

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	33.63	peak	7.49	41.12	74.00	100	100	-32.88	
*	12185.000	32.80	peak	13.82	46.62	74.00	100	35	-27.38	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:11:33

Humidity:60 %

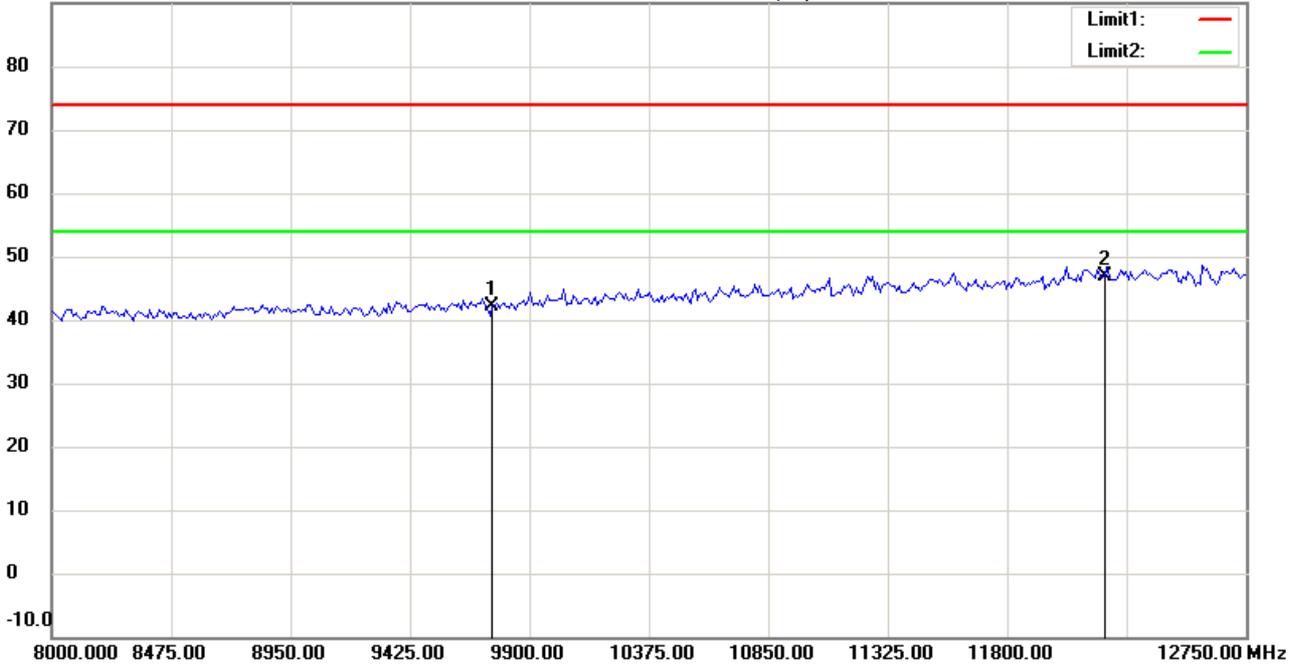

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.63	peak	7.49	42.12	74.00	100	265	-31.88	
*	12185.000	33.16	peak	13.82	46.98	74.00	100	55	-27.02	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:08:27

Humidity:60 %

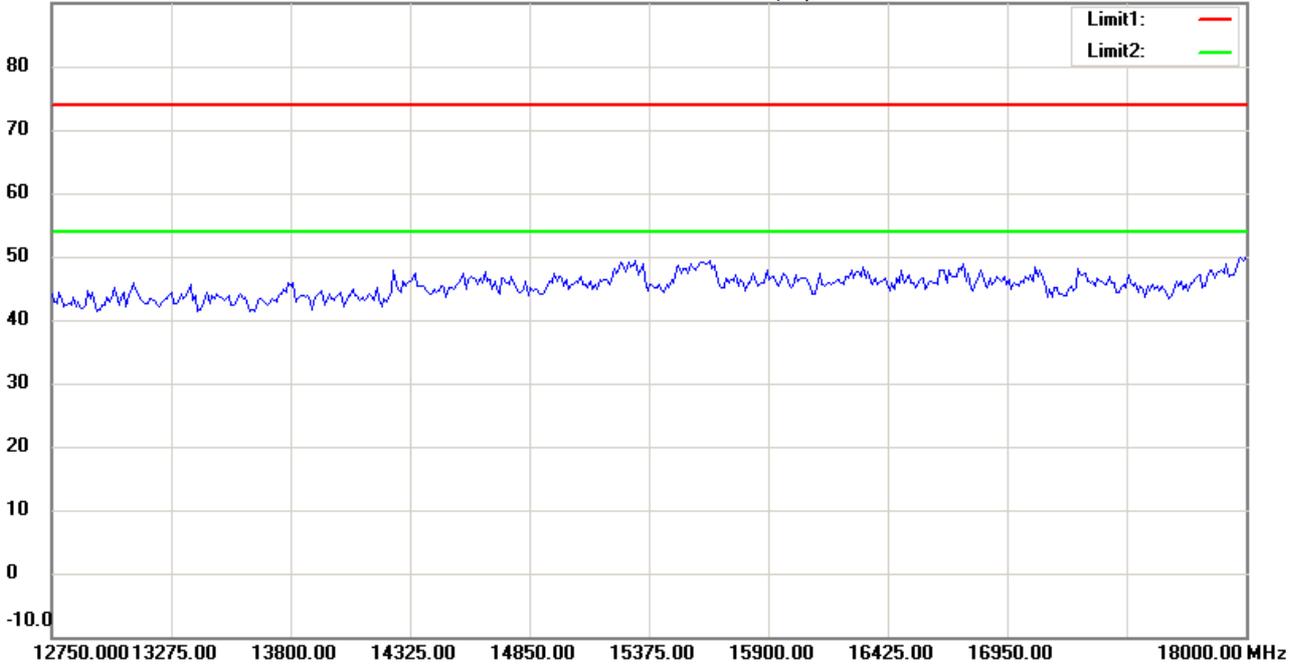

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH6

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:11:47

Humidity:60 %

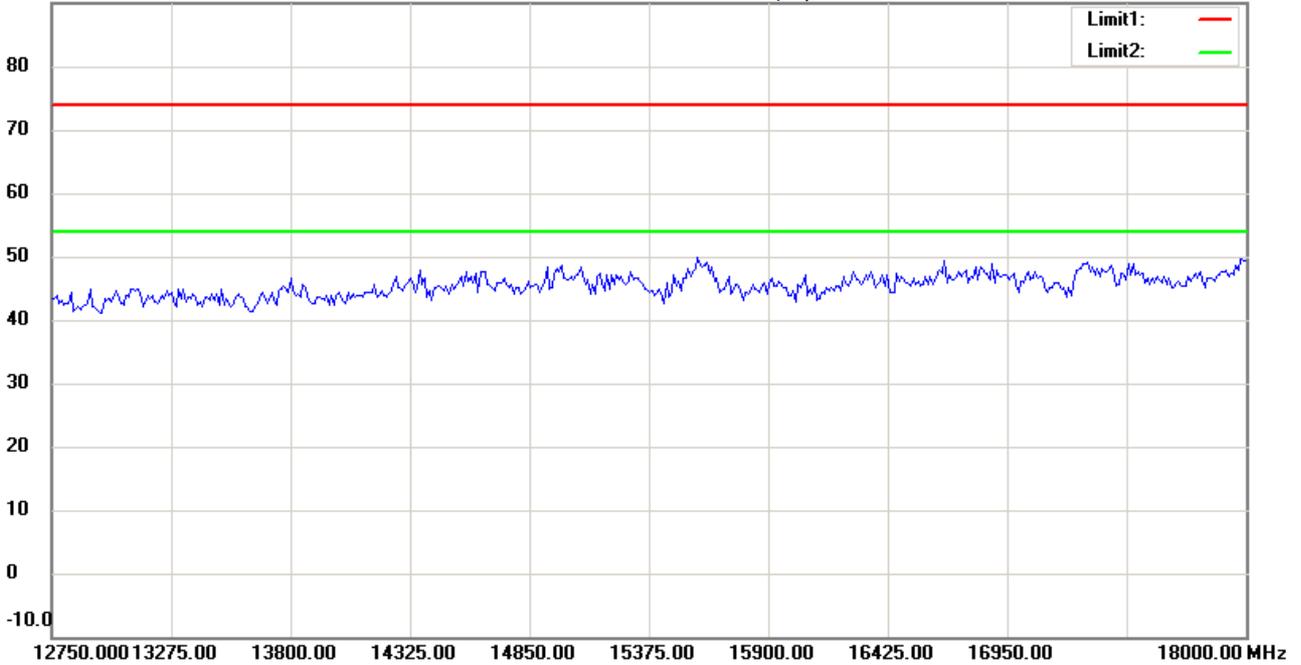

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:08:37

Humidity:60 %

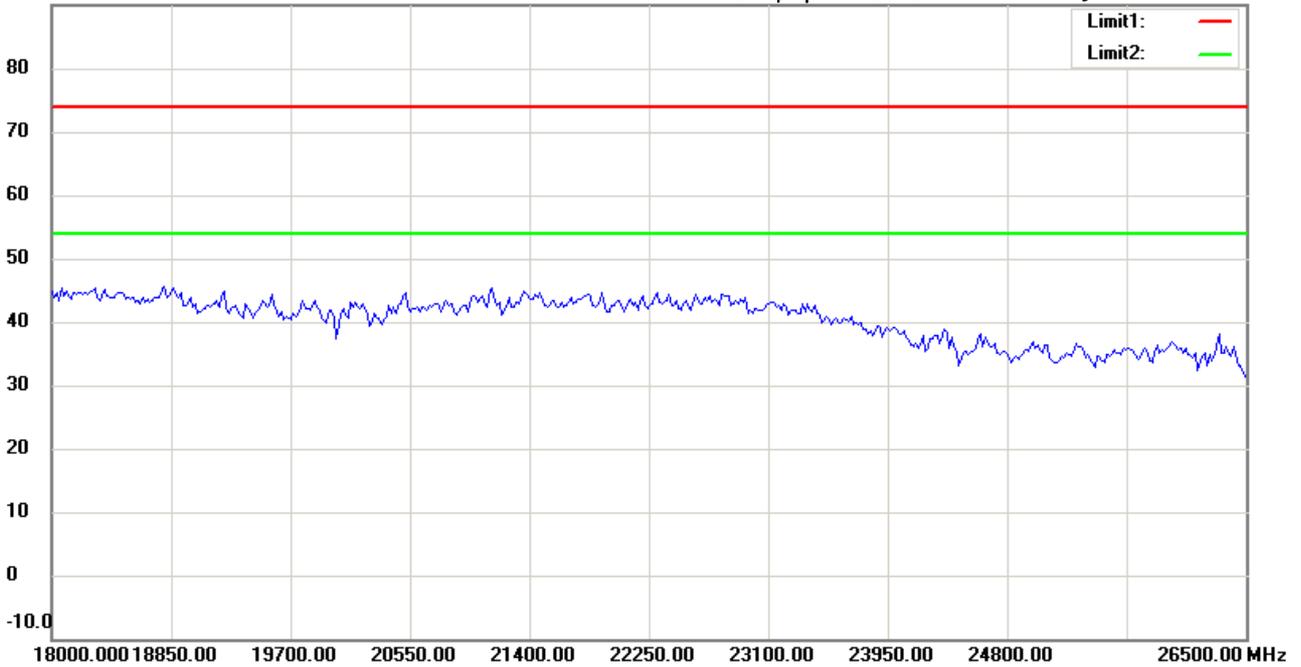

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH6

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:11:56

Humidity:60 %

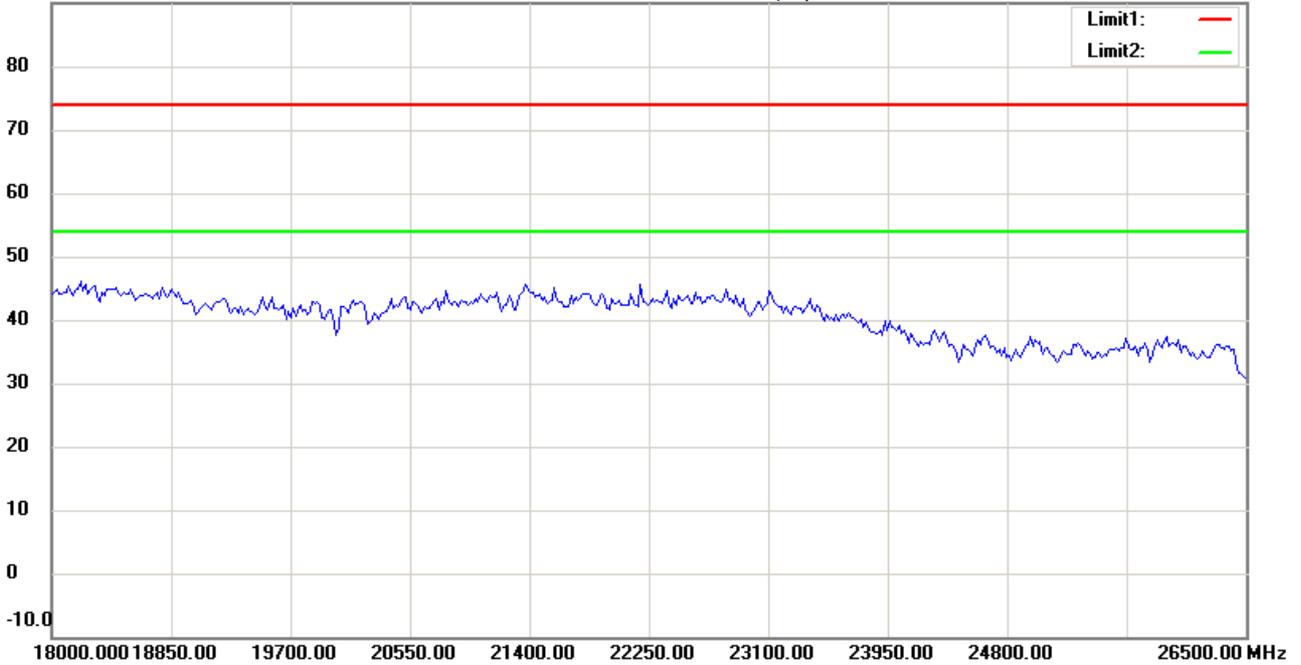

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH6

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 上午 12:04:44

Humidity:60 %

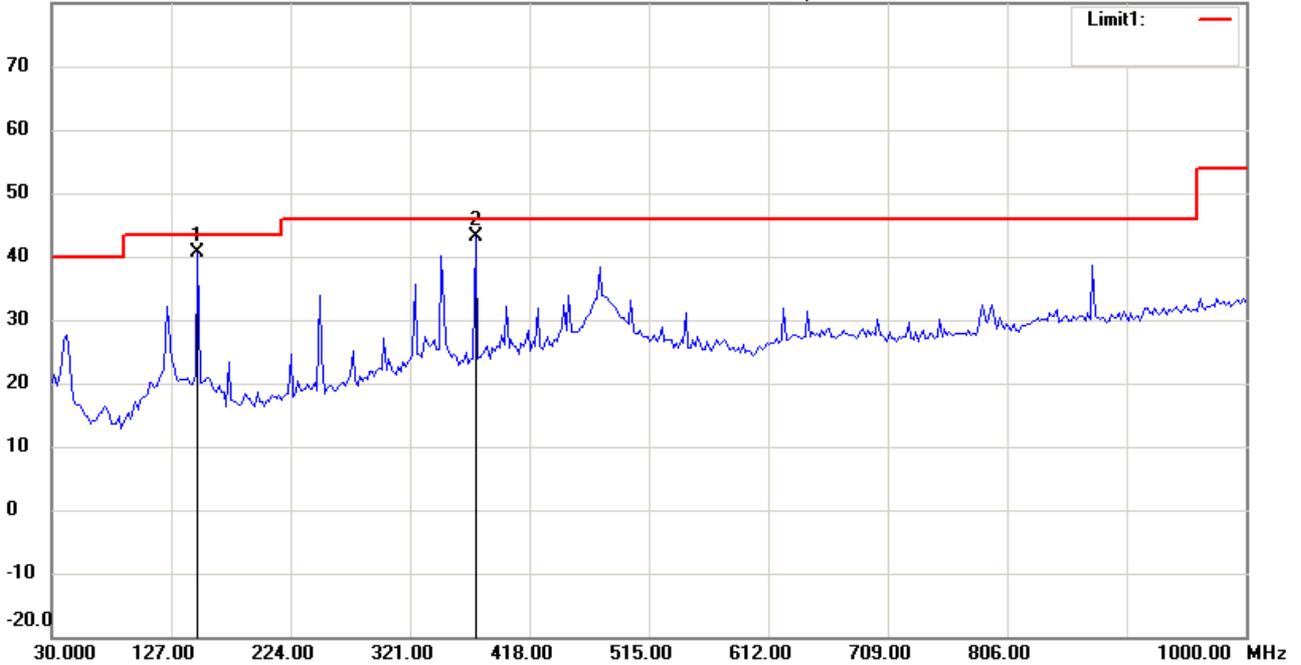

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	48.16	peak	-7.51	40.65	43.50	100	110	-2.85	
*	374.0681	47.37	peak	-4.14	43.23	46.00	100	25	-2.77	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 上午 12:05:29

Humidity:60 %

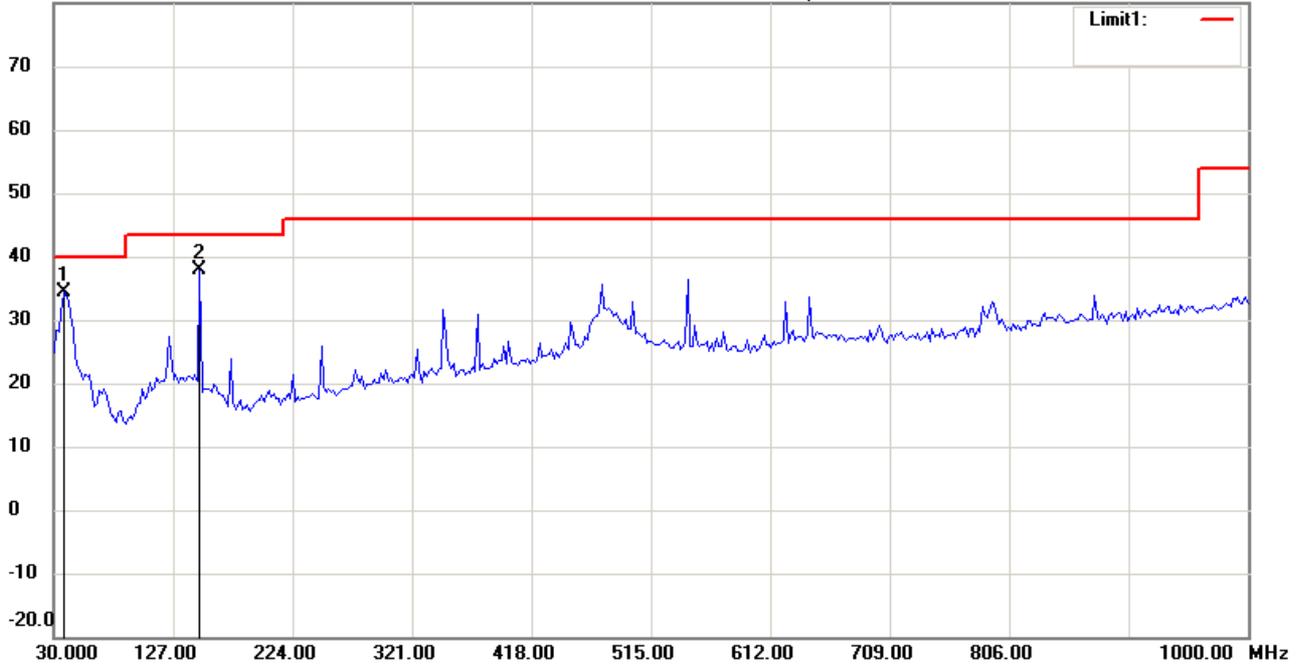

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH11

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	37.7756	42.29	peak	-7.87	34.42	40.00	100	75	-5.58	
	148.5772	45.38	peak	-7.51	37.87	43.50	100	130	-5.63	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:15:45

Humidity:60 %

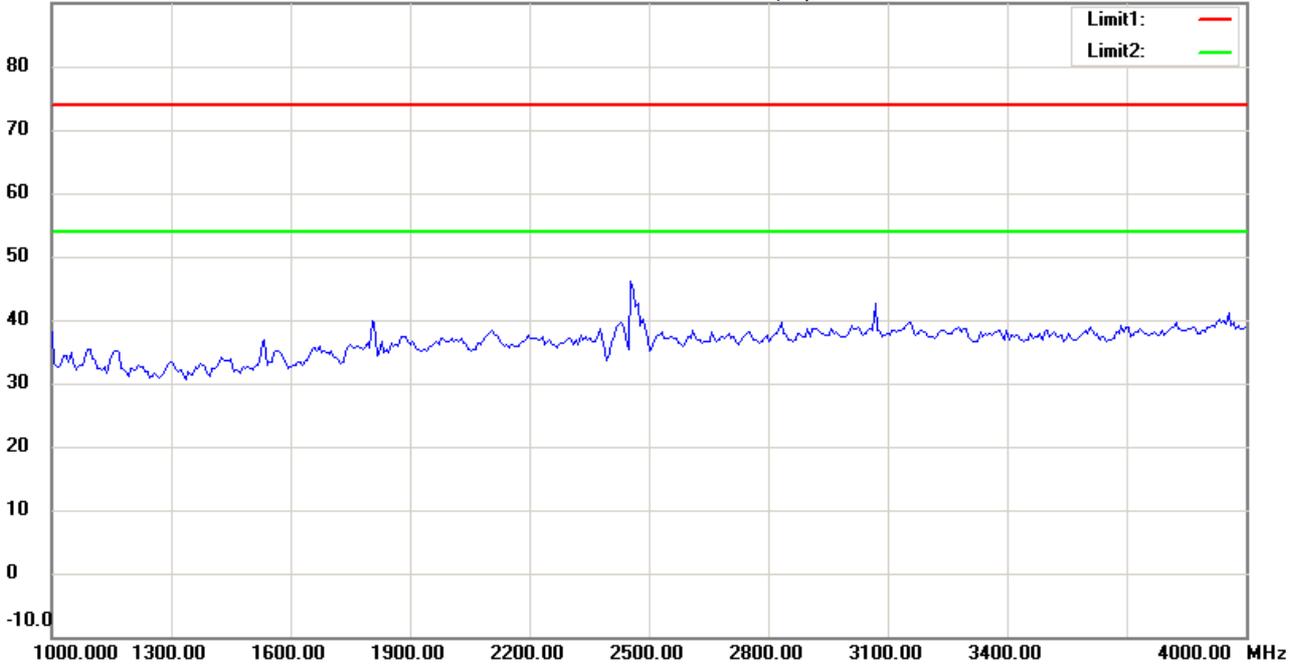

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:19:06

Humidity:60 %

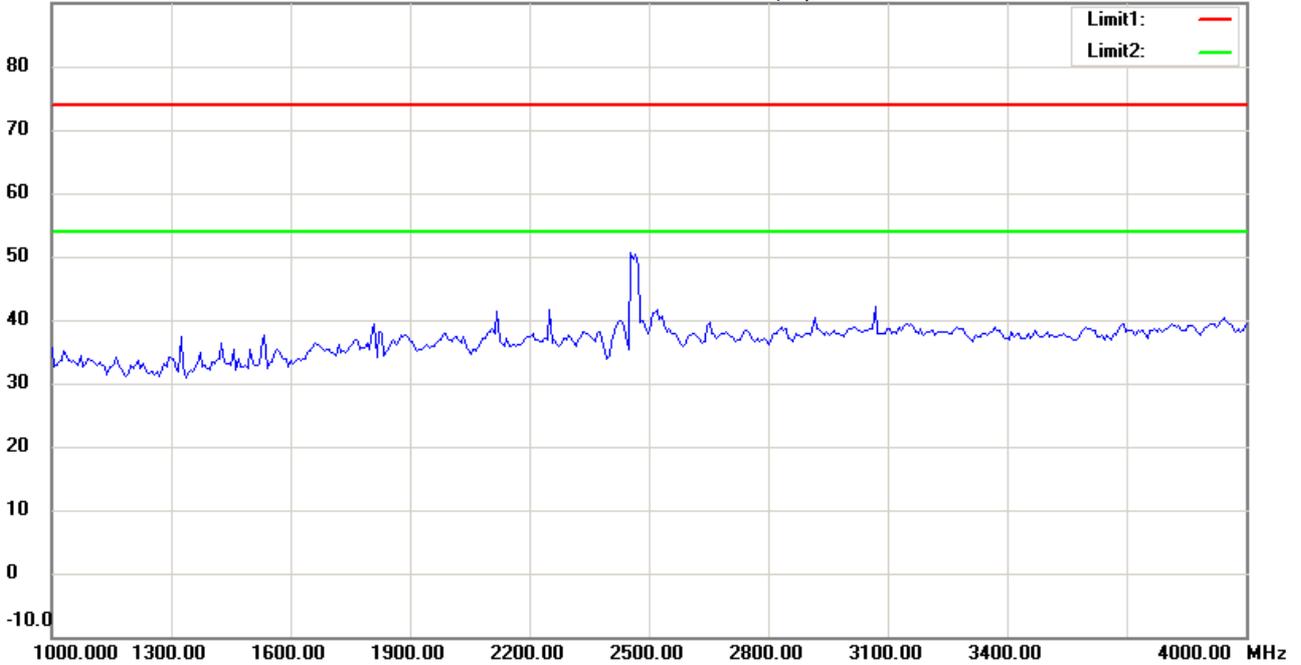

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:16:30

Humidity:60 %

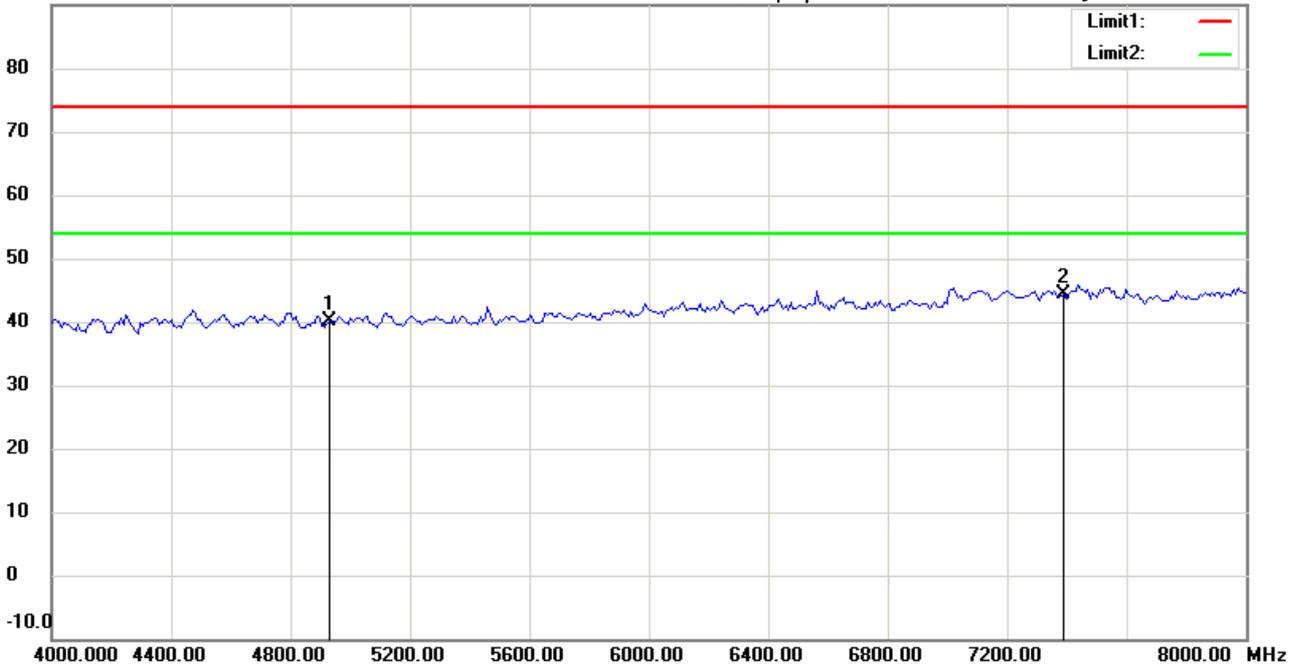

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.46	peak	-0.33	40.13	74.00	100	55	-33.87	
*	7386.000	39.37	peak	4.93	44.30	74.00	100	130	-29.70	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:19:52

Humidity:60 %

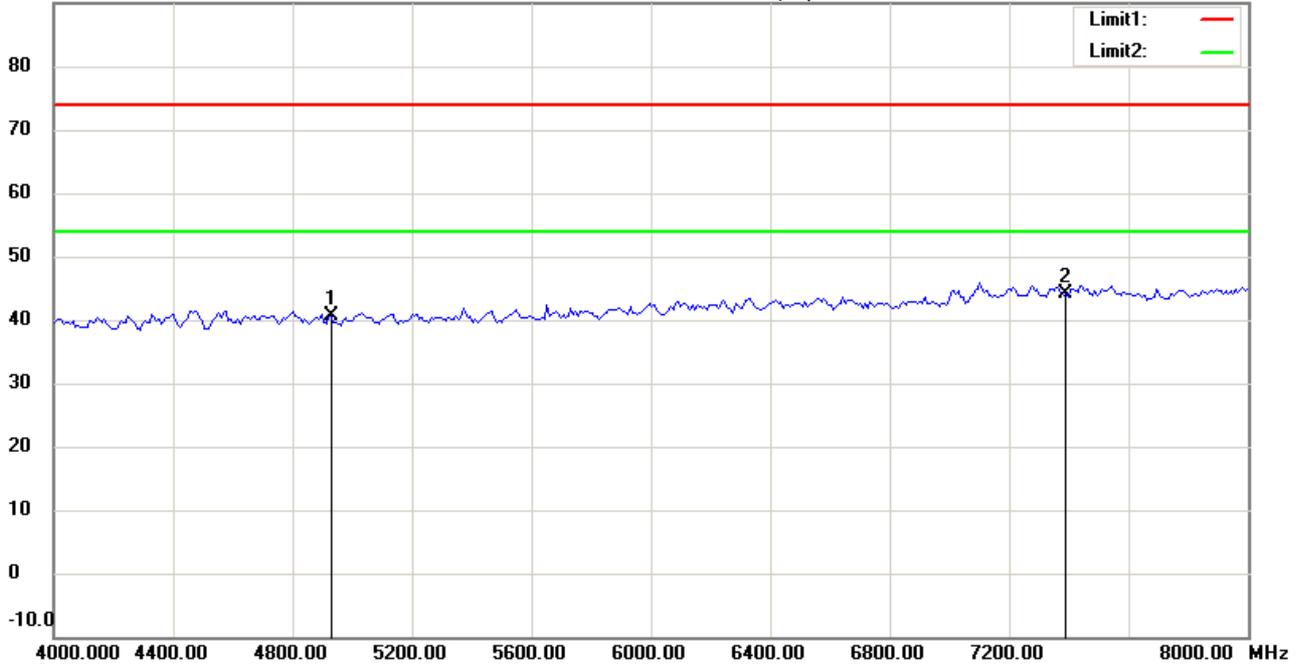

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	40.92	peak	-0.33	40.59	74.00	100	300	-33.41	
*	7386.000	39.27	peak	4.93	44.20	74.00	100	70	-29.80	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:17:22

Humidity:60 %

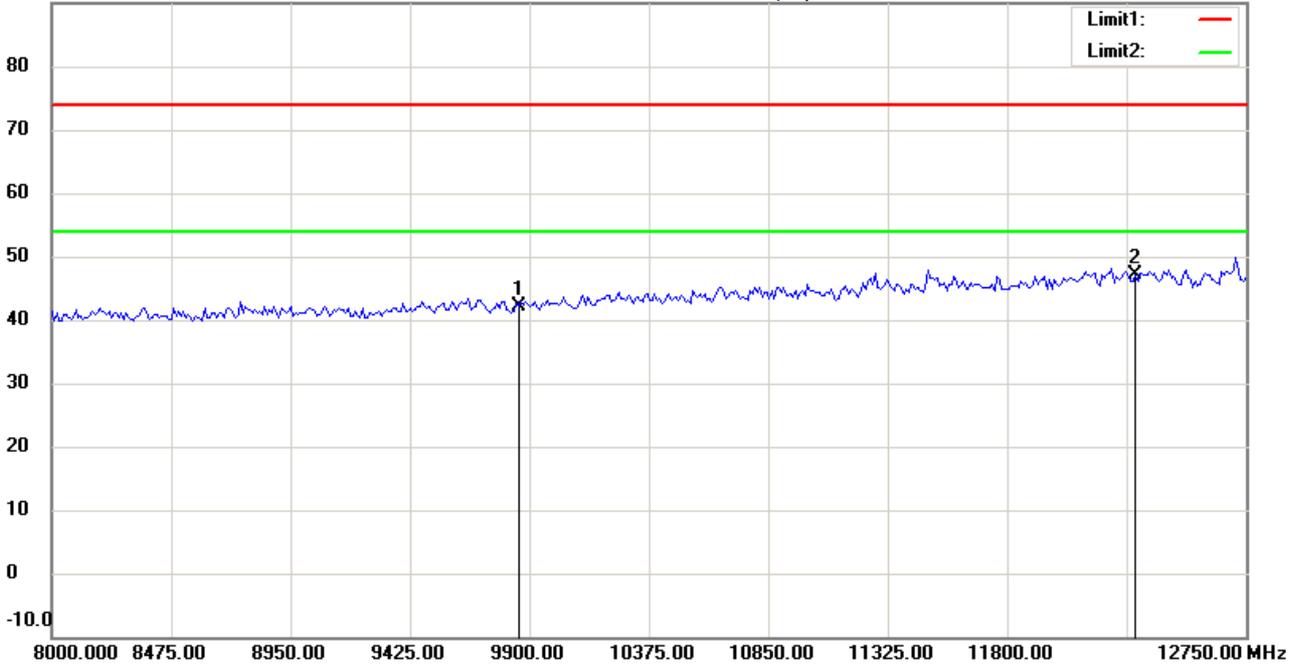

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.55	peak	7.68	42.23	74.00	100	95	-31.77	
*	12310.000	33.77	peak	13.25	47.02	74.00	100	320	-26.98	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:20:36

Humidity:60 %

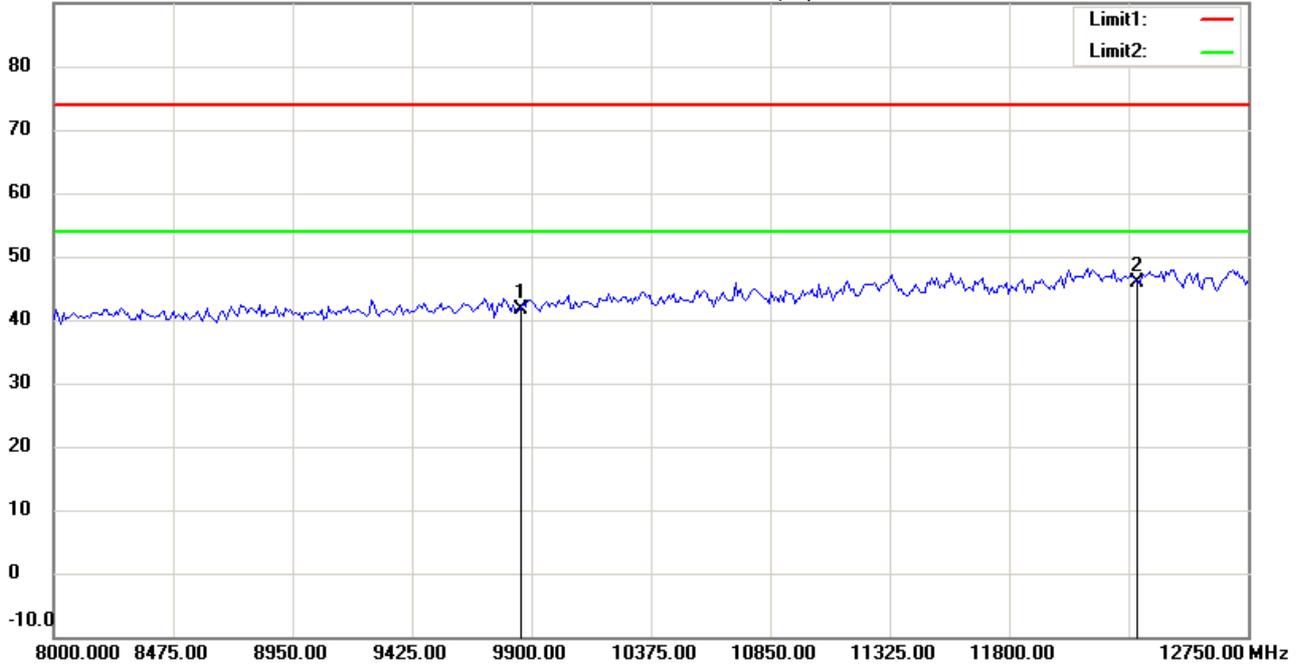

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	33.85	peak	7.68	41.53	74.00	100	220	-32.47	
*	12310.000	32.51	peak	13.25	45.76	74.00	100	145	-28.24	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:17:35

Humidity:60 %

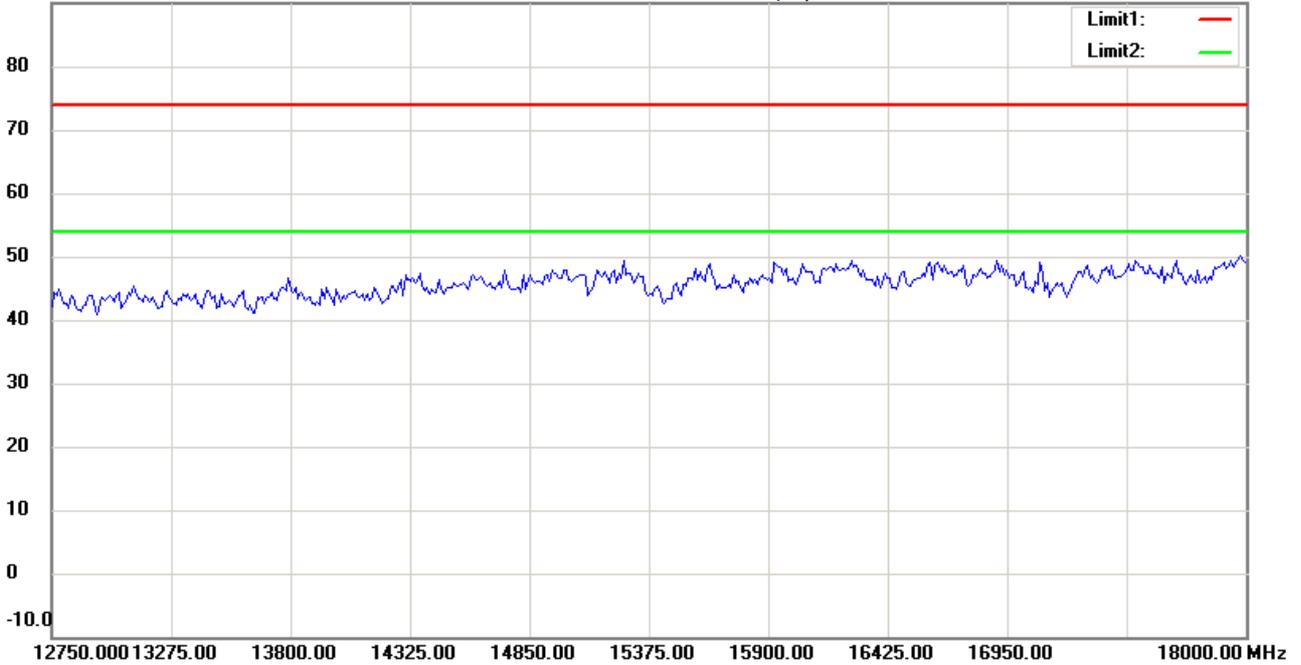

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:20:50

Humidity:60 %

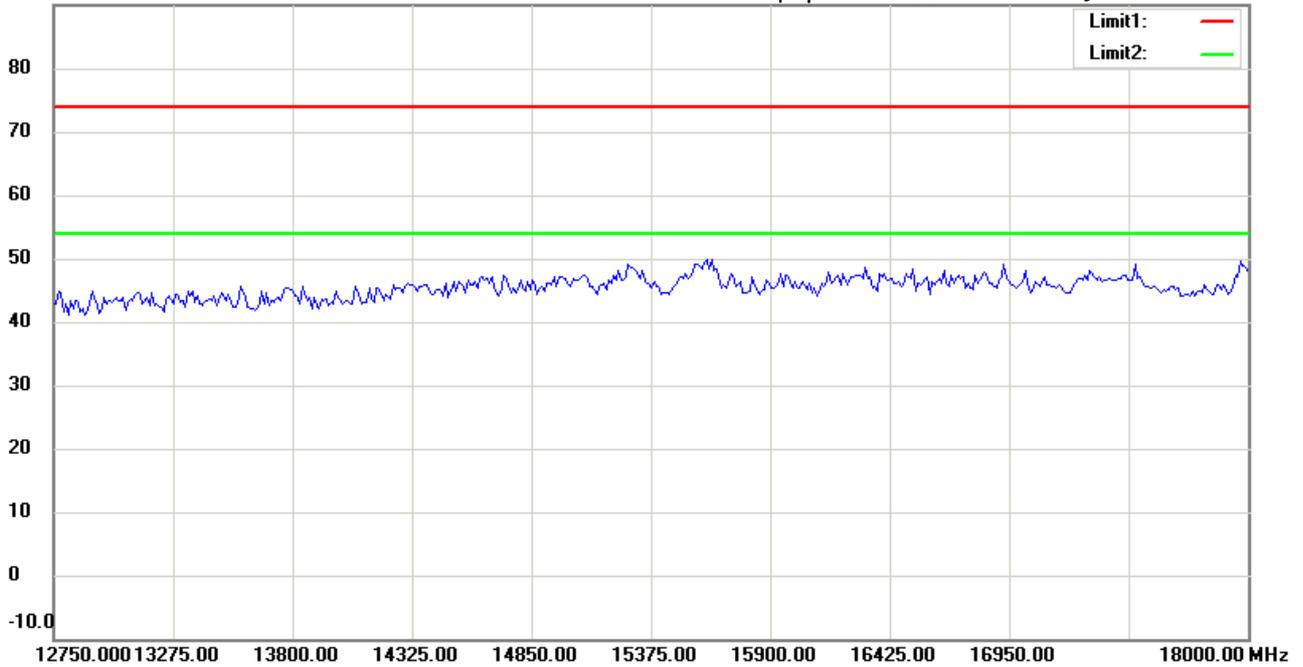

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 802.11n 20M CH11

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:17:45

Humidity:60 %

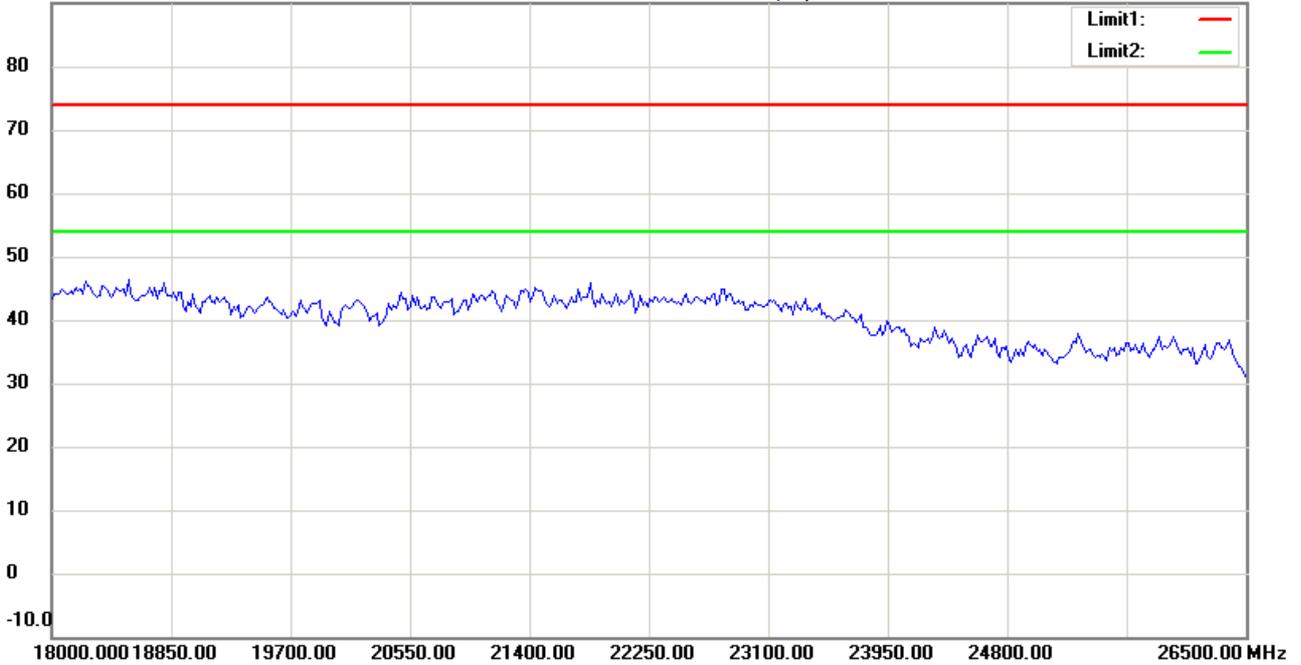

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH11

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/10

Temperature:24 °C

90.0 dBuV/m

Time: 下午 11:20:59

Humidity:60 %

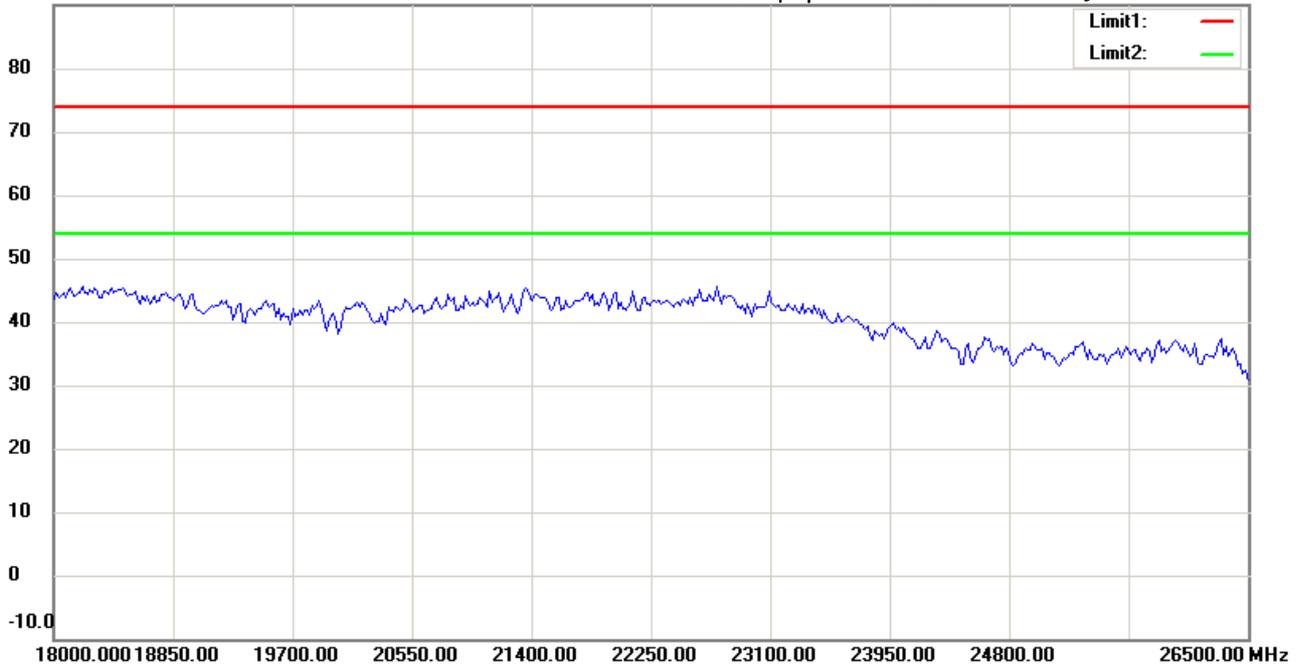

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 802.11n 20M CH11


Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Registration number: W6M21604-15762-P-15B

Appendix

Measurement diagrams

Spurious Emissions radiated_TX_BT2.0



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:11:24

Humidity:60 %

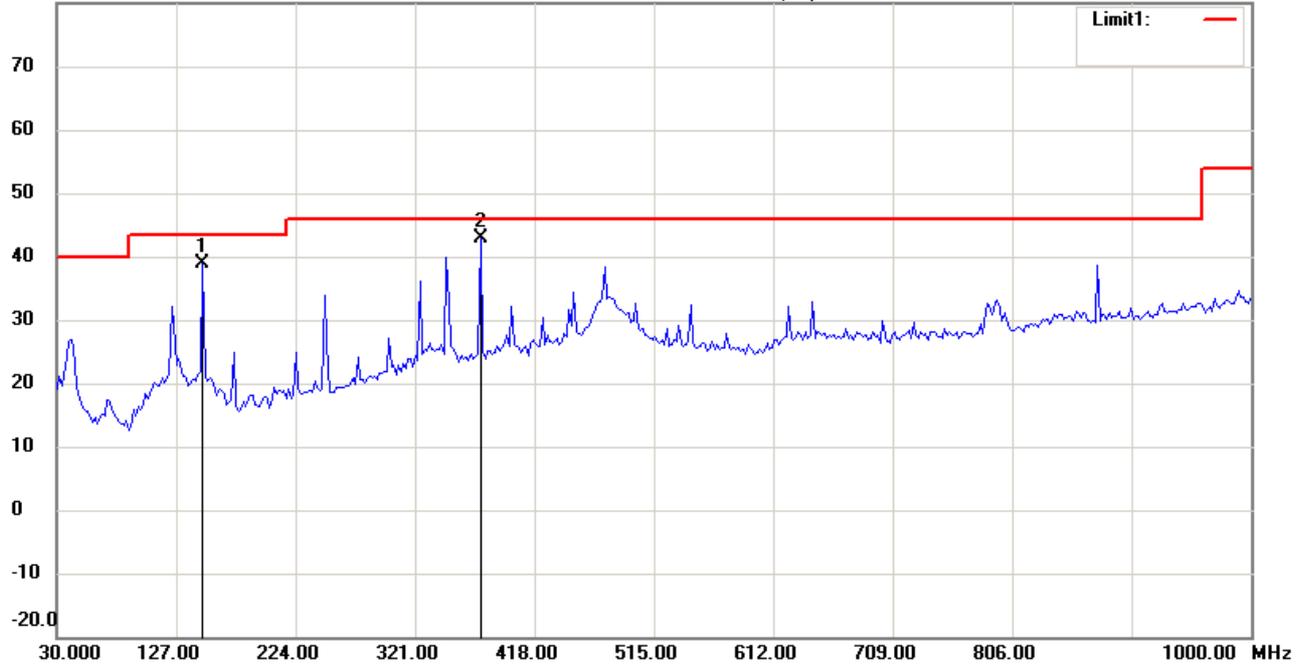

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	46.28	peak	-7.51	38.77	43.50	100	95	-4.73	
*	374.0681	46.90	peak	-4.14	42.76	46.00	100	140	-3.24	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:12:10

Humidity:60 %

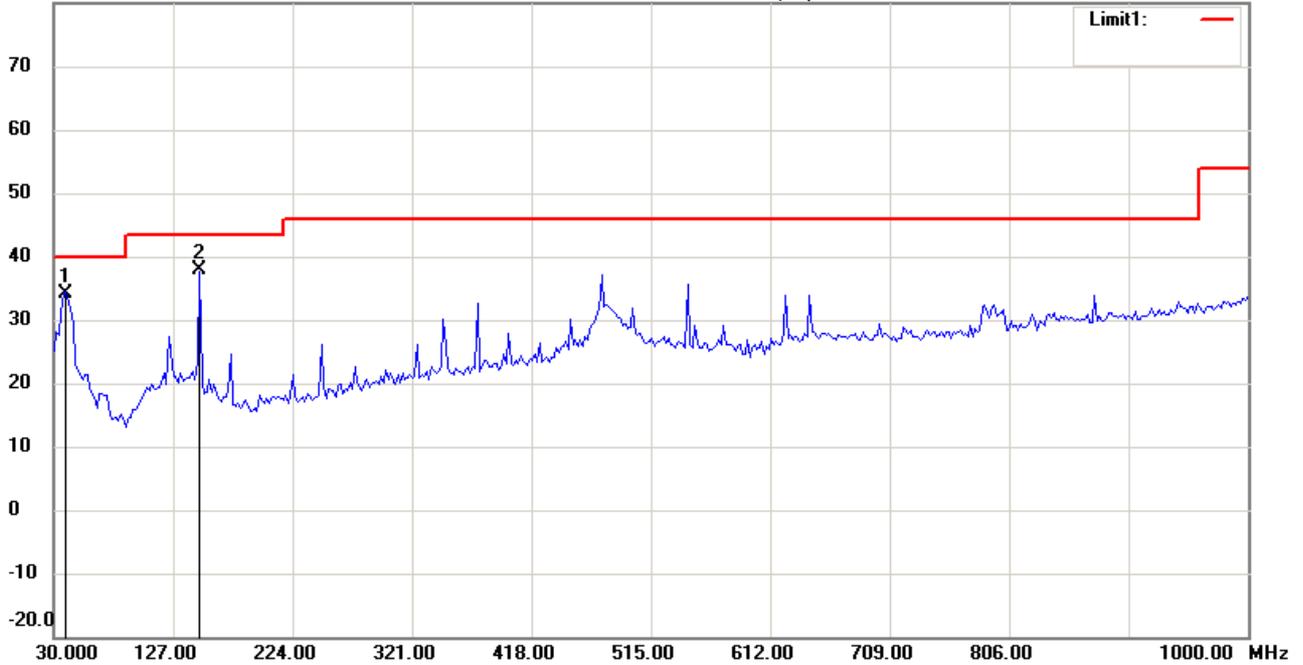

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	39.7194	42.30	peak	-8.15	34.15	40.00	100	50	-5.85	
*	148.5772	45.28	peak	-7.51	37.77	43.50	100	210	-5.73	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:03:13

Humidity:60 %

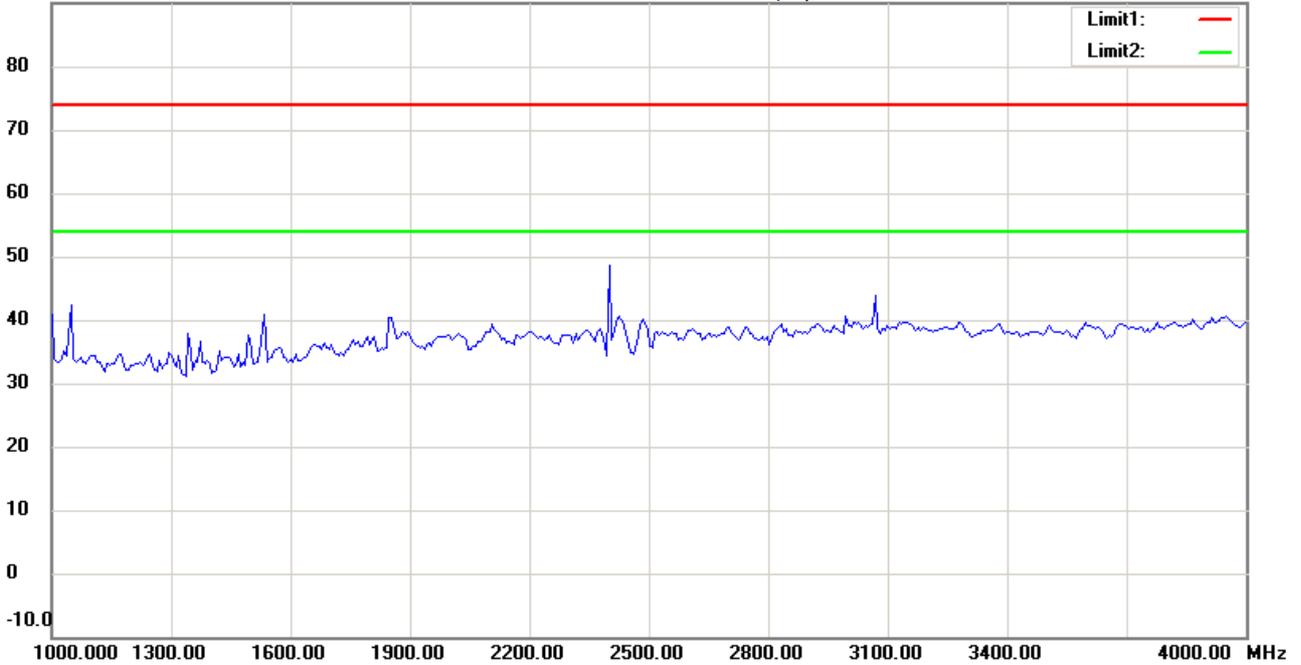

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:06:27

Humidity:60 %

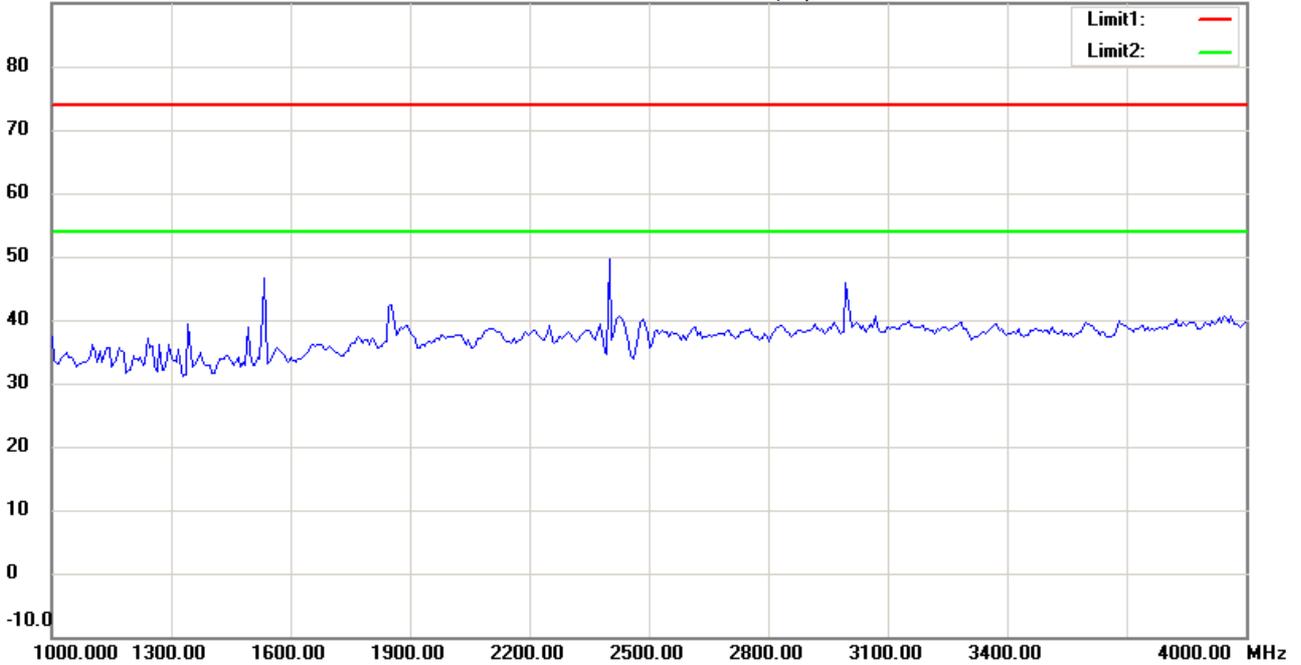

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:03:59

Humidity:60 %

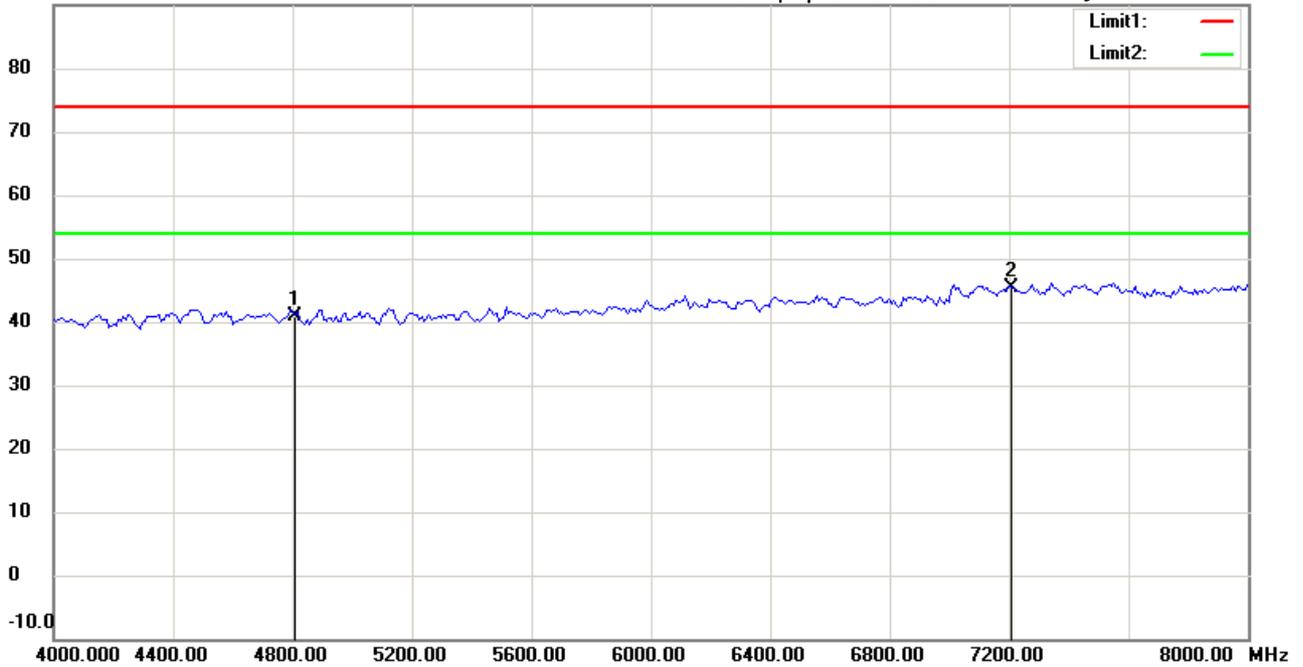

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	41.48	peak	-0.59	40.89	74.00	100	140	-33.11	
*	7206.000	41.01	peak	4.26	45.27	74.00	100	305	-28.73	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:07:02

Humidity:60 %

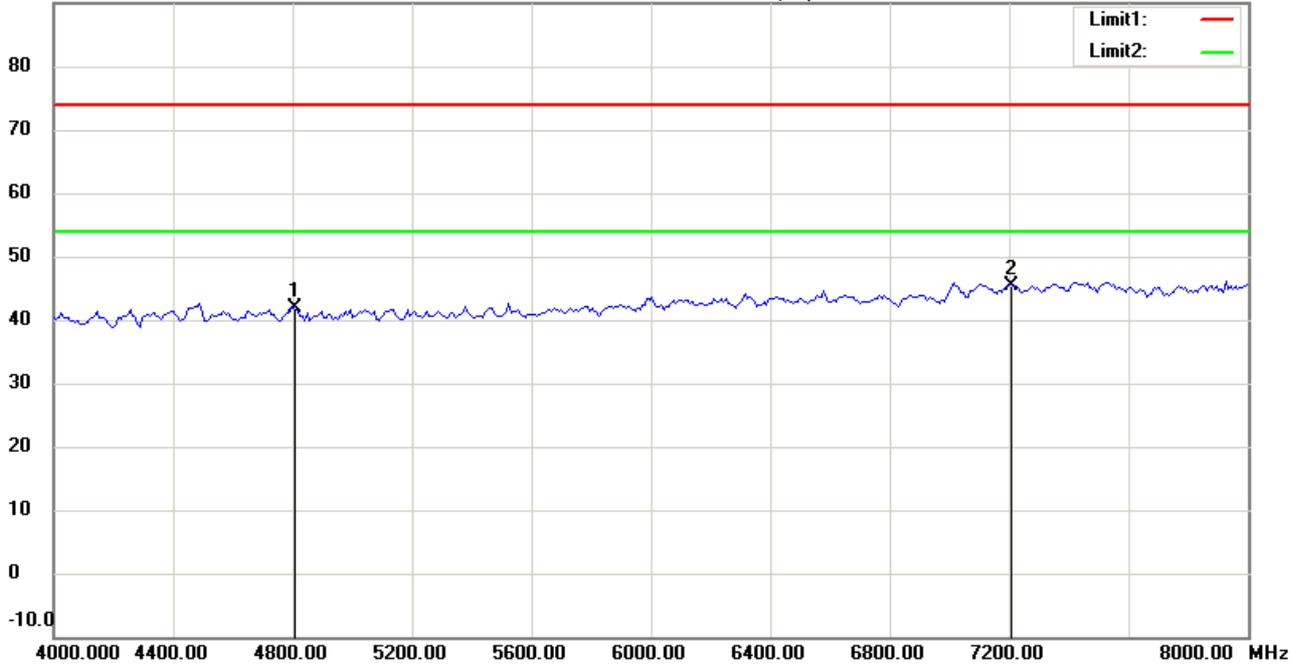

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.51	peak	-0.59	41.92	74.00	100	80	-32.08	
*	7206.000	41.19	peak	4.26	45.45	74.00	100	215	-28.55	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:04:36

Humidity:60 %

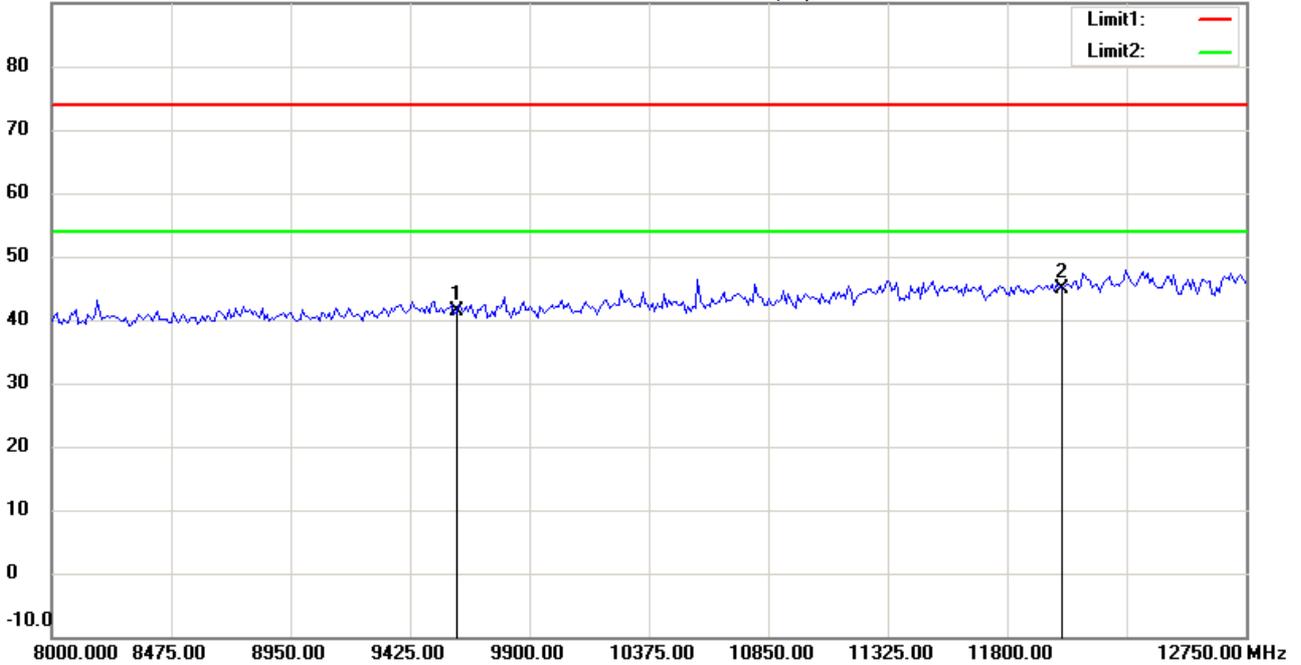

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.72	peak	7.59	41.31	74.00	100	40	-32.69	
*	12010.000	32.52	peak	12.47	44.99	74.00	100	130	-29.01	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:07:49

Humidity:60 %

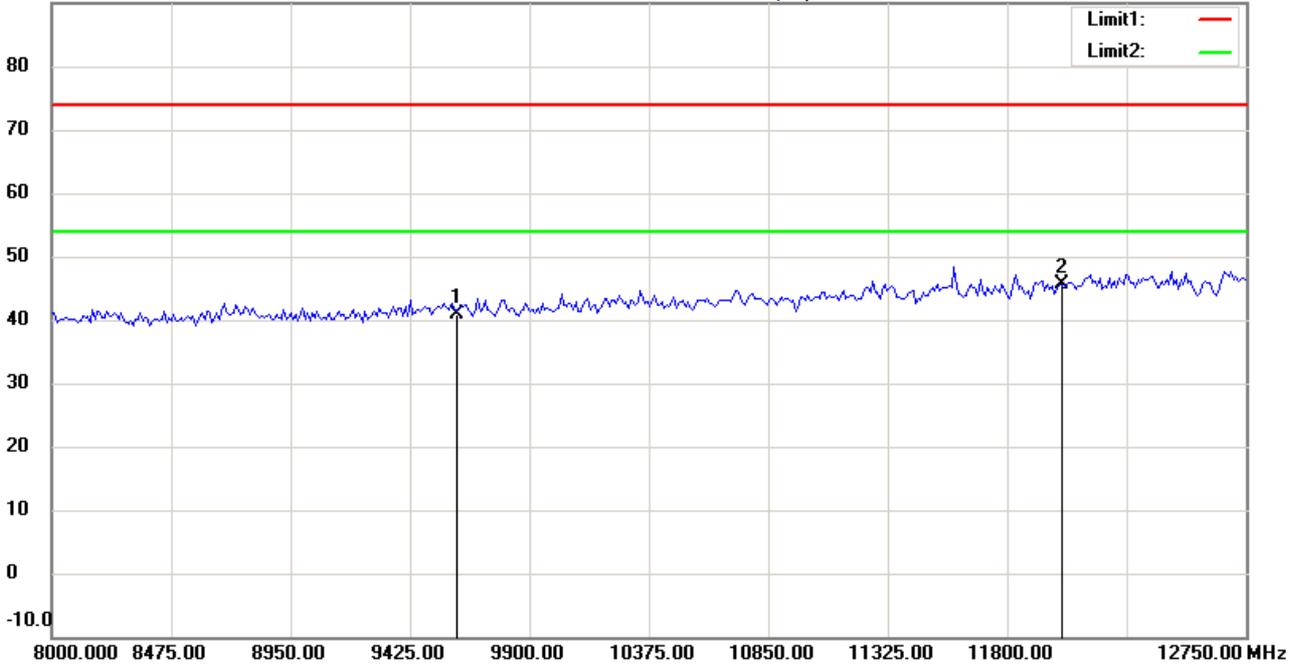

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.41	peak	7.59	41.00	74.00	100	60	-33.00	
*	12010.000	33.25	peak	12.47	45.72	74.00	100	115	-28.28	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:05:02

Humidity:60 %

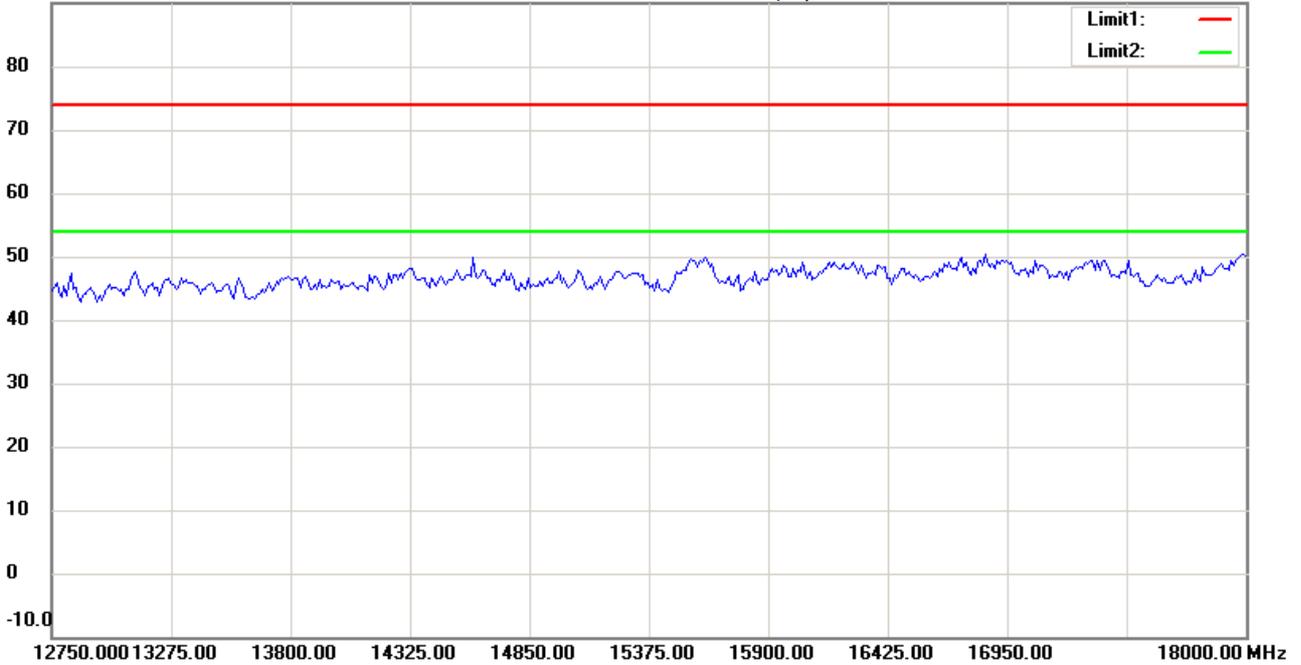

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:08:41

Humidity:60 %

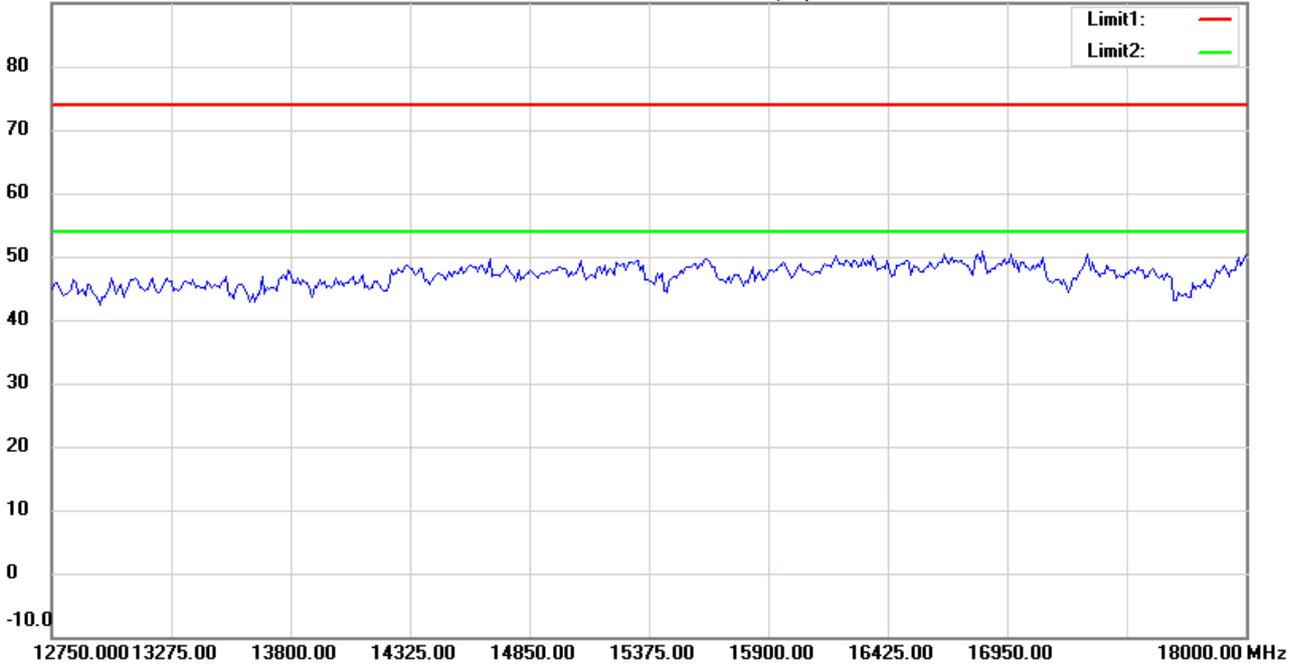

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:05:30

Humidity:60 %

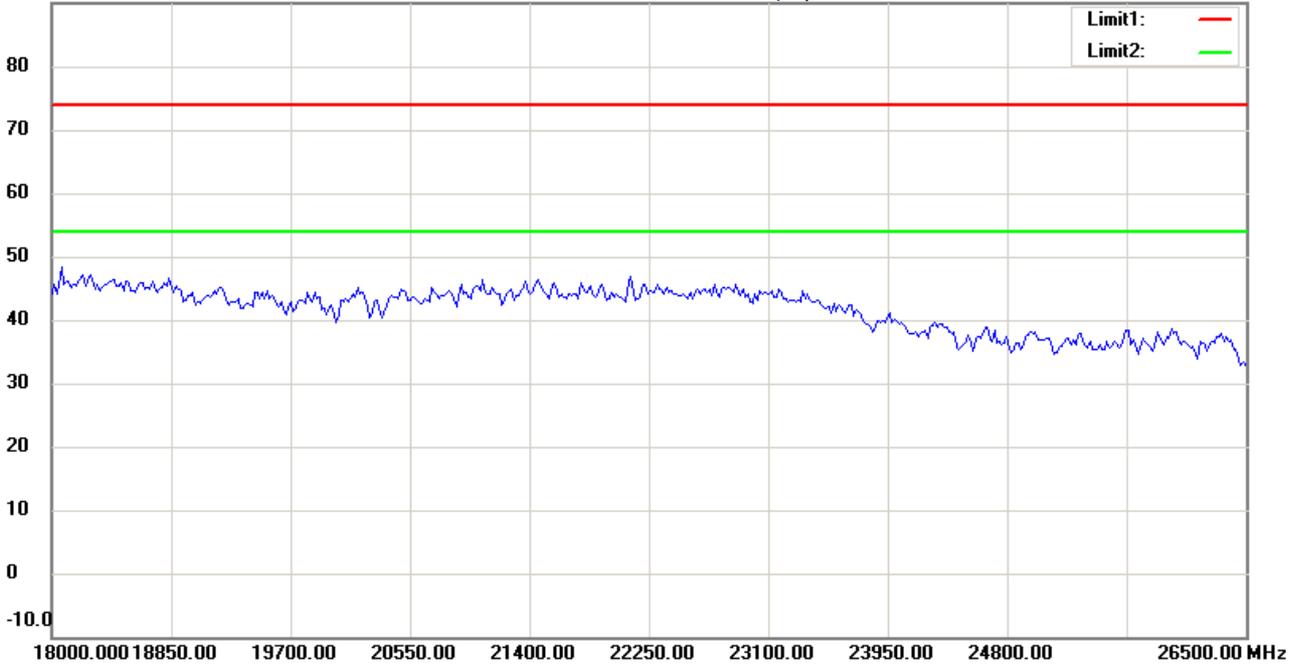

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:09:11

Humidity:60 %

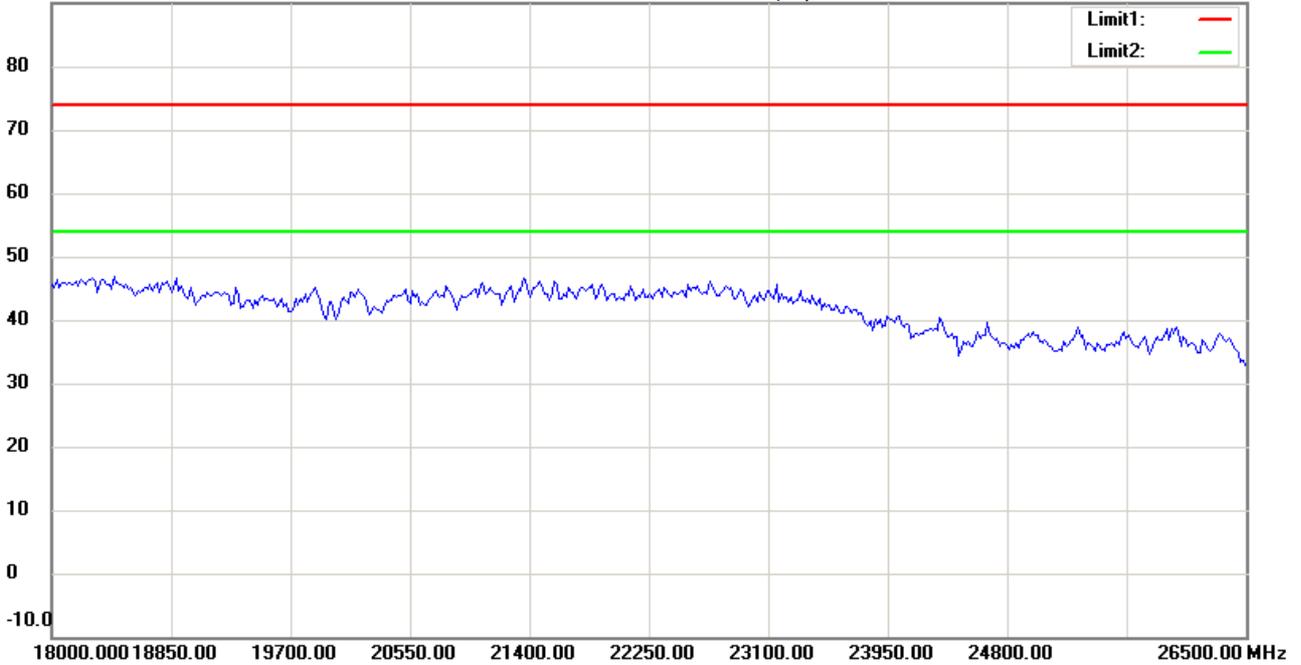

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:14:20

Humidity:60 %

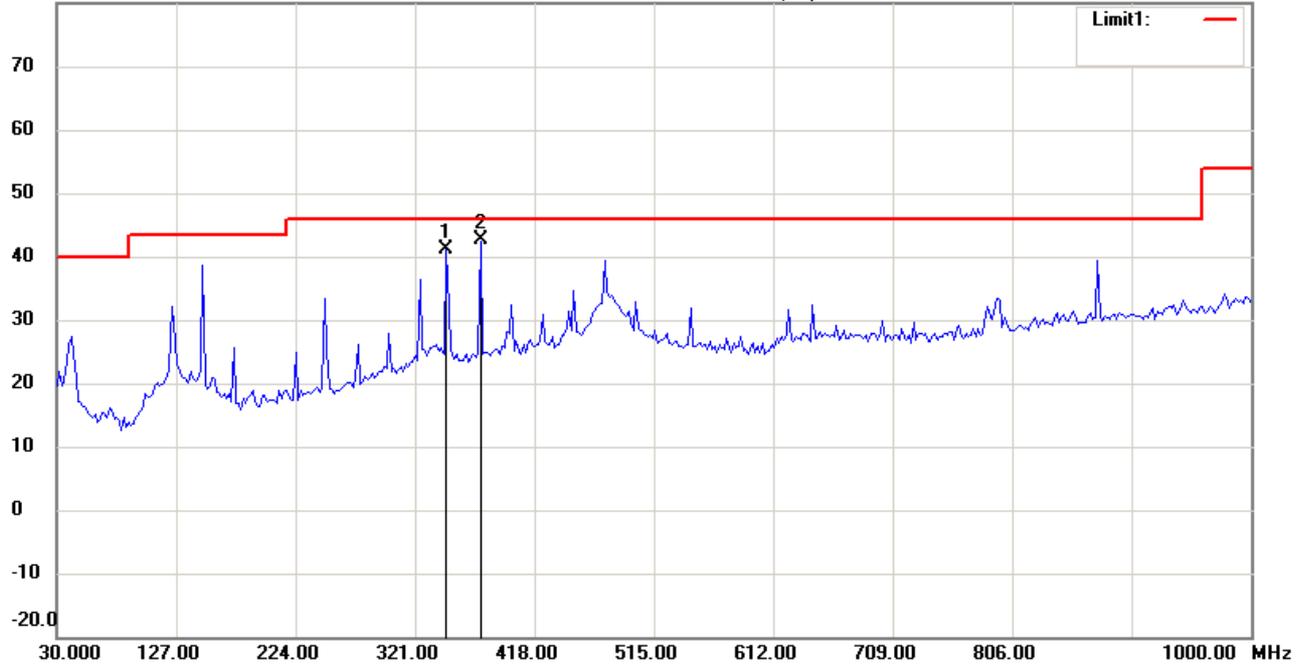

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	45.70	peak	-4.63	41.07	46.00	100	100	-4.93	
*	374.0681	46.68	peak	-4.14	42.54	46.00	100	175	-3.46	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:15:09

Humidity:60 %

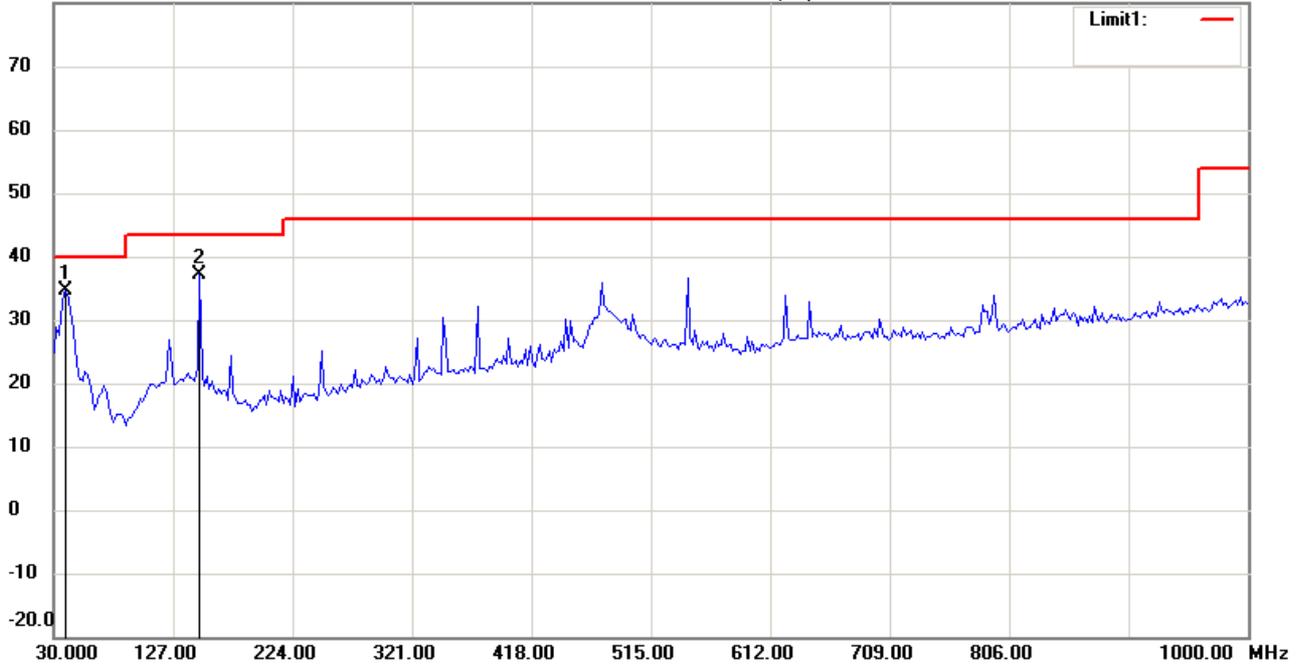

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.82	peak	-8.15	34.67	40.00	100	80	-5.33	
	148.5772	44.60	peak	-7.51	37.09	43.50	100	225	-6.41	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:14:30

Humidity:60 %

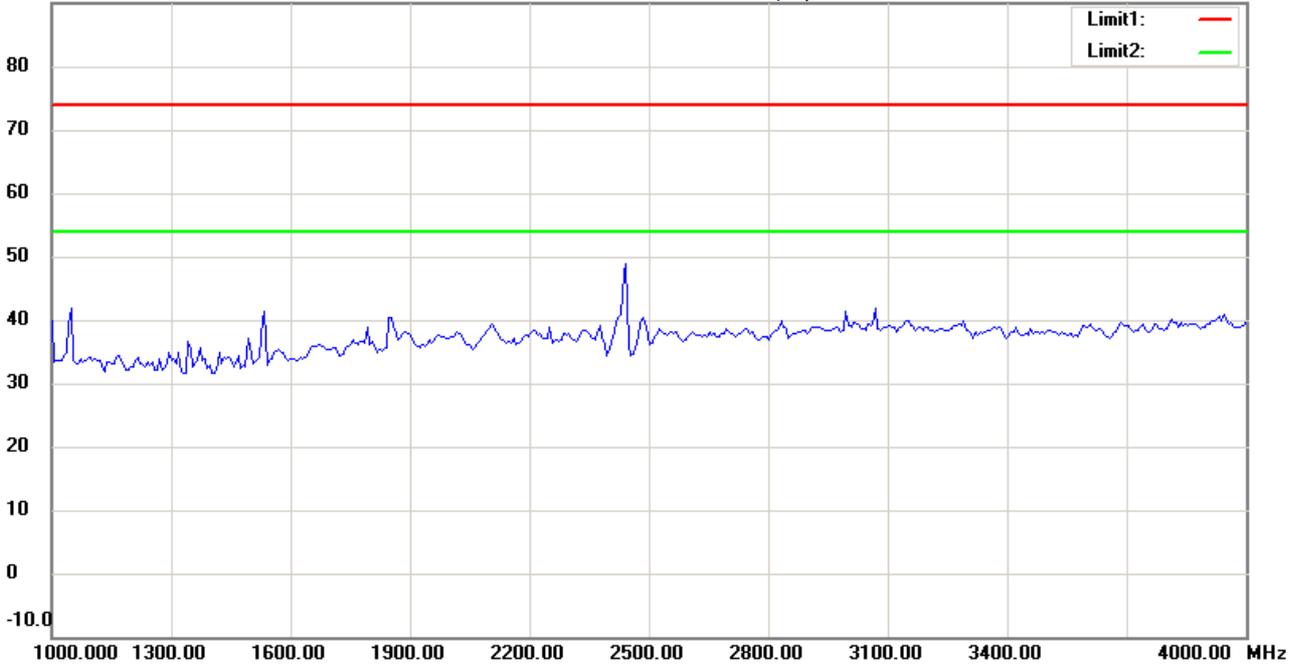

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:18:09

Humidity:60 %

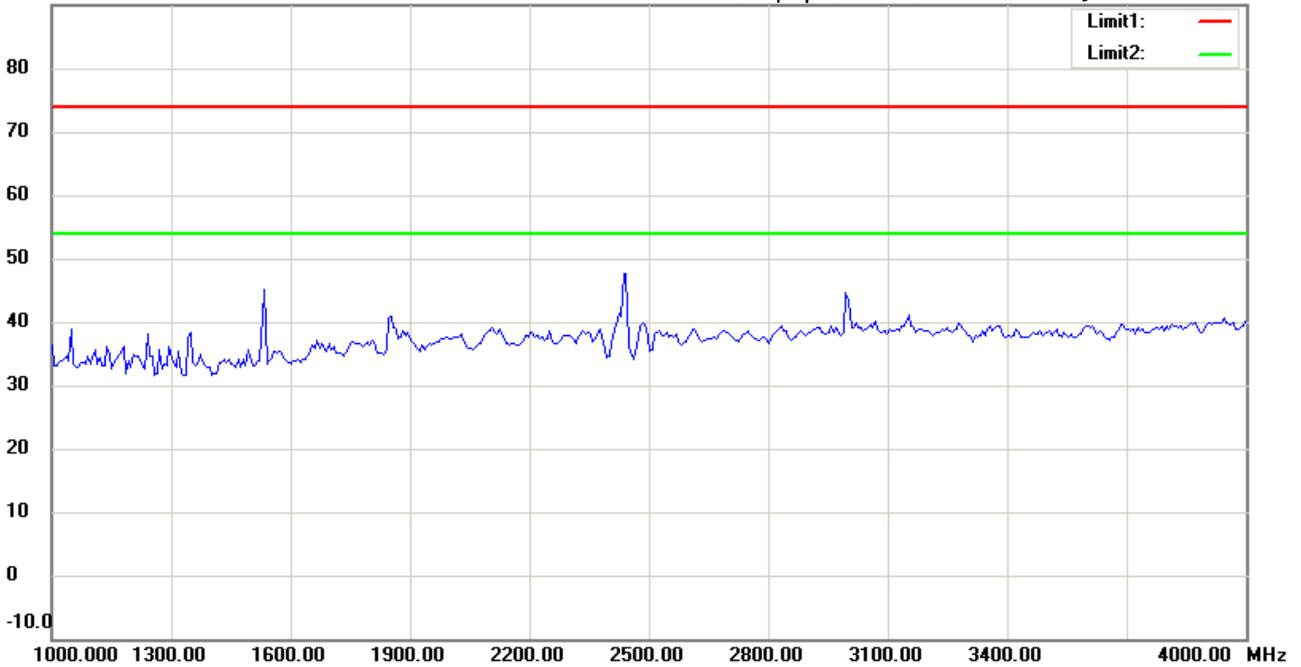

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:15:24

Humidity:60 %

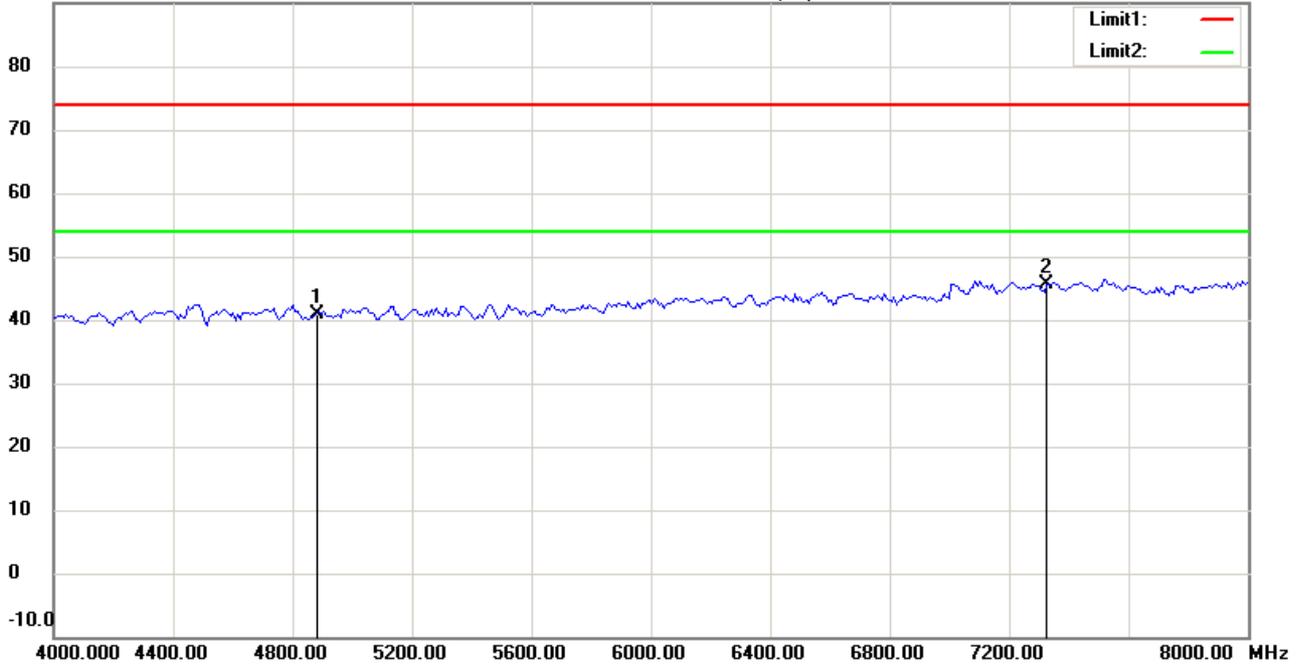

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	41.48	peak	-0.49	40.99	74.00	100	265	-33.01	
*	7320.000	41.10	peak	4.49	45.59	74.00	100	40	-28.41	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:18:47

Humidity:60 %

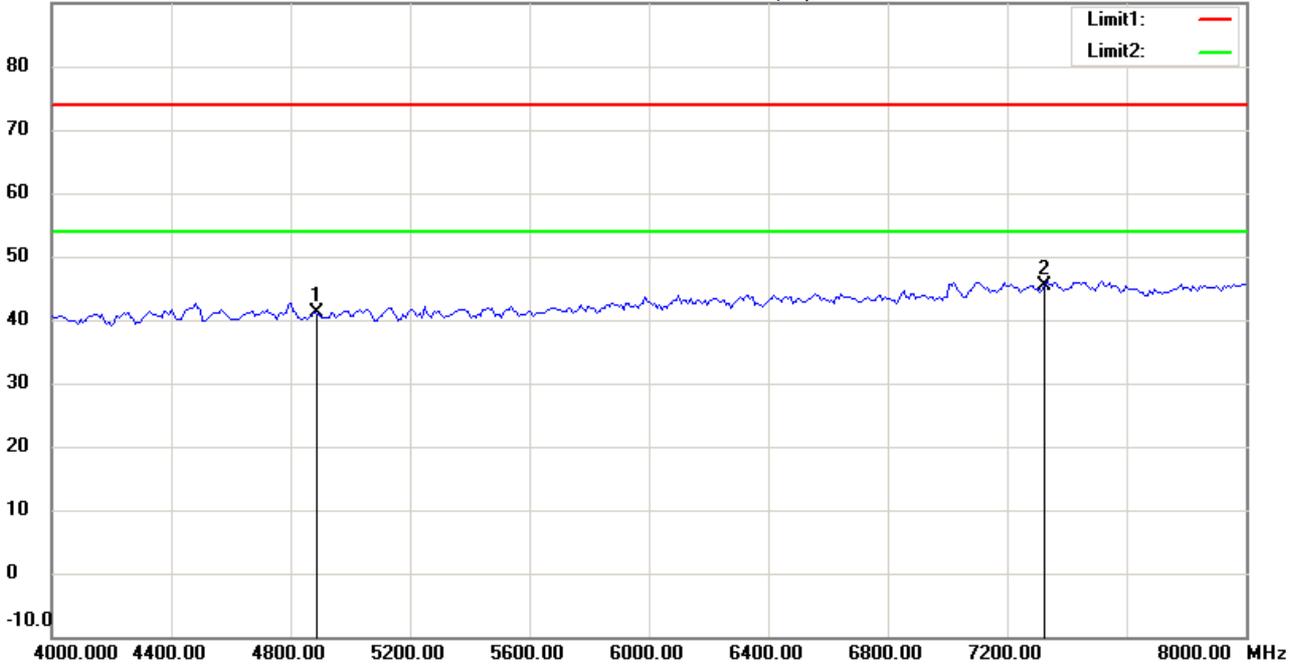

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4882.000	41.51	peak	-0.49	41.02	74.00	100	35	-32.98	
*	7323.000	40.84	peak	4.51	45.35	74.00	100	100	-28.65	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:16:00

Humidity:60 %

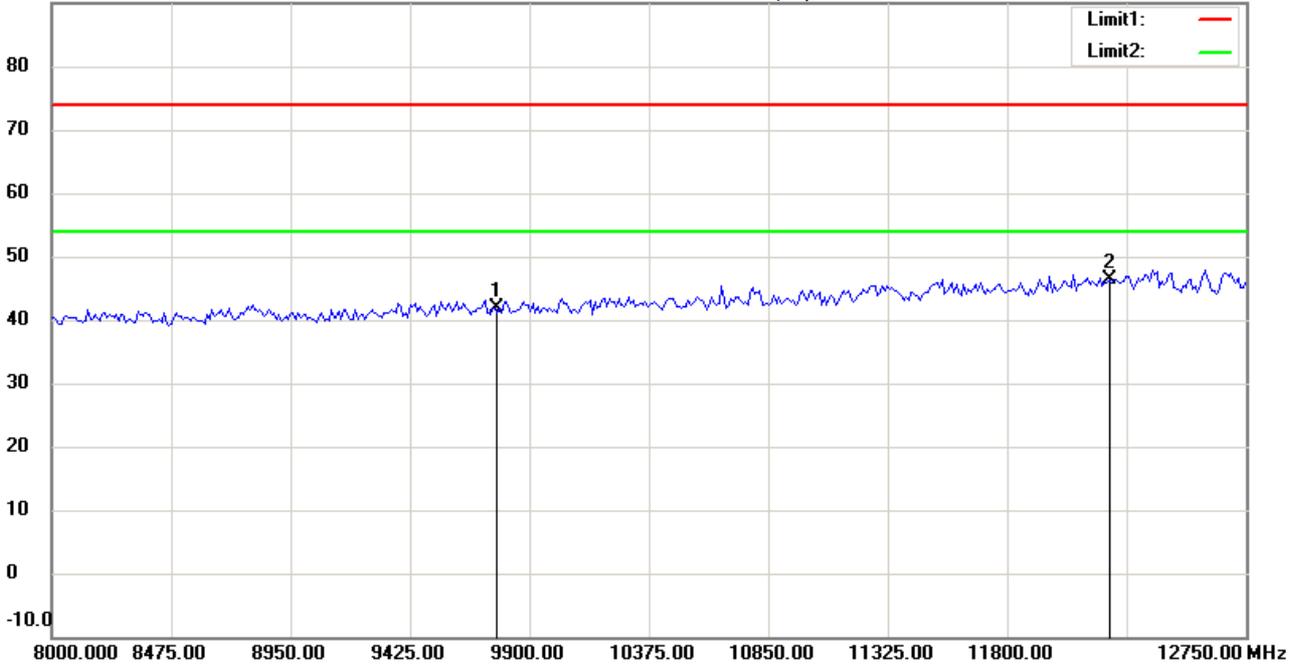

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	34.29	peak	7.51	41.80	74.00	100	220	-32.20	
*	12205.000	32.46	peak	13.80	46.26	74.00	100	300	-27.74	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:19:28

Humidity:60 %

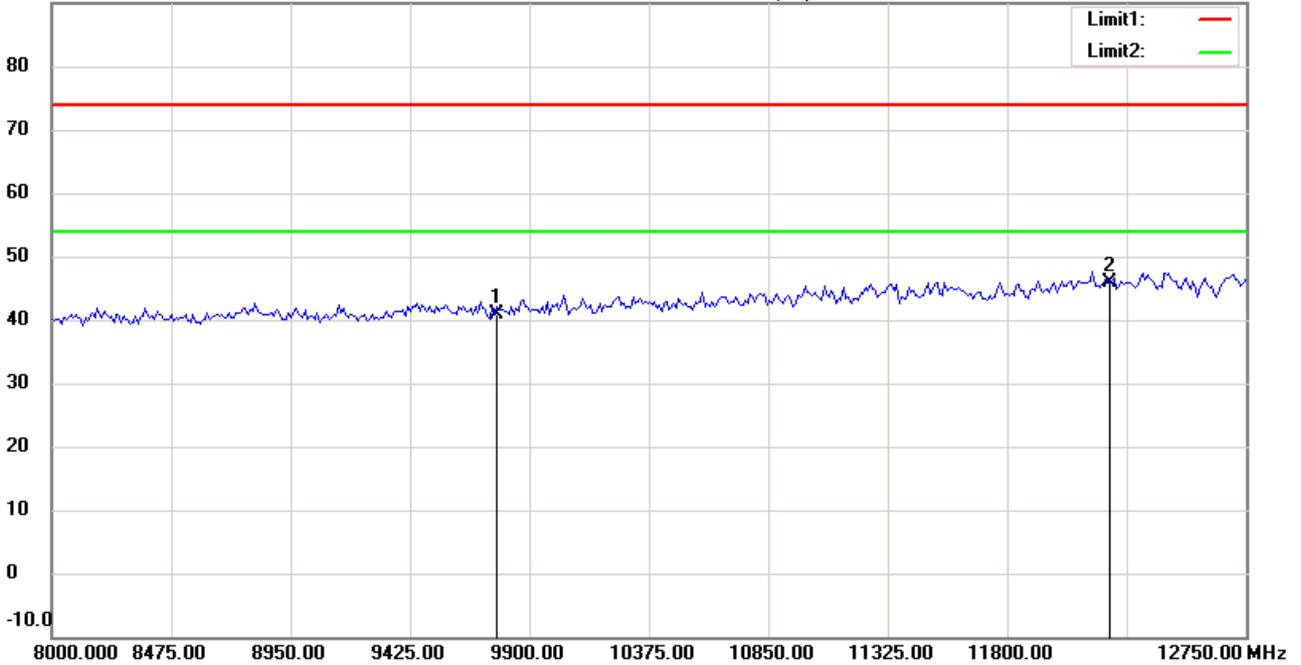

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	33.34	peak	7.51	40.85	74.00	100	150	-33.15	
*	12205.000	32.02	peak	13.80	45.82	74.00	100	235	-28.18	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:16:49

Humidity:60 %

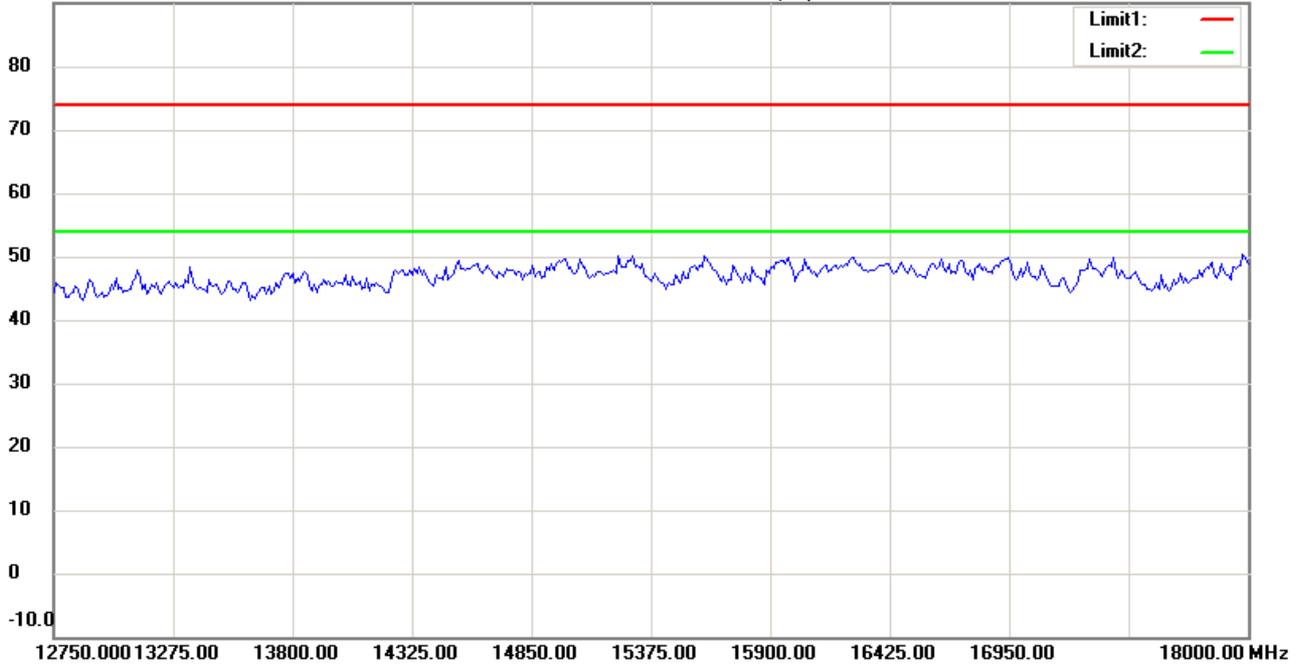

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2441MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:19:59

Humidity:60 %

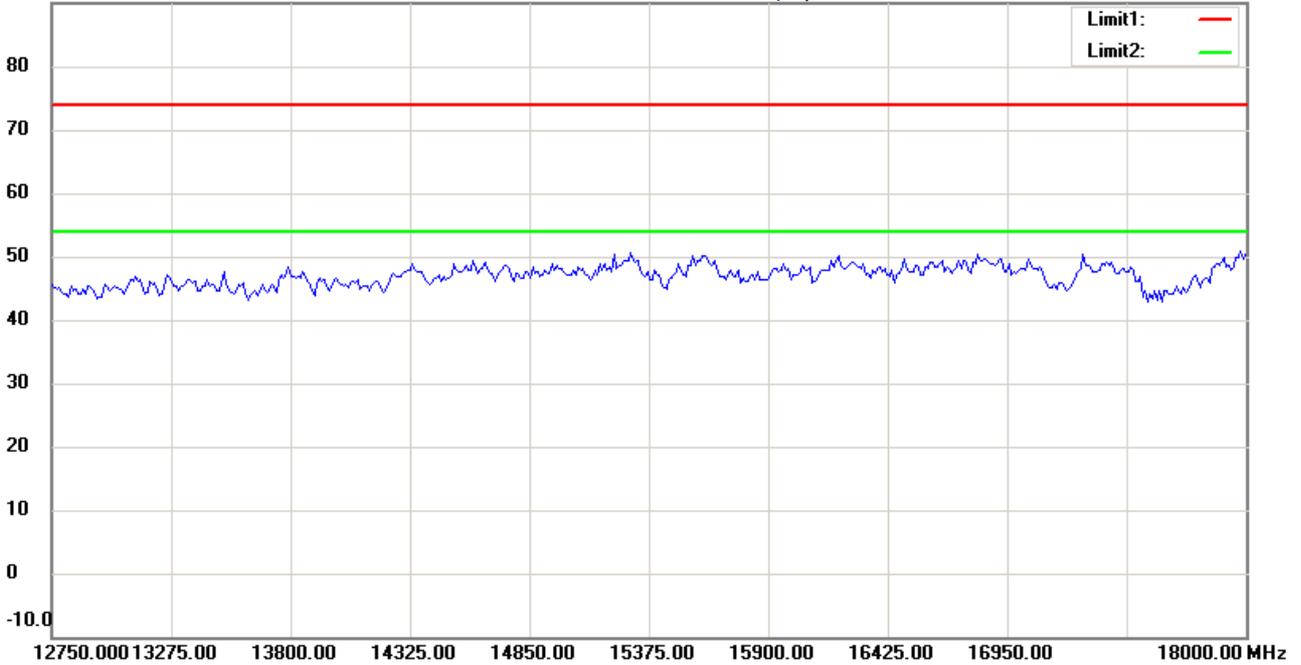

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:17:28

Humidity:60 %

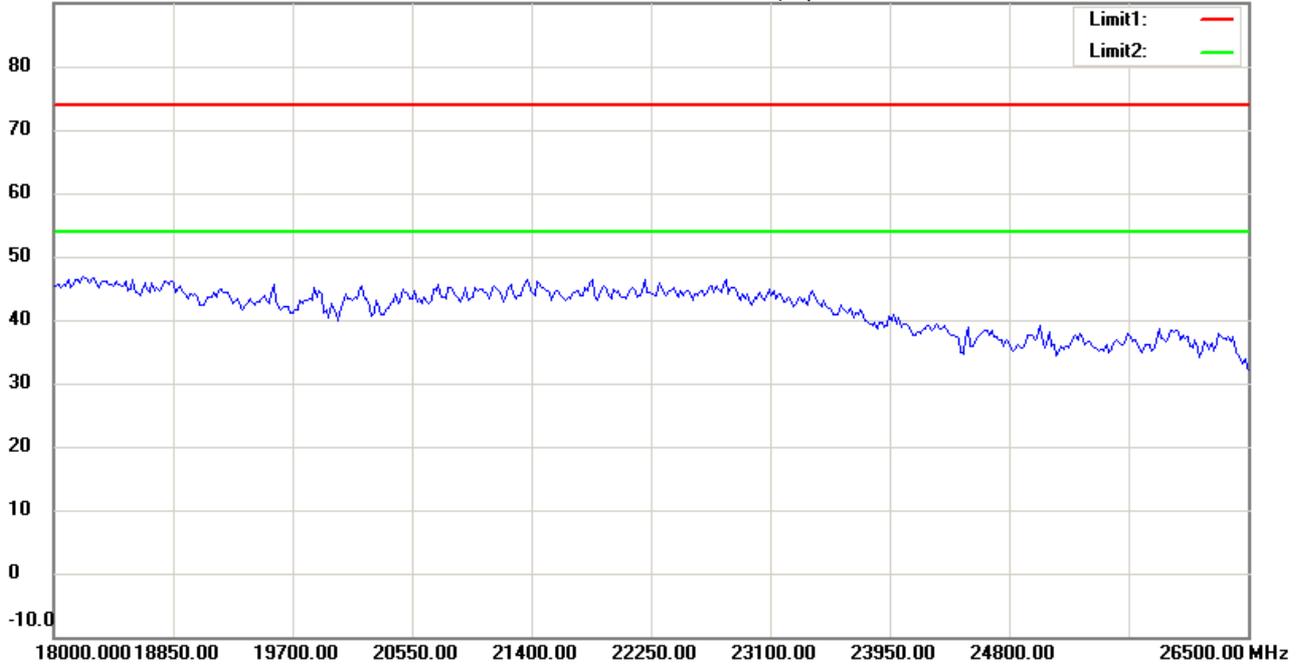

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:20:30

Humidity:60 %

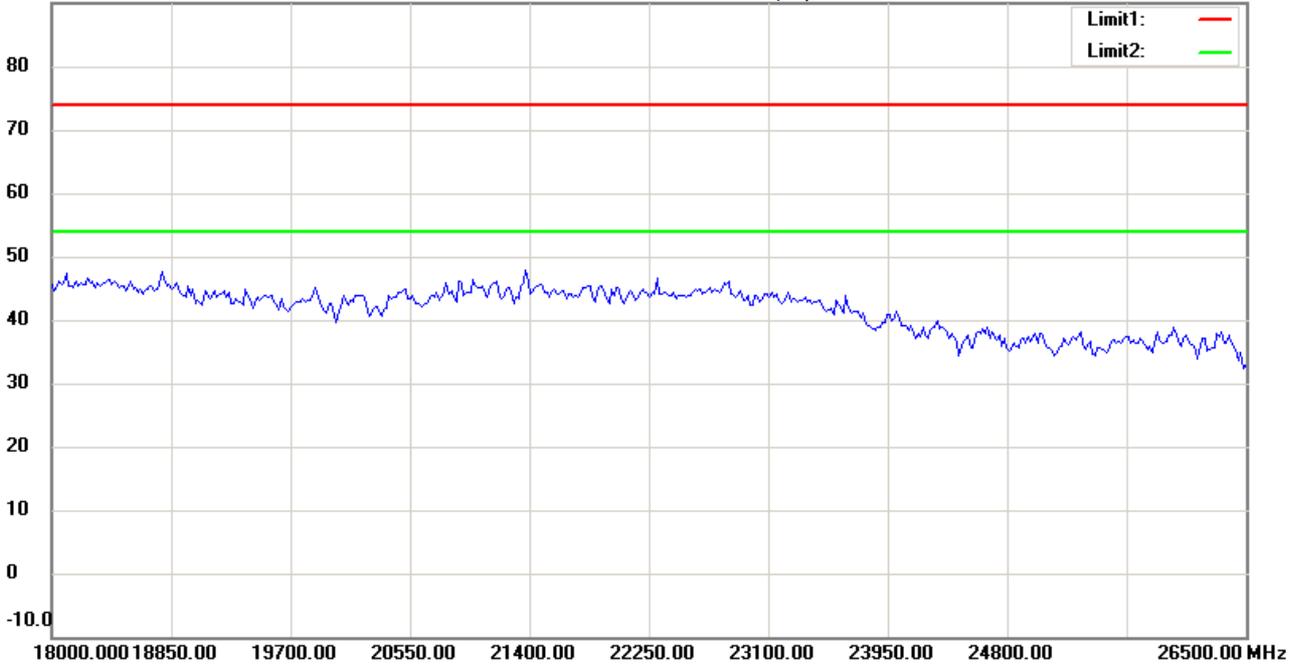

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2441MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:16:10

Humidity:60 %

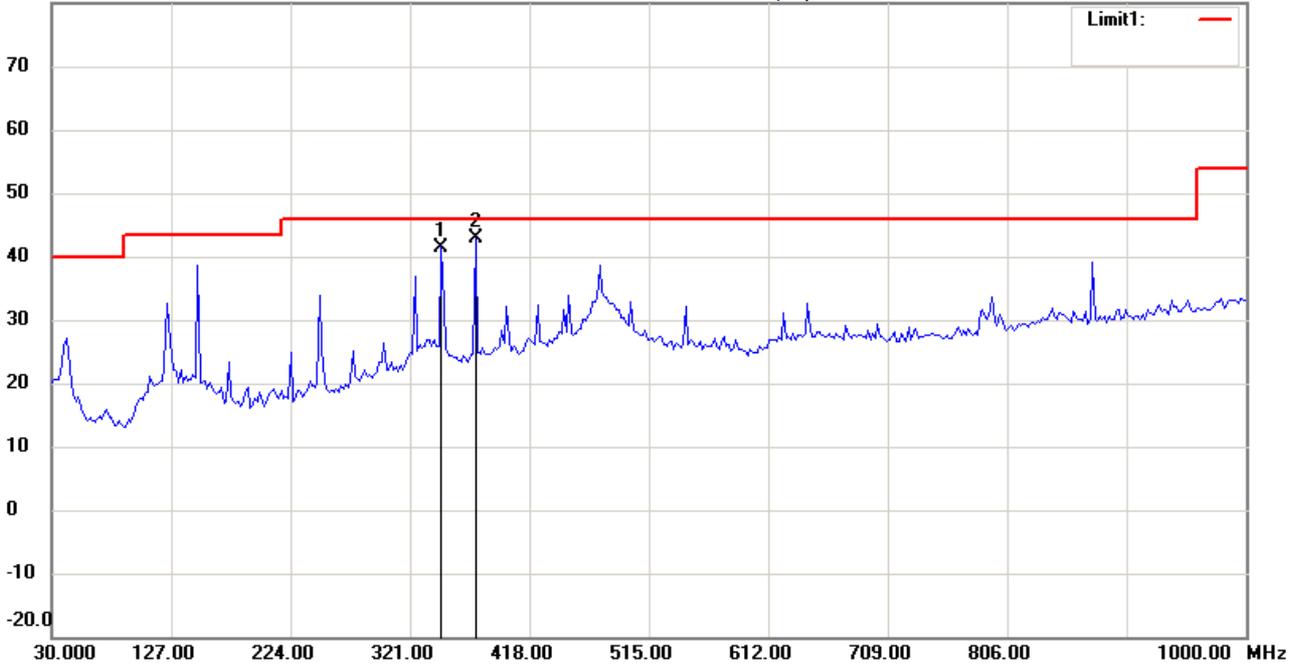

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	46.11	peak	-4.63	41.48	46.00	100	35	-4.52	
*	374.0681	47.08	peak	-4.14	42.94	46.00	100	120	-3.06	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/18

Temperature:24 °C

80.0 dBuV/m

Time: 下午 08:16:53

Humidity:60 %

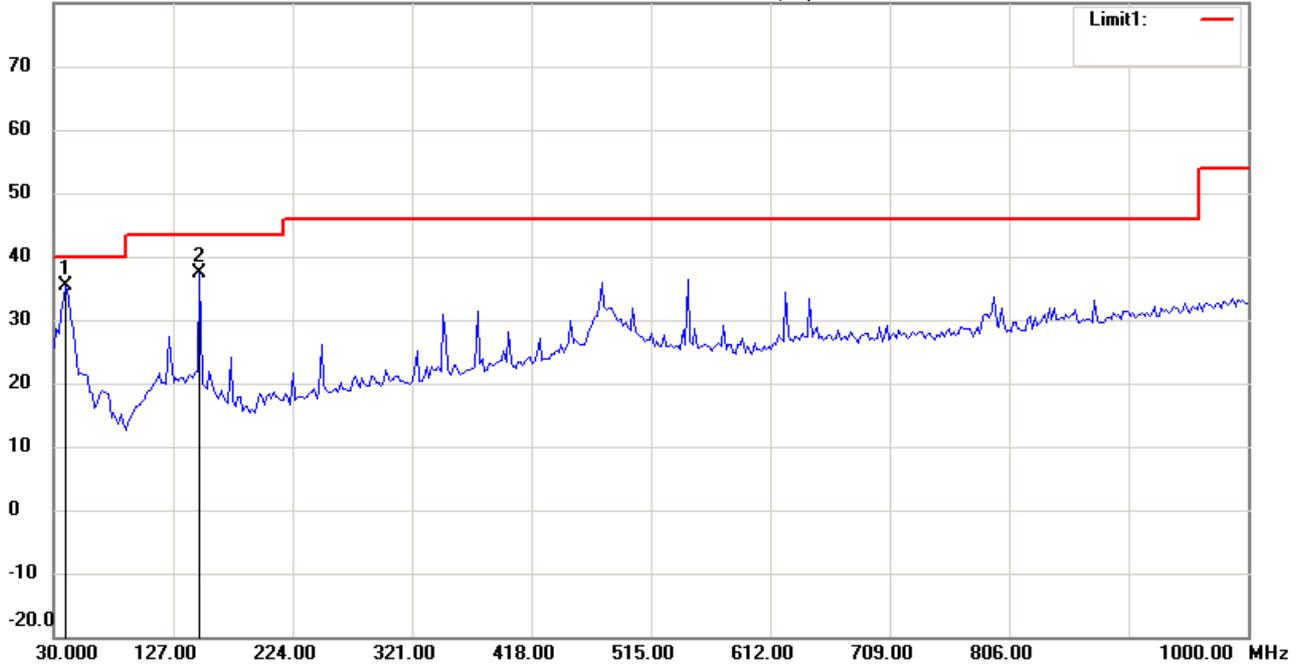

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	43.65	peak	-8.15	35.50	40.00	100	75	-4.50	
	148.5772	44.97	peak	-7.51	37.46	43.50	100	160	-6.04	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:24:20

Humidity:60 %

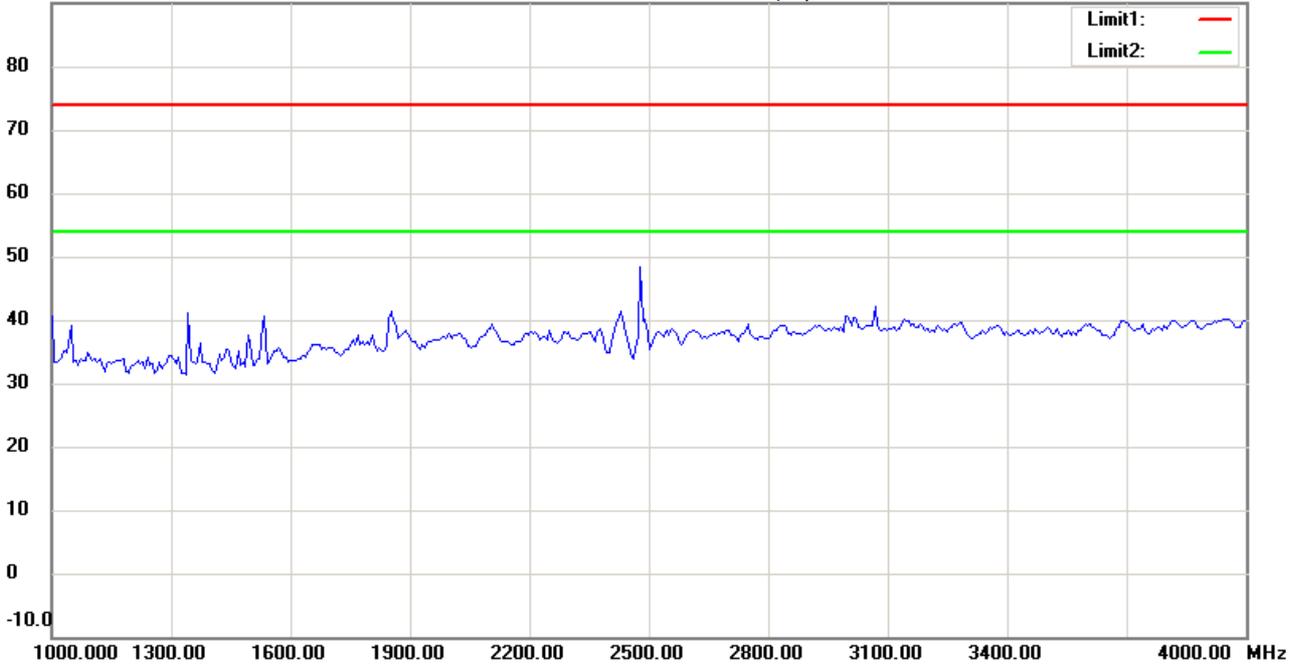

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:28:21

Humidity:60 %

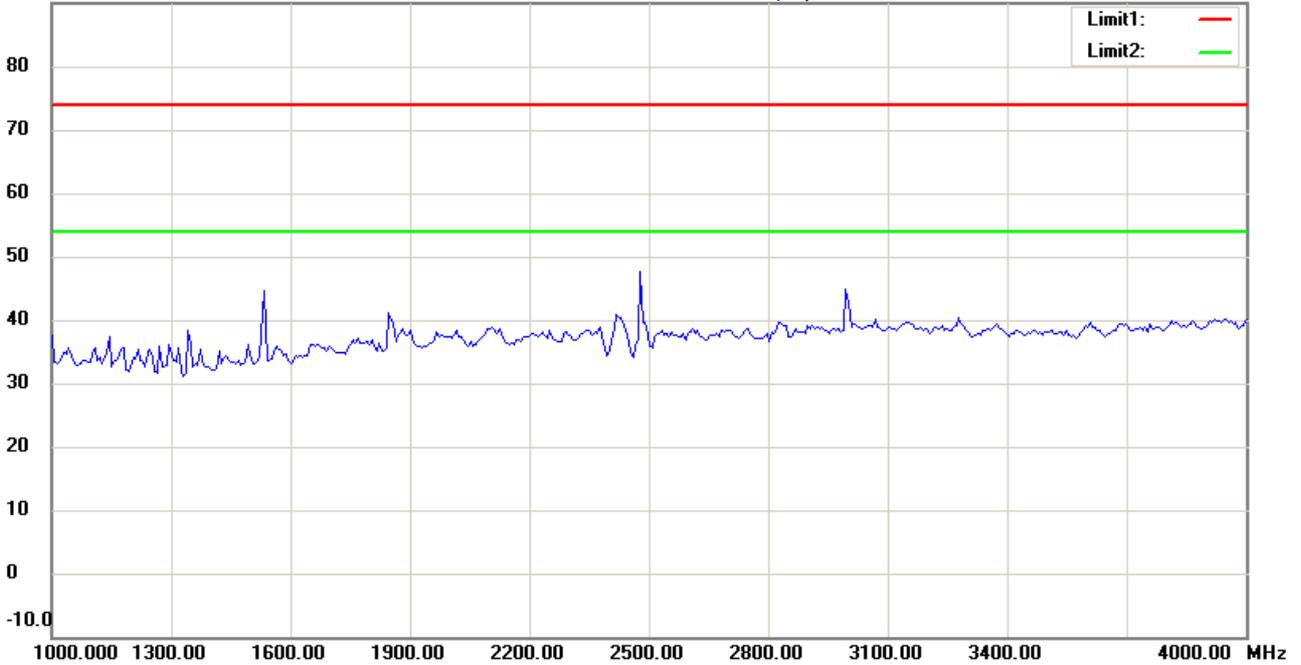

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:25:05

Humidity:60 %

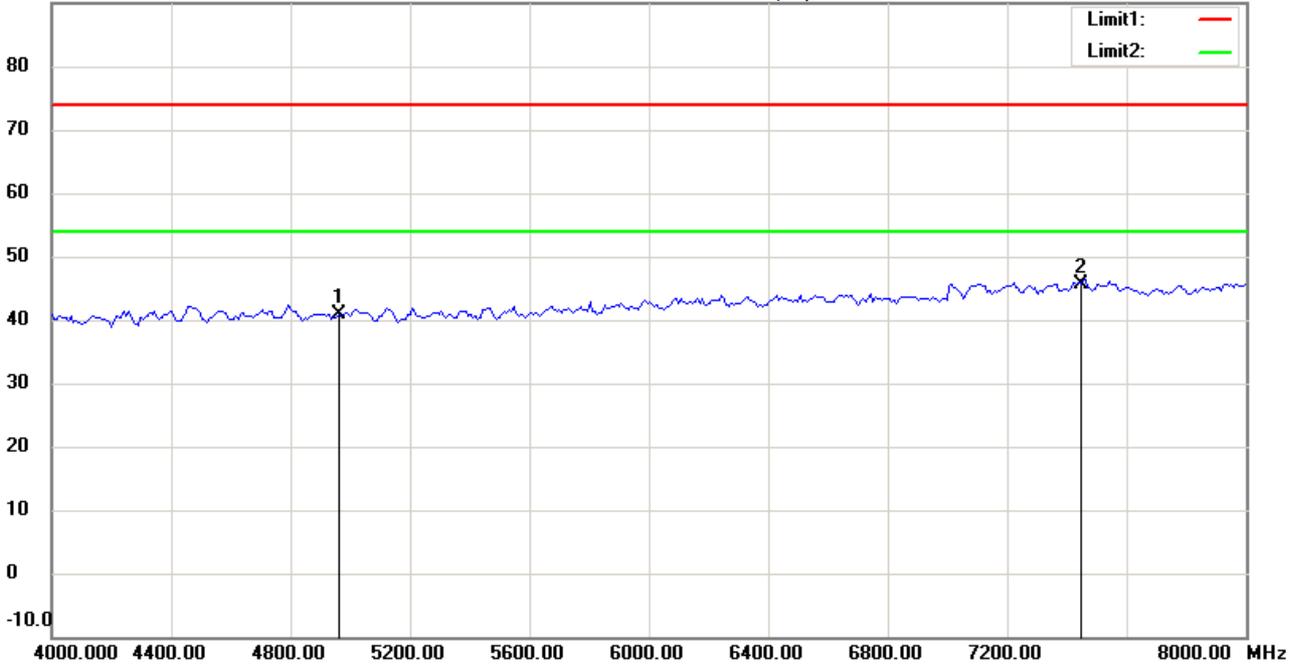

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	41.10	peak	-0.14	40.96	74.00	100	95	-33.04	
*	7440.000	40.85	peak	4.89	45.74	74.00	100	150	-28.26	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:29:11

Humidity:60 %

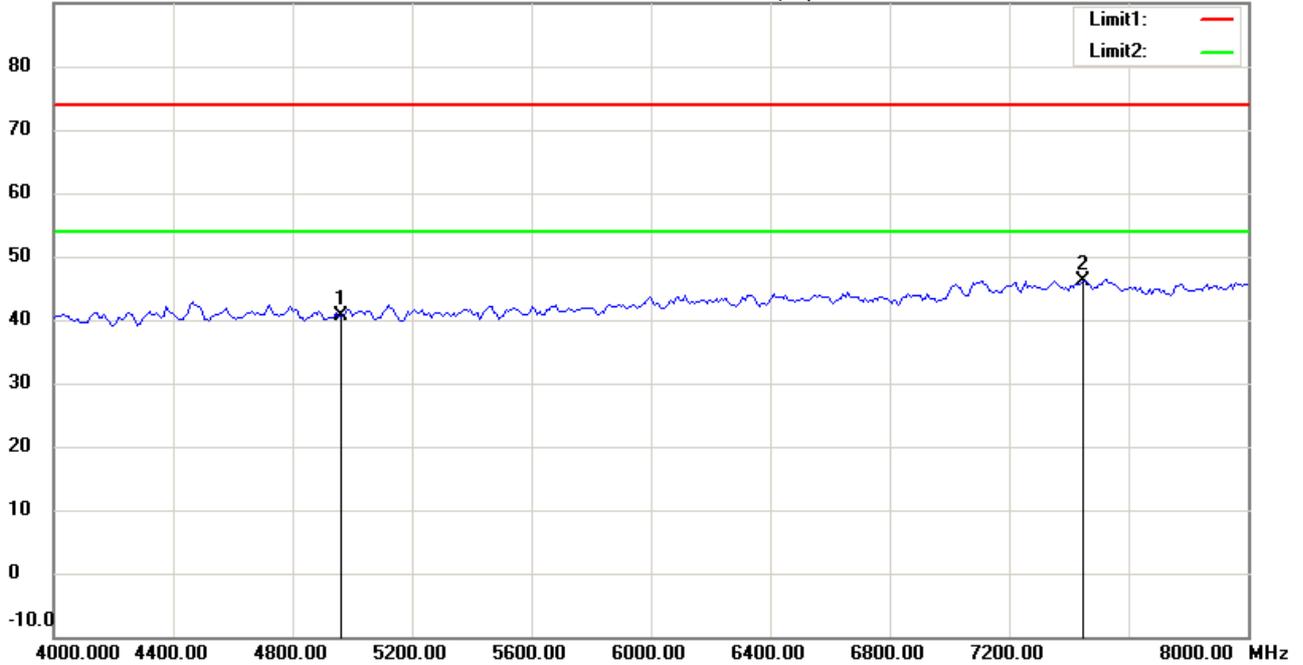

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	40.86	peak	-0.14	40.72	74.00	100	25	-33.28	
*	7440.000	41.34	peak	4.89	46.23	74.00	100	140	-27.77	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:25:58

Humidity:60 %

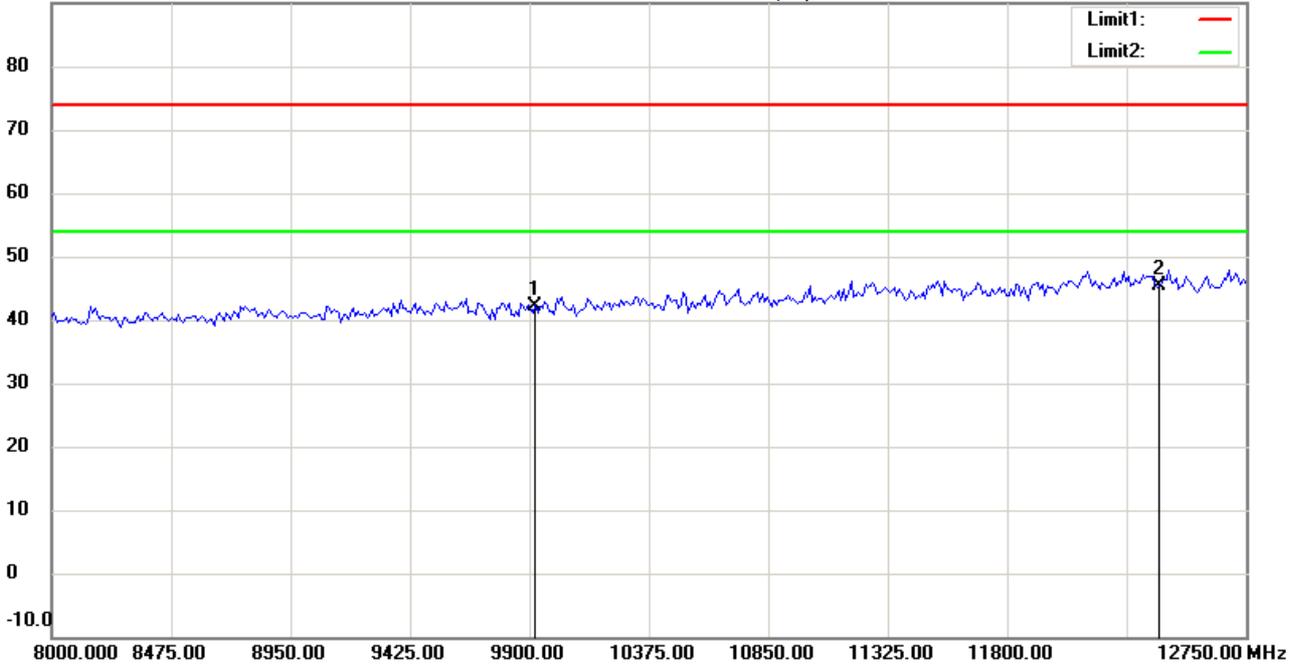

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.42	peak	7.83	42.25	74.00	100	170	-31.75	
*	12400.000	31.46	peak	13.99	45.45	74.00	100	315	-28.55	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:29:54

Humidity:60 %

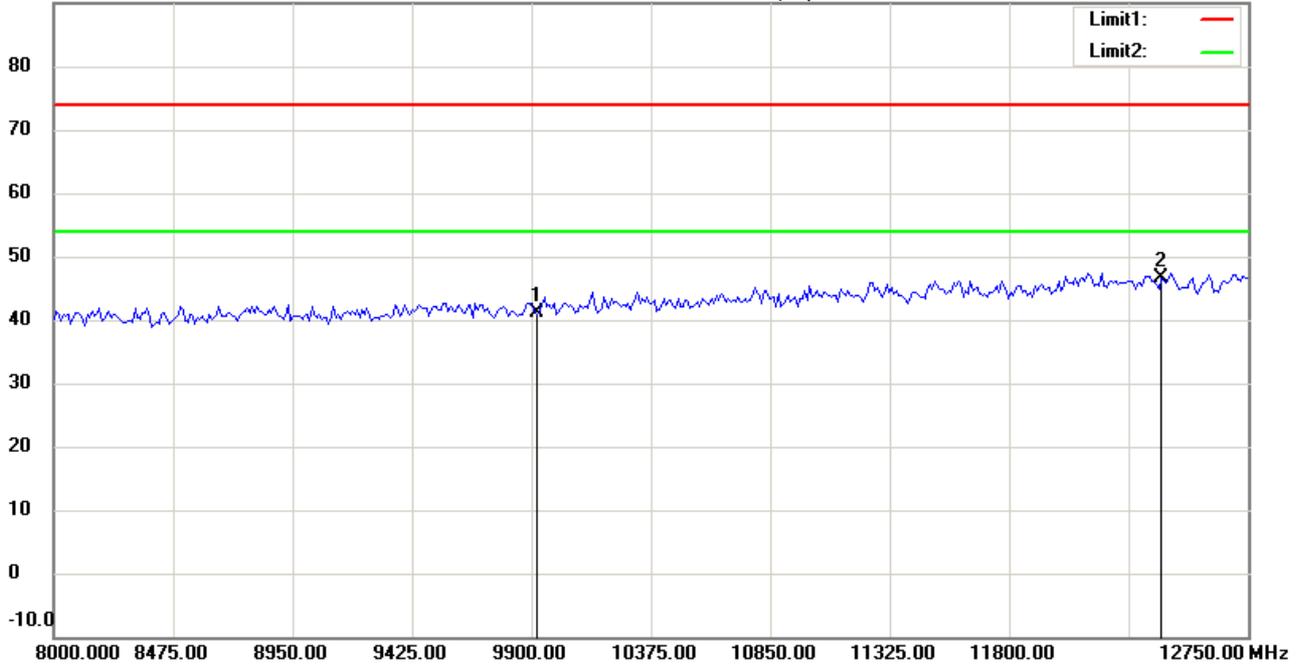

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.18	peak	7.83	41.01	74.00	100	320	-32.99	
*	12400.000	32.54	peak	13.99	46.53	74.00	100	100	-27.47	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:26:36

Humidity:60 %

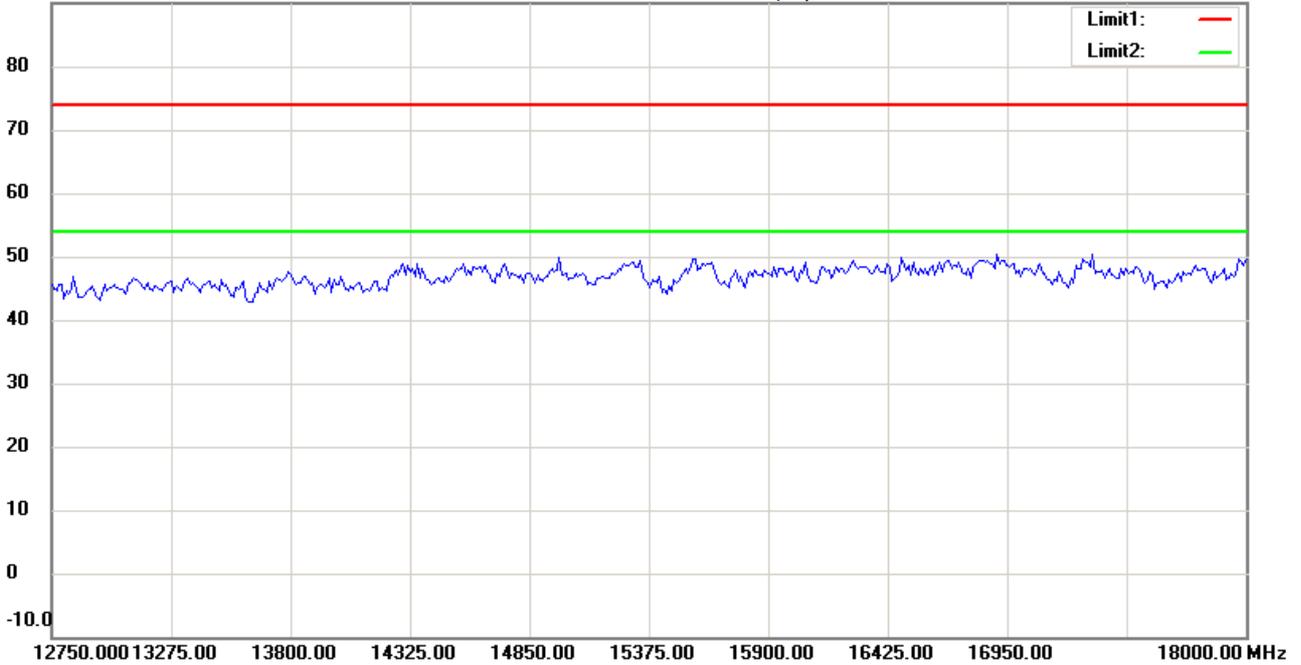

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:31:15

Humidity:60 %

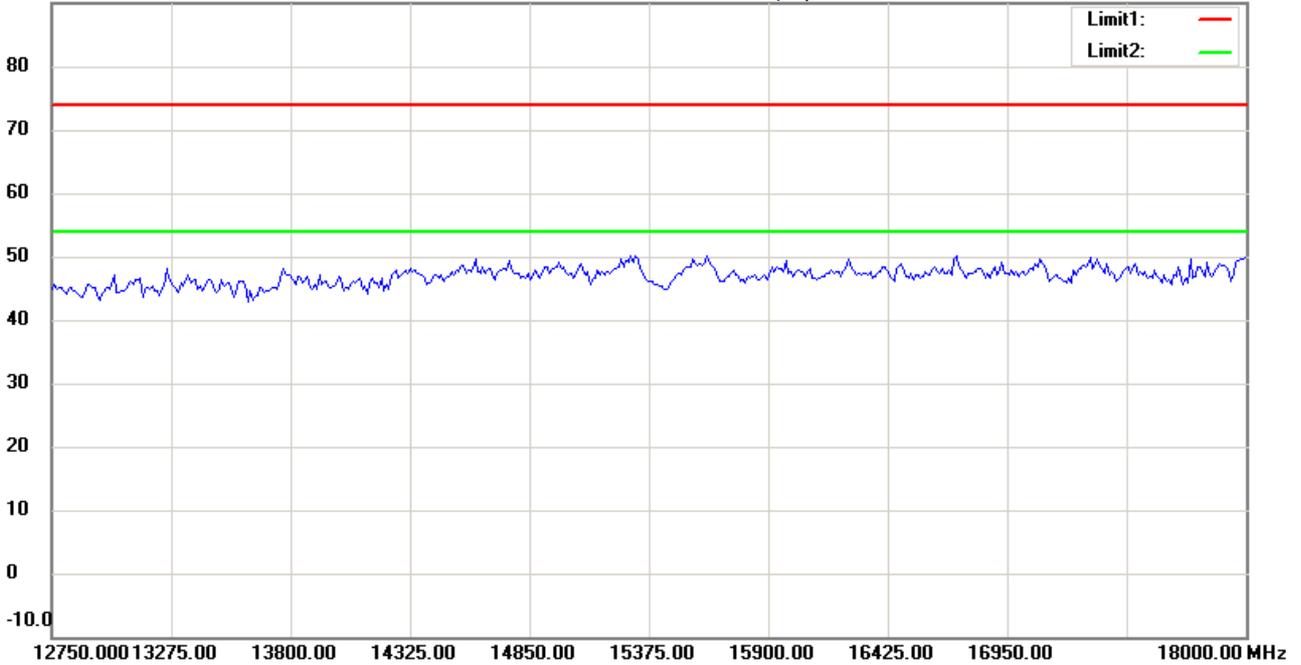

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:27:05

Humidity:60 %

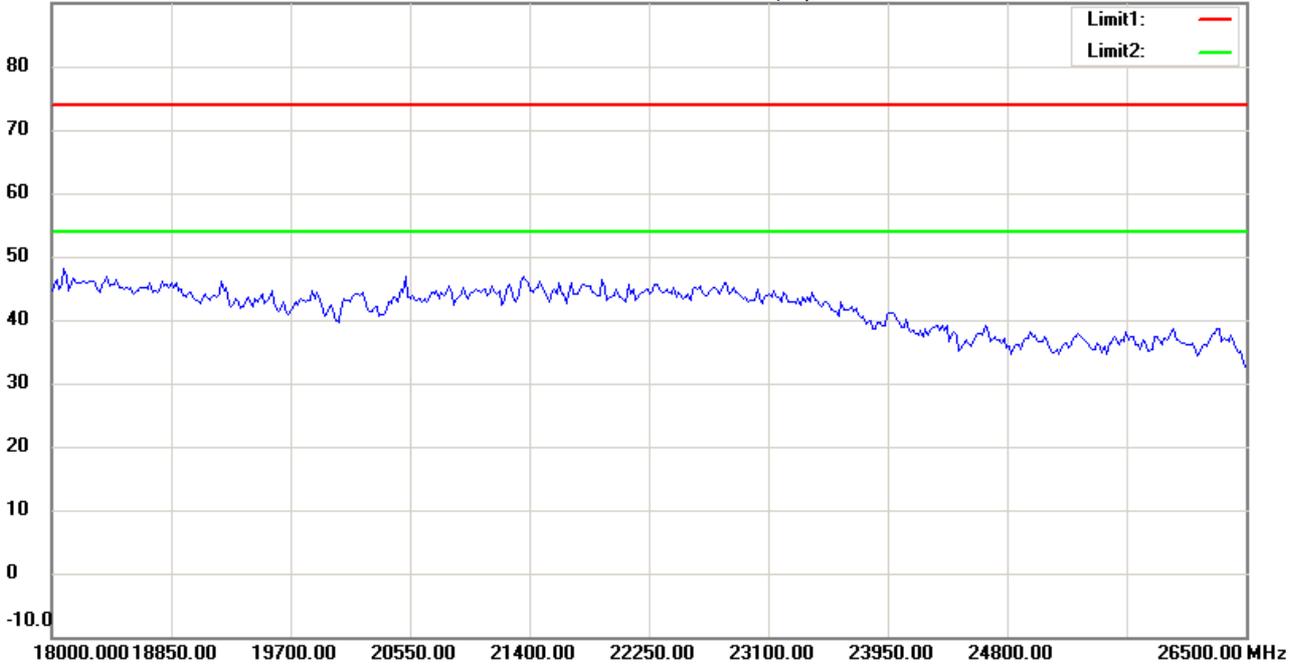

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/18

Temperature:24 °C

90.0 dBuV/m

Time: 下午 07:31:55

Humidity:60 %

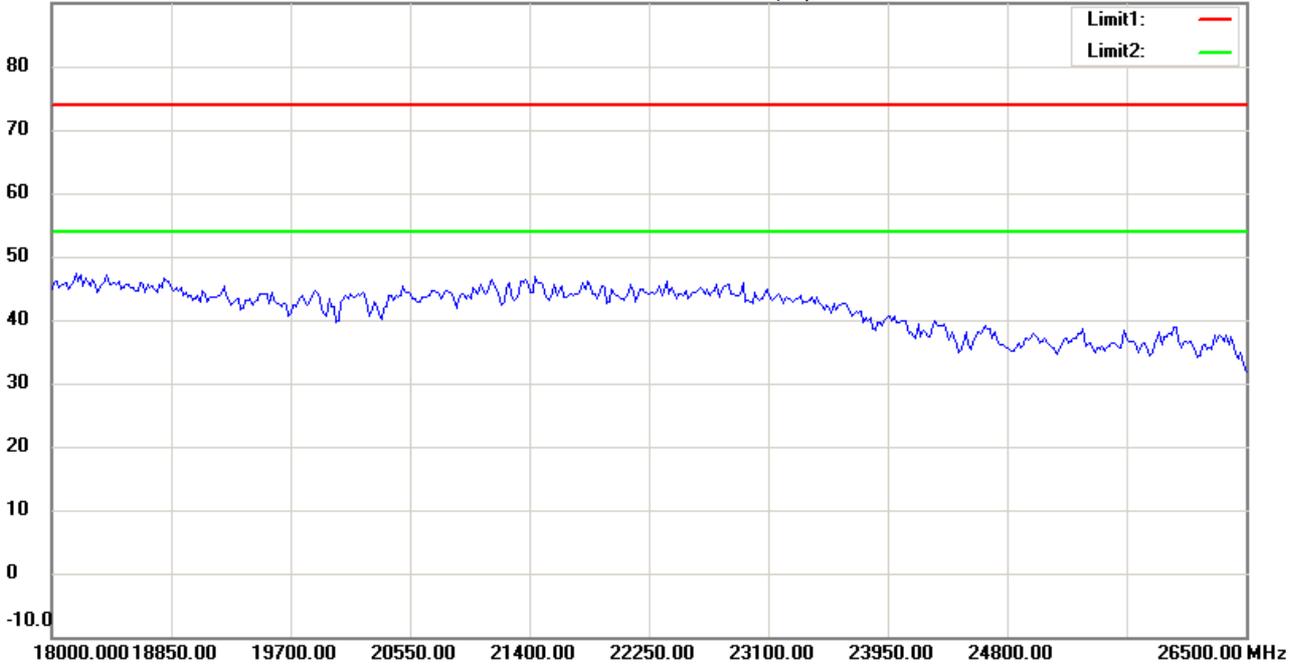

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz


Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Registration number: W6M21604-15762-P-15B

Appendix

Measurement diagrams

Spurious Emissions radiated_TX_BT4.0



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:45:32

Humidity:60 %

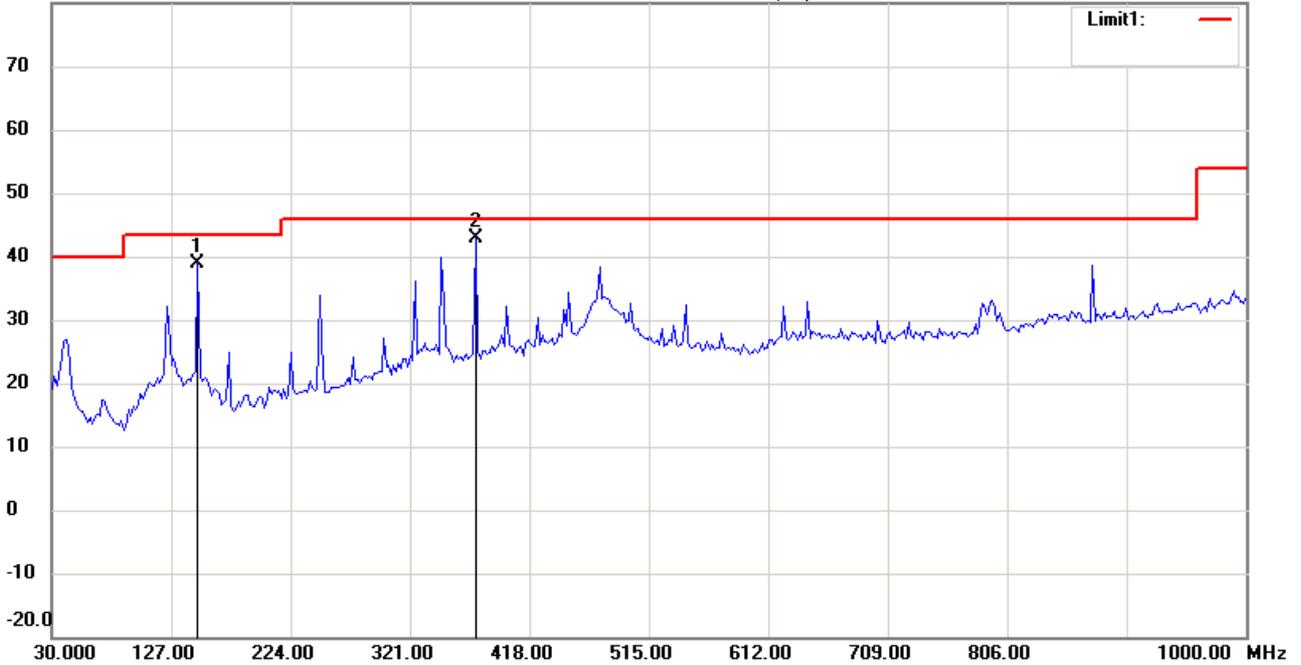

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	148.5772	46.32	peak	-7.51	38.81	43.50	100	170	-4.69	
*	374.0681	46.94	peak	-4.14	42.80	46.00	100	325	-3.20	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:46:17

Humidity:60 %

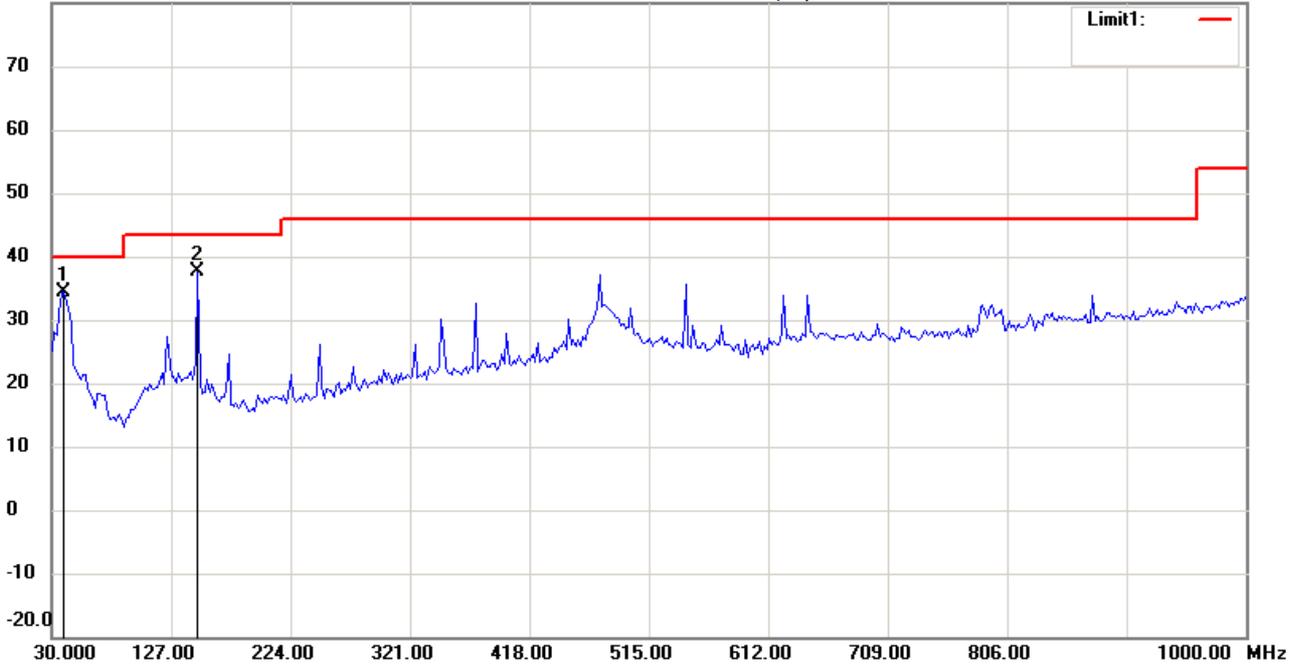

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.58	peak	-8.15	34.43	40.00	100	95	-5.57	
	148.5772	45.20	peak	-7.51	37.69	43.50	100	225	-5.81	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:08:00

Humidity:60 %

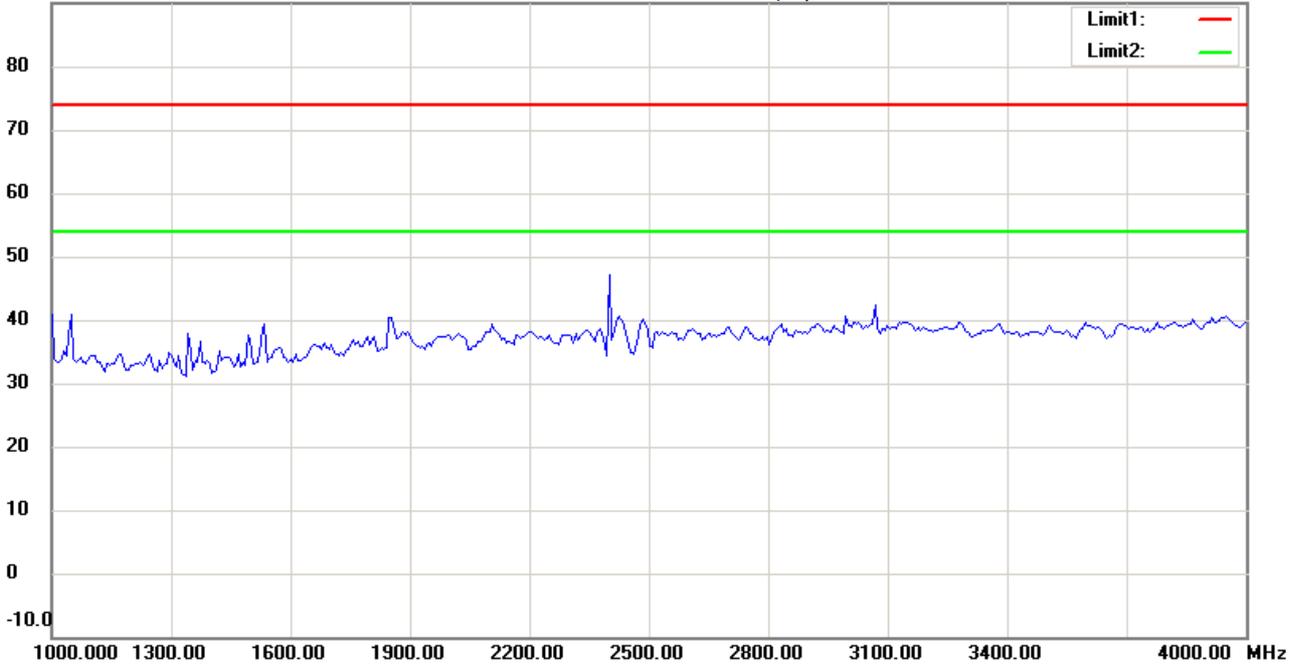

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:10:51

Humidity:60 %

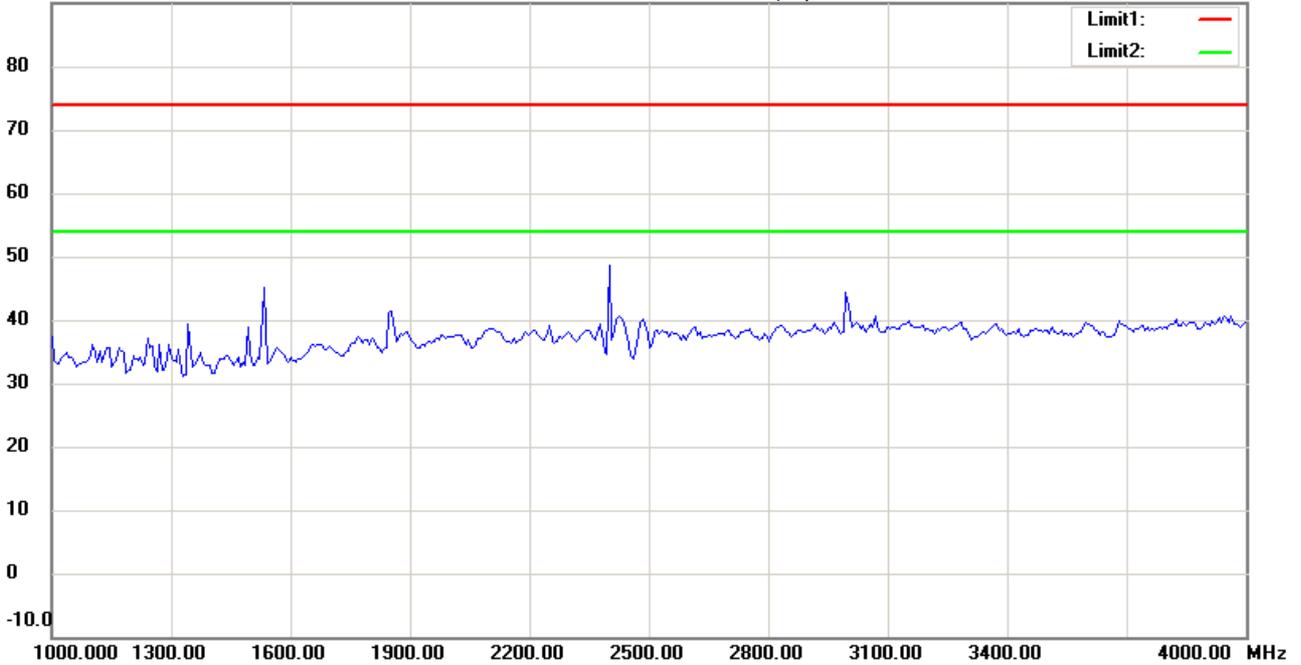

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:08:46

Humidity:60 %

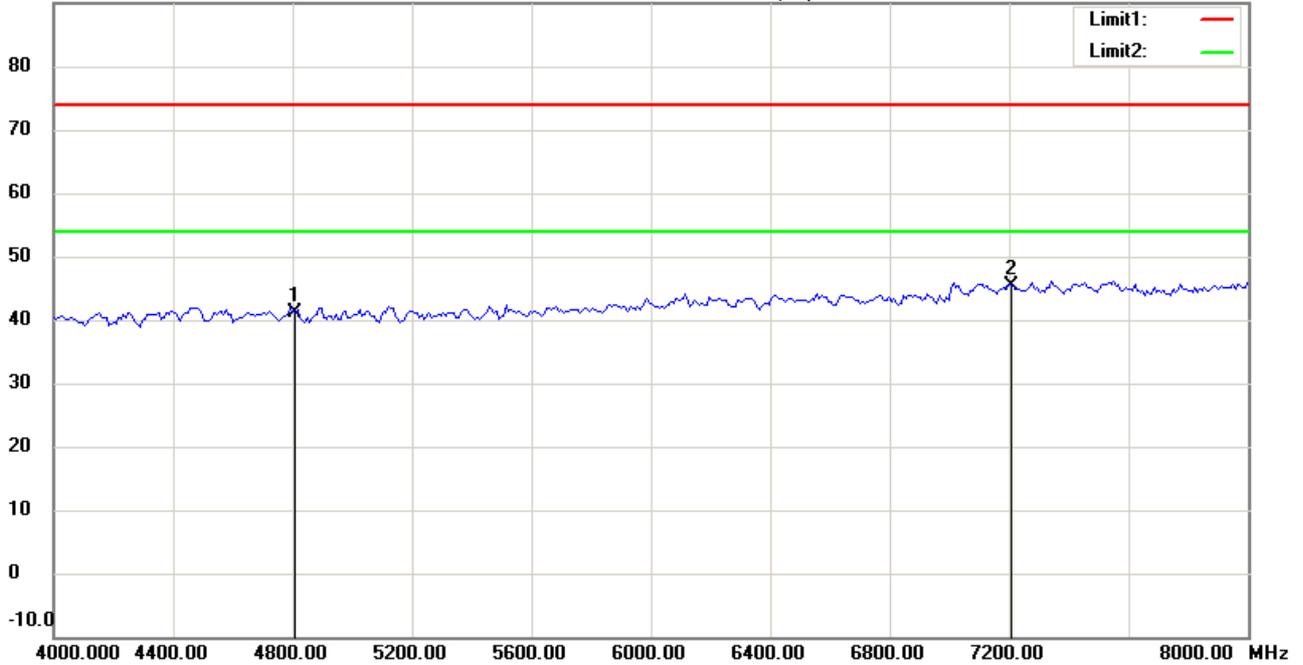

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	41.62	peak	-0.59	41.03	74.00	100	60	-32.97	
*	7206.000	41.07	peak	4.26	45.33	74.00	100	175	-28.67	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:11:37

Humidity:60 %

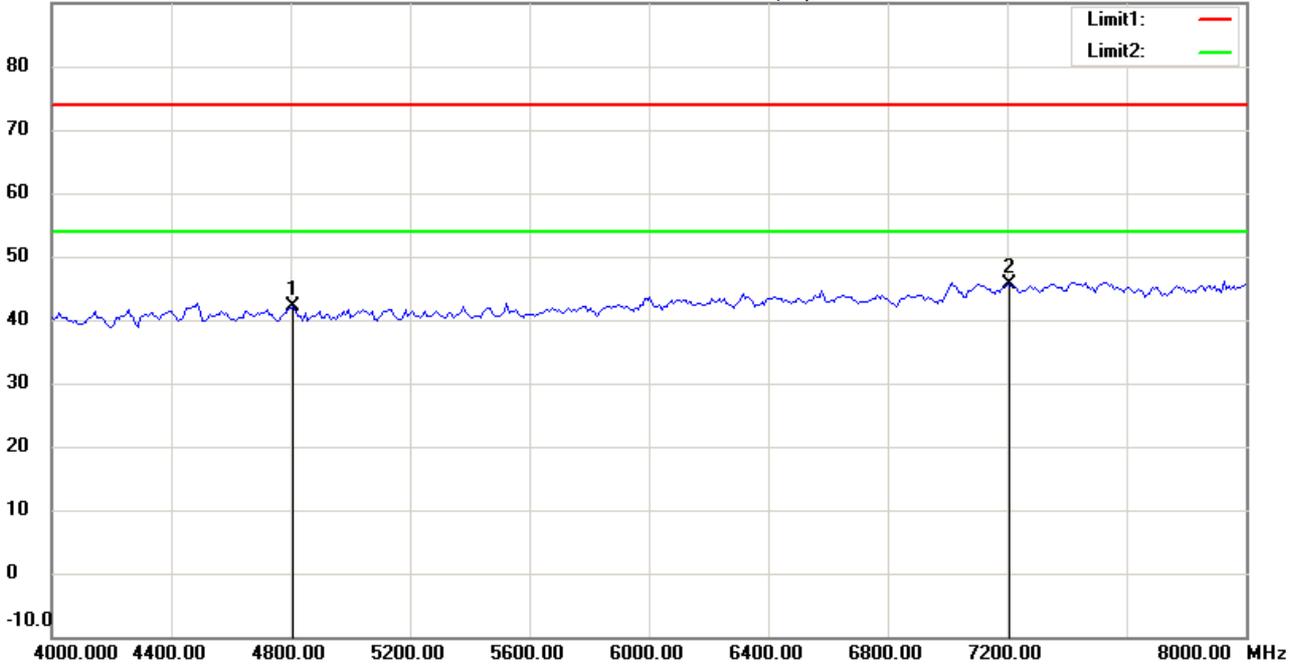

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.63	peak	-0.59	42.04	74.00	100	175	-31.96	
*	7206.000	41.30	peak	4.26	45.56	74.00	100	110	-28.44	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:08:58

Humidity:60 %

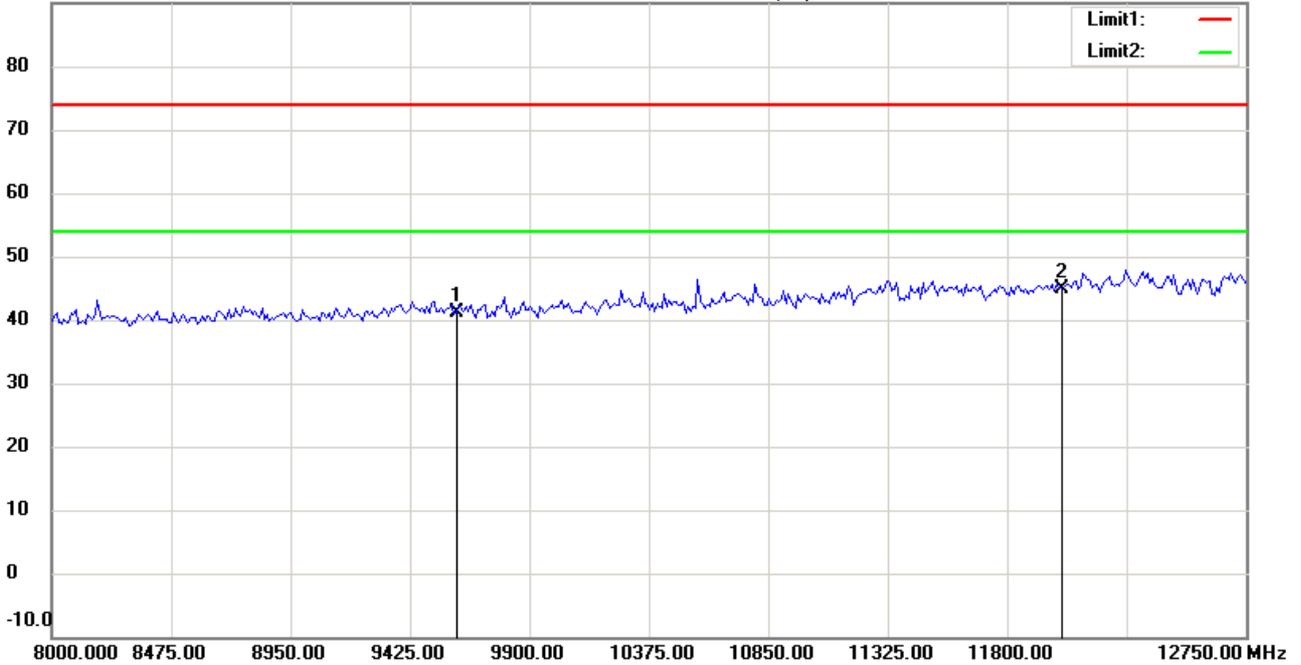

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.60	peak	7.59	41.19	74.00	100	90	-32.81	
*	12010.000	32.45	peak	12.47	44.92	74.00	100	355	-29.08	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:11:49

Humidity:60 %

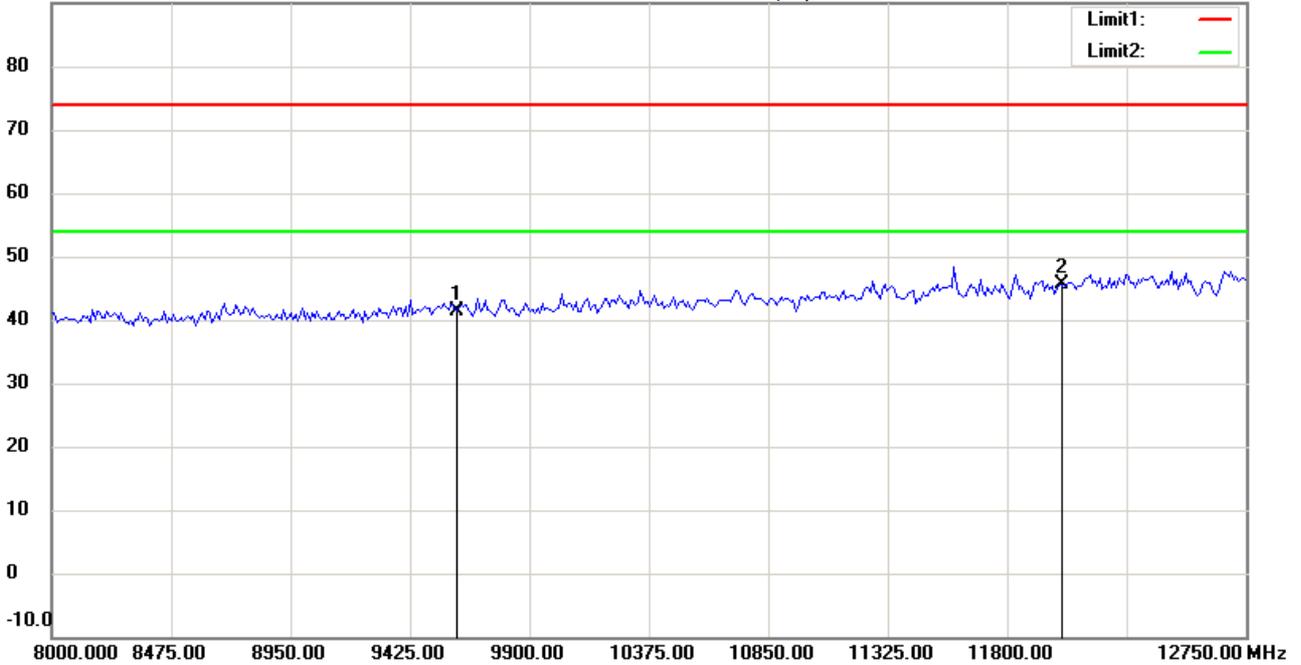

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	33.70	peak	7.59	41.29	74.00	100	215	-32.71	
*	12010.000	33.13	peak	12.47	45.60	74.00	100	50	-28.40	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:09:56

Humidity:60 %

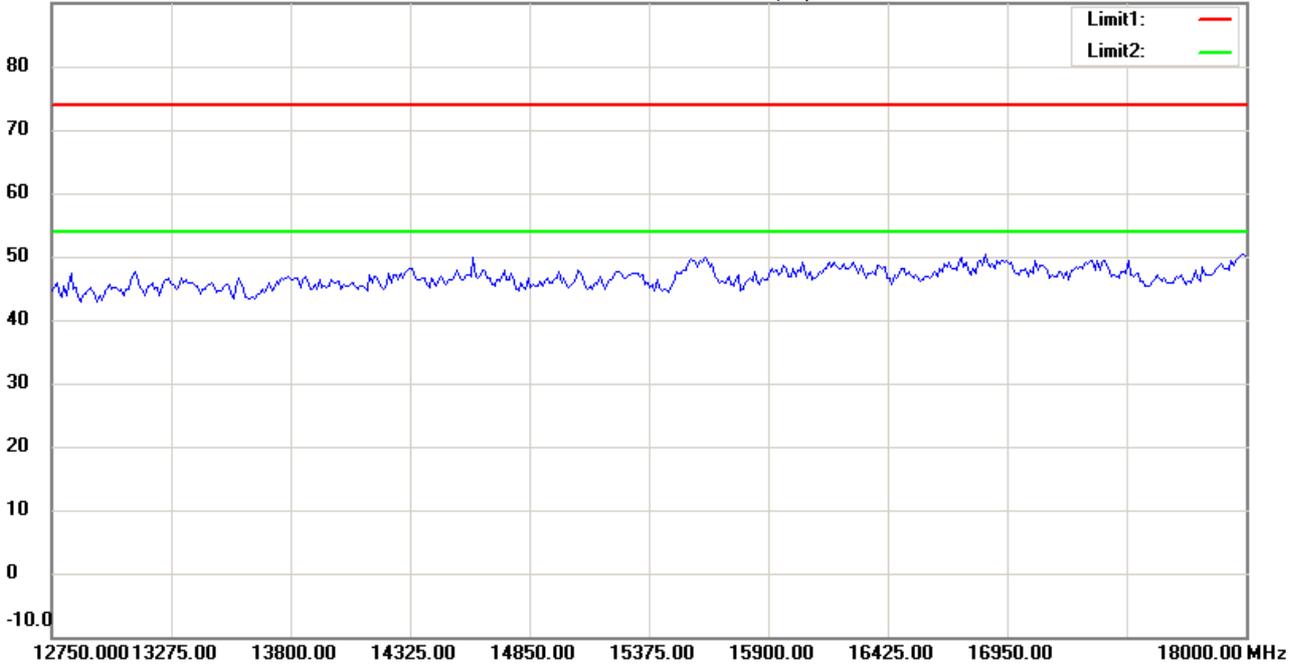

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:12:51

Humidity:60 %

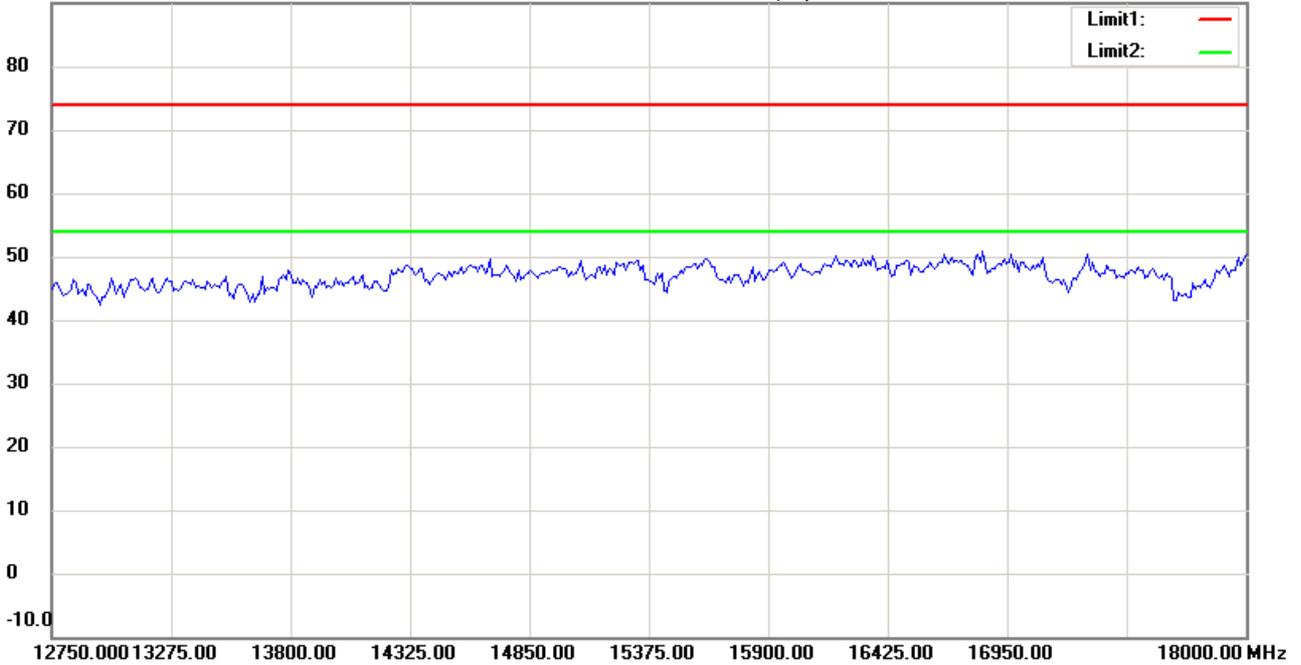

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2402MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:10:06

Humidity:60 %

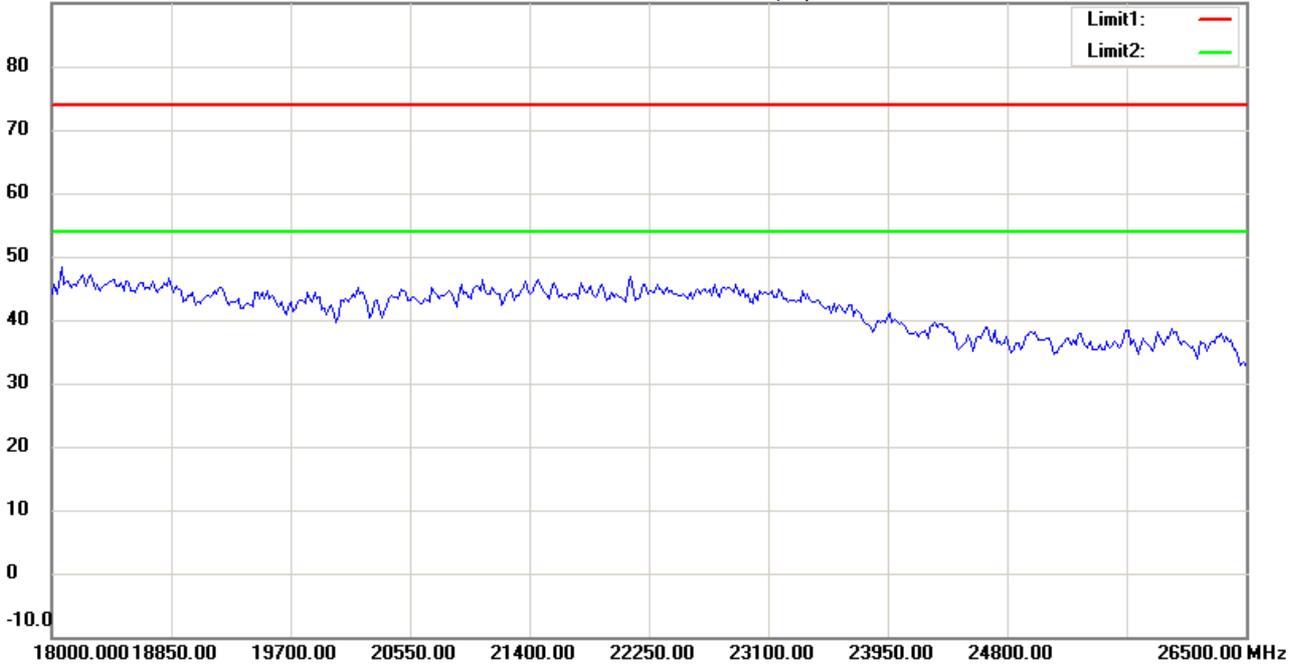

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:13:01

Humidity:60 %

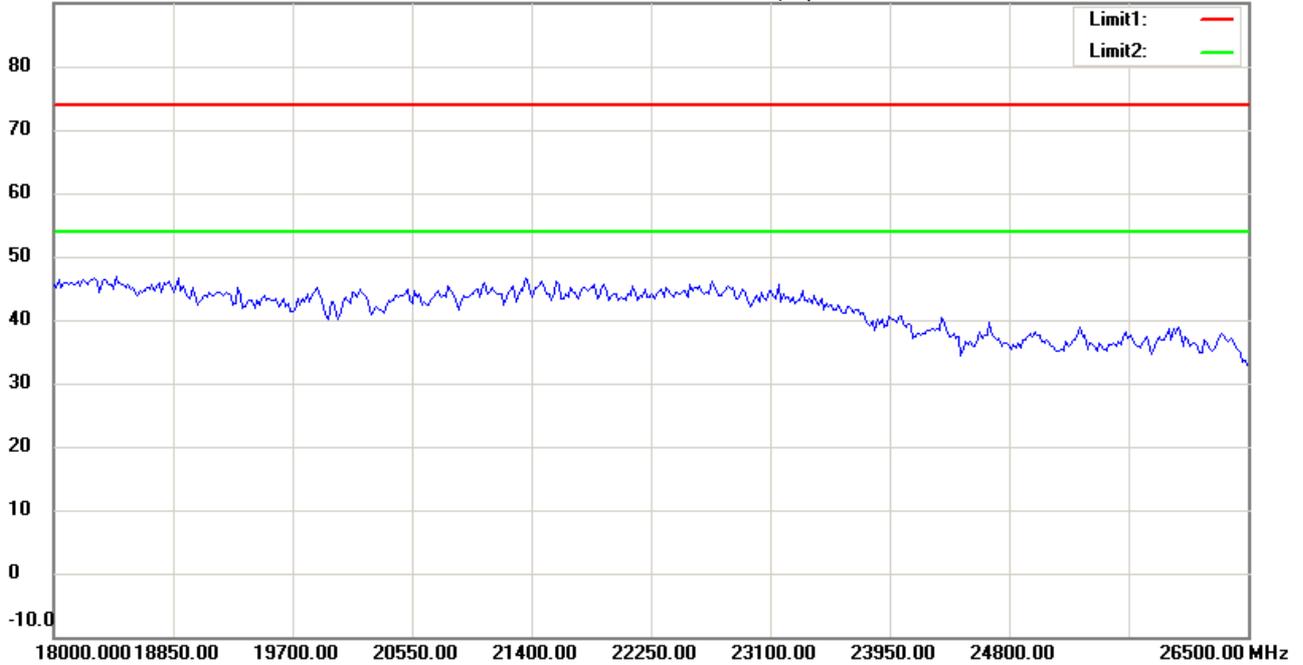

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2402MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:43:30

Humidity:60 %

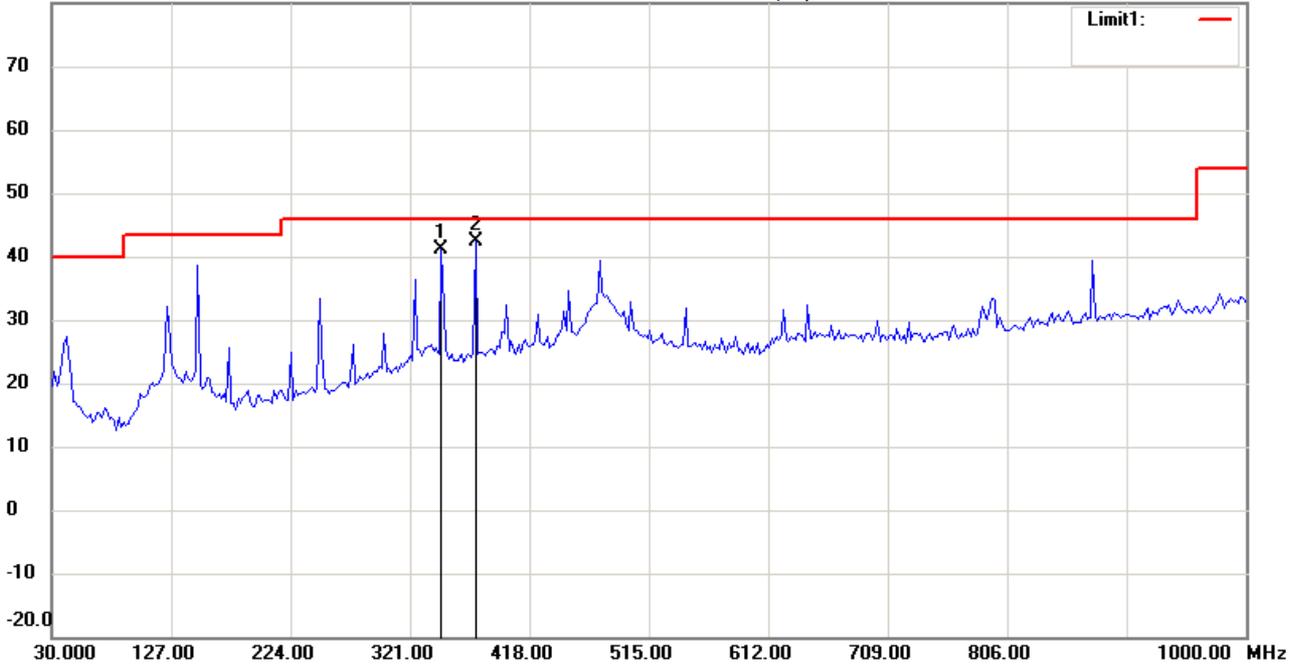

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	45.74	peak	-4.63	41.11	46.00	100	75	-4.89	
*	374.0681	46.61	peak	-4.14	42.47	46.00	100	180	-3.53	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:44:15

Humidity:60 %

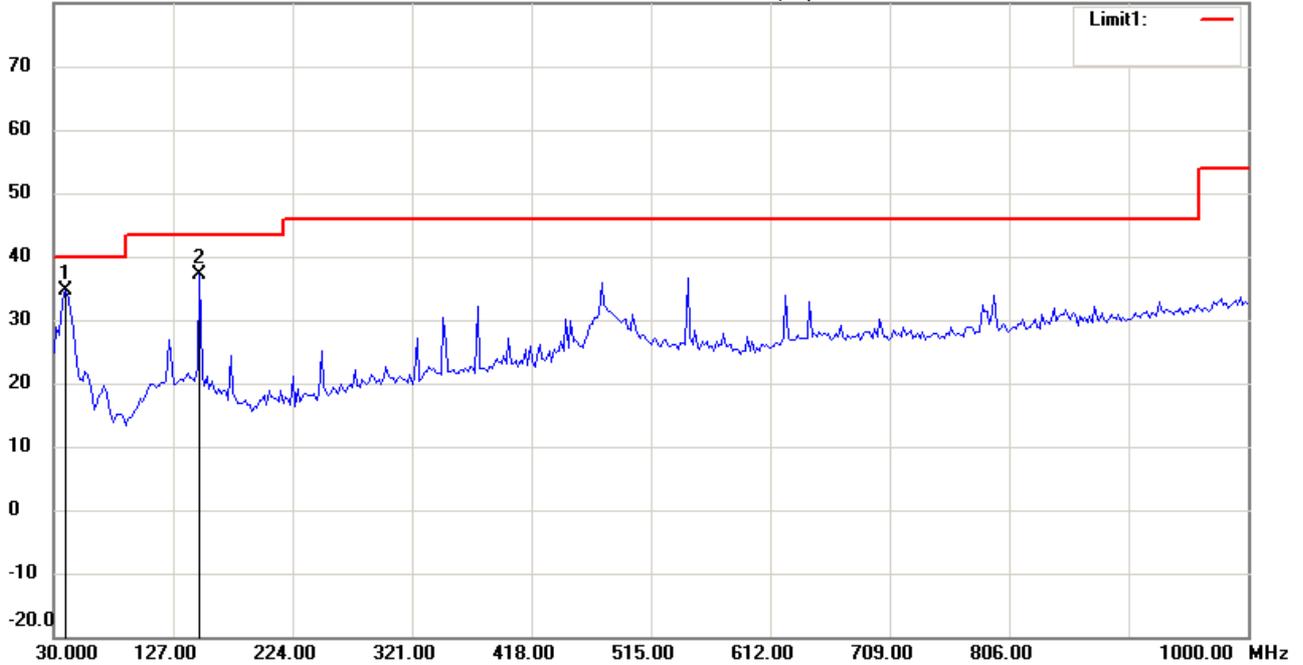

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	42.88	peak	-8.15	34.73	40.00	100	165	-5.27	
	148.5772	44.67	peak	-7.51	37.16	43.50	100	300	-6.34	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:16:29

Humidity:60 %

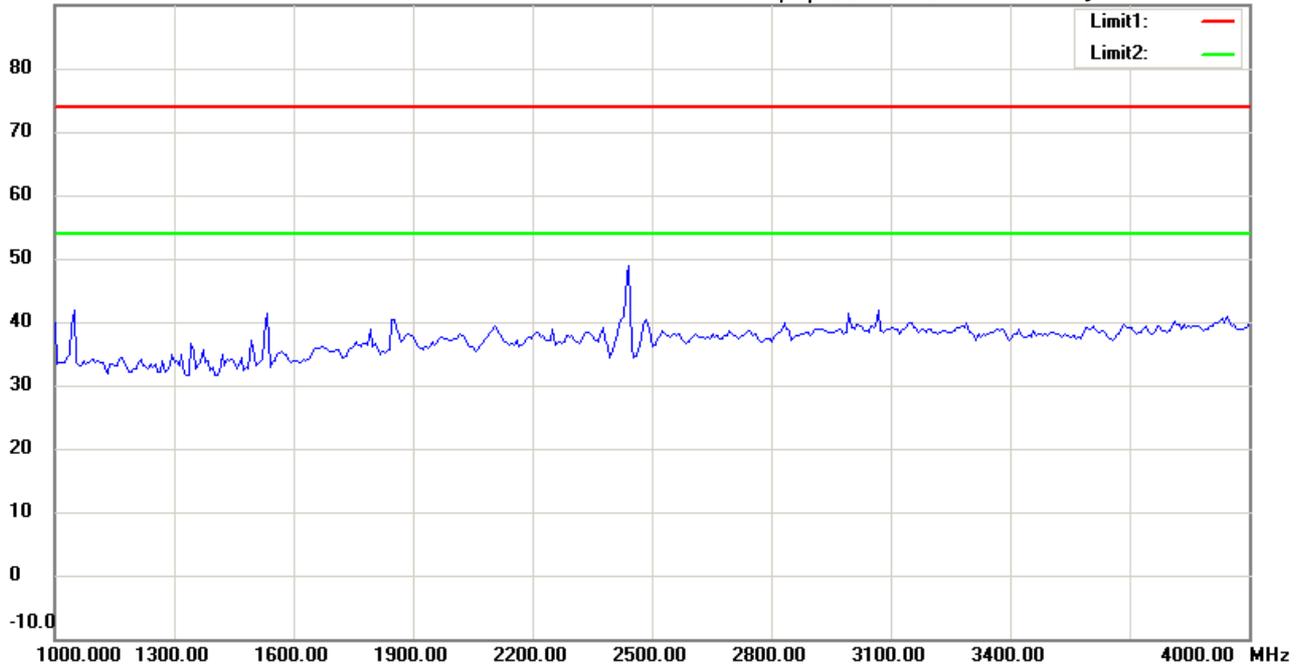

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:20:07

Humidity:60 %

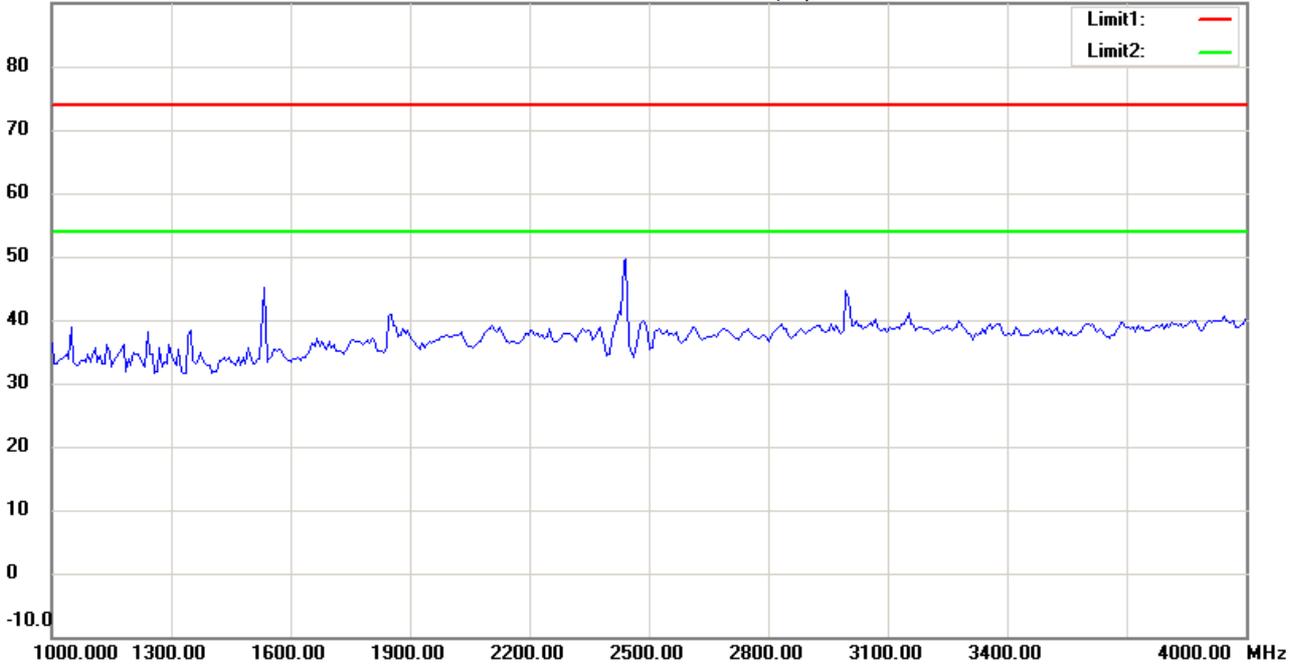

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:18:02

Humidity:60 %

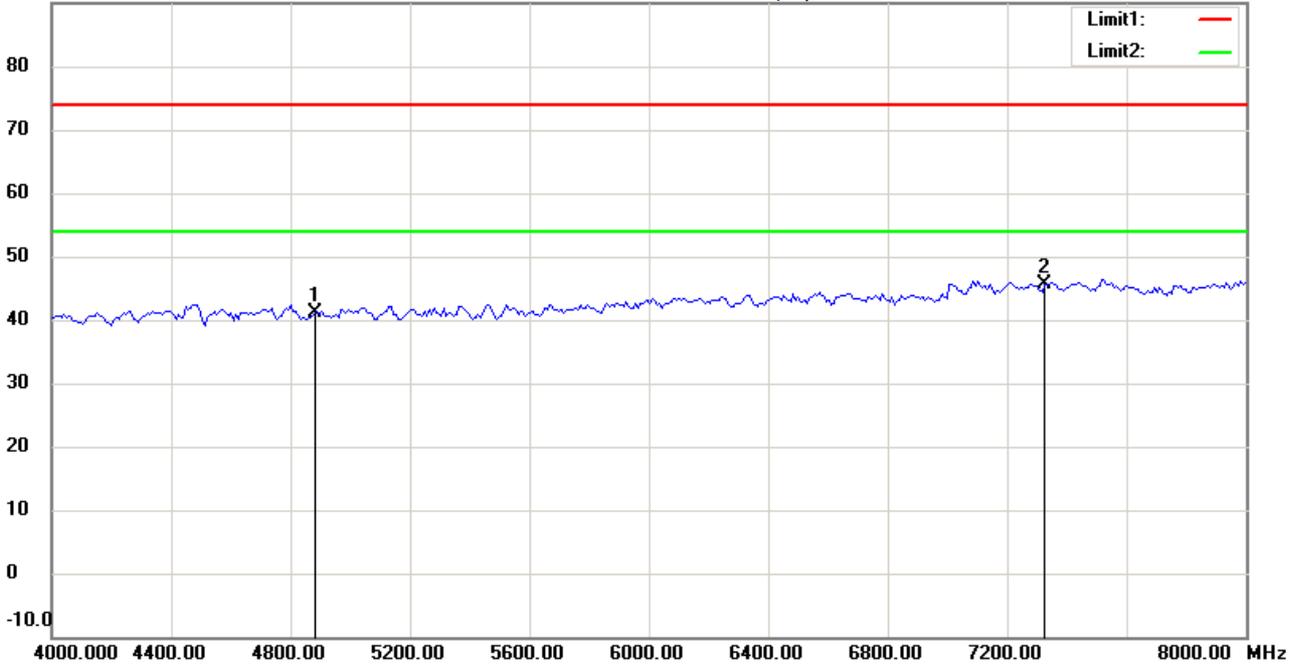

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	41.55	peak	-0.49	41.06	74.00	100	180	-32.94	
*	7320.000	41.18	peak	4.49	45.67	74.00	100	105	-28.33	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:21:17

Humidity:60 %

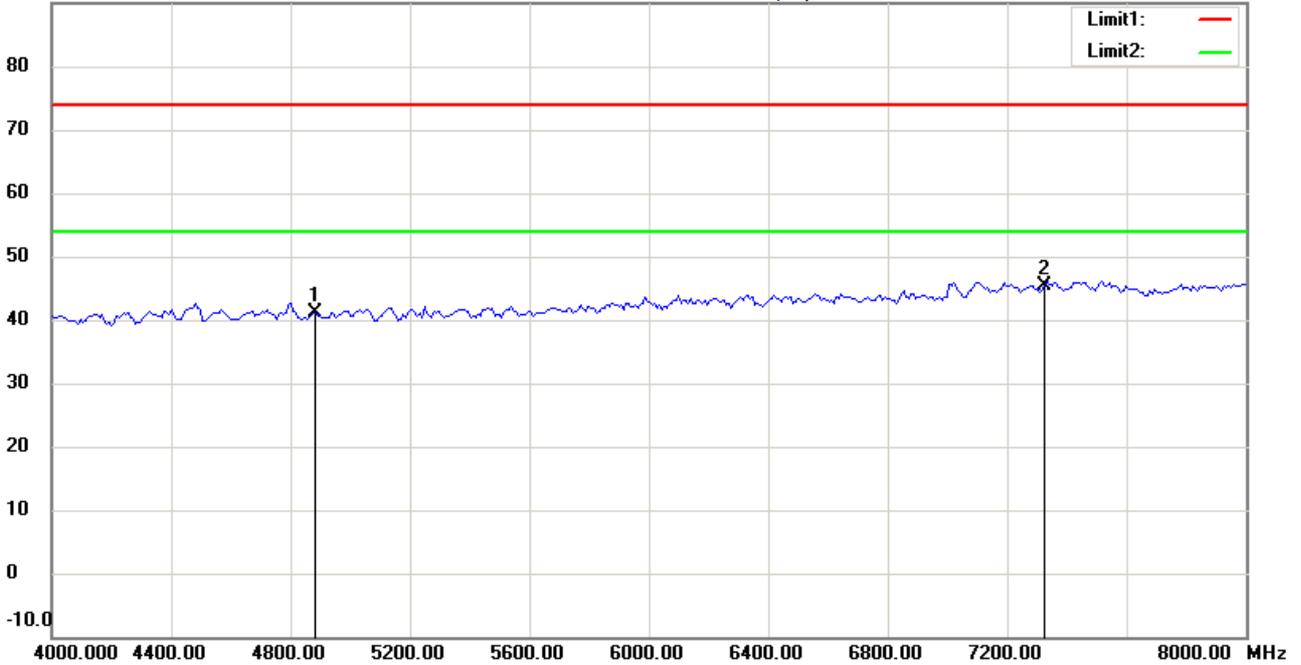

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	41.60	peak	-0.49	41.11	74.00	100	165	-32.89	
*	7320.000	40.94	peak	4.49	45.43	74.00	100	220	-28.57	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
 Tel:+886-2-6606-8877
 Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:18:14

Humidity:60 %

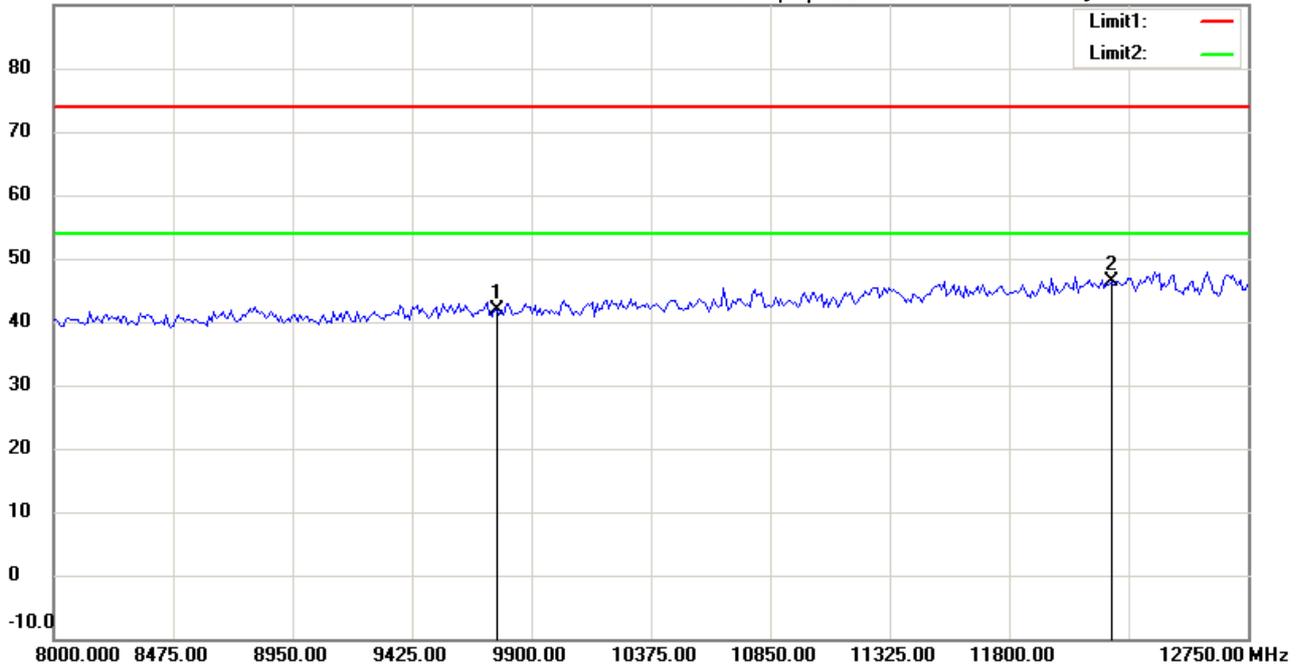

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.30	peak	7.50	41.80	74.00	100	60	-32.20	
*	12200.000	32.43	peak	13.83	46.26	74.00	100	335	-27.74	

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:21:30

Humidity:60 %

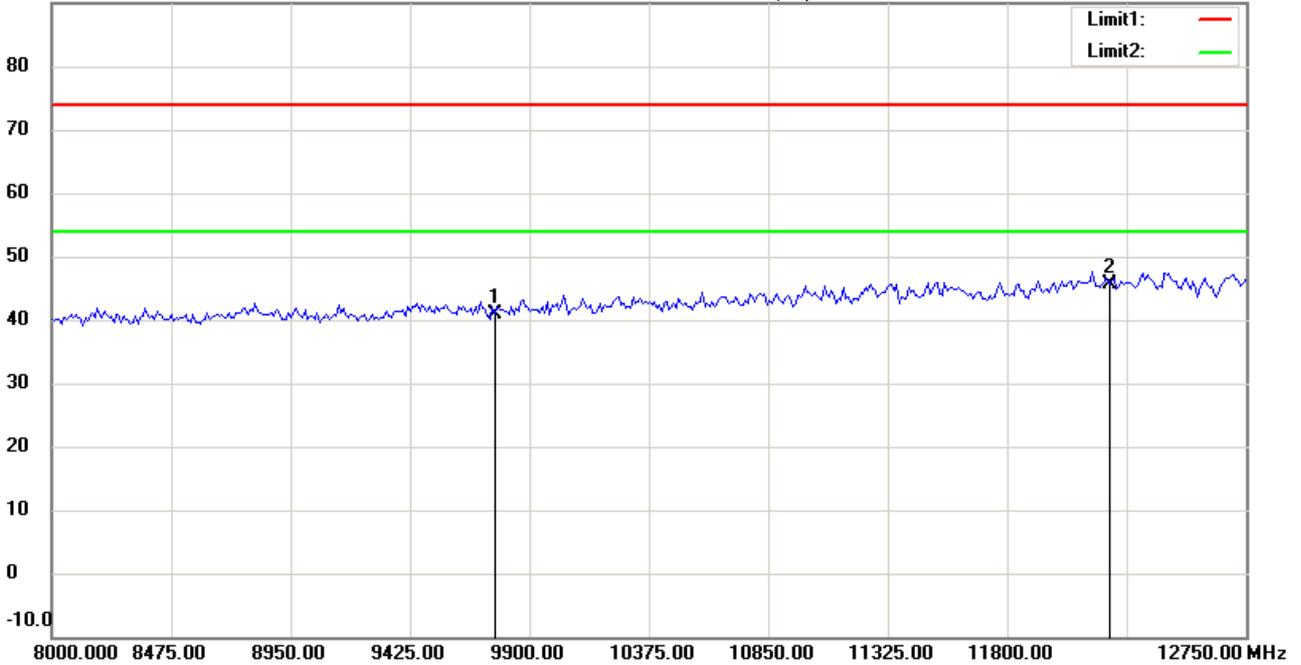

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	33.31	peak	7.50	40.81	74.00	100	120	-33.19	
*	12200.000	31.91	peak	13.83	45.74	74.00	100	70	-28.26	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:19:12

Humidity:60 %

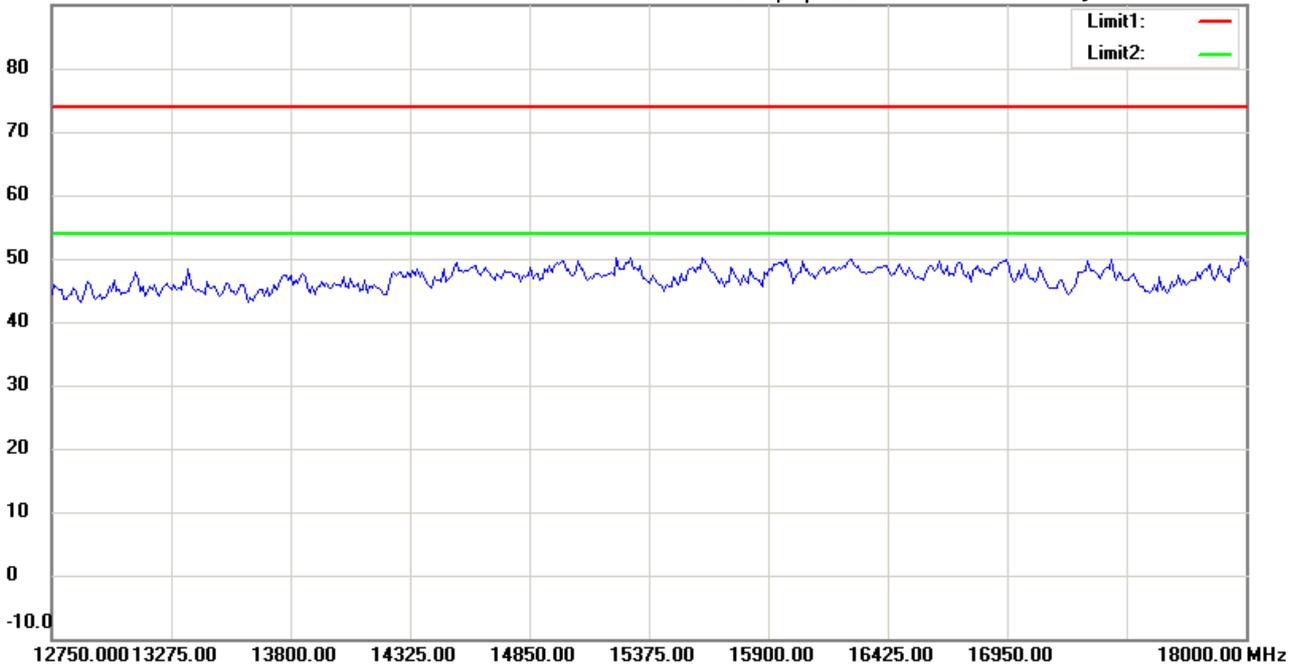

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:22:32

Humidity:60 %

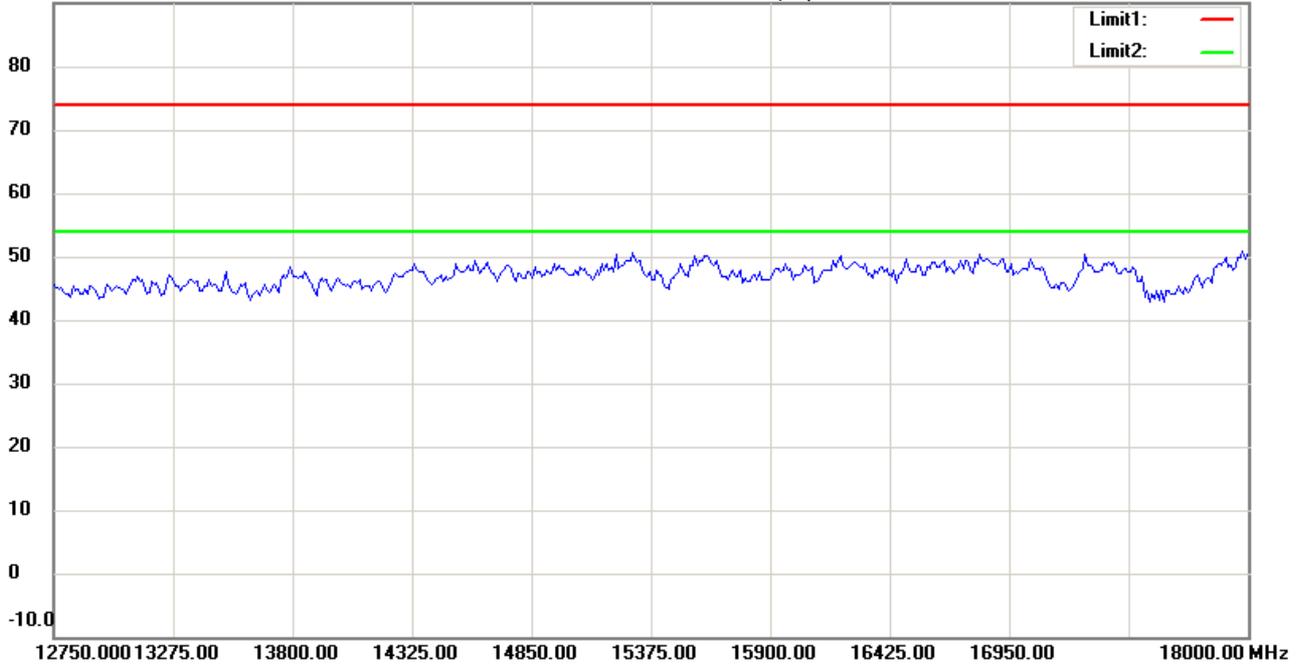

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2440MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:19:22

Humidity:60 %

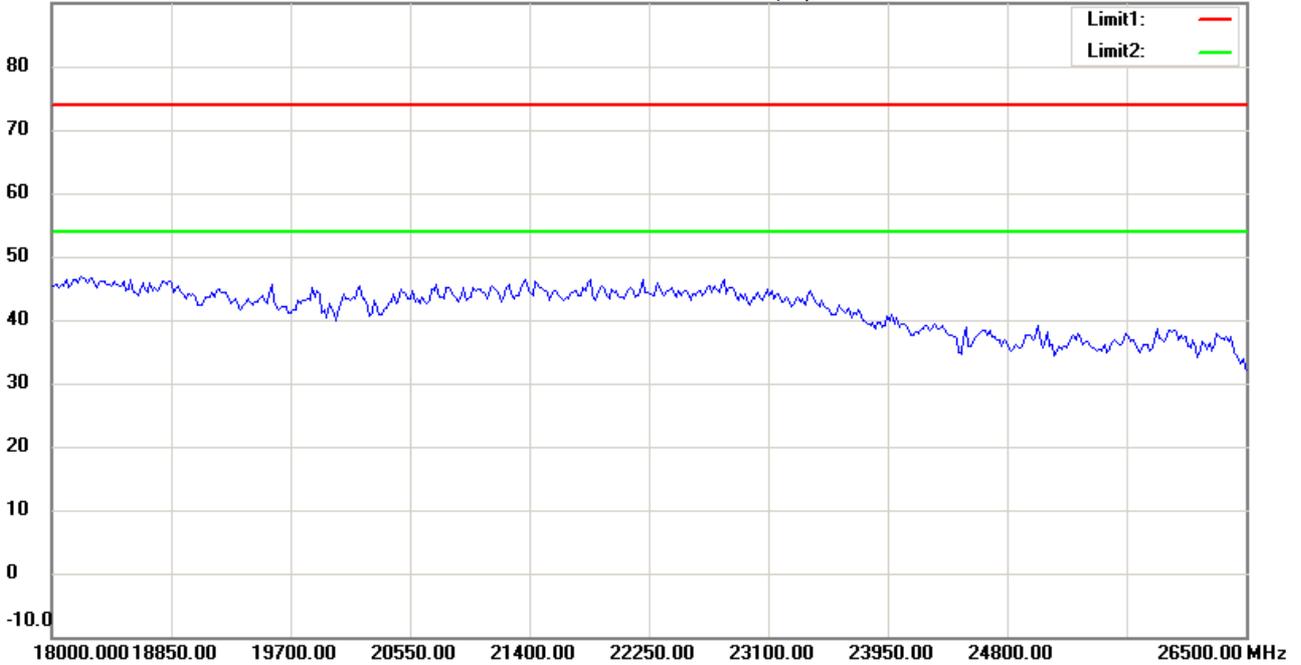

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:22:41

Humidity:60 %

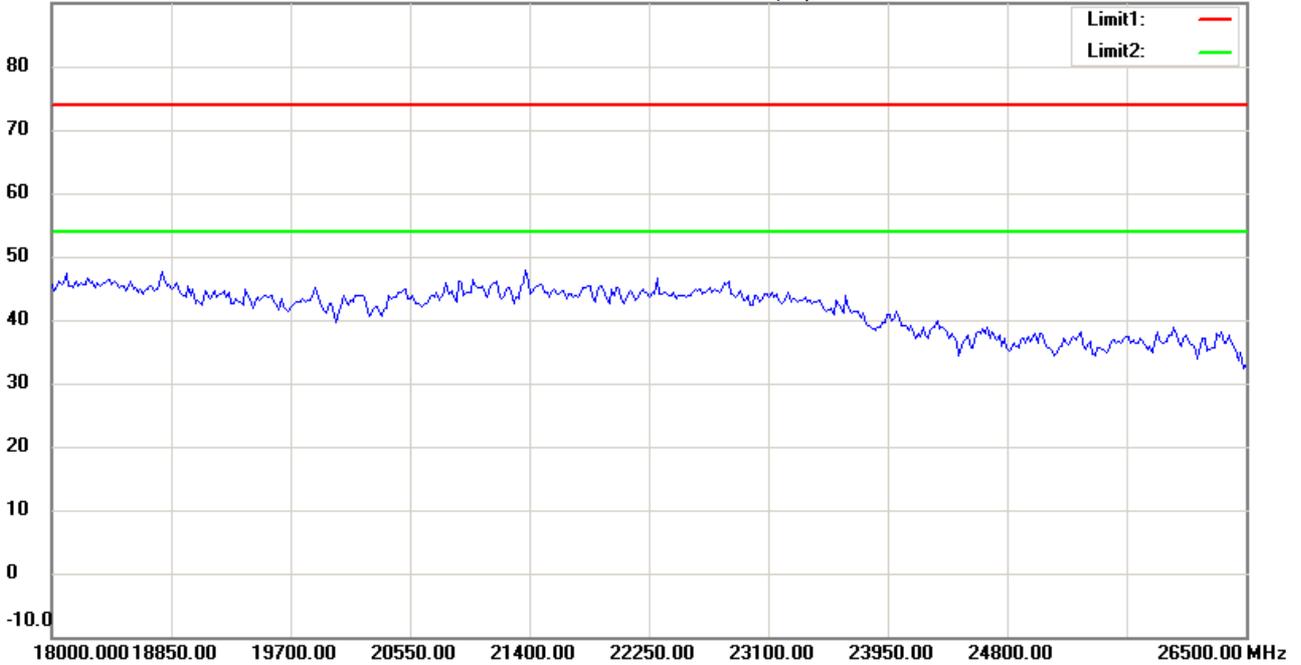

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2440MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :1

Data :#1


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:41:10

Humidity:60 %

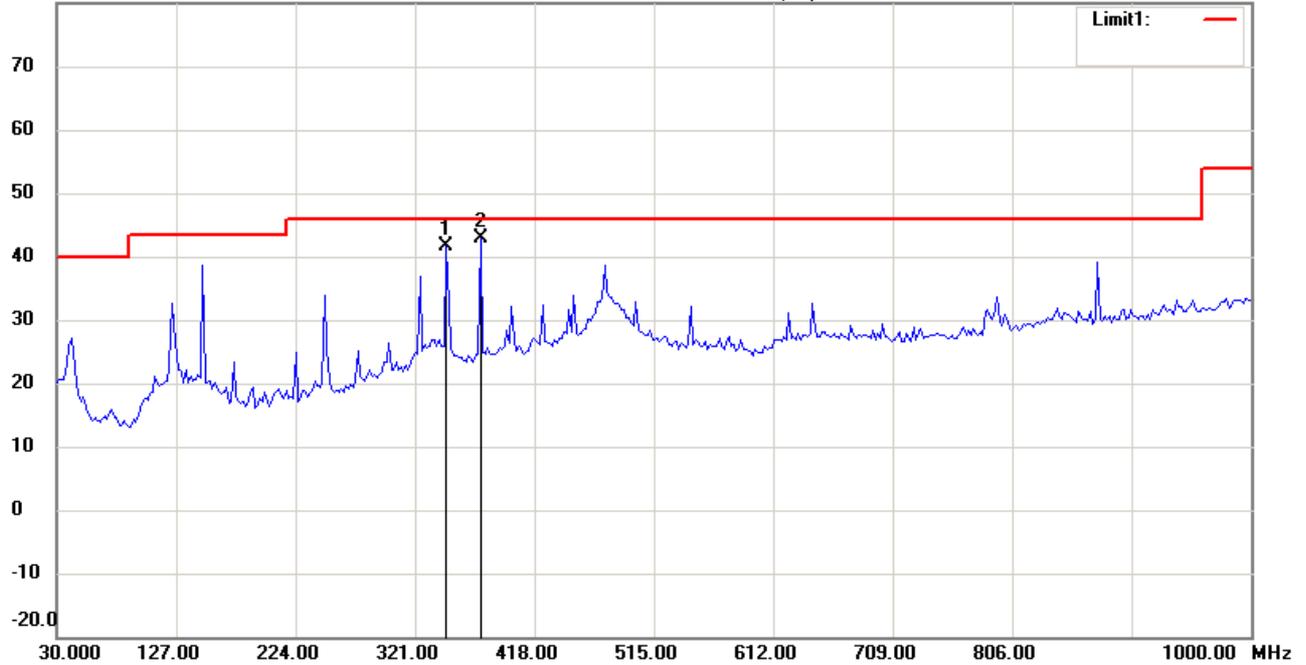

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	346.8536	46.18	peak	-4.63	41.55	46.00	100	70	-4.45	
*	374.0681	47.05	peak	-4.14	42.91	46.00	100	165	-3.09	



Radiated Emission Measurement

Operator: Roy

File :1

Data :#2


Date: 2016/5/17

Temperature:24 °C

80.0 dBuV/m

Time: 下午 11:41:54

Humidity:60 %

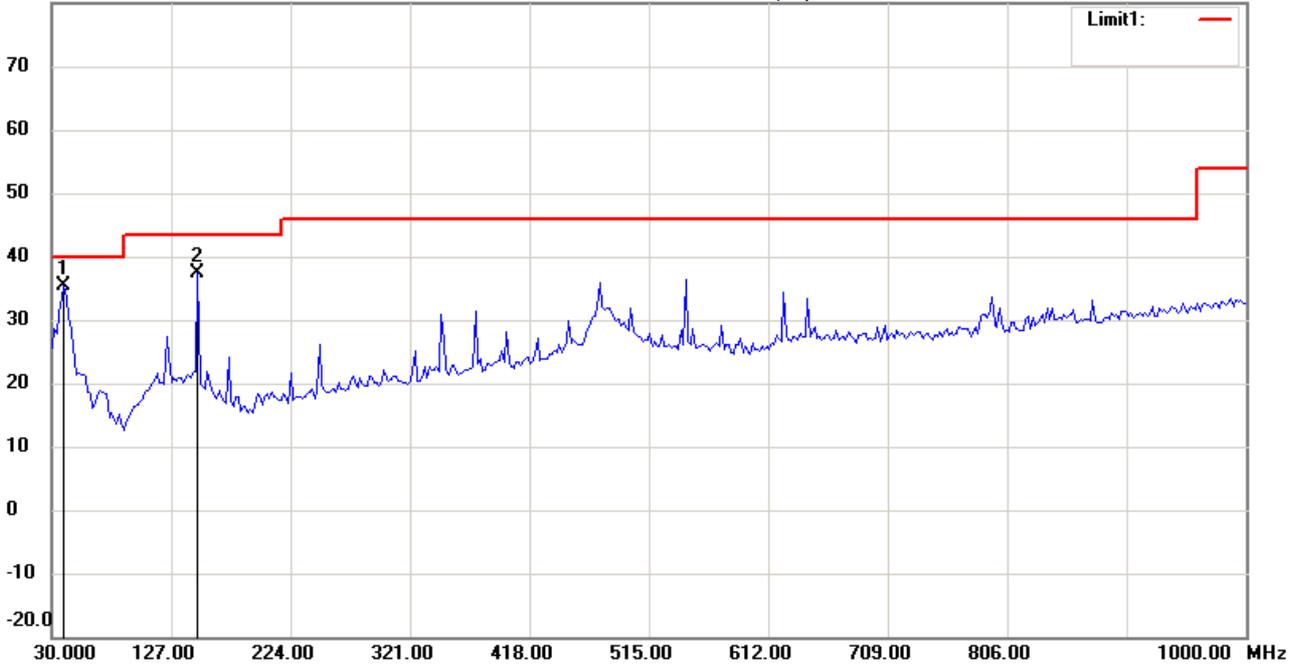

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	39.7194	43.59	peak	-8.15	35.44	40.00	100	120	-4.56	
	148.5772	44.92	peak	-7.51	37.41	43.50	100	55	-6.09	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#1


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:26:30

Humidity:60 %

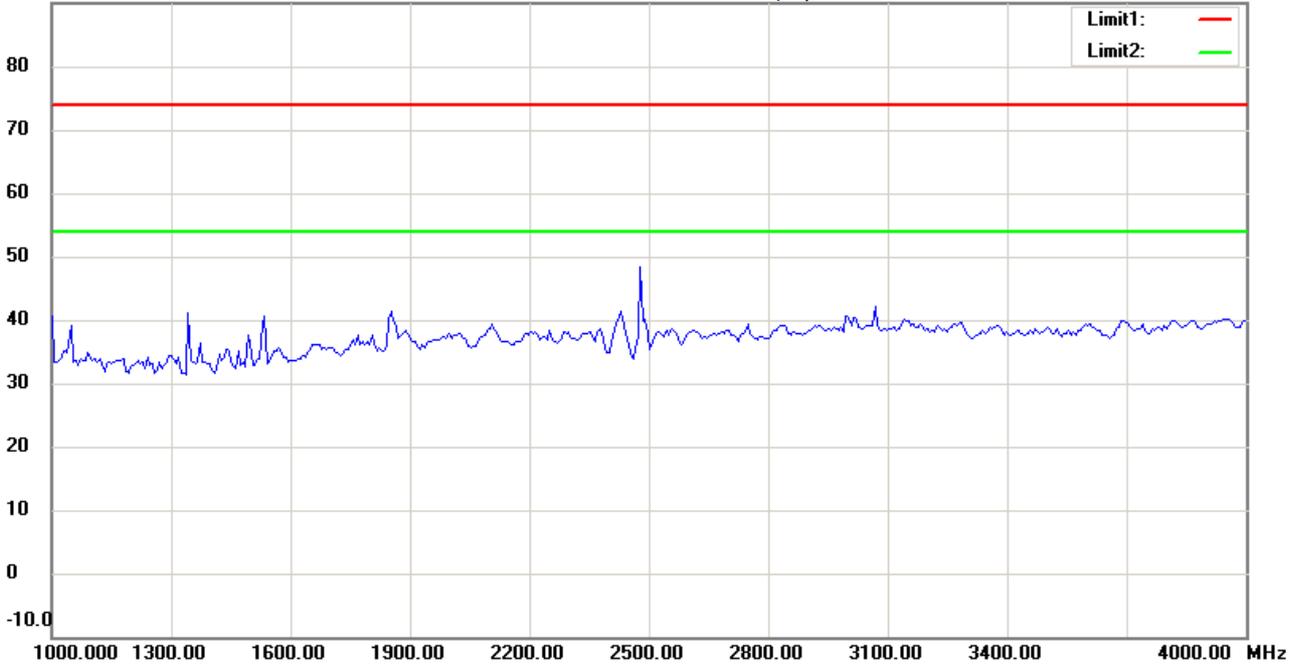

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#6


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:29:21

Humidity:60 %

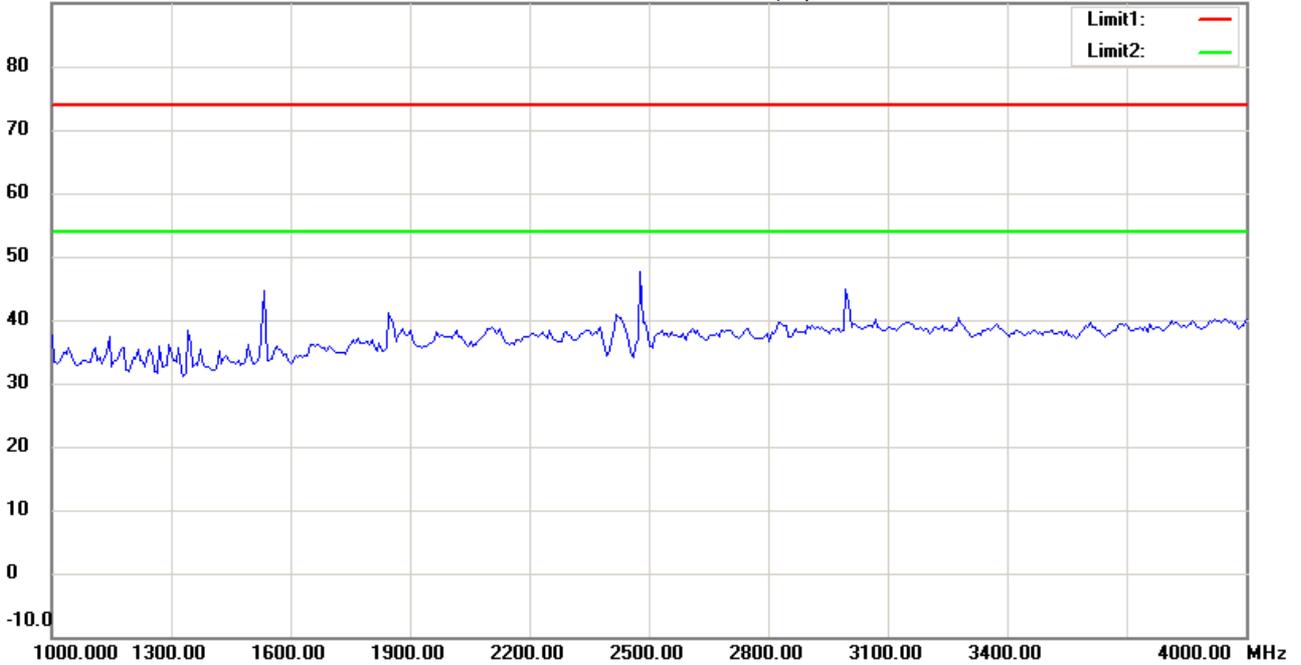

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#2


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:27:15

Humidity:60 %

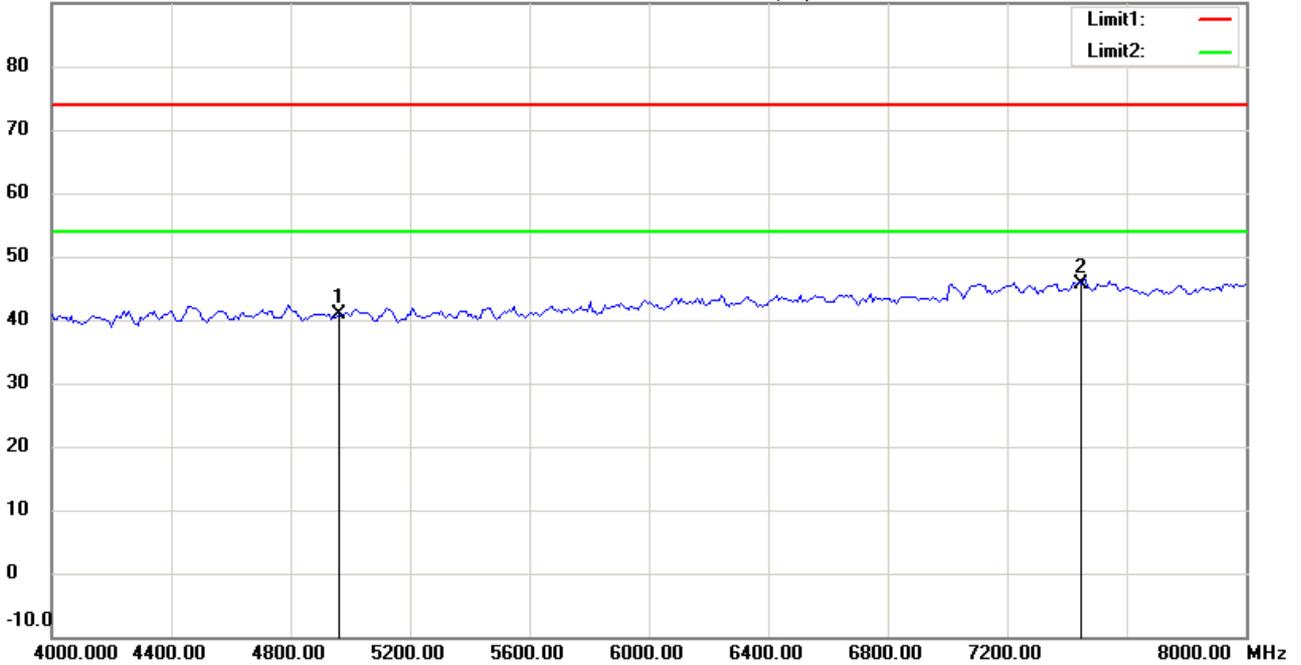

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	41.04	peak	-0.14	40.90	74.00	100	125	-33.10	
*	7440.000	40.84	peak	4.89	45.73	74.00	100	40	-28.27	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#7


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:30:41

Humidity:60 %

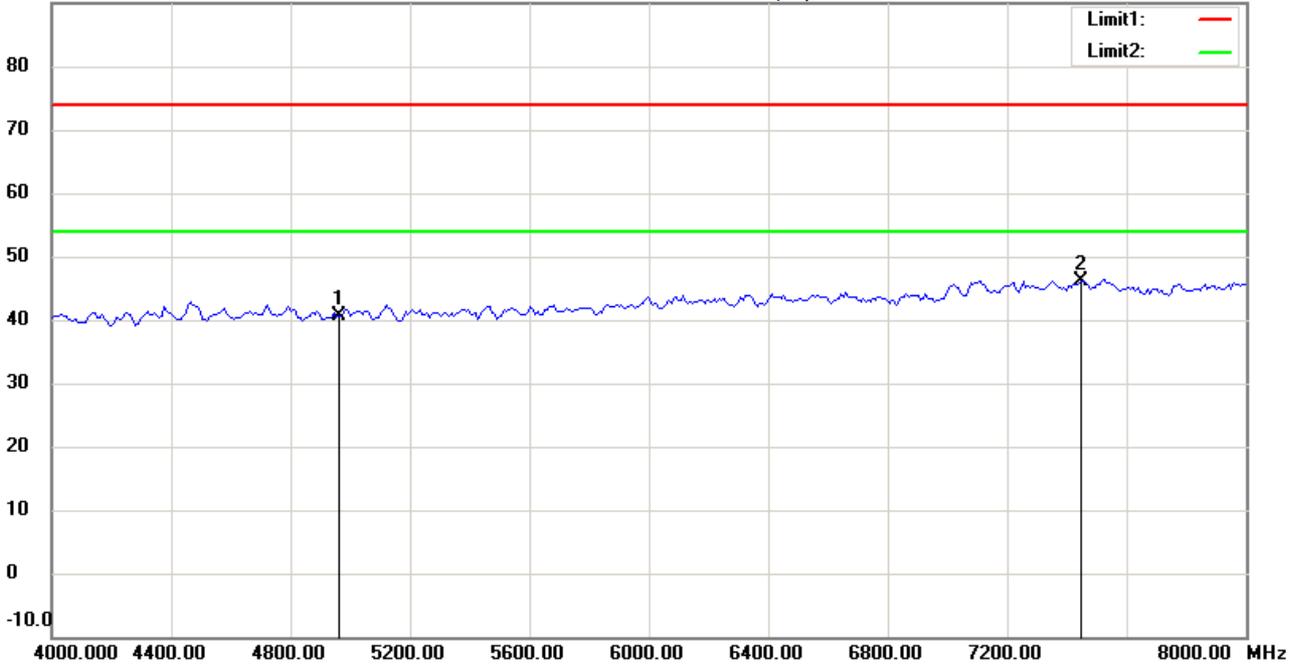

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Vertical*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	40.82	peak	-0.14	40.68	74.00	100	140	-33.32	
*	7440.000	41.30	peak	4.89	46.19	74.00	100	100	-27.81	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#3


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:27:28

Humidity:60 %

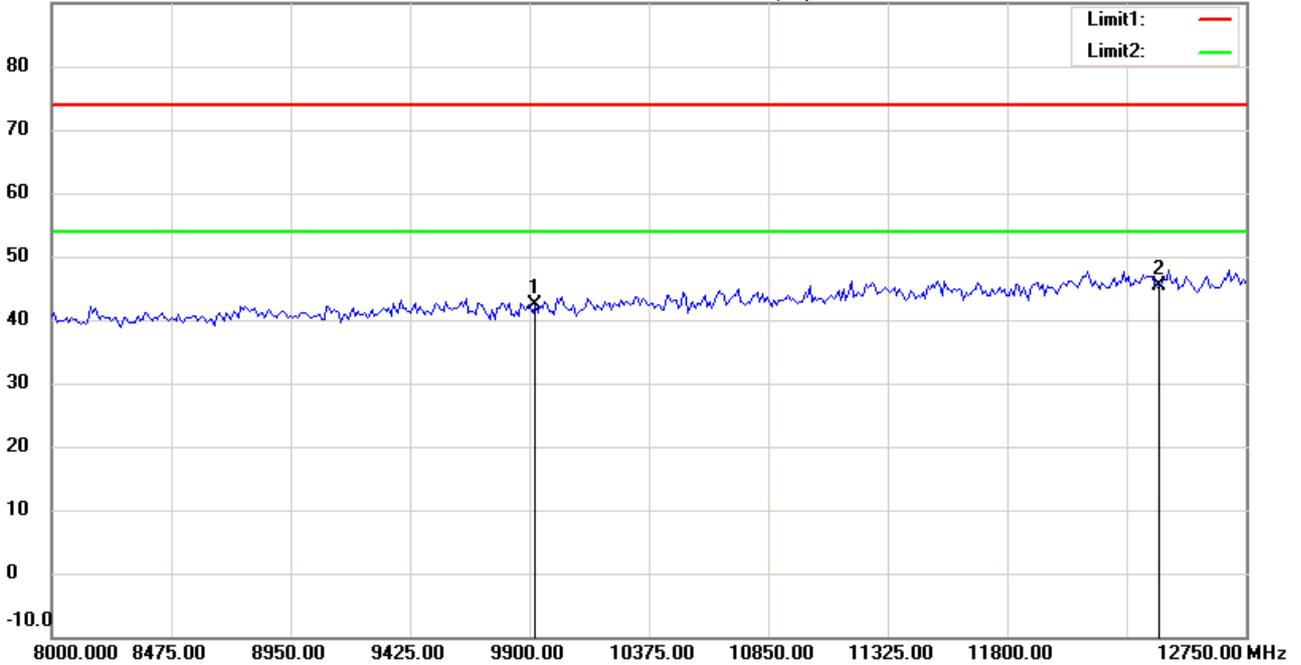

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.45	peak	7.83	42.28	74.00	100	275	-31.72	
*	12400.000	31.42	peak	13.99	45.41	74.00	100	330	-28.59	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#8


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:30:54

Humidity:60 %

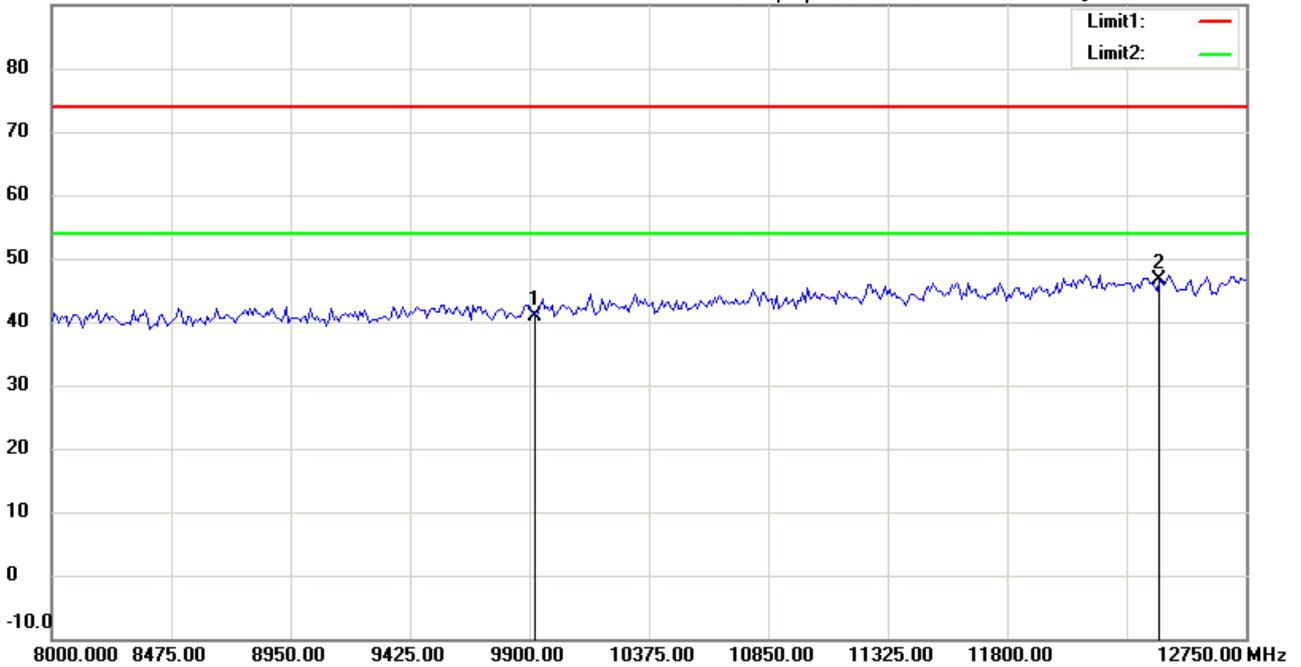

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: **Vertical**

EUT : W6M21604-15762

Power : 120 V.a.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	33.10	peak	7.83	40.93	74.00	100	80	-33.07	
*	12400.000	32.54	peak	13.99	46.53	74.00	100	250	-27.47	



Radiated Emission Measurement

Operator: Roy

File :3

Data :#4


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:28:26

Humidity:60 %

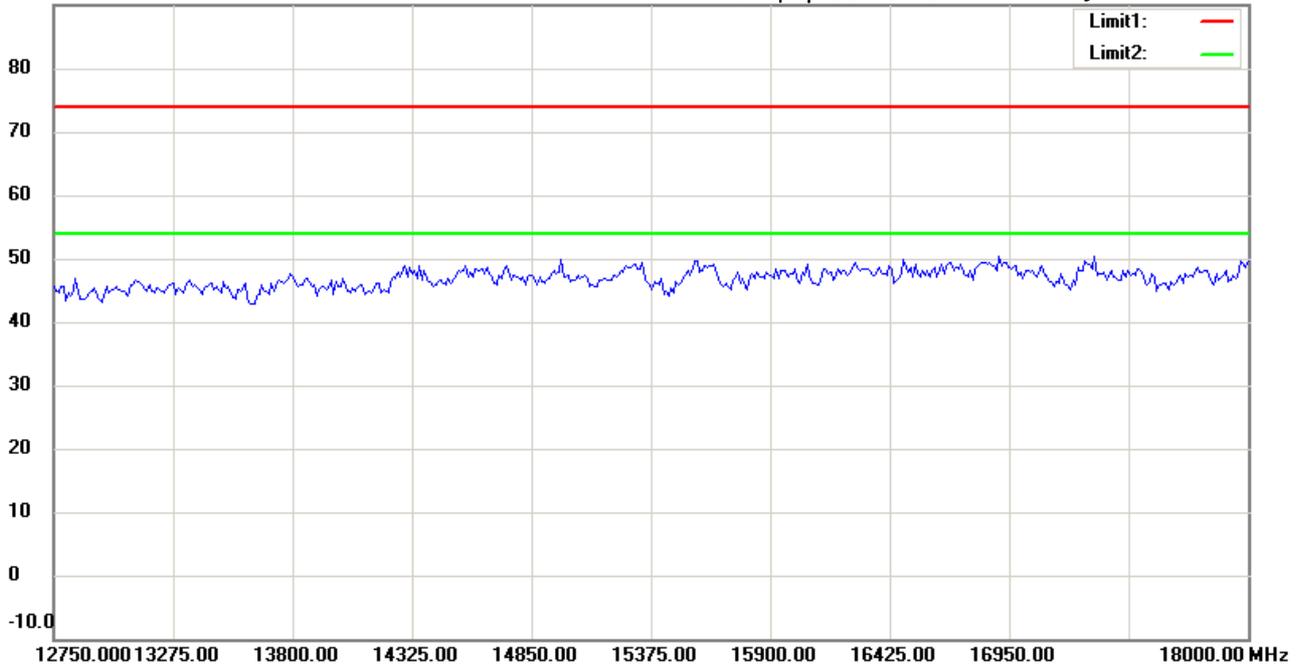

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#9


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:31:55

Humidity:60 %

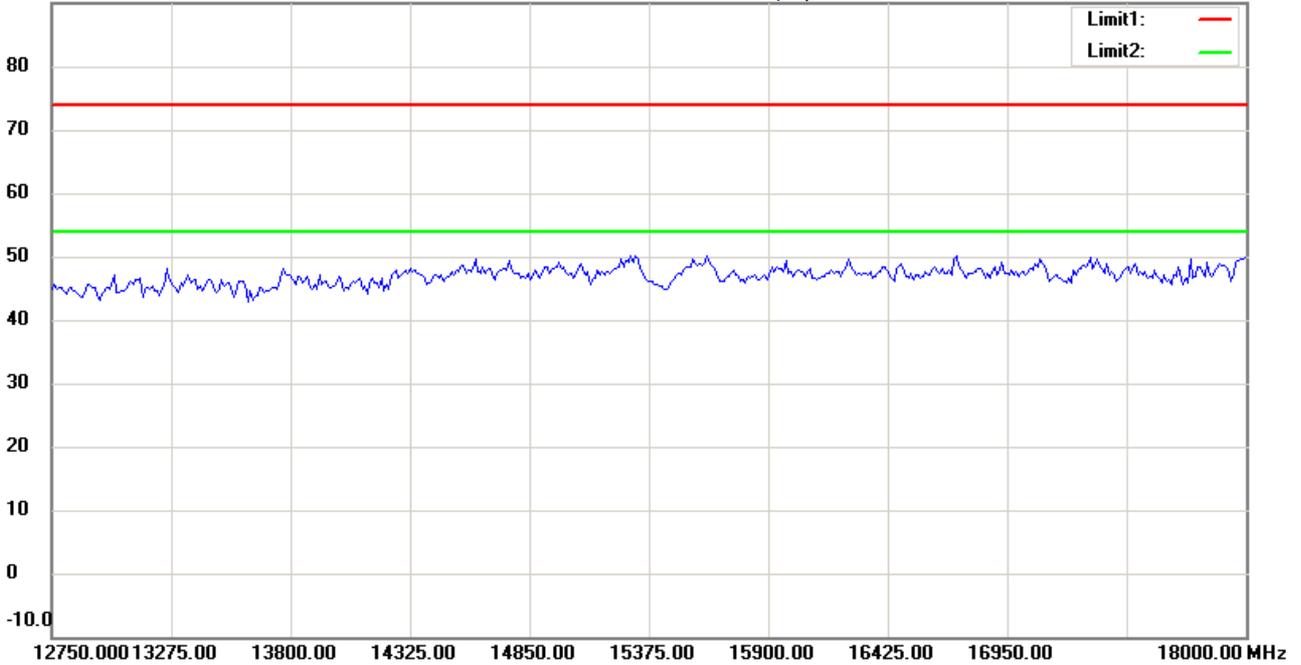

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 V.a.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#5


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:28:35

Humidity:60 %

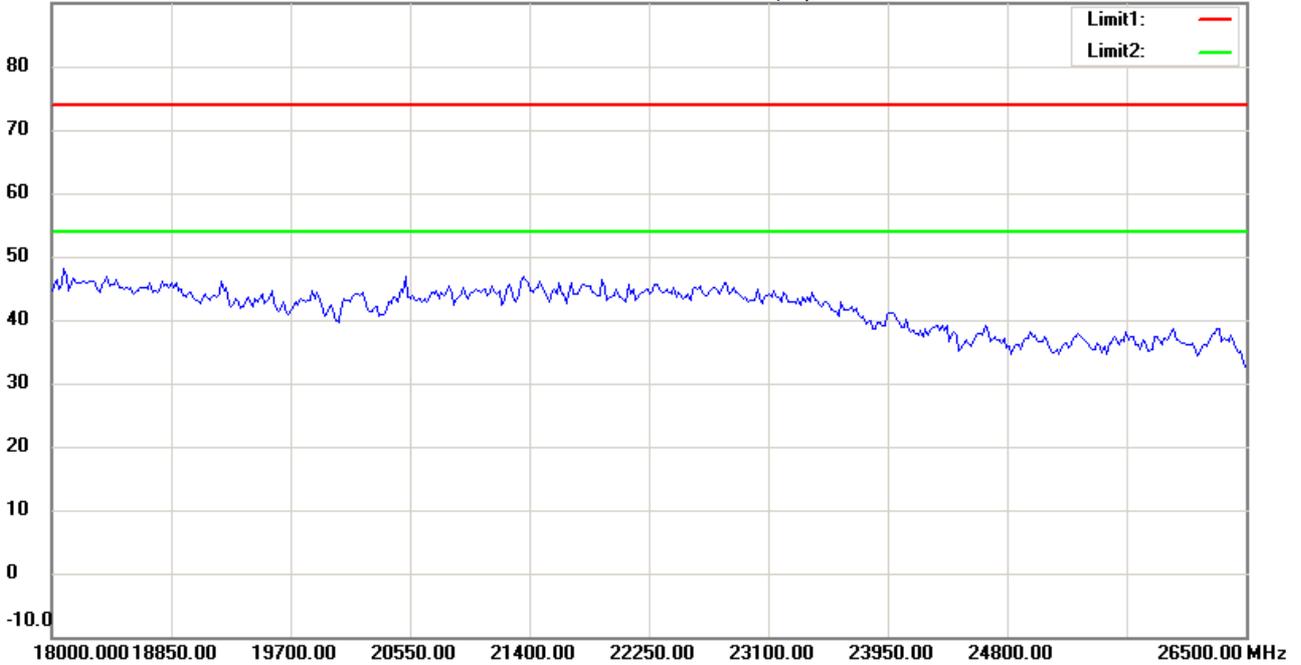

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

Polarization: *Horizontal*

EUT : W6M21604-15762

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------



Radiated Emission Measurement

Operator: Roy

File :3

Data :#10


Date: 2016/5/11

Temperature:24 °C

90.0 dBuV/m

Time: 下午 09:32:05

Humidity:60 %

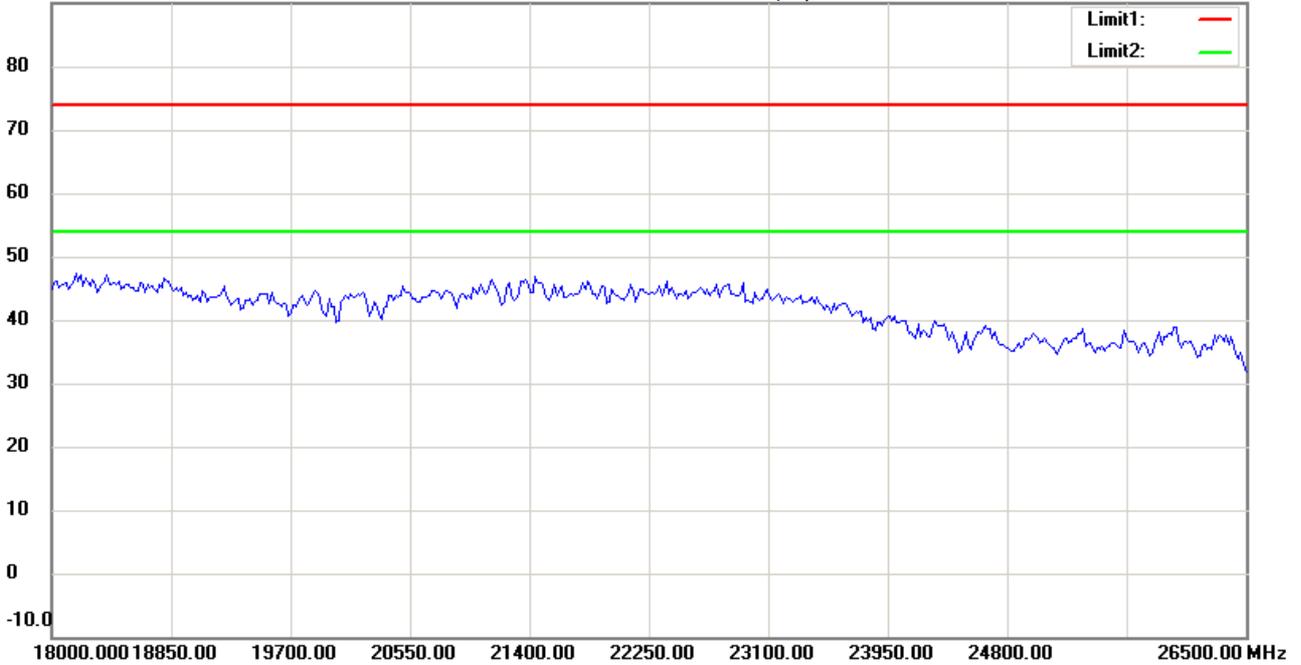

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M21604-15762

M/N:

Test Mode : TX 2480MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------