

RF Test Report

For

Applicant name: Migear International Group LLC
Address: 21 West 38th Street, 14th Floor. New York, NY 10018, United States
EUT name: POWER BANK
Brand name: BAUHN, FISHER
Model number: BWPB502
Series model number: BWPB540-PDQ8ALD, BWPB502K, BWPB502P, BWPB502B, FWPB502, FWPB515, FWPB500
FCC ID: 2AIDL-BWPB502

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Report number: BTF251126R00202
Test standards: 47 CFR Part 1 Subpart I Section 1.1310
Test conclusion: Pass

Date of sample receipt: 2025-11-26
Test date: 2025-11-26 to 2025-12-08
Date of issue: 2025-12-09
Test by: Sean He
Sean He / Tester

Prepared by: Chris Liu
Chris Liu / Project engineer

Approved by:



Ryan.C / EMC manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue date	Revisions content
R_V0	2025-12-09	Original

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility	4
1.3 Announcement	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	5
3 Test Equipment List	6
4 Applied Reference Documents	6
5 Test Auxiliary Equipment	6
5.1 Test mode	6
6 Test Requirement	7
7 Test Settings	8
8 Exposure Assessment	9
8.1 E-Field Strength Test Date	9
8.2 H-Field Strength Test Date:	11
8.3 Estimated Model	14
8.4 Comparison of evaluation data and test data	16
9 Test Setup Photos	17

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	Migear International Group LLC
Address:	21 West 38th Street, 14th Floor. New York, NY 10018, United States

2.2 Manufacturer Information

Company name:	Loud Global (Shenzhen) Import & Export Co., Ltd
Address:	ROOM 1705, BUILDING A, UNITED PLAZA, NO.5022 BINHE AVENUE, FUSHAN COMMUNITY, FUTIAN STREET, FUTIAN DISTRICT, SHENZHEN

2.3 Factory Information

Company name:	Shenzhen Tianwei Gao Electronics Co., LTD
Address:	Room 201, Building 1, Hengtong Industrial City, No. 280, Jihua Road, Shuijing Community, Jihua Subdistrict, Longgang District, Shenzhen City

2.4 General Description of Equipment under Test (EUT)

EUT name	POWER BANK
Under test model name	BWPB502
Series model name	BWPB540-PDQ8ALD, BWPB502K, BWPB502P, BWPB502B, FWPB502, FWPB515, FWPB500
Description of model name differentiation	The model name is different, The color different, while the rest are identical, all featuring plastic shells.
Hardware Version	N/A
Software Version	N/A
Rating:	Input/Output: 5V= 3A, 9V= 2A, 10V= 2.25A, 12V= 1.5A Wireless Transmitting: 15W Lithium Battery Capacity: 3.7V 5000mAh 18.5Wh Rated Capacity: 5000mAh

2.5 Technical Information

Operation frequency:	115kHz ~ 200kHz
Modulation technology:	ASK
Antenna type:	Coil Antenna

3 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Electric and Magnetic Field Analyzer	Narda	EHP-200A	180ZX11001	2025/11/16	2026/11/15

4 Applied Reference Documents

Identity	Document Title
47 CFR Part 1 Subpart I Section 1.1310	Radio frequency radiation exposure limits.

5 Test Auxiliary Equipment

Description	Manufacturer	Model	Serial No.	Length	Description
Phone	HONOR	PGT-AN10	/	/	/

5.1 Test mode

No.	Test Modes	
TM1	EUT stand alone, standby.powered by AC input.	
TM2	Direct contact during/operating between the EUT& Mobile phone is powered.	Using a mobile phone load (Battery Status:99%)
TM3		Using a mobile phone load (Battery Status:50%)
TM4		Using a mobile phone load (Battery Status:1%)
Remark: Per-scan all kind of data rate, and report only reflects the test data of worst data rate mode.		

6 Test Requirement

KDB 680106 D01 RF Exposure Wireless Charging App v03

According to the item 5.2 of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from

submitting an RF exposure evaluation.

a) Power transfer frequency is less than 1 MHz.

Yes, the device operate in the frequency range from 115kHz ~ 200kHz

b) Client device is placed directly in contact with the transmitter.


Yes, client device is placed directly in contact with the transmitter.


TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

7 Test Settings

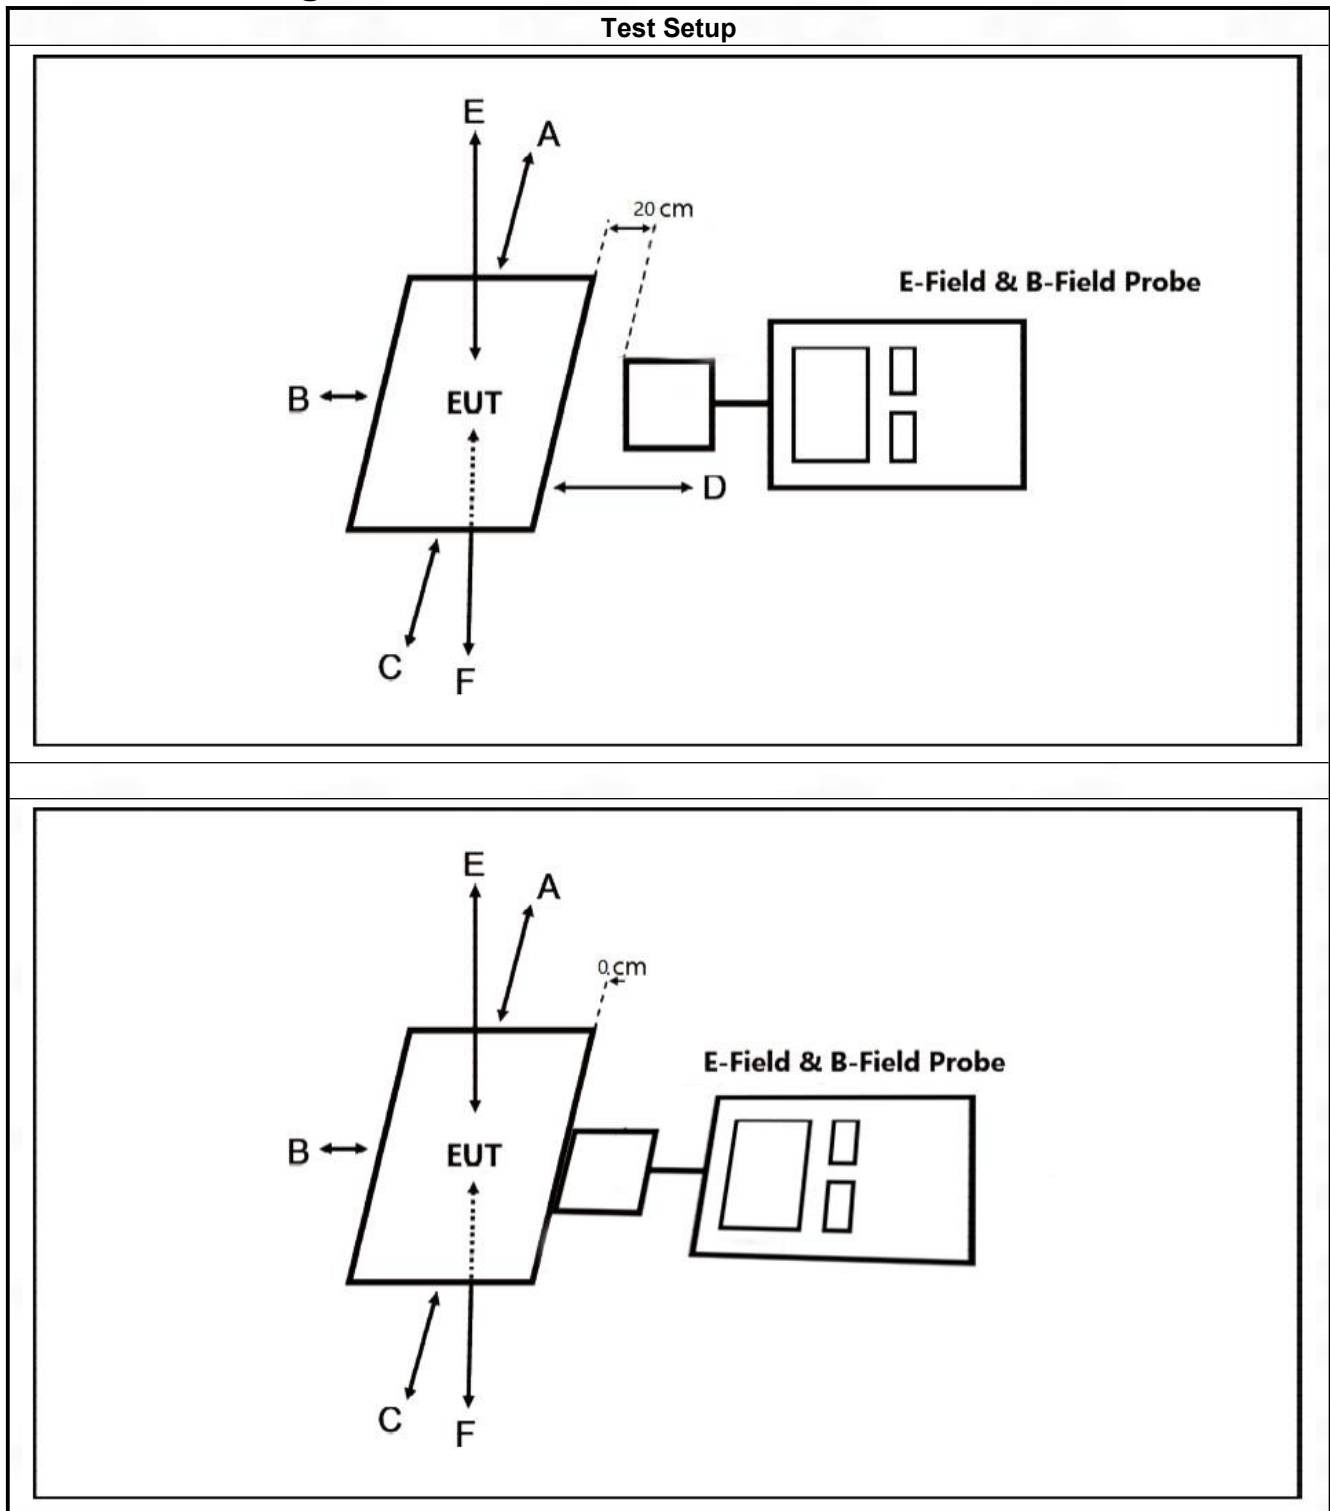

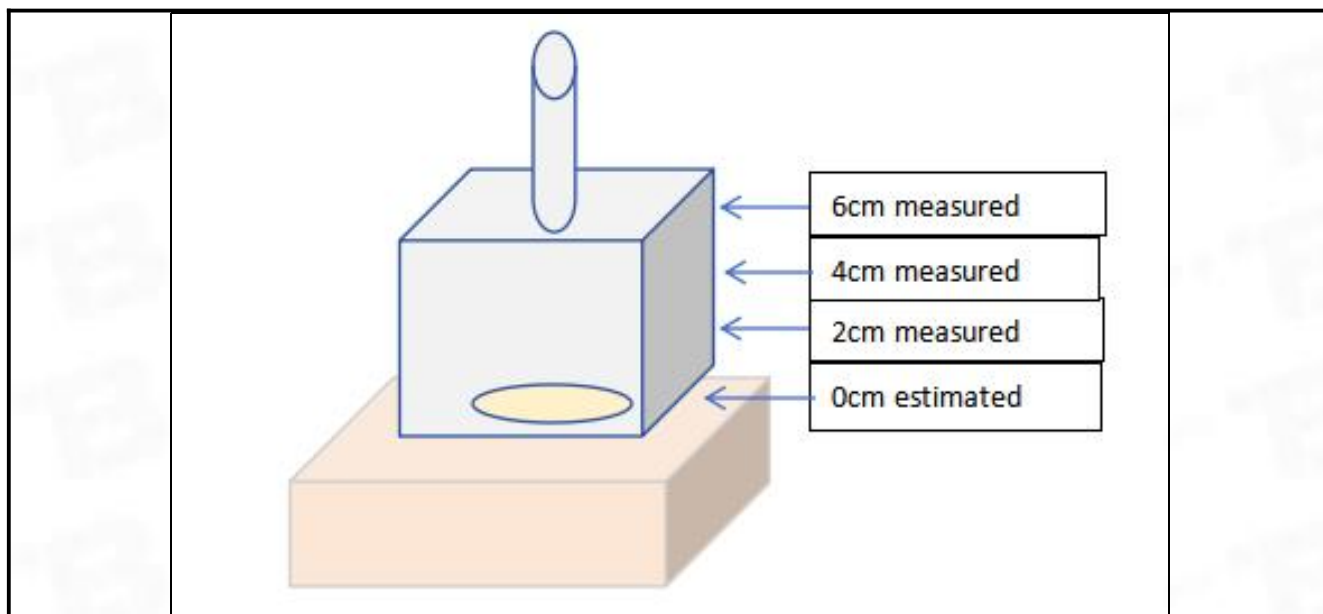

Note1: The sensitive elements are located approximately 8mm below the external surface

Note2: Measurements should be made from all sides and the top of the primary/client pair, with the 0/2/4/6/8/10/12/14/16/18/20cm measured from the center of the probe(s) to the edge of the device.

The RF exposure test was performed in anechoic chamber.

The measurement probe was placed at test distance (0/2/4/6/8/10/12/14/16/18/20cm) which is between the edge of the charger and the geometric center of probe.

The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.

The EUT was measured according to the dictates of KDB 680106 D01 v04.

8 Exposure Assessment

8.1 E-Field Strength Test Date

➤ E-Field Strength at 2/4/6/8/10/12/14/16/18/20cm from the edges surrounding the EUT:

Charging Battery Level	Measured E-Field Strength Values (V/m)							FCC E-Field Strength Limits (V/m)
	Measured Distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	2	4.4346	4.8652	4.4288	4.5584	7.4650	7.3268	614
50%	2	4.3232	5.1232	4.7533	4.7641	7.8581	7.4976	614
1%	2	4.6344	5.1249	4.6254	4.4577	7.6870	7.6233	614
99%	4	4.0233	4.5472	4.1357	4.2206	7.2840	6.9461	614
50%	4	3.9123	4.7458	4.3103	4.2497	7.4947	7.1183	614
1%	4	4.2252	4.8790	4.3962	4.2535	7.5909	7.2891	614
99%	6	3.6623	4.4061	3.9518	3.9491	7.1472	6.7796	614
50%	6	3.7852	4.5452	4.1056	3.9963	7.3895	6.9508	614
1%	6	4.0120	4.7051	4.2152	4.1163	7.5210	7.1779	614

99%	8	3.5162	4.3562	3.8294	3.8296	7.0625	6.6660	614
50%	8	3.7040	4.4686	3.9788	3.9417	7.2878	6.8544	614
1%	8	3.8935	4.6207	4.0926	4.0555	7.5128	7.0823	614
99%	10	2.7626	3.7151	3.3013	3.2636	6.0804	5.7240	614
50%	10	2.9140	3.8664	3.4140	3.3763	6.3078	5.9119	614
1%	10	3.0640	3.9783	3.5283	3.4896	6.4973	6.1011	614
99%	12	2.0837	3.2261	2.8492	2.8104	5.2517	4.9325	614
50%	12	2.1963	3.3022	2.9243	2.8866	5.4398	5.0841	614
1%	12	2.3485	3.4145	3.0372	2.9995	5.5906	5.2340	614
99%	14	1.4814	2.7724	2.4329	2.4335	4.5354	4.2162	614
50%	14	1.5938	2.8482	2.5082	2.5084	4.6859	4.3670	614
1%	14	1.7082	2.9246	2.5850	2.5857	4.8363	4.5181	614
99%	16	0.9902	2.3588	2.0953	2.0944	3.9328	3.6496	614
50%	16	1.0659	2.4342	2.1706	2.1326	4.0459	3.7627	614
1%	16	1.1788	2.5088	2.2446	2.2079	4.1591	3.8769	614
99%	18	0.5389	2.0192	1.7930	1.7918	3.4042	3.1231	614
50%	18	0.6510	2.0956	1.8695	1.8315	3.4797	3.2344	614
1%	18	0.7270	2.1711	1.9070	1.9057	3.5935	3.3110	614
99%	20	0.1611	1.7556	1.5292	1.5298	2.9518	2.6704	614
50%	20	0.2366	1.7920	1.6035	1.5674	3.0277	2.7826	614
1%	20	0.3122	1.8685	1.6423	1.5946	3.1039	2.8585	614
Note: V/m= A/m *377								

E-Field Strength at 20cm from the edges surrounding the EUT:

Charging Battery Level	Measured E-Field Strength Values (V/m)							FCC E-Field Strength Limits (V/m)
	Measured Distance (cm)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	20	0.1618	1.7553	1.5295	1.5286	2.9512	2.6695	614
50%	20	0.2365	1.7920	1.6036	1.5674	3.0281	2.7823	614
1%	20	0.3114	1.8697	1.6423	1.5944	3.1041	2.8587	614

8.2 H-Field Strength Test Date:

➤ H-Field Strength at 2/4/6 8/10/12/14/16/18/20cm from the edges surrounding the EUT

Charging Battery Level	Measured E-Field Strength Values (V/m)								FCC H-Field Strength Limits (A/m)
	Measured Distance (cm)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	2	uT	0.0406	0.0439	0.0345	0.0284	0.0618	0.0693	--
99%	2	A/m	0.0325	0.0351	0.0276	0.0227	0.0495	0.0554	1.63
50%	2	uT	0.0466	0.0406	0.0330	0.0297	0.0629	0.0720	--
50%	2	A/m	0.0373	0.0325	0.0264	0.0237	0.0503	0.0576	1.63
1%	2	uT	0.0425	0.0415	0.0330	0.0365	0.0594	0.0692	--
1%	2	A/m	0.0340	0.0332	0.0264	0.0292	0.0475	0.0554	1.63
99%	4	uT	0.0303	0.0258	0.0221	0.0244	0.0373	0.0418	--
99%	4	A/m	0.0243	0.0207	0.0177	0.0195	0.0299	0.0334	1.63
50%	4	uT	0.0354	0.0255	0.0229	0.0250	0.0376	0.0464	--
50%	4	A/m	0.0283	0.0204	0.0183	0.0200	0.0301	0.0371	1.63
1%	4	uT	0.0349	0.0301	0.0257	0.0241	0.0355	0.0456	--
1%	4	A/m	0.0279	0.0241	0.0206	0.0192	0.0284	0.0365	1.63
99%	6	uT	0.0252	0.0226	0.0191	0.0167	0.0343	0.0428	--
99%	6	A/m	0.0202	0.0181	0.0153	0.0134	0.0274	0.0342	1.63
50%	6	uT	0.0260	0.0217	0.0190	0.0191	0.0347	0.0462	--
50%	6	A/m	0.0208	0.0173	0.0152	0.0153	0.0277	0.0370	1.63
1%	6	uT	0.0252	0.0225	0.0198	0.0214	0.0316	0.0435	--
1%	6	A/m	0.0201	0.0180	0.0159	0.0171	0.0253	0.0348	1.63
99%	8	uT	0.0217	0.0174	0.0151	0.0168	0.0264	0.0268	--
99%	8	A/m	0.0174	0.0139	0.0121	0.0135	0.0211	0.0214	1.63
50%	8	uT	0.0240	0.0175	0.0142	0.0153	0.0295	0.0270	--
50%	8	A/m	0.0192	0.0140	0.0113	0.0122	0.0236	0.0216	1.63
1%	8	uT	0.0232	0.0180	0.0144	0.0156	0.0295	0.0265	--
1%	8	A/m	0.0185	0.0144	0.0115	0.0125	0.0236	0.0212	1.63
99%	10	uT	0.0194	0.0140	0.0129	0.0130	0.0232	0.0236	--
99%	10	A/m	0.0155	0.0112	0.0103	0.0104	0.0185	0.0189	1.63
50%	10	uT	0.0213	0.0162	0.0125	0.0144	0.0243	0.0219	--
50%	10	A/m	0.0171	0.0129	0.0100	0.0115	0.0194	0.0175	1.63
1%	10	uT	0.0219	0.0162	0.0120	0.0154	0.0256	0.0235	--
1%	10	A/m	0.0175	0.0129	0.0096	0.0123	0.0205	0.0188	1.63

99%	12	uT	0.0175	0.0129	0.0116	0.0117	0.0204	0.0204	--
99%	12	A/m	0.0140	0.0103	0.0093	0.0094	0.0163	0.0164	1.63
50%	12	uT	0.0169	0.0131	0.0126	0.0111	0.0205	0.0203	--
50%	12	A/m	0.0135	0.0105	0.0101	0.0089	0.0164	0.0162	1.63
1%	12	uT	0.0175	0.0135	0.0123	0.0110	0.0222	0.0206	--
1%	12	A/m	0.0140	0.0108	0.0098	0.0088	0.0178	0.0165	1.63
99%	14	uT	0.0147	0.0111	0.0111	0.0101	0.0182	0.0182	--
99%	14	A/m	0.0118	0.0089	0.0089	0.0081	0.0146	0.0146	1.63
50%	14	uT	0.0163	0.0114	0.0096	0.0101	0.0177	0.0180	--
50%	14	A/m	0.0131	0.0091	0.0077	0.0081	0.0142	0.0144	1.63
1%	14	uT	0.0165	0.0120	0.0106	0.0110	0.0175	0.0176	--
1%	14	A/m	0.0132	0.0096	0.0085	0.0088	0.0140	0.0141	1.63
99%	16	uT	0.0129	0.0099	0.0093	0.0086	0.0163	0.0148	--
99%	16	A/m	0.0104	0.0079	0.0074	0.0069	0.0131	0.0119	1.63
50%	16	uT	0.0120	0.0102	0.0084	0.0090	0.0161	0.0158	--
50%	16	A/m	0.0096	0.0082	0.0067	0.0072	0.0129	0.0126	1.63
1%	16	uT	0.0139	0.0093	0.0099	0.0097	0.0172	0.0162	--
1%	16	A/m	0.0111	0.0074	0.0079	0.0078	0.0138	0.0129	1.63
99%	18	uT	0.0113	0.0082	0.0072	0.0083	0.0140	0.0131	--
99%	18	A/m	0.0090	0.0066	0.0057	0.0066	0.0112	0.0105	1.63
50%	18	uT	0.0121	0.0084	0.0076	0.0078	0.0139	0.0131	--
50%	18	A/m	0.0097	0.0068	0.0061	0.0062	0.0112	0.0105	1.63
1%	18	uT	0.0107	0.0093	0.0086	0.0075	0.0146	0.0144	--
1%	18	A/m	0.0085	0.0074	0.0069	0.0060	0.0117	0.0115	1.63
99%	20	uT	0.0111	0.0065	0.0062	0.0076	0.0109	0.0107	--
99%	20	A/m	0.0089	0.0052	0.0049	0.0061	0.0087	0.0086	1.63
50%	20	uT	0.0097	0.0083	0.0078	0.0070	0.0124	0.0119	--
50%	20	A/m	0.0077	0.0067	0.0063	0.0056	0.0099	0.0095	1.63
1%	20	uT	0.0094	0.0091	0.0069	0.0064	0.0121	0.0115	--
1%	20	A/m	0.0075	0.0073	0.0055	0.0051	0.0096	0.0092	1.63

Note: A/m=uT/1.25

➤ H-Field Strength a 20cm from the edges surrounding the EUT

Charging Battery Level	Measured E-Field Strength Values (V/m)								FCC H-Field Strength Limits (A/m)
	Measured Distance (cm)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	20	uT	0.0107	0.0075	0.0057	0.0070	0.0115	0.0108	--
99%	20	A/m	0.0086	0.0060	0.0046	0.0056	0.0092	0.0087	1.63
50%	20	uT	0.0093	0.0090	0.0074	0.0080	0.0117	0.0116	--
50%	20	A/m	0.0075	0.0072	0.0059	0.0064	0.0093	0.0092	1.63
1%	20	uT	0.0107	0.0089	0.0064	0.0073	0.0119	0.0118	--
1%	20	A/m	0.0086	0.0071	0.0051	0.0058	0.0096	0.0094	1.63

8.3 Estimated Model

According to the formula:

The formula for the magnetic field strength at a distance r from the coil is

$$H = I / (2\pi r) * \mu$$

H is A/m

I is the current intensity

μ is the permeability, and its value depends on the medium.

The other parameters are fixed, so H is inversely proportional to r .

Therefore, From the measurement H_6 we can estimate the values of H_4, H_2, H_0 :

$$H_4 = H_6 * r_6 / r_4$$

$$H_2 = H_6 * r_6 / r_2$$

$$H_0 = H_6 * r_6 / r_0$$

The values of “ r ” are shown in the following table:

A:Rear.1.097cm 	B:Left.1.383cm 
C:Front.4.962cm 	D:Right.1.395cm 
E:Top.0.233cm 	F:Bottom.1.485cm 

➤ **ABCDEF direction The actual distance(r) to the antenna coil:**

measured distance(cm)	Actual distance r to the antenna (cm)					
	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F
0	1.10	1.38	4.96	1.40	0.23	1.49
2	3.10	3.38	6.96	3.40	2.23	3.49
4	5.10	5.38	8.96	5.40	4.23	5.49
6	7.10	7.38	10.96	7.40	6.23	7.49
8	9.10	9.38	12.96	9.40	8.23	9.49
10	11.10	11.38	14.96	11.40	10.23	11.49
12	13.10	13.38	16.96	13.40	12.23	13.49
14	15.10	15.38	18.96	15.40	14.23	15.49
16	17.10	17.38	20.96	17.40	16.23	17.49
18	19.10	19.38	22.96	19.40	18.23	19.49
20	21.10	21.38	24.96	21.40	20.23	21.49

Note: The phone is 16.21mm thick.

➤ **The result is calculated by the above formula:**

H-Field Strength at 0/2/4cm from the edges surrounding the EUT

Charging Battery Level	Measured E-Field Strength Values (V/m)								FCC H-Field Strength Limits (A/m)
	Measured Distance (cm)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	0	A/m	0.0432	0.0388	0.0328	0.0287	0.0589	0.0734	1.63
50%	0	A/m	0.0446	0.0372	0.0326	0.0328	0.0595	0.0793	1.63
1%	0	A/m	0.0432	0.0386	0.0340	0.0367	0.0543	0.0747	1.63
99%	2	A/m	0.0313	0.0280	0.0238	0.0208	0.0426	0.0531	1.63
50%	2	A/m	0.0323	0.0269	0.0236	0.0238	0.0431	0.0574	1.63
1%	2	A/m	0.0312	0.0279	0.0246	0.0266	0.0393	0.0541	1.63
99%	4	A/m	0.0245	0.0220	0.0186	0.0163	0.0334	0.0416	1.63
50%	4	A/m	0.0253	0.0211	0.0185	0.0186	0.0337	0.0450	1.63
1%	4	A/m	0.0245	0.0219	0.0193	0.0208	0.0308	0.0424	1.63

8.4 Comparison of evaluation data and test data

➤ We compare the test value of 4cm/2cm with the estimated value:

Test Value									
Charging Battery Level	Measured E-Field Strength Values (V/m)								FCC H-Field Strength Limits (A/m)
	Measured Distance (cm)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	2	A/m	0.0325	0.0351	0.0276	0.0227	0.0495	0.0554	1.63
50%	2	A/m	0.0373	0.0325	0.0264	0.0237	0.0503	0.0576	1.63
1%	2	A/m	0.0340	0.0332	0.0264	0.0292	0.0475	0.0554	1.63
99%	4	A/m	0.0243	0.0207	0.0177	0.0195	0.0299	0.0334	1.63
50%	4	A/m	0.0283	0.0204	0.0183	0.0200	0.0301	0.0371	1.63
1%	4	A/m	0.0279	0.0241	0.0206	0.0192	0.0284	0.0365	1.63
Estimated Value									
Charging Battery Level	Measured E-Field Strength Values (V/m)								FCC H-Field Strength Limits (A/m)
	Measured Distance (cm)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	2	A/m	0.0313	0.0280	0.0238	0.0208	0.0426	0.0531	1.63
50%	2	A/m	0.0323	0.0269	0.0236	0.0238	0.0431	0.0574	1.63
1%	2	A/m	0.0312	0.0279	0.0246	0.0266	0.0393	0.0541	1.63
99%	4	A/m	0.0245	0.0220	0.0186	0.0163	0.0334	0.0416	1.63
50%	4	A/m	0.0253	0.0211	0.0185	0.0186	0.0337	0.0450	1.63
1%	4	A/m	0.0245	0.0219	0.0193	0.0208	0.0308	0.0424	1.63

➤ The corresponding deviation value is calculated:

Charging Battery Level	Deviation value								Limits
	Measured Distance (cm)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
99%	2	A/m	3.85%	25.24%	16.08%	9.37%	16.08%	4.31%	30%
50%	2	A/m	15.49%	20.57%	11.87%	-0.20%	16.89%	0.38%	30%
1%	2	A/m	8.90%	18.81%	7.35%	9.90%	20.95%	2.43%	30%
99%	4	A/m	-1.02%	-5.97%	-4.92%	19.87%	-10.57%	-19.67%	30%
50%	4	A/m	12.06%	-3.33%	-0.66%	7.56%	-10.78%	-17.42%	30%
1%	4	A/m	14.08%	9.94%	6.59%	-7.59%	-7.69%	-13.81%	30%

➤ Conclusion:

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106.

The model was established with a 30% agreement, so it was considered to be approved.

The estimated test distances of 0cm are reliable.

9 Test Setup Photos



Side(C)



Side(A)



Side(B)



Side(D)



Top(E)



Bottom(F)



Idle mode



BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--