


H162 antenna specification

Issued by:

Shanghai Amphenol Airwave Communication Electronics Co., Ltd.
No. 689 Shen Nan Road, Xin Zhuang Industry Park, Shanghai, China

Date: July 2, 2026


Ant1_S11

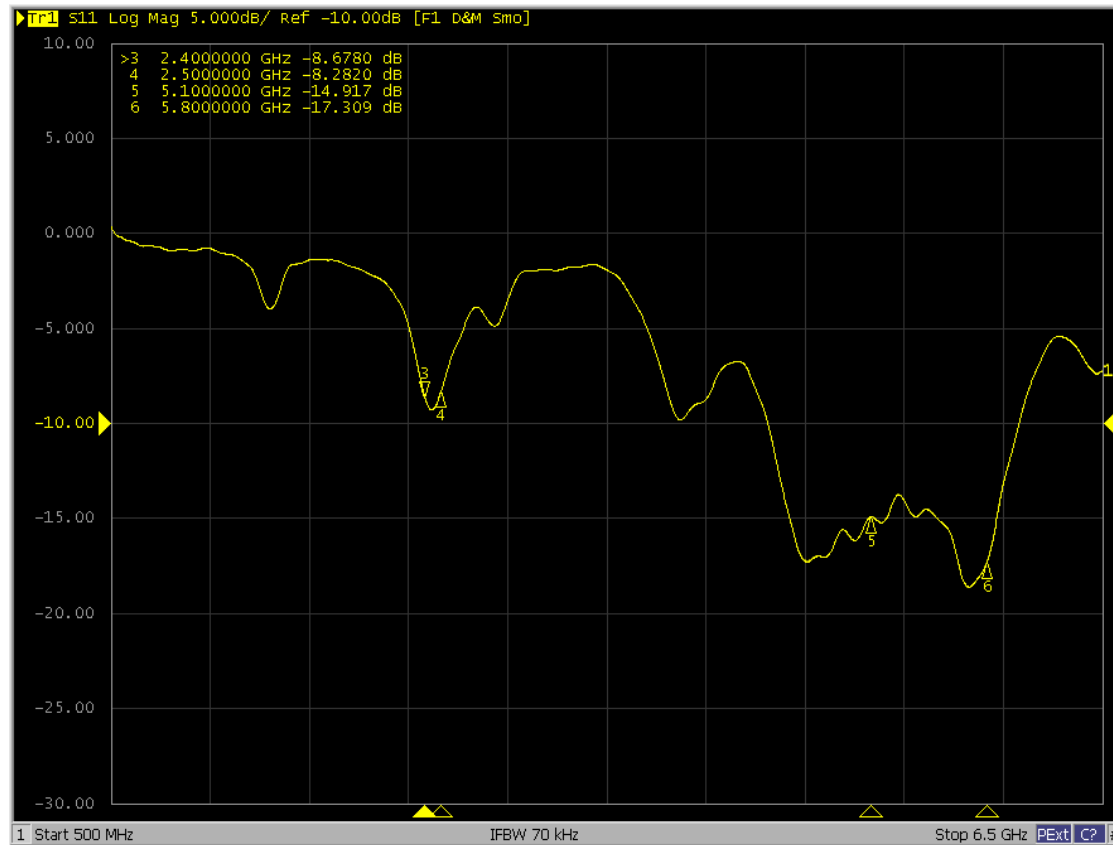


Ant1_Efficiency

Freq	Efficiency_dB	Gain	Efficiency_Pcent
2400	-5.3	-1.2	29.8
2440	-4.8	-1.2	33.1
2480	-4.9	-1.5	32.6
5150	-2.8	3.4	52.1
5350	-3.1	3.2	48.9
5490	-3.4	3.0	45.7
5675	-2.7	3.3	54.2
5895	-2.3	3.8	58.3


Ant1_2D_Theta90°

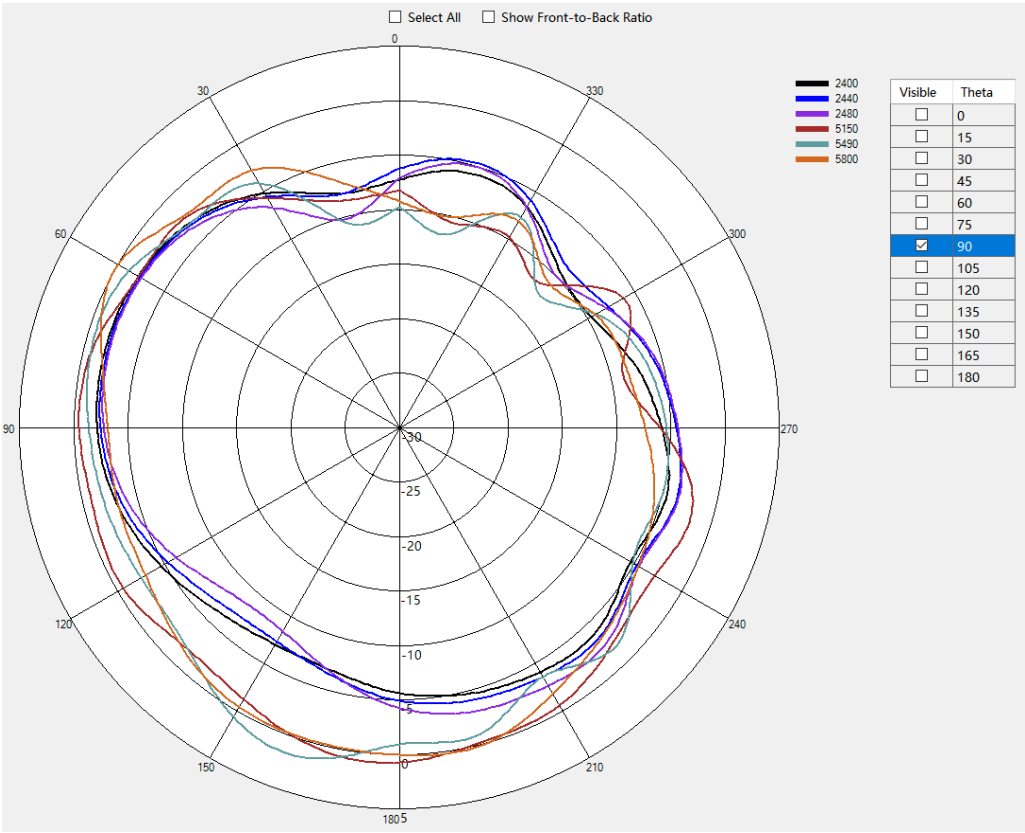

Ant1_3D

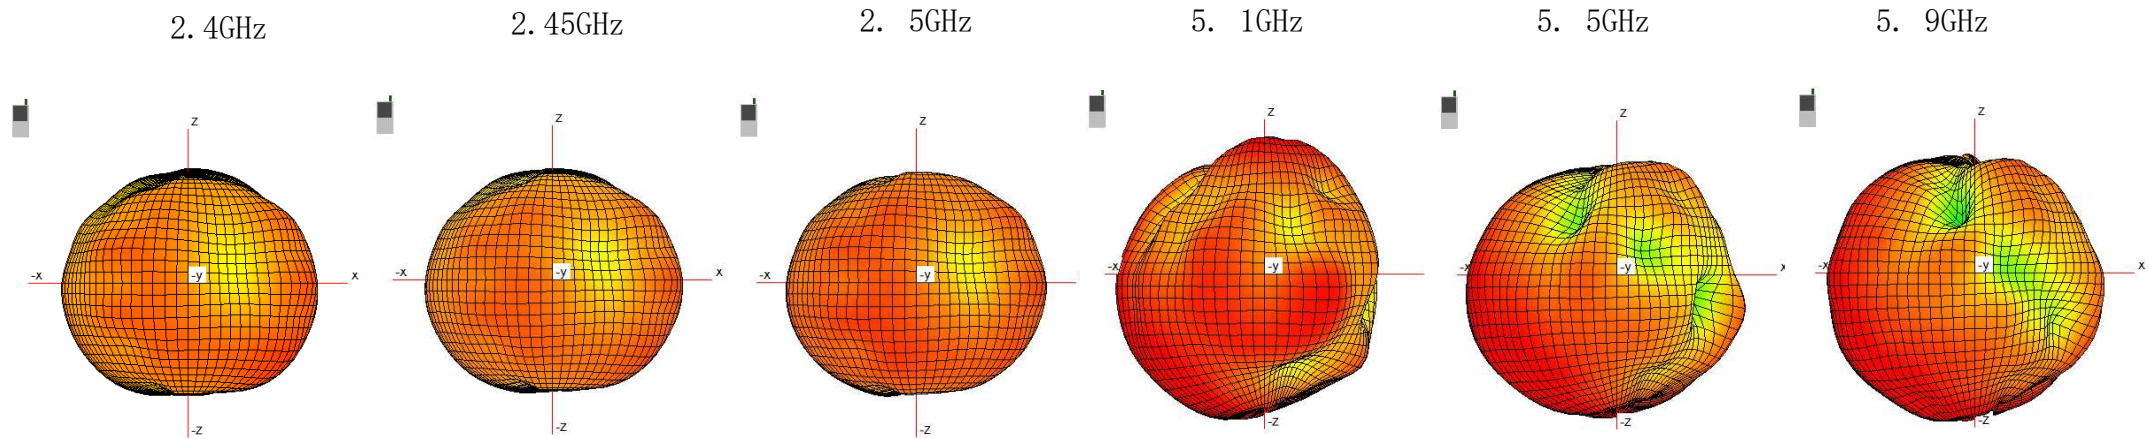


Ant2_S11

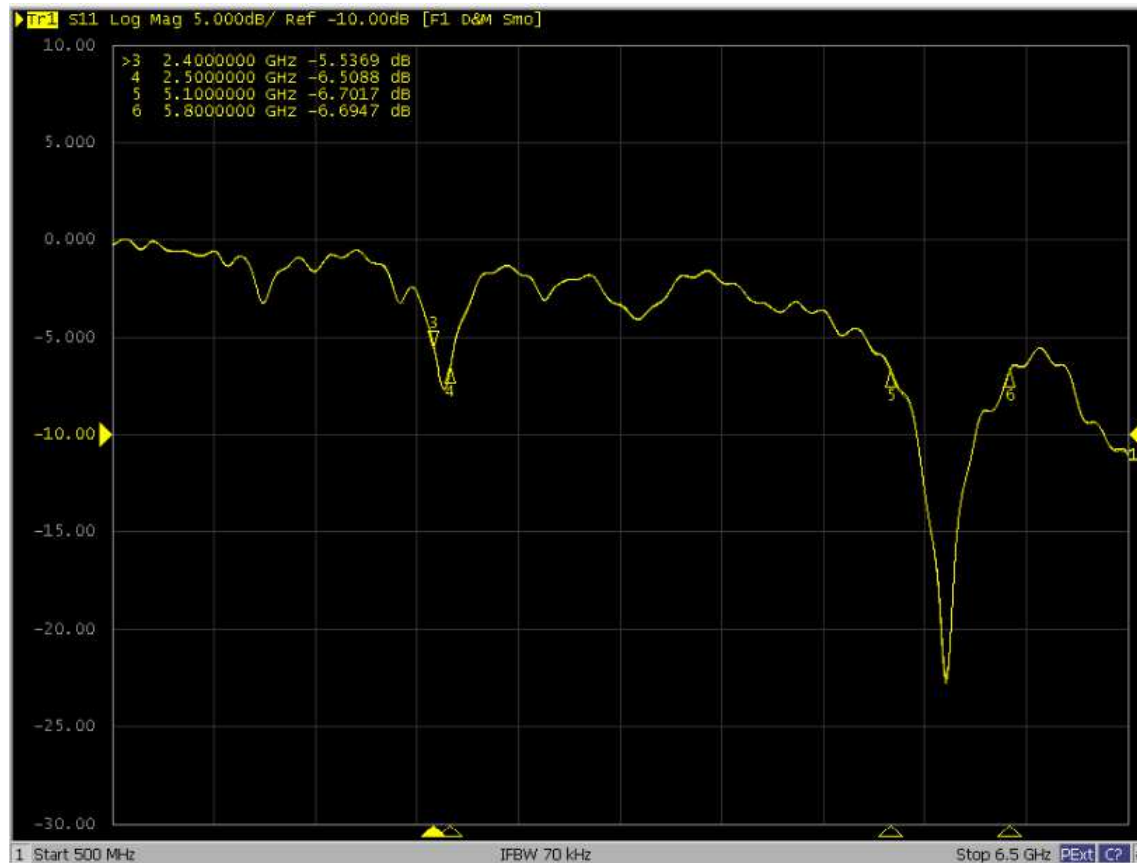


Ant2_Efficiency

Freq	Efficiency_dB	Gain	Efficiency_Percent
2400	-4.4	2.2	36.4
2440	-3.6	2.6	43.8
2480	-3.2	2.3	48.0
5150	-4.3	0.5	37.5
5350	-3.1	0.9	48.8
5490	-3.1	2.9	49.4
5675	-3.0	3.0	49.9
5895	-3.7	1.6	43.0


Ant2_2D_Theta90°

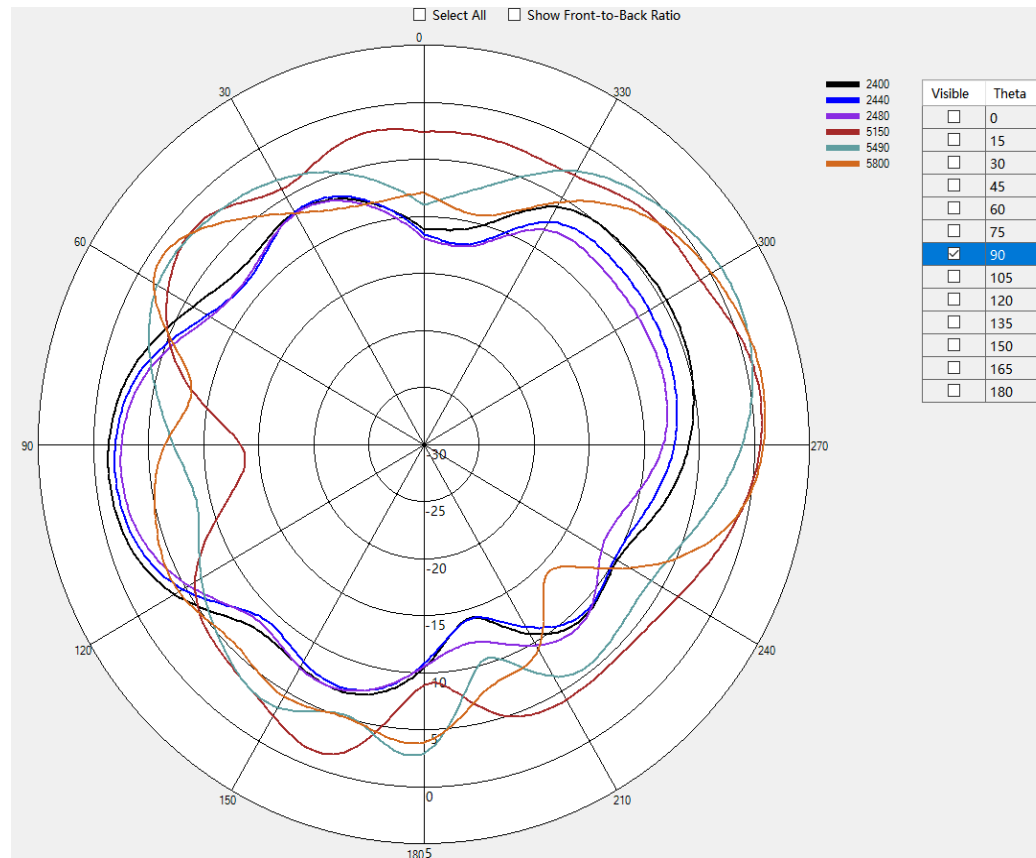

Ant2_3D

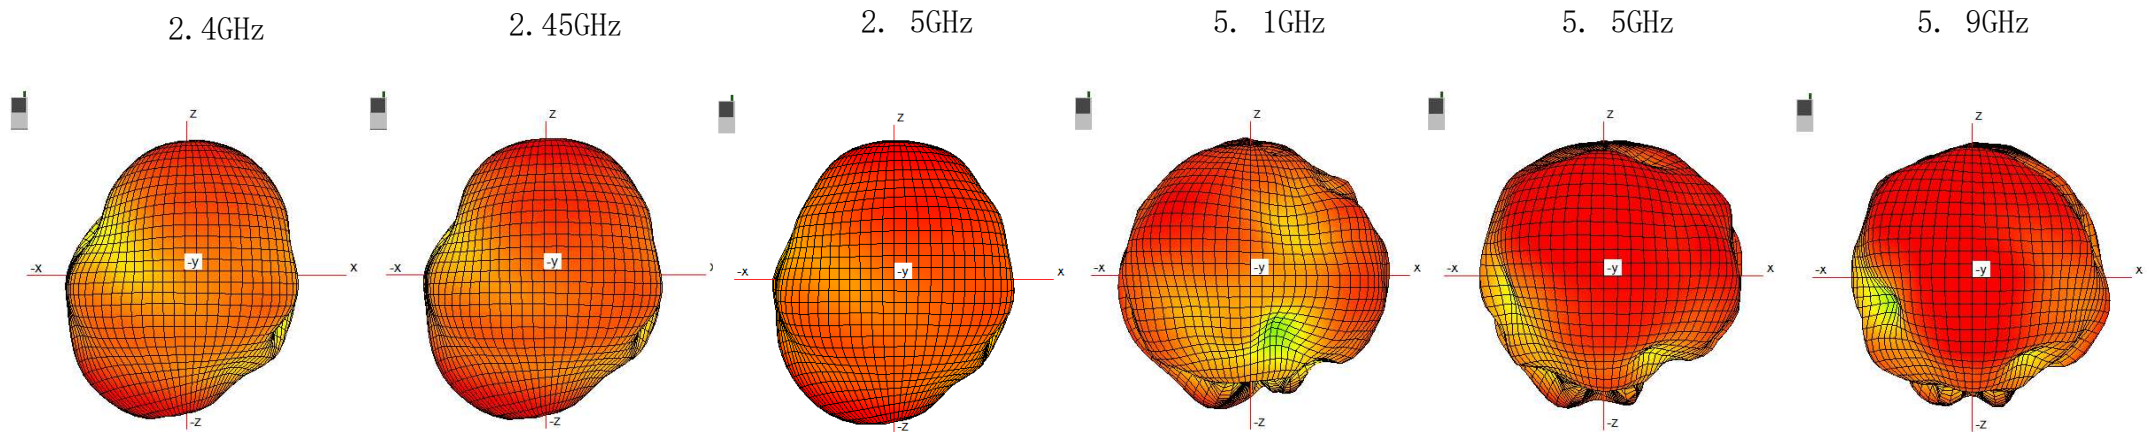

Amphenol Antenna picture_Ant1(Front Ant)

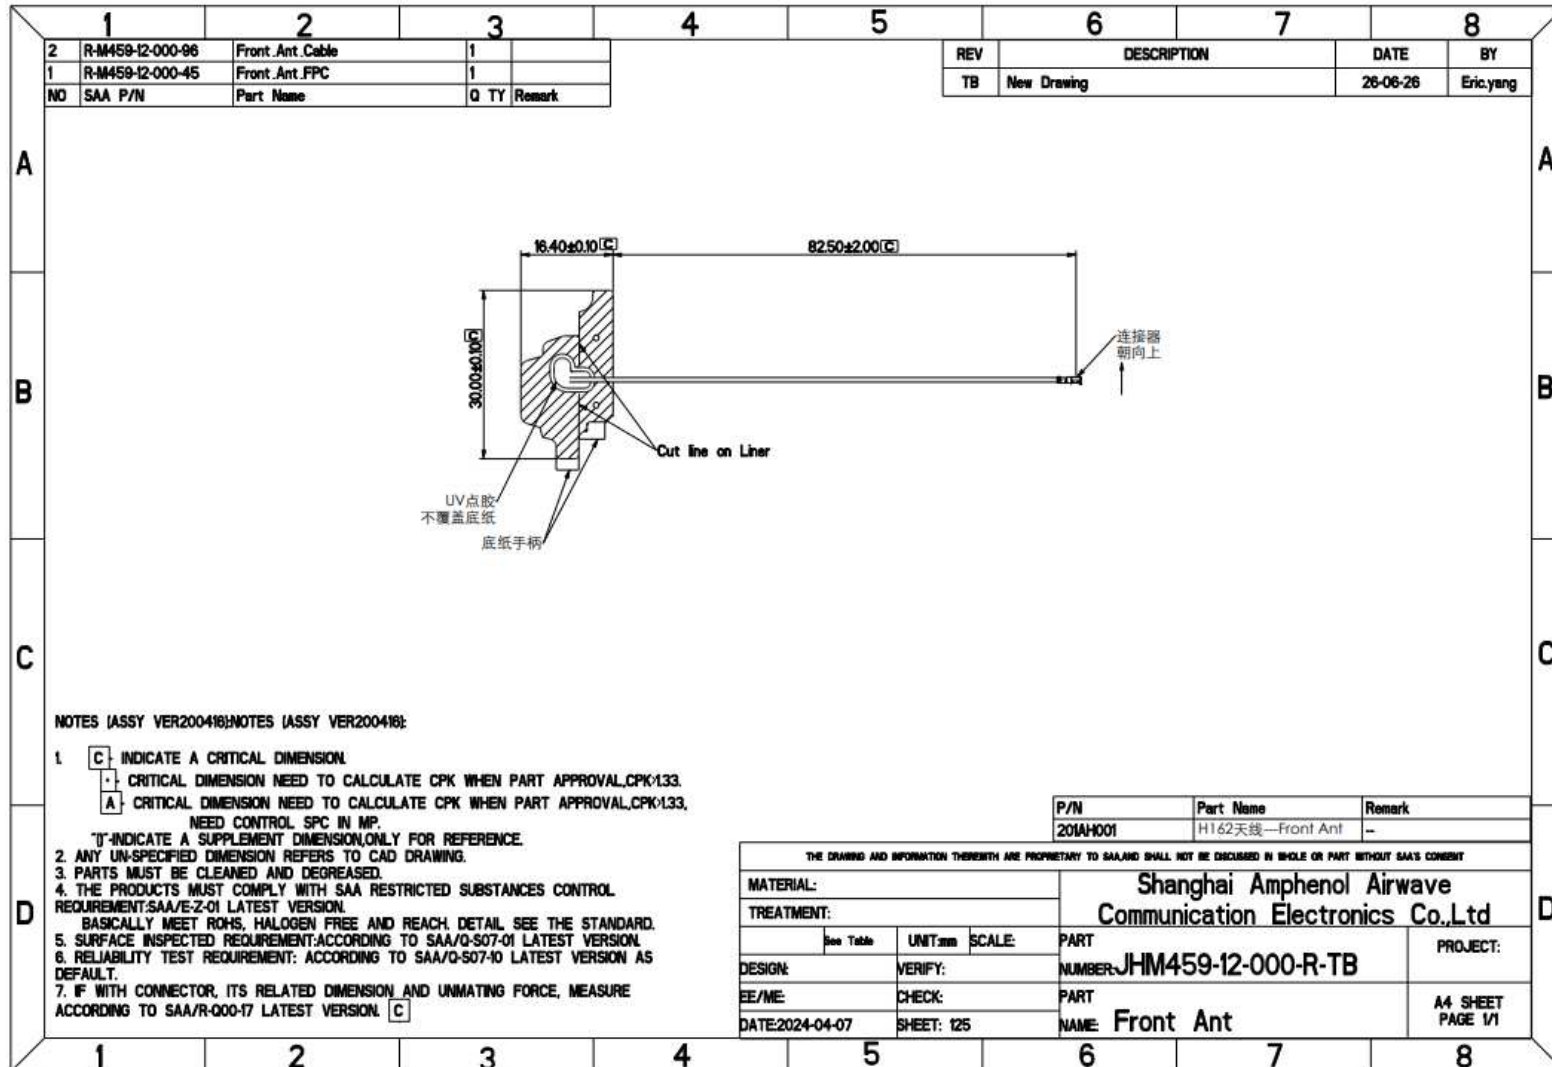

Amphenol Antenna picture_Ant2(Rear Ant)

