

Test Report

Report No. : MTi260703023-0101E1
Date of issue : 2026-07-14
Applicant : Shenzhen Zero Zero Infinity Technology Co.,
Ltd.
Product : VERSA
Model(s) : ZZ-H-1-006
FCC ID : 2AIDW-ZZ-H-1-006

Shenzhen Microtest Co., Ltd.

TEST REPORT

Report No.: MTi260703023-0101E1

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	4
1.3	Environmental Conditions	5
1.4	Description of support units	5
1.5	Measurement uncertainty	5
2	Summary of Test Result	6
3	Test Facilities and accreditations	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Emission Test Results (EMI)	9
5.1	Conducted emissions on AC mains	9
5.2	Radiated emissions (Below 1GHz)	12
5.3	Radiated emissions (Above 1GHz)	15
	Photographs of the test setup	18
	Photographs of the EUT	20

TEST REPORT

Report No.: MTi260703023-0101E1

Test Result Certification		
Applicant	Shenzhen Zero Zero Infinity Technology Co., Ltd.	
Applicant Address	4F Qianhai Yidu Tower Building, Shenzhen China	
Manufacturer	Shenzhen Zero Zero Infinity Technology Co., Ltd.	
Manufacturer Address	4F Qianhai Yidu Tower Building, Shenzhen China	
Product description		
Product name	VERSA	
Trademark	N/A	
Model name	ZZ-H-1-006	
Series Model(s)	N/A	
Standards	47 CFR Part 15, Subpart B	
Test Method	ANSI C63.4-2014	
Testing Information		
Date of test	2026-07-11 to 2026-07-12	
Test result	Pass	
Prepared by:	Letter Lan	<i>Letter. Lan.</i>
Reviewed by:	David Lee	<i>David. Lee</i>
Approved by:	Lewis Lian	<i>Lewis Lian</i>

TEST REPORT

Report No.: MTi260703023-0101E1

1 General Description

1.1 Description of the EUT

Product name:	VERSA
Model name:	ZZ-H-1-006
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: 5V/9V/12V/15V== Max.3A Battery: 7.12VDC 2070mAh
Accessories:	Cable: Type-C to Type-C cable 0.5m
Test sample(s) number:	MTi260703023-01-E001

1.2 Description of test modes

For test, the EUT has been pre-tested under the following test modes, Only the worst case data will be shown in the report.

No.	Emission test modes
Mode1	Charging +2.4G Wifi Linking
Mode2	Charging +5G Wifi Linking
Mode3	normal working +5G Wifi Linking
Mode4	normal working +2.4G Wifi Linking
Mode5	Charging+BT linking
Mode6	BT linking

TEST REPORT

Report No.: MTi260703023-0101E1

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list

Description	Model	Serial No.	Manufacturer
HUAWEI QUICK CHARGE(65W)	HW-200325CP1	FL8606P8500764	HUAWEI
Mobile phone	Find X3	bf6e6b3b	OPPO

Support cable list

Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Radiated emissions (30MHz~1GHz)	±4.7dB
Radiated emissions (above 1GHz)	±5.1dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTi260703023-0101E1

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Conducted emissions on AC mains	47 CFR Part 15, Subpart B	15.107, Class B	Pass
2	Radiated emissions (Below 1GHz)	47 CFR Part 15, Subpart B	15.109, Class B	Pass
3	Radiated emissions (Above 1GHz)	47 CFR Part 15, Subpart B	15.109, Class B	Pass

TEST REPORT

Report No.: MTi260703023-0101E1

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

TEST REPORT

Report No.: MTi260703023-0101E1

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted emissions on AC mains						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2026-03-10	2027-03-09
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2026-03-11	2027-03-10
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2026-03-10	2027-03-09
4	EMI Test Software	Farad	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated emissions (Below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2026-03-10	2027-03-09
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2025-05-23	2027-05-22
3	Amplifier	Hewlett-Packard	8447F	3113A06184	2026-03-10	2027-03-09
4	EMI Test Software	Farad	EZ-EMC	Ver. EMEC-3A1	/	/
Radiated emissions (Above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2026-03-10	2027-03-09
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2025-05-27	2027-05-26
3	Amplifier	Agilent	8449B	3008A01120	2026-03-10	2027-03-09
4	EMI Test Software	Farad	EZ-EMC	Ver. EMEC-3A1	/	/

TEST REPORT

Report No.: MTI260703023-0101E1

5 Emission Test Results (EMI)


5.1 Conducted emissions on AC mains

Test Requirement:	15.107, Class B		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.4-2014		
Procedure:	An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected. Remark: Level= Read Level+ Cable Loss+ LISN Factor		

5.1.1 E.U.T. Operation:

Operating Environment:			
Temperature:	25.7 °C	Humidity:	66 %
		Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode5		
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode2) is recorded in the report		

5.1.2 Test Setup Diagram:

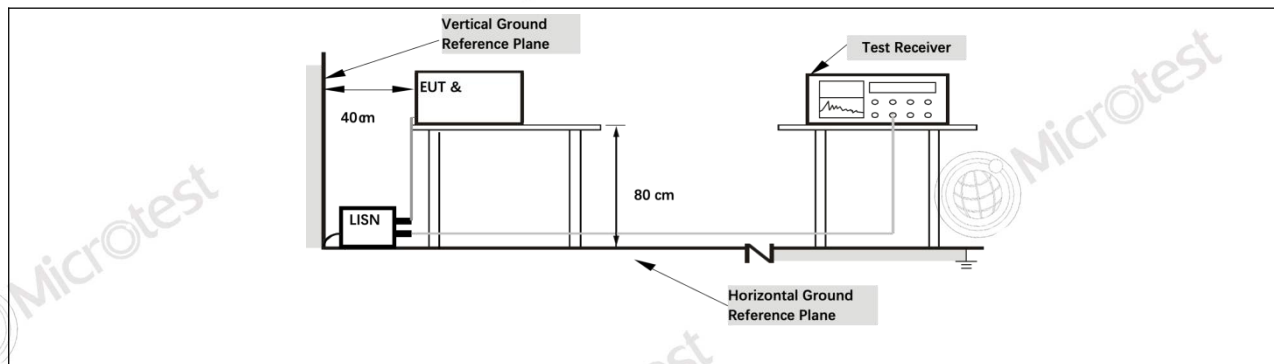


TEST REPORT

Report No.: MTi260703023-0101E1

5.1.3 Test Data:


Mode2 / Line: Line

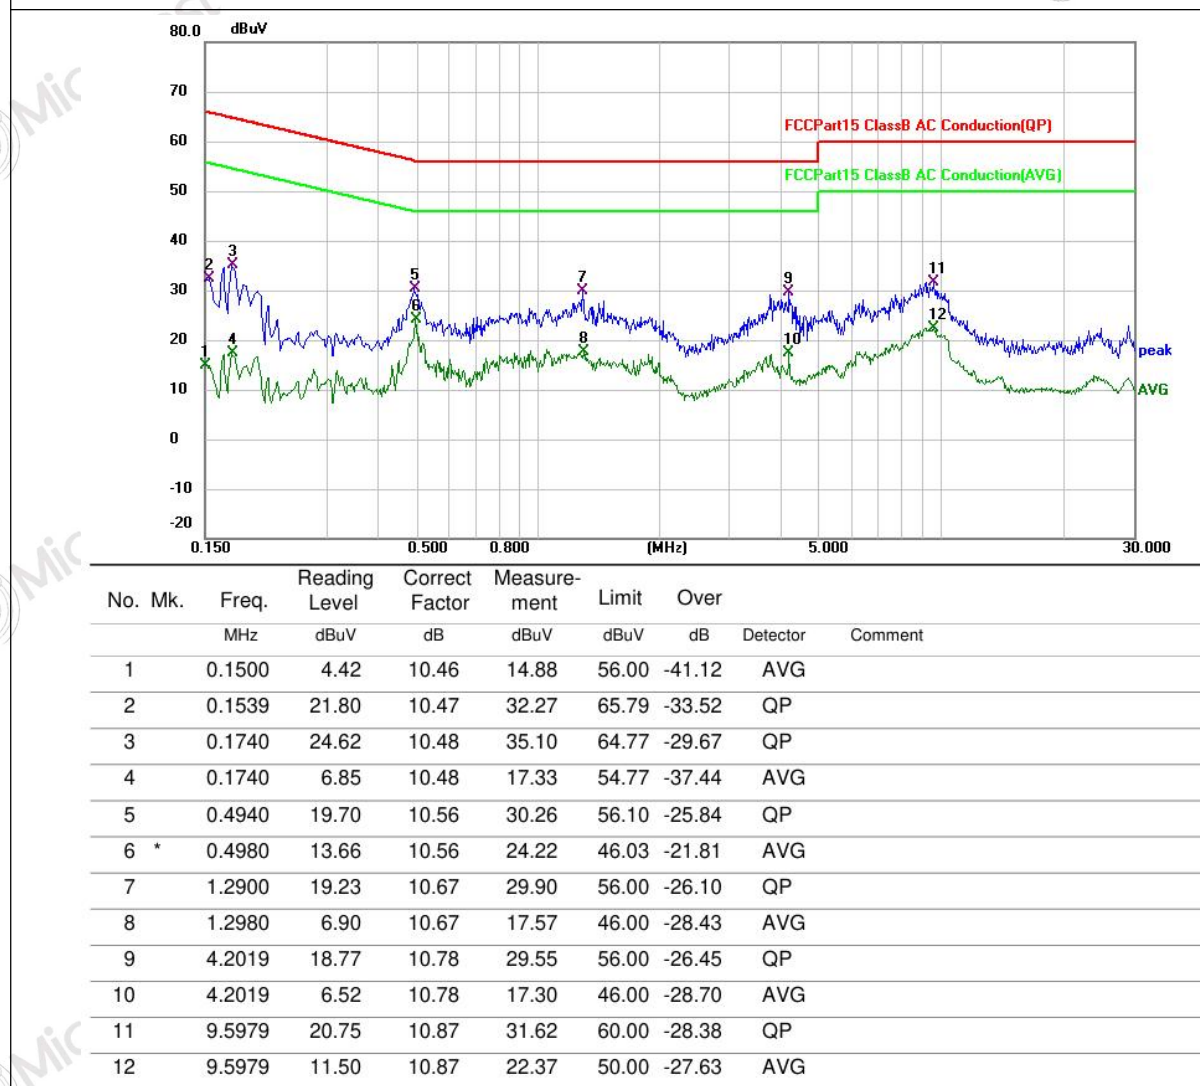

TEST REPORT

Report No.: MTi260703023-0101E1

Mode2 / Line: Neutral

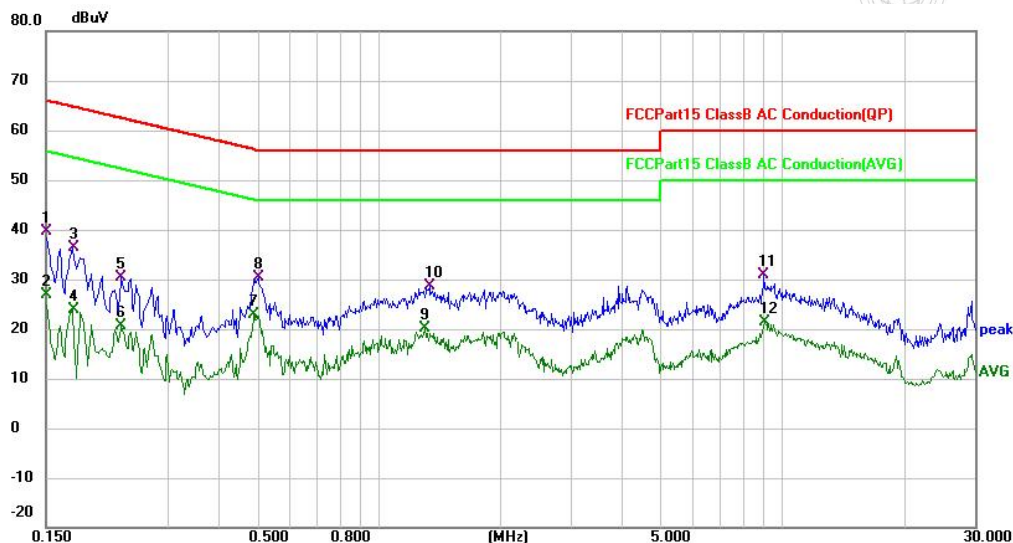

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1500	29.27	10.48	39.75	66.00	-26.25	QP	
2	0.1500	16.37	10.48	26.85	56.00	-29.15	AVG	
3	0.1740	25.91	10.49	36.40	64.77	-28.37	QP	
4	0.1740	13.32	10.49	23.81	54.77	-30.96	AVG	
5	0.2300	19.95	10.50	30.45	62.45	-32.00	QP	
6	0.2300	10.03	10.50	20.53	52.45	-31.92	AVG	
7 *	0.4900	12.35	10.56	22.91	46.17	-23.26	AVG	
8	0.5020	19.76	10.56	30.32	56.00	-25.68	QP	
9	1.3020	9.42	10.66	20.08	46.00	-25.92	AVG	
10	1.3340	17.88	10.66	28.54	56.00	-27.46	QP	
11	9.0219	20.02	10.86	30.88	60.00	-29.12	QP	
12	9.1059	10.52	10.86	21.38	50.00	-28.62	AVG	

TEST REPORT

Report No.: MTi260703023-0101E1


5.2 Radiated emissions (Below 1GHz)

Test Requirement:	15.109, Class B																																
Test Limit:	Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values: <table border="1"> <thead> <tr> <th rowspan="2">Frequency of emission (MHz)</th><th colspan="2">Field strength @3m</th><th colspan="2">Field strength @10m</th></tr> <tr> <th>($\mu\text{V/m}$)</th><th>(dB$\mu\text{V/m}$)</th><th>($\mu\text{V/m}$)</th><th>(dB$\mu\text{V/m}$)</th></tr> </thead> <tbody> <tr> <td>30 – 88</td><td>100</td><td>40</td><td>30</td><td>29.5</td></tr> <tr> <td>88 – 216</td><td>150</td><td>43.5</td><td>45</td><td>33.1</td></tr> <tr> <td>216 – 960</td><td>200</td><td>46</td><td>60</td><td>35.6</td></tr> <tr> <td>Above 960</td><td>500</td><td>54</td><td>150</td><td>43.5</td></tr> </tbody> </table>				Frequency of emission (MHz)	Field strength @3m		Field strength @10m		($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)	($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)	30 – 88	100	40	30	29.5	88 – 216	150	43.5	45	33.1	216 – 960	200	46	60	35.6	Above 960	500	54	150	43.5
Frequency of emission (MHz)	Field strength @3m		Field strength @10m																														
	($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)	($\mu\text{V/m}$)	(dB $\mu\text{V/m}$)																													
30 – 88	100	40	30	29.5																													
88 – 216	150	43.5	45	33.1																													
216 – 960	200	46	60	35.6																													
Above 960	500	54	150	43.5																													
Test Method:	ANSI C63.4-2014																																
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor																																

5.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	61 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode3) is recorded in the report				

5.2.2 Test Setup Diagram:

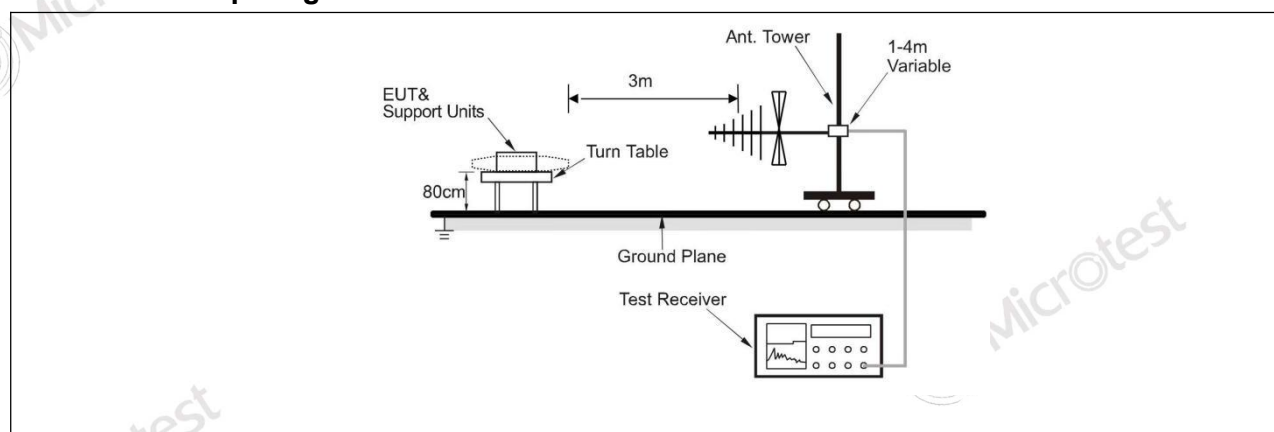


TEST REPORT

Report No.: MTi260703023-0101E1

5.2.3 Test Data:


Mode3 / Polarization: Horizontal

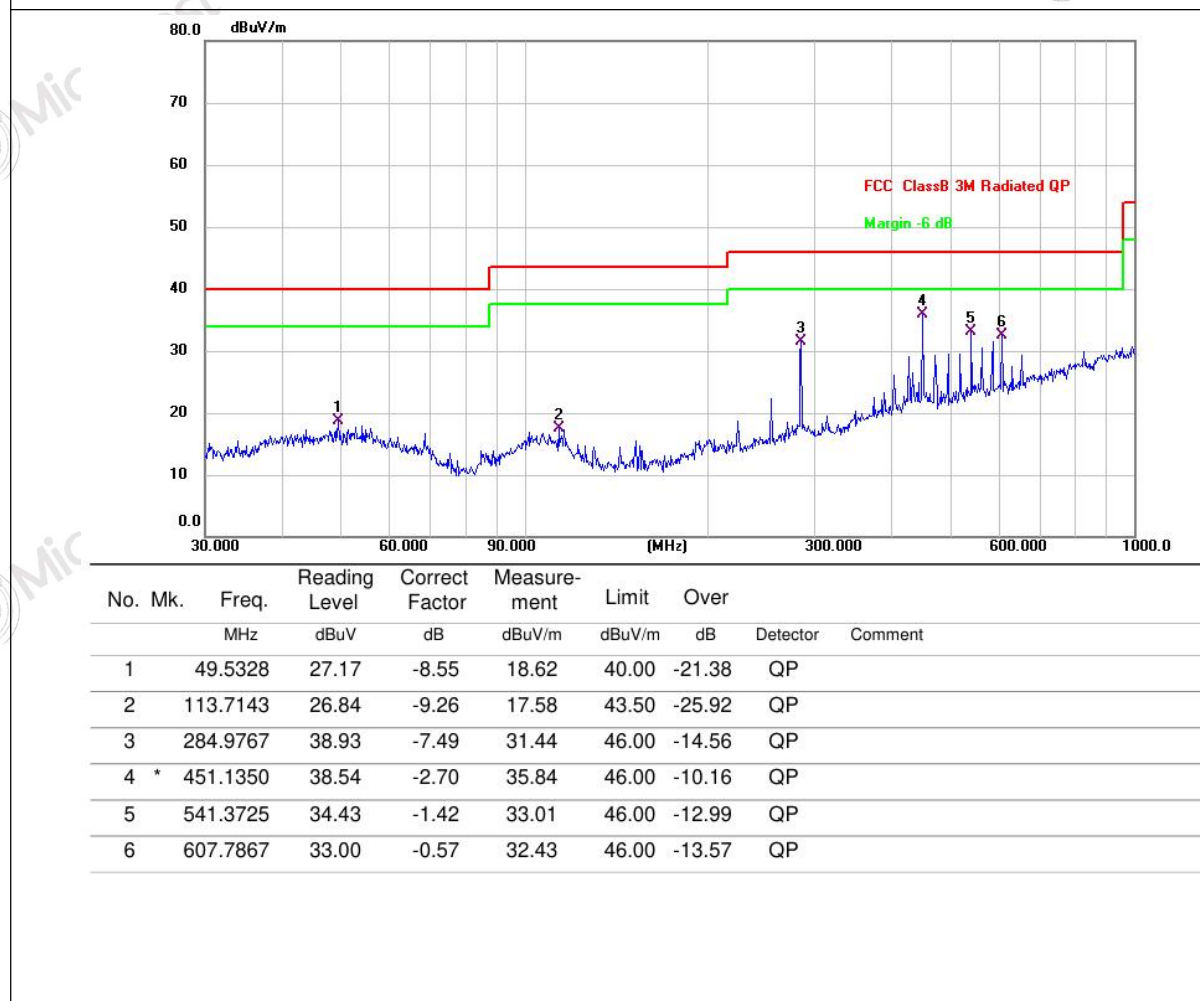

TEST REPORT

Report No.: MTi260703023-0101E1

Mode3 / Polarization: Vertical

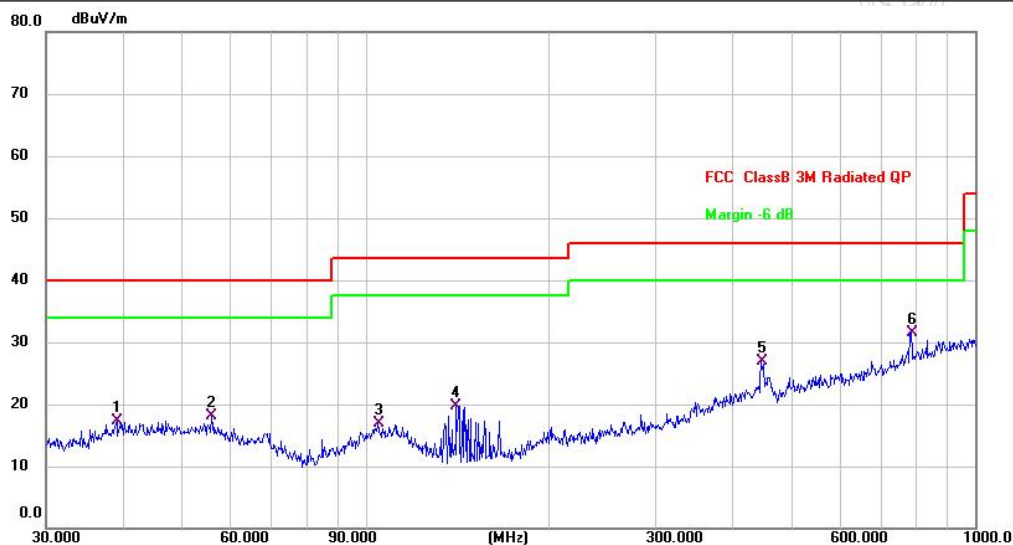

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		39.1615	26.25	-8.96	17.29	40.00	-22.71	QP	
2		56.0007	26.44	-8.42	18.02	40.00	-21.98	QP	
3		104.9032	25.47	-8.56	16.91	43.50	-26.59	QP	
4		140.8350	32.70	-13.04	19.66	43.50	-23.84	QP	
5		446.4140	29.74	-2.89	26.85	46.00	-19.15	QP	
6	*	785.0934	28.43	3.05	31.48	46.00	-14.52	QP	

TEST REPORT

Report No.: MTi260703023-0101E1


5.3 Radiated emissions (Above 1GHz)

Test Requirement:	15.109, Class B			
Test Limit:	Frequency of emission (MHz)	Field strength @3m		
		Average (uV/m)	Average(d BuV/m)	Peak (dBUV/m)
	Above 1GHz	500	54	74
Test Method:	ANSI C63.4-2014			
Procedure:	An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. For below 1GHz test, Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities. For above 1GHz test, Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities. Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor			

5.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	61 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode3) is recorded in the report				

5.3.2 Test Setup Diagram:

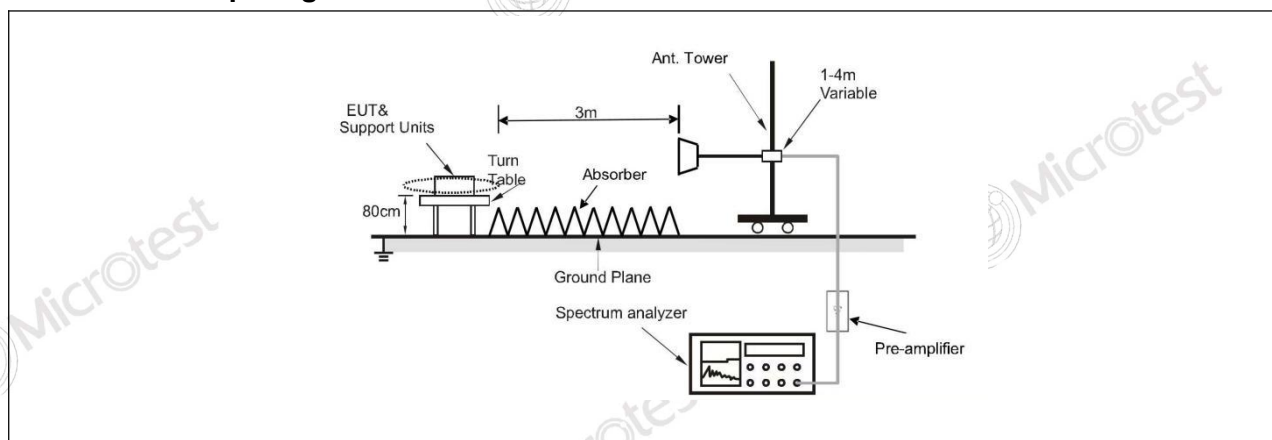


TEST REPORT

Report No.: MTi260703023-0101E1

5.3.3 Test Data:

Mode3 / Polarization: Horizontal

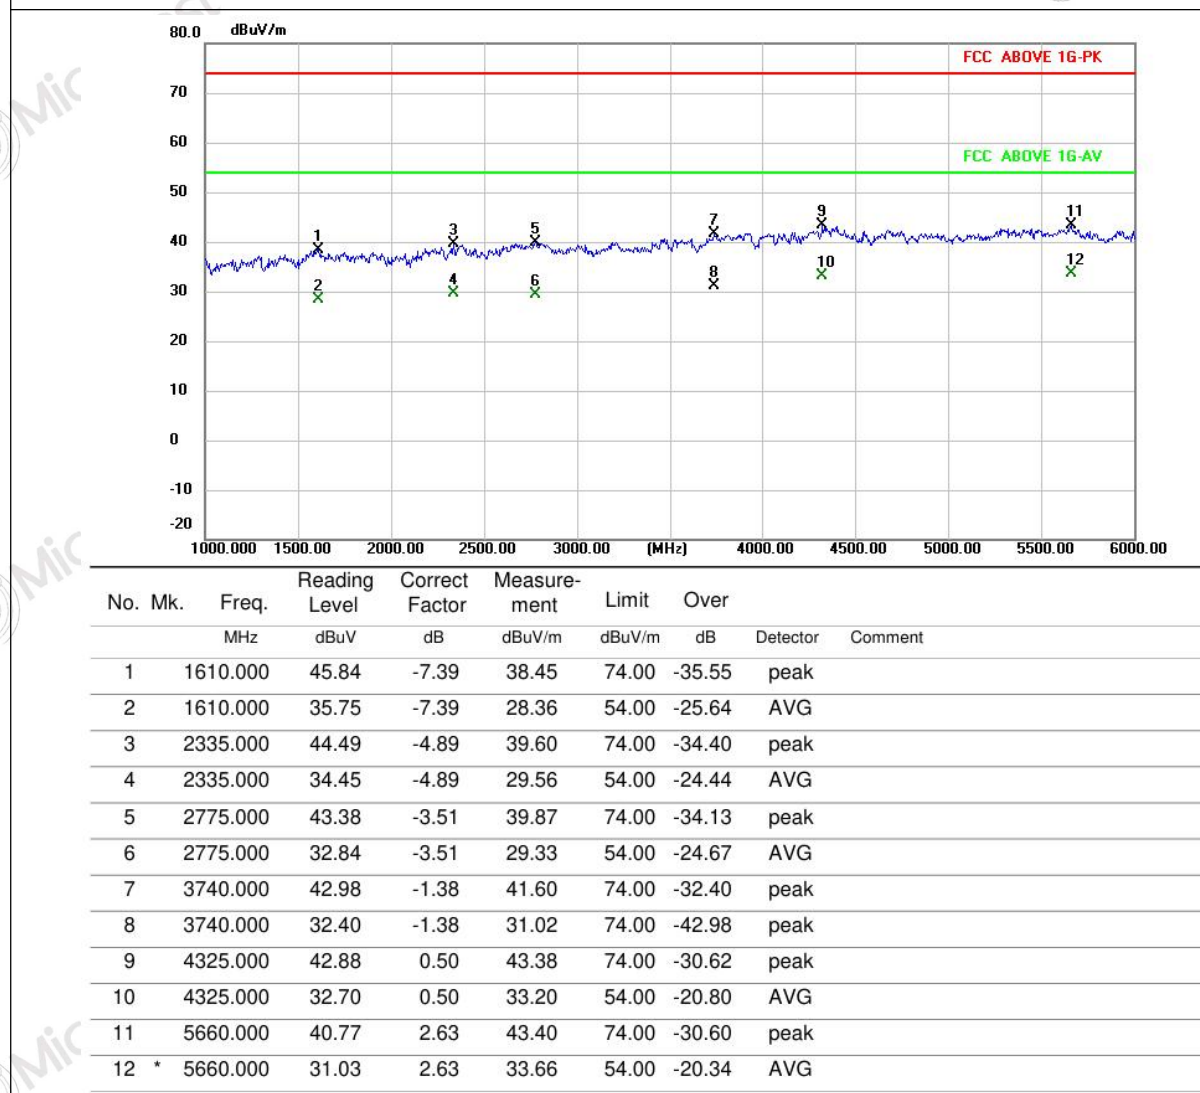

TEST REPORT

Report No.: MTi260703023-0101E1

Mode3 / Polarization: Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		1735.000	44.22	-6.90	37.32	74.00	-36.68	peak	
2		1735.000	34.46	-6.90	27.56	54.00	-26.44	AVG	
3		2595.000	42.37	-4.18	38.19	74.00	-35.81	peak	
4		2595.000	32.72	-4.18	28.54	54.00	-25.46	AVG	
5		3165.000	41.52	-2.58	38.94	74.00	-35.06	peak	
6		3165.000	31.13	-2.58	28.55	54.00	-25.45	AVG	
7		3620.000	40.84	-1.78	39.06	74.00	-34.94	peak	
8		3620.000	31.41	-1.78	29.63	54.00	-24.37	AVG	
9		4700.000	39.51	1.30	40.81	74.00	-33.19	peak	
10		4700.000	28.92	1.30	30.22	54.00	-23.78	AVG	
11		5535.000	40.45	2.48	42.93	74.00	-31.07	peak	
12	*	5535.000	29.72	2.48	32.20	54.00	-21.80	AVG	

TEST REPORT


Report No.: MTi260703023-0101E1

Photographs of the test setup

Conducted emissions on AC mains




Radiated emissions (Below 1GHz)

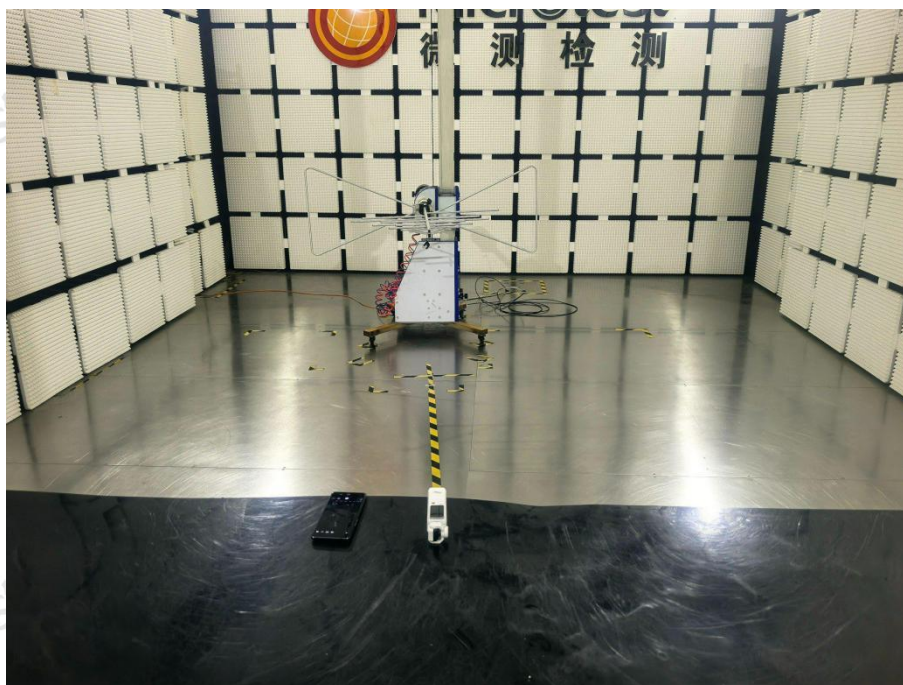

TEST REPORT

Report No.: MTi260703023-0101E1

Radiated emissions (Above 1GHz)

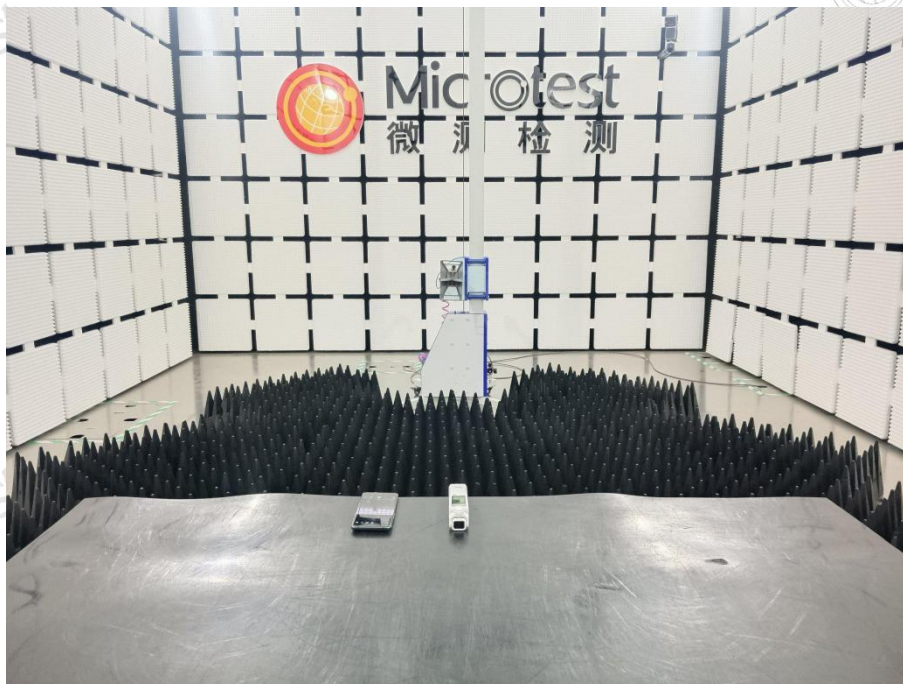

TEST REPORT

Report No.: MTi260703023-0101E1

Photographs of the EUT

Refer to Appendix - EUT Photos

TEST REPORT

Report No.: MTi260703023-0101E1

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****