

Test Report

Report No. : MTi260703023-0102E3
Date of issue : 2026-07-29
Applicant : Shenzhen Zero Zero Infinity Technology Co.,
Ltd.
Product : VERSA
Model(s) : ZZ-H-1-006
FCC ID : 2AIDW-ZZ-H-1-006

Shenzhen Microtest Co., Ltd.

TEST REPORT

Report No.: MTi260703023-0102E3

Table of contents

1	General Description	4
1.1	Description of the EUT	4
1.2	Description of test modes	4
1.3	Environmental Conditions	6
1.4	Description of support units	6
1.5	Measurement uncertainty	6
2	Summary of Test Result	7
3	Test Facilities and accreditations	8
3.1	Test laboratory	8
4	List of test equipment	9
5	Evaluation Results (Evaluation)	11
5.1	Antenna requirement	11
6	Radio Spectrum Matter Test Results (RF)	12
6.1	Conducted Emission at AC power line	12
6.2	6dB Bandwidth	15
6.3	Maximum Conducted Output Power	17
6.4	Power Spectral Density	18
6.5	Band edge emissions (Radiated)	19
6.6	Radiated emissions (below 1GHz)	53
6.7	Radiated emissions (above 1GHz)	61
	Photographs of the test setup	72
	Photographs of the EUT	73
	Appendix A: DTS Bandwidth	74
	Appendix B: Maximum conducted output power	94
	Appendix C: Maximum power spectral density	96
	Appendix D: Band edge measurements	128
	Appendix E: Conducted Spurious Emission	148
	Appendix F: Duty Cycle	268

TEST REPORT

Report No.: MTi260703023-0102E3

Test Result Certification		
Applicant	Shenzhen Zero Zero Infinity Technology Co., Ltd.	
Applicant Address	4F Qianhai Yidu Tower Building, Shenzhen China	
Manufacturer	Shenzhen Zero Zero Infinity Technology Co., Ltd.	
Manufacturer Address	4F Qianhai Yidu Tower Building, Shenzhen China	
Product description		
Product name	VERSA	
Trademark	N/A	
Model name	ZZ-H-1-006	
Series Model(s)	N/A	
Standards	47 CFR Part 15.247	
Test Method	KDB 558074 D01 15.247 Meas Guidance v05r02 KDB 662911 D01 Multiple Transmitter Output v02r01 ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	
Testing Information		
Date of test	2026-07-13 to 2026-07-22	
Test result	Pass	
Prepared by:	Letter Lan	<i>Letter Lan.</i>
Reviewed by:	David Lee	<i>David. Lee</i>
Approved by:	Lewis Lian	<i>Lewis Lian</i>

TEST REPORT

Report No.: MTi260703023-0102E3

1 General Description

1.1 Description of the EUT

Product name:	VERSA
Model name:	ZZ-H-1-006
Series Model(s):	N/A
Model difference:	N/A
Electrical rating:	Input: 5V/9V/12V/15V== Max.3A Battery: 7.12VDC 2070mAh
Accessories:	Cable: Type-C to Type-C cable 0.5m
Hardware version:	H162_MB_V10
Software version:	0.0.28
Test sample(s) number:	MTi260703023-01-R001
RF specification	
Operating frequency range:	802.11b/g/n20/ax20:2412~2462 MHz 802.11n40/ax40:2422~2452 MHz
Channel number:	802.11b/g/n/ax(HT20): 11 Channels; 802.11n(HT40/ax): 7 Channels
Modulation type:	802.11b: DSSS(CCK, DBPSK, DQPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20 and HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax(HE20 and HE40): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
Antenna(s) type:	FPC
Antenna(s) gain:	ANT1: -1.2dBi ANT2: 2.6dBi Directional gain: 1.10dBi
Directional Gain Calculation Method:	$\text{Directional Gain} = 10 \log \left[\left(10^{\frac{G_1}{10}} + 10^{\frac{G_2}{10}} + \dots + 10^{\frac{G_n}{10}} \right) / N_{ant} \right] \text{ dBi}$

1.2 Description of test modes

No.	Emission test modes
Mode1	TX-802.11b
Mode2	TX-802.11g
Mode3	TX-802.11N20-SISO
Mode4	TX-802.11N40-SISO
Mode5	TX-802.11AX20-SISO
Mode6	TX-802.11AX40-SISO
Mode7	TX-802.11N20-MIMO
Mode8	TX-802.11N40-MIMO
Mode9	TX-802.11AX20-MIMO
Mode10	TX-802.11AX40-MIMO

802.11ax only Support Full RU Mode.

TEST REPORT

Report No.: MTi260703023-0102E3

1.2.1 Operation channel list

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Test Channel List

Operation Band: 2400-2483.5 MHz

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	2412	2437	2462
40	2422	2437	2452

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software: Qualcomm Radio Control Tool

For power setting, refer to below table.

Mode	LCH	MCH)	HCH
All channels (SISO&MIMO)	12	12	12

TEST REPORT

Report No.: MTi260703023-0102E3

1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list

Description	Model	Serial No.	Manufacturer
HUAWEI QUICK CHARGE(65W)	HW-200325CP1	FL8606P8500764	HUAWEI

Support cable list

Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

TEST REPORT

Report No.: MTi260703023-0102E3

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
3	6dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(2)	Pass
4	Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(3)	Pass
5	Power Spectral Density	47 CFR Part 15.247	47 CFR 15.247(e)	Pass
6	Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
7	Radiated emissions (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
8	Radiated emissions (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

TEST REPORT

Report No.: MTi260703023-0102E3

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

TEST REPORT

Report No.: MTi260703023-0102E3

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2026-03-10	2027-03-09
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2026-03-11	2027-03-10
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2026-03-10	2027-03-09
4	EMI Test Software	Farad	EZ-EMC	Ver. EMEC-3A1	/	/
6dB Bandwidth Maximum Conducted Output Power Power Spectral Density						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2026-03-09	2027-03-08
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2026-03-09	2027-03-08
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2026-03-10	2027-03-09
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2026-03-10	2027-03-09
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2026-03-09	2027-03-08
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2026-03-11	2027-03-10
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2026-03-11	2027-03-10
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2026-03-10	2027-03-09
9	DC Power Supply	Agilent	E3632A	MY40027695	2026-03-09	2027-03-08
10	RF Test System	Tonscend	JS1120-3 Test System	V3.6.21	/	/
Band edge emissions (Radiated) Emissions in frequency bands (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2026-03-10	2027-03-09
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2025-05-27	2027-05-26
3	Amplifier	Agilent	8449B	3008A01120	2026-03-10	2027-03-09
4	MXA signal analyzer	Agilent	N9020A	MY54440859	2026-03-10	2027-03-09
5	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2026-03-10	2027-03-09
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2025-05-27	2027-05-26
7	Pre-amplifier	Space-Dtronics	EVLAN18 40G	210405001	2026-03-11	2027-03-10
8	EMI Test Software	Farad	EZ-EMC	Ver. EMEC-3A1	/	/

TEST REPORT

Report No.: MTi260703023-0102E3

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Emissions in frequency bands (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCi7	101166	2026-03-10	2027-03-09
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2025-05-23	2027-05-22
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2026-03-08	2028-03-07
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2026-03-10	2027-03-09
5	EMI Test Software	Farad	EZ-EMC	Ver. EMEC- 3A1	/	/

TEST REPORT

Report No.: MTi260703023-0102E3

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---

5.1.1 Conclusion:

The antenna of the EUT is permanently attached.
The EUT complies with the requirement of FCC PART 15.203.

TEST REPORT

Report No.: MTi260703023-0102E3

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.2		
Procedure:	Refer to ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25.7 °C	Humidity:	66 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode9, Mode10				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.1.2 Test Setup Diagram:

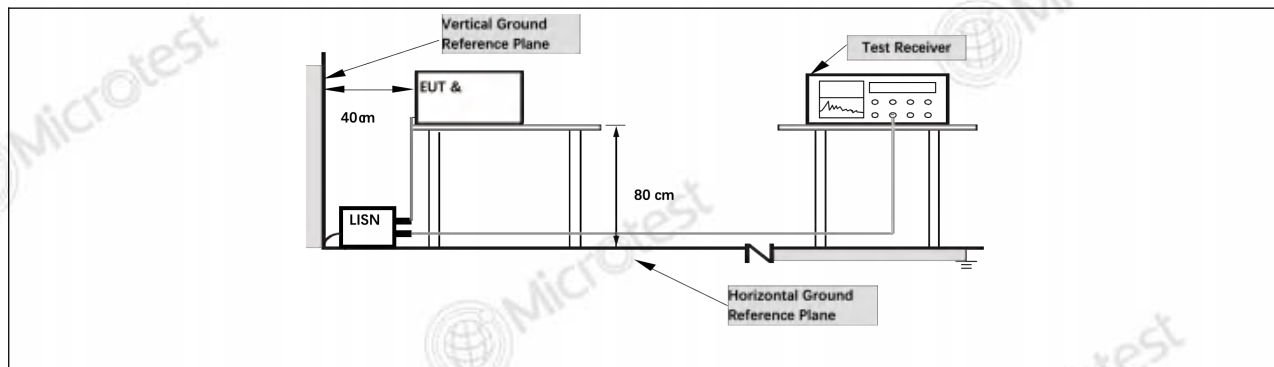


TEST REPORT

Report No.: MTi260703023-0102E3

6.1.3 Test Data:

Mode1 / Line: Line / CH: L

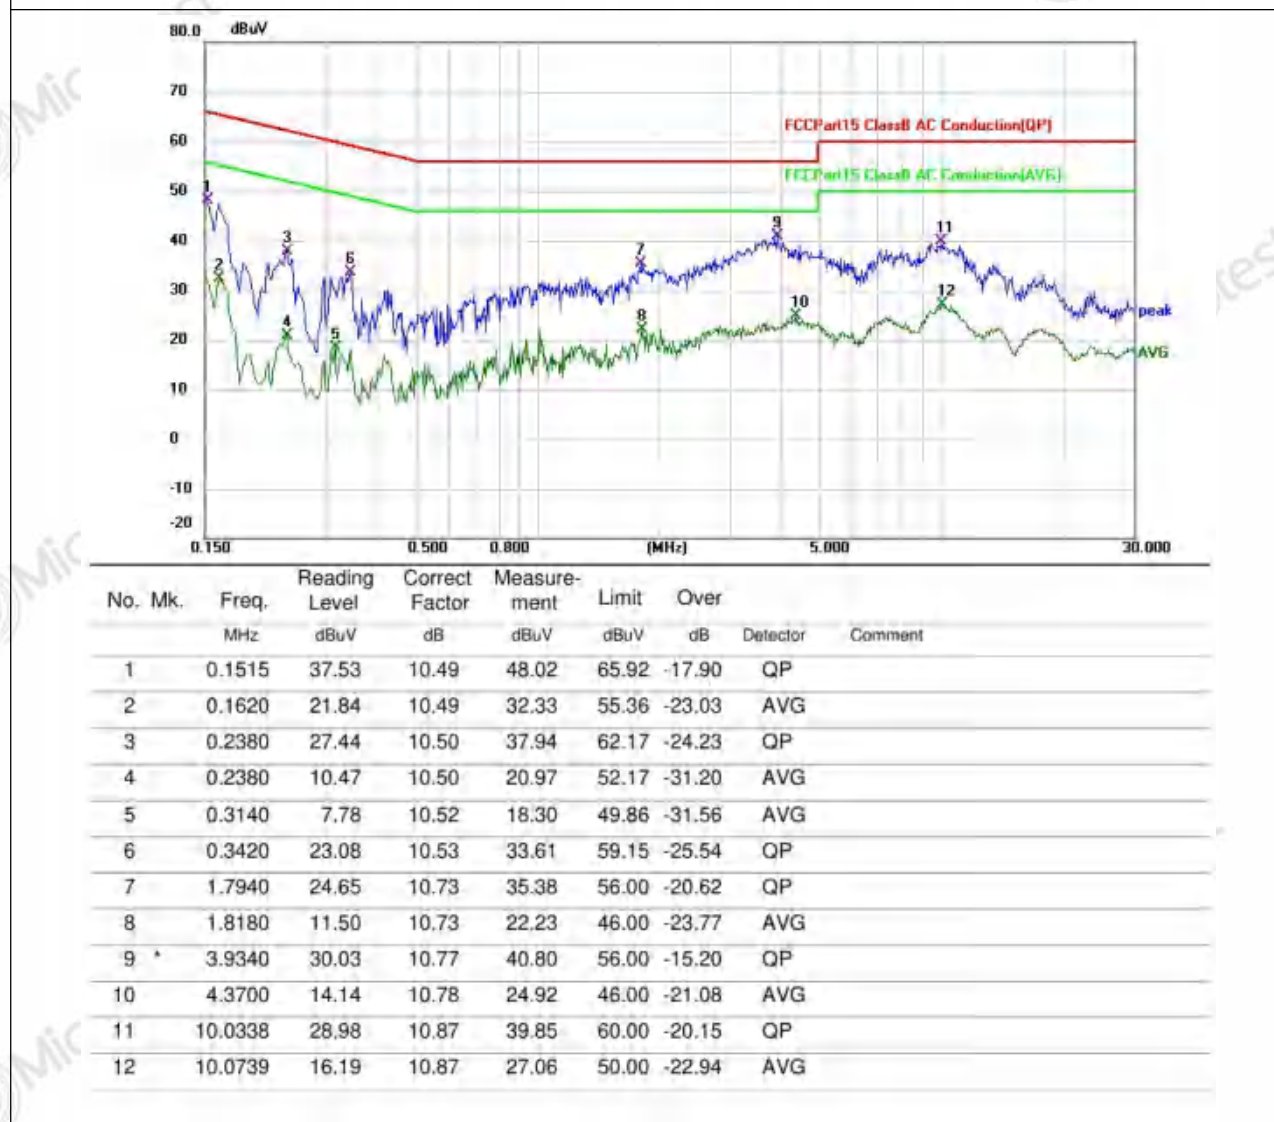

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Line: Neutral / CH: L



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1556	16.62	10.47	27.09	55.70	-28.61	AVG	
2		0.1620	36.25	10.48	46.73	65.36	-18.63	QP	
3		0.2260	10.80	10.50	21.30	52.60	-31.30	AVG	
4		0.2300	26.28	10.50	36.78	62.45	-25.67	QP	
5		0.8900	17.34	10.63	27.97	46.00	-18.03	AVG	
6		0.9940	24.93	10.64	35.57	56.00	-20.43	QP	
7		1.6300	14.05	10.72	24.77	46.00	-21.23	AVG	
8		1.6820	25.38	10.72	36.10	56.00	-19.90	QP	
9	*	3.8460	31.00	10.78	41.78	56.00	-14.22	QP	
10		4.2659	11.12	10.79	21.91	46.00	-24.09	AVG	
11		5.2659	29.46	10.80	40.26	60.00	-19.74	QP	
12		5.2659	14.44	10.80	25.24	50.00	-24.76	AVG	

TEST REPORT

Report No.: MTi260703023-0102E3

6.2 6dB Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	11.8.1 Option 1 The steps for the first option are as follows: a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max-hold. e) Sweep = No faster than coupled (auto) time. f) Allow the trace to stabilize. g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value. 11.8.2 Option 2 The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

6.2.1 E.U.T. Operation:


Operating Environment:					
Temperature:	29.1 °C	Humidity:	72.3 %	Atmospheric Pressure:	100.1 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				

6.2.2 Test Setup Diagram:

--

TEST REPORT

Report No.: MTi260703023-0102E3

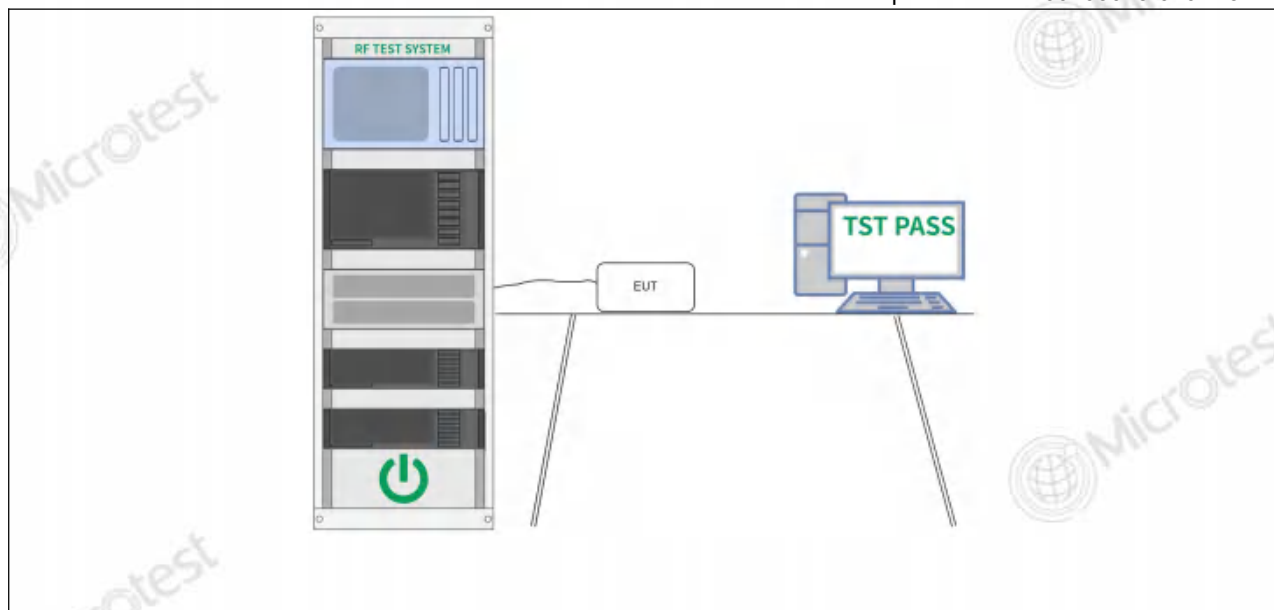

6.2.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi260703023-0102E3


6.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.9.1 Maximum peak conducted output power

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	33.3 °C	Humidity:	56 %	Atmospheric Pressure:	100.1 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode9, Mode10				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode9, Mode10				

6.3.2 Test Setup Diagram:

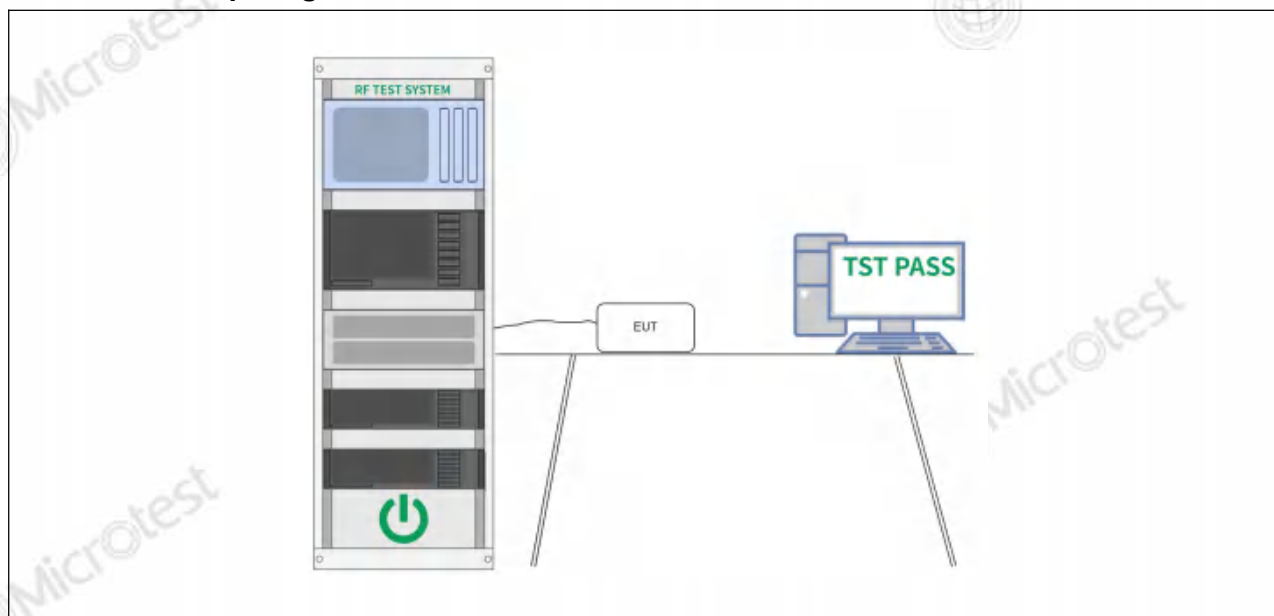

6.3.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi260703023-0102E3


6.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024, section 11.10, Maximum power spectral density level in the fundamental emission

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.1 °C	Humidity:	28.3 %	Atmospheric Pressure:	100.1 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode9, Mode10				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode9, Mode10				

6.4.2 Test Setup Diagram:

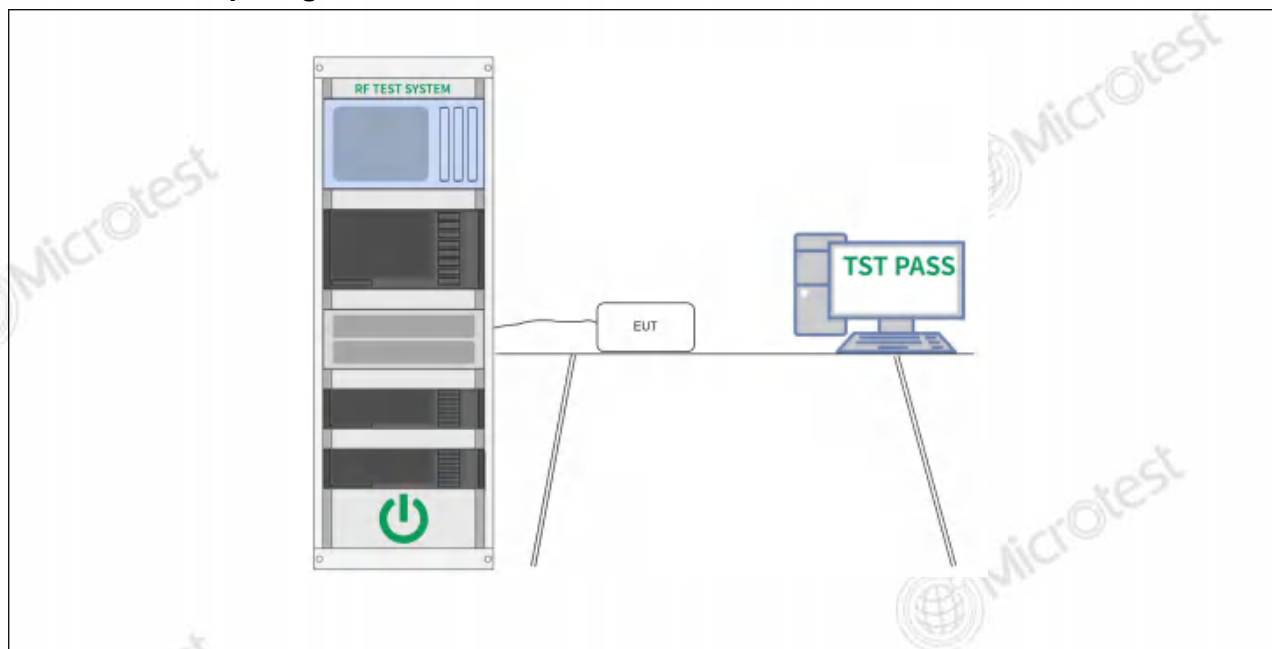

6.4.3 Test Data:

Please Refer to Appendix for Details.

TEST REPORT

Report No.: MTi260703023-0102E3

6.5 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.10.5.2		


6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23 °C	Humidity:	45 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10				
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported.					

TEST REPORT

Report No.: MTi260703023-0102E3

6.5.2 Test Setup Diagram:

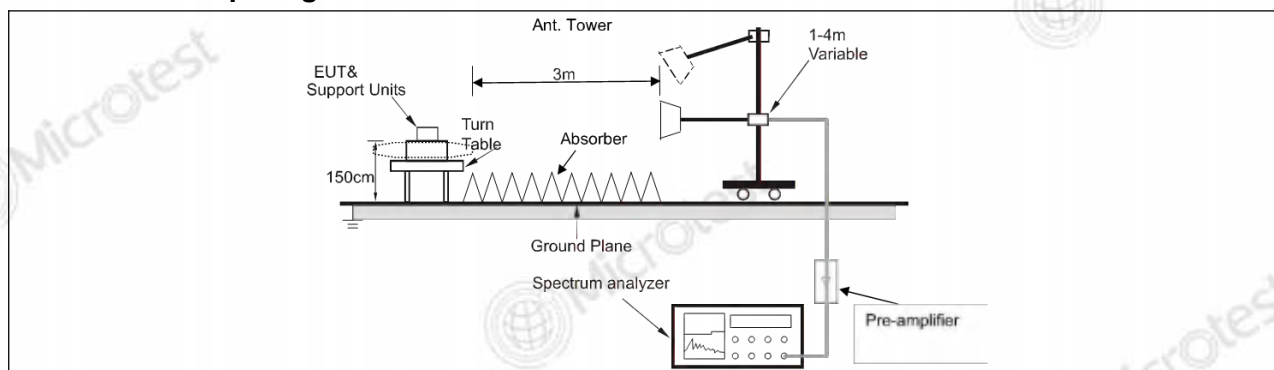

TEST REPORT

Report No.: MTi260703023-0102E3

6.5.3 Test Data:

ANT1:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.47	-4.50	47.97	74.00	-26.03	peak
2		2310.000	42.61	-4.50	38.11	54.00	-15.89	AVG
3		2390.000	51.32	-4.31	47.01	74.00	-26.99	peak
4	*	2390.000	43.33	-4.31	39.02	54.00	-14.98	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.73	-4.50	47.23	74.00	-26.77	peak
2		2310.000	42.87	-4.50	38.37	54.00	-15.63	AVG
3		2390.000	52.56	-4.31	48.25	74.00	-25.75	peak
4	*	2390.000	42.86	-4.31	38.55	54.00	-15.45	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.99	-4.23	43.76	74.00	-30.24	peak
2		2483.500	38.31	-4.23	34.08	54.00	-19.92	AVG
3		2500.000	46.50	-4.15	42.35	74.00	-31.65	peak
4	*	2500.000	38.57	-4.15	34.42	54.00	-19.58	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.53	-4.23	44.30	74.00	-29.70	peak
2	*	2483.500	38.69	-4.23	34.46	54.00	-19.54	AVG
3		2500.000	47.49	-4.15	43.34	74.00	-30.66	peak
4		2500.000	38.59	-4.15	34.44	54.00	-19.56	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode2 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.54	-4.50	48.04	74.00	-25.96	peak
2		2310.000	42.74	-4.50	38.24	54.00	-15.76	AVG
3		2390.000	55.48	-4.31	51.17	74.00	-22.83	peak
4	*	2390.000	44.82	-4.31	40.51	54.00	-13.49	AVG

Mode2 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.63	-4.50	47.13	74.00	-26.87	peak
2		2310.000	42.64	-4.50	38.14	54.00	-15.86	AVG
3		2390.000	58.17	-4.31	53.86	74.00	-20.14	peak
4	*	2390.000	45.62	-4.31	41.31	54.00	-12.69	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode2 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	50.04	-4.23	45.81	74.00	-28.19	peak
2	*	2483.500	38.82	-4.23	34.59	54.00	-19.41	AVG
3		2500.000	47.65	-4.15	43.50	74.00	-30.50	peak
4		2500.000	38.55	-4.15	34.40	54.00	-19.60	AVG

Mode2 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	49.13	-4.23	44.90	74.00	-29.10	peak
2	*	2483.500	39.66	-4.23	35.43	54.00	-18.57	AVG
3		2500.000	47.84	-4.15	43.69	74.00	-30.31	peak
4		2500.000	39.28	-4.15	35.13	54.00	-18.87	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode3 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.50	-4.50	48.00	74.00	-26.00	peak
2		2310.000	42.50	-4.50	38.00	54.00	-16.00	AVG
3		2390.000	56.93	-4.31	52.62	74.00	-21.38	peak
4	*	2390.000	46.10	-4.31	41.79	54.00	-12.21	AVG

Mode3 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.10	-4.50	47.60	74.00	-26.40	peak
2		2310.000	42.85	-4.50	38.35	54.00	-15.65	AVG
3		2390.000	59.17	-4.31	54.86	74.00	-19.14	peak
4	*	2390.000	46.60	-4.31	42.29	54.00	-11.71	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode3 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.71	-4.23	42.48	74.00	-31.52	peak
2	*	2483.500	38.75	-4.23	34.52	54.00	-19.48	AVG
3		2500.000	46.50	-4.15	42.35	74.00	-31.65	peak
4		2500.000	38.18	-4.15	34.03	54.00	-19.97	AVG

Mode3 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.65	-4.23	44.42	74.00	-29.58	peak
2	*	2483.500	38.78	-4.23	34.55	54.00	-19.45	AVG
3		2500.000	47.16	-4.15	43.01	74.00	-30.99	peak
4		2500.000	38.51	-4.15	34.36	54.00	-19.64	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode4 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.45	-4.50	47.95	74.00	-26.05	peak
2		2310.000	42.65	-4.50	38.15	54.00	-15.85	AVG
3		2390.000	52.68	-4.31	48.37	74.00	-25.63	peak
4	*	2390.000	43.29	-4.31	38.98	54.00	-15.02	AVG

Mode4 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.33	-4.50	46.83	74.00	-27.17	peak
2		2310.000	42.72	-4.50	38.22	54.00	-15.78	AVG
3		2390.000	53.87	-4.31	49.56	74.00	-24.44	peak
4	*	2390.000	43.51	-4.31	39.20	54.00	-14.80	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode4 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.08	-4.23	43.85	74.00	-30.15	peak
2	*	2483.500	38.22	-4.23	33.99	54.00	-20.01	AVG
3		2500.000	46.32	-4.15	42.17	74.00	-31.83	peak
4		2500.000	37.97	-4.15	33.82	54.00	-20.18	AVG

Mode4 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.93	-4.23	43.70	74.00	-30.30	peak
2	*	2483.500	39.36	-4.23	35.13	54.00	-18.87	AVG
3		2500.000	47.32	-4.15	43.17	74.00	-30.83	peak
4		2500.000	38.61	-4.15	34.46	54.00	-19.54	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode5 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.84	-4.50	48.34	74.00	-25.66	peak
2		2310.000	42.92	-4.50	38.42	54.00	-15.58	AVG
3		2390.000	53.14	-4.31	48.83	74.00	-25.17	peak
4	*	2390.000	43.48	-4.31	39.17	54.00	-14.83	AVG

Mode5 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.73	-4.50	48.23	74.00	-25.77	peak
2		2310.000	42.65	-4.50	38.15	54.00	-15.85	AVG
3		2390.000	52.41	-4.31	48.10	74.00	-25.90	peak
4	*	2390.000	43.44	-4.31	39.13	54.00	-14.87	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode5 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.50	-4.23	44.27	74.00	-29.73	peak
2		2483.500	38.61	-4.23	34.38	54.00	-19.62	AVG
3		2500.000	46.88	-4.15	42.73	74.00	-31.27	peak
4	*	2500.000	38.61	-4.15	34.46	54.00	-19.54	AVG

Mode5 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.19	-4.23	43.96	74.00	-30.04	peak
2	*	2483.500	39.08	-4.23	34.85	54.00	-19.15	AVG
3		2500.000	47.17	-4.15	43.02	74.00	-30.98	peak
4		2500.000	38.51	-4.15	34.36	54.00	-19.64	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode6 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.59	-4.50	46.09	74.00	-27.91	peak
2		2310.000	42.55	-4.50	38.05	54.00	-15.95	AVG
3		2390.000	51.74	-4.31	47.43	74.00	-26.57	peak
4	*	2390.000	43.27	-4.31	38.96	54.00	-15.04	AVG

Mode6 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.41	-4.50	47.91	74.00	-26.09	peak
2		2310.000	42.70	-4.50	38.20	54.00	-15.80	AVG
3		2390.000	53.17	-4.31	48.86	74.00	-25.14	peak
4	*	2390.000	43.73	-4.31	39.42	54.00	-14.58	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode6 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.46	-4.23	44.23	74.00	-29.77	peak
2	*	2483.500	38.84	-4.23	34.61	54.00	-19.39	AVG
3		2500.000	46.70	-4.15	42.55	74.00	-31.45	peak
4		2500.000	38.29	-4.15	34.14	54.00	-19.86	AVG

Mode6 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.18	-4.23	43.95	74.00	-30.05	peak
2	*	2483.500	39.12	-4.23	34.89	54.00	-19.11	AVG
3		2500.000	48.18	-4.15	44.03	74.00	-29.97	peak
4		2500.000	38.60	-4.15	34.45	54.00	-19.55	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

ANT2:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.15	-4.50	47.65	74.00	-26.35	peak
2		2310.000	42.37	-4.50	37.87	54.00	-16.13	AVG
3		2390.000	52.10	-4.31	47.79	74.00	-26.21	peak
4	*	2390.000	42.64	-4.31	38.33	54.00	-15.67	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.19	-4.50	46.69	74.00	-27.31	peak
2		2310.000	42.63	-4.50	38.13	54.00	-15.87	AVG
3		2390.000	52.50	-4.31	48.19	74.00	-25.81	peak
4	*	2390.000	43.15	-4.31	38.84	54.00	-15.16	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.44	-4.23	43.21	74.00	-30.79	peak
2		2483.500	38.22	-4.23	33.99	54.00	-20.01	AVG
3		2500.000	47.36	-4.15	43.21	74.00	-30.79	peak
4	*	2500.000	38.19	-4.15	34.04	54.00	-19.96	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	46.69	-4.23	42.46	74.00	-31.54	peak
2	*	2483.500	38.88	-4.23	34.65	54.00	-19.35	AVG
3		2500.000	48.35	-4.15	44.20	74.00	-29.80	peak
4		2500.000	38.49	-4.15	34.34	54.00	-19.66	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode2 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.72	-4.50	47.22	74.00	-26.78	peak
2		2310.000	42.69	-4.50	38.19	54.00	-15.81	AVG
3		2390.000	56.16	-4.31	51.85	74.00	-22.15	peak
4	*	2390.000	45.02	-4.31	40.71	54.00	-13.29	AVG

Mode2 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.05	-4.50	47.55	74.00	-26.45	peak
2		2310.000	42.73	-4.50	38.23	54.00	-15.77	AVG
3		2390.000	58.61	-4.31	54.30	74.00	-19.70	peak
4	*	2390.000	45.56	-4.31	41.25	54.00	-12.75	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode2 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	49.14	-4.23	44.91	74.00	-29.09	peak
2	*	2483.500	38.91	-4.23	34.68	54.00	-19.32	AVG
3		2500.000	47.50	-4.15	43.35	74.00	-30.65	peak
4		2500.000	38.43	-4.15	34.28	54.00	-19.72	AVG

Mode2 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.06	-4.23	43.83	74.00	-30.17	peak
2	*	2483.500	38.93	-4.23	34.70	54.00	-19.30	AVG
3		2500.000	48.95	-4.15	44.80	74.00	-29.20	peak
4		2500.000	38.82	-4.15	34.67	54.00	-19.33	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode3 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.91	-4.50	48.41	74.00	-25.59	peak
2		2310.000	42.77	-4.50	38.27	54.00	-15.73	AVG
3		2390.000	56.99	-4.31	52.68	74.00	-21.32	peak
4	*	2390.000	45.97	-4.31	41.66	54.00	-12.34	AVG

Mode3 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.85	-4.50	47.35	74.00	-26.65	peak
2		2310.000	42.84	-4.50	38.34	54.00	-15.66	AVG
3		2390.000	58.23	-4.31	53.92	74.00	-20.08	peak
4	*	2390.000	46.69	-4.31	42.38	54.00	-11.62	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode3 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.93	-4.23	43.70	74.00	-30.30	peak
2		2483.500	38.61	-4.23	34.38	54.00	-19.62	AVG
3		2500.000	48.55	-4.15	44.40	74.00	-29.60	peak
4	*	2500.000	38.68	-4.15	34.53	54.00	-19.47	AVG

Mode3 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.05	-4.23	43.82	74.00	-30.18	peak
2	*	2483.500	38.75	-4.23	34.52	54.00	-19.48	AVG
3		2500.000	48.44	-4.15	44.29	74.00	-29.71	peak
4		2500.000	38.63	-4.15	34.48	54.00	-19.52	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode4 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.24	-4.50	46.74	74.00	-27.26	peak
2		2310.000	42.72	-4.50	38.22	54.00	-15.78	AVG
3		2390.000	52.60	-4.31	48.29	74.00	-25.71	peak
4	*	2390.000	43.22	-4.31	38.91	54.00	-15.09	AVG

Mode4 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.69	-4.50	48.19	74.00	-25.81	peak
2		2310.000	42.70	-4.50	38.20	54.00	-15.80	AVG
3		2390.000	52.49	-4.31	48.18	74.00	-25.82	peak
4	*	2390.000	43.72	-4.31	39.41	54.00	-14.59	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode4 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.93	-4.23	44.70	74.00	-29.30	peak
2	*	2483.500	38.84	-4.23	34.61	54.00	-19.39	AVG
3		2500.000	49.11	-4.15	44.96	74.00	-29.04	peak
4		2500.000	38.47	-4.15	34.32	54.00	-19.68	AVG

Mode4 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.84	-4.23	43.61	74.00	-30.39	peak
2	*	2483.500	39.02	-4.23	34.79	54.00	-19.21	AVG
3		2500.000	47.16	-4.15	43.01	74.00	-30.99	peak
4		2500.000	38.35	-4.15	34.20	54.00	-19.80	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode5 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.12	-4.50	46.62	74.00	-27.38	peak
2		2310.000	42.89	-4.50	38.39	54.00	-15.61	AVG
3		2390.000	53.47	-4.31	49.16	74.00	-24.84	peak
4	*	2390.000	43.25	-4.31	38.94	54.00	-15.06	AVG

Mode5 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.77	-4.50	47.27	74.00	-26.73	peak
2		2310.000	42.55	-4.50	38.05	54.00	-15.95	AVG
3		2390.000	52.60	-4.31	48.29	74.00	-25.71	peak
4	*	2390.000	43.42	-4.31	39.11	54.00	-14.89	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode5 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.45	-4.23	44.22	74.00	-29.78	peak
2	*	2483.500	38.66	-4.23	34.43	54.00	-19.57	AVG
3		2500.000	47.85	-4.15	43.70	74.00	-30.30	peak
4		2500.000	38.25	-4.15	34.10	54.00	-19.90	AVG

Mode5 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.36	-4.23	43.13	74.00	-30.87	peak
2	*	2483.500	39.00	-4.23	34.77	54.00	-19.23	AVG
3		2500.000	48.20	-4.15	44.05	74.00	-29.95	peak
4		2500.000	38.81	-4.15	34.66	54.00	-19.34	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode6 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.83	-4.50	47.33	74.00	-26.67	peak
2		2310.000	42.72	-4.50	38.22	54.00	-15.78	AVG
3		2390.000	52.56	-4.31	48.25	74.00	-25.75	peak
4	*	2390.000	43.53	-4.31	39.22	54.00	-14.78	AVG

Mode6 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.81	-4.50	48.31	74.00	-25.69	peak
2		2310.000	42.76	-4.50	38.26	54.00	-15.74	AVG
3		2390.000	53.23	-4.31	48.92	74.00	-25.08	peak
4	*	2390.000	43.53	-4.31	39.22	54.00	-14.78	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode6 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.48	-4.23	43.25	74.00	-30.75	peak
2		2483.500	38.82	-4.23	34.59	54.00	-19.41	AVG
3		2500.000	47.76	-4.15	43.61	74.00	-30.39	peak
4	*	2500.000	38.75	-4.15	34.60	54.00	-19.40	AVG

Mode6 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	50.01	-4.23	45.78	74.00	-28.22	peak
2	*	2483.500	38.98	-4.23	34.75	54.00	-19.25	AVG
3		2500.000	47.38	-4.15	43.23	74.00	-30.77	peak
4		2500.000	38.26	-4.15	34.11	54.00	-19.89	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

MIMO:

Mode7 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.55	-4.50	48.05	74.00	-25.95	peak
2		2310.000	42.80	-4.50	38.30	54.00	-15.70	AVG
3		2390.000	52.03	-4.31	47.72	74.00	-26.28	peak
4	*	2390.000	43.07	-4.31	38.76	54.00	-15.24	AVG

Mode7 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.69	-4.50	47.19	74.00	-26.81	peak
2		2310.000	42.48	-4.50	37.98	54.00	-16.02	AVG
3		2390.000	52.04	-4.31	47.73	74.00	-26.27	peak
4	*	2390.000	43.01	-4.31	38.70	54.00	-15.30	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode7 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.29	-4.23	43.06	74.00	-30.94	peak
2	*	2483.500	38.81	-4.23	34.58	54.00	-19.42	AVG
3		2500.000	47.24	-4.15	43.09	74.00	-30.91	peak
4		2500.000	38.31	-4.15	34.16	54.00	-19.84	AVG

Mode7 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	47.15	-4.23	42.92	74.00	-31.08	peak
2	*	2483.500	38.49	-4.23	34.26	54.00	-19.74	AVG
3		2500.000	47.85	-4.15	43.70	74.00	-30.30	peak
4		2500.000	38.00	-4.15	33.85	54.00	-20.15	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode8 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.33	-4.50	46.83	74.00	-27.17	peak
2		2310.000	42.50	-4.50	38.00	54.00	-16.00	AVG
3		2390.000	52.71	-4.31	48.40	74.00	-25.60	peak
4	*	2390.000	43.21	-4.31	38.90	54.00	-15.10	AVG

Mode8 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	50.33	-4.50	45.83	74.00	-28.17	peak
2		2310.000	42.49	-4.50	37.99	54.00	-16.01	AVG
3		2390.000	51.73	-4.31	47.42	74.00	-26.58	peak
4	*	2390.000	42.92	-4.31	38.61	54.00	-15.39	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode8 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	49.09	-4.23	44.86	74.00	-29.14	peak
2	*	2483.500	39.37	-4.23	35.14	54.00	-18.86	AVG
3		2500.000	47.31	-4.15	43.16	74.00	-30.84	peak
4		2500.000	38.53	-4.15	34.38	54.00	-19.62	AVG

Mode8 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.31	-4.23	44.08	74.00	-29.92	peak
2	*	2483.500	39.05	-4.23	34.82	54.00	-19.18	AVG
3		2500.000	47.40	-4.15	43.25	74.00	-30.75	peak
4		2500.000	38.82	-4.15	34.67	54.00	-19.33	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode9 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.97	-4.50	47.47	74.00	-26.53	peak
2		2310.000	42.96	-4.50	38.46	54.00	-15.54	AVG
3		2390.000	52.84	-4.31	48.53	74.00	-25.47	peak
4	*	2390.000	43.12	-4.31	38.81	54.00	-15.19	AVG

Mode9 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.80	-4.50	48.30	74.00	-25.70	peak
2		2310.000	42.56	-4.50	38.06	54.00	-15.94	AVG
3		2390.000	52.26	-4.31	47.95	74.00	-26.05	peak
4	*	2390.000	43.34	-4.31	39.03	54.00	-14.97	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode9 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.81	-4.23	44.58	74.00	-29.42	peak
2	*	2483.500	39.47	-4.23	35.24	54.00	-18.76	AVG
3		2500.000	48.05	-4.15	43.90	74.00	-30.10	peak
4		2500.000	38.60	-4.15	34.45	54.00	-19.55	AVG

Mode9 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.67	-4.23	44.44	74.00	-29.56	peak
2	*	2483.500	38.69	-4.23	34.46	54.00	-19.54	AVG
3		2500.000	48.00	-4.15	43.85	74.00	-30.15	peak
4		2500.000	38.52	-4.15	34.37	54.00	-19.63	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode10 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	52.91	-4.50	48.41	74.00	-25.59	peak
2		2310.000	43.10	-4.50	38.60	54.00	-15.40	AVG
3		2390.000	53.69	-4.31	49.38	74.00	-24.62	peak
4	*	2390.000	43.68	-4.31	39.37	54.00	-14.63	AVG

Mode10 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2310.000	51.34	-4.50	46.84	74.00	-27.16	peak
2		2310.000	42.80	-4.50	38.30	54.00	-15.70	AVG
3		2390.000	52.50	-4.31	48.19	74.00	-25.81	peak
4	*	2390.000	43.75	-4.31	39.44	54.00	-14.56	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode10 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.93	-4.23	44.70	74.00	-29.30	peak
2	*	2483.500	39.74	-4.23	35.51	54.00	-18.49	AVG
3		2500.000	46.84	-4.15	42.69	74.00	-31.31	peak
4		2500.000	38.49	-4.15	34.34	54.00	-19.66	AVG

Mode10 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		2483.500	48.61	-4.23	44.38	74.00	-29.62	peak
2	*	2483.500	39.04	-4.23	34.81	54.00	-19.19	AVG
3		2500.000	47.56	-4.15	43.41	74.00	-30.59	peak
4		2500.000	38.79	-4.15	34.64	54.00	-19.36	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

6.6 Radiated emissions (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4		


6.6.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23 °C	Humidity:	45 %	Atmospheric Pressure:	101 kPa
Pre test mode:		Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10			
Final test mode:		All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode7) is recorded in the report			
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported. There were no emissions found below 30MHz within 20dB of the limit.					

TEST REPORT

Report No.: MTi260703023-0102E3

6.6.2 Test Setup Diagram:

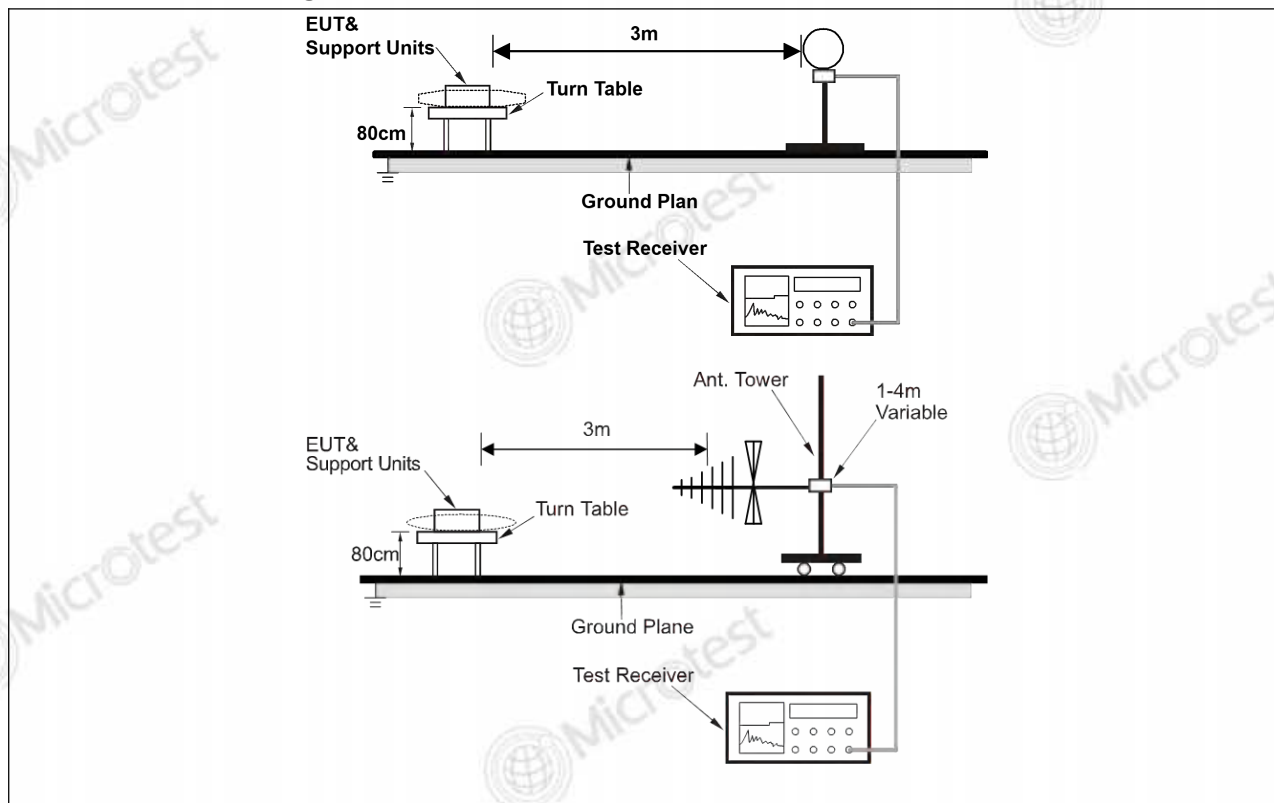


TEST REPORT

Report No.: MTi260703023-0102E3

6.6.3 Test Data:

ANT1:


Mode1 / Polarization: Horizontal / CH: H

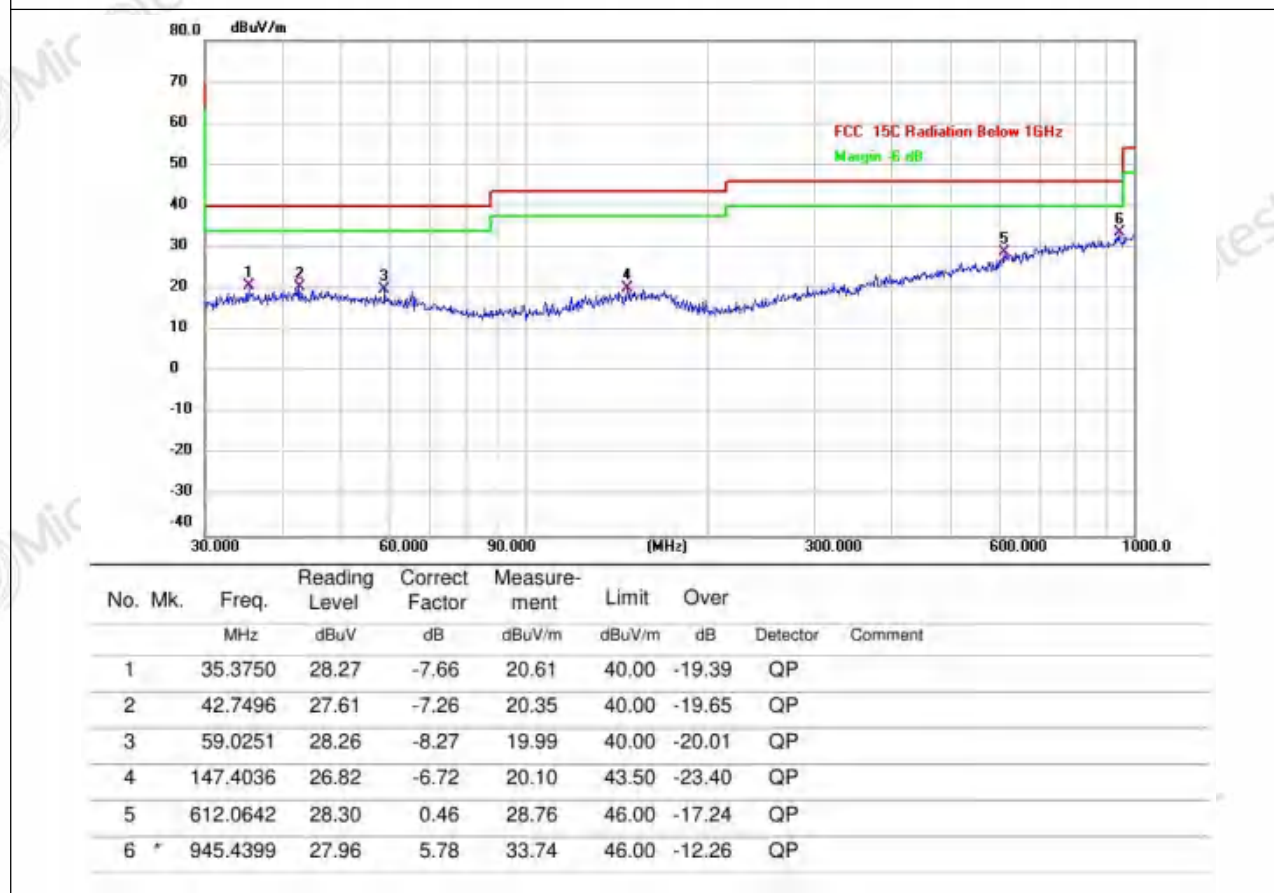

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Vertical / CH: H

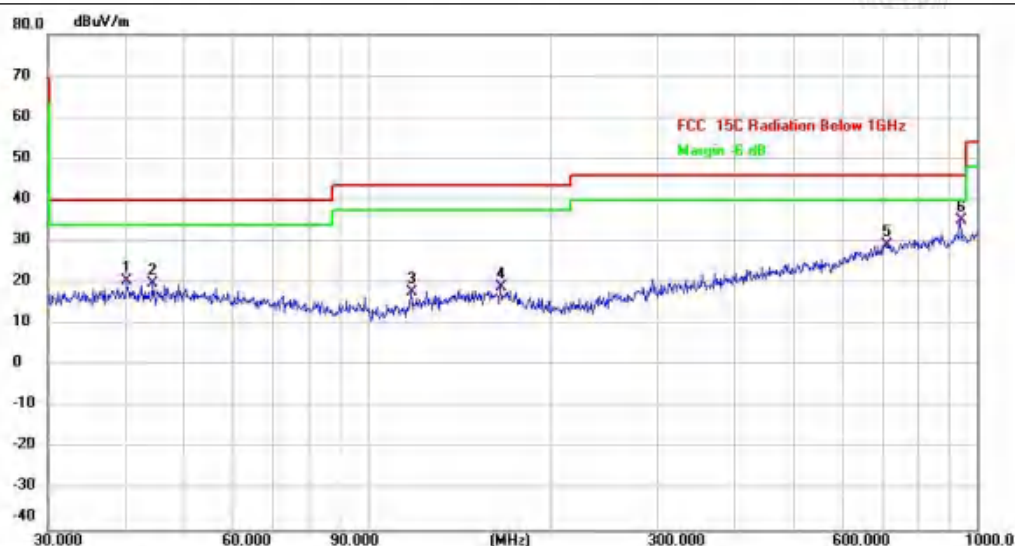


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	40.2757	27.43	-7.10	20.33	40.00	-19.67	QP	
2	44.4308	27.12	-7.34	19.78	40.00	-20.22	QP	
3	117.7725	26.91	-9.23	17.68	43.50	-25.82	QP	
4	164.9075	25.54	-6.70	18.84	43.50	-24.66	QP	
5	709.1823	26.72	2.54	29.26	46.00	-16.74	QP	
6	938.8326	29.45	5.63	35.08	46.00	-10.92	QP	

TEST REPORT

Report No.: MTi260703023-0102E3

ANT2:

Mode1 / Polarization: Horizontal / CH: H

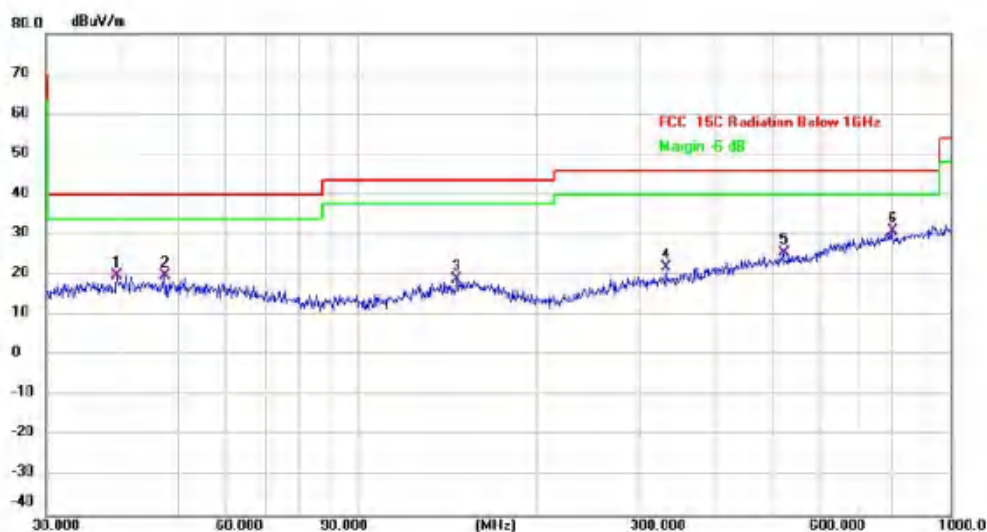

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		39.4371	26.97	-7.15	19.82	40.00	-20.18	QP	
2		47.3255	27.37	-7.52	19.85	40.00	-20.15	QP	
3		147.4036	25.55	-6.72	18.83	43.50	-24.67	QP	
4		332.5187	27.16	-5.21	21.95	46.00	-24.05	QP	
5		524.5541	26.98	-1.53	25.45	46.00	-20.55	QP	
6	*	798.9797	26.84	4.04	30.88	46.00	-15.12	QP	

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Vertical / CH: H




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		39.5757	26.54	-7.13	19.41	40.00	-20.59	QP	
2		93.7685	27.86	-11.33	16.53	43.50	-26.97	QP	
3		148.4410	27.69	-6.62	21.07	43.50	-22.43	QP	
4		472.1760	27.26	-2.39	24.87	46.00	-21.13	QP	
5		776.8778	27.97	3.71	31.68	46.00	-14.32	QP	
6	*	938.8326	31.18	5.63	36.81	46.00	-9.19	QP	

TEST REPORT

Report No.: MTi260703023-0102E3

MIMO:

Mode7 / Polarization: Horizontal / CH: H

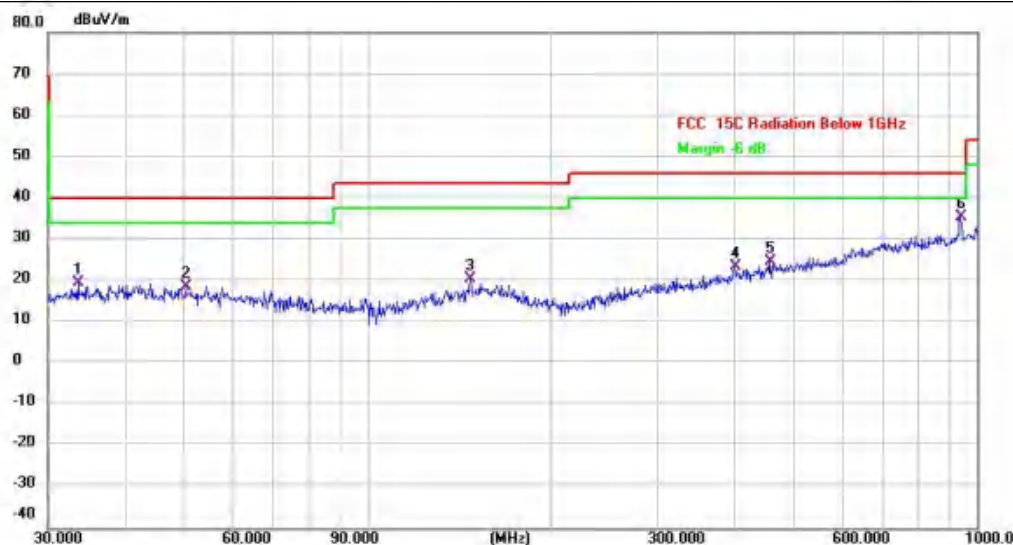


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		33.5624	27.49	-7.85	19.64	40.00	-20.36	QP	
2		50.4089	26.29	-7.63	18.66	40.00	-21.34	QP	
3		147.4036	27.17	-6.72	20.45	43.50	-23.05	QP	
4		400.4319	27.30	-3.80	23.50	46.00	-22.50	QP	
5		457.5073	27.18	-2.66	24.52	46.00	-21.48	QP	
6	*	938.8326	29.86	5.63	35.49	46.00	-10.51	QP	

TEST REPORT

Report No.: MTi260703023-0102E3

Mode7 / Polarization: Vertical / CH: H

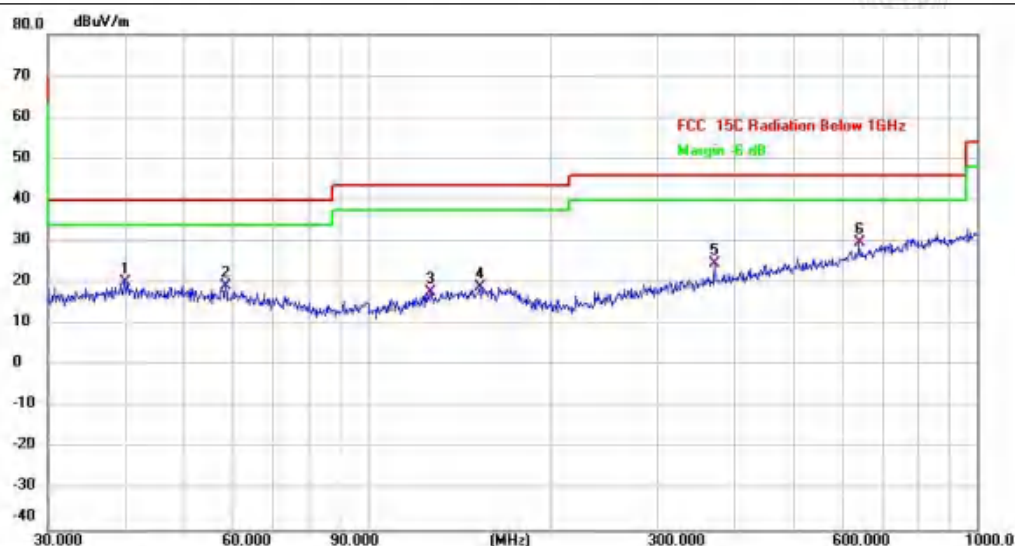

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	39.9942	27.25	-7.09	20.16	40.00	-19.84	QP	
2	58.6126	27.38	-8.24	19.14	40.00	-20.86	QP	
3	126.7723	25.87	-8.16	17.71	43.50	-25.79	QP	
4	152.6641	25.35	-6.42	18.93	43.50	-24.57	QP	
5	372.0045	28.93	-4.37	24.56	46.00	-21.44	QP	
6	640.6110	28.30	1.32	29.62	46.00	-16.38	QP	

TEST REPORT

Report No.: MTi260703023-0102E3

6.7 Radiated emissions (above 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.			
Test Method:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Procedure:	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 section 6.5.4		


6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	23 °C	Humidity:	45 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6, Mode7, Mode8, Mode9, Mode10				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1, Mode7) is recorded in the report				
Note: Test frequency are from 1GHz to 25GHz, the amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. All modes of operation of the EUT were investigated, and only the worst-case results are reported.					

TEST REPORT

Report No.: MTi260703023-0102E3

6.7.2 Test Setup Diagram:

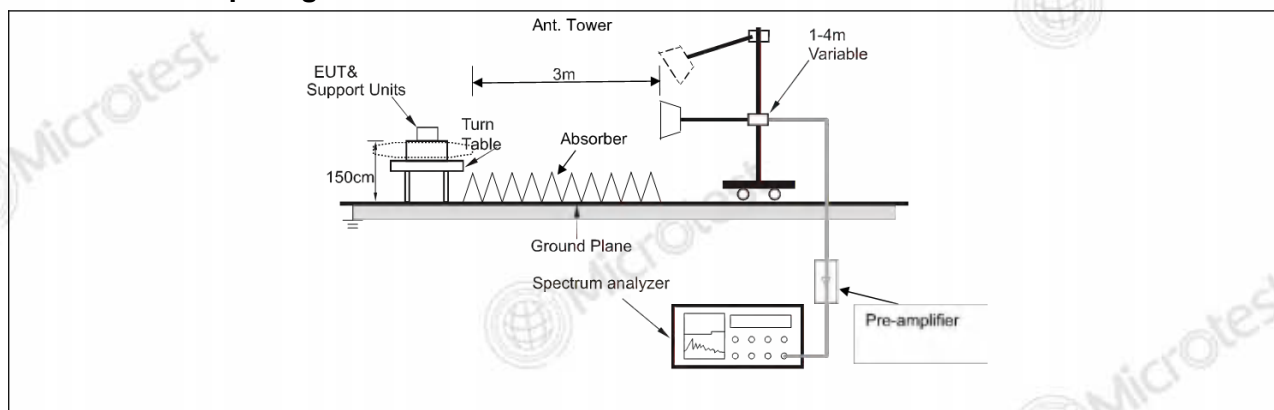

TEST REPORT

Report No.: MTi260703023-0102E3

6.7.3 Test Data:

ANT1:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	49.74	2.71	52.45	74.00	-21.55	peak
2	*	4824.000	45.99	2.71	48.70	54.00	-5.30	AVG
3		7236.000	42.27	7.40	49.67	74.00	-24.33	peak
4		7236.000	39.18	7.40	46.58	54.00	-7.42	AVG
5		9648.000	41.27	9.31	50.58	74.00	-23.42	peak
6		9648.000	35.93	9.31	45.24	54.00	-8.76	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	44.19	2.71	46.90	74.00	-27.10	peak
2		4824.000	42.56	2.71	45.27	54.00	-8.73	AVG
3		7236.000	41.96	7.40	49.36	74.00	-24.64	peak
4		7236.000	38.62	7.40	46.02	54.00	-7.98	AVG
5		9648.000	40.82	9.31	50.13	74.00	-23.87	peak
6	*	9648.000	36.79	9.31	46.10	54.00	-7.90	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	49.79	2.74	52.53	74.00	-21.47	peak
2	*	4874.000	45.82	2.74	48.56	54.00	-5.44	AVG
3		7311.000	41.12	7.70	48.82	74.00	-25.18	peak
4		7311.000	38.85	7.70	46.55	54.00	-7.45	AVG
5		9748.000	41.86	9.92	51.78	74.00	-22.22	peak
6		9748.000	37.53	9.92	47.45	54.00	-6.55	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	42.35	2.74	45.09	74.00	-28.91	peak
2		4874.000	41.41	2.74	44.15	54.00	-9.85	AVG
3		7311.000	40.95	7.70	48.65	74.00	-25.35	peak
4		7311.000	37.58	7.70	45.28	54.00	-8.72	AVG
5		9748.000	42.48	9.92	52.40	74.00	-21.60	peak
6	*	9748.000	36.11	9.92	46.03	54.00	-7.97	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	48.13	2.93	51.06	74.00	-22.94	peak
2	*	4924.000	45.71	2.93	48.64	54.00	-5.36	AVG
3		7386.000	41.44	7.75	49.19	74.00	-24.81	peak
4		7386.000	39.49	7.75	47.24	54.00	-6.76	AVG
5		9848.000	44.13	9.81	53.94	74.00	-20.06	peak
6		9848.000	36.57	9.81	46.38	54.00	-7.62	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	45.89	2.93	48.82	74.00	-25.18	peak
2	*	4924.000	43.54	2.93	46.47	54.00	-7.53	AVG
3		7386.000	40.96	7.75	48.71	74.00	-25.29	peak
4		7386.000	37.83	7.75	45.58	54.00	-8.42	AVG
5		9848.000	42.01	9.81	51.82	74.00	-22.18	peak
6		9848.000	35.85	9.81	45.66	54.00	-8.34	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

ANT2:

Mode1 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	48.15	2.71	50.86	74.00	-23.14	peak
2	*	4824.000	45.70	2.71	48.41	54.00	-5.59	AVG
3		7236.000	42.59	7.40	49.99	74.00	-24.01	peak
4		7236.000	38.95	7.40	46.35	54.00	-7.65	AVG
5		9648.000	42.10	9.31	51.41	74.00	-22.59	peak
6		9648.000	35.97	9.31	45.28	54.00	-8.72	AVG

Mode1 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	45.95	2.71	48.66	74.00	-25.34	peak
2		4824.000	43.36	2.71	46.07	54.00	-7.93	AVG
3		7236.000	41.36	7.40	48.76	74.00	-25.24	peak
4	*	7236.000	38.93	7.40	46.33	54.00	-7.67	AVG
5		9648.000	41.17	9.31	50.48	74.00	-23.52	peak
6		9648.000	36.19	9.31	45.50	54.00	-8.50	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	48.33	2.74	51.07	74.00	-22.93	peak
2	*	4874.000	45.70	2.74	48.44	54.00	-5.56	AVG
3		7311.000	41.33	7.70	49.03	74.00	-24.97	peak
4		7311.000	39.08	7.70	46.78	54.00	-7.22	AVG
5		9748.000	42.36	9.92	52.28	74.00	-21.72	peak
6		9748.000	35.78	9.92	45.70	54.00	-8.30	AVG

Mode1 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	45.73	2.74	48.47	74.00	-25.53	peak
2		4874.000	43.43	2.74	46.17	54.00	-7.83	AVG
3		7311.000	41.16	7.70	48.86	74.00	-25.14	peak
4		7311.000	37.84	7.70	45.54	54.00	-8.46	AVG
5		9748.000	42.60	9.92	52.52	74.00	-21.48	peak
6	*	9748.000	36.68	9.92	46.60	54.00	-7.40	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode1 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	48.08	2.93	51.01	74.00	-22.99	peak
2	*	4924.000	46.03	2.93	48.96	54.00	-5.04	AVG
3		7386.000	41.57	7.75	49.32	74.00	-24.68	peak
4		7386.000	39.70	7.75	47.45	54.00	-6.55	AVG
5		9848.000	43.21	9.81	53.02	74.00	-20.98	peak
6		9848.000	36.54	9.81	46.35	54.00	-7.65	AVG

Mode1 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	46.32	2.93	49.25	74.00	-24.75	peak
2		4924.000	43.84	2.93	46.77	54.00	-7.23	AVG
3		7386.000	41.32	7.75	49.07	74.00	-24.93	peak
4	*	7386.000	39.83	7.75	47.58	54.00	-6.42	AVG
5		9848.000	42.58	9.81	52.39	74.00	-21.61	peak
6		9848.000	37.04	9.81	46.85	54.00	-7.15	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

MIMO:

Mode7 / Polarization: Horizontal / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	46.09	2.71	48.80	74.00	-25.20	peak
2		4824.000	43.25	2.71	45.96	54.00	-8.04	AVG
3		7236.000	41.32	7.40	48.72	74.00	-25.28	peak
4		7236.000	38.38	7.40	45.78	54.00	-8.22	AVG
5		9648.000	42.25	9.31	51.56	74.00	-22.44	peak
6	*	9648.000	37.02	9.31	46.33	54.00	-7.67	AVG

Mode7 / Polarization: Vertical / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4824.000	49.46	2.71	52.17	74.00	-21.83	peak
2	*	4824.000	46.29	2.71	49.00	54.00	-5.00	AVG
3		7236.000	42.30	7.40	49.70	74.00	-24.30	peak
4		7236.000	38.96	7.40	46.36	54.00	-7.64	AVG
5		9648.000	40.46	9.31	49.77	74.00	-24.23	peak
6		9648.000	35.93	9.31	45.24	54.00	-8.76	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode7 / Polarization: Horizontal / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	45.15	2.74	47.89	74.00	-26.11	peak
2		4874.000	42.95	2.74	45.69	54.00	-8.31	AVG
3		7311.000	41.87	7.70	49.57	74.00	-24.43	peak
4		7311.000	38.35	7.70	46.05	54.00	-7.95	AVG
5		9748.000	41.92	9.92	51.84	74.00	-22.16	peak
6	*	9748.000	37.18	9.92	47.10	54.00	-6.90	AVG

Mode7 / Polarization: Vertical / CH: M

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4874.000	47.63	2.74	50.37	74.00	-23.63	peak
2	*	4874.000	46.16	2.74	48.90	54.00	-5.10	AVG
3		7311.000	41.93	7.70	49.63	74.00	-24.37	peak
4		7311.000	39.15	7.70	46.85	54.00	-7.15	AVG
5		9748.000	42.24	9.92	52.16	74.00	-21.84	peak
6		9748.000	36.35	9.92	46.27	54.00	-7.73	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Mode7 / Polarization: Horizontal / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	47.21	2.93	50.14	74.00	-23.86	peak
2		4924.000	43.46	2.93	46.39	54.00	-7.61	AVG
3		7386.000	40.75	7.75	48.50	74.00	-25.50	peak
4	*	7386.000	40.07	7.75	47.82	54.00	-6.18	AVG
5		9848.000	42.64	9.81	52.45	74.00	-21.55	peak
6		9848.000	36.96	9.81	46.77	54.00	-7.23	AVG

Mode7 / Polarization: Vertical / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4924.000	48.68	2.93	51.61	74.00	-22.39	peak
2	*	4924.000	45.95	2.93	48.88	54.00	-5.12	AVG
3		7386.000	40.70	7.75	48.45	74.00	-25.55	peak
4		7386.000	38.51	7.75	46.26	54.00	-7.74	AVG
5		9848.000	43.71	9.81	53.52	74.00	-20.48	peak
6		9848.000	35.30	9.81	45.11	54.00	-8.89	AVG

TEST REPORT

Report No.: MTi260703023-0102E3

Photographs of the test setup

Refer to Appendix - Test Setup Photos

TEST REPORT

Report No.: MTi260703023-0102E3

Photographs of the EUT

Refer to Appendix - EUT Photos

TEST REPORT

Report No.: MTi260703023-0102E3

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	8.200	0.5	PASS
	Ant2	2412	8.200	0.5	PASS
	Ant1	2437	8.200	0.5	PASS
	Ant2	2437	8.200	0.5	PASS
	Ant1	2462	8.160	0.5	PASS
	Ant2	2462	8.200	0.5	PASS
11G	Ant1	2412	16.320	0.5	PASS
	Ant2	2412	16.320	0.5	PASS
	Ant1	2437	16.360	0.5	PASS
	Ant2	2437	16.200	0.5	PASS
	Ant1	2462	16.240	0.5	PASS
	Ant2	2462	16.280	0.5	PASS
11N20SISO	Ant1	2412	17.440	0.5	PASS
	Ant2	2412	17.520	0.5	PASS
	Ant1	2437	17.400	0.5	PASS
	Ant2	2437	17.440	0.5	PASS
	Ant1	2462	17.560	0.5	PASS
	Ant2	2462	17.640	0.5	PASS
11N40SISO	Ant1	2422	36.080	0.5	PASS
	Ant2	2422	36.160	0.5	PASS
	Ant1	2437	35.760	0.5	PASS
	Ant2	2437	36.800	0.5	PASS
	Ant1	2452	36.160	0.5	PASS
	Ant2	2452	36.160	0.5	PASS
11AX20SISO	Ant1	2412	18.960	0.5	PASS
	Ant2	2412	18.960	0.5	PASS
	Ant1	2437	18.880	0.5	PASS
	Ant2	2437	19.000	0.5	PASS
	Ant1	2462	18.960	0.5	PASS
	Ant2	2462	18.840	0.5	PASS
11AX40SISO	Ant1	2422	39.200	0.5	PASS
	Ant2	2422	37.920	0.5	PASS
	Ant1	2437	37.520	0.5	PASS
	Ant2	2437	38.080	0.5	PASS
	Ant1	2452	37.760	0.5	PASS
	Ant2	2452	38.000	0.5	PASS

TEST REPORT

Report No.: MTi260703023-0102E3

Test Graphs



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2437



11B_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2462



11B_Ant2_2462



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2412



11G_Ant2_2412



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2437



11G_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2462




11G_Ant2_2462




TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2412

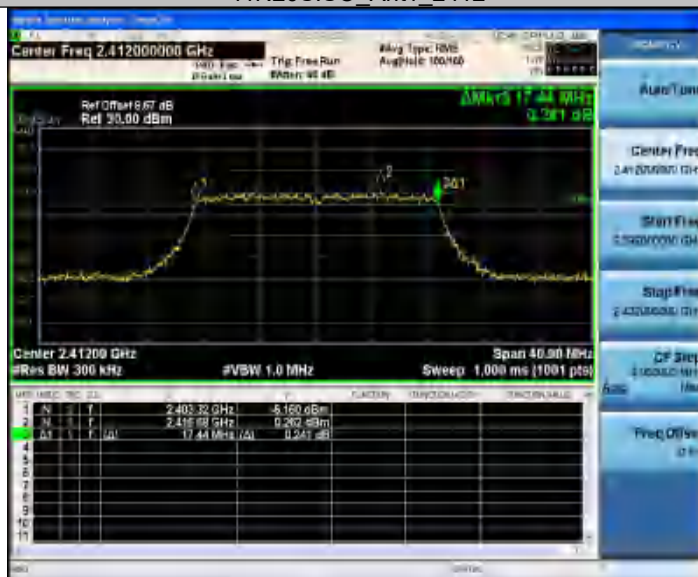

11N20SISO_Ant2_2412

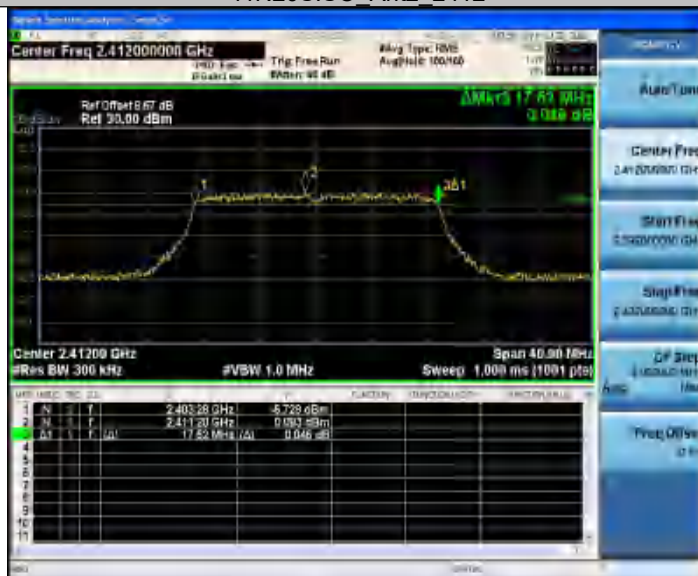

TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2437



11N20SISO_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2462



11N20SISO_Ant2_2462




TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2422



11N40SISO_Ant2_2422

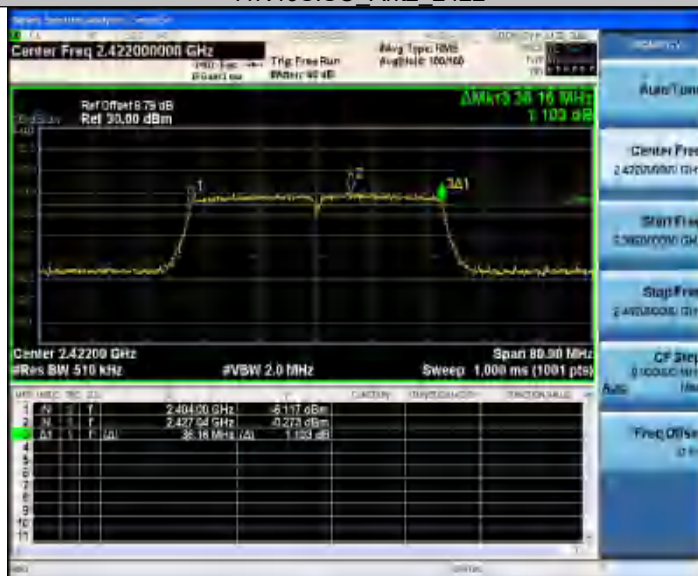

TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2437



11N40SISO_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2452



11N40SISO_Ant2_2452




TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2412




11AX20SISO_Ant2_2412

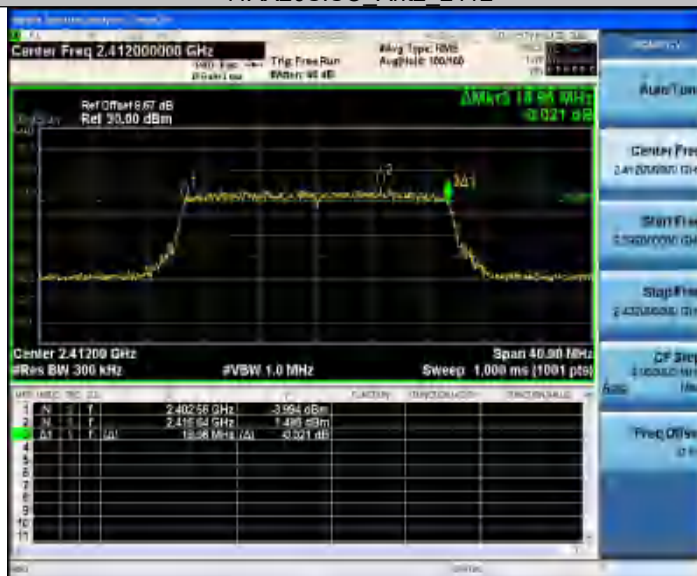

TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2437

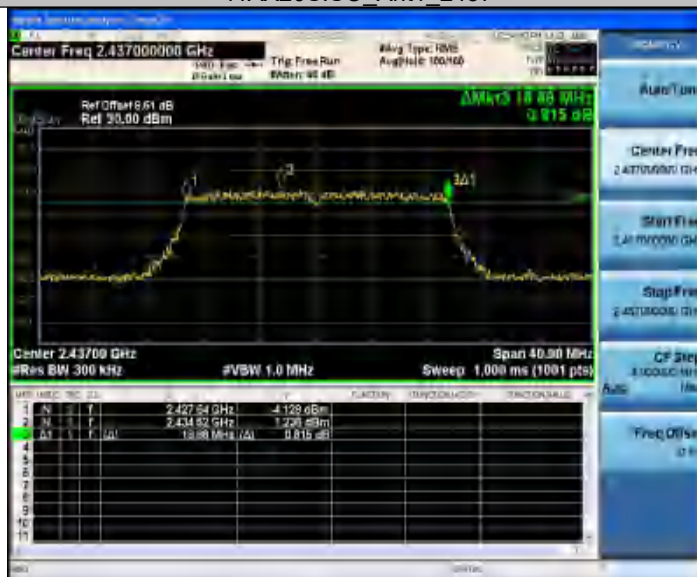

11AX20SISO_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2462



11AX20SISO_Ant2_2462



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2422




11AX40SISO_Ant2_2422



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2437

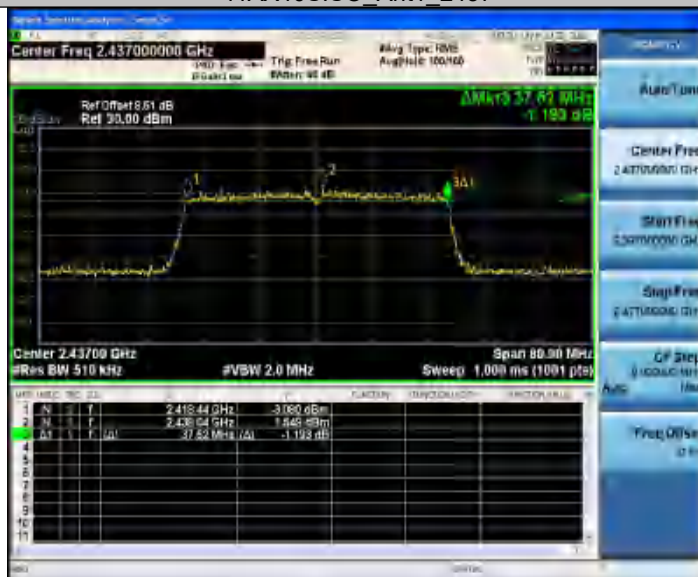


11AX40SISO_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2452

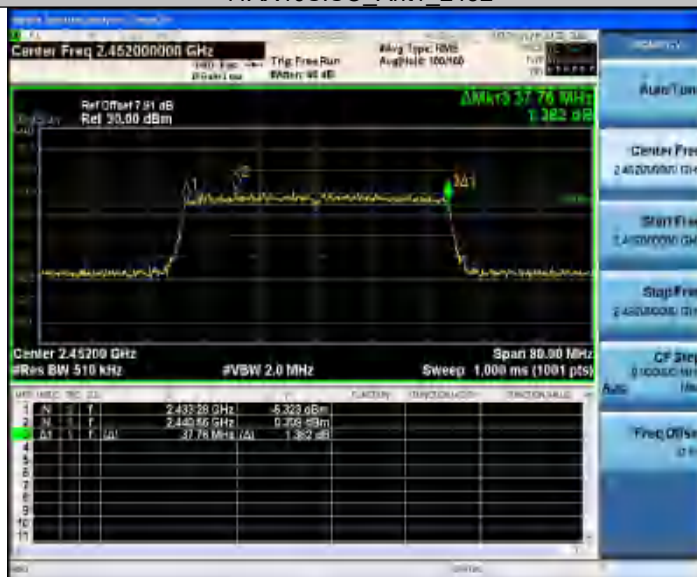

11AX40SISO_Ant2_2452



TEST REPORT

Report No.: MTi260703023-0102E3

TEST REPORT

Report No.: MTi260703023-0102E3

Appendix B: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Conducted Limit [dBm]	Verdict
11B	Ant1	2412	13.47	≤30.00	PASS
	Ant2	2412	13.72	≤30.00	PASS
	Ant1	2437	13.58	≤30.00	PASS
	Ant2	2437	11.93	≤30.00	PASS
	Ant1	2462	13.43	≤30.00	PASS
	Ant2	2462	11.76	≤30.00	PASS
11G	Ant1	2412	16.81	≤30.00	PASS
	Ant2	2412	15.85	≤30.00	PASS
	Ant1	2437	16.93	≤30.00	PASS
	Ant2	2437	14.22	≤30.00	PASS
	Ant1	2462	15.98	≤30.00	PASS
	Ant2	2462	14.23	≤30.00	PASS
11N20SISO	Ant1	2412	15.63	≤30.00	PASS
	Ant2	2412	16.05	≤30.00	PASS
	Ant1	2437	15.99	≤30.00	PASS
	Ant2	2437	14.39	≤30.00	PASS
	Ant1	2462	15.72	≤30.00	PASS
	Ant2	2462	14.56	≤30.00	PASS
11N40SISO	Ant1	2422	16.33	≤30.00	PASS
	Ant2	2422	16.66	≤30.00	PASS
	Ant1	2437	16.24	≤30.00	PASS
	Ant2	2437	14.51	≤30.00	PASS
	Ant1	2452	15.61	≤30.00	PASS
	Ant2	2452	14.20	≤30.00	PASS
11AX20SISO	Ant1	2412	16.80	≤30.00	PASS
	Ant2	2412	17.11	≤30.00	PASS
	Ant1	2437	17.12	≤30.00	PASS
	Ant2	2437	15.43	≤30.00	PASS
	Ant1	2462	16.95	≤30.00	PASS
	Ant2	2462	15.32	≤30.00	PASS
11AX40SISO	Ant1	2422	16.95	≤30.00	PASS
	Ant2	2422	17.23	≤30.00	PASS
	Ant1	2437	16.88	≤30.00	PASS
	Ant2	2437	15.29	≤30.00	PASS
	Ant1	2452	16.01	≤30.00	PASS
	Ant2	2452	14.63	≤30.00	PASS
11N20MIMO	Ant1	2412	15.06	≤30.00	PASS
	Ant2	2412	15.31	≤30.00	PASS
	total	2412	18.20	≤30.00	PASS
	Ant1	2437	15.05	≤30.00	PASS
	Ant2	2437	13.55	≤30.00	PASS
	total	2437	17.37	≤30.00	PASS
	Ant1	2462	14.91	≤30.00	PASS
	Ant2	2462	13.57	≤30.00	PASS
11N40MIMO	total	2462	17.30	≤30.00	PASS
	Ant1	2422	14.94	≤30.00	PASS
	Ant2	2422	15.51	≤30.00	PASS
	total	2422	18.24	≤30.00	PASS
	Ant1	2437	14.82	≤30.00	PASS
	Ant2	2437	13.56	≤30.00	PASS
	total	2437	17.25	≤30.00	PASS
	Ant1	2452	14.35	≤30.00	PASS
11AX20MIMO	Ant2	2452	13.05	≤30.00	PASS
	total	2452	16.76	≤30.00	PASS
	Ant1	2412	15.34	≤30.00	PASS

TEST REPORT

Report No.: MTi260703023-0102E3

	Ant2	2412	15.88	≤30.00	PASS
	total	2412	18.63	≤30.00	PASS
	Ant1	2437	15.60	≤30.00	PASS
	Ant2	2437	14.27	≤30.00	PASS
	total	2437	18.00	≤30.00	PASS
	Ant1	2462	15.51	≤30.00	PASS
	Ant2	2462	14.30	≤30.00	PASS
	total	2462	17.96	≤30.00	PASS
11AX40MIMO	Ant1	2422	15.36	≤30.00	PASS
	Ant2	2422	15.92	≤30.00	PASS
	total	2422	18.66	≤30.00	PASS
	Ant1	2437	17.52	≤30.00	PASS
	Ant2	2437	15.10	≤30.00	PASS
	total	2437	19.49	≤30.00	PASS
	Ant1	2452	16.11	≤30.00	PASS
	Ant2	2452	14.18	≤30.00	PASS
	total	2452	18.26	≤30.00	PASS

TEST REPORT

Report No.: MTi260703023-0102E3

Appendix C: Maximum power spectral density

Test Result

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	-12.16	≤8.00	PASS
	Ant2	2412	-13.70	≤8.00	PASS
	Ant1	2437	-13.40	≤8.00	PASS
	Ant2	2437	-12.27	≤8.00	PASS
	Ant1	2462	-14.17	≤8.00	PASS
	Ant2	2462	-13.94	≤8.00	PASS
11G	Ant1	2412	-17.87	≤8.00	PASS
	Ant2	2412	-16.79	≤8.00	PASS
	Ant1	2437	-17.60	≤8.00	PASS
	Ant2	2437	-18.03	≤8.00	PASS
	Ant1	2462	-17.49	≤8.00	PASS
	Ant2	2462	-18.69	≤8.00	PASS
11N20SISO	Ant1	2412	-16.32	≤8.00	PASS
	Ant2	2412	-16.88	≤8.00	PASS
	Ant1	2437	-15.91	≤8.00	PASS
	Ant2	2437	-18.42	≤8.00	PASS
	Ant1	2462	-17.02	≤8.00	PASS
	Ant2	2462	-17.60	≤8.00	PASS
11N40SISO	Ant1	2422	-19.20	≤8.00	PASS
	Ant2	2422	-18.95	≤8.00	PASS
	Ant1	2437	-18.91	≤8.00	PASS
	Ant2	2437	-20.44	≤8.00	PASS
	Ant1	2452	-18.88	≤8.00	PASS
	Ant2	2452	-21.37	≤8.00	PASS
11AX20SISO	Ant1	2412	-16.92	≤8.00	PASS
	Ant2	2412	-17.10	≤8.00	PASS
	Ant1	2437	-17.48	≤8.00	PASS
	Ant2	2437	-18.86	≤8.00	PASS
	Ant1	2462	-17.15	≤8.00	PASS
	Ant2	2462	-18.93	≤8.00	PASS
11AX40SISO	Ant1	2422	-19.14	≤8.00	PASS
	Ant2	2422	-19.08	≤8.00	PASS
	Ant1	2437	-19.45	≤8.00	PASS
	Ant2	2437	-20.60	≤8.00	PASS
	Ant1	2452	-19.02	≤8.00	PASS
	Ant2	2452	-21.16	≤8.00	PASS
11N20MIMO	Ant1	2412	-17.46	≤8.00	PASS
	Ant2	2412	-17.59	≤8.00	PASS
	total	2412	-14.51	≤8.00	PASS
	Ant1	2437	-17.22	≤8.00	PASS
	Ant2	2437	-18.67	≤8.00	PASS
	total	2437	-14.87	≤8.00	PASS
	Ant1	2462	-16.62	≤8.00	PASS
	Ant2	2462	-18.57	≤8.00	PASS
	total	2462	-14.48	≤8.00	PASS
11N40MIMO	Ant1	2422	-18.86	≤8.00	PASS
	Ant2	2422	-19.22	≤8.00	PASS
	total	2422	-16.03	≤8.00	PASS
	Ant1	2437	-18.3	≤8.00	PASS
	Ant2	2437	-21.13	≤8.00	PASS
	total	2437	-16.48	≤8.00	PASS
	Ant1	2452	-21.14	≤8.00	PASS
	Ant2	2452	-22.35	≤8.00	PASS
	total	2452	-18.69	≤8.00	PASS
11AX20MIMO	Ant1	2412	-18.54	≤8.00	PASS

TEST REPORT

Report No.: MTi260703023-0102E3

	Ant2	2412	-18.43	≤8.00	PASS
	total	2412	-15.47	≤8.00	PASS
	Ant1	2437	-17.30	≤8.00	PASS
	Ant2	2437	-19.55	≤8.00	PASS
	total	2437	-15.27	≤8.00	PASS
	Ant1	2462	-17.75	≤8.00	PASS
	Ant2	2462	-20.38	≤8.00	PASS
	total	2462	-15.86	≤8.00	PASS
11AX40MIMO	Ant1	2422	-20.71	≤8.00	PASS
	Ant2	2422	-19.59	≤8.00	PASS
	total	2422	-17.10	≤8.00	PASS
	Ant1	2437	-20.89	≤8.00	PASS
	Ant2	2437	-23.18	≤8.00	PASS
	total	2437	-18.88	≤8.00	PASS
	Ant1	2452	-20.58	≤8.00	PASS
	Ant2	2452	-21.89	≤8.00	PASS
	total	2452	-18.18	≤8.00	PASS

TEST REPORT

Report No.: MTi260703023-0102E3

Test Graphs



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2437



11B_Ant2_2437



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2462




11B_Ant2_2462




TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2412

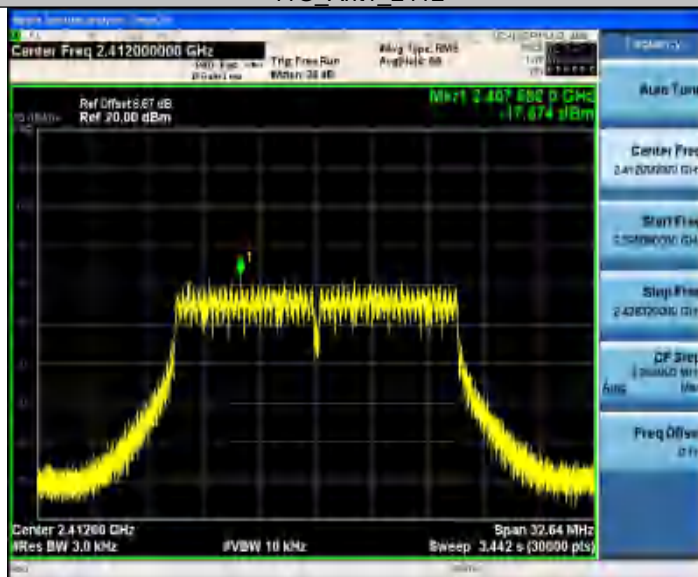


11G_Ant2_2412

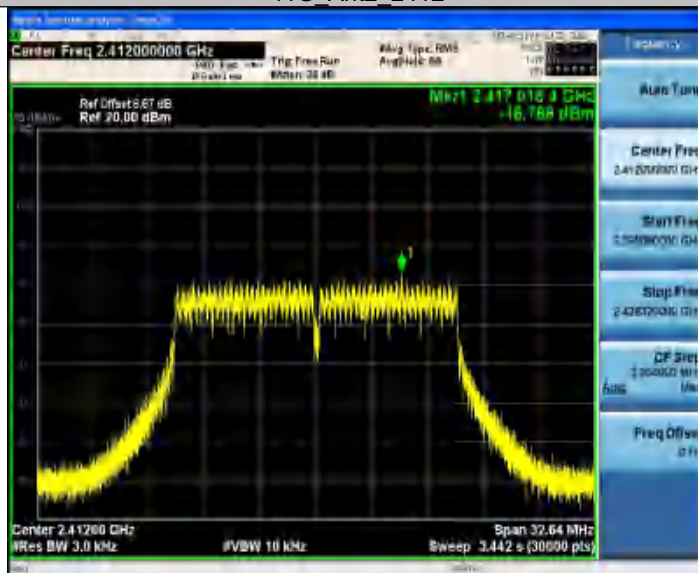


TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2437

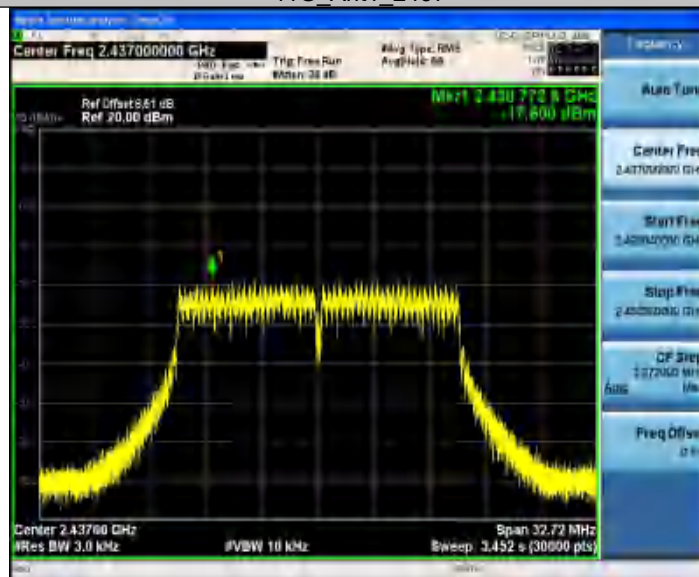


11G_Ant2_2437

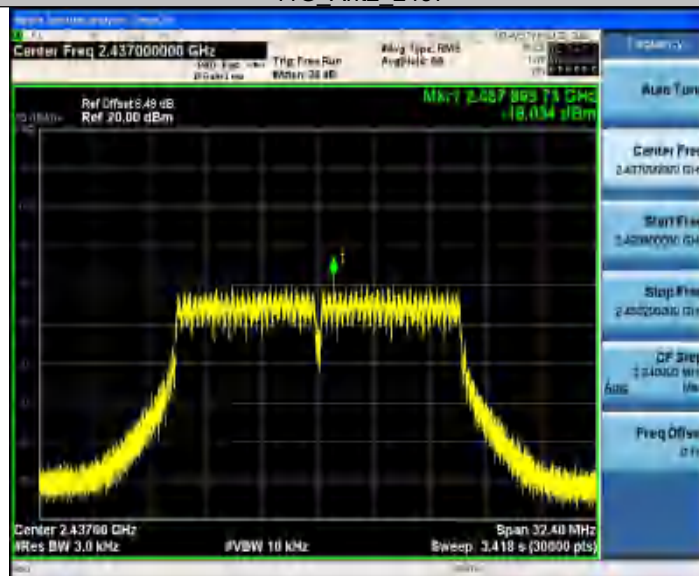


TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2462

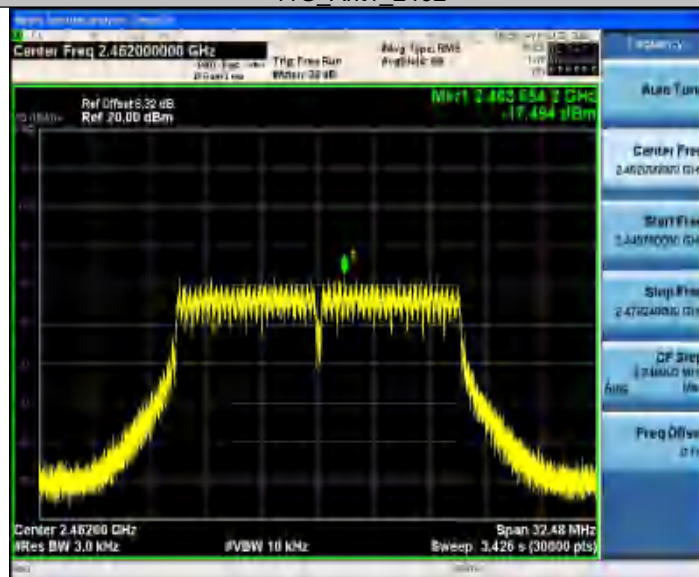


11G_Ant2_2462

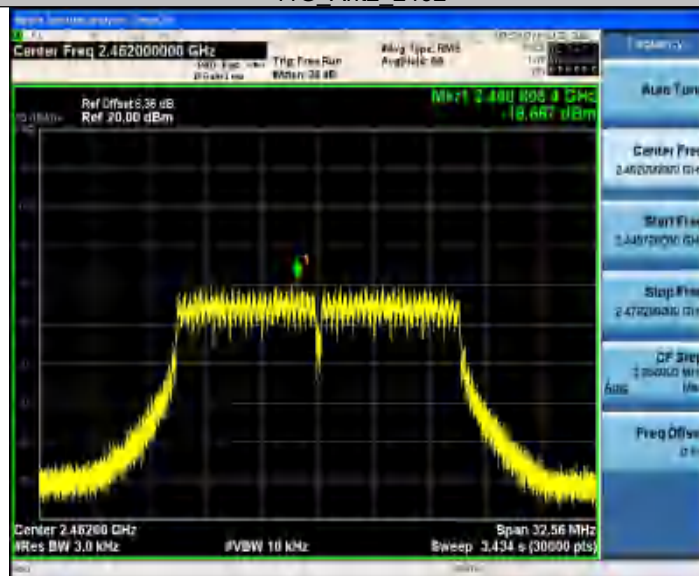


TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2412

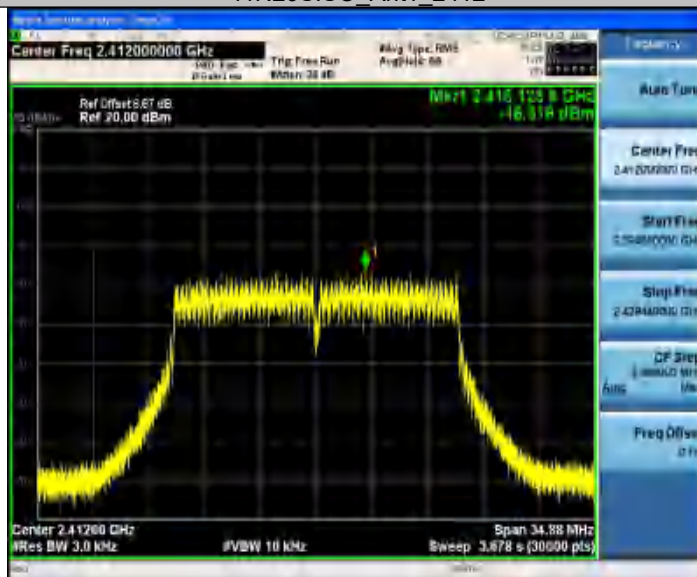


11N20SISO_Ant2_2412

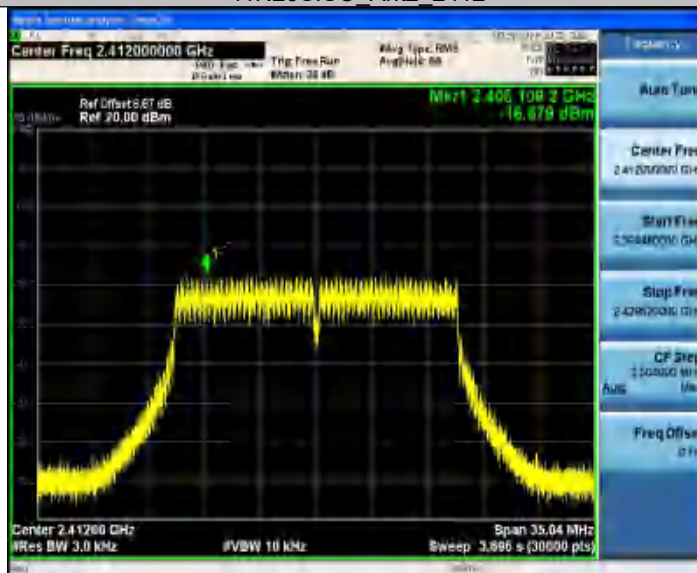


TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2437

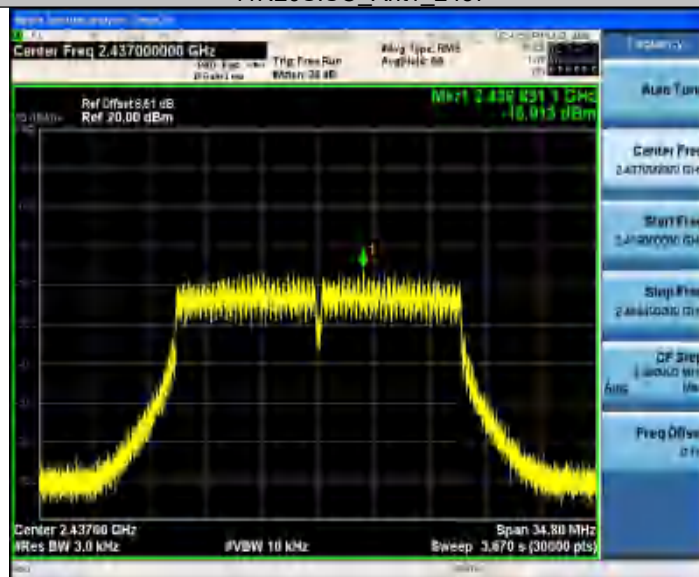


11N20SISO_Ant2_2437

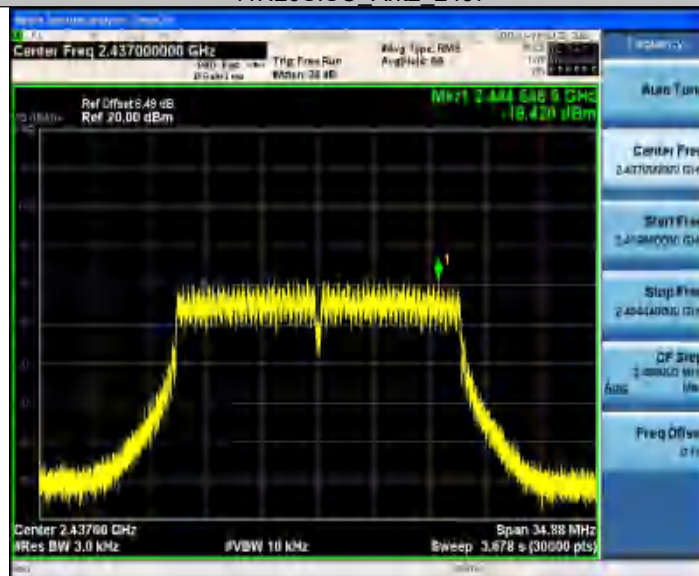


TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2462

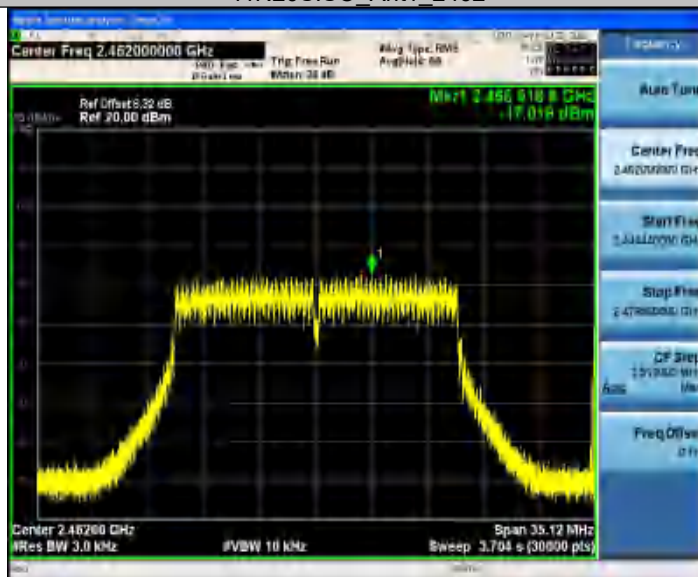


11N20SISO_Ant2_2462

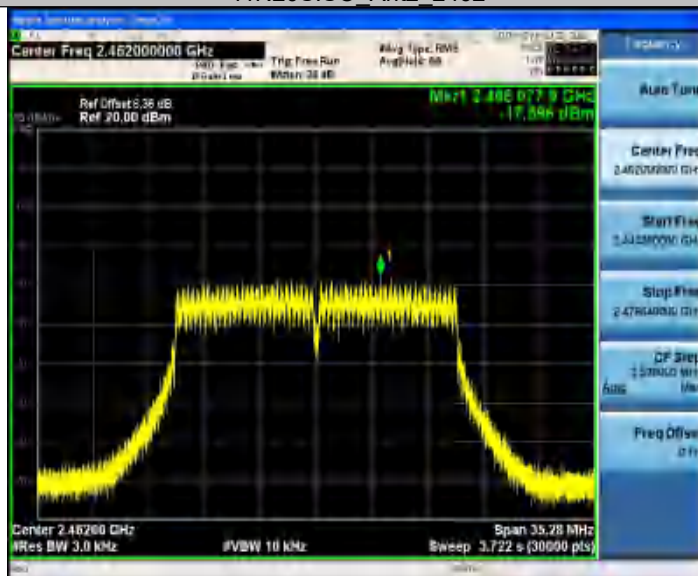


TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2422

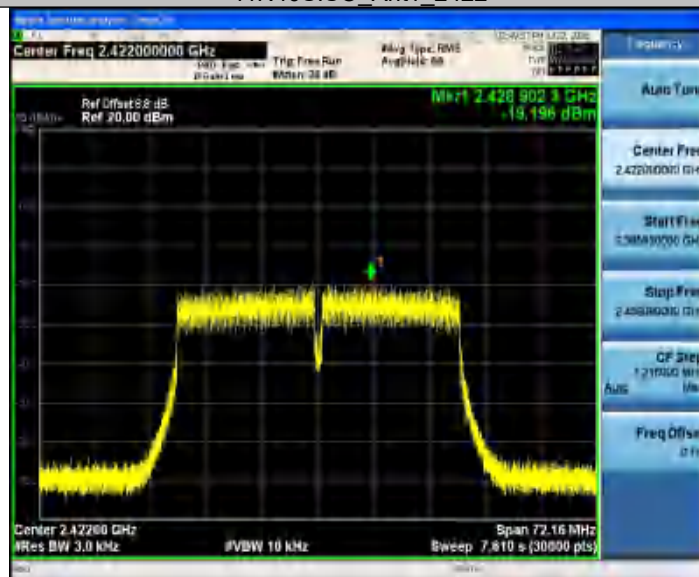


11N40SISO_Ant2_2422

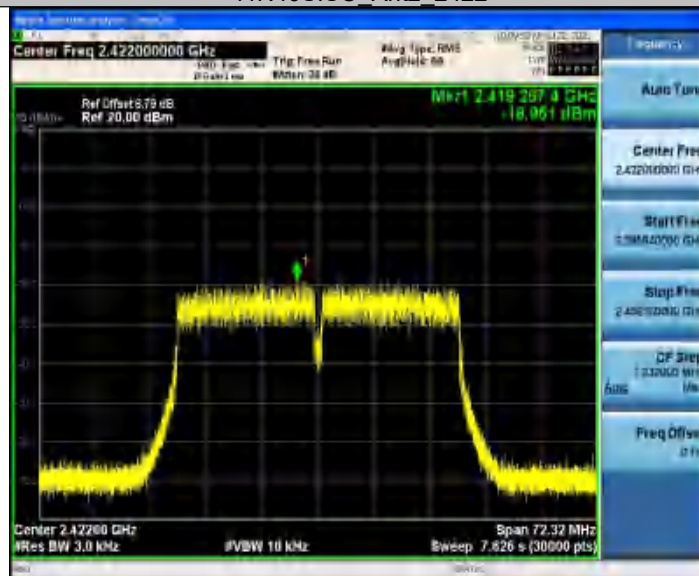


TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2437

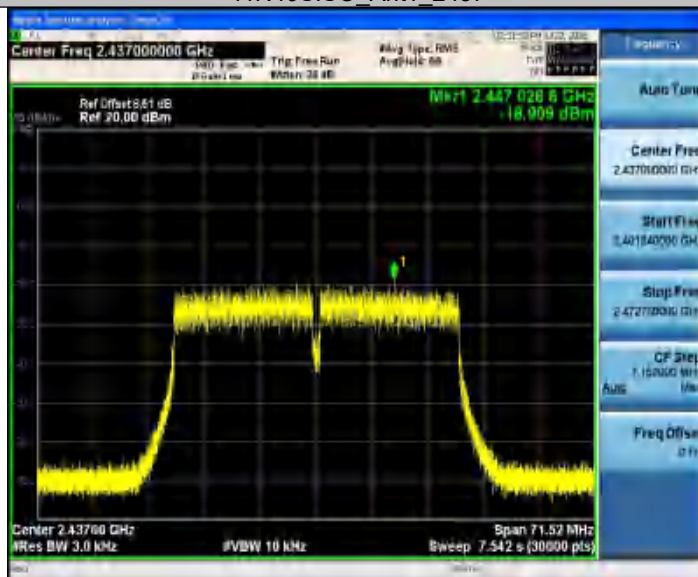


11N40SISO_Ant2_2437

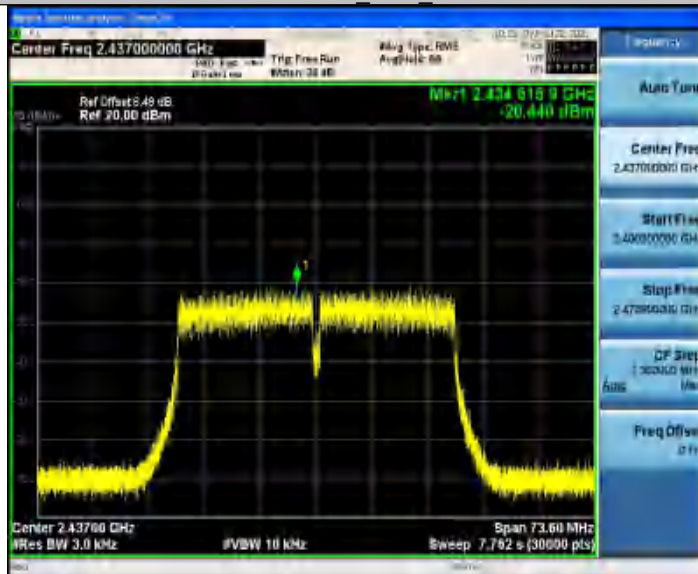


TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2452

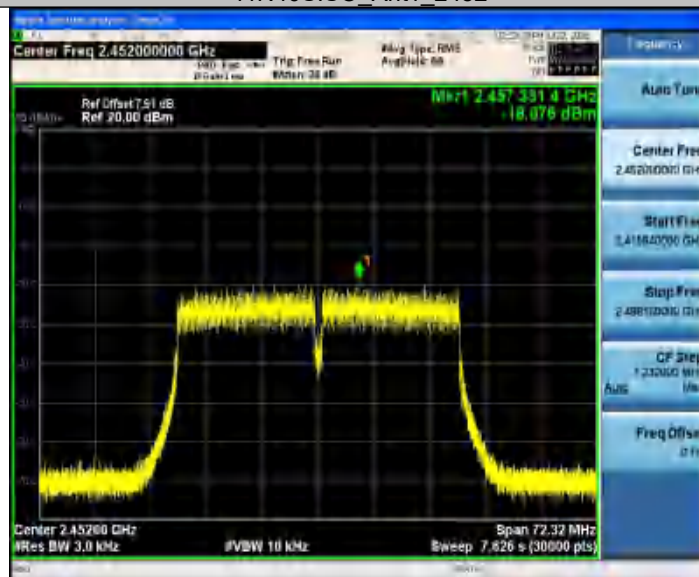


11N40SISO_Ant2_2452

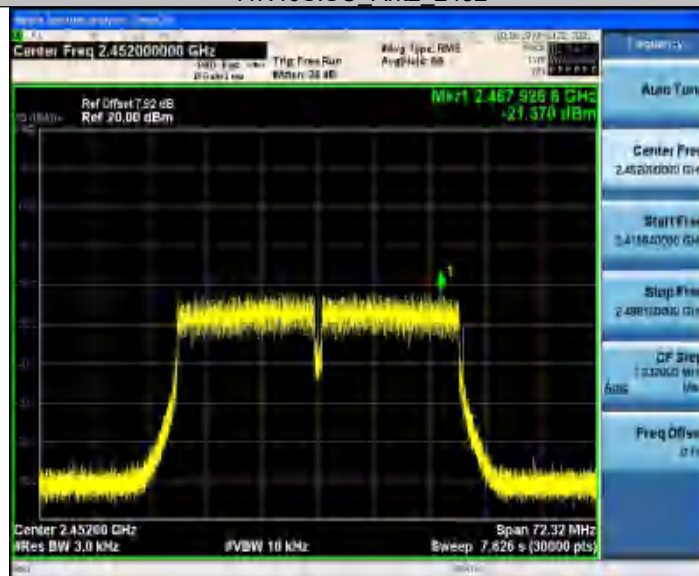


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2412

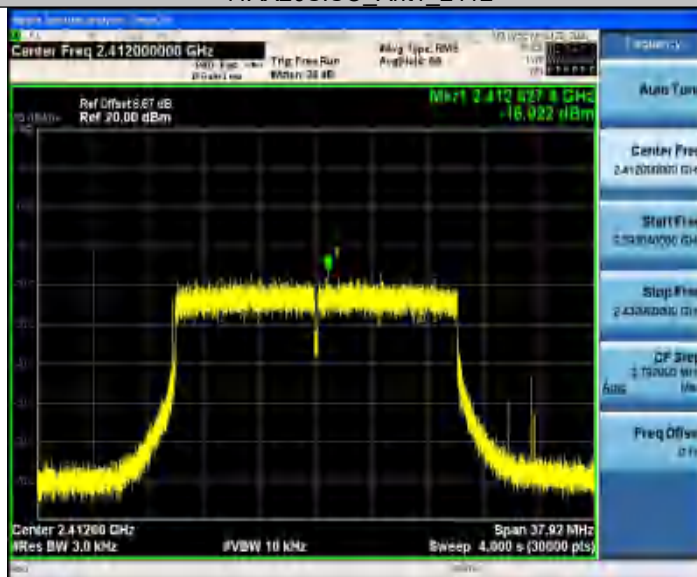


11AX20SISO_Ant2_2412

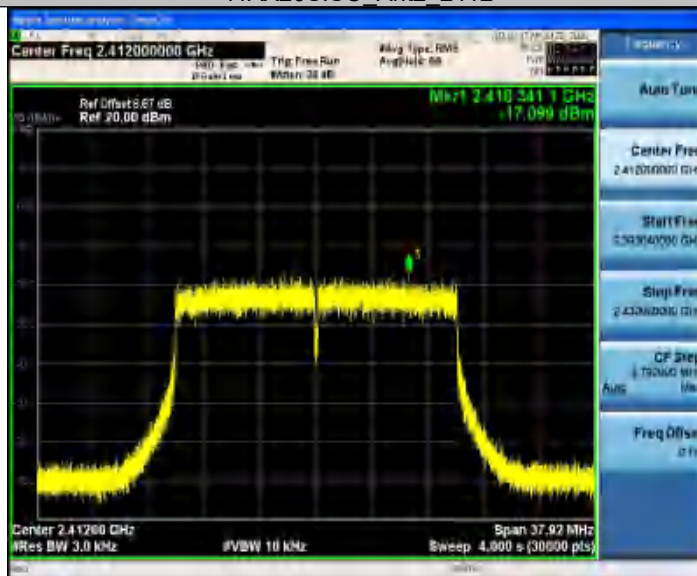


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2437

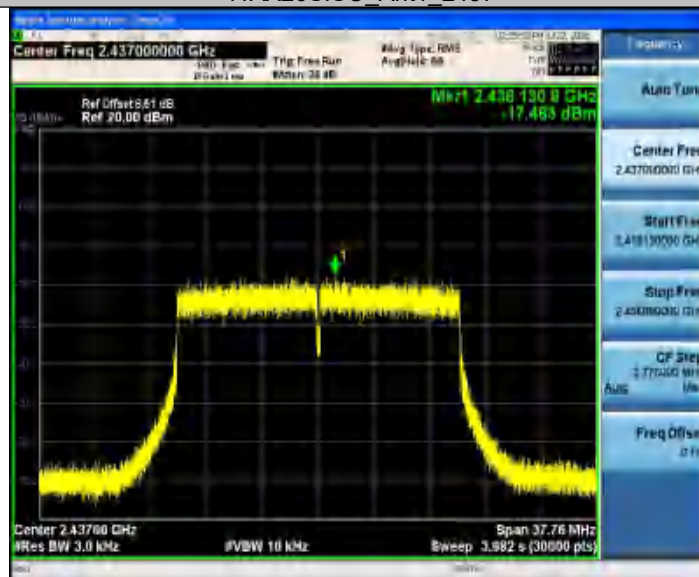


11AX20SISO_Ant2_2437

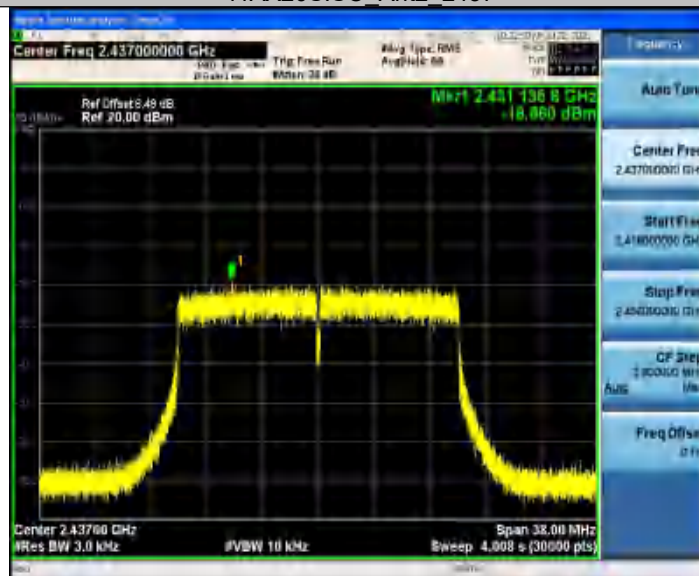


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2462

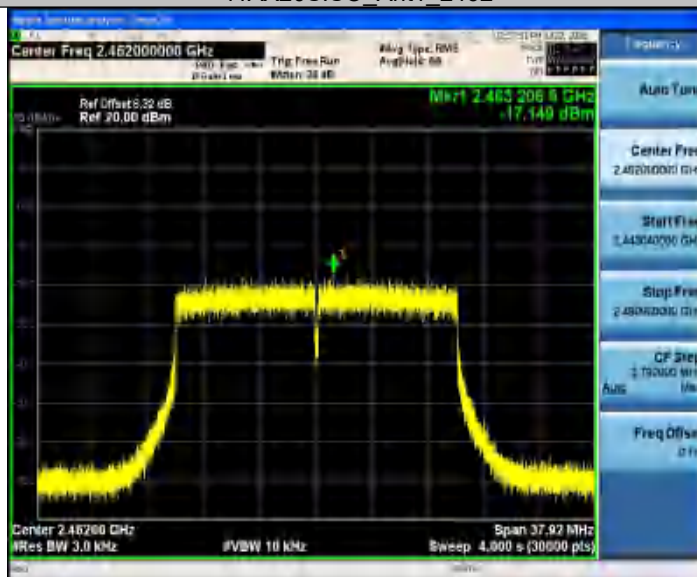


11AX20SISO_Ant2_2462

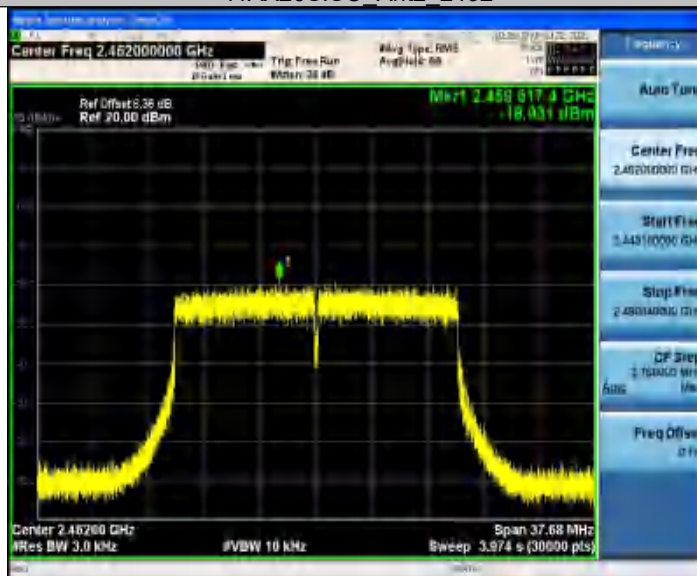


TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2422

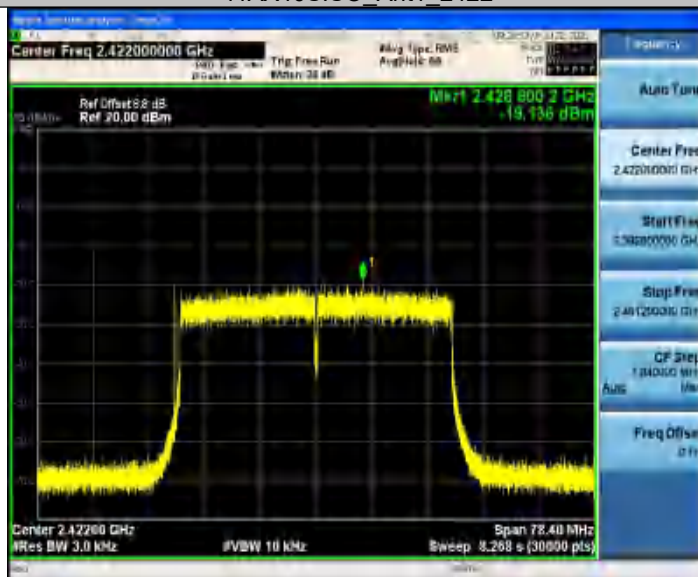


11AX40SISO_Ant2_2422

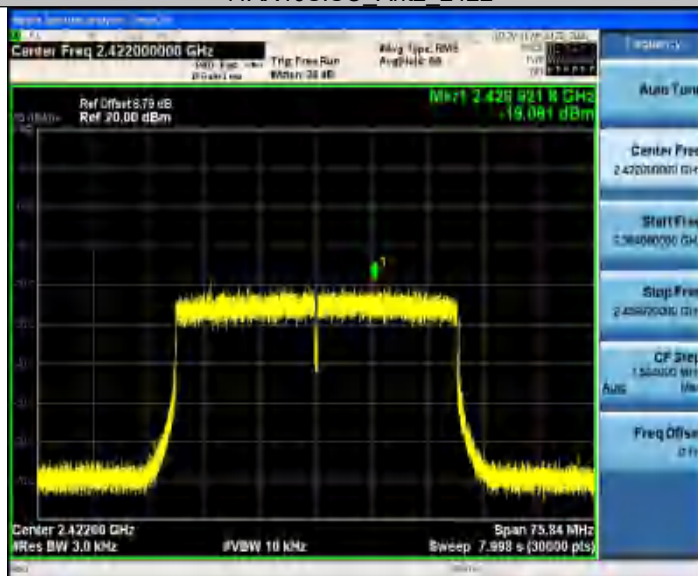


TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2437

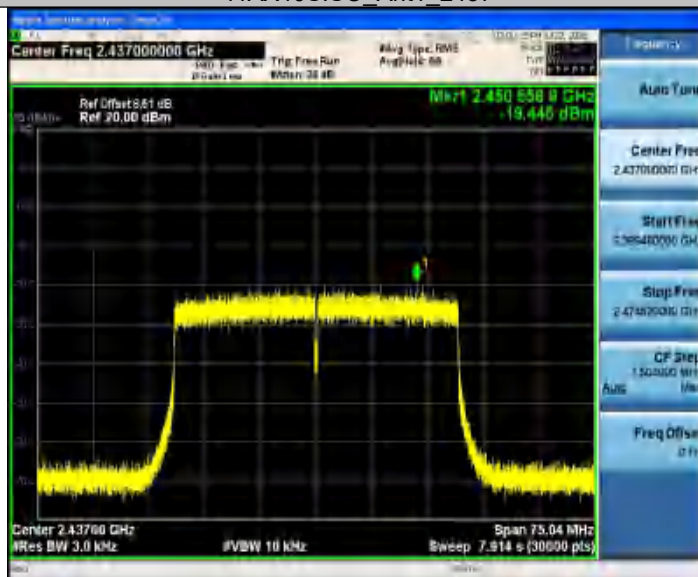


11AX40SISO_Ant2_2437

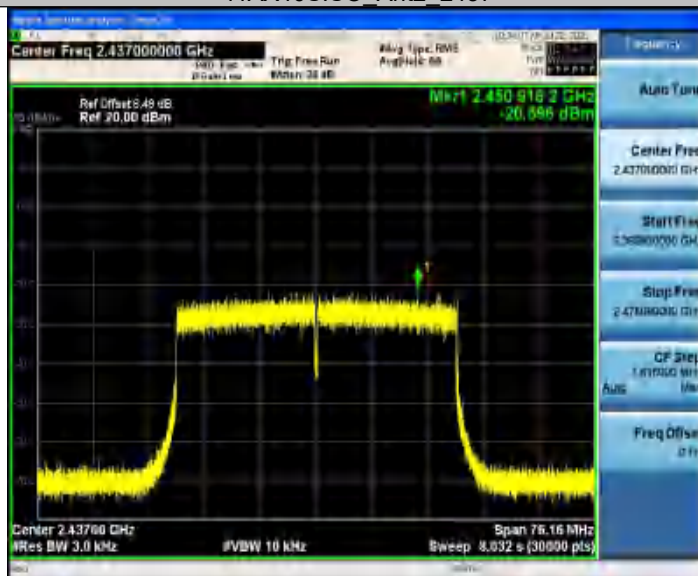


TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2452

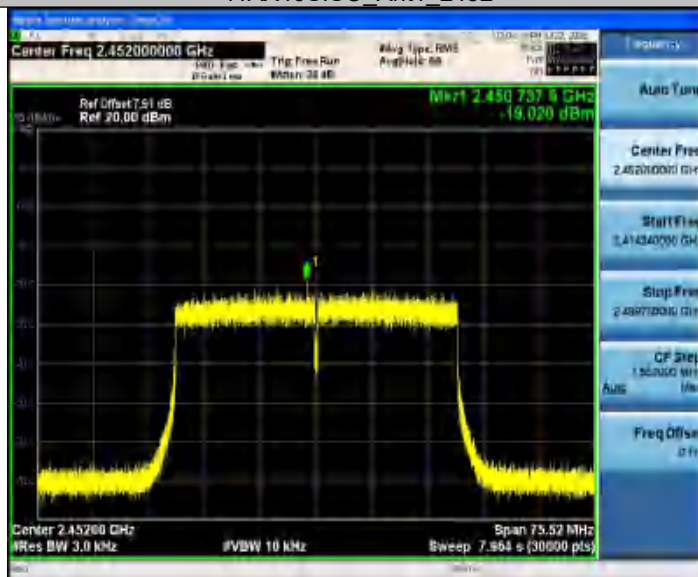


11AX40SISO_Ant2_2452

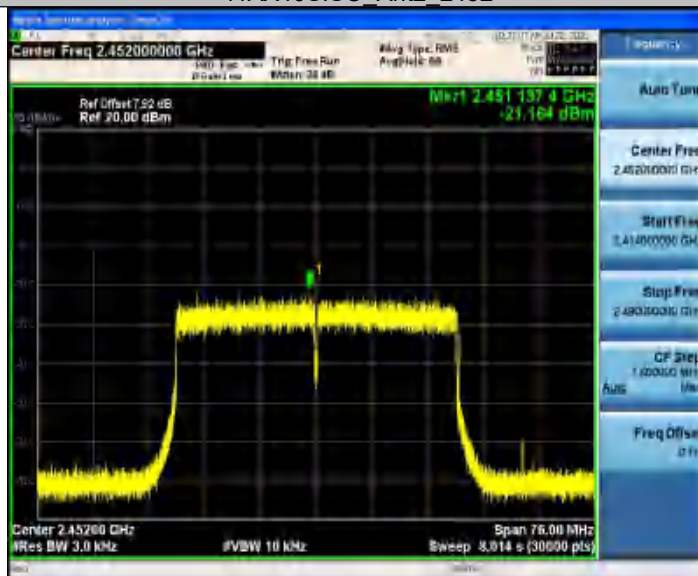


TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2412

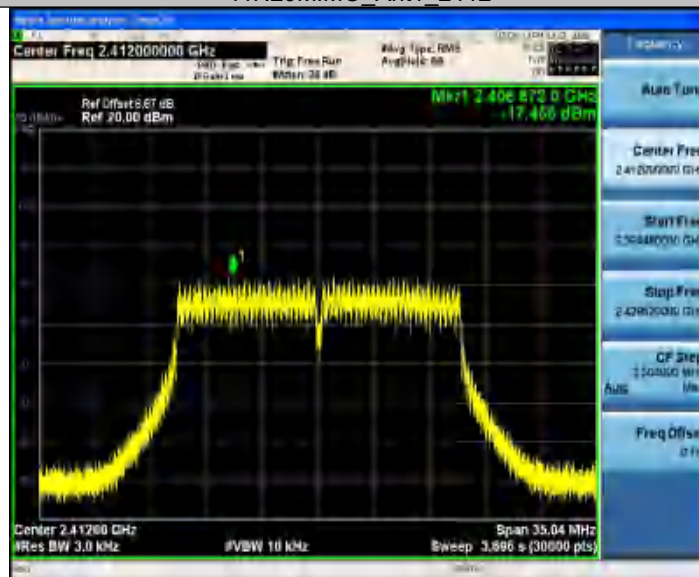


11N20MIMO_Ant2_2412

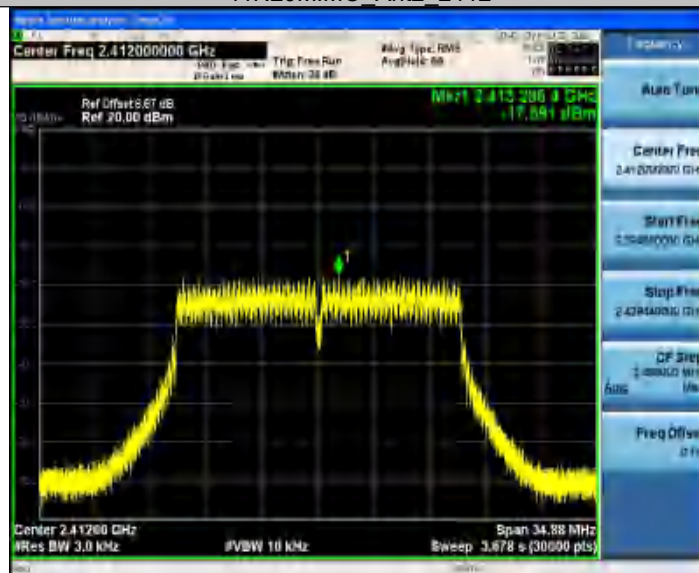


TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2437

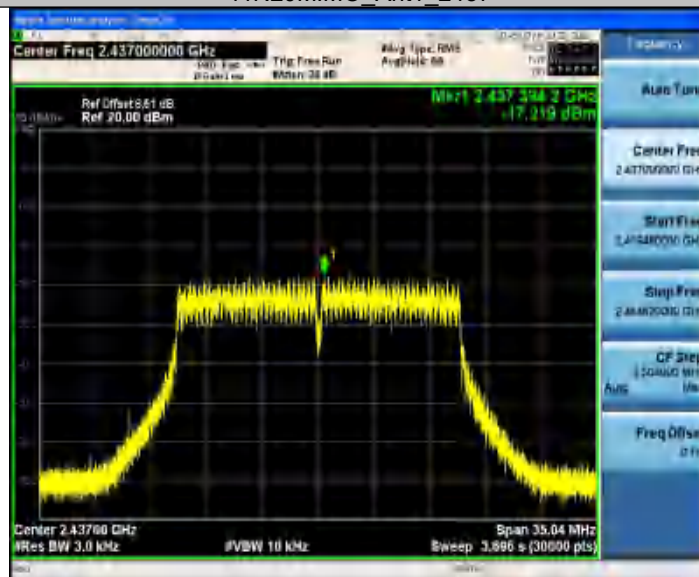


11N20MIMO_Ant2_2437

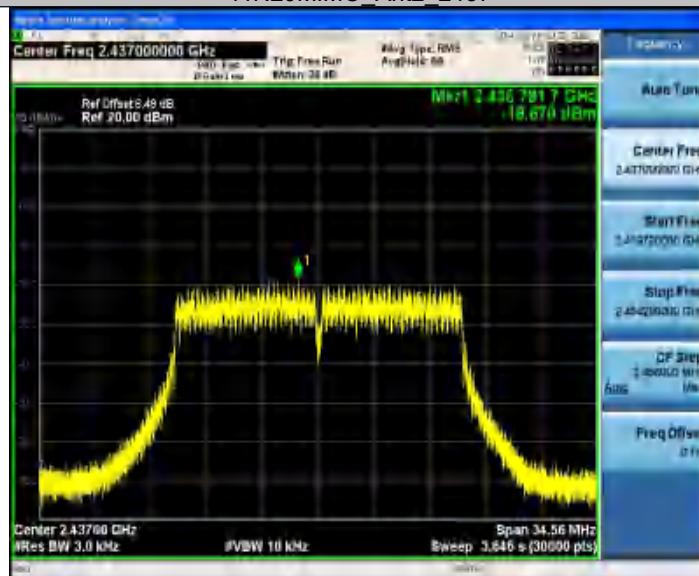


TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2462

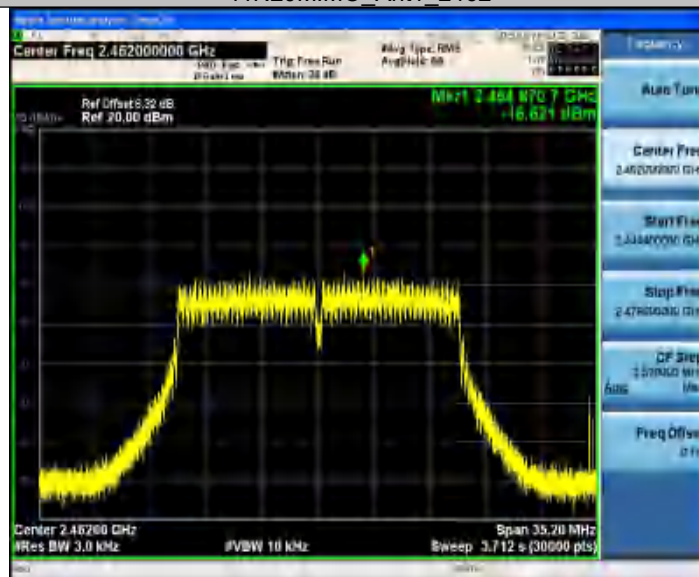


11N20MIMO_Ant2_2462

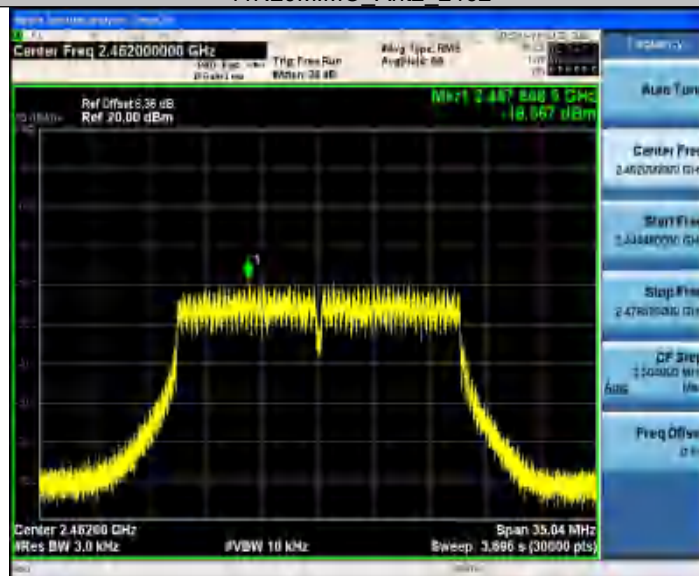


TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2422

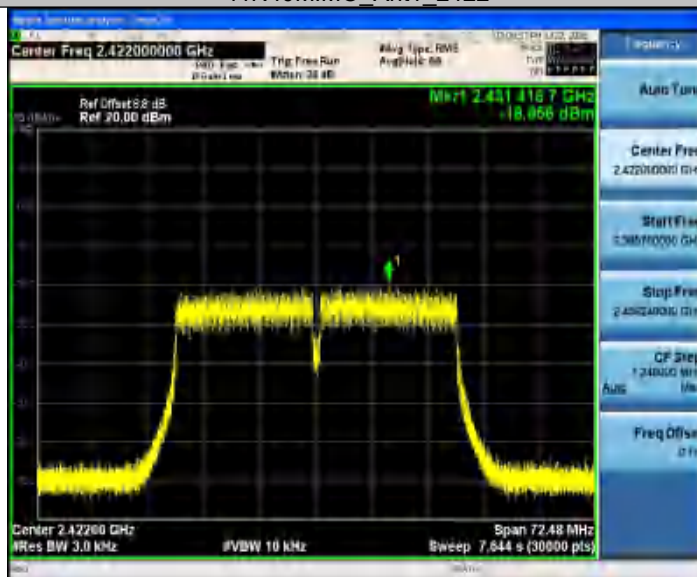


11N40MIMO_Ant2_2422

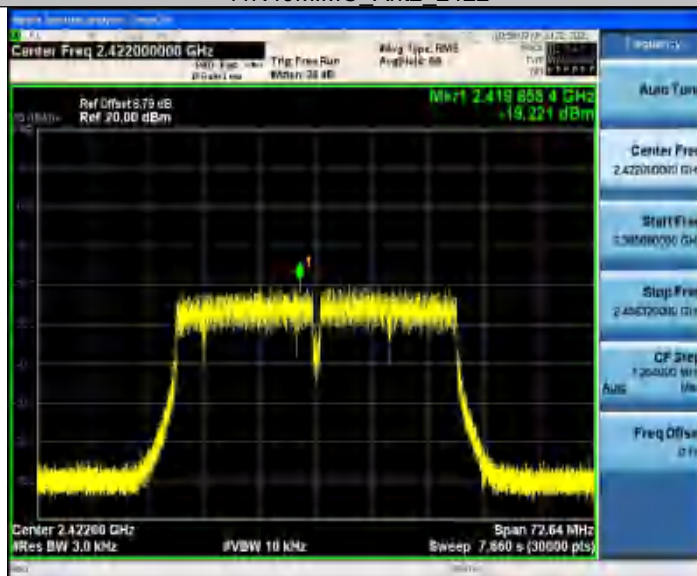


TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2437

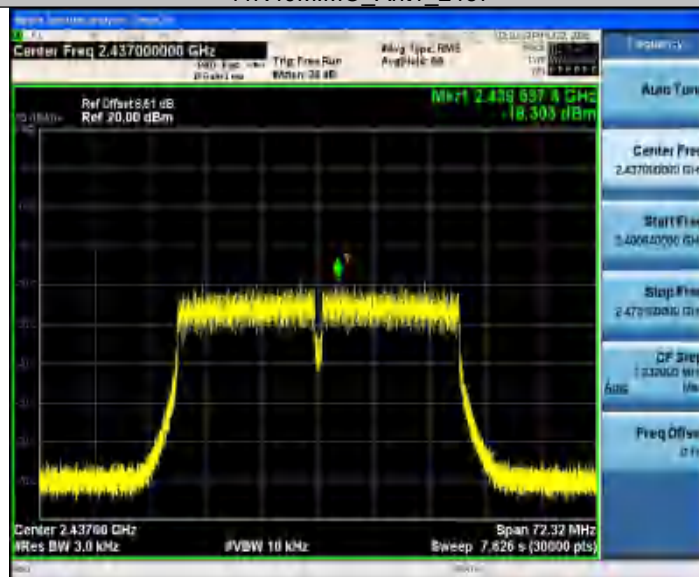


11N40MIMO_Ant2_2437

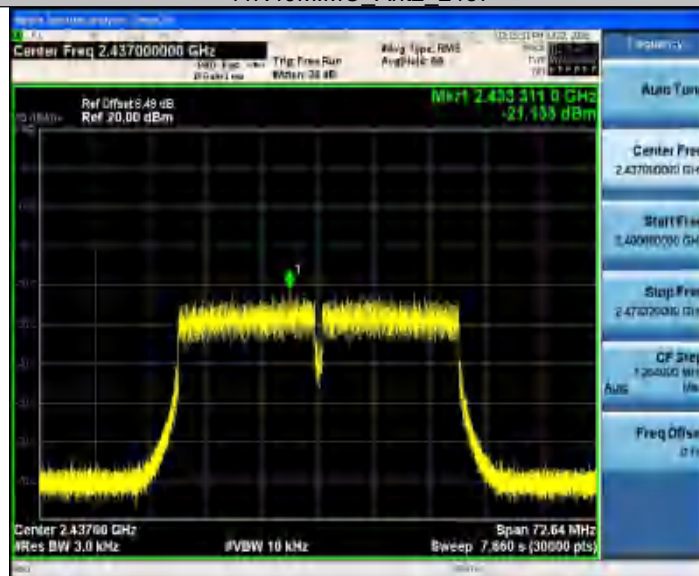


TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2452

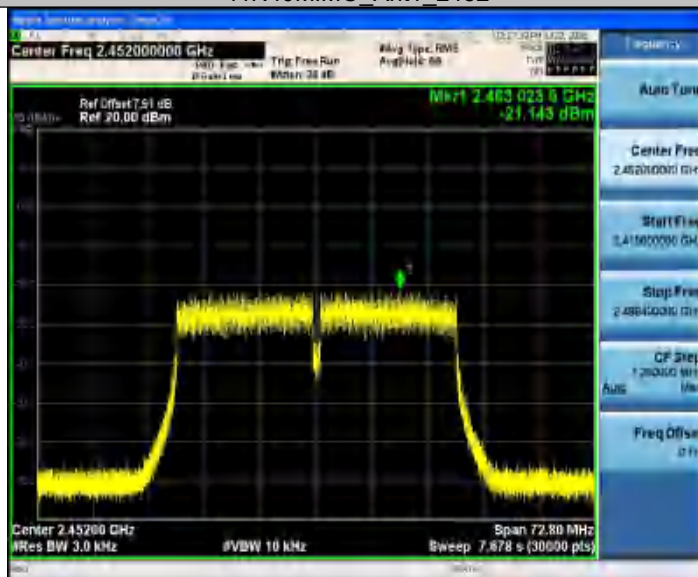


11N40MIMO_Ant2_2452

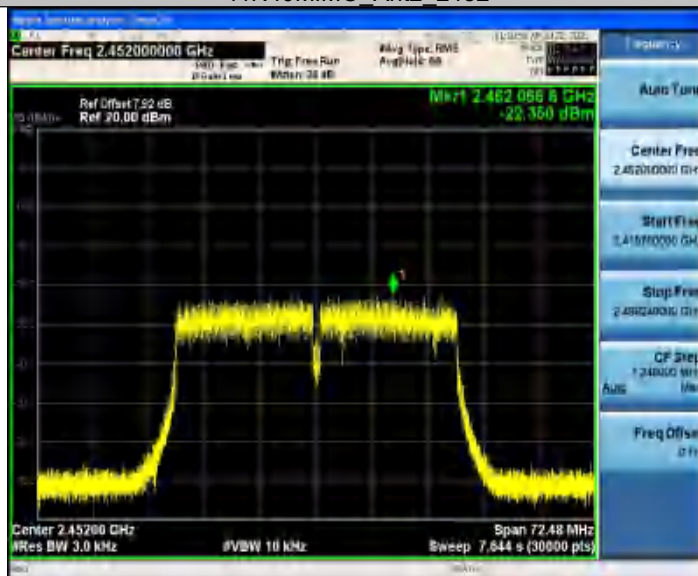


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2412

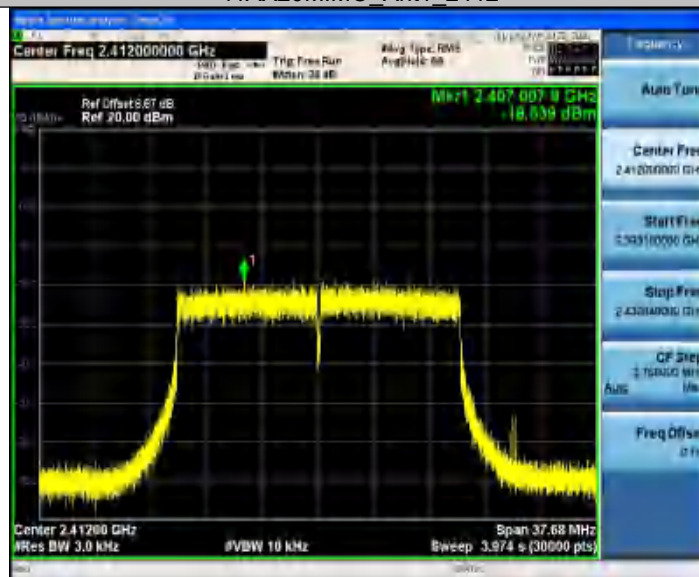


11AX20MIMO_Ant2_2412

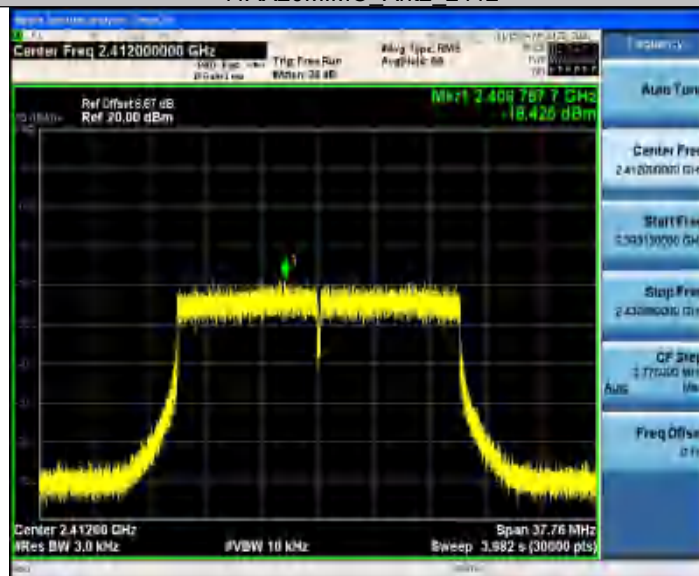


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2437

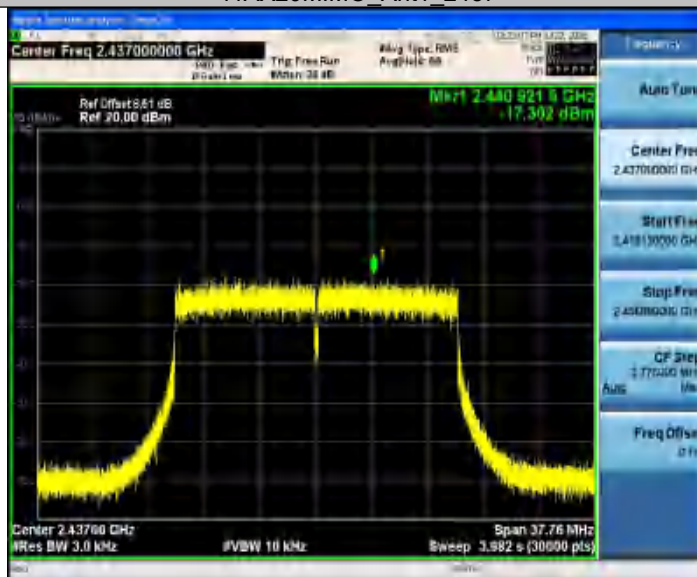


11AX20MIMO_Ant2_2437

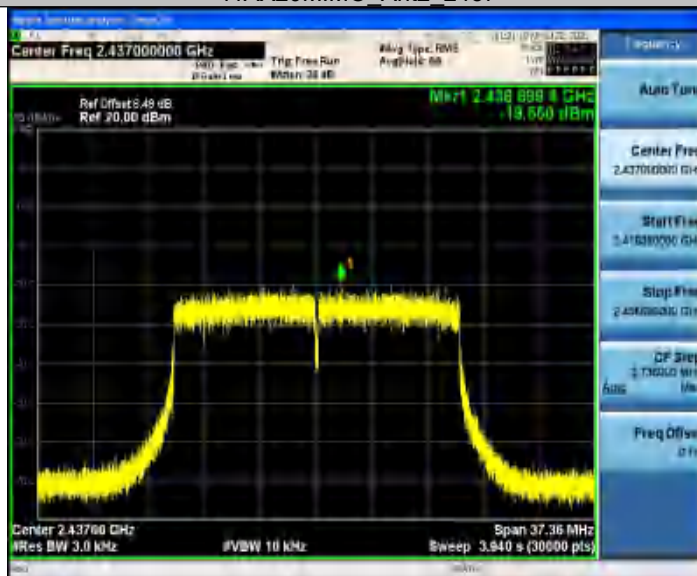


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2462

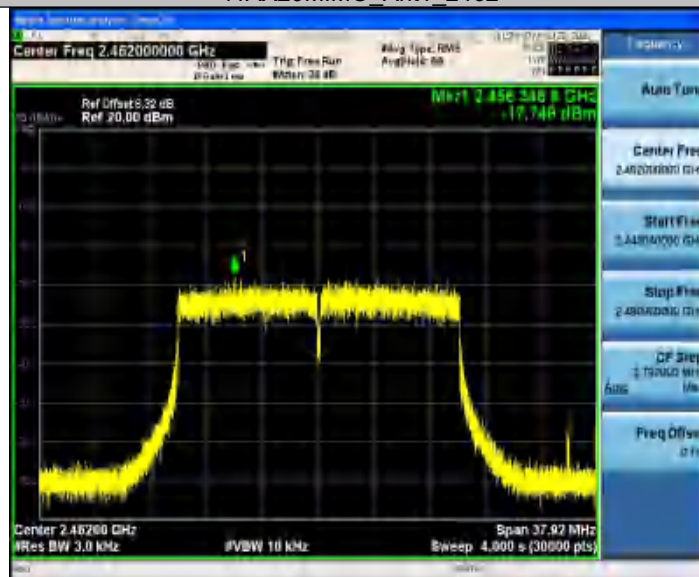


11AX20MIMO_Ant2_2462

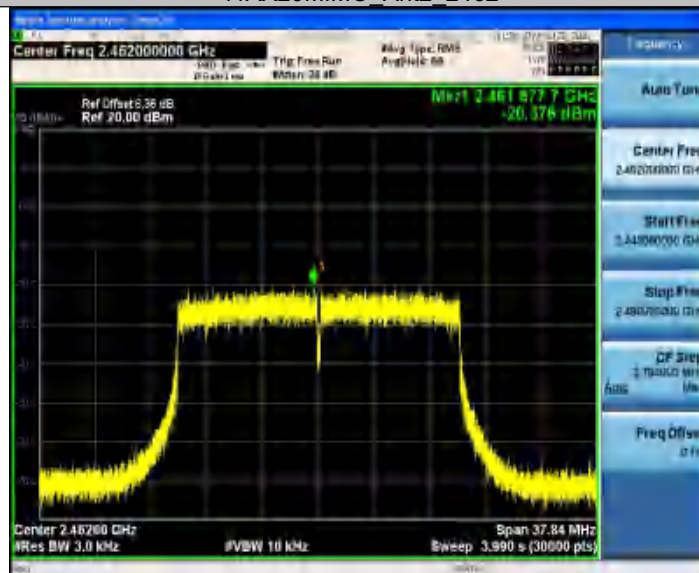


TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2422

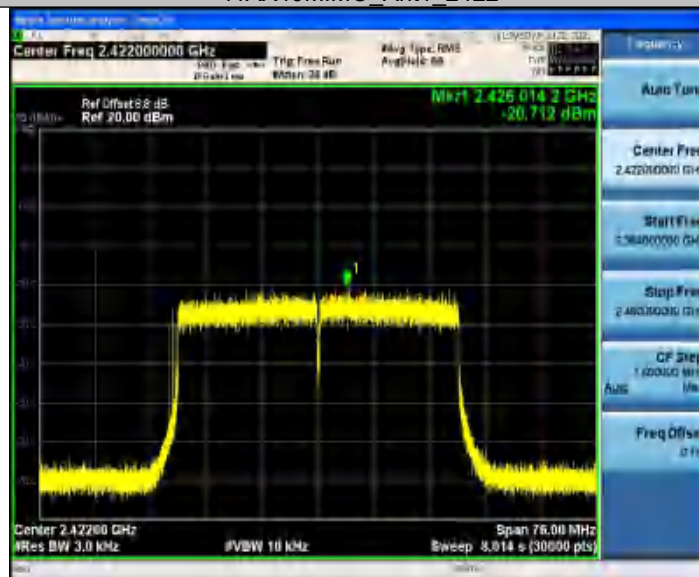


11AX40MIMO_Ant2_2422

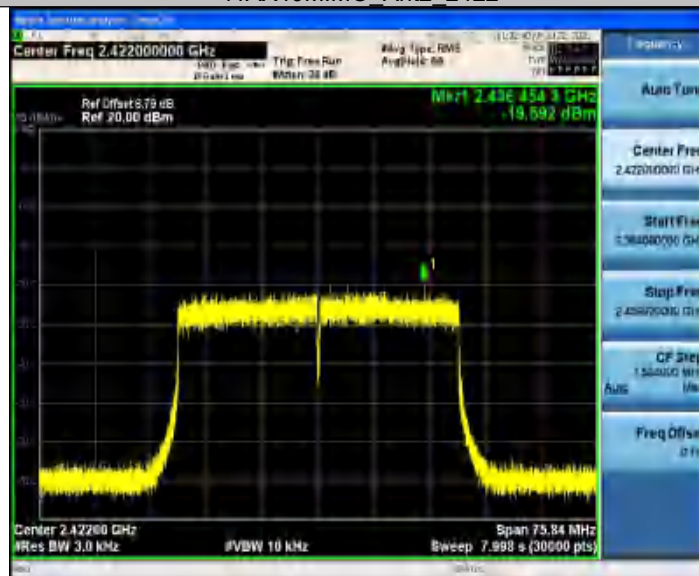


TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2437

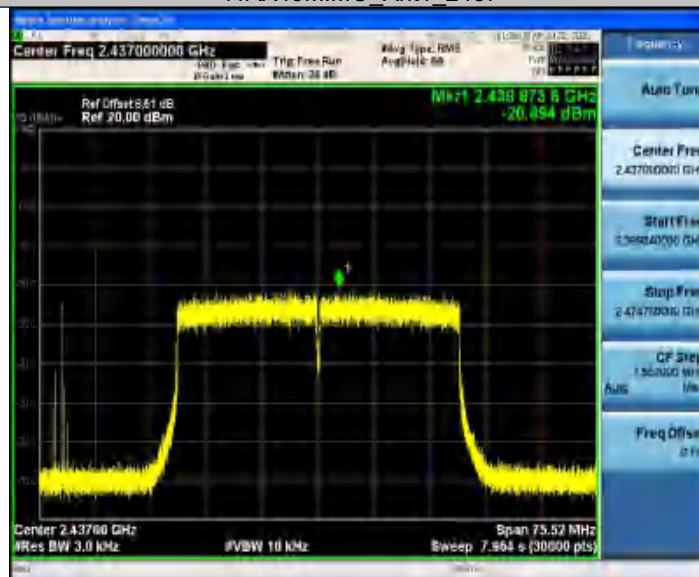


11AX40MIMO_Ant2_2437

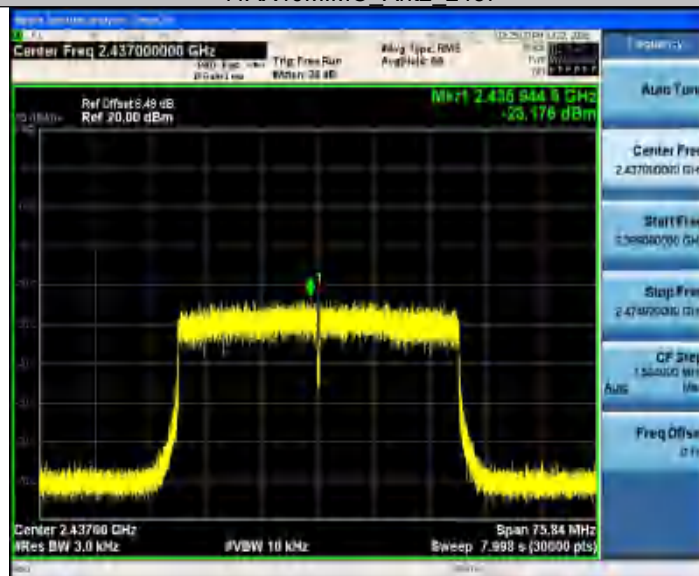


TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2452

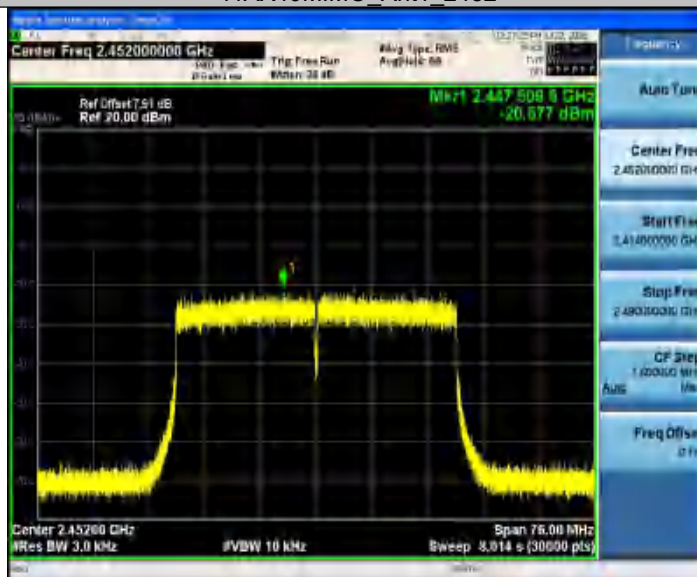

11AX40MIMO_Ant2_2452

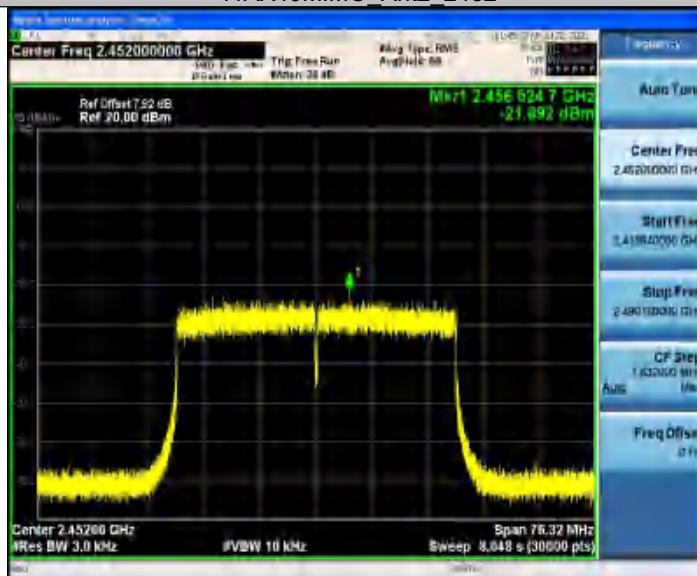

TEST REPORT

Report No.: MTi260703023-0102E3

Appendix D: Band edge measurements




TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_High_2462




11B_Ant2_High_2462

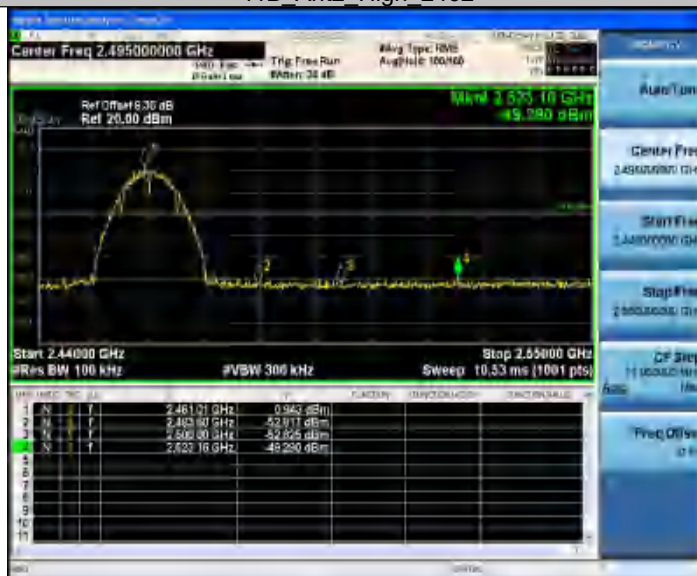


11G_Ant1_Low_2412

TEST REPORT


Report No.: MTi260703023-0102E3

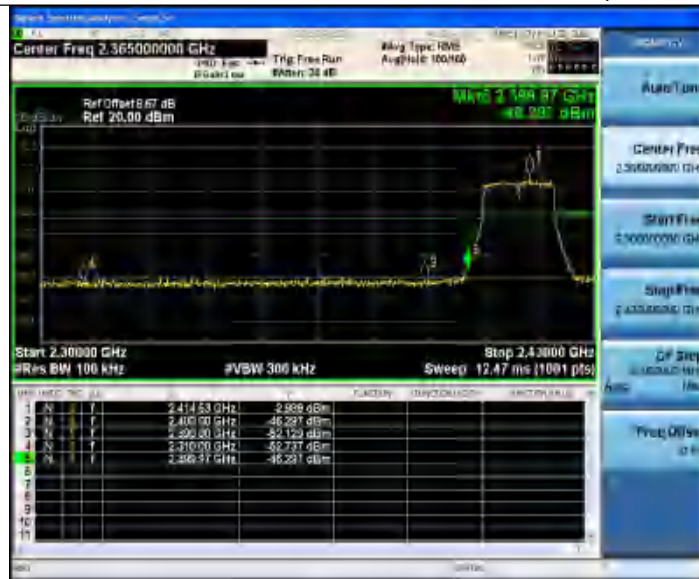

11G_Ant2_Low_2412

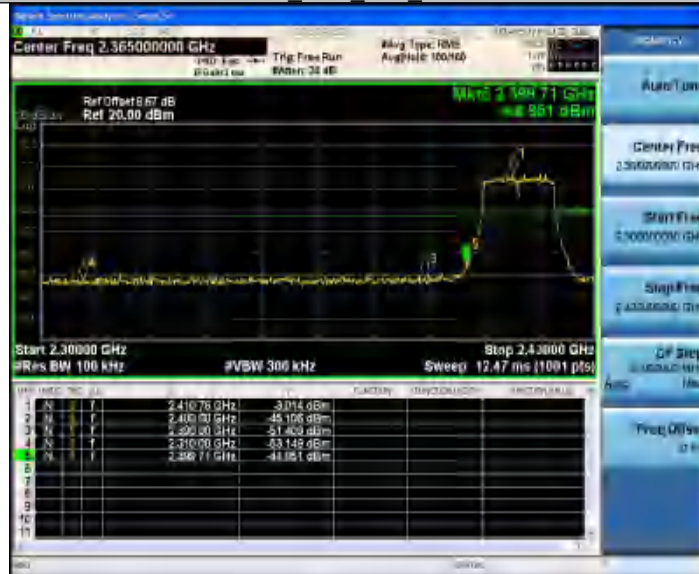


11G_Ant1_High_2462

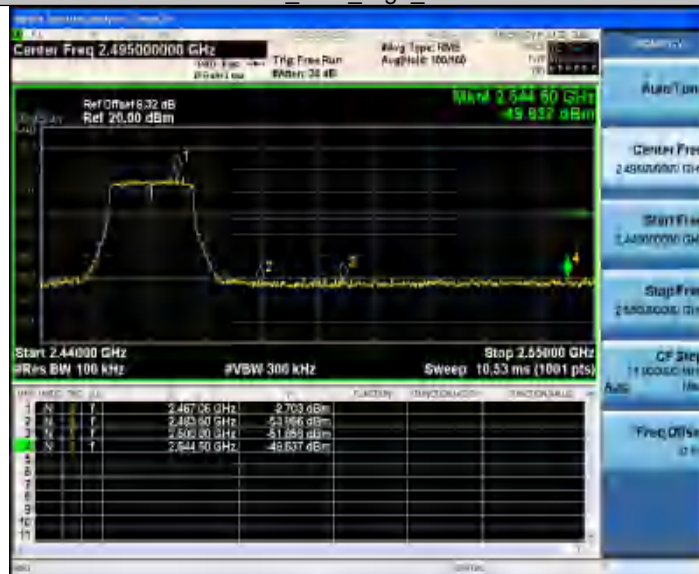


TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant2_High_2462

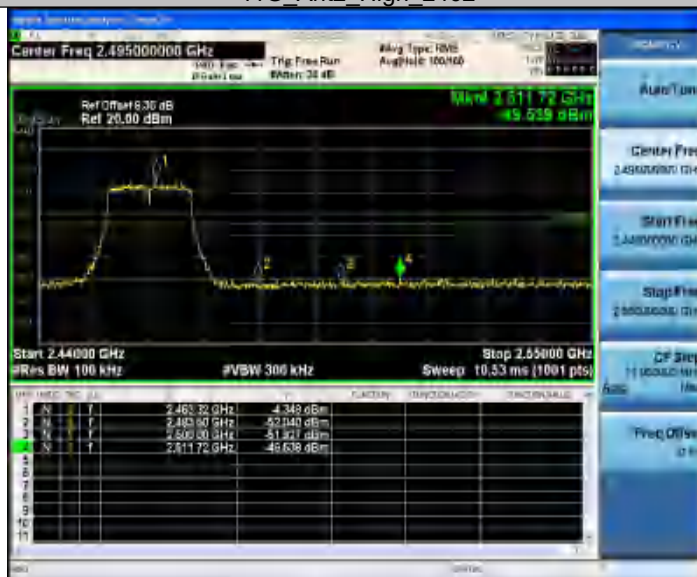


11N20SISO_Ant1_Low_2412

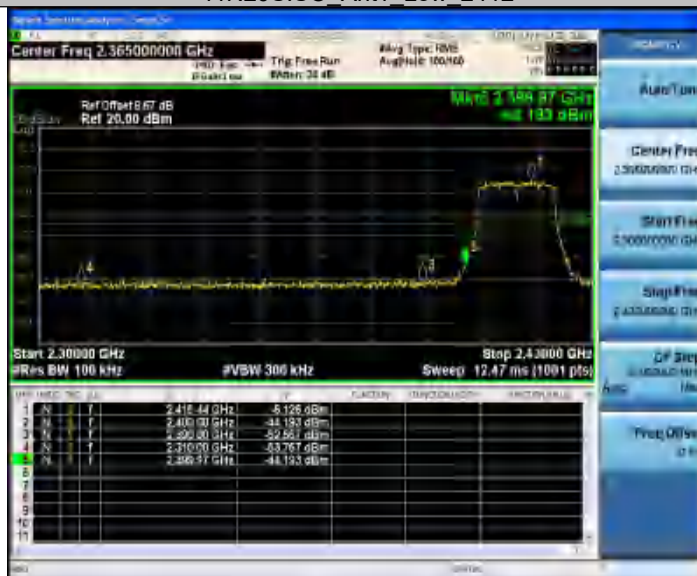

TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_Low_2412

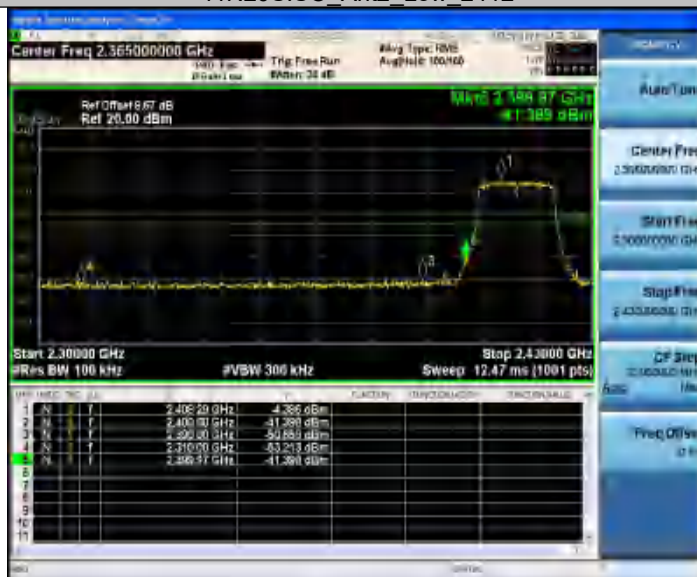

11N20SISO_Ant1_High_2462




TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_High_2462



11N40SISO_Ant1_Low_2422

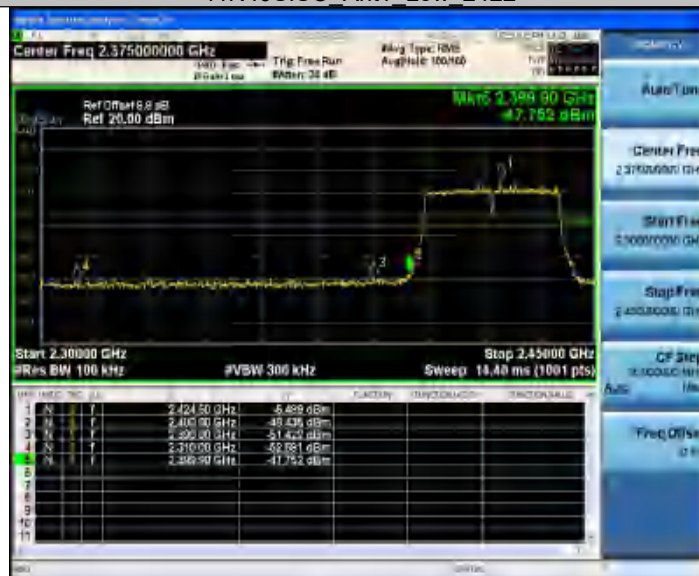

TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_Low_2422



11N40SISO_Ant1_High_2452




TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_High_2452




11AX20SISO_Ant1_Low_2412

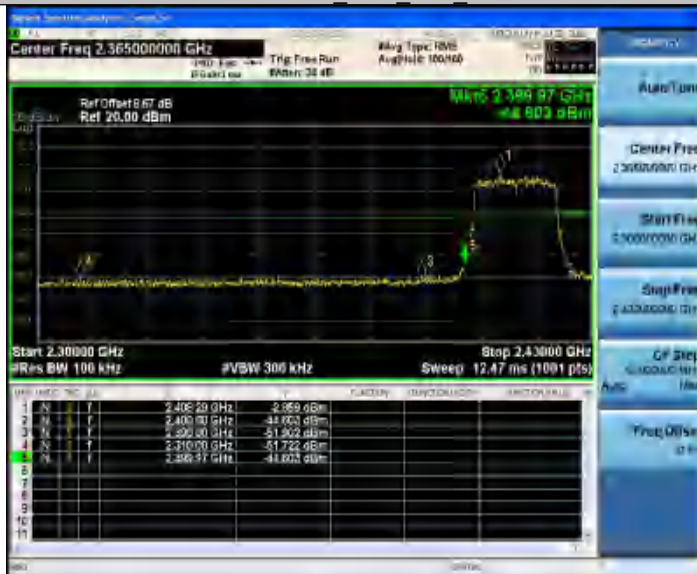


TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_Low_2412

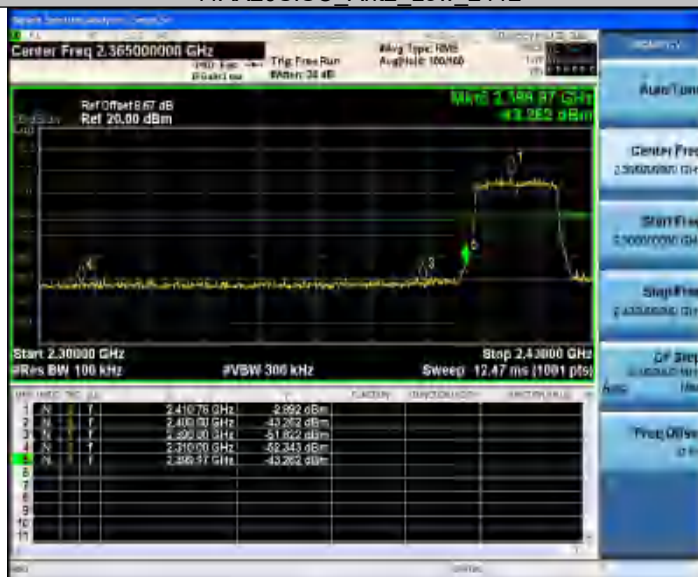

11AX20SISO_Ant1_High_2462

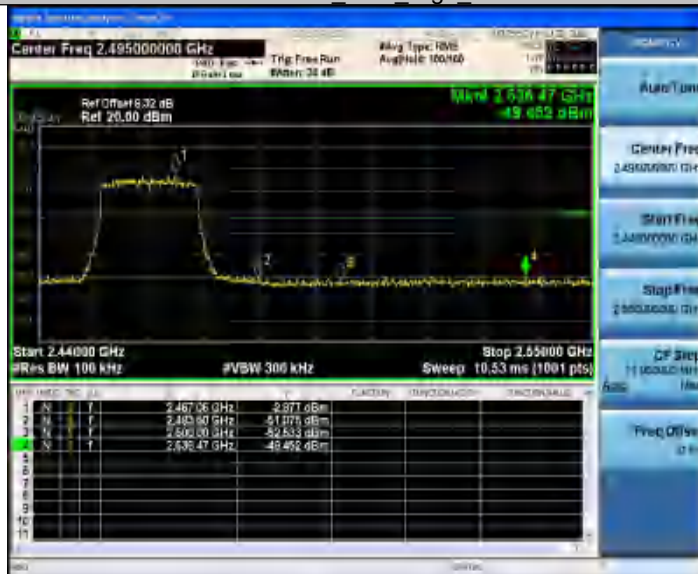

TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_High_2462



11AX40SISO_Ant1_Low_2422



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_Low_2422



11AX40SISO_Ant1_High_2452




TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_High_2452



11N20MIMO_Ant1_Low_2412

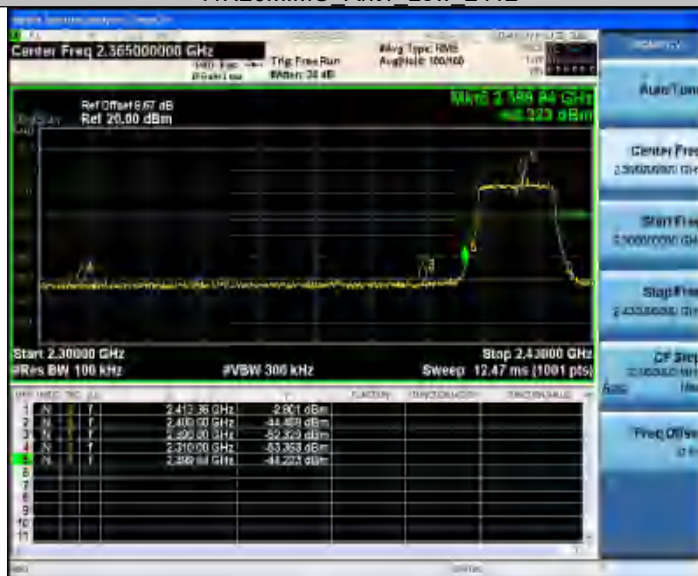


TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_Low_2412




11N20MIMO_Ant1_High_2462

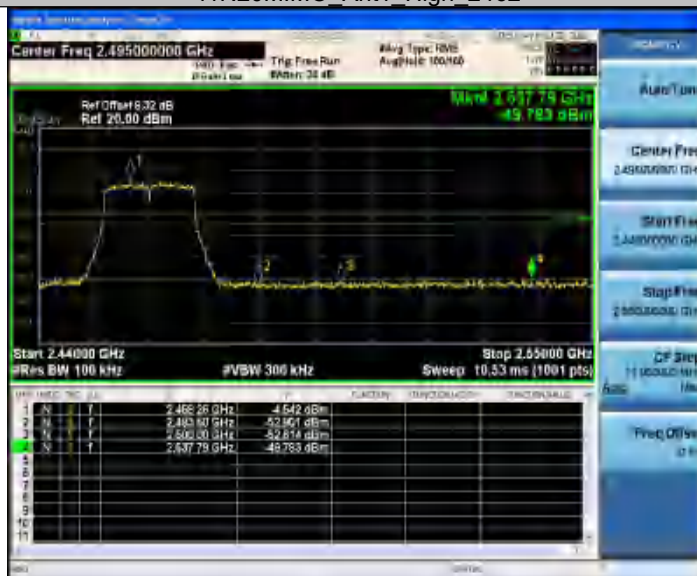


TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_High_2462

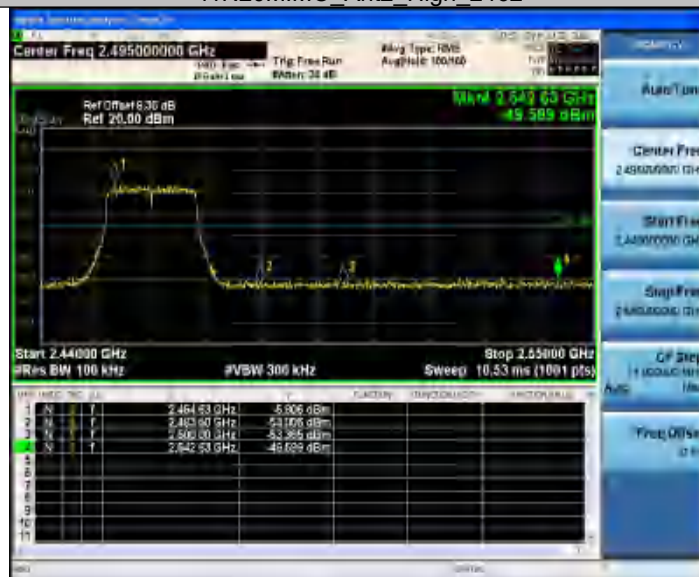

11N40MIMO_Ant1_Low_2422

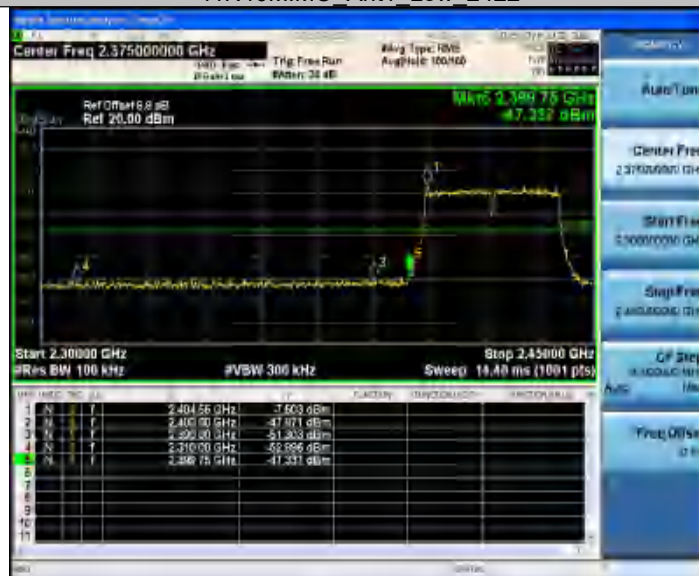

TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_Low_2422




11N40MIMO_Ant1_High_2452



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_High_2452

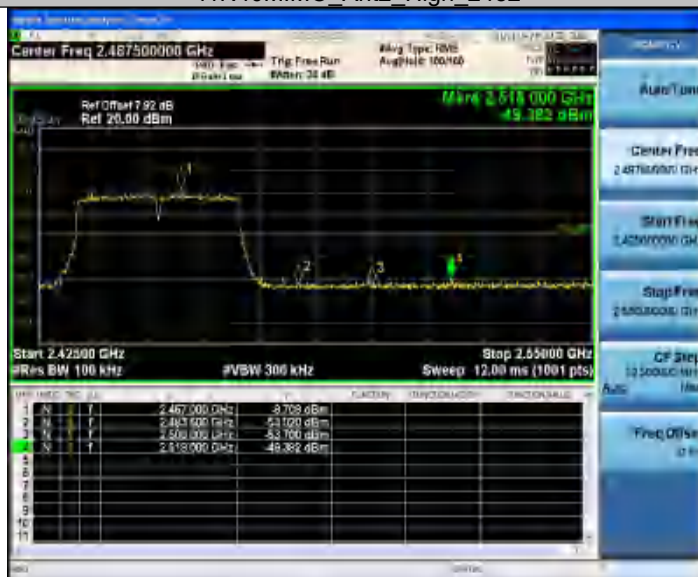

11AX20MIMO_Ant1_Low_2412




TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_Low_2412



11AX20MIMO_Ant1_High_2462

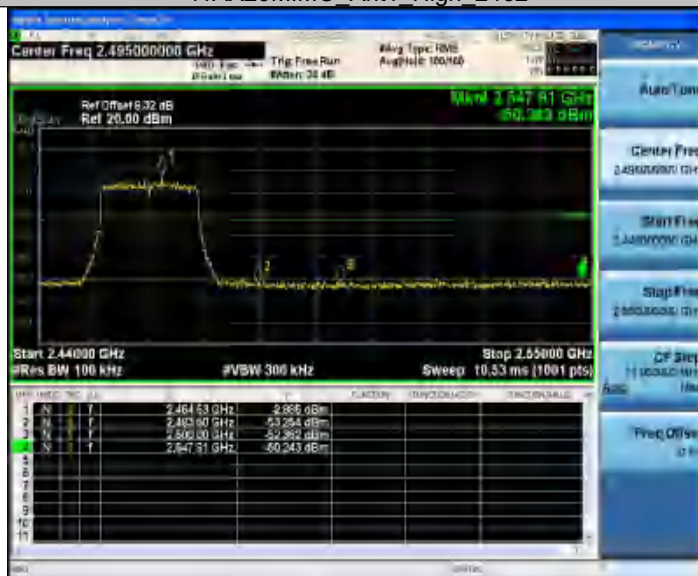

TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_High_2462



11AX40MIMO_Ant1_Low_2422



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_Low_2422




11AX40MIMO_Ant1_High_2452



TEST REPORT

Report No.: MTi260703023-0102E3

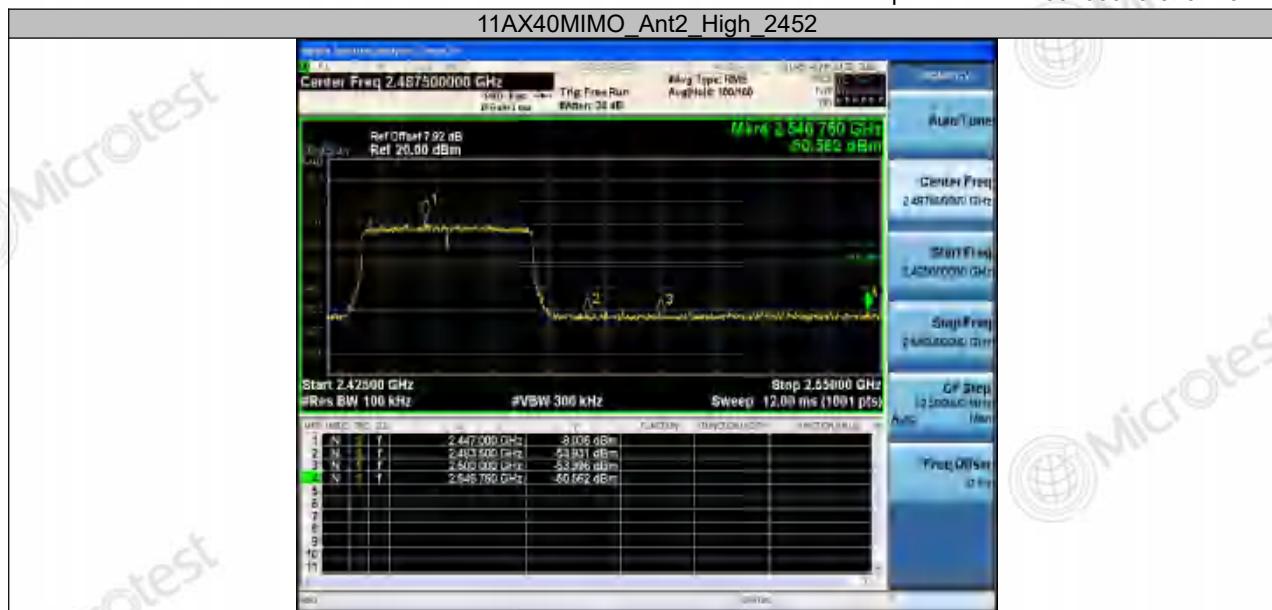


Note: The minimum measured margin for each transmit chain is greater than 3.01 dB. Therefore, no additional MIMO power summation assessment is required.

TEST REPORT

Report No.: MTI260703023-0102E3


Appendix E: Conducted Spurious Emission

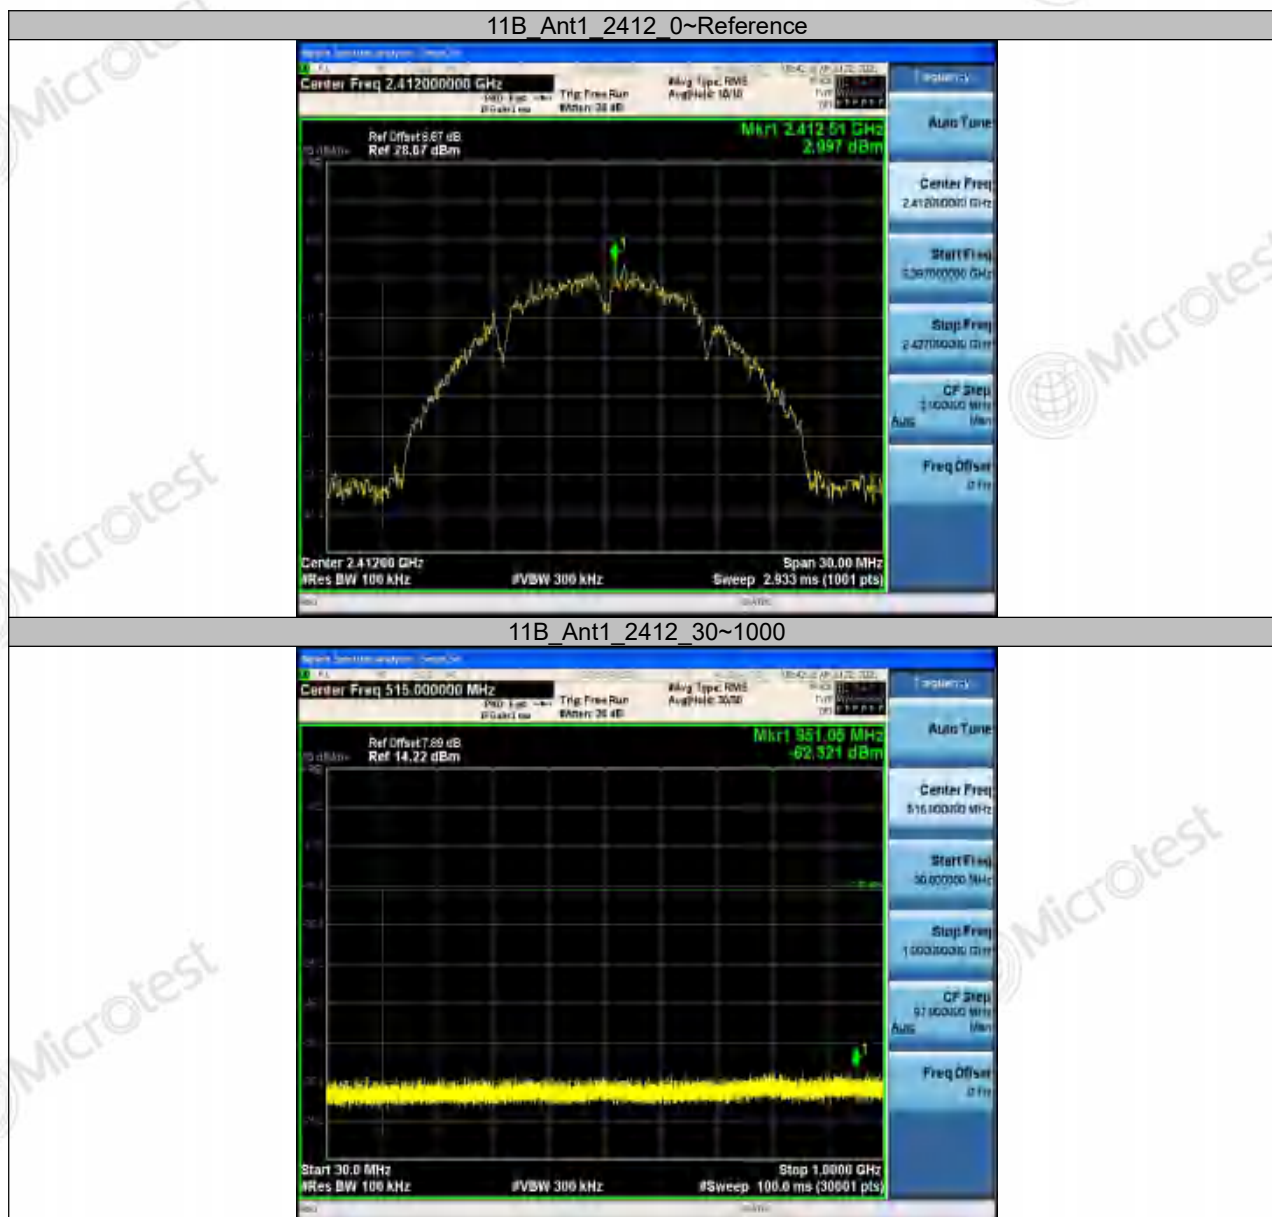

TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2412_1000~12750

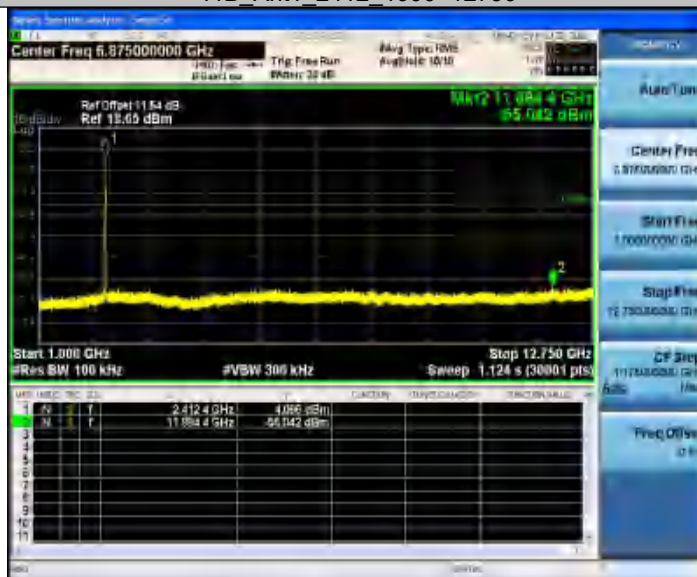

11B_Ant1_2412_12750~26500




TEST REPORT

Report No.: MTI260703023-0102E3

11B_Ant2_2412_0~Reference




11B_Ant2_2412_30~1000

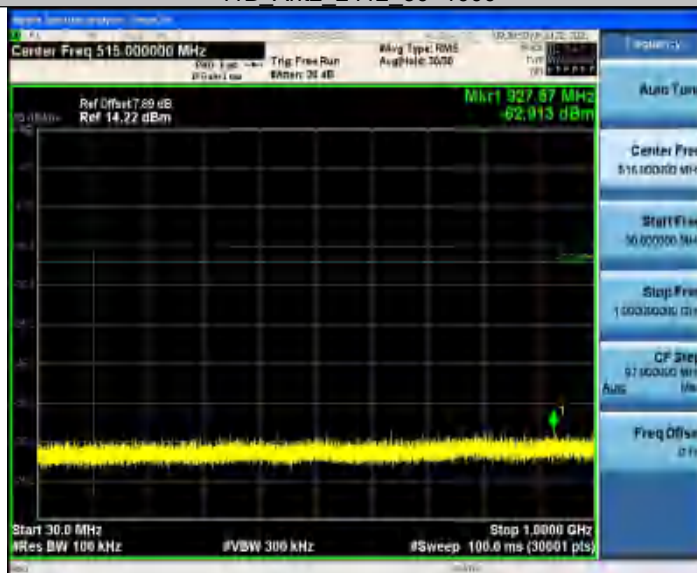

TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant2_2412_1000~12750

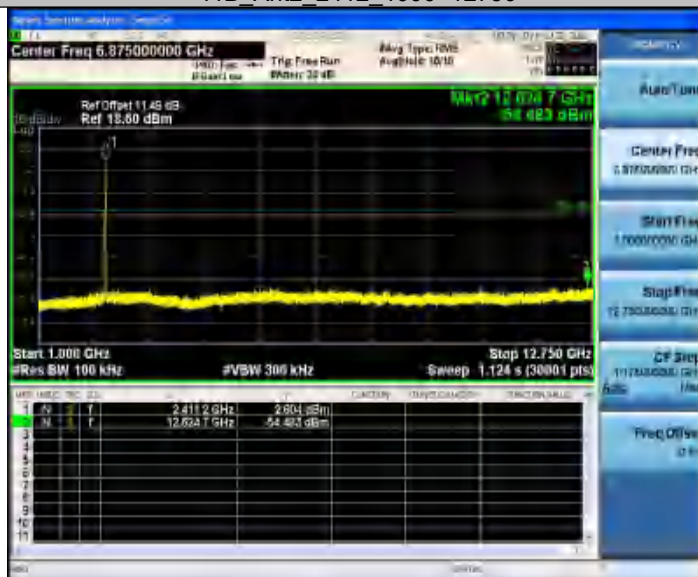

11B_Ant2_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2437_0~Reference




11B_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2437_1000~12750

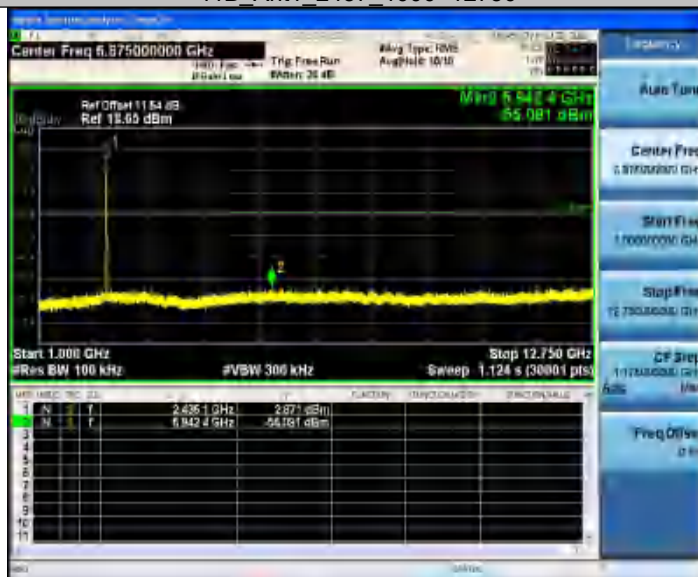

11B_Ant1_2437_12750~26500



TEST REPORT


Report No.: MTi260703023-0102E3



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant2_2437_1000~12750

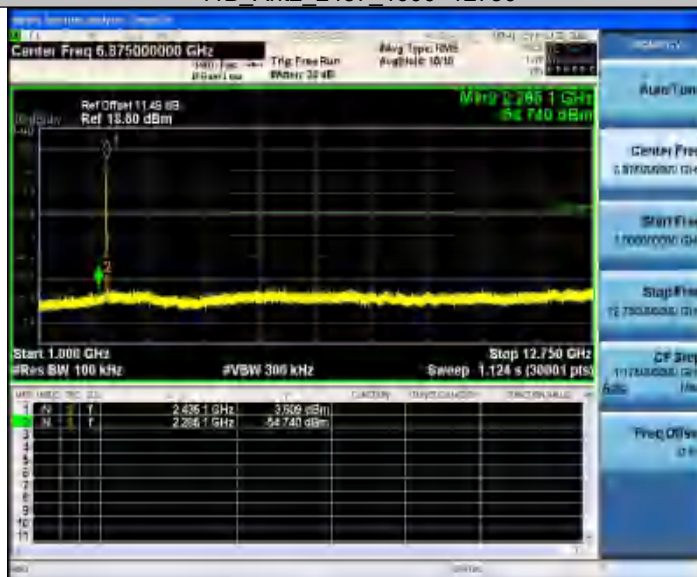

11B_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant1_2462_1000~12750

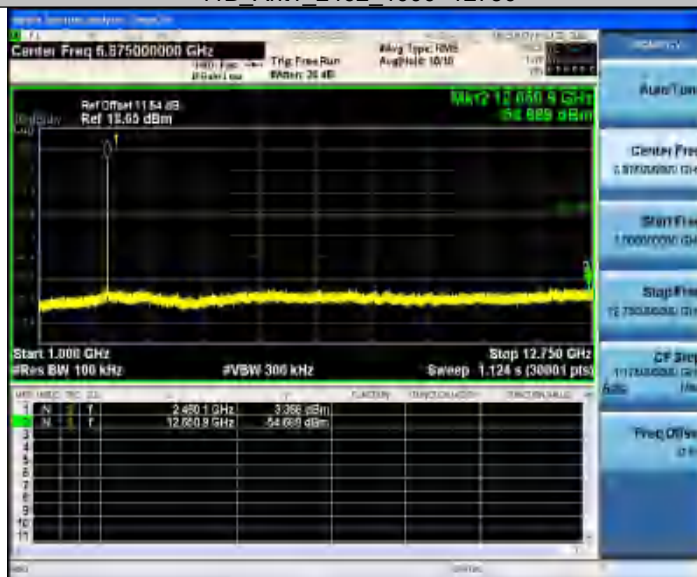


11B_Ant1_2462_12750~26500



TEST REPORT


Report No.: MTi260703023-0102E3

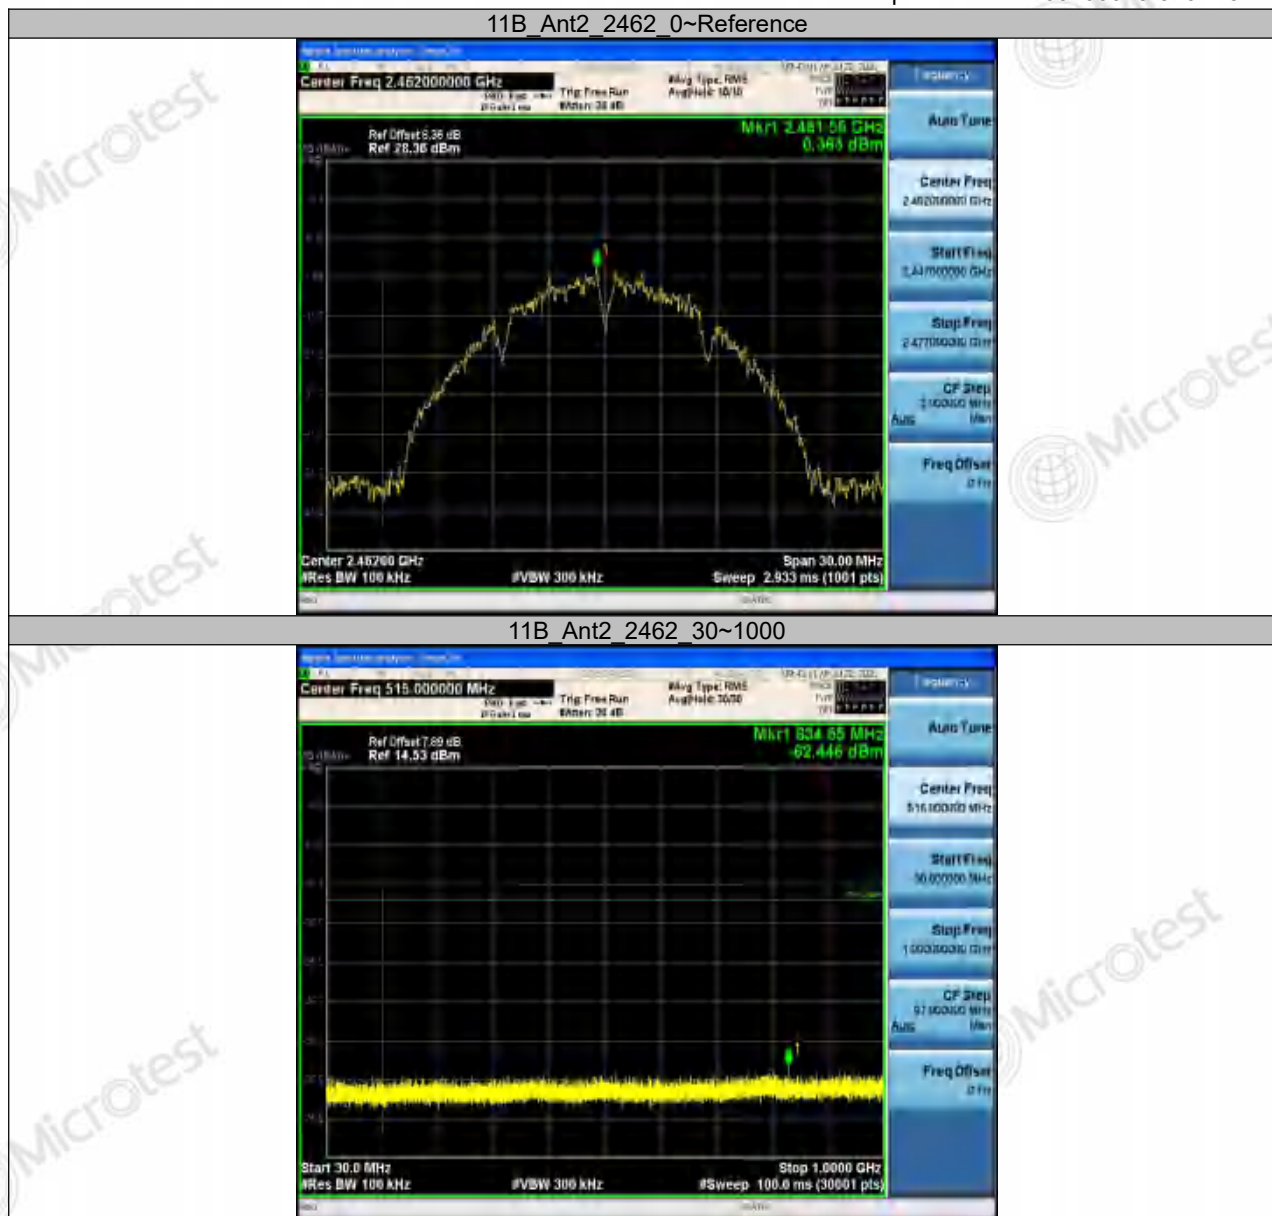

TEST REPORT

Report No.: MTi260703023-0102E3

11B_Ant2_2462_1000~12750

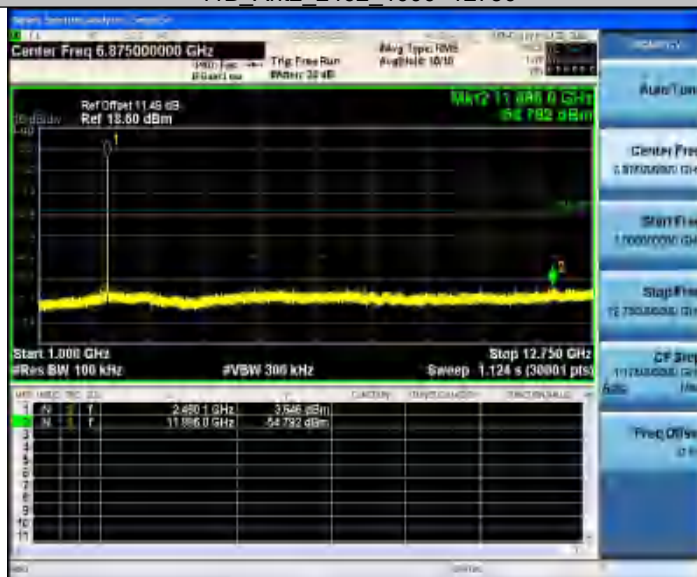


11B_Ant2_2462_12750~26500



TEST REPORT


Report No.: MTi260703023-0102E3

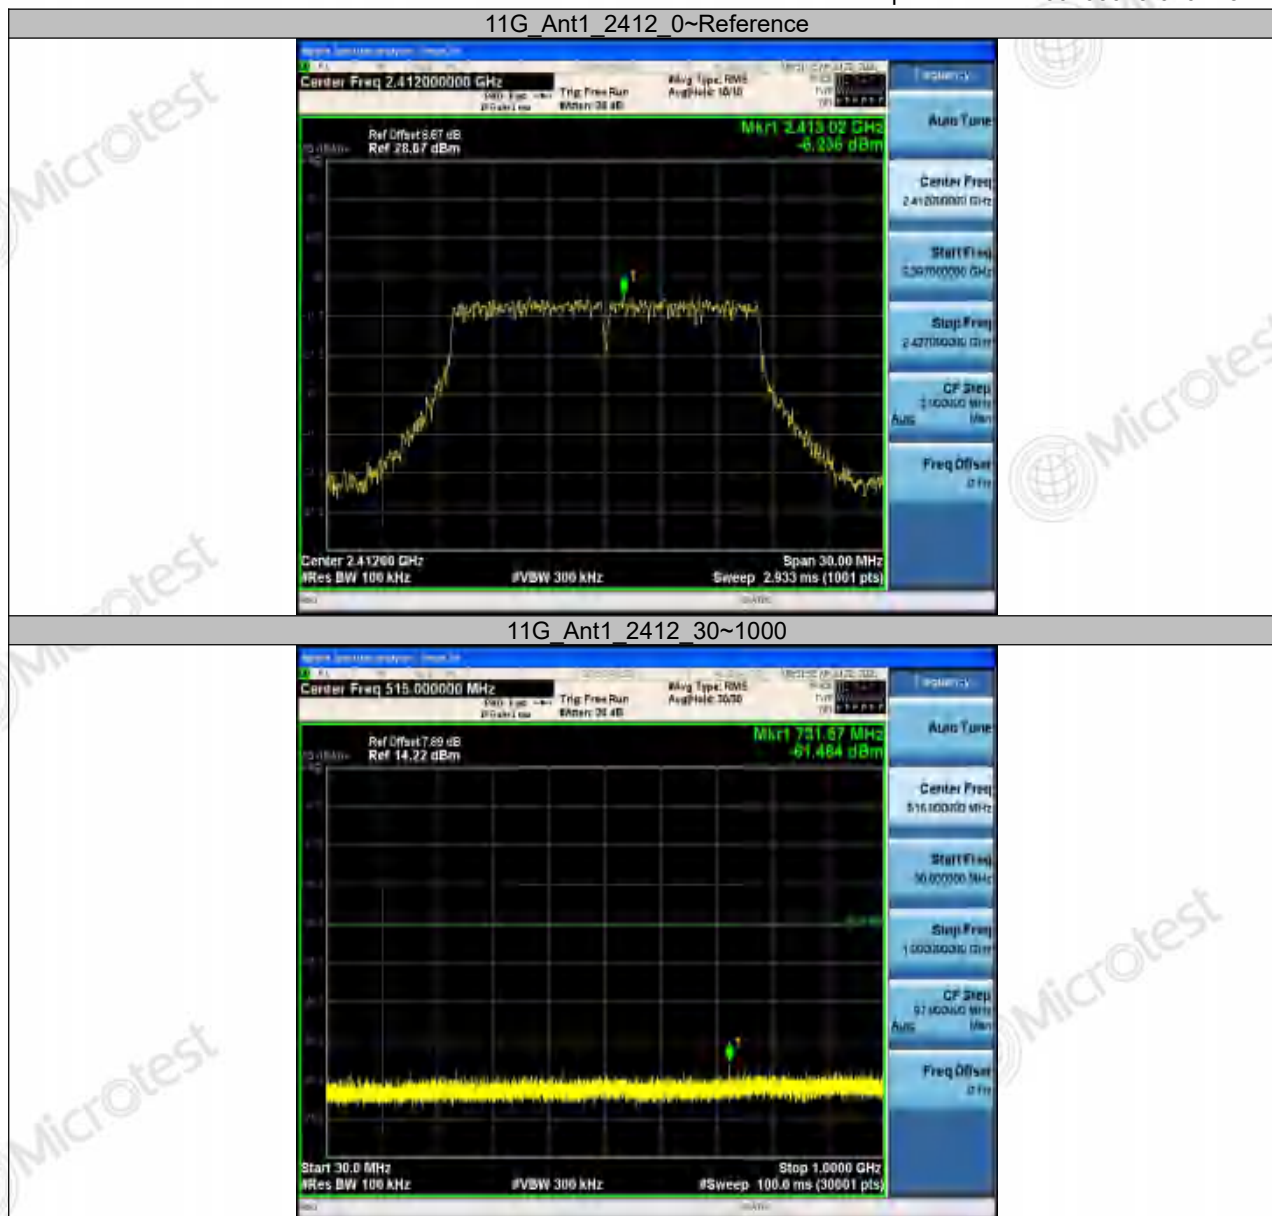

TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2412_1000~12750

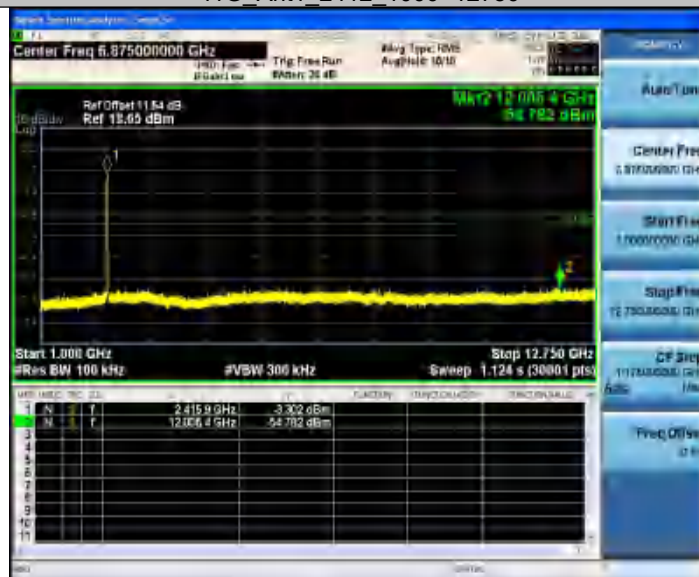

11G_Ant1_2412_12750~26500




TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant2_2412_0~Reference




11G_Ant2_2412_30~1000

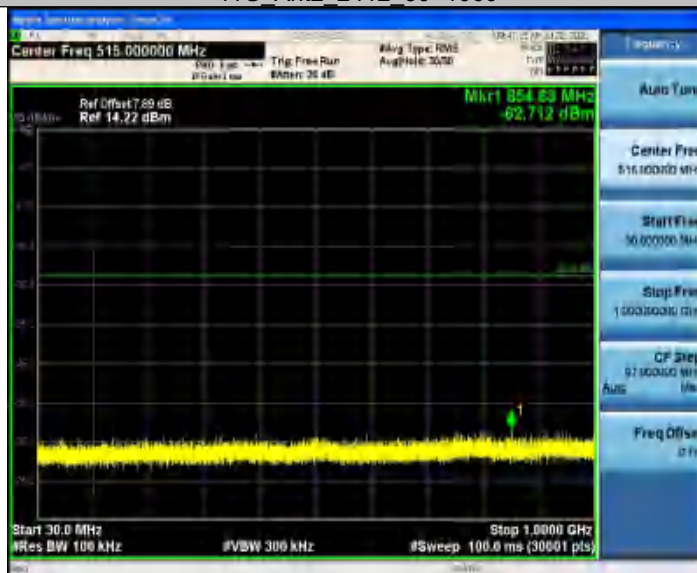

TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant2_2412_1000~12750

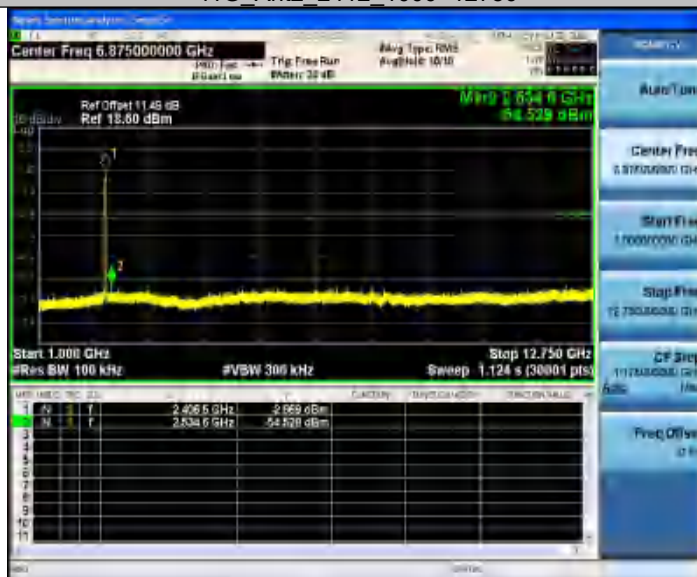


11G_Ant2_2412_12750~26500



TEST REPORT


Report No.: MTi260703023-0102E3

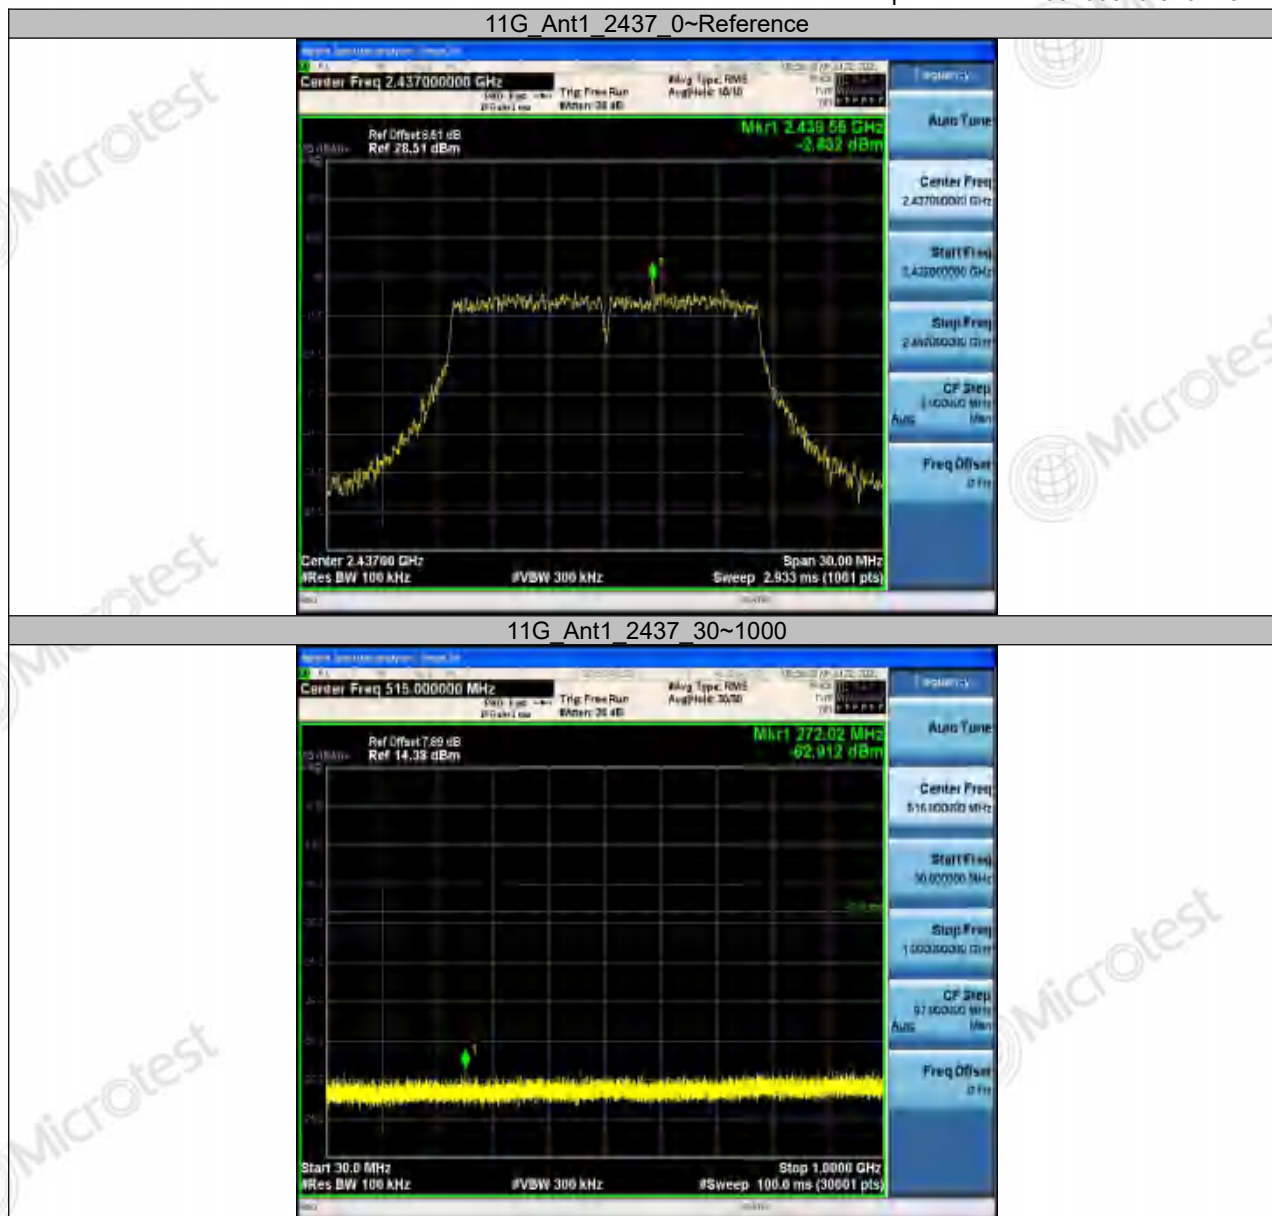

TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2437_1000~12750

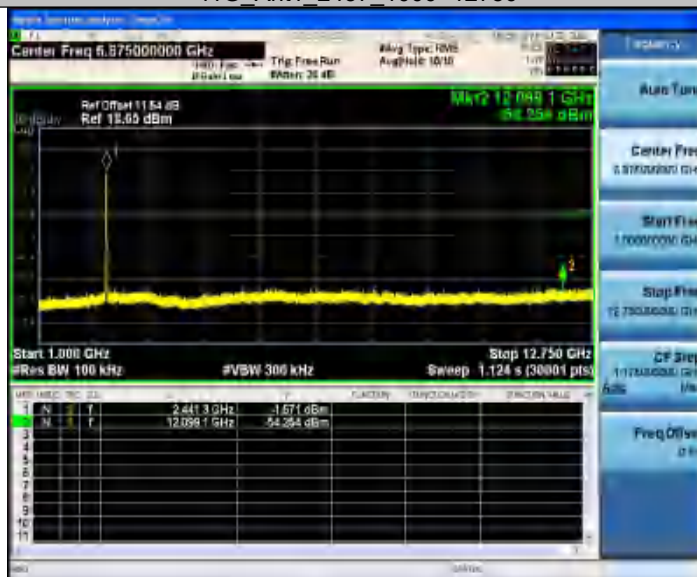


11G_Ant1_2437_12750~26500



TEST REPORT


Report No.: MTi260703023-0102E3

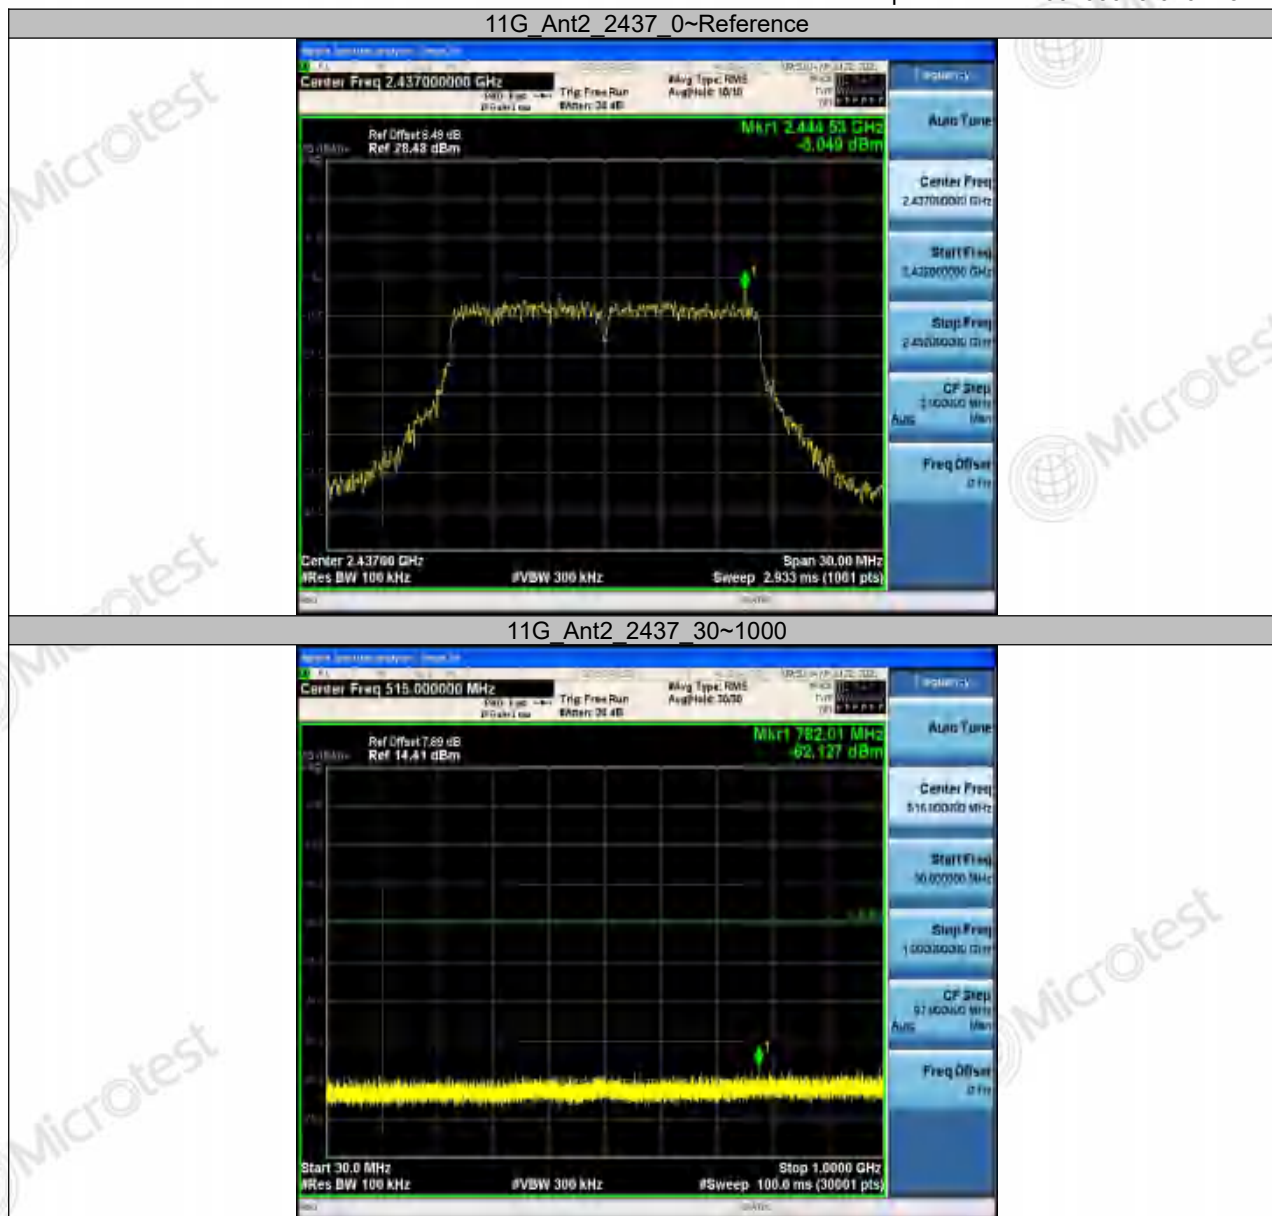

TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant2_2437_1000~12750

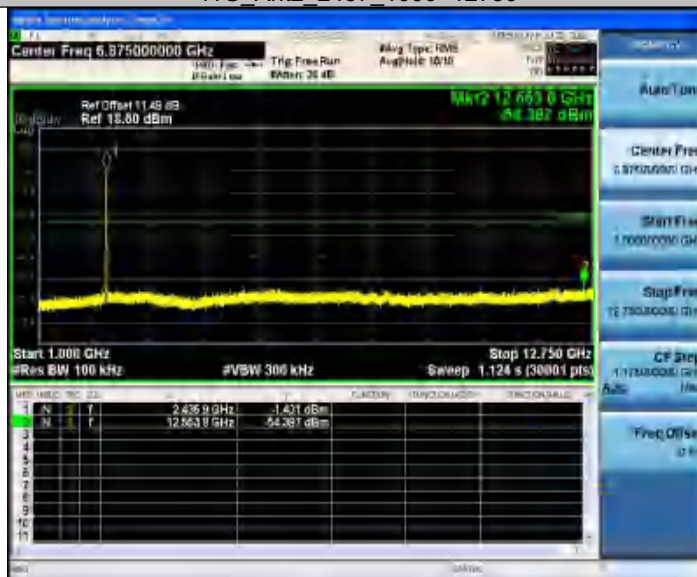


11G_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2462_0~Reference

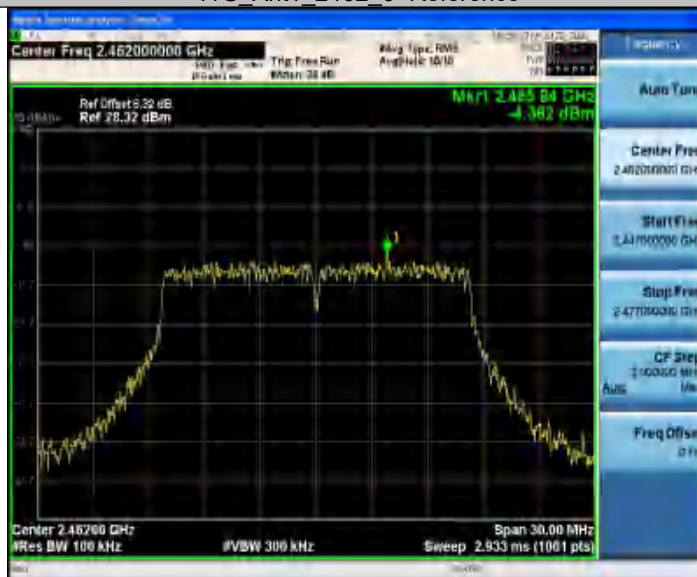


11G_Ant1_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2462_1000~12750

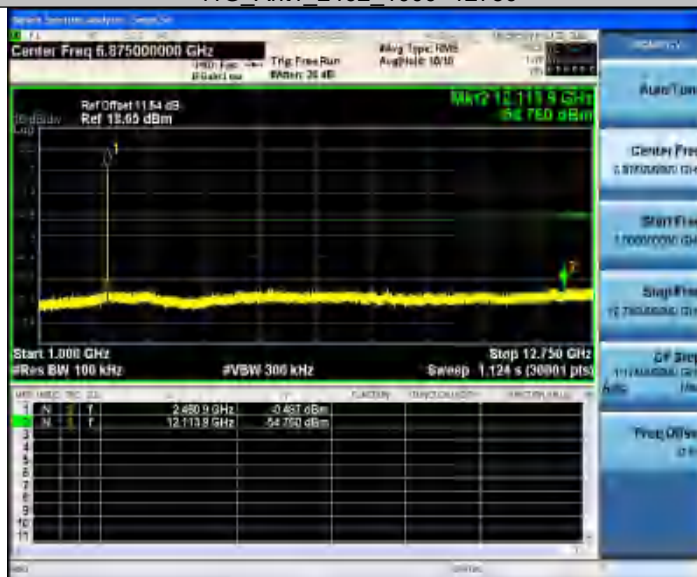

11G_Ant1_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant2_2462_0~Reference




11G_Ant2_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant2_2462_1000~12750

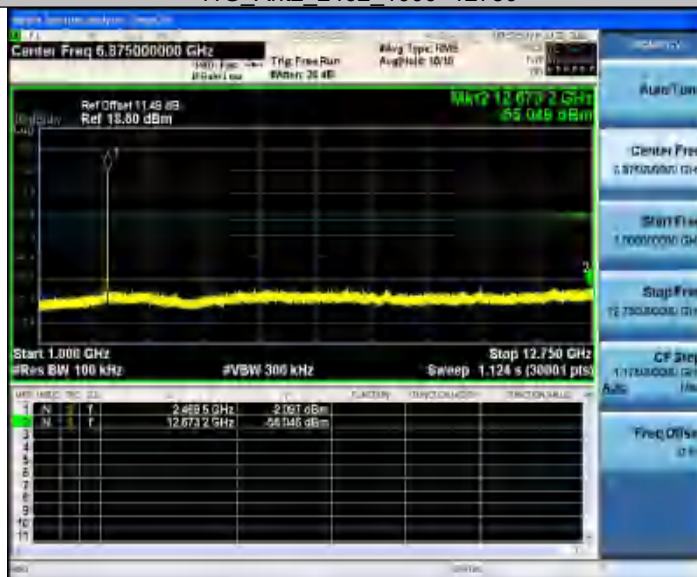

11G_Ant2_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2412_0~Reference




11N20SISO_Ant1_2412_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2412_1000~12750

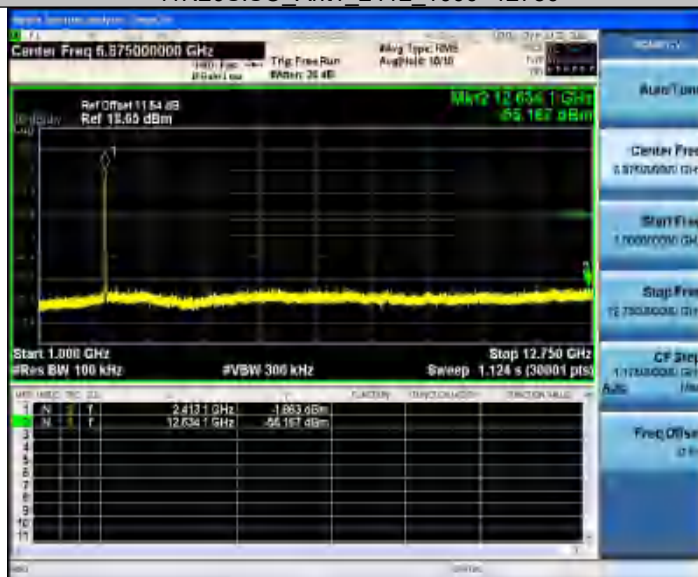

11N20SISO_Ant1_2412_12750~26500




TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_2412_0~Reference




11N20SISO_Ant2_2412_30~1000

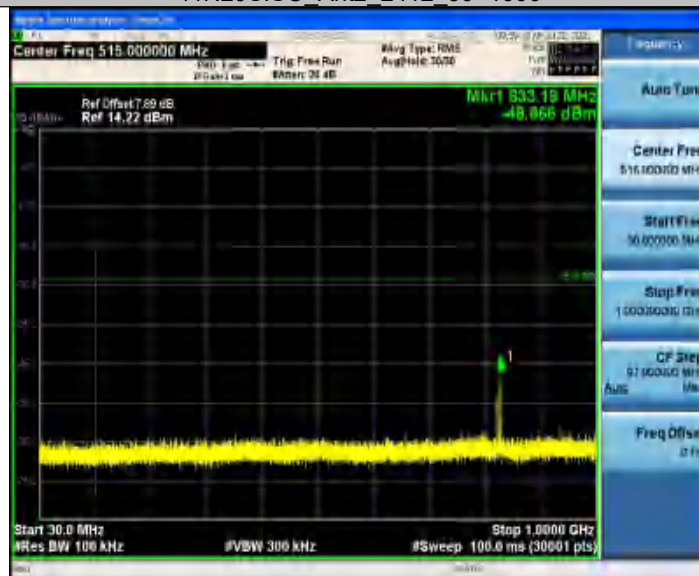

TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_2412_1000~12750

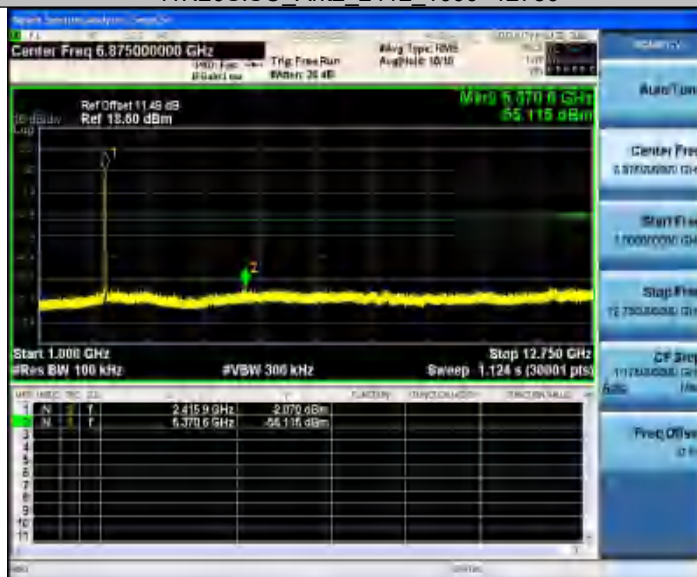

11N20SISO_Ant2_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2437_0~Reference




11N20SISO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2437_1000~12750

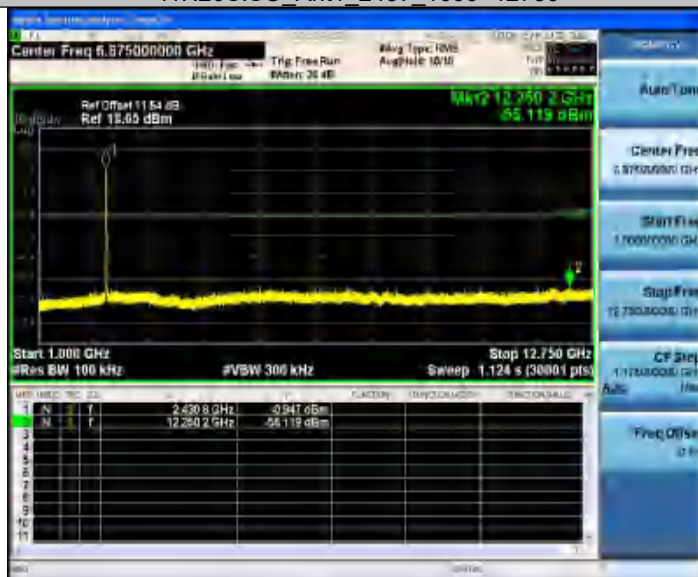

11N20SISO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_2437_0~Reference




11N20SISO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_2437_1000~12750

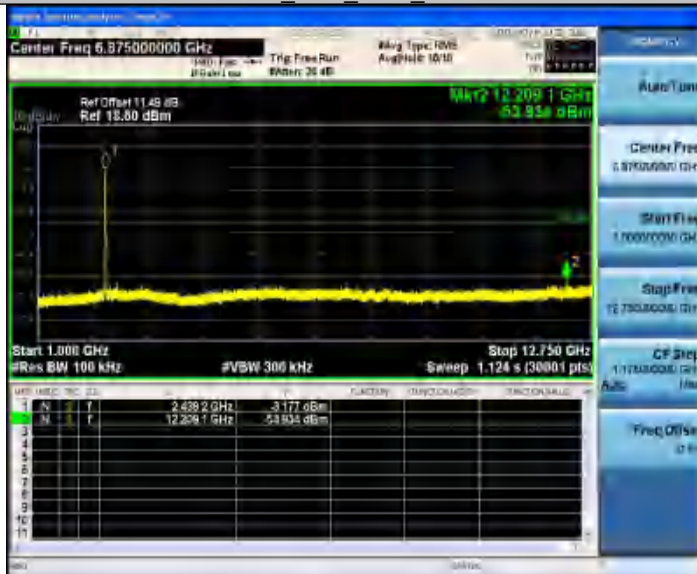

11N20SISO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2462_0~Reference




11N20SISO_Ant1_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2462_1000~12750

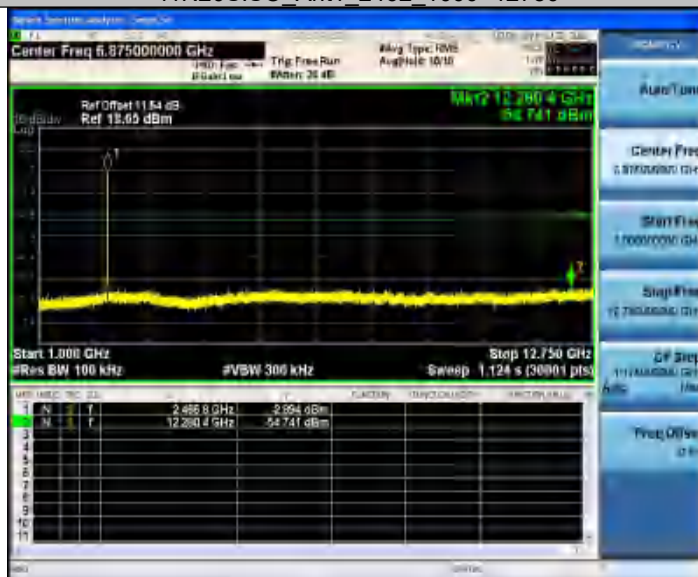

11N20SISO_Ant1_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_2462_0~Reference




11N20SISO_Ant2_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant2_2462_1000~12750

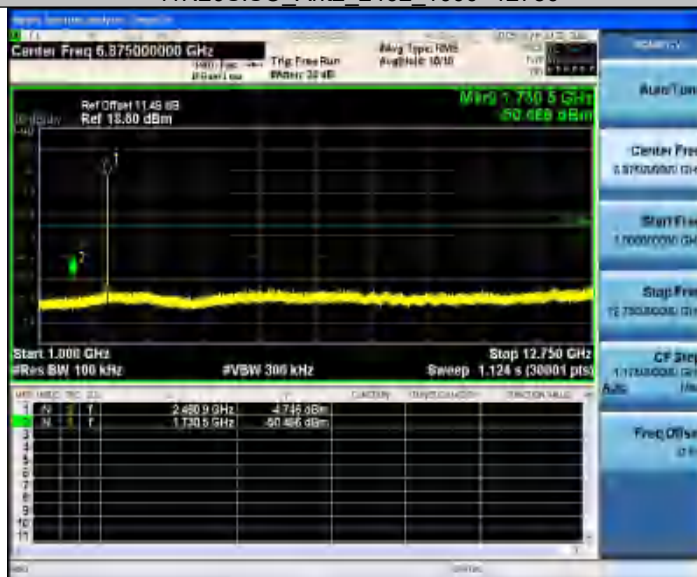


11N20SISO_Ant2_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2422_0~Reference

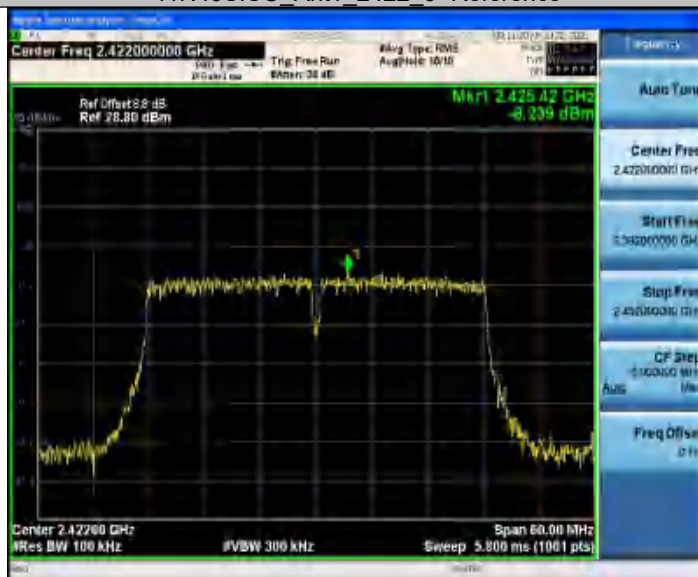


11N40SISO_Ant1_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2422_1000~12750

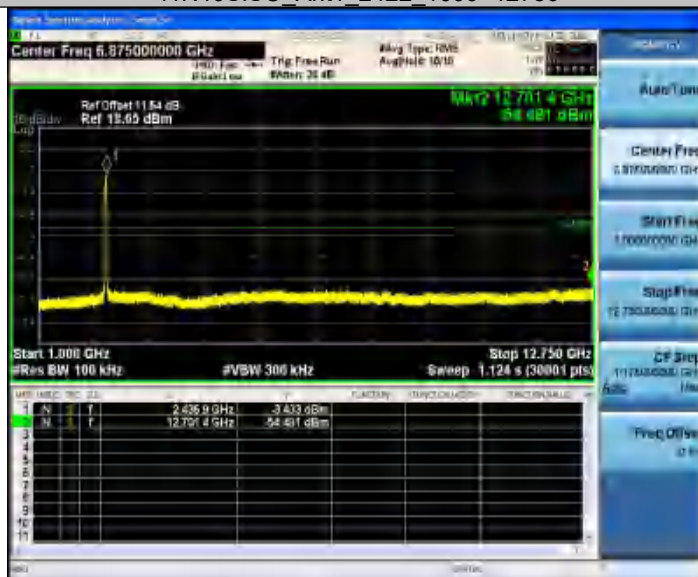

11N40SISO_Ant1_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_2422_0~Reference




11N40SISO_Ant2_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_2422_1000~12750

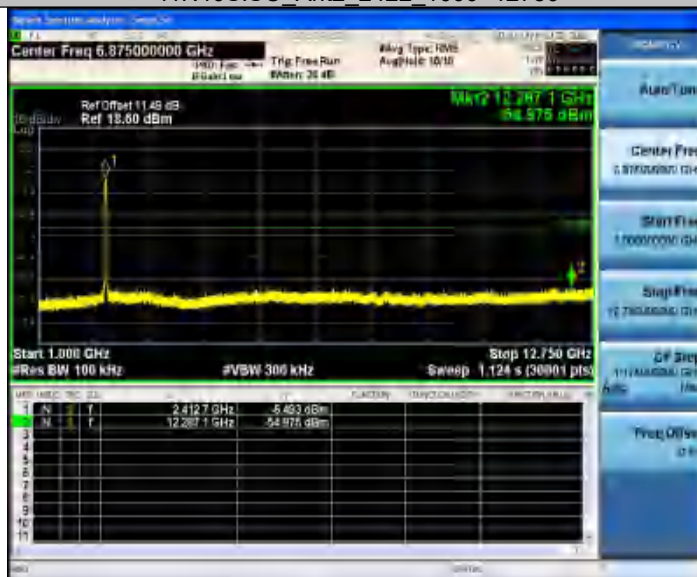

11N40SISO_Ant2_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2437_0~Reference




11N40SISO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2437_1000~12750

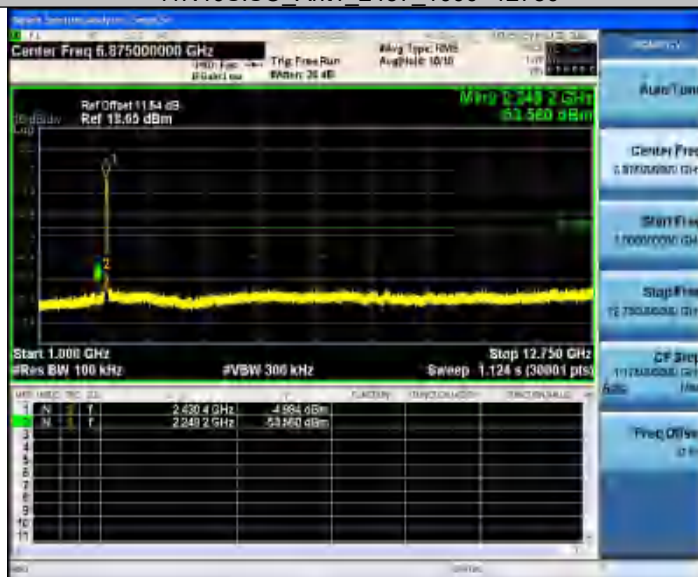

11N40SISO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_2437_0~Reference




11N40SISO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_2437_1000~12750

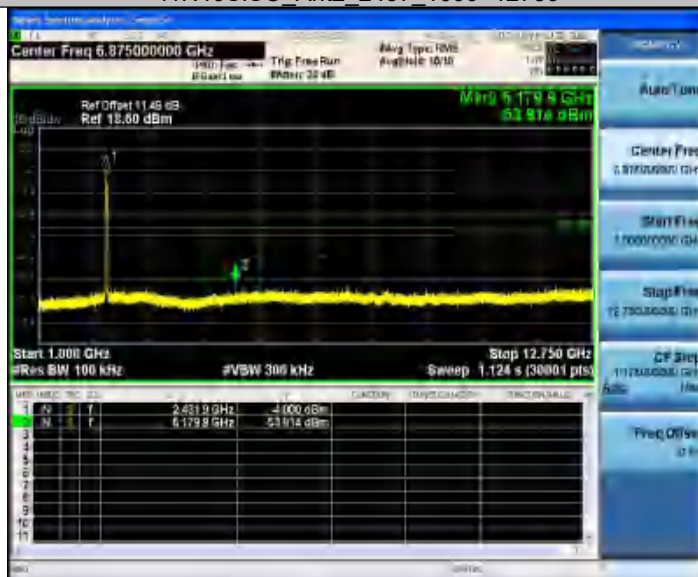

11N40SISO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2452_0~Reference




11N40SISO_Ant1_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2452_1000~12750

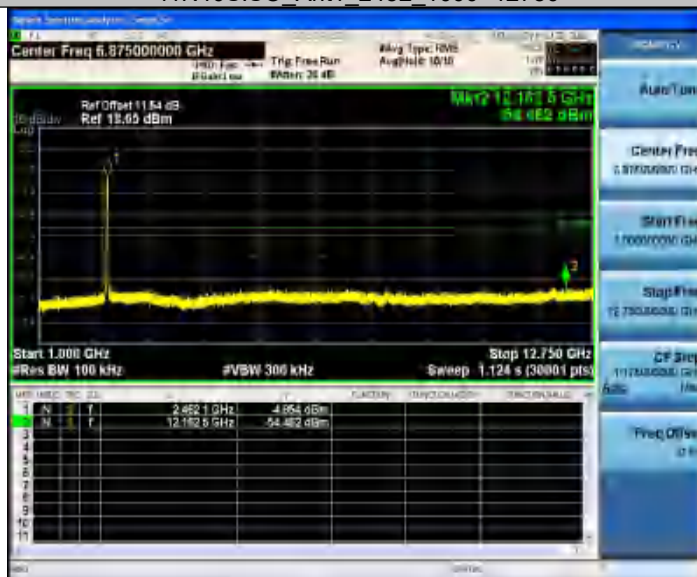

11N40SISO_Ant1_2452_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_2452_0~Reference




11N40SISO_Ant2_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant2_2452_1000~12750

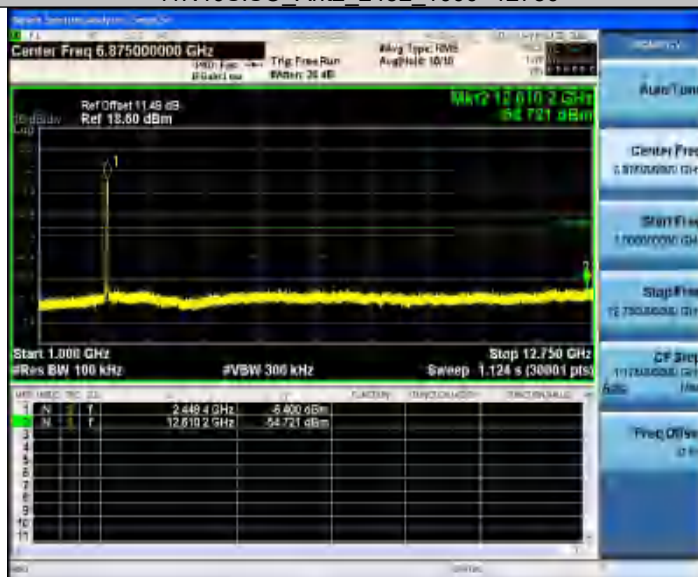

11N40SISO_Ant2_2452_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2412_0~Reference




11AX20SISO_Ant1_2412_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2412_1000~12750

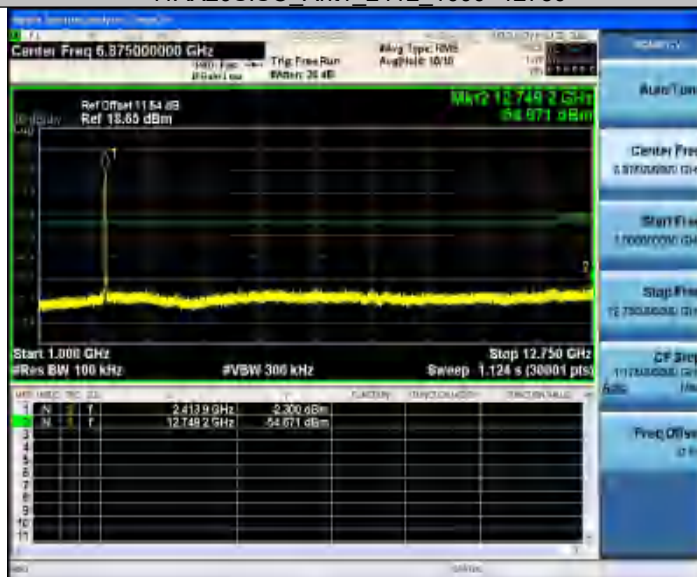

11AX20SISO_Ant1_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_2412_0~Reference




11AX20SISO_Ant2_2412_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_2412_1000~12750

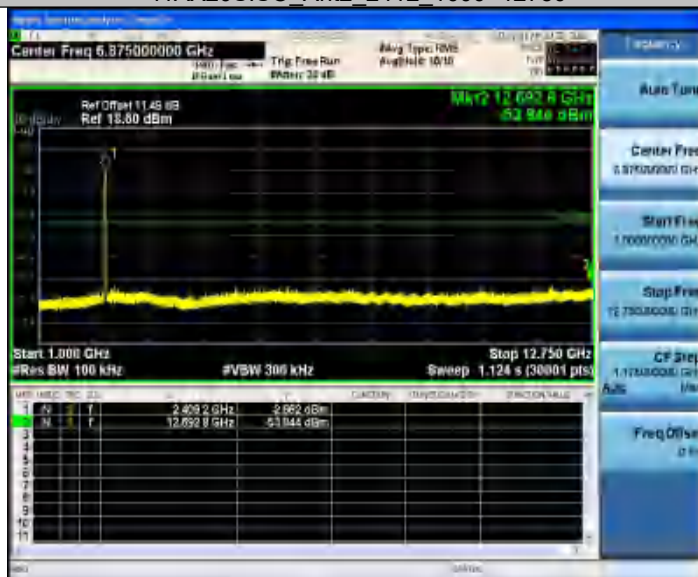

11AX20SISO_Ant2_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2437_0~Reference




11AX20SISO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2437_1000~12750

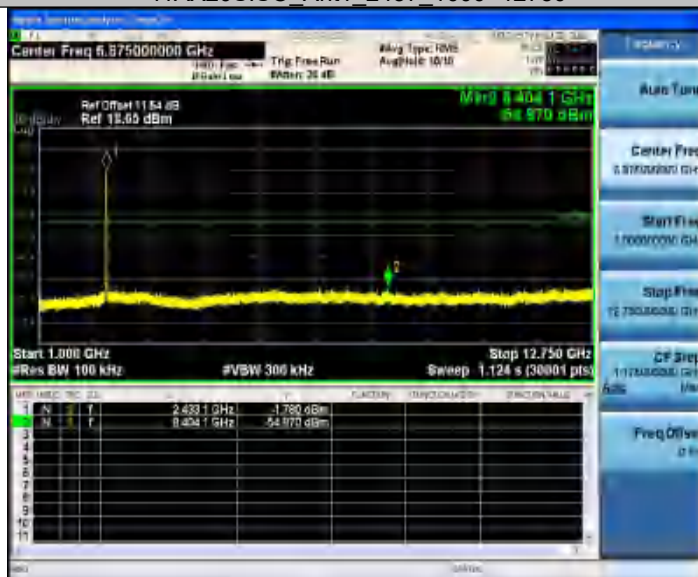

11AX20SISO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_2437_0~Reference




11AX20SISO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_2437_1000~12750

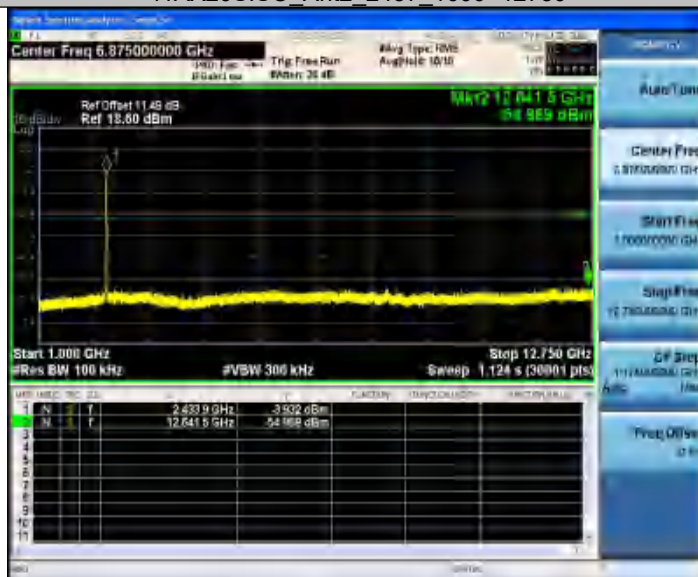

11AX20SISO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2462_0~Reference




11AX20SISO_Ant1_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2462_1000~12750

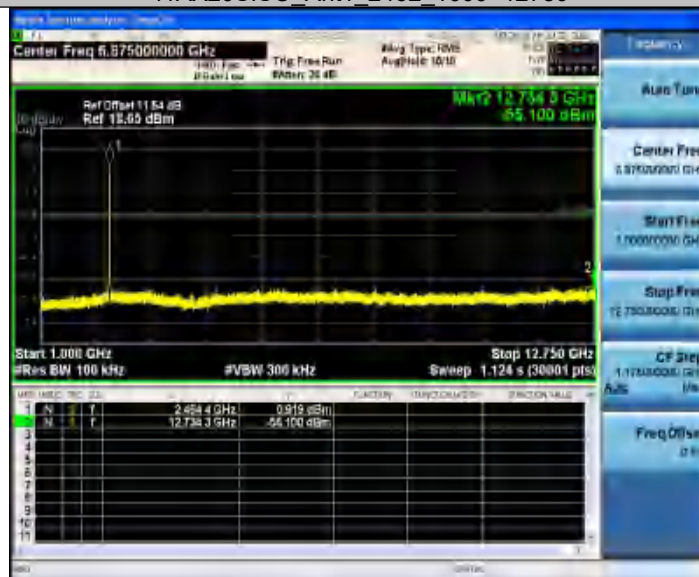

11AX20SISO_Ant1_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_2462_0~Reference




11AX20SISO_Ant2_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant2_2462_1000~12750

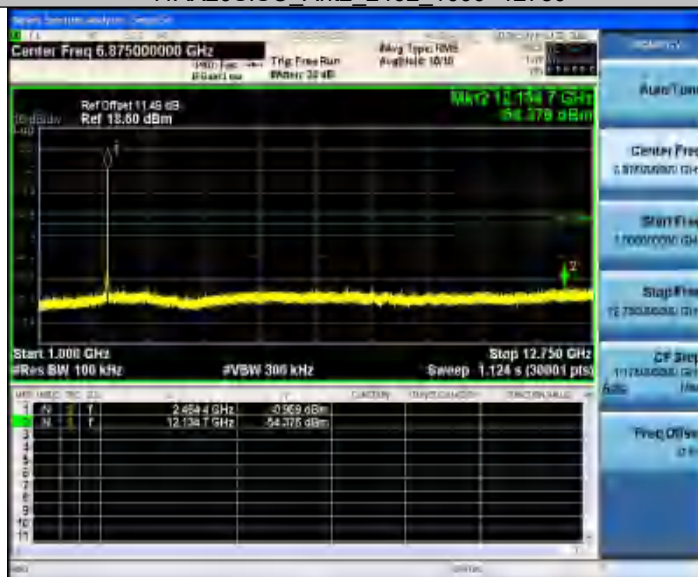

11AX20SISO_Ant2_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2422_0~Reference




11AX40SISO_Ant1_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2422_1000~12750

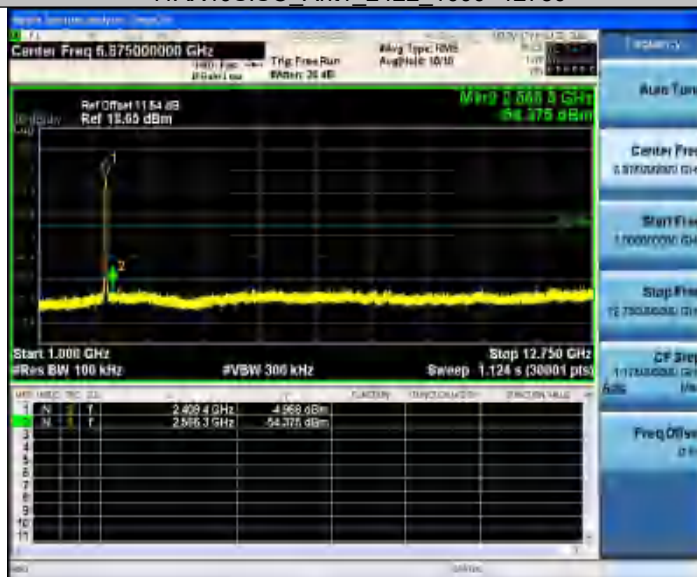

11AX40SISO_Ant1_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_2422_0~Reference




11AX40SISO_Ant2_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_2422_1000~12750

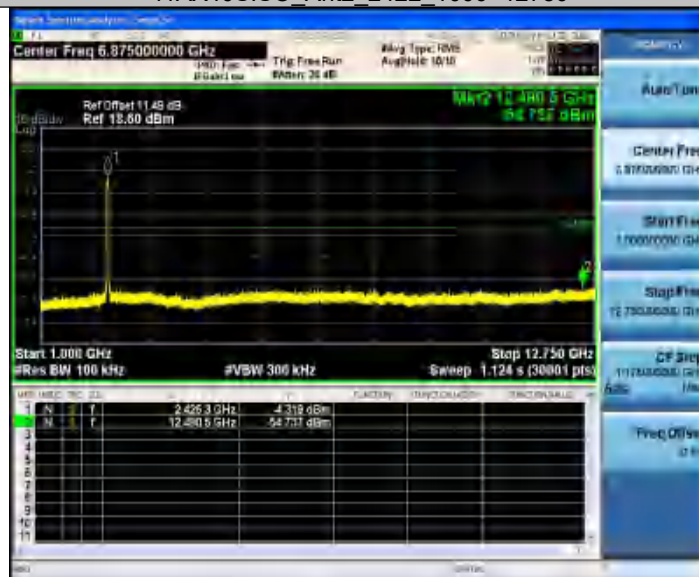

11AX40SISO_Ant2_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2437_0~Reference




11AX40SISO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2437_1000~12750

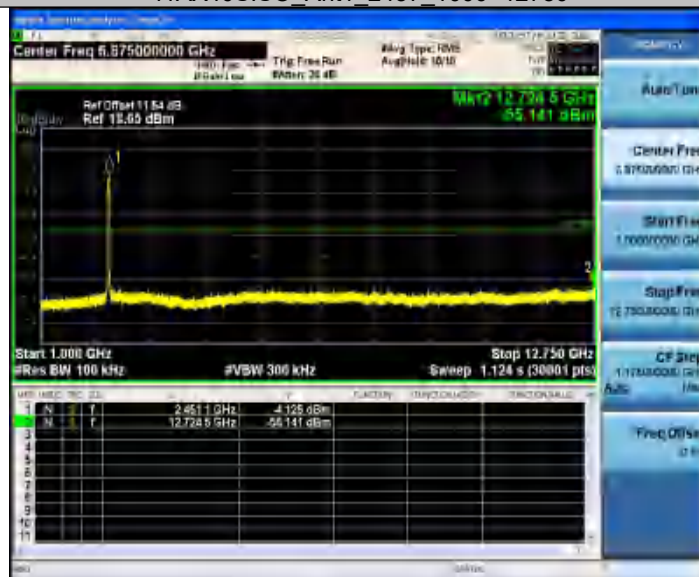

11AX40SISO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_2437_0~Reference




11AX40SISO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_2437_1000~12750

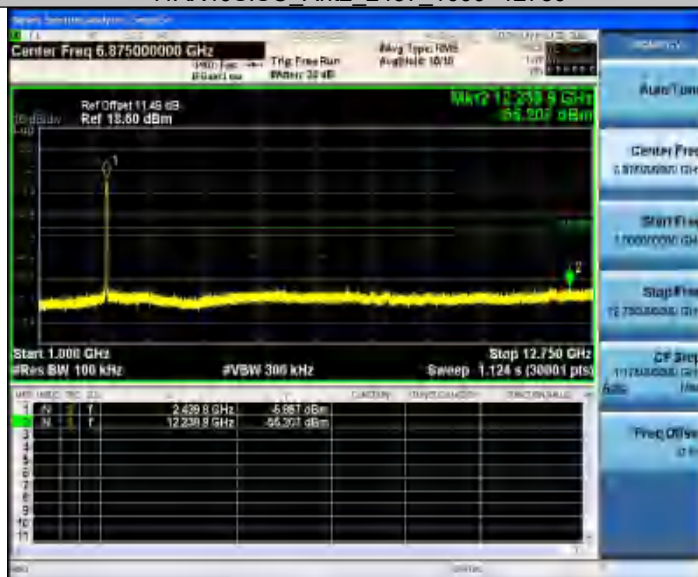

11AX40SISO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2452_0~Reference




11AX40SISO_Ant1_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2452_1000~12750

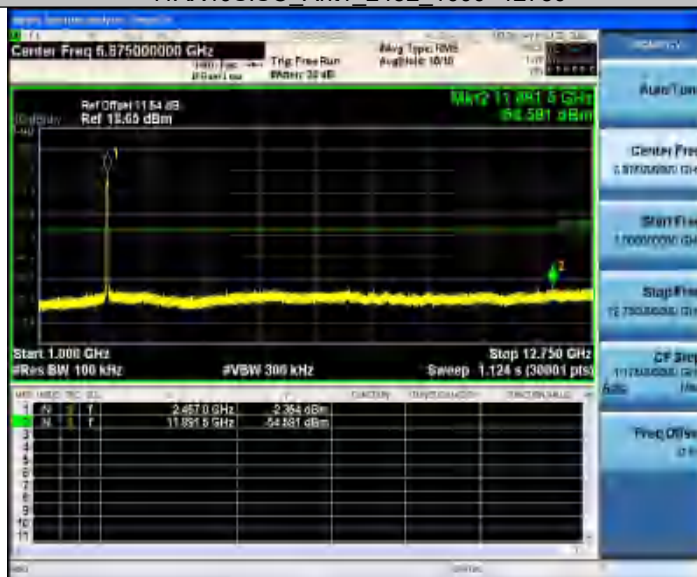

11AX40SISO_Ant1_2452_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_2452_0~Reference




11AX40SISO_Ant2_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant2_2452_1000~12750

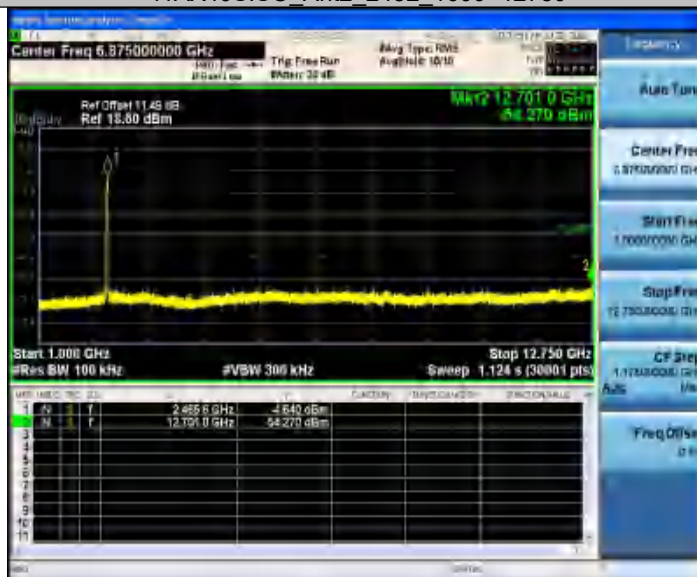

11AX40SISO_Ant2_2452_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2412_0~Reference




11N20MIMO_Ant1_2412_30~1000



TEST REPORT


Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2412_1000~12750

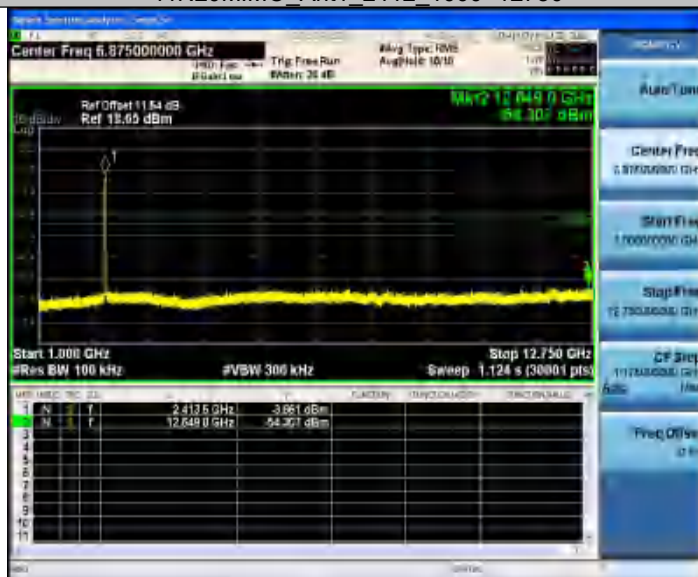

11N20MIMO_Ant1_2412_12750~26500






TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_2412_1000~12750

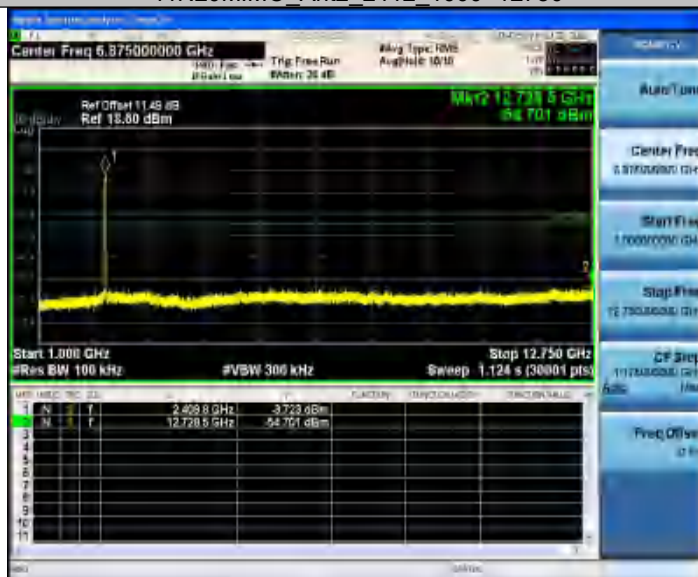


11N20MIMO_Ant2_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2437_0~Reference

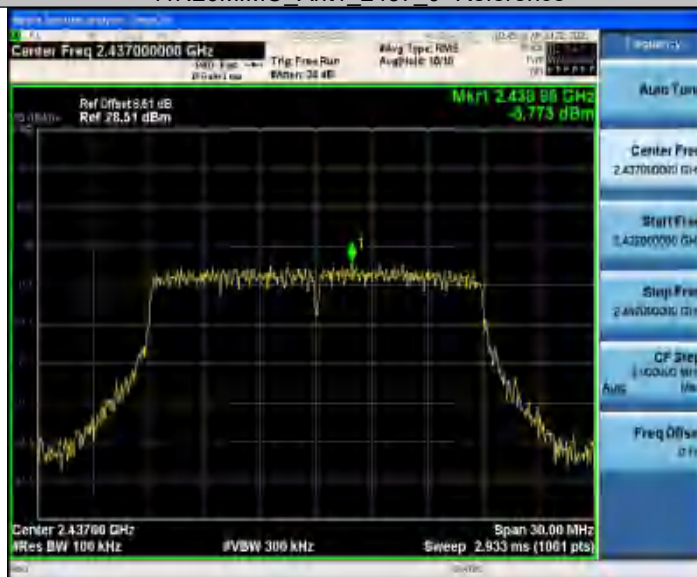


11N20MIMO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2437_1000~12750

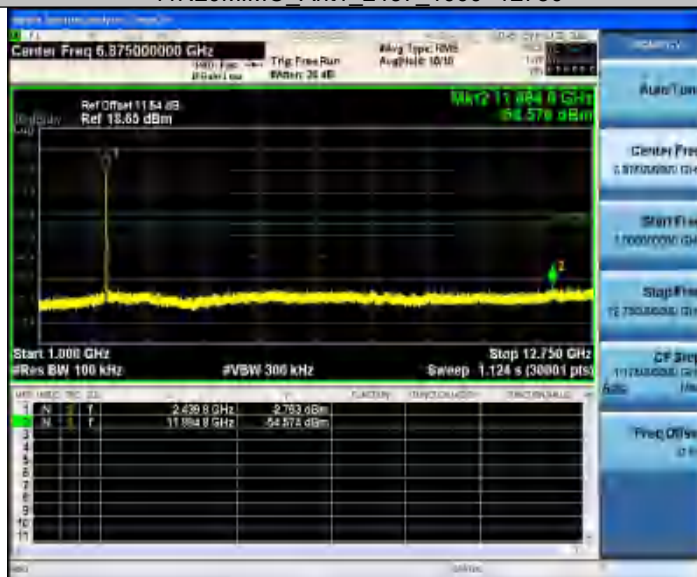


11N20MIMO_Ant1_2437_12750~26500




TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_2437_0~Reference

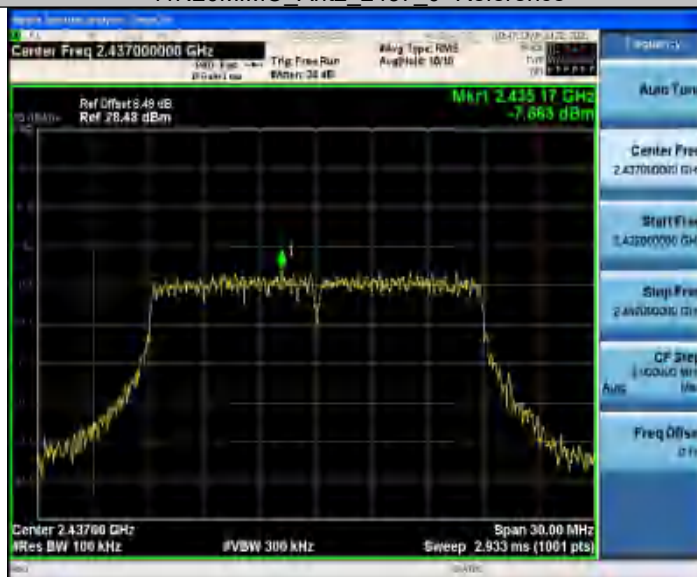


11N20MIMO_Ant2_2437_30~1000

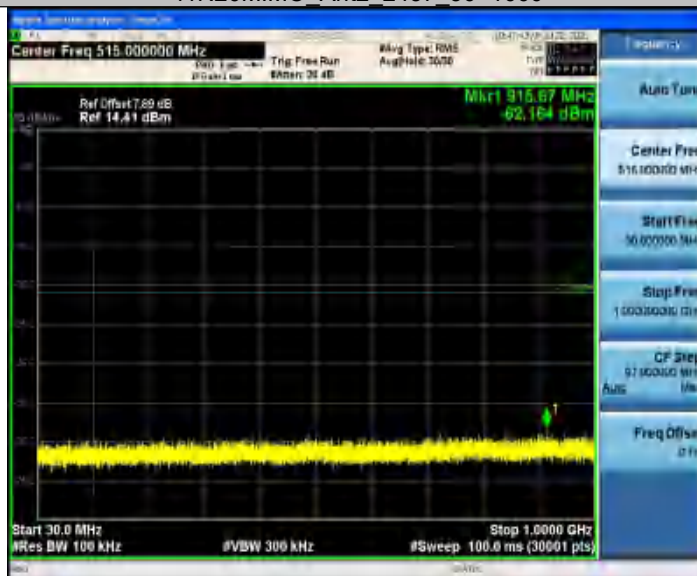

TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_2437_1000~12750

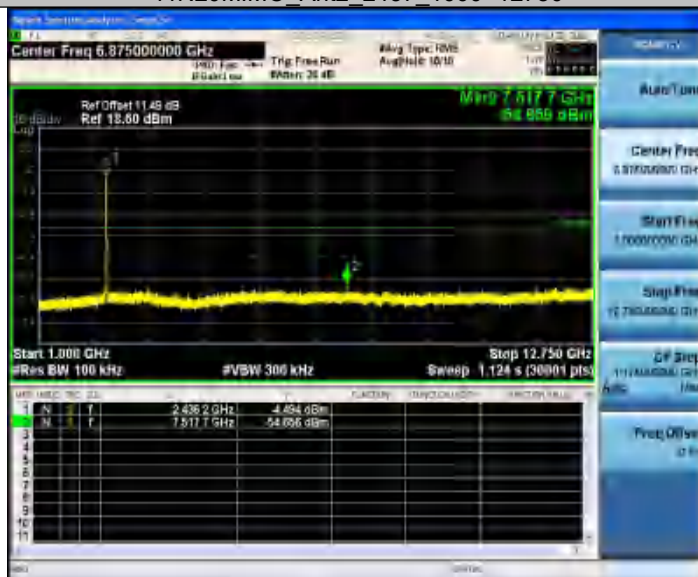

11N20MIMO_Ant2_2437_12750~26500




TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2462_0~Reference




11N20MIMO_Ant1_2462_30~1000

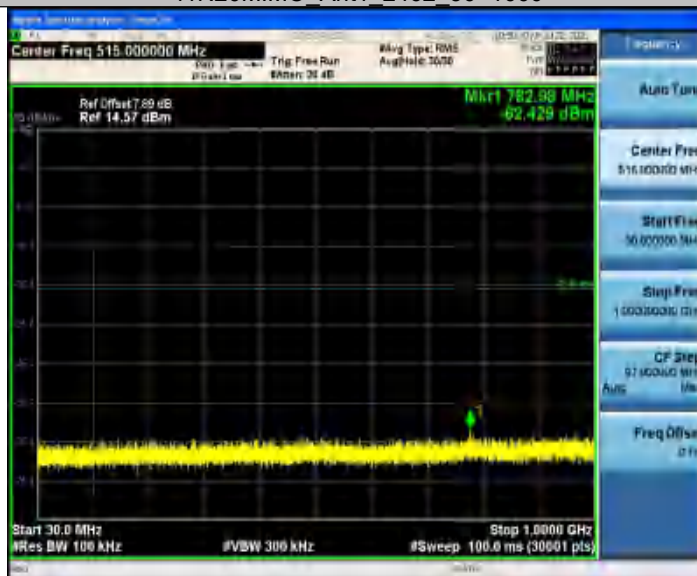

TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant1_2462_1000~12750

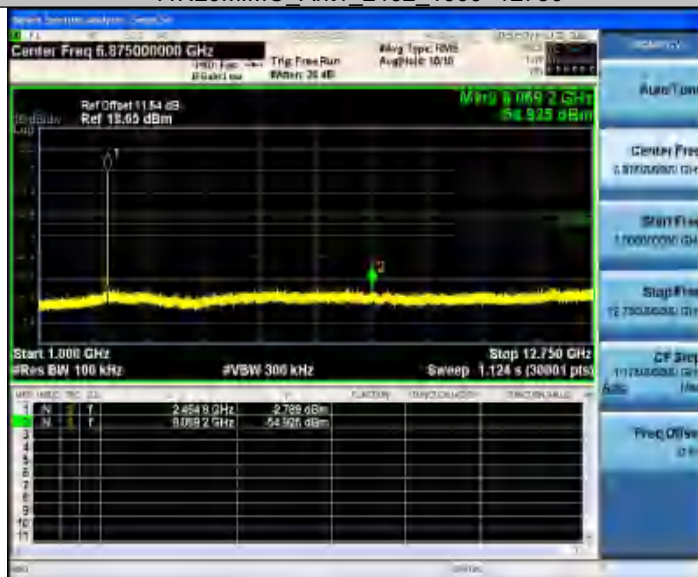


11N20MIMO_Ant1_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_2462_0~Reference

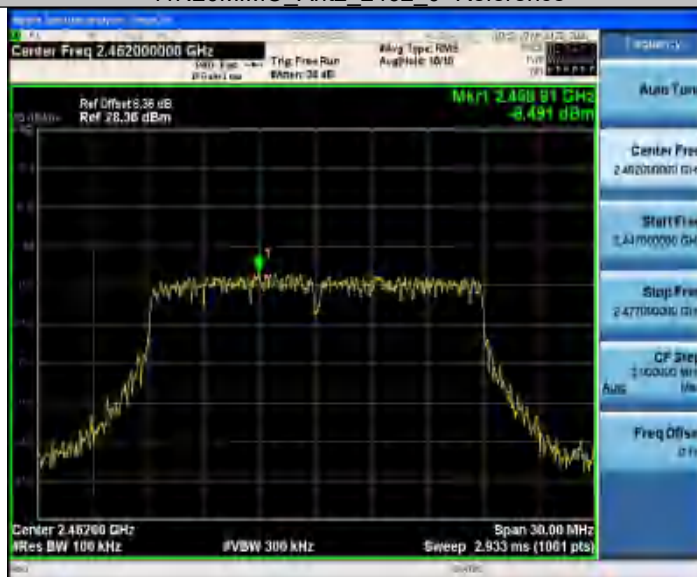


11N20MIMO_Ant2_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N20MIMO_Ant2_2462_1000~12750

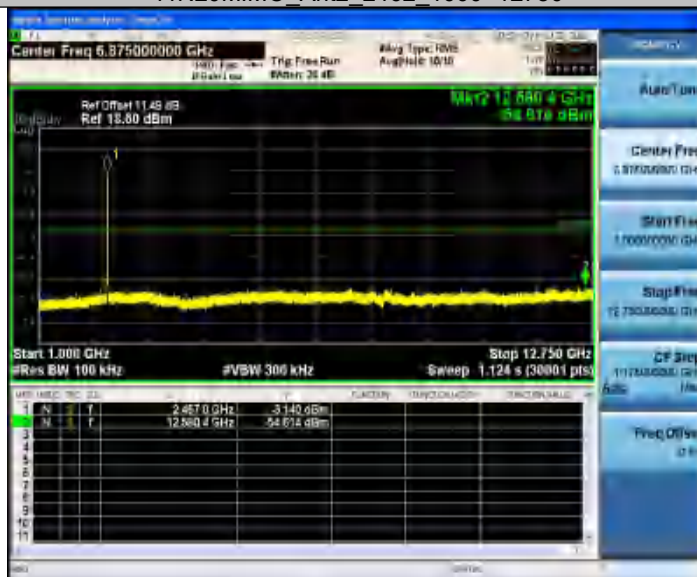

11N20MIMO_Ant2_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2422_0~Reference




11N40MIMO_Ant1_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2422_1000~12750

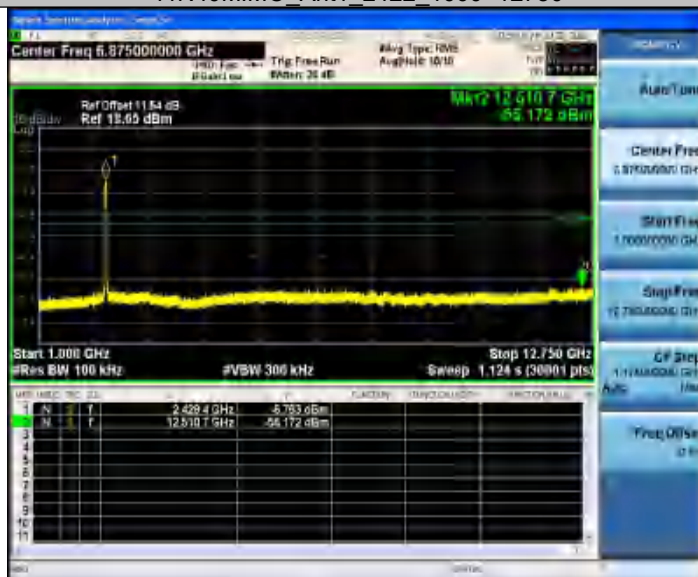

11N40MIMO_Ant1_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_2422_0~Reference




11N40MIMO_Ant2_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_2422_1000~12750

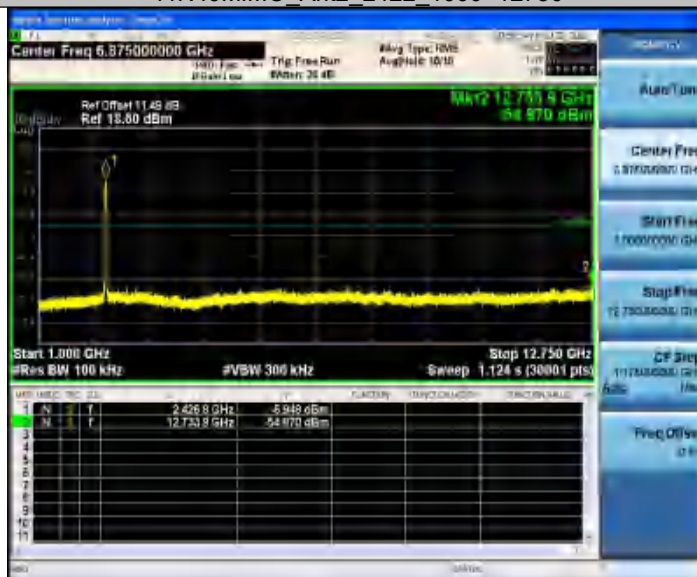

11N40MIMO_Ant2_2422_12750~26500




TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2437_0~Reference




11N40MIMO_Ant1_2437_30~1000

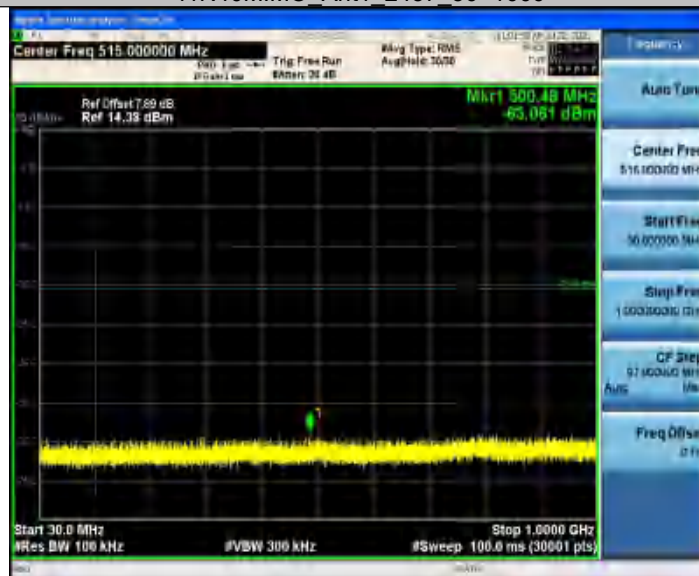

TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2437_1000~12750

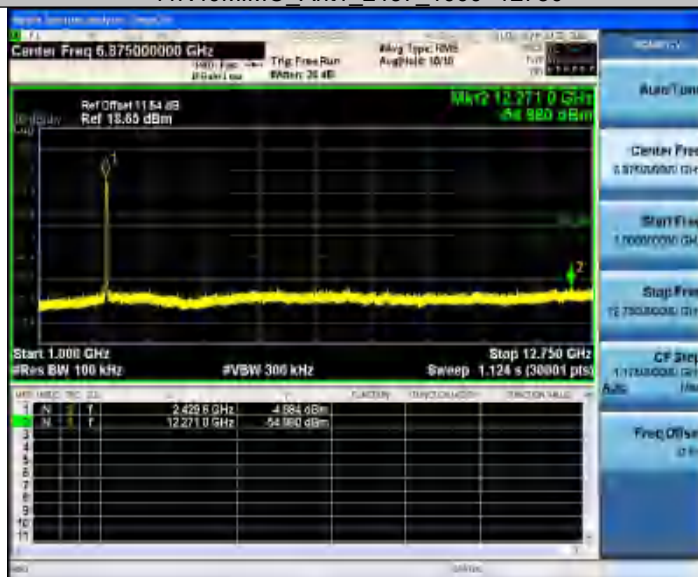


11N40MIMO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_2437_0~Reference

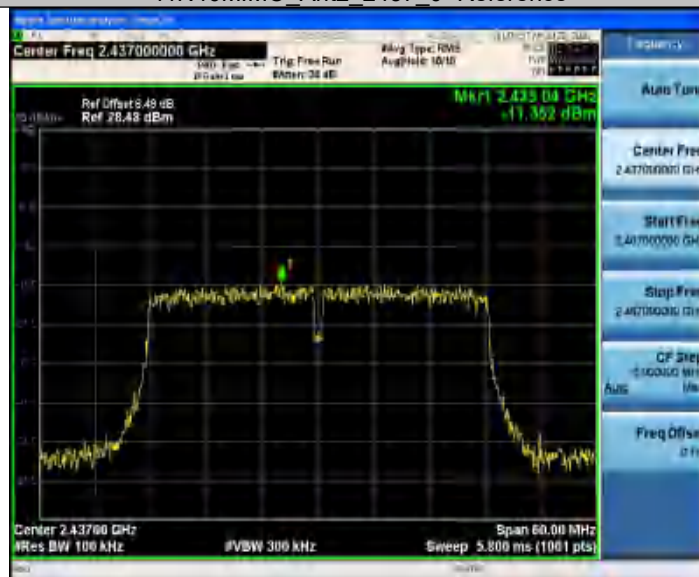


11N40MIMO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_2437_1000~12750

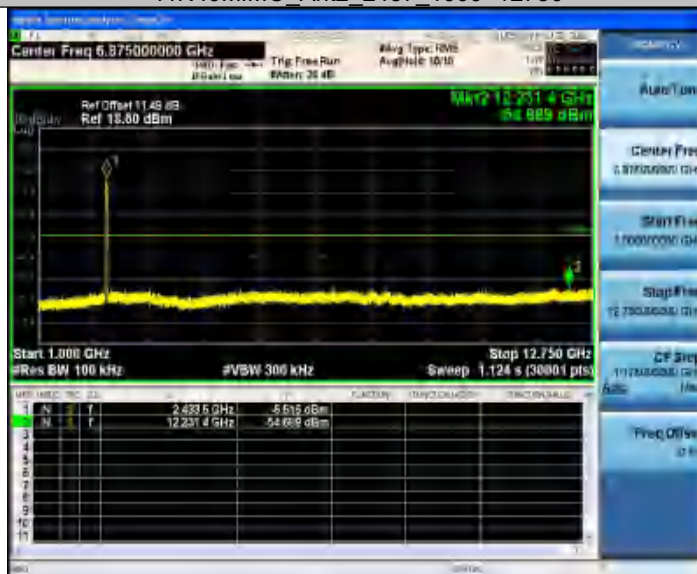

11N40MIMO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2452_0~Reference




11N40MIMO_Ant1_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant1_2452_1000~12750

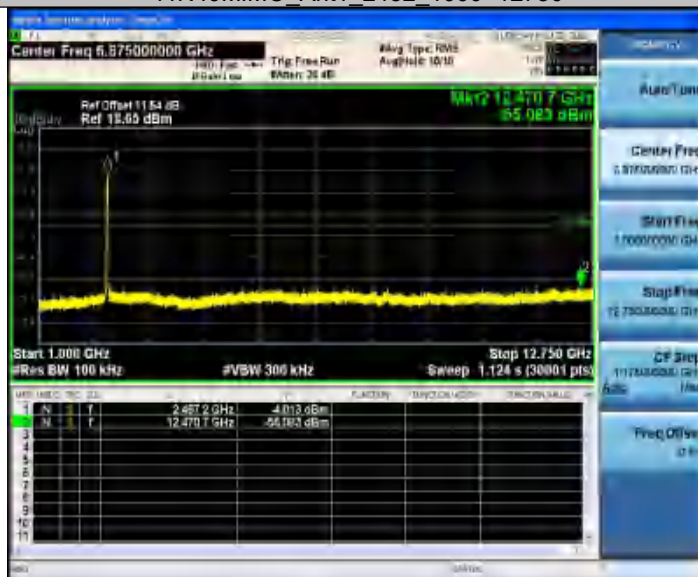

11N40MIMO_Ant1_2452_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_2452_0~Reference




11N40MIMO_Ant2_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11N40MIMO_Ant2_2452_1000~12750

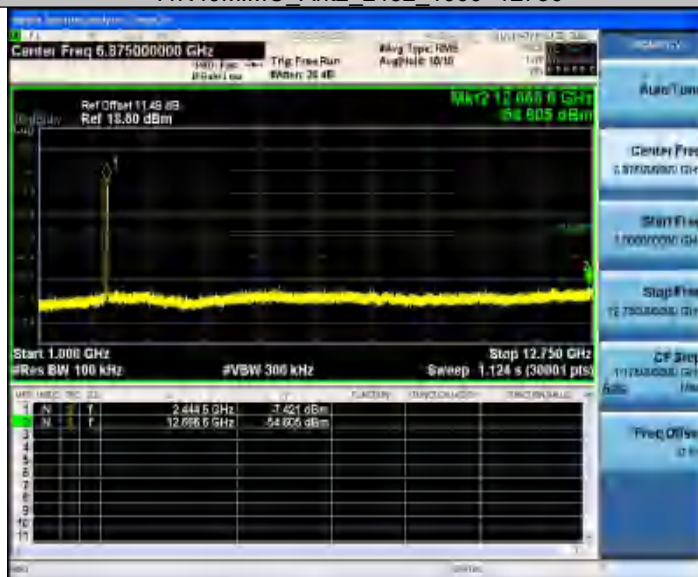

11N40MIMO_Ant2_2452_12750~26500




TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2412_0~Reference




11AX20MIMO_Ant1_2412_30~1000

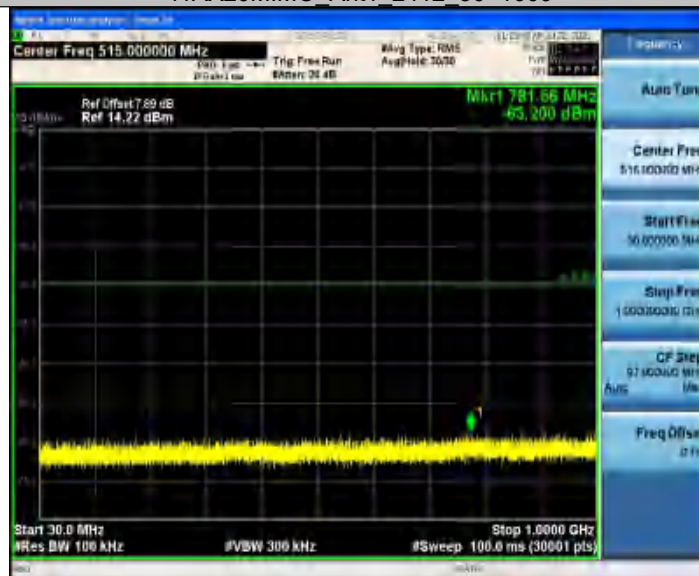

TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2412_1000~12750

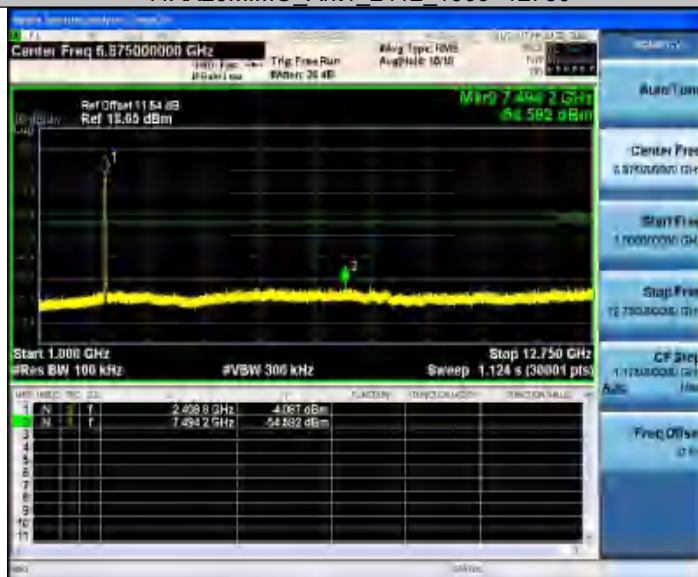

11AX20MIMO_Ant1_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_2412_0~Reference




11AX20MIMO_Ant2_2412_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_2412_1000~12750

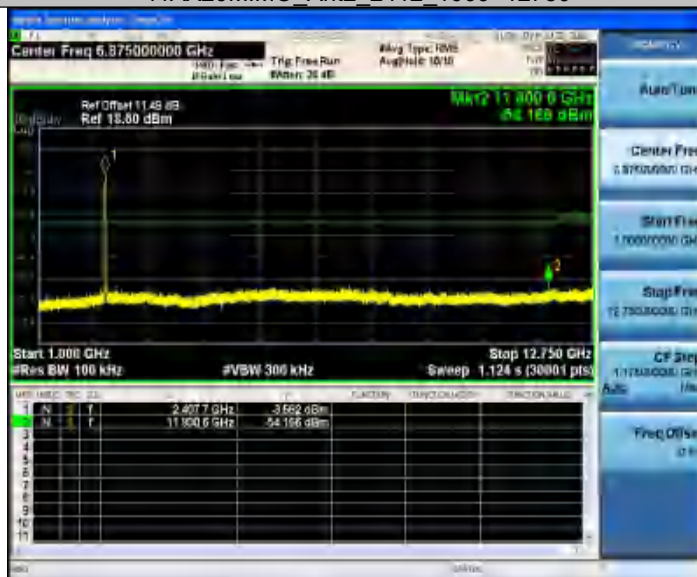

11AX20MIMO_Ant2_2412_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2437_0~Reference




11AX20MIMO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2437_1000~12750

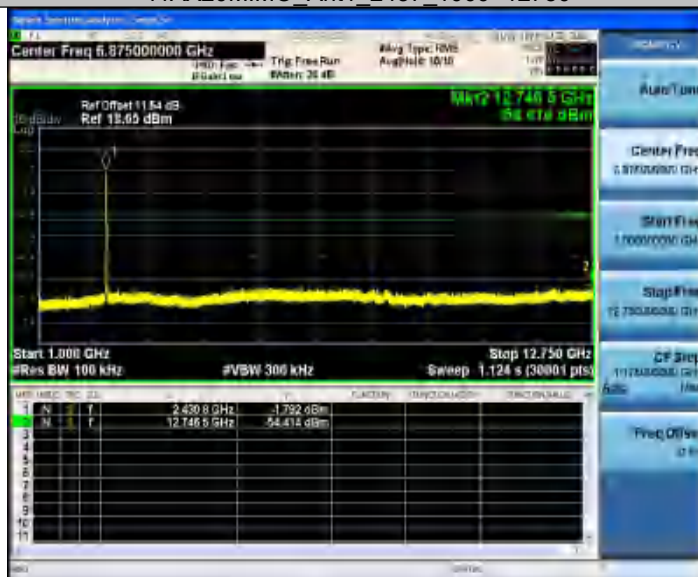

11AX20MIMO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_2437_0~Reference




11AX20MIMO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_2437_1000~12750

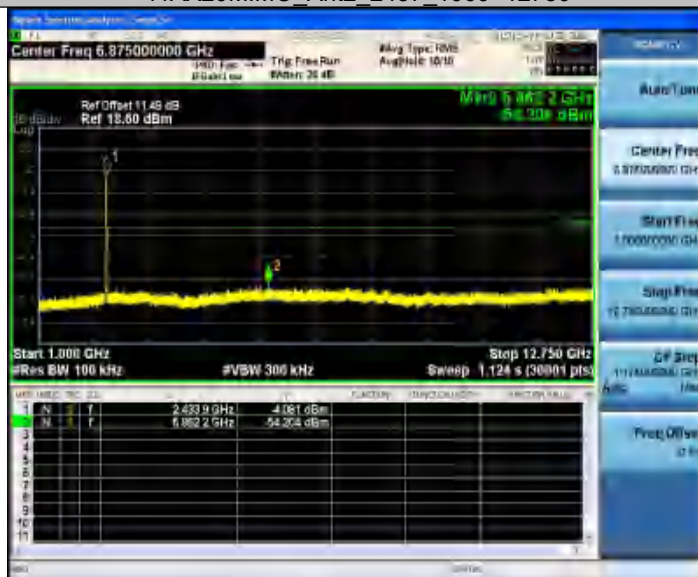

11AX20MIMO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2462_0~Reference




11AX20MIMO_Ant1_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant1_2462_1000~12750

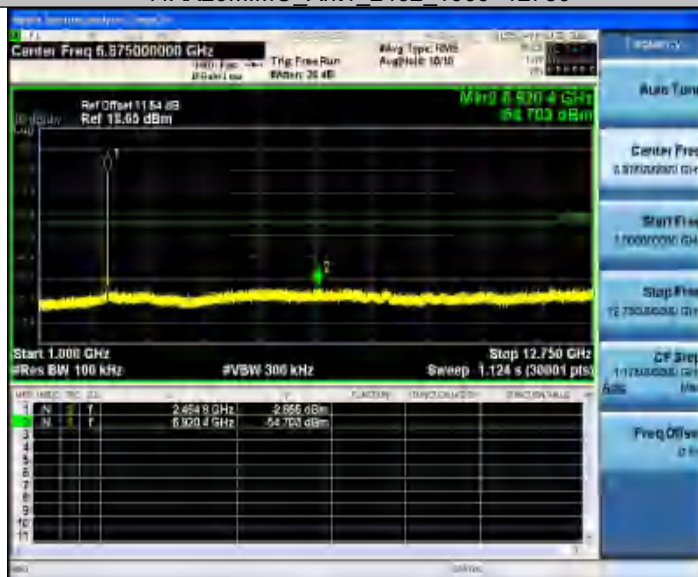

11AX20MIMO_Ant1_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_2462_0~Reference




11AX20MIMO_Ant2_2462_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX20MIMO_Ant2_2462_1000~12750

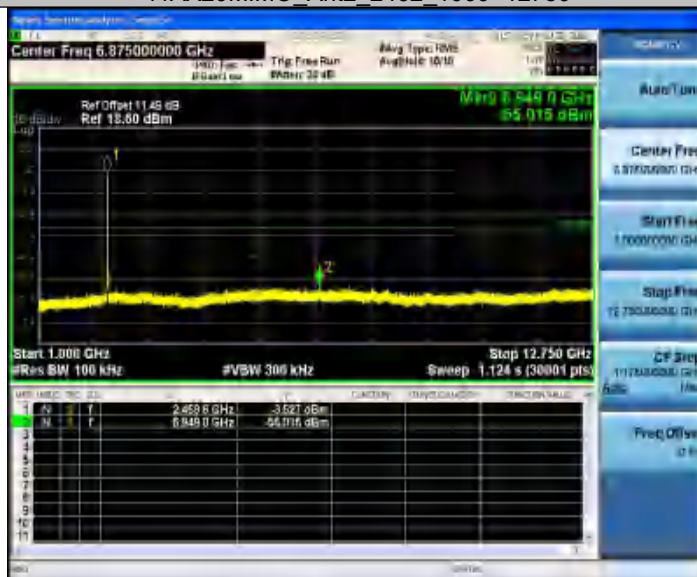

11AX20MIMO_Ant2_2462_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2422_0~Reference




11AX40MIMO_Ant1_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2422_1000~12750

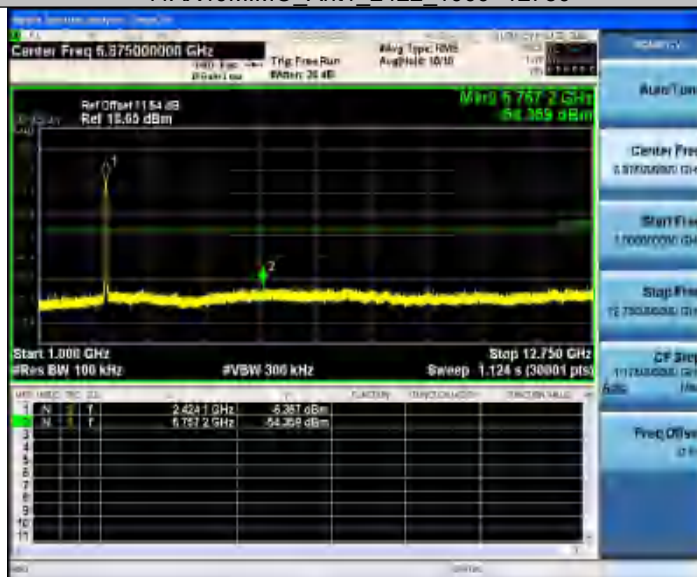

11AX40MIMO_Ant1_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_2422_0~Reference




11AX40MIMO_Ant2_2422_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_2422_1000~12750

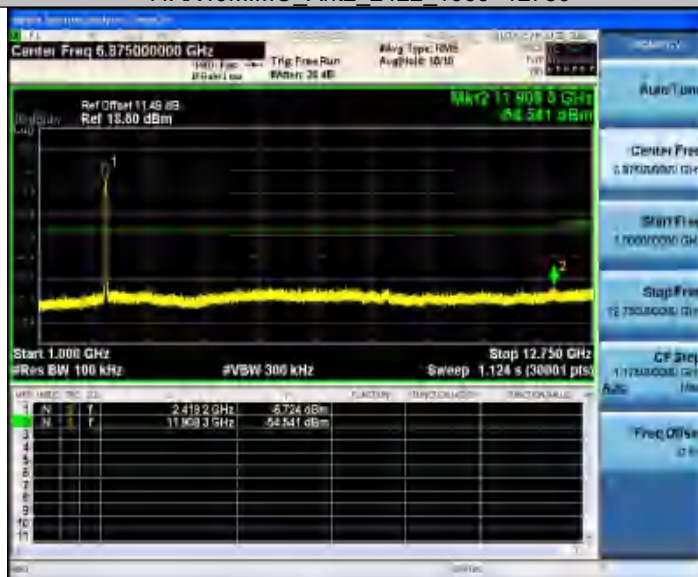

11AX40MIMO_Ant2_2422_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2437_0~Reference




11AX40MIMO_Ant1_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2437_1000~12750

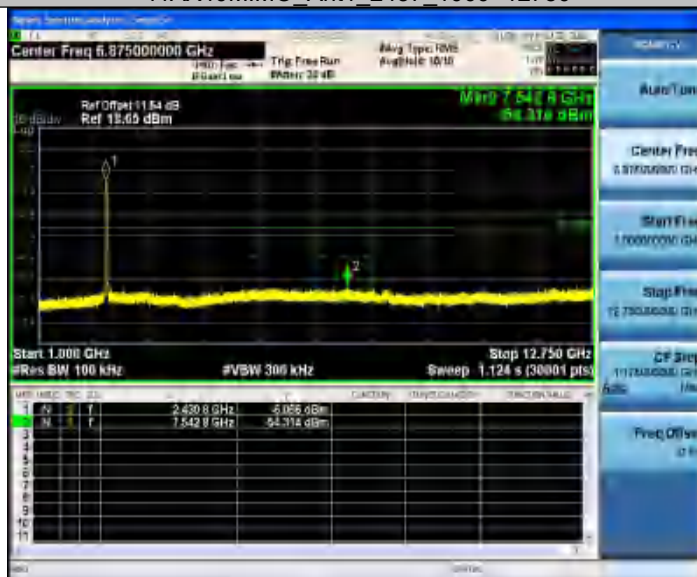

11AX40MIMO_Ant1_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_2437_0~Reference




11AX40MIMO_Ant2_2437_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_2437_1000~12750

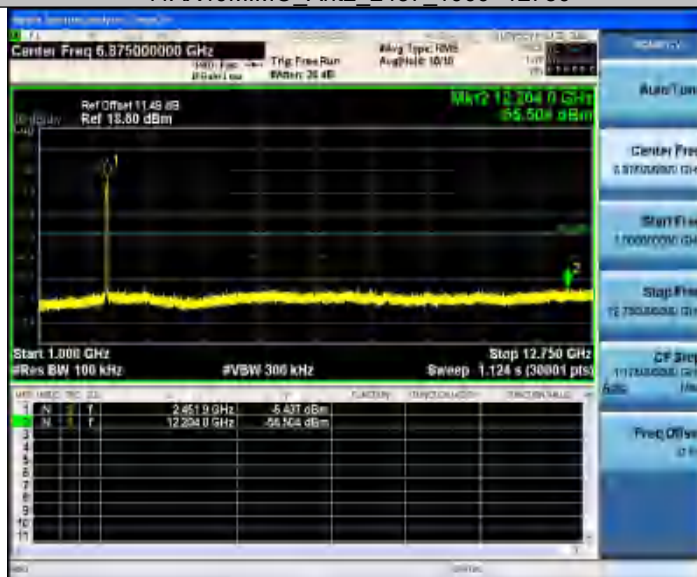

11AX40MIMO_Ant2_2437_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2452_0~Reference




11AX40MIMO_Ant1_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant1_2452_1000~12750

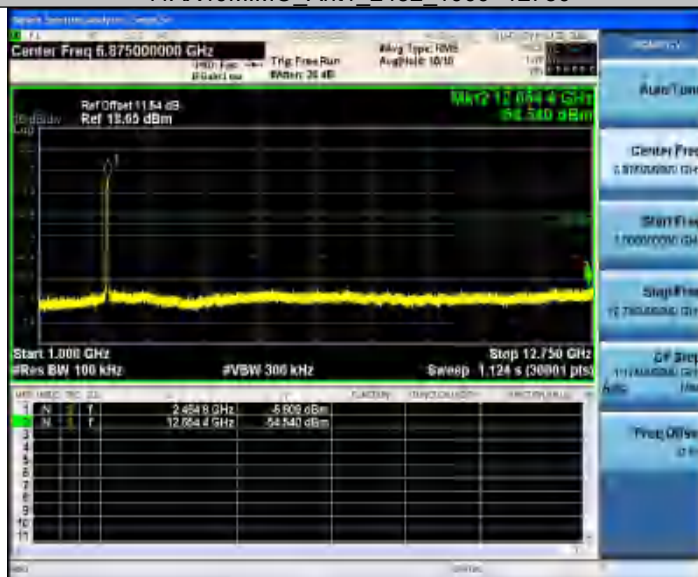

11AX40MIMO_Ant1_2452_12750~26500



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_2452_0~Reference




11AX40MIMO_Ant2_2452_30~1000



TEST REPORT

Report No.: MTi260703023-0102E3

11AX40MIMO_Ant2_2452_1000~12750

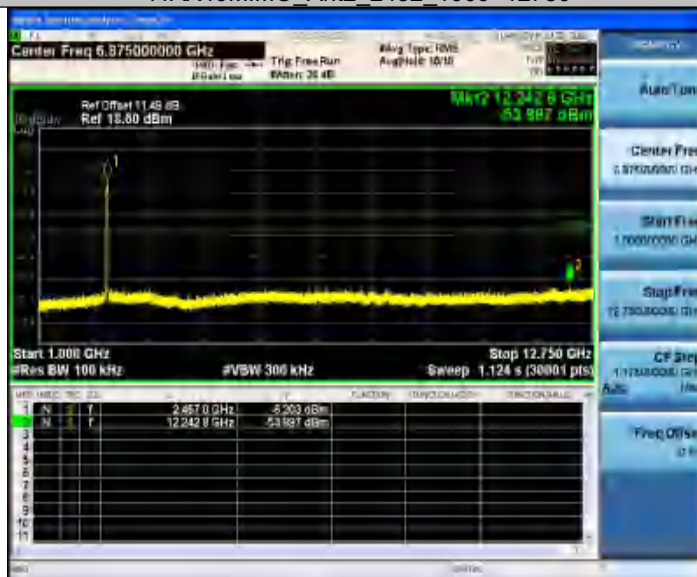

11AX40MIMO_Ant2_2452_12750~26500



Note: The minimum measured margin for each transmit chain is greater than 3.01 dB. Therefore, no additional MIMO power summation assessment is required.

TEST REPORT

Report No.: MTi260703023-0102E3

Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2437	1.13	1.15	98.26	0.08
	Ant2	2437	1.13	1.15	98.26	0.08
11G	Ant1	2437	2.10	2.11	99.53	0.02
	Ant2	2437	2.10	2.12	99.06	0.04
11N20SISO	Ant1	2437	5.43	5.44	99.82	0.01
	Ant2	2437	5.43	5.44	99.82	0.01
11N40SISO	Ant1	2437	5.43	5.44	99.82	0.01
	Ant2	2437	5.43	5.45	99.63	0.02
11AX20SISO	Ant1	2437	5.44	5.46	99.63	0.02
	Ant2	2437	5.45	5.46	99.82	0.01
11AX40SISO	Ant1	2437	5.44	5.46	99.63	0.02
	Ant2	2437	5.44	5.46	99.63	0.02

Notes:


Duty Cycle [%] = Transmission Duration [ms] / Transmission Period [ms] * 100

Factor = 10 * log (Duty Cycle)

TEST REPORT

Report No.: MTI260703023-0102E3


Test Graphs

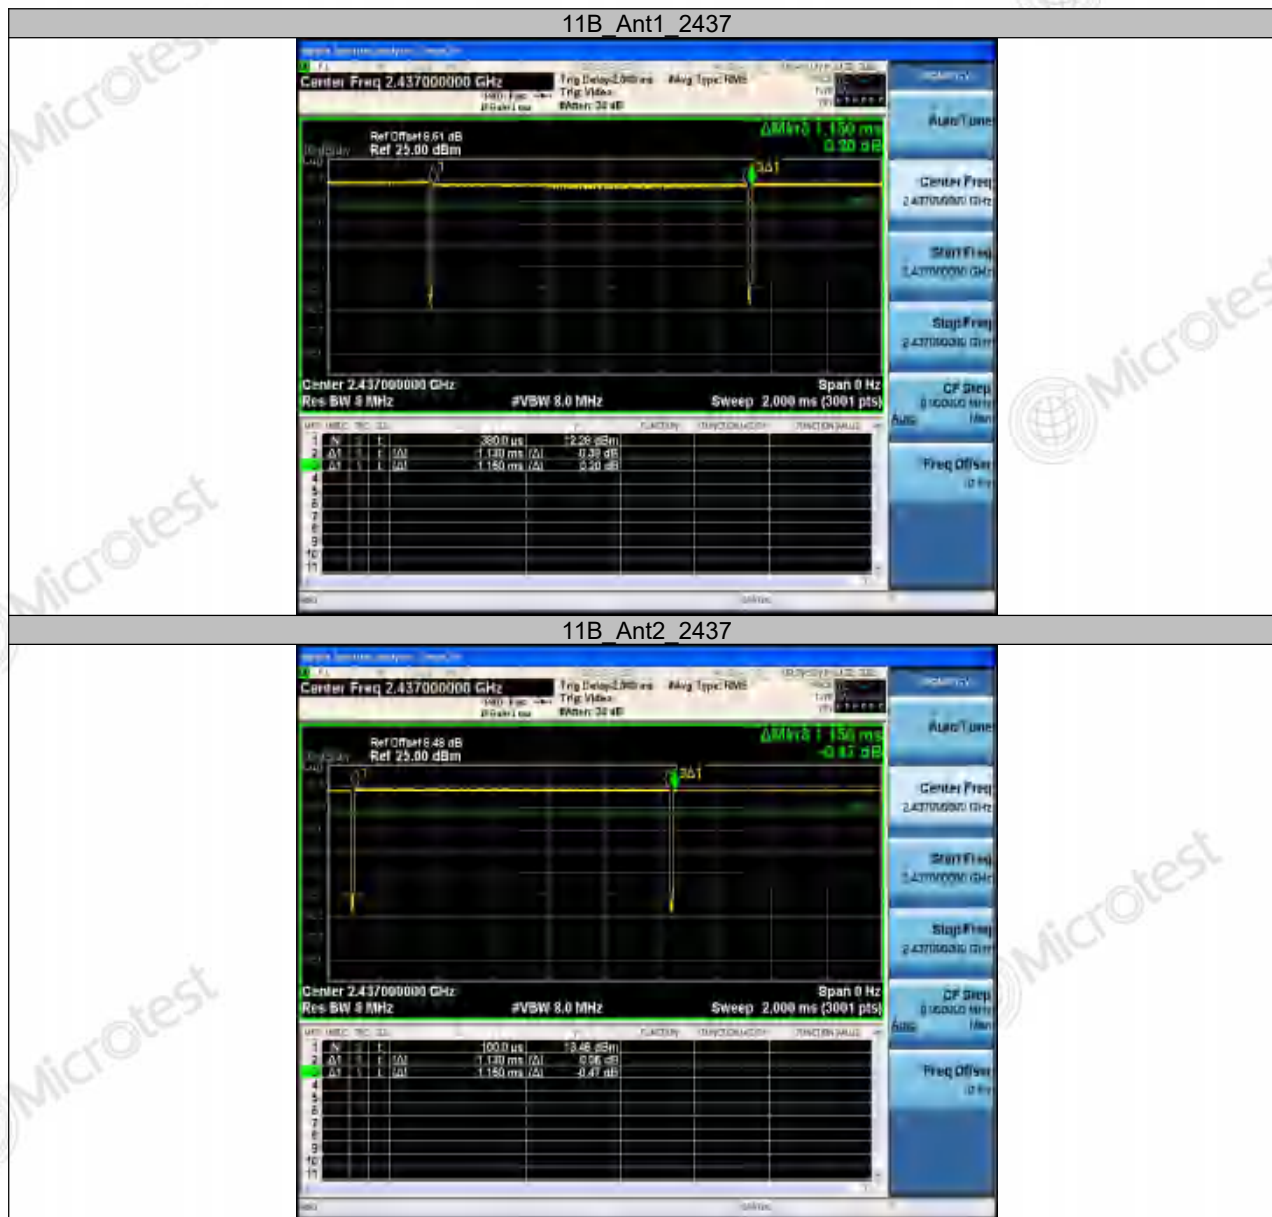


TEST REPORT

Report No.: MTi260703023-0102E3

11G_Ant1_2437

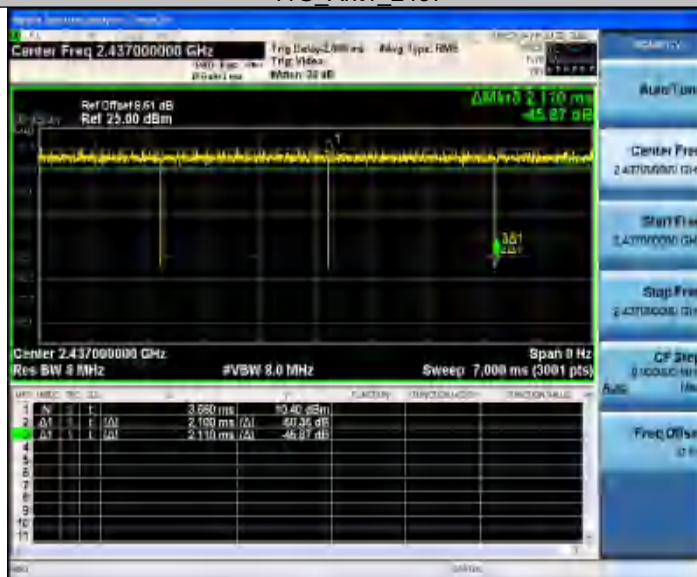


11G_Ant2_2437

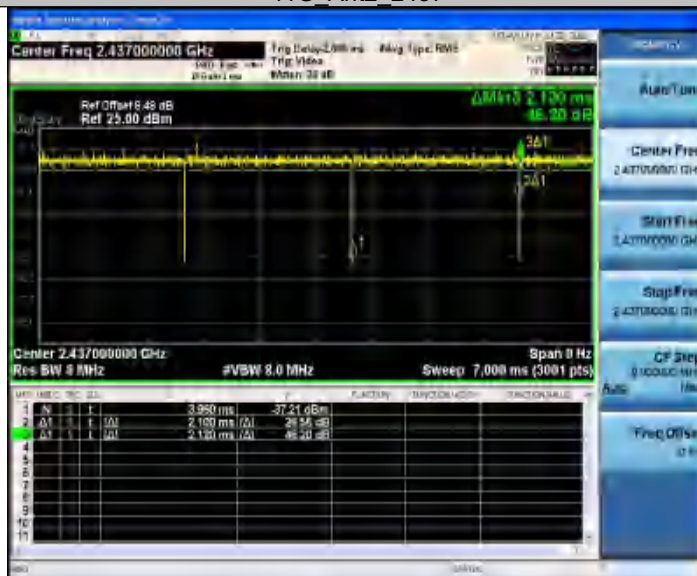


TEST REPORT

Report No.: MTi260703023-0102E3

11N20SISO_Ant1_2437

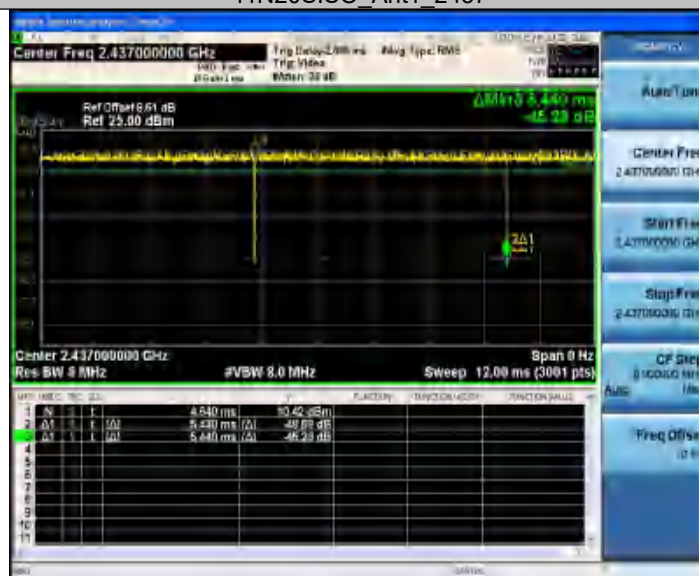


11N20SISO_Ant2_2437

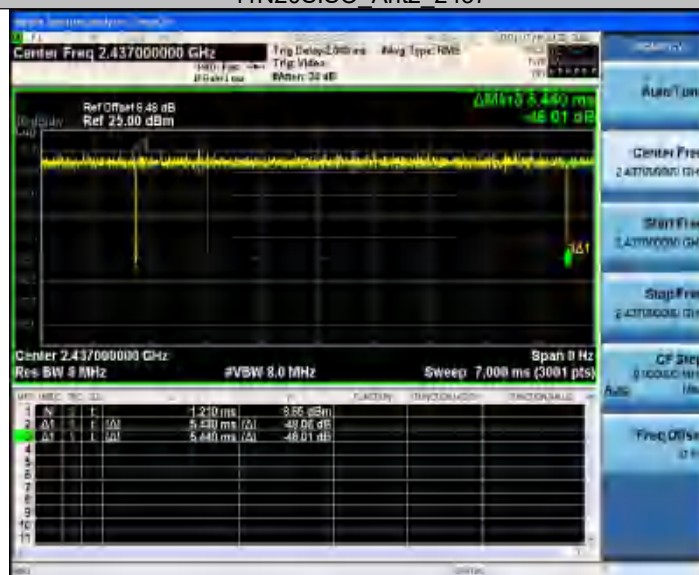


TEST REPORT

Report No.: MTi260703023-0102E3

11N40SISO_Ant1_2437

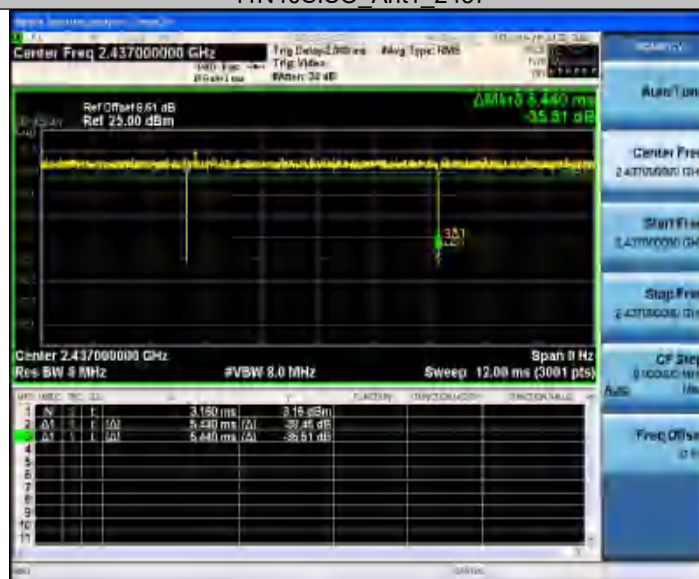


11N40SISO_Ant2_2437

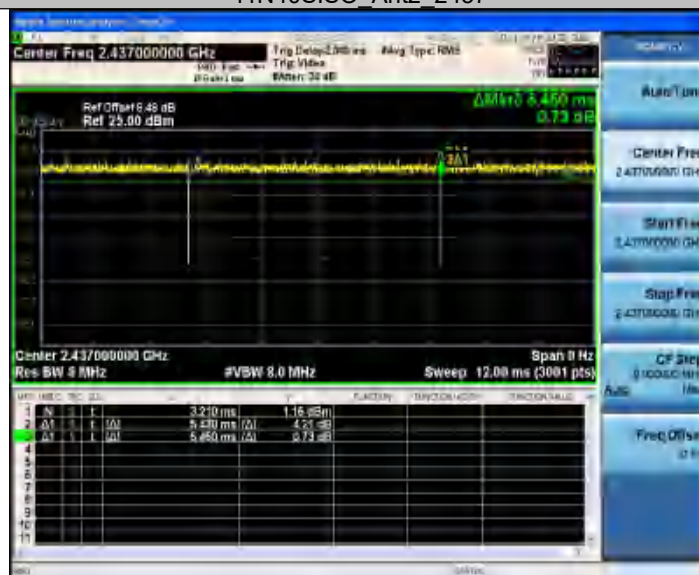

TEST REPORT

Report No.: MTi260703023-0102E3

11AX20SISO_Ant1_2437

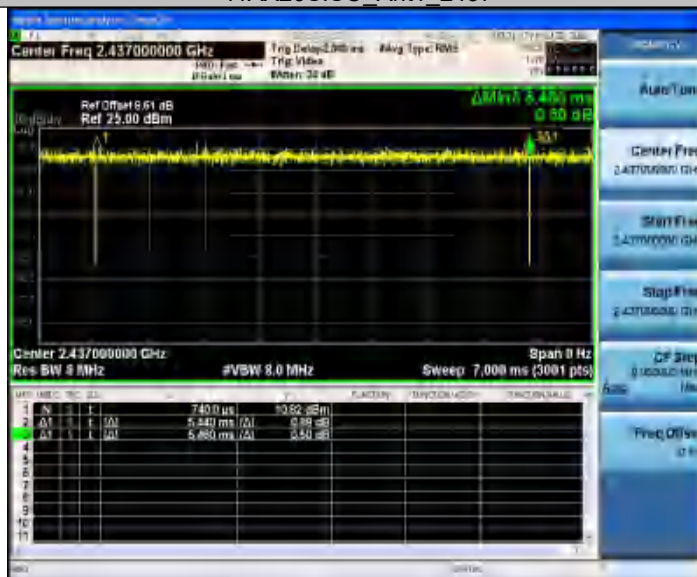

11AX20SISO_Ant2_2437




TEST REPORT

Report No.: MTi260703023-0102E3

11AX40SISO_Ant1_2437



11AX40SISO_Ant2_2437

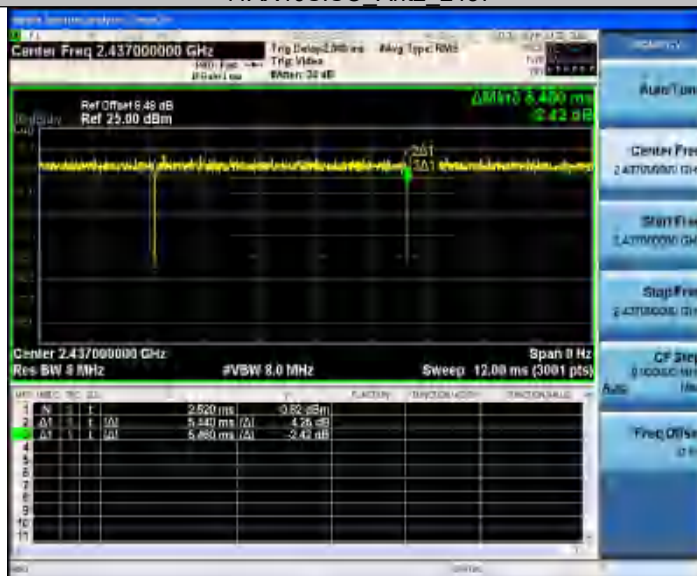

TEST REPORT

Report No.: MTi260703023-0102E3

Statement

1. This report is invalid without the seal and signature of the laboratory.
2. The test results of this report are only responsible for the samples submitted. Client shall be responsible for representativeness of the sample and authenticity of the material.
3. The report shall not be partially reproduced without the written consent of the Laboratory.
4. This report is invalid if transferred, altered or tampered with in any form without authorization.
5. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
6. Any objection to this report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

***** END OF REPORT *****