

TEST REPORT

FCC ID: 2AIFYSD55

Product: MOBILE PHONE

Model No.: SD55

Trade mark: UNEONE

Report No.: TCT171110E014

Issued Date: Nov. 14, 2017

Issued for:

Darmuoba, S.A. de C.V

**Mar Negro 1, Col. Tacuba, CDMX. C.P 11410 Miguel Hidalgo, Distrito Federal,
Mexico**

Issued By:

Shenzhen Tongce Testing Lab

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China**

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary.....	4
3. EUT Description.....	5
4. Test Methodology.....	6
4.1. Decision of Final Test Mode	6
4.2. EUT System Operation	6
5. Setup of Equipment under Test.....	7
5.1. Description of Support Units	7
5.2. Configuration of System Under Test	7
6. Facilities and Accreditations	8
6.1. Facilities.....	8
6.2. Measurement Uncertainty	8
7. Emission Test	9
7.1. Conducted Emission at Mains Terminals	9
7.2. Radiated Emission.....	13
8. Photographs of Test Configuration.....	20
9. Photographs of EUT	22

1. Test Certification

Product:	MOBILE PHONE
Model No.:	SD55
Applicant:	Darmuoba, S.A. de C.V
Address:	Mar Negro 1, Col. Tacuba, CDMX. C.P 11410 Miguel Hidalgo, Distrito Federal, Mexico
Manufacturer:	Z-TECH COMMUNICATION(SZ)CO.,LTD
Address:	7/F BLK D BAO'AN ZHI'GU YIN'TIAN RD. NO.4 XI'XIANG ST' BAO'AN Shenzhen China
Test Voltage:	AC 120 V/ 60 Hz
Date of Test:	Oct. 19, 2017 ~ Oct. 25, 2017
Applicable Standards:	47 CFR FCC Part 15 Subpart B: 2016 ANSI C63.4: 2014

The above equipment has been tested by Shenzhen Tongce Testing Lab and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Rleo

Date:

Oct. 25, 2017

Check By:



Joe Zhou

Date:

Nov. 14, 2017

Approved By:



Tomsin

Date:

Nov. 14, 2017



2. Test Result Summary

Emission		
Test Method	Item	Result
FCC 47 CFR Part 15 Subpart B	Conducted Emission at Mains Terminals	Pass
	Radiated Emission	Pass

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The information of measurement uncertainty is available upon the customer's request.

3. EUT Description

Product Name:	MOBILE PHONE
Model No.:	SD55
Power supply:	Adaptador ca/cc Entrada: AC 100-240V Salida: DC 5.0V, 1A Or DC 3.8V 2500mAh Ion de Litio
AC Mains:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☒ Not applicable ☐ Length:
DC Line:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☒ Not applicable ☐ Length:
Control Line:	☐ Shielded ☐ Unshielded, ☐ Detachable ☐ Un-detachable ☒ Not applicable ☐ Length:

4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode
Mode 1: Data exchanging with PC mode
Mode 2: TF card playing mode
Mode 3: Video recording mode

4.2. EUT System Operation

1. Set up EUT with the support equipments.
2. Make sure the EUT work normally during the test.

5. Setup of Equipment under Test

5.1. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
PC	G485	LB00402300	/	Lenovo
TF card	SD-C01G	/	/	Kingston

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration of System Under Test

Mode 1



Mode 2/3



(EUT: MOBILE PHONE)

6. Facilities and Accreditations

6.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

Test Firm Registration Number: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	$\pm 0.1^{\circ}\text{C}$
2.	Humidity	$\pm 1.0 \%$
3.	Spurious Emissions, Conducted	$\pm 2.56 \text{ dB}$
4.	All Emissions, Radiated	$\pm 4.28 \text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.

7. Emission Test

7.1. Conducted Emission at Mains Terminals

7.1.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	150 kHz to 30 MHz

7.1.2. Limits

Frequency (MHz)	Class B dB(uV)	
	Quasi-peak	Average
0.15 - 0.5	66 – 56 ^a	56 – 46 ^a
0.50 - 5.0	56	46
5.0 - 30.0	60	50

a. Decreases with the logarithm of the frequency

7.1.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Sep. 27, 2018
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN

7.1.5. Block Diagram of Test Setup

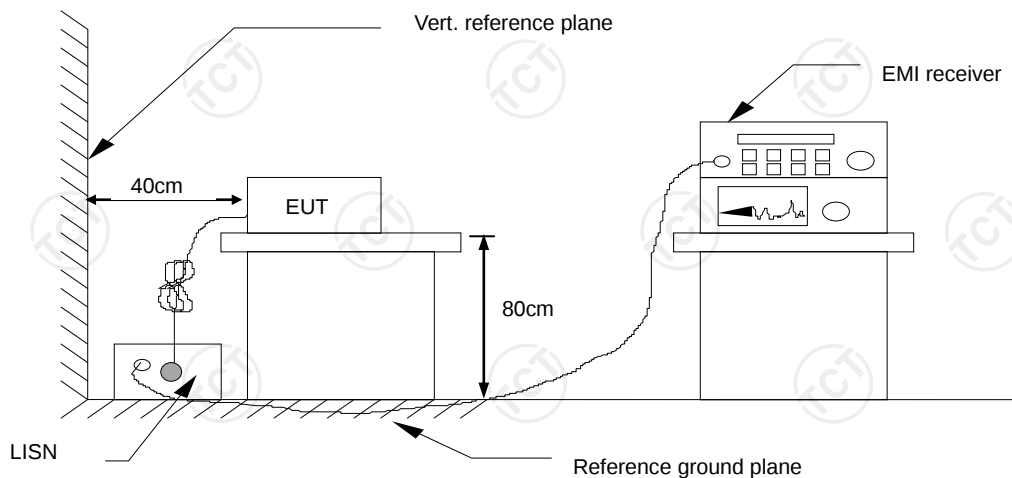

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.:	25 °C	Humid.:	52 %	Press.:	1012mbar
Test Mode:	Mode 2, Mode 3					
Test Voltage:	AC 120 V /60 Hz					
Test Result:	Pass					

Note:

L1 = Live Line / N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Correct Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.


Please refer to following diagram for individual

Line:

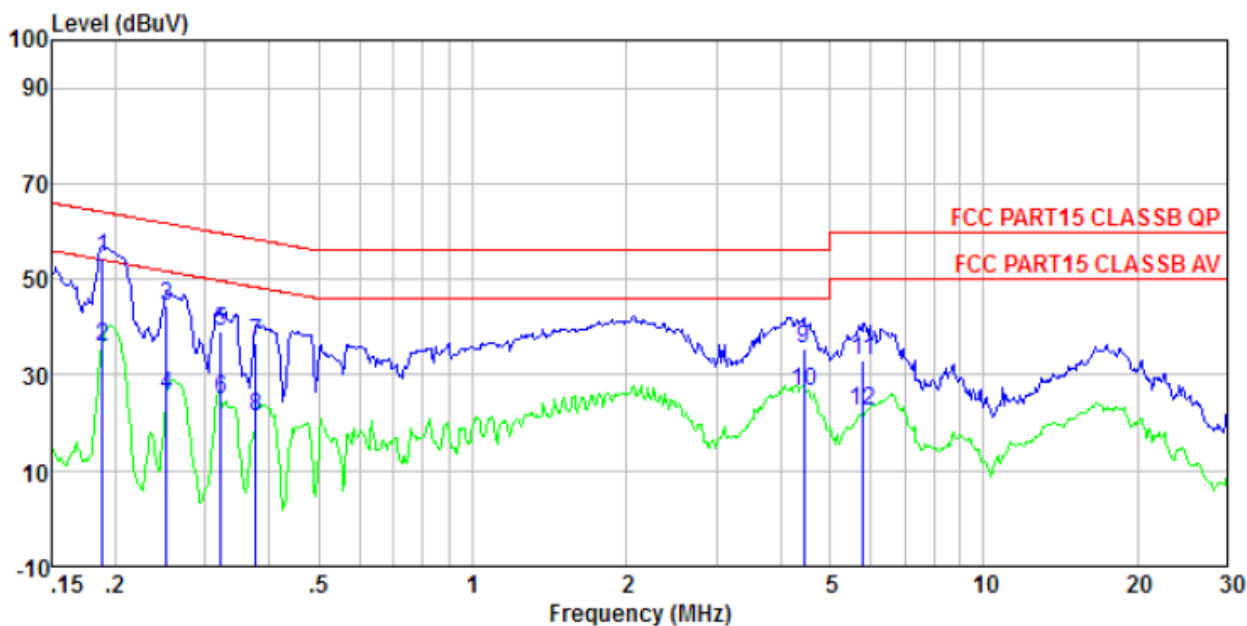

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.188	53.85	0.42	0.13	54.40	64.11	-9.71	QP
0.188	35.34	0.42	0.13	35.89	54.11	-18.22	Average
0.252	44.00	0.44	0.11	44.55	61.69	-17.14	QP
0.252	25.36	0.44	0.11	25.91	51.69	-25.78	Average
0.322	38.42	0.43	0.10	38.95	59.66	-20.71	QP
0.322	24.35	0.43	0.10	24.88	49.66	-24.78	Average
0.377	36.00	0.42	0.10	36.52	58.34	-21.82	QP
0.377	20.56	0.42	0.10	21.08	48.34	-27.26	Average
4.454	35.02	0.21	0.15	35.38	56.00	-20.62	QP
4.454	26.28	0.21	0.15	26.64	46.00	-19.36	Average
5.805	32.83	0.21	0.16	33.20	60.00	-26.80	QP
5.805	22.15	0.21	0.16	22.52	50.00	-27.48	Average

Neutral:

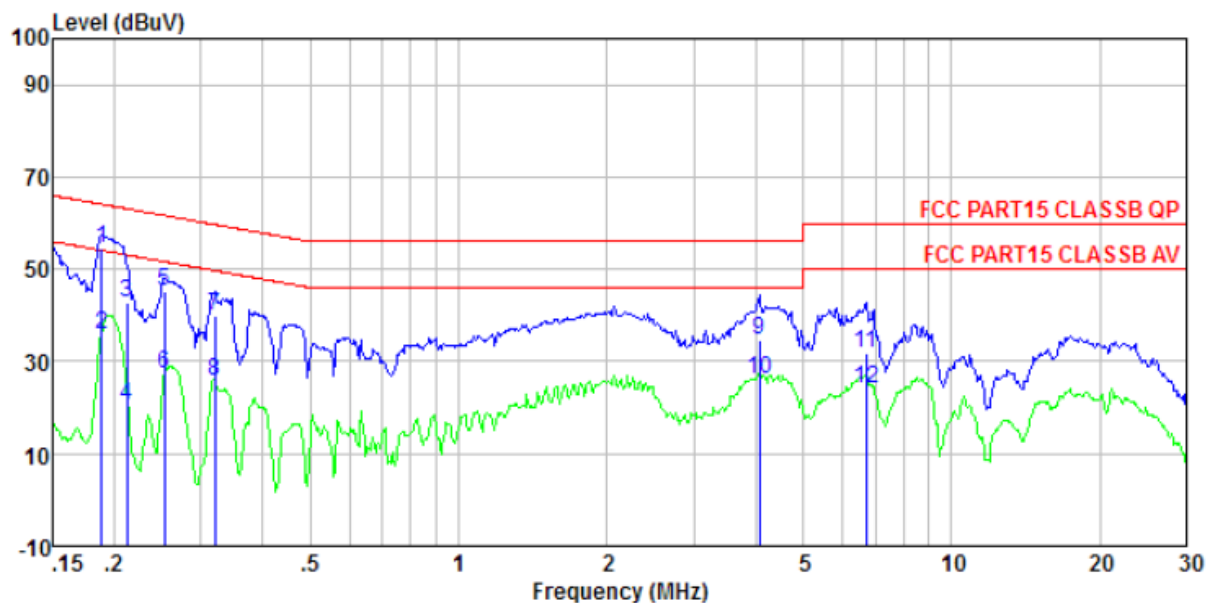

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.188	54.16	0.41	0.13	54.70	64.11	-9.41	QP
0.188	35.40	0.41	0.13	35.94	54.11	-18.17	Average
0.213	42.22	0.41	0.13	42.76	63.10	-20.34	QP
0.213	20.01	0.41	0.13	20.55	53.10	-32.55	Average
0.253	44.48	0.42	0.11	45.01	61.64	-16.63	QP
0.253	26.80	0.42	0.11	27.33	51.64	-24.31	Average
0.320	39.25	0.42	0.10	39.77	59.71	-19.94	QP
0.320	25.04	0.42	0.10	25.56	49.71	-24.15	Average
4.070	34.43	0.21	0.15	34.79	56.00	-21.21	QP
4.070	25.87	0.21	0.15	26.23	46.00	-19.77	Average
6.698	31.49	0.21	0.16	31.86	60.00	-28.14	QP
6.698	23.53	0.21	0.16	23.90	50.00	-26.10	Average

7.2. Radiated Emission

7.2.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	30 MHz to 6000 MHz
Measurement Distance:	3 m
Antenna Polarization:	Horizontal & Vertical

7.2.2. Limits

Below 1 GHz

Frequency (MHz)	Class B (at 3m)
	dBuV/m
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
960 ~ 1000	54.0

Above 1 GHz

Frequency (MHz)	Peak Value (at 3m)	Average (at 3m)
	dBuV/m	dBuV/m
Above 1GHz	74.0	54.0

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level $\text{dB}(\mu\text{V}/\text{m}) = 20 \log \text{Emission level } (\mu\text{V}/\text{m})$.

7.2.3. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESVD	100008	Sep. 27, 2018
Spectrum Analyzer	R&S	FSEM	848597-001	Sep. 27, 2018
Amplifier	HP	8447D	2727A05017	Sep. 27, 2018
Amplifier	EM	EM30265	07032613	Sep. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.2.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

7.2.5. Block Diagram of Test Setup

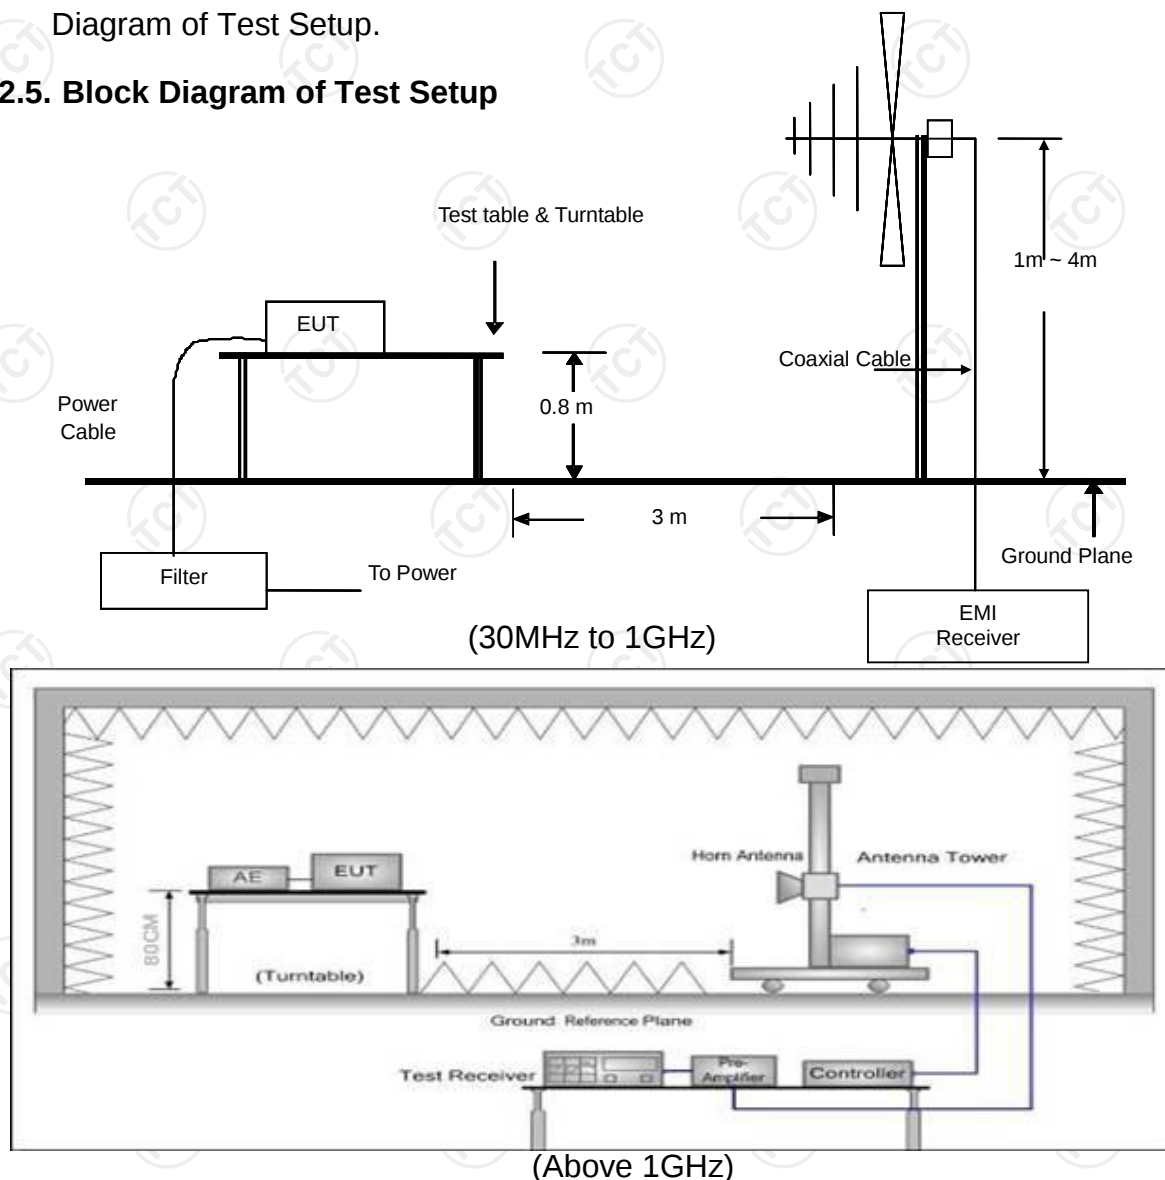

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 52 %	Press.: 1012 mbar
Test Mode:	Mode 1, Mode 2, Mode 3		
Test Voltage:	AC 120 V /60 Hz		
Test Result:	Pass		

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss-AMP factor

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

* is meaning the worst frequency has been tested in the test frequency range

Please refer to following diagram for individual


Below 1GHz

Horizontal:

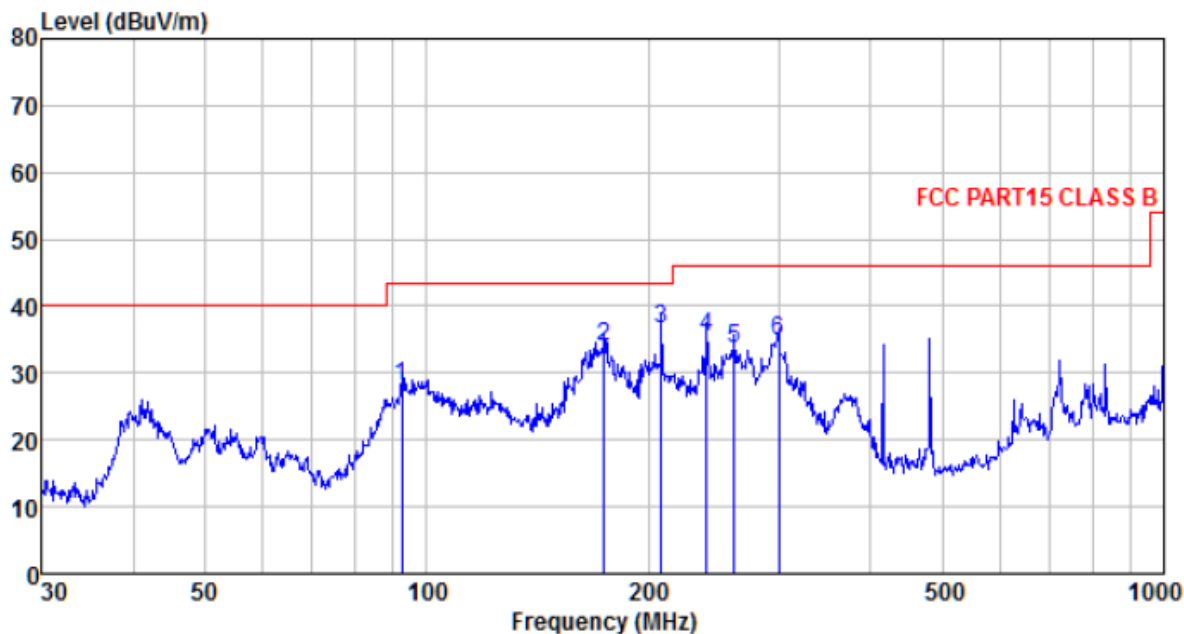


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
92.462	45.60	10.98	1.13	29.73	27.98	43.50	-15.52	QP
173.814	53.09	8.50	1.71	29.30	34.00	43.50	-9.50	QP
207.850	53.48	10.49	1.89	29.28	36.58	43.50	-6.92	QP
239.987	51.37	11.56	2.07	29.56	35.44	46.00	-10.56	QP
261.058	49.00	12.24	2.18	29.73	33.69	46.00	-12.31	QP
300.367	48.85	13.50	2.36	29.99	34.72	46.00	-11.28	QP

Vertical:

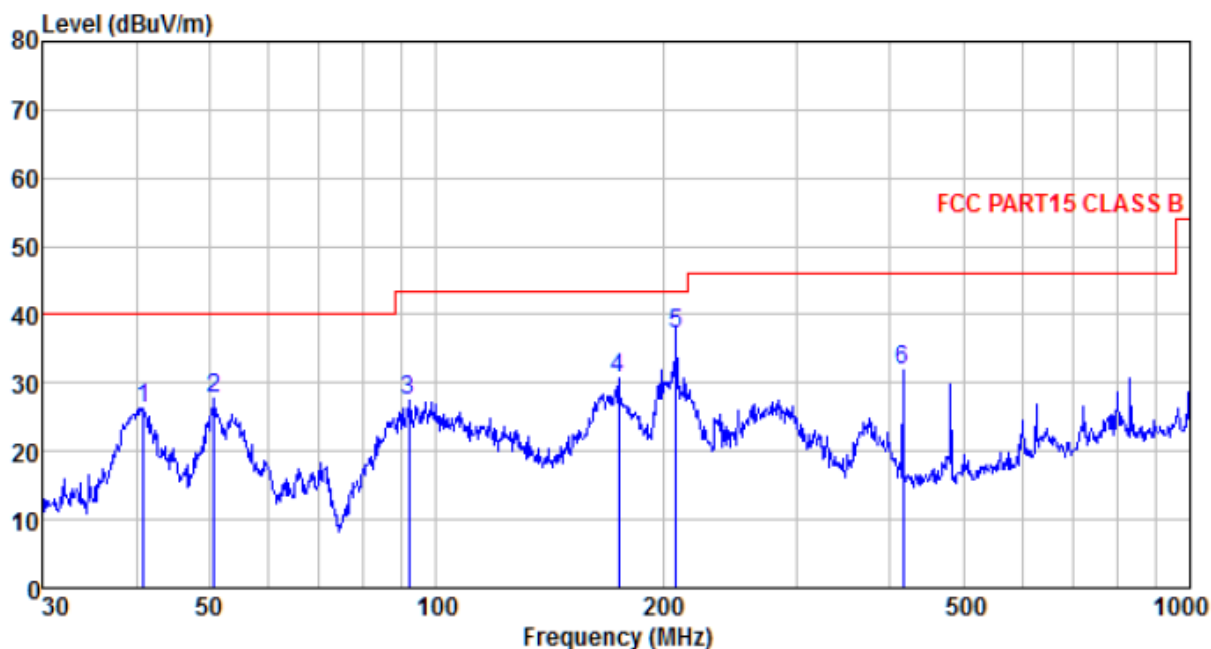


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBUV/m	Over limit dB	Remark
40.845	43.48	12.27	0.67	30.04	26.38	40.00	-13.62	QP
50.764	44.76	12.20	0.78	29.99	27.75	40.00	-12.25	QP
91.816	45.14	10.98	1.12	29.74	27.50	43.50	-16.00	QP
174.424	49.61	8.60	1.71	29.30	30.62	43.50	-12.88	QP
207.850	54.05	10.49	1.89	29.28	37.15	43.50	-6.35	QP
416.179	42.47	15.80	2.93	29.46	31.74	46.00	-14.26	QP

Above 1GHz
Horizontal:

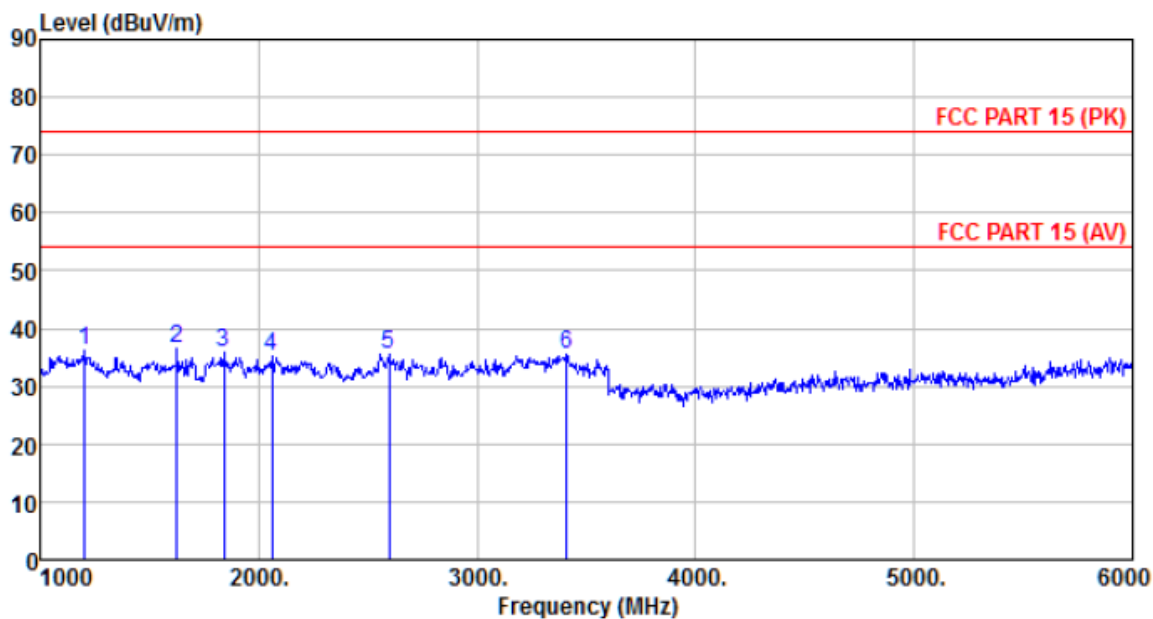

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1205.000	42.27	25.37	4.47	35.92	36.19	74.00	-37.81	Peak
1625.000	43.16	24.92	4.76	36.18	36.66	74.00	-37.34	Peak
1840.000	41.66	25.48	4.88	36.30	35.72	74.00	-38.28	Peak
2060.000	39.99	26.57	5.03	36.44	35.15	74.00	-38.85	Peak
2595.000	39.13	27.80	5.58	36.87	35.64	74.00	-38.36	Peak
3410.000	37.33	28.64	6.78	37.32	35.43	74.00	-38.57	Peak


Vertical:

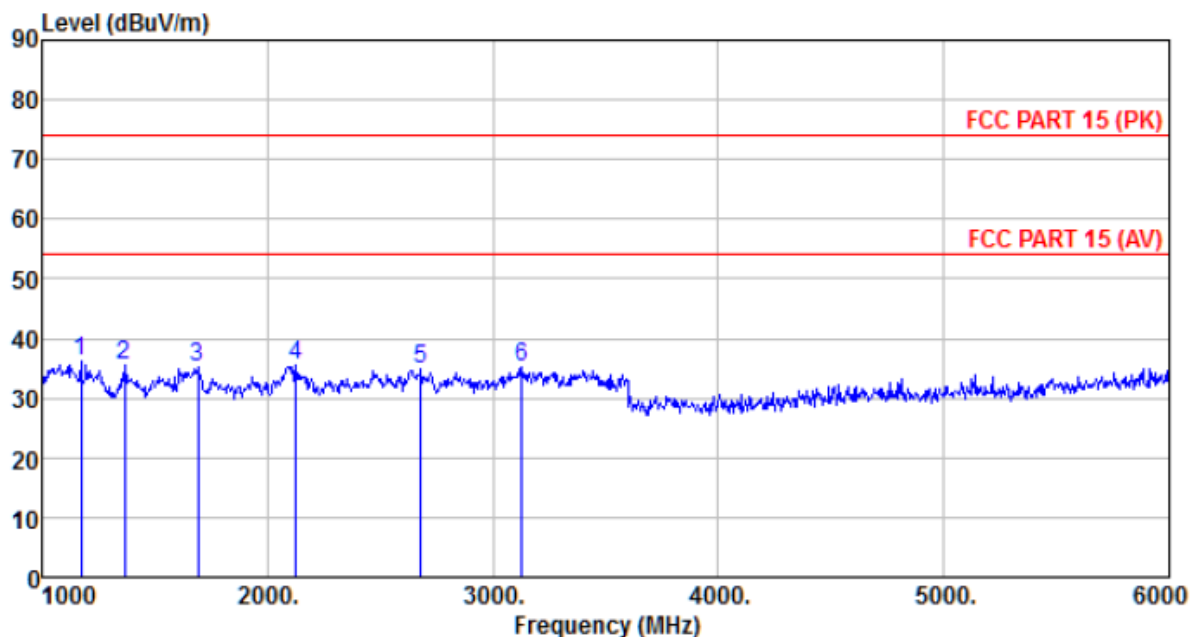


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1175.000	42.31	25.20	4.45	35.90	36.06	74.00	-37.94	Peak
1365.000	41.19	25.67	4.59	36.01	35.44	74.00	-38.56	Peak
1690.000	41.52	24.96	4.80	36.22	35.06	74.00	-38.94	Peak
2125.000	39.57	27.24	5.10	36.49	35.42	74.00	-38.58	Peak
2680.000	38.17	28.08	5.65	36.94	34.96	74.00	-39.04	Peak
3130.000	37.43	28.82	6.21	37.24	35.22	74.00	-38.78	Peak


8. Photographs of Test Configuration

Conducted Emission Test View

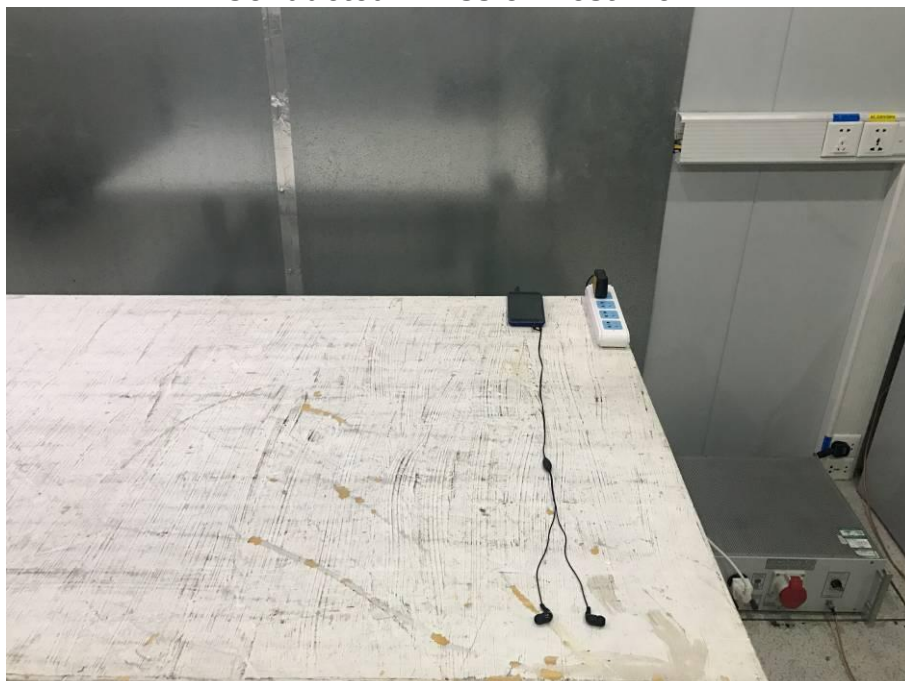

Radiated Emission Test View

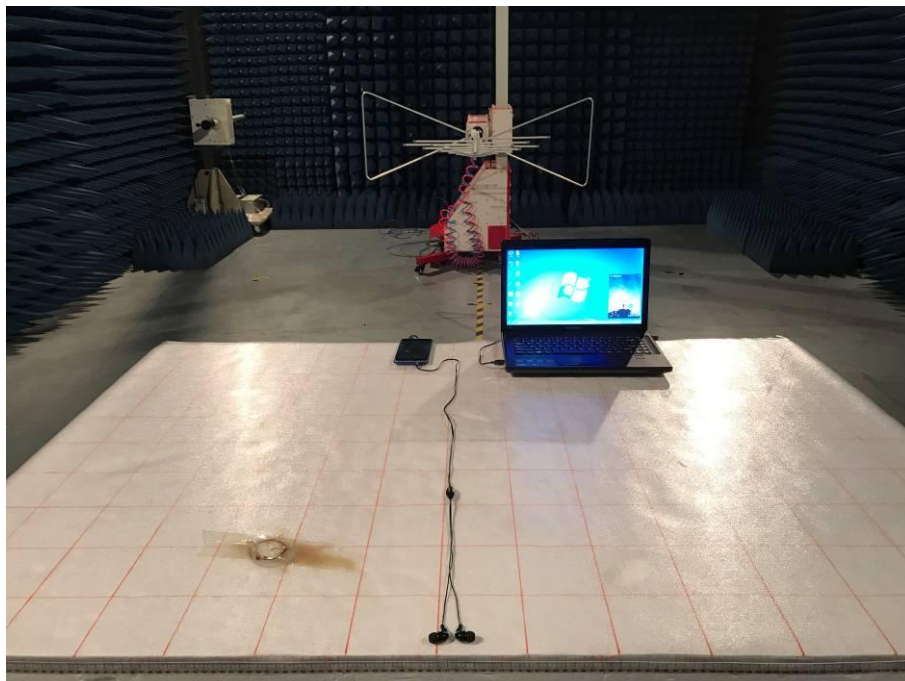

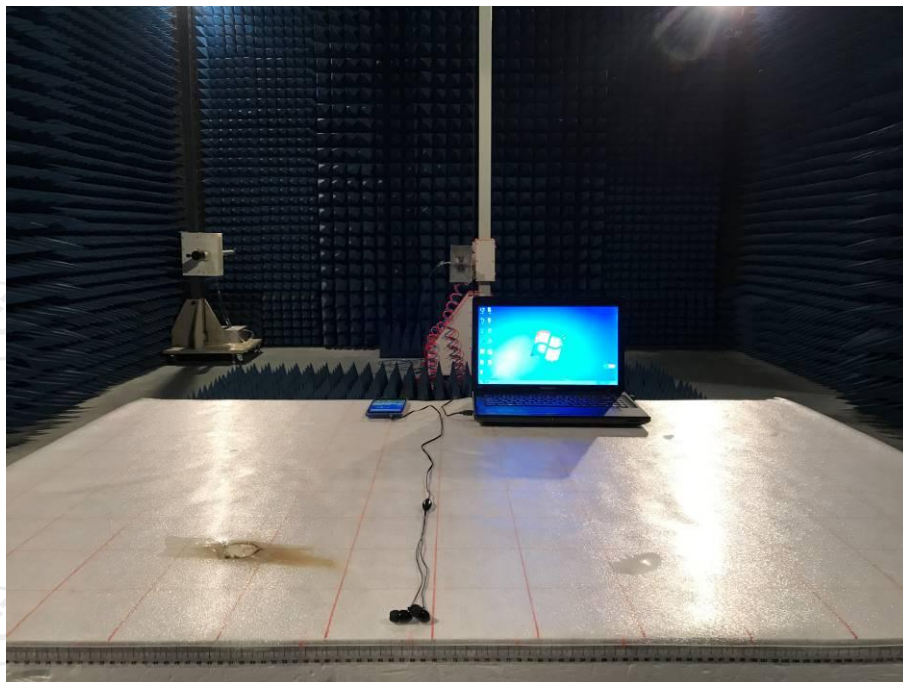



9. Photographs of EUT












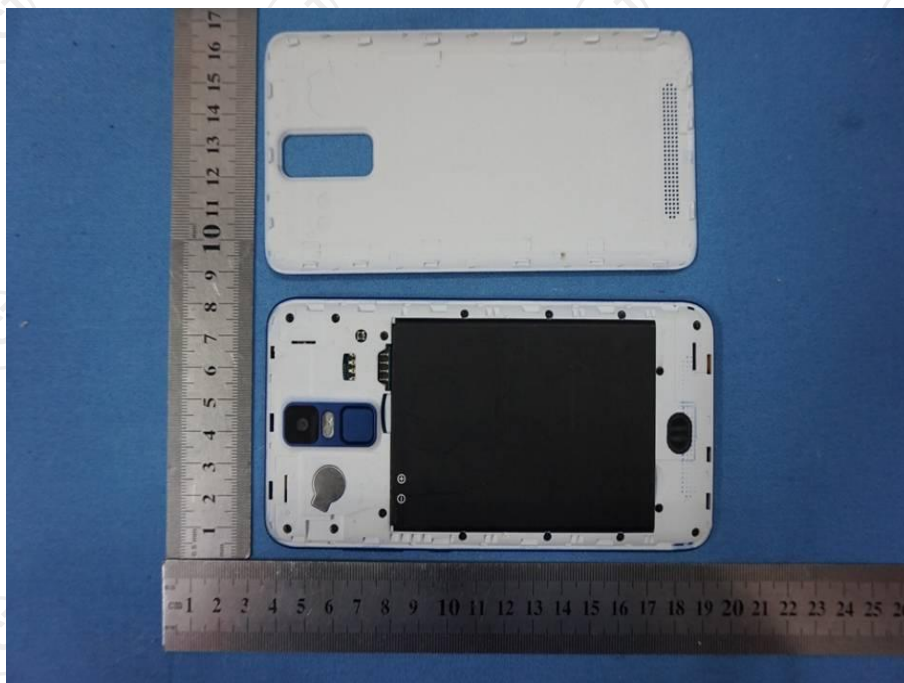


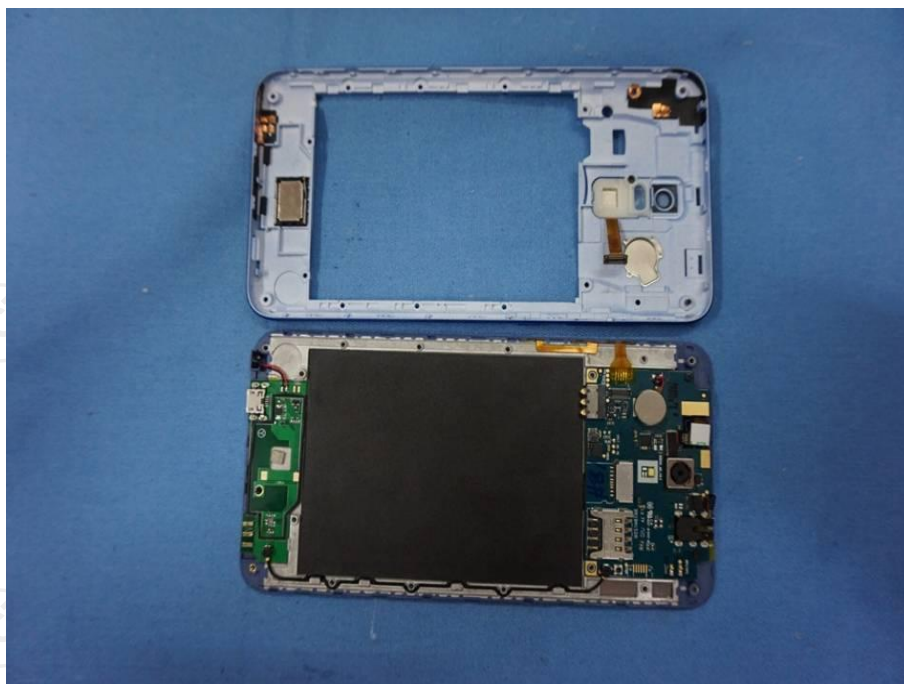

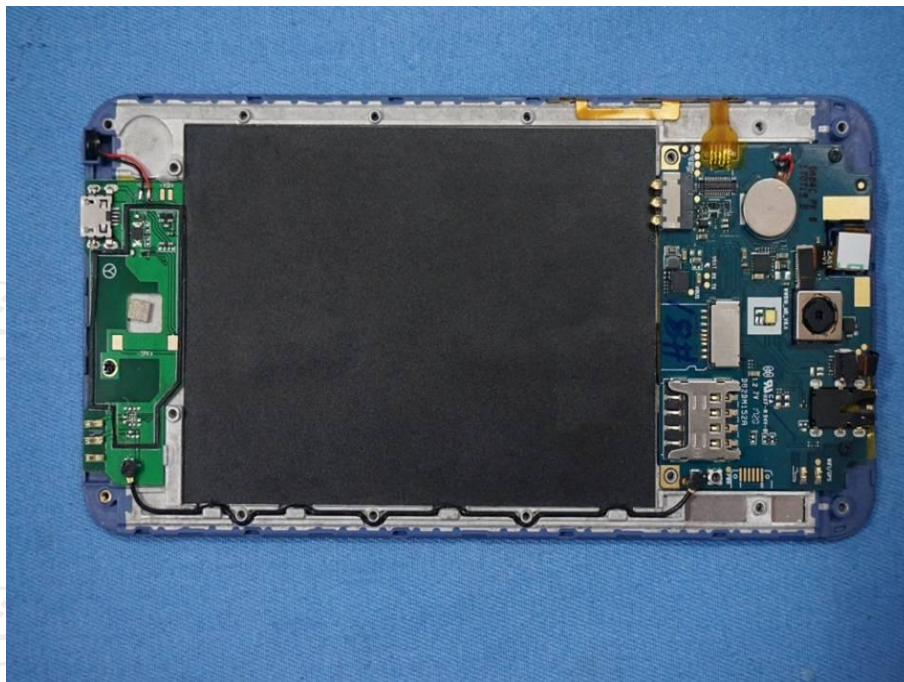

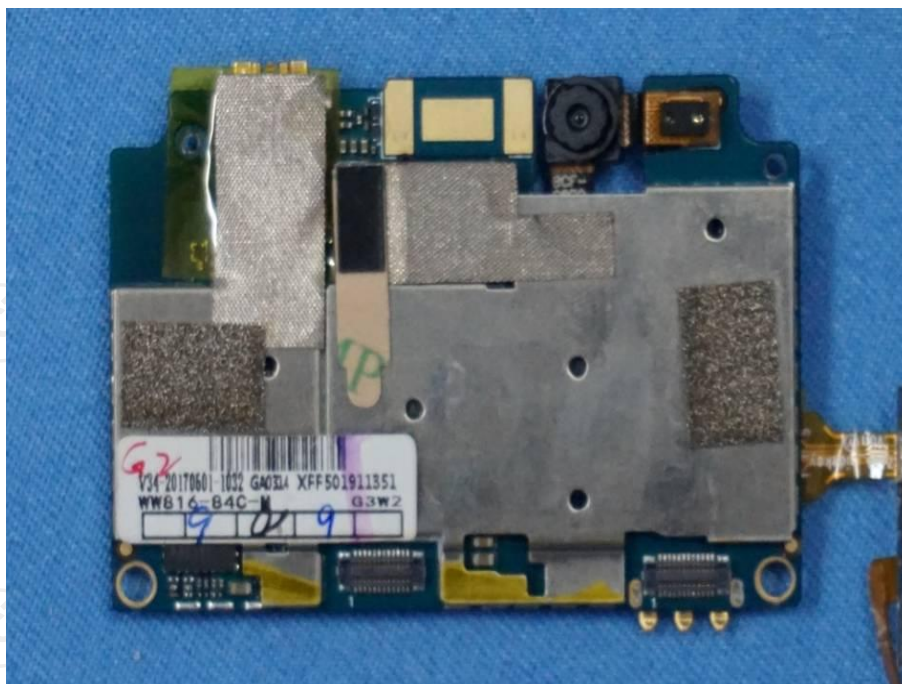

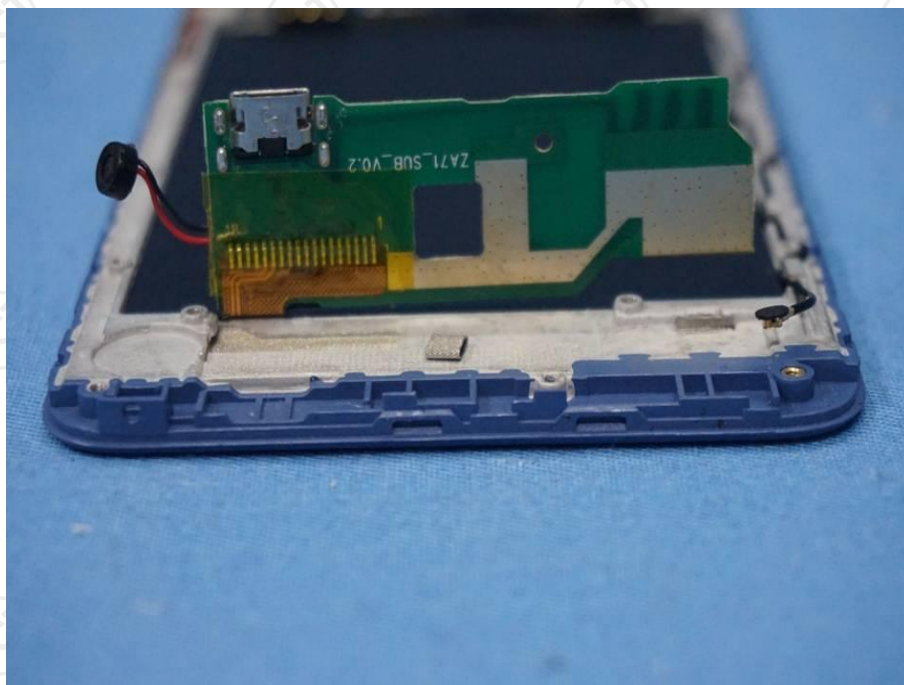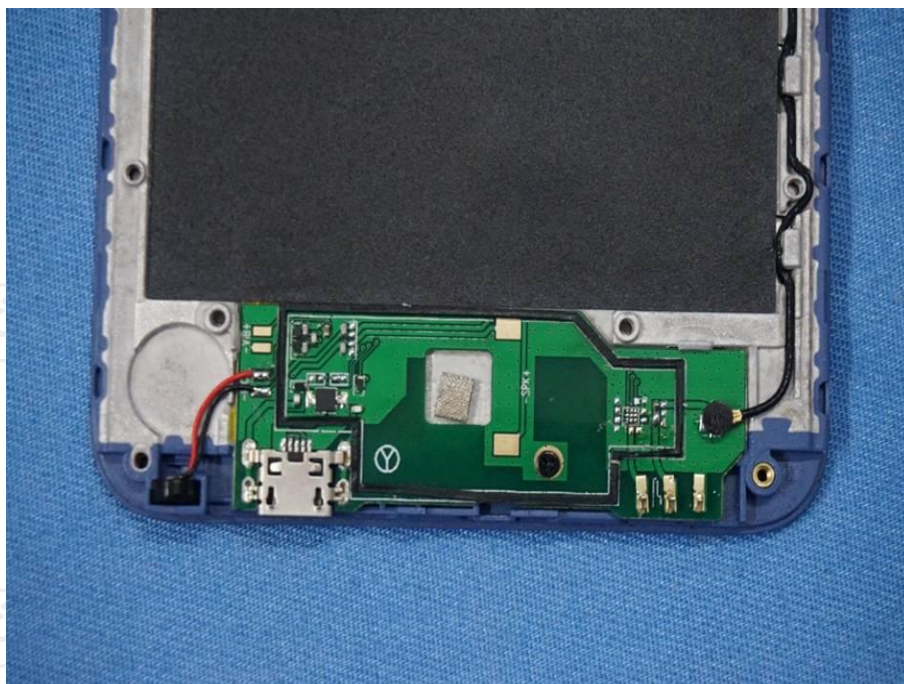

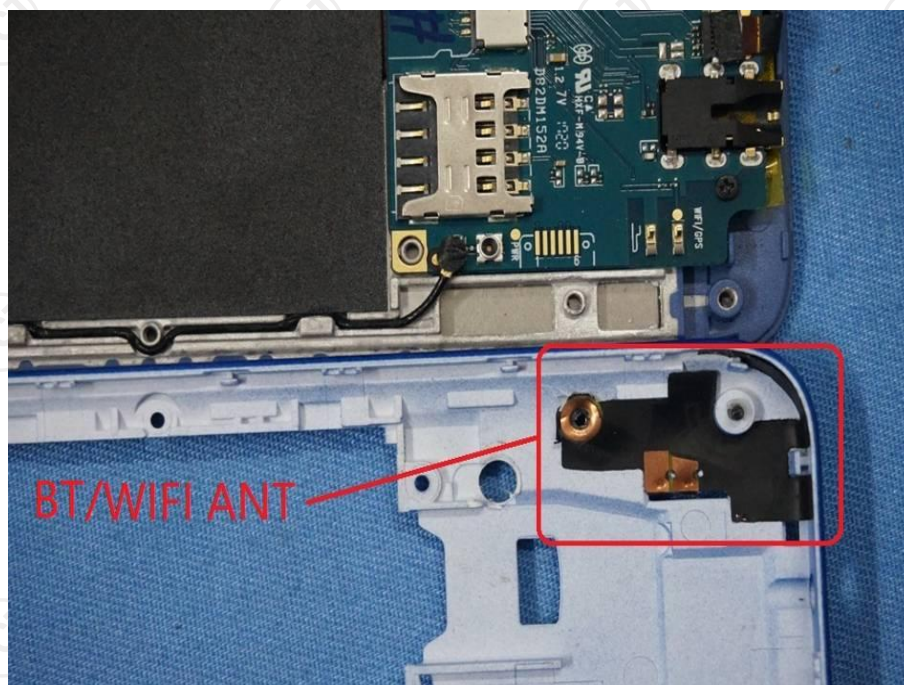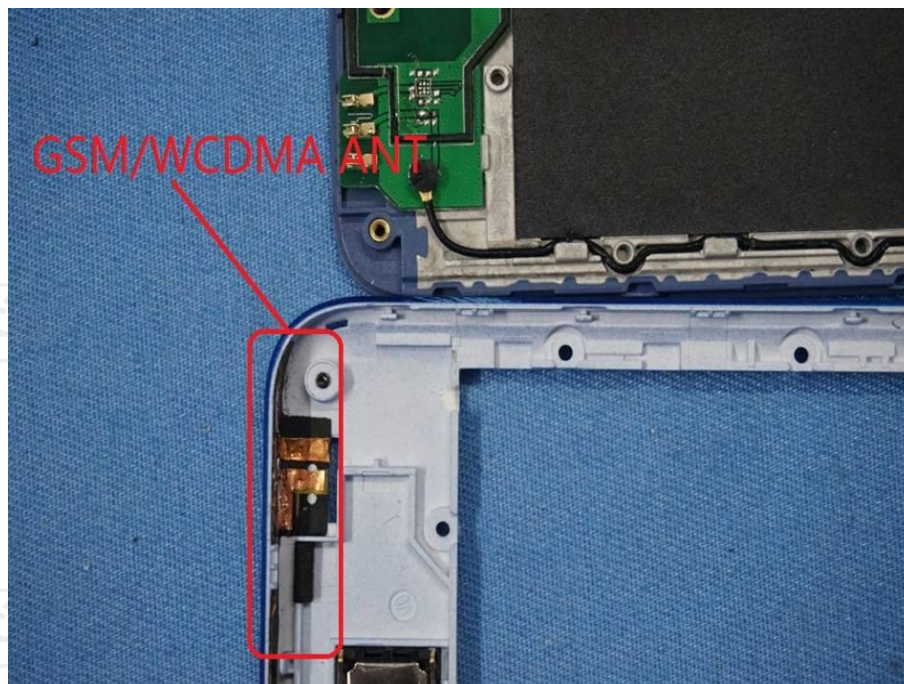



*****END OF REPORT*****