

TEST REPORT

Product : TouchLock BT XL
Trade mark : BIO-key
Model/Type reference : BL1209
Serial Number : N/A
Report Number : EED32J00175905
FCC ID : 2AIKJ-BL
Date of Issue : Oct. 27, 2017
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

BIO-key Hong Kong Limited
1806, 18/F, Tower Two, Lippo Centre, 89 Queensway Hong Kong

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom chen

Tom chen (Test Project)

Compiled by:

Mill chen

Mill chen (Project Engineer)

Reviewed by:

Kevin Yang

Kevin yang (Reviewer)

Approved by:

Sheek Luo

Sheek Luo (Lab supervisor)

Date:

Oct. 27, 2017

Check No.: 1022565636



2 Version

Version No.	Date	Description
00	Oct. 27, 2017	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
Radiated Spurious Emissions	47 CFR Part 15Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample and the sample information are provided by the client.

Model No.: BL1209, BL0509

This test report (Ref. No.: EED32J00175905) is only valid with the original test report (Ref. No.: EED32J00175901).

According to the declaration from the applicant, the RF portion of model BL0509 and model BL1209 is the same, the RF radio Frequency of the two models is without any change, only the color, the size of motor, the capacity of battery, the size of structure and some peripheral circuit layout or parameter(for example, the capacity of C1 for BL1209 is 1uF, for BL0509 is 0.1 uF) are different.

Therefore in this report AC Power Line Conducted Emission, Conducted Peak Output Power and Radiated Spurious emissions were fully retested on model BL1209 and shown the data in this report, other tests please refer to original report EED32J00175901.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 TEST FACILITY	8
6.7 DEVIATION FROM STANDARDS	8
6.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	12
Appendix A): Conducted Peak Output Power	13
Appendix B): AC Power Line Conducted Emission	15
Appendix C): Radiated Spurious Emissions	18
PHOTOGRAPHS OF TEST SETUP	23
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	25

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

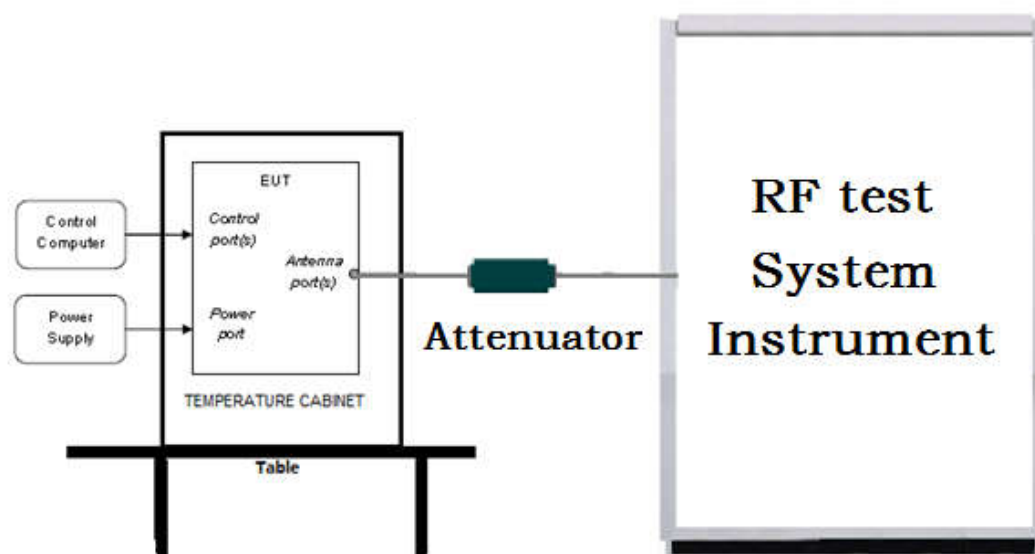

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

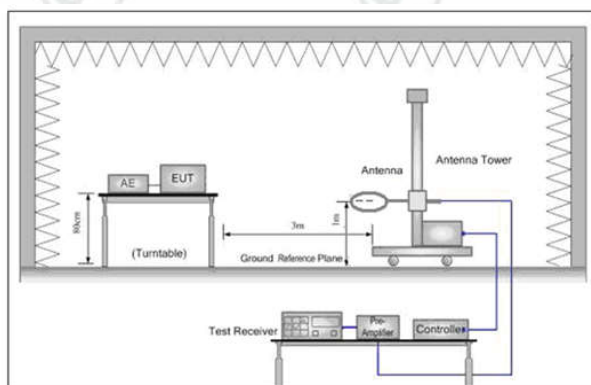


Figure 1. Below 30MHz

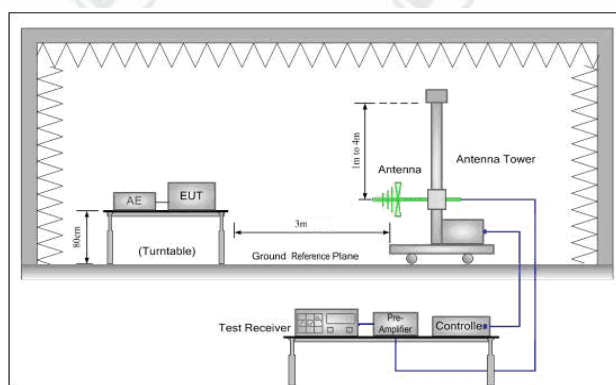


Figure 2. 30MHz to 1GHz


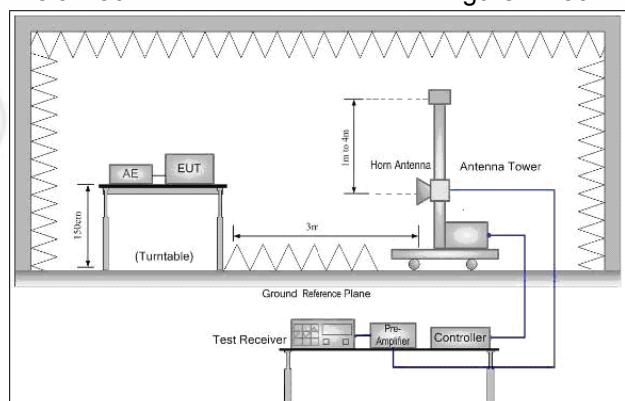


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

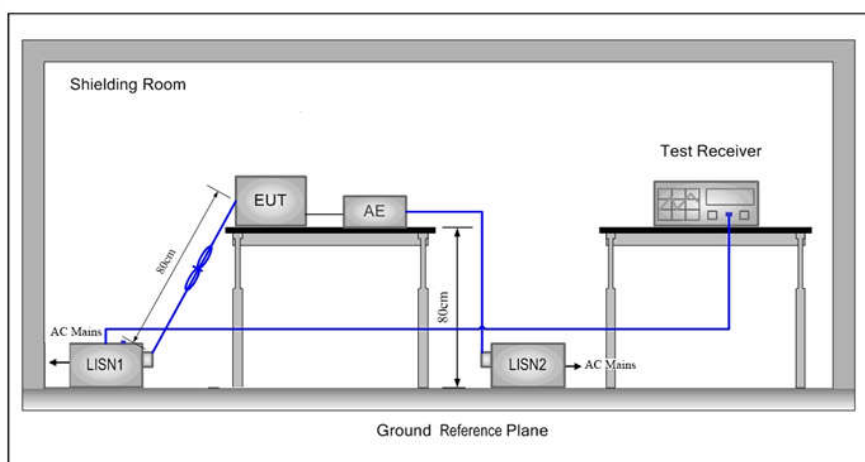

5.2 Test Environment

Operating Environment:	
Temperature:	25°C
Humidity:	51% RH
Atmospheric Pressure:	1010 mbar

5.3 Test Condition

Test channel:

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK	2402MHz ~2480 MHz	Channel 1	Channel 20	Channel 40
		2402MHz	2440MHz	2480MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

6 General Information

6.1 Client Information

Applicant:	BIO-key Hong Kong Limited
Address of Applicant:	1806, 18/F, Tower Two, Lippo Centre, 89 Queensway, Hong Kong
Manufacturer:	TOP LEADER ELECTRONIC (SHEN ZHEN) CO., LTD.
Address of Manufacturer:	No.9 NanXin Road, NanLing Village Community, NanWan Street Office, LongGang District, ShenZhen, Guangdong, China
Factory:	TOP LEADER ELECTRONIC (SHEN ZHEN) CO., LTD.
Address of Factory:	No.9 NanXin Road, NanLing Village Community, NanWan Street Office, LongGang District, ShenZhen, Guangdong, China

6.2 General Description of EUT

Product Name:	TouchLock BT XL
Model No.(EUT):	BL1209
Trade mark:	BIO-key
EUT Supports Radios application:	BT 4.1 Signal mode
Power Supply:	DC 5V by USB port DC 3.7V by battery
Sample Received Date:	Aug. 14, 2017
Sample tested Date:	Aug. 14, 2017 to Oct. 27, 2017

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.1
Modulation Type:	GFSK
Hardware Version:	5.0 (manufacturer declare)
Software Version:	29 (manufacturer declare)
Test Power Grade:	6
Test Software of EUT:	BLUENRG_GUI.exe
Antenna Type:	Integral
Antenna Gain:	0.49dBi
Test Voltage:	DC 3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	FCC ID	Supplied by
AE1	AC/DC adapter	Apple	A1385	N/A	CTI

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

Test location

The test site a is located on *Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China*.

Test site at Centre Testing International Group Co., Ltd has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014.

The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

FCC Designation No.: CN1164

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-14-2017	03-13-2018
Signal Generator	Keysight	N5182B	MY53051549	03-14-2017	03-13-2018
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	TTF20120439	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	003	01-11-2017	01-10-2018
DC Power	Keysight	E3642A	MY54436035	03-14-2017	03-13-2018
BT&WI-FI Automatic control	R&S	OSP120	101374	03-14-2017	03-13-2018
RF control unit	JS Tonscend	JS0806-2	158060006	03-14-2017	03-13-2018

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-14-2017	06-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
LISN	R&S	ENV216	100098	06-13-2017	06-12-2018
LISN	schwarzbeck	NNLK8121	8121-529	06-13-2017	06-12-2018
Voltage Probe	R&S	ESH2-Z3	--	06-13-2017	06-12-2018
Current Probe	R&S	EZ17	100106	06-13-2017	06-12-2018
ISN	TESEQ GmbH	ISN T800	30297	02-23-2017	02-22-2018

Radiated Emission					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2017	05-22-2018
Microwave Preamplifier	Agilent	8449B	3008A02425	02-16-2017	02-15-2018
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	07-30-2016	07-28-2018
Spectrum Analyzer	R&S	FSP40	100416	06-13-2017	06-12-2018
Receiver	R&S	ESCI	100435	06-14-2017	06-13-2018
Multi device Controller	matur	NCD/070/10711112	---	01-11-2017	01-10-2018
LISN	schwarzbeck	NNBM8125	81251547	06-13-2017	06-12-2018
LISN	schwarzbeck	NNBM8125	81251548	06-13-2017	06-12-2018
Signal Generator	Agilent	E4438C	MY45095744	03-14-2017	03-13-2018
Signal Generator	Keysight	E8257D	MY53401106	03-14-2017	03-13-2018
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-08-2017	05-07-2018
Cable line	Fulai(7M)	SF106	5219/6A	01-11-2017	01-10-2018
Cable line	Fulai(6M)	SF106	5220/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5216/6A	01-11-2017	01-10-2018
Cable line	Fulai(3M)	SF106	5217/6A	01-11-2017	01-10-2018
High-pass filter	Sinoscite	FL3CX03WG18NM1 2-0398-002	---	01-11-2017	01-10-2018
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA09CL12 -0395-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX01CA08CL12 -0393-001	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA04CL12 -0396-002	---	01-11-2017	01-10-2018
band rejection filter	Sinoscite	FL5CX02CA03CL12 -0394-001	---	01-11-2017	01-10-2018

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix B)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix C)


Appendix A): Conducted Peak Output Power

Test Result

Mode	Channel	Conduct Peak Power[dBm]	Verdict
BLE	LCH	0.148	PASS
BLE	MCH	-0.275	PASS
BLE	HCH	-0.922	PASS

Test Graphs

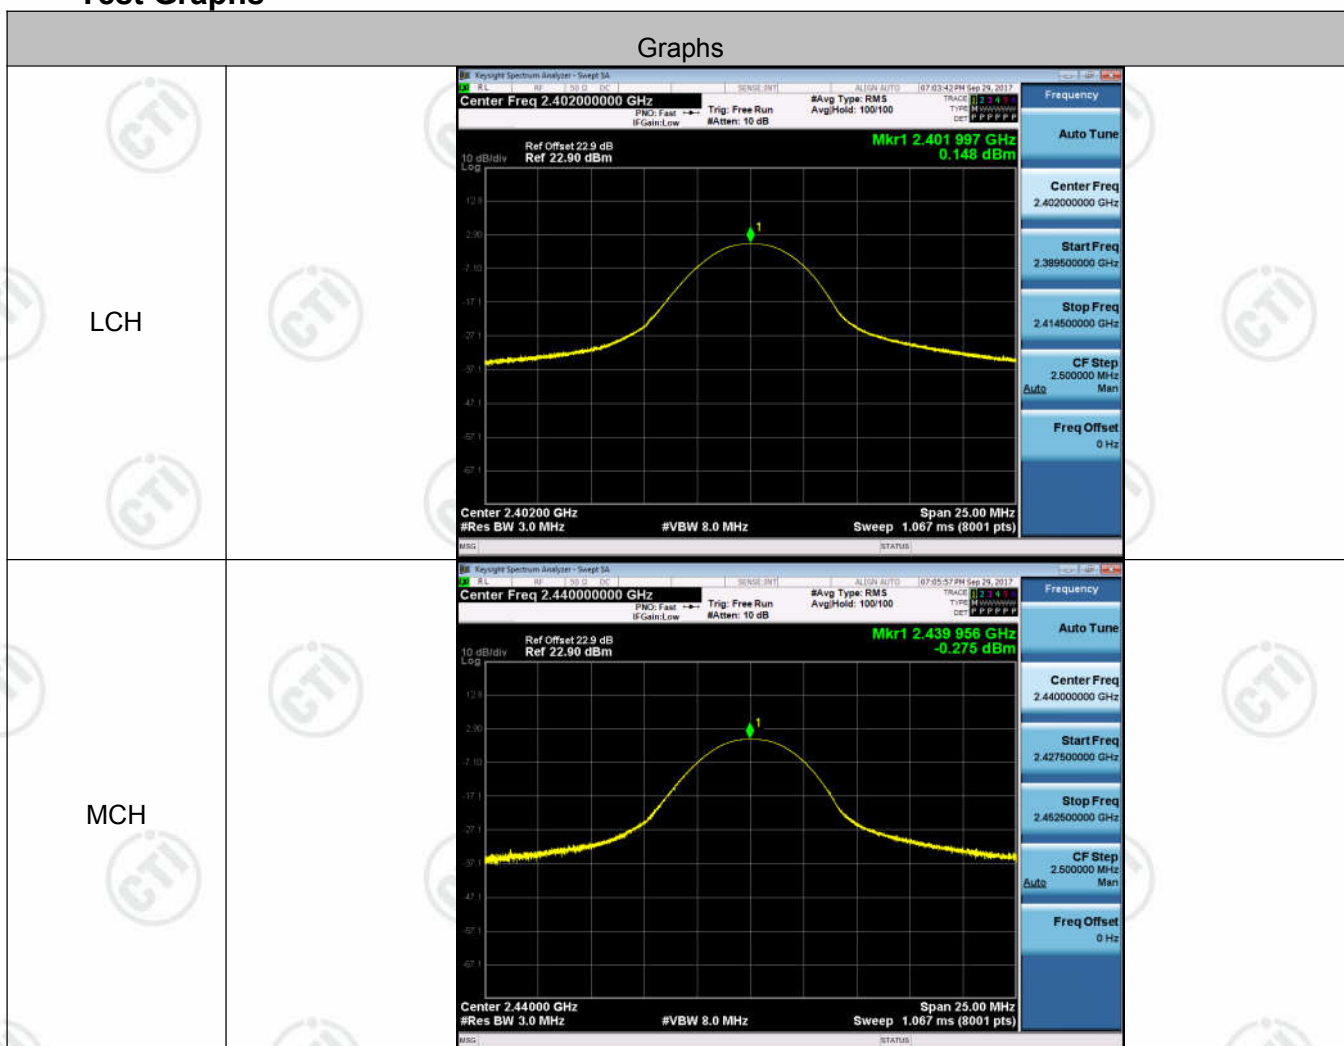

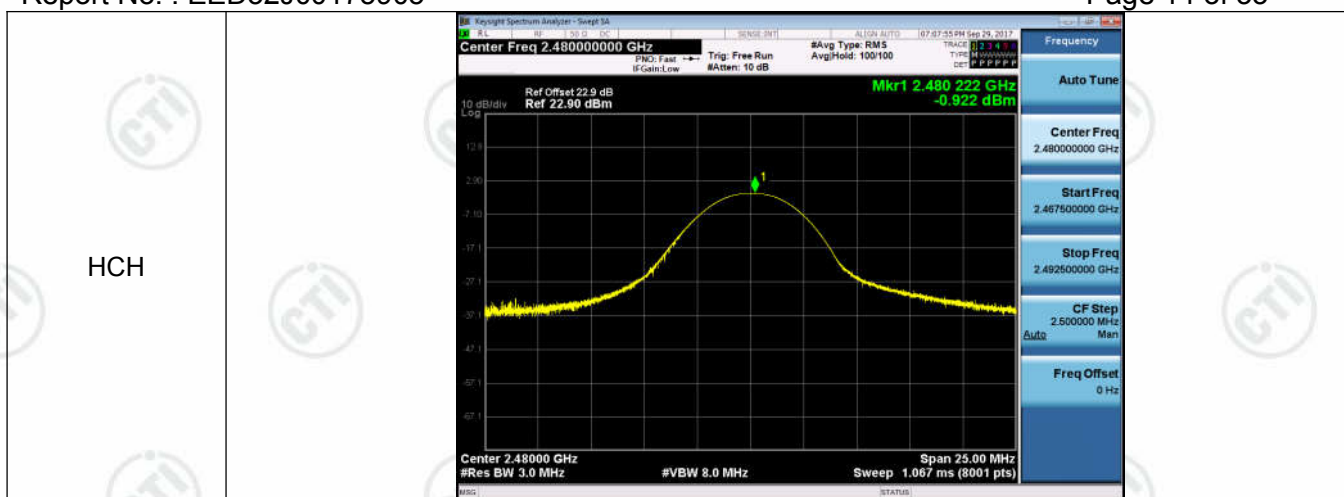

Appendix B): AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:


80.0 dBuV

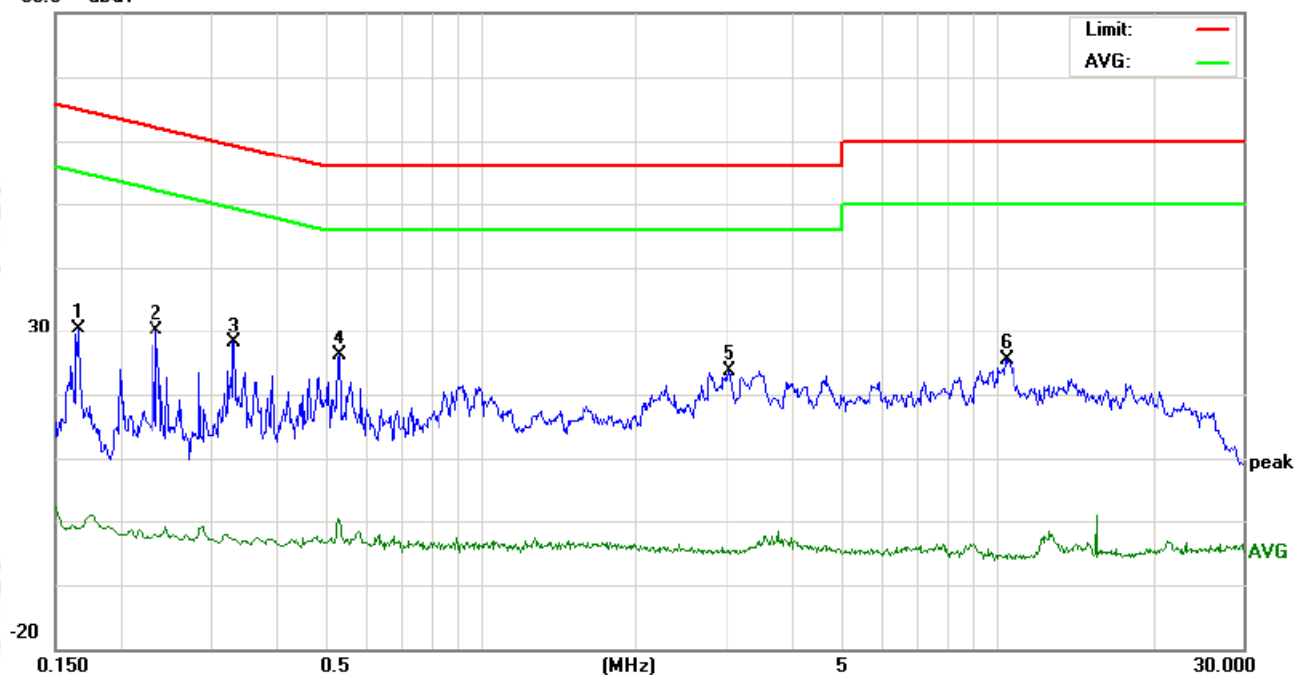

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1660	20.55	8.33	-10.9	9.75	30.30	18.08	-1.23	65.15	55.15	-47.07	-56.38	P	
2	0.2353	20.51	9.02	-11.9	9.73	30.24	18.75	-2.24	62.26	52.26	-43.51	-54.50	P	
3	0.3301	18.76	7.21	-12.6	9.77	28.53	16.98	-2.89	59.45	49.45	-42.47	-52.34	P	
4	0.5340	16.52	5.54	-12.4	9.72	26.24	15.26	-2.76	56.00	46.00	-40.74	-48.76	P	
5	3.0379	13.87	1.32	-14.2	9.69	23.56	11.01	-4.52	56.00	46.00	-44.99	-50.52	P	
6	10.5059	15.60	4.27	-15.3	9.81	25.41	14.08	-5.49	60.00	50.00	-45.92	-55.49	P	

Neutral Line:

80.0 dBuV

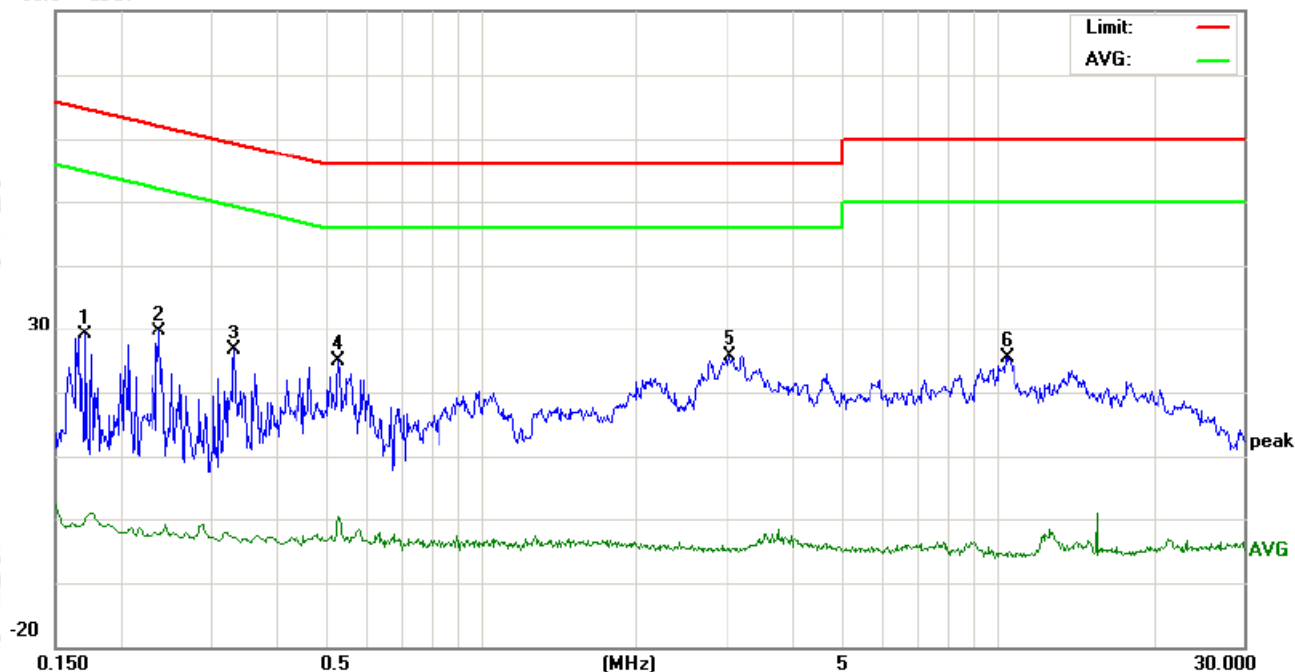

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1711	19.48	8.35	-11.8	9.74	29.22	18.09	-2.11	64.90	54.90	-46.81	-57.01	P	
2	0.2379	19.80	8.13	-12.0	9.74	29.54	17.87	-2.30	62.17	52.17	-44.30	-54.47	P	
3	0.3321	16.97	5.36	-12.6	9.77	26.74	15.13	-2.90	59.40	49.40	-44.27	-52.30	P	
4	0.5299	15.06	3.54	-12.2	9.72	24.78	13.26	-2.52	56.00	46.00	-42.74	-48.52	P	
5	3.0379	15.87	4.76	-14.2	9.69	25.56	14.45	-4.52	56.00	46.00	-41.55	-50.52	P	
6	10.5059	15.60	4.38	-15.3	9.81	25.41	14.19	-5.49	60.00	50.00	-45.81	-55.49	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix C): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				


Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Horizontal

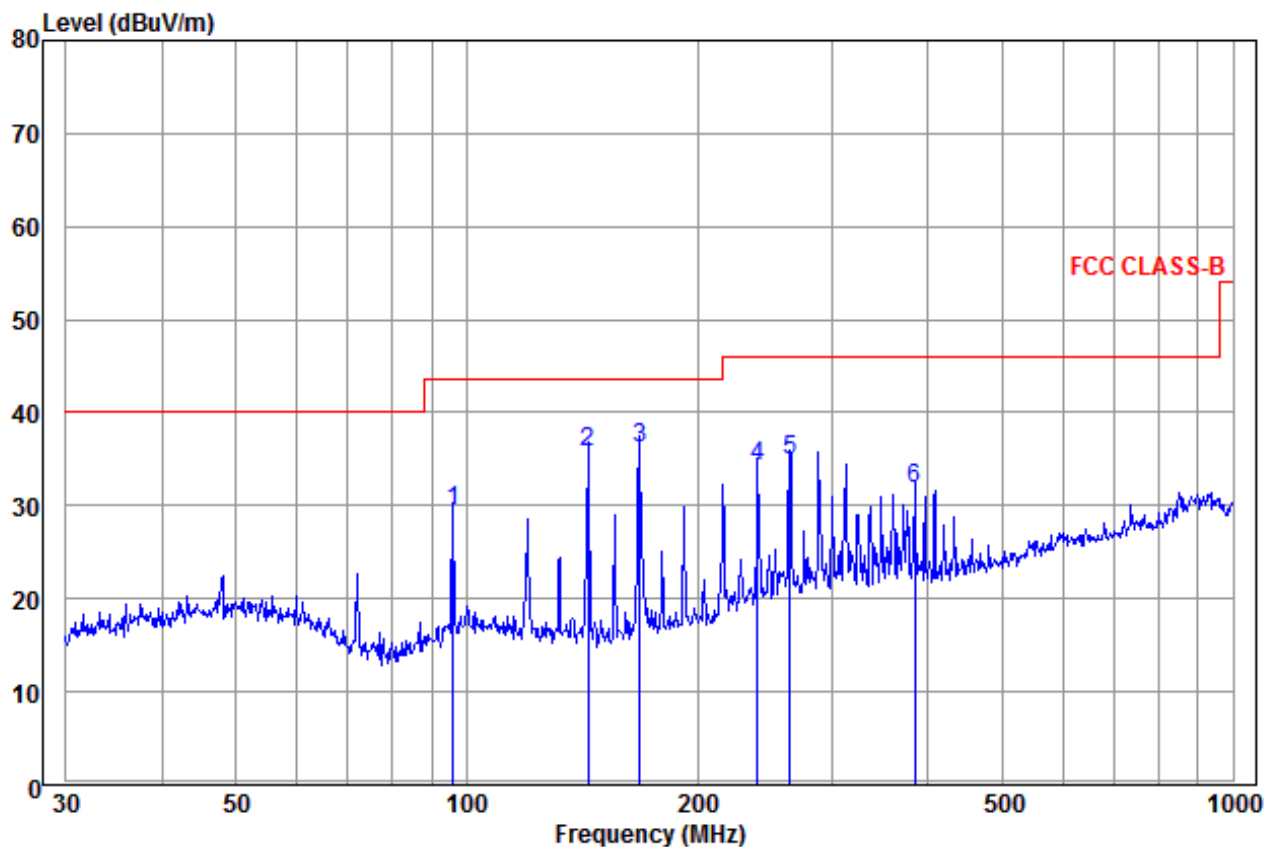

	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	96.099	11.90	0.52	16.98	29.40	43.50	-14.10	Horizontal	QP
2	143.830	9.18	0.61	26.02	35.81	43.50	-7.69	Horizontal	QP
3 pp	168.414	9.89	0.81	25.55	36.25	43.50	-7.25	Horizontal	QP
4	239.987	12.40	1.30	20.46	34.16	46.00	-11.84	Horizontal	QP
5	263.819	12.84	1.26	20.83	34.93	46.00	-11.07	Horizontal	QP
6	383.932	14.95	1.32	15.55	31.82	46.00	-14.18	Horizontal	QP

Test mode:	Transmitting	Vertical
------------	--------------	----------

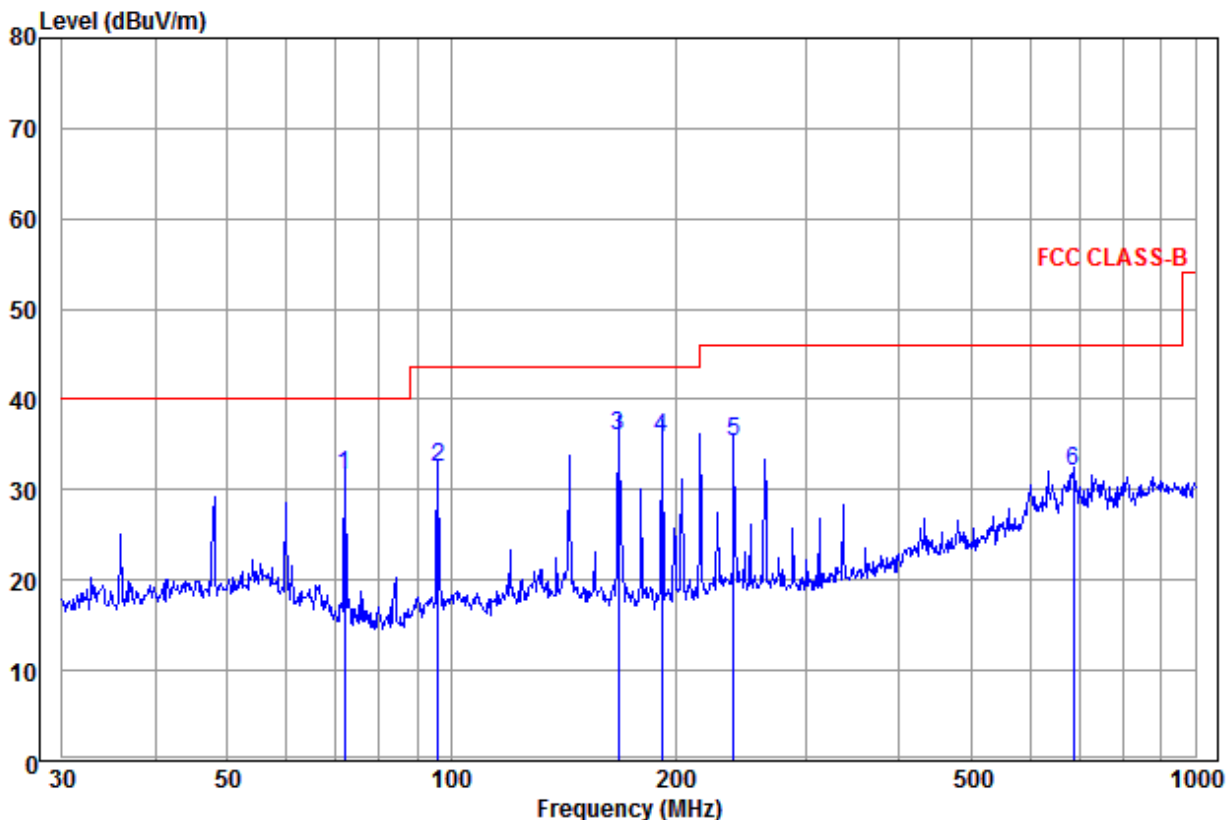

	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	71.832	10.05	0.28	21.25	31.58	40.00	-8.42	Vertical	QP
2	96.099	11.90	0.52	20.01	32.43	43.50	-11.07	Vertical	QP
3 pp	167.824	9.85	0.80	25.42	36.07	43.50	-7.43	Vertical	QP
4	191.745	11.10	1.03	23.60	35.73	43.50	-7.77	Vertical	QP
5	239.987	12.40	1.30	21.51	35.21	46.00	-10.79	Vertical	QP
6	687.151	19.05	1.97	11.03	32.05	46.00	-13.95	Vertical	QP

Transmitter Emission above 1GHz

Worse case mode:		GFSK		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1450.122	30.77	2.22	44.06	45.13	34.06	74.00	-39.94	Pass	H
1860.992	31.49	2.70	43.62	45.92	36.49	74.00	-37.51	Pass	H
4086.459	33.02	4.40	44.60	45.18	38.00	74.00	-36.00	Pass	H
4804.000	34.69	5.98	44.60	43.36	39.43	74.00	-34.57	Pass	H
7206.000	36.42	6.97	44.77	43.65	42.27	74.00	-31.73	Pass	H
9608.000	37.88	6.98	45.58	42.16	41.44	74.00	-32.56	Pass	H
1506.563	30.88	2.30	43.99	46.33	35.52	74.00	-38.48	Pass	V
1846.834	31.47	2.69	43.64	46.22	36.74	74.00	-37.26	Pass	V
3225.037	33.40	3.57	44.67	45.98	38.28	74.00	-35.72	Pass	V
4804.000	34.69	5.98	44.60	41.59	37.66	74.00	-36.34	Pass	V
7206.000	36.42	6.97	44.77	44.01	42.63	74.00	-31.37	Pass	V
9608.000	37.88	6.98	45.58	41.45	40.73	74.00	-33.27	Pass	V

Worse case mode:		GFSK		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1413.674	30.70	2.17	44.10	45.31	34.08	74.00	-39.92	Pass	H
1809.605	31.41	2.65	43.67	46.50	36.89	74.00	-37.11	Pass	H
2890.665	33.43	3.31	44.59	46.00	38.15	74.00	-35.85	Pass	H
4880.000	34.85	6.13	44.60	41.82	38.20	74.00	-35.80	Pass	H
7320.000	36.43	6.85	44.87	42.52	40.93	74.00	-33.07	Pass	H
9760.000	38.05	7.12	45.55	41.96	41.58	74.00	-32.42	Pass	H
1381.656	30.63	2.13	44.14	45.35	33.97	74.00	-40.03	Pass	V
1786.719	31.37	2.62	43.70	46.82	37.11	74.00	-36.89	Pass	V
3104.217	33.51	3.46	44.69	46.61	38.89	74.00	-35.11	Pass	V
4880.000	34.85	6.13	44.60	42.66	39.04	74.00	-34.96	Pass	V
7320.000	36.43	6.85	44.87	42.38	40.79	74.00	-33.21	Pass	V
9760.000	38.05	7.12	45.55	41.08	40.70	74.00	-33.30	Pass	V

Worse case mode:		GFSK		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1420.890	30.71	2.18	44.09	45.23	34.03	74.00	-39.97	Pass	H
1805.005	31.40	2.64	43.68	45.47	35.83	74.00	-38.17	Pass	H
3216.838	33.41	3.56	44.68	44.18	36.47	74.00	-37.53	Pass	H
4960.000	35.02	6.29	44.60	41.12	37.83	74.00	-36.17	Pass	H
7440.000	36.45	6.73	44.97	40.83	39.04	74.00	-34.96	Pass	H
9920.000	38.22	7.26	45.52	40.09	40.05	74.00	-33.95	Pass	H
1565.200	30.99	2.37	43.92	46.90	36.34	74.00	-37.66	Pass	V
2076.259	31.88	2.89	43.61	46.06	37.22	74.00	-36.78	Pass	V
3579.815	33.11	3.87	44.64	46.67	39.01	74.00	-34.99	Pass	V
4960.000	35.02	6.29	44.60	40.92	37.63	74.00	-36.37	Pass	V
7440.000	36.45	6.73	44.97	40.62	38.83	74.00	-35.17	Pass	V
9920.000	38.22	7.26	45.52	42.07	42.03	74.00	-31.97	Pass	V

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: BL1209



Radiated emission Test Setup-1(9kHz~30MHz)



Radiated spurious emission Test Setup-2 (30MHz~1GHz)




Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions

PHOTOGRAPHS OF EUT Constructional Details


Test model No.: BL1209

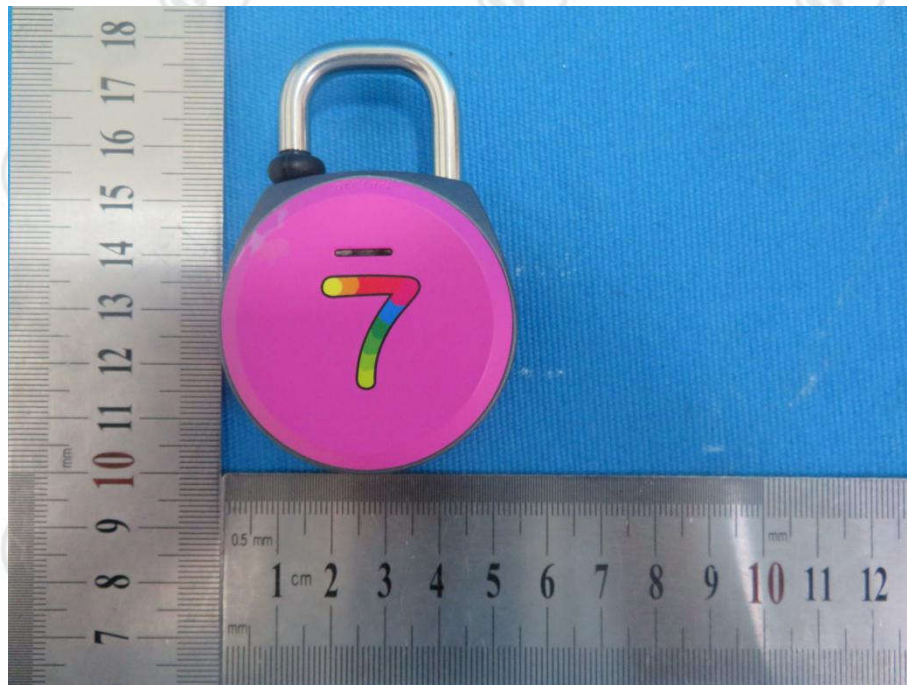


View of Product-1




View of Product-2

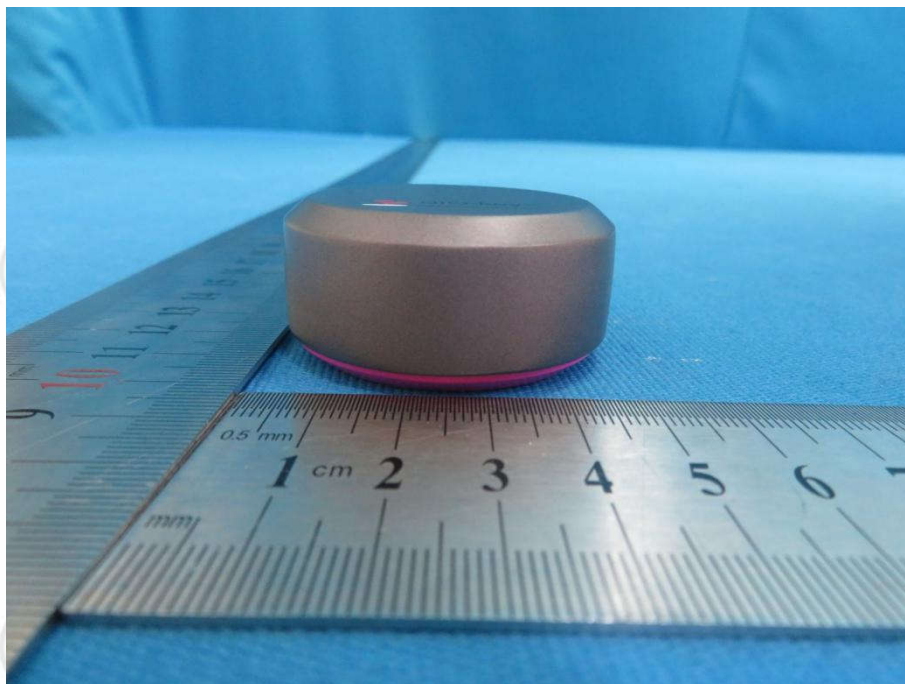


View of Product-3

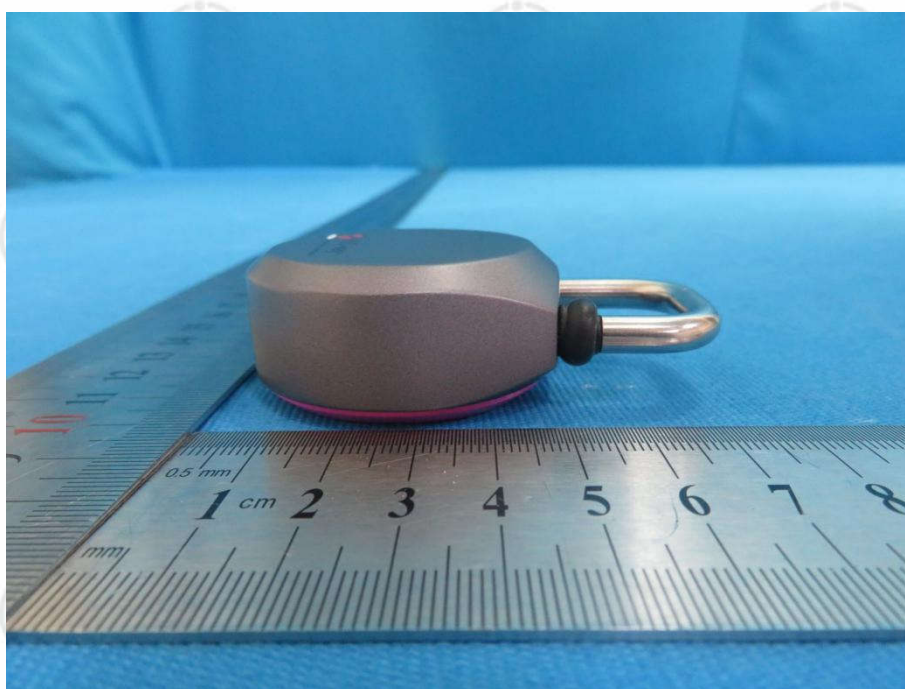


View of Product-4

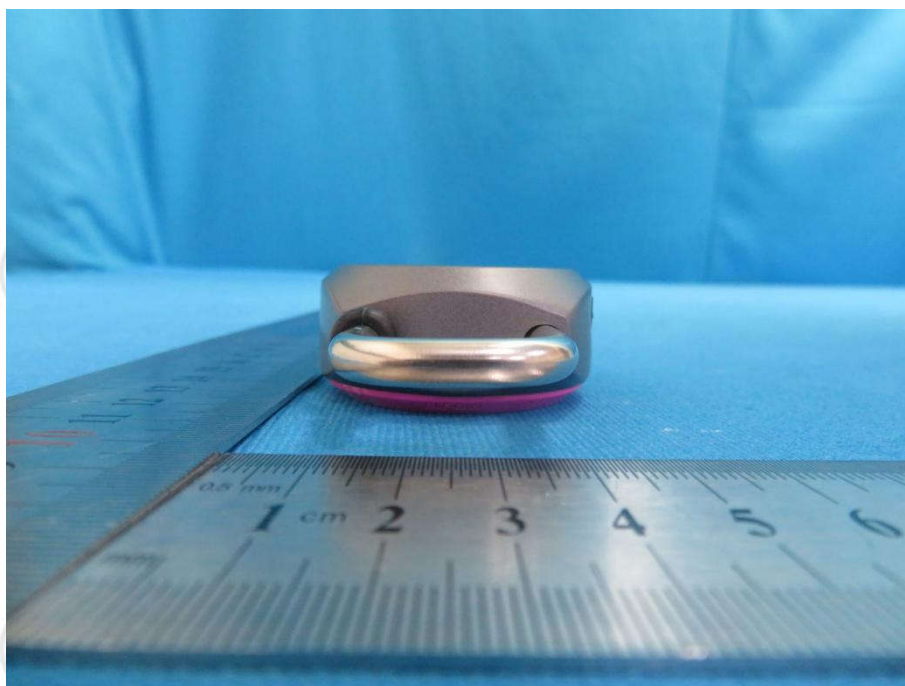


View of Product-5

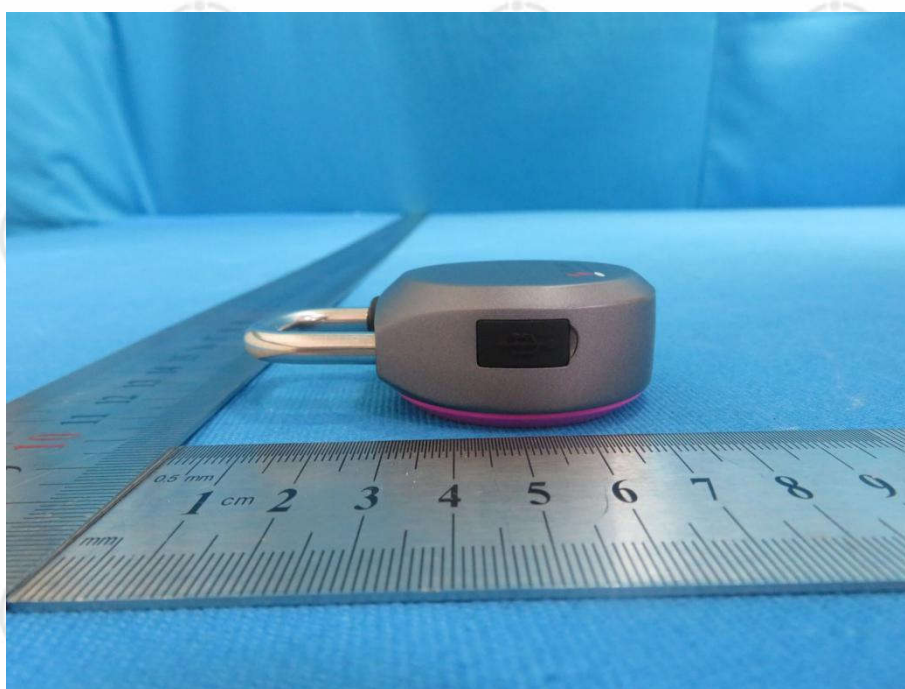


View of Product-6

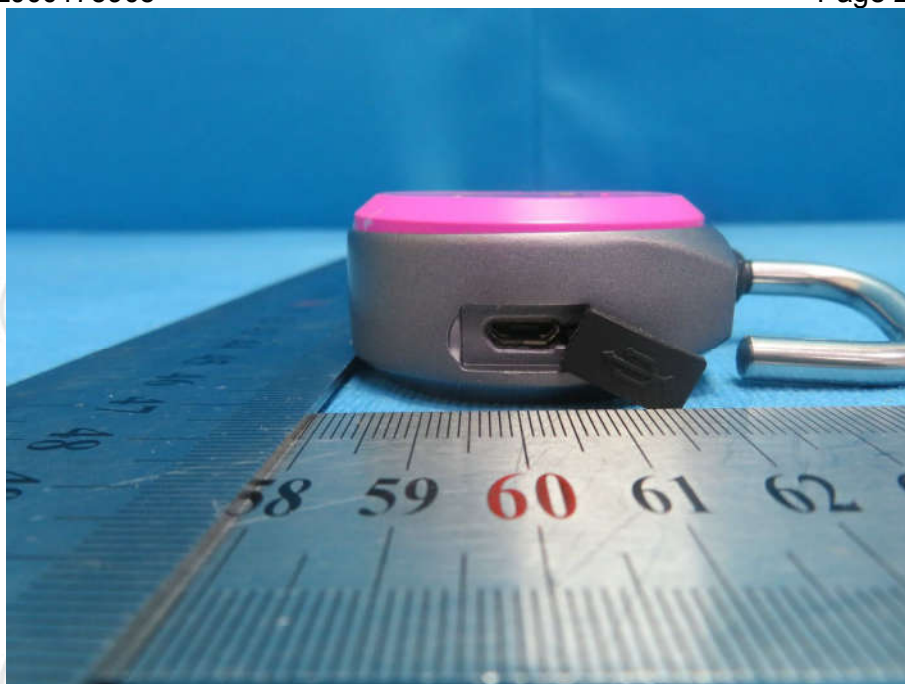


View of Product-7

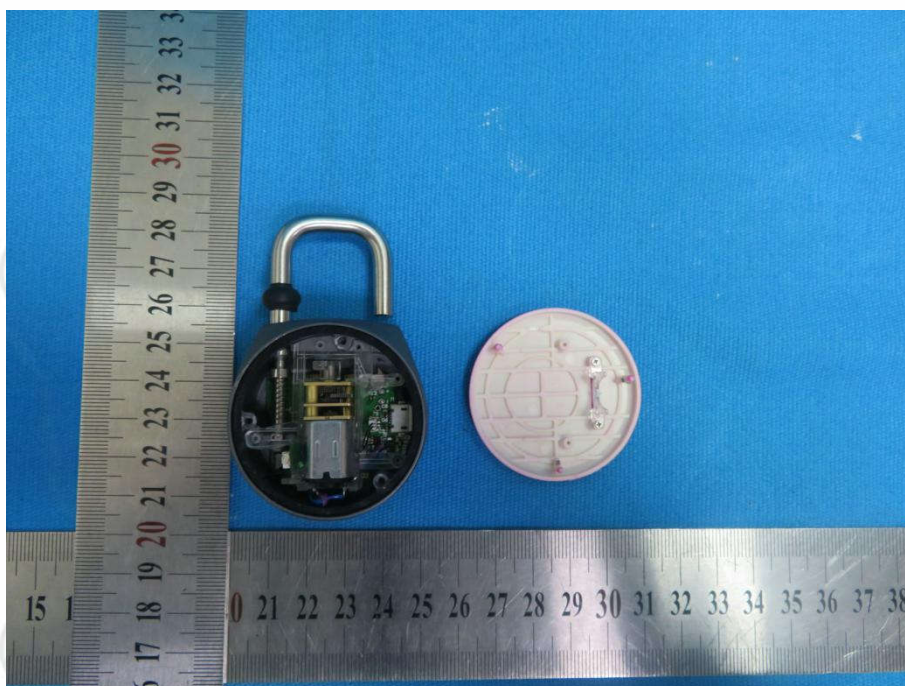


View of Product-8

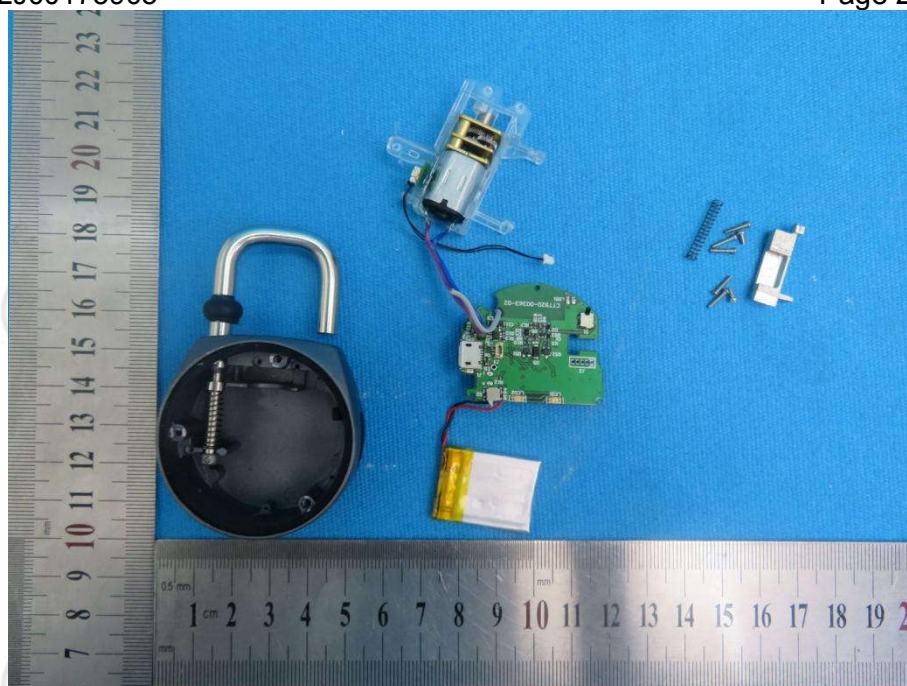


View of Product-9

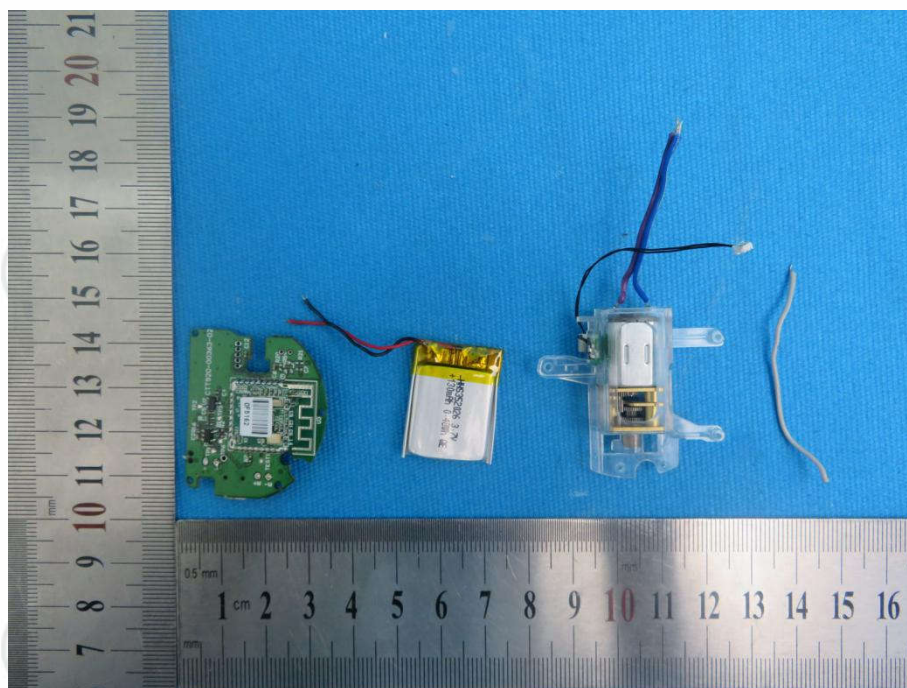


View of Product-10

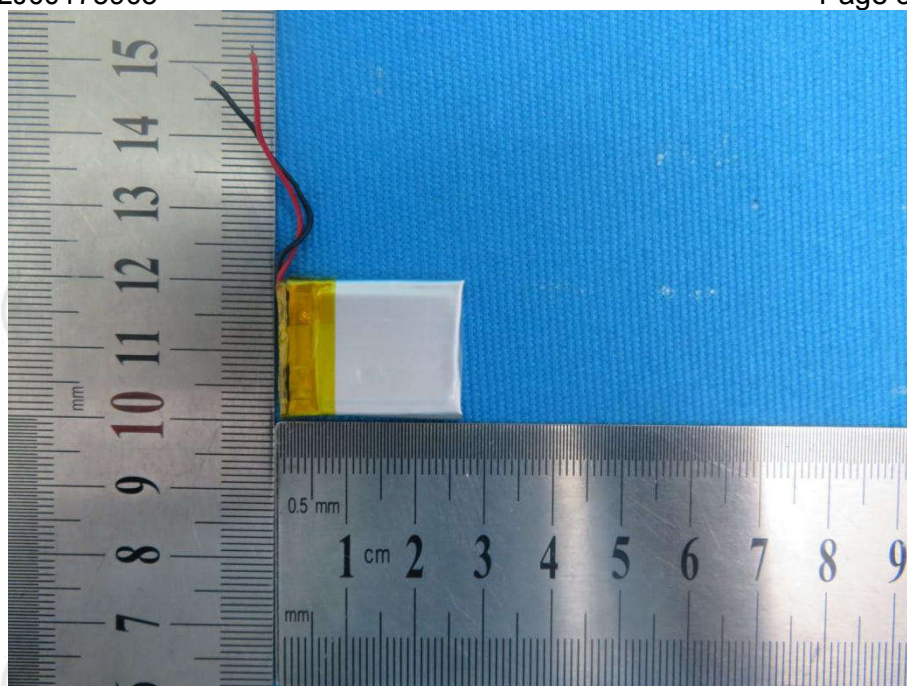


View of Product-11

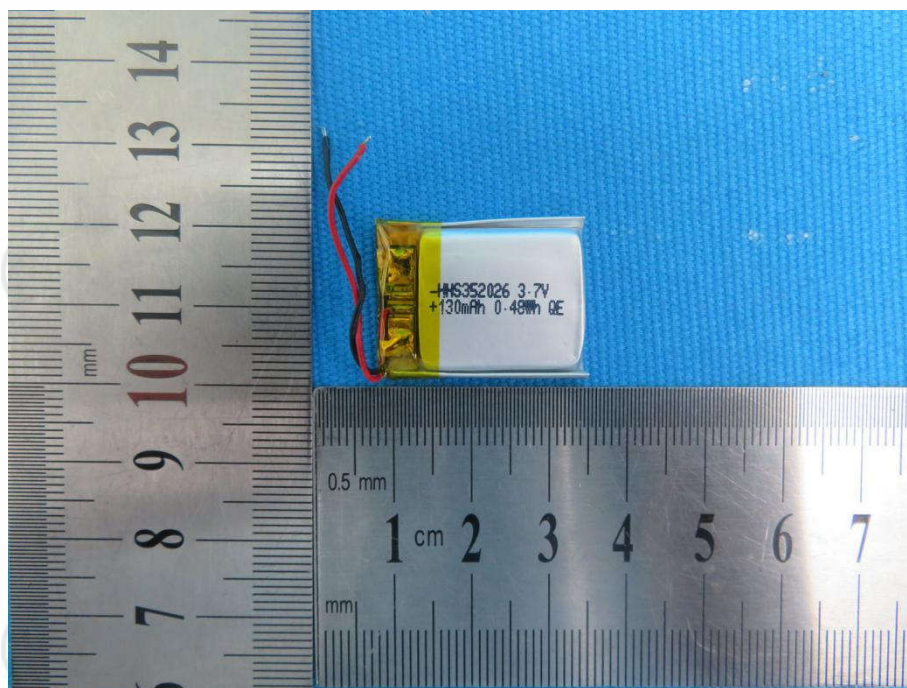


View of Product-12

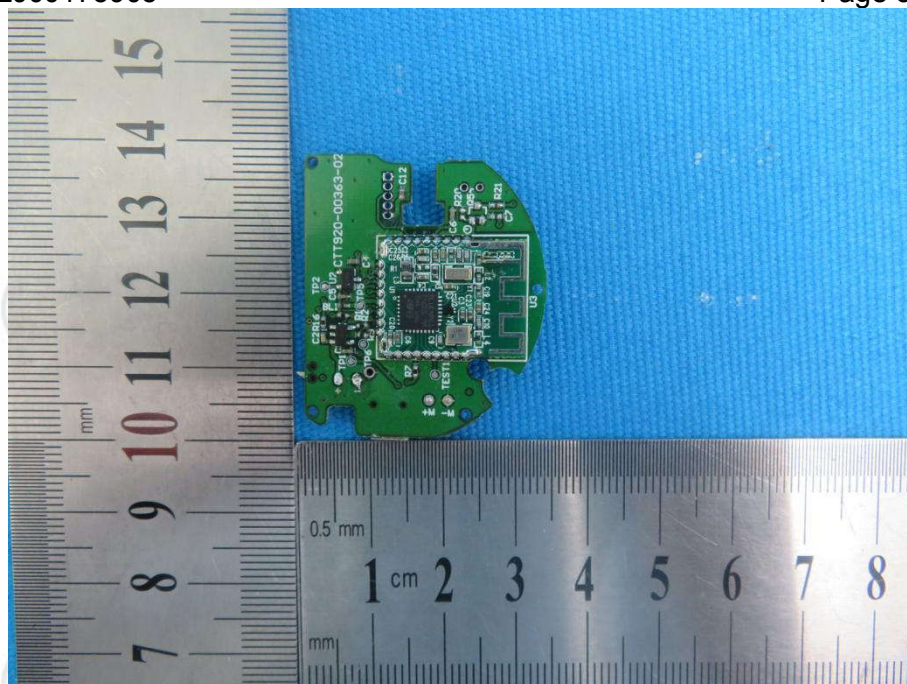


View of Product-13

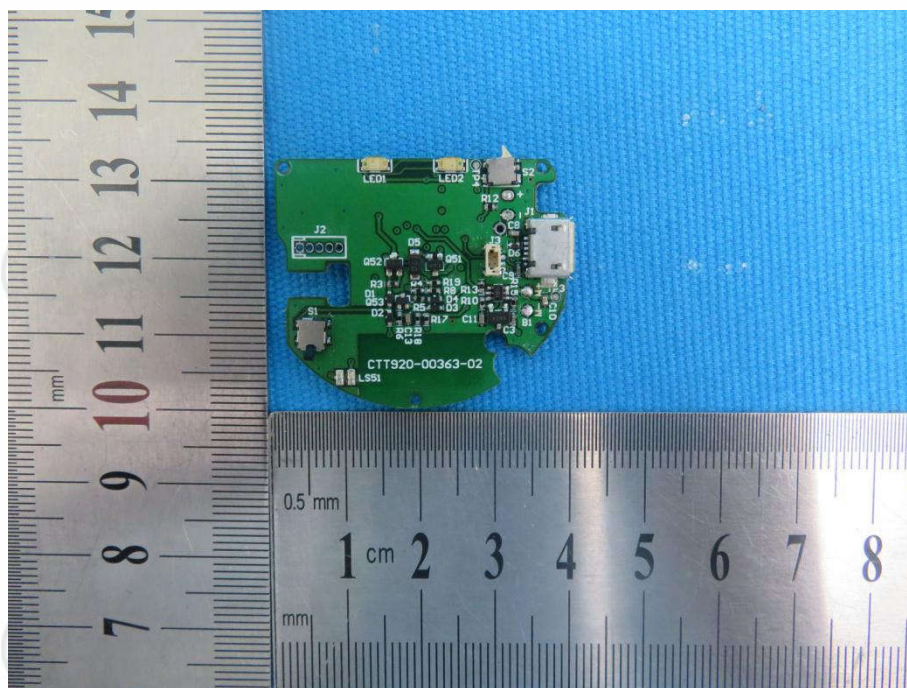


View of Product-14

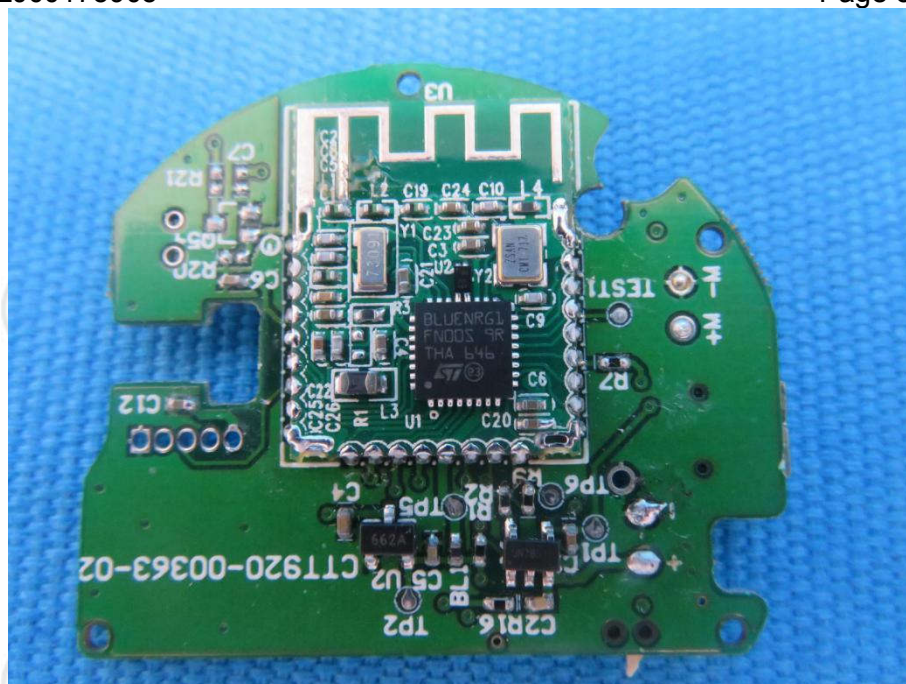


View of Product-15

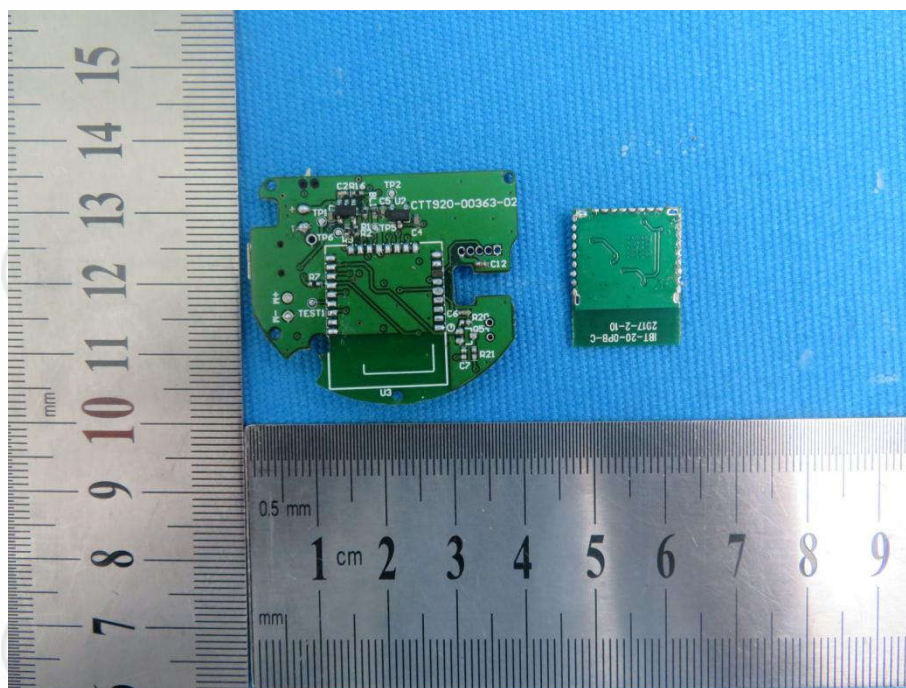

View of Product-16

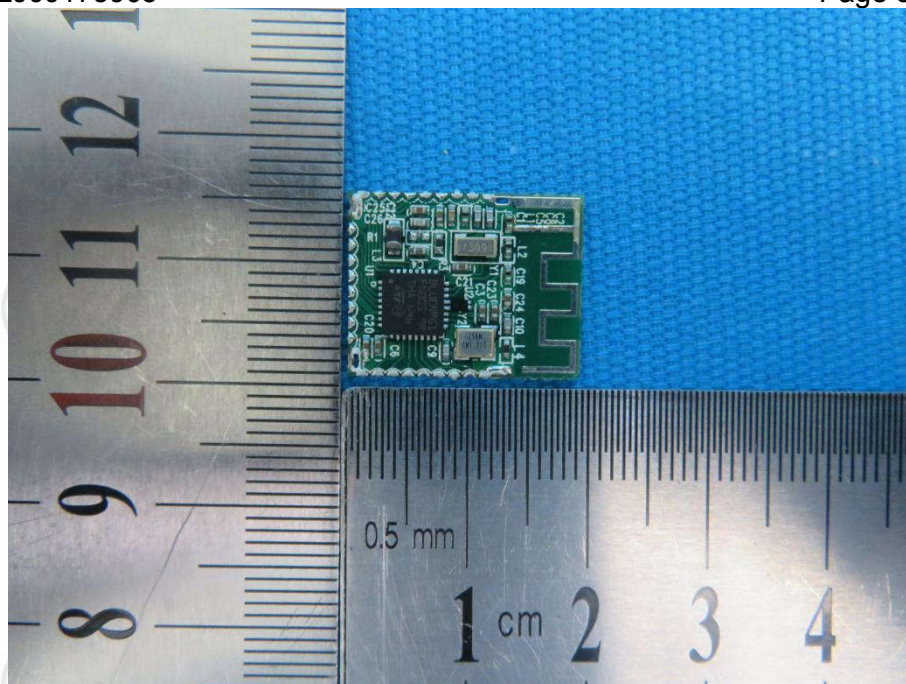

View of Product-17

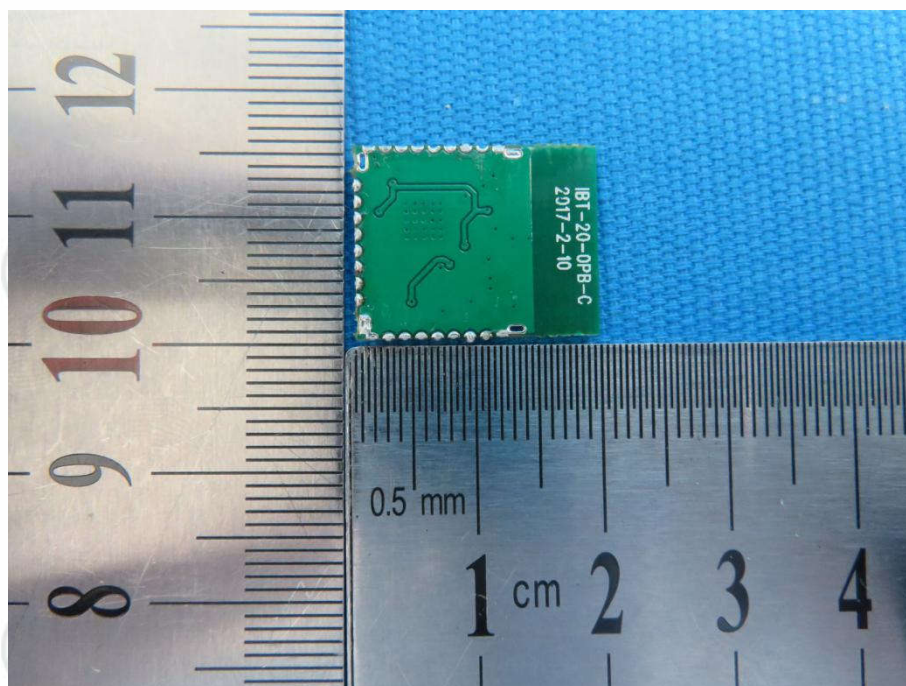

View of Product-18

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.