

TEST REPORT

Applicant Name: F5CS LTD
Address: 3500 S Dupont Hwy Ste 300 Dover Delaware 19901 United States
Report Number: 2501X06556E-RF-00D
FCC ID: 2AIKX-FWIN232HELIOS

Test Standard (s)

FCC PART 15.407

Sample Description

Product Type: TABLET PC
Model No.: FWIN232 HELIOS10
Multiple Model(s) No.: FWIN232 HELIOS12, FWIN232 HELIOS11, FWIN232 HELIOS10 PLUS, FWIN232 HELIOS10 PRO, FWIN232 HELIOS12 PLUS, FWIN232 HELIOS12 PRO
Trade Mark: Fusion5
Date Received: 2025-09-27
Issue Date: 2025-11-04

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

GaLa Liu

GaLa Liu
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
EMC Manager

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.
This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
REQUIREMENTS AND TEST PROCEDURES	12
CONDUCTED EMISSIONS	12
UNDESIRABLE EMISSION	14
EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	18
CONDUCTED TRANSMITTER OUTPUT POWER	20
POWER SPECTRAL DENSITY	21
DUTY CYCLE	22
ANTENNA REQUIREMENT	23
TEST DATA AND RESULTS	24
CONDUCTED EMISSIONS	24
UNDESIRABLE EMISSION	27
EMISSION BANDWIDTH	154
99% OCCUPIED BANDWIDTH	159
MAXIMUM CONDUCTED OUTPUT POWER	164
POWER SPECTRAL DENSITY	166
DUTY CYCLE	171
RF EXPOSURE EVALUATION	173
EUT PHOTOGRAPHS	174
TEST SETUP PHOTOGRAPHS	175

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2501X06556E-RF-00D	Original Report	2025-11-04

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	TABLET PC
Tested Model	FWIN232 HELIOS10
Multiple Model(s)	FWIN232 HELIOS12, FWIN232 HELIOS11, FWIN232 HELIOS10 PLUS, FWIN232 HELIOS10 PRO, FWIN232 HELIOS12 PLUS, FWIN232 HELIOS12 PRO
Frequency Range	5150-5250MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80
Maximum Conducted Average Output Power	12.54dBm
Modulation Technique	OFDM
Antenna Specification[#]	ANT2:1.05dBi; ANT1: 1.24dBi (provided by the applicant)
Voltage Range	DC5/9/12/15/20V from Adapter or DC 7.74V from Battery
Sample serial number	3ASD-1 for Conducted and Radiated Emissions Test 3ASD-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: P877-GAN45W Input: AC 100-240V, 50/60Hz, 1.5A Output: DC 5.0V, 3.0A, 15.0W Max or 9.0V, 3.0A, 27.0W, Max or 12.0V, 3.0A, 36.0W, Max or 15.0V, 3.0A, 45.0W, Max or 20.0V, 2.25A, 45.0W, Max PPS: DC 5.0-11.0V, 4.5A, 45.0W, Max
Note: The Multiple models are electrically identical with the test model except for model name and sales channel. Please refer to the declaration letter [#] for more detail, which was provided by manufacturer.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
RF output power, conducted		0.86dB(k=2, 95% level of confidence)
Unwanted Emission, conducted		1.60dB(k=2, 95% level of confidence)
Power Spectral Density		0.90dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz-150kHz	3.63dB(k=2, 95% level of confidence)
	150kHz-30MHz	3.66dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.60dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
18GHz - 40GHz		5.64dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. The device support 802.11a/n20/n40/ac20/ac40/ac80, the 802.11n20/n40 were reduced since the identical parameters with 802.11ac20/ac40.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/ac20 mode: channel 36, 40, 48 were tested;

For 802.11ac40 mode: channel 38, 46 were tested;

For 802.11ac80 mode, channel 42 was tested.

EUT Exercise Software

Exercise Software [#]	DRTU				
5150-5250 MHz Band					
Mode	Test Channels	Test Frequency (MHz)	Data rate	Power Level [#]	
				ANT 1	ANT 2
802.11a	Low	5180	6Mbps	15	9
	Middle	5200	6Mbps	15	9
	High	5240	6Mbps	15	9
802.11ac20	Low	5180	MCS0	15	9
	Middle	5200	MCS0	15	9
	High	5240	MCS0	15	9
802.11ac40	Low	5190	MCS0	15	9
	High	5230	MCS0	15	9
802.11ac80	Middle	5210	MCS0	15	9

Note 1: The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the power and PSD across all data rates bandwidths, and modulations.

Note 2: The EUT only supports the SISO mode.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	Latitude E6411	11429208686
Unknown	USB Cable(Two)	Unknown	Unknown
Unknown	HDMI Cable	Unknown	Unknown
OUPU	Receptacle	ODU-OP1606K	6971041358020
Unknown	3.5mm Audio Cable	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Detachable HDMI Cable	0.8	EUT	Notebook
Unshielded Detachable USB Cable(Two)	1.0	EUT	Notebook
Unshielded Un-Detachable Cable	1.0	Receptacle	LISN/AC Main
Unshielded Un-Detachable AC Cable	0.8	EUT	Adapter
Un-shielded Detachable Audio cable	1.2	EUT	Earphone

Block Diagram of Test Setup


For Conducted Emissions:

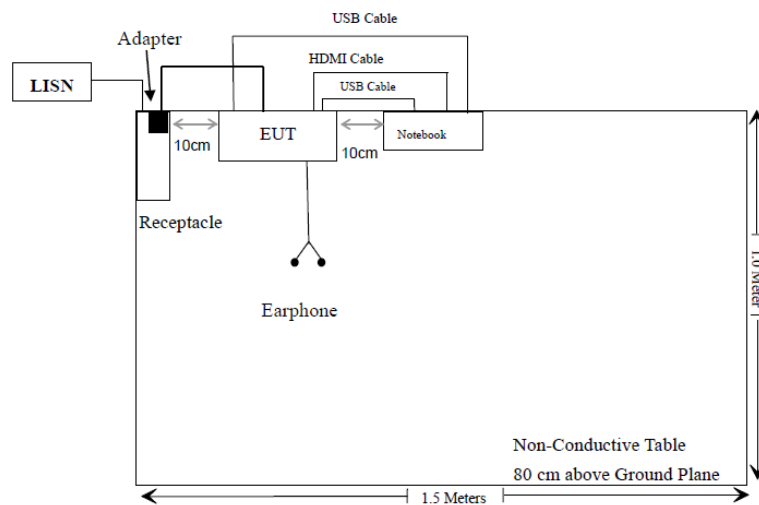

For Radiated Emissions below 1GHz:

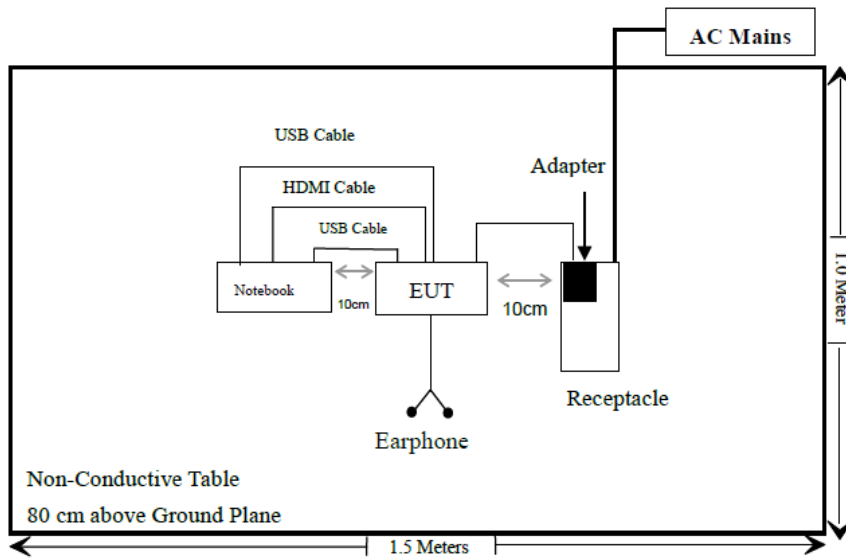

For Radiated Emissions above 1GHz:

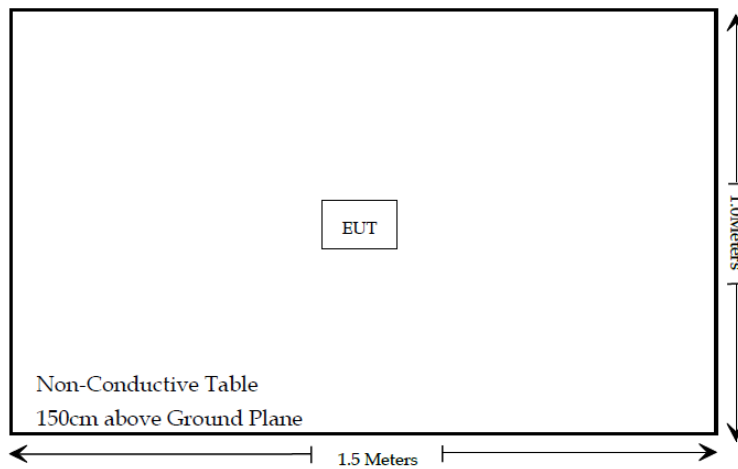

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Not Applicable
C63.10 §11.6	Duty Cycle	/

Not Applicable: The product only supports 5150-5250MHz.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Radiated Emission Test					
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A3	Cable A3	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A4	Cable A4	2025/09/08	2026/09/07
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde&Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
A.H.System	Pre-amplifier	PAM-1840VH	190	2025/09/08	2026/09/07
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
Unknown	Chamber B Cable	Cable B4	Cable B4	2025/09/17	2026/09/16
Unknown	Chamber B Cable	Cable B5	Cable B5	2025/09/17	2026/09/16
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
R&S	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
ANRITSU	Microwave peak power sensor	MA24418A	12622	2025/09/01	2026/08/31
Unknown	10dB Attenuator	Unknown	F-03-EM190	2025/06/26	2026/06/25
JD	JD Auto TestSystem	NA	1.0.0.3769	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


REQUIREMENTS AND TEST PROCEDURES

Conducted Emissions

Applicable Standard

FCC §15.207

EUT Setup

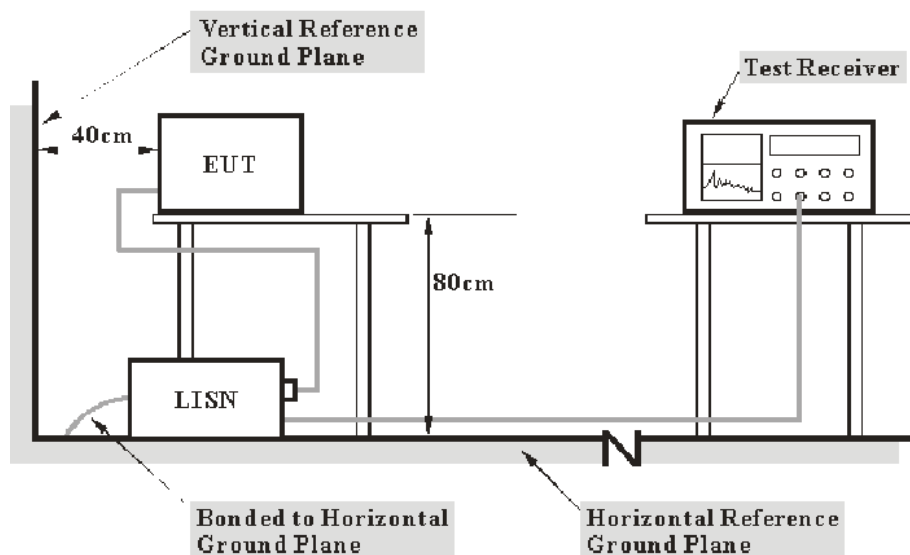

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Undesirable Emission

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:



- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

9 kHz-30MHz:

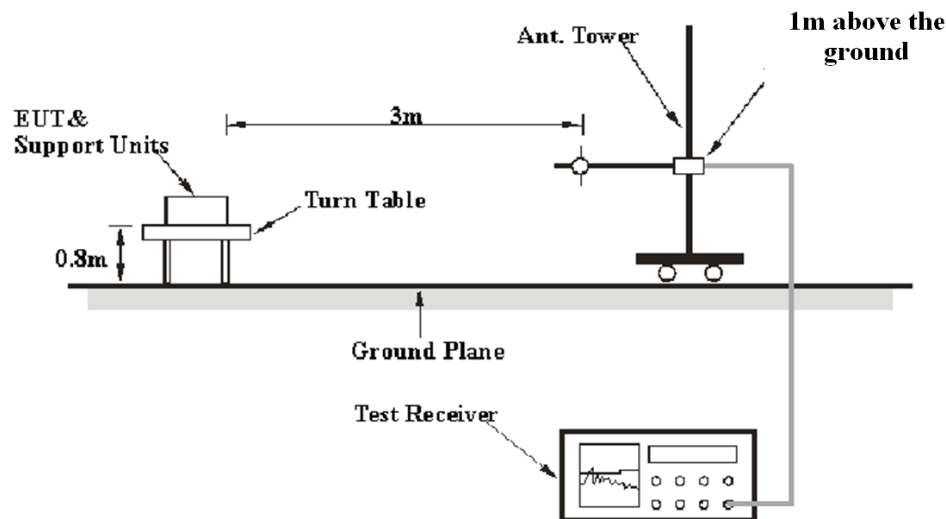

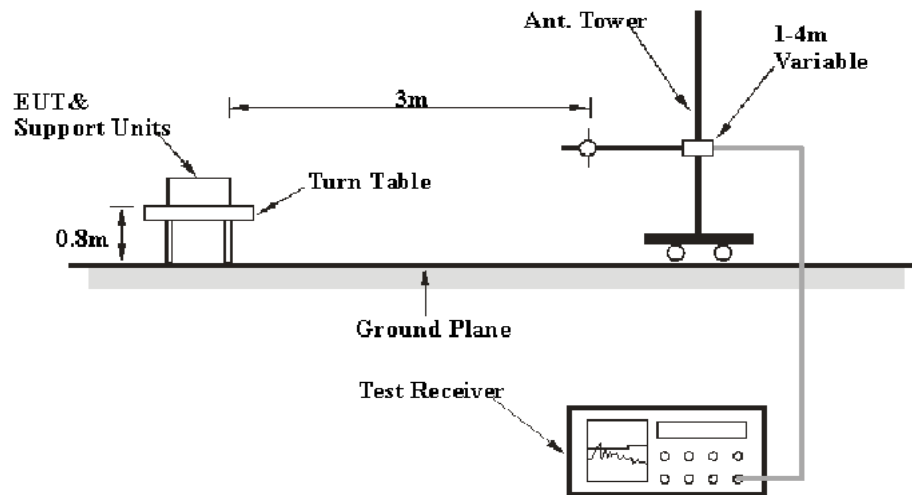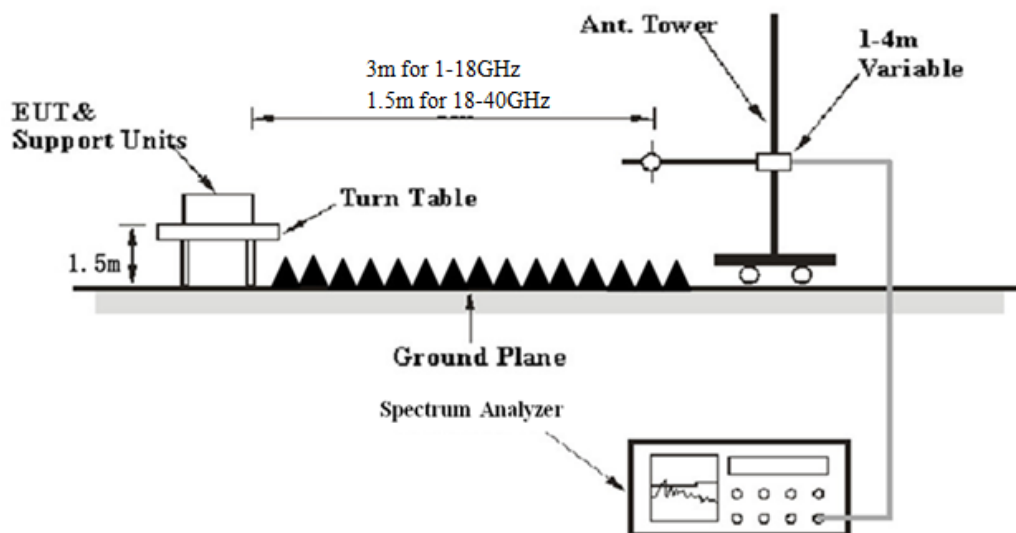30MHz-1GHz:**Above 1 GHz:**

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	/	/	200 Hz	QP	QP
	300 Hz	1 kHz	/	PK	Peak
150 kHz – 30 MHz	/	/	9 kHz	QP	QP
	10 kHz	30 kHz	/	PK	Peak
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	Peak

1-40GHz:

Pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	1 kHz	Peak
	<98%	1MHz	≥1/Ton	Peak

Final measurement for emission identified during pre-scan

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
AV	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	≥1/Ton	Peak

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Radiated Spurious Emission

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

According to ANSI C63.10-2020,9.2.1: For field strength measurements made at other than the distance specified by the limit, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance)

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dB μ V/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dB μ V/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1.5/3) = -6.0$ dB, for 18-40GHz range, the limit of 1.5m distance was added by 6.0dB from limit of 3m to compared with the result measurement at 1.5m distance.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} - \text{Limit}; \text{Margin} = \text{Limit} - \text{Corrected Amplitude} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Emission Bandwidth & 99% Occupied Bandwidth

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2020 Section 12.5.1 & 12.5.2 & 12.5.3

12.5.1 Emission bandwidth for the band 5.725 GHz to 5.85 GHz

The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

12.5.2 Emission bandwidth for all other bands

The procedure for this method is as follows:


- a) Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- b) Set the VBW $>$ RBW.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

12.5.3 Occupied bandwidth

See 6.9.3 for the measurement procedure for OBW.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

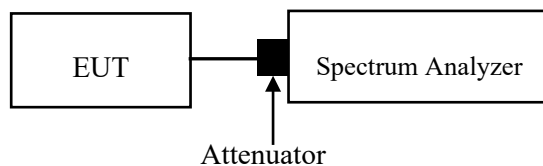

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Conducted Transmitter Output Power

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2 Method PM-G

- a. Place the EUT on a bench and set it in transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.

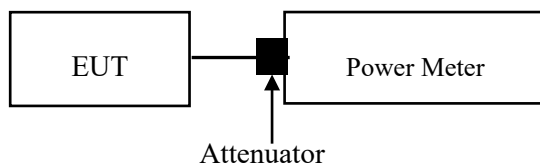

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

Power Spectral Density


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to ANSI C63.10-2020 Clause 12.6 Method SA-2 should be applied

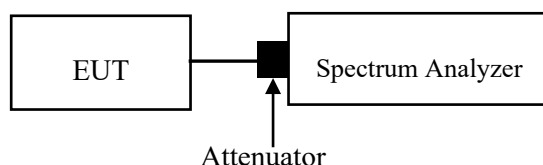

Note 1: A short RF cable with low cable loss connected to the EUT antenna port, which was provided by client or lab, the cable loss was add with offset into test equipment, the total offset consists of attenuator and/or RF cable and/or power splitter loss

Note 2: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)


Duty Cycle

Test Procedure

According to ANSI C63.10-2020 Section 12.2

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

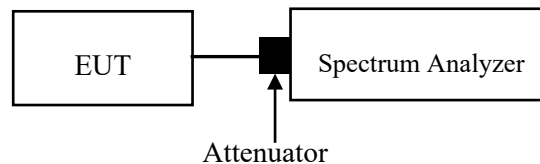

Note: Offset (10.5dB) = Attenuator (10dB) + Cable loss (0.5dB)

ANTENNA REQUIREMENT

Applicable Standard

According to FCC § , an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has two internal antennas arrangement, which were permanently attached, the antenna gain# ANT2:1.05dBi; ANT1: 1.24dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

TEST DATA AND RESULTS

Conducted Emissions

Temperature (°C)	26.5	Relative Humidity (%)	45
ATM Pressure (kPa)	101.1	Test engineer	Macy.shi
Test date	2025.10.28		
EUT operation mode	Transmitting (Maximum output power mode: 802.11ac80, 5210MHz, ANT 1)		

AC 120V 60 Hz, Line

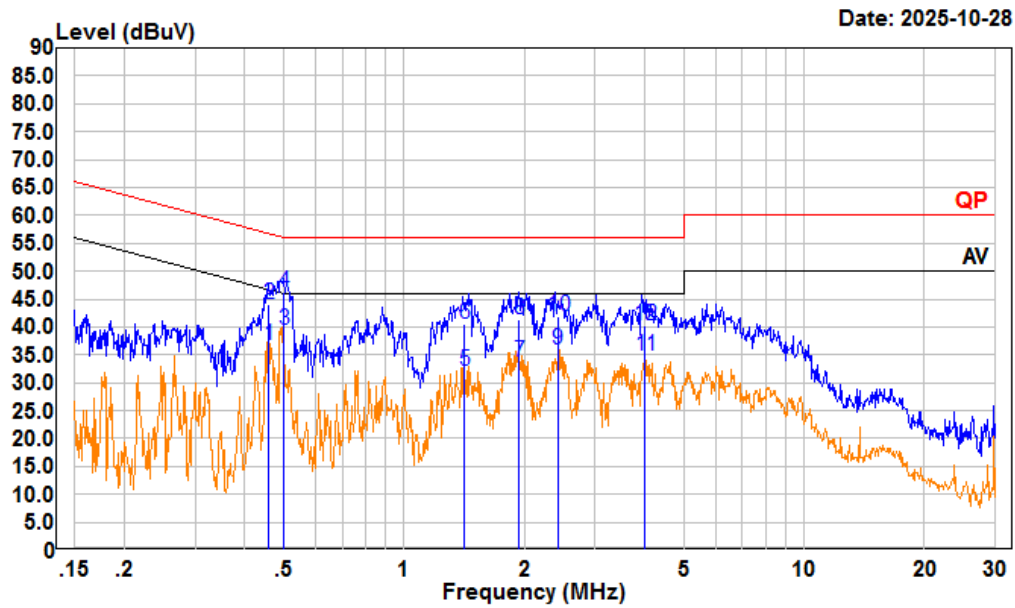

Condition: Line


Project : 2501X06556E-RF

tester : Macy.shi Note:5G WIFI Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.458	16.95	36.77	9.79	10.03	46.73	-9.96	Average
2	0.458	24.26	44.08	9.79	10.03	56.73	-12.65	QP
3	0.500	19.47	39.30	9.80	10.03	46.00	-6.70	Average
4	0.500	26.39	46.22	9.80	10.03	56.00	-9.78	QP
5	1.413	11.96	32.07	9.90	10.21	46.00	-13.93	Average
6	1.413	20.52	40.63	9.90	10.21	56.00	-15.37	QP
7	1.941	13.76	33.86	9.90	10.20	46.00	-12.14	Average
8	1.941	21.35	41.45	9.90	10.20	56.00	-14.55	QP
9	2.424	15.87	35.97	9.90	10.20	46.00	-10.03	Average
10	2.424	21.66	41.76	9.90	10.20	56.00	-14.24	QP
11	3.999	14.75	34.86	9.90	10.21	46.00	-11.14	Average
12	3.999	20.20	40.31	9.90	10.21	56.00	-15.69	QP

AC 120V 60 Hz, Neutral

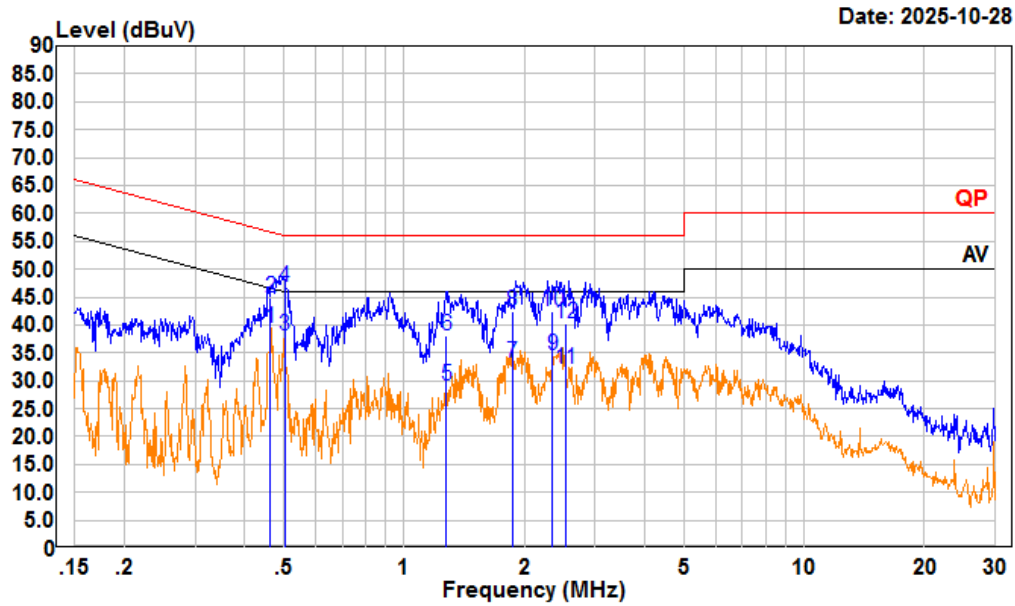

Condition: neutral

Project : 2501X06556E-RF

tester : Macy.shi Note:5G WIFI Transmitting

Setting : RBW:9kHz

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.463	19.73	39.36	9.60	10.03	46.64	-7.28	Average
2	0.463	25.14	44.77	9.60	10.03	56.70	-11.93	QP
3	0.504	18.45	38.08	9.60	10.03	46.00	-7.92	Average
4	0.504	27.26	46.89	9.60	10.03	56.00	-9.11	QP
5	1.274	9.38	29.19	9.60	10.21	46.00	-16.81	Average
6	1.274	18.26	38.07	9.60	10.21	56.00	-17.93	QP
7	1.864	13.29	33.09	9.60	10.20	46.00	-12.91	Average
8	1.864	22.72	42.52	9.60	10.20	56.00	-13.48	QP
9	2.351	14.73	34.53	9.60	10.20	46.00	-11.47	Average
10	2.351	22.50	42.30	9.60	10.20	56.00	-13.70	QP
11	2.535	12.24	32.04	9.60	10.20	46.00	-13.96	Average
12	2.535	20.51	40.31	9.60	10.20	56.00	-15.69	QP


Undesirable Emission

Temperature (°C)	23.5-24.2	Relative Humidity (%)	50.1-52.3
ATM Pressure (kPa):	101.2-101.6	Test engineer:	Anson Su&Zenos Qiao
Test date:	2025.10.23-2025.10.25		
EUT operation mode:	Below 1GHz: Transmitting(Maximum output power mode: 802.11ac80, 5210MHz, ANT 1) Above 1GHz: Transmitting		
Note:	1. For the radiated spurious emission below 30MHz, only the worst case (parallel) was recorded. 2. For the radiated spurious emission below 1GHz, When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded. 3. After pre-scan in the X, Y and Z axes of orientation, the worst case z-axis of orientation were recorded.		

Below 1GHz:

ANT 1


9kHz-150kHz

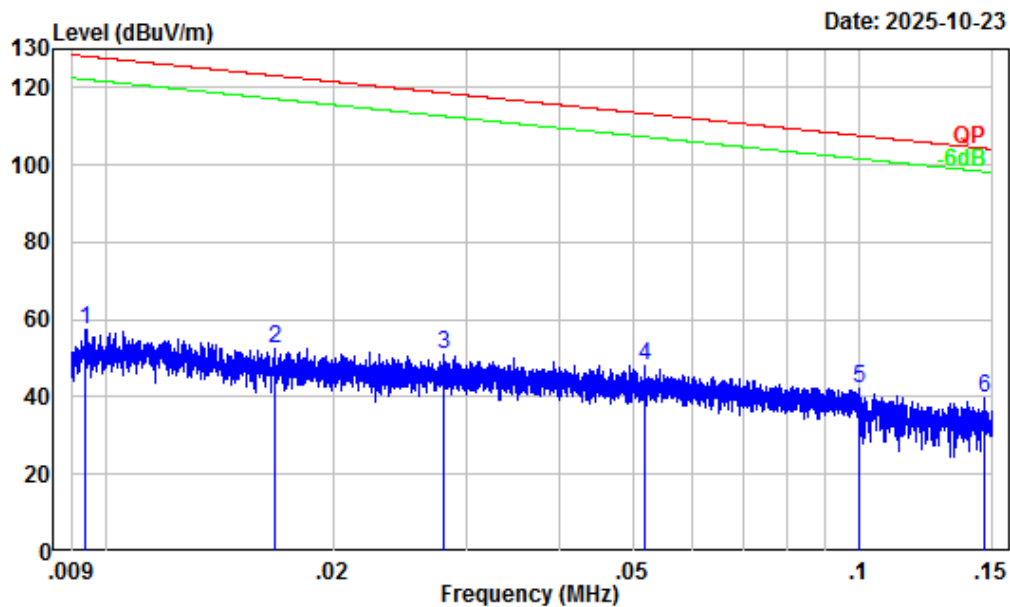

Site : Chamber A
Condition : 3m
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.009	32.42	24.79	57.21	128.13	-70.92	Peak
2	0.017	31.01	21.56	52.57	123.11	-70.54	Peak
3	0.028	28.85	22.15	51.00	118.62	-67.62	Peak
4	0.052	26.20	22.00	48.20	113.29	-65.09	Peak
5	0.100	22.03	19.95	41.98	107.64	-65.66	Peak
6	0.147	19.25	20.73	39.98	104.28	-64.30	Peak


150kHz-30MHz

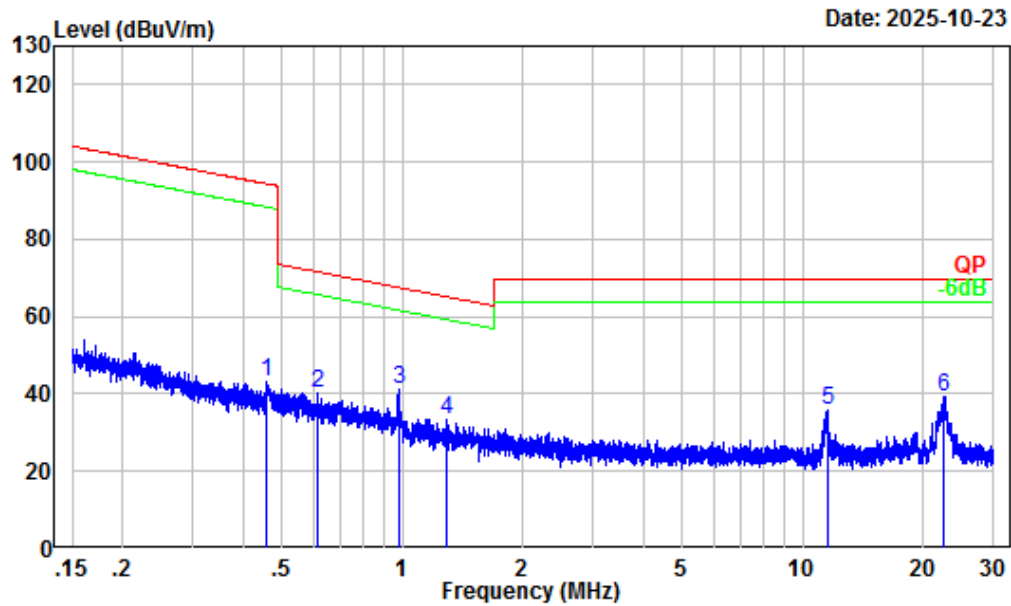

Site : Chamber A
Condition : 3m
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.460	7.16	36.20	43.36	94.35	-50.99	Peak
2	0.617	4.96	35.46	40.42	71.76	-31.34	Peak
3	0.979	1.35	40.09	41.44	67.66	-26.22	Peak
4	1.298	0.37	33.09	33.46	65.16	-31.70	Peak
5	11.529	-2.80	38.39	35.59	69.54	-33.95	Peak
6	22.625	-3.10	42.50	39.40	69.54	-30.14	Peak


30MHz-1GHz_Horizontal

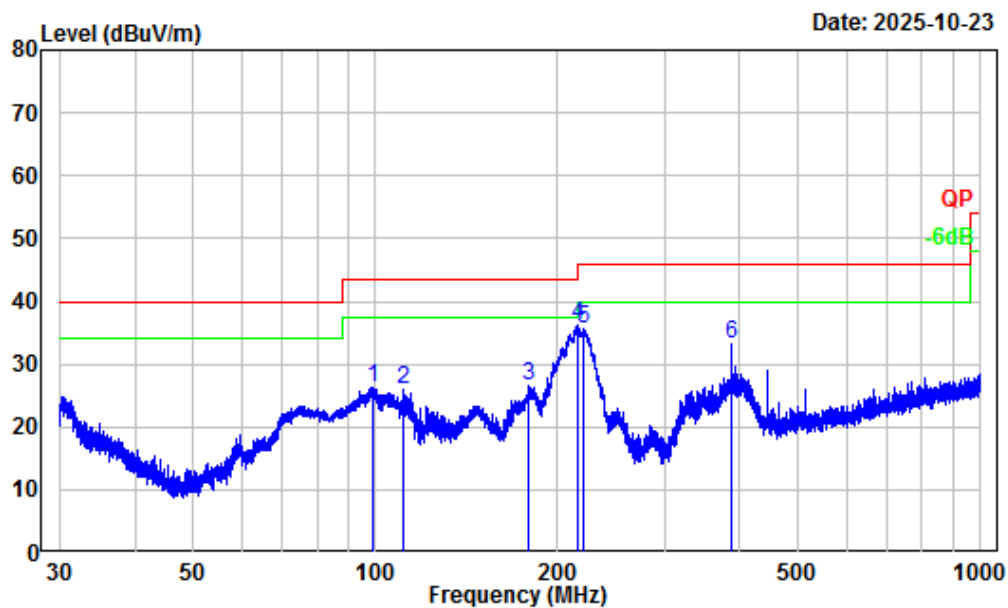

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	98.83	-16.25	42.64	26.39	43.50	-17.11 Peak
2	110.86	-12.91	38.80	25.89	43.50	-17.61 Peak
3	179.07	-13.65	40.08	26.43	43.50	-17.07 Peak
4	215.36	-14.21	50.35	36.14	43.50	-7.36 Peak
5	221.39	-14.16	49.73	35.57	46.00	-10.43 Peak
6	388.16	-8.93	42.06	33.13	46.00	-12.87 Peak

30MHz-1GHz_ Vertical

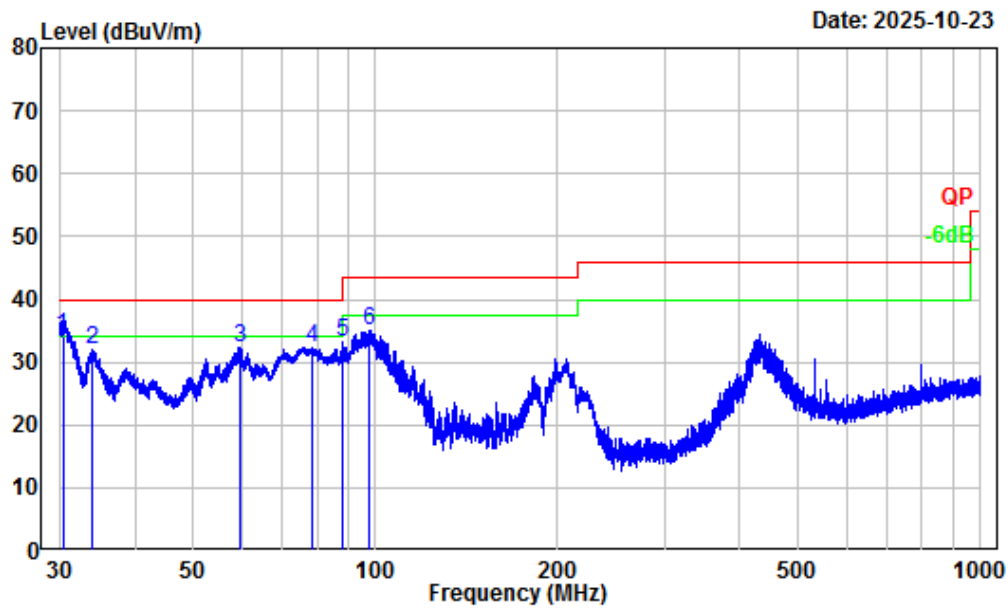


Site : Chamber A
Condition : 3m Vertical
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.40	-6.16	40.40	34.24	40.00	-5.76	QP
2	34.04	-8.30	40.31	32.01	40.00	-7.99	Peak
3	59.62	-18.16	50.49	32.33	40.00	-7.67	Peak
4	78.65	-17.88	50.25	32.37	40.00	-7.63	Peak
5	88.19	-18.08	51.28	33.20	43.50	-10.30	Peak
6	97.63	-16.62	51.77	35.15	43.50	-8.35	Peak

ANT 2


9kHz-150kHz

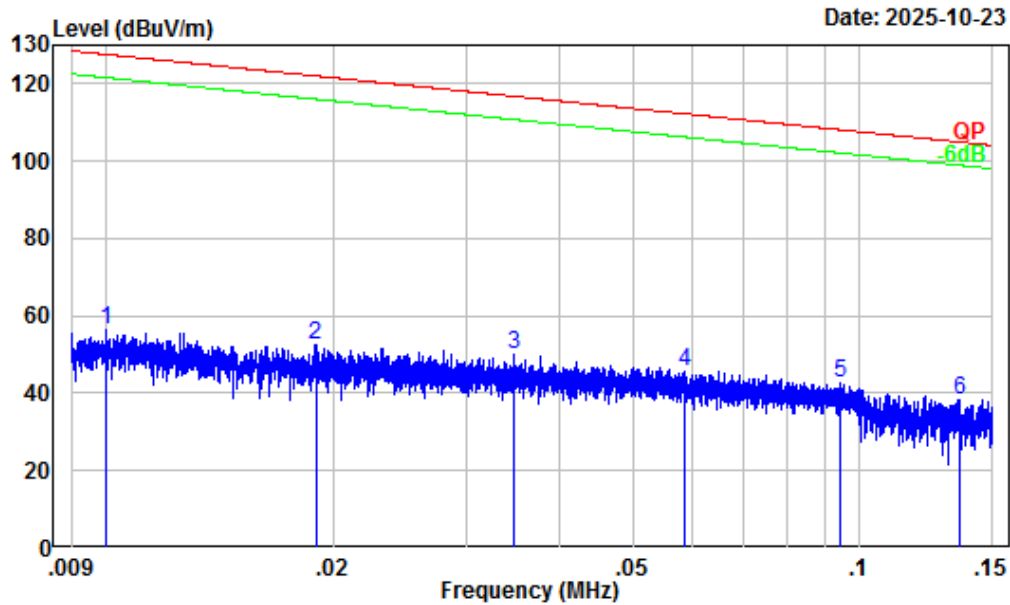

Site : Chamber A
Condition : 3m
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 0.3/1kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.010	32.30	24.32	56.62	127.62	-71.00	Peak
2	0.019	30.59	22.03	52.62	122.04	-69.42	Peak
3	0.035	27.99	22.27	50.26	116.77	-66.51	Peak
4	0.059	25.54	20.10	45.64	112.25	-66.61	Peak
5	0.094	22.41	20.14	42.55	108.13	-65.58	Peak
6	0.136	19.88	18.40	38.28	104.93	-66.65	Peak


150kHz-30MHz

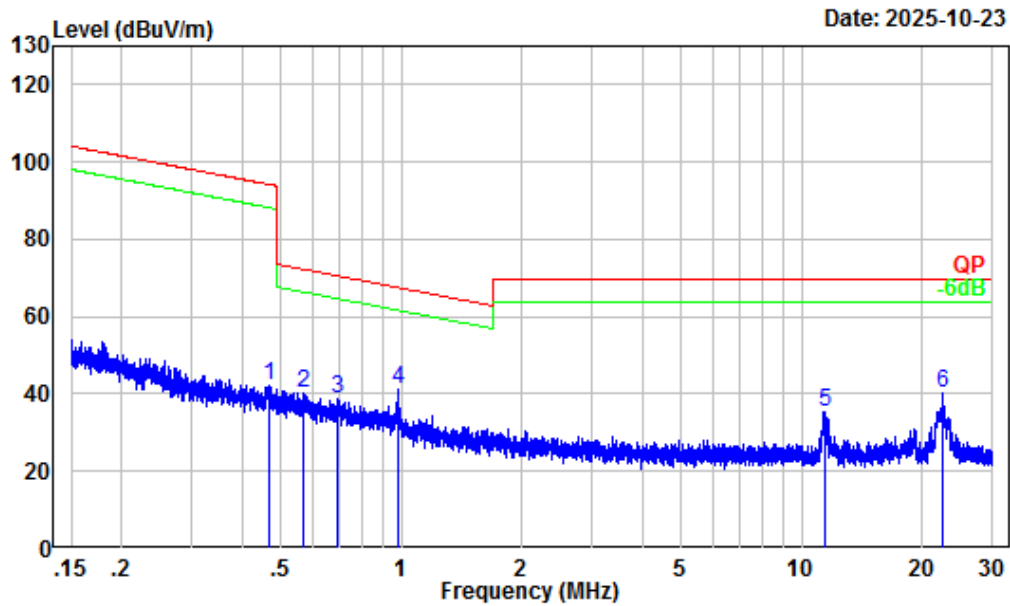

Site : Chamber A
Condition : 3m
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 10/30kHz
Tester : Anson Su

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.468	7.01	35.23	42.24	94.20	-51.96	Peak
2	0.571	5.53	34.66	40.19	72.45	-32.26	Peak
3	0.693	4.02	34.51	38.53	70.72	-32.19	Peak
4	0.981	1.35	39.77	41.12	67.65	-26.53	Peak
5	11.392	-2.80	38.28	35.48	69.54	-34.06	Peak
6	22.491	-3.10	43.09	39.99	69.54	-29.55	Peak


30MHz-1GHz_Horizontal

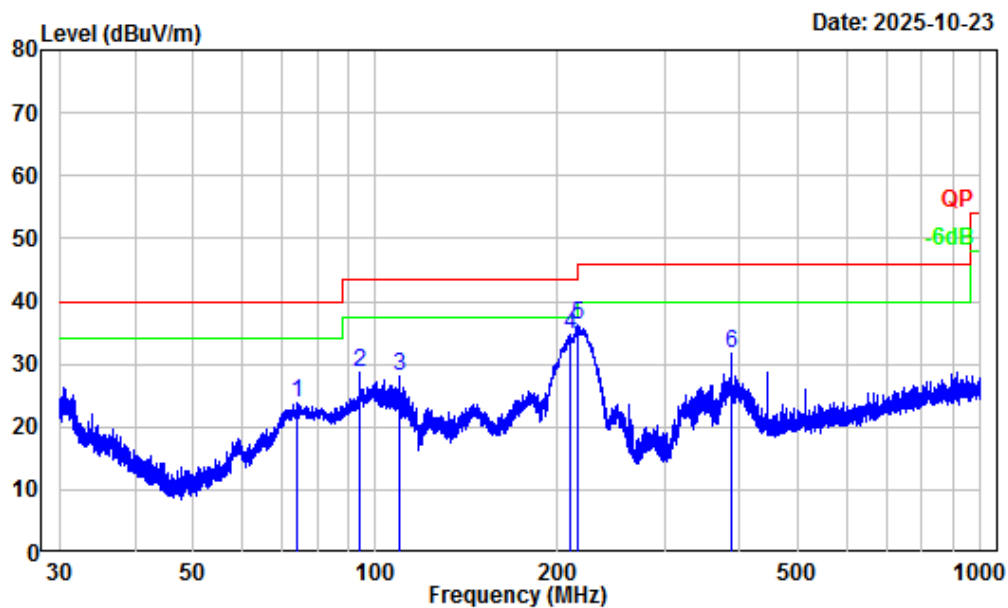

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq Factor		Read		Limit	Over	Remark
	MHz	dB/m	Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	74.04	-17.84	41.62	23.78	40.00	-16.22	Peak
2	94.14	-17.50	46.16	28.66	43.50	-14.84	Peak
3	109.65	-13.19	41.17	27.98	43.50	-15.52	Peak
4	209.13	-13.93	48.59	34.66	43.50	-8.84	Peak
5	216.59	-14.20	50.29	36.09	46.00	-9.91	Peak
6	388.16	-8.93	40.73	31.80	46.00	-14.20	Peak

30MHz-1GHz_ Vertical

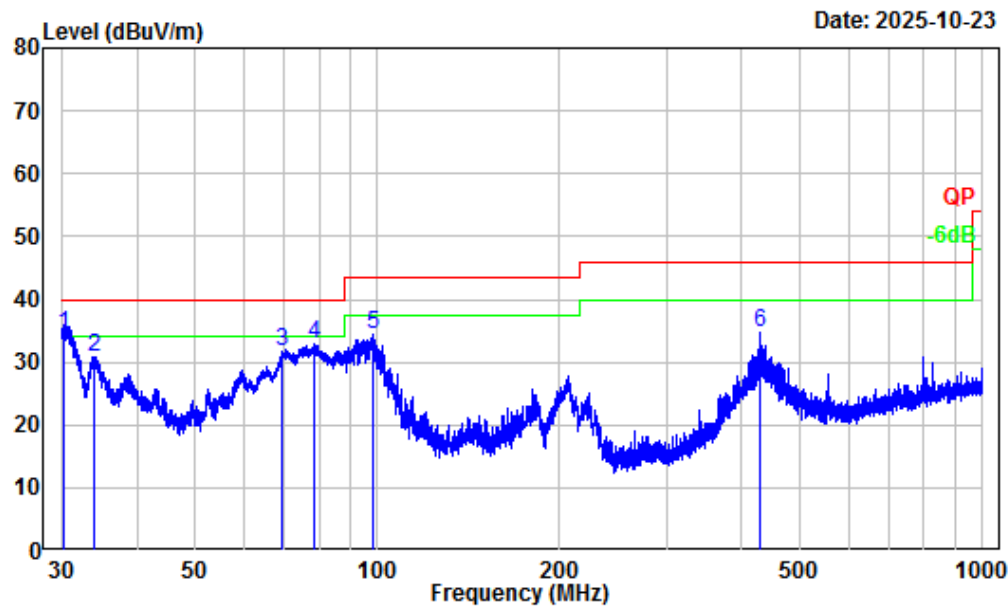

Site : Chamber A
Condition : 3m Vertical
Project Number : 2501X06556E-RF
Test Mode : 5G WIFI Transmitting
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	30.30	-6.11	40.39	34.28	40.00	-5.72 QP
2	33.99	-8.27	39.12	30.85	40.00	-9.15 Peak
3	69.66	-17.87	49.49	31.62	40.00	-8.38 Peak
4	78.79	-17.88	50.77	32.89	40.00	-7.11 Peak
5	98.06	-16.48	50.76	34.28	43.50	-9.22 Peak
6	429.33	-7.81	42.51	34.70	46.00	-11.30 Peak

Above 1GHz:

5150-5250 MHz

ANT 1

Frequency (MHz)	Reading (dB μ V)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
802.11a							
Low Channel							
10360	53.96	PK	H	2.48	56.44	68.2	-11.76
10360	53.62	PK	V	2.48	56.1	68.2	-12.1
Middle Channel							
10400	53.61	PK	H	2.47	56.08	68.2	-12.12
10400	53.28	PK	V	2.47	55.75	68.2	-12.45
High Channel							
10480	54.38	PK	H	2.19	56.57	68.2	-11.63
10480	54.03	PK	V	2.19	56.22	68.2	-11.98
802.11ac20							
Low Channel							
10360	53.75	PK	H	2.48	56.23	68.2	-11.97
10360	53.42	PK	V	2.48	55.9	68.2	-12.3
Middle Channel							
10400	53.43	PK	H	2.47	55.9	68.2	-12.3
10400	53.09	PK	V	2.47	55.56	68.2	-12.64
High Channel							
10480	54.19	PK	H	2.19	56.38	68.2	-11.82
10480	53.87	PK	V	2.19	56.06	68.2	-12.14
802.11ac40							
Low Channel							
10380	53.54	PK	H	2.48	56.02	68.2	-12.18
10380	53.19	PK	V	2.48	55.67	68.2	-12.53
High Channel							
10460	54.02	PK	H	2.26	56.28	68.2	-11.92
10460	53.68	PK	V	2.26	55.94	68.2	-12.26
802.11ac80							
Middle Channel							
10420	53.37	PK	H	2.4	55.77	68.2	-12.43
10420	53.04	PK	V	2.4	55.44	68.2	-12.76

ANT 2

Frequency (MHz)	Reading (dBμV)	PK/Ave	Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
802.11a							
Low Channel							
10360	53.21	PK	H	2.48	55.69	68.2	-12.51
10360	53.55	PK	V	2.48	56.03	68.2	-12.17
Middle Channel							
10400	52.78	PK	H	2.47	55.25	68.2	-12.95
10400	53.13	PK	V	2.47	55.6	68.2	-12.6
High Channel							
10480	53.64	PK	H	2.19	55.83	68.2	-12.37
10480	53.97	PK	V	2.19	56.16	68.2	-12.04
802.11ac20							
Low Channel							
10360	52.99	PK	H	2.48	55.47	68.2	-12.73
10360	53.32	PK	V	2.48	55.8	68.2	-12.4
Middle Channel							
10400	52.62	PK	H	2.47	55.09	68.2	-13.11
10400	52.95	PK	V	2.47	55.42	68.2	-12.78
High Channel							
10480	53.41	PK	H	2.19	55.6	68.2	-12.6
10480	53.76	PK	V	2.19	55.95	68.2	-12.25
802.11ac40							
Low Channel							
10380	52.78	PK	H	2.48	55.26	68.2	-12.94
10380	53.12	PK	V	2.48	55.6	68.2	-12.6
High Channel							
10460	53.27	PK	H	2.26	55.53	68.2	-12.67
10460	53.6	PK	V	2.26	55.86	68.2	-12.34
802.11ac80							
Middle Channel							
10420	52.63	PK	H	2.4	55.03	68.2	-13.17
10420	52.98	PK	V	2.4	55.38	68.2	-12.82

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

Test plots:

Band Edge

ANT 1


Left Band edge Horizontal Peak 802.11a 5180MHz

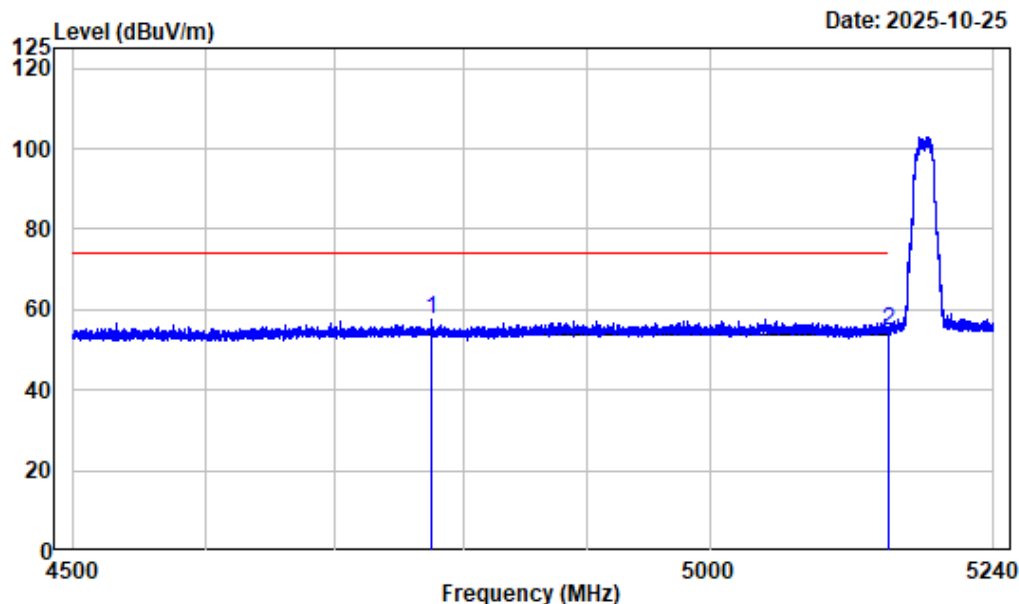

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4775.373	-7.73	65.41	57.68	74.00	-16.32 Peak
2	5150.000	-7.45	62.21	54.76	74.00	-19.24 Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz

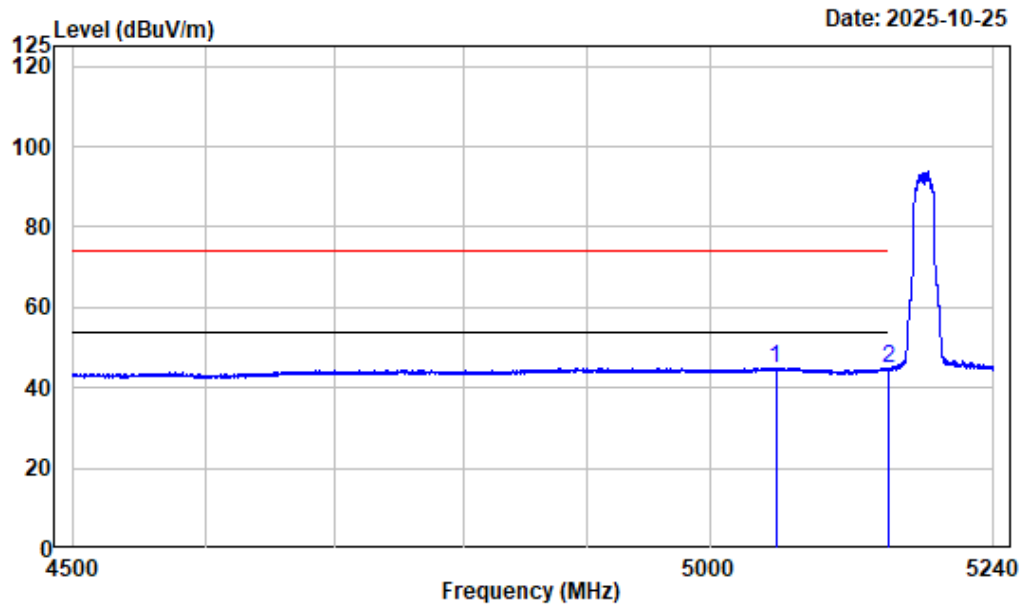

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5054.815	-7.31	52.35	45.04	54.00	-8.96 Average
2	5150.000	-7.45	52.07	44.62	54.00	-9.38 Average


Left Band edge_Vertical_Peak_802.11a_5180MHz

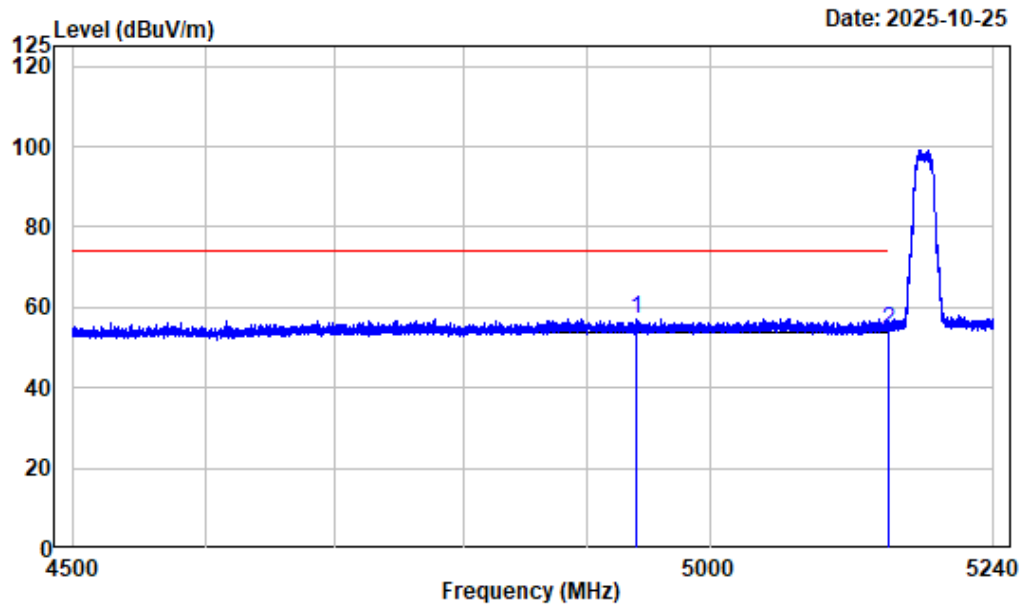

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4940.208	-7.63	64.81	57.18	74.00	-16.82	Peak
2 5150.000	-7.45	61.89	54.44	74.00	-19.56	Peak


Left Band edge_Vertical_Average_802.11a_5180MHz

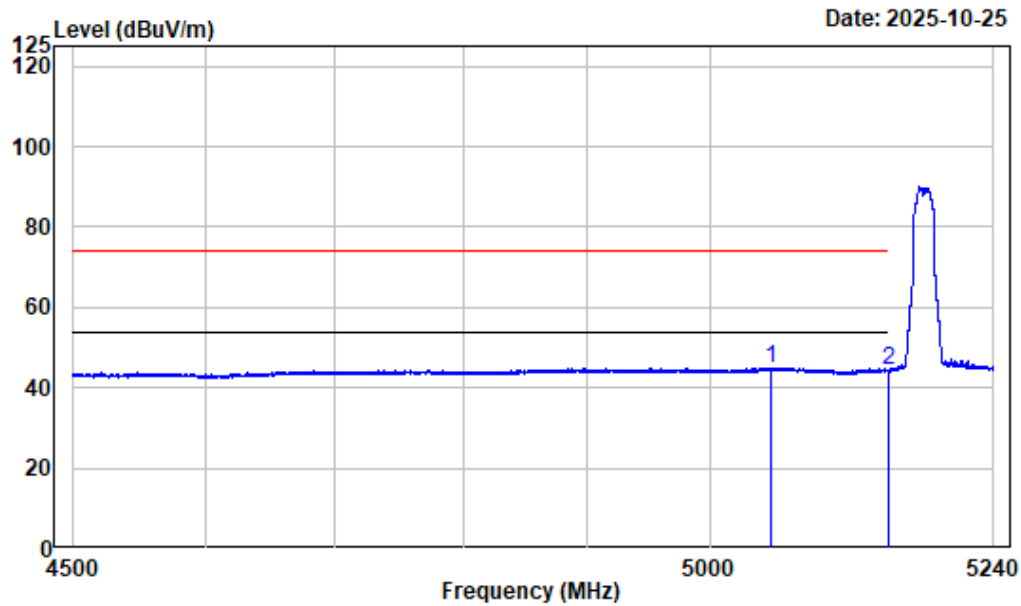

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5051.393	-7.29	52.33	45.04	54.00	-8.96 Average
2	5150.000	-7.45	51.72	44.27	54.00	-9.73 Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz

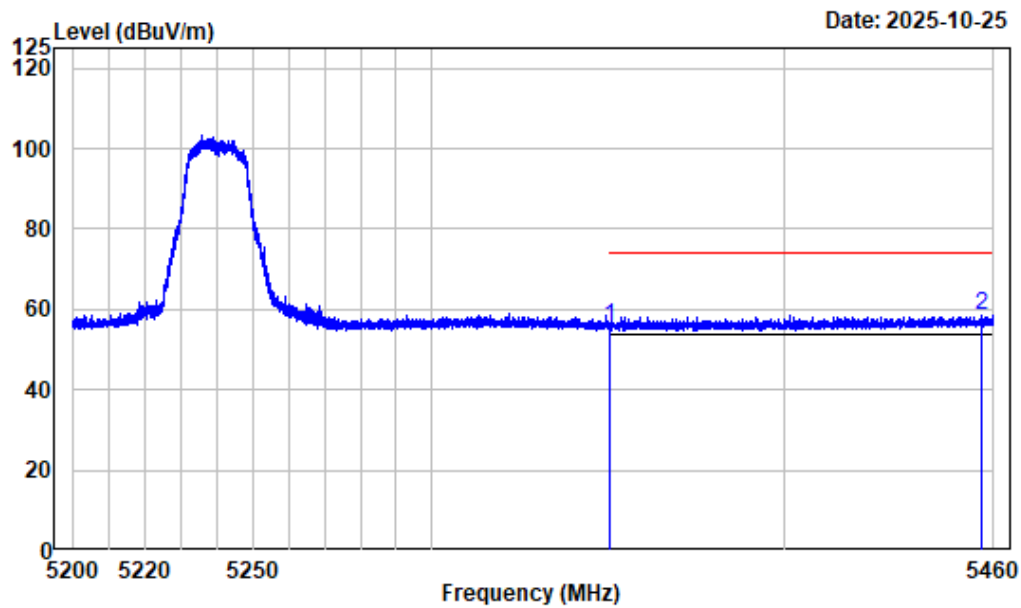

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	62.47	55.71	74.00	-18.29	Peak
2 5456.750	-6.28	64.98	58.70	74.00	-15.30	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz

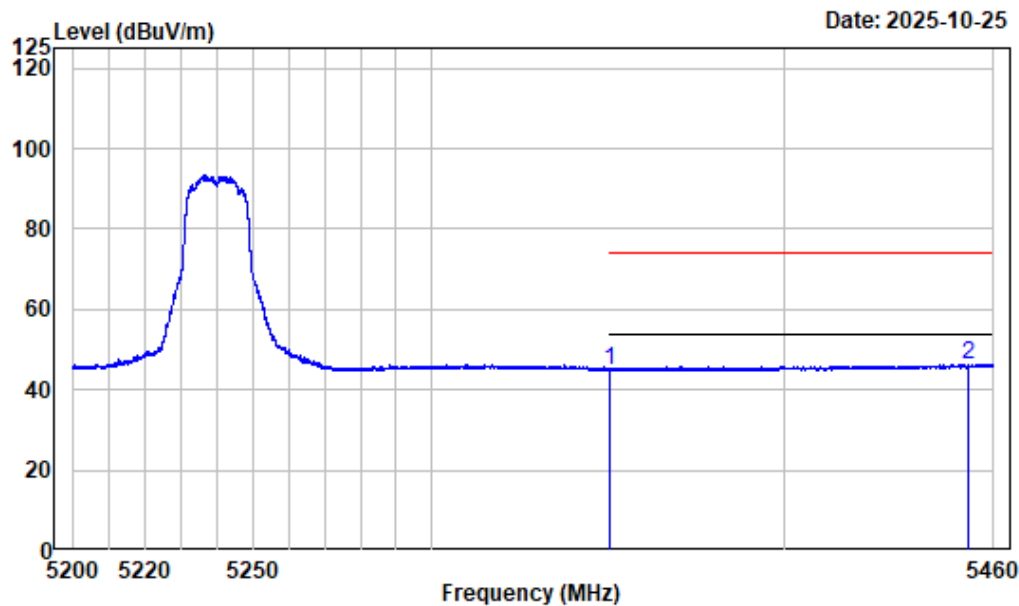

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.80	45.04	54.00	-8.96 Average
2	5452.720	-6.29	52.70	46.41	54.00	-7.59 Average


Right Band edge_Vertical_Peak_802.11a_5240MHz

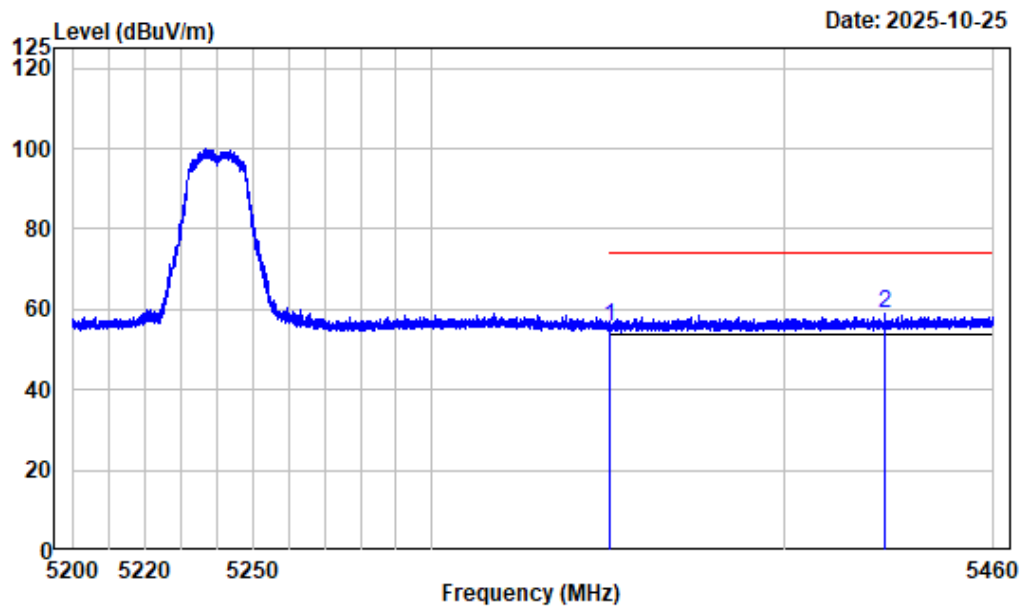

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.51	55.75	74.00	-18.25 Peak
2	5428.833	-6.44	65.40	58.96	74.00	-15.04 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz

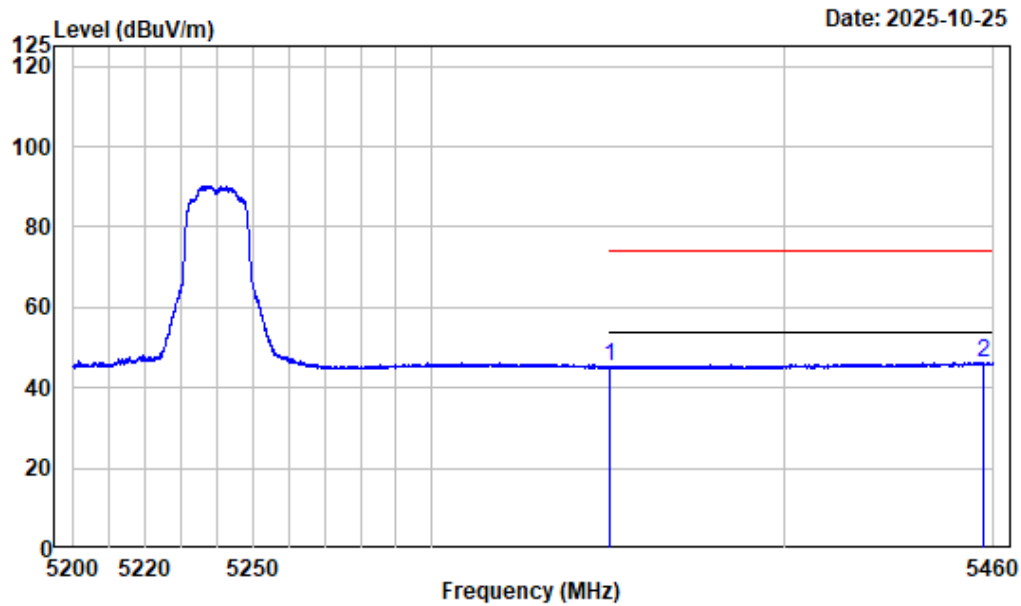

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	52.04	45.28	54.00	-8.72 Average
2	5457.010	-6.28	52.53	46.25	54.00	-7.75 Average


Left Band edge_Horizontal_Peak_802.11ac-vht20_5180MHz

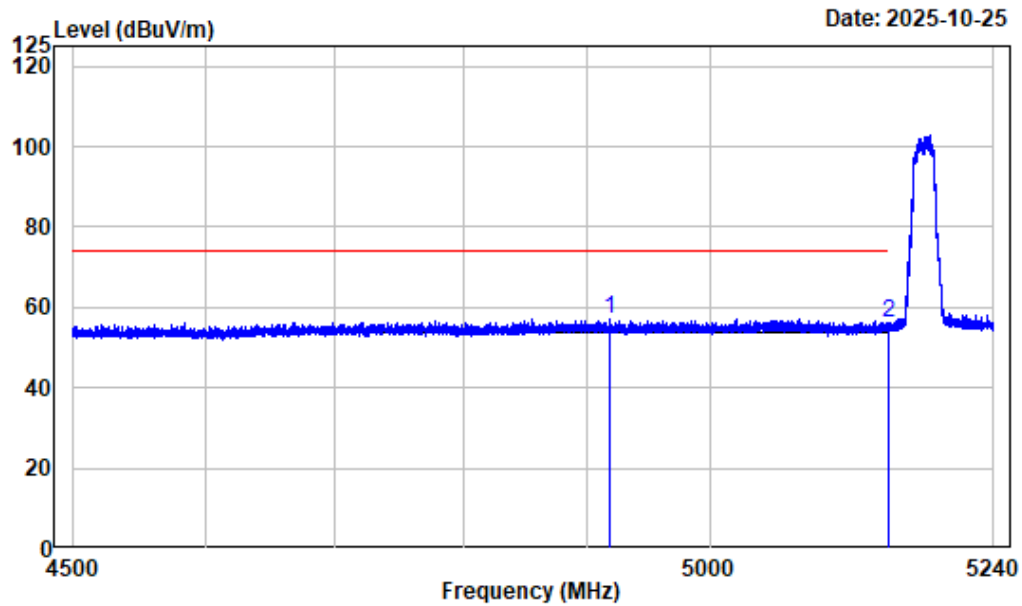

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4918.655	-7.62	64.69	57.07	74.00	-16.93 Peak
2	5150.000	-7.45	63.55	56.10	74.00	-17.90 Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5180MHz

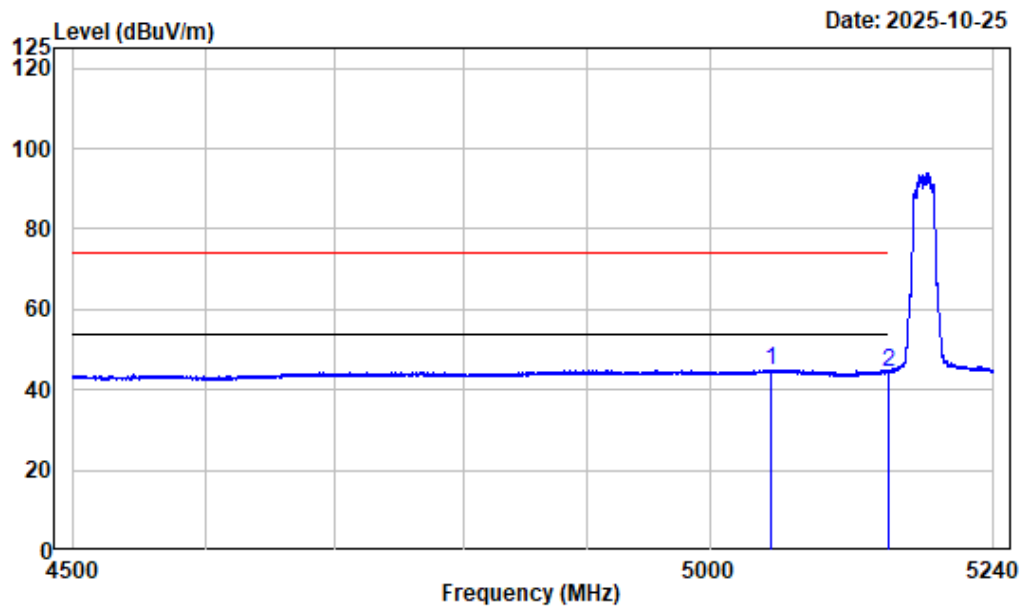

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5051.485	-7.29	52.32	45.03	54.00	-8.97	Average
2 5150.000	-7.45	51.99	44.54	54.00	-9.46	Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5180MHz

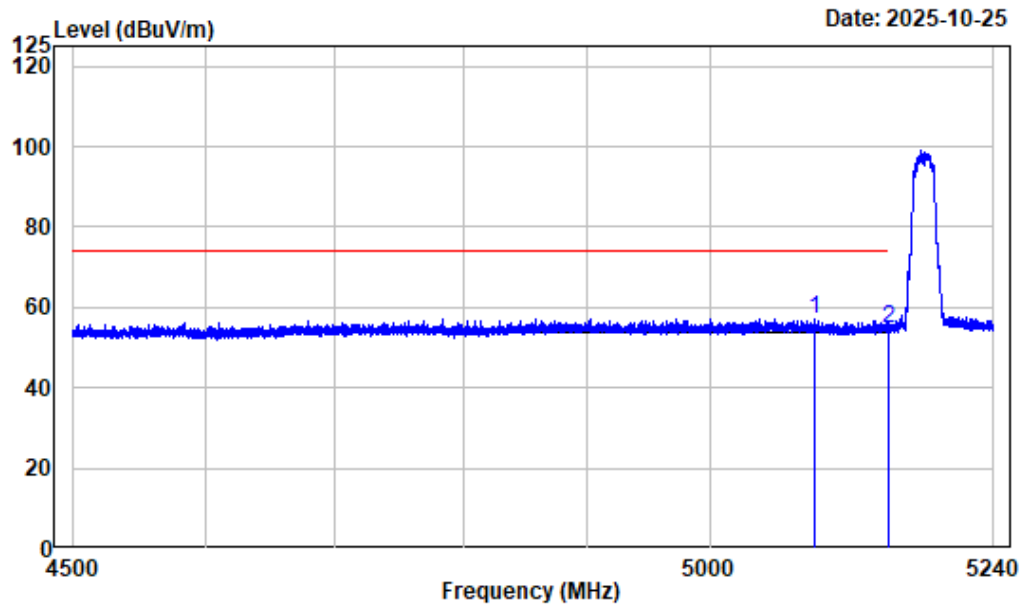

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5086.820	-7.42	64.65	57.23	74.00	-16.77 Peak
2	5150.000	-7.45	62.14	54.69	74.00	-19.31 Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5180MHz

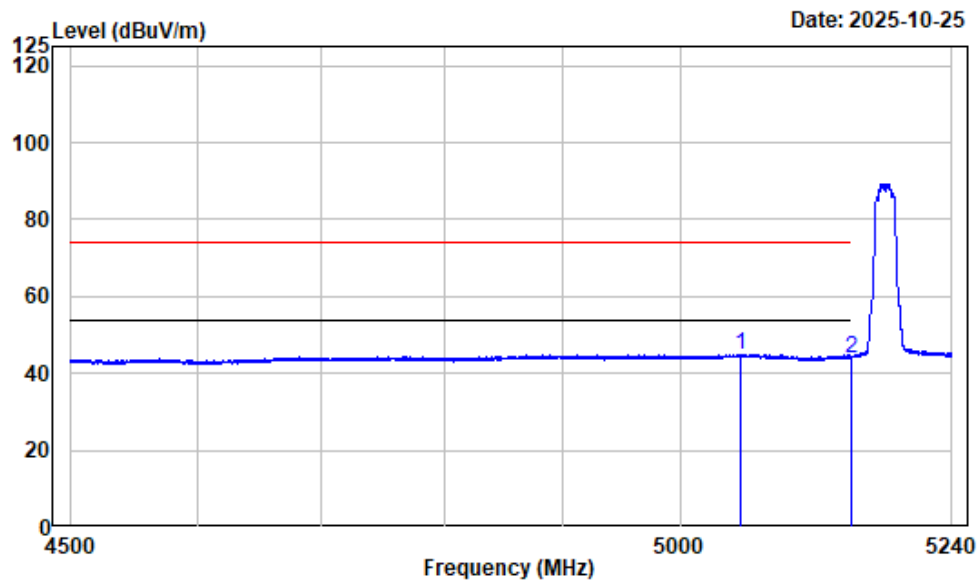

Condition : Vertical
 Project No. : 2501X06556E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
 Note : 5GWiFi-Band1-AC20-5180

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBUV/m	dBUV/m	dB	
1	5052.502	-7.29	52.22	44.93	54.00	-9.07	Average
2	5150.000	-7.45	51.48	44.03	54.00	-9.97	Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5240MHz

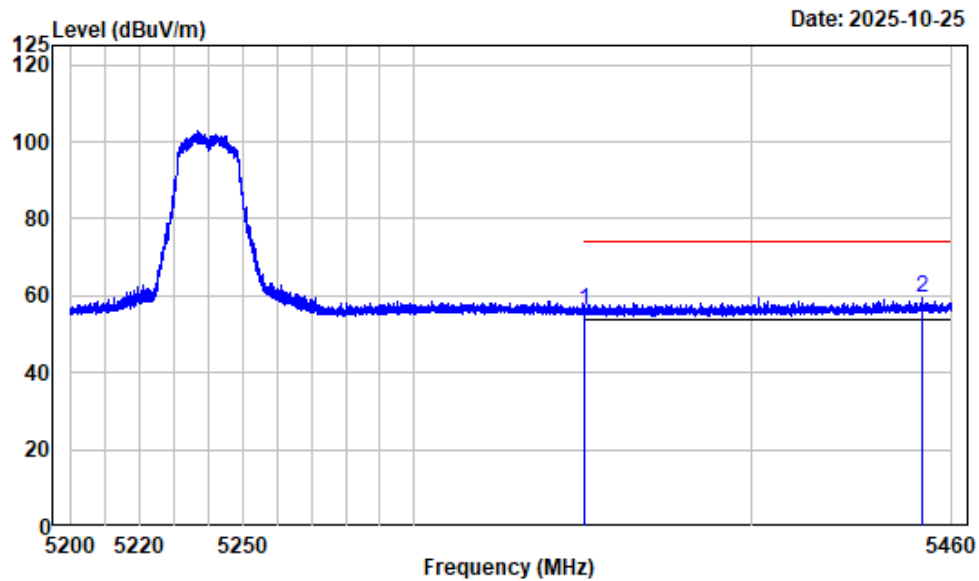

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.94	56.18	74.00	-17.82	Peak
2	5451.257	-6.31	65.75	59.44	74.00	-14.56	Peak


Right Band edge_Horizontal_Average_802.11ac-vht20_5240MHz

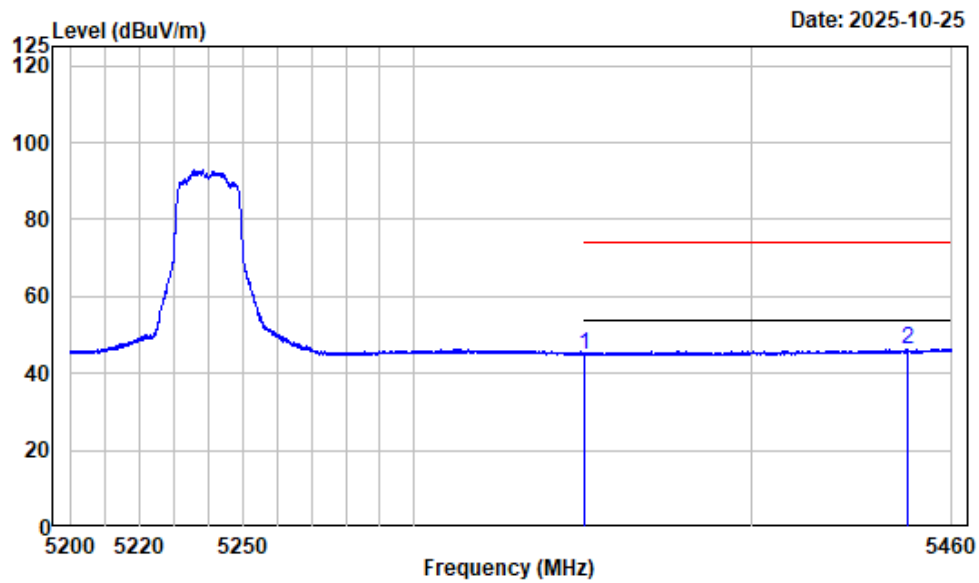

Condition : Horizontal
 Project No. : 2501X06556E-RF
 Tester : Zenos Qiao
 Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
 Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.75	44.99	54.00	-9.01	Average
2	5446.740	-6.33	52.58	46.25	54.00	-7.75	Average


Right Band edge_Vertical_Peak_802.11ac-vht20_5240MHz

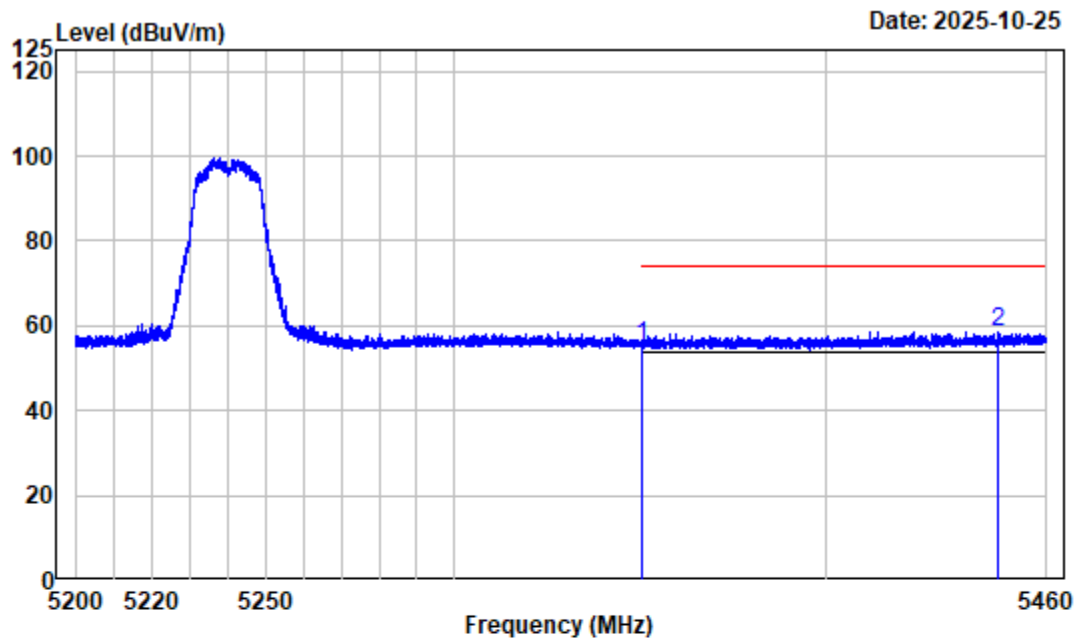

Condition : Vertical
 Project No. : 2501X06556E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.07	55.31	74.00	-18.69	Peak
2	5446.480	-6.33	64.91	58.58	74.00	-15.42	Peak


Right Band edge_Vertical_Average_802.11ac-vht20_5240MHz

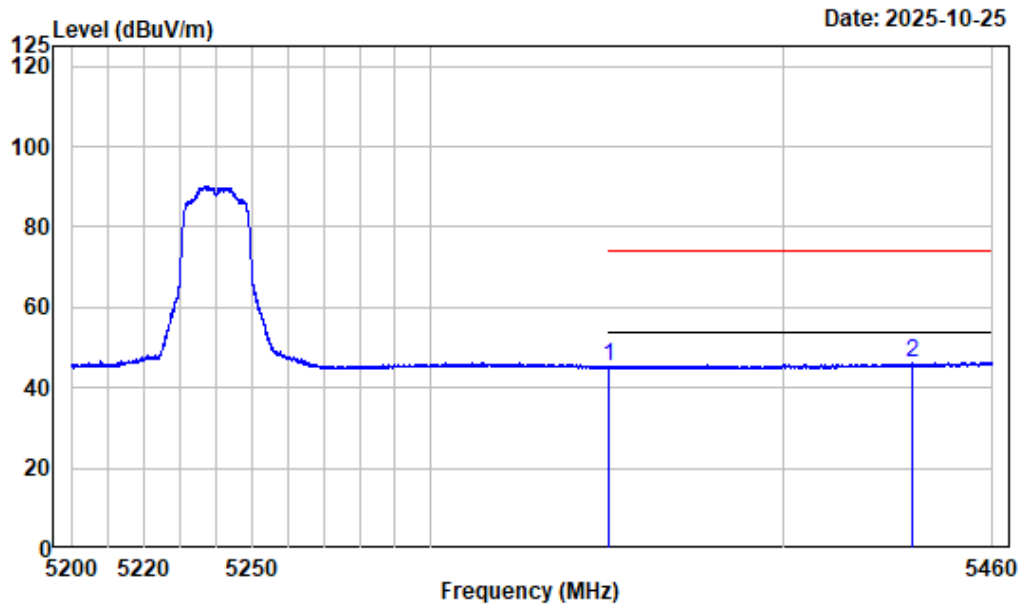

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.84	45.08	54.00	-8.92 Average
2	5436.697	-6.39	52.59	46.20	54.00	-7.80 Average


Left Band edge_Horizontal_Peak_802.11ac-vht40_5190MHz

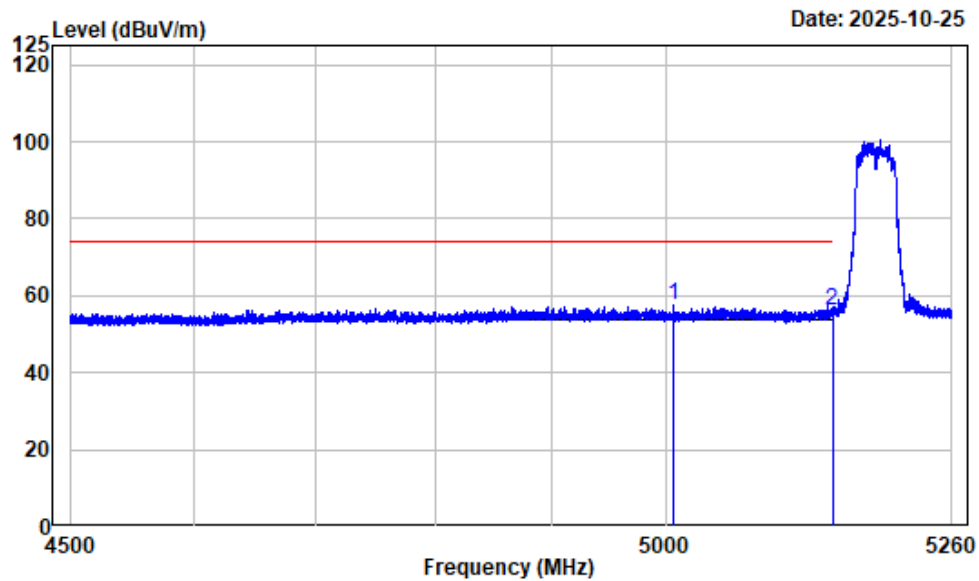

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5007.110	-7.29	64.64	57.35	74.00	-16.65	Peak
2	5150.000	-7.45	63.58	56.13	74.00	-17.87	Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5190MHz

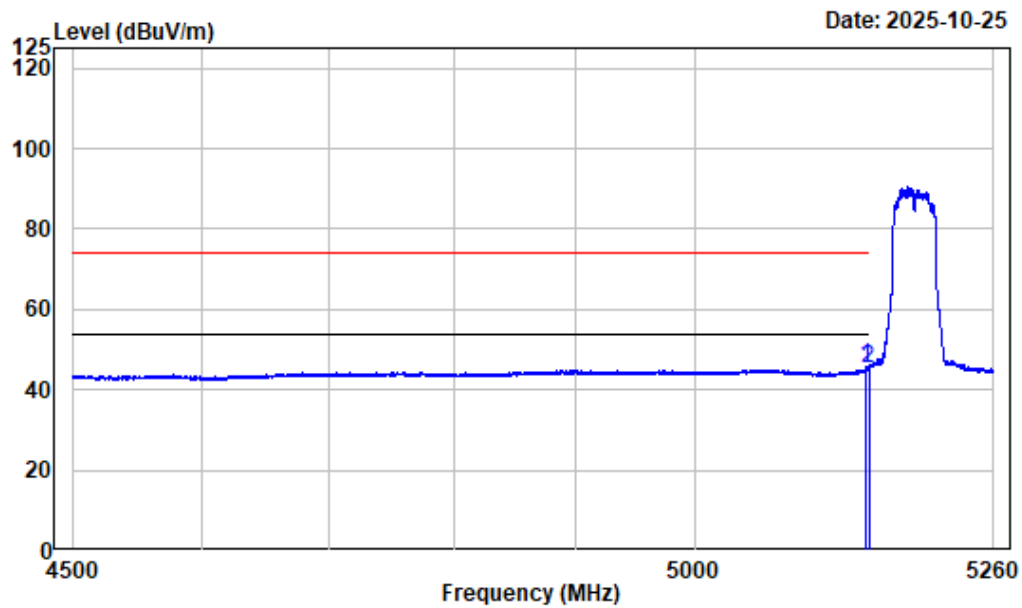

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5147.330	-7.45	53.25	45.80	54.00	-8.20 Average
2	5150.000	-7.45	52.67	45.22	54.00	-8.78 Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5190MHz

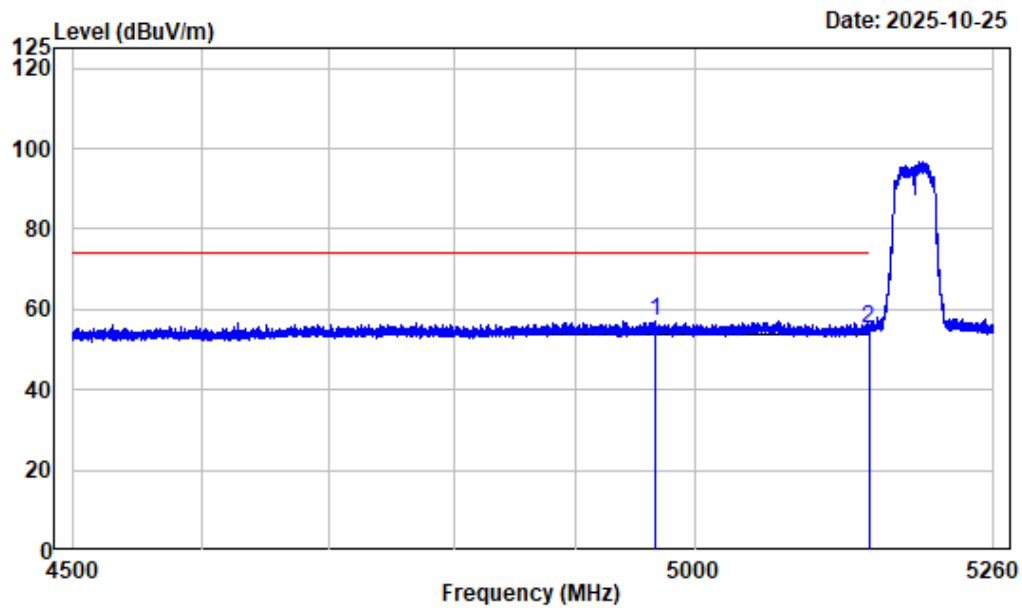

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4967.875	-7.51	64.44	56.93	74.00	-17.07 Peak
2	5150.000	-7.45	62.58	55.13	74.00	-18.87 Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5190MHz

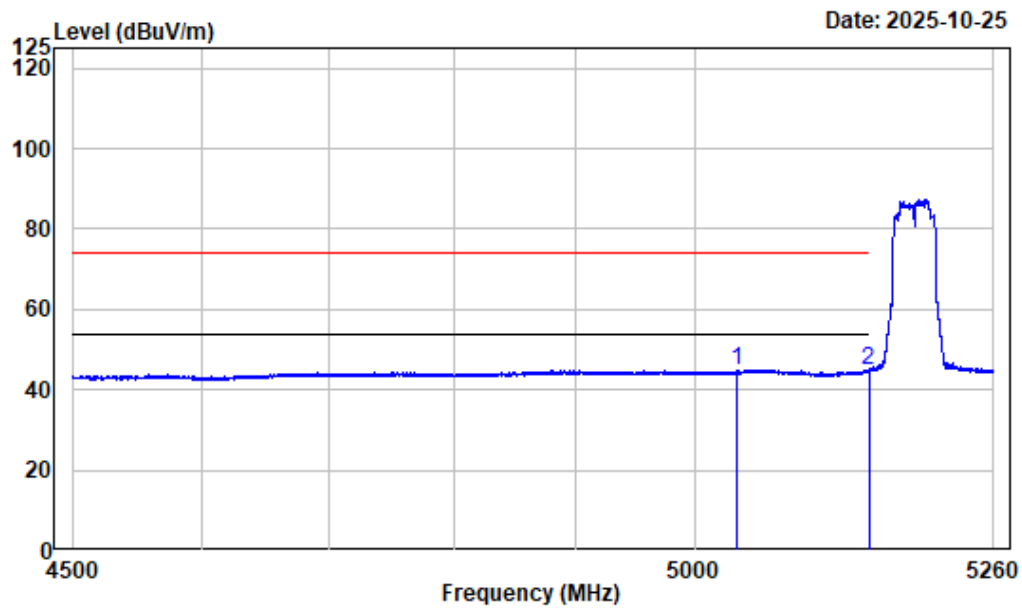

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5036.845	-7.28	52.28	45.00	54.00	-9.00 Average
2	5150.000	-7.45	52.17	44.72	54.00	-9.28 Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5230MHz

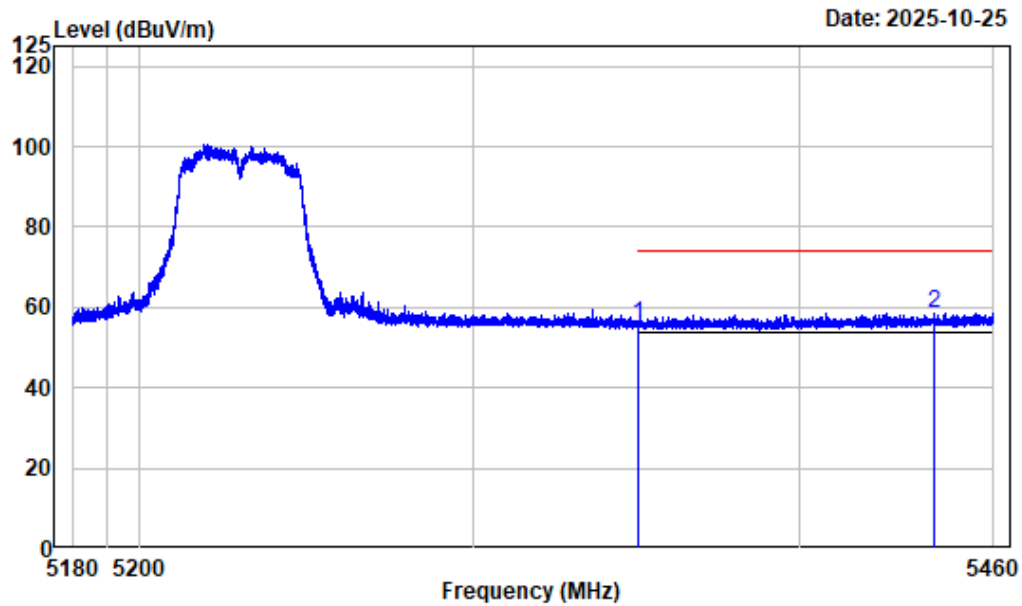

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.44	55.68	74.00	-18.32 Peak
2	5441.275	-6.36	64.94	58.58	74.00	-15.42 Peak


Right Band edge_Horizontal_Average_802.11ac-vht40_5230MHz

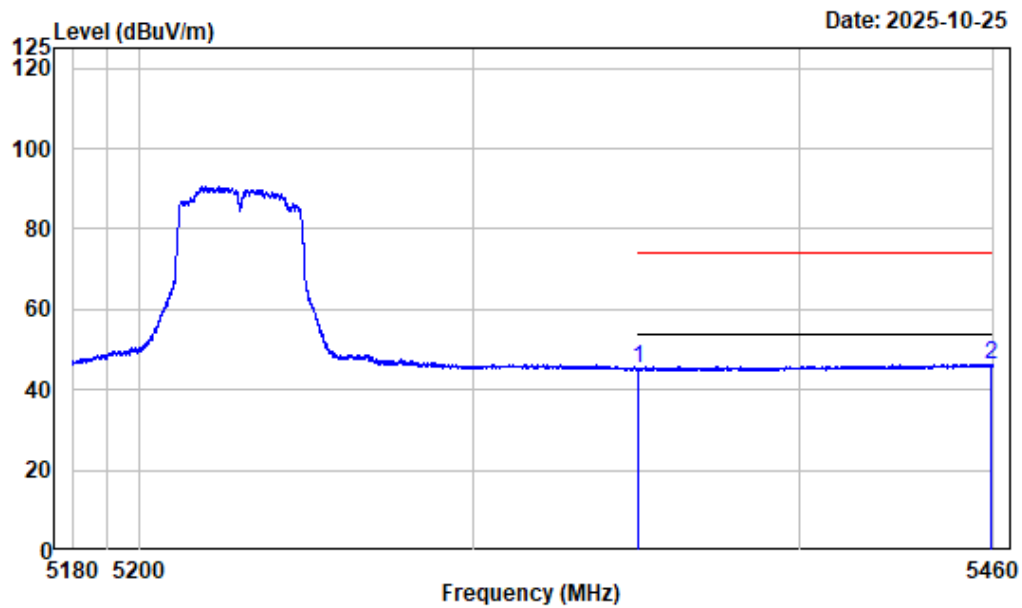

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz		dB/m	dBuV	dBuV/m	dBuV/m	
1	5350.000	-6.76	51.84	45.08	54.00	-8.92 Average
2	5459.335	-6.26	52.68	46.42	54.00	-7.58 Average


Right Band edge_Vertical_Peak_802.11ac-vht40_5230MHz

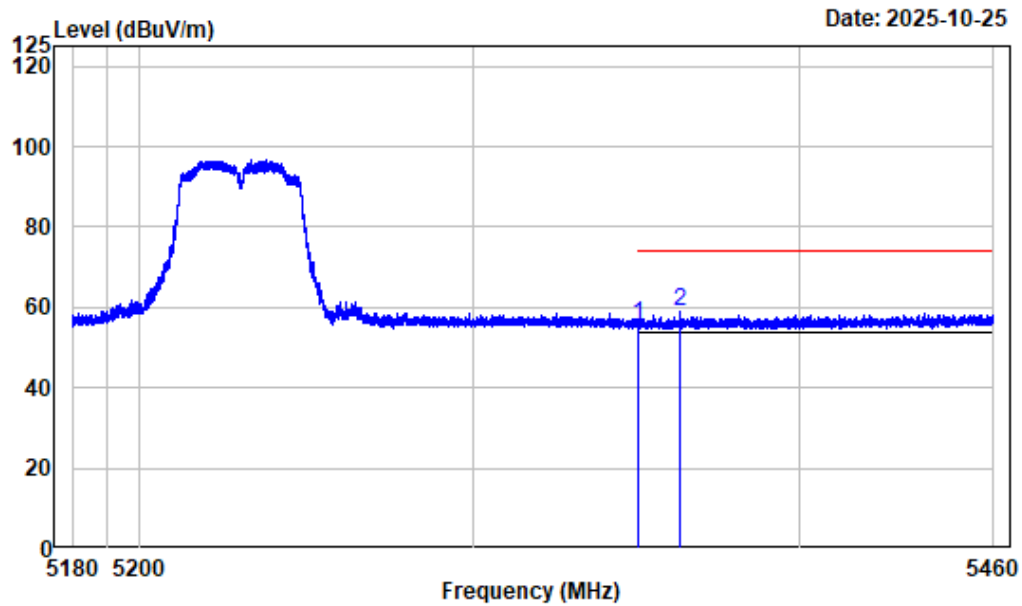

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.53	55.77	74.00	-18.23 Peak
2	5363.260	-6.72	65.46	58.74	74.00	-15.26 Peak


Right Band edge_Vertical_Average_802.11ac-vht40_5230MHz

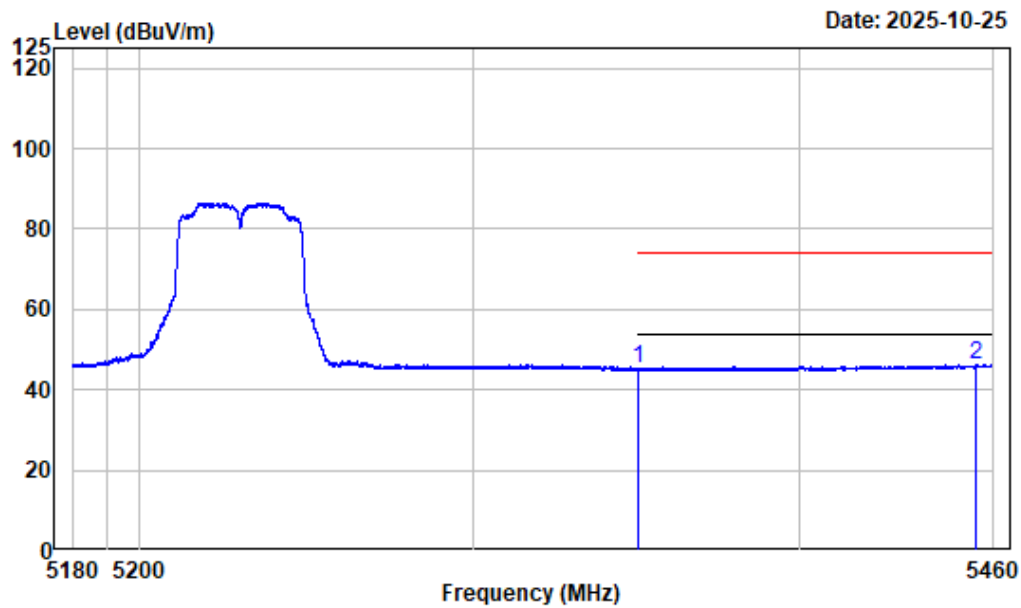

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	51.83	45.07	54.00	-8.93	Average
2 5454.575	-6.29	52.51	46.22	54.00	-7.78	Average


Left Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

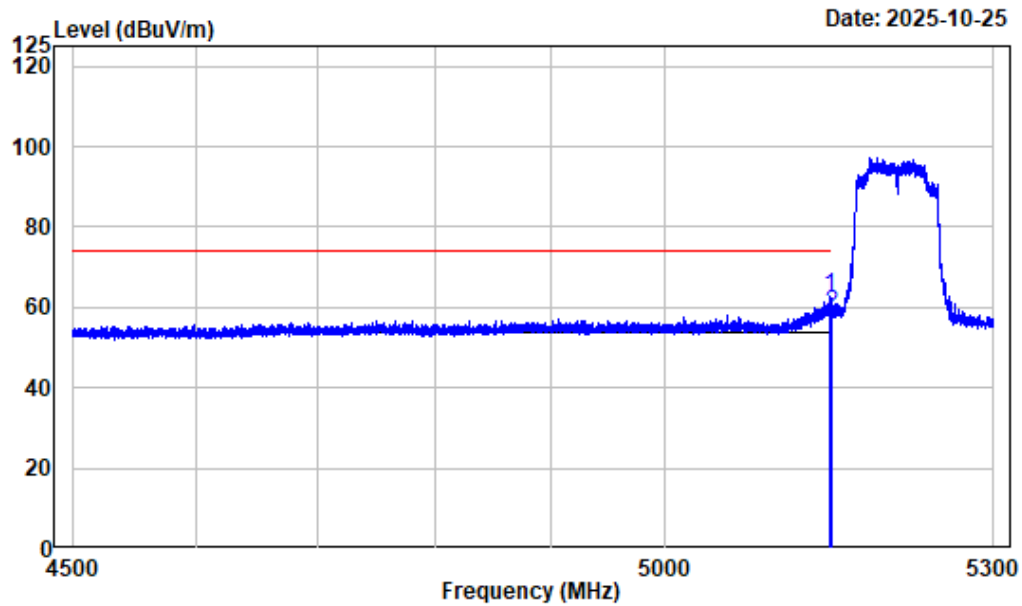

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5147.400	-7.45	70.18	62.73	74.00	-11.27	Peak
2 5150.000	-7.45	66.14	58.69	74.00	-15.31	Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

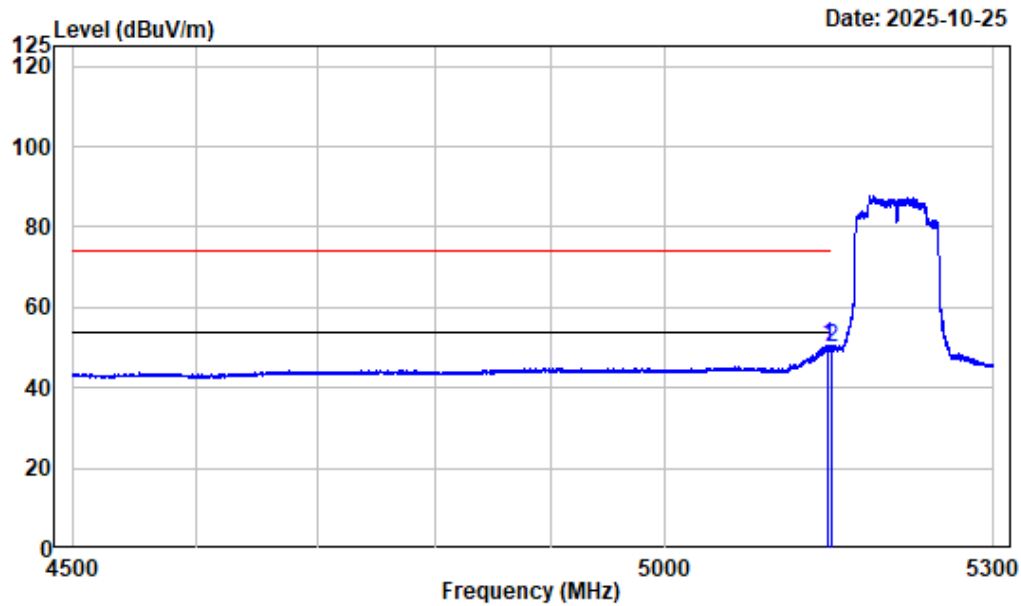

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5146.600	-7.45	58.05	50.60	54.00	-3.40 Average
2	5150.000	-7.45	57.44	49.99	54.00	-4.01 Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

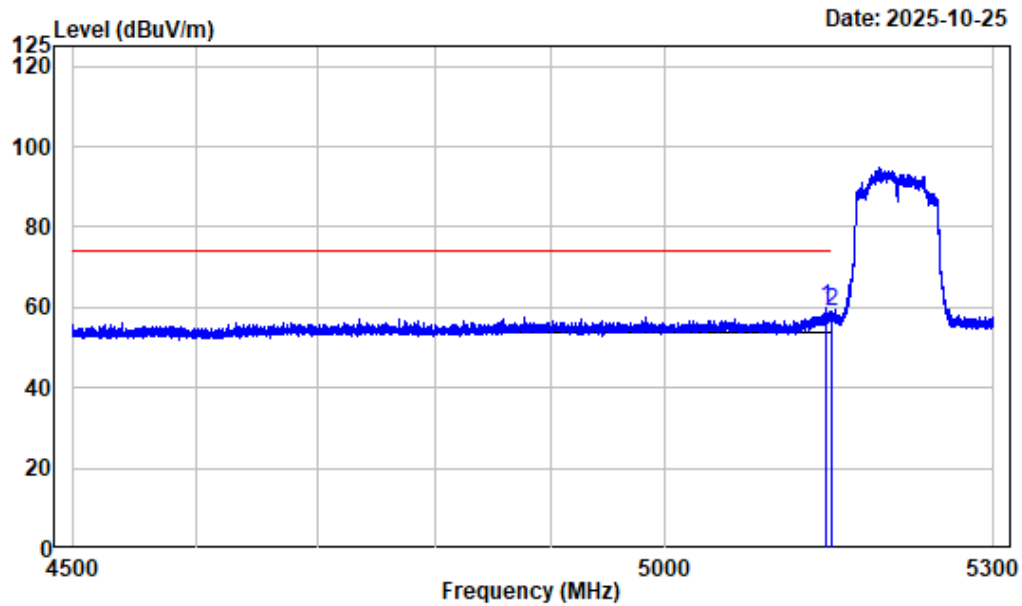

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5144.700	-7.46	67.41	59.95	74.00	-14.05	Peak
2 5150.000	-7.45	66.40	58.95	74.00	-15.05	Peak


Left Band edge_Vertical_Average_802.11ac-vht80_5210MHz

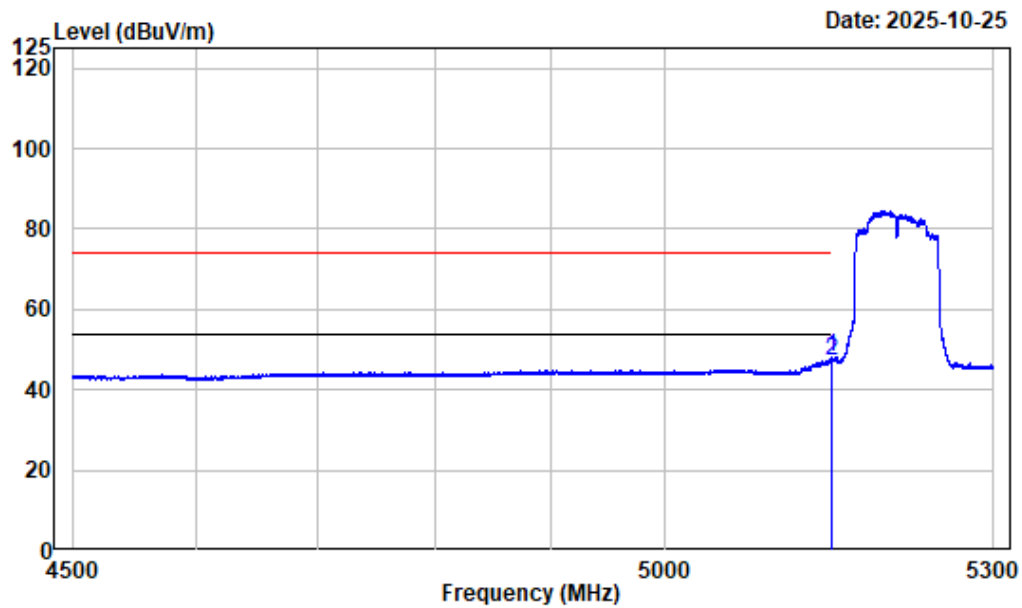

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5149.300	-7.45	55.44	47.99	54.00	-6.01 Average
2	5150.000	-7.45	54.71	47.26	54.00	-6.74 Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

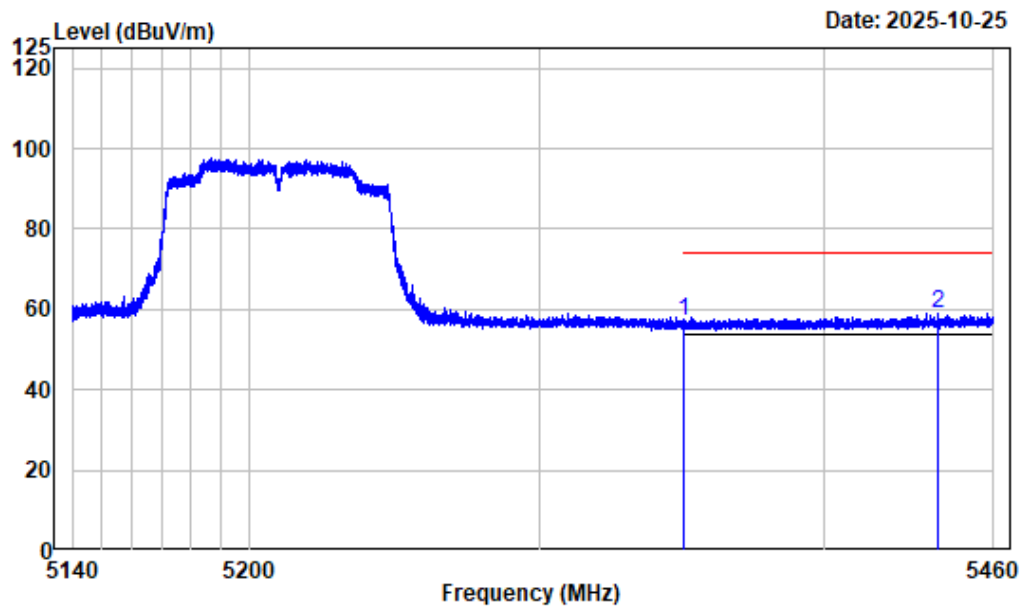

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	63.62	56.86	74.00	-17.14	Peak
2	5440.440	-6.37	65.30	58.93	74.00	-15.07	Peak


Right Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

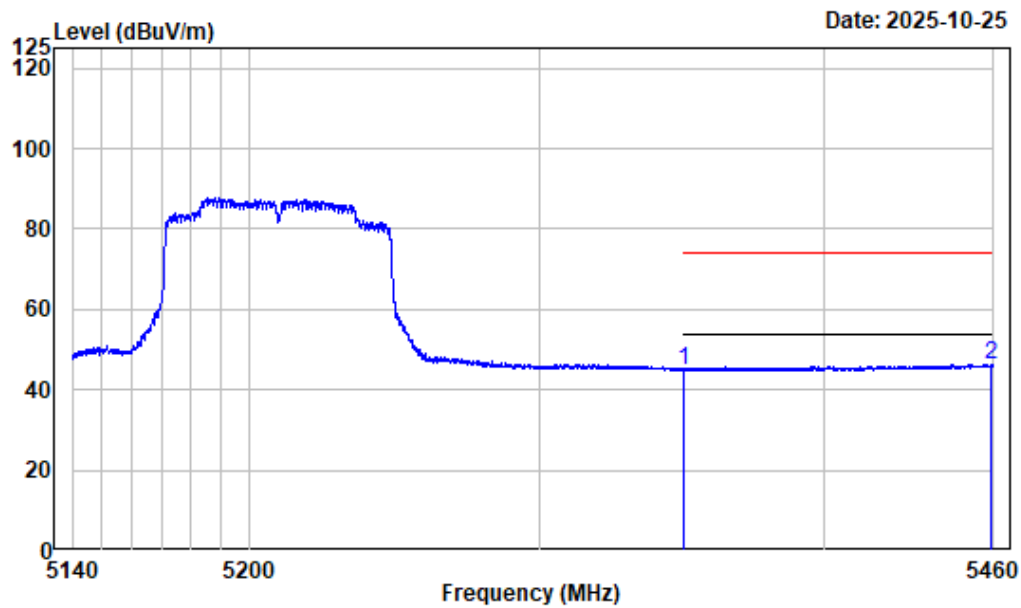

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.75	44.99	54.00	-9.01 Average
2	5458.920	-6.28	52.50	46.22	54.00	-7.78 Average


Right Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

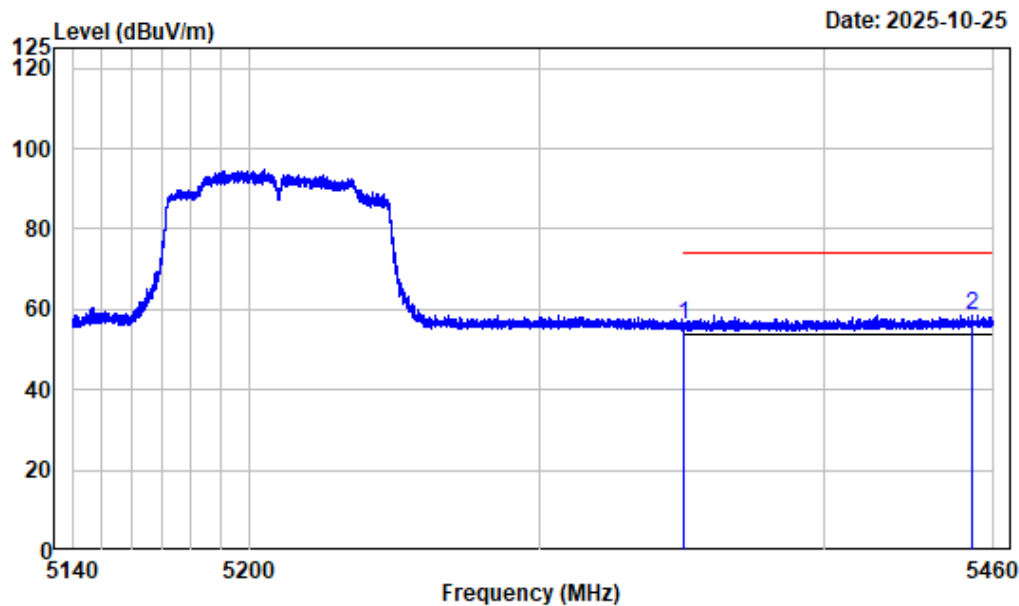

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	62.88	56.12	74.00	-17.88 Peak
2	5452.280	-6.29	64.86	58.57	74.00	-15.43 Peak

Right Band edge_Vertical_Average_802.11ac-vht80_5210MHz

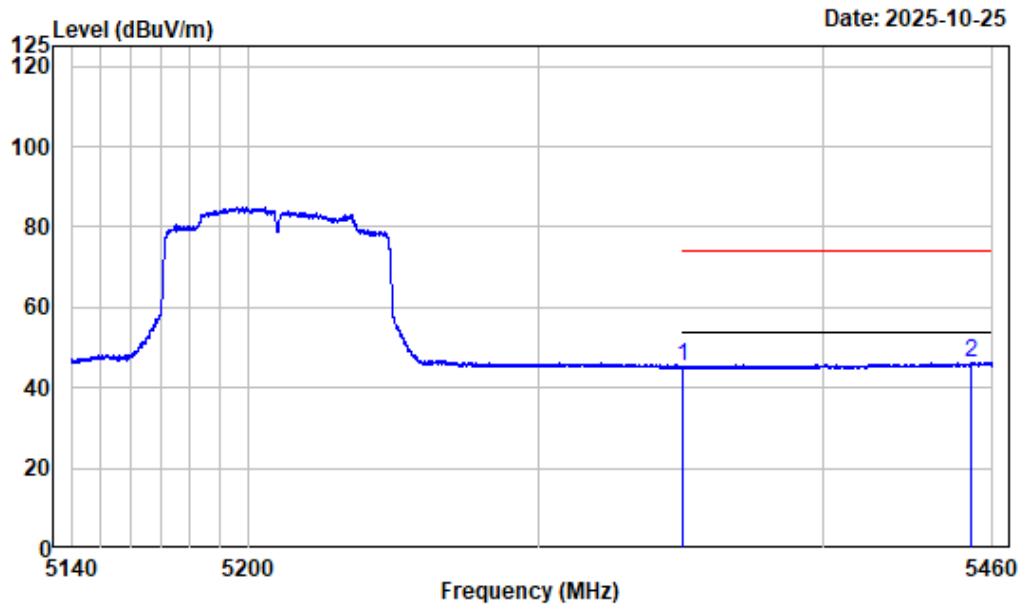


Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	52.01	45.25	54.00	-8.75 Average
2	5452.200	-6.29	52.59	46.30	54.00	-7.70 Average

ANT 2


Left Band edge_Horizontal_Peak_802.11a_5180MHz

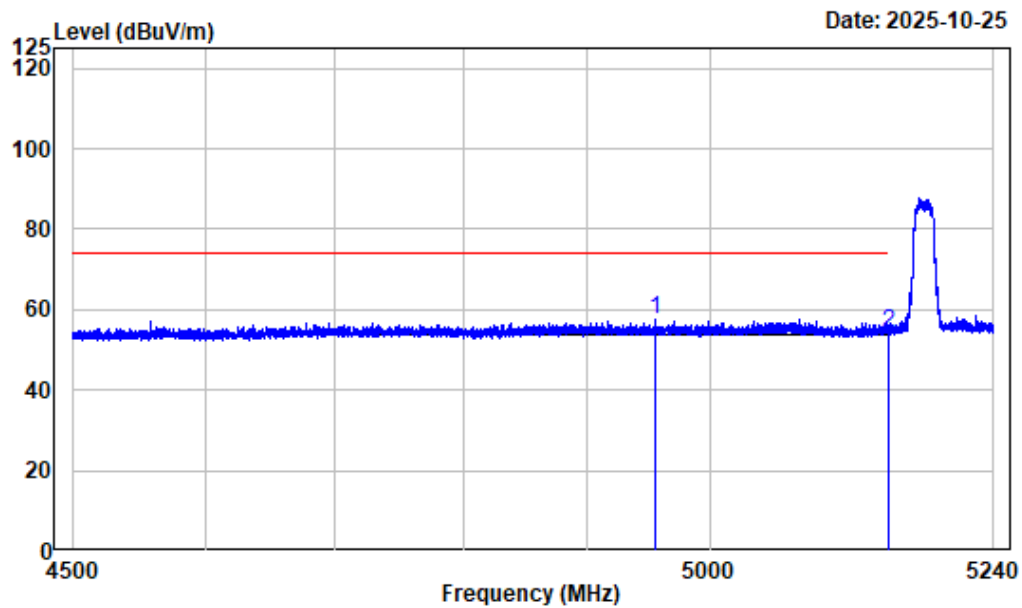

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	4955.840	-7.60	65.01	57.41	74.00	-16.59 Peak
2	5150.000	-7.45	61.68	54.23	74.00	-19.77 Peak


Left Band edge_Horizontal_Average_802.11a_5180MHz

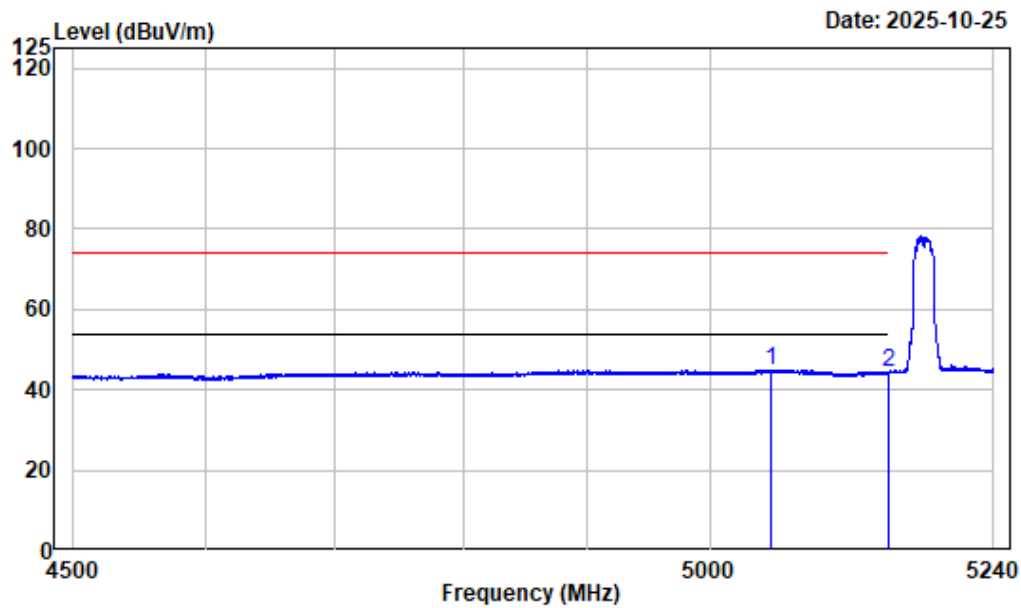

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5050.930	-7.28	52.31	45.03	54.00	-8.97 Average
2	5150.000	-7.45	51.57	44.12	54.00	-9.88 Average


Left Band edge_Vertical_Peak_802.11a_5180MHz

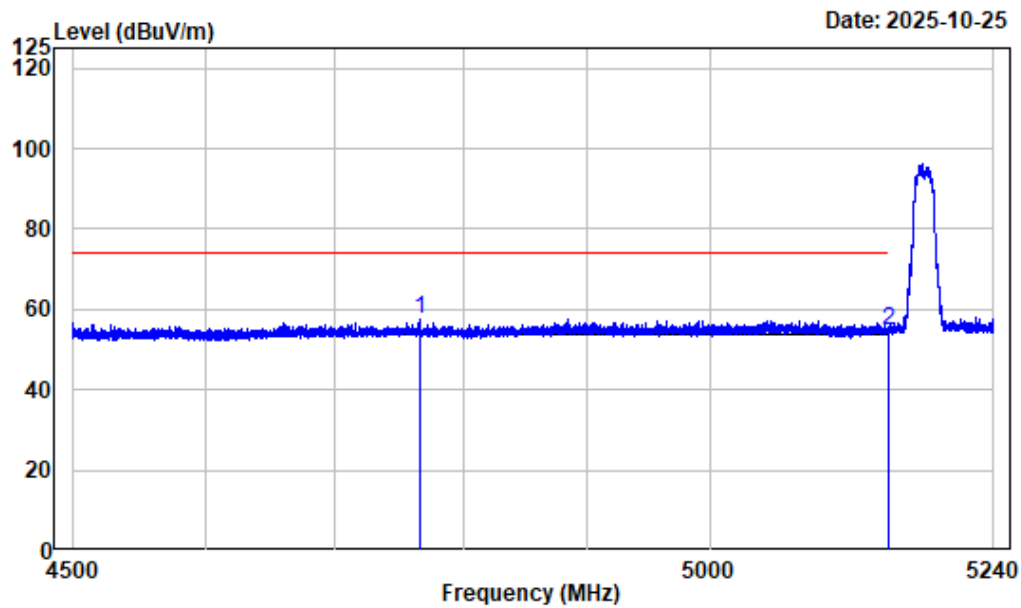

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4765.660	-7.69	65.16	57.47	74.00	-16.53	Peak
2 5150.000	-7.45	62.08	54.63	74.00	-19.37	Peak


Left Band edge_Vertical_Average_802.11a_5180MHz

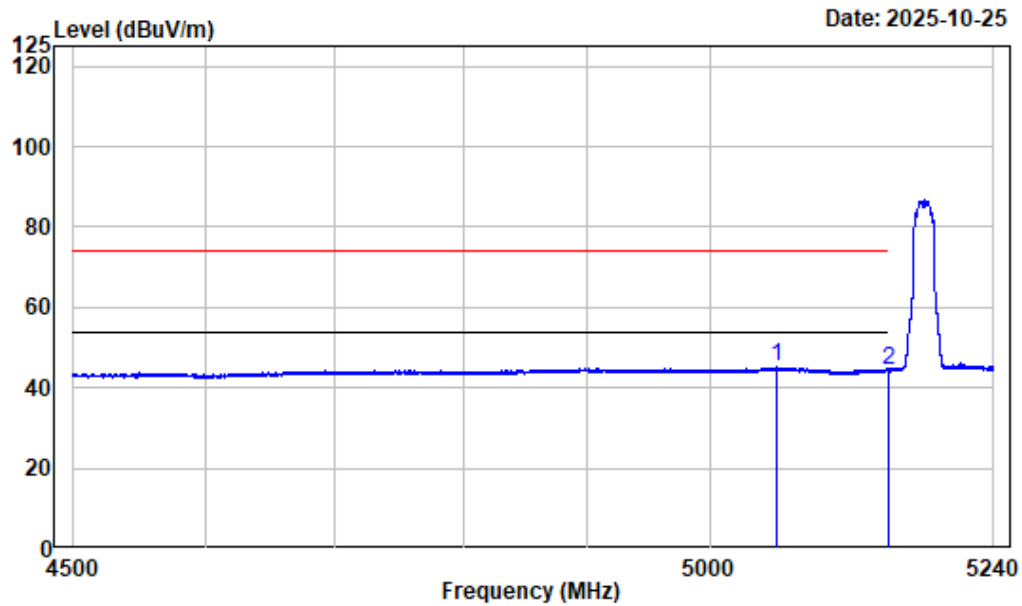

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5056.110	-7.30	52.45	45.15	54.00	-8.85 Average
2	5150.000	-7.45	51.73	44.28	54.00	-9.72 Average


Right Band edge_Horizontal_Peak_802.11a_5240MHz

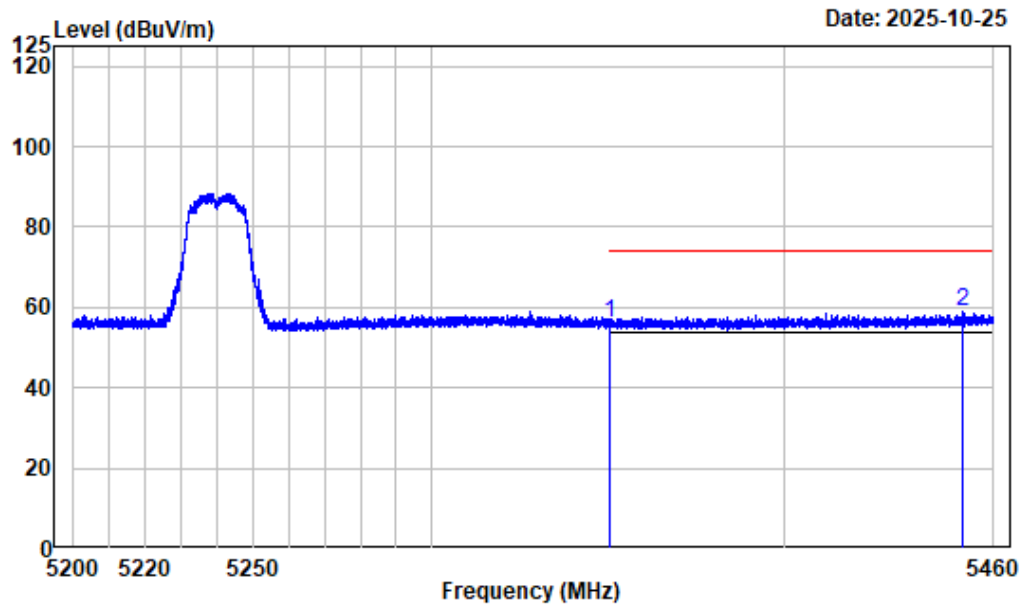

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	62.67	55.91	74.00	-18.09	Peak
2 5451.290	-6.31	65.17	58.86	74.00	-15.14	Peak


Right Band edge_Horizontal_Average_802.11a_5240MHz

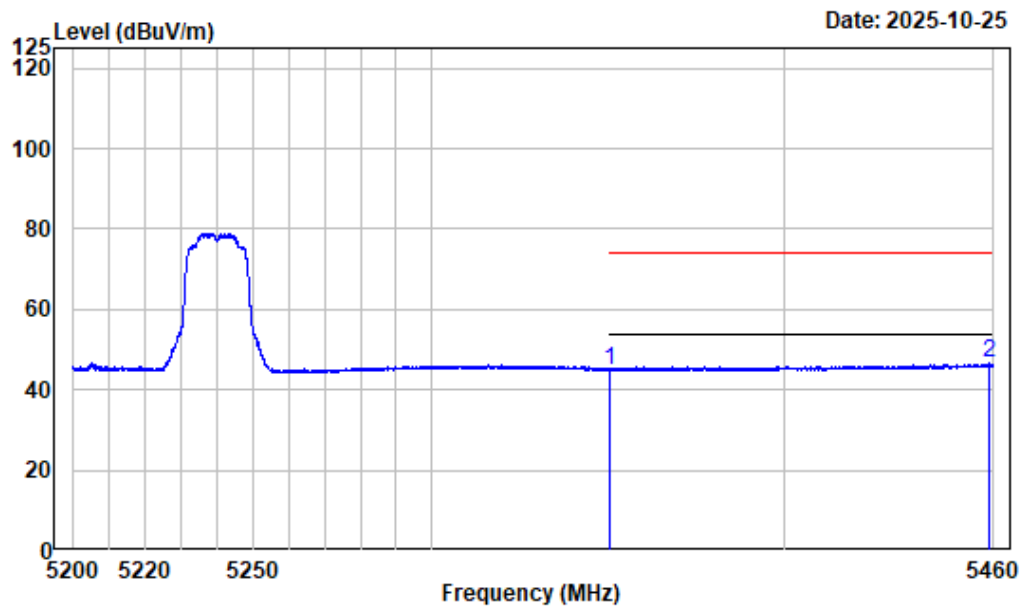

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.74	44.98	54.00	-9.02 Average
2	5458.862	-6.28	52.88	46.60	54.00	-7.40 Average


Right Band edge_Vertical_Peak_802.11a_5240MHz

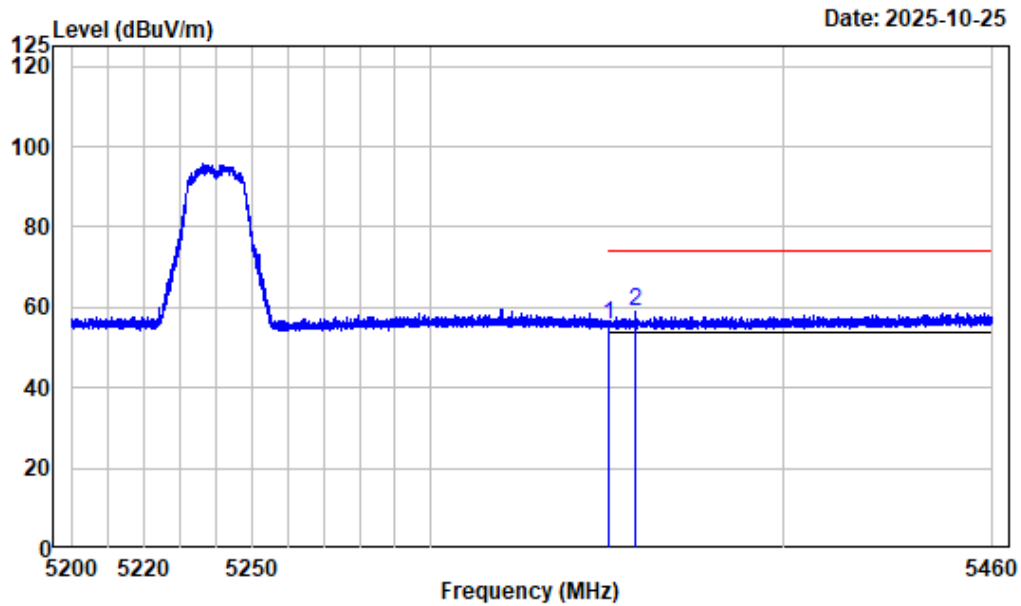

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.20	55.44	74.00	-18.56 Peak
2	5357.917	-6.73	65.58	58.85	74.00	-15.15 Peak


Right Band edge_Vertical_Average_802.11a_5240MHz

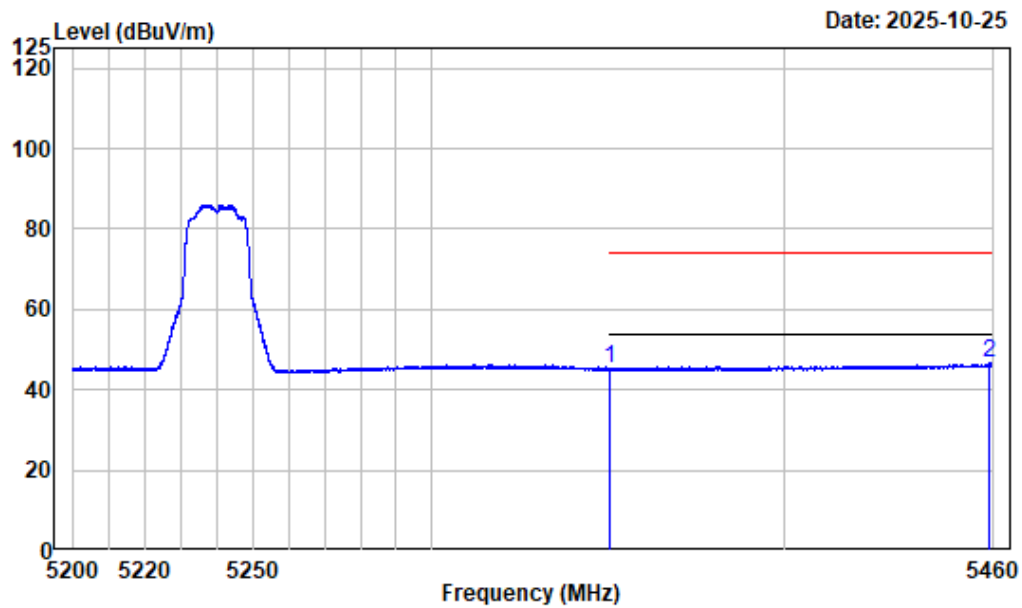

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.88	45.12	54.00	-8.88 Average
2	5458.993	-6.26	52.84	46.58	54.00	-7.42 Average


Left Band edge_Horizontal_Peak_802.11ac-vht20_5180MHz

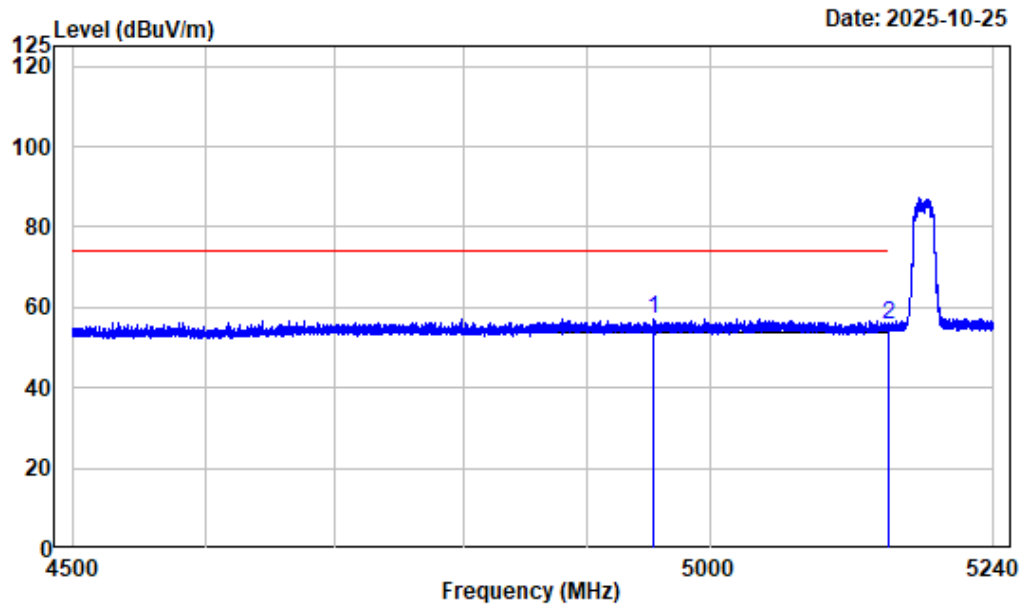

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	4953.435	-7.62	64.89	57.27	74.00	-16.73 Peak
2	5150.000	-7.45	63.16	55.71	74.00	-18.29 Peak


Left Band edge_Horizontal_Average_802.11ac-vht20_5180MHz

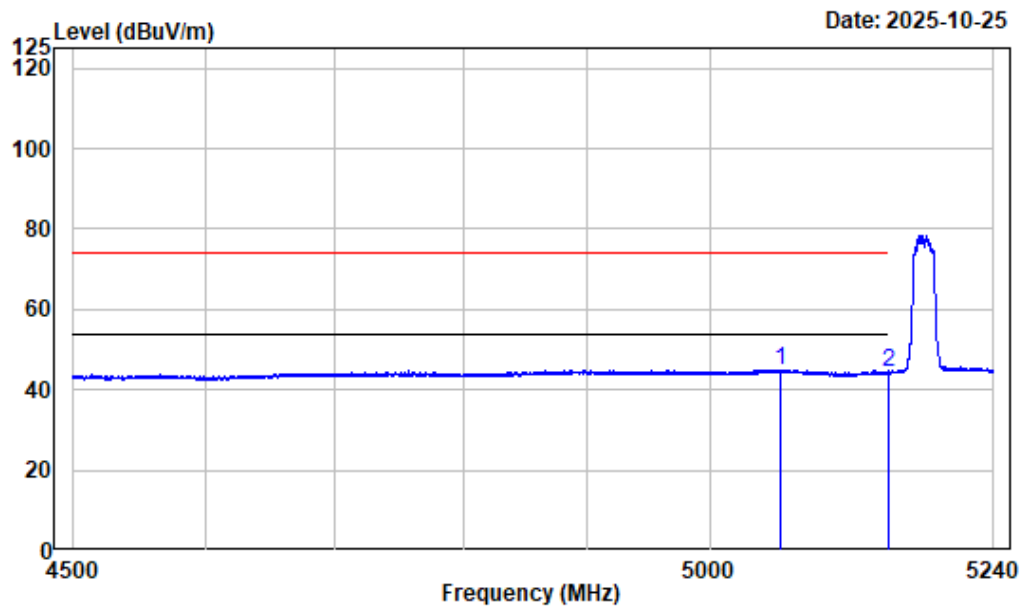

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5058.422	-7.31	52.33	45.02	54.00	-8.98 Average
2	5150.000	-7.45	51.66	44.21	54.00	-9.79 Average


Left Band edge_Vertical_Peak_802.11ac-vht20_5180MHz

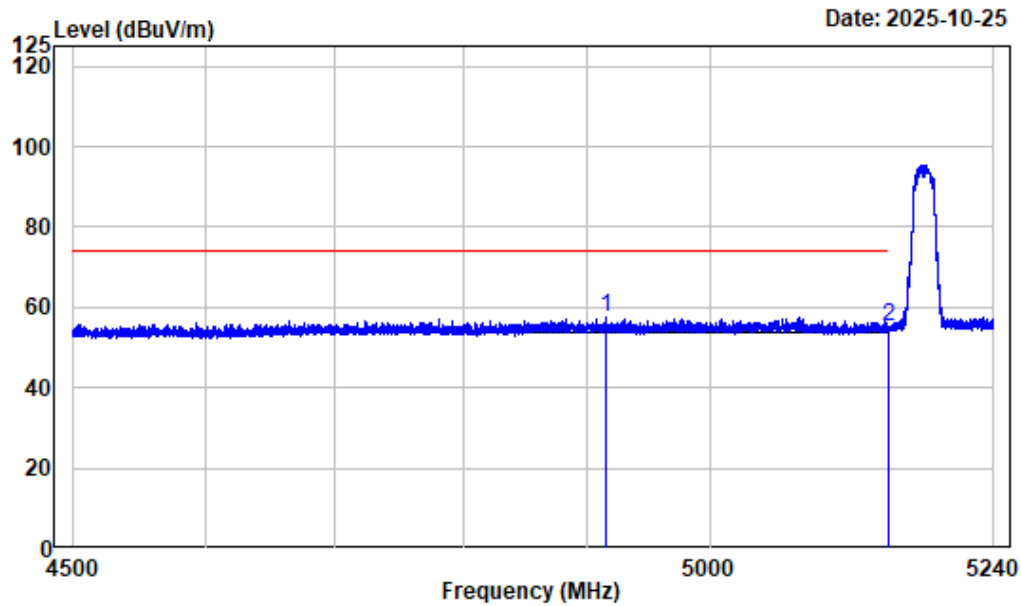

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 4915.140	-7.61	65.18	57.57	74.00	-16.43	Peak
2 5150.000	-7.45	62.64	55.19	74.00	-18.81	Peak


Left Band edge_Vertical_Average_802.11ac-vht20_5180MHz

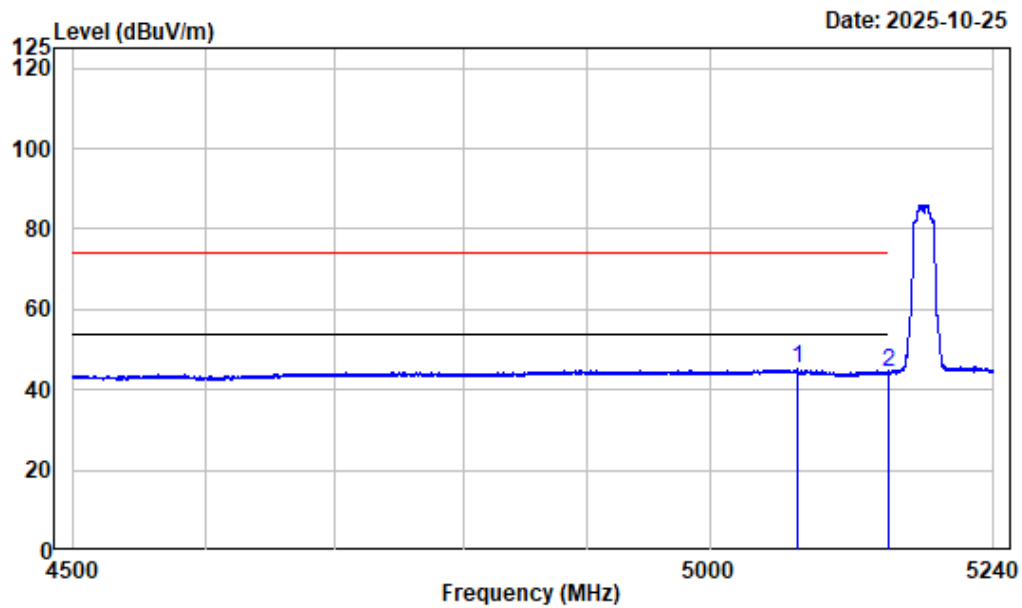

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5180

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5072.575	-7.37	52.45	45.08	54.00	-8.92 Average
2	5150.000	-7.45	51.75	44.30	54.00	-9.70 Average


Right Band edge_Horizontal_Peak_802.11ac-vht20_5240MHz

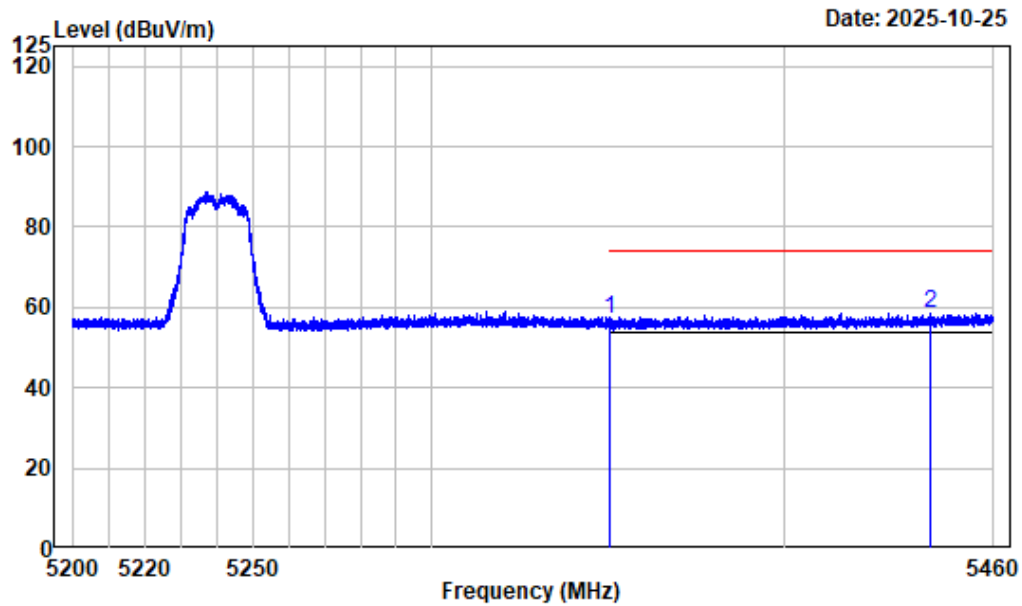

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	64.07	57.31	74.00	-16.69	Peak
2 5441.962	-6.36	64.83	58.47	74.00	-15.53	Peak


Right Band edge_Horizontal_Average_802.11ac-vht20_5240MHz

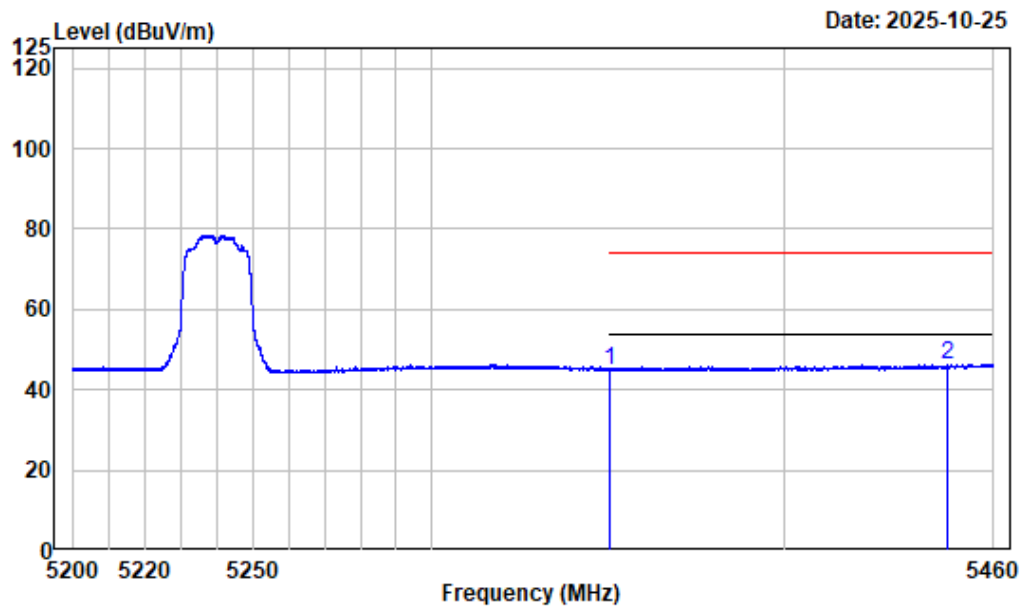

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	51.68	44.92	54.00	-9.08	Average
2 5446.545	-6.33	52.44	46.11	54.00	-7.89	Average


Right Band edge_Vertical_Peak_802.11ac-vht20_5240MHz

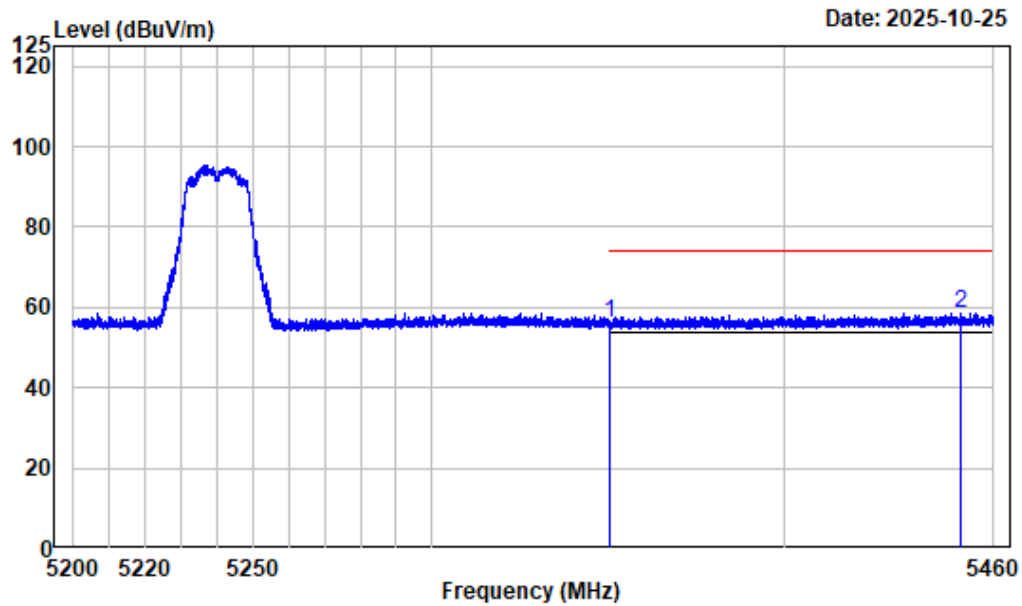

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.08	56.32	74.00	-17.68	Peak
2 5450.672	-6.31	64.97	58.66	74.00	-15.34	Peak


Right Band edge_Vertical_Average_802.11ac-vht20_5240MHz

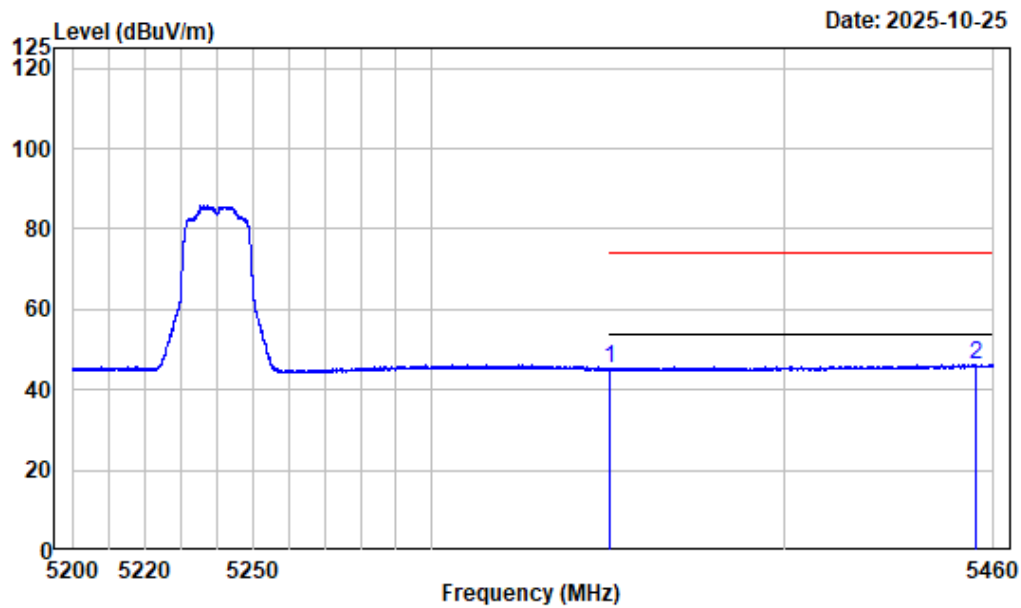

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.81	45.05	54.00	-8.95 Average
2	5454.962	-6.29	52.48	46.19	54.00	-7.81 Average


Left Band edge_Horizontal_Peak_802.11ac-vht40_5190MHz

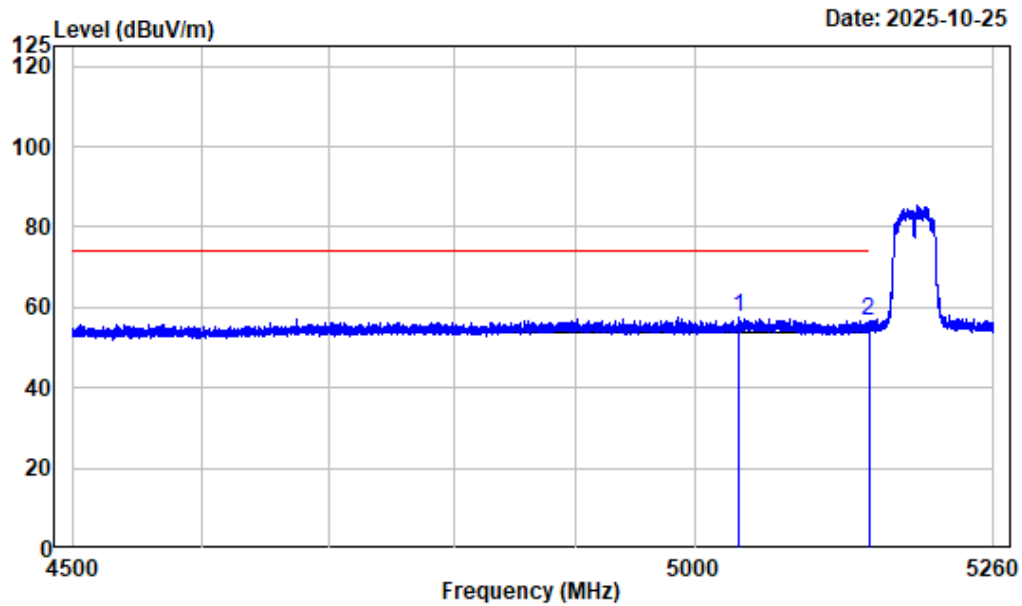

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5037.415	-7.28	64.68	57.40	74.00	-16.60 Peak
2	5150.000	-7.45	63.93	56.48	74.00	-17.52 Peak


Left Band edge_Horizontal_Average_802.11ac-vht40_5190MHz

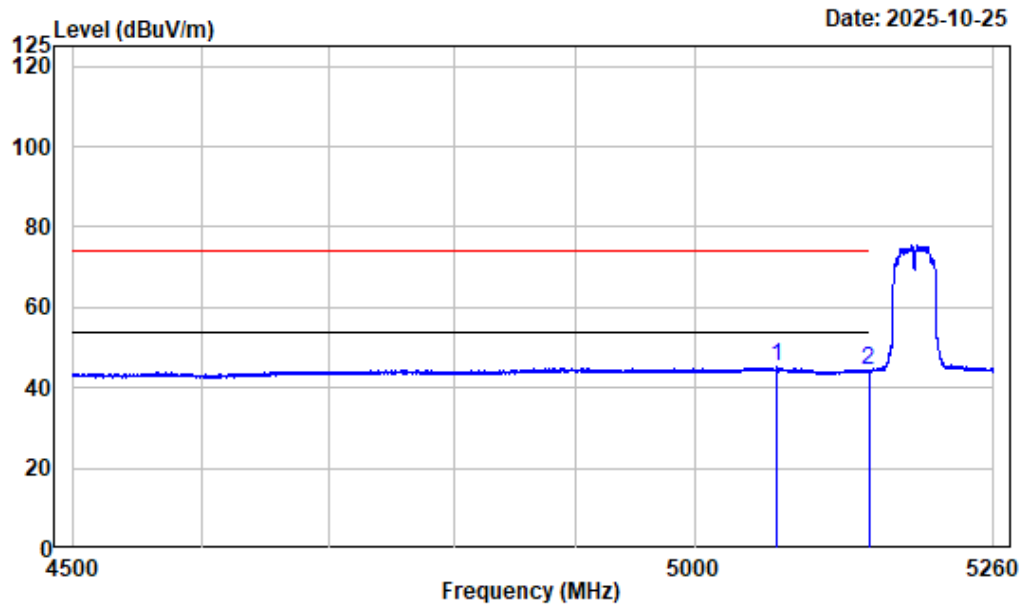

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5069.905	-7.36	52.49	45.13	54.00	-8.87 Average
2	5150.000	-7.45	51.67	44.22	54.00	-9.78 Average


Left Band edge_Vertical_Peak_802.11ac-vht40_5190MHz

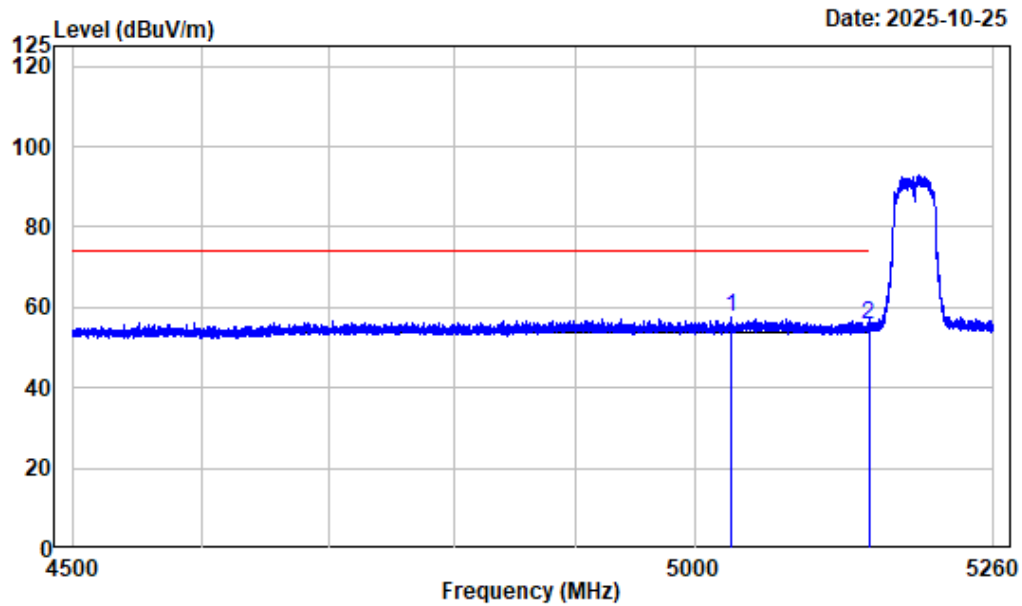

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5032.095	-7.29	64.94	57.65	74.00	-16.35	Peak
2 5150.000	-7.45	63.00	55.55	74.00	-18.45	Peak


Left Band edge_Vertical_Average_802.11ac-vht40_5190MHz

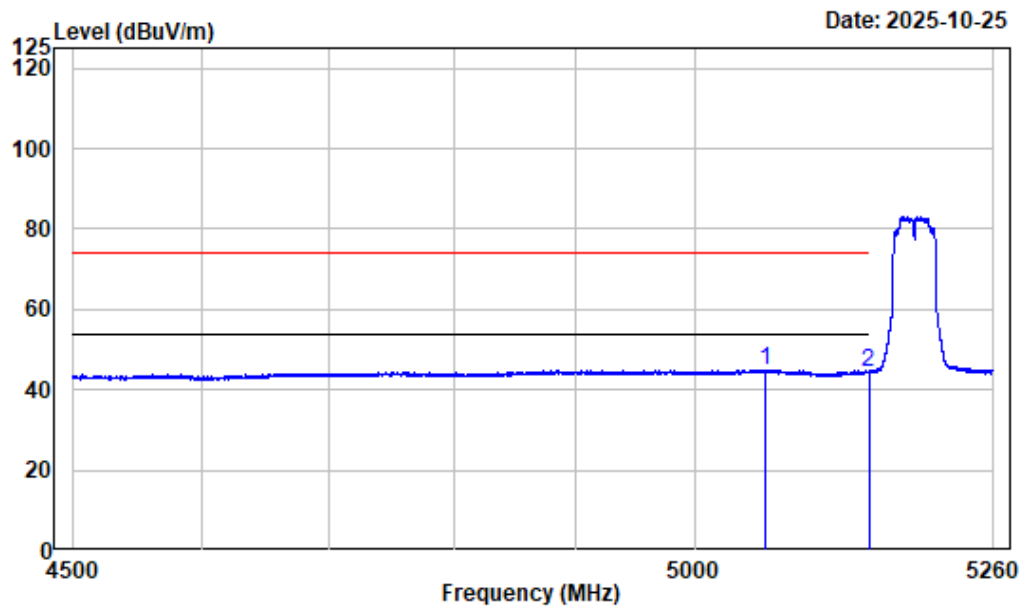

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5190

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5060.310	-7.32	52.29	44.97	54.00	-9.03 Average
2	5150.000	-7.45	51.61	44.16	54.00	-9.84 Average


Right Band edge_Horizontal_Peak_802.11ac-vht40_5230MHz

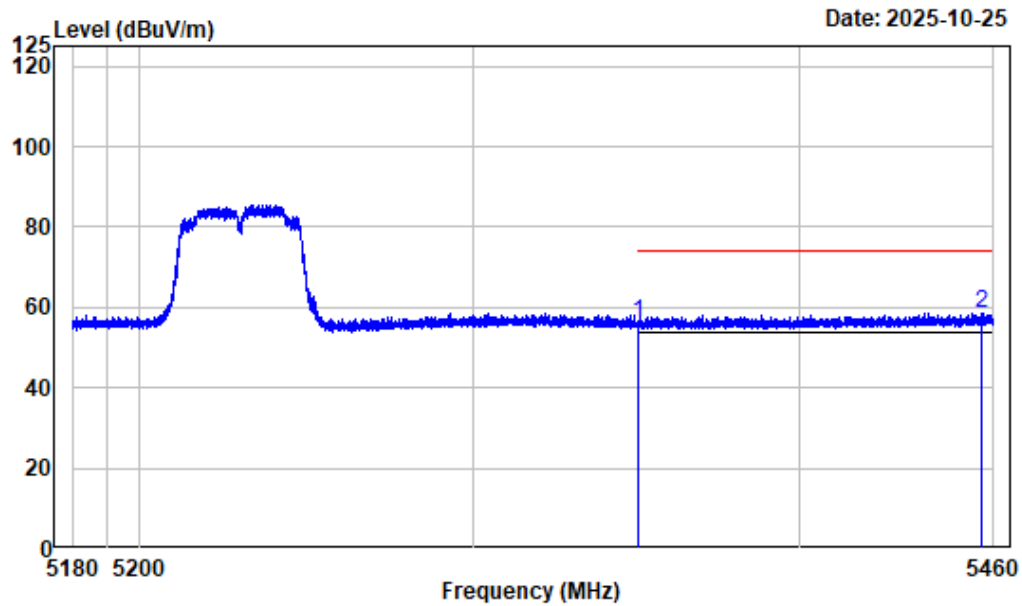

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	62.78	56.02	74.00	-17.98 Peak
2	5456.220	-6.28	64.84	58.56	74.00	-15.44 Peak


Right Band edge_Horizontal_Average_802.11ac-vht40_5230MHz

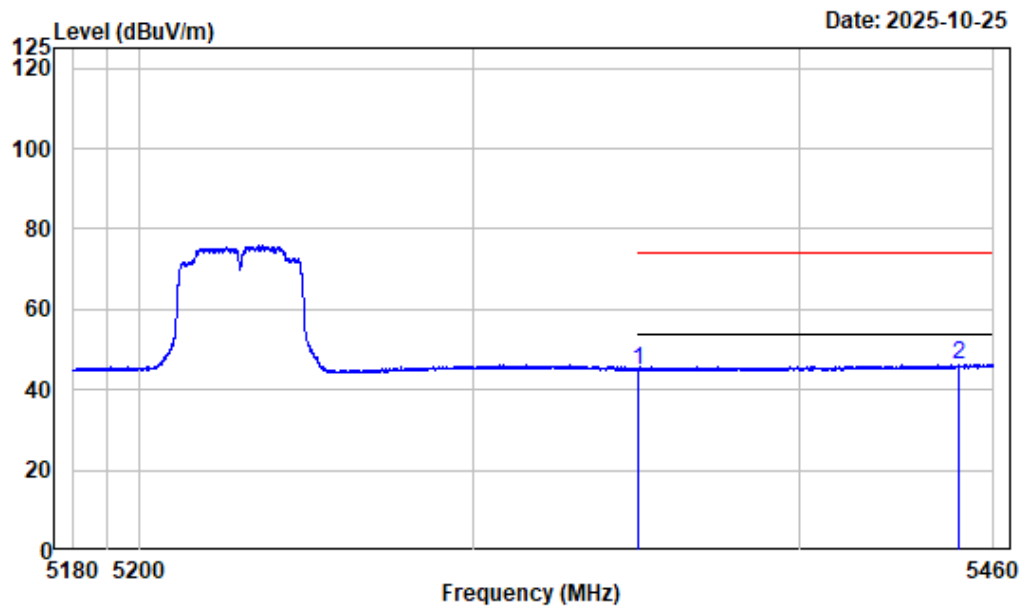

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.72	44.96	54.00	-9.04 Average
2	5449.010	-6.31	52.64	46.33	54.00	-7.67 Average


Right Band edge_Vertical_Peak_802.11ac-vht40_5230MHz

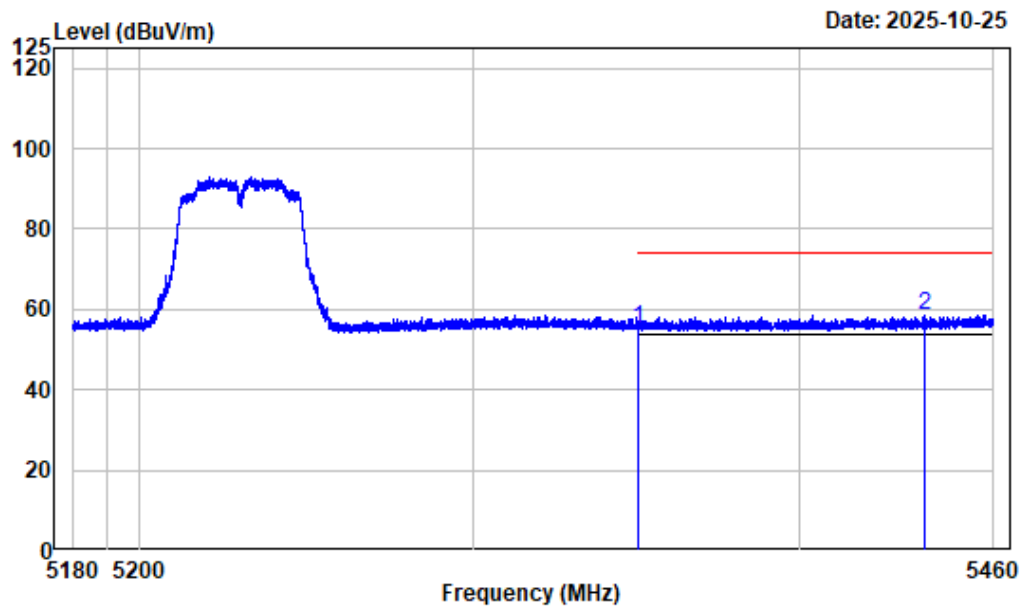

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	61.95	55.19	74.00	-18.81	Peak
2 5438.300	-6.37	64.96	58.59	74.00	-15.41	Peak


Right Band edge_Vertical_Average_802.11ac-vht40_5230MHz

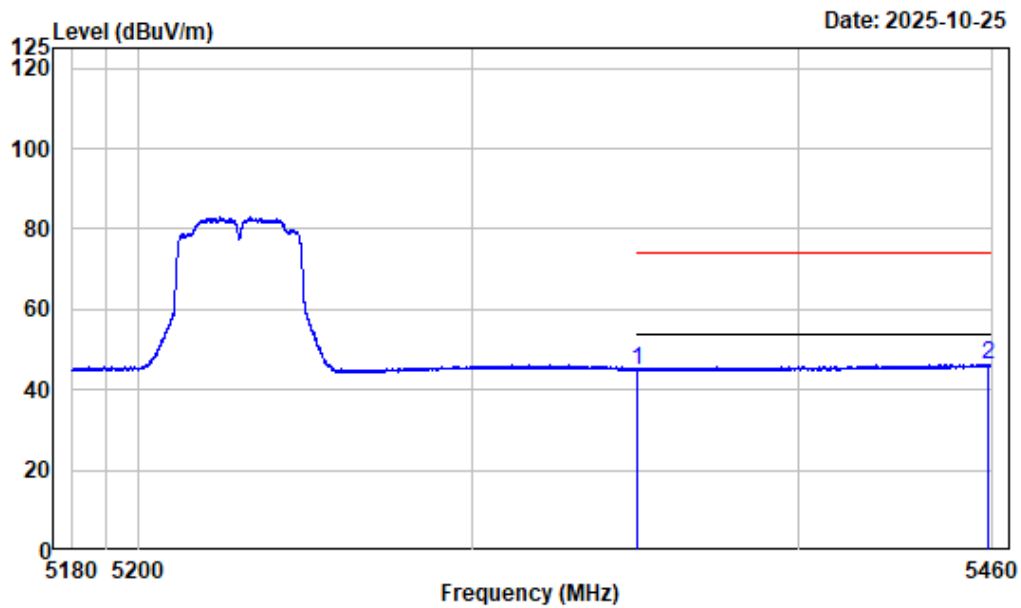

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5350.000	-6.76	51.78	45.02	54.00	-8.98 Average
2	5458.565	-6.28	52.51	46.23	54.00	-7.77 Average


Left Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

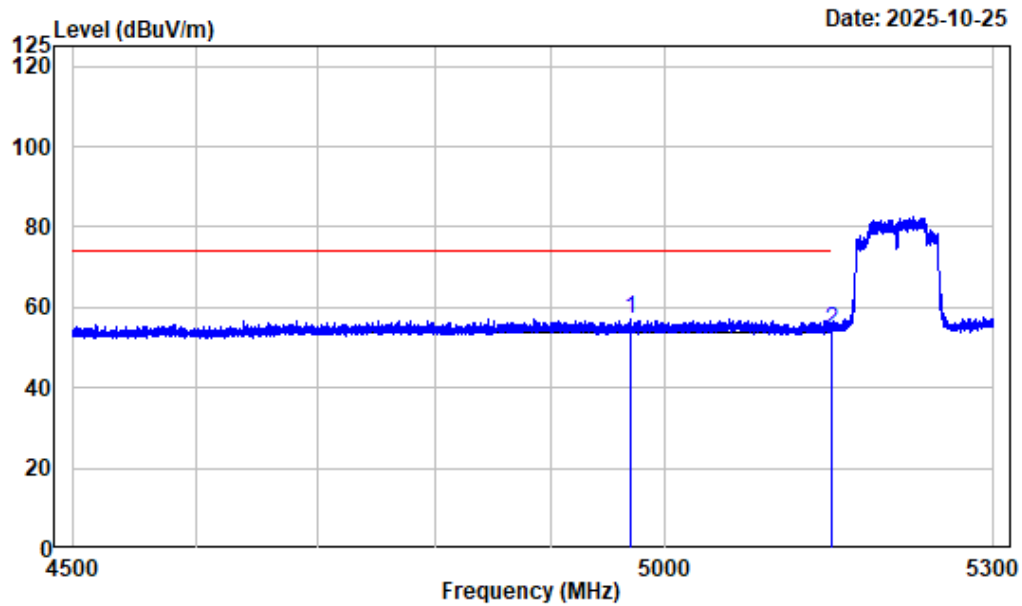

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1	4969.300	-7.50	64.56	57.06	74.00	-16.94 Peak
2	5150.000	-7.45	61.57	54.12	74.00	-19.88 Peak


Left Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

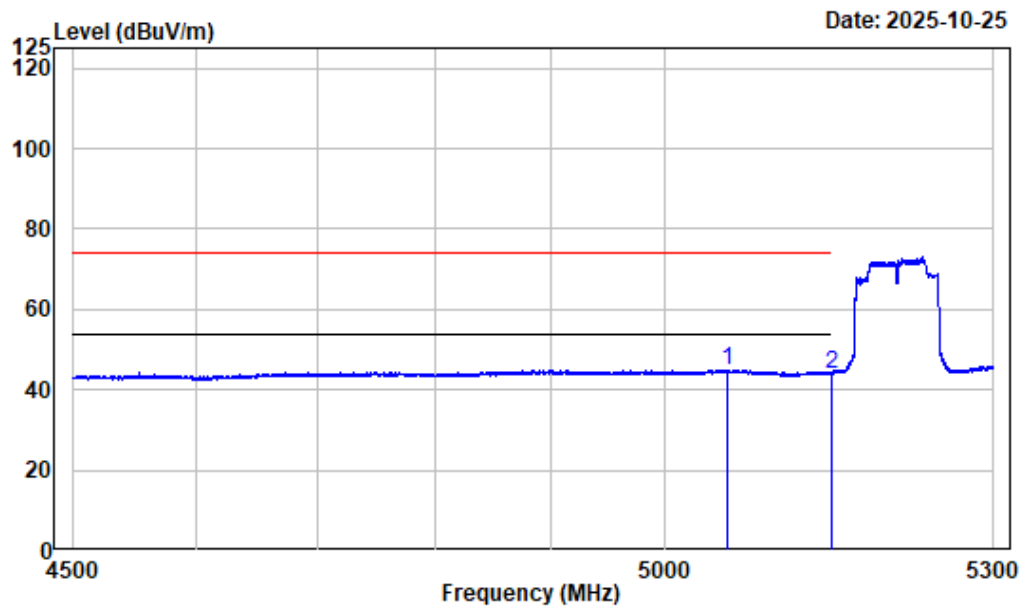

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5056.000	-7.30	52.26	44.96	54.00	-9.04	Average
2 5150.000	-7.45	51.53	44.08	54.00	-9.92	Average


Left Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

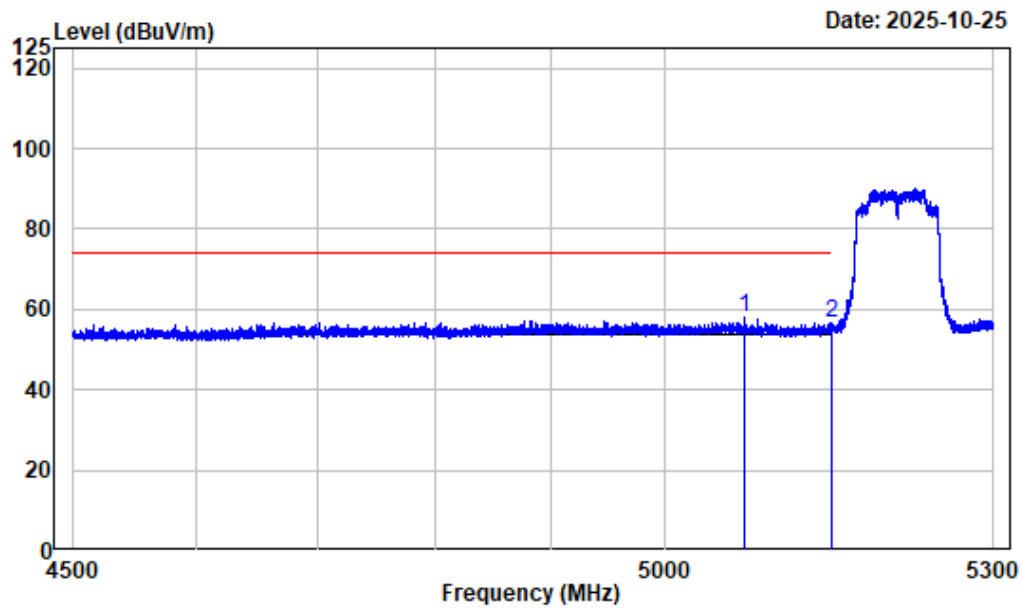

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5071.400	-7.37	65.35	57.98	74.00	-16.02	Peak
2 5150.000	-7.45	64.01	56.56	74.00	-17.44	Peak


Left Band edge_Vertical_Average_802.11ac-vht80_5210MHz

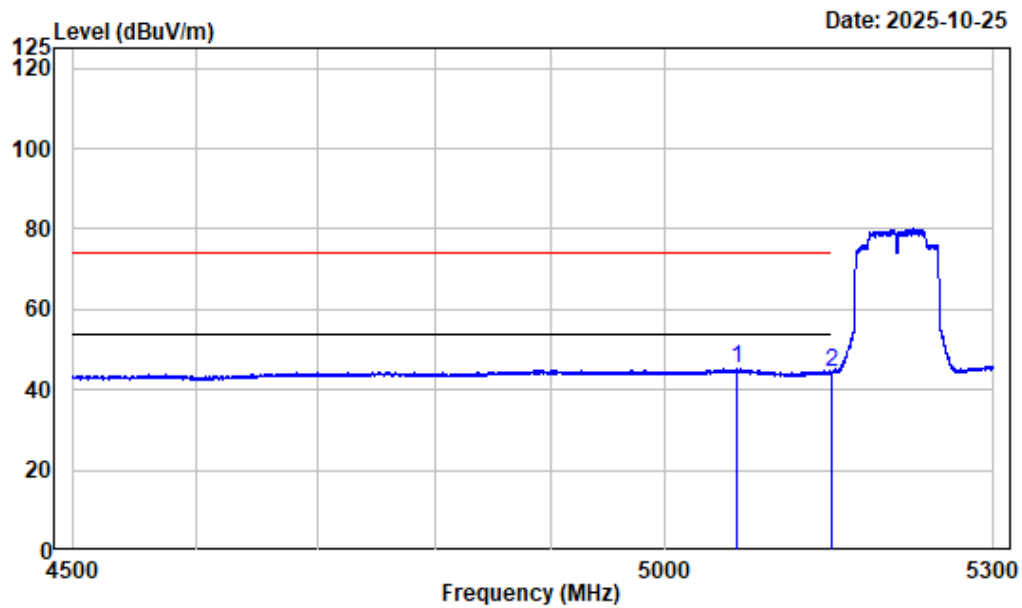

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5063.300	-7.34	52.53	45.19	54.00	-8.81 Average
2	5150.000	-7.45	51.79	44.34	54.00	-9.66 Average


Right Band edge_Horizontal_Peak_802.11ac-vht80_5210MHz

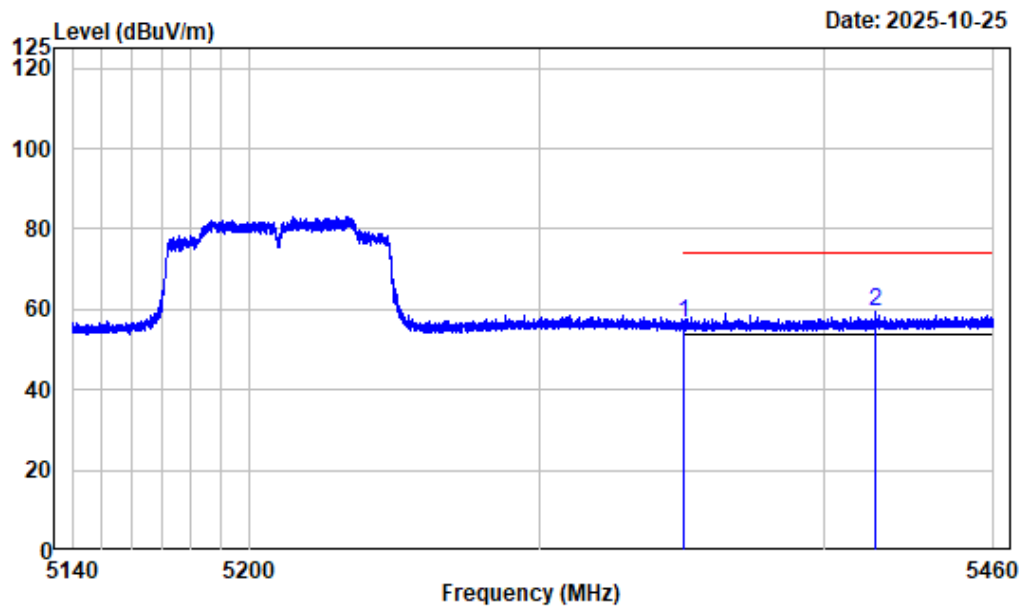

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	63.31	56.55	74.00	-17.45	Peak
2 5417.600	-6.50	65.70	59.20	74.00	-14.80	Peak


Right Band edge_Horizontal_Average_802.11ac-vht80_5210MHz

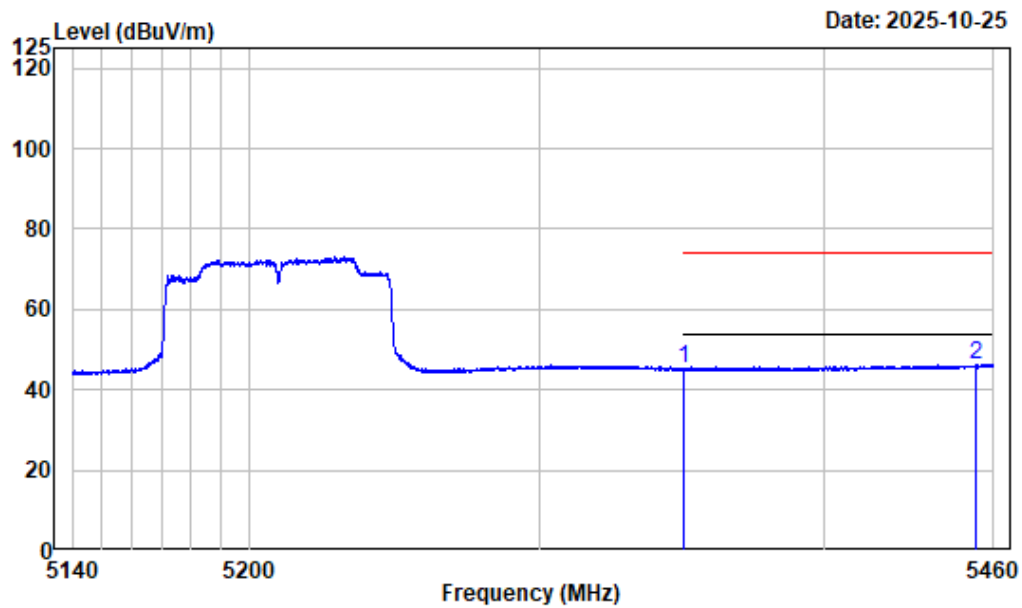

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5350.000	-6.76	51.81	45.05	54.00	-8.95	Average
2 5453.640	-6.29	52.54	46.25	54.00	-7.75	Average


Right Band edge_Vertical_Peak_802.11ac-vht80_5210MHz

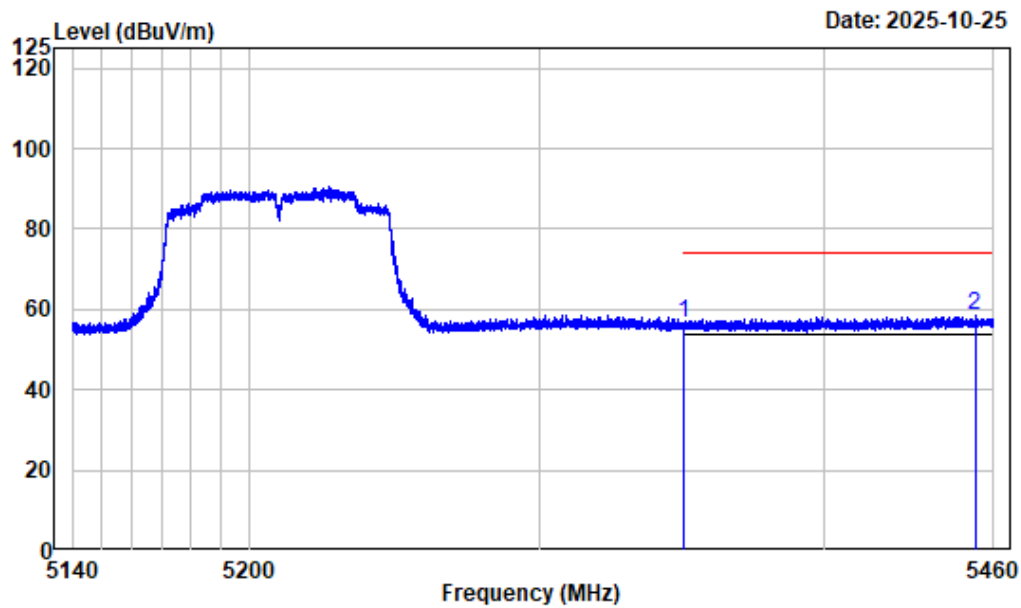

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 5350.000	-6.76	63.36	56.60	74.00	-17.40 Peak
2 5453.360	-6.29	64.75	58.46	74.00	-15.54 Peak

Right Band edge_Vertical_Average_802.11ac-vht80_5210MHz

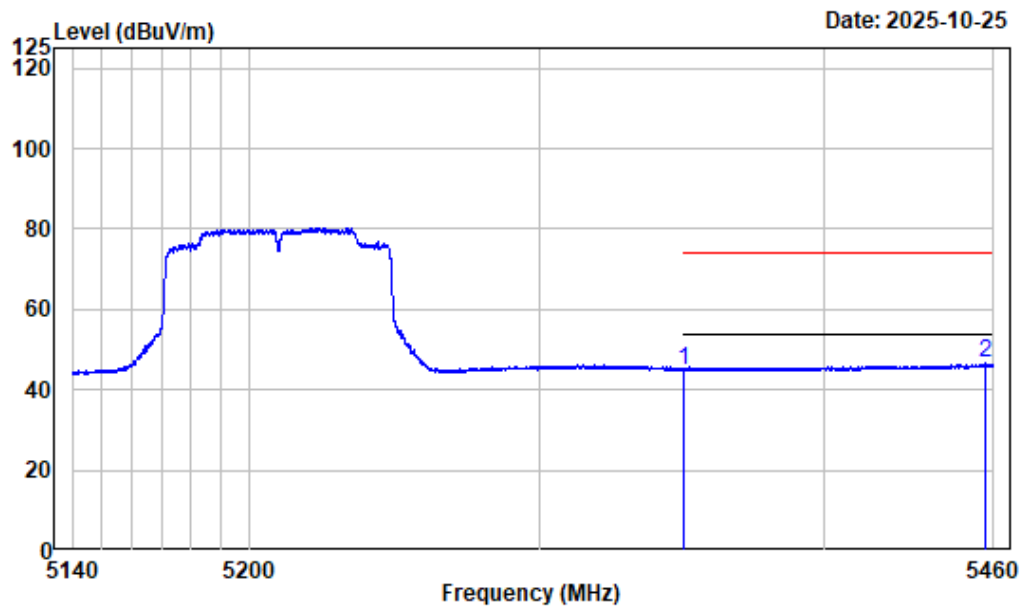


Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-6.76	51.67	44.91	54.00	-9.09 Average
2	5456.960	-6.28	52.86	46.58	54.00	-7.42 Average

1-18GHz (Listed with the worst margin test plot)

ANT 1


1-7GHz_Horizontal_802.11a_5240MHz

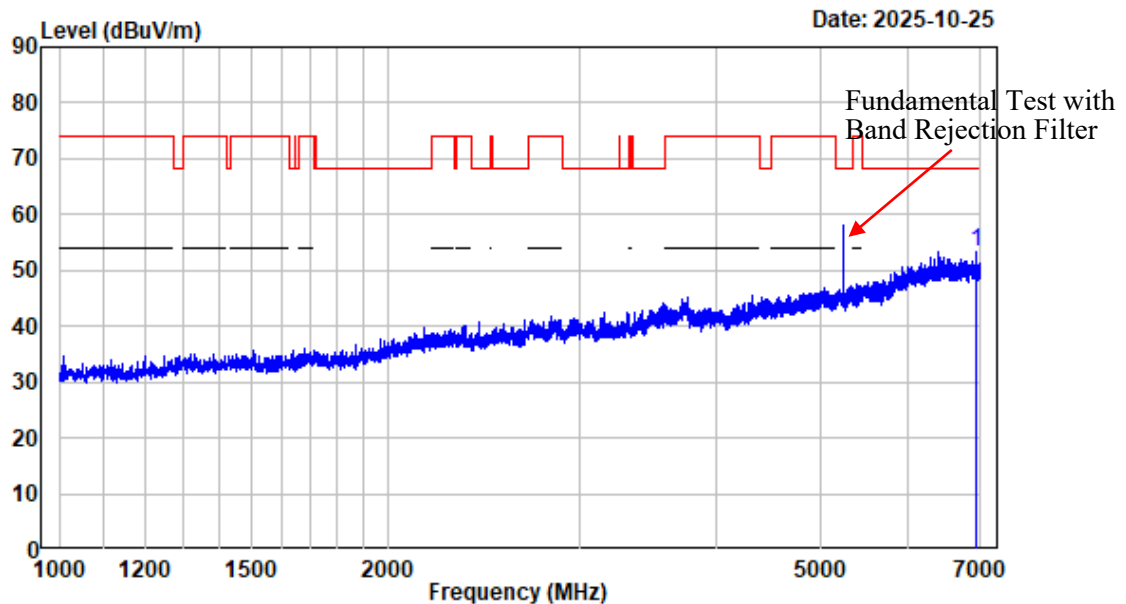

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6947.500	-2.67	55.87	53.20	68.20	-15.00	Peak


1-7GHz_Vertical_802.11a_5240MHz

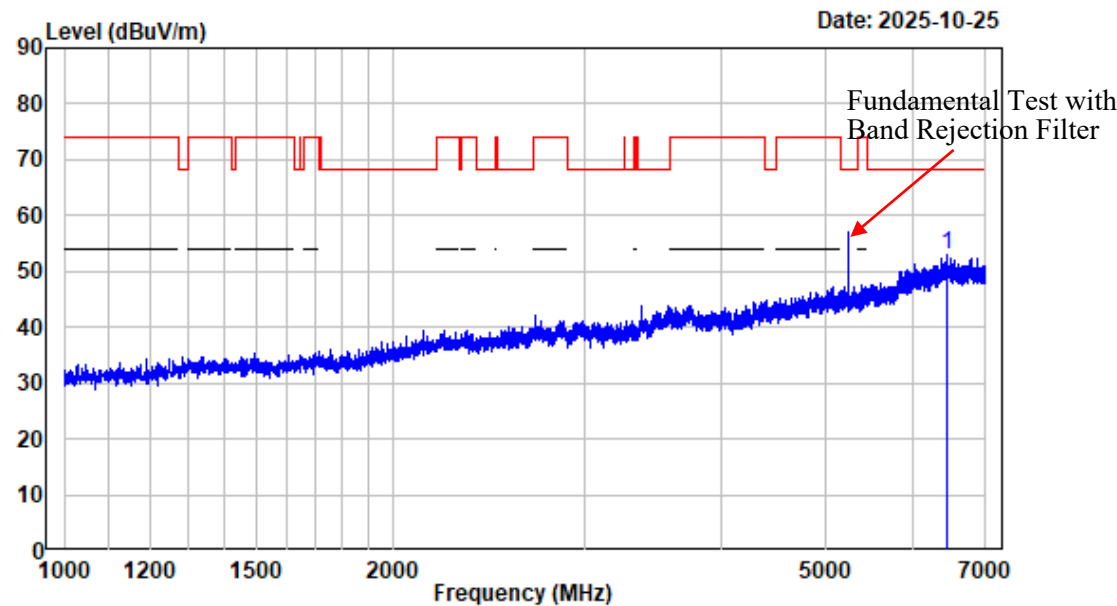

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6452.500	-2.87	55.69	52.82	68.20	-15.38 Peak


7-18GHz_Horizontal_Peak_802.11a_5240MHz

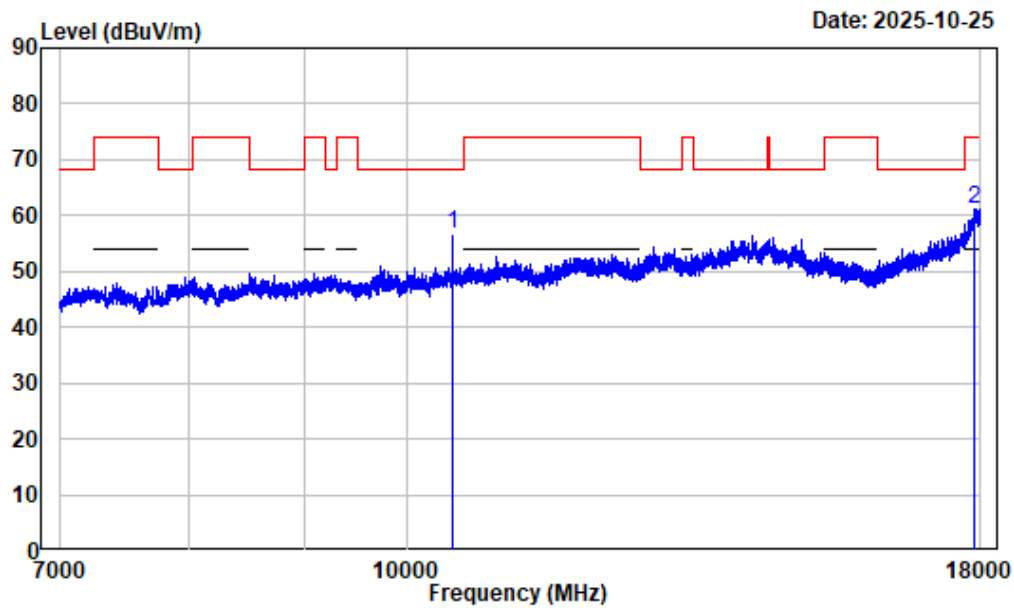

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	54.38	56.57	68.20	-11.63 Peak
2 17891.380	12.59	48.65	61.24	74.00	-12.76 Peak


7-18GHz_Horizontal_Average_802.11a_5240MHz

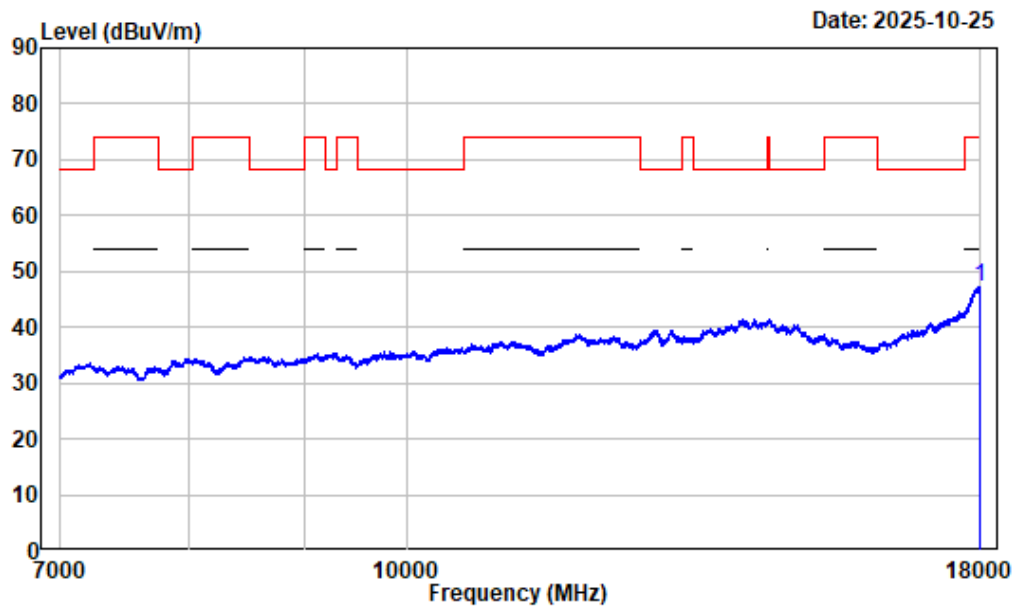

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17987.630	13.19	34.10	47.29	54.00	-6.71	Average


7-18GHz_Vertical_Peak_802.11a_5240MHz

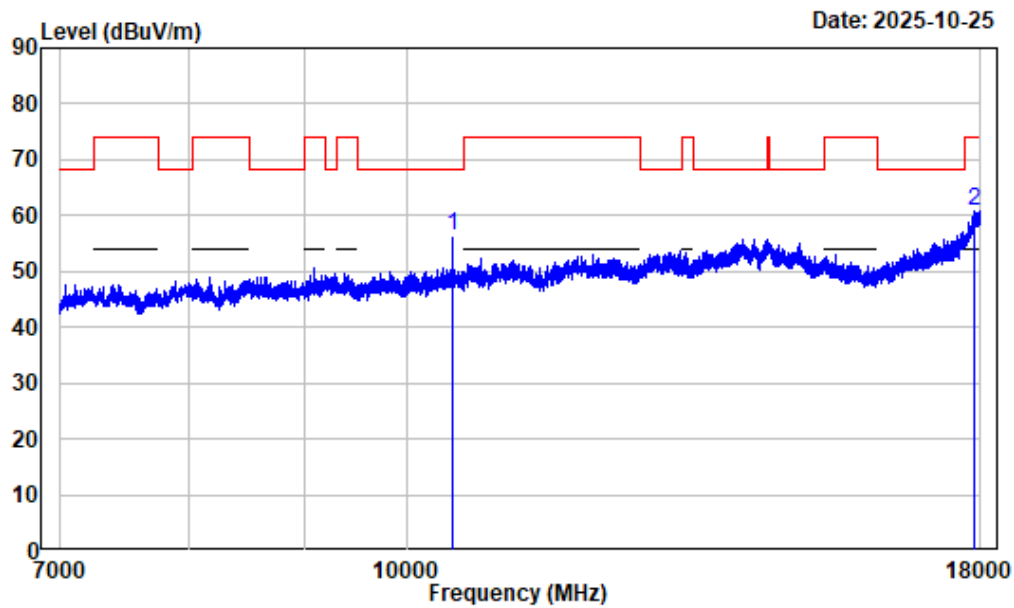

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	
1	10480.000	2.19	54.03	56.22	68.20 -11.98 Peak
2	17877.630	12.33	48.43	60.76	74.00 -13.24 Peak


7-18GHz_Vertical_Average_802.11a_5240MHz

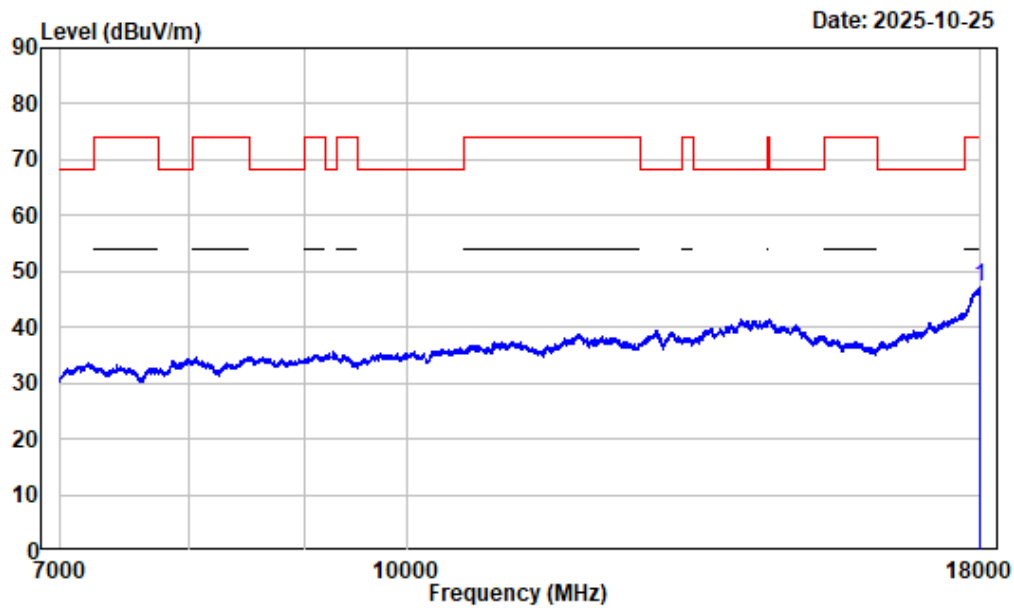

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.23	33.92	47.15	54.00	-6.85	Average


1-7GHz_Horizontal_802.11ac20_5240MHz

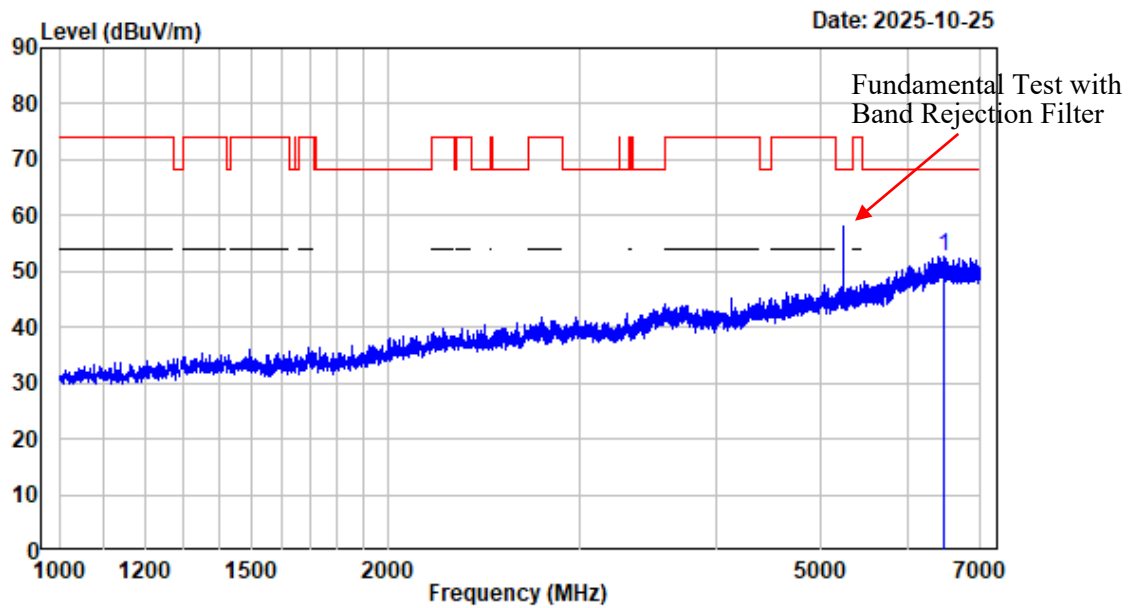

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6469.000	-2.90	55.54	52.64	68.20	-15.56	Peak


1-7GHz_Vertical_802.11ac20_5240MHz

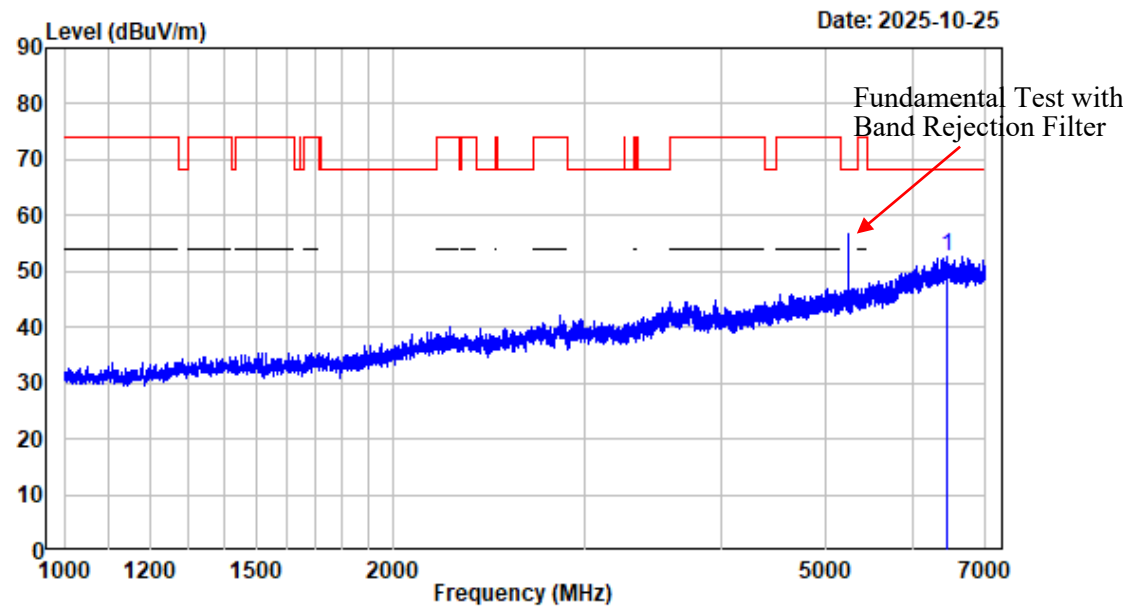

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6448.000	-2.86	55.65	52.79	68.20	-15.41	Peak


7-18GHz_Horizontal_Peak_802.11ac20_5240MHz

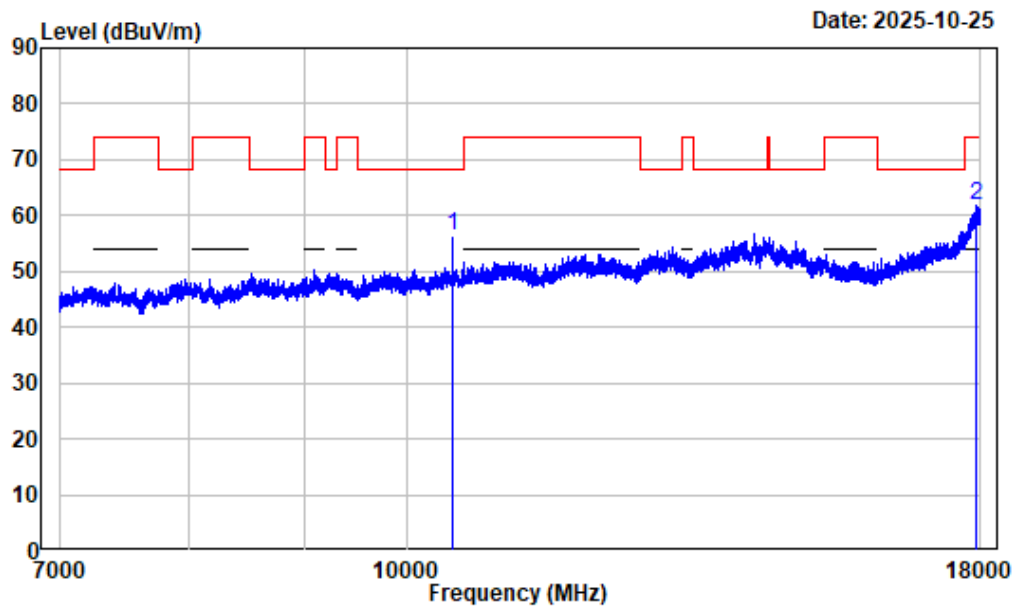

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	54.19	56.38	68.20	-11.82 Peak
2 17920.250	12.85	48.82	61.67	74.00	-12.33 Peak


7-18GHz_Horizontal_Average_802.11ac20_5240MHz

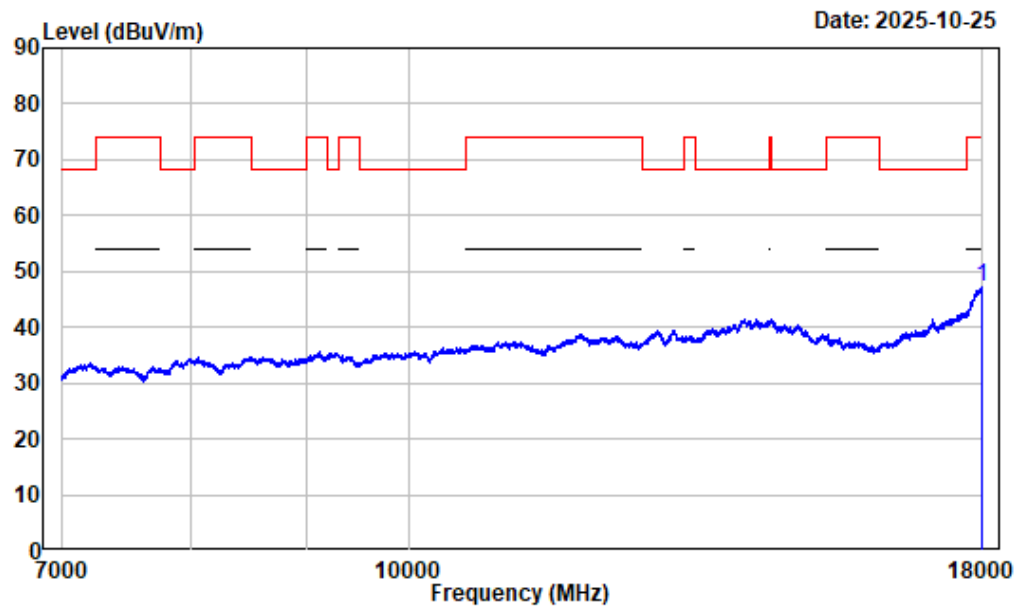

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17997.250	13.25	33.97	47.22	54.00	-6.78	Average


7-18GHz_Vertical_Peak_802.11ac20_5240MHz

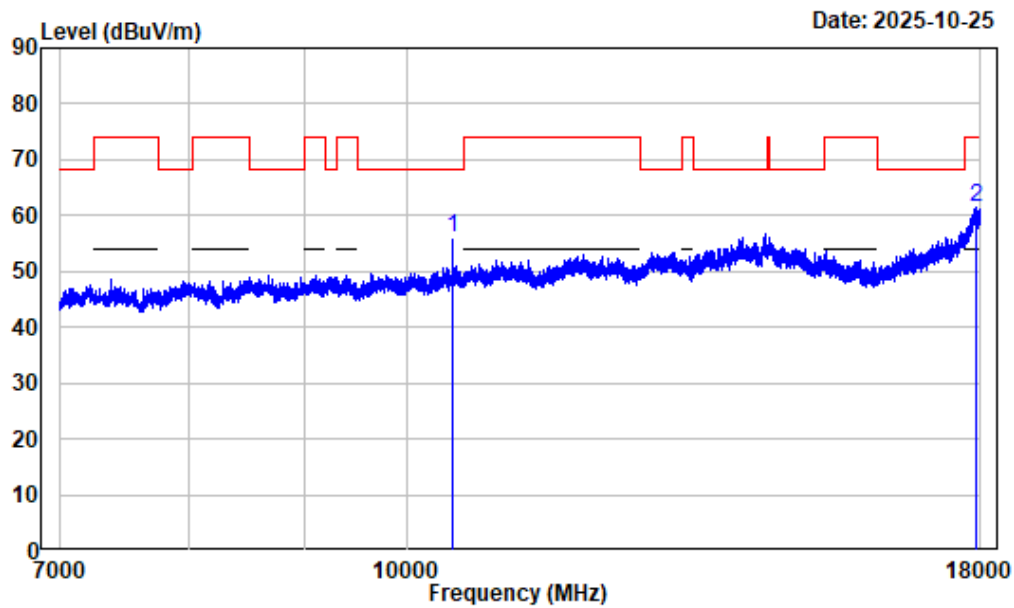

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	53.87	56.06	68.20	-12.14 Peak
2 17925.750	12.89	48.45	61.34	74.00	-12.66 Peak


7-18GHz_Vertical_Average_802.11ac20_5240MHz

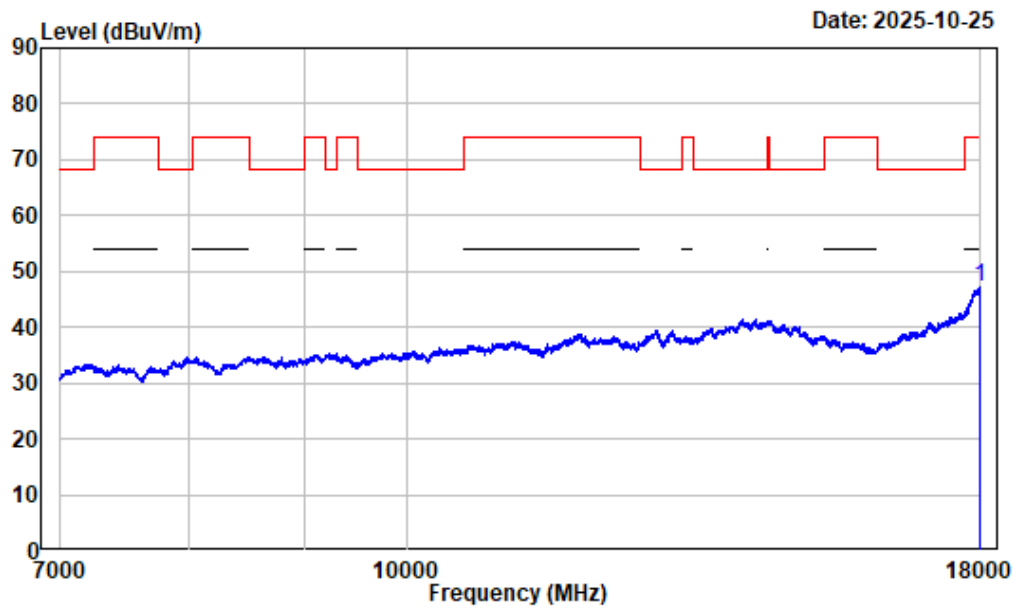

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17991.750	13.22	33.91	47.13	54.00	-6.87	Average


1-7GHz_Horizontal_802.11ac40_5230MHz

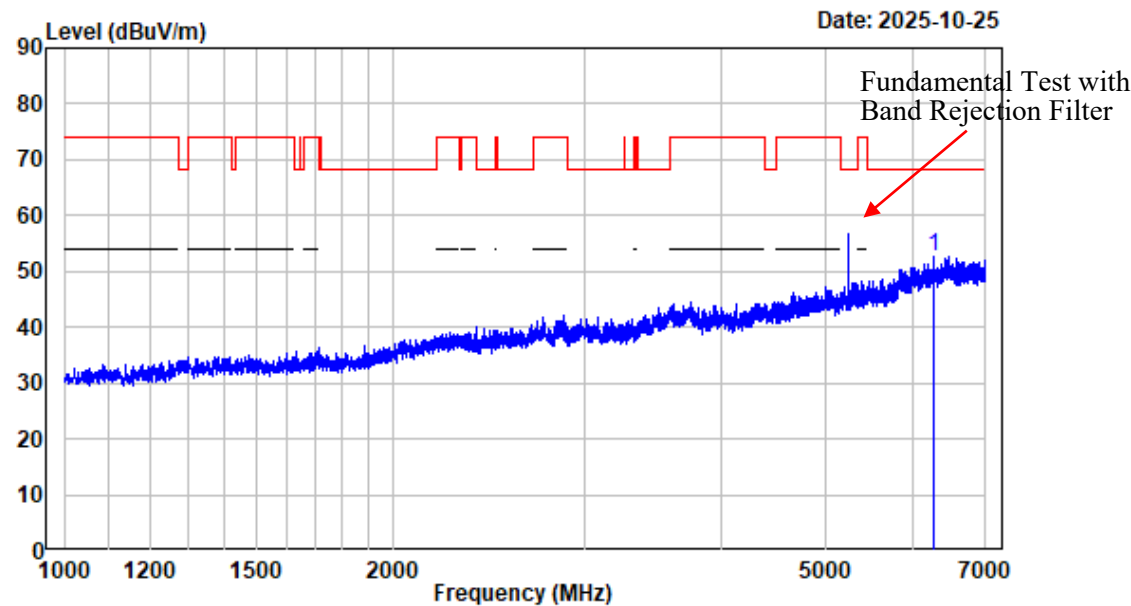

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6277.750	-3.65	56.18	52.53	68.20	-15.67	Peak


1-7GHz_Vertical_802.11ac40_5230MHz

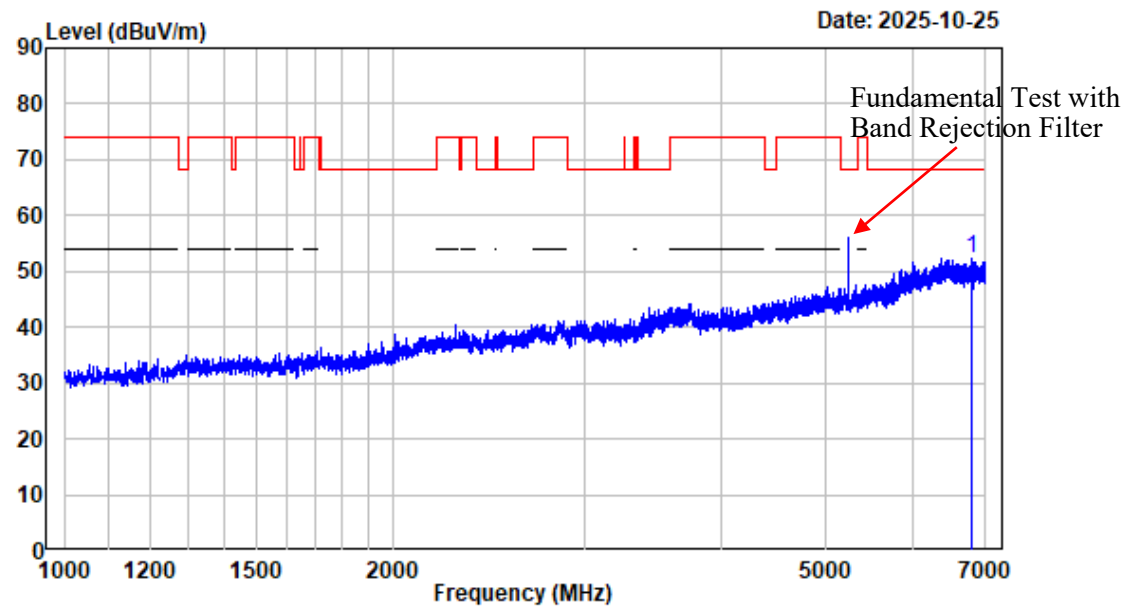

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6790.000	-3.34	55.72	52.38	68.20	-15.82 Peak


7-18GHz_Horizontal_Peak_802.11ac40_5230MHz

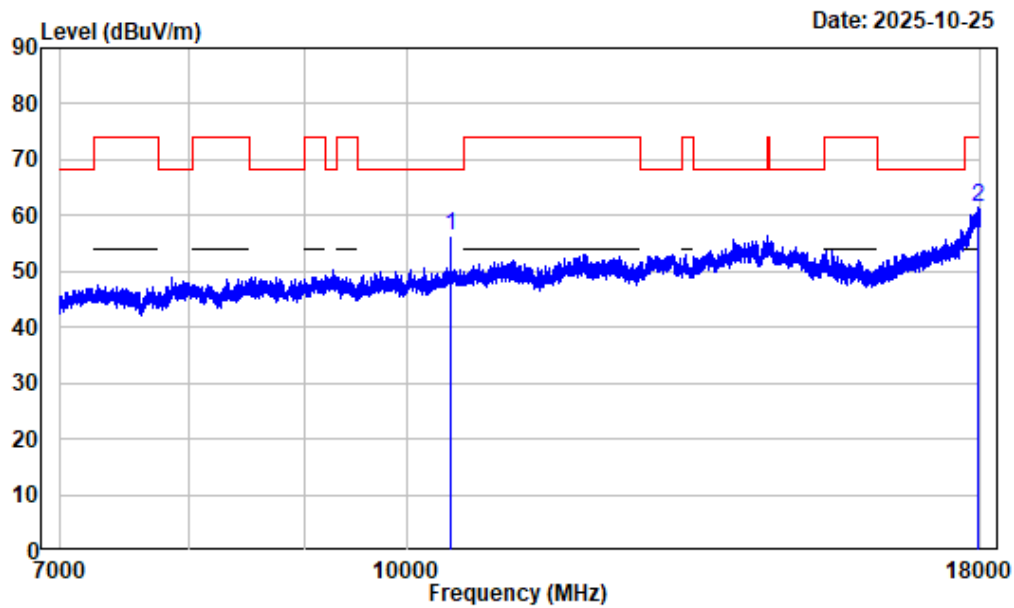

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10460.000	2.26	54.02	56.28	68.20	-11.92 Peak
2 17961.500	13.06	48.57	61.63	74.00	-12.37 Peak


7-18GHz_Horizontal_Average_802.11ac40_5230MHz

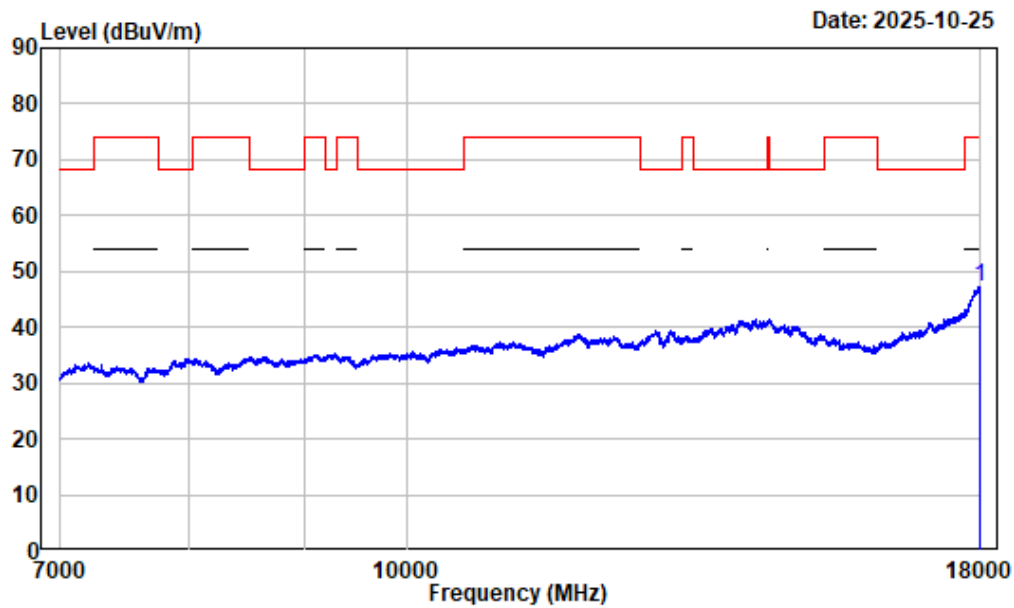

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17993.130	13.23	34.08	47.31	54.00	-6.69 Average


7-18GHz_Vertical_Peak_802.11ac40_5230MHz

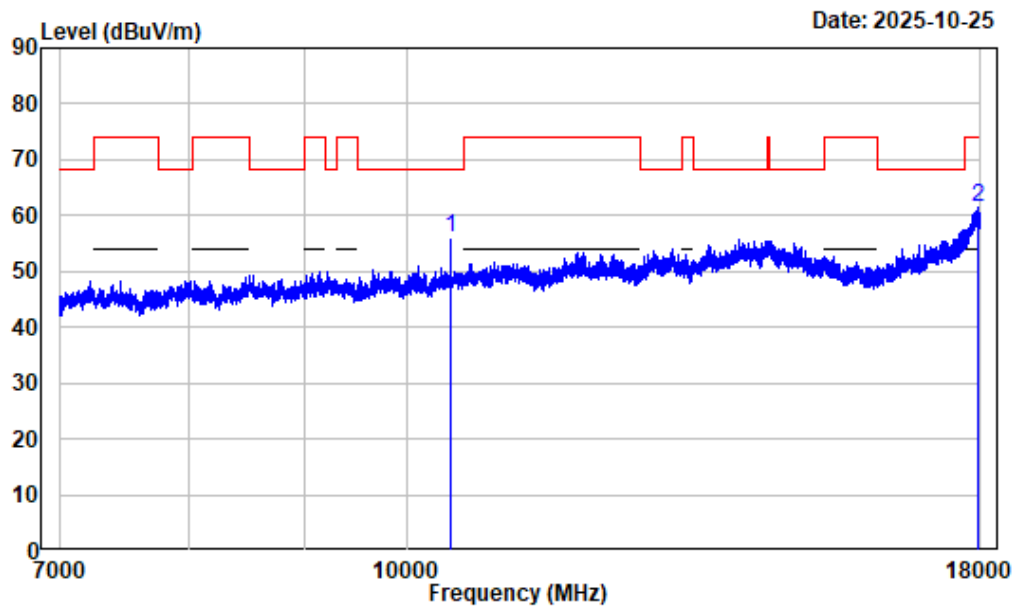

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10460.000	2.26	53.68	55.94	68.20	-12.26 Peak
2 17951.880	13.02	48.47	61.49	74.00	-12.51 Peak


7-18GHz_Vertical_Average_802.11ac40_5230MHz

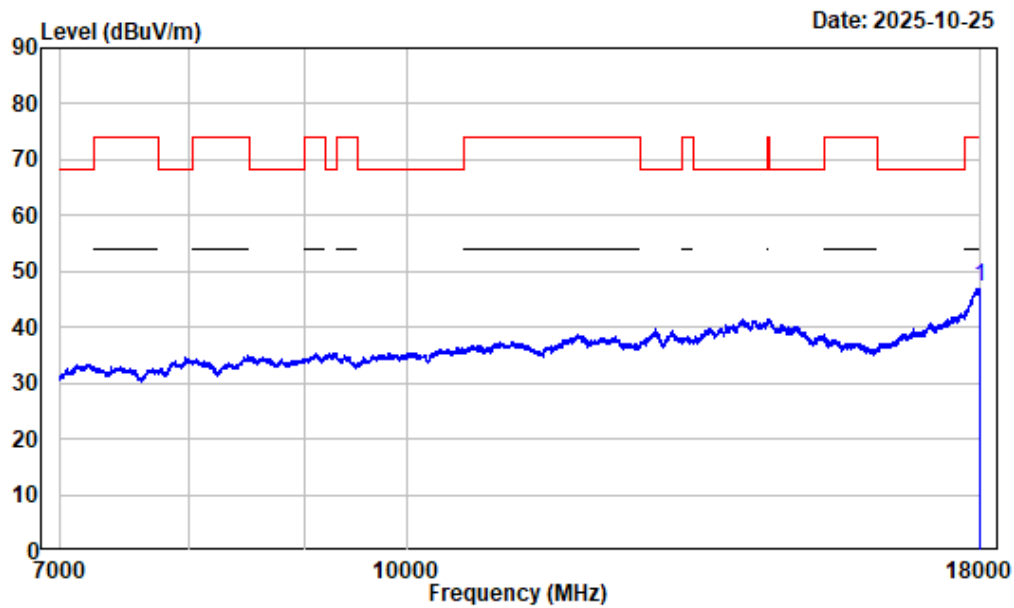

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 17998.630	13.26	33.90	47.16	54.00	-6.84 Average


1-7GHz_Horizontal_802.11ac80_5210MHz

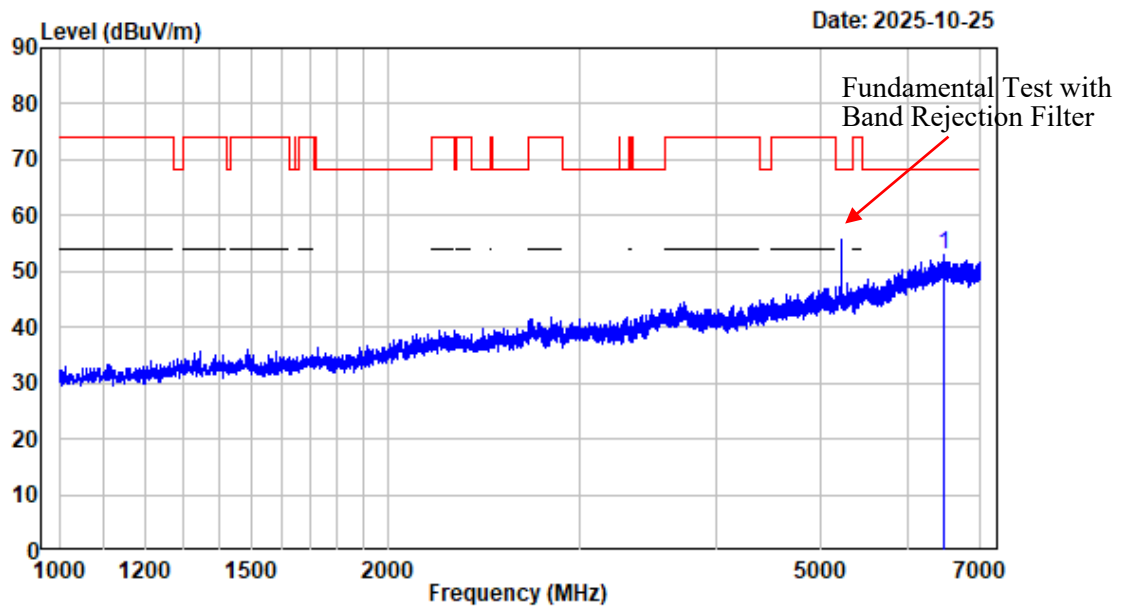

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 6481.000	-2.91	55.90	52.99	68.20	-15.21 Peak


1-7GHz_Vertical_802.11ac80_5210MHz

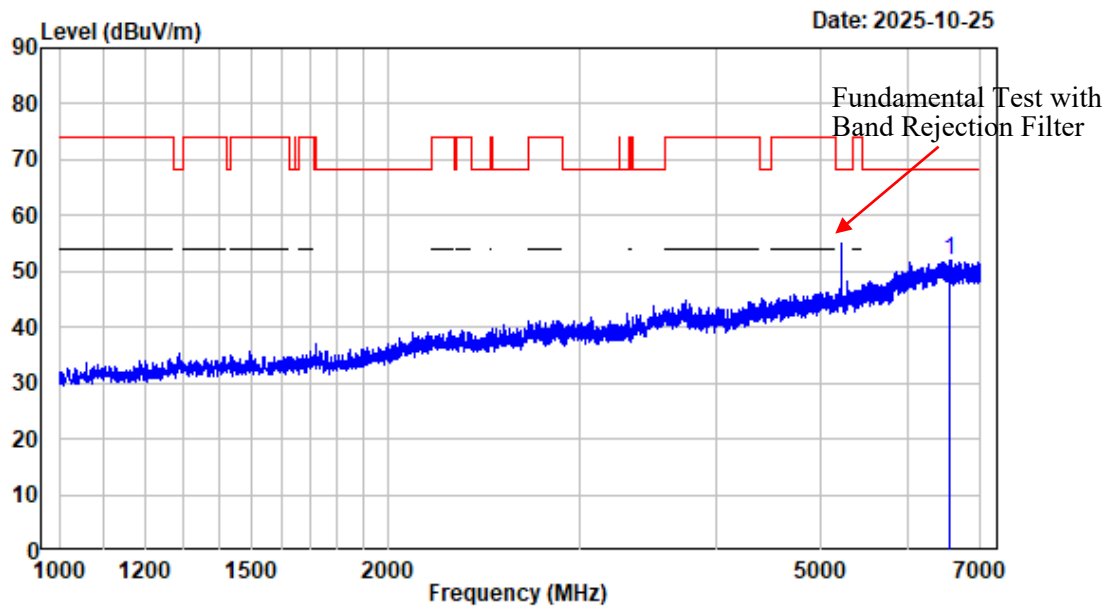

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6555.250	-3.04	55.01	51.97	68.20 -16.23 Peak


7-18GHz_Horizontal_Peak_802.11ac80_5210MHz

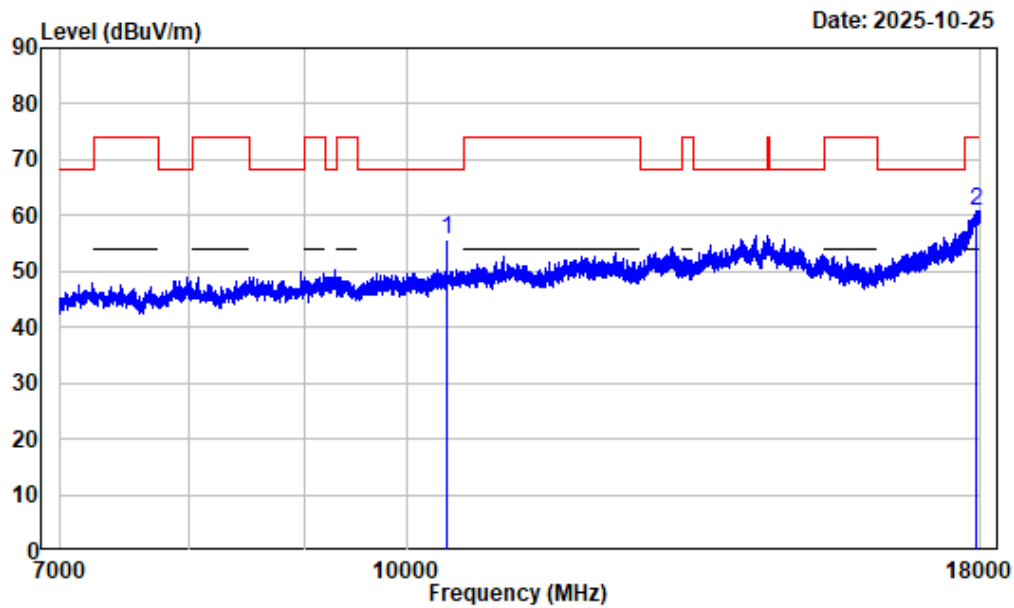

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10420.000	2.40	53.37	55.77	68.20	-12.43	Peak
2	17912.000	12.81	48.09	60.90	74.00	-13.10	Peak


7-18GHz_Horizontal_Average_802.11ac80_5210MHz

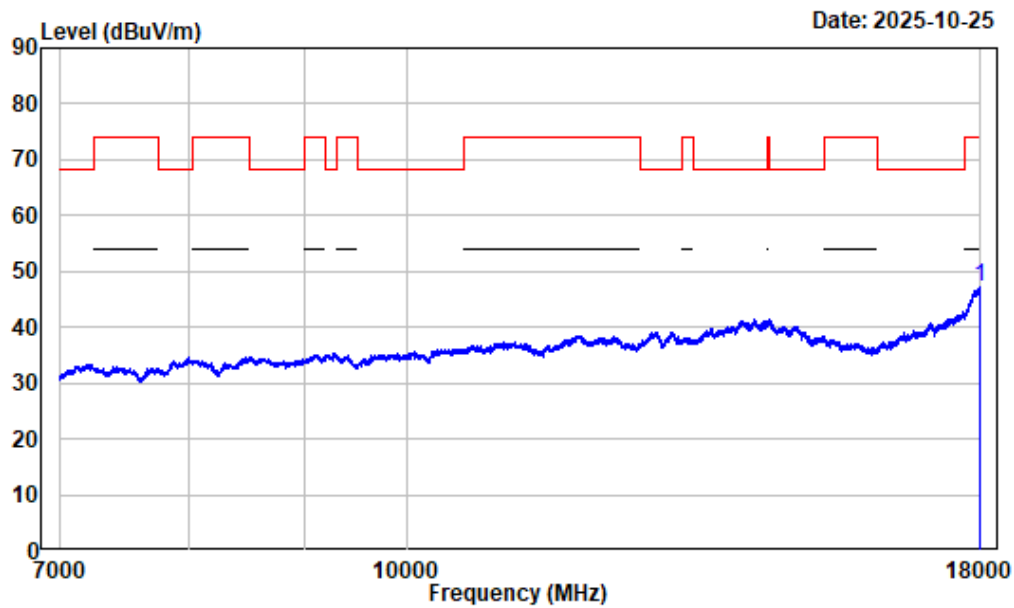

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17990.380	13.21	33.94	47.15	54.00	-6.85	Average


7-18GHz_Vertical_Peak_802.11ac80_5210MHz

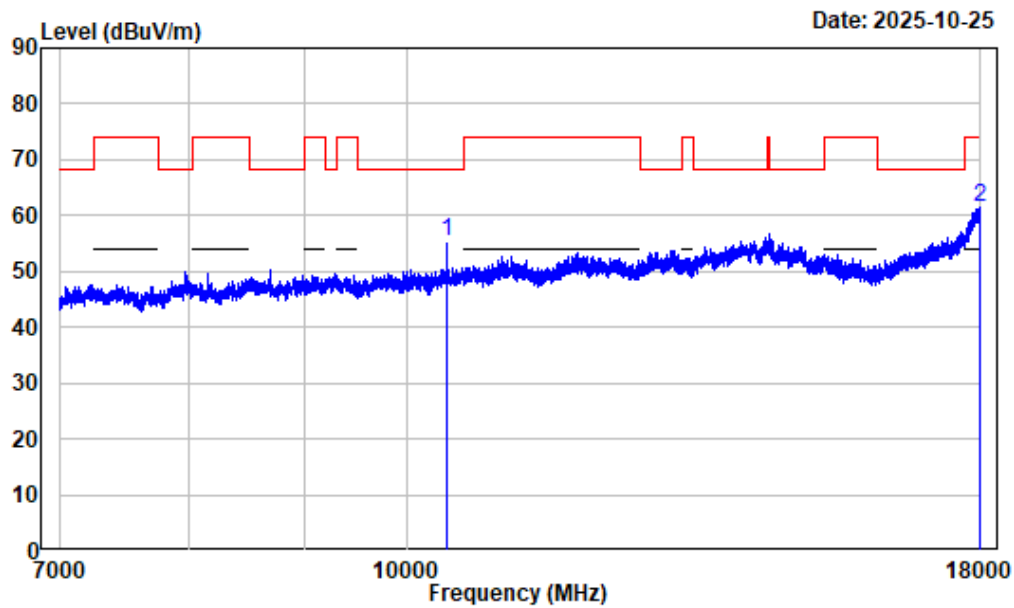

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10420.000	2.40	53.04	55.44	68.20	-12.76 Peak
2 17984.880	13.18	48.41	61.59	74.00	-12.41 Peak

7-18GHz_Vertical_Average_802.11ac80_5210MHz

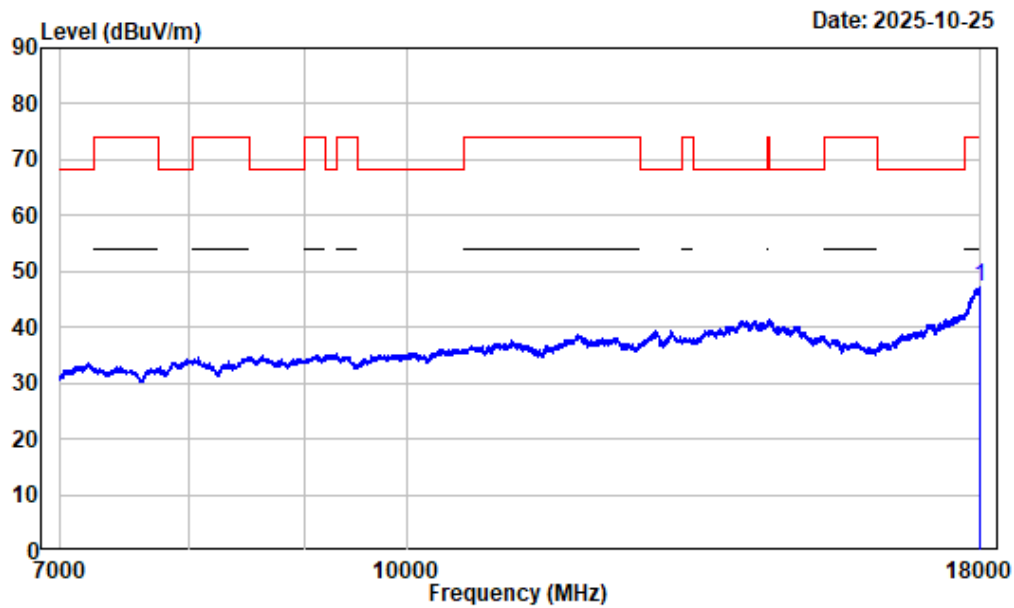


Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17998.250	13.26	34.03	47.29	54.00	-6.71	Average

18-40GHz (Only Listed with the worst margin test plot)


18-40GHz_Horizontal_802.11a_5240MHz

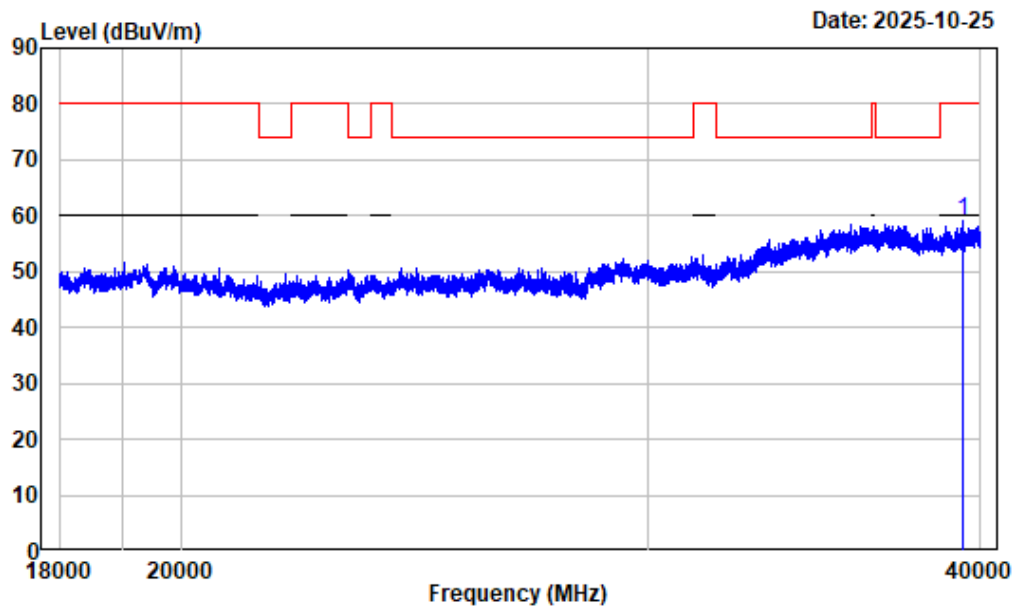

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
		Level		Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39419.680	22.18	36.81	58.99	80.00	-21.01	Peak

18-40GHz_Vertical_802.11a_5240MHz

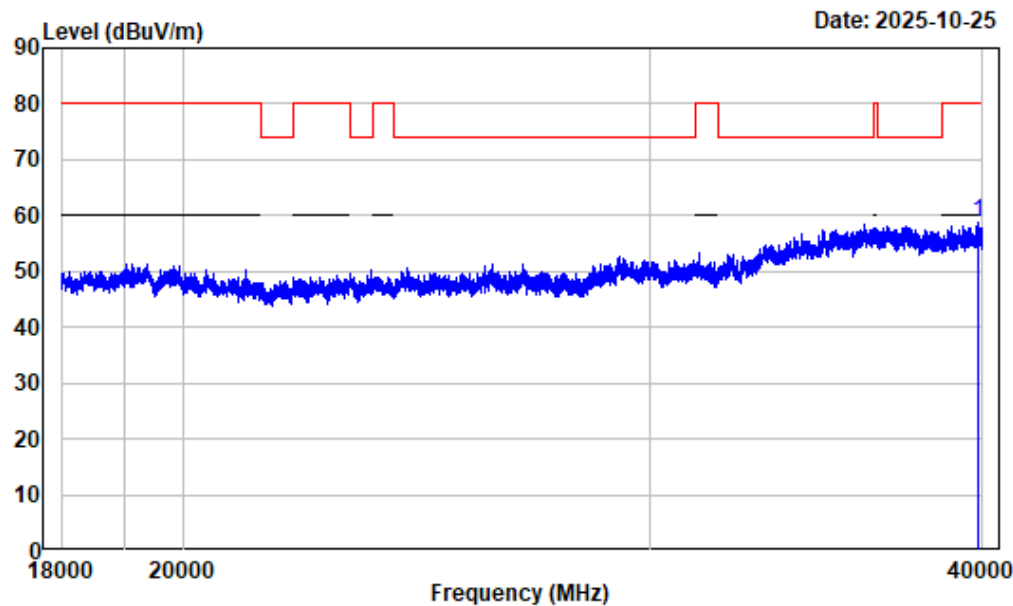


Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39878.980	22.26	36.33	58.59	80.00	-21.41	Peak

ANT 2


1-7GHz_Horizontal_802.11a_5240MHz

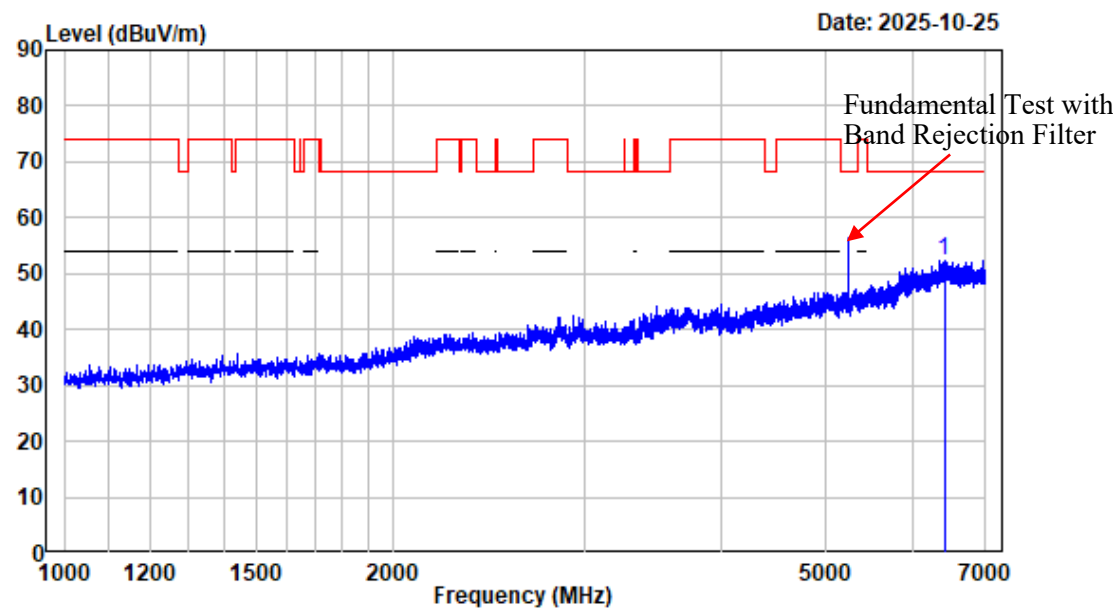

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6415.750	-2.85	55.32	52.47	68.20	-15.73	Peak


1-7GHz_Vertical_802.11a_5240MHz

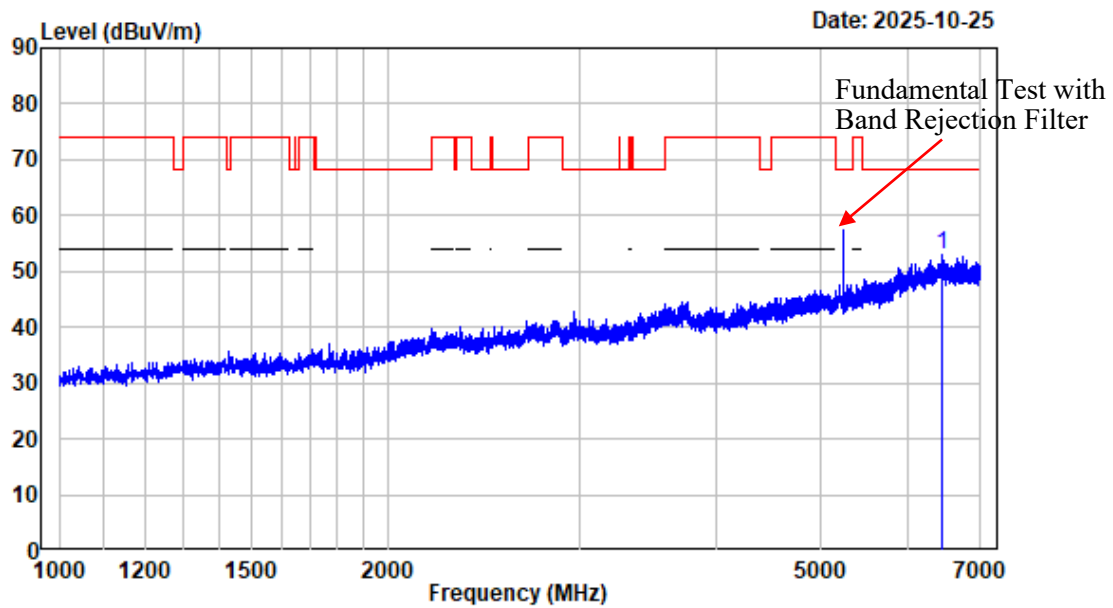

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6448.000	-2.86	55.71	52.85	68.20	-15.35	Peak


7-18GHz_Horizontal_Peak_802.11a_5240MHz

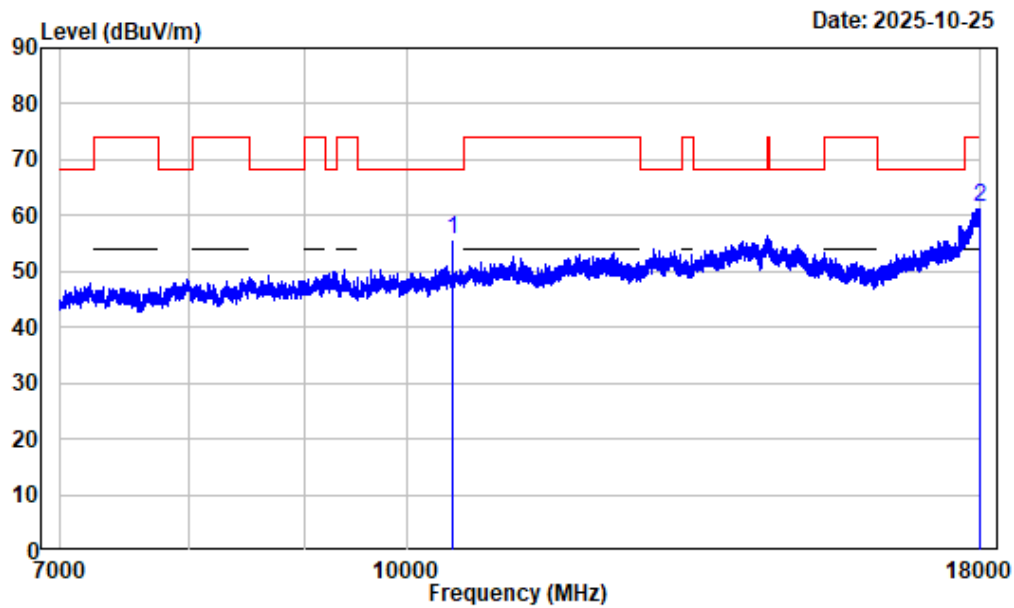

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	53.64	55.83	68.20	-12.37 Peak
2 17998.630	13.26	48.11	61.37	74.00	-12.63 Peak


7-18GHz_Horizontal_Average_802.11a_5240MHz

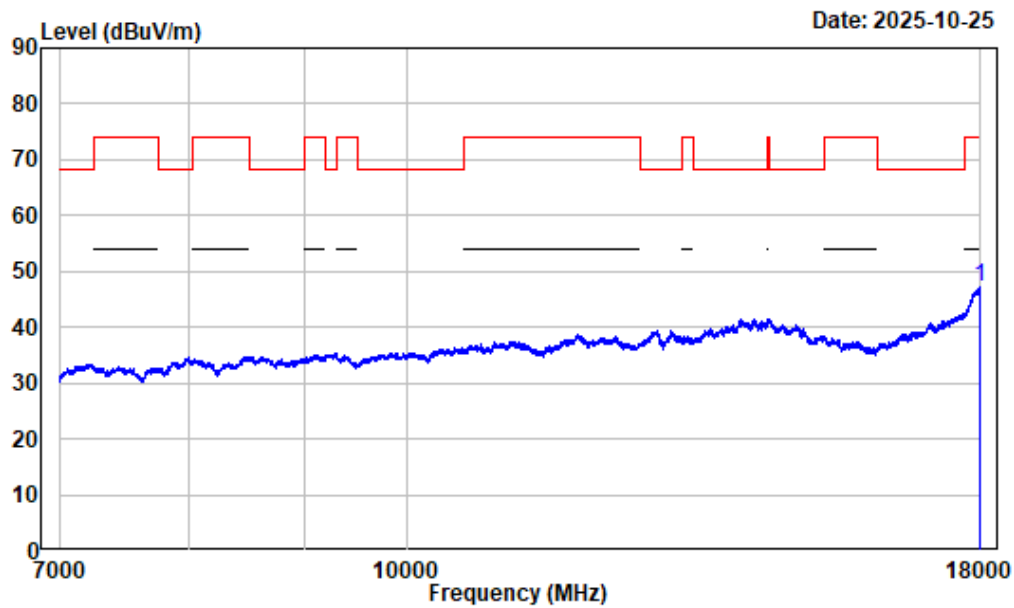

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 17995.880	13.24	33.92	47.16	54.00	-6.84 Average


7-18GHz_Vertical_Peak_802.11a_5240MHz

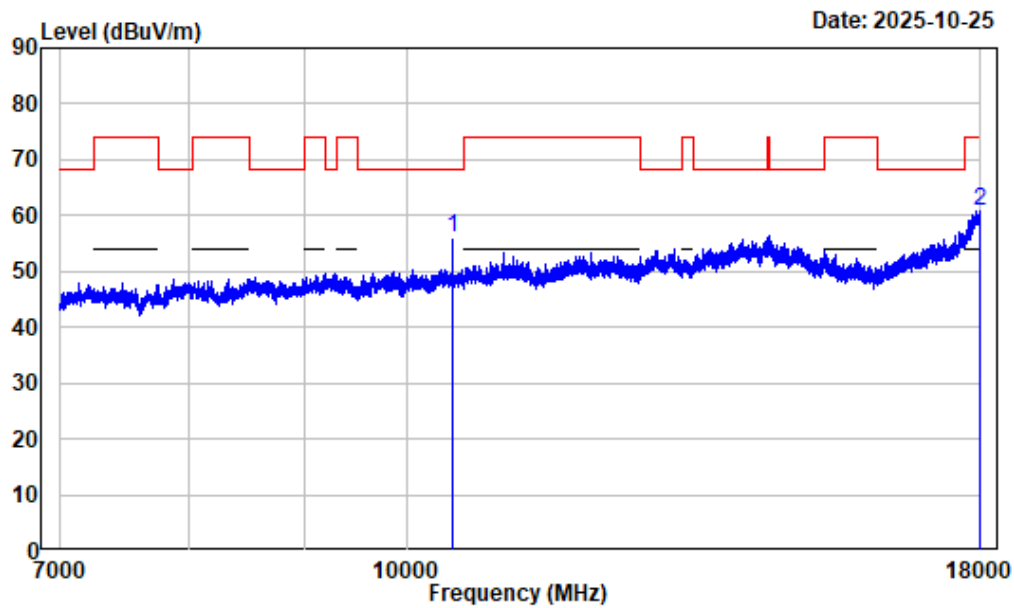

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	53.97	56.16	68.20	-12.04 Peak
2 17984.880	13.18	47.68	60.86	74.00	-13.14 Peak


7-18GHz_Vertical_Average_802.11a_5240MHz

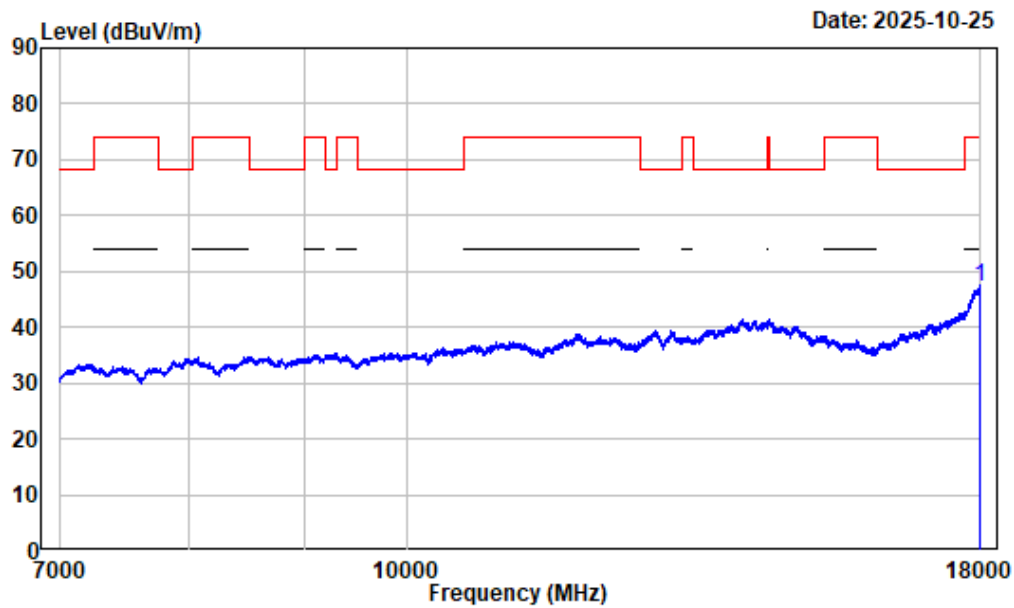

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
				Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17979.380	13.16	34.14	47.30	54.00	-6.70	Average


1-7GHz_Horizontal_802.11ac20_5240MHz

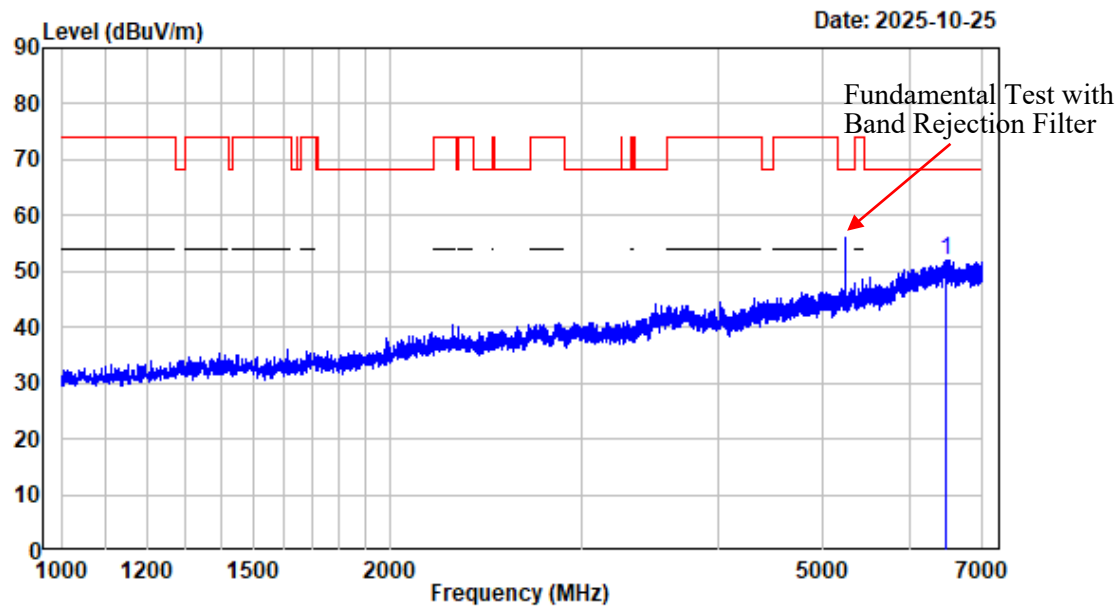

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6467.500	-2.89	54.95	52.06	68.20	-16.14 Peak


1-7GHz_Vertical_802.11ac20_5240MHz

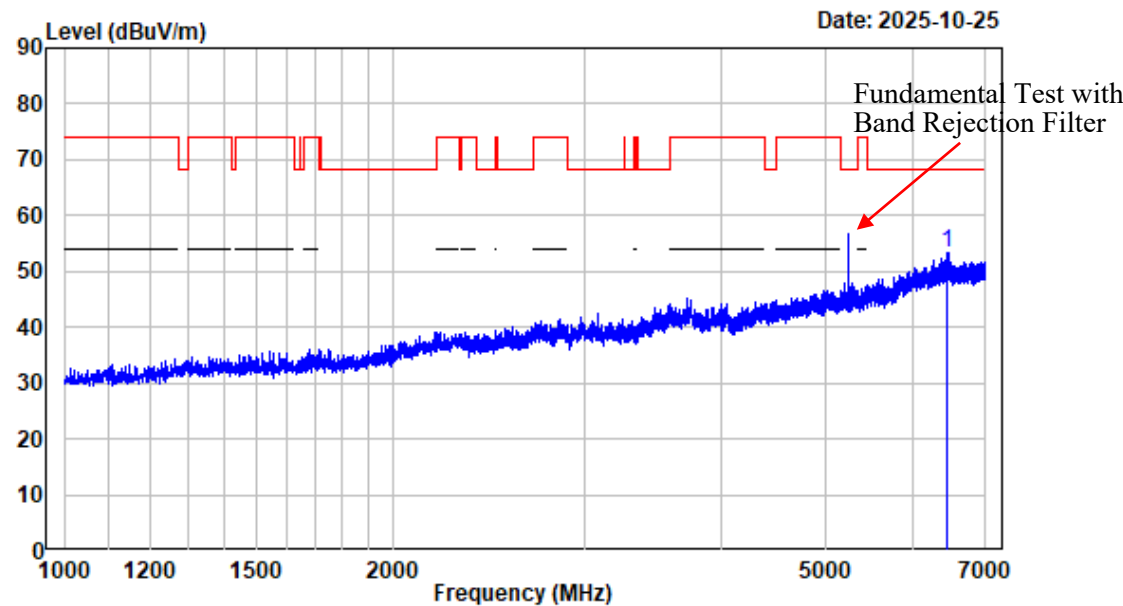

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6460.750	-2.88	56.17	53.29	68.20	-14.91	Peak


7-18GHz_Horizontal_Peak_802.11ac20_5240MHz

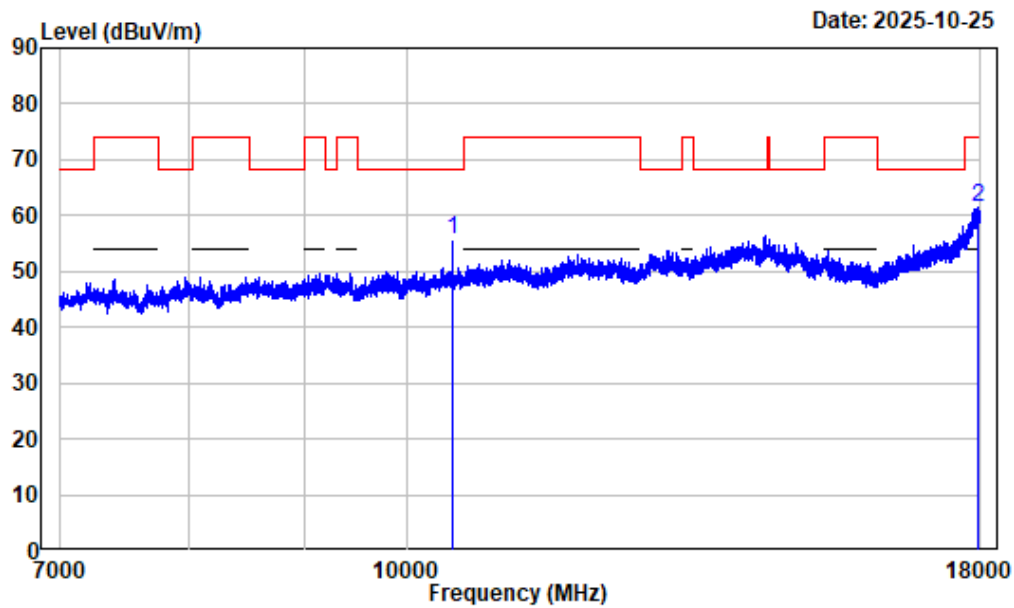

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	53.41	55.60	68.20	-12.60 Peak
2 17946.380	12.99	48.57	61.56	74.00	-12.44 Peak


7-18GHz_Horizontal_Average_802.11ac20_5240MHz

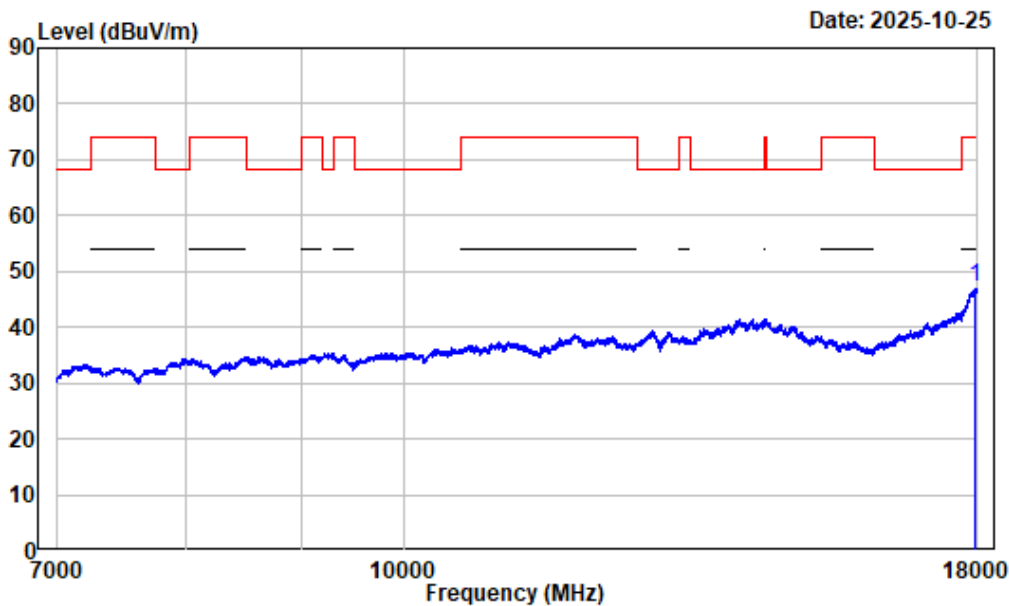

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17964.250	13.08	34.07	47.15	54.00	-6.85 Average


7-18GHz_Vertical_Peak_802.11ac20_5240MHz

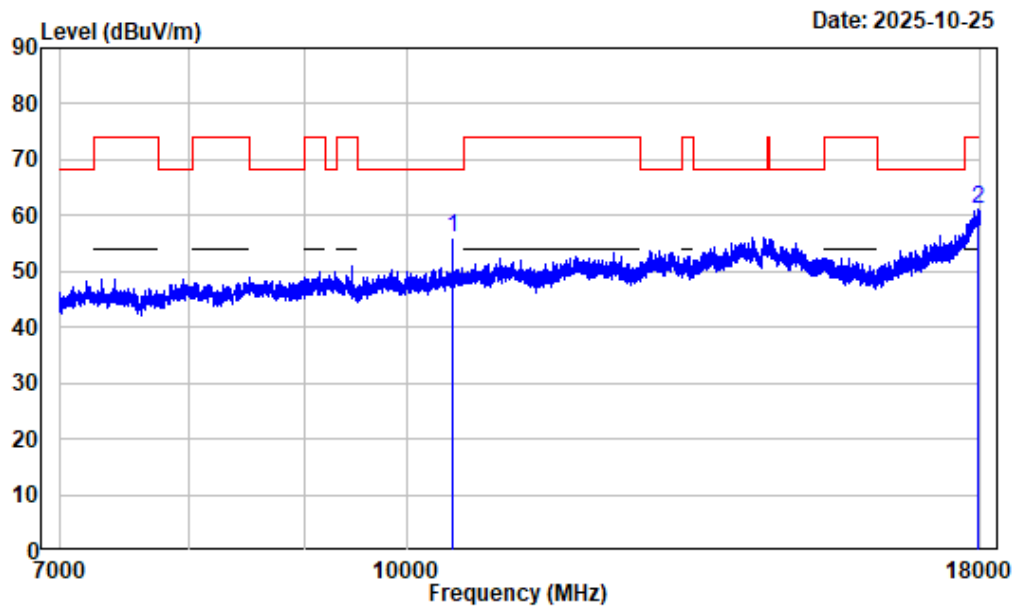

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 10480.000	2.19	53.76	55.95	68.20	-12.25 Peak
2 17946.380	12.99	48.10	61.09	74.00	-12.91 Peak


7-18GHz_Vertical_Average_802.11ac20_5240MHz

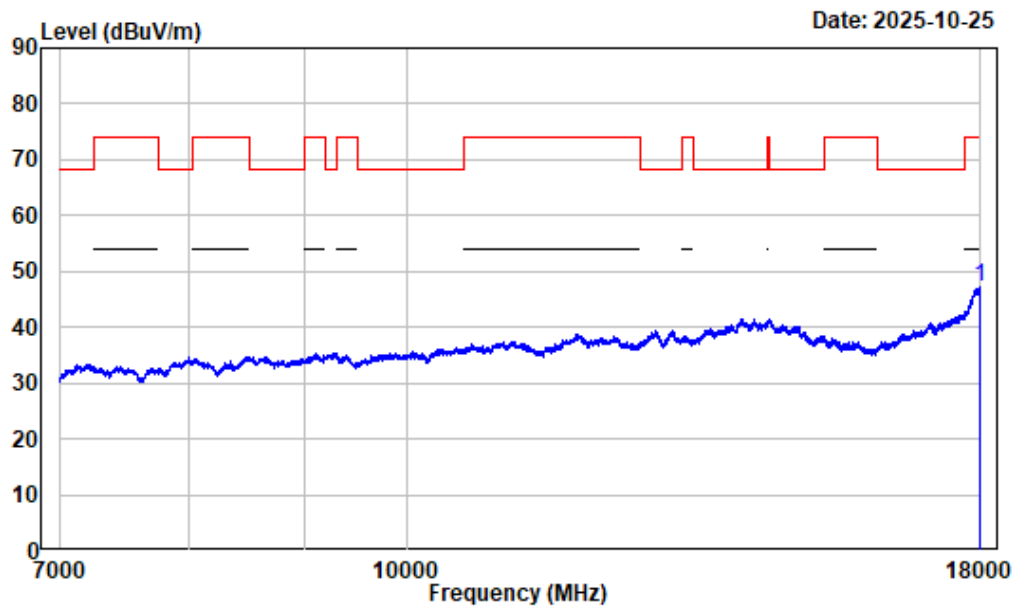

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC20-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880	13.24	34.01	47.25	54.00	-6.75	Average


1-7GHz_Horizontal_802.11ac40_5230MHz

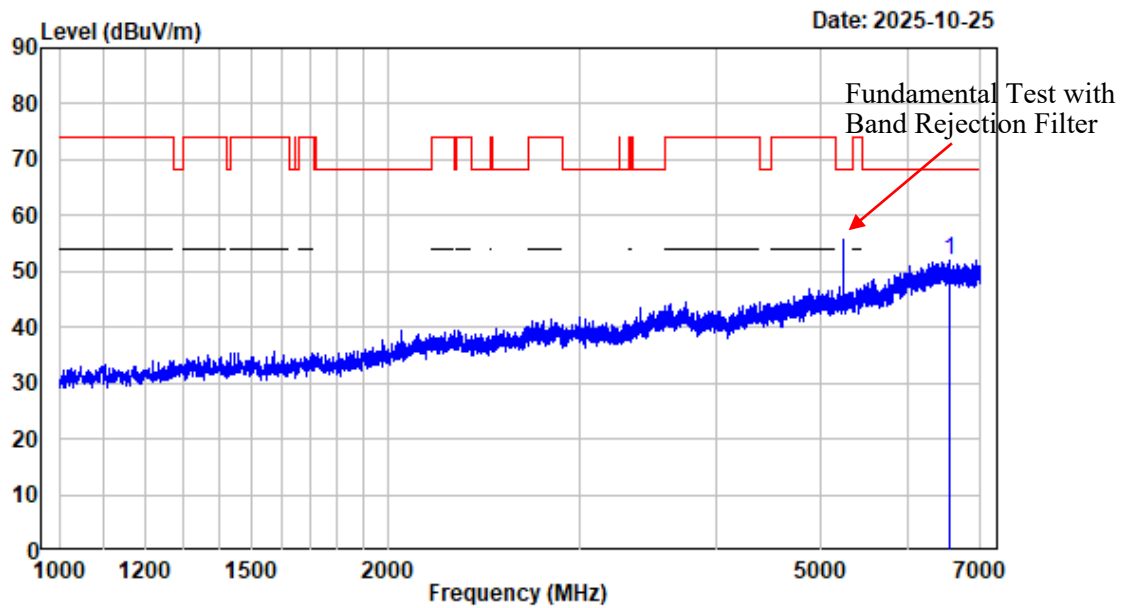

Condition : Horizontal
 Project No. : 2501X06556E-RF
 Tester : Zenos Qiao
 Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
 Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 6563.500	-3.06	55.02	51.96	68.20	-16.24 Peak


1-7GHz_Vertical_802.11ac40_5230MHz

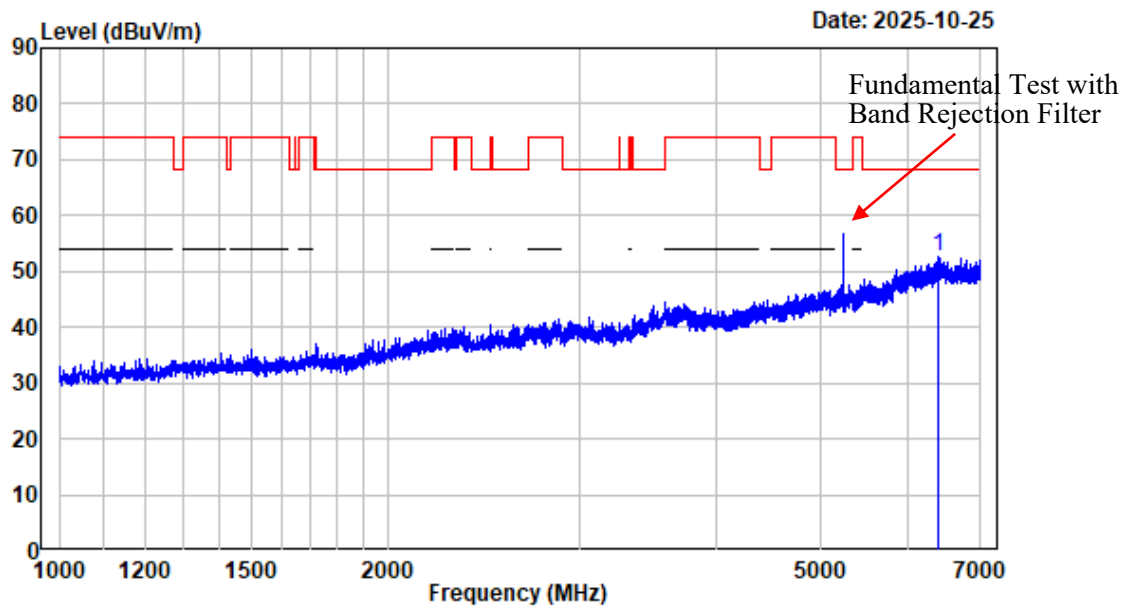

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6397.000	-2.89	55.39	52.50	68.20	-15.70	Peak


7-18GHz_Horizontal_Peak_802.11ac40_5230MHz

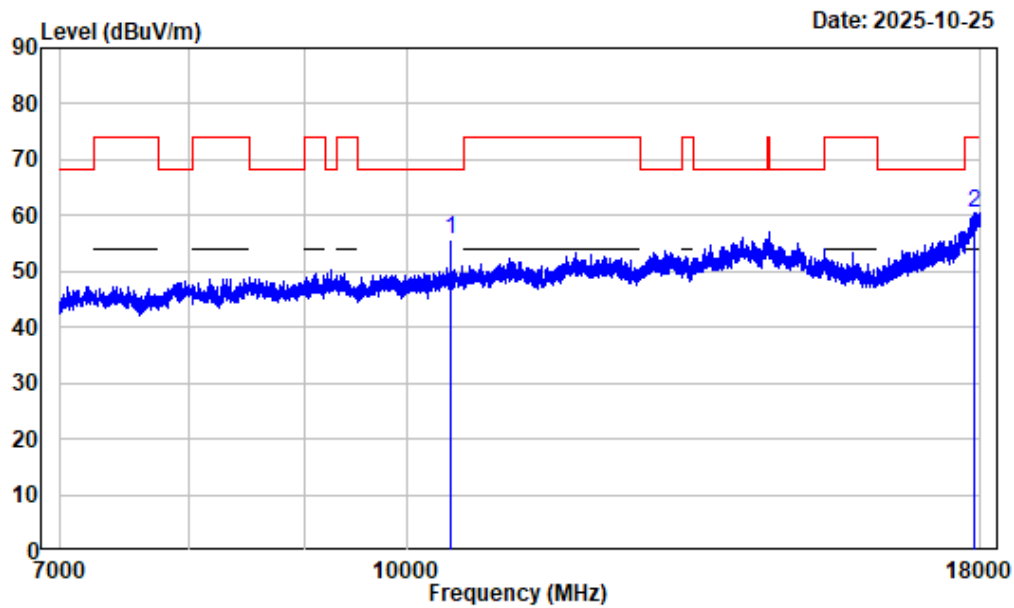

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read		Limit	Over	Remark
MHz	dB/m	Level	Level	Line	Limit	
		dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	2.26	53.27	55.53	68.20	-12.67	Peak
2 17890.000	12.57	47.99	60.56	74.00	-13.44	Peak


7-18GHz_Horizontal_Average_802.11ac40_5230MHz

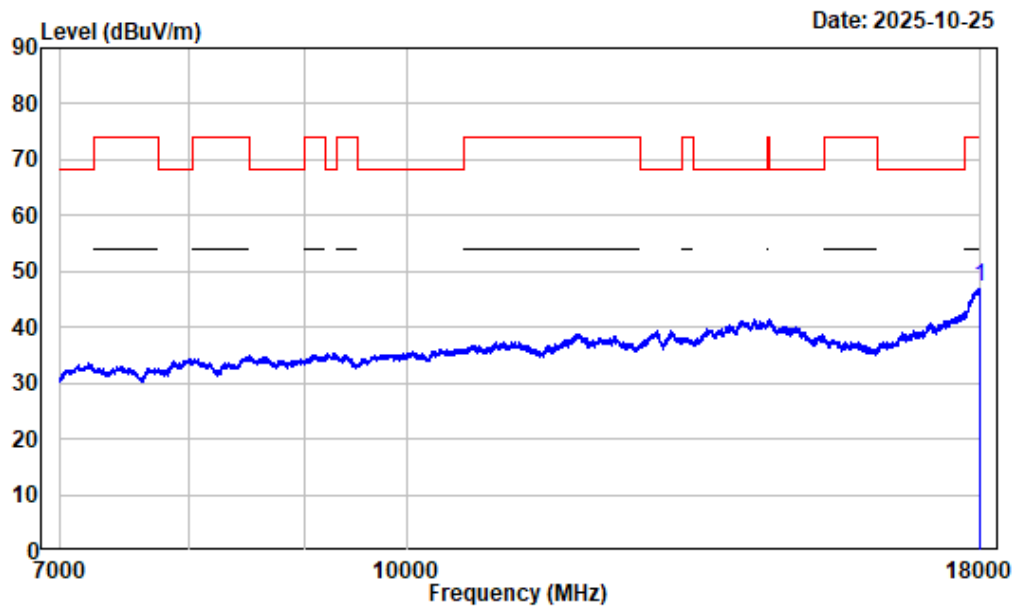

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17995.880	13.24	33.93	47.17	54.00	-6.83	Average


7-18GHz_Vertical_Peak_802.11ac40_5230MHz

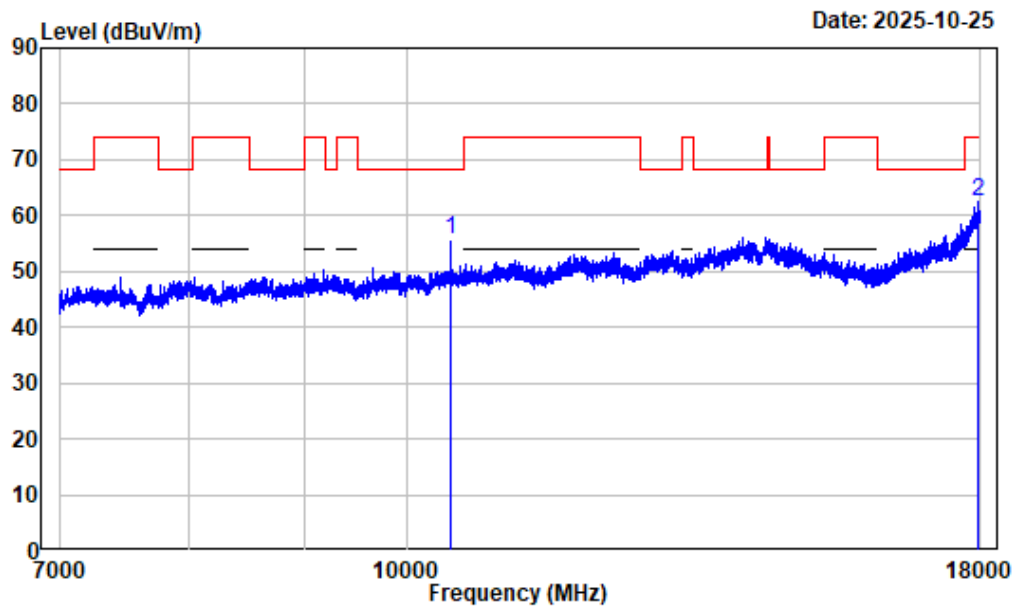

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	2.26	53.60	55.86	68.20	-12.34	Peak
2	17962.880	13.07	49.30	62.37	74.00	-11.63	Peak


7-18GHz_Vertical_Average_802.11ac40_5230MHz

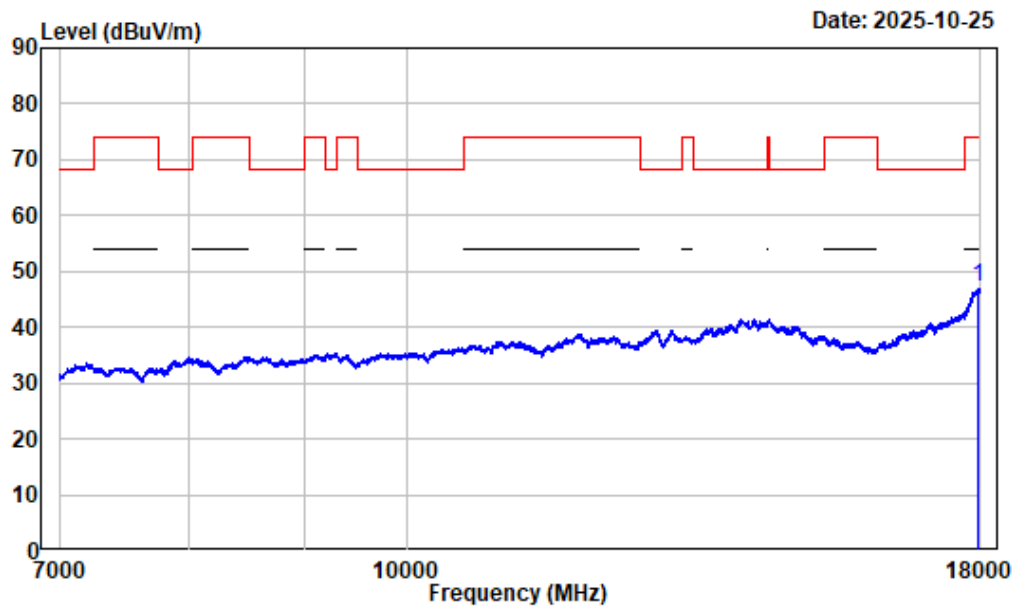

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC40-5230

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17971.130	13.12	34.12	47.24	54.00	-6.76 Average


1-7GHz_Horizontal_802.11ac80_5210MHz

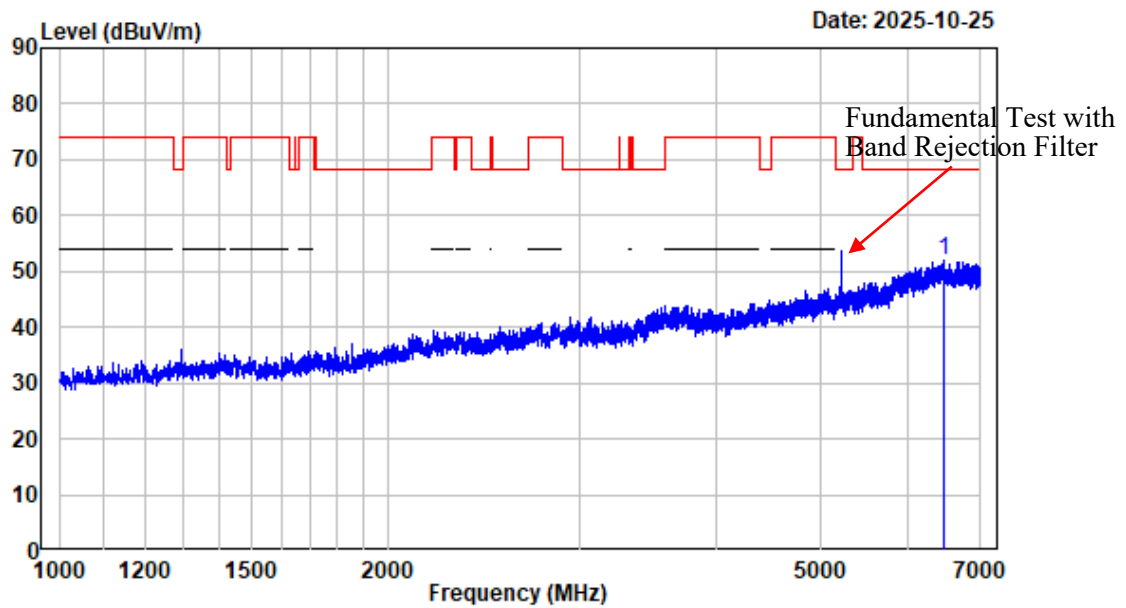

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 6471.250	-2.90	54.92	52.02	68.20	-16.18 Peak


1-7GHz_Vertical_802.11ac80_5210MHz

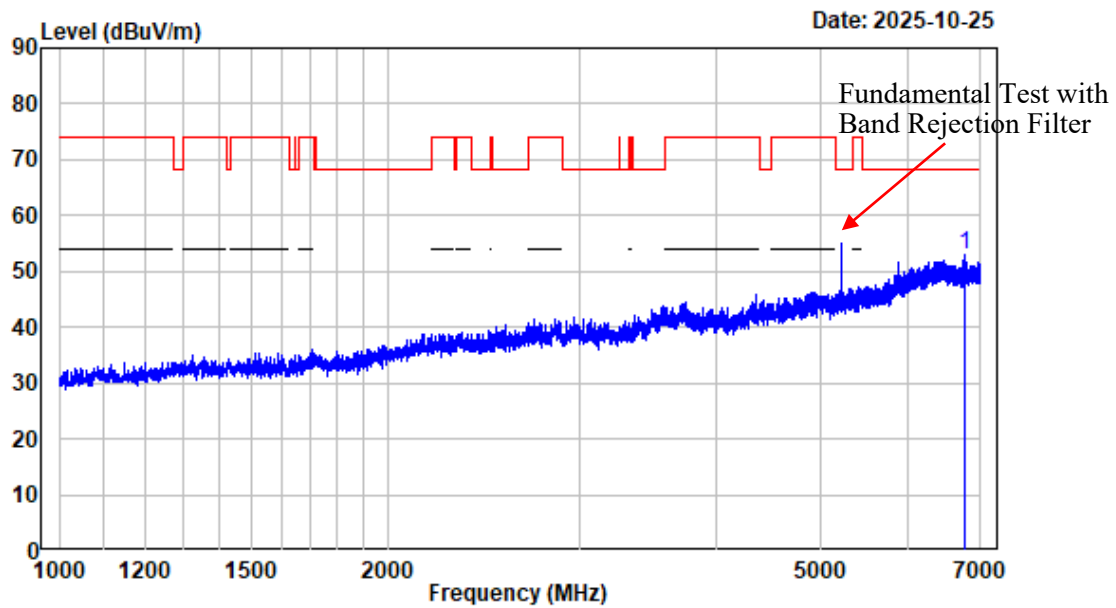

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6767.500	-3.26	56.36	53.10	68.20 -15.10 Peak


7-18GHz_Horizontal_Peak_802.11ac80_5210MHz

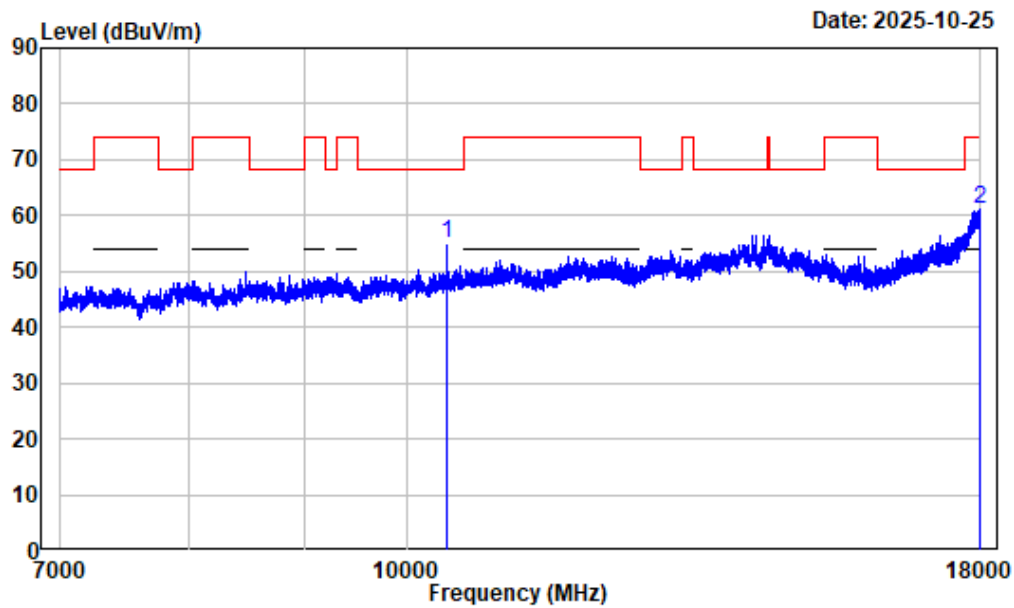

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10420.000	2.40	52.63	55.03	68.20	-13.17 Peak
2 17983.500	13.17	47.92	61.09	74.00	-12.91 Peak


7-18GHz_Horizontal_Average_802.11ac80_5210MHz

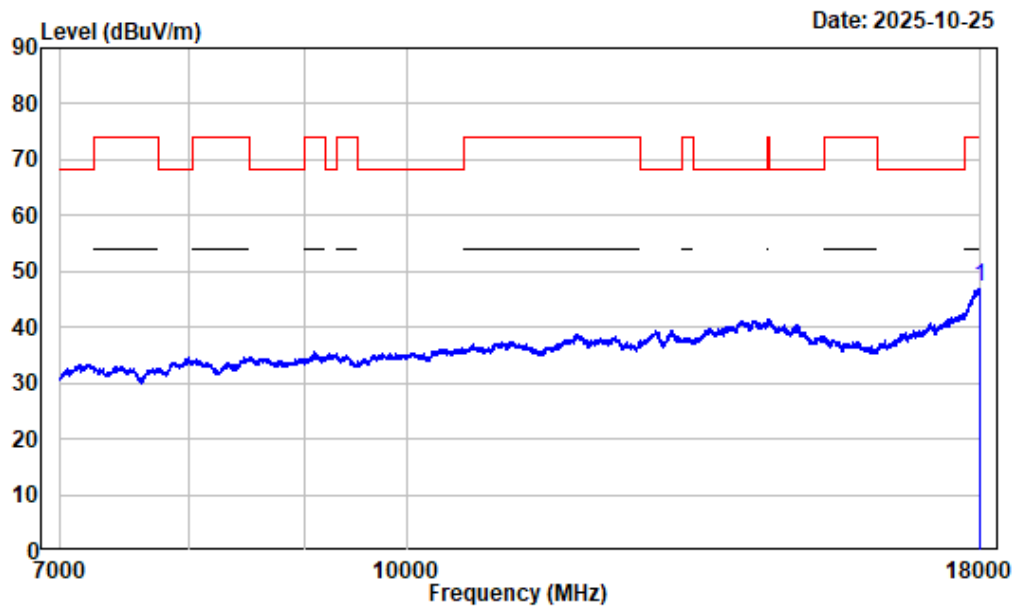

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
		Level	Level	Line	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1 17993.130	13.23	33.93	47.16	54.00	-6.84 Average


7-18GHz_Vetical_Peak_802.11ac80_5210MHz

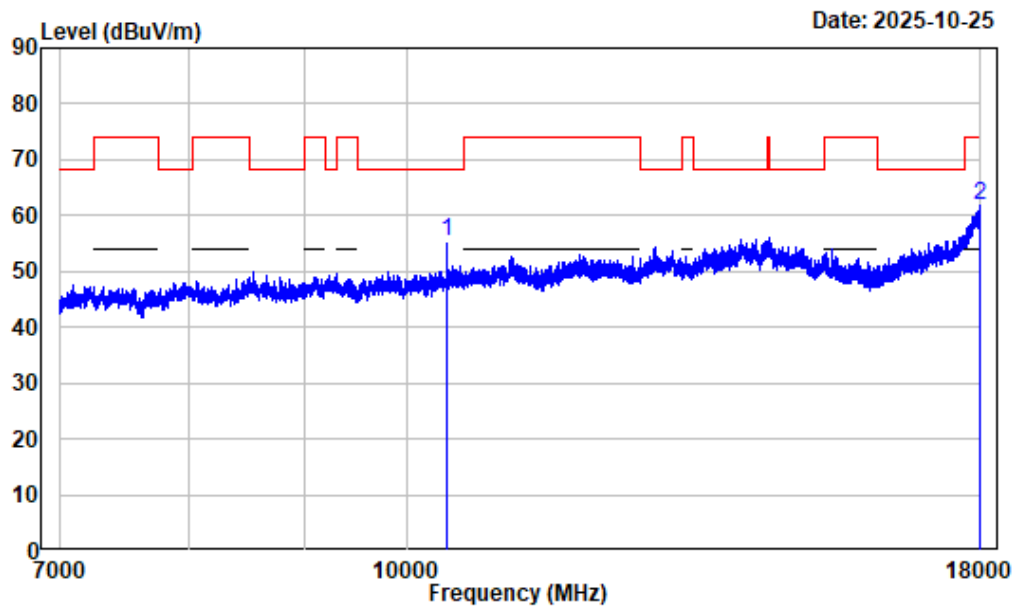

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read	Limit	Over	Remark
MHz	dB/m	Level	Level	Line	
		dBuV	dBuV/m	dBuV/m	dB
1 10420.000	2.40	52.98	55.38	68.20	-12.82 Peak
2 17990.380	13.21	48.53	61.74	74.00	-12.26 Peak

7-18GHz_Vertical_Average_802.11ac80_5210MHz

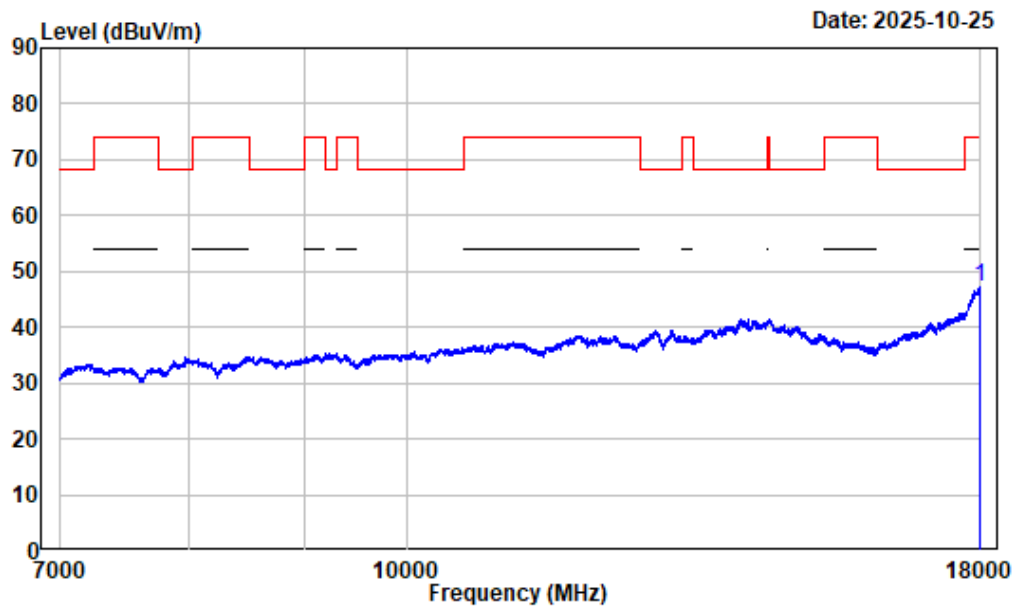


Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Average reading:RBW:1MHz VBW:3kHz Detector:Peak
Note : 5GWiFi-Band1-AC80-5210

Freq Factor		Read Level		Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 17994.500	13.23	34.05	47.28	54.00	-6.72	Average

18-40GHz (Only Listed with the worst margin test plot)


18-40GHz_Horizontal_802.11a_5240MHz

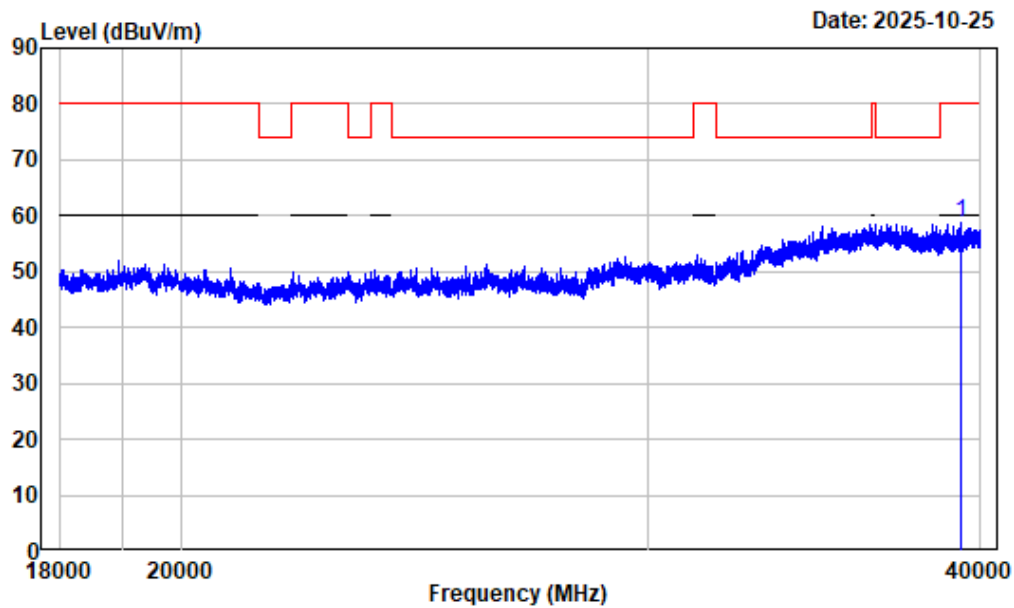

Condition : Horizontal
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39350.920	22.24	36.47	58.71	80.00	-21.29	Peak

18-40GHz_Vertical_802.11a_5240MHz

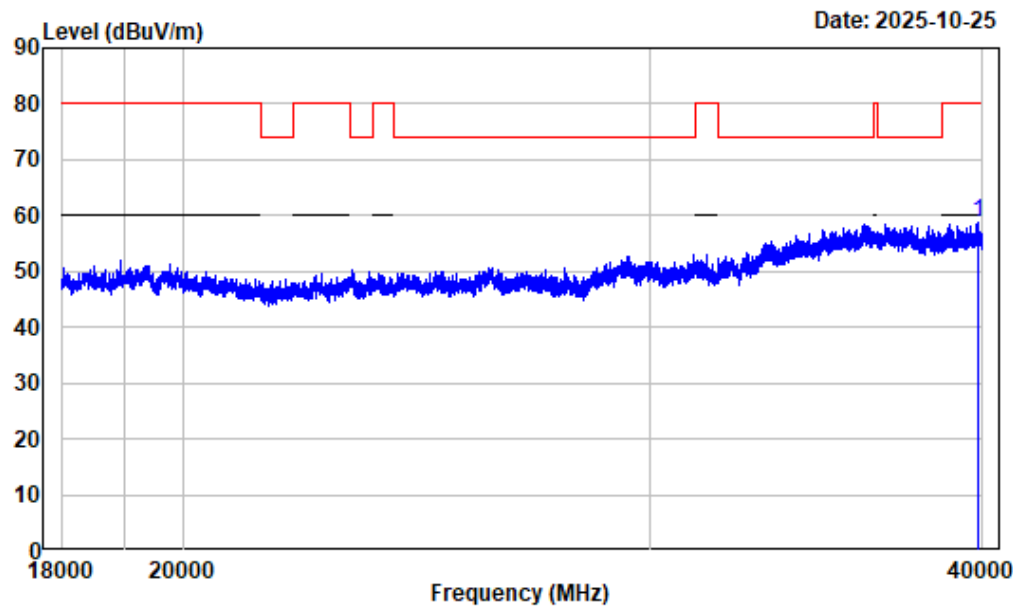

Condition : Vertical
Project No. : 2501X06556E-RF
Tester : Zenos Qiao
Spectrum setting: Peak reading:RBW:1MHz VBW:3MHz Detector:Peak
Note : 5GWiFi-Band1-A-5240

Freq Factor		Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 39845.980	22.26	36.43	58.69	80.00	-21.31	Peak

Emission Bandwidth

Test Information:

Sample No.:	3ASD-2	Test Date:	2025/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ethan Bu	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	25.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Data:**26dB Emission Bandwidth
5150-5250MHz**

Mode	Antenna	Test Frequency (MHz)	Result (MHz)
802.11a	ANT 1	5180	23.702
		5200	23.686
		5240	23.314
	ANT 2	5180	23.609
		5200	23.910
		5240	23.354
802.11ac20	ANT 1	5180	22.782
		5200	23.098
		5240	22.503
	ANT 2	5180	23.223
		5200	22.960
		5240	23.455
802.11ac40	ANT 1	5190	41.942
		5230	42.242
	ANT 2	5190	44.645
		5230	42.543
802.11ac80	ANT 1	5210	83.083
	ANT 2	5210	87.087


5150-5250MHz

802.11a_5180MHz_ANT 1

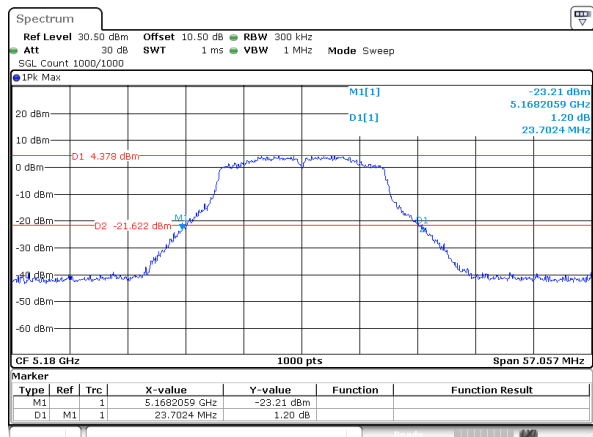


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:05:38

802.11a_5200MHz_ANT 1

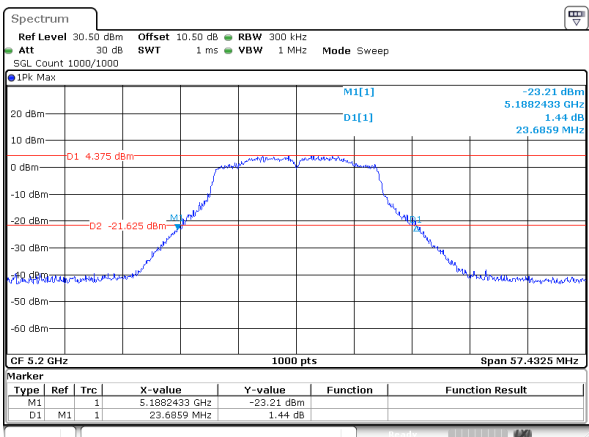


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:10:26

802.11a_5240MHz_ANT 1

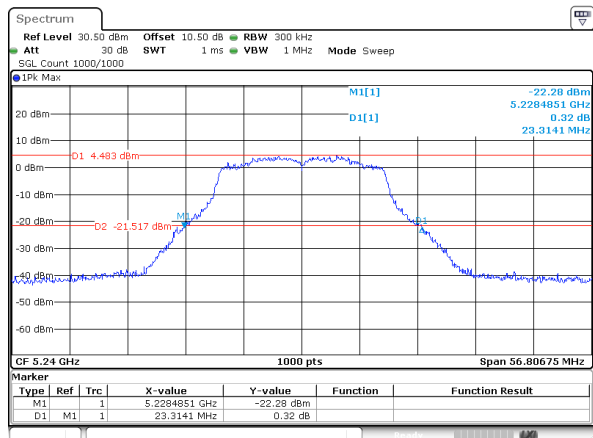


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:14:24

802.11a_5180MHz_ANT 2

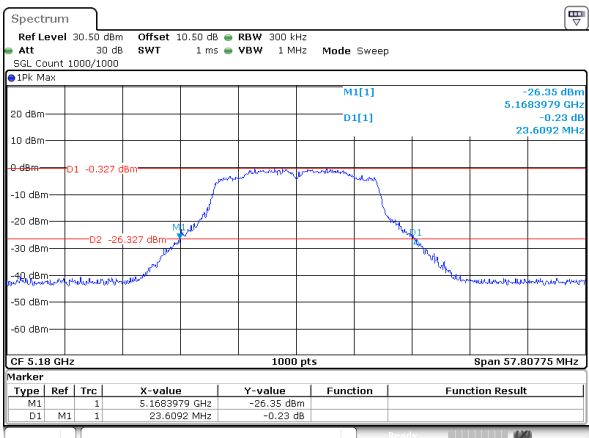


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:21:44

802.11a_5200MHz_ANT 2

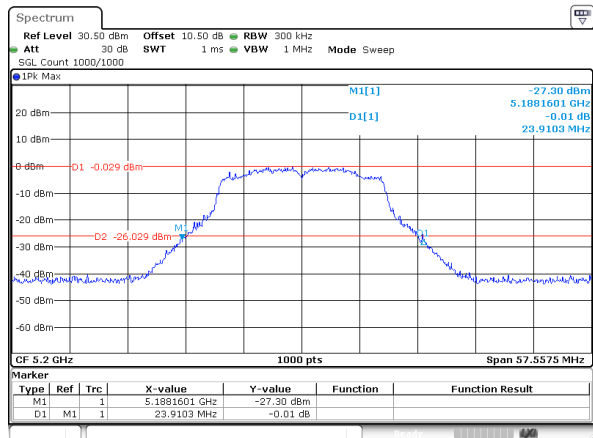


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:26:05

802.11a_5240MHz_ANT 2

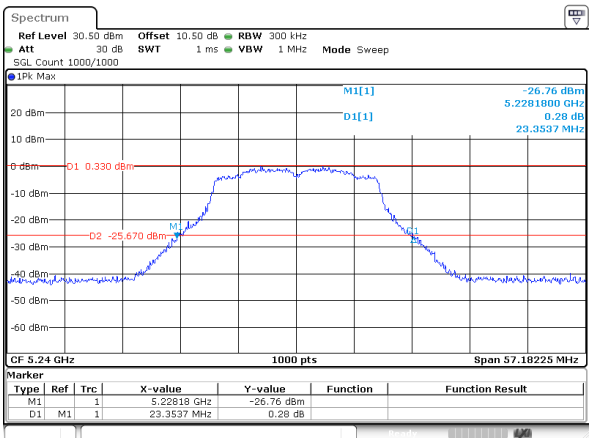


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:30:45

802.11ac20_5180MHz_ANT 1

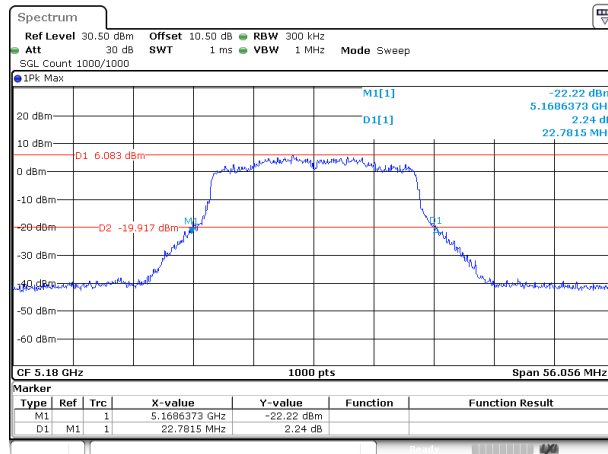


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:19:00

802.11ac20_5200MHz_ANT 1

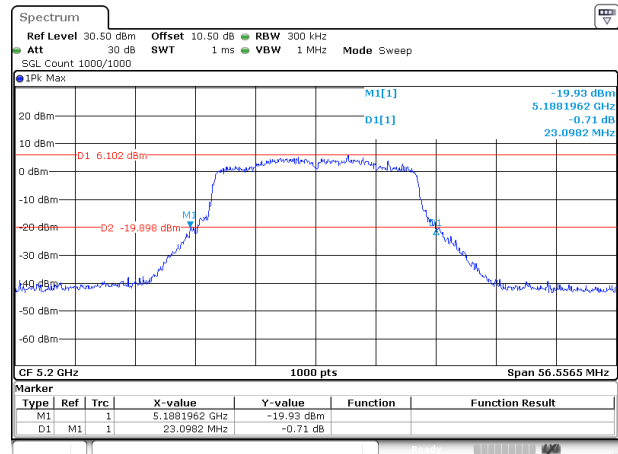


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:47:46

802.11ac20_5240MHz_ANT 1

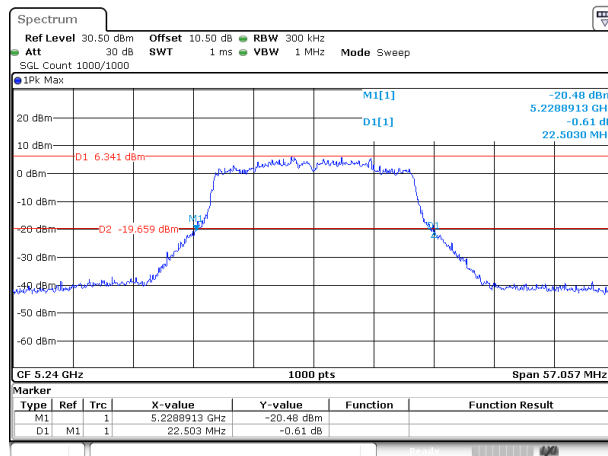


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:53:10

802.11ac20_5180MHz_ANT 2

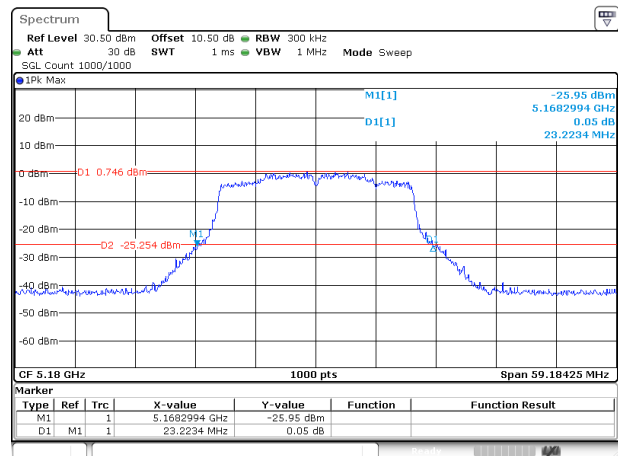


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:37:00

802.11ac20_5200MHz_ANT 2

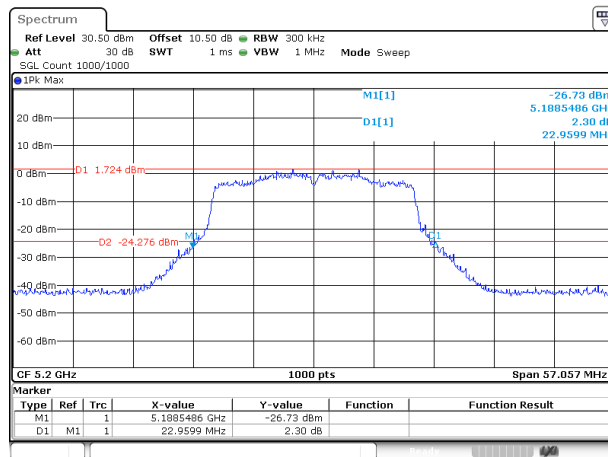


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:41:30

802.11ac20_5240MHz_ANT 2

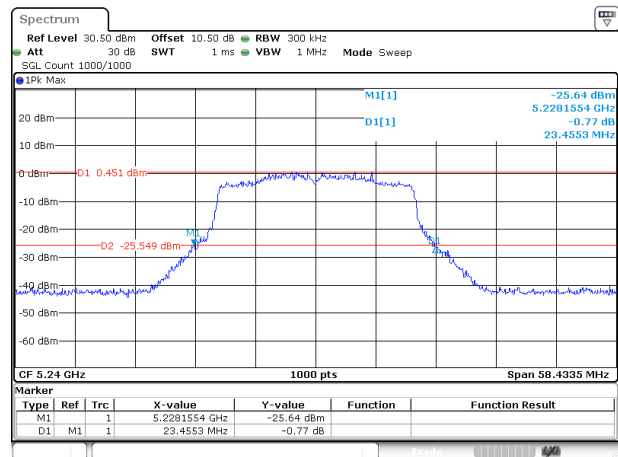


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:46:28

802.11ac40_5190MHz_ANT 1

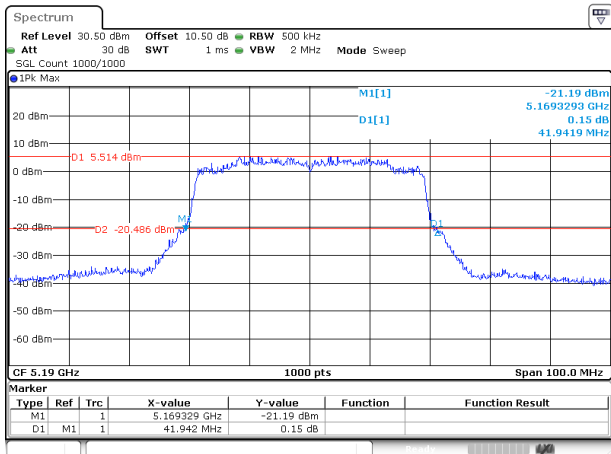


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:56:53

802.11ac40_5230MHz_ANT 1

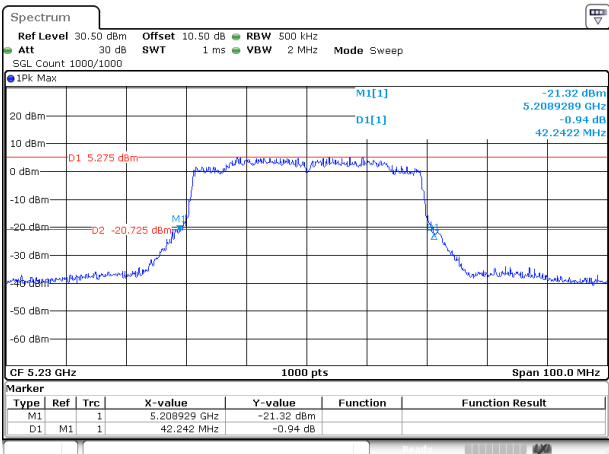


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:00:31

802.11ac40_5190MHz_ANT 2

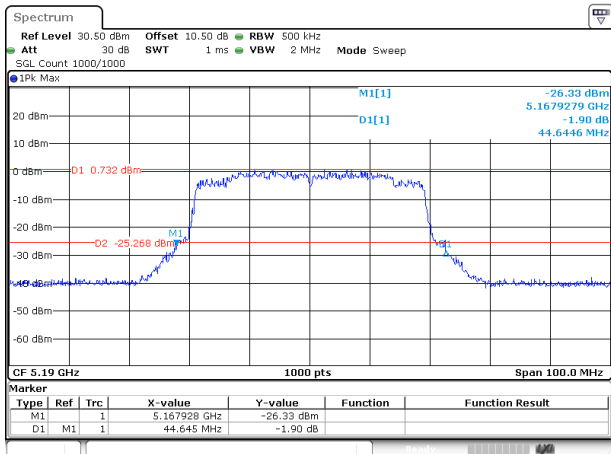


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:50:32

802.11ac40_5230MHz_ANT 2

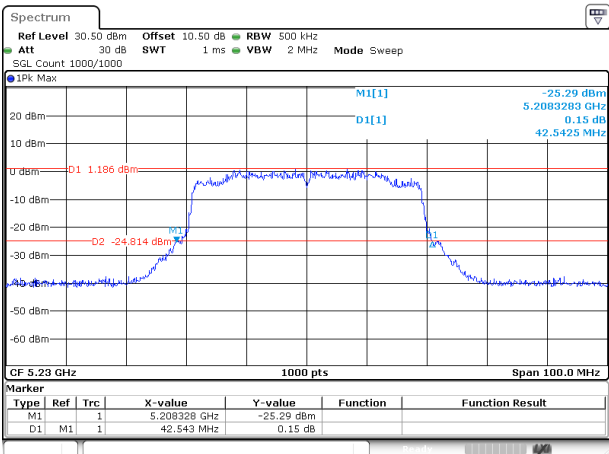


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:54:10

802.11ac80_5210MHz_ANT 1

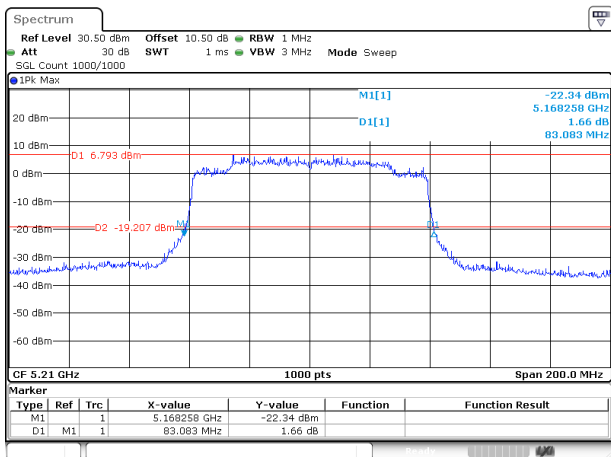

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:04:15

802.11ac80_5210MHz_ANT 2

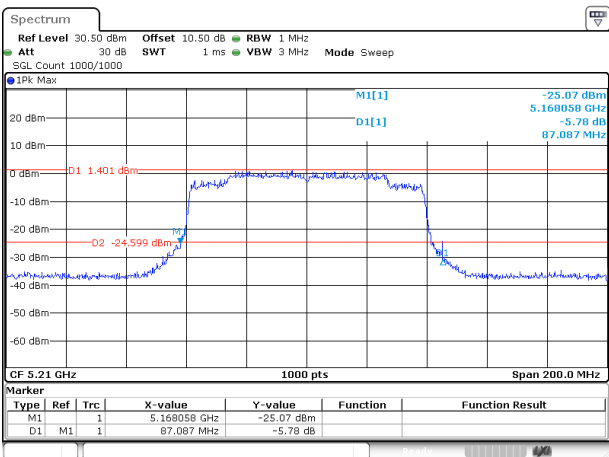

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:57:42

99% Occupied Bandwidth**Test Information:**

Sample No.:	3ASD-2	Test Date:	2025/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ethan Bu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.2
------------------------------	------	---------------------------------------	----	--------------------------------	-------

Test Data:**5150-5250MHz**


Mode	Antenna	Test Frequency (MHz)	99% OBW (MHz)
802.11a	ANT 1	5180	16.550
		5200	16.600
		5240	16.600
	ANT 2	5180	16.600
		5200	16.650
		5240	16.600
802.11ac20	ANT 1	5180	18.900
		5200	18.850
		5240	18.900
	ANT 2	5180	18.900
		5200	18.900
		5240	18.900
802.11ac40	ANT 1	5190	37.600
		5230	37.500
	ANT 2	5190	37.600
		5230	37.500
802.11ac80	ANT 1	5210	76.800
	ANT 2	5210	76.800

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.


5150-5250MHz

802.11a_5180MHz_ANT 1

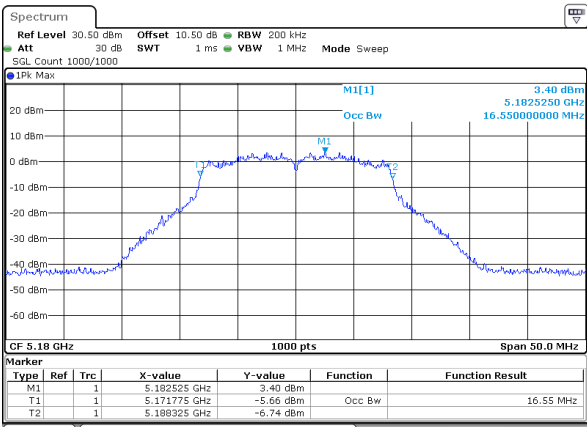


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:06:22

802.11a_5200MHz_ANT 1

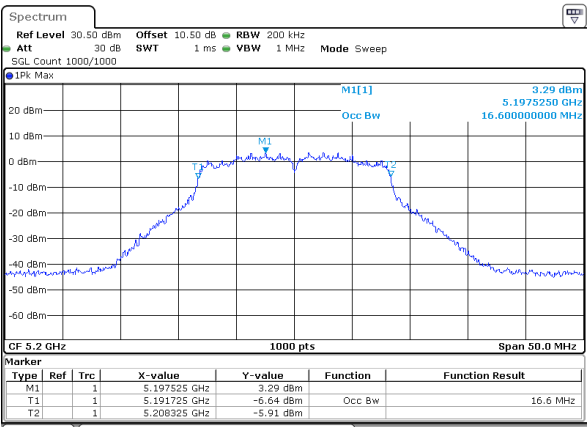


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:11:02

802.11a_5240MHz_ANT 1

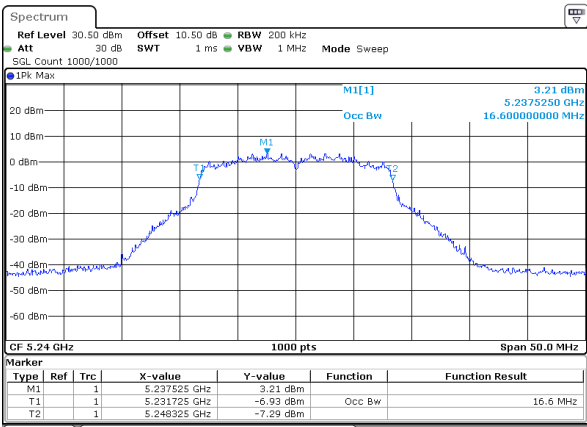


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:15:04

802.11a_5180MHz_ANT 2

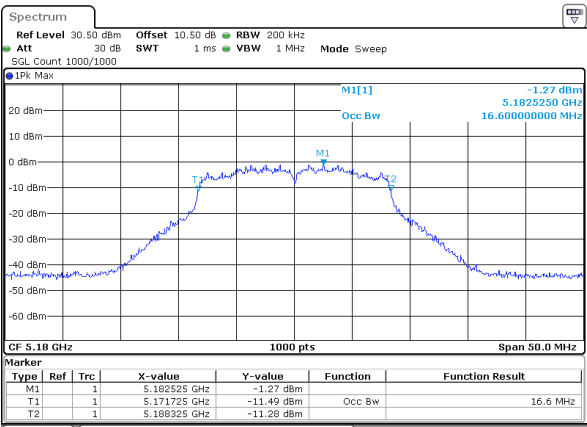


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:22:28

802.11a_5200MHz_ANT 2

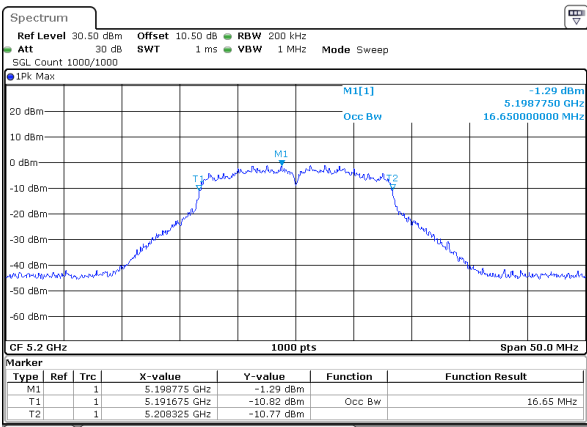


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:26:41

802.11a_5240MHz_ANT 2

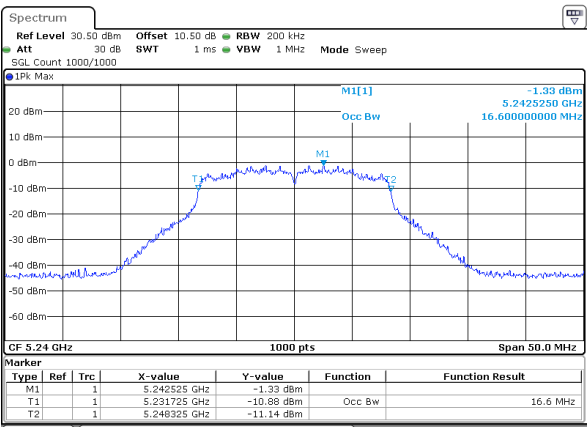


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:31:25

802.11ac20_5180MHz_ANT 1

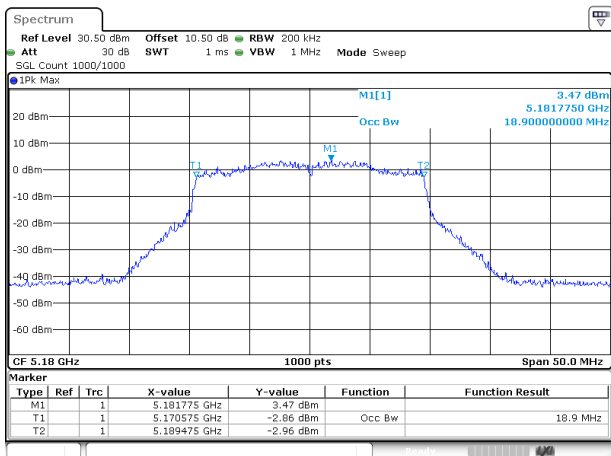


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:19:45

802.11ac20_5200MHz_ANT 1

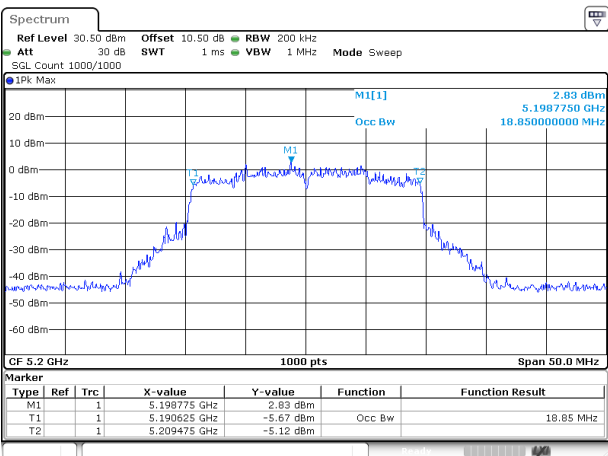


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:49:33

802.11ac20_5240MHz_ANT 1

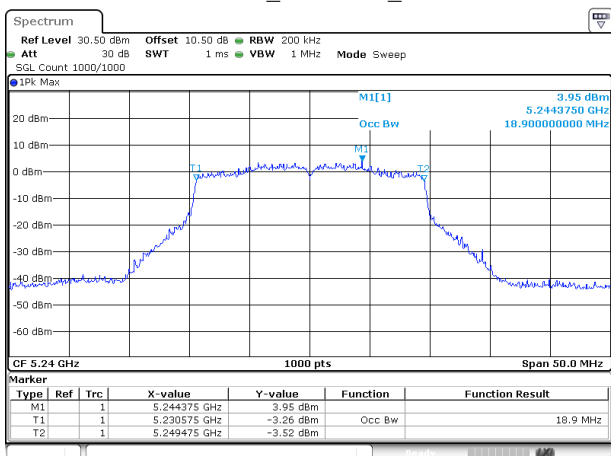


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:53:50

802.11ac20_5180MHz_ANT 2

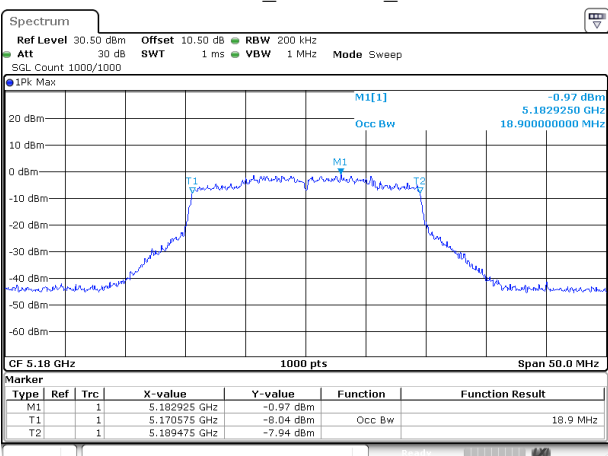


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:37:45

802.11ac20_5200MHz_ANT 2

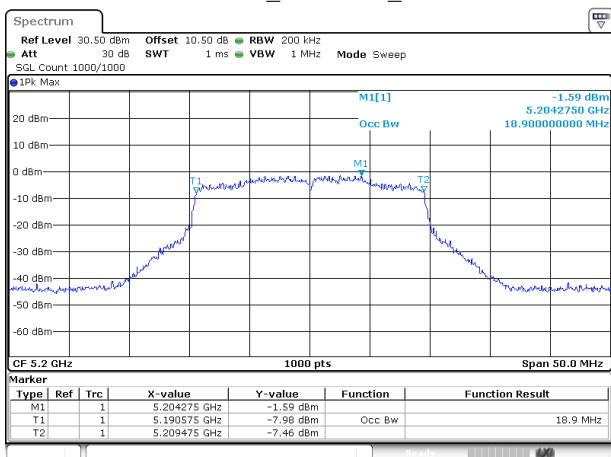


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:42:06


802.11ac20_5240MHz_ANT 2

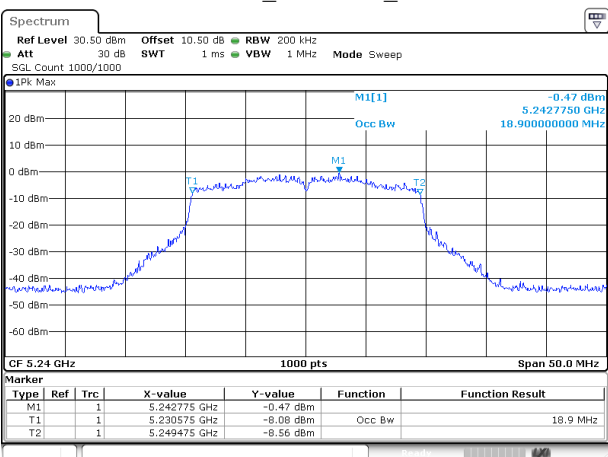


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:47:08

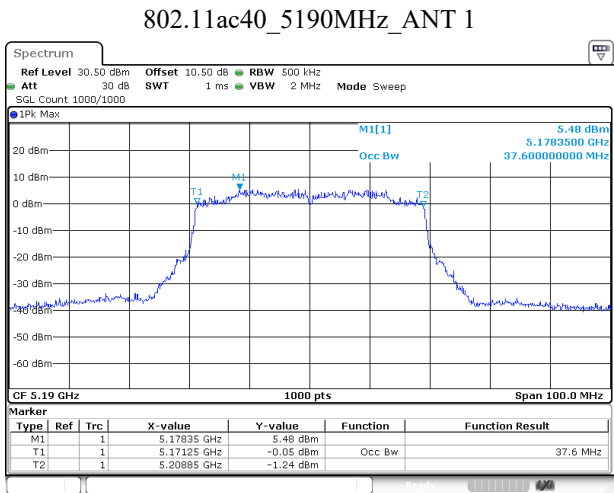


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:57:16

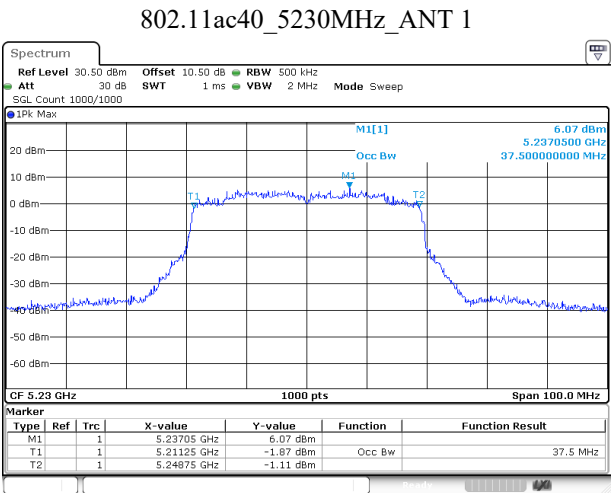


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:00:54

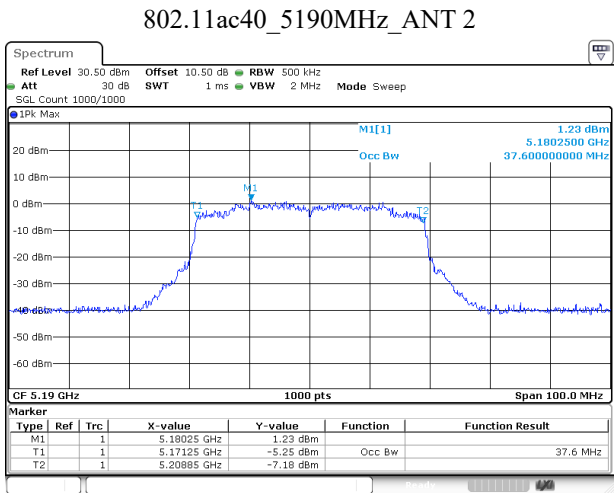


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:51:09

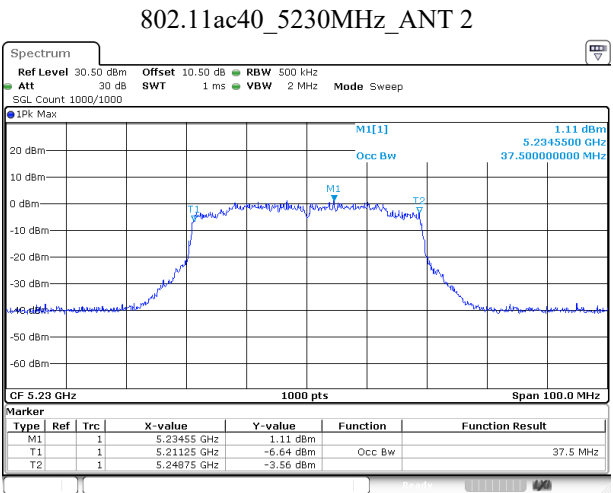

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:54:33

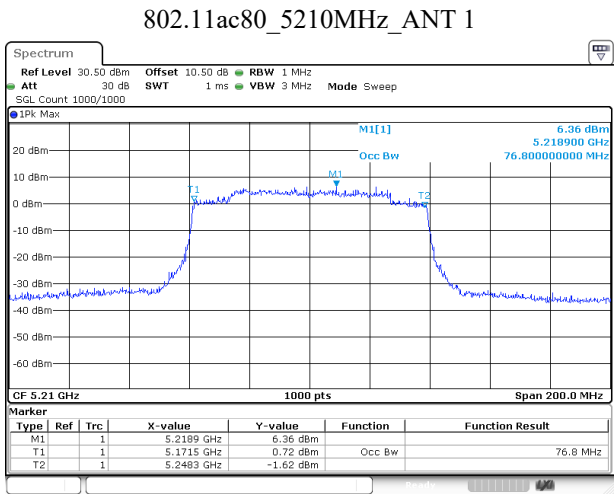

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:04:42

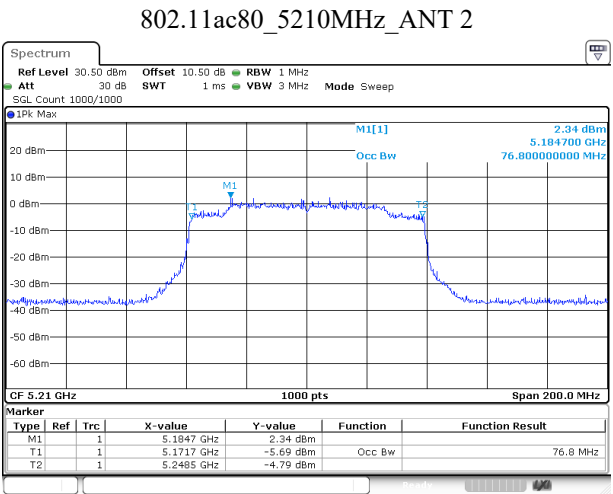

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:58:09

Maximum Conducted Output Power

Test Information:

Sample No.:	3ASD-2	Test Date:	2025/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ethan Bu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------

Test Data:**5150-5250MHz**

Mode	Antenna	Test Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Verdict
802.11a	ANT 1	5180	12.41	23.98	Pass
		5200	12.23	23.98	Pass
		5240	12.21	23.98	Pass
	ANT 2	5180	7.71	23.98	Pass
		5200	7.68	23.98	Pass
		5240	7.62	23.98	Pass
802.11ac20	ANT 1	5180	12.16	23.98	Pass
		5200	12.22	23.98	Pass
		5240	12.13	23.98	Pass
	ANT 2	5180	7.49	23.98	Pass
		5200	7.31	23.98	Pass
		5240	7.32	23.98	Pass
802.11ac40	ANT 1	5190	12.34	23.98	Pass
		5230	12.11	23.98	Pass
	ANT 2	5190	7.55	23.98	Pass
		5230	7.55	23.98	Pass
802.11ac80	ANT 1	5210	12.54	23.98	Pass
	ANT 2	5210	7.72	23.98	Pass

Note: The EUT is a client device.

Power Spectral Density

Test Information:

Sample No.:	3ASD-2	Test Date:	2025/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ethan Bu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.2
----------------------	------	------------------------------	----	------------------------	-------


Test Data:**5150-5250MHz**

Mode	Antenna	Test Frequency (MHz)	Reading (dBm /MHz)	Duty Cycle Factor (dB)	Result (dBm /MHz)	Limit (dBm /MHz)	Verdict
802.11a	ANT 1	5180	1.69	0.53	2.22	11	Pass
		5200	1.68	0.53	2.21	11	Pass
		5240	1.42	0.53	1.95	11	Pass
	ANT 2	5180	-3.04	0.53	-2.51	11	Pass
		5200	-2.91	0.53	-2.38	11	Pass
		5240	-3.41	0.53	-2.88	11	Pass
802.11ac20	ANT 1	5180	1.43	0.53	1.96	11	Pass
		5200	1.36	0.53	1.89	11	Pass
		5240	1.67	0.53	2.20	11	Pass
	ANT 2	5180	-3.43	0.53	-2.90	11	Pass
		5200	-3.66	0.53	-3.13	11	Pass
		5240	-3.66	0.53	-3.13	11	Pass
802.11ac40	ANT 1	5190	-1.87	0.53	-1.34	11	Pass
		5230	-2.20	0.53	-1.67	11	Pass
	ANT 2	5190	-6.57	0.53	-6.04	11	Pass
		5230	-6.46	0.53	-5.93	11	Pass
802.11ac80	ANT 1	5210	-4.38	0.52	-3.86	11	Pass
	ANT 2	5210	-9.59	0.52	-9.07	11	Pass

Result = Reading + Duty Cycle Factor


5150-5250MHz

802.11a_5180MHz_ANT 1

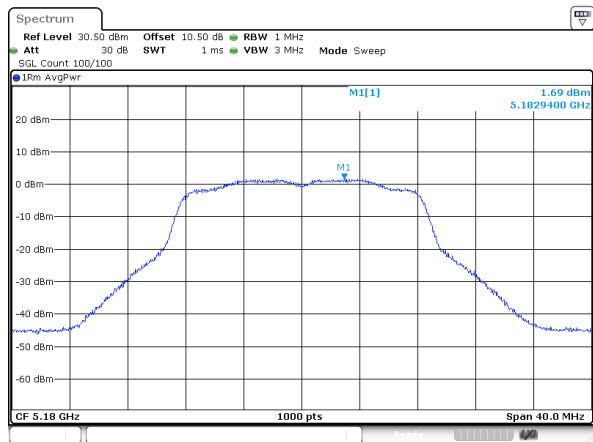


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:06:39

802.11a_5200MHz_ANT 1

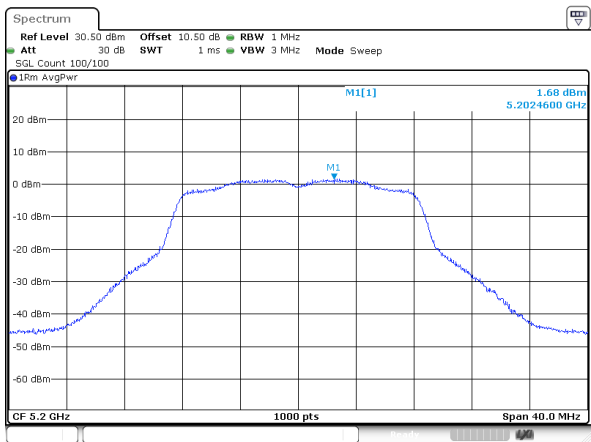


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:11:19

802.11a_5240MHz_ANT 1

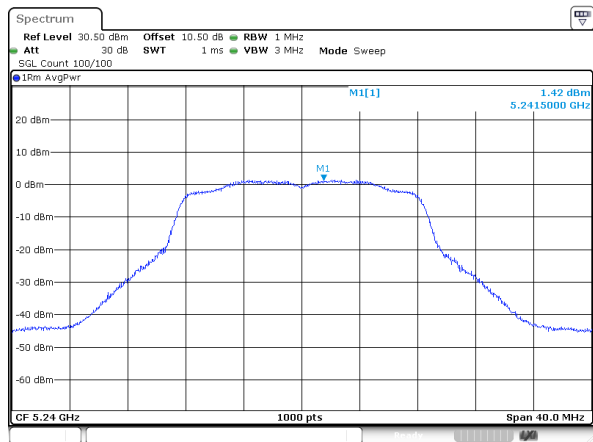


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:15:22

802.11a_5180MHz_ANT 2

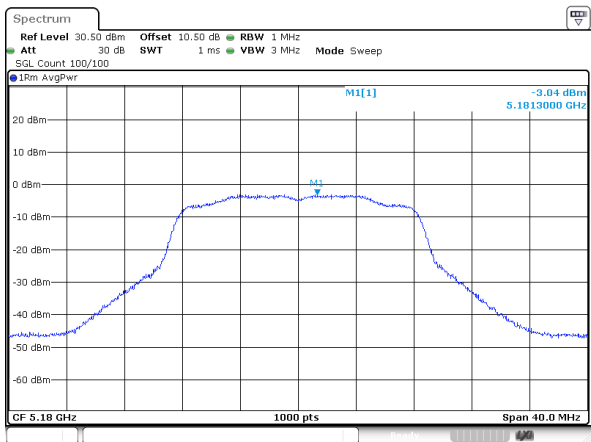


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:22:47

802.11a_5200MHz_ANT 2

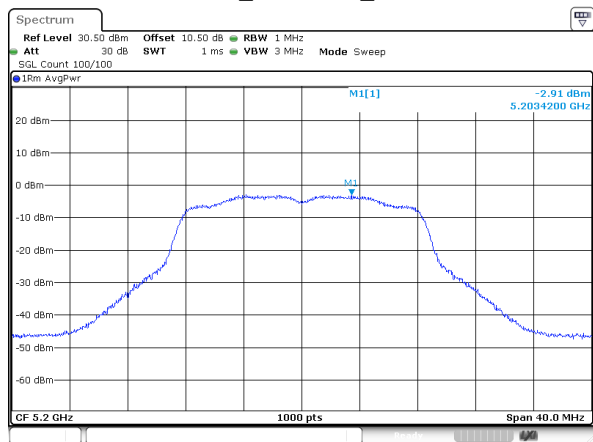


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:26:59

802.11a_5240MHz_ANT 2

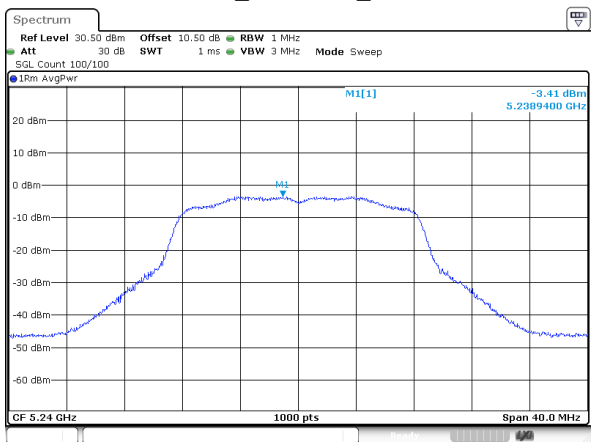


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:31:43

802.11ac20_5180MHz_ANT 1

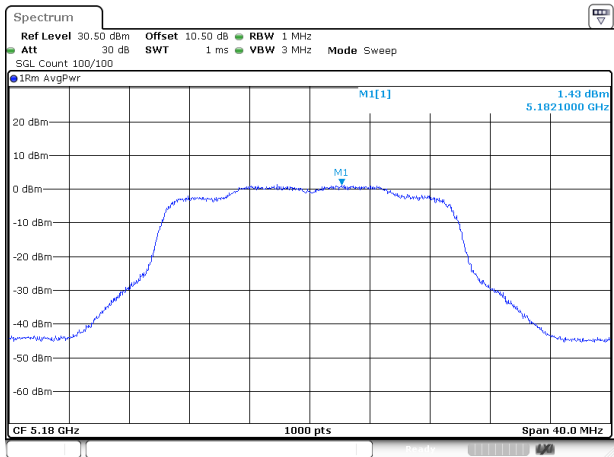


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:20:05

802.11ac20_5200MHz_ANT 1

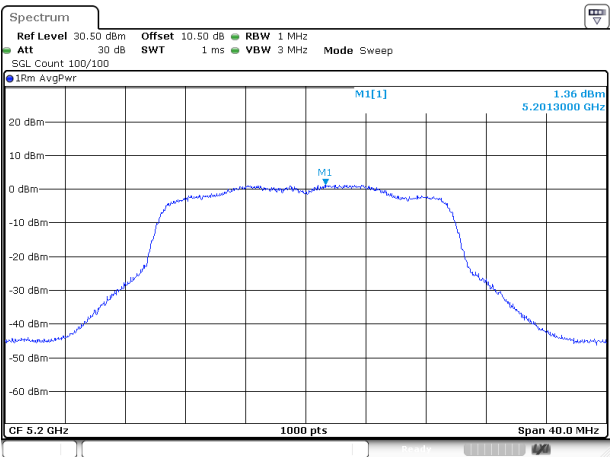


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:49:51

802.11ac20_5240MHz_ANT 1

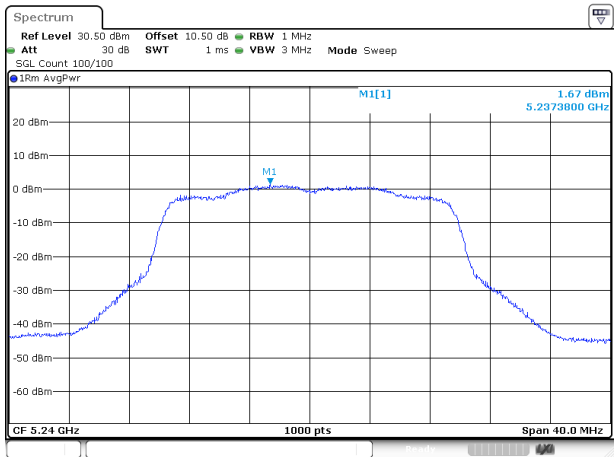


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:54:08

802.11ac20_5180MHz_ANT 2

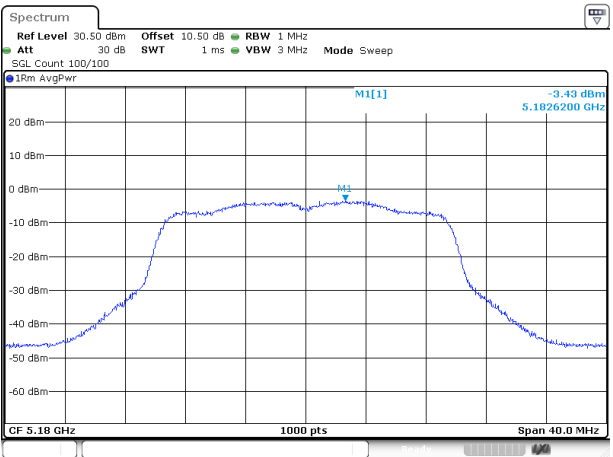


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:38:04

802.11ac20_5200MHz_ANT 2

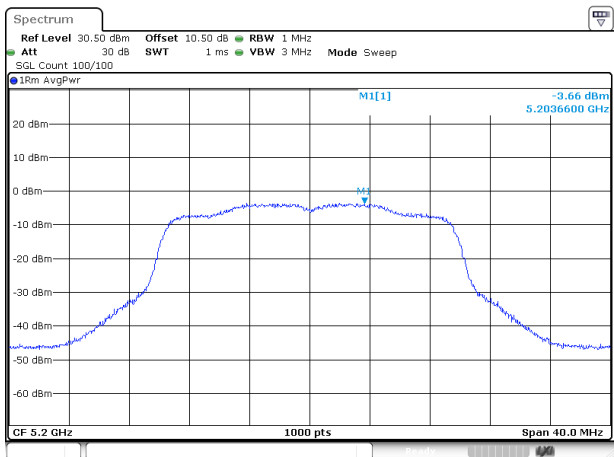


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:42:24

802.11ac20_5240MHz_ANT 2

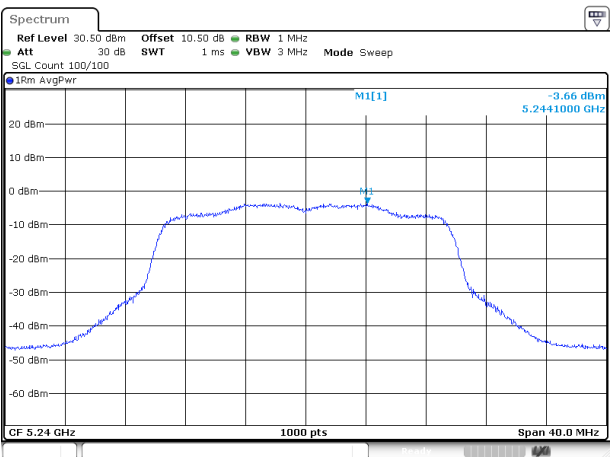


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:47:26

802.11ac40_5190MHz_ANT 1

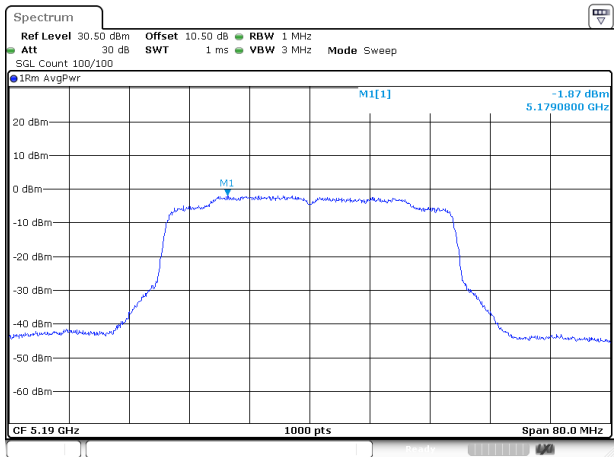


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:57:35

802.11ac40_5230MHz_ANT 1

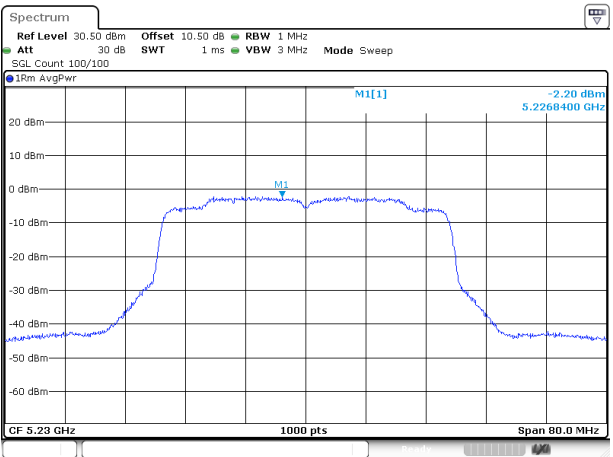


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:01:15

802.11ac40_5190MHz_ANT 2

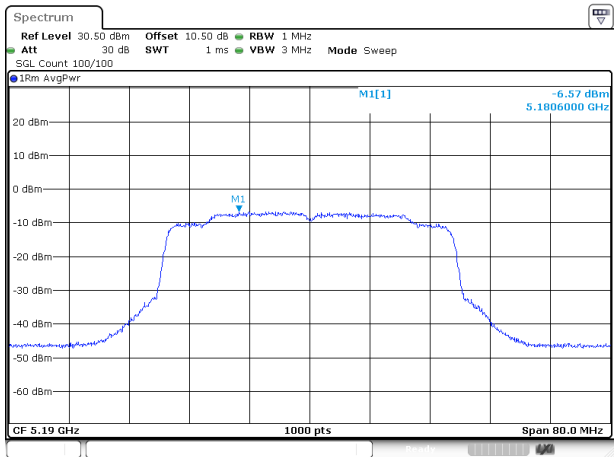


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:51:32

802.11ac40_5230MHz_ANT 2

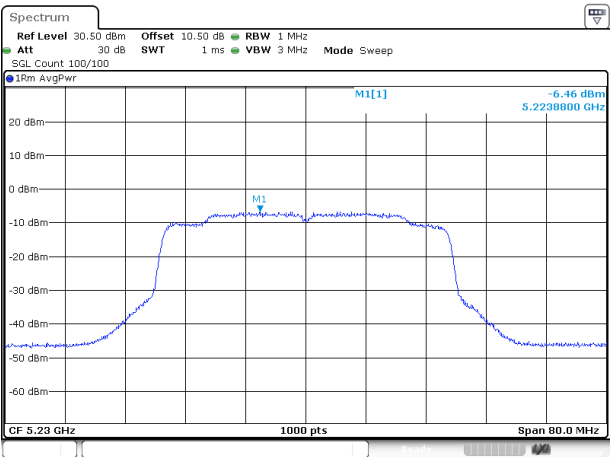


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:54:52

802.11ac80_5210MHz_ANT 1

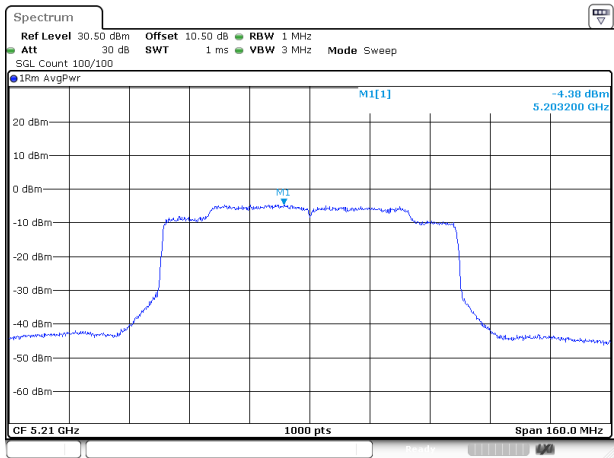

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:05:01

802.11ac80_5210MHz_ANT 2

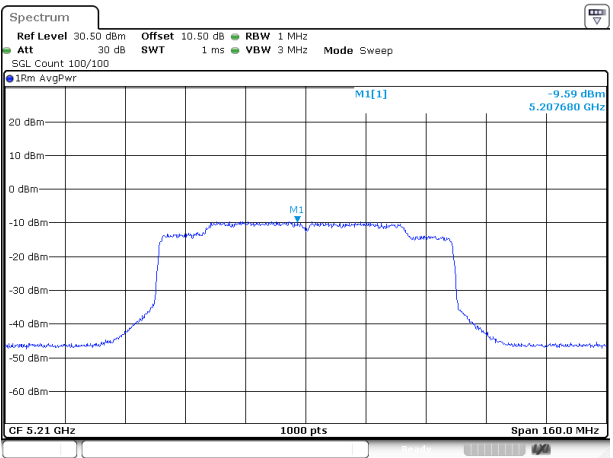

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 11:58:28

Duty Cycle**Test Information:**

Sample No.:	3ASD-2	Test Date:	2025/10/25
Test Site:	RF	Test Mode:	Transmitting
Tester:	Ethan Bu	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.8	Relative Humidity: (%)	40	ATM Pressure: (kPa)	101.2
-----------------------------	------	----------------------------------	----	-------------------------------	-------


Test Data:**5150-5250MHz**

Mode	Test Frequency (MHz)	Ton (ms)	Ton+Toff (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/Ton (Hz)	VBW Setting (kHz)
802.11a	5200	0.360	0.407	88.45	0.53	2778	3
802.11ac20	5200	0.370	0.418	88.52	0.53	2703	3
802.11ac40	5190	0.370	0.418	88.52	0.53	2703	3
802.11ac80	5210	0.378	0.426	88.73	0.52	2646	3

Duty Cycle = Ton/(Ton+Toff)*100%


5150-5250MHz

802.11a_5200MHz

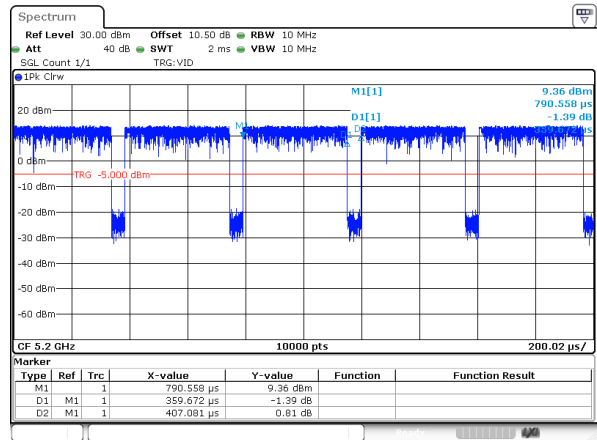


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 09:53:48

802.11ac20_5200MHz

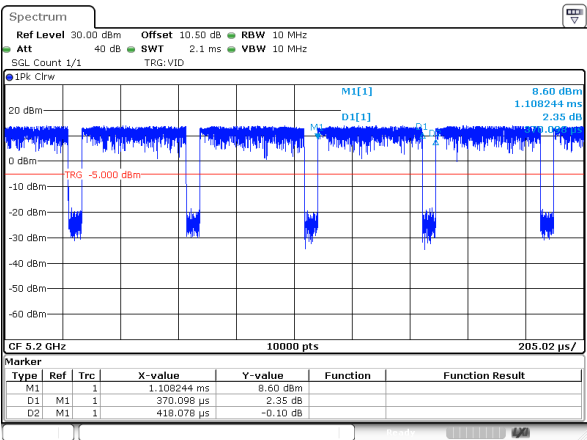


ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 09:54:42

802.11ac40_5190MHz

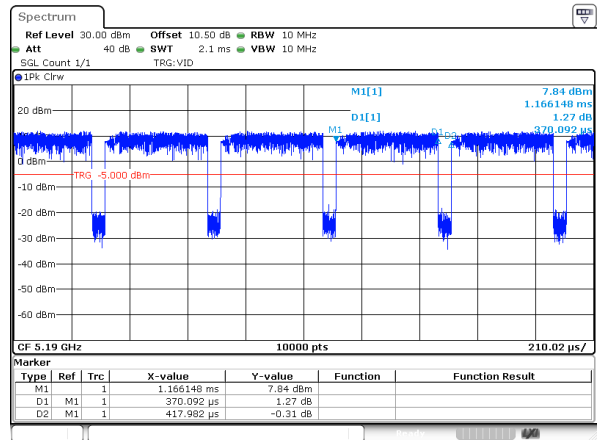

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 10:03:11

802.11ac80_5210MHz

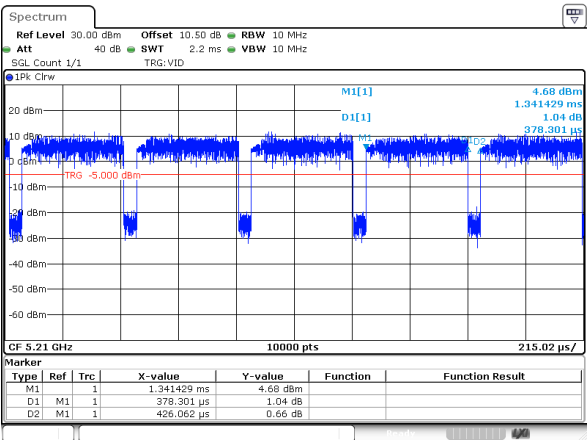

ProjectNo.:2501X06556E-RF Tester:Ethan Bu
Date: 25.OCT.2025 09:59:14

RF EXPOSURE EVALUATION

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: 2501X06556E-SAA.

EUT PHOTOGRAPHS

Please refer to the attachment 2501X06556E-RF-EXP External photo and 2501X06556E-RF-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2501X06556E-RF-TSPB Test Setup photo.

***** **END OF REPORT** *****