



Appendix B

Detailed Test Results

1. WIFI
WIFI 2.4GHz for Body
WIFI 5.2GHz for Body
WIFI 5.8GHz for Body





Date: 2024/5/27

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 0mm-ANT0**DUT: LAPTOP; Type: S15 N2 512GB; Serial: A240527001-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.009

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.765 \text{ S/m}$; $\epsilon_r = 38.587$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (11x13x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.966 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.425 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.917 W/kg

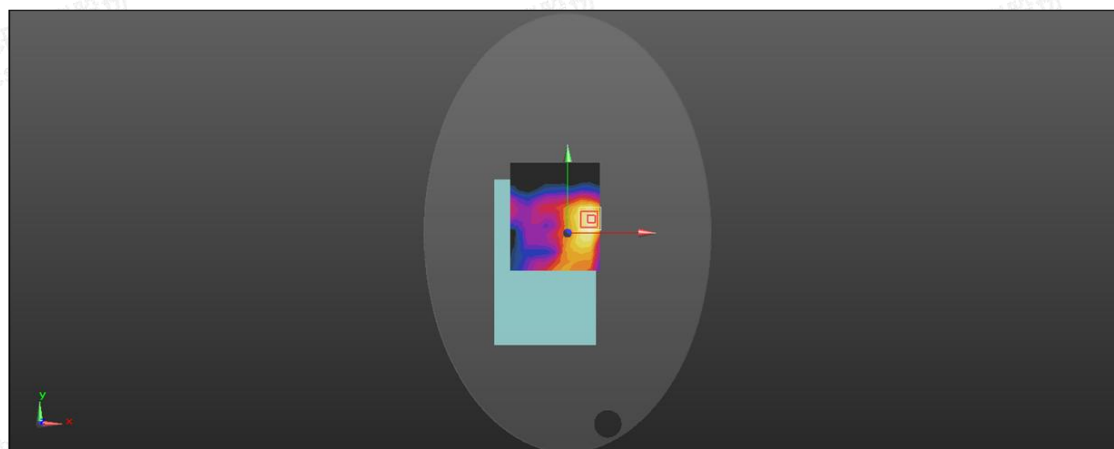

0 dB = 0.917 W/kg = -0.38 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/5/27

Test Laboratory: LCS-SAR Lab

WIFI 2.4G 802.11b 1CH Rear side 0mm-ANT1**DUT: LAPTOP; Type: S15 N2 512GB; Serial: A240527001-1**

Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.008

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.765 \text{ S/m}$; $\epsilon_r = 38.587$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (11x13x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.366 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.620 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 0.331 W/kg

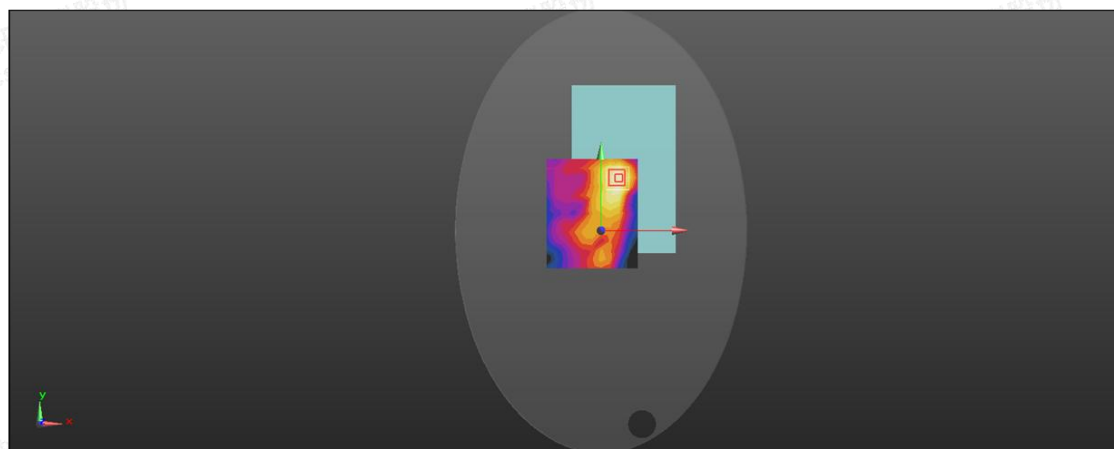

0 dB = 0.331 W/kg = -4.80 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/3

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 40CH Body Rear 0mm-ANT0**DUT: LAPTOP; Type: S15 N2 512GB; Serial: A240527001-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1.076

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.721 \text{ S/m}$; $\epsilon_r = 35.746$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.577 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.647 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.679 W/kg

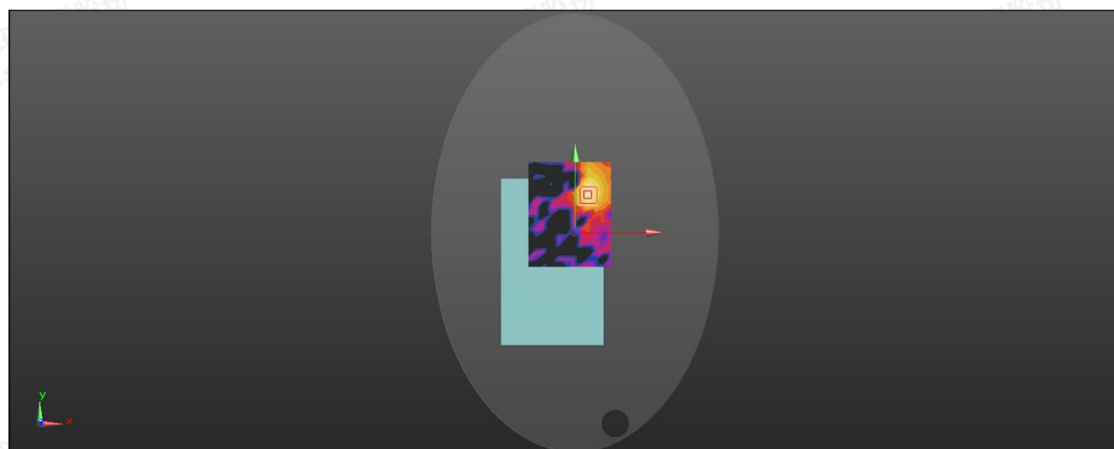

0 dB = 0.679 W/kg = -1.68 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/3

Test Laboratory: LCS-SAR Lab

WIFI 5.2G 802.11a 40CH Body Rear 0mm-ANT1**DUT: LAPTOP; Type: S15 N2 512GB; Serial: A240527001-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz; Duty Cycle: 1:1.076

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.721 \text{ S/m}$; $\epsilon_r = 35.746$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(5.38, 5.38, 5.38); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.541 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.436 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.601 W/kg

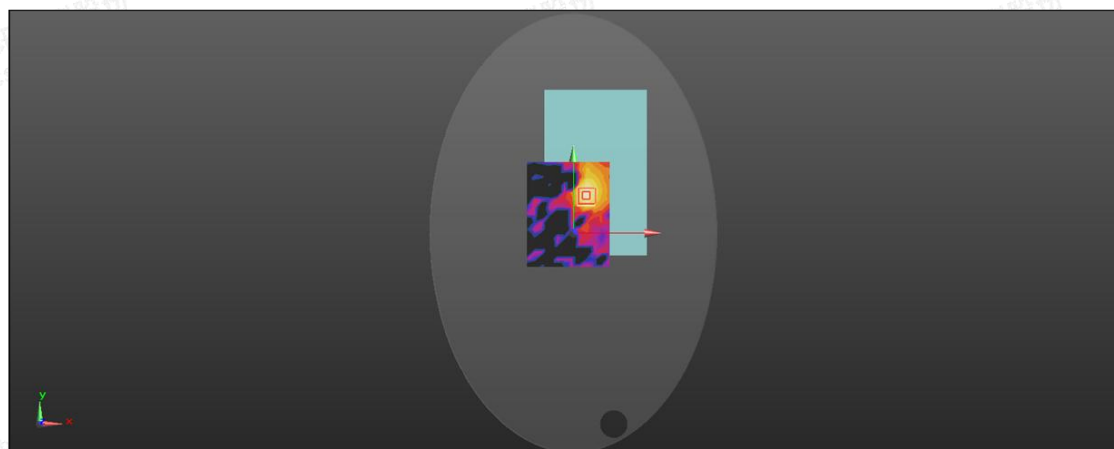 $0 \text{ dB} = 0.601 \text{ W/kg} = -2.21 \text{ dBW/kg}$ 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/3

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Body Rear 0mm-ANT0**DUT: LAPTOP; Type: S15 N2 512GB; Serial: A240527001-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.076

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 35.619$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.677 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.424 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.922 W/kg

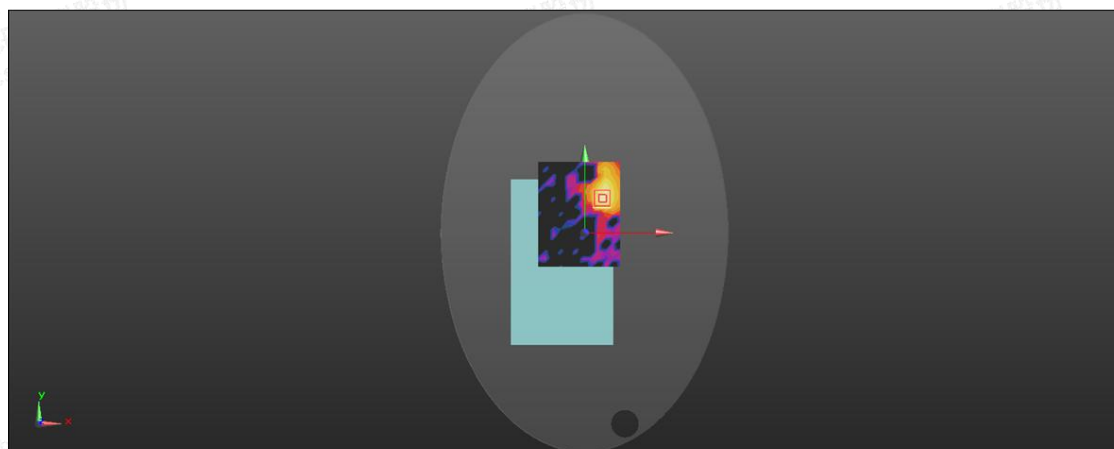

0 dB = 0.922 W/kg = -0.35 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Date: 2024/6/3

Test Laboratory: LCS-SAR Lab

WIFI 5.8G 802.11a 149CH Body Rear 0mm-ANT1**DUT: LAPTOP; Type: S15 N2 512GB; Serial: A240527001-1**

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.076

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.211 \text{ S/m}$; $\epsilon_r = 35.619$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(4.88, 4.88, 4.88); Calibrated: 2023/11/23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: ELI v5.0; Type: ELI; Serial: 2010
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Unnamed procedure/Area Scan (12x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.433 W/kg



Configuration/Unnamed procedure/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 0.365 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.952 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.513 W/kg

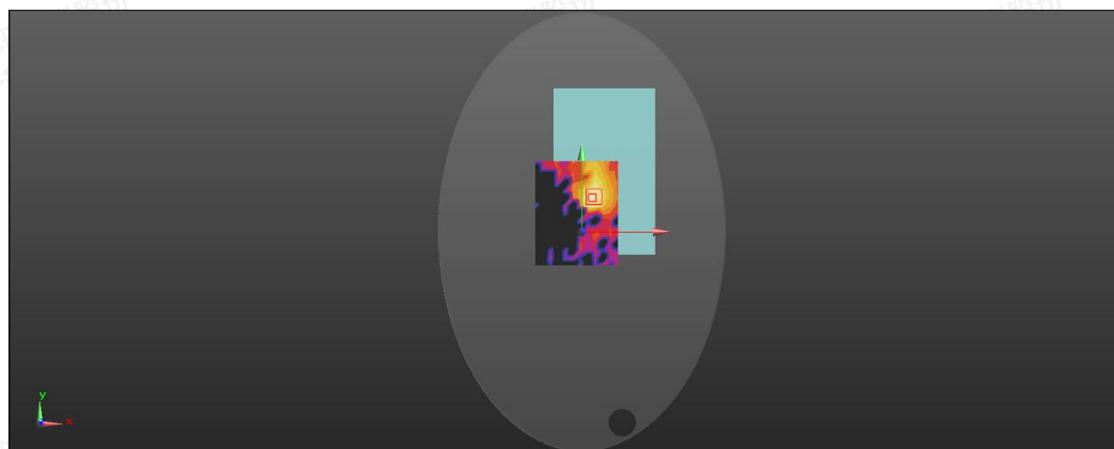

0 dB = 0.513 W/kg = -2.90 dBW/kg



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity