Emissions
Test Report

EUT Name: Ember Mug

Model No.: TM15

CFR 47 Part 15.247: 2015 and RSS 247: 2015

Prepared for:

Chris Wakeham
Ember Technologies, Inc.
4607 Lakeview Canyon Rd., #500
Westlake Village, CA 91361
Tel: (858) 603-4951

Prepared by:

TUV Rheinland of North America, Inc.
1279 Quarry Lane, Suite A
Pleasanton, CA 94566
Tel: (925) 249-9123
Fax: (925) 249-9124
http://www.tuv.com/

Report/Issue Date: October 5, 2016
Job # 0000136548
Report Number: 31662400.002

Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	09/15/2016	Original Document	N/A
1	10/5/2016	Updated KDB references to include the document version. Updated SAR exemption calculation to omit antenna gain. Removed irrelevant power data from OBW plots	E. Mariscal

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer:	Ember Technologies, Inc. 4607 Lakeview Canyon Rd., #500 Westlake Village, CA 91361 (858) 603-4951
Requester / Applicant:	Chris Wakeham
Name of Equipment:	Ember Mug
Model No.	TM15
Type of Equipment:	Intentional Radiator
Application of Regulations:	CFR 47 Part 15.247: 2015 and RSS 247: 2015
Test Dates:	08 Sept 2016 to 13 Sept 2016

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v03r05

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v03r05

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Eddie Mariscal		David Spencer	
Test Engineer	Date October 5, 2016	A2LA Signatory	Date October 5, 2016

Testing Cert #3331.02 **US5254** **2932M-1**

1 Executive Summary 7

1.1 Scope 7

1.2 Purpose 7

1.3 Summary of Test Results 8

1.4 Special Accessories 8

1.5 Equipment Modifications 8

2 Laboratory Information 9

2.1 Accreditations & Endorsements 9

2.1.1 US Federal Communications Commission 9

2.1.2 NIST / A2LA 9

2.1.3 Canada – Industry Canada 9

2.1.4 Japan – VCCI 9

2.1.5 Acceptance by Mutual Recognition Arrangement 10

2.2 Test Facilities 10

2.2.1 Emission Test Facility 10

2.2.2 Immunity Test Facility 10

2.3 Measurement Uncertainty 10

2.3.1 Sample Calculation – radiated & conducted emissions 11

2.3.2 Measurement Uncertainty 11

2.3.3 Measurement Uncertainty Immunity 12

2.4 Calibration Traceability 12

3 Product Information 13

3.1 Product Description 13

3.2 Equipment Configuration 13

3.3 Operating Mode 13

3.4 Unique Antenna Connector 14

3.4.1 Results 14

4 Emissions 15

4.1 Output Power Requirements 15

4.1.1 Test Method 15

4.1.2 Results 16

4.2 Occupied Bandwidth 19

4.2.1 Test Method 19

4.2.2 Results 19

4.3 Peak Power Spectral Density 23

4.3.1 Test Method 23

4.3.2 Results 23

4.4 Out of Band Emissions 27

4.4.1 Test Method 27

4.4.2 Results 28

4.5 Transmit Spurious Emissions ____ 36
4.5.1 Test Methodology ____ 36
4.5.2 Transmitter Spurious Emission Limit ____ 37
4.5.3 Test Results ____ 37

4.6 AC Conducted Emissions ____ 57
4.6.1 Test Methodology ____ 57
4.6.2 Test Results ____ 57

4.7 Maximum Permissible Exposure ____ 62
4.7.1 Test Methodology ____ 62
4.7.2 FCC KDB 447498 D01v06 – General SAR Test Exclusion Guidance ____ 62
4.7.3 EUT Operating Condition ____ 63
4.7.4 Classification ____ 63
4.7.5 SAR Test Exclusion Threshold ____ 63

5 Test Equipment List ____ 64

5.1 Equipment List ____ 64

6 EMC Test Plan ____ 65

6.1 Introduction ____ 65

6.2 Customer ____ 65

6.3 Equipment Under Test (EUT) ____ 66

6.4 Test Specifications ____ 69

Table 1: Summary of Test Results 8
Table 2: RF Output Power at the Antenna Port – Test Results 16
Table 3: Occupied Bandwidth – Test Results 20
Table 4: Peak Power Spectral Density – Test Results 24
Table 6: Emissions at the Band-Edge – Test Results 28
Table 7: Transmit Spurious Emission at Band-Edge Requirements 38
Table 8: AC Conducted Emissions – Test Results 57
Table 9: Customer Information 65
Table 10: Technical Contact Information 65
Table 11: EUT Specifications 66
Table 12: Antenna Information 66
Table 13: EUT Channel Power Specifications 67
Table 14: Interface Specifications 68
Table 15: Supported Equipment 68
Table 16: Description of Sample used for Testing 68
Table 17: Description of Test Configuration used for Radiated Measurement. 68
Table 18: Test Specifications 69

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2015 and RSS 247: 2015 based on the results of testing performed on 08 Sept 2016 to 13 Sept 2016 on the Ember Mug Model TM15 manufactured by Ember Technologies, Inc. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2400 MHz to 2483.5 MHz frequency band is covered in this document.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.4	Test Parameters (Measured)	Result
Spurious Emission in Transmit Mode	CFR47 15.209, RSS-GEN Sect.8.9	Class B	**Complied**
Restricted Bands of Operation	CFR47 15.205, RSS GEN Sect.8.10	Class B	**Complied**
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	**Complied**
Occupied Bandwidth	CFR47 15.247 (a2), RSS 247 Sect. 5.2.1	See plots	**Complied**
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4.4	2.74dBm	**Complied**
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2.2	2.64dBm/3kHz	**Complied**
Out of Band Emission	CFR47 15.247 (d), RSS 247 Sect.5.5	30 MHz - 25 GHz < -17.36 dBm/100kHz	**Complied**
RF Exposure	CFR47 15.247 (i), 2.1093 RSS-102 Issue 5	General Population	**Complied**

Note: This test report covers 2400 MHz to 2483.5 MHz band.

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US5254). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / A2LA

TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:1999 and ISO 9002 (Lab Code Testing Cert #3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada

TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0031

VCCI Registration No. for Santa Clara: A-0032

2.1.5 Acceptance by Mutual Recognition Arrangement

The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA. The 2305 Mission College, Santa Clara, 95054, USA location is considered a Pleasanton annex.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-kΩ resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-kΩ resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

Field Strength (dBμV/m) = RAW - AMP + CBL + ACF

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu V/m = 10^{\frac{dB\mu V/m}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

25 dBuV/m + 17.5 dB – 20 dB + 1.0 dB = 23.5 dBuV/m

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	**U_{lab}**	**U_{cispr}**
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is ± 5.0%.	Per CISPR 16-4-2 Methods

2.3.3 Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is ± 8.2%.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is ± 2.9%.	Per IEC 61000-4-8

Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is ± 2.6%.
The estimated combined standard uncertainty for surge immunity measurements is ± 2.6%.
The estimated combined standard uncertainty for voltage variation and interruption measurements is ± 1.74%.

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The Model TM15, Ember Mug, is a portable, self-heating coffee mug capable of operating in the 2.4 GHz frequency band utilizing BLE technology.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Ember Mug employs a single integral antenna inaccessible to the end user. The antenna has a declared maximum gain of +6dBi.

Refer to Table 13 for additional antenna information.

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2015 and RSS 247: 2015. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b):2015 and RSS 247: 2015 Sect. 5.4.4.


The maximum transmitted powers are:

Band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

The ANSI C63.10-2013 Section 11.9.2.2.2 conducted method was used to measure the channel power output. The measurements were conducted on 3 channels in each operating range per CFR47 Part 15.247(b): 2015 and RSS 247 Sect. 5.4.4; 2400 MHz to 2483.5 MHz

Test Setup:

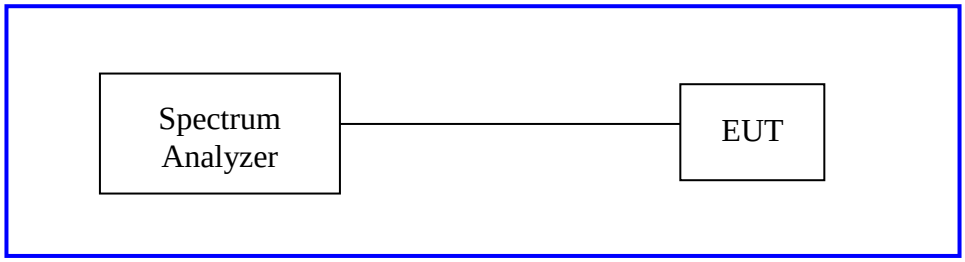

The method described in section 9.1.1 of "KDB 558074 – DTS Measurement Guidance v03r05" applies and was used.

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature			
Antenna Type: Custom Integrated		**Power Setting:** See test plan	
Max. Directional Gain: +6 dBi			
Signal State: Modulated at 100%.			
Ambient Temp.: 24° C		**Relative Humidity:**39%	
BLE 4.0			
Operating Channel (MHz)	**Measured Power [dBm]**	**Limit [dBm]**	**Margin [dB]**
2402.00	2.54	30.00	-27.46
2440.00	2.74	30.00	-27.26
2480.00	2.61	30.00	-27.39
Note: Note: All insertion loss corrections are accounted for in the measurement plots.			

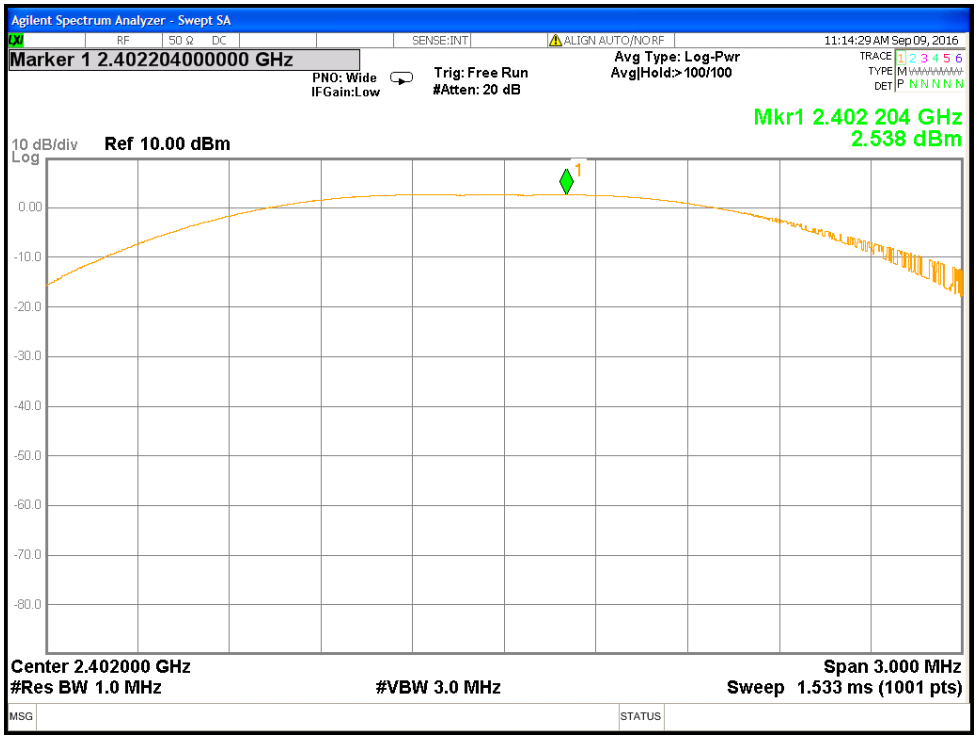


Figure 1 : Maximum peak conducted output power, 2402MHz

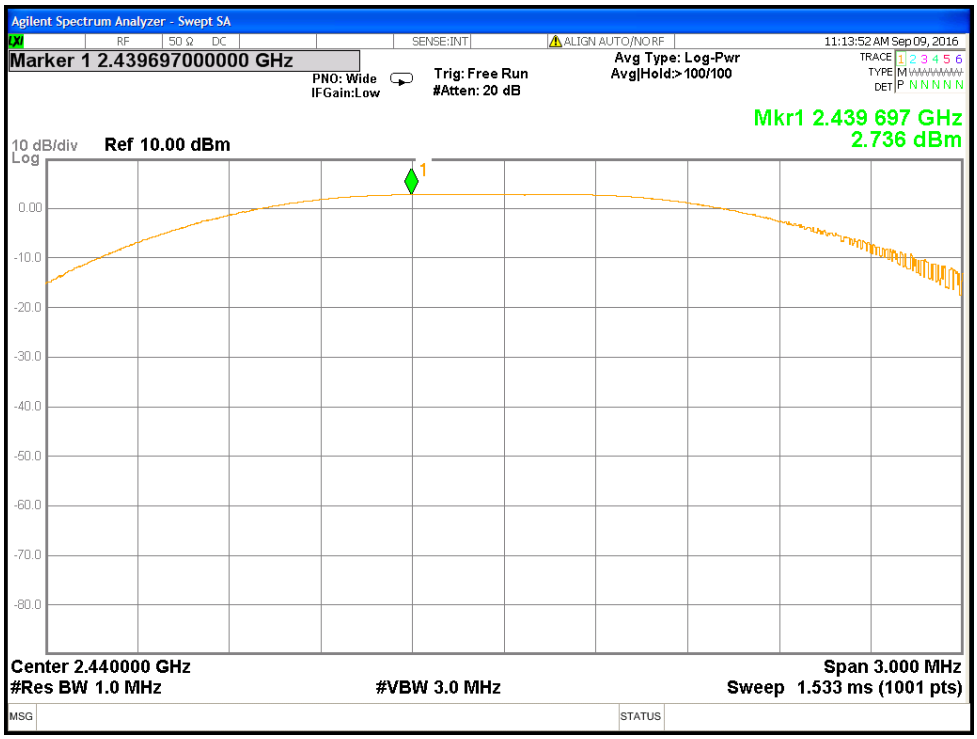


Figure 2 : Maximum peak conducted output power, 2440MHz

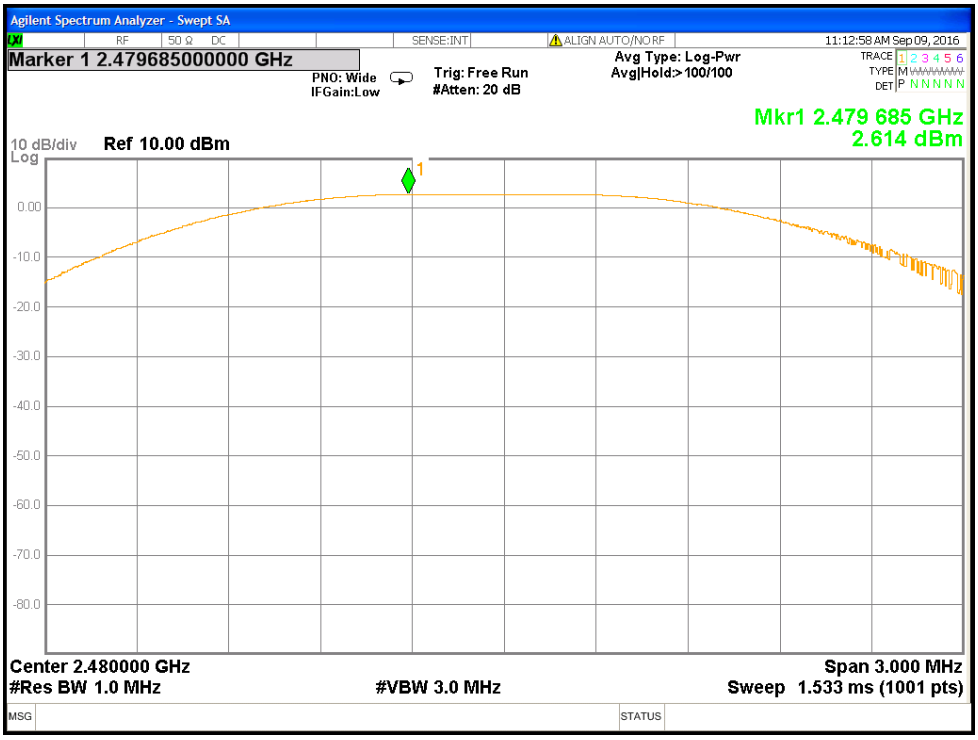


Figure 3 : Maximum peak conducted output power, 2480MHz

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.


The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247(a) (2) 2015 and RSS 247 Sect. 5.2.1:2015. Measurements were performed on 3 channels in each operating frequency range; 2400 MHz to 2483.5 MHz, a 6 dB bandwidth was used.

Test Setup:

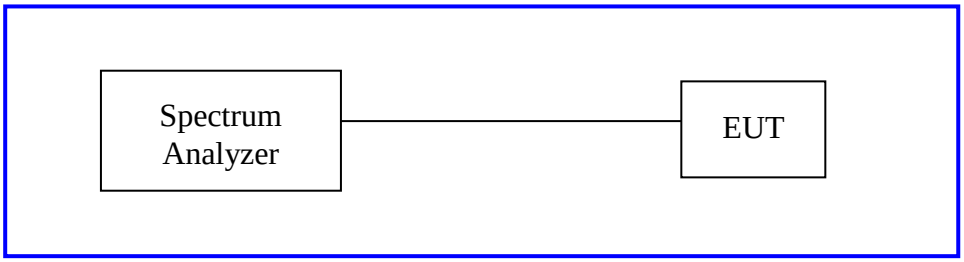

4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement, Normal Temperature		
Antenna Type: Custom Integrated		**Power Setting:** See test plan
Max. Directional Gain: +6 dBi		
Signal State: Modulated at 100%.		
Ambient Temp.: 24° C		**Relative Humidity:**39%
Bandwidth (MHz) for BLE 4.0		
Freq. (MHz)	**6dB Bandwidth (kHz)**	**99% Bandwidth (MHz)**
2402	695.6	1.0595
2440	693.8	1.0650
2480	702.1	1.0660
Note: None		

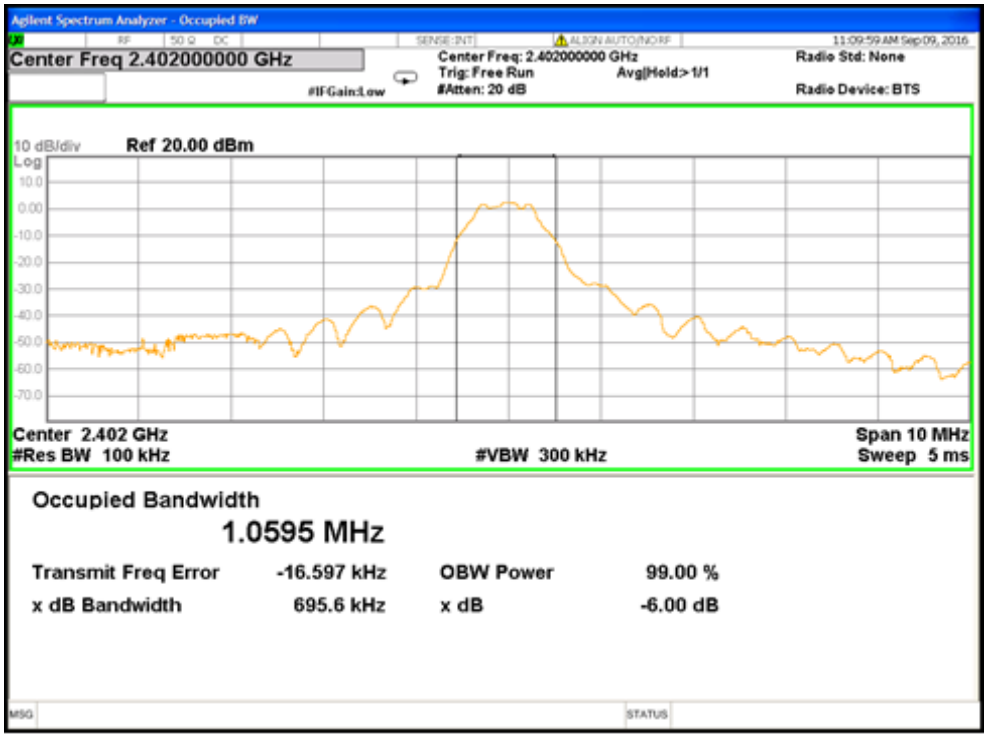


Figure 4 : 6dB & 99% Occupied Bandwidth, 2402MHz

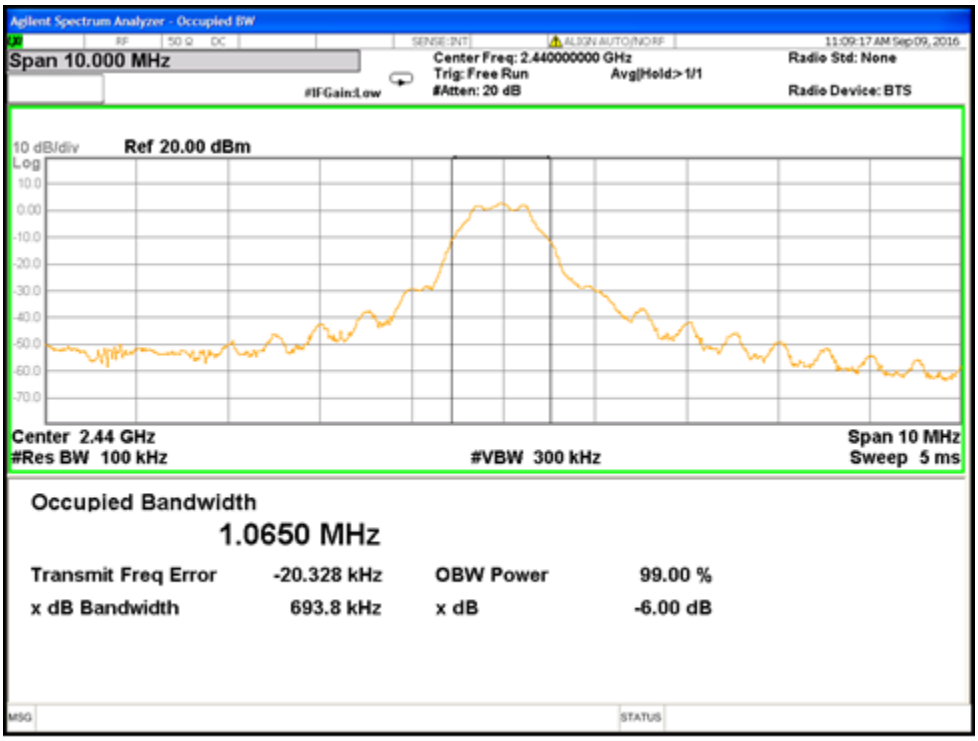


Figure 5 : 6dB & 99% Occupied Bandwidth, 2440MHz

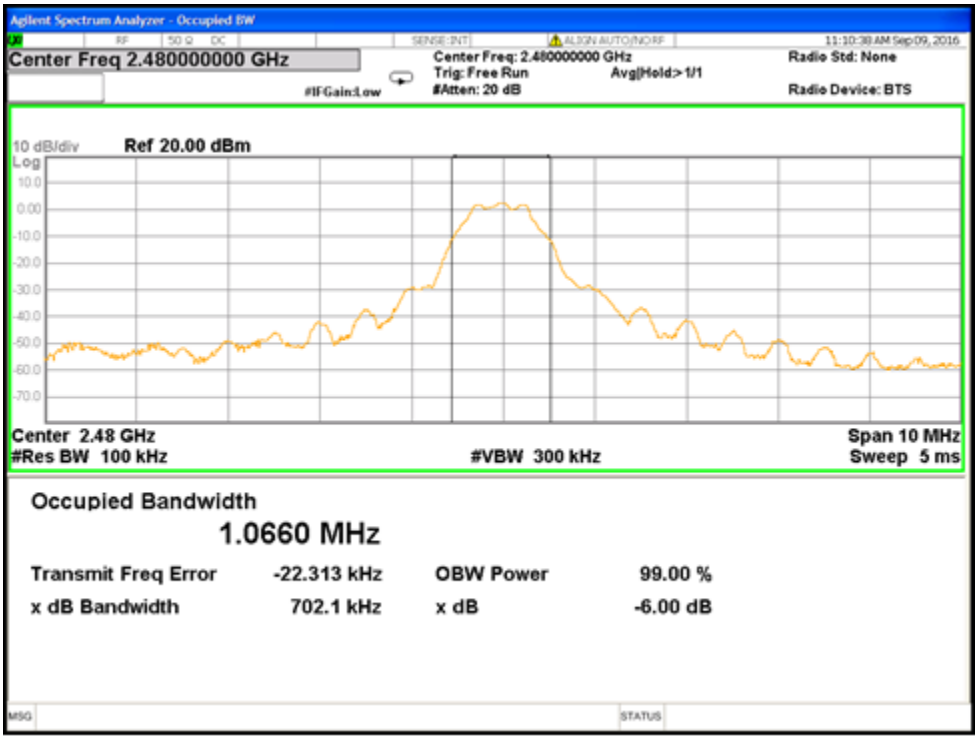


Figure 6 : 6dB & 99% Occupied Bandwidth, 2480MHz


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2.2, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.2. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2.2.

Test Setup:

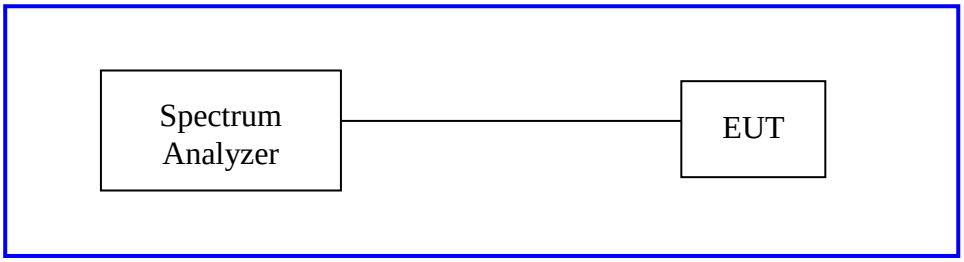

4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results

Test Conditions: Conducted Measurement, Normal Temperature				
Antenna Type: Custom Integrated			**Power Setting:** See test plan	
Max. Directional Gain: +6 dBi				
Signal State: Modulated at 100%.				
Ambient Temp.: 24° C			**Relative Humidity:**39%	
Peak Power Spectral Density				
BLE 4.0				
Freq. (MHz)	**Measured PSD [dBm/100kHz]**	**Calculated PSD [dBm/3kHz]**	**Limit [dBm/3kHz]**	**Margin [dB]**
2402	2.50	-12.73	8	-20.73
2440	2.64	-12.59	8	-20.59
2480	2.52	-12.71	8	-20.71
Note: All insertion loss corrections are accounted for in the measurement plots. 2. PSD (dBm/100kHz) is used to calculate PSD (dBm/3kHz) using the following formula: PSD (dBm/3kHz) = PSD (dBm/100kHz) – 15.23dB.				

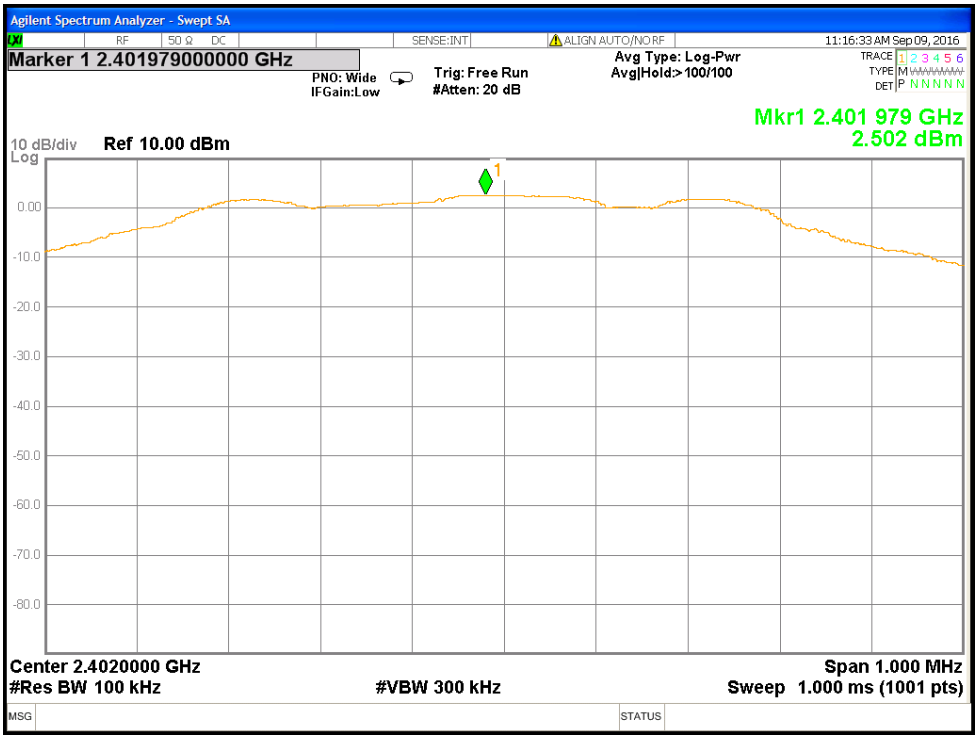


Figure 7: Power Spectral Density, 2402 MHz

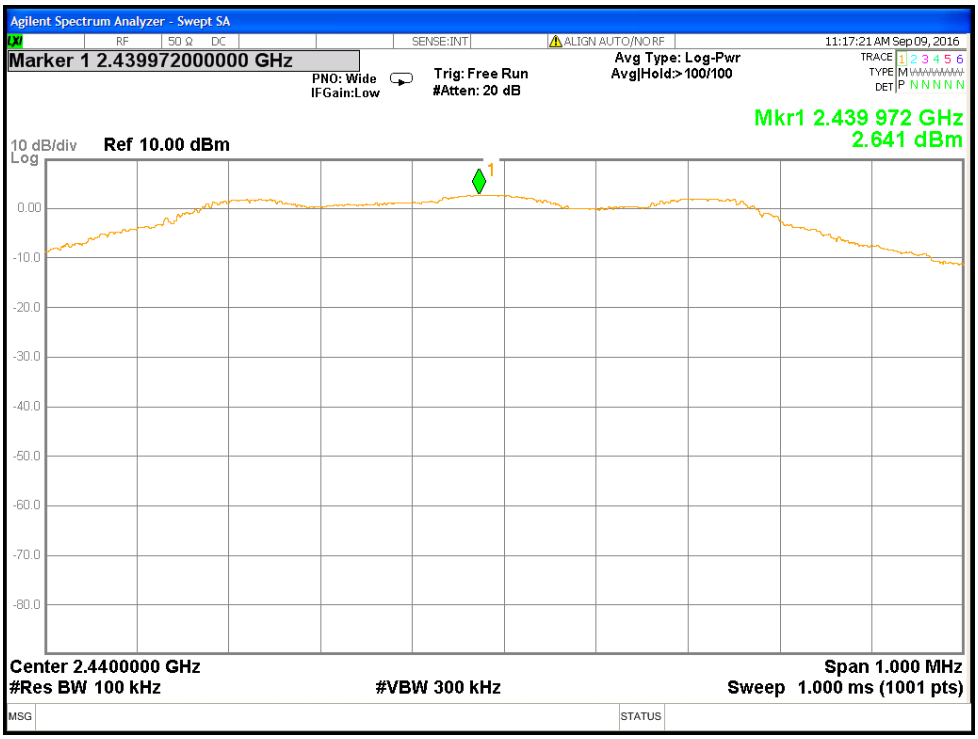


Figure 8: Power Spectral Density, 2440 MHz

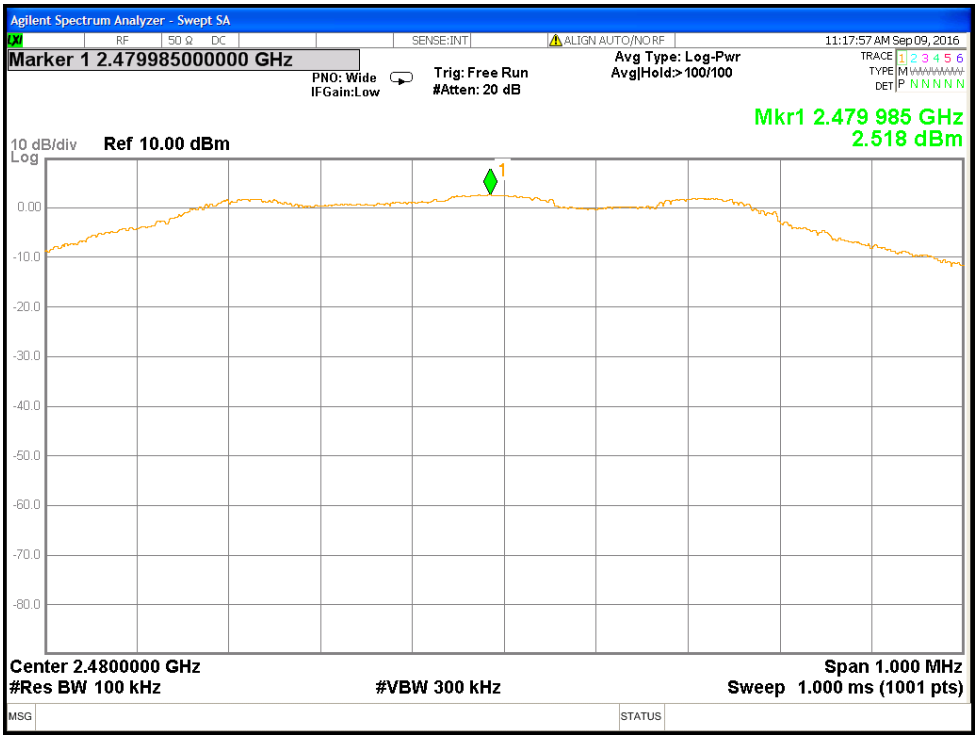


Figure 9: Power Spectral Density, 2480 MHz


4.4 Out of Band Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5.

4.4.1 Test Method

The conducted method was used to measure the undesirable emission requirement. The measurement was performed with modulation.

Test Setup:

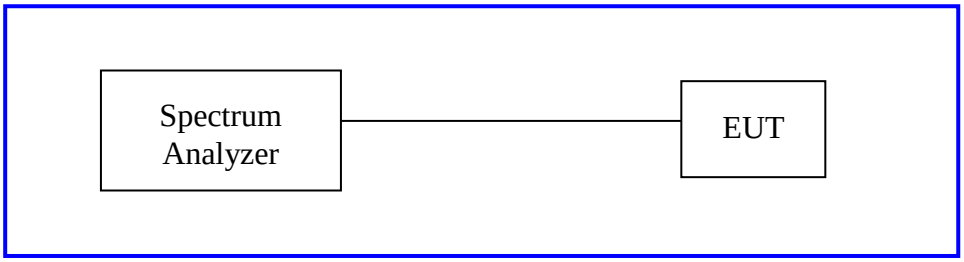

4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Out of Band Emissions including the Band-Edge – Test Results

Test Conditions: Conducted Measurement, Normal Temperature					
Antenna Type: Custom Integrated		**Power Setting:** See test plan			
Max. Directional Gain: +6 dBi		**Highest Level in 100kHz BW:** 2.64 dBm			
Signal State: Modulated					
Ambient Temp.: 24° C		**Relative Humidity:**39%			
Non-Restricted Frequency Band Emissions					
Operating Freq. (MHz)	**Measured Freq. (MHz)**	**Measured (dBm)**	**Limit (dBm)**	**Plot**	**Result**
2400	676.02	-67.11	-17.36	12	Pass
2400	525.67	-69.30	-17.36	12	Pass
2440	686.69	-67.50	-17.36	13	Pass
2440	533.43	-68.76	-17.36	13	Pass
2480	697.36	-67.26	-17.36	14	Pass
2480	542.16	-67.54	-17.36	14	Pass
2400	2371.72	-42.75	-17.36	15	Pass
2400	2315.14	-43.53	-17.36	15	Pass
2400	1201.48	-53.39	-17.36	15	Pass
2440	1219.8	-53.46	-17.36	16	Pass
2440	2363.6	-65.96	-17.36	16	Pass
2480	1239.4	-53.43	-17.36	17	Pass
2480	2092.0	-67.80	-17.36	17	Pass
2402	2400.0	-40.72	-17.36	10	Pass
2480	2483.5	-51.20	-17.36	11	Pass
2480	2494.0	-38.33	-17.36	11	Pass
Note: 1. The stated limits are -20dBc relative to the max output measured in a 100kHz band per					

Table 6: Out of Band Emissions including the Band-Edge – Test Results-Continued

Test Conditions: Conducted Measurement, Normal Temperature					
Antenna Type: Custom Integrated		**Power Setting:** See test plan			
Max. Directional Gain: +6 dBi		**Highest Level in 100kHz BW:** 2.64			
Signal State: Modulated					
Ambient Temp.: 24° C		**Relative Humidity:**39%			
Non-Restricted Frequency Band Emissions					
Operating Freq. (MHz)	**Measured Freq. (MHz)**	**Measured (dBm)**	**Limit (dBm)**	**Plot**	**Result**
2400	4803.0	-40.57	-17.36	18	Pass
2400	7212.0	-56.69	-17.36	18	Pass
2440	4870.0	-49.79	-17.36	19	Pass
2440	7325.0	-54.29	-17.36	19	Pass
2400	4952.5	-41.53	-17.36	20	Pass
2400	7450.0	-47.36	-17.36	20	Pass
Note: 1. The stated limits are -20dBc relative to the max output measured in a 100kHz band per					

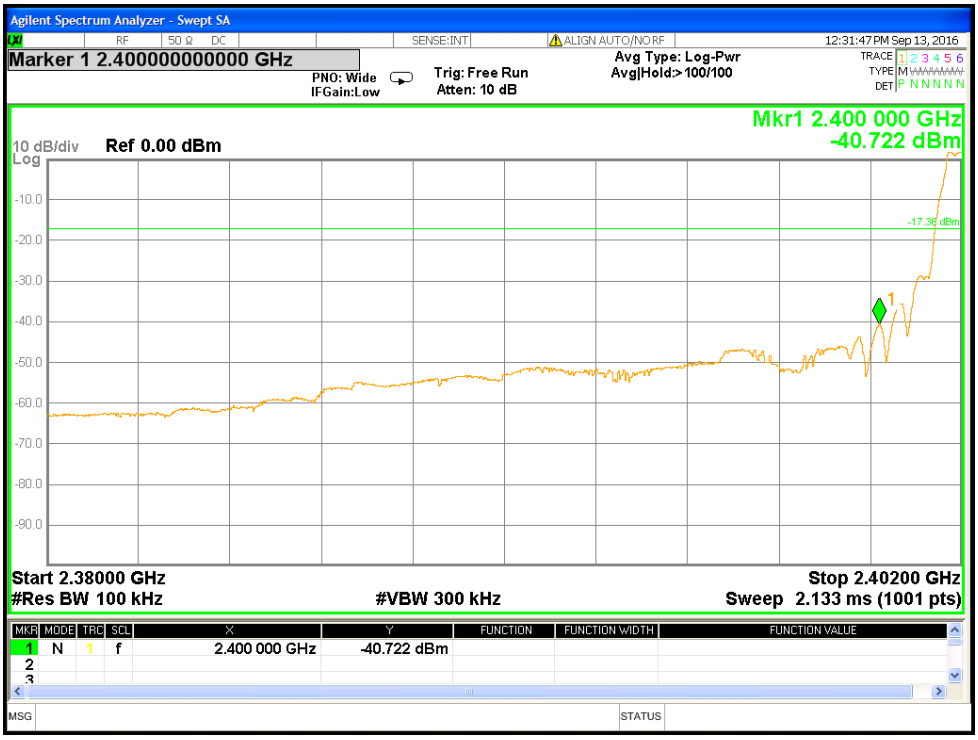


Figure 10: Measured Low Bandedge at 2402MHz

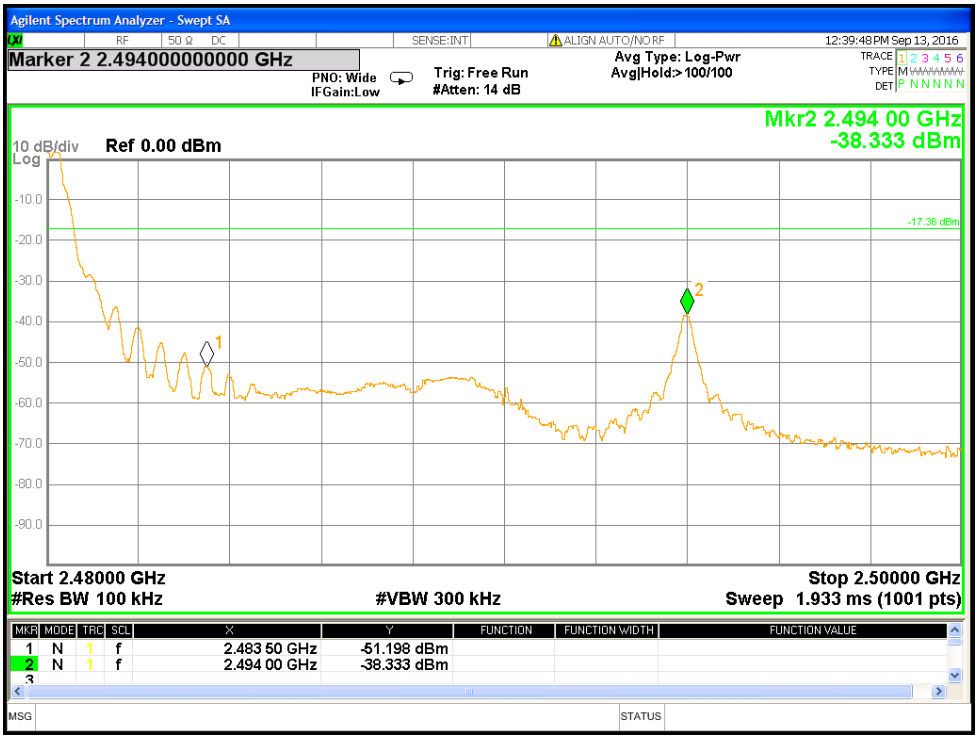


Figure 11: Measured High Bandedge at 2480MHz

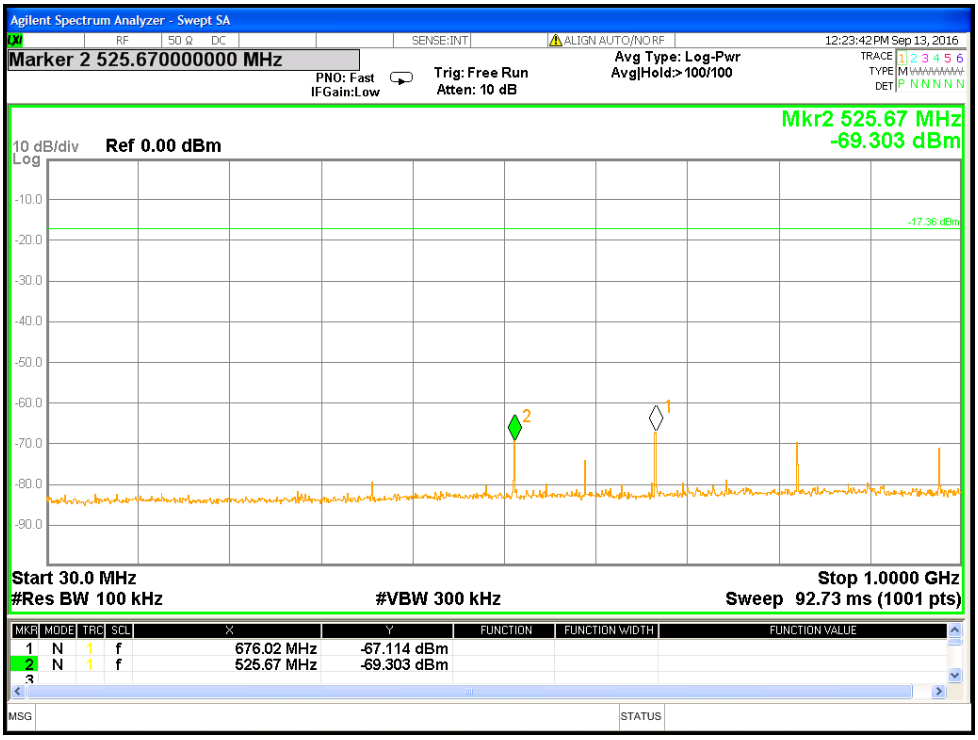


Figure 12: Out of Band Emissions at 2402 MHz, 30-1000MHz

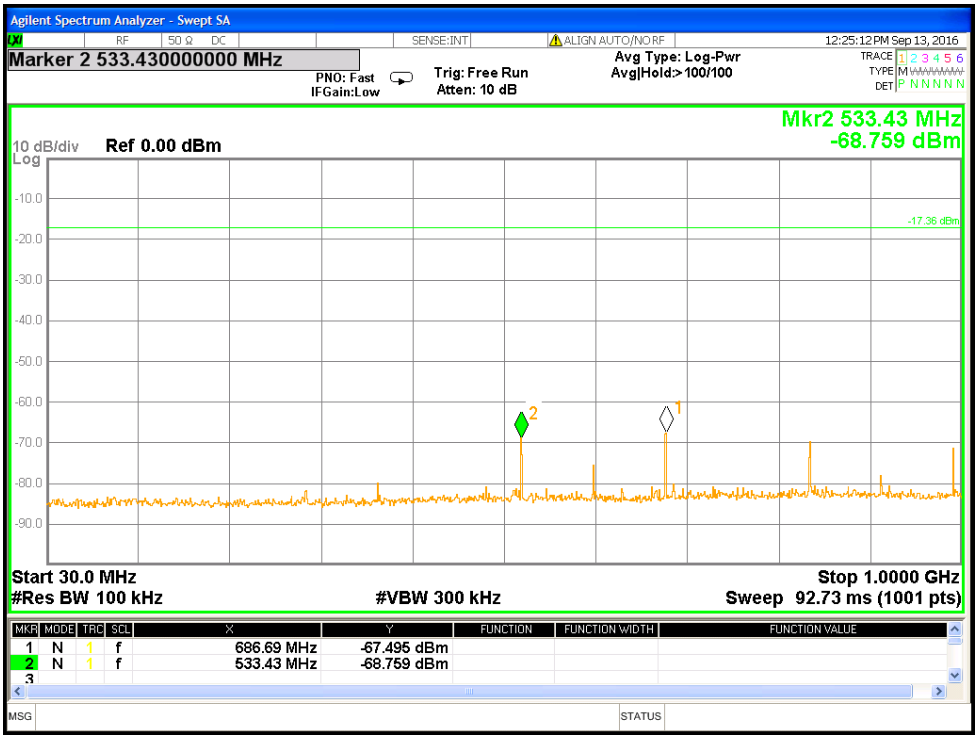


Figure 13: Out of Band Emissions at 2440 MHz, 30-1000MHz

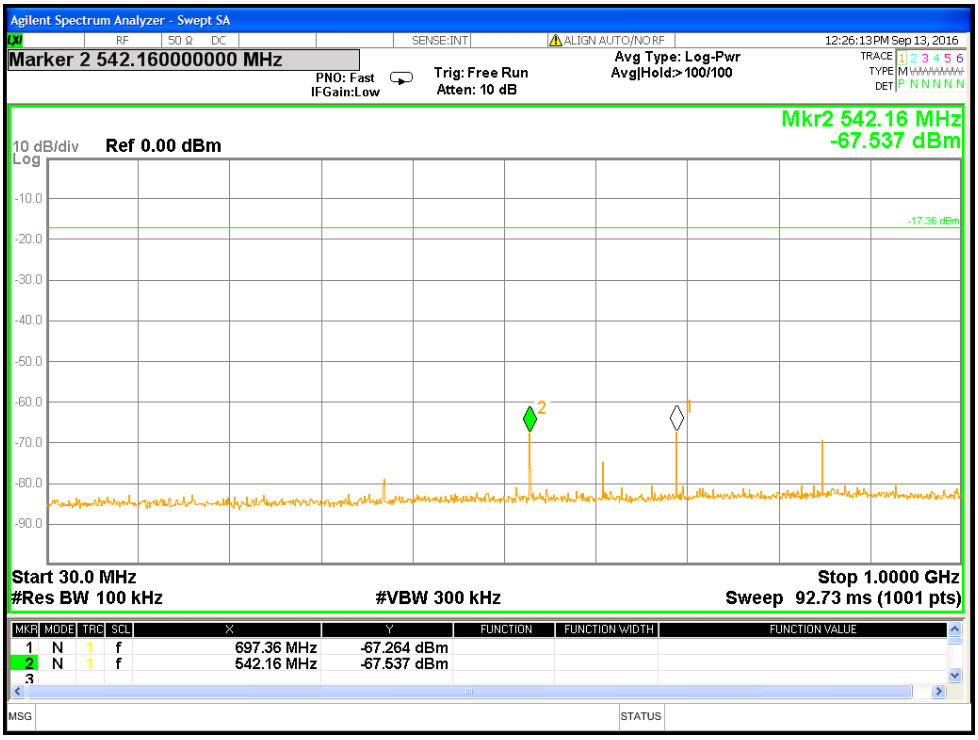


Figure 14: Out of Band Emissions at 2480 MHz, 30-1000MHz

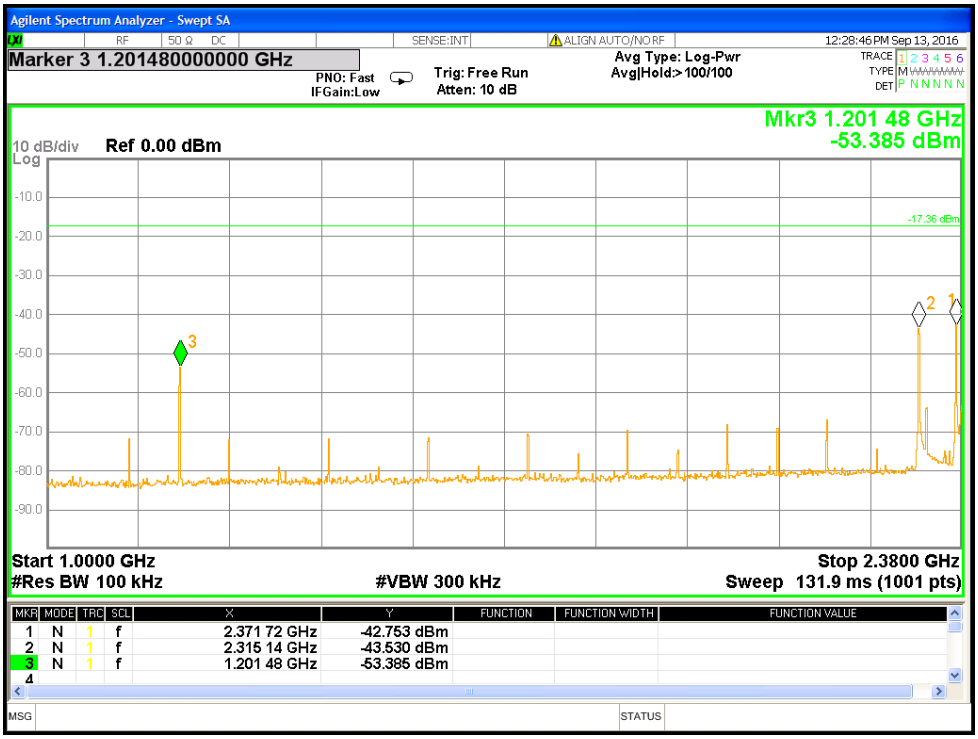


Figure 15: Out of Band Emissions at 2402 MHz, 1000-2380MHz

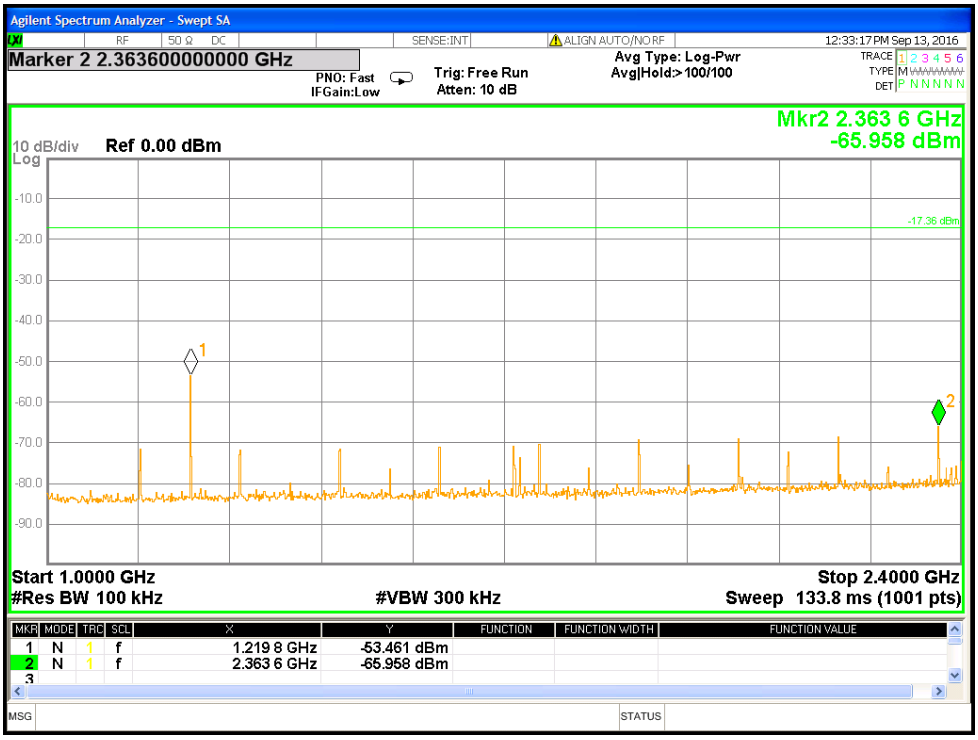


Figure 16: Out of Band Emissions at 2440 MHz, 1000-2400MHz

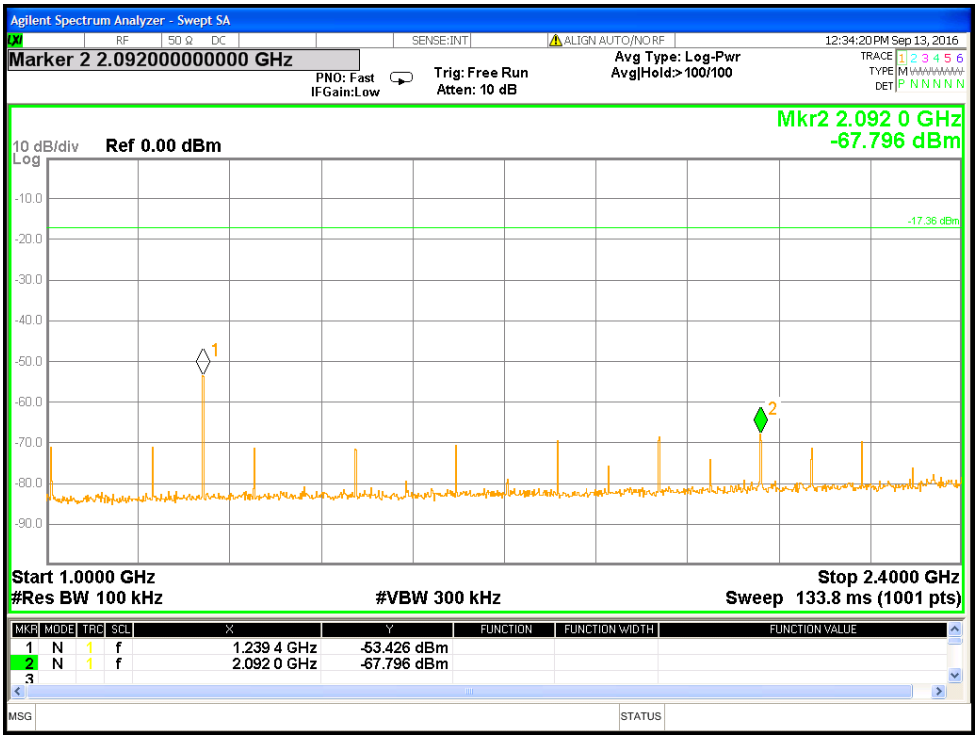


Figure 17: Out of Band Emissions at 2480 MHz, 1000-2400MHz

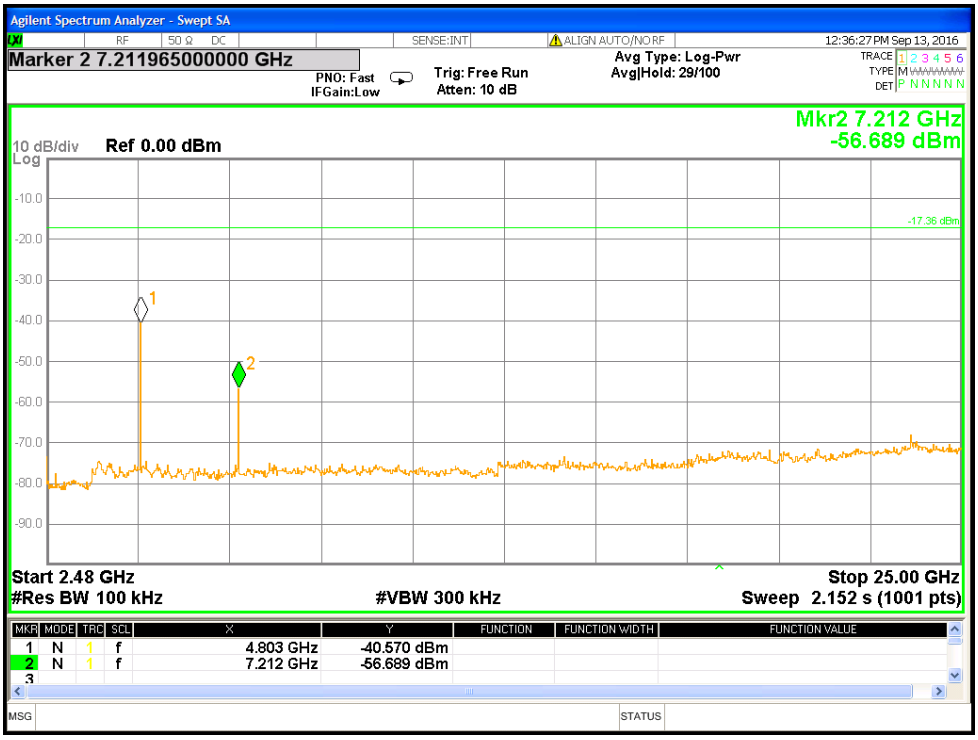


Figure 18: Out of Band Emissions at 2402 MHz, 2483.5 - 25000MHz

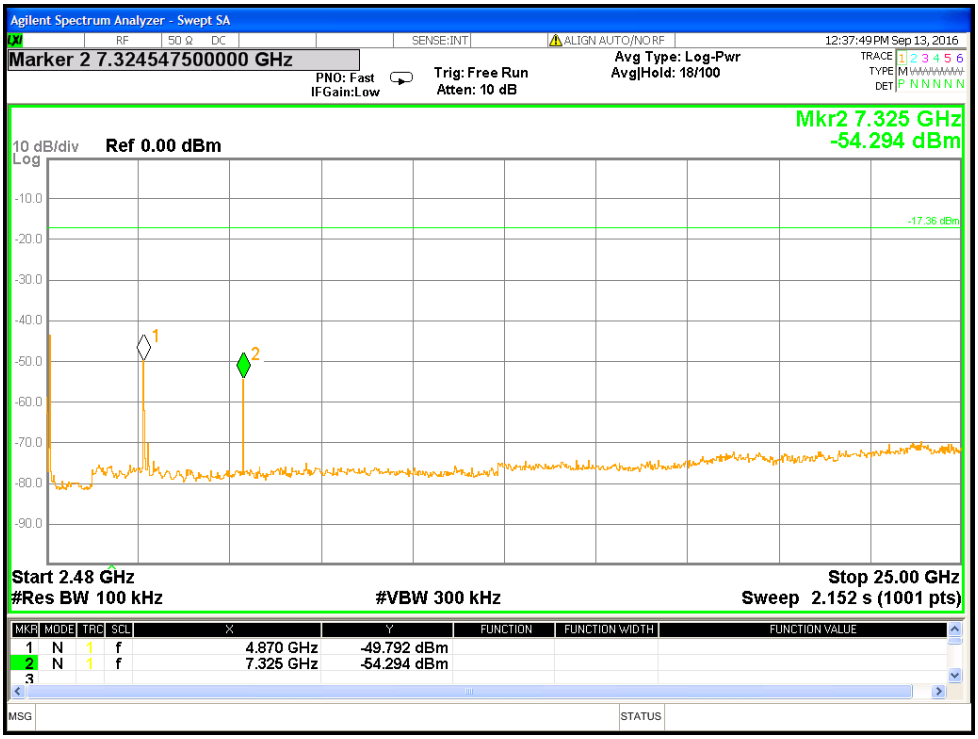


Figure 19: Out of Band Emissions at 2440 MHz, 2483.5-25000MHz

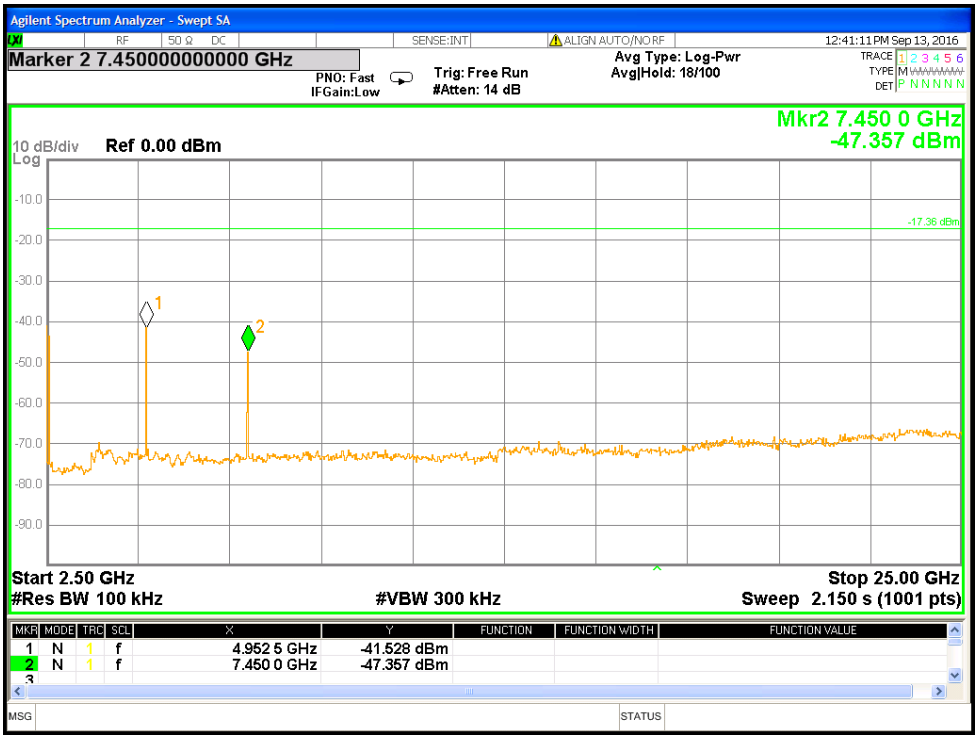


Figure 20: Out of Band Emissions at 2480 MHz, 2500-25000MHz

4.5 Transmit Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 247 Sect.5.5.

4.5.1 Test Methodology

4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

4.5.1.2 Final Test


For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

4.5.1.3 Deviations

None.

Test Setup:

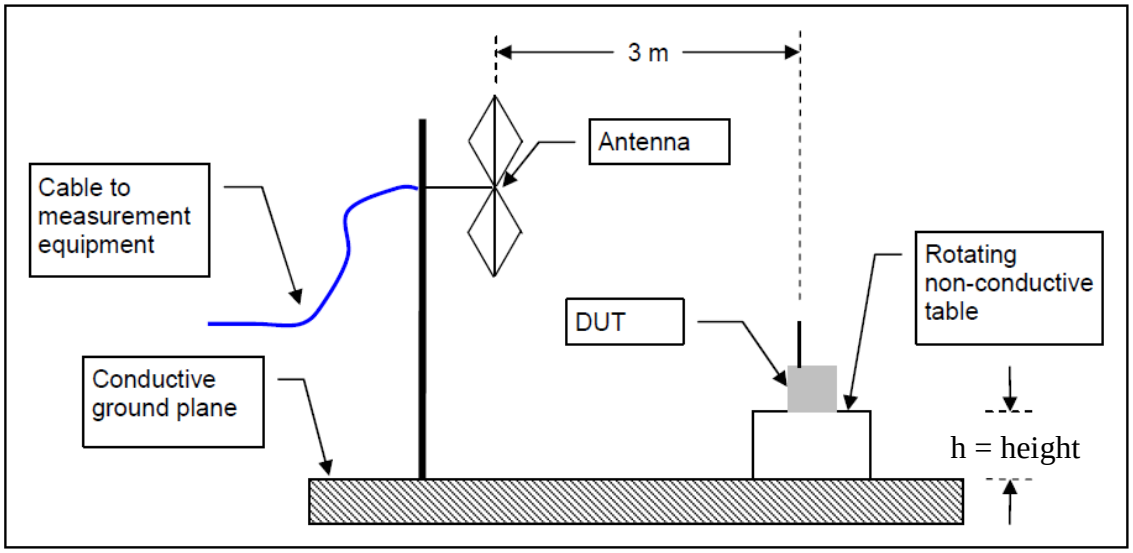

Where h = 80cm for <1GHz and 150cm for >1GHz

4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS Gen Sect. 8.10: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20dB below the in-band emission.

4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: Transmit Spurious Emission Band-Edge Requirements

Test Conditions: Radiated Measurement									
Antenna Type: Custom Integrated				**Power Setting:** See test plan					
Max. Directional Gain: +6dBi									
Signal State: Modulated at 100%.									
Ambient Temp.: 24° C				**Relative Humidity:**37%					
Band-Edge Results									
Channel	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol. (H/V)	Det.	Table Deg.	Tower (cm)	Note
1	2387.36	58.03	74	-15.97	V	Pk	84	139.8	
1	2389.14	47.34	54	-6.66	V	Ave	84	139.8	
1	2386.92	58.65	74	-15.35	H	Pk	256	174.9	
1	2387.73	47.36	54	-6.64	H	Ave	256	174.9	
39	2483.94	56.86	74	-17.14	V	Pk	101	161.6	
39	2483.88	48.01	54	-5.99	V	Ave	101	161.6	
39	2483.68	57.49	74	-16.51	H	Pk	251	169.9	
39	2483.68	48.06	54	-5.94	H	Ave	251	169.9	
Note: 1. The emissions were measured at the adjacent restricted band of the fundamental signal. 2. All the band-edge measurements met the restricted band requirements of CFR47 15.205.									

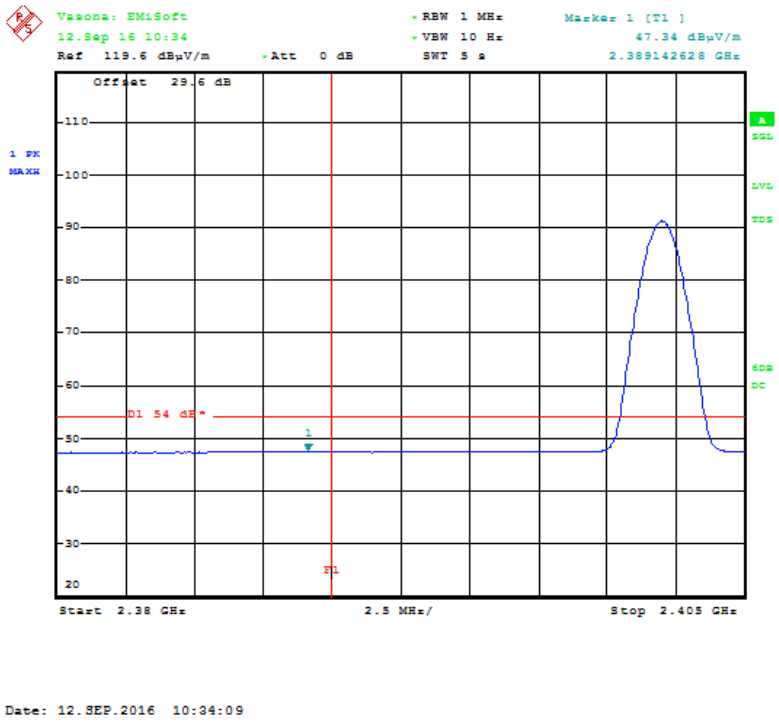


Figure 21: Radiated Emission at 2390 MHz Edge – 2380-2405MHz – Vert. (Ave)

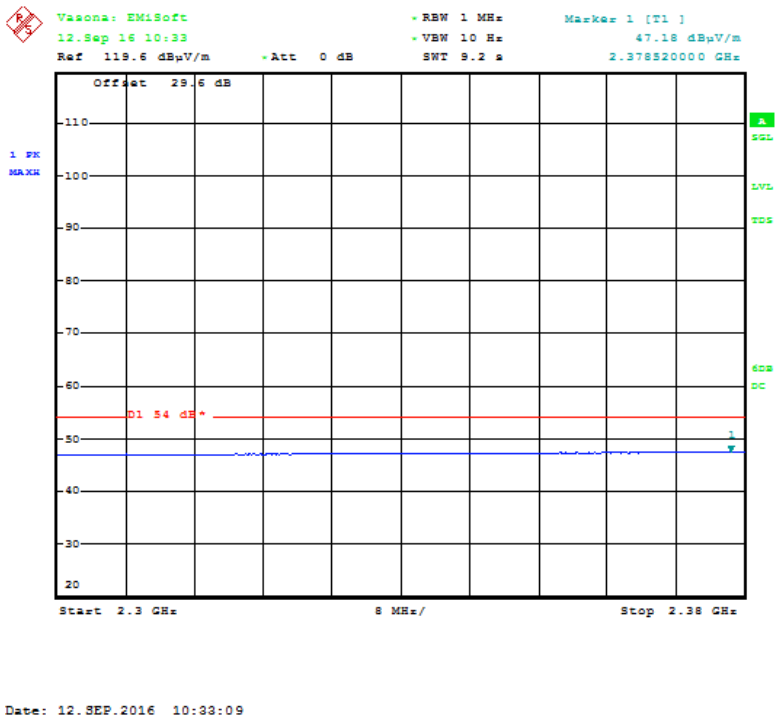


Figure 22: Radiated Emission at 2390 MHz Edge – 2300-2380MHz– Vert. (Ave)

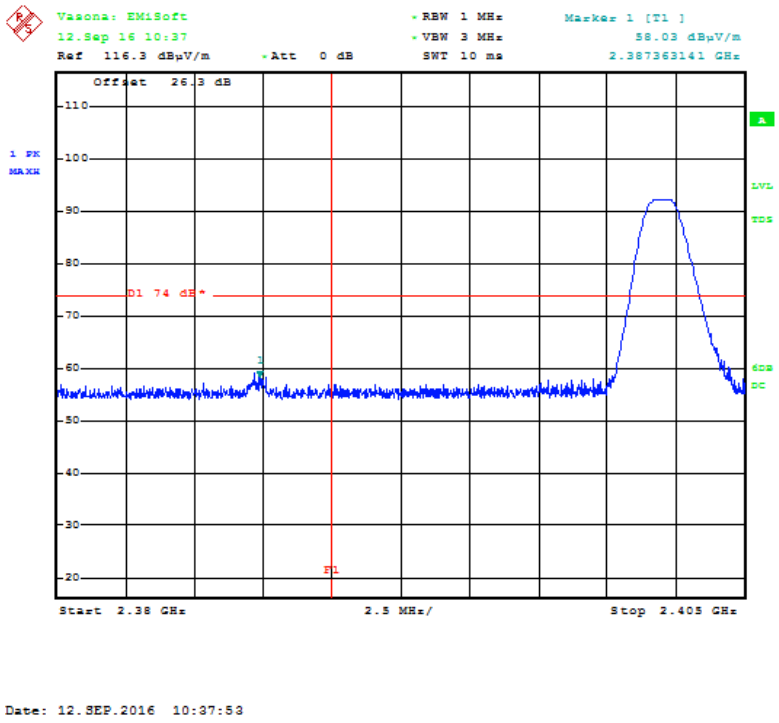


Figure 23: Radiated Emission at 2390 MHz Edge – 2380-2405MHz – Vert. (Peak)

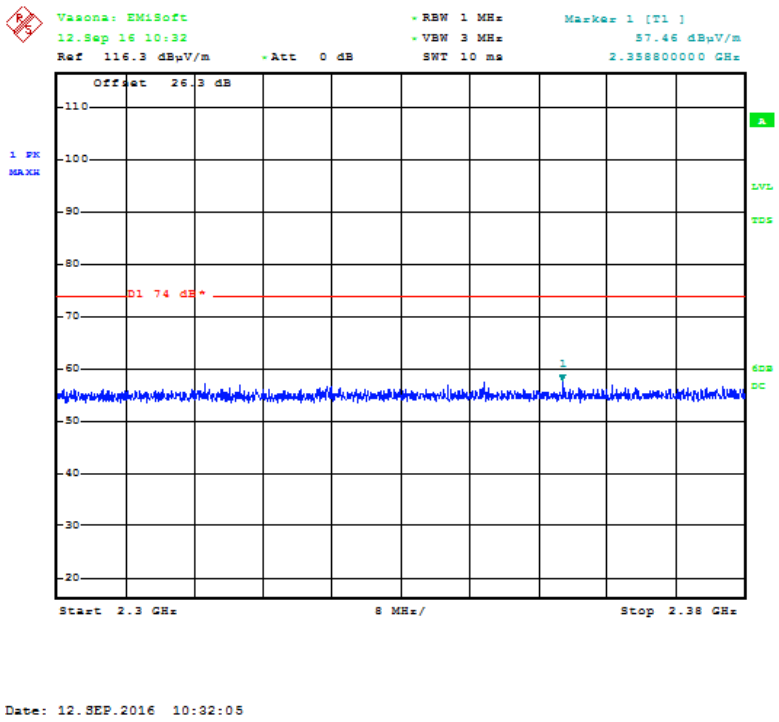


Figure 24: Radiated Emission at 2390 MHz Edge – 2300-2380MHz – Vert. (Peak)

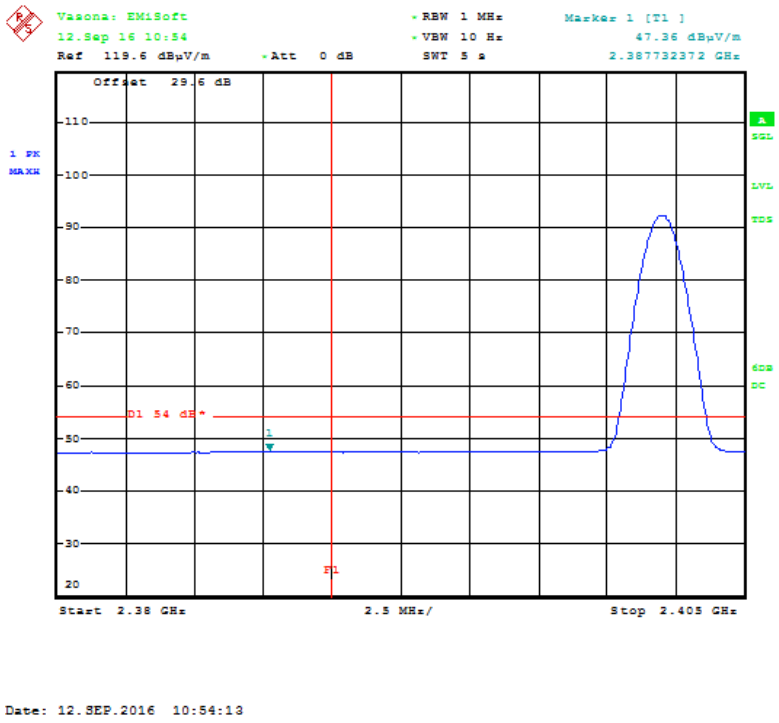


Figure 25: Radiated Emission at 2390 MHz Edge – 2380-2405MHz – Horz. (Ave)

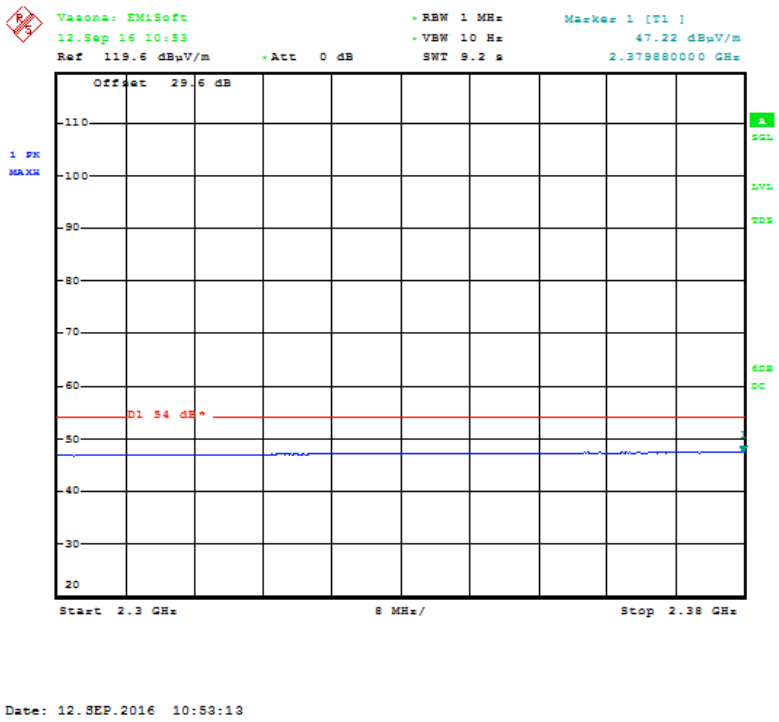


Figure 26: Radiated Emission at 2390 MHz Edge – 2300-2380MHz – Horz. (Ave)

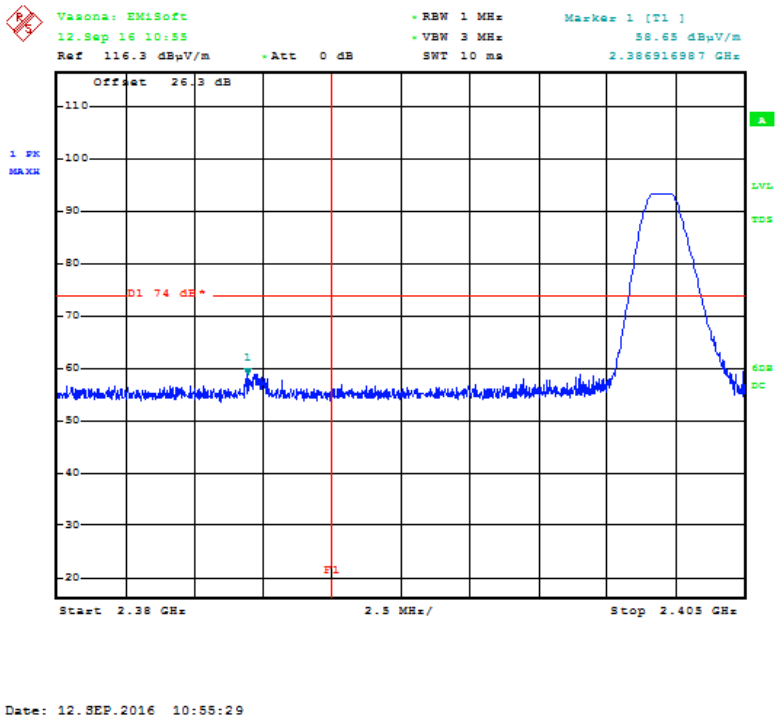


Figure 27: Radiated Emission at 2390 MHz Edge – 2380-2405MHz – Horz. (Peak)

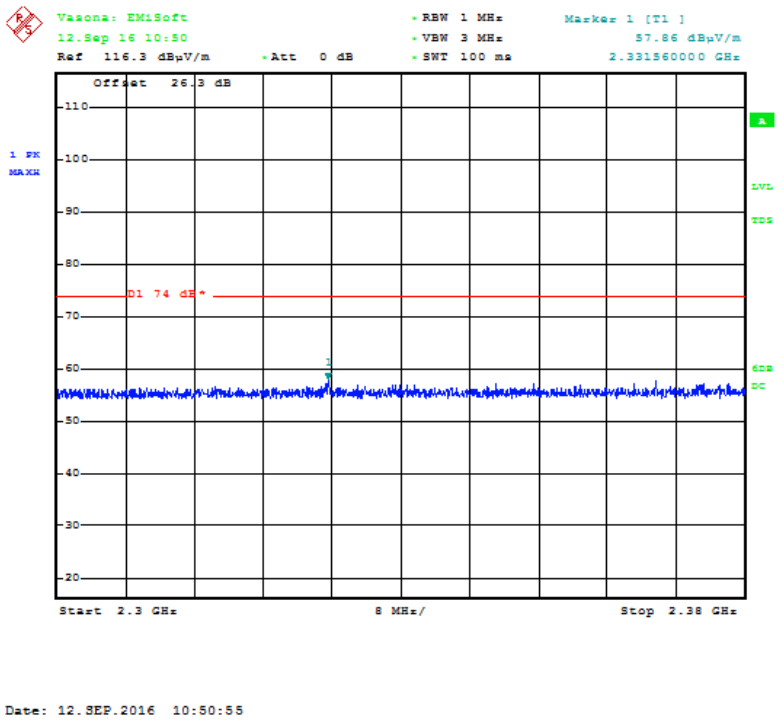


Figure 28: Radiated Emission at 2390 MHz Edge – 2300-2380MHz – Horz. (Peak)

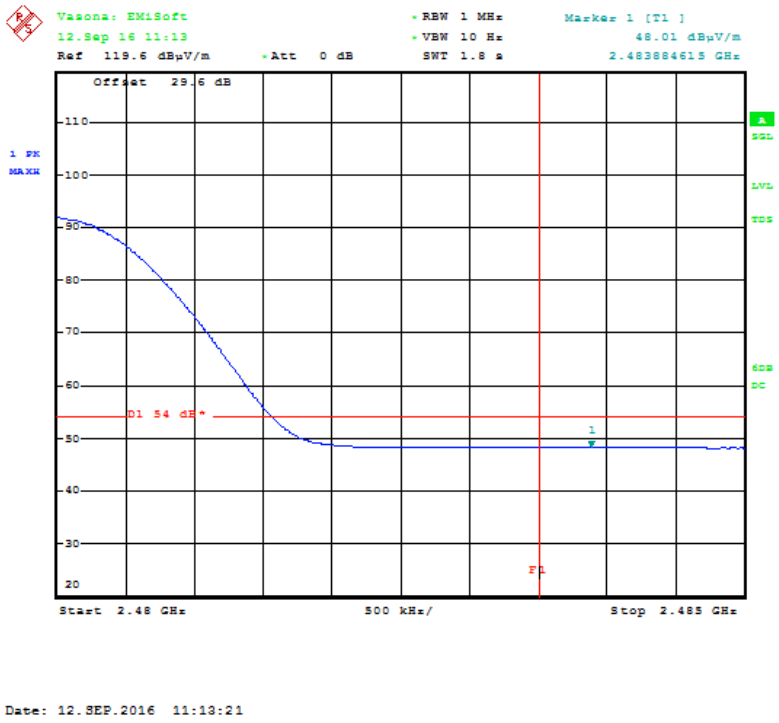


Figure 29: Radiated Emission at 2483.5 MHz Edge – 2480-2485MHz – Vert. (Ave)

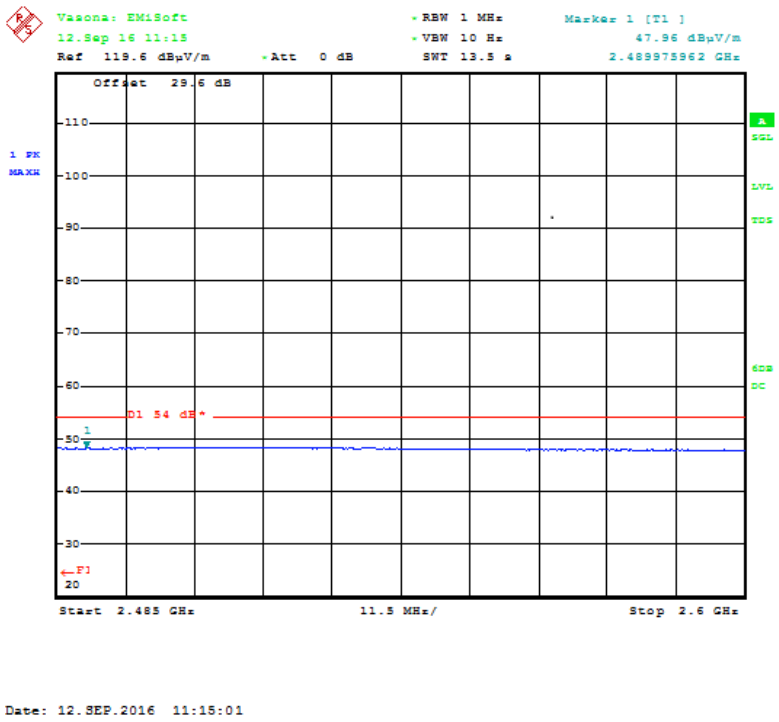


Figure 30: Radiated Emission at 2483.5 MHz Edge – 2485-2600MHz – Vert. (Ave)

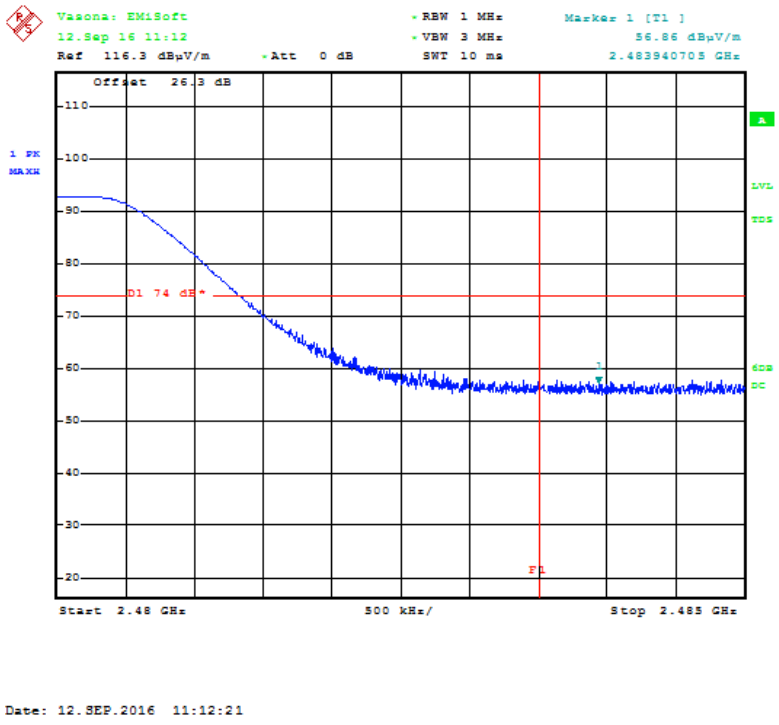


Figure 31: Radiated Emission at 2483.5 MHz Edge – 2480-2485MHz – Vert. (Peak)

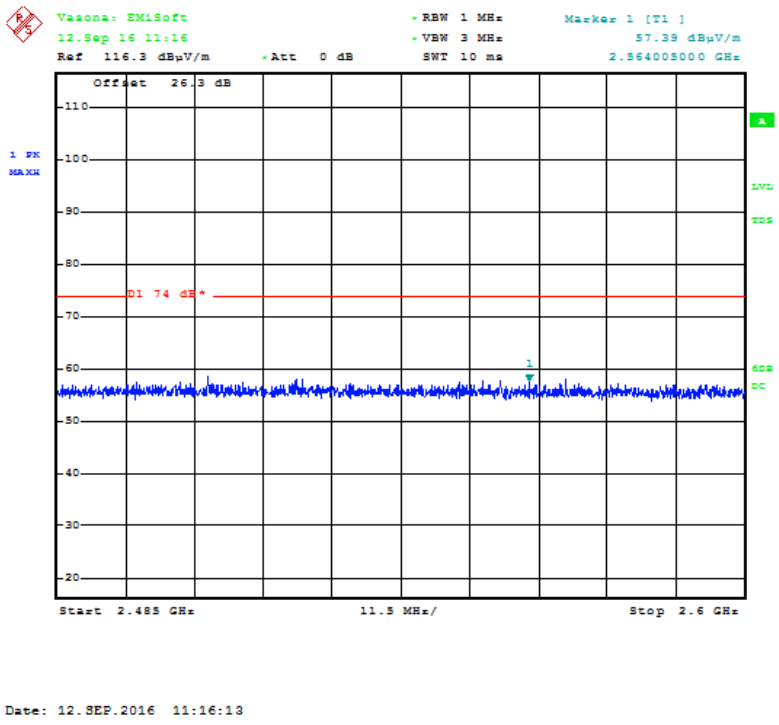


Figure 32: Radiated Emission at 2483.5 MHz Edge – 2485-2600MHz – Vert. (Peak)

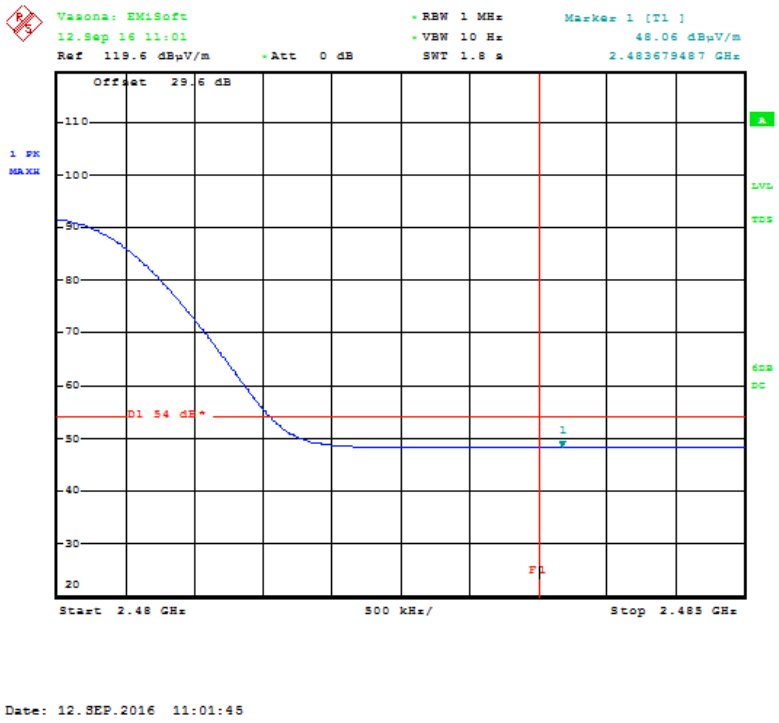


Figure 33: Radiated Emission at 2483.5 MHz Edge – 2480-2485MHz – Horz. (Ave)

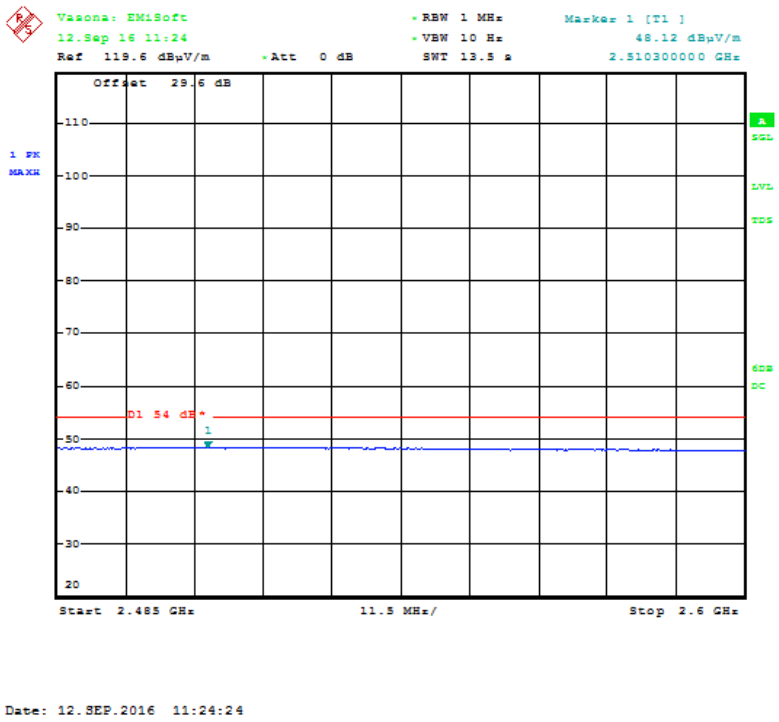


Figure 34: Radiated Emission at 2483.5 MHz Edge – 2485-2600MHz – Horz. (Ave)

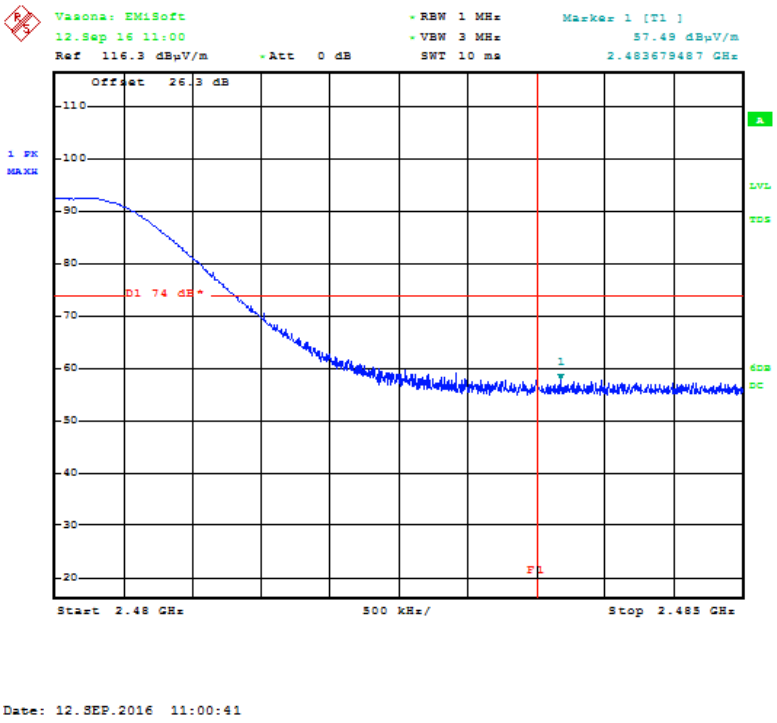


Figure 35: Radiated Emission at 2483.5 MHz Edge – 2480-2485MHz – Horz. (Peak)

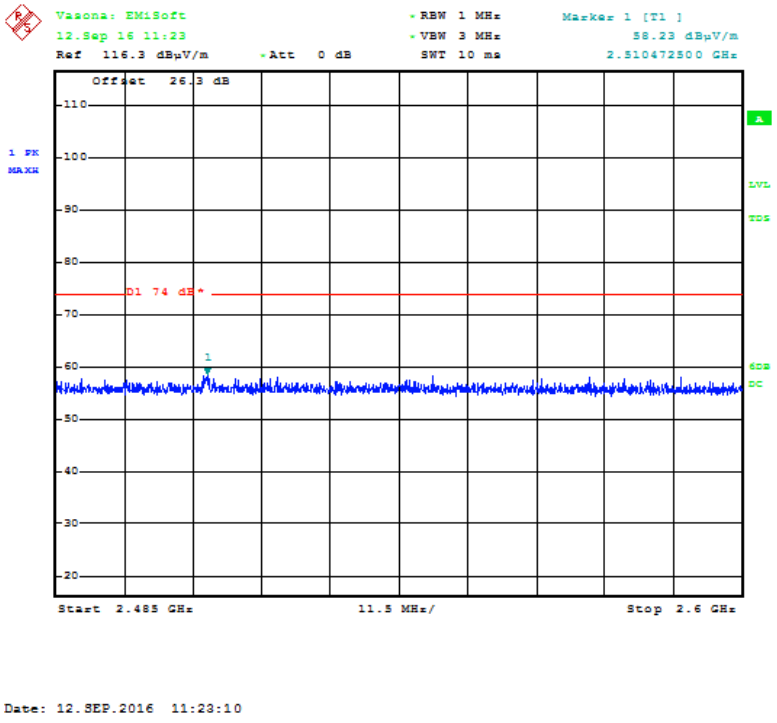



Figure 36: Radiated Emission at 2483.5 MHz Edge – 2485-2600MHz – Horz. (Peak)

SOP 1 Radiated Emissions — Tracking # 31662400.002 Page 1 of 10

EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	24° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2440MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	120 kHz/ 300 kHz
Dist/Ant Used	3m / JB3	**Performed by**	Eddie Mariscal

30 MHz – 1 GHz Transmit at 2440 MHz

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
436.475	40.45	3.04	-11.16	32.33	QP	V	111	312	46	-13.67
955.7355	19.29	4.1	-3.07	20.32	QP	V	163	64	46	-25.68
30.14075	20.26	1.56	-7.36	14.47	QP	H	157	268	40	-25.53
234.482	43.89	2.48	-16.06	30.31	QP	H	123	254	46	-15.69
486.6385	28.78	3.16	-10.05	21.89	QP	V	184	314	46	-24.11

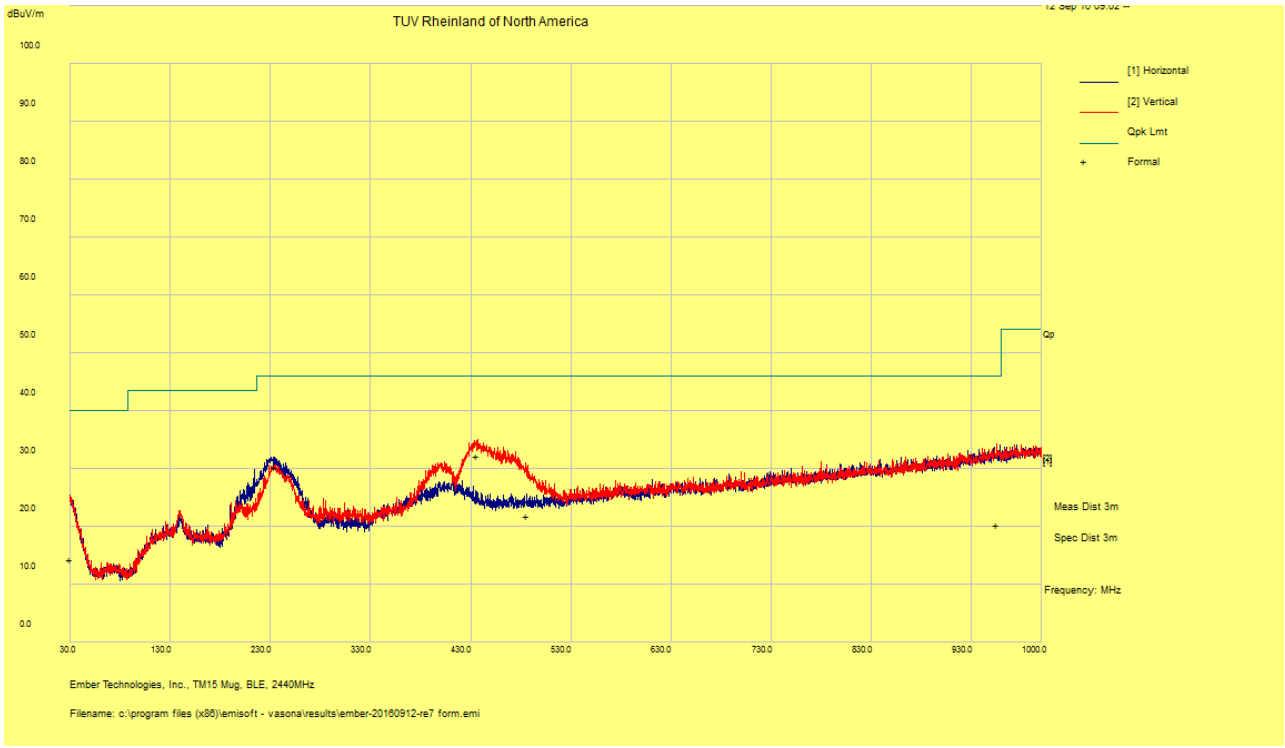

Spec Margin = E-Field QP - Limit, E-Field QP = FIM QP+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note: 1. Center channel was determined to be the worst-case.

SOP 1 Radiated Emissions — Tracking # 31662400.002 Page 2 of 10

EUT Name	Ember Mug	**Date**	Sept 9, 2016
EUT Model	TM15	**Temp / Hum in**	21° C / 37%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2402MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	3m – EMCO3115	**Performed by**	Eddie Mariscal

1 – 12 GHz Transmit at 2402 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
4803.831	53.47	2.5	-4.64	51.33	Peak	V	143	58	74	-22.67
4803.831	35.15	2.5	-4.64	33.01	Ave	V	143	58	54	-17.63

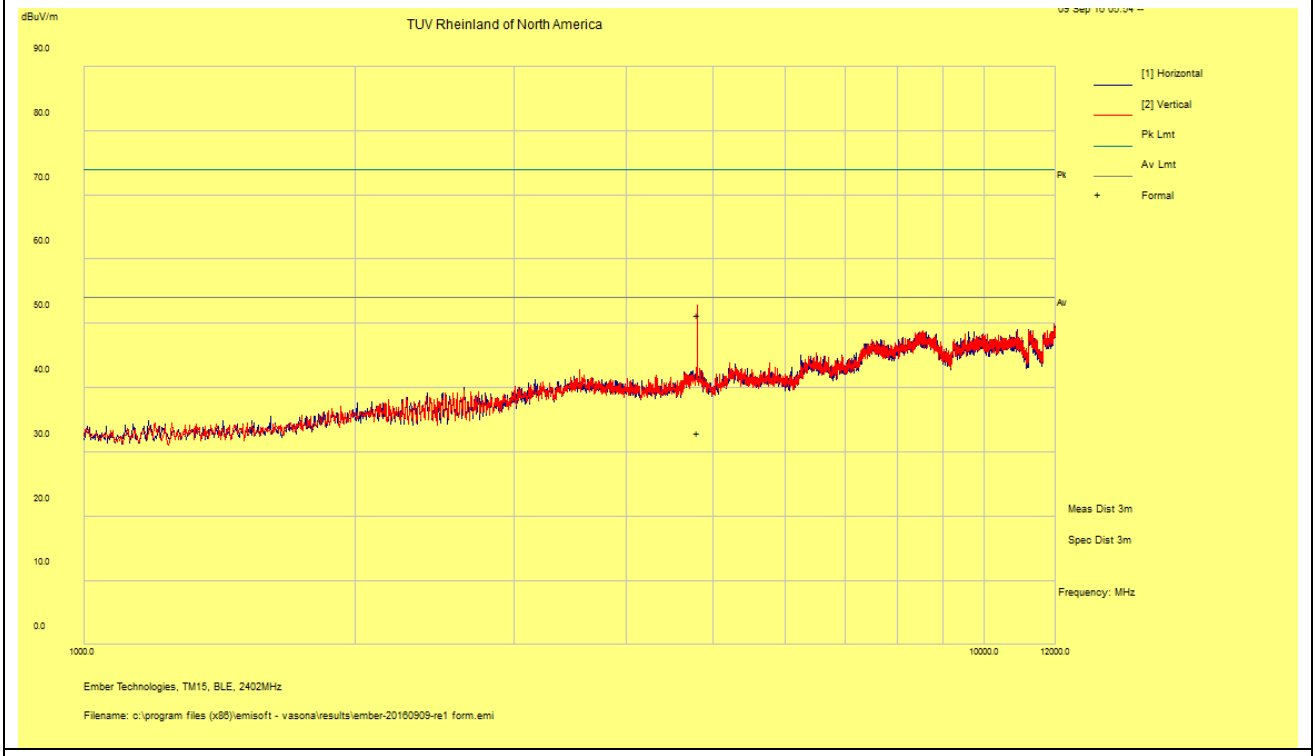

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions — Tracking # 31662400.002 Page 3 of 10

EUT Name	Ember Mug	**Date**	Sept 9, 2016
EUT Model	TM15	**Temp / Hum in**	21° C / 37%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2440MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	3m – EMCO3115	**Performed by**	Eddie Mariscal

1 – 12 GHz Transmit at 2440 MHz (Mid Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
4880.218	55.36	2.52	-4.65	53.23	Peak	V	122	328	74	-20.77
4880.218	34.5	2.52	-4.65	32.37	Ave	V	122	328	54	-18.27

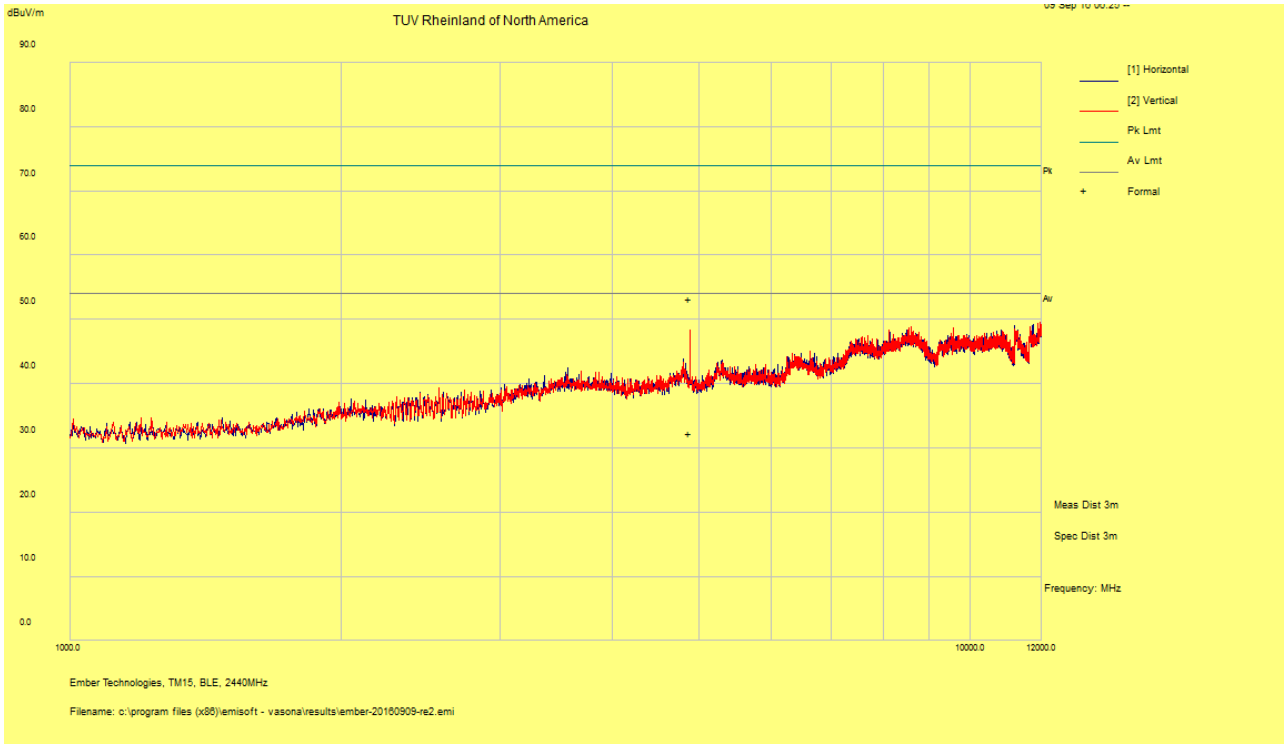

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions — Tracking # 31662400.002 Page 4 of 10

EUT Name	Ember Mug	**Date**	Sept 9, 2016
EUT Model	TM15	**Temp / Hum in**	21° C / 37%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2480MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	3m – EMCO3115	**Performed by**	Eddie Mariscal

1 – 12 GHz Transmit at 2480 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB
4960.688	56.81	2.55	-4.66	54.7	Peak	V	236	286	74	-19.3
4960.688	40.23	2.55	-4.66	38.11	Ave	V	236	286	54	-12.53

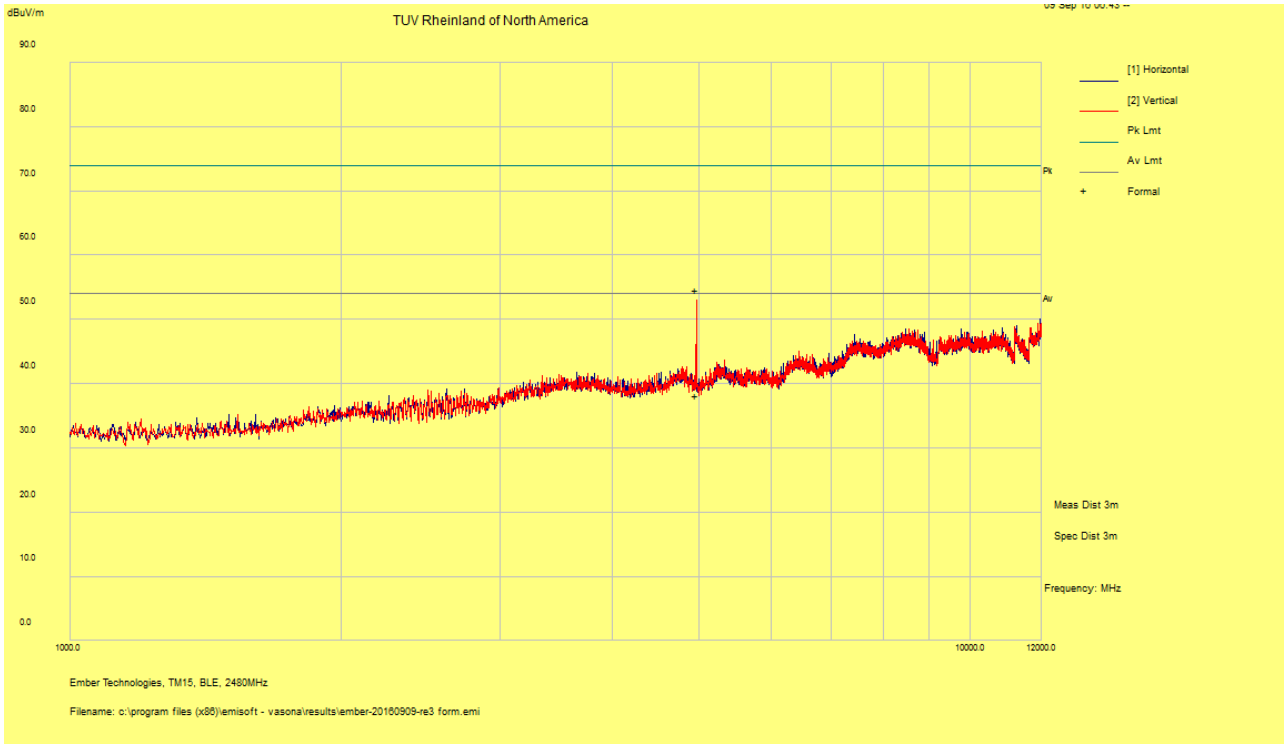

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions		Tracking # 31662400.002 Page 5 of 10	
EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	20° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2402MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	1m – EMCO3115	**Performed by**	Eddie Mariscal

12-18GHz Transmit at 2402 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB

No EUT emissions were detected above the noise floor from 12-18GHz.

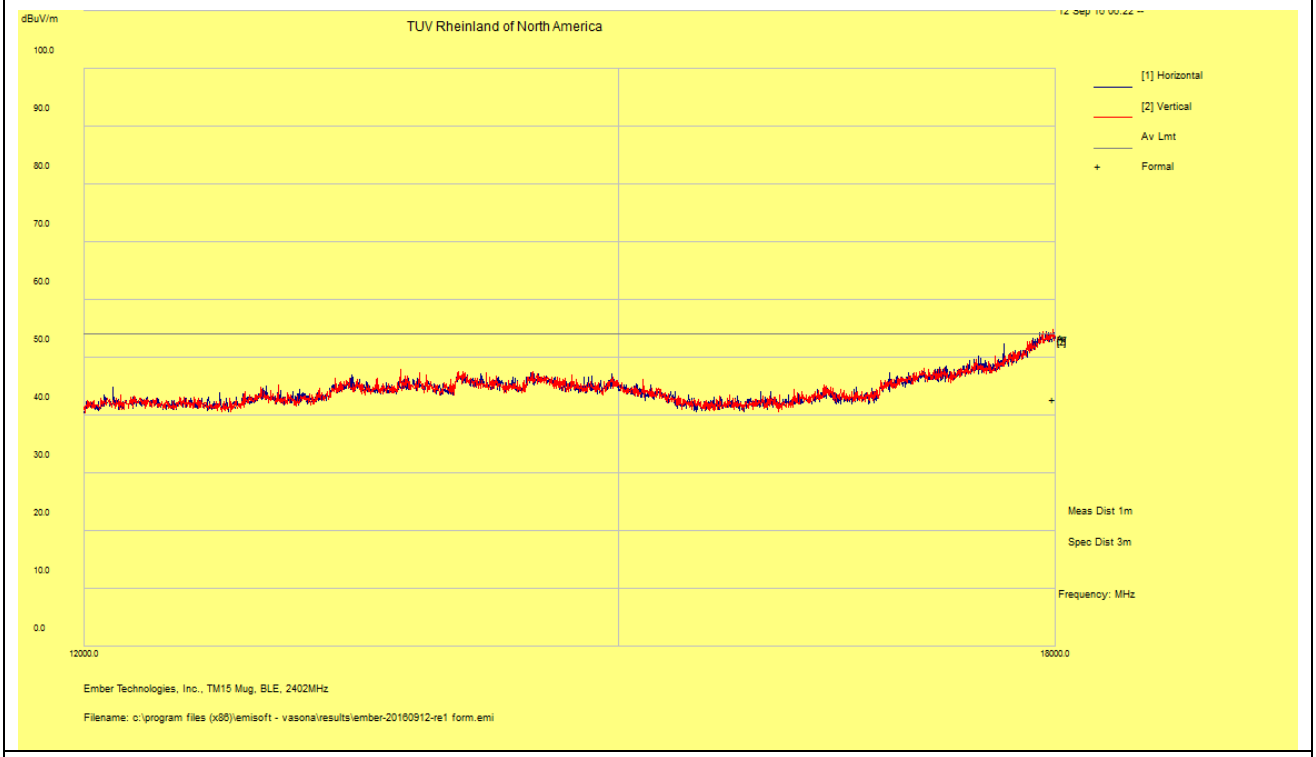

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions		Tracking # 31662400.002 Page 6 of 10	
EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	20° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2440MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	1m – EMCO3115	**Performed by**	Eddie Mariscal

12 – 18GHz Transmit at 2440 MHz (Mid Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB

No EUT emissions were detected above the noise floor from 12-18GHz.

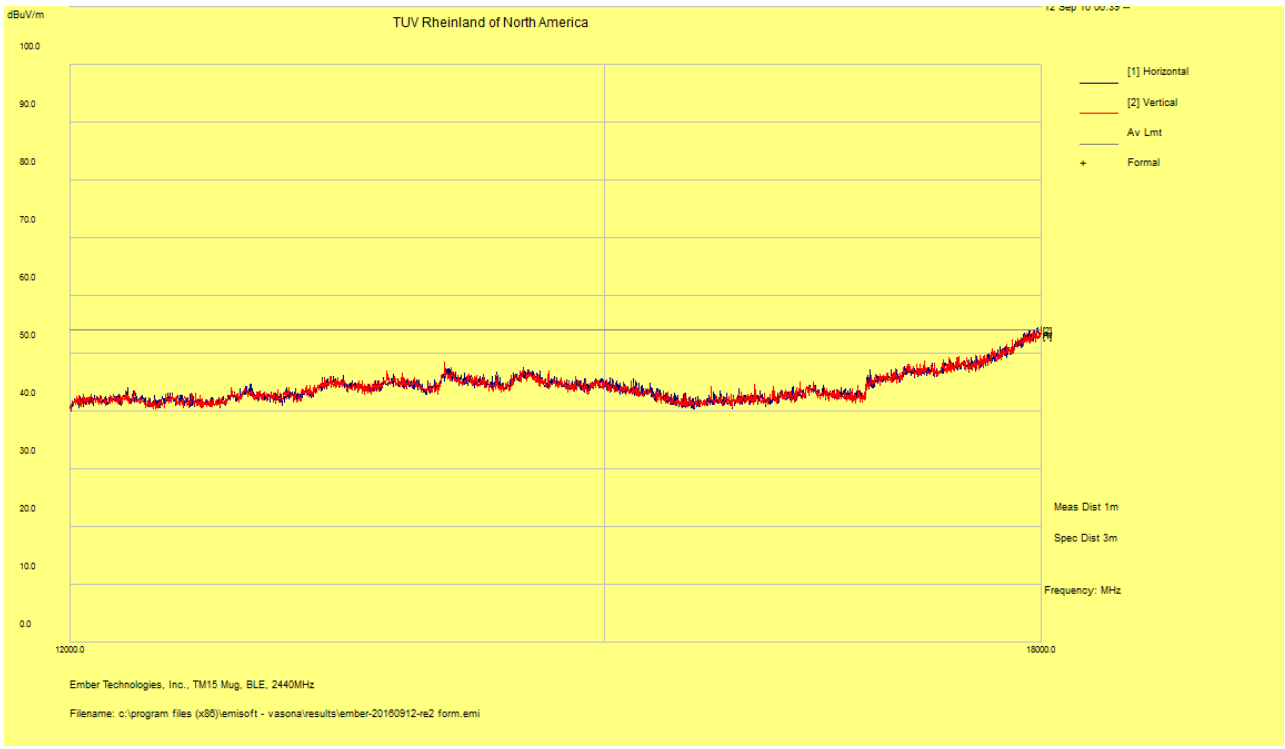

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions		Tracking # 31662400.002 Page 7 of 10	
EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	20° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2480MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	1m – EMCO3115	**Performed by**	Eddie Mariscal

12 – 18GHz Transmit at 2480 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB

No EUT emissions were detected above the noise floor from 12-18GHz.

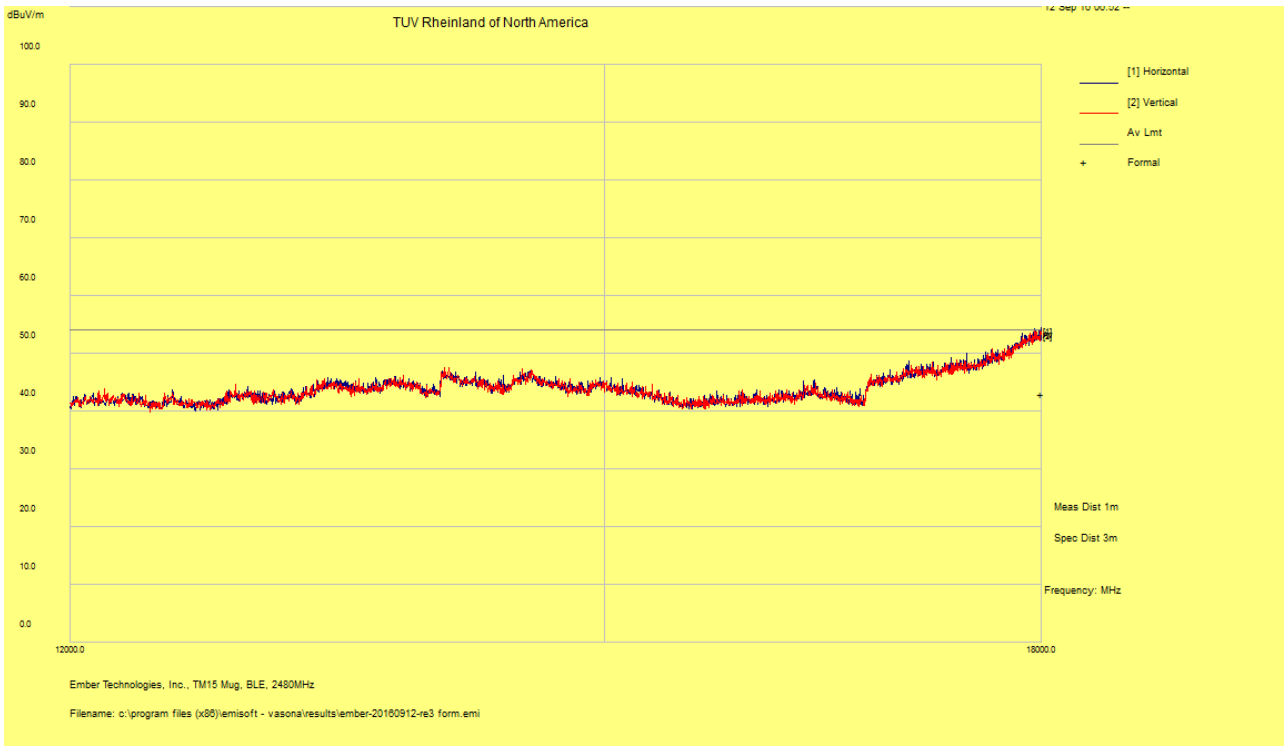

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note:


SOP 1 Radiated Emissions — Tracking # 31662400.002 Page 8 of 10

EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	20° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2402MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	1m – AHA-840	**Performed by**	Eddie Mariscal

18 – 25 GHz Transmit at 2402 MHz (Low Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB

No EUT emissions were detected above the noise floor from 18-25GHz.

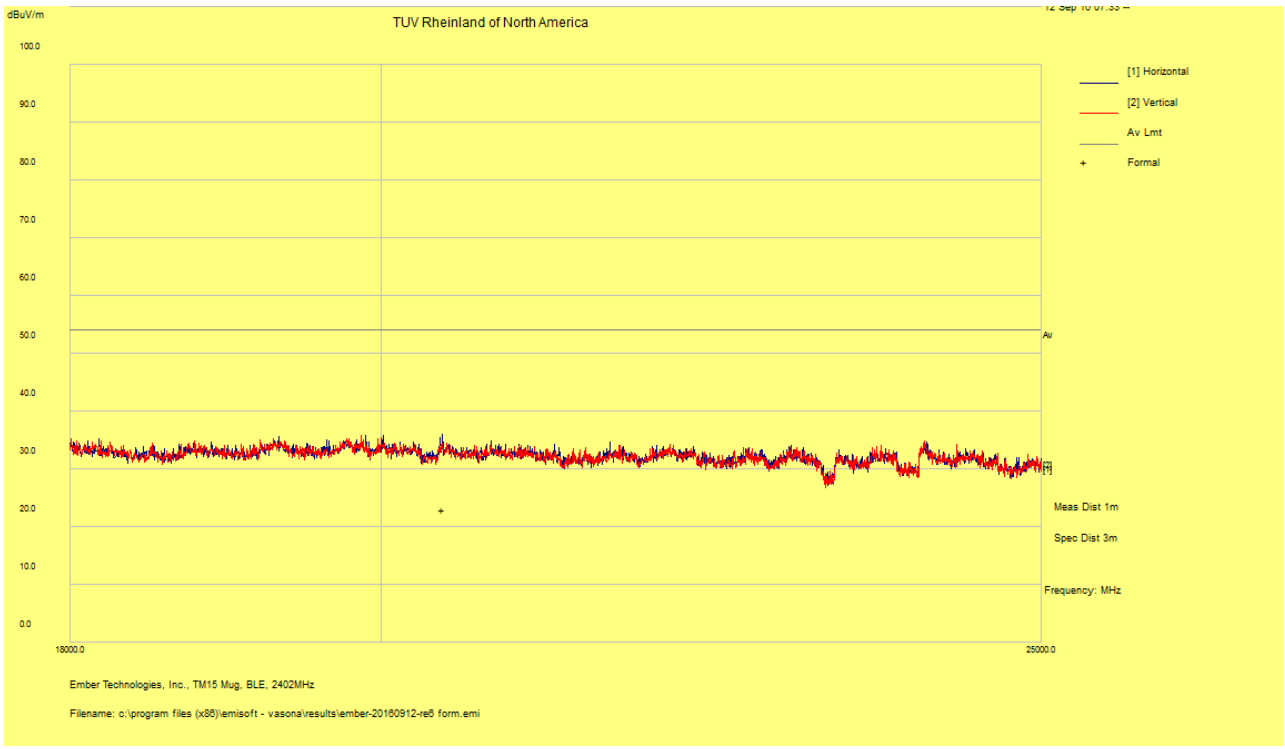

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions		Tracking # 31662400.002 Page 9 of 10	
EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	20° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2440MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	1m – AHA-840	**Performed by**	Eddie Mariscal

18 – 25 GHz Transmit at 2437 MHz (Mid Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB

No EUT emissions were detected above the noise floor from 18-25GHz.

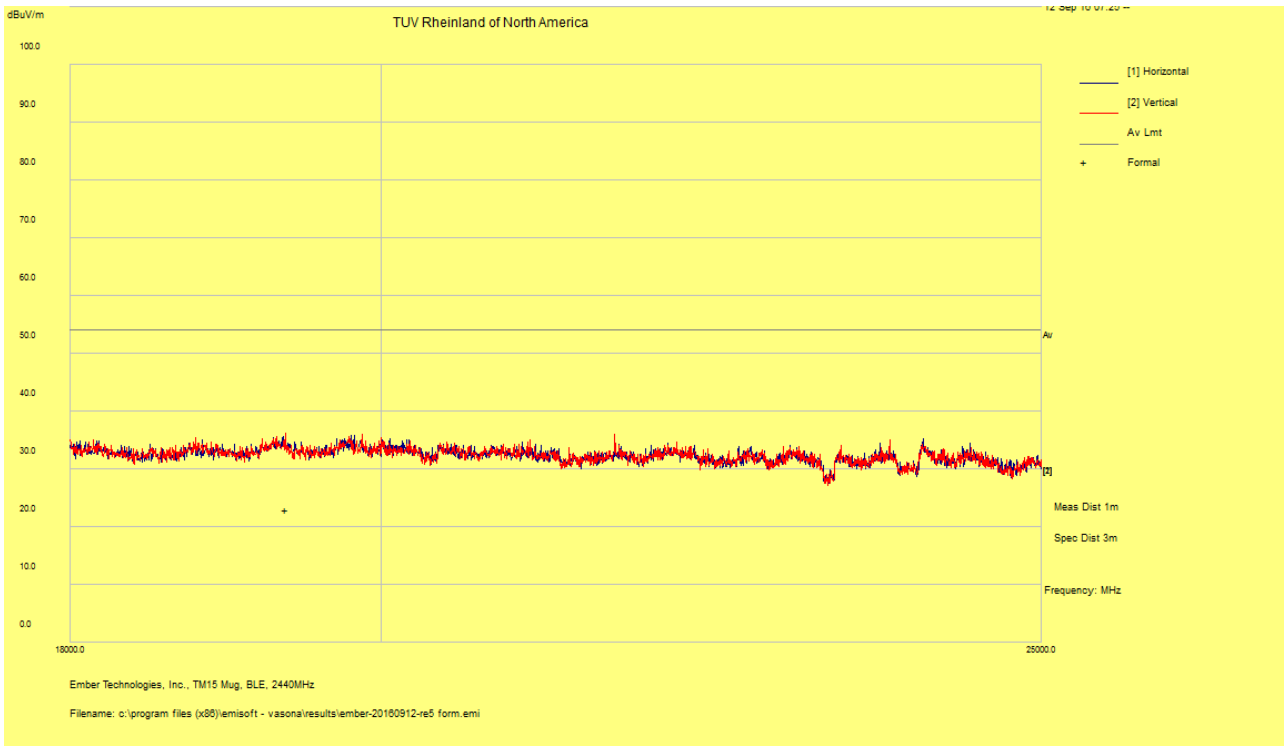

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp


Note:

SOP 1 Radiated Emissions		Tracking # 31662400.002 Page 10 of 10	
EUT Name	Ember Mug	**Date**	Sept 12, 2016
EUT Model	TM15	**Temp / Hum in**	20° C / 34%rh
EUT Serial	6290083	**Temp / Hum out**	N/A
EUT Config.	2480MHz - BLE	**Line AC / Freq**	120 Vac / 60 Hz
Standard	CFR47 Part 15 Subpart C, RSS-247, RSS-GEN	**RBW / VBW**	1 MHz/ 3 MHz
Dist/Ant Used	1m – AHA-840	**Performed by**	Eddie Mariscal

18 – 25 GHz Transmit at 2480 MHz (High Channel)

Frequency	Raw	Cable Loss	AF	Level	Detector	Polarity	Height	Azimuth	Limit	Margin
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB

No EUT emissions were detected above the noise floor from 18-25GHz.

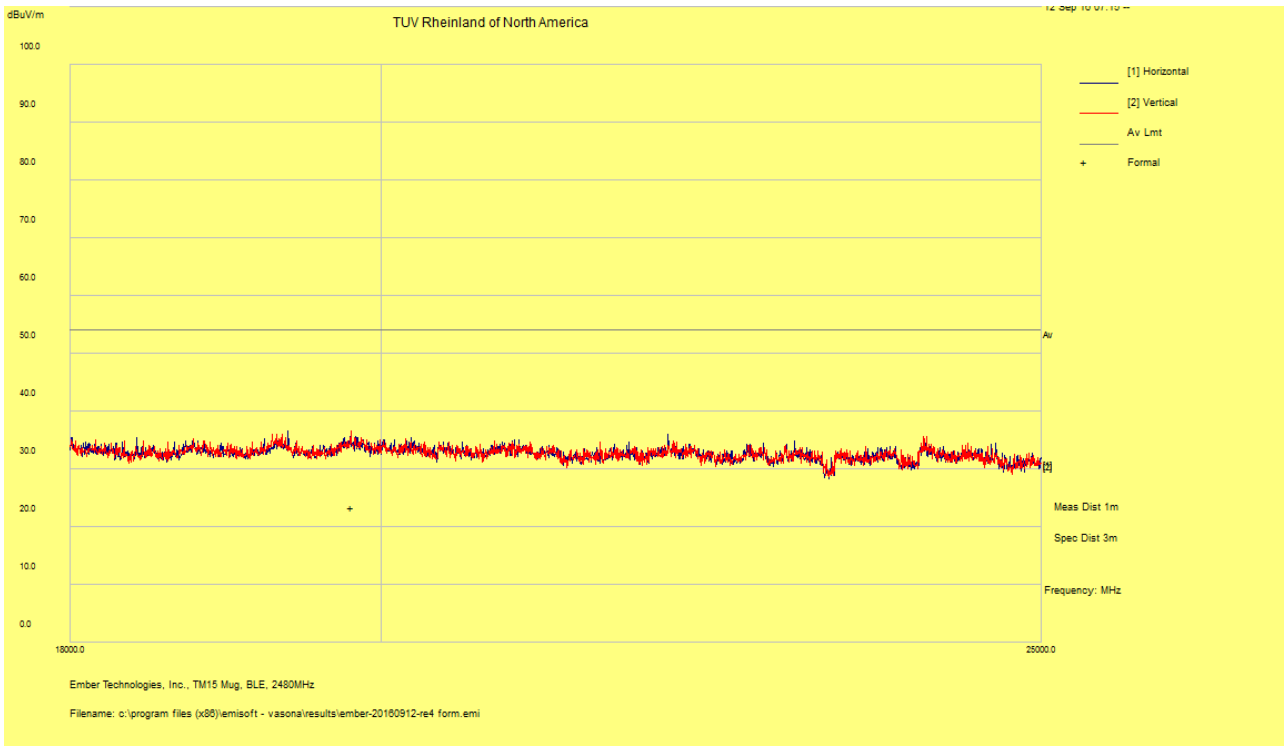

Spec Margin = E-Field AVG - Limit, E-Field AVG = FIM AVG+ Total CF ± Uncertainty
Total CF= AF+ Cable Loss AF= Antenna factor + Preamp

Note: No significant emissions were observed above the spectrum noise floor.

4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2015 and RSS Gen: 2015 Sect. 8.8.

4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50μH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.6.1.1 Deviations

There were no deviations from this test methodology.

4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 8: AC Conducted Emissions – Test Results

Test Conditions: Conducted Measurement at Normal Conditions only		
Antenna Type: Custom Integrated	**Power Level:** See Test Plan	
AC Power: 120 Vac/60 Hz	**Configuration:** Tabletop	
Ambient Temperature: 22° C	**Relative Humidity:** 37% RH	
Configuration	**Frequency Range**	**Test Result**
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass

SOP 2 Conducted Emissions

Tracking # 31662400.002 Page 1 of 4

EUT Name	Ember Mug	**Date**	04 Aug 2016
EUT Model	TM15	**Temp / Hum in**	23° C / 37% rh
EUT Serial	TM15DBBA63000051	**Temp / Hum out**	N/A
EUT Config.	Normal Operating mode	**Line AC / Freq**	120Vac / 60Hz
Standard	CFR47 Part 15.207 and RSS Gen	**RBW / VBW**	9 kHz / 30 kHz
Lab/LISN	Lab #5 /Com-Power, Line 1	**Performed by**	Eddie Mariscal

Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV		Line	dBuV	dB	
0.15	38.84	9.97	0.25	49.06	QP	Live	66	-16.94	Pass
0.16	39.77	9.98	0.23	49.97	QP	Live	65.23	-15.26	Pass
0.18	33.57	9.97	0.21	43.75	QP	Live	64.31	-20.56	Pass
0.90	21.56	10.06	0.07	31.69	QP	Live	56	-24.31	Pass
1.18	23.37	10.07	0.06	33.51	QP	Live	56	-22.49	Pass
0.92	22.19	10.06	0.07	32.32	QP	Live	56	-23.68	Pass
0.15	16.42	9.97	0.25	26.64	Ave	Live	56	-29.36	Pass
0.16	16.02	9.98	0.23	26.22	Ave	Live	55.23	-29.01	Pass
0.18	14.1	9.97	0.21	24.28	Ave	Live	54.31	-30.03	Pass
0.90	11.67	10.06	0.07	21.8	Ave	Live	46	-24.2	Pass
1.18	11.05	10.07	0.06	21.18	Ave	Live	46	-24.82	Pass
0.92	10.39	10.06	0.07	20.52	Ave	Live	46	-25.48	Pass

Spec Margin = QP./Ave. - Limit, ± Uncertainty


Combined Standard Uncertainty $u_c(y)$ = ± 1.2 dB Expanded Uncertainty $U = ku_c(y)$ k = 2 for 95% confidence

Notes: EUT was setup as table top equipment and continuously transmitting to support iPod.

SOP 2 Conducted Emissions — Tracking # 31662400.002 Page 2 of 4

EUT Name	Ember Mug	**Date**	08 Aug 2016
EUT Model	TM15	**Temp / Hum in**	23° C / 37% rh
EUT Serial	TM15DBBA63000051	**Temp / Hum out**	N/A
EUT Config.	Normal Operating mode	**Line AC**	120Vac / 60Hz
Standard	CFR47 Part 15.207 and RSS Gen	**RBW / VBW**	9 kHz / 30 kHz
Lab/LISN	Lab #5 /Com-Power, Line 1	**Performed by**	Eddie Mariscal

150 kHz to 30 MHz Plot for Line 1 (Hot)

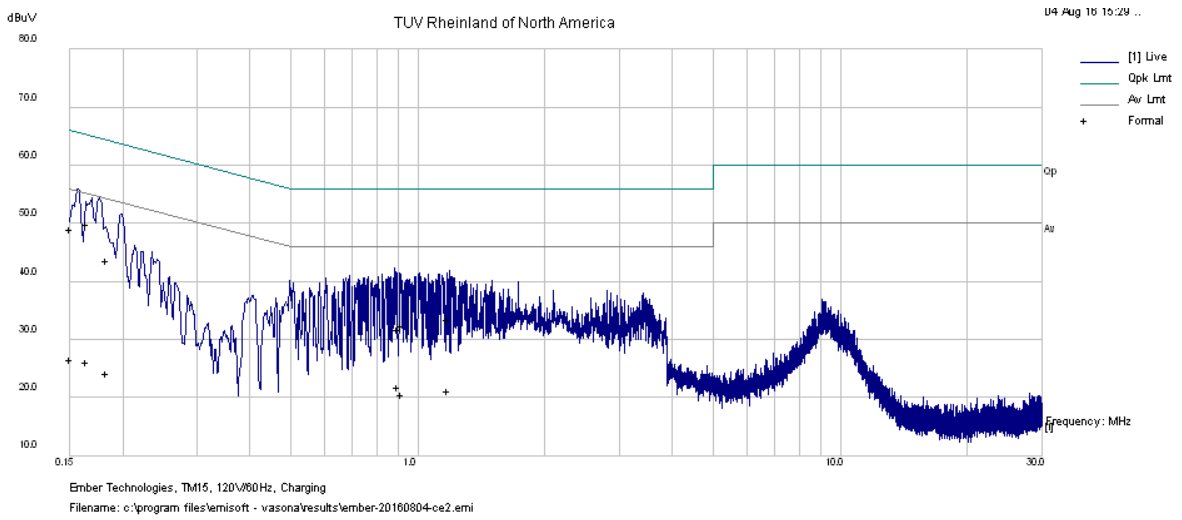

Note: Met FCC Class B limit.

SOP 2 Conducted Emissions

Tracking # 31662400.002 Page 3 of 4

EUT Name	Ember Mug	**Date**	08 Aug 2016
EUT Model	TM15	**Temp / Hum in**	23° C / 37% rh
EUT Serial	TM15DBBA63000051	**Temp / Hum out**	N/A
EUT Config.	Normal Operating mode	**Line AC / Freq**	120Vac / 60Hz
Standard	CFR47 Part 15.207 and RSS Gen	**RBW / VBW**	9 kHz / 30 kHz
Lab/LISN	Lab #5 /Com-Power, Line 2	**Performed by**	Eddie Mariscal

Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV		Line	dBuV	dB	
0.15	42.13	9.97	0.25	52.35	QP	Neutral	66	-13.65	Pass
0.15	40.91	9.97	0.24	51.12	QP	Neutral	65.78	-14.66	Pass
0.16	39.69	9.98	0.23	49.89	QP	Neutral	65.37	-15.47	Pass
0.18	37.57	9.97	0.21	47.75	QP	Neutral	64.54	-16.79	Pass
0.20	33.61	9.98	0.19	43.78	QP	Neutral	63.56	-19.79	Pass
1.02	23.41	10.06	0.07	33.54	QP	Neutral	56	-22.46	Pass
0.15	25.68	9.97	0.25	35.9	Ave	Neutral	56	-20.1	Pass
0.15	25.3	9.97	0.24	35.52	Ave	Neutral	55.78	-20.26	Pass
0.16	23.37	9.98	0.23	33.58	Ave	Neutral	55.37	-21.79	Pass
0.18	22.72	9.97	0.21	32.9	Ave	Neutral	54.54	-21.64	Pass
0.20	21.77	9.98	0.19	31.94	Ave	Neutral	53.56	-21.62	Pass
1.02	10.79	10.06	0.07	20.93	Ave	Neutral	46	-25.07	Pass
0.15	42.13	9.97	0.25	52.35	QP	Neutral	66	-13.65	Pass
0.15	40.91	9.97	0.24	51.12	QP	Neutral	65.78	-14.66	Pass

Spec Margin = QP./Ave. - Limit, ± Uncertainty

Combined Standard Uncertainty $u_c(y)$ = ± 1.2 dB Expanded Uncertainty $U = ku_c(y)$ k = 2 for 95% confidence


Notes: EUT was setup as table top equipment and continuously transmitting to support iPod.

SOP 2 Conducted Emissions

Tracking # 31662400.002 Page 4 of 4

EUT Name	Ember Mug	**Date**	08 Aug 2016
EUT Model	TM15	**Temp / Hum in**	23° C / 37% rh
EUT Serial	TM15DBBA63000051	**Temp / Hum out**	N/A
EUT Config.	Normal Operating mode	**Line AC**	120Vac / 60Hz
Standard	CFR47 Part 15.207 and RSS Gen	**RBW / VBW**	9 kHz / 30 kHz
Lab/LISN	Lab #5 /Com-Power, Line 2	**Performed by**	Eddie Mariscal

150 kHz to 30 MHz Plot for Line 2 (Neutral)

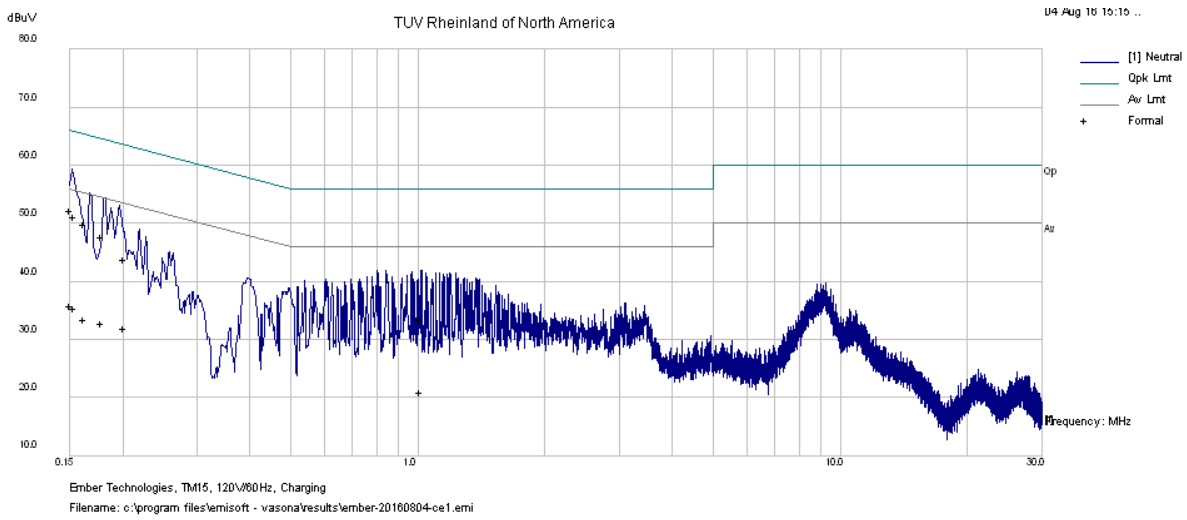

Note: Met FCC Class B Limit.

4.7 Maximum Permissible Exposure

4.7.1 Test Methodology

In this section, we try to prove the safety of radiation harmfulness to the human body for our product. The KDB 447498 D01v06 General RF Exposure Guidance is followed. The Gain of the antenna used in this calculation is declared by the manufacturer, and the maximum average power input to the antenna is measured. Using the general SAR test exclusion guidance in Section 4.3 of KDB 447498 D01v06, we show the device meeting the SAR exclusion threshold.

ISED accepts the KDB 447498 D01v06 Procedure.

4.7.2 FCC KDB 447498 D01v06 – General SAR Test Exclusion Guidance

The SAR exclusion threshold conditions are listed:
1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by the following formula:

$$\text{Exclusion Threshold} = [\ P / d\ ] * [\sqrt{f}]$$

Where

P = max power of channel (including tune-up tolerance) in mW
d = min. test separation distance in mm
f = the RF channel transmit frequency in GHz
Power and distance are rounded to the nearest mW and mm before calculation
The result is rounded to one decimal place for comparison

Limits: ≤ 3.0 for 1-g SAR ≤ 7.5 for 10-g extremity SAR

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

4.7.3 EUT Operating Condition

The software provided by the manufacturer enabled the EUT to transmit data at lowest, middle and highest channel individually.

4.7.4 Classification

The antenna of the product, under normal use condition, is less than 20cm away from the body of the user. This device is classified as a **Portable Device**.

4.7.5 SAR Test Exclusion Threshold

SAR Exclusion Threshold Calculation

Mode	Frequency (GHz)	Max Power (dBm)	Max Power (mW)	Min. Distance (mm)	Cal. Excl. Threshold	1-g SAR Limit	10-g extremity SAR Limit	Result
Modulated	2.44	2.74	1.879	5	0.6	≤3.0	≤7.5	Exempted *

Note:
1. Since EUT can operate at distance less than 50 mm, the minimum distance, 5 mm, was used for calculation per condition #1 of SAR Exclusion Threshold.
2. The maximum output power was taken from Table 2 of "Ember – FCC-IC 2.4GHz Report - 31662400.001".
3. (*) The calculated threshold is less than 3.0; therefore, EUT is SAR exempted for head and body usage.

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Bilog Antenna	Sunol Sciences	JB3	A102606	06/15/2016	06/15/2017
Horn Ant. (1-18GHz)	EMCO	3115	9710-5301	10/08/2015	10/08/2017
Antenna (18-40 GHz)	Com-Power	AHA-840	105005	07/08/2015	07/08/2017
Spectrum Analyzer	Agilent	N9030A	MY52350885	05/17/2016	05/17/2017
EMI Receiver	Rohde & Schwarz	ESU	100364	04/21/2016	04/21/2017
Preamplifier	Sonoma Instruments	310	185516	01/10/2016	01/10/2017
Preamplifier	HP	8449B	3008A01014	01/20/2016	01/20/2017
Notch Filter	Micro-Tronics	BRM50716	037	07/29/2016	07/29/2017

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 9: Customer Information

Company Name	Ember Technologies, Inc.
Address	4607 Lakeview Canyon Rd., #500
City, State, Zip	Westlake Village, CA 91361
Country	USA
Phone	(858) 603-4951

Table 10: Technical Contact Information

Name	Chris Wakeham
E-mail	chris.wakeham@embertech.com
Phone	(858) 603-4951

6.3 Equipment Under Test (EUT)

Table 11: EUT Specifications

EUT Specifications	
Dimensions	Diameter: 3.125in (80mm) Height: 7.75in (200mm)
AC Input	Charging Coaster: 100-240V AC, 50 – 60 Hz
Environment	Home/Indoor/Outdoor
Operating Temperature Range:	0 to 30 degrees C
Multiple Feeds:	☐ Yes and how many ☒ No
Hardware Version	
Firmware Version	
RF Software Version	Nordic s110_nrf51_8.0.0
Operating Mode	BLE 4.0
Transmitter Frequency Band	2.4 GHz – 2.4835 GHz
Max. Rated Power Output	See Channel Planning Table.
Power Setting @ Operating Channel	See Channel Planning Table.
Antenna Type	Qty 1: Meandered PIFA on Main PCBA
Antenna Gain	+6 dBi
Modulation Type	☐ AM ☐ FM ☐ DSSS ☐ OFDM ☒ Other describe: GFSK
Data Rate	1Mbps
TX/RX Chain (s)	Single
Type of Equipment	☒ Table Top ☐ Wall-mount ☐ Floor standing cabinet ☒ Other: Portable
Note:	

Table 12: Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 1	Meandered PIFA	2.4GHz Integral Antenna	+6.0

Table 13: EUT Channel Power Specifications

Max Power for single chain

TP Setting	No.	Frequency (MHz)	Target Power Value dBm			
			BLE 4.0			
4	1	2402	4.0			
4	19	2440	4.0			
4	39	2480	4.0			
Note: 1. The adjusted power target values are updated at the evaluated frequencies.						

Table 14: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
None	-	-	-	-

Table 15: Support Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	P54G	HMWT362	Configure channel, power, etc.
Note: None.				

Table 16: Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.247
Travel Mug TM15	TM15DBBA 63000051	Integrated Antenna	AC Conducted Emissions
	6290083	Integrated Antenna	Radiated Bandedge Emissions, Radiated Spurious Emissions
	629005Z	Female SMA	Peak Transmit Power, Peak Power Spectral Density, Occupied Bandwidth, Band-Edge, Out-of-Band Emissions

Table 17: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
Travel Mug TM15	Custom Integrated	Transmit	EUT Upright	EUT lying down with display perpendicular to ground plane	EUT lying down with display parallel to ground plane
Note: Y-Axis was determined to be the worst-case.					

6.4 Test Specifications

Table 18: Test Specifications

Emissions and Immunity	
Standard	**Requirement**
CFR 47 Part 15.247: 2015	All
RSS 247 Issue 1, 2015	All

END OF REPORT