

RF TEST REPORT



Report No.: 16070659-FCC-R2

Supersede Report No.: N/A

Applicant	SMT TELECOMM HK LIMITED	
Product Name	Mobile Phone	
Model No.	X401	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	May 12 to May 23, 2015	
Issue Date	June 07, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
<i>Winnie Zhang</i>	<i>Chris You</i>	
Lucifer He Test Engineer	Chris You Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070659-FCC-R2
Page	3 of 53

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH	14
6.4 PEAK OUTPUT POWER	18
6.5 NUMBER OF HOPPING CHANNEL	22
6.6 TIME OF OCCUPANCY (DWEIL TIME)	24
6.7 BAND EDGE	28
6.8 AC POWER LINE CONDUCTED EMISSIONS	33
6.9 RADIATED SPURIOUS EMISSIONS	37
ANNEX A. TEST INSTRUMENT	42
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	43
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	48
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	52
ANNEX E. DECLARATION OF SIMILARITY	53

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070659-FCC-R2	NONE	Original	June 07,2016

2. Customer information

Applicant Name	SMT TELECOMM HK LIMITED
Applicant Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL
Manufacturer	SMT TELECOMM HK LIMITED
Manufacturer Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile Phone

Main Model: X401

Serial Model: N/A

Date EUT received: May 11, 2015

Test Date(s): May 12 to May 23, 2015

Equipment Category : DSS

Antenna Gain:

GSM850: -0.4 dBi
PCS1900: 0.5 dBi
UMTS-FDD Band V: -0.4dBi
UMTS-FDD Band II: 0.5dBi
Bluetooth/BLE: 0.4dBi
WIFI: 0.4 dBi

Type of Modulation:

GSM / GPRS: GMSK
UMTS-FDD: QPSK, 16QAM
802.11b/g/n: DSSS, OFDM
Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
BLE: GFSK

RF Operating Frequency (ies):

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WIFI: 802.11b/g/n(20M): 2412-2462 MHz
WIFI: 802.11n(40M): 2422-2452 MHz
Bluetooth& BLE: 2402-2480 MHz

Max. Output Power: GFSK: 3.102 dBm

Test Report	16070659-FCC-R2
Page	7 of 53

Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V : 102CH UMTS-FDD Band II : 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH
Port:	Power Port, Earphone Port, USB Port
Input Power:	Adapter: Model: PC X401 Input: AC 100-240V; 50/60Hz 0.15A Max Output: DC 5.0V; 0.5A Battery: Model: BP-X401 Spec: 3.7V 1200mAh Charging Limit Voltage:4.2V
Trade Name :	N/A
GPRS Multi-slot class	8/10/12
FCC ID:	2AIMEX401

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI, the gain is 0.4dBi for Bluetooth/BLE/WIFI.

A permanently attached PIFA antenna for GSM and UMTS, the gain is -0.4dBi for GSM850, -0.4dBi for UMTS-FDD Band V, 0.5dBi for PCS1900, the gain is 0.5dBi for UMTS-FDD Band II


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 13, 2015
Tested By :	Lucifer He

Requirement(s):

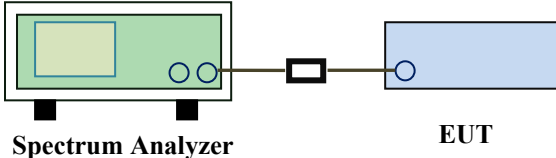Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.		

Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.681	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.684	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.966	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.859	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.875	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.855	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.865	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.861	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.861	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result



GFSK - Low Channel



GFSK - Middle Channel



GFSK - High Channel



$\pi/4$ DPSK - Low Channel



$\pi/4$ DQPSK - Middle Channel



$\pi/4$ DQPSK - High Channel



8DPSK - Low Channel



8DPSK - Middle Channel




8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 13, 2015
Tested By :	Lucifer He

Requirement(s):

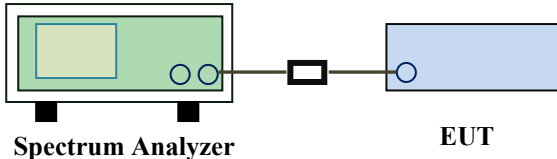Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW $\geq$ 1% of the 20 dB bandwidth - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference		

Test Report	16070659-FCC-R2
Page	15 of 53

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A


Measurement result

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.019	0.895
	Mid	2441	1.032	0.894
	High	2480	0.966	0.892
$\pi/4$ DQPSK	Low	2402	1.284	1.167
	Mid	2441	1.284	1.165
	High	2480	1.311	1.177
8-DPSK	Low	2402	1.289	1.177
	Mid	2441	1.288	1.176
	High	2480	1.289	1.179

Test Plots

20dB Bandwidth measurement result

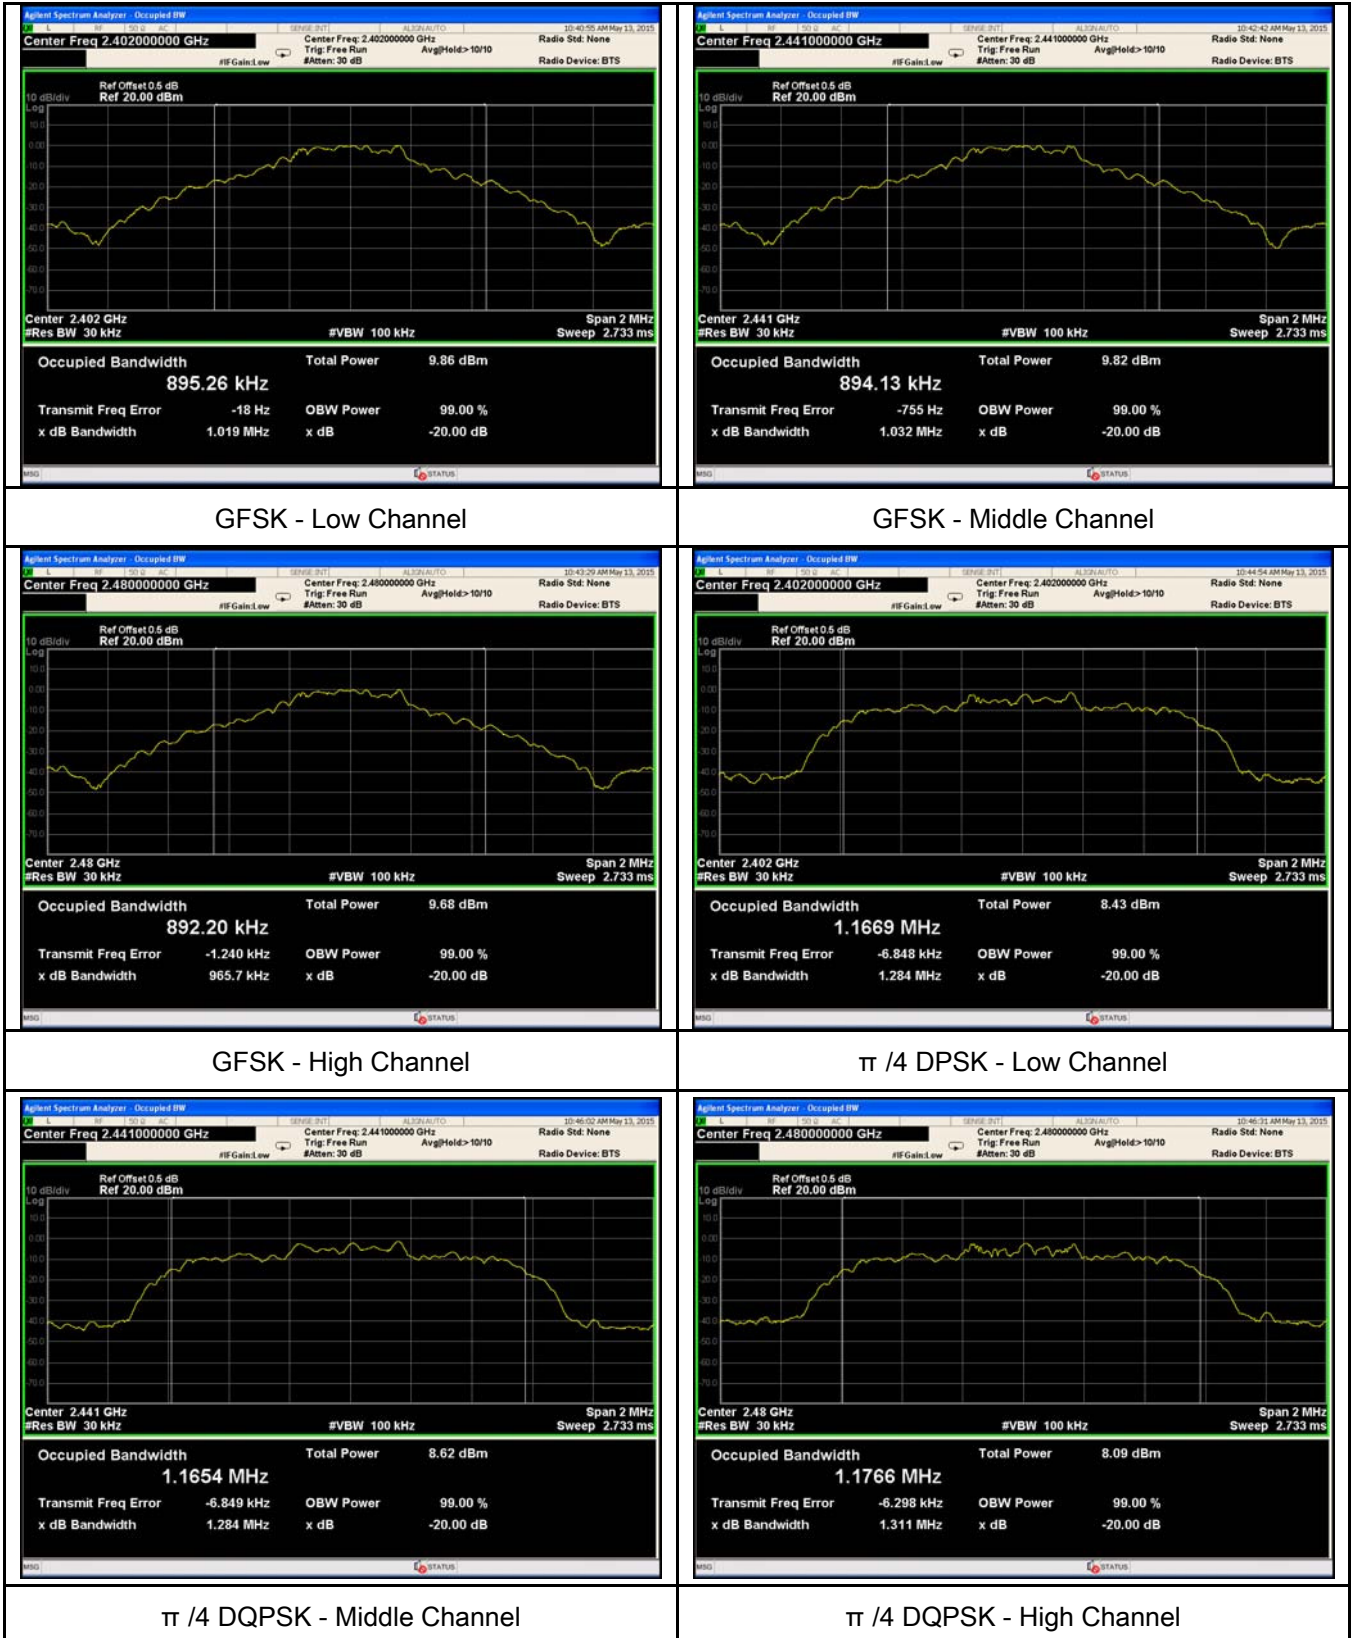


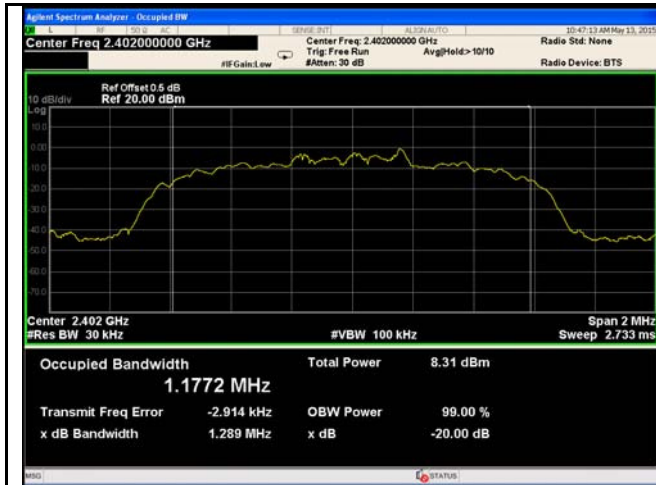

8DPSK - Low Channel



8DPSK - Middle Channel

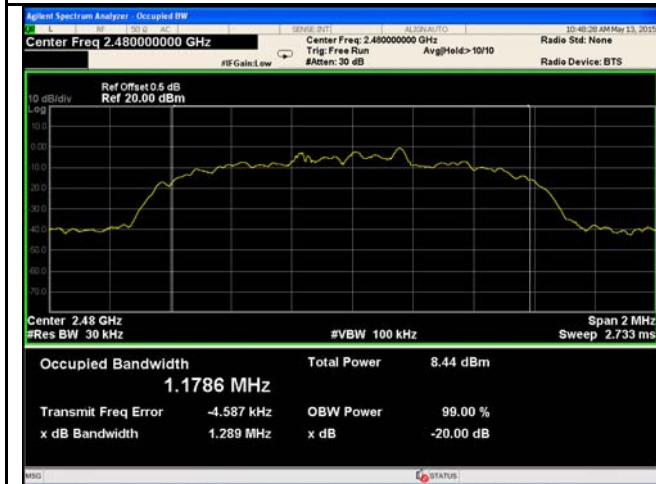


8DPSK - High Channel

6.4 Peak Output Power

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 13, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	☒
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	☐
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	☒
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	☐
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	☐
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	☐

Test Setup	 Spectrum Analyzer EUT
------------	--

Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings: - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW $>$ the 20 dB bandwidth of the emission being measured - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold
----------------	--

Test Report	16070659-FCC-R2
Page	19 of 53

	- Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Peak Output Power measurement result


Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	3.102	125	Pass
		Mid	2441	3.004	125	Pass
		High	2480	2.812	1000	Pass
	$\pi/4$ DQPSK	Low	2402	2.853	125	Pass
		Mid	2441	2.806	125	Pass
		High	2480	2.632	125	Pass
	8-DPSK	Low	2402	3.006	125	Pass
		Mid	2441	2.955	125	Pass
		High	2480	2.787	125	Pass

Test Plots


Output Power measurement result




GFSK Output power - Low CH 2402

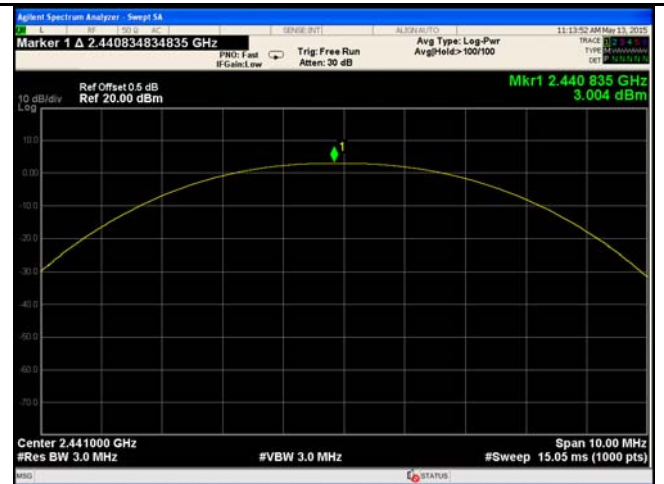


GFSK Output power - Mid CH 2441

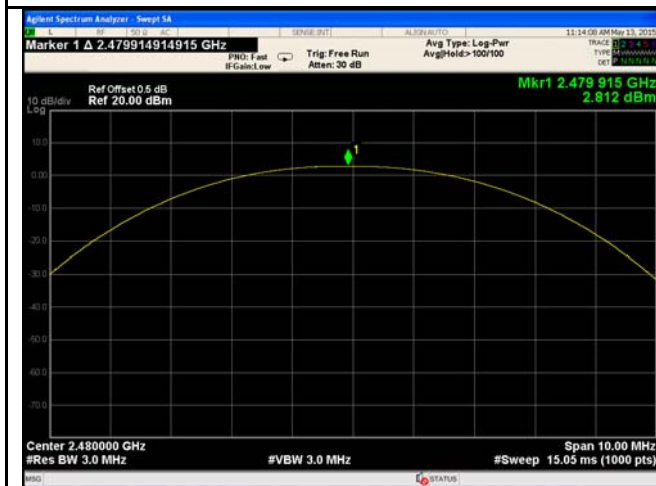


GFSK Output power - High CH 2480

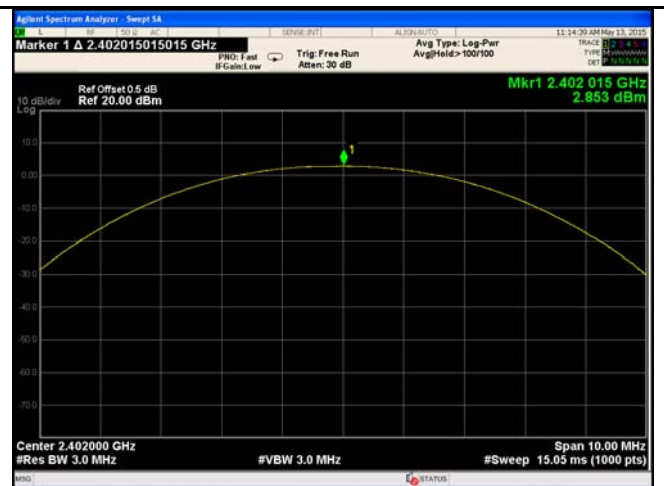


$\pi/4$ DQPSK Output power - Low CH 2402

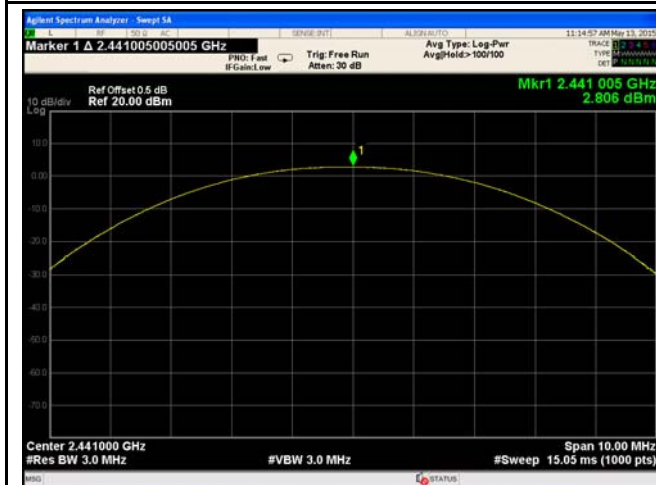


$\pi/4$ DQPSK Output power - Mid CH 2441

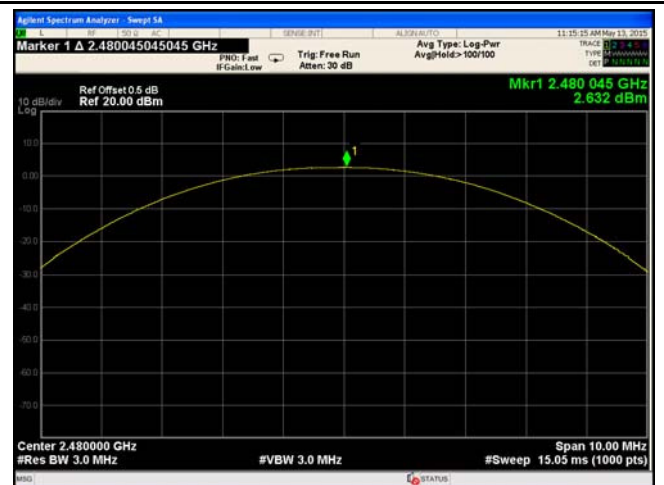


$\pi/4$ DQPSK Output power - High CH 2480

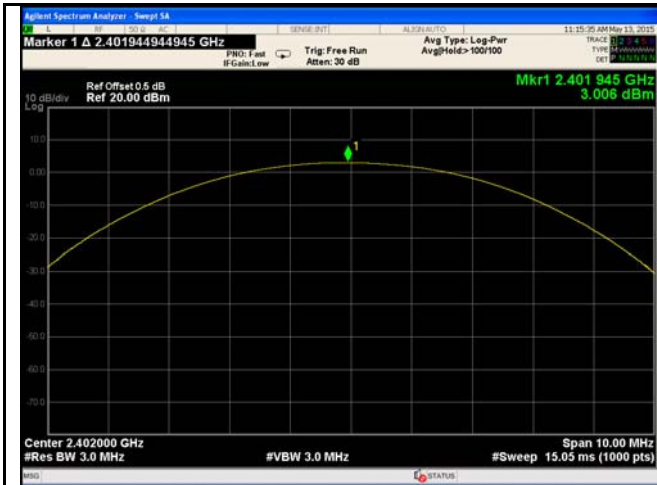

8DPSK Output power - Low CH 2402

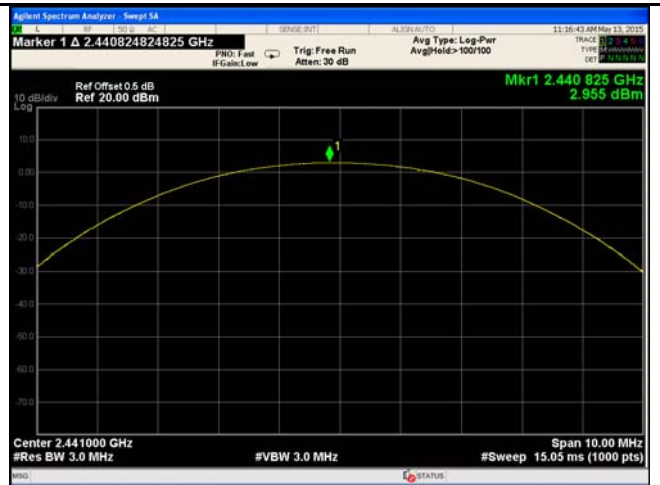

8DPSK Output power - Mid CH 2441

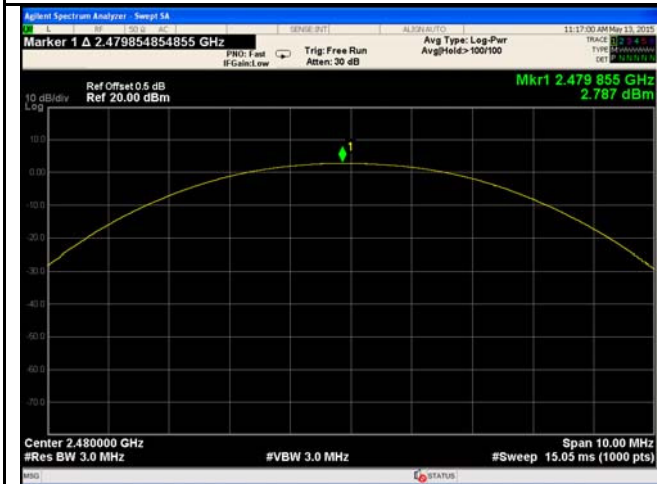


8DPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 13 2015
Tested By :	Lucifer He

Requirement(s):

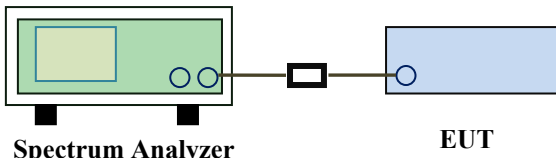Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled. - Span = the frequency band of operation - RBW $\geq$ 1% of the span - VBW $\geq$ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).		
Remark			
Result	☒ Pass ☐ Fail		


Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

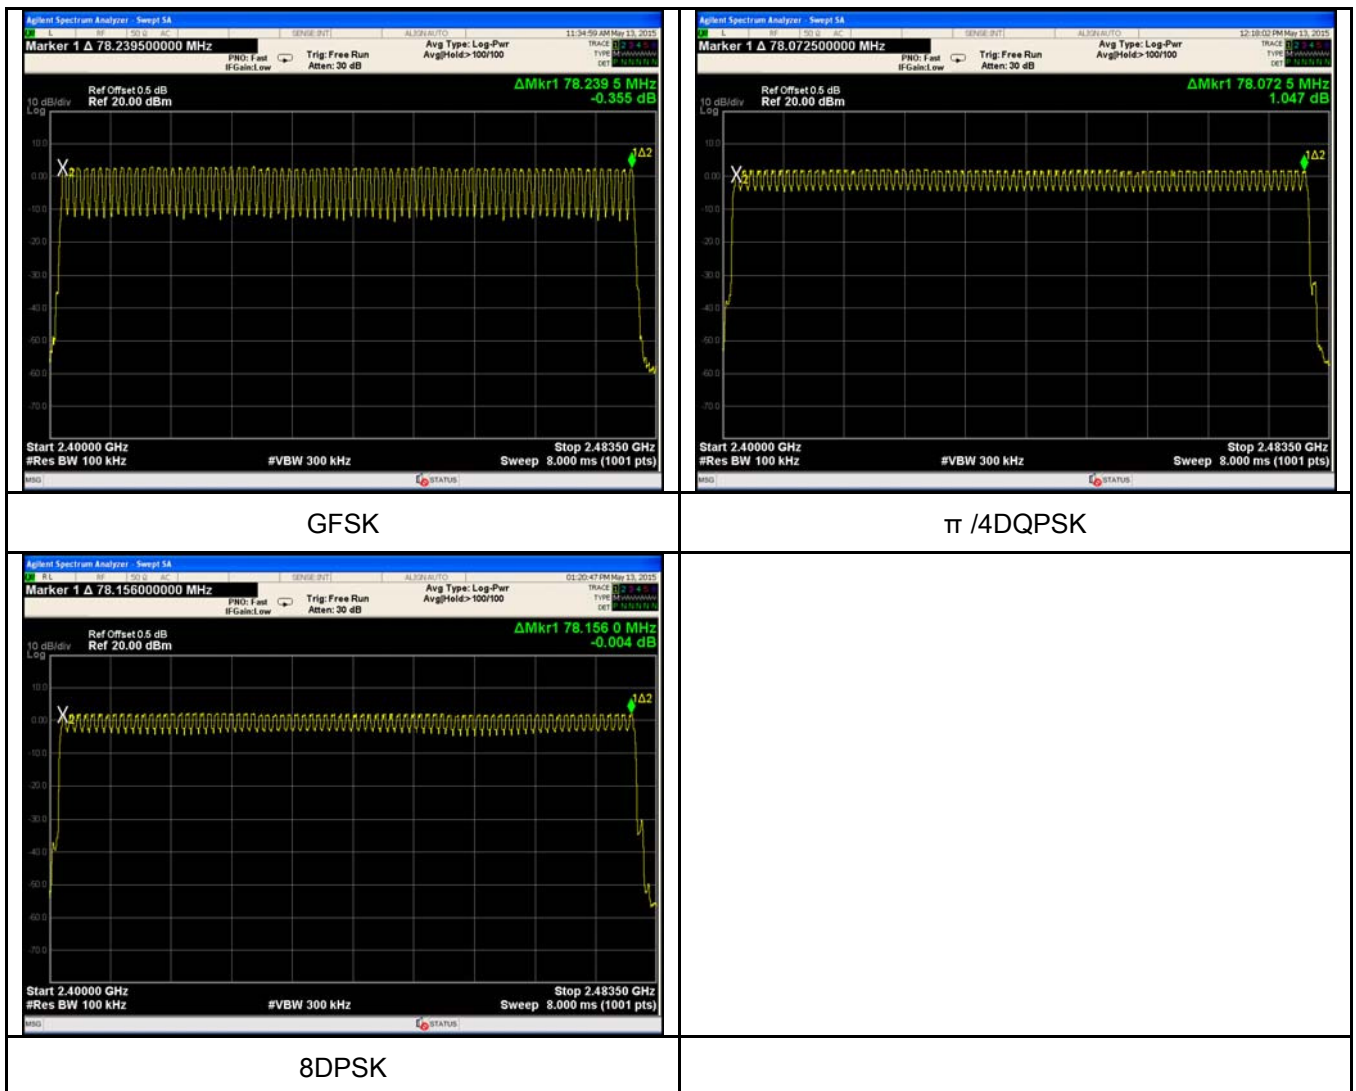

6.6 Time of Occupancy (Dwell Time)

Temperature	22°C
Relative Humidity	55%
Atmospheric Pressure	1013mbar
Test date :	May 13, 2015
Tested By :	Lucifer He

Requirement(s):

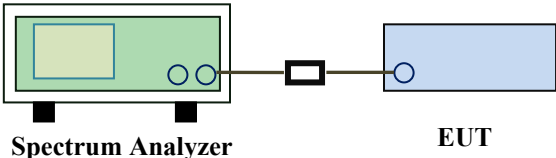Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	☒
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time		
Remark			
Result	☒ Pass ☐ Fail		


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.875	306.667	400	Pass
		Mid	2.846	303.573	400	Pass
		High	2.860	305.067	400	Pass
	$\pi/4$ DQPSK	Low	2.860	305.067	400	Pass
		Mid	2.860	305.067	400	Pass
		High	2.860	305.067	400	Pass
	8-DPSK	Low	2.860	305.067	400	Pass
		Mid	2.860	305.067	400	Pass
		High	2.860	305.067	400	Pass
Note: Dwell time=Pulse Time (ms) $\times$ (1600 $\div$ 6 $\div$ 79) $\times$ 31.6						

Test Plots


Dwell Time measurement result

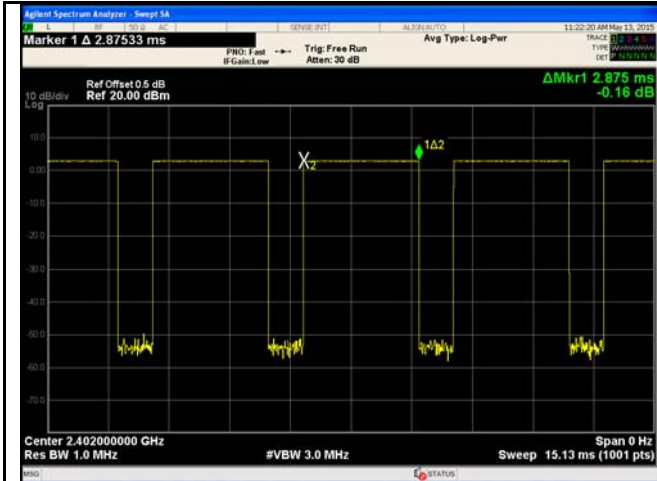


GFSK - Low CH 2402

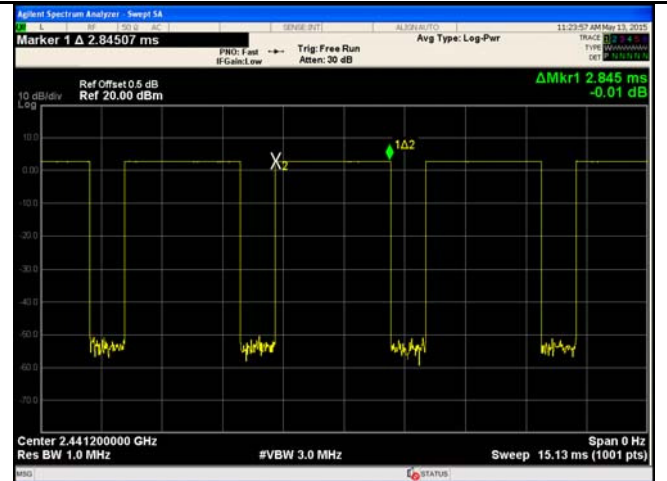


GFSK - Mid CH 2441

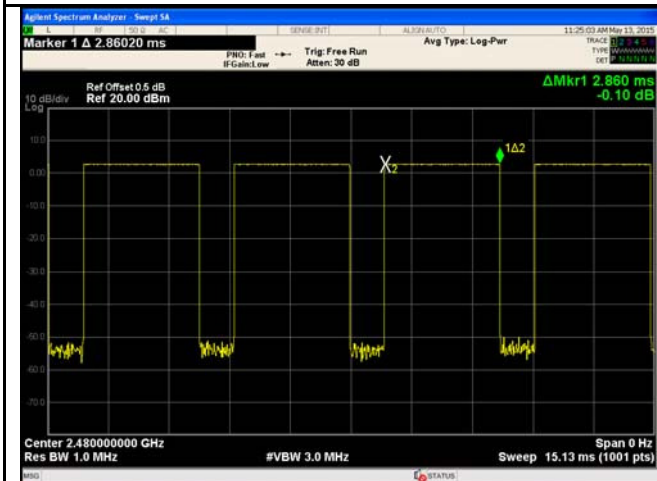


GFSK - High CH 2480

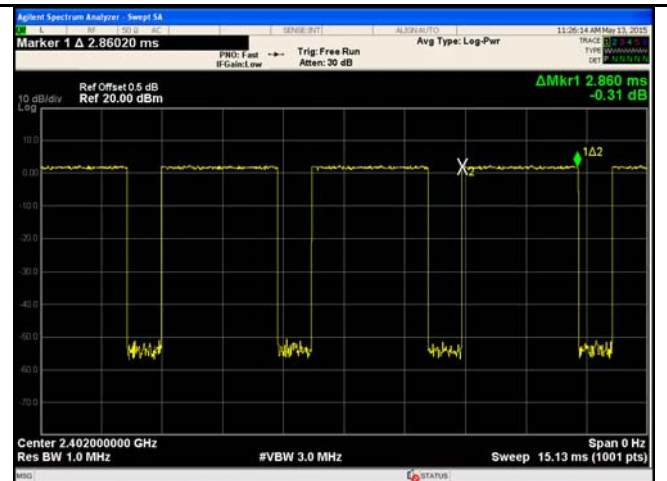


$\pi/4$ DQPSK - Low CH 2402

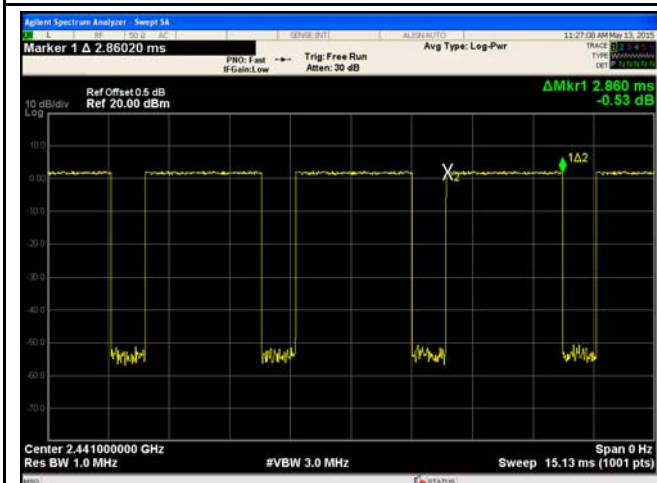


$\pi/4$ DQPSK - Mid CH 2441

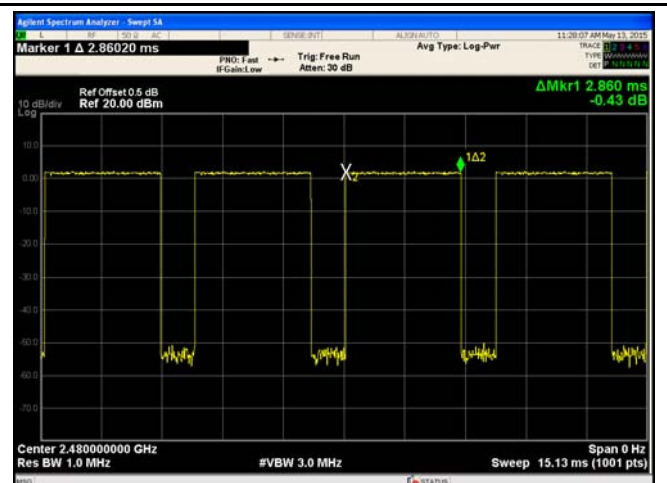


$\pi/4$ DQPSK - High CH 2480

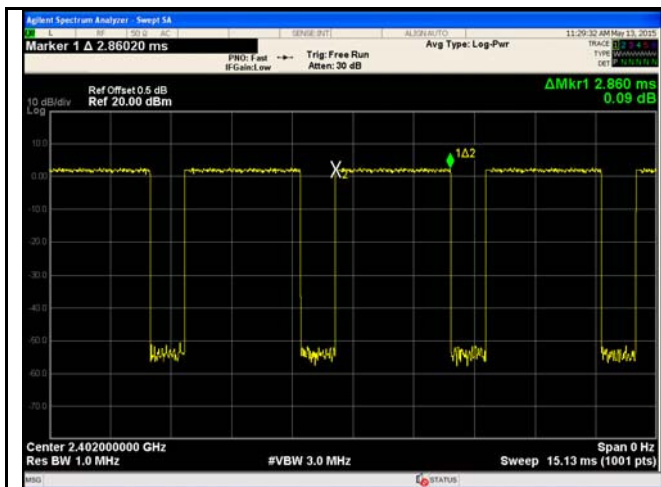

8DPSK - Low CH 2402

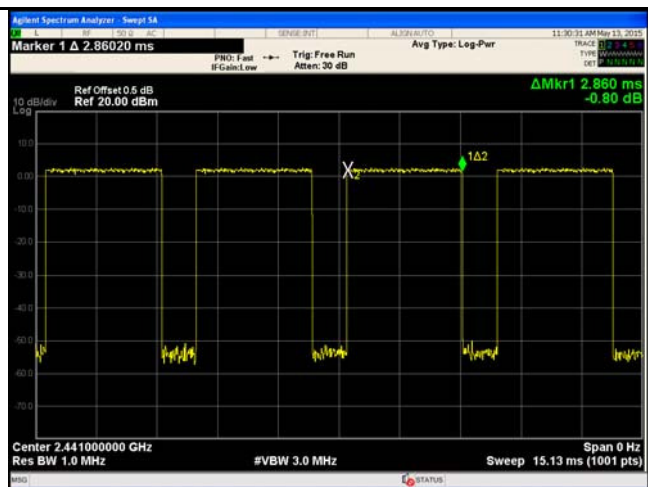

8DPSK - Mid CH 2441

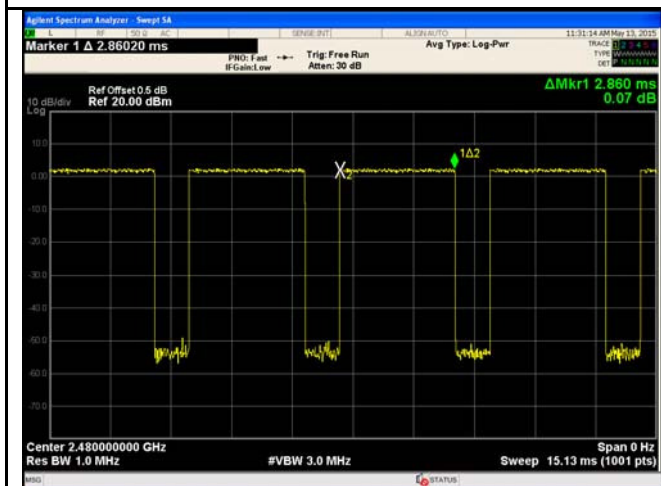


8DPSK - High CH 2480

6.7 Band Edge

Temperature	20°C
Relative Humidity	52%
Atmospheric Pressure	1022mbar
Test date :	April 22 2015
Tested By :	Lucifer He

Requirement(s):

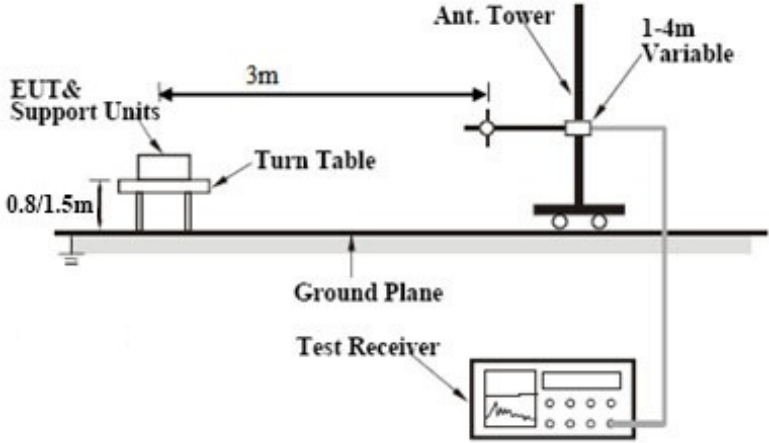Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	☒
Test Setup			
Test Procedure	The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,		

Test Report	16070659-FCC-R2
Page	29 of 53


	and make sure the instrument is operated in its linear range. - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	☒ Pass ☐ Fail

Test Data ☐ Yes ☒ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Plots


GFSK Mode:

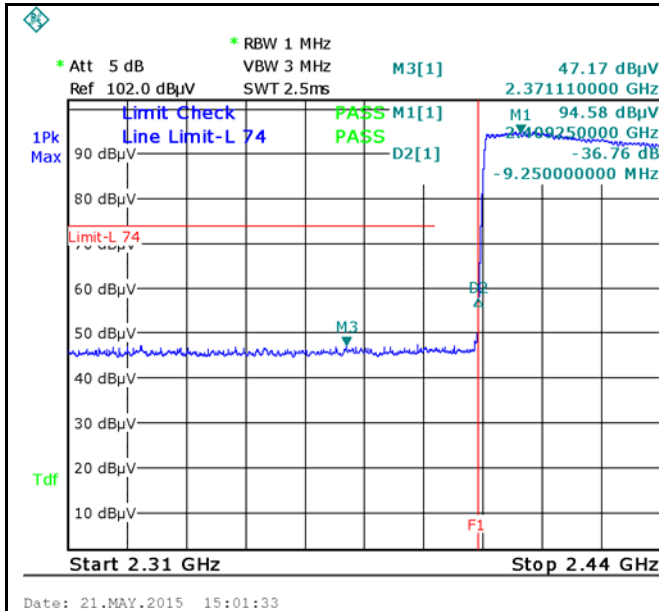

GFSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

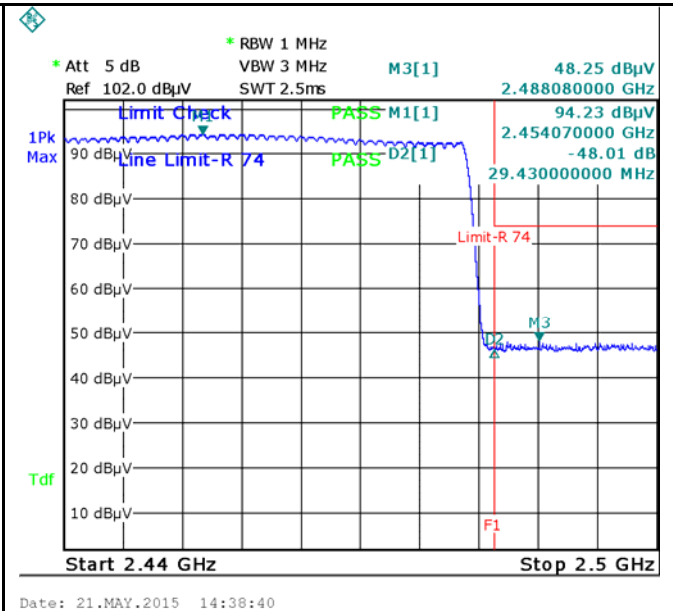


GFSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)


GFSK-Hopping Left Side-AV

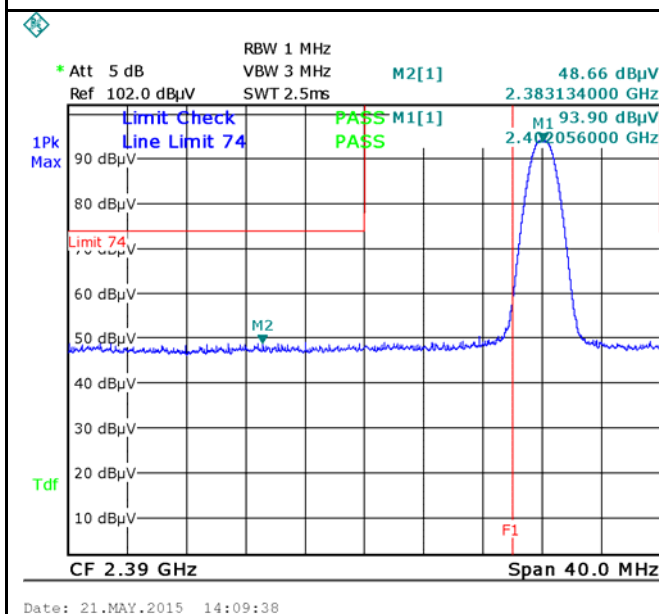

GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

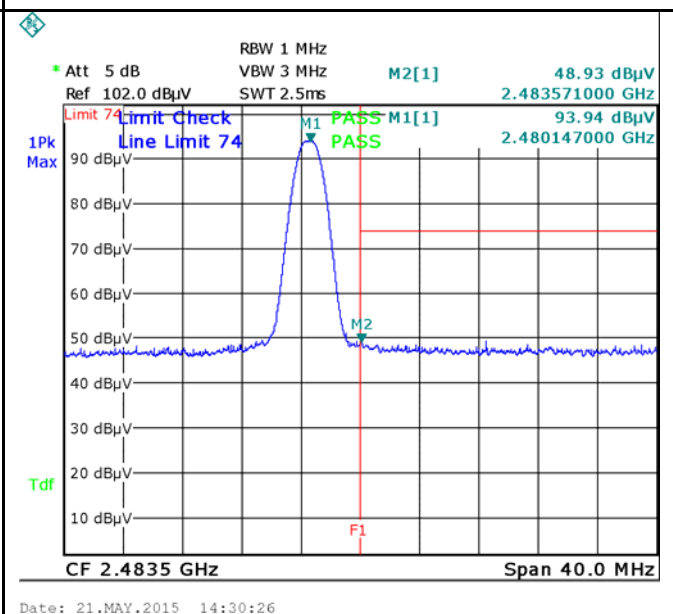

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV


GFSK-Right Side-AV

The figure displays four spectral plots arranged in a 2x2 grid, showing the frequency response of a $\pi/4$ DQPSK signal. Each plot includes a blue trace for the signal, a red trace for the limit, and a green trace for the Tdf. The y-axis is labeled '1Pk Max' and 'Tdf'. The x-axis is labeled 'Start' and 'Stop'.

- Top-Left Plot:** $\pi/4$ DQPSK-Hopping Left Side-PK. The signal peak is at 2.332960000 GHz with a power of 47.20 dBμV. The limit is at 74 dBμV. The Tdf is at 2.332960000 GHz.
- Top-Right Plot:** $\pi/4$ DQPSK-Hopping Right Side-PK. The signal peak is at 2.487250000 GHz with a power of 47.60 dBμV. The limit is at 74 dBμV. The Tdf is at 2.487250000 GHz.
- Bottom-Left Plot:** $\pi/4$ DQPSK-Hopping Left Side-AV. The signal peak is at 2.380339000 GHz with a power of 48.19 dBμV. The limit is at 74 dBμV. The Tdf is at 2.380339000 GHz.
- Bottom-Right Plot:** $\pi/4$ DQPSK-Hopping Right Side-AV. The signal peak is at 2.487164000 GHz with a power of 47.81 dBμV. The limit is at 74 dBμV. The Tdf is at 2.487164000 GHz.

Each plot also includes a 'Limit Check' section with 'Line Limit-L 74' and 'Line Limit-R 74'.

8-DPSK Mode:

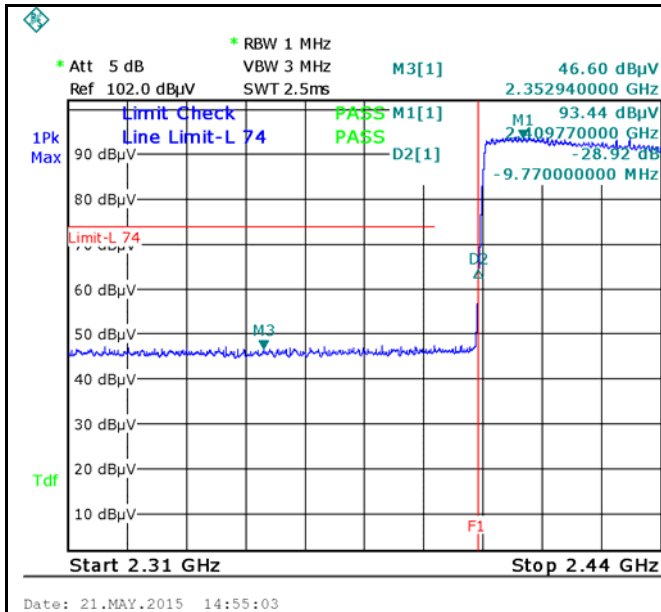


8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Left-AV

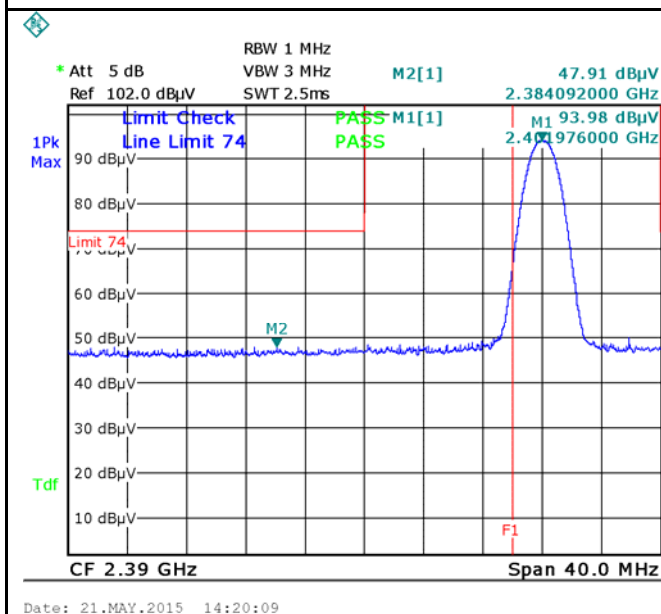


8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

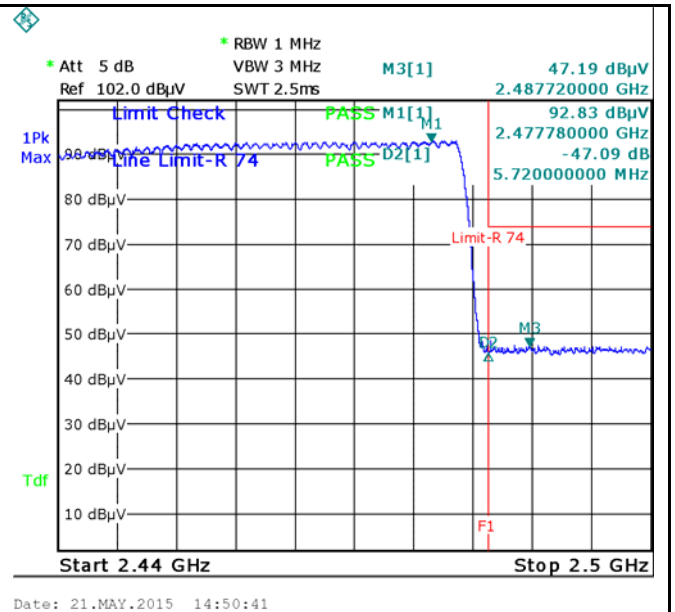


8DPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Right-AV

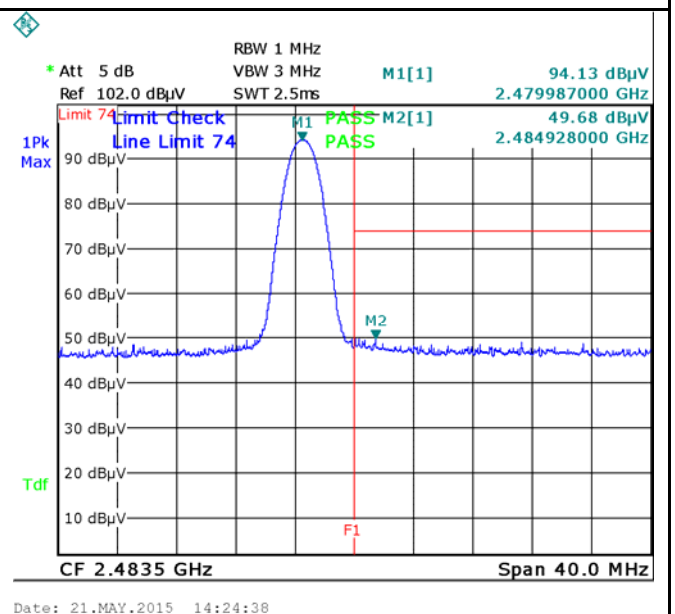

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

8DPSK-Right Side-AV

6.8 AC Power Line Conducted Emissions

Temperature	20°C
Relative Humidity	52%
Atmospheric Pressure	1022bar
Test date :	April 22, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207,	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	☒														
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
		0.15 ~ 0.5		66 – 56	56 – 46												
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	--


Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---

Test Report	16070659-FCC-R2
Page	34 of 53

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A
 Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Bluetooth Mode

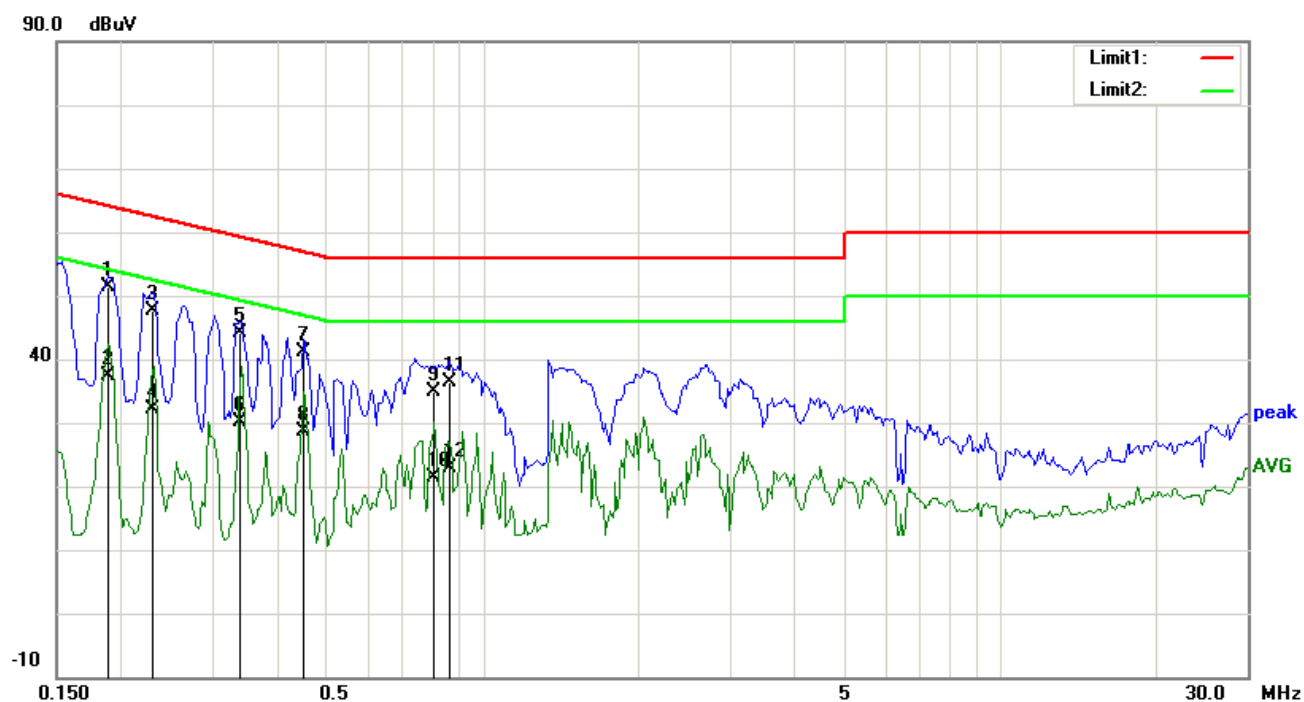


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)	
1	L1	0.1891	38.23	QP	13.05	51.28	64.08	-12.80	
2	L1	0.1891	24.39	AVG	13.05	37.44	54.08	-16.64	
3	L1	0.2304	34.82	QP	12.90	47.72	62.44	-14.72	
4	L1	0.2304	19.19	AVG	12.90	32.09	52.44	-20.35	
5	L1	0.3392	31.60	QP	12.50	44.10	59.22	-15.12	
6	L1	0.3392	17.60	AVG	12.50	30.10	49.22	-19.12	
7	L1	0.4508	28.94	QP	12.08	41.02	56.86	-15.84	
8	L1	0.4508	16.51	AVG	12.08	28.59	46.86	-18.27	
9	L1	0.8063	23.32	QP	11.59	34.91	56.00	-21.09	
10	L1	0.8063	9.91	AVG	11.59	21.50	46.00	-24.50	
11	L1	0.8618	24.85	QP	11.54	36.39	56.00	-19.61	
12	L1	0.8618	11.37	AVG	11.54	22.91	46.00	-23.09	

Test Mode: Bluetooth Mode

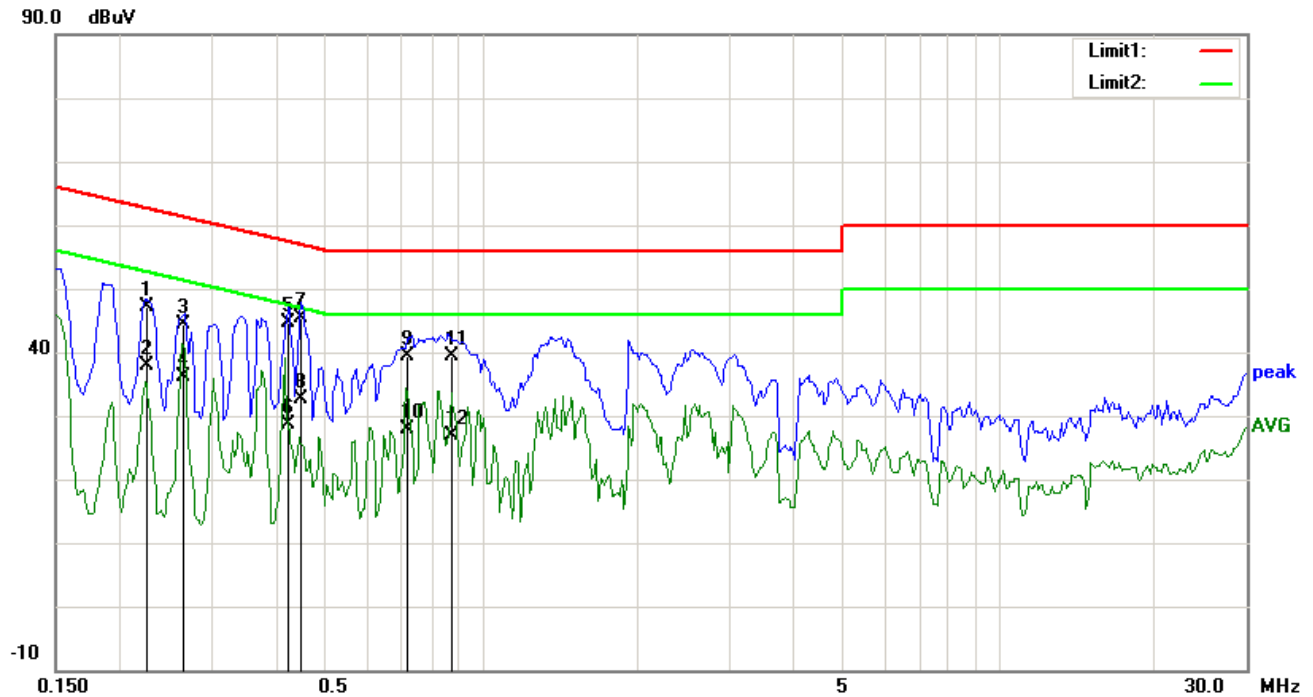

Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Comment
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)	
1	N	0.2256	34.18	QP	12.92	47.10	62.61	-15.51	
2	N	0.2256	24.99	AVG	12.92	37.91	52.61	-14.70	
3	N	0.2644	31.49	QP	12.78	44.27	61.29	-17.02	
4	N	0.2644	23.40	AVG	12.78	36.18	51.29	-15.11	
5	N	0.4234	32.57	QP	12.18	44.75	57.38	-12.63	
6	N	0.4234	16.36	AVG	12.18	28.54	47.38	-18.84	
7	N	0.4469	33.34	QP	12.10	45.44	56.93	-11.49	
8	N	0.4469	20.62	AVG	12.10	32.72	46.93	-14.21	
9	N	0.7164	27.75	QP	11.68	39.43	56.00	-16.57	
10	N	0.7164	16.25	AVG	11.68	27.93	46.00	-18.07	
11	N	0.8766	27.93	QP	11.52	39.45	56.00	-16.55	
12	N	0.8766	15.48	AVG	11.52	27.00	46.00	-19.00	

6.9 Radiated Spurious Emissions

Temperature	20°C
Relative Humidity	52%
Atmospheric Pressure	1022mbar
Test date :	May 22, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
-----------	---

Test Report	16070659-FCC-R2
Page	38 of 53

	a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: Bluetooth Mode

Below 1GHz

80.0 dBuV/m

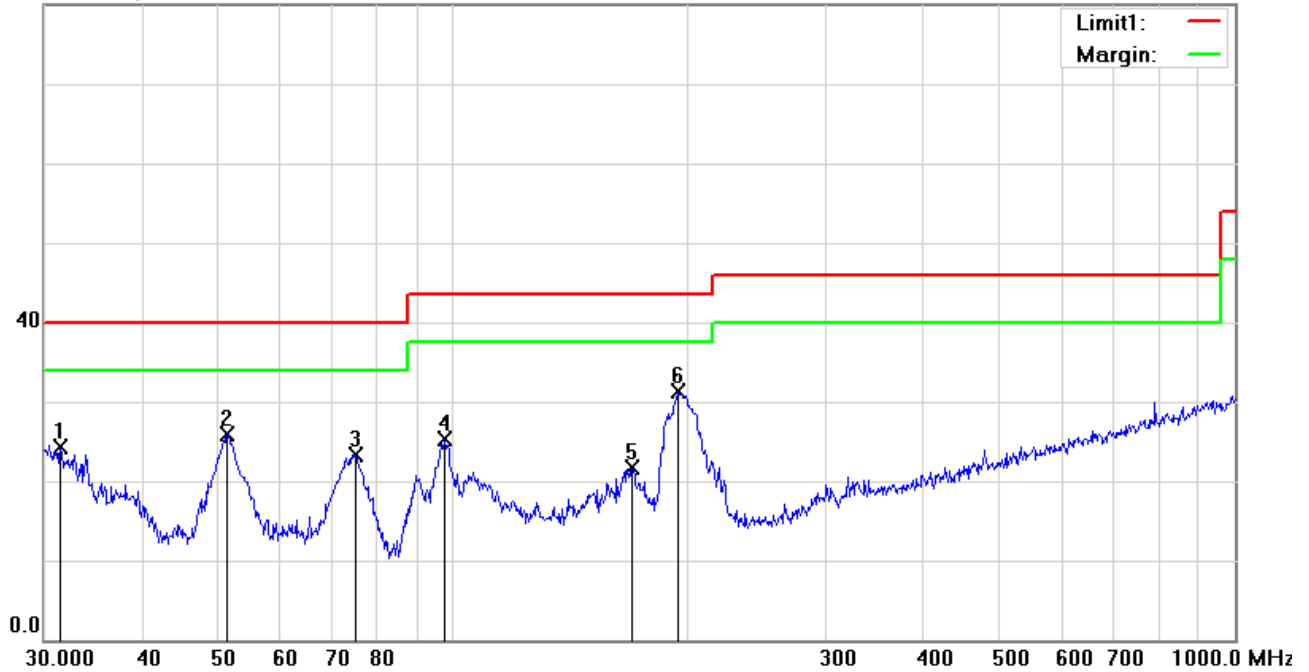


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	H	31.5095	25.64	peak	-1.37	24.27	40.00	-15.73	100	34	
2	H	51.4807	39.25	peak	-13.35	25.90	40.00	-14.10	100	233	
3	H	75.1823	37.08	peak	-13.74	23.34	40.00	-16.66	100	207	
4	H	97.7983	36.64	peak	-11.39	25.25	43.50	-18.25	100	165	
5	H	169.5990	30.69	peak	-9.07	21.62	43.50	-21.88	100	162	
6	H	194.4534	40.27	peak	-9.01	31.26	43.50	-12.24	100	211	

Below 1GHz

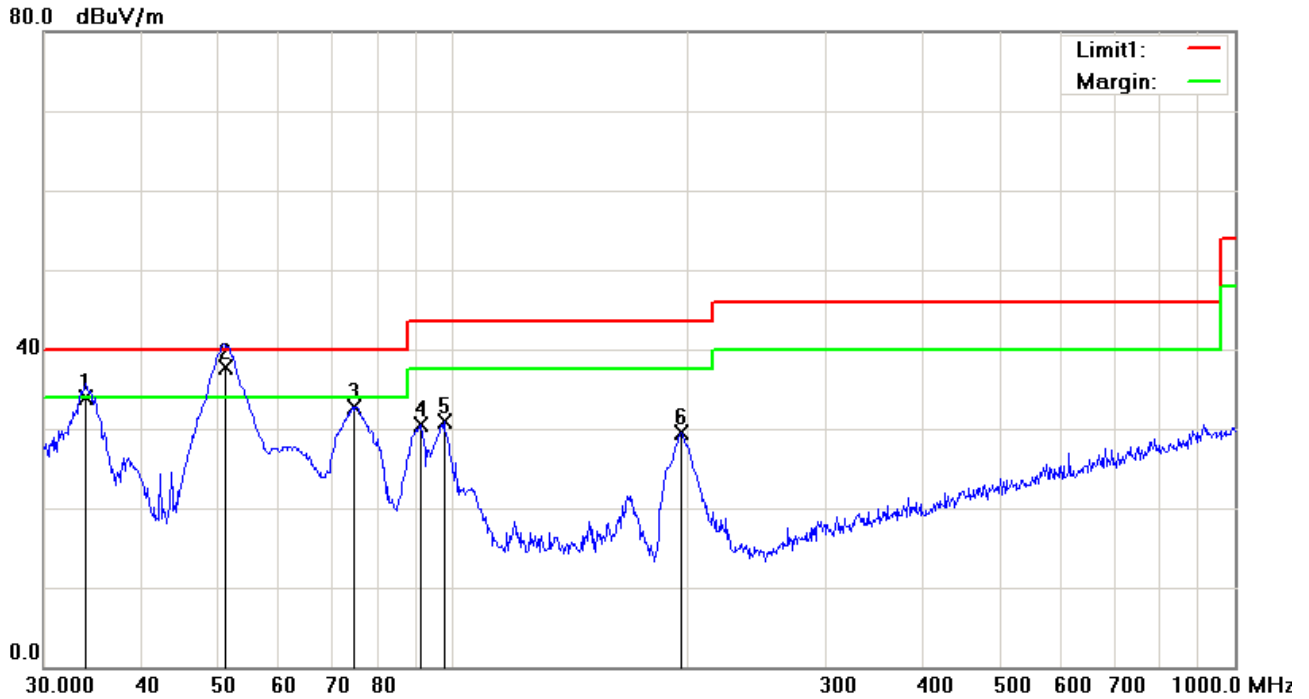

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree	Comment
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()	
1	V	33.9174	37.09	QP	-3.15	33.94	40.00	-6.06	100	205	
2	V	51.2217	51.07	QP	-13.31	37.76	40.00	-2.24	100	291	
3	V	74.9191	46.48	peak	-13.74	32.74	40.00	-7.26	100	1	
4	V	91.1746	43.51	peak	-13.08	30.43	43.50	-13.07	100	100	
5	V	97.4560	42.29	peak	-11.48	30.81	43.50	-12.69	100	96	
6	V	195.8220	38.42	peak	-8.94	29.48	43.50	-14.02	100	186	

Test Mode:	Transmitting Mode
------------	-------------------

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	34.56	AV	V	33.83	6.86	31.72	43.53	54	-10.47
4804	34.88	AV	H	33.83	6.86	31.72	43.85	54	-10.15
4804	47.61	PK	V	33.83	6.86	31.72	56.58	74	-17.42
4804	47.95	PK	H	33.83	6.86	31.72	56.92	74	-17.08

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	35.16	AV	V	33.86	6.82	31.82	44.02	54	-9.98
4882	34.83	AV	H	33.86	6.82	31.82	43.69	54	-10.31
4882	48.21	PK	V	33.86	6.82	31.82	57.07	74	-16.93
4882	47.86	PK	H	33.86	6.82	31.82	56.72	74	-17.28

High Channel (2480 MHz)


Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	34.87	AV	V	33.9	6.76	31.92	43.61	54	-10.39
4960	34.73	AV	H	33.9	6.76	31.92	43.47	54	-10.53
4960	48.19	PK	V	33.9	6.76	31.92	56.93	74	-17.07
4960	47.92	PK	H	33.9	6.76	31.92	56.66	74	-17.34

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	☒
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	☒
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	☒
LISN	ISN T800	34373	09/26/2014	09/25/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	☒
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	☒
Power Splitter	1#	1#	09/02/2014	09/01/2015	☒
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	☒
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	☒
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	☒
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	☒

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

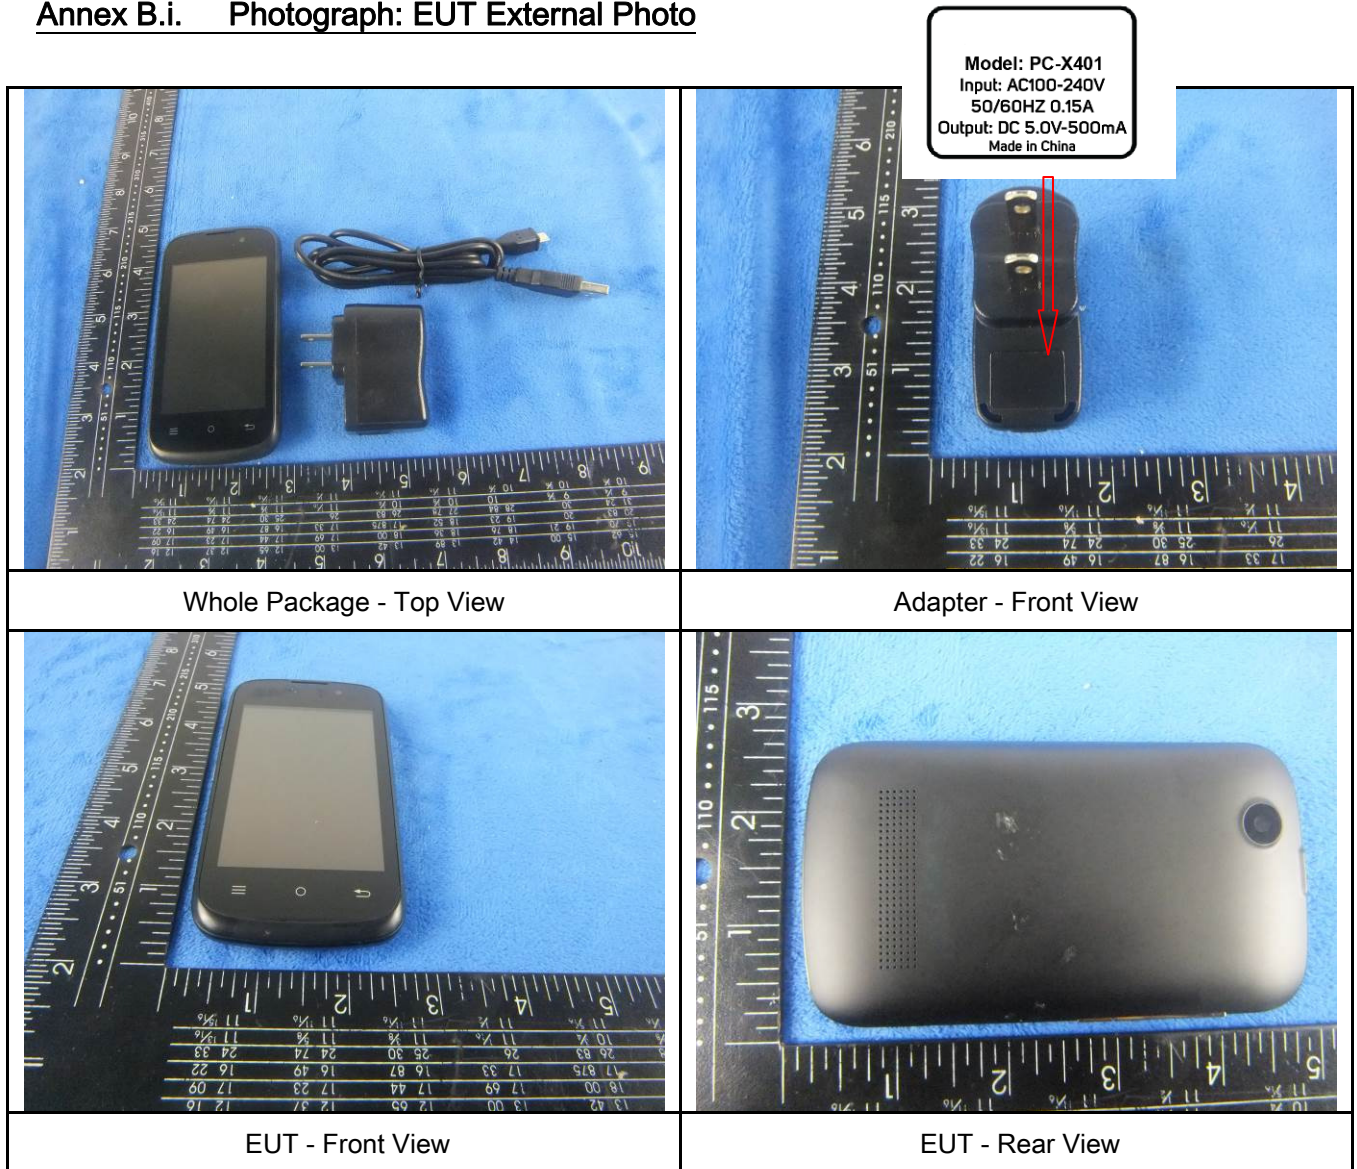




EUT - Top View



EUT - Bottom View

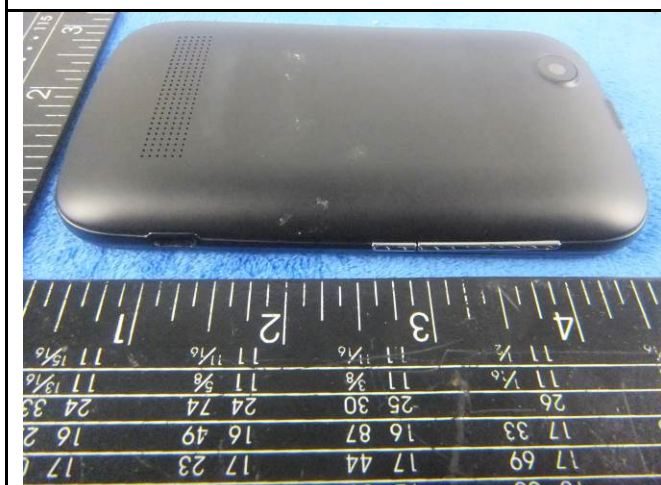

EUT - Left View



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Top View




Battery - Bottom View

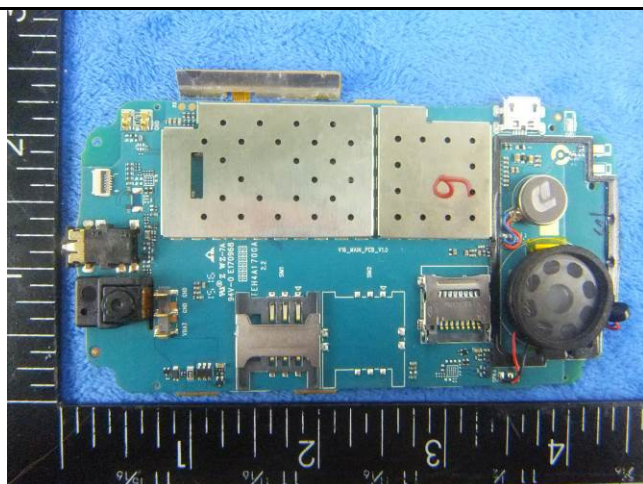


Mainboard With Shielding - Front View

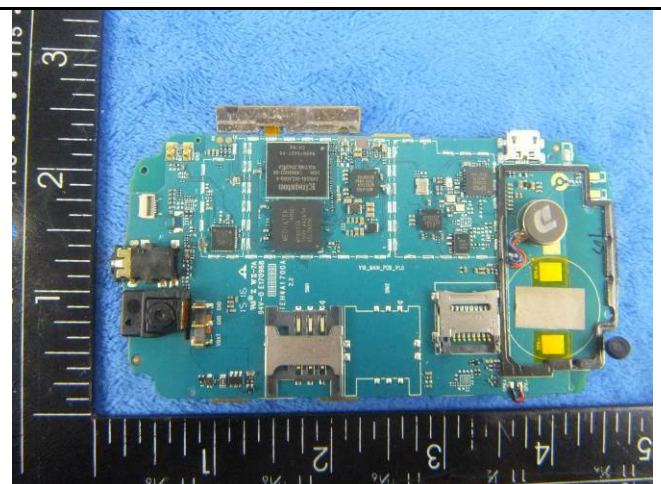


Mainboard Without Shielding - Front View

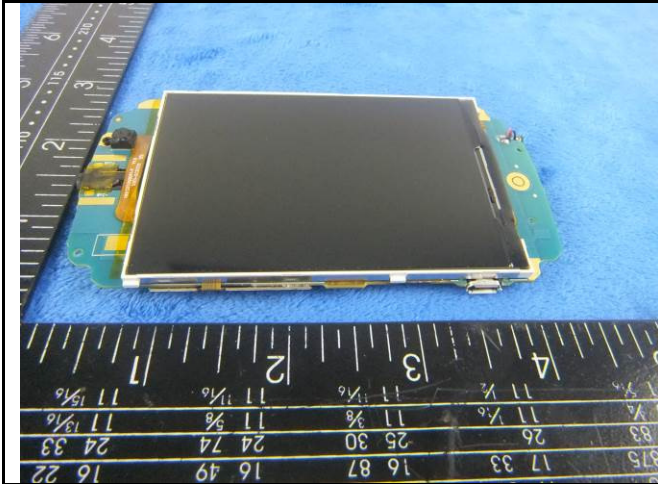


Mainboard Without Shielding - rear View

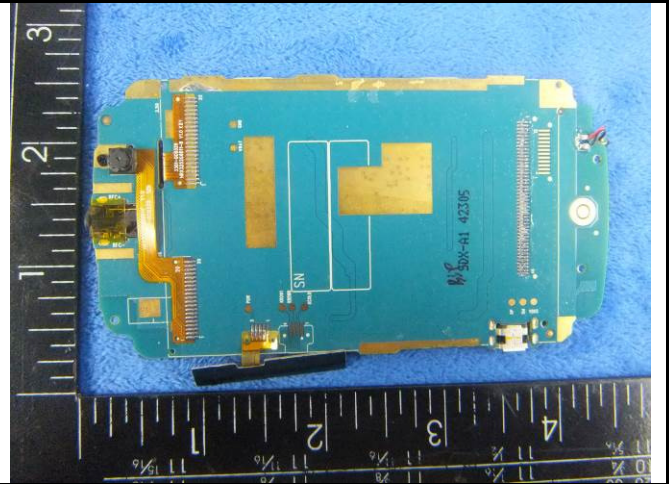

Mainboard Without Shielding - rear View

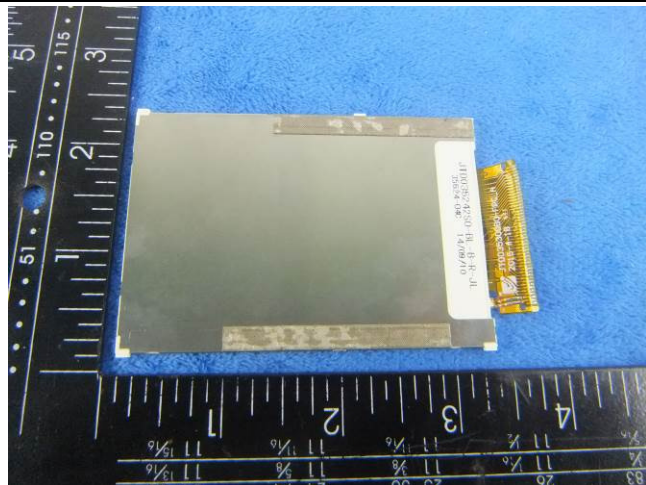


LCD – Rear View

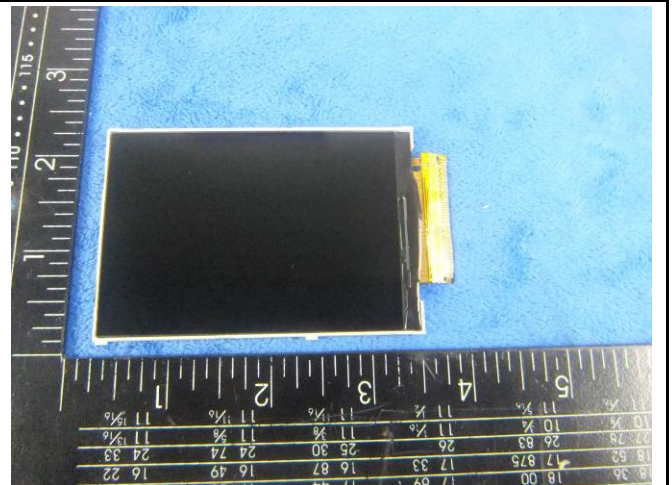

LCD - Front View



WIFI/BT/BLE - Antenna View

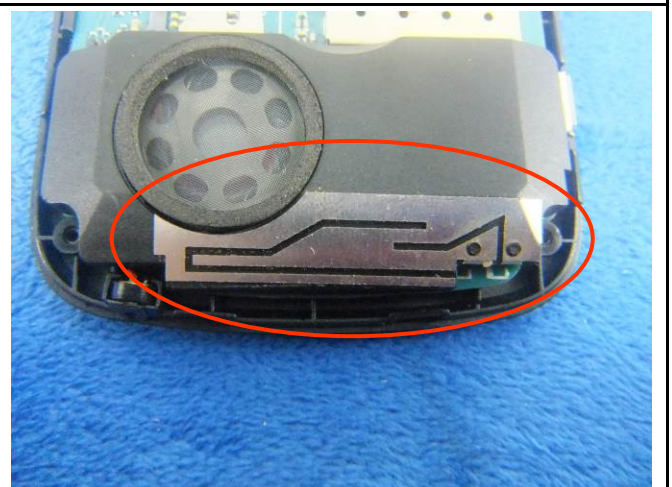

GSM/PCS/UMTS-FDD Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

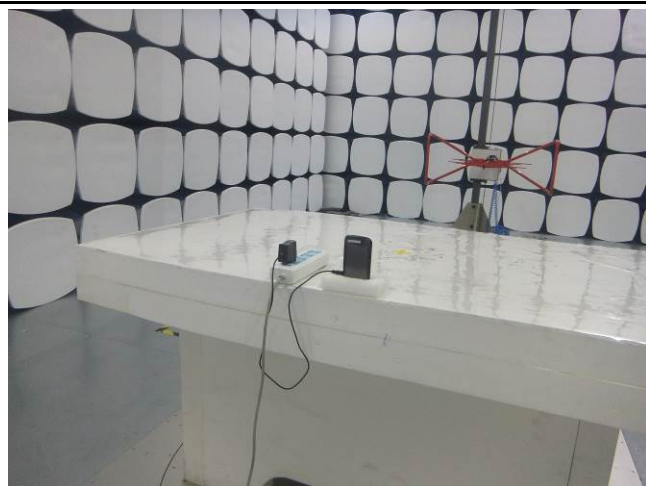

Radiated Spurious Emissions Test Setup Below 1GHz

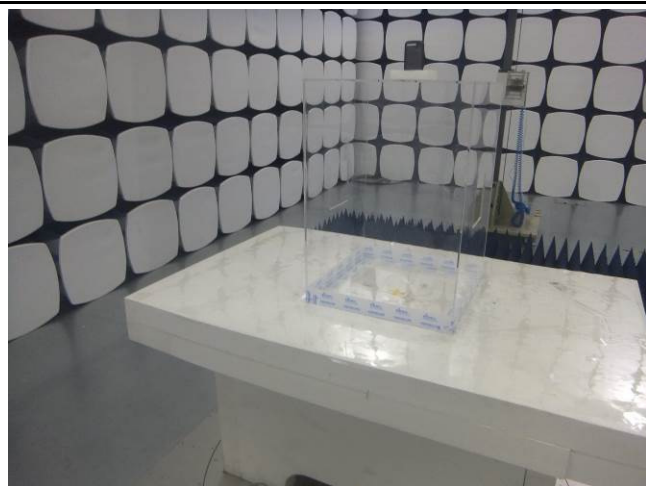


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

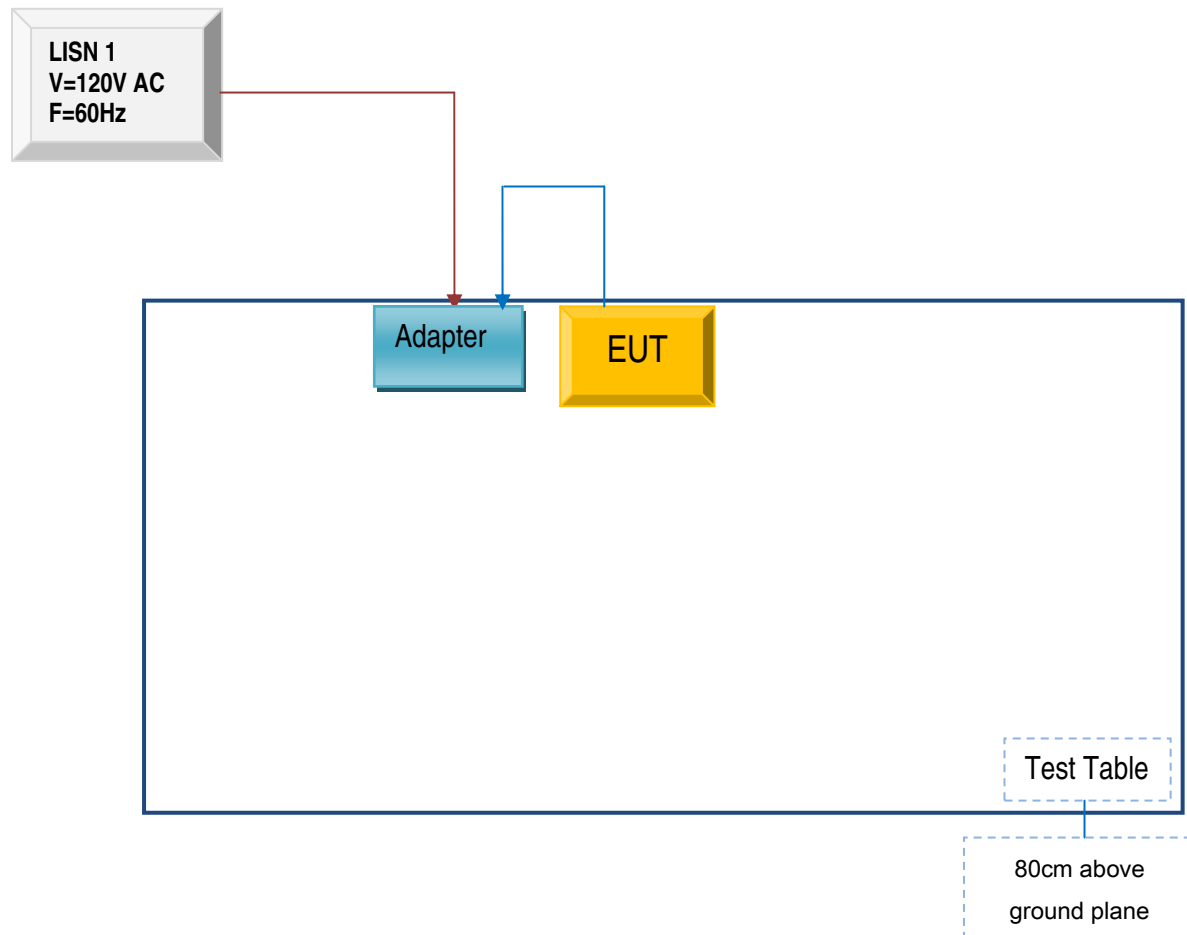

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

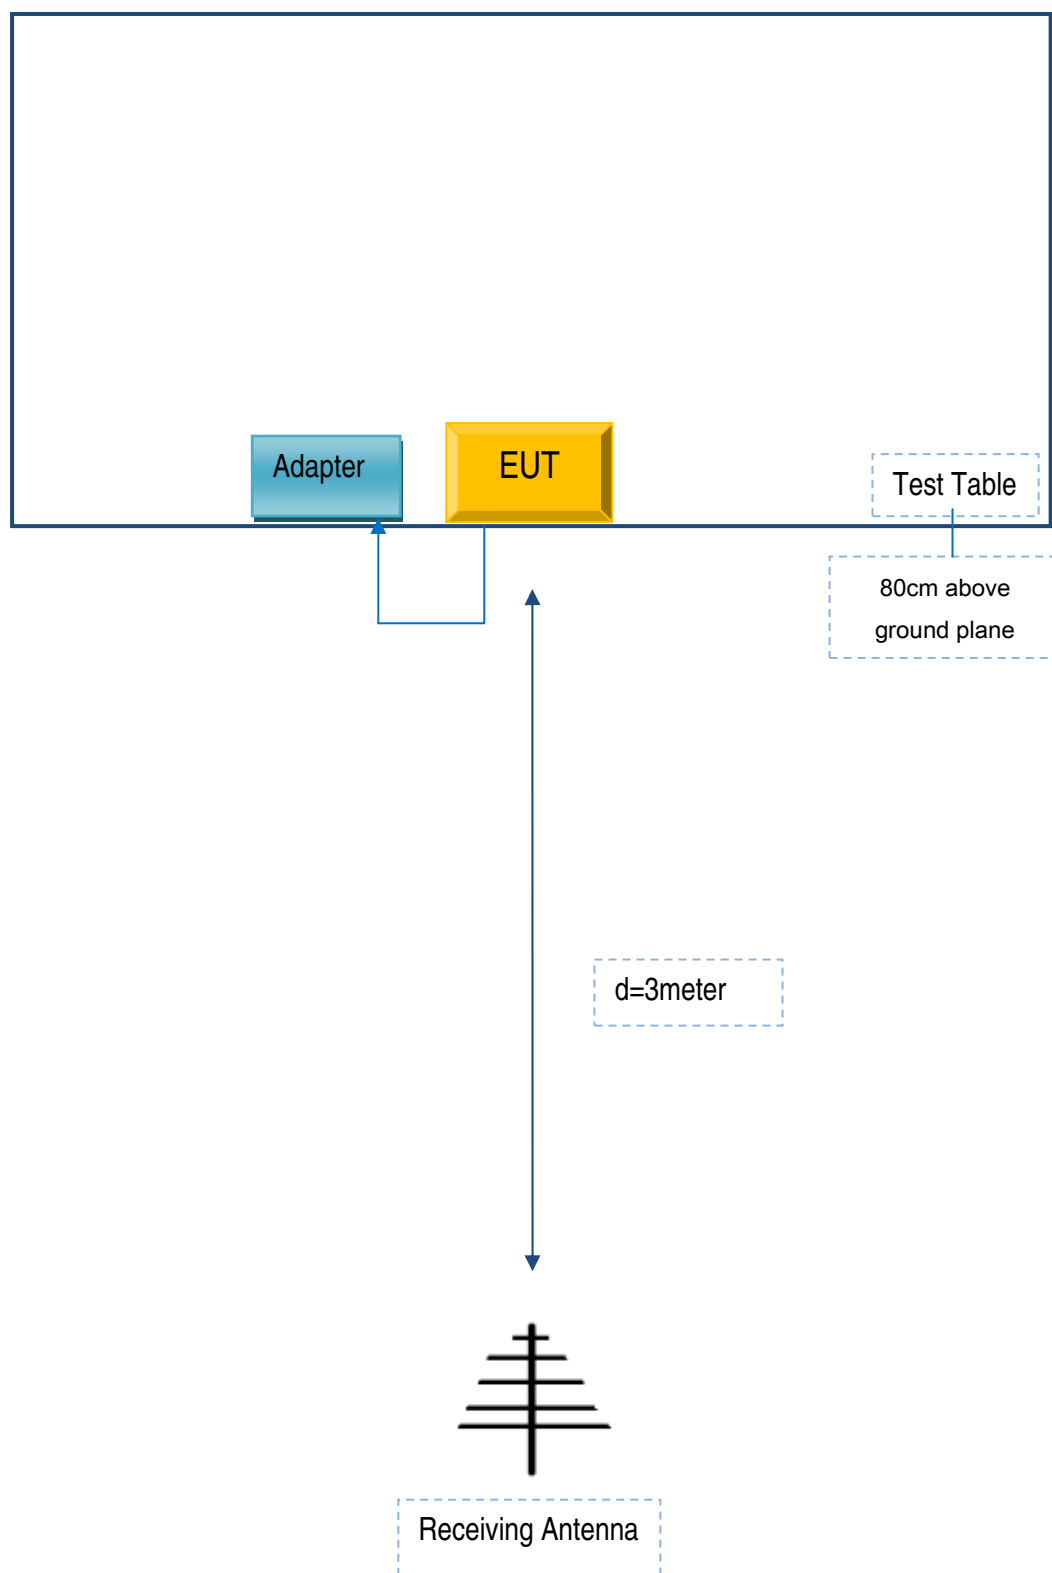

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

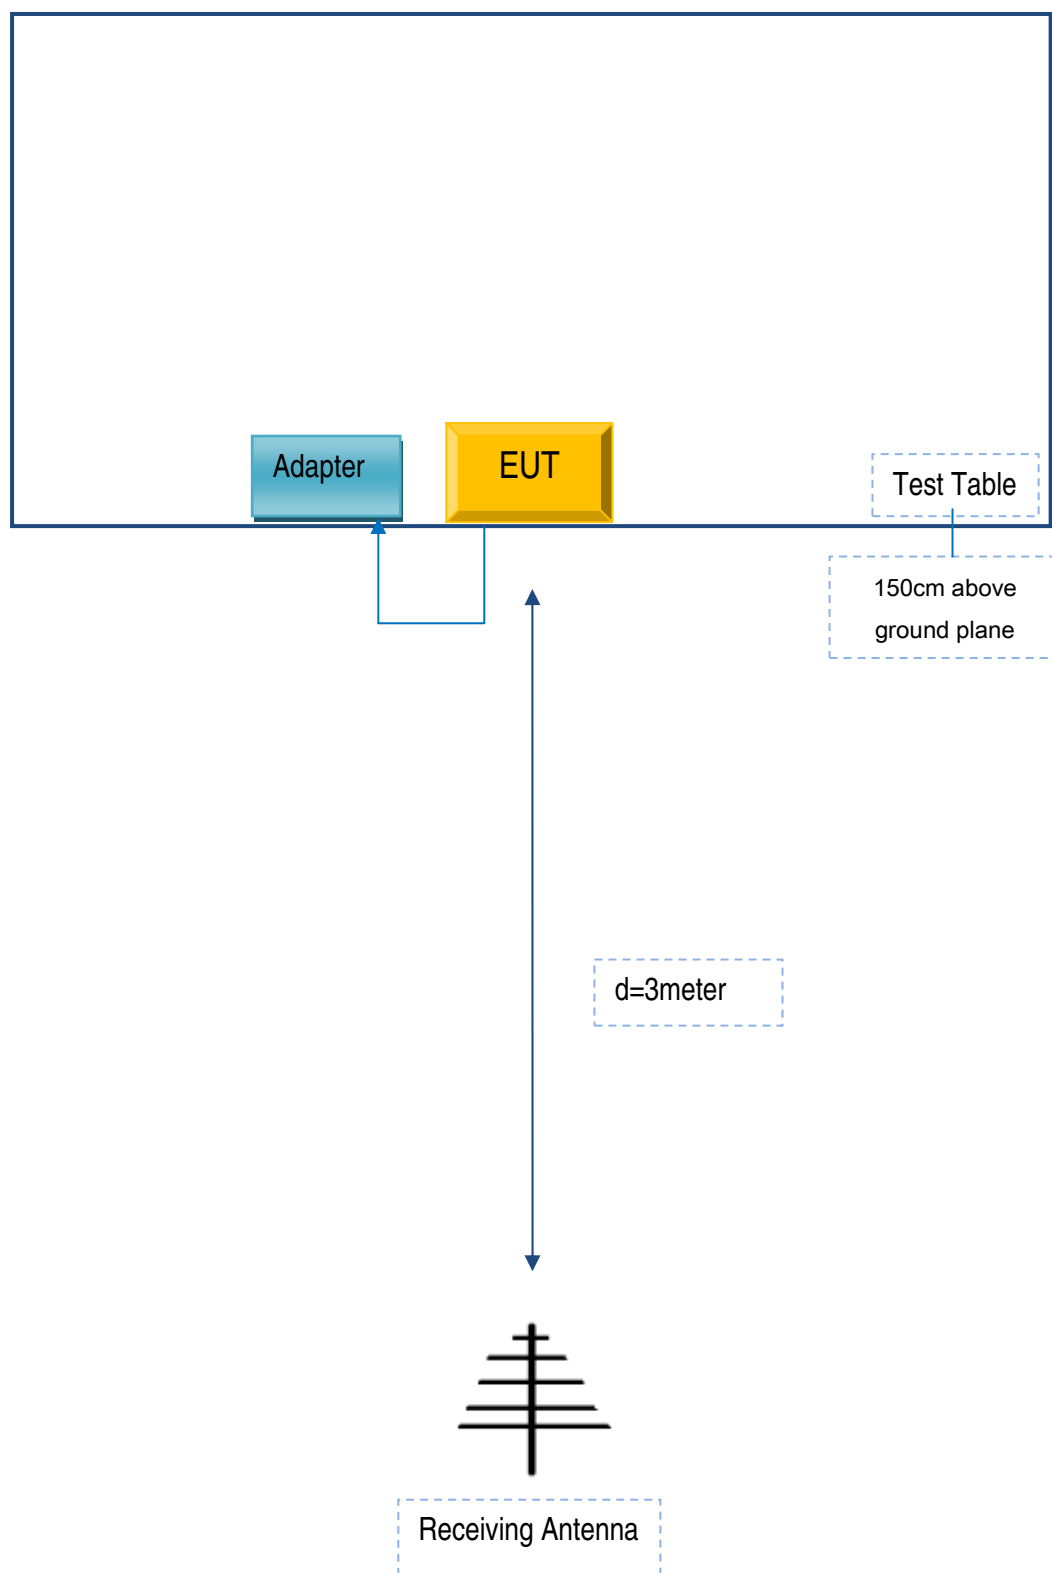

Test Report	16070659-FCC-R2
Page	51 of 53

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Test Report	16070659-FCC-R2
Page	52 of 53

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report	16070659-FCC-R2
Page	53 of 53

Annex E. DECLARATION OF SIMILARITY

N/A