



EMC TEST REPORT



Report No.: 16070720-FCC-E

Supersede Report No.:N/A

Applicant	SMT TELECOMM HK LIMITED	
Product Name	Mobile Phone	
Model No.	X444	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2015, ANSI C63.4: 2014	
Test Date	June 21 to July 11, 2016	
Issue Date	July 12, 2016	
Test Result	☒ Pass ☐ Fail	
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070720-FCC-E
Page	3 of 30

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS	9
6.2 RADIATED EMISSIONS	15
ANNEX A. TEST INSTRUMENT	20
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	21
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	26
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	29
ANNEX E. DECLARATION OF SIMILARITY	30

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070720-FCC-E	NONE	Original	July 12, 2016

2. Customer information

Applicant Name	SMT TELECOMM HK LIMITED
Applicant Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL
Manufacturer	SMT TELECOMM HK LIMITED
Manufacturer Add	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	X444
Serial Model:	N/A
Antenna Gain:	GSM850: -1.5dBi PCS1900: -1.3dBi UMTS-FDD Band V: -1.5dBi UMTS-FDD Band II: -1.2dBi Bluetooth/BLE/WIFI: -2.5dBi
Antenna Type:	PIFA antenna
Input Power:	Adapter: Model:PC444 Input: AC 100-240V~50/60Hz;0.15A Output: DC 5.0V,500mA Battery: Model:BPX444 Spec: 3.7V,1300mAh(4.81Wh) Charge limited voltage: 4.2V
Equipment Category :	JPC
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK

RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX: 1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz WIFI: 802.11b/g/n(20M): 2412-2462 MHz WIFI: 802.11n(40M): 2422-2452 MHz Bluetooth& BLE: 2402-2480 MHz
Number of Channels:	GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V : 102CH UMTS-FDD Band II : 277CH WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH Bluetooth: 79CH BLE: 40CH
Port:	Earphone Port, USB Port
Trade Name :	N/A
FCC ID:	2AIMEX444
Date EUT received:	June 20, 2016
Test Date(s):	June 21 to July 11, 2016

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	22°C
Relative Humidity	58%
Atmospheric Pressure	1025mbar
Test date :	June 25, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.															
		<table><tr><th rowspan="2">Frequency ranges (MHz)</th><th colspan="2">Limit (dBµV)</th></tr><tr><th>QP</th><th>Average</th></tr><tr><td>0.15 ~ 0.5</td><td>66 – 56</td><td>56 – 46</td></tr><tr><td>0.5 ~ 5</td><td>56</td><td>46</td></tr><tr><td>5 ~ 30</td><td>60</td><td>50</td></tr></table>	Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	
Frequency ranges (MHz)	Limit (dBµV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

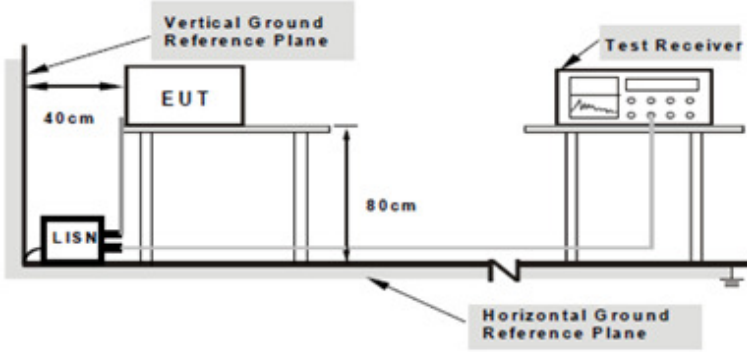Test Setup	 Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.
------------	---

Procedure	- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. - The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains.
-----------	--


Test Report	16070720-FCC-E
Page	10 of 30

	3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	☒ Pass ☐ Fail

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode: USB Mode

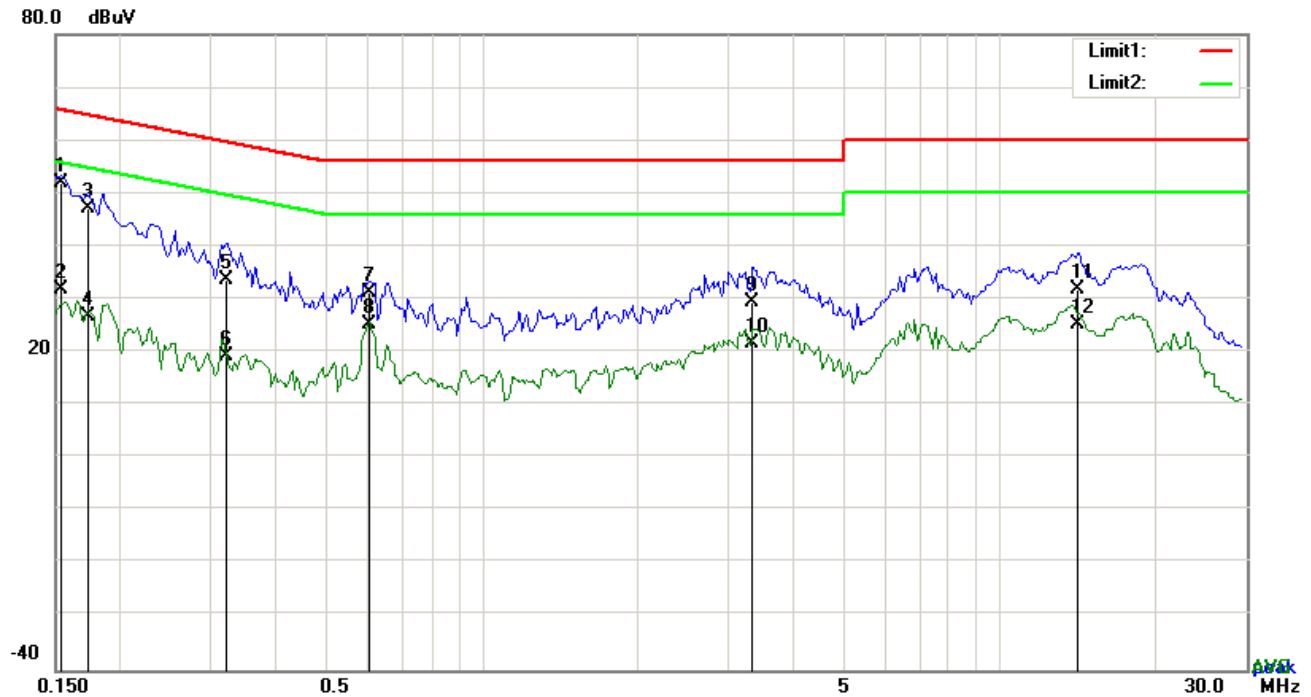


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	L1	0.1539	41.84	QP	10.03	51.87	65.79	-13.92
2	L1	0.1539	21.91	AVG	10.03	31.94	55.79	-23.85
3	L1	0.1734	37.20	QP	10.03	47.23	64.80	-17.57
4	L1	0.1734	16.73	AVG	10.03	26.76	54.80	-28.04
5	L1	0.3216	23.69	QP	10.03	33.72	59.67	-25.95
6	L1	0.3216	9.30	AVG	10.03	19.33	49.67	-30.34
7	L1	0.6063	21.29	QP	10.03	31.32	56.00	-24.68
8	L1	0.6063	15.29	AVG	10.03	25.32	46.00	-20.68
9	L1	3.3432	19.39	QP	10.06	29.45	56.00	-26.55
10	L1	3.3432	11.61	AVG	10.06	21.67	46.00	-24.33
11	L1	14.2047	21.58	QP	10.21	31.79	60.00	-28.21
12	L1	14.2047	15.11	AVG	10.21	25.32	50.00	-24.68

Test Mode: USB Mode

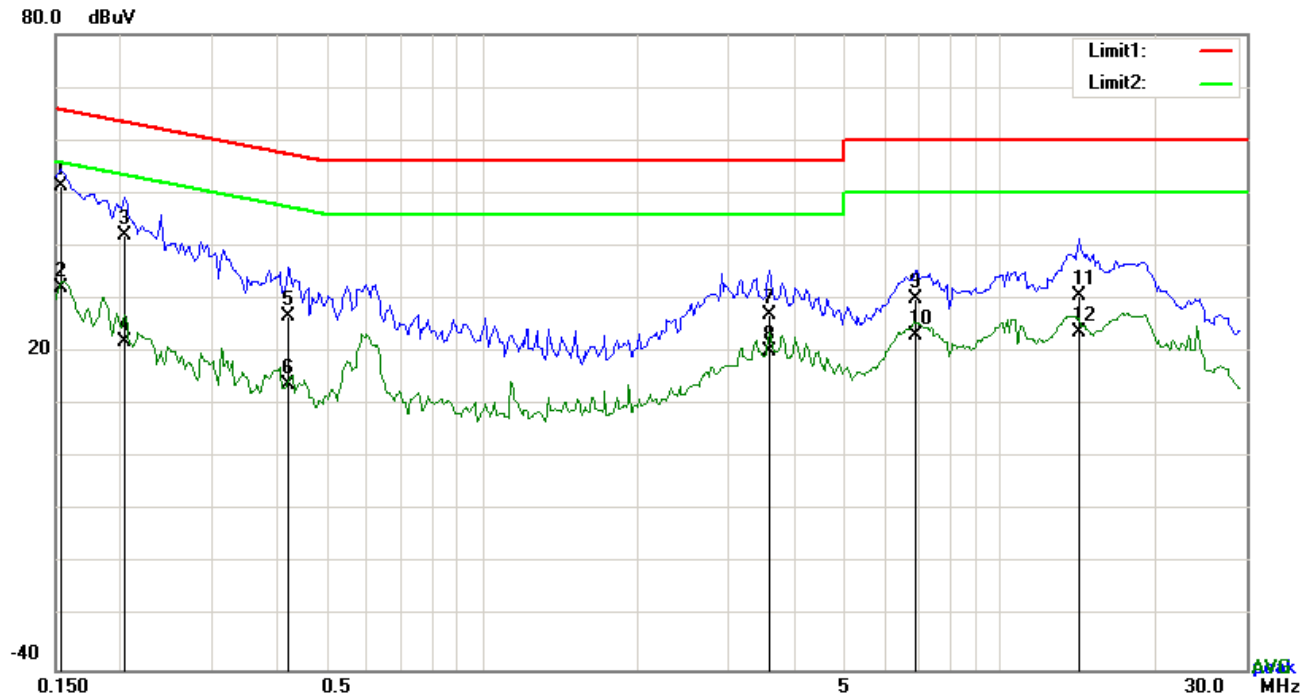


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1539	41.32	QP	10.02	51.34	65.79	-14.45
2	N	0.1539	22.10	AVG	10.02	32.12	55.79	-23.67
3	N	0.2046	32.18	QP	10.02	42.20	63.42	-21.22
4	N	0.2046	11.94	AVG	10.02	21.96	53.42	-31.46
5	N	0.4230	16.76	QP	10.02	26.78	57.39	-30.61
6	N	0.4230	3.81	AVG	10.02	13.83	47.39	-33.56
7	N	3.5850	17.11	QP	10.06	27.17	56.00	-28.83
8	N	3.5850	10.02	AVG	10.06	20.08	46.00	-25.92
9	N	6.9039	20.06	QP	10.10	30.16	60.00	-29.84
10	N	6.9039	12.95	AVG	10.10	23.05	50.00	-26.95
11	N	14.2749	20.55	QP	10.19	30.74	60.00	-29.26
12	N	14.2749	13.71	AVG	10.19	23.90	50.00	-26.10

Test Mode: USB Mode

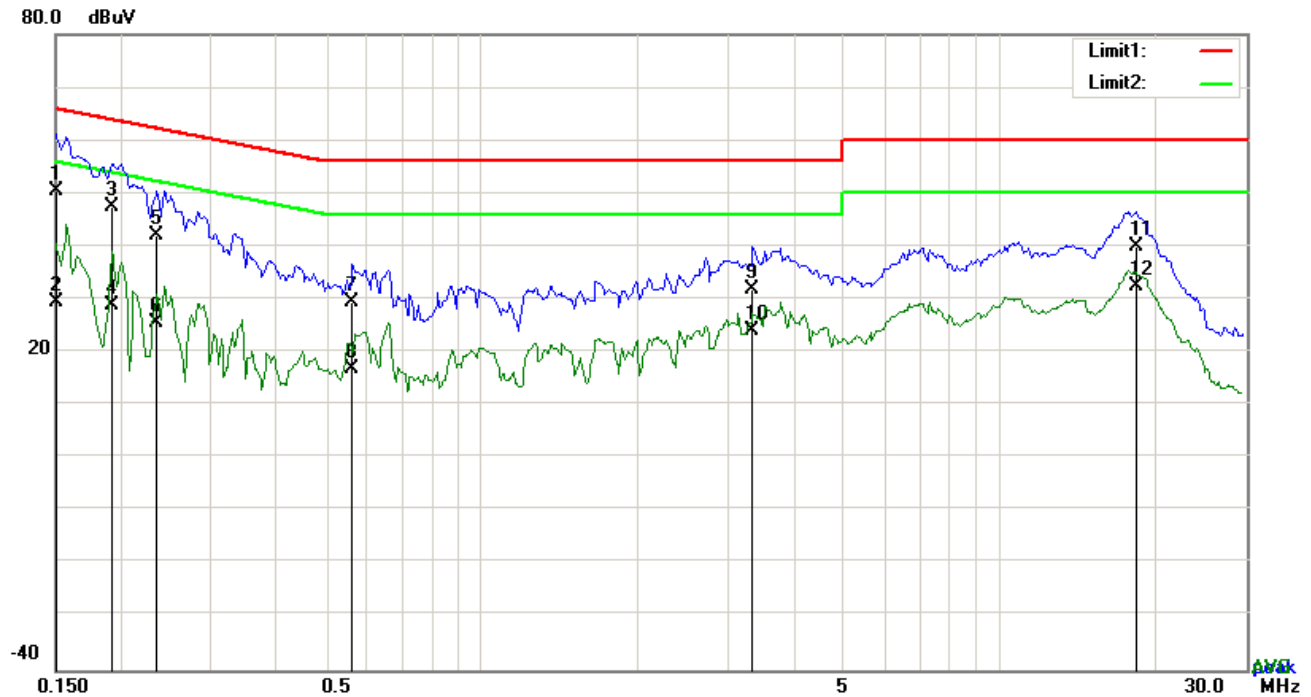


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1500	40.31	QP	10.03	50.34	66.00	-15.66
2	L1	0.1500	19.53	AVG	10.03	29.56	56.00	-26.44
3	L1	0.1929	37.37	QP	10.03	47.40	63.91	-16.51
4	L1	0.1929	18.74	AVG	10.03	28.77	53.91	-25.14
5	L1	0.2358	32.13	QP	10.03	42.16	62.24	-20.08
6	L1	0.2358	15.49	AVG	10.03	25.52	52.24	-26.72
7	L1	0.5634	19.31	QP	10.03	29.34	56.00	-26.66
8	L1	0.5634	6.84	AVG	10.03	16.87	46.00	-29.13
9	L1	3.3393	21.70	QP	10.06	31.76	56.00	-24.24
10	L1	3.3393	14.10	AVG	10.06	24.16	46.00	-21.84
11	L1	18.3621	29.79	QP	10.28	40.07	60.00	-19.93
12	L1	18.3621	22.04	AVG	10.28	32.32	50.00	-17.68

Test Mode: USB Mode

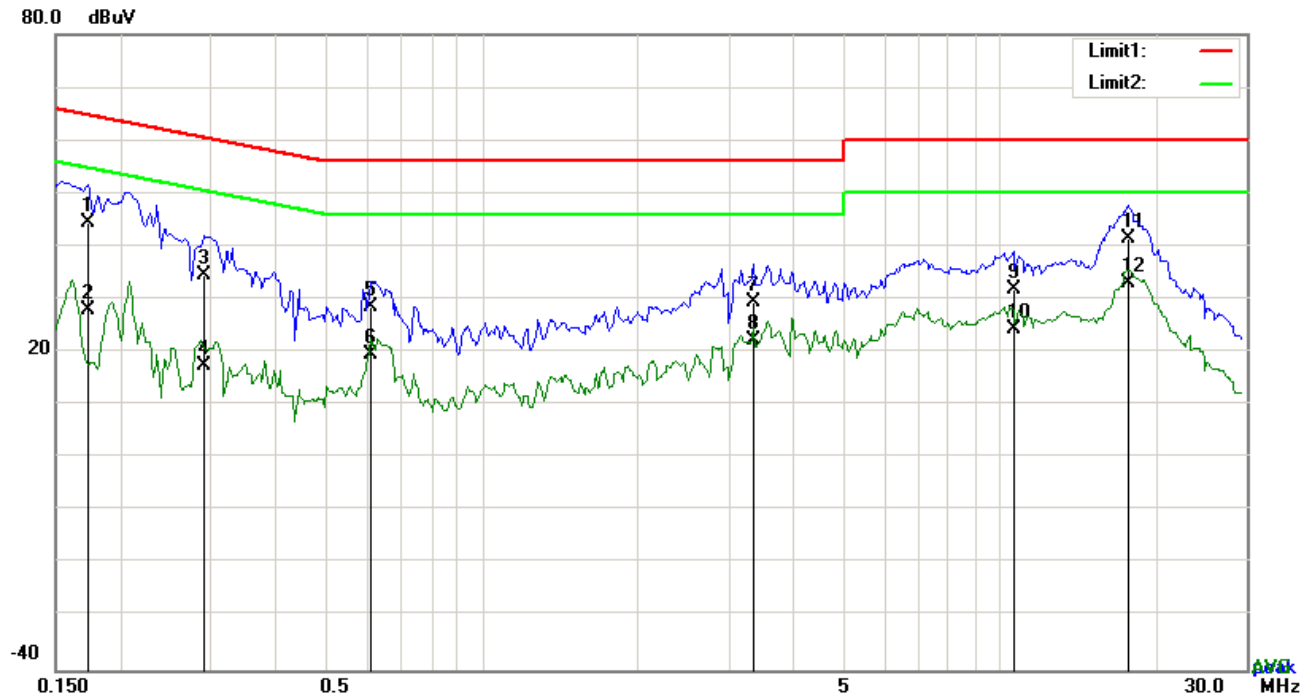

Test Data

Phase Neutral Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1734	34.47	QP	10.02	44.49	64.80	-20.31
2	N	0.1734	17.90	AVG	10.02	27.92	54.80	-26.88
3	N	0.2904	24.54	QP	10.02	34.56	60.51	-25.95
4	N	0.2904	7.57	AVG	10.02	17.59	50.51	-32.92
5	N	0.6102	18.59	QP	10.02	28.61	56.00	-27.39
6	N	0.6102	9.63	AVG	10.02	19.65	46.00	-26.35
7	N	3.3627	19.36	QP	10.05	29.41	56.00	-26.59
8	N	3.3627	12.17	AVG	10.05	22.22	46.00	-23.78
9	N	10.6518	21.71	QP	10.15	31.86	60.00	-28.14
10	N	10.6518	14.07	AVG	10.15	24.22	50.00	-25.78
11	N	17.6913	31.37	QP	10.23	41.60	60.00	-18.40
12	N	17.6913	22.85	AVG	10.23	33.08	50.00	-16.92

6.2 Radiated Emissions

Temperature	24°C
Relative Humidity	53%
Atmospheric Pressure	1001mbar
Test date :	July 01, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable	
47CFR§15.109(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges		
		Frequency range (MHz)		Field Strength (µV/m)
		30 – 88		100
		88 – 216		150
		216 960		200
		Above 960		500

Test Setup	
------------	--

Procedure	- The EUT was switched on and allowed to warm up to its normal operating condition. - The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: - Vertical or horizontal polarization (whichever gave the higher emission level
-----------	--

Test Report	16070720-FCC-E
Page	16 of 30

	over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz. ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	
Result	☒ Pass ☐ Fail


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test Mode : USB Mode

Below 1GHz

80.0 dBuV/m

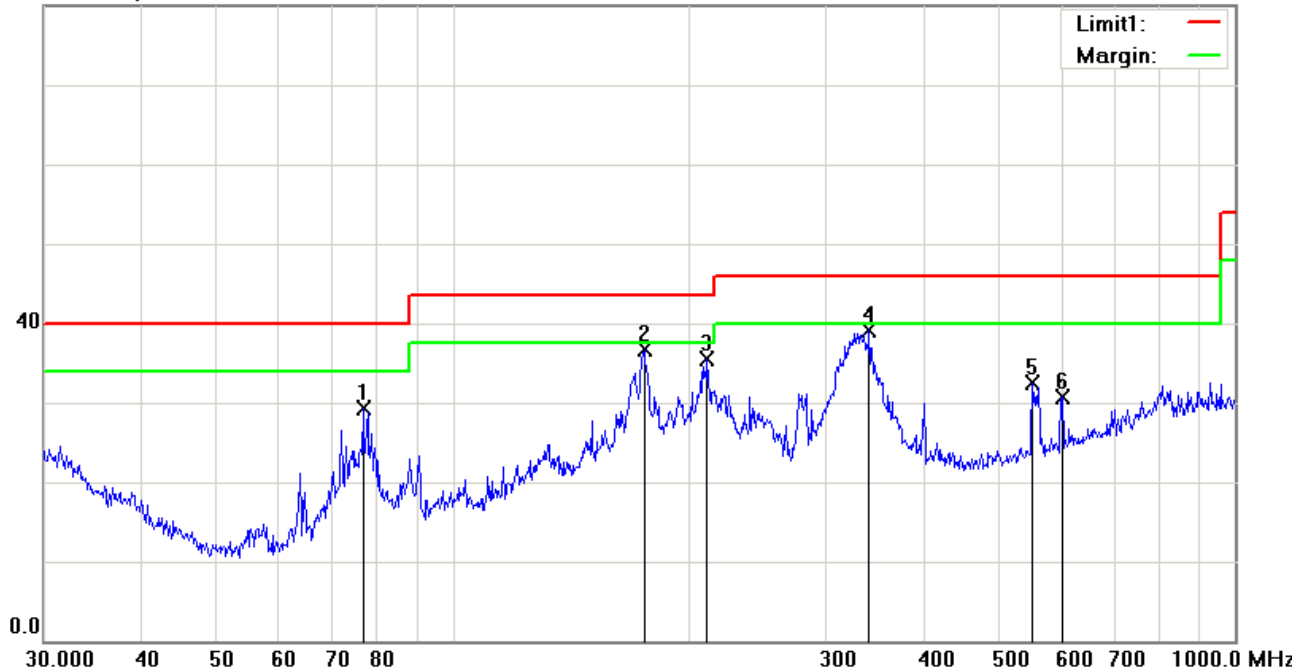


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	H	76.7808	43.12	peak	-13.76	29.36	40.00	-10.64	100	52
2	H	175.6516	46.20	peak	-9.54	36.66	43.50	-6.84	100	187
3	H	211.5265	44.36	peak	-8.84	35.52	43.50	-7.98	100	341
4	H	340.7817	44.75	peak	-5.73	39.02	46.00	-6.98	100	165
5	H	550.9480	33.28	peak	-0.80	32.48	46.00	-13.52	100	112
6	H	601.4265	30.76	peak	0.03	30.79	46.00	-15.21	100	206

Below 1GHz

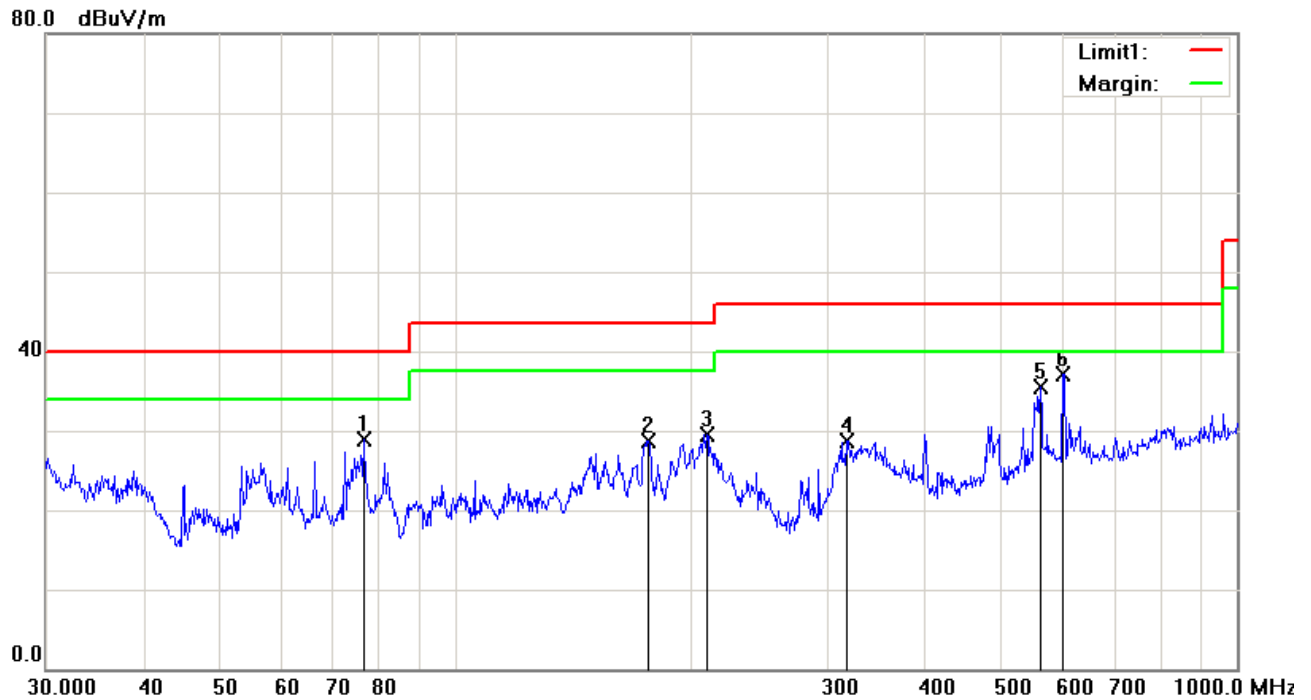

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	V	76.5121	42.66	peak	-13.75	28.91	40.00	-11.09	100	291
2	V	176.8878	38.37	peak	-9.64	28.73	43.50	-14.77	100	169
3	V	210.0482	38.40	peak	-8.83	29.57	43.50	-13.93	100	223
4	V	316.5890	35.20	peak	-6.42	28.78	46.00	-17.22	100	159
5	V	560.6928	36.11	peak	-0.64	35.47	46.00	-10.53	100	101
6	V	599.3213	37.13	peak	0.00	37.13	46.00	-8.87	100	58

Above 1GHz

Frequency (MHz)	Amplitude (dBμV/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Limit (dBμV/m)	Margin (dB)	Detector (PK/AV)
788.63	51.02	52	142	V	-21.22	74	-22.98	PK
10375.33	55.66	101	156	V	-20.53	74	-18.34	PK
1134.52	52.13	97	135	V	-24.03	74	-21.87	PK
848.63	53.25	88	250	H	-23.42	74	-20.75	PK
1243.56	45.44	120	222	H	-21.56	74	-28.56	PK
1703.65	53.52	115	173	H	-21.69	74	-20.48	PK

Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to $5 \times 2472 \text{ MHz} = 12,360 \text{ MHz}$.

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	☒
Line Impedance Stabilization Network	LI-125A	191106	09/25/2015	09/24/2016	☒
Line Impedance Stabilization Network	LI-125A	191107	09/25/2015	09/24/2016	☒
LISN	ISN T800	34373	09/25/2015	09/24/2016	☒
Transient Limiter	LIT-153	531118	09/01/2015	08/31/2016	☒
Radiated Emissions					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	☒
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/01/2015	08/31/2016	☒
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	☒
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	☒
Double Ridge Horn Antenna	AH-118	71259	09/24/2015	09/23/2016	☒


Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Model: PC444
Input: AC100-240V
50/60HZ 0.15A
Output: DC 5.0V-500mA
Made in China



Whole Package View

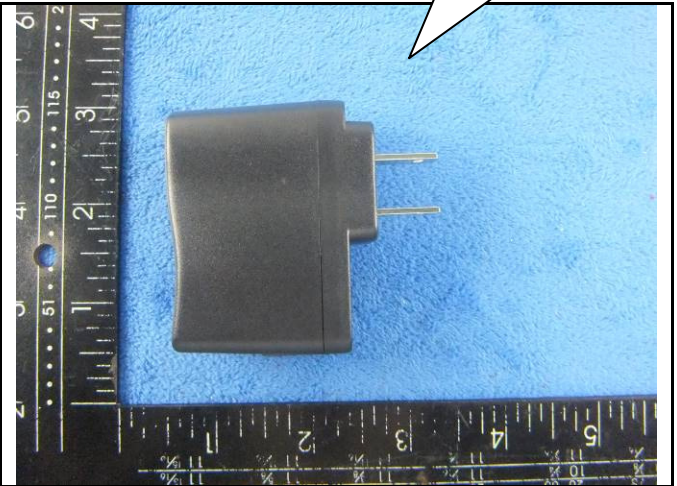

Adapter - Front View



EUT - Front View




EUT - Rear View




EUT - Top View



EUT - Bottom View

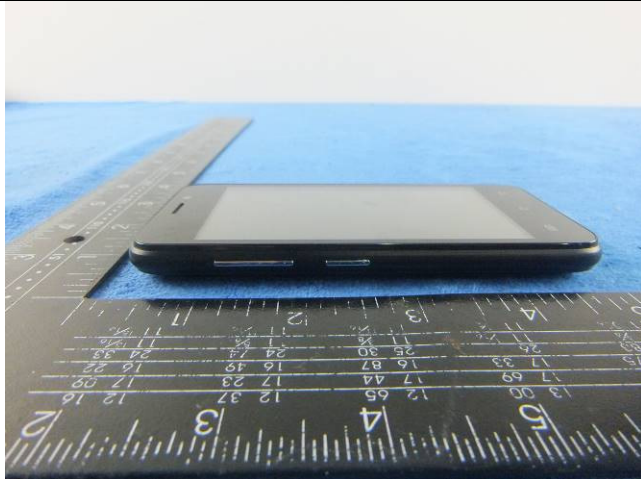

EUT - Left View

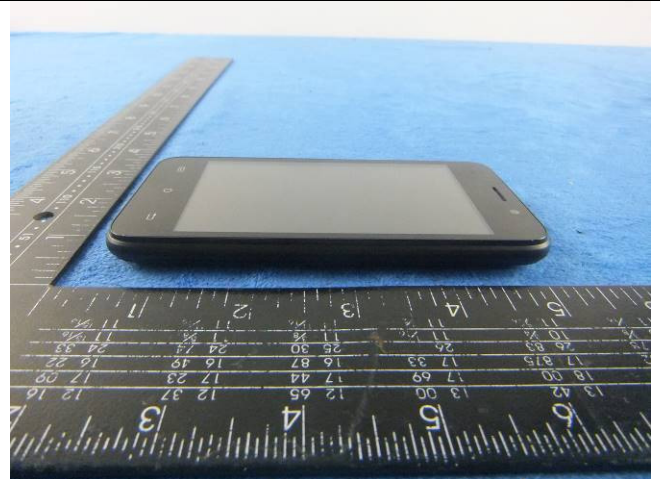

EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo



Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View




Battery - Rear View

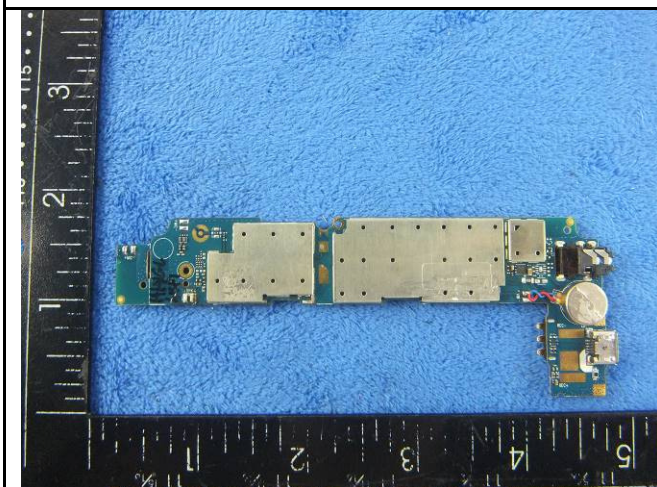

Mainboard with Shielding - Front View

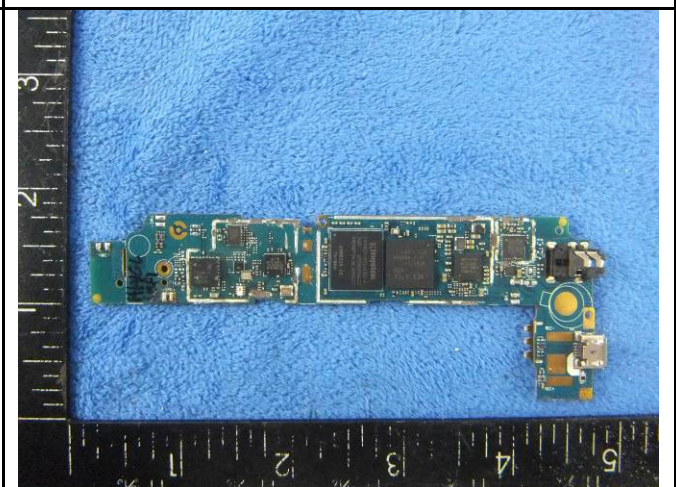

Mainboard without Shielding - Front View

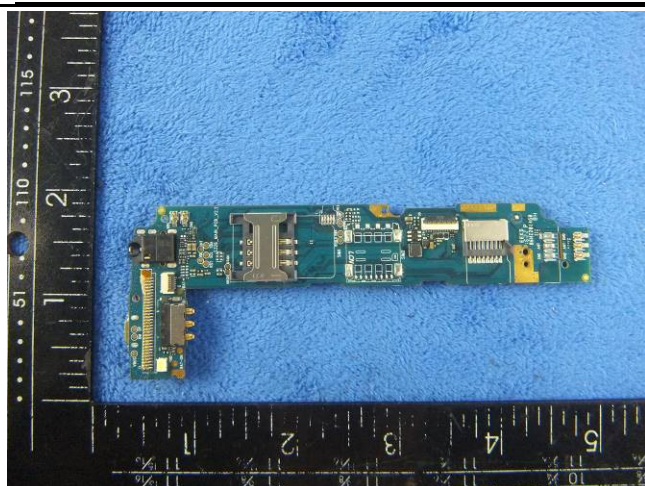

Mainboard - Rear View




LCD - Front View



LCD - Rear View



GSM/PCS/UMTS-FDD Antenna View

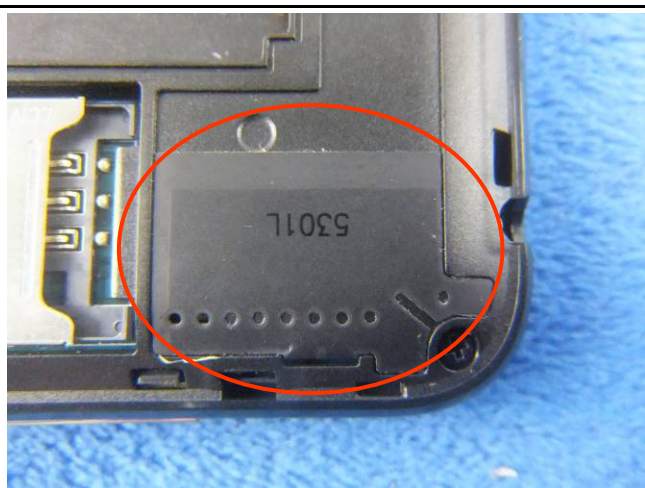

WIFI/BT/BLE - Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

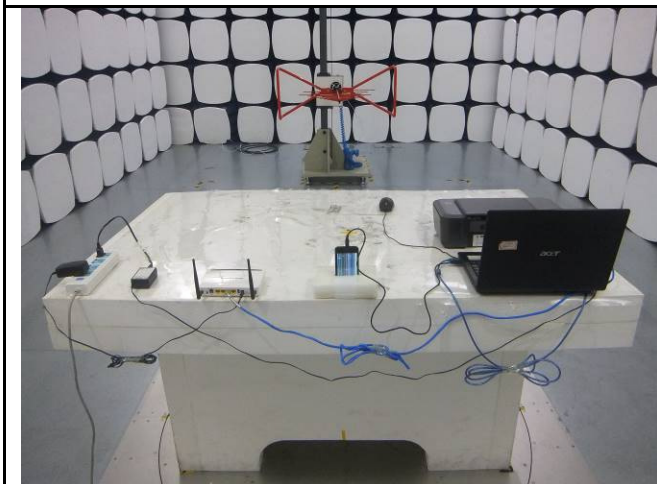

Radiated Emissions Test Setup Below 1GHz

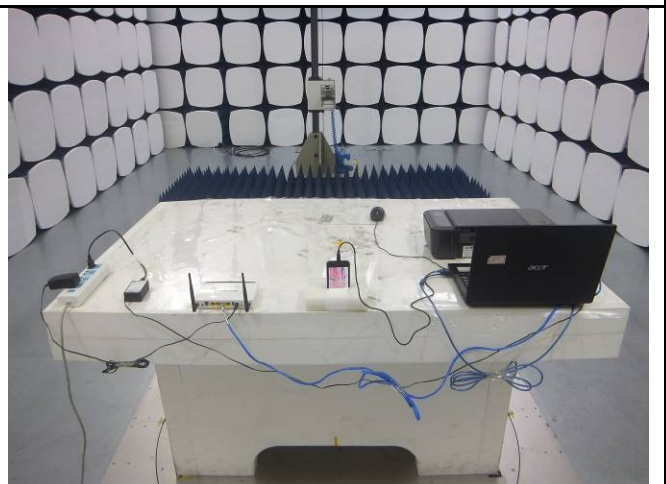


Radiated Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

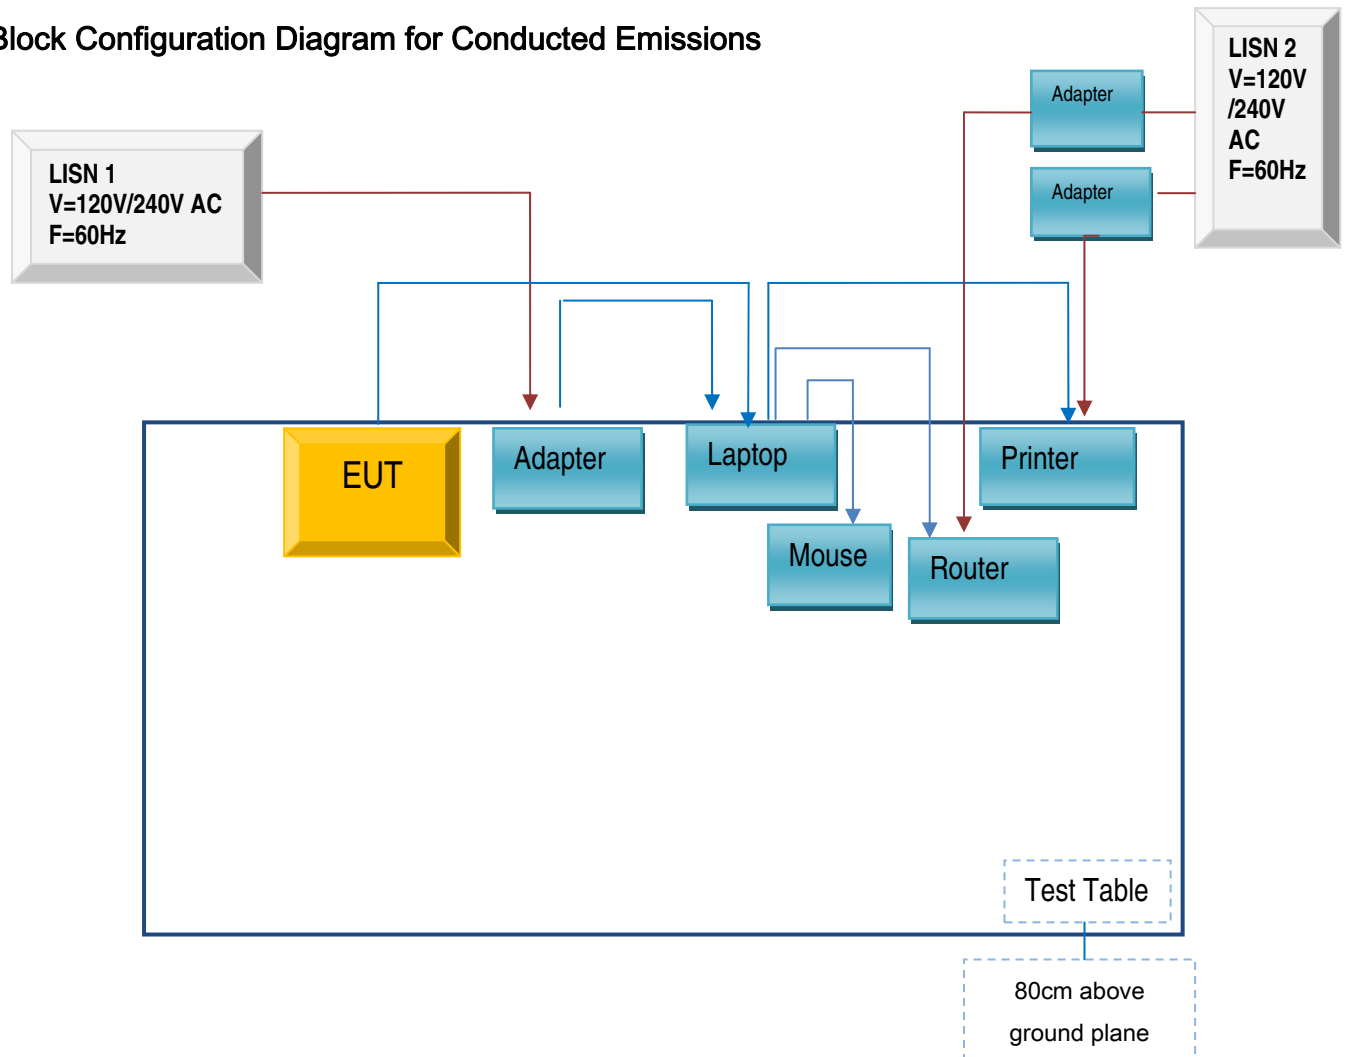

Block Configuration Diagram for Radiated Emissions

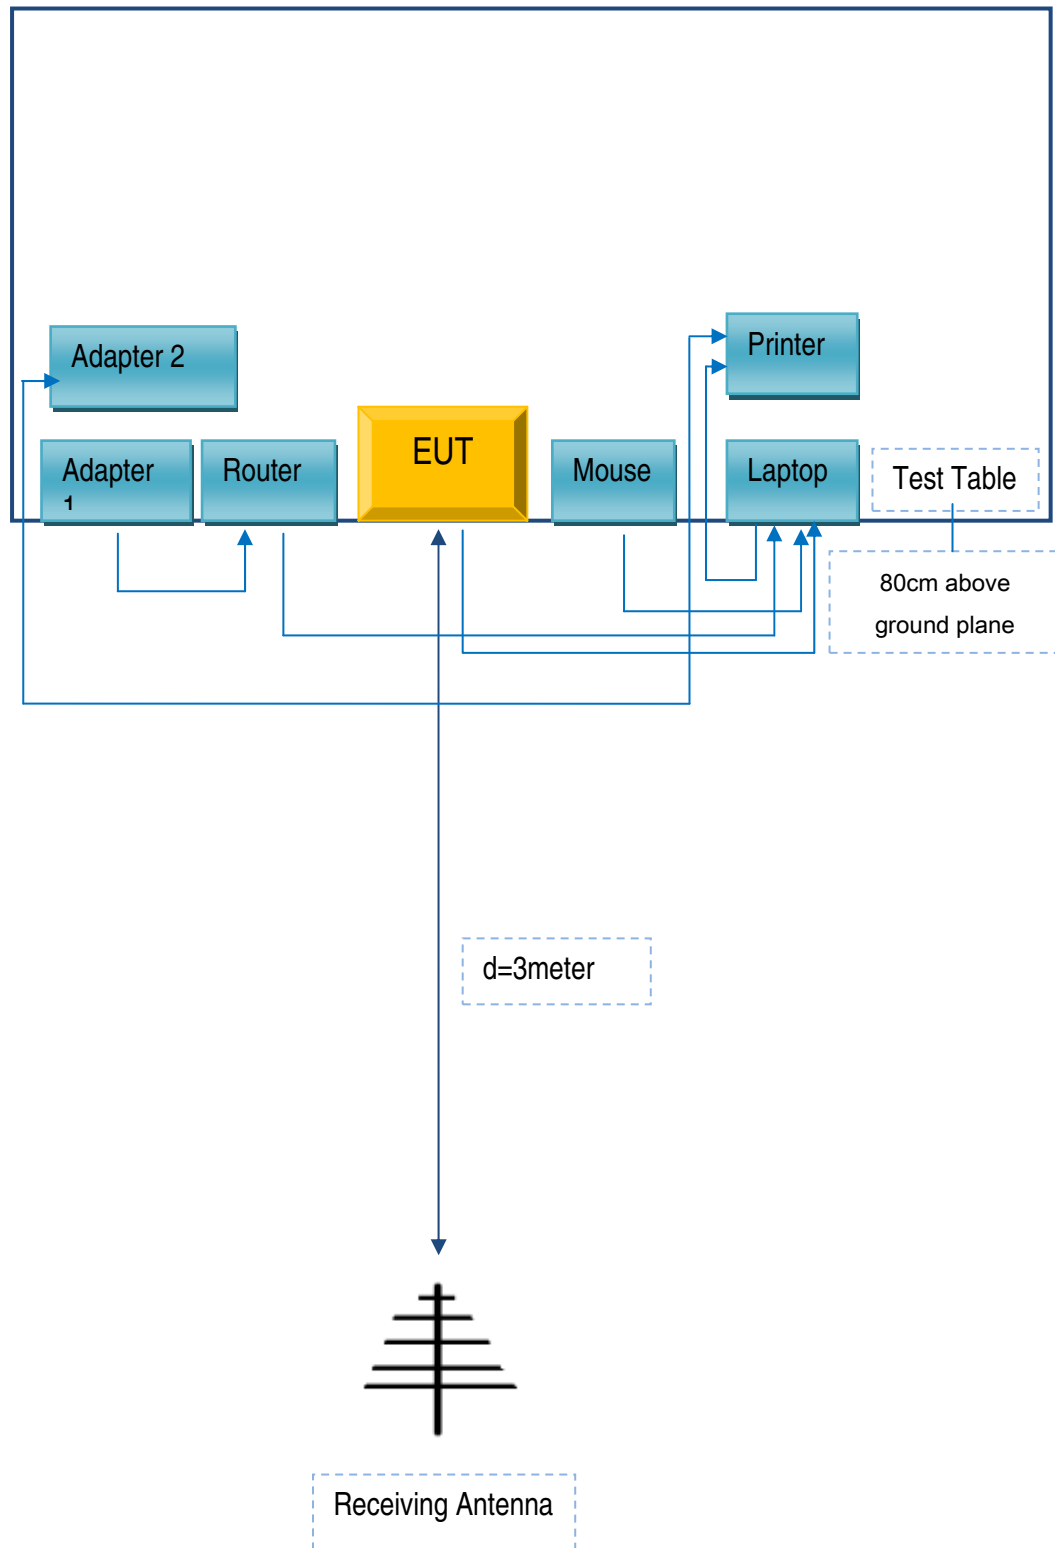

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Laptop	E40	LR-1EHRX
GOLDWEB	Router	R102	1202032094
SMT TELECOMM HK LIMITED	Adapter	PC444	X444
Lenovo	AC Adapter	42T4416	21D9JU
HP	Printer	VCVRA-1003	CN36M19JWX
DELL	Mouse	E100	912NMTUT41481
BULL	Socket	GN-403	GN201203

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	2m	JX120051274
USB Cable	Un-shielding	No	2m	JX110725002
RJ45 Cable	Un-shielding	No	2m	KX156327541
Router Power cable	Un-shielding	No	2m	13274630Z
Printer Power cable	Un-shielding	No	2m	127581031
Power Cable	Un-shielding	No	0.8m	GT211032

Test Report	16070720-FCC-E
Page	29 of 30

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report	16070720-FCC-E
Page	30 of 30

Annex E. DECLARATION OF SIMILARITY

N/A