




Test Report No.:
FCCSZ2024-0019-RF4

RF Test Report

FCC ID : 2AATL-K265B-UU
EUT : WiFi +Bt module
MODEL : K265B-UU
BRAND NAME : *FN-LINK*
APPLICANT : FN-LINK TECHNOLOGY LIMITED
Classification Of Test : N/A

CVC Testing Technology (Shenzhen) Co., Ltd.



Applicant	Name: FN-LINK TECHNOLOGY LIMITED Address: No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan,CHINA		
Manufacturer	Name: FN-LINK TECHNOLOGY LIMITED Address: No.8, Litong Road, Liuyang Economic & Technical Development Zone, Changsha, Hunan,CHINA		
Equipment Under Test	Product Name:WiFi +Bt module Model/Type: K265B-UU Brand Name:  Serial NO.: N/A Sample NO.:3-1		
Date of Receipt.	2024.03.26	Date of Testing	2024.03.26~2024.10.15
Test Specification			Test Result
FCC Part 15, Subpart E, Section 15.407			PASS
Evaluation of Test Result	The equipment under test was found to comply with the requirements of the standards applied.  Issue Date: 2024-10-15		
Compiled by:  <u>Cai Jianyu</u> Name Signature	Reviewed by:  <u>Mo Xianbiao</u> Name Signature	Approved by:  <u>Dong Sanbi</u> Name Signature	
Other Aspects: NONE.			
Abbreviations:OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.

TABLE OF CONTENTS

1 SUMMARY OF TEST RESULTS.....	5
1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
1.2 TEST LOCATION.....	6
2 GENERAL INFORMATION.....	7
2.1 GENERAL PRODUCT INFORMATION	7
2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
2.3 DESCRIPTION OF SUPPORT UNITS	9
3 REQUIREMENTS AND PARAMETERS FOR DFS TEST	10
3.1 APPLICABILITY OF DFS REQUIREMENTS.....	10
3.2 DETECTION THRESHOLD VALUES.....	11
3.3 DFS RESPONSE REQUIREMENT VALUES	11
3.4 PARAMETERS OF DFS TEST SIGNALS	12
4 TEST RESULTS	13
4.1 TEST SETUP OF DFS.....	13
4.2 DFS DETECTION THRESHOLD	14
4.3 CHANNEL LOADING	15
4.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME	16
4.5 NON- OCCUPANCY PERIOD.....	17
5 PHOTOGRAPHS OF THE EUT	19

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCCSZ2024-0019-RF4	Original release	2024-10-15

1 SUMMARY OF TEST RESULTS

STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC 15.407	Channel Move Time	PASS	513.7 ms
FCC 15.407	Channel Closing Transmission Time	PASS	200+5.2ms
FCC 15.407	Non-Occupancy Period and Client Beacon Test	PASS	≥30 min

The EUT has been tested according to the following specifications:

Note: Since the product is client without radar detection function, only Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period and Client Beacon Test are required to be performed

1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial Number	Cal. interval	Cal. Due
Antenna Port Conducted Test					
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 30	104408	1 year	2025.5.22
#4Shielding room	MORI	443	N/A	3 year	2026.5.16
Wideband radio communication tester	Rohde&Schwarz	CMW 500	168588	1 year	2025.5.24
Analog signal Generator(100kHz~12.75GHz)	Rohde&Schwarz	SMB 100A	181882	1 year	2025.4.27
Vector signal Generator(8kHz~6GHz)	Rohde&Schwarz	SMBV 100B	101846	1 year	2025.4.28
DC power supply	Rohde&Schwarz	HMC8041-G	101203	1 year	2025.4.29
RF control unit(2/3/4/5G)	Tonscend	JS0806-1	CS0300027	1 year	2025.4.28
Automatic filter bank(2/3/4G)	Tonscend	JS0806-F	CS0300028	1 year	2025.4.28
Automatic filter bank(5G)	Tonscend	JS0806-F-5G NR	N/A	1 year	2025.4.28
Temperature and humidity meter	UNI-T	A10T	C193561464	1 year	2025.4.27
Radio Communication Analyzer	Anritsu	MT8821C	6272374548	1 year	2025.1.09
Constant temperature humidity chamber	TEELONG	TL-HW-225B	20220518-01	1 year	2025.5.24
Radio Communication Test Station	Anritsu	MT8000A	6272354169	1 year	2025.1.09
Radiation Spurious(Above 1GHz)					/
Signal&Spectrum Analyzer	Rohde&Schwarz	FSV 40	101898	1 year	2025.4.28
EMI Test Receiver	Rohde&Schwarz	ESR3	102693	1 year	2025.5.24
Antenna(30MHz~1001MHz)	SCHWARZBECK	VULB 9168	1133	1 year	2025.2.21
Horn antenna(1GHz-18GHz)	ETS	3117	227611	1 year	2025.3.24
Horn antenna(18GHz-40GHz)	QMS	QMS-00880	22051	1 year	2025.3.24
3m anechoic chamber	MORI	966	CS0300011	3 year	2026.5.18
Filter group(RSE-BT/WiFi)	Rohde&Schwarz	WiFi /BT Variant 1	100820	1 year	2025.4.28
Filter group(RSE-Cellular)	Rohde&Schwarz	Cellular Variant 1	100768	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100799	1 year	2025.4.28
Preamplifier(1GHz-18GHz)	Rohde&Schwarz	SCU-18F	100801	1 year	2025.4.28
Preamplifier(18Gz-40GHz)	Rohde&Schwarz	SCU-40A	101209	1 year	2025.4.28
#2 control room	MORI	433	CS0200059	3 year	2026.5.16
Temperature and humidity meter	/	C193561517	C193561517	1 year	2025.4.27

1.2 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

CABID:CN0137

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong,China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

FCC(Test firm designation number: CN1363)

IC(Test firm CAB identifier number: CN0137)

CNAS(Test firm designation number: L16091)

2 GENERAL INFORMATION

PRODUCT	WiFi +Bt module
BRAND	
TEST MODEL	K265B-UU
ADDITIONAL MODEL	N/A
POWER SUPPLY	DC 3.3V
OPERATING FREQUENCY	5260MHz ~ 5320MHz, 5500MHz ~ 5700MHz
ANTENNA TYPE (Note 4)	ANT 1: FPC Antenna with 3.37dBi gain Ant 2: FPC Antenna with 3.37dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A
DEVICE TYPE	☐ Master ☒ Client without radar detection ☐ Client with radar detection
Note: - For more detailed features description, please refer to the manufacturer's specifications or the User's Manual. - For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report. - EUT photo refer to report (Report NO.: FCCSZ2024-0019-EUT). - Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.	

2.1 GENERAL PRODUCT INFORMATION

2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

BANDWIDTH	CHAIN	CHANNEL	TEST TYPE AND LIMIT
20MHz	CHAIN1+CHAIN2	CH100	Channel Move Time
			Channel Closing Transmission Time
			Non-Occupancy Period and Client Beacon Test

This test was investigated for different bandwidth (20MHz, 40MHz,80MHz). The following plots done on 20MHz was worst case.

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand	Model No.	FCC ID	SN	Supplied by	
1	Wireless router	LINKSYS	WRT3200ACM	Q87-WRT3200A CM	19811609801 281	Lab	
1	Laptop	Lenovo	K4e-ARE120	/	MP20kshe	Lab	
Support Cable							
NO	Description	Quantity (Number)	Length (m)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

3 REQUIREMENTS AND PARAMETERS FOR DFS TEST

3.1 APPLICABILITY OF DFS REQUIREMENTS

APPLICABILITY OF DFS REQUIREMENTS PRIOR TO USE A CHANNEL

REQUIREMENT	OPERATIONAL MODE		
	MASTER	CLIENT WITHOUT RADAR DETECTION	CLIENT WITH RADAR DETECTION
Non-Occupancy Period	✓	✓	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

APPLICABILITY OF DFS REQUIREMENTS DURING NORMAL OPERATION

REQUIREMENT	OPERATIONAL MODE		
	MASTER	CLIENT WITHOUT RADAR DETECTION	CLIENT WITH RADAR DETECTION
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

3.2 DETECTION THRESHOLD VALUES

DFS DETECTION THRESHOLDS FOR MASTER DEVICES AND CLIENT DEVICES WITH RADAR DETECTION

MAXIMUM TRANSMIT POWER	VALUE (SEE Note 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

3.3 DFS RESPONSE REQUIREMENT VALUES

PARAMETER	VALUE
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	100% of the UNII transmission power bandwidth. See Note 3.
Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows: • For the Short Pulse Radar Test Signals this instant is the end of the Burst. • For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated. • For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

3.4 PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A Test B	$\text{Roundup} \left\{ \begin{array}{l} \left(\frac{1}{360} \right)^* \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

LONG PULSE RADAR TEST WAVEFORM


RADAR TYPE	PULSE WIDTH (μsec)	CHIRP WIDTH (MHz)	PRI (μsec)	NUMBER OF PULSES PER BURST	NUMBER OF BURSTS	MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION	MINIMUM NUMBER OF TRIALS
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

FREQUENCY HOPPING RADAR TEST WAVEFORM


RADAR TYPE	PULSE WIDTH (μsec)	PRI (μsec)	PULSES PER HOP	HOPPING RATE (kHz)	HOPPING SEQUENCE LENGTH (msec)	MINIMUM PERCENTAGE OF SUCCESSFUL DETECTION	MINIMUM NUMBER OF TRIALS
6	1	333	9	0.333	300	70%	30

4 TEST RESULTS

4.1 TEST SETUP OF DFS

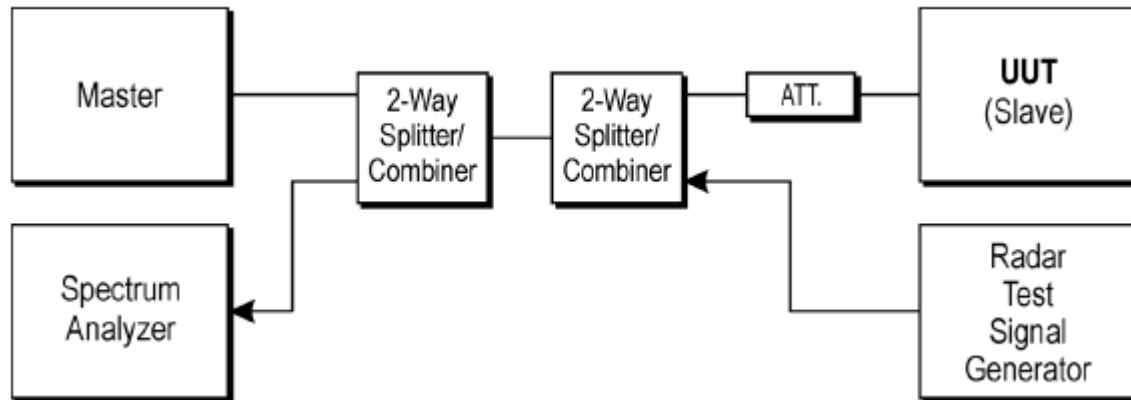


4.2 DFS DETECTION THRESHOLD

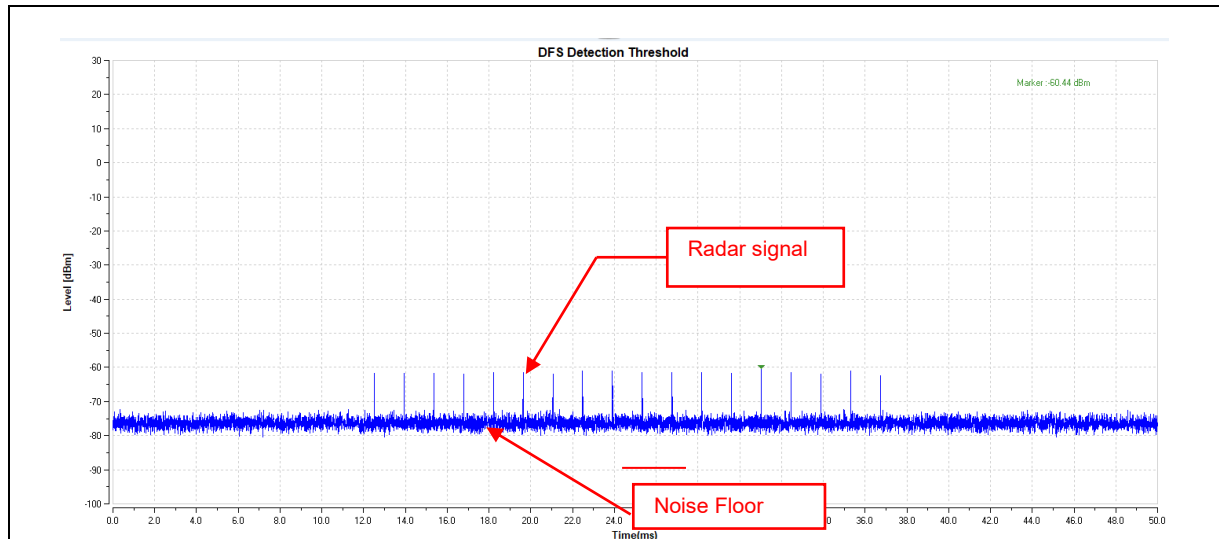

4.3 CHANNEL LOADING


The radar signal was the same as transmitted channels, and injected into the antenna port of AP (master) with radar signal, measured the channel shutdown. The slave transmitted the test data to master, the transmitted duty cycle is 36.2%.

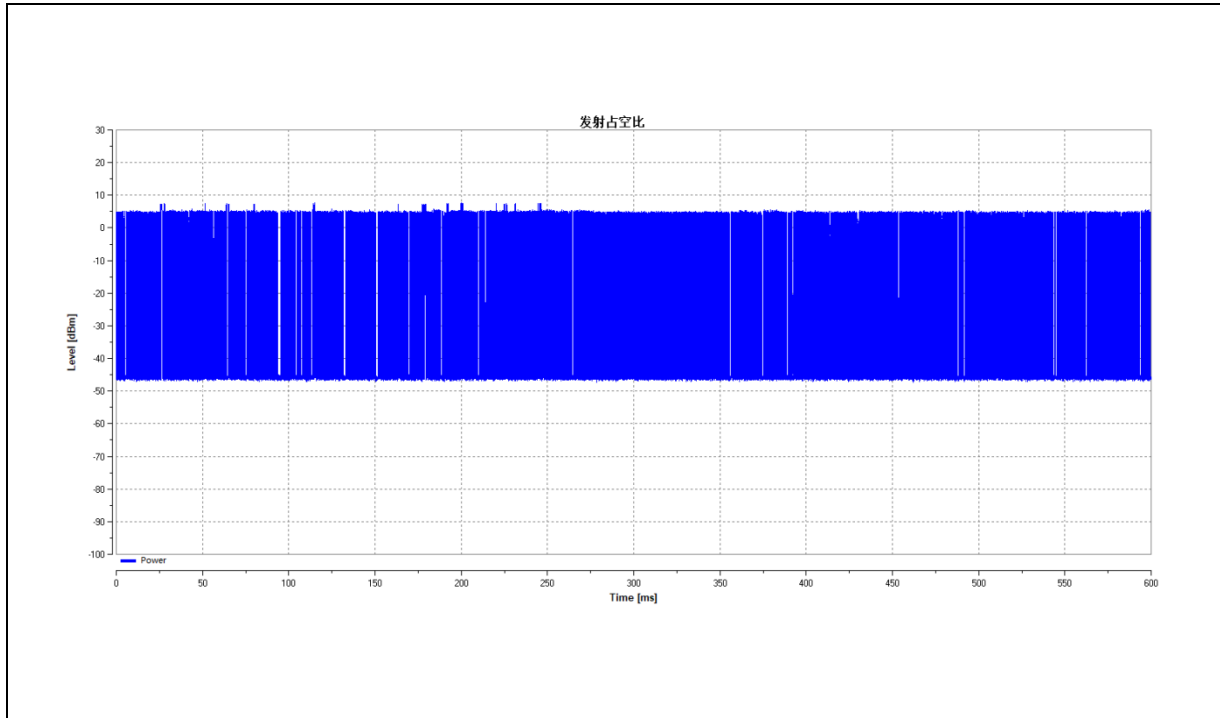

Note: Traffic signal: from slave transmit to master.


4.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME

Radar Signal 0

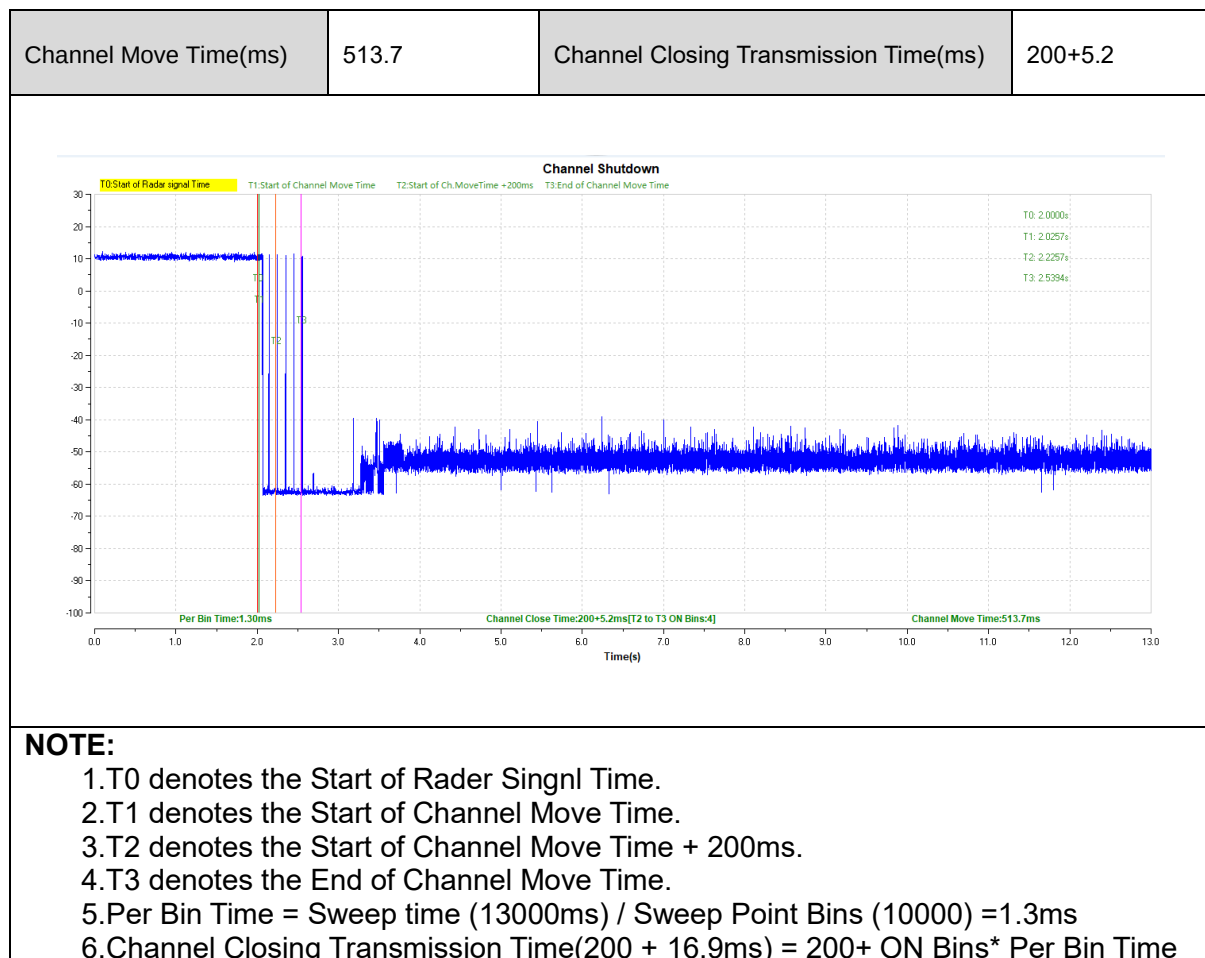

4.5 NON- OCCUPANCY PERIOD


- 1) Test results demonstrating an associated client link is established with the master on a test frequency
- 2) The client and DFS-certified master device are associated, and system testing will be performed with channel-loading for a non-occupancy period test.
- 3). The device transmits one type of radar as specified in the DFS Order.
- 4) The test frequency has been monitored to ensure no transmission of any type has occurred for 30 minutes;
Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear;
- 5)An analyzer plot that contains a single 30-minute sweep on the original test frequency.

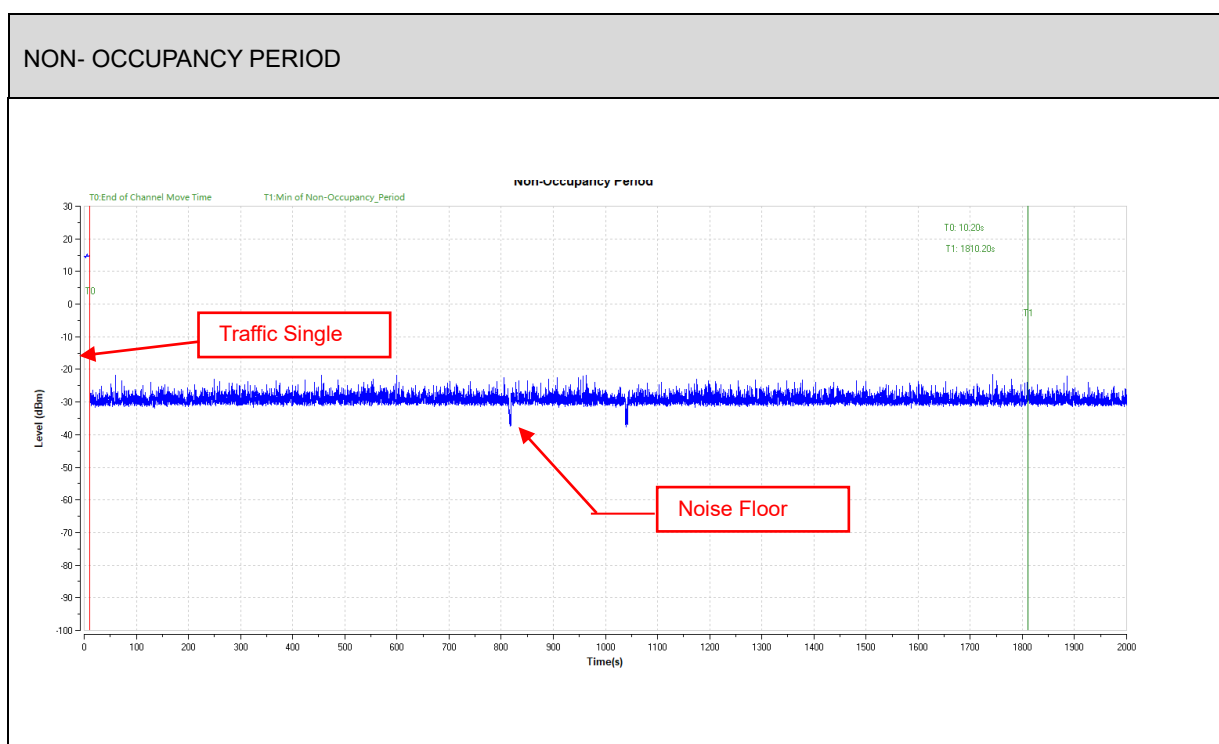

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up

NON-ASSOCIATED TEST

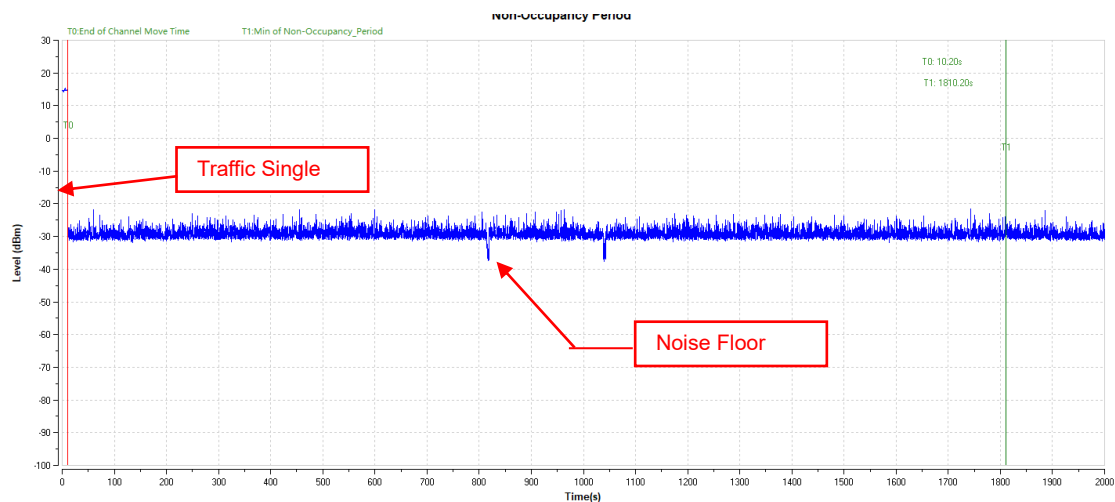

5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----

Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110 Tel: 0755-23763060-8805

Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>