


|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5755MHz               | Polarization | Horizontal |

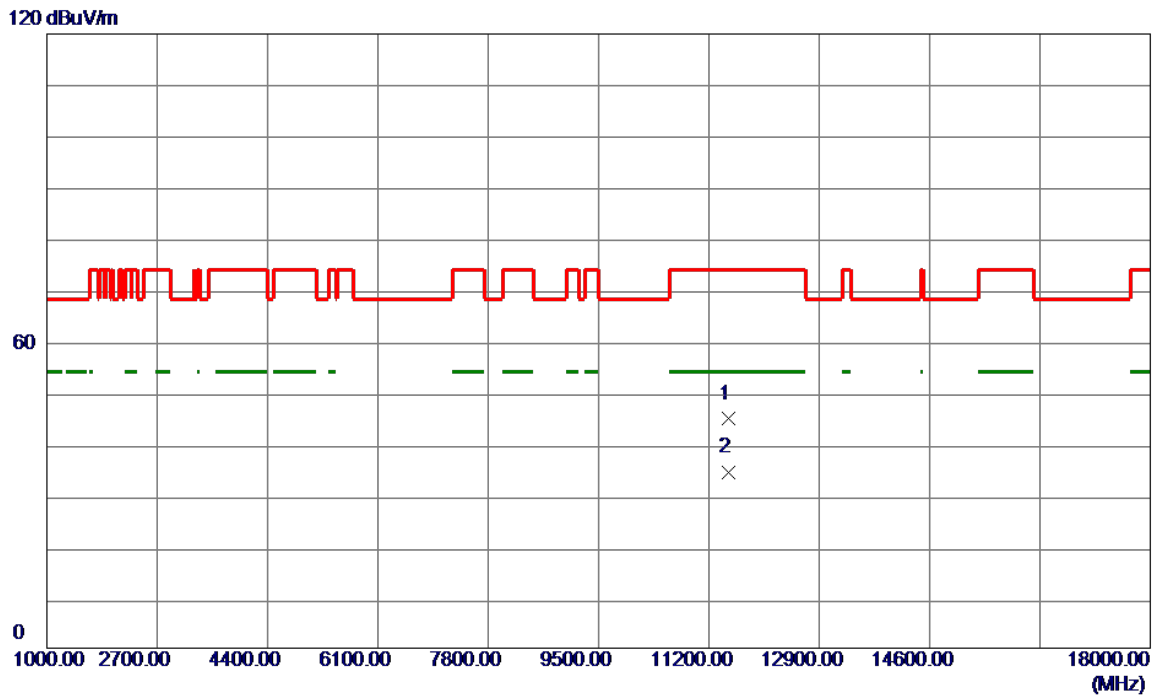


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11510.0000   | 43.94                      | 0.83                    | 44.77                     | 74.00           | -29.23       | Peak     |         |
| 2 * | 11510.0000   | 33.61                      | 0.83                    | 34.44                     | 54.00           | -19.56       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5795MHz               | Polarization | Vertical   |

120 dBuV/m

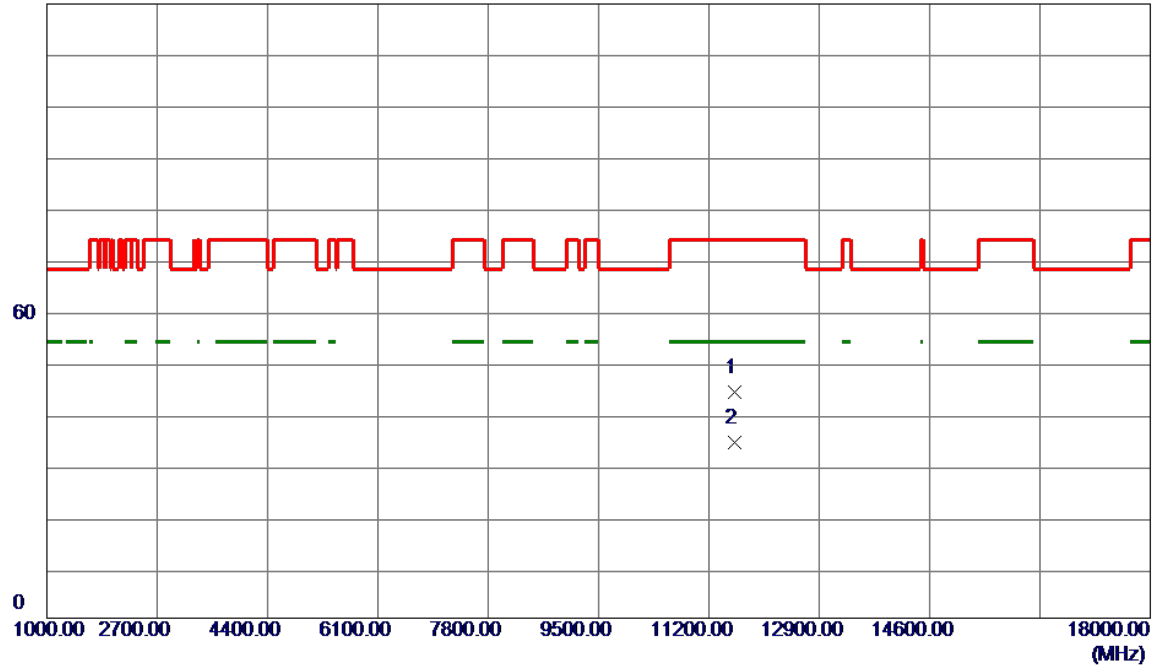

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11590.0000   | 43.23                      | 0.85                    | 44.08                     | 74.00           | -29.92       | Peak     |         |
| 2 * | 11590.0000   | 33.47                      | 0.85                    | 34.32                     | 54.00           | -19.68       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5795MHz               | Polarization | Horizontal |

120 dBuV/m

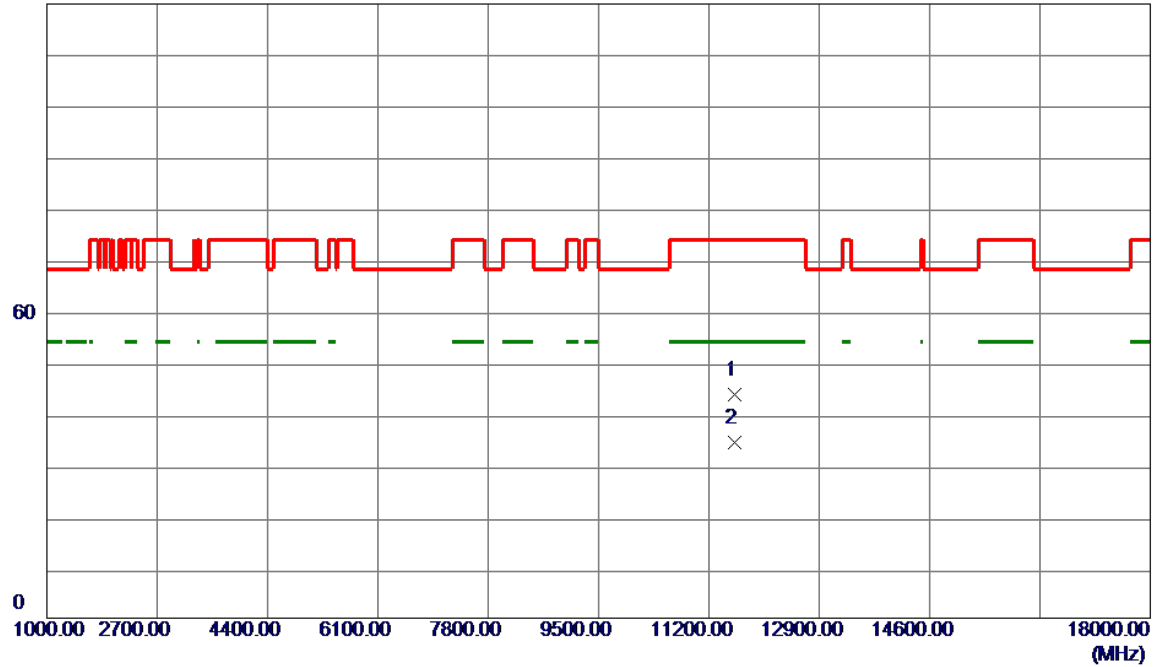


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11590.0000   | 42.81                      | 0.85                    | 43.66                     | 74.00           | -30.34       | Peak     |         |
| 2 * | 11590.0000   | 33.58                      | 0.85                    | 34.43                     | 54.00           | -19.57       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5210MHz               | Polarization | Vertical   |

120 dBuV/m

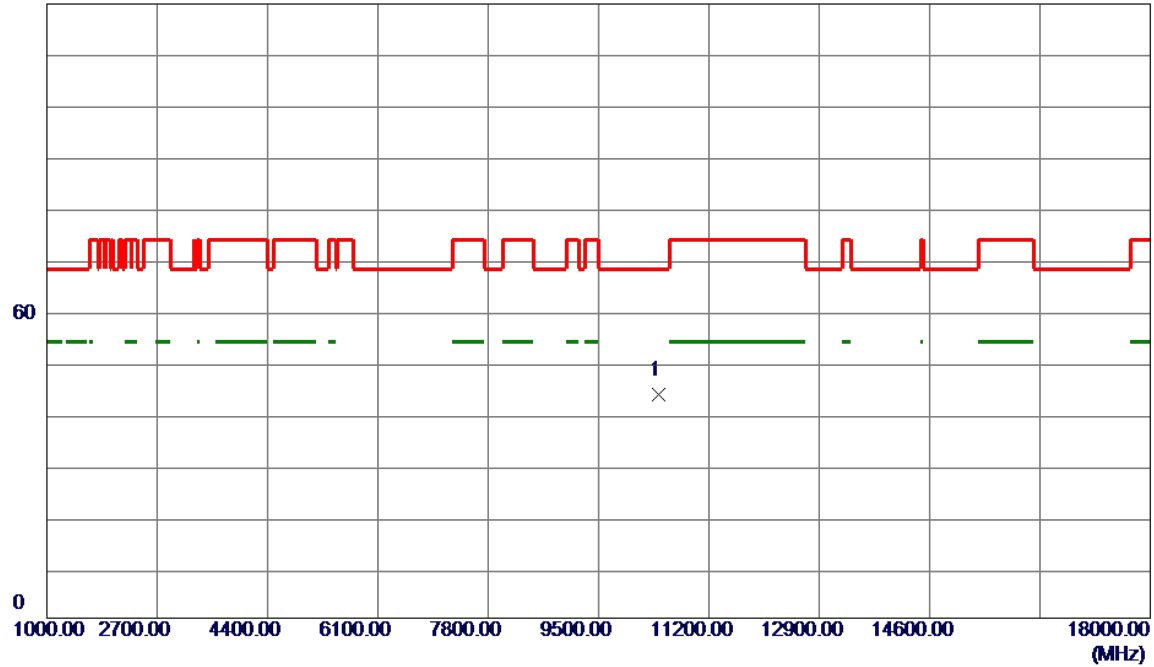


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.0000   | 44.08                      | -0.43                   | 43.65                     | 68.20           | -24.55       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5210MHz               | Polarization | Horizontal |

120 dBuV/m

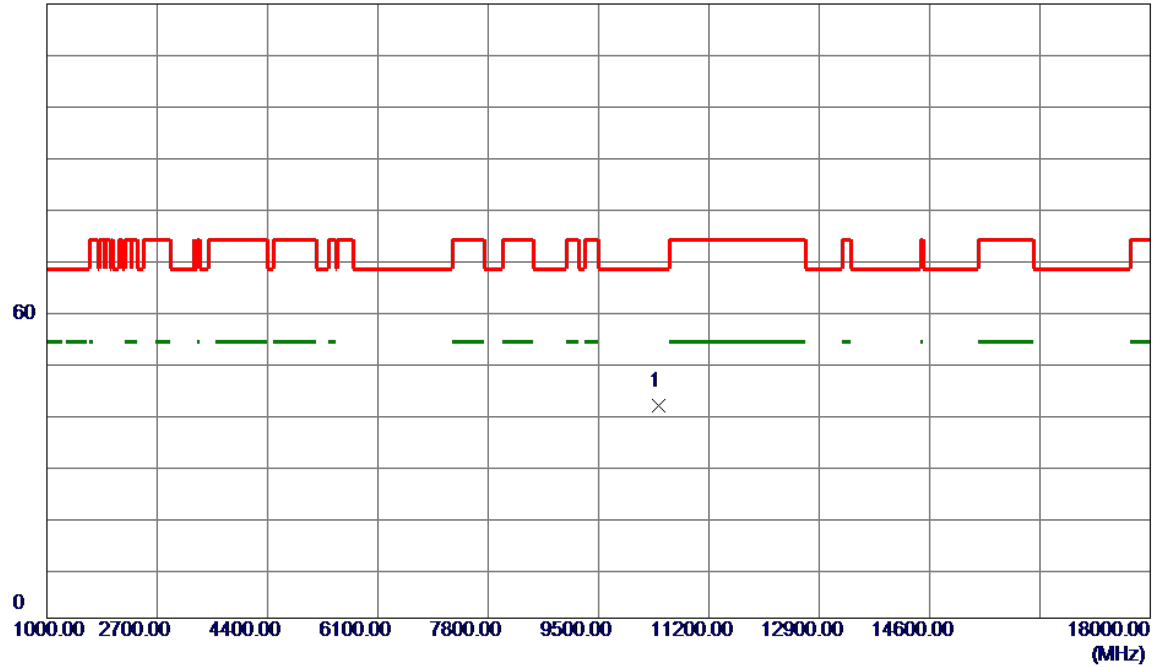


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.0000   | 41.87                      | -0.43                   | 41.44                     | 68.20           | -26.76       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5290MHz               | Polarization | Vertical   |

120 dBuV/m

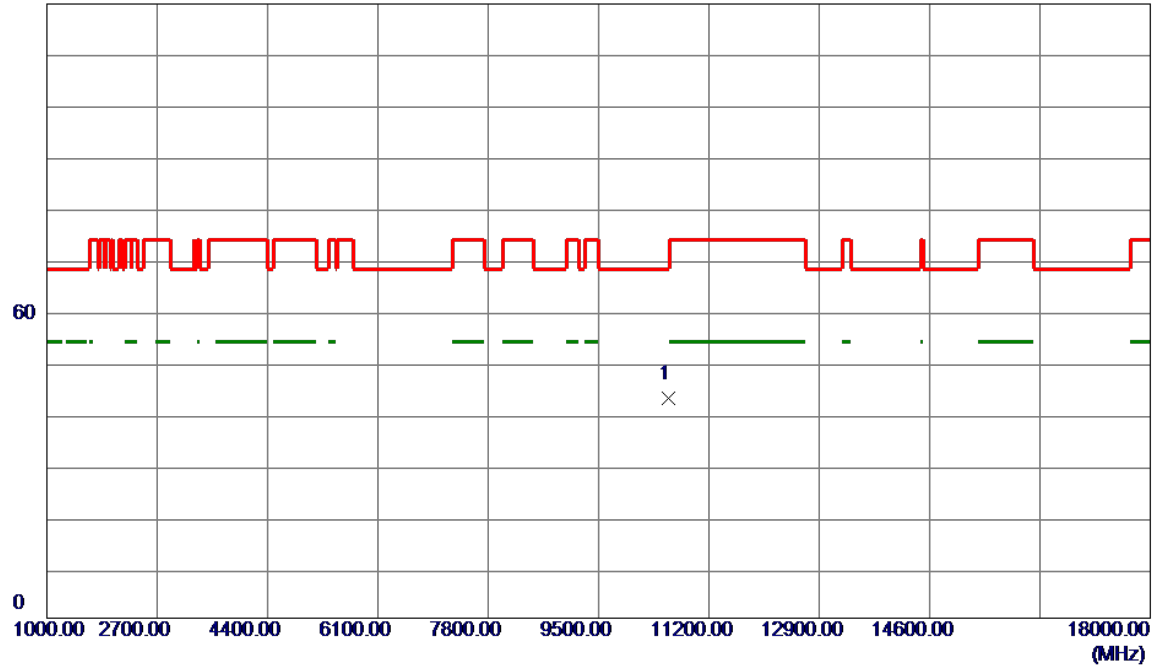


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10580.0000 | 43.16         | -0.28          | 42.88       | 68.20  | -25.32 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5290MHz               | Polarization | Horizontal |

120 dBuV/m

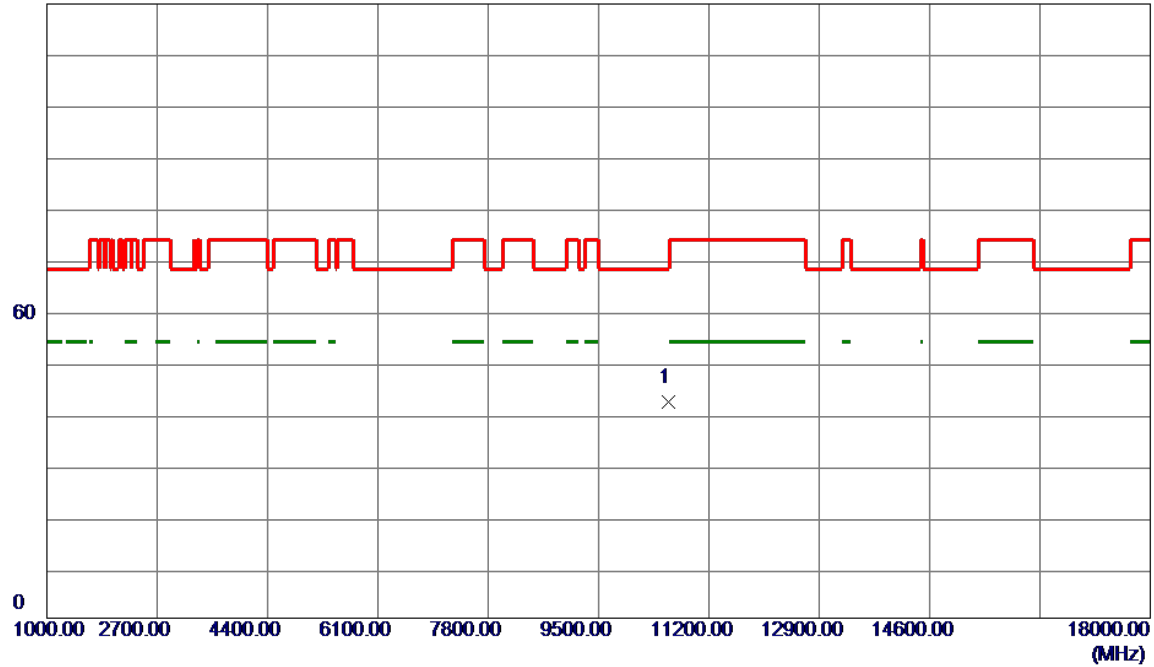


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10580.0000   | 42.55                      | -0.28                   | 42.27                     | 68.20           | -25.93       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5530MHz               | Polarization | Vertical   |

120 dBuV/m

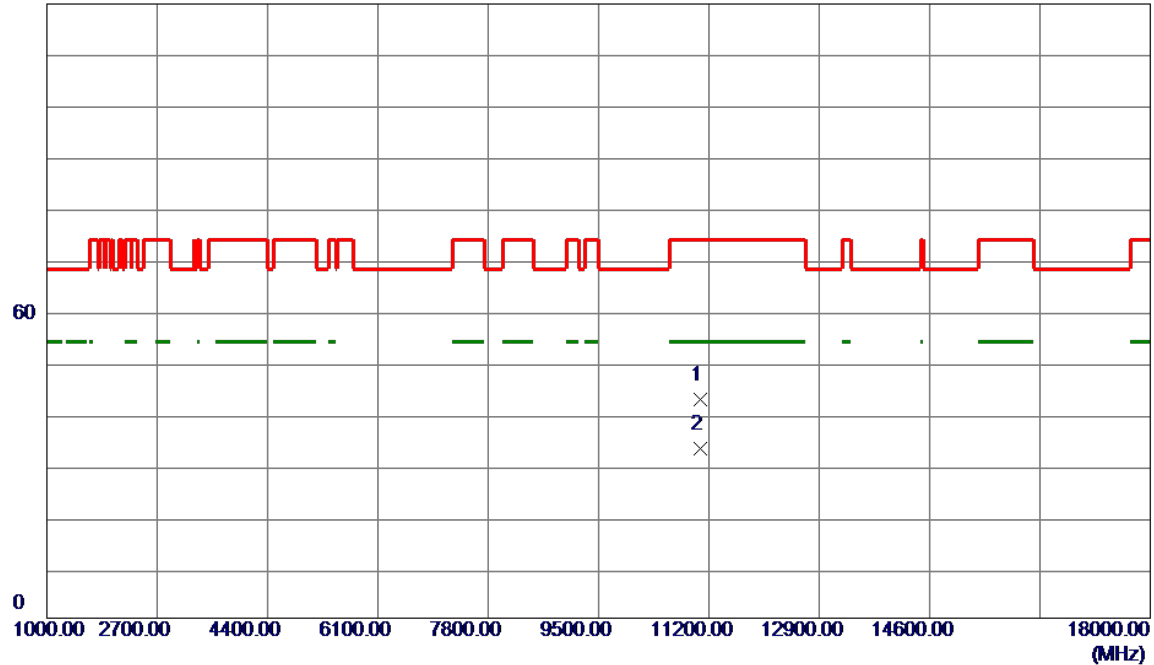


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.0000   | 42.70                      | -0.02                   | 42.68                     | 74.00           | -31.32       | Peak     |         |
| 2 * | 11060.0000   | 33.20                      | -0.02                   | 33.18                     | 54.00           | -20.82       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5530MHz               | Polarization | Horizontal |

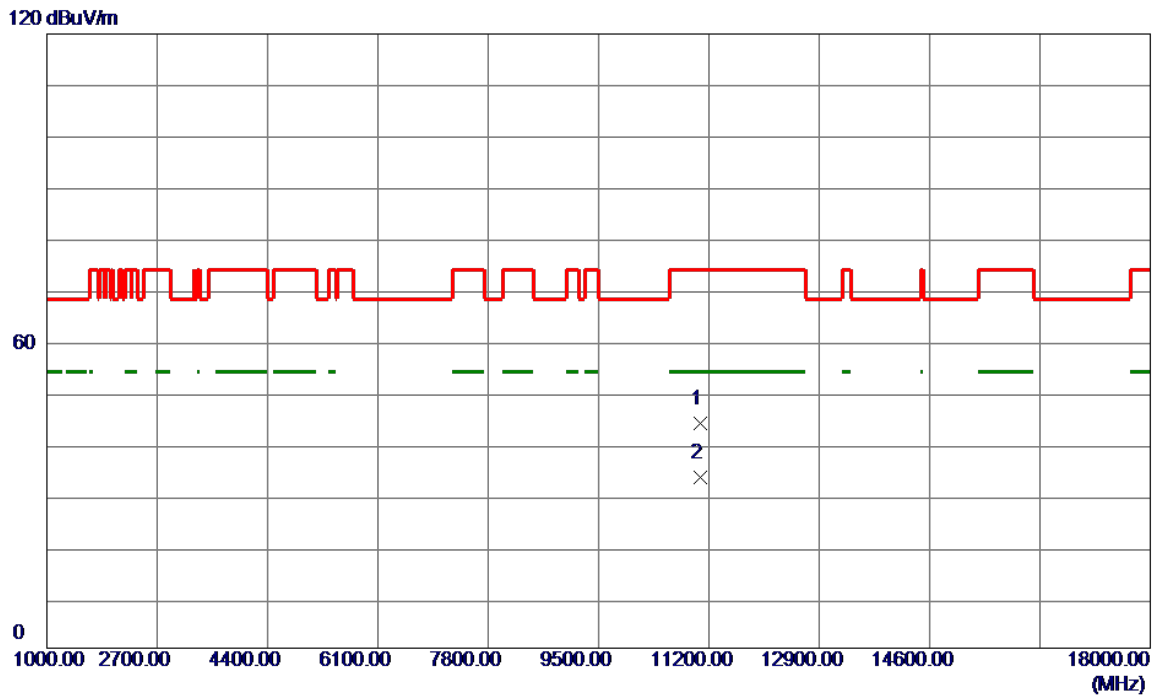


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.0000   | 43.97                      | -0.02                   | 43.95                     | 74.00           | -30.05       | Peak     |         |
| 2 * | 11060.0000   | 33.41                      | -0.02                   | 33.39                     | 54.00           | -20.61       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5610MHz               | Polarization | Vertical   |

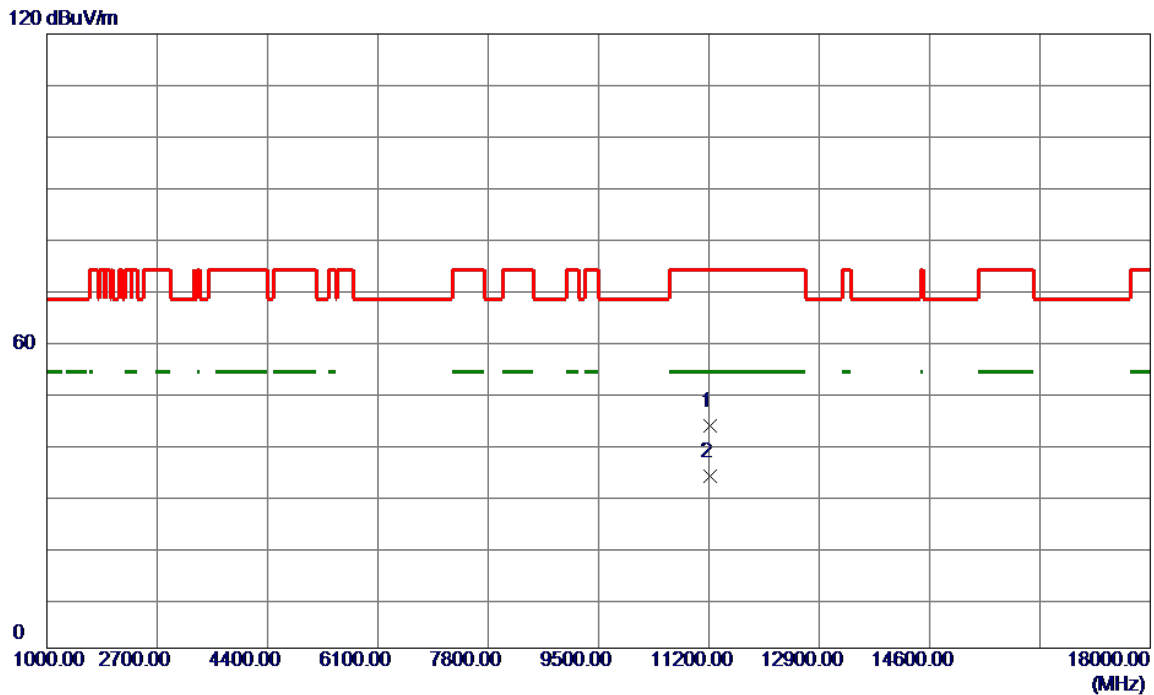


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.0000   | 43.04                      | 0.29                    | 43.33                     | 74.00           | -30.67       | Peak     |         |
| 2 * | 11220.0000   | 33.25                      | 0.29                    | 33.54                     | 54.00           | -20.46       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5610MHz               | Polarization | Horizontal |

120 dBuV/m

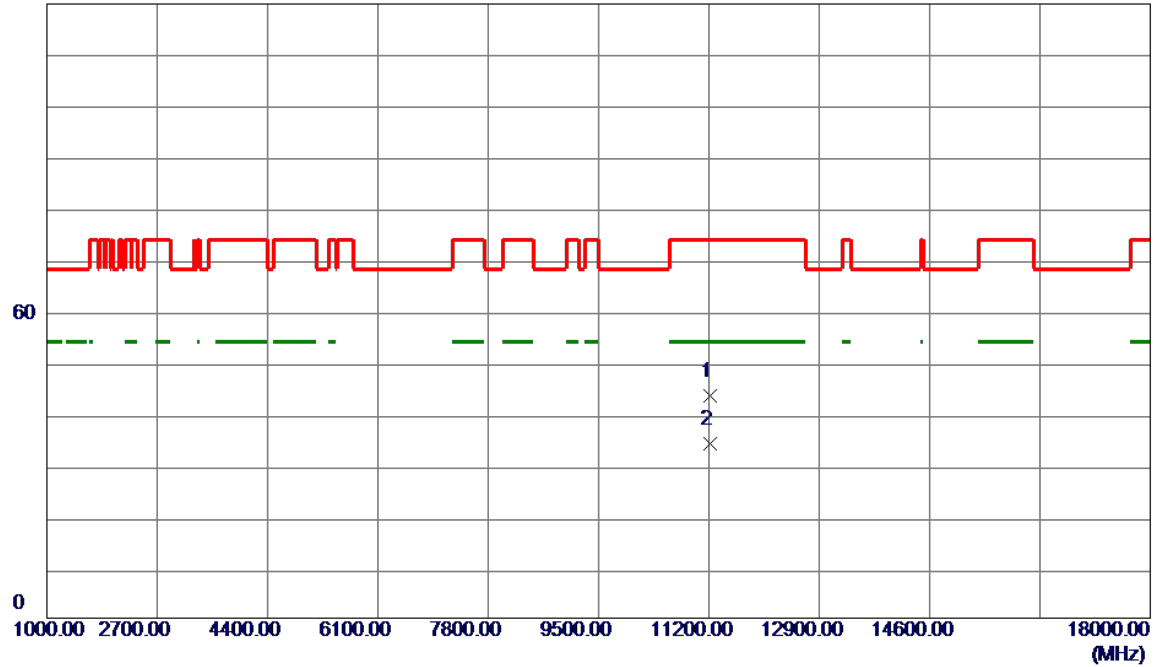


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.0000   | 43.04                      | 0.29                    | 43.33                     | 74.00           | -30.67       | Peak     |         |
| 2 * | 11220.0000   | 33.87                      | 0.29                    | 34.16                     | 54.00           | -19.84       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5775MHz               | Polarization | Vertical   |

120 dBuV/m

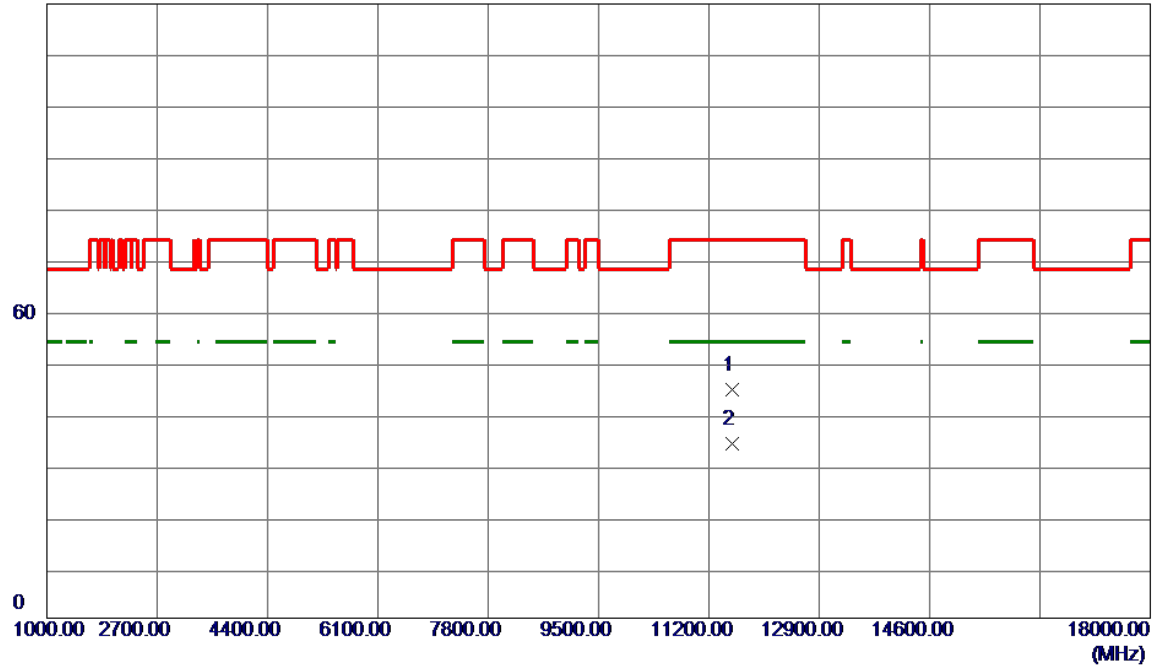


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.0000   | 43.86                      | 0.84                    | 44.70                     | 74.00           | -29.30       | Peak     |         |
| 2 * | 11550.0000   | 33.22                      | 0.84                    | 34.06                     | 54.00           | -19.94       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5775MHz               | Polarization | Horizontal |

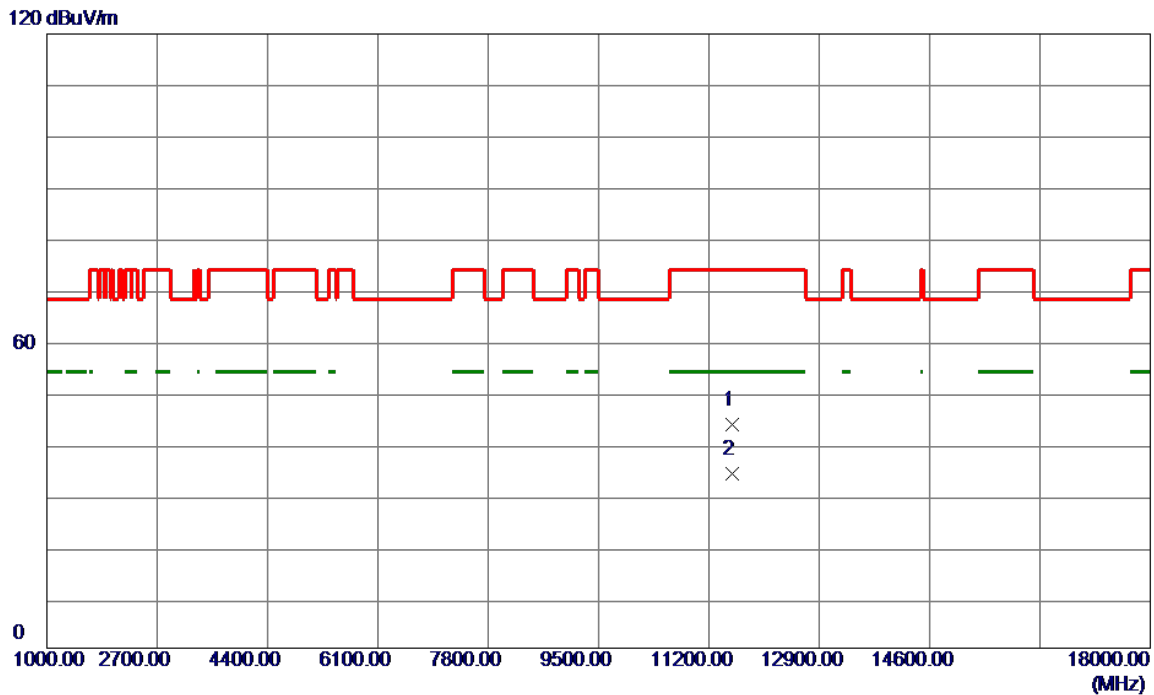

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.0000   | 42.91                      | 0.84                    | 43.75                     | 74.00           | -30.25       | Peak     |         |
| 2 * | 11550.0000   | 33.19                      | 0.84                    | 34.03                     | 54.00           | -19.97       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5250MHz                | Polarization | Vertical   |

120 dBuV/m

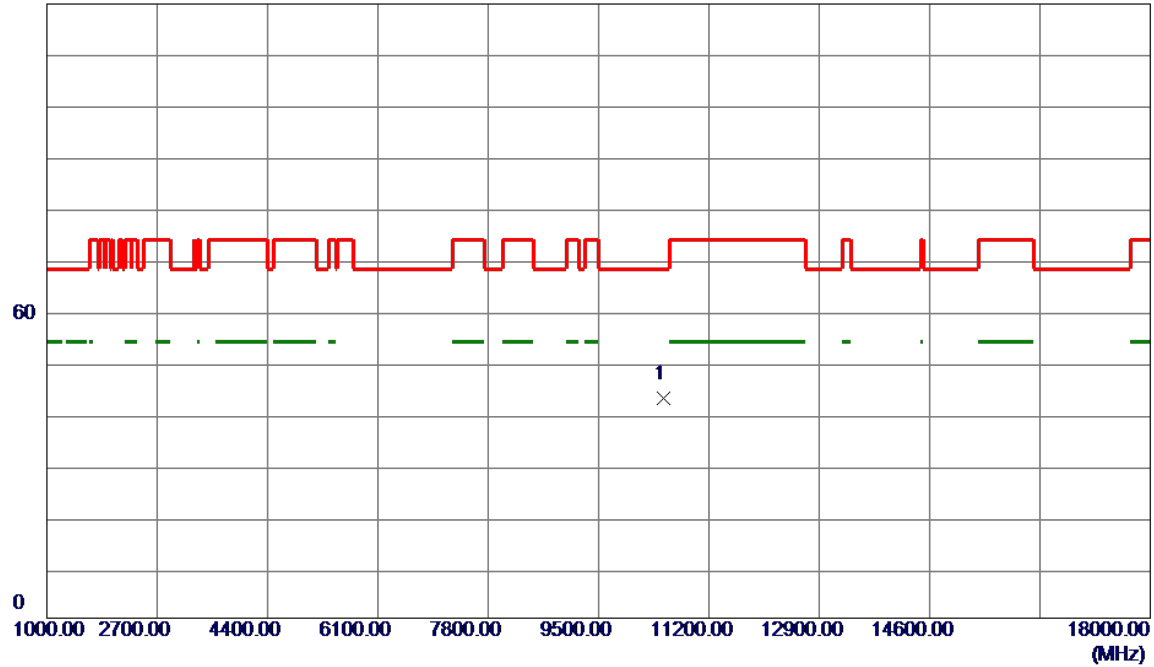


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10500.0000   | 43.26                      | -0.31                   | 42.95                     | 68.20           | -25.25       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5250MHz                | Polarization | Horizontal |

120 dBuV/m

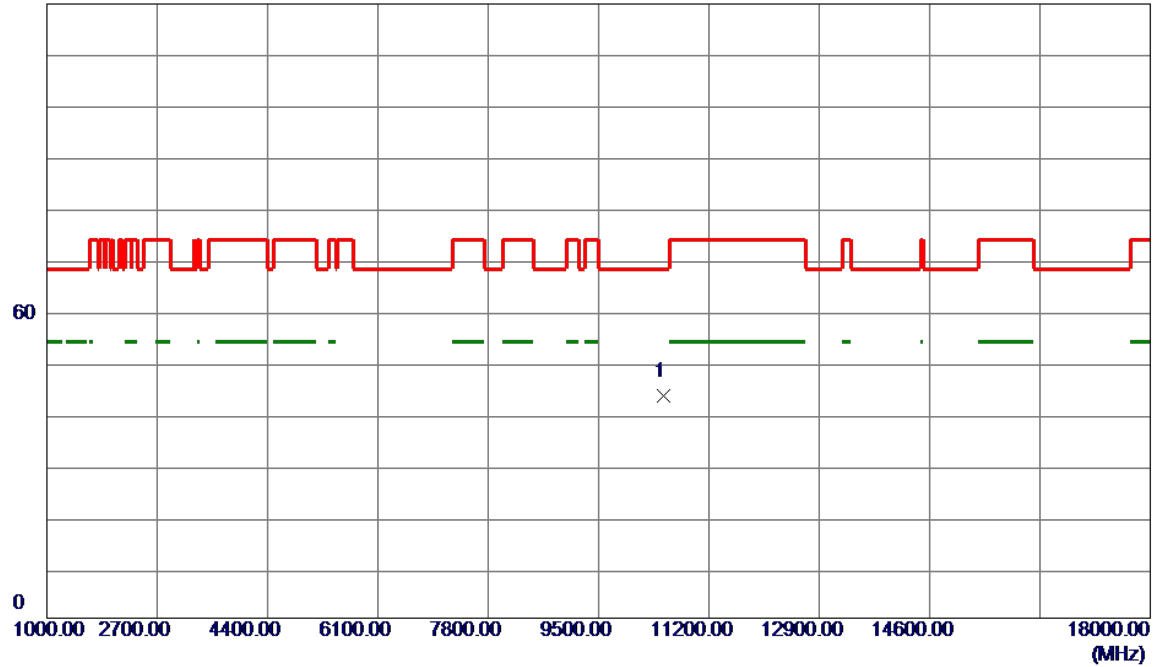


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10500.0000   | 43.76                      | -0.31                   | 43.45                     | 68.20           | -24.75       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5570MHz                | Polarization | Vertical   |

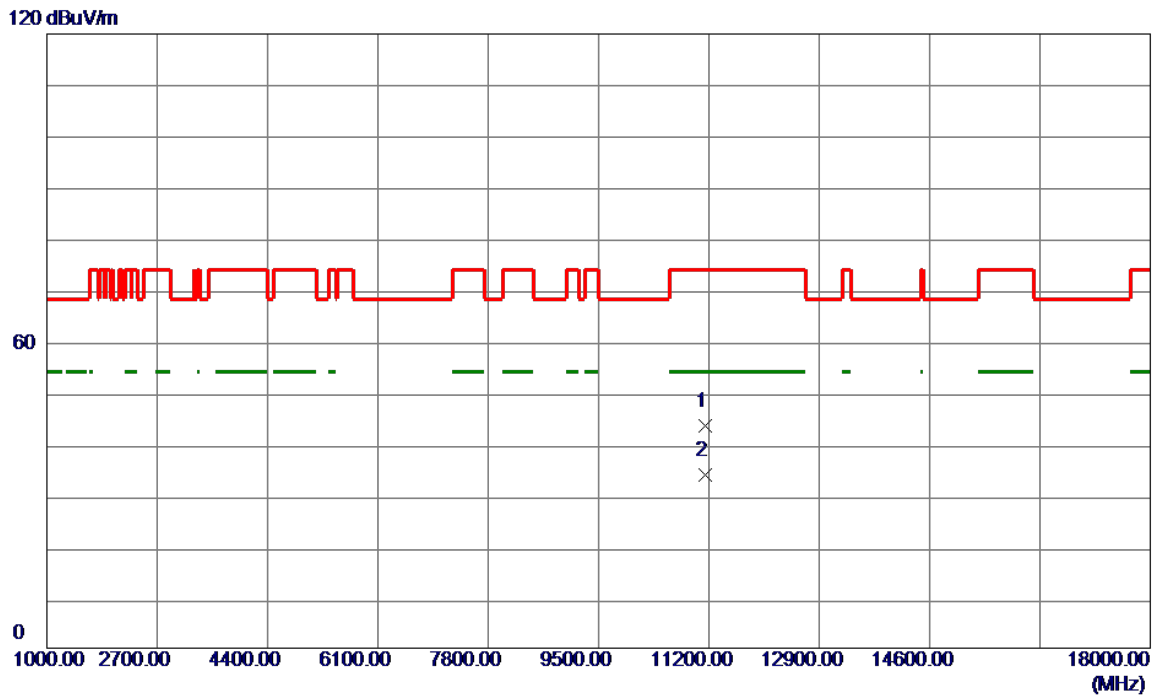


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11140.0000   | 43.30                      | 0.13                    | 43.43                     | 74.00           | -30.57       | Peak     |         |
| 2 * | 11140.0000   | 33.65                      | 0.13                    | 33.78                     | 54.00           | -20.22       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5570MHz                | Polarization | Horizontal |

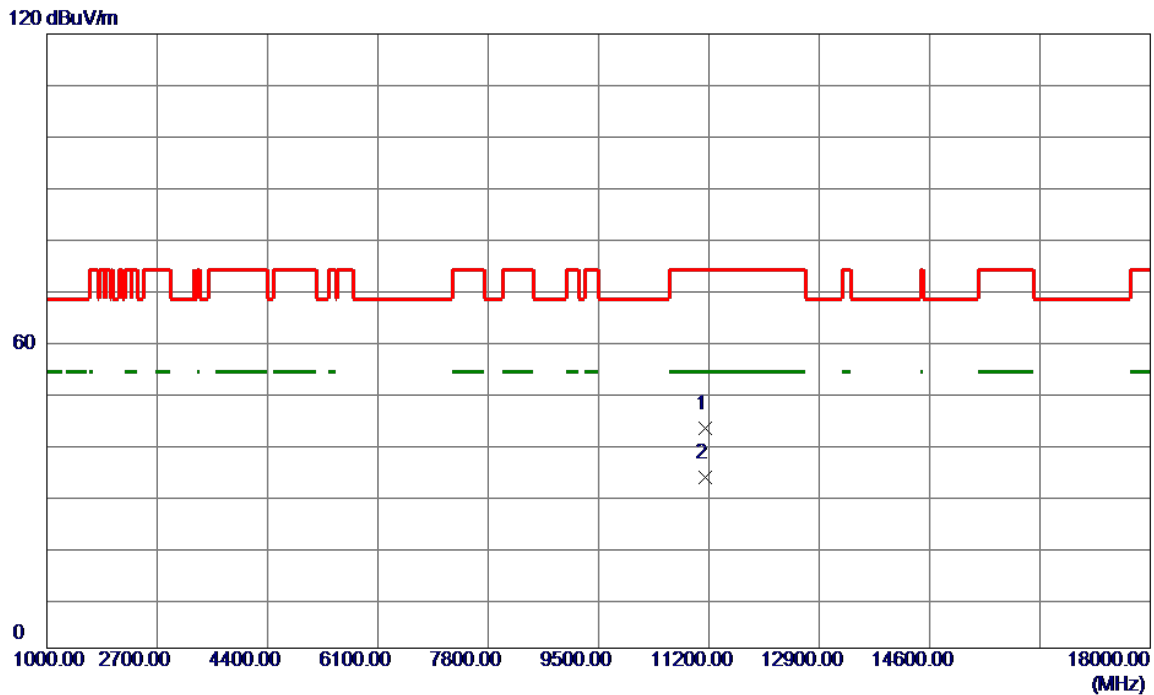


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11140.0000   | 42.82                      | 0.13                    | 42.95                     | 74.00           | -31.05       | Peak     |         |
| 2 * | 11140.0000   | 33.16                      | 0.13                    | 33.29                     | 54.00           | -20.71       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5180MHz              | Polarization | Vertical   |

120 dBuV/m

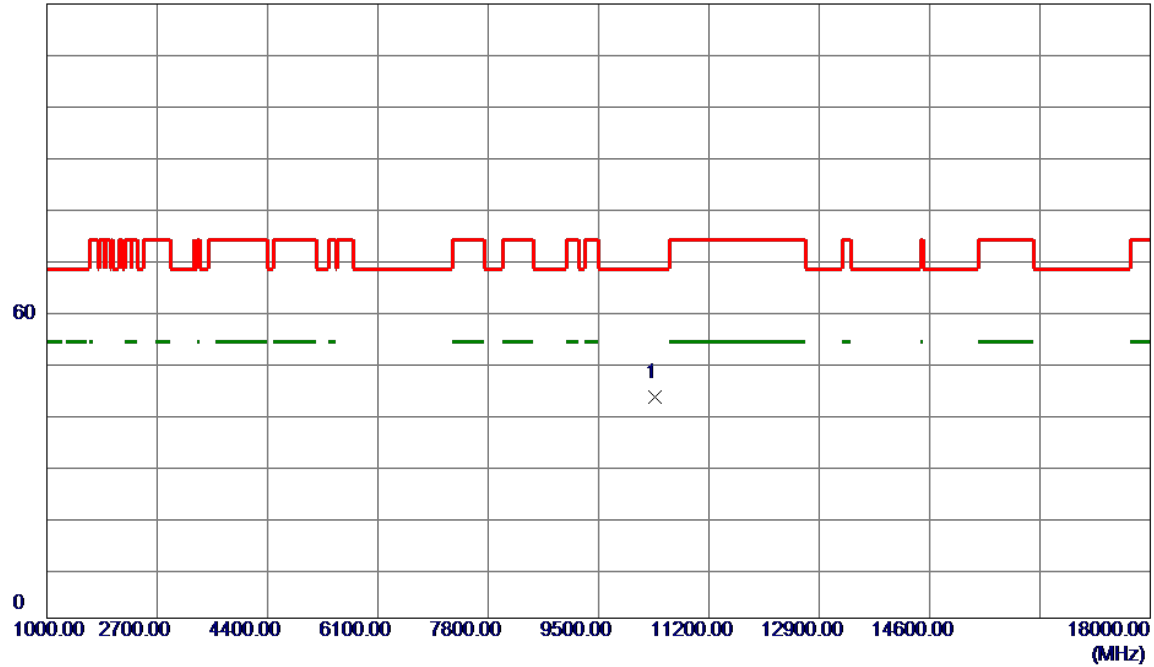


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10360.0000   | 43.76                      | -0.53                   | 43.23                     | 68.20           | -24.97       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5180MHz              | Polarization | Horizontal |

120 dBuV/m

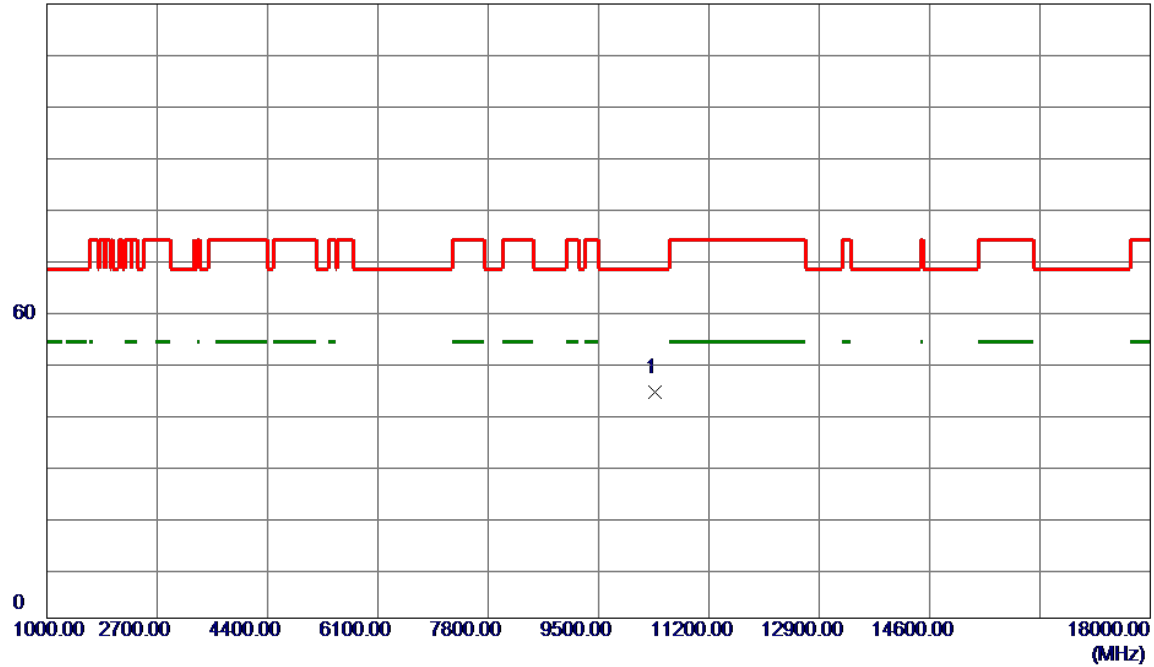


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10360.0000   | 44.67                      | -0.53                   | 44.14                     | 68.20           | -24.06       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5200MHz              | Polarization | Vertical   |

120 dBuV/m

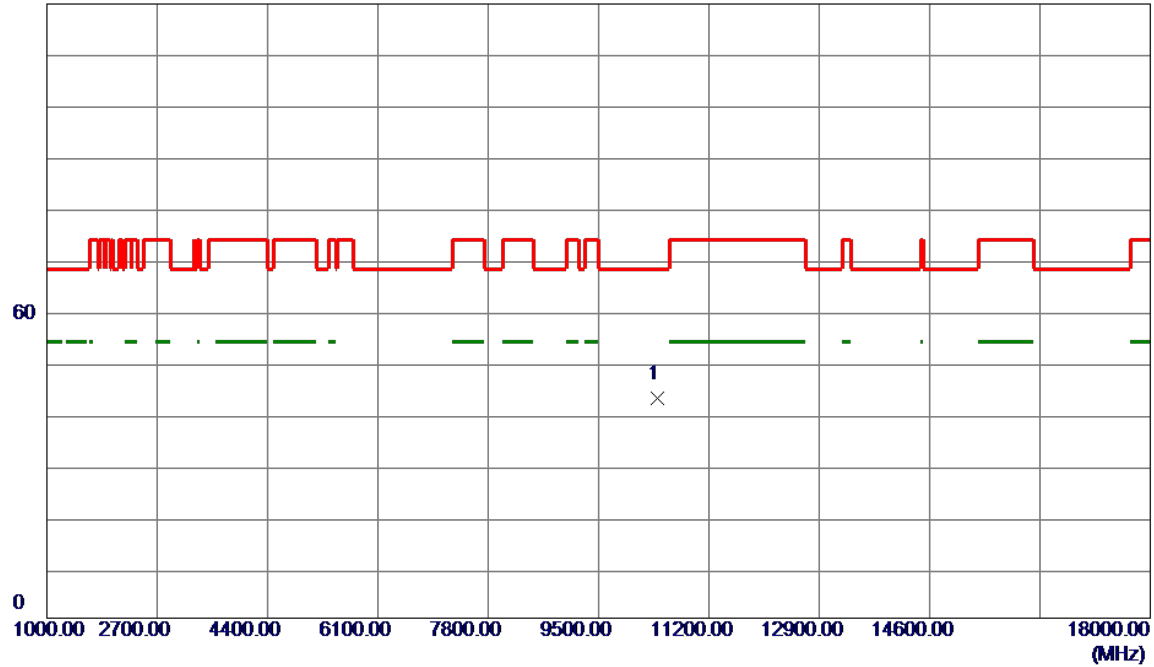


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10400.0000 | 43.38         | -0.46          | 42.92       | 68.20  | -25.28 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5200MHz              | Polarization | Horizontal |

120 dBuV/m

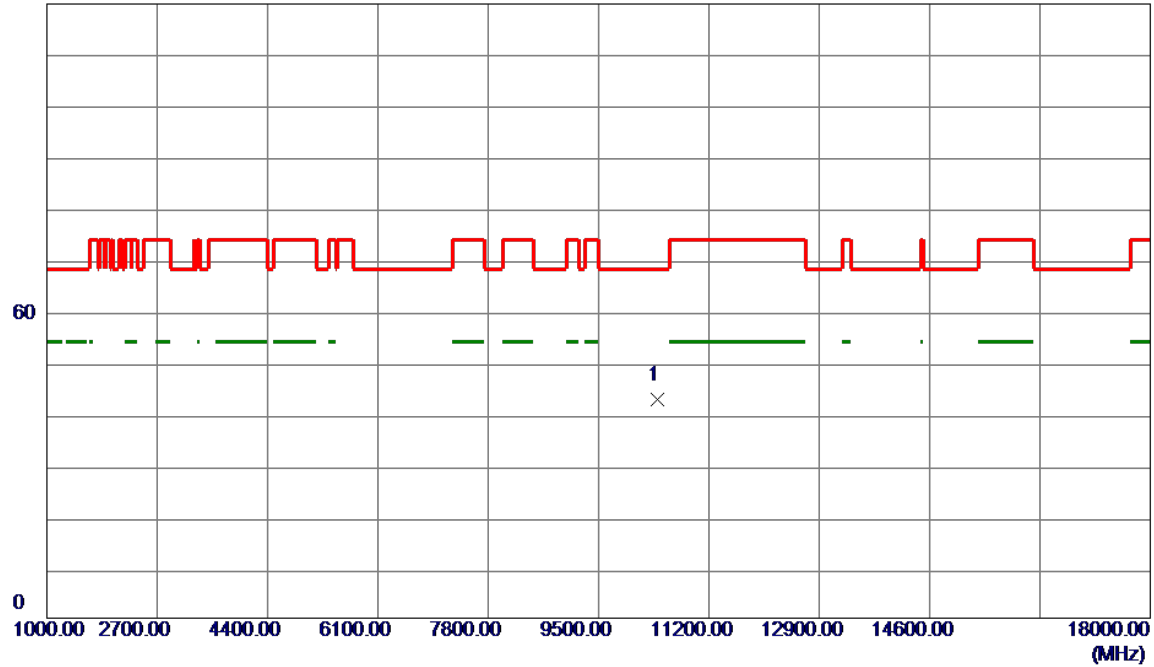


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.0000   | 43.14                      | -0.46                   | 42.68                     | 68.20           | -25.52       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5240MHz              | Polarization | Vertical   |

120 dBuV/m

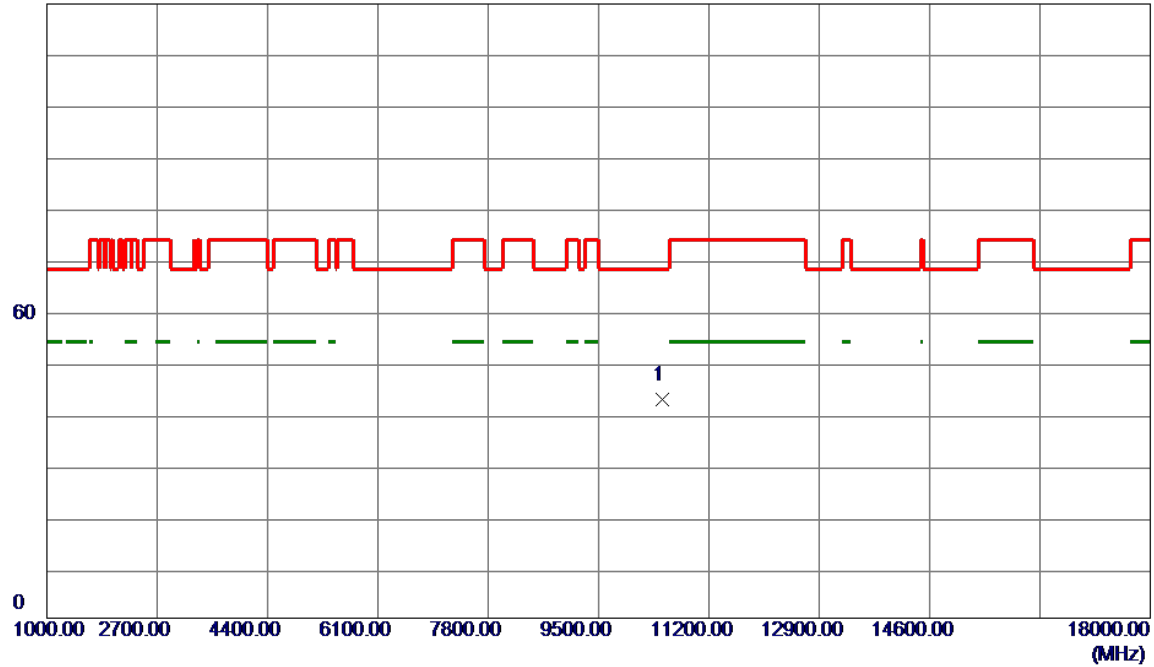


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.0000   | 43.16                      | -0.34                   | 42.82                     | 68.20           | -25.38       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5240MHz              | Polarization | Horizontal |

120 dBuV/m

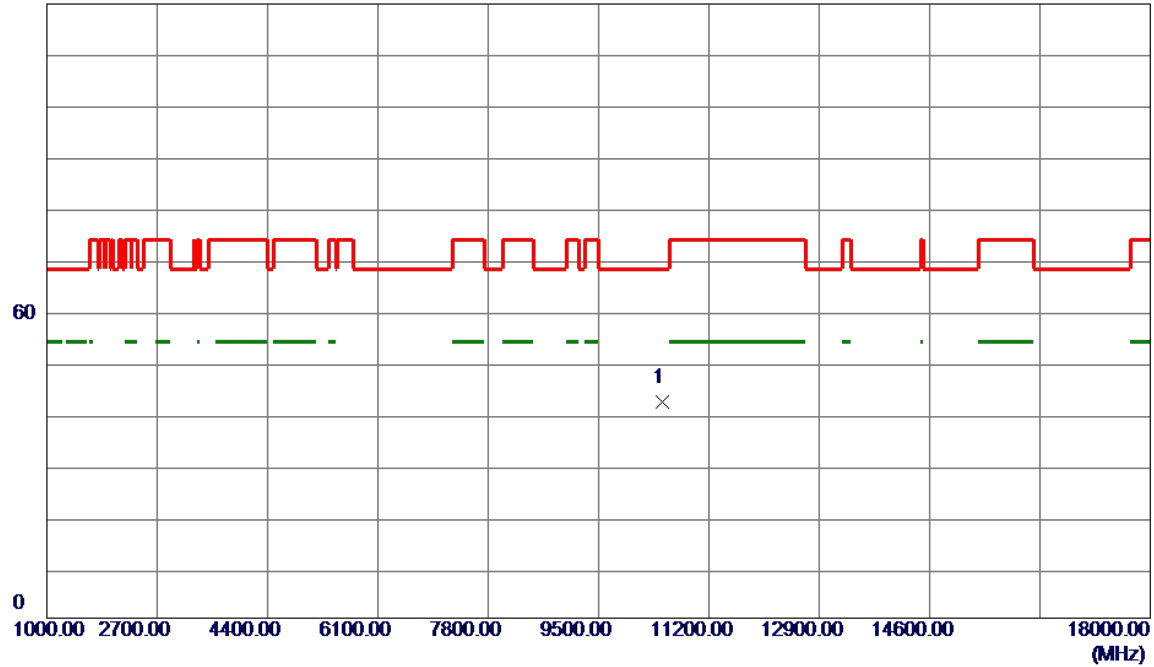


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10480.0000 | 42.62         | -0.34          | 42.28       | 68.20  | -25.92 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5260MHz              | Polarization | Vertical   |

120 dBuV/m

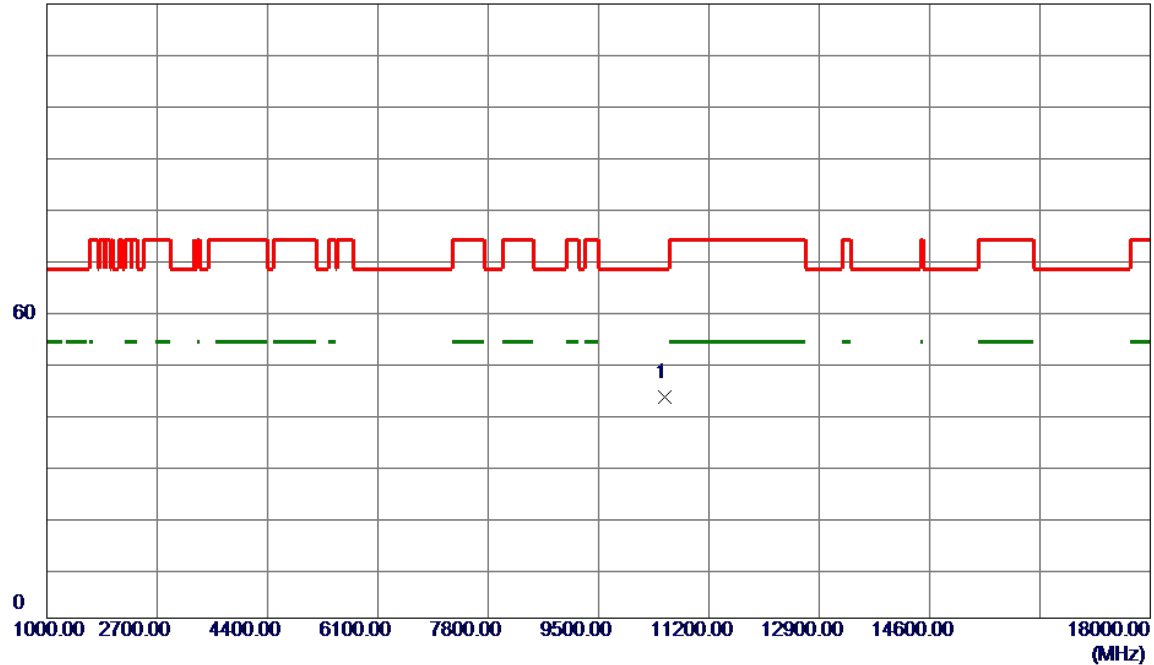


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10520.0000   | 43.51                      | -0.30                   | 43.21                     | 68.20           | -24.99       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5260MHz              | Polarization | Horizontal |

120 dBuV/m

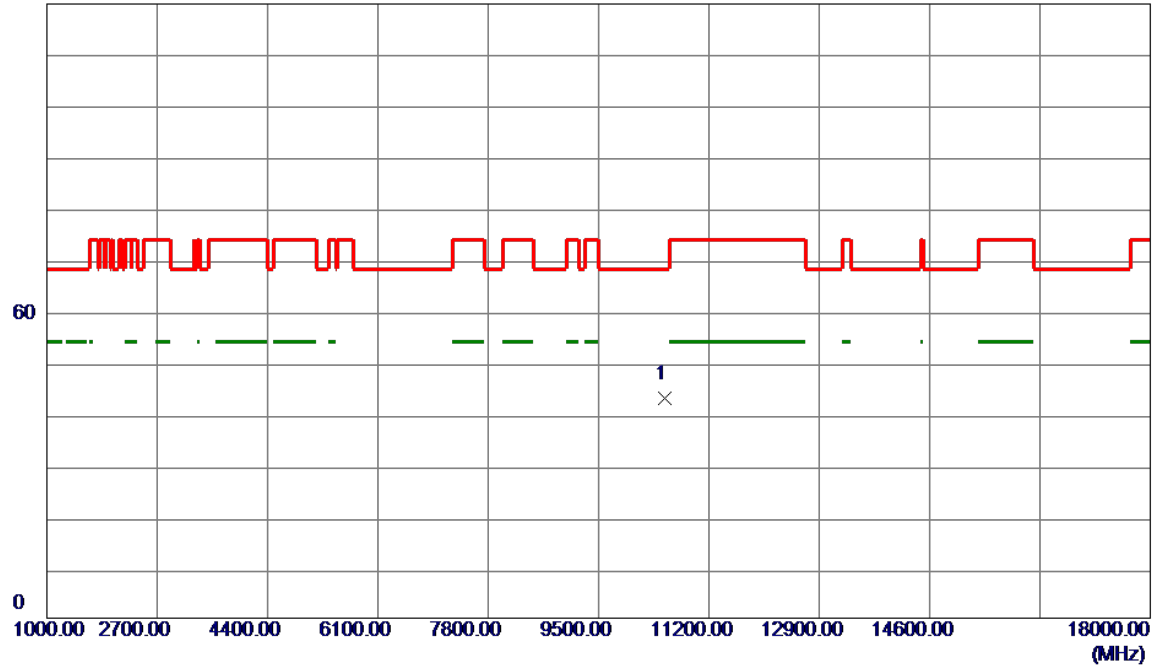


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10520.0000   | 43.30                      | -0.30                   | 43.00                     | 68.20           | -25.20       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5300MHz              | Polarization | Vertical   |

120 dBuV/m

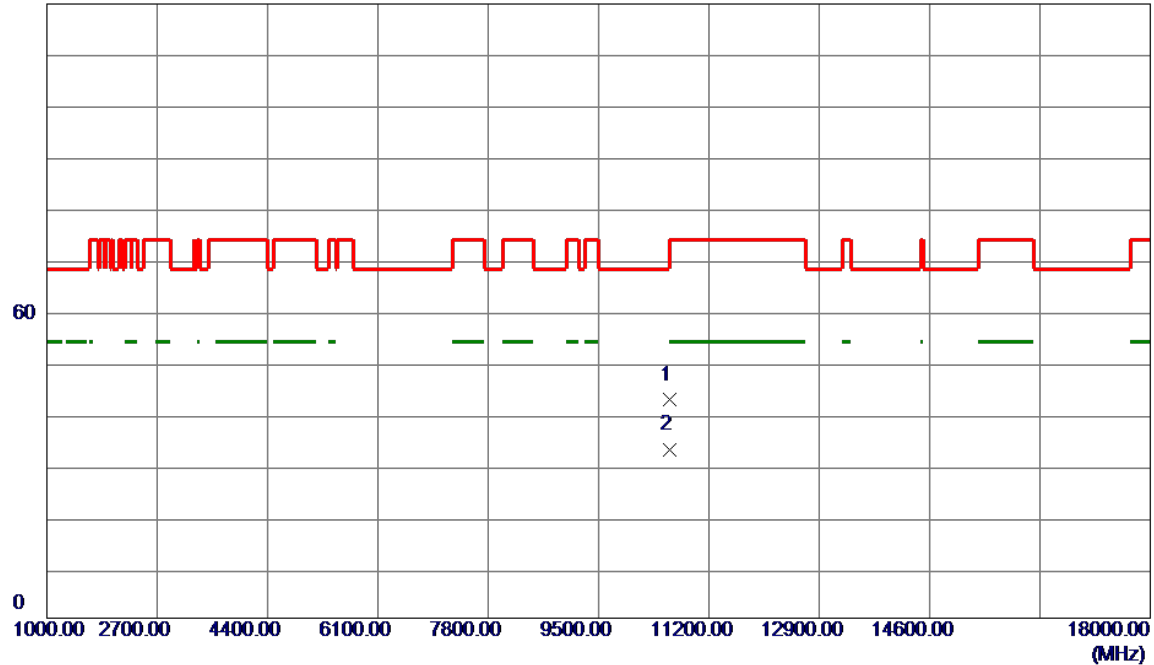


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10600.0000   | 43.10                      | -0.28                   | 42.82                     | 68.20           | -25.38       | Peak     |         |
| 2   | 10600.0000   | 33.28                      | -0.28                   | 33.00                     | 999.00          | -966.00      | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5300MHz              | Polarization | Horizontal |

120 dBuV/m

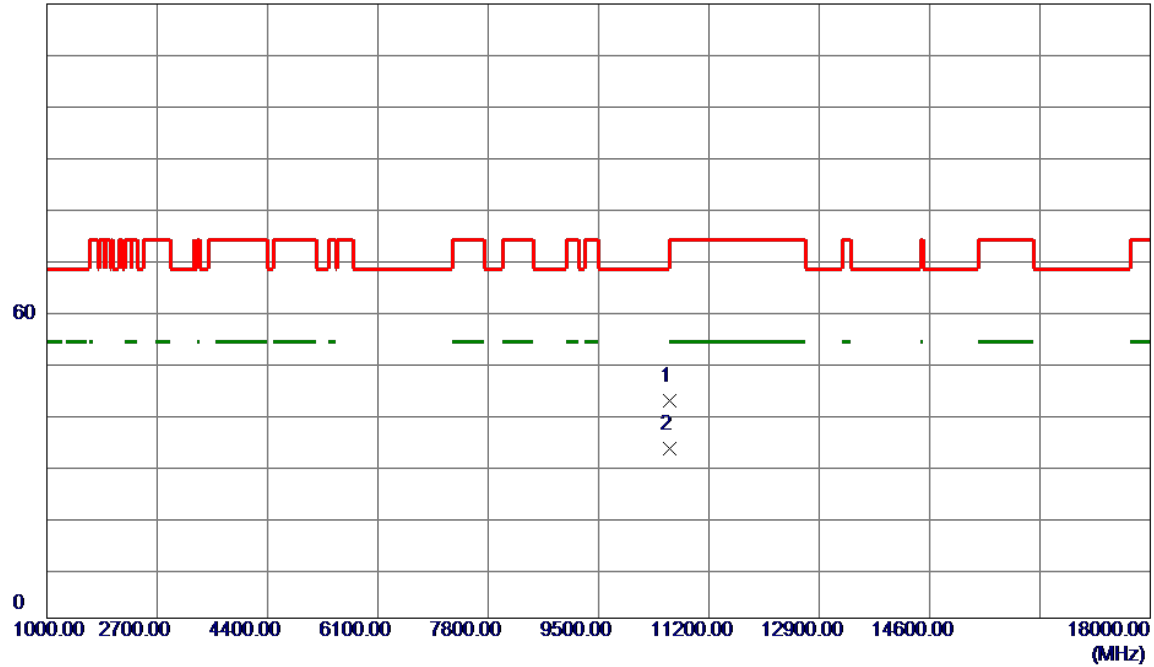

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10600.0000   | 42.65                      | -0.28                   | 42.37                     | 68.20           | -25.83       | Peak     |         |
| 2   | 10600.0000   | 33.39                      | -0.28                   | 33.11                     | 999.00          | -965.89      | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5320MHz              | Polarization | Vertical   |

120 dBuV/m

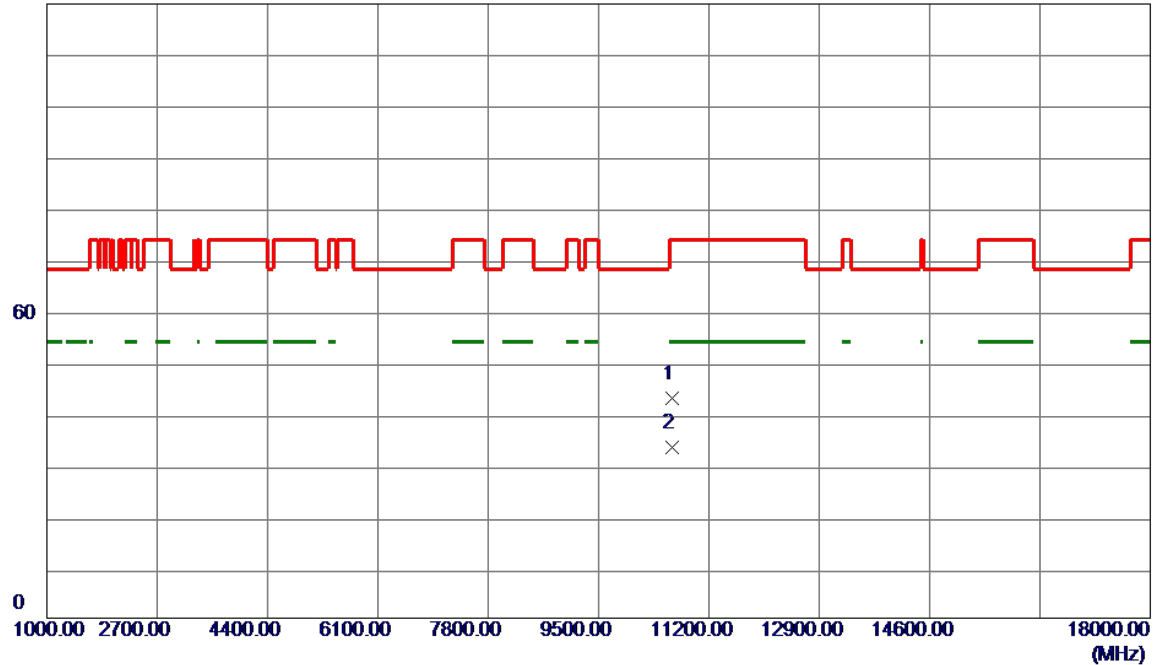


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10640.0000   | 43.31                      | -0.26                   | 43.05                     | 74.00           | -30.95       | Peak     |         |
| 2 * | 10640.0000   | 33.55                      | -0.26                   | 33.29                     | 54.00           | -20.71       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5320MHz              | Polarization | Horizontal |

120 dBuV/m

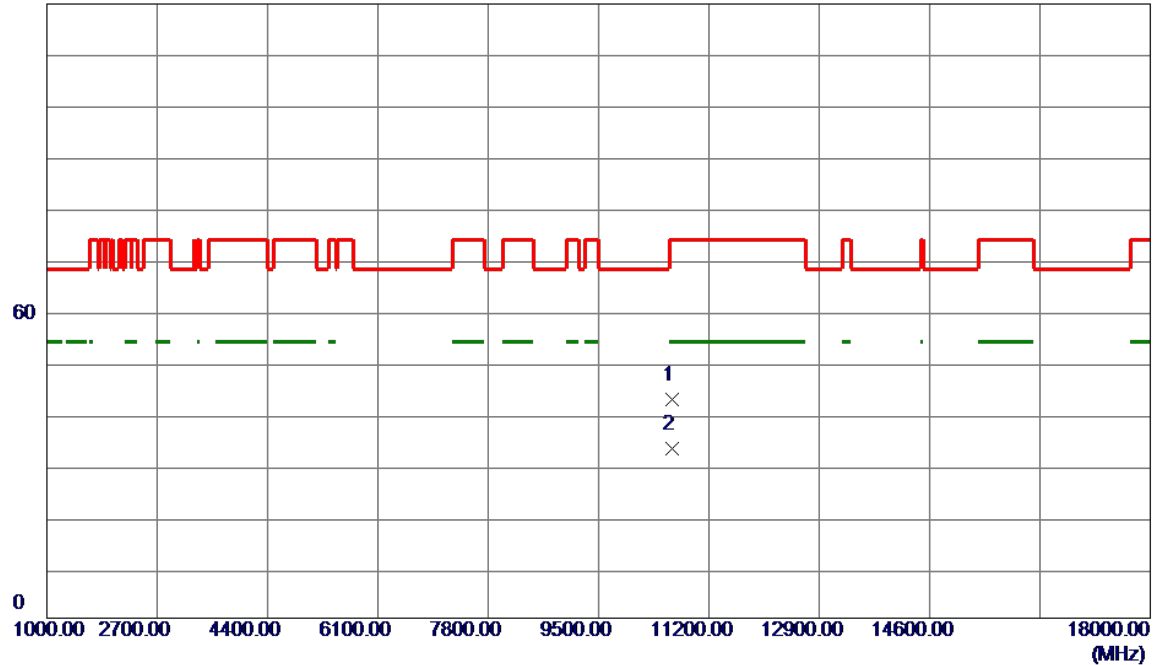


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10640.0000   | 42.93                      | -0.26                   | 42.67                     | 74.00           | -31.33       | Peak     |         |
| 2 * | 10640.0000   | 33.38                      | -0.26                   | 33.12                     | 54.00           | -20.88       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5500MHz              | Polarization | Vertical   |

120 dBuV/m

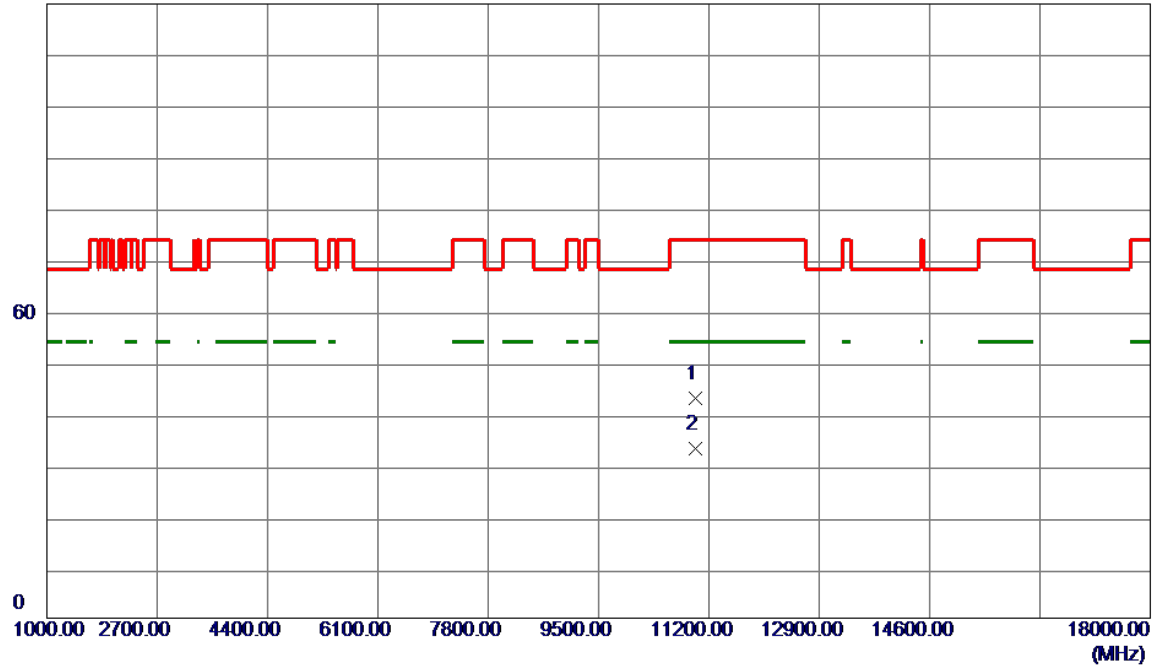


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11000.0000   | 43.06                      | -0.14                   | 42.92                     | 74.00           | -31.08       | Peak     |         |
| 2 * | 11000.0000   | 33.17                      | -0.14                   | 33.03                     | 54.00           | -20.97       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5500MHz              | Polarization | Horizontal |

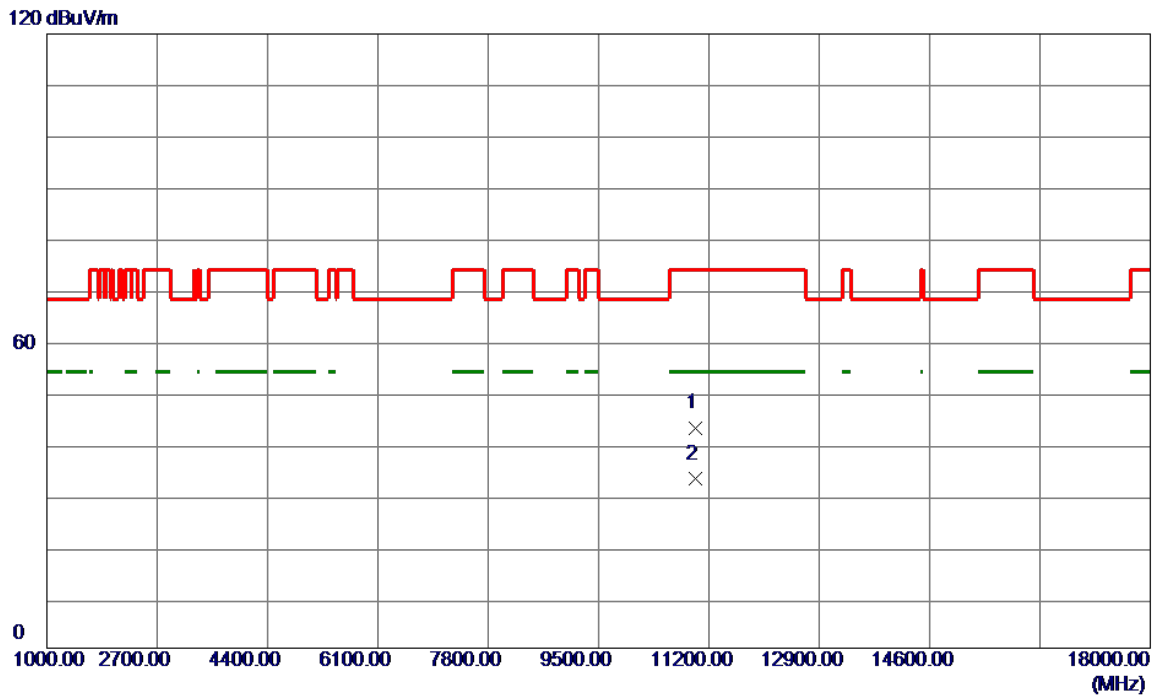


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11000.0000   | 43.22                      | -0.14                   | 43.08                     | 74.00           | -30.92       | Peak     |         |
| 2 * | 11000.0000   | 33.24                      | -0.14                   | 33.10                     | 54.00           | -20.90       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5580MHz              | Polarization | Vertical   |

120 dBuV/m

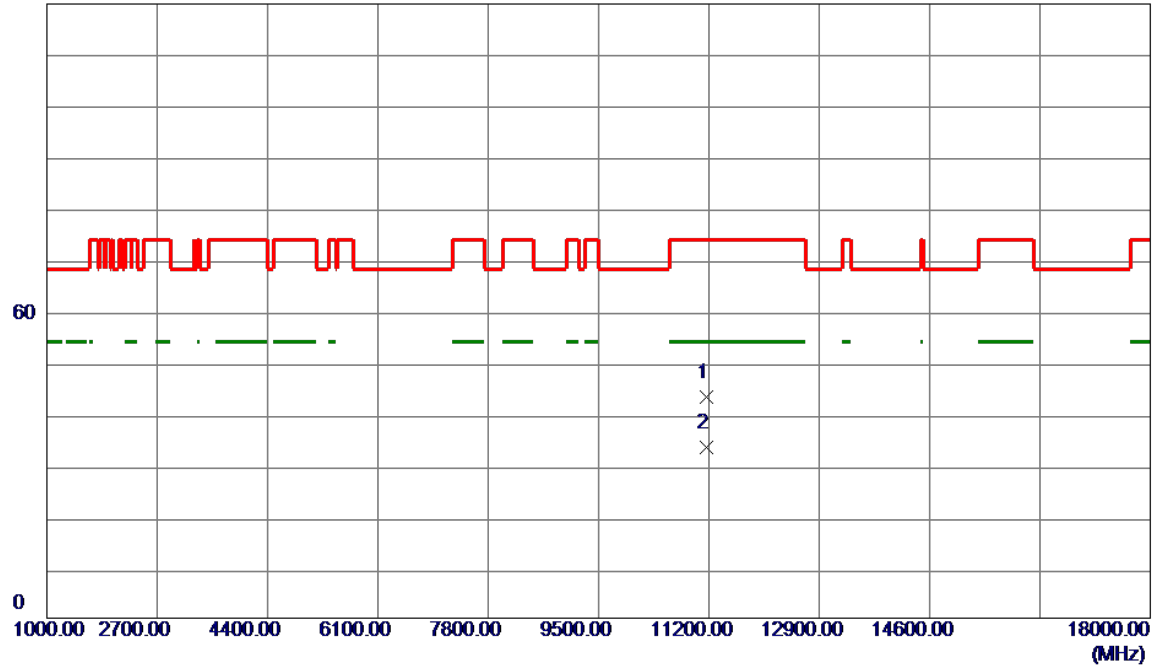


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11160.0000   | 43.11                      | 0.17                    | 43.28                     | 74.00           | -30.72       | Peak     |         |
| 2 * | 11160.0000   | 33.25                      | 0.17                    | 33.42                     | 54.00           | -20.58       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5580MHz              | Polarization | Horizontal |

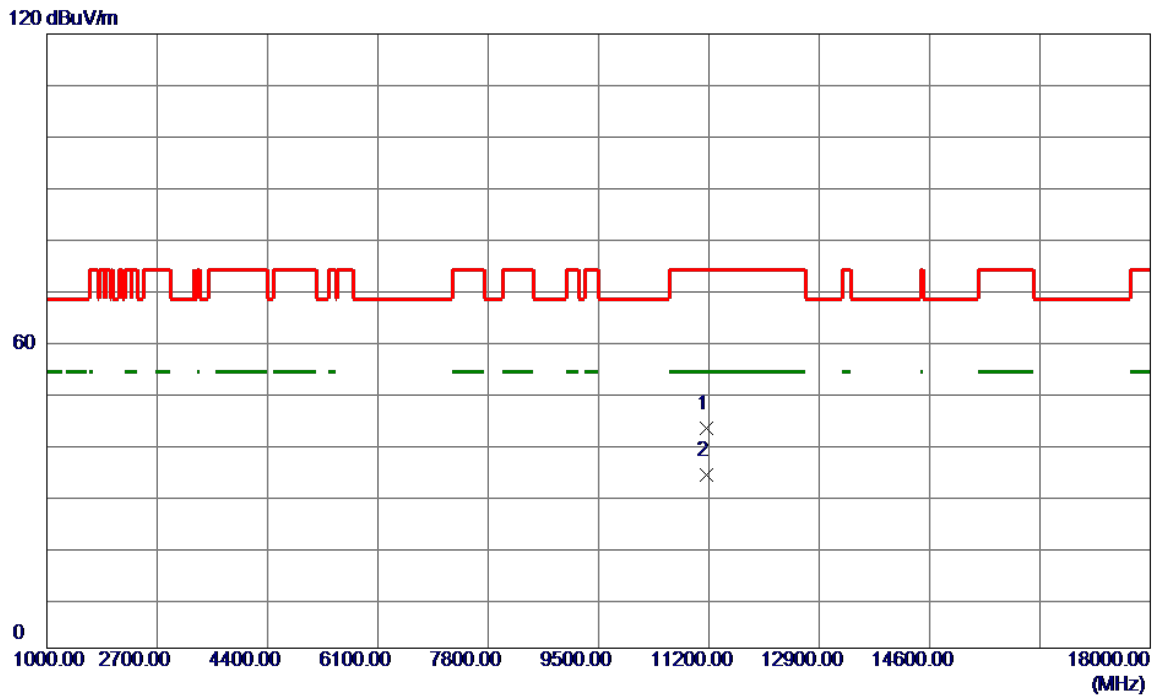

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11160.0000   | 42.87                      | 0.17                    | 43.04                     | 74.00           | -30.96       | Peak     |         |
| 2 * | 11160.0000   | 33.63                      | 0.17                    | 33.80                     | 54.00           | -20.20       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5700MHz              | Polarization | Vertical   |

120 dBuV/m

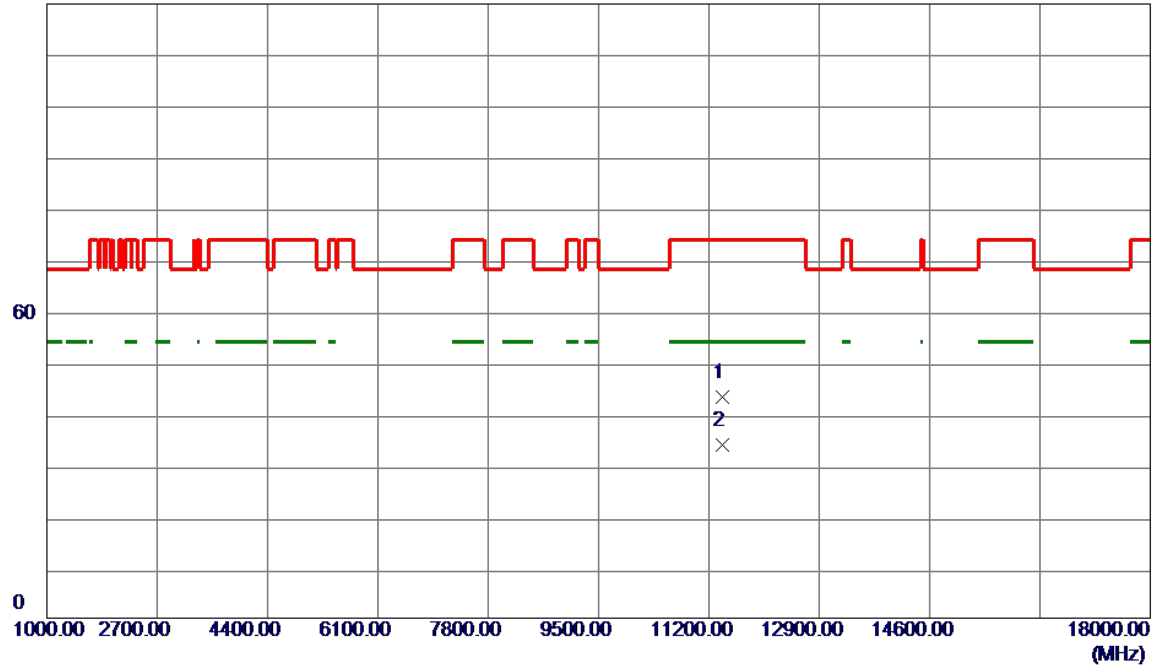

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11400.0000   | 42.45                      | 0.64                    | 43.09                     | 74.00           | -30.91       | Peak     |         |
| 2 * | 11400.0000   | 33.21                      | 0.64                    | 33.85                     | 54.00           | -20.15       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5700MHz              | Polarization | Horizontal |

120 dBuV/m

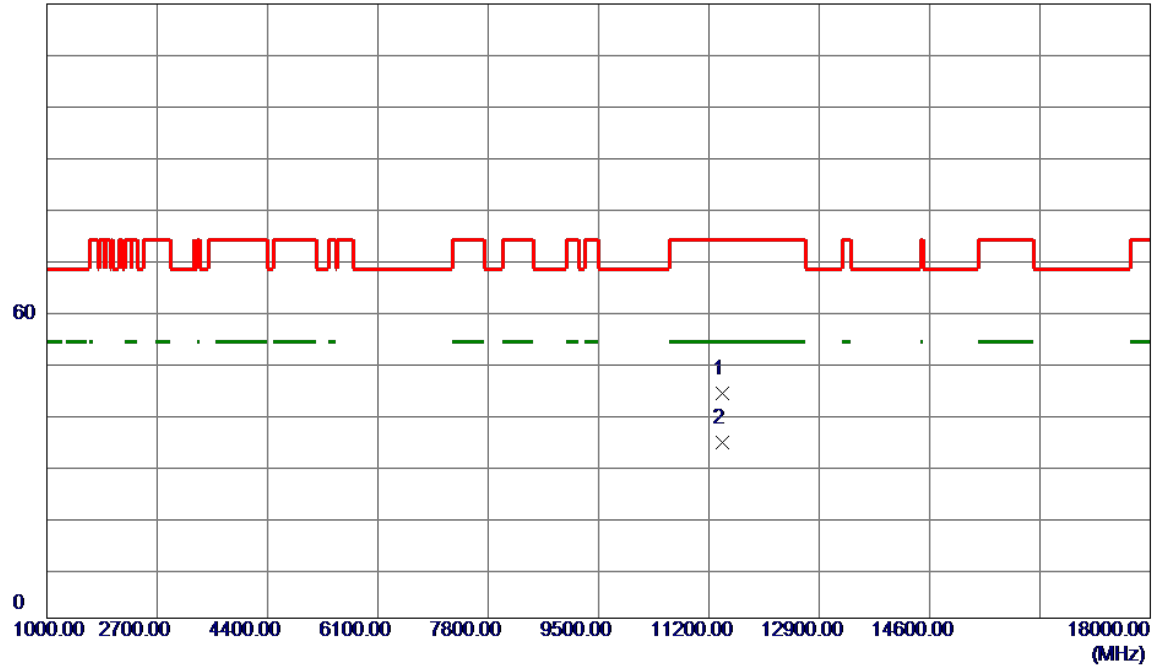


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11400.0000   | 43.29                      | 0.64                    | 43.93                     | 74.00           | -30.07       | Peak     |         |
| 2 * | 11400.0000   | 33.58                      | 0.64                    | 34.22                     | 54.00           | -19.78       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5745MHz              | Polarization | Vertical   |

120 dBuV/m

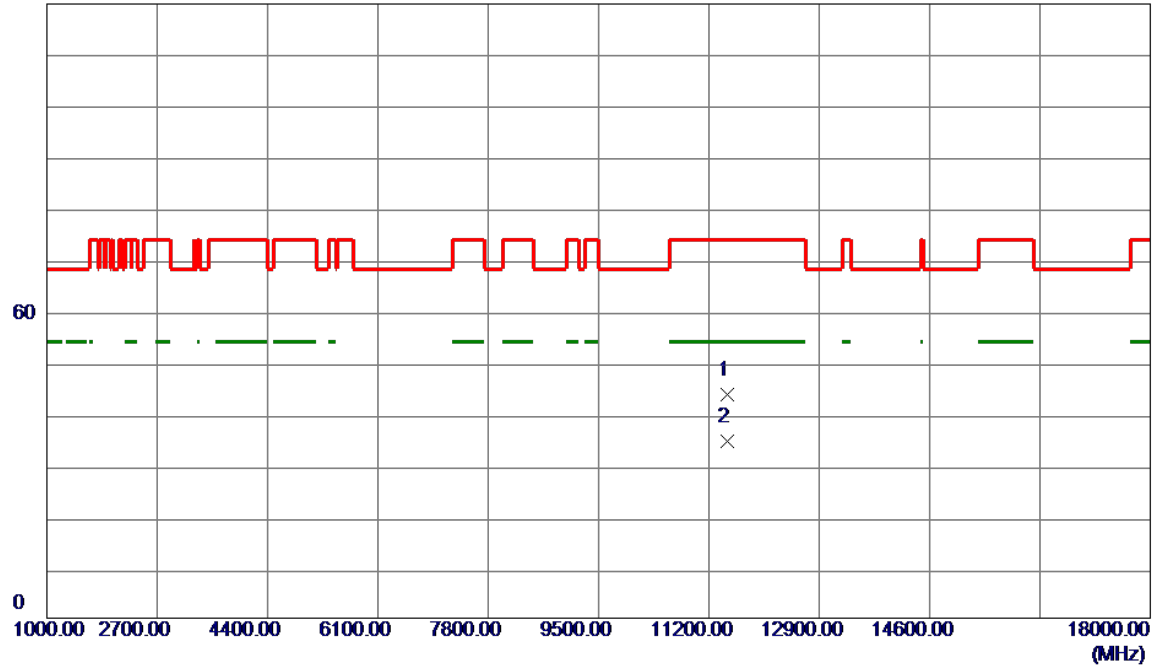

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11490.0000   | 42.88                      | 0.81                    | 43.69                     | 74.00           | -30.31       | Peak     |         |
| 2 * | 11490.0000   | 33.68                      | 0.81                    | 34.49                     | 54.00           | -19.51       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5745MHz              | Polarization | Horizontal |

120 dBuV/m

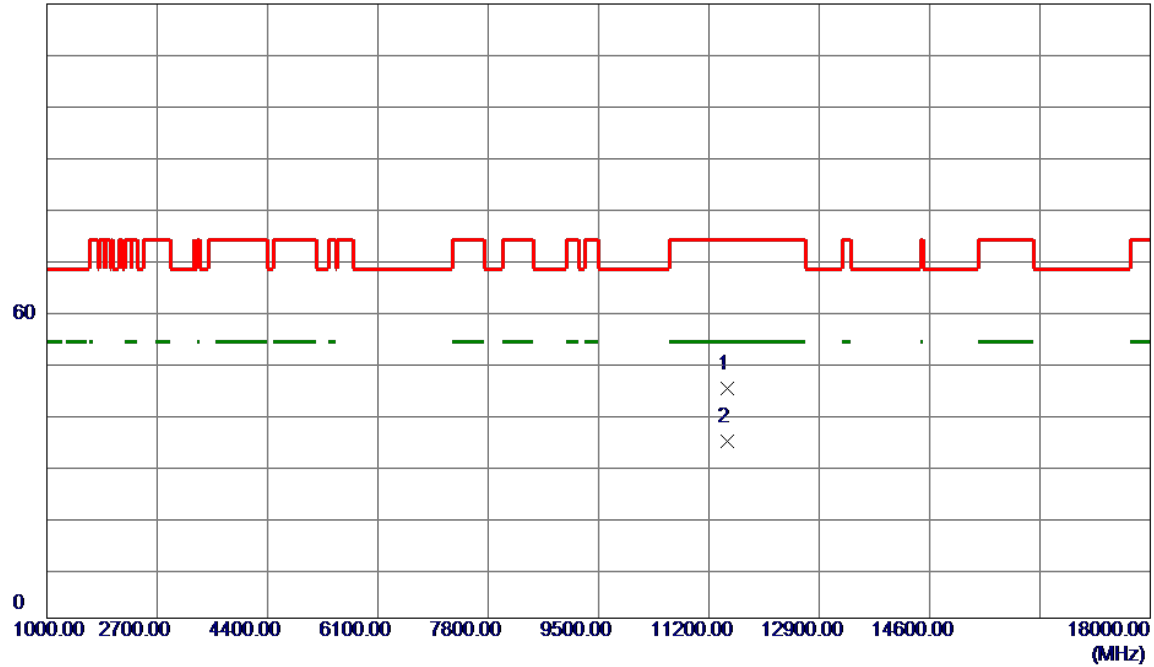

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11490.0000   | 43.97                      | 0.81                    | 44.78                     | 74.00           | -29.22       | Peak     |         |
| 2 * | 11490.0000   | 33.64                      | 0.81                    | 34.45                     | 54.00           | -19.55       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5785MHz              | Polarization | Vertical   |

120 dBuV/m

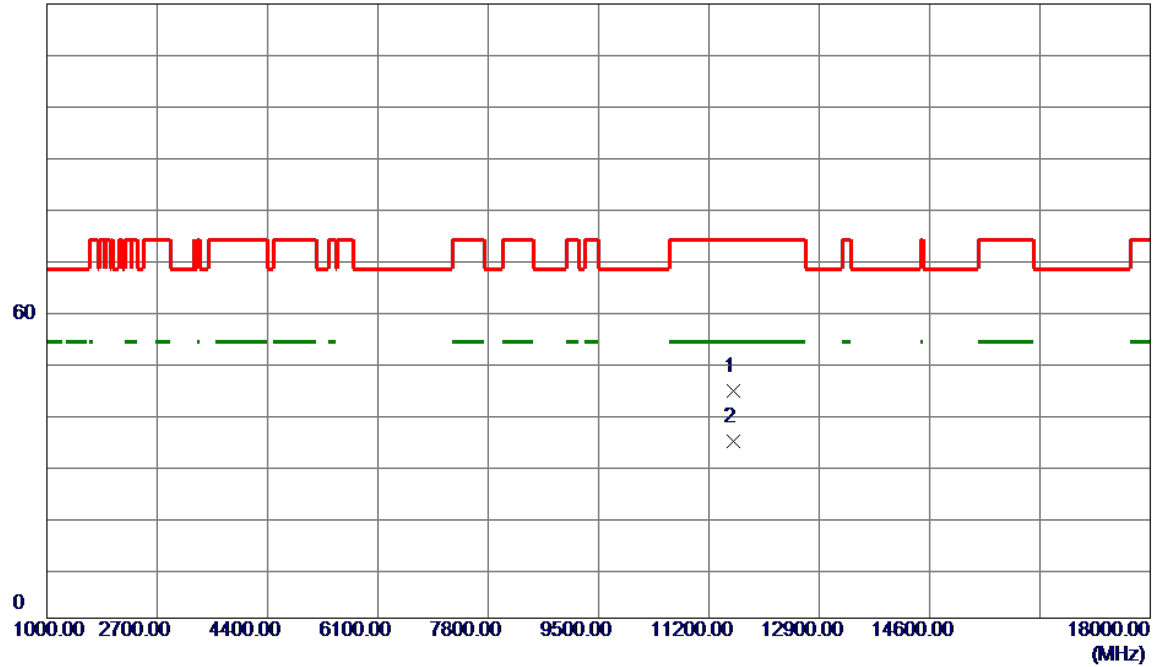


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11570.0000   | 43.66                      | 0.85                    | 44.51                     | 74.00           | -29.49       | Peak     |         |
| 2 * | 11570.0000   | 33.63                      | 0.85                    | 34.48                     | 54.00           | -19.52       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5785MHz              | Polarization | Horizontal |

120 dBuV/m

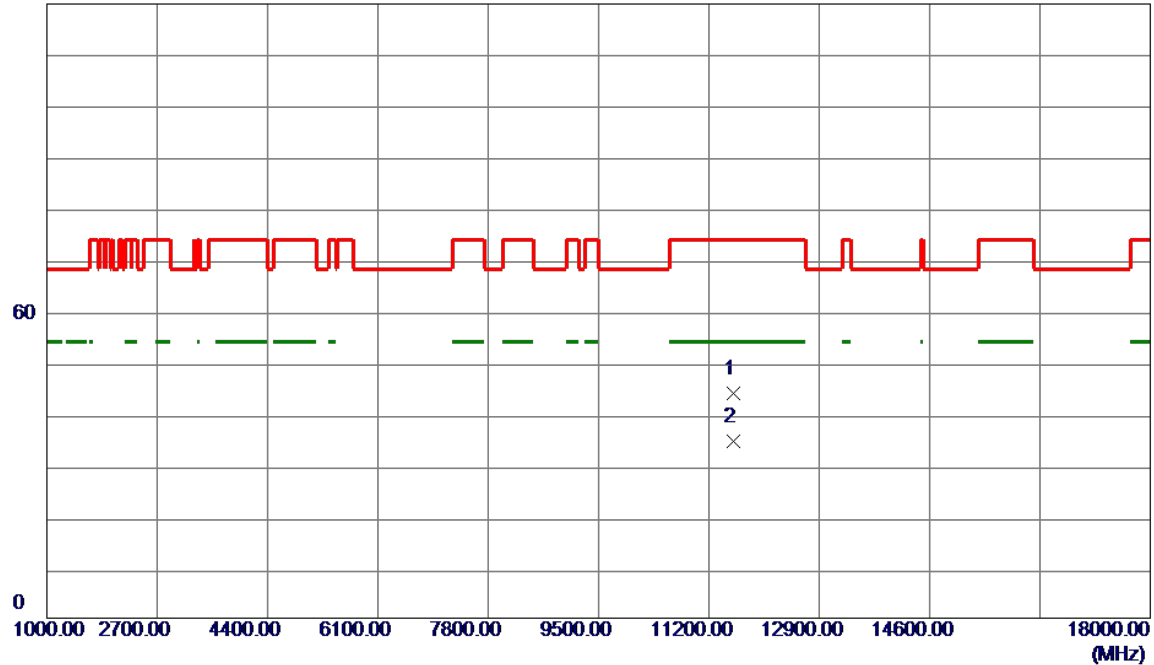


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11570.0000   | 43.04                      | 0.85                    | 43.89                     | 74.00           | -30.11       | Peak     |         |
| 2 * | 11570.0000   | 33.63                      | 0.85                    | 34.48                     | 54.00           | -19.52       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5825MHz              | Polarization | Vertical   |

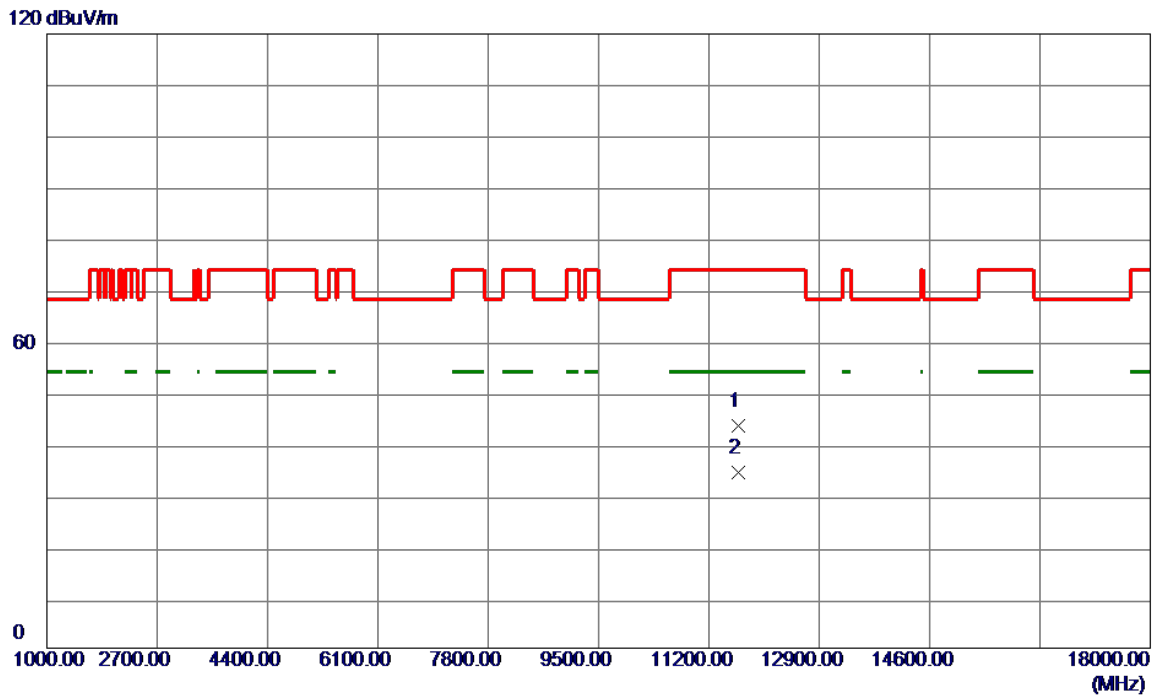

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11650.0000   | 42.47                      | 0.86                    | 43.33                     | 74.00           | -30.67       | Peak     |         |
| 2 * | 11650.0000   | 33.54                      | 0.86                    | 34.40                     | 54.00           | -19.60       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/26 |
| Test Frequency | 5825MHz              | Polarization | Horizontal |

120 dBuV/m

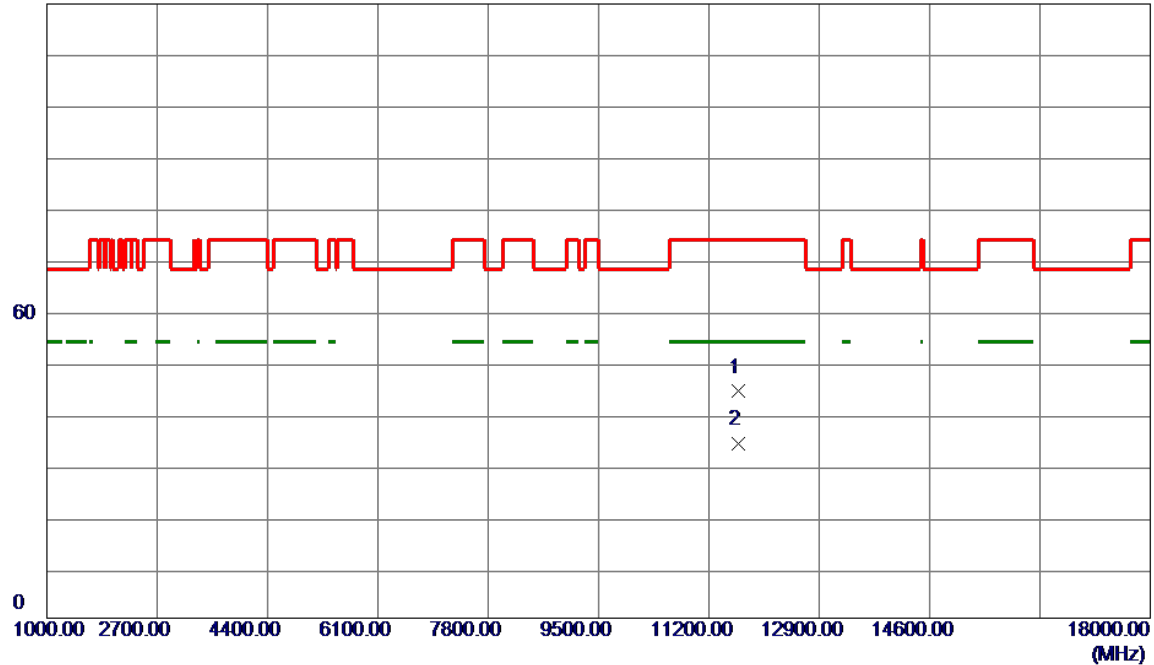


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11650.0000   | 43.42                      | 0.86                    | 44.28                     | 74.00           | -29.72       | Peak     |         |
| 2 * | 11650.0000   | 33.14                      | 0.86                    | 34.00                     | 54.00           | -20.00       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5190MHz              | Polarization | Vertical   |

120 dBuV/m

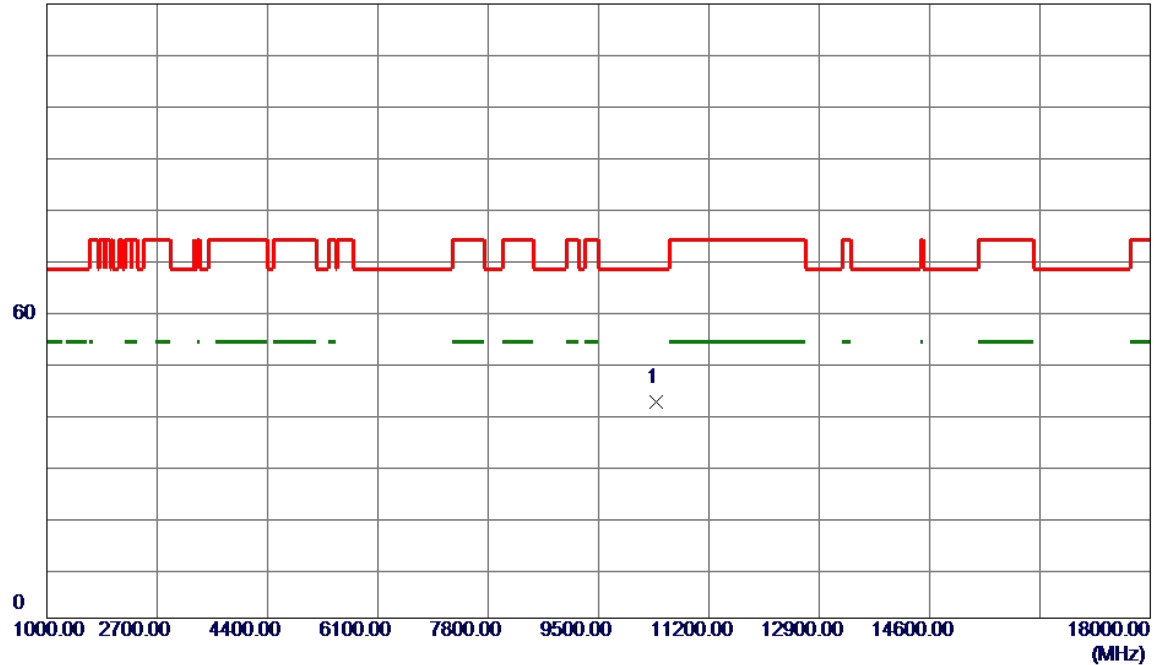


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.0000   | 42.75                      | -0.49                   | 42.26                     | 68.20           | -25.94       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5190MHz              | Polarization | Horizontal |

120 dBuV/m

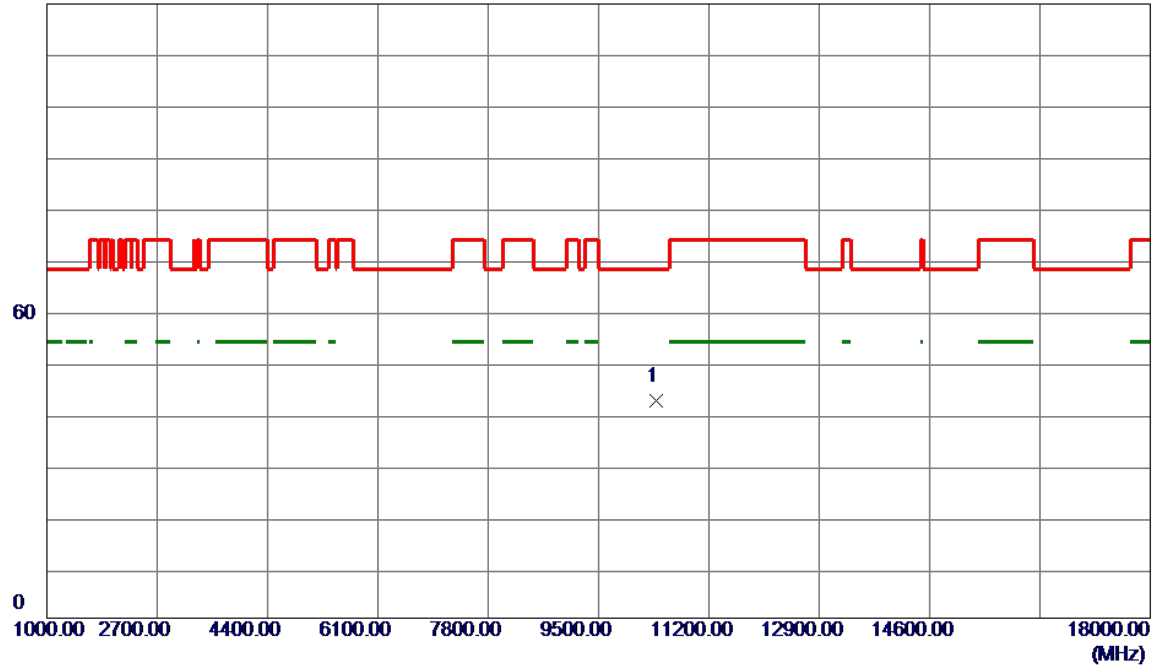


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.0000   | 42.98                      | -0.49                   | 42.49                     | 68.20           | -25.71       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5230MHz              | Polarization | Vertical   |

120 dBuV/m

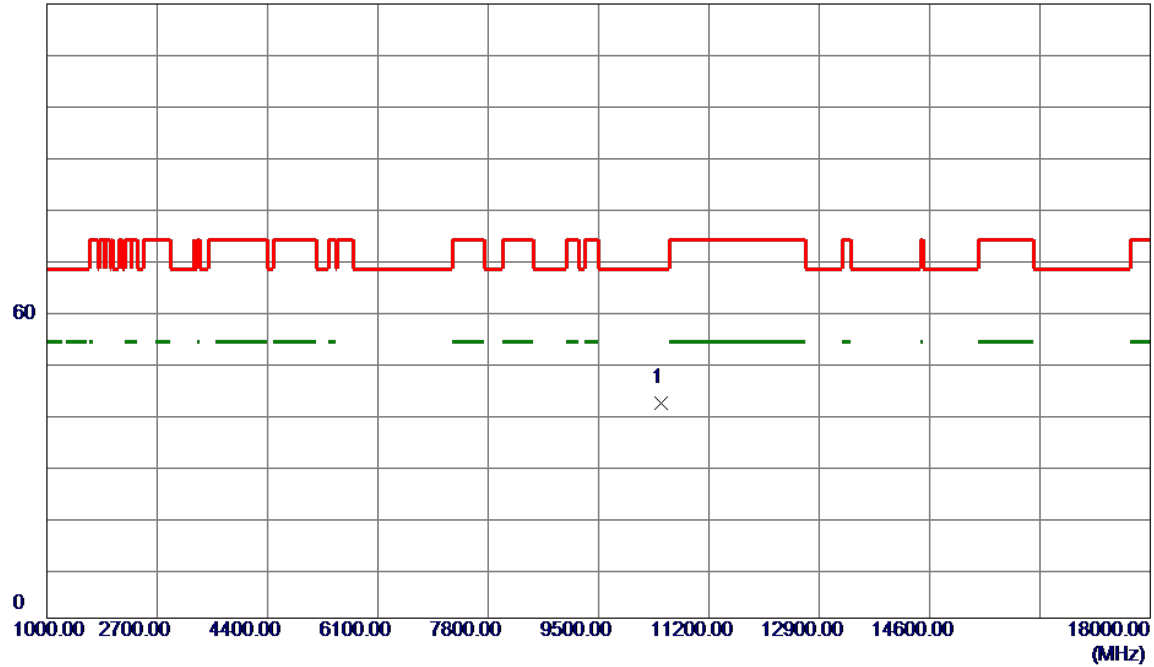


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.0000   | 42.49                      | -0.37                   | 42.12                     | 68.20           | -26.08       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5230MHz              | Polarization | Horizontal |

120 dBuV/m

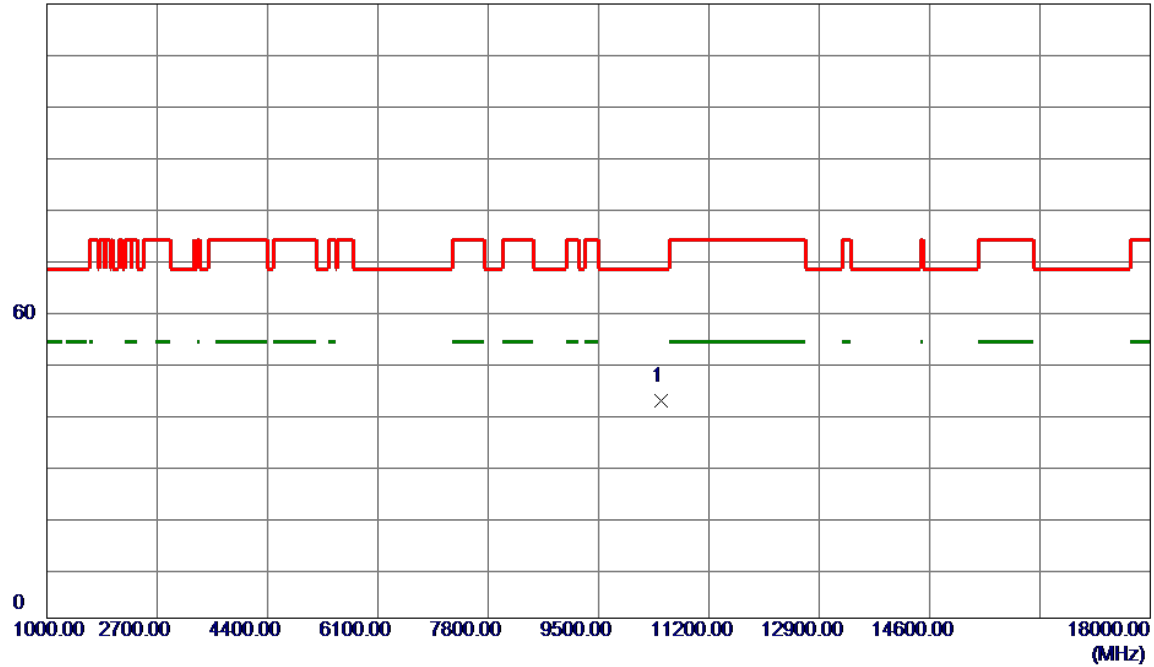


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10460.0000 | 42.84         | -0.37          | 42.47       | 68.20  | -25.73 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5270MHz              | Polarization | Vertical   |

120 dBuV/m

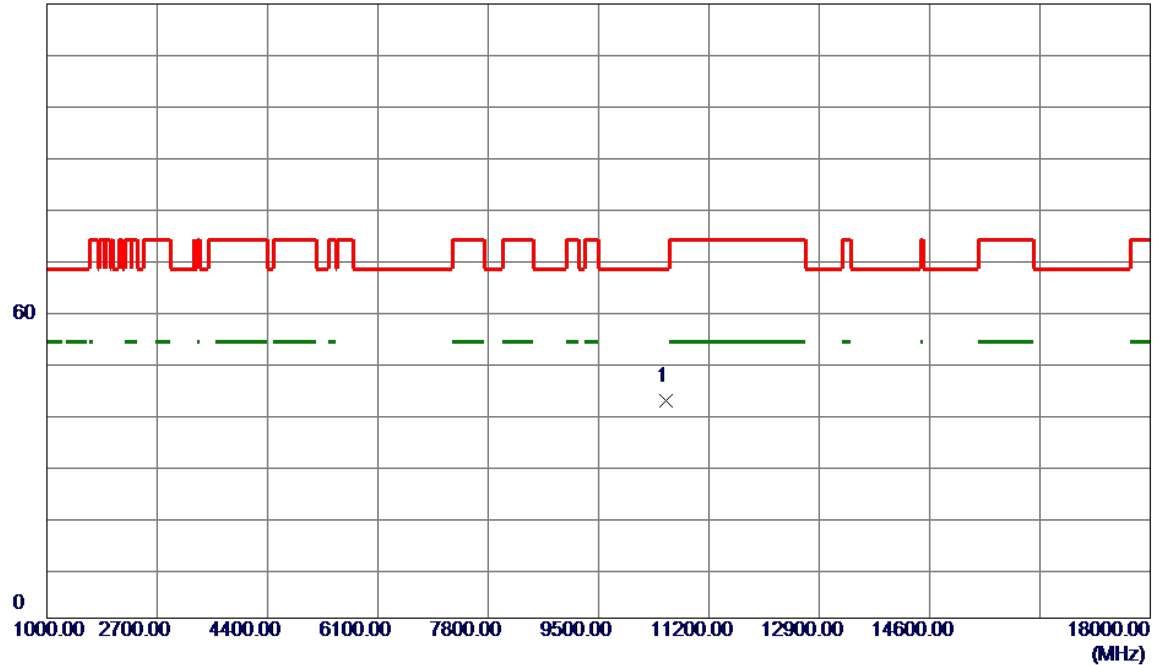


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10540.0000   | 42.68                      | -0.30                   | 42.38                     | 68.20           | -25.82       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5270MHz              | Polarization | Horizontal |

120 dBuV/m

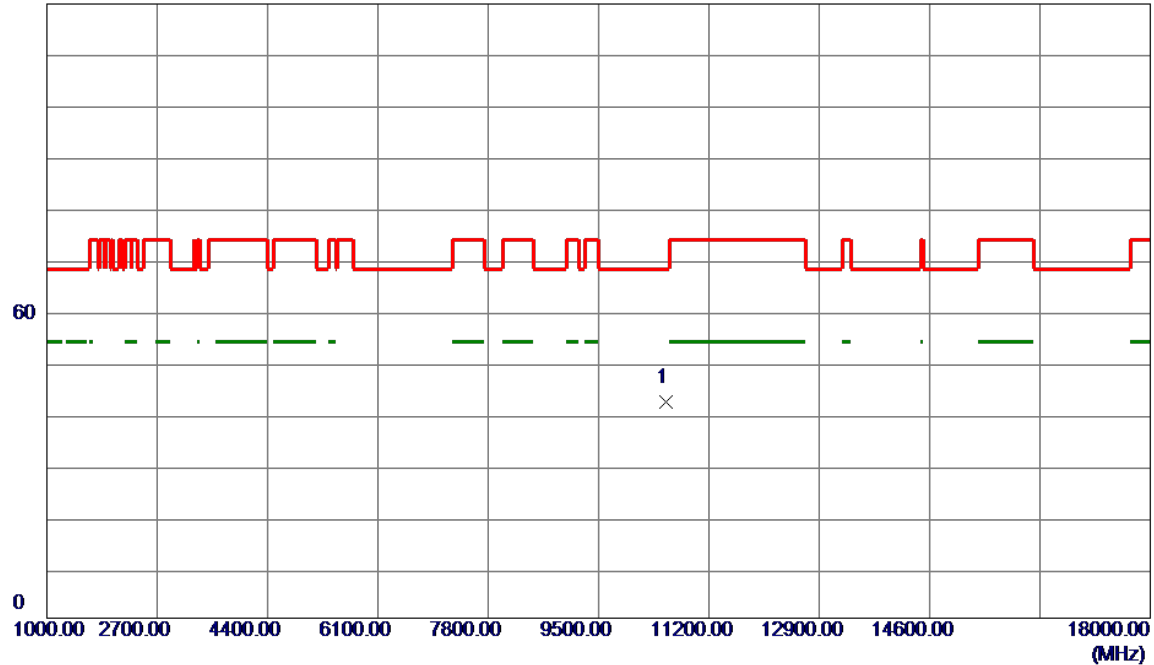


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10540.0000 | 42.50         | -0.30          | 42.20       | 68.20  | -26.00 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5310MHz              | Polarization | Vertical   |

120 dBuV/m

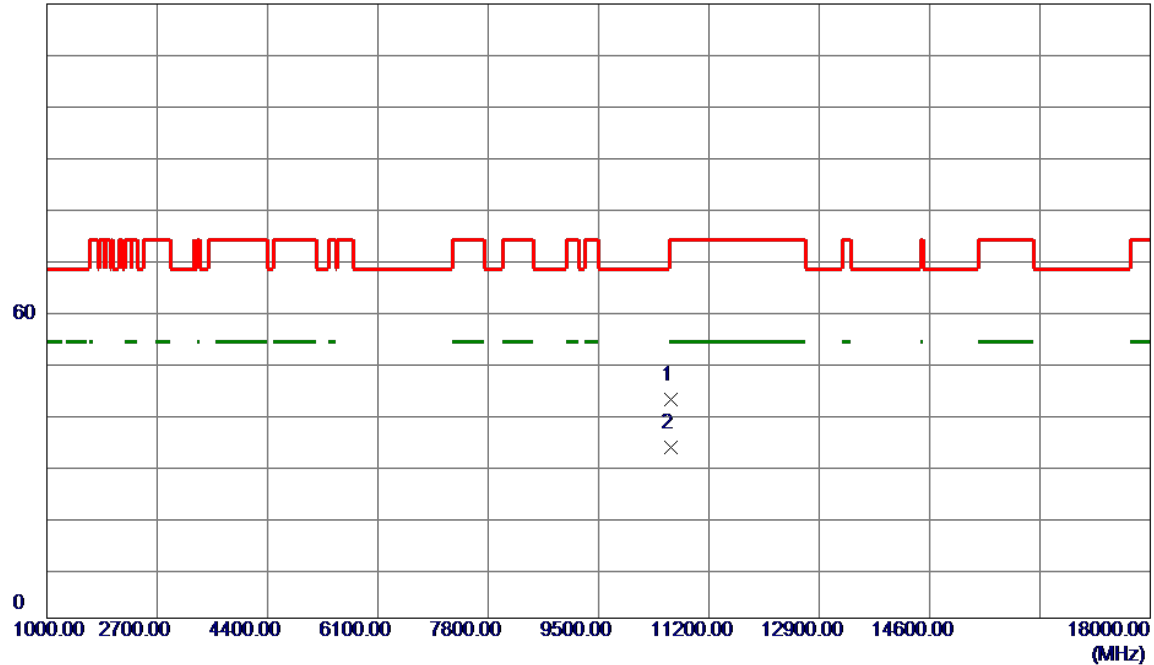


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10620.0000   | 42.90                      | -0.27                   | 42.63                     | 74.00           | -31.37       | Peak     |         |
| 2 * | 10620.0000   | 33.65                      | -0.27                   | 33.38                     | 54.00           | -20.62       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5310MHz              | Polarization | Horizontal |

120 dBuV/m

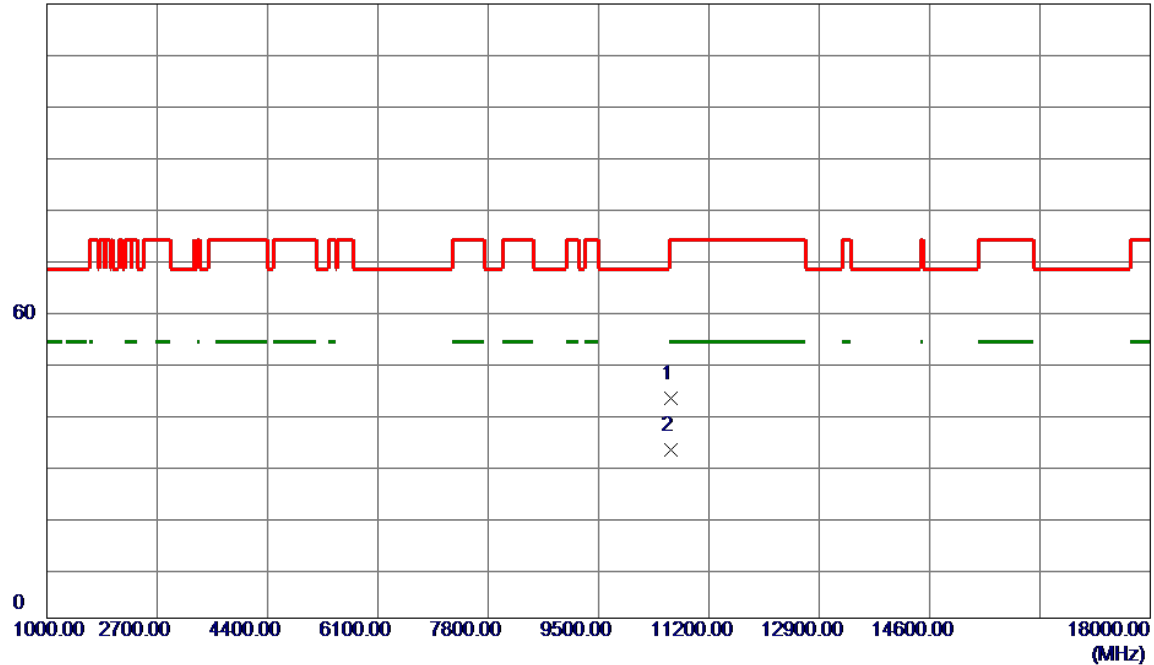


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10620.0000   | 43.29                      | -0.27                   | 43.02                     | 74.00           | -30.98       | Peak     |         |
| 2 * | 10620.0000   | 33.21                      | -0.27                   | 32.94                     | 54.00           | -21.06       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5510MHz              | Polarization | Vertical   |

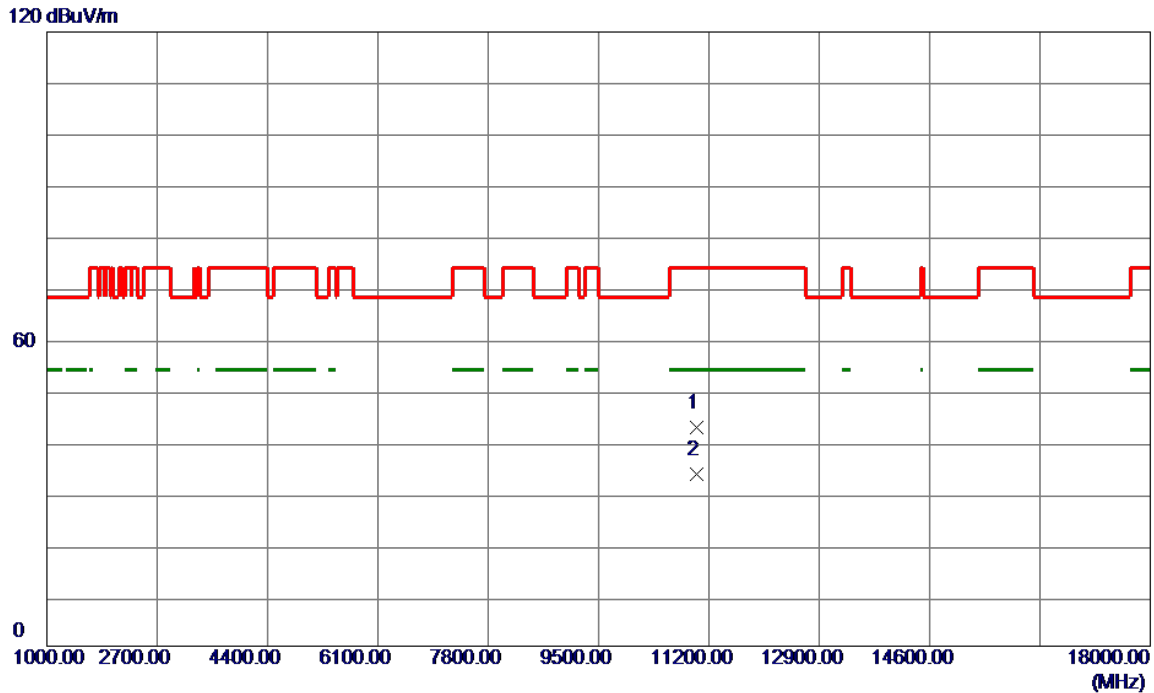


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11020.0000   | 42.84                      | -0.10                   | 42.74                     | 74.00           | -31.26       | Peak     |         |
| 2 * | 11020.0000   | 33.68                      | -0.10                   | 33.58                     | 54.00           | -20.42       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5510MHz              | Polarization | Horizontal |

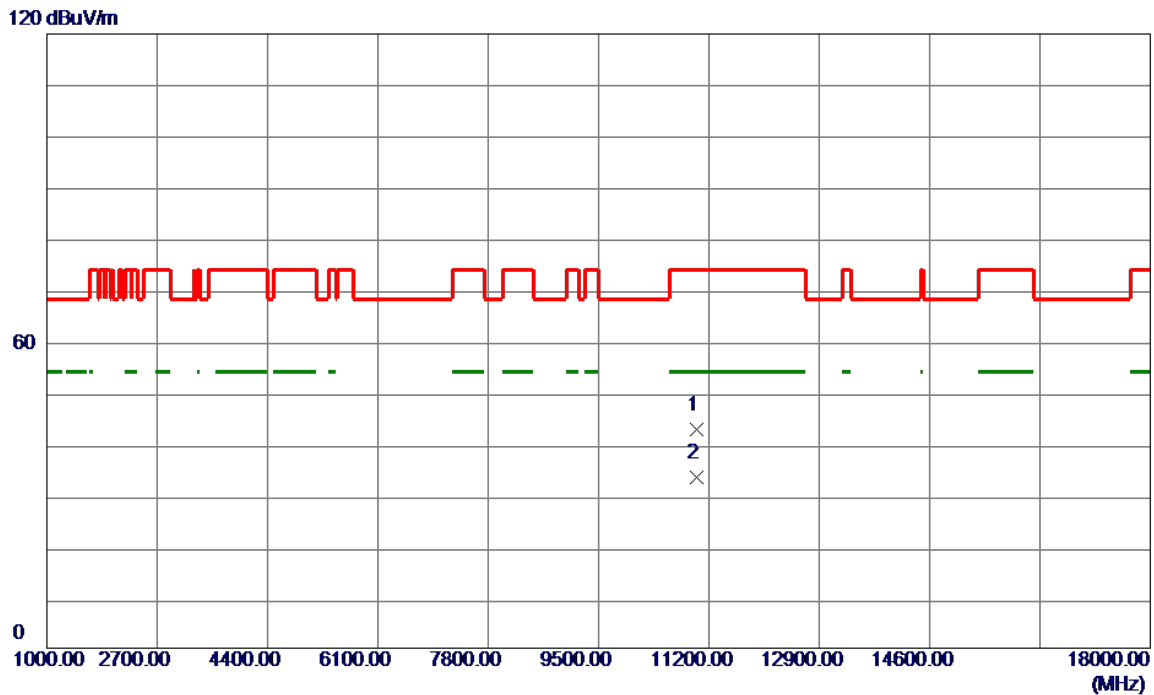


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11020.0000   | 42.88                      | -0.10                   | 42.78                     | 74.00           | -31.22       | Peak     |         |
| 2 * | 11020.0000   | 33.55                      | -0.10                   | 33.45                     | 54.00           | -20.55       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5550MHz              | Polarization | Vertical   |

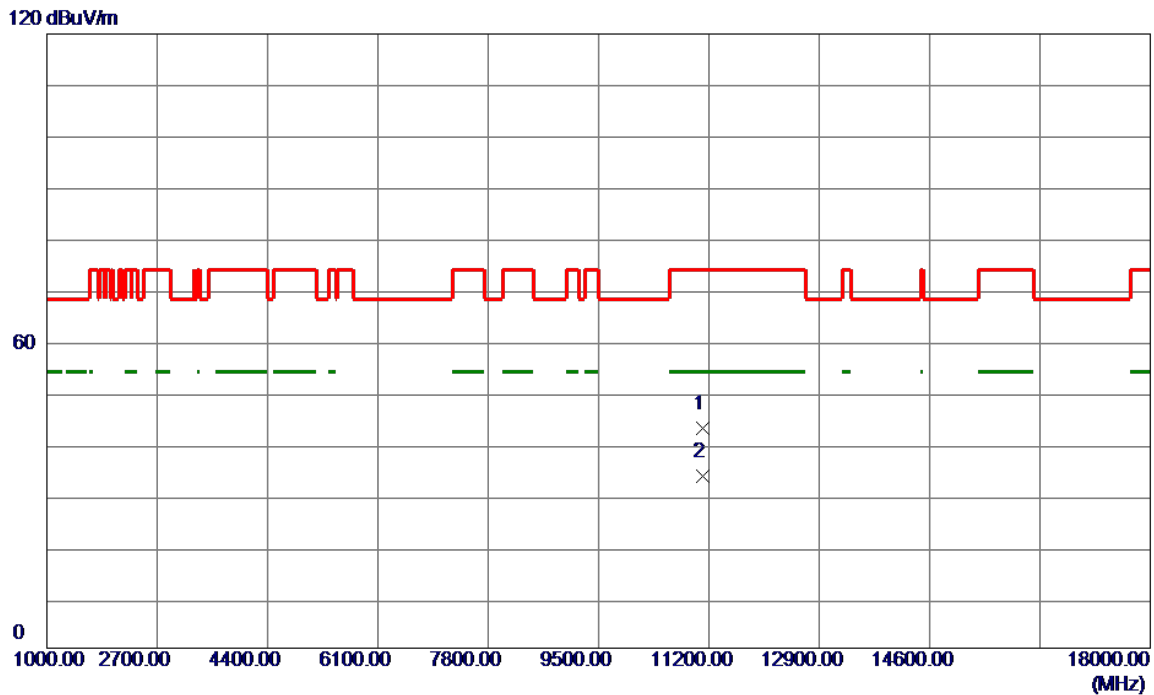


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11100.0000   | 42.94                      | 0.05                    | 42.99                     | 74.00           | -31.01       | Peak     |         |
| 2 * | 11100.0000   | 33.65                      | 0.05                    | 33.70                     | 54.00           | -20.30       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5550MHz              | Polarization | Horizontal |

120 dBuV/m

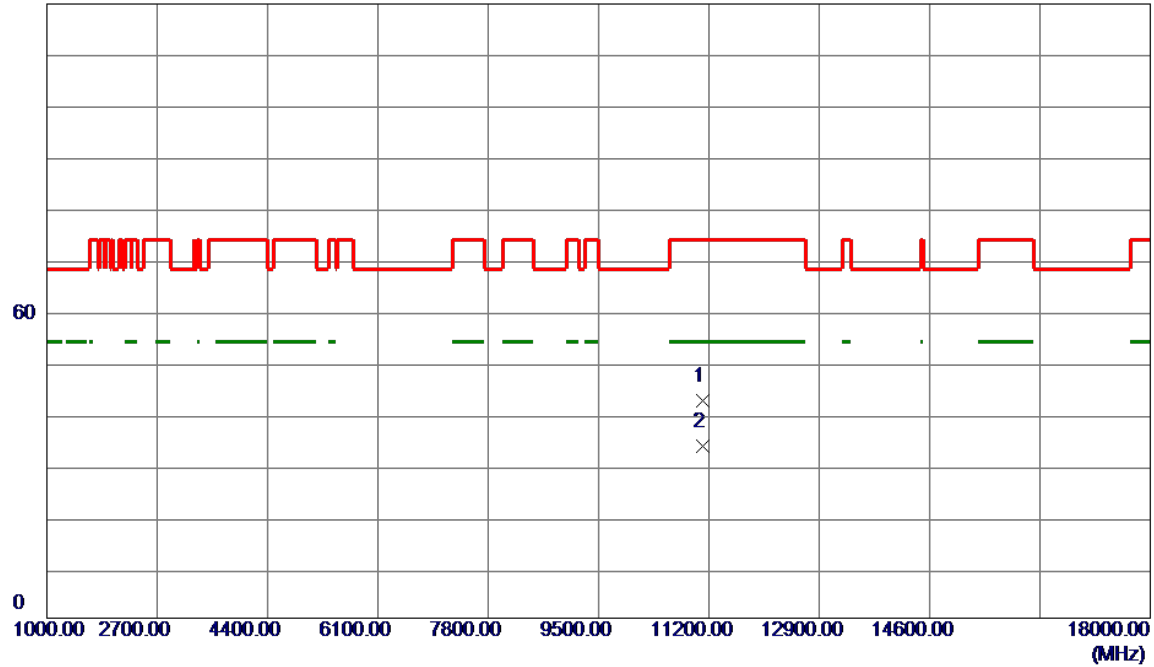

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11100.0000   | 42.54                      | 0.05                    | 42.59                     | 74.00           | -31.41       | Peak     |         |
| 2 * | 11100.0000   | 33.64                      | 0.05                    | 33.69                     | 54.00           | -20.31       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5670MHz              | Polarization | Vertical   |

120 dBuV/m

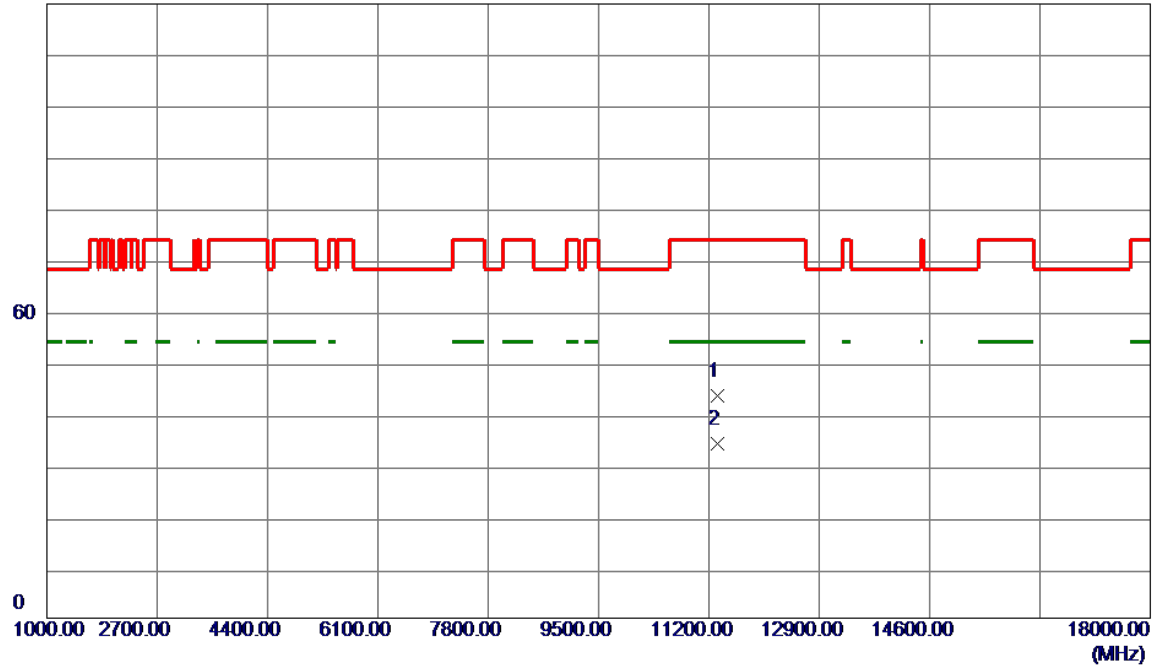


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11340.0000   | 42.97                      | 0.52                    | 43.49                     | 74.00           | -30.51       | Peak     |         |
| 2 * | 11340.0000   | 33.47                      | 0.52                    | 33.99                     | 54.00           | -20.01       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5670MHz              | Polarization | Horizontal |

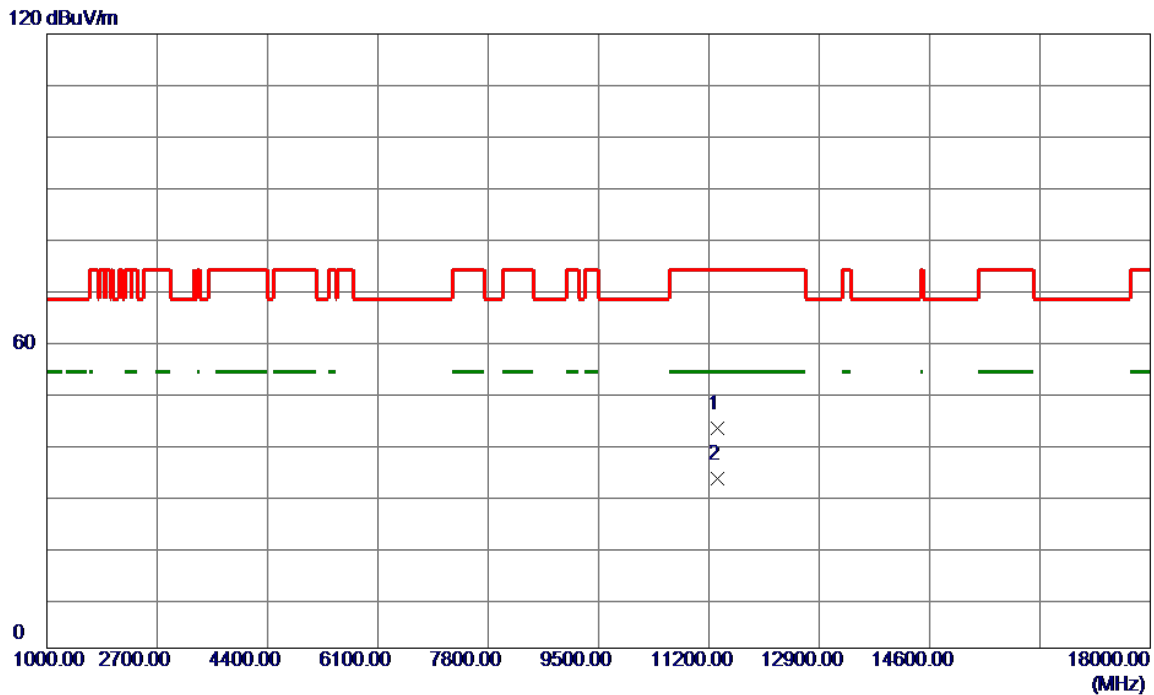


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11340.0000   | 42.46                      | 0.52                    | 42.98                     | 74.00           | -31.02       | Peak     |         |
| 2 * | 11340.0000   | 32.54                      | 0.52                    | 33.06                     | 54.00           | -20.94       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5755MHz              | Polarization | Vertical   |

120 dBuV/m

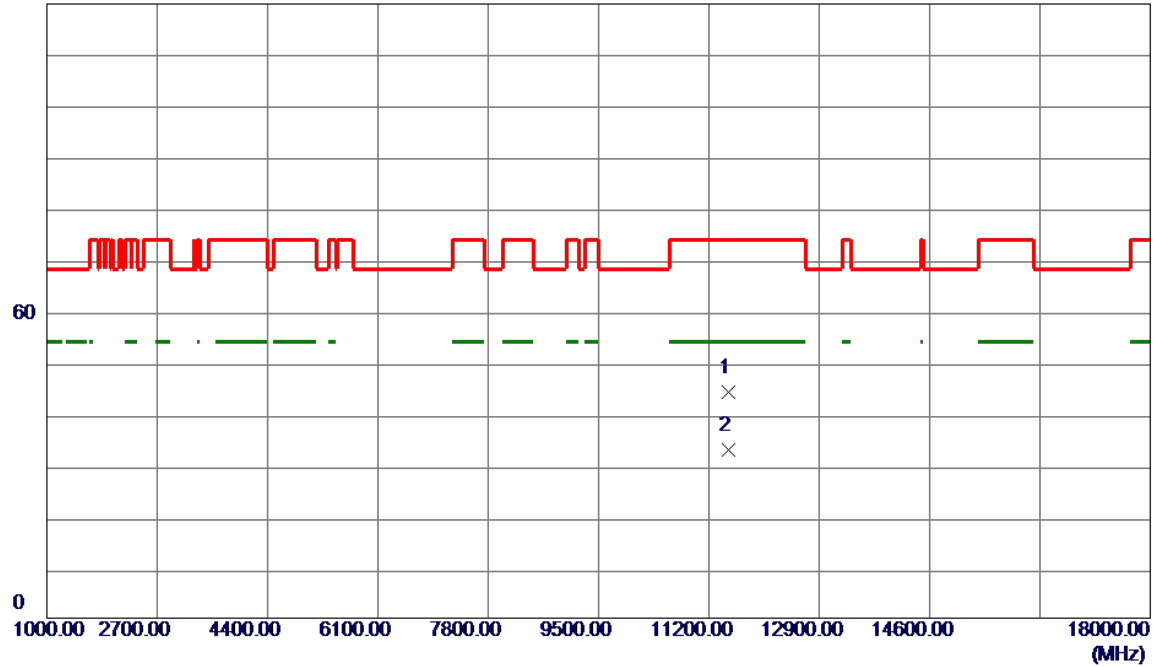


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11510.0000   | 43.26                      | 0.83                    | 44.09                     | 74.00           | -29.91       | Peak     |         |
| 2 * | 11510.0000   | 32.00                      | 0.83                    | 32.83                     | 54.00           | -21.17       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5755MHz              | Polarization | Horizontal |

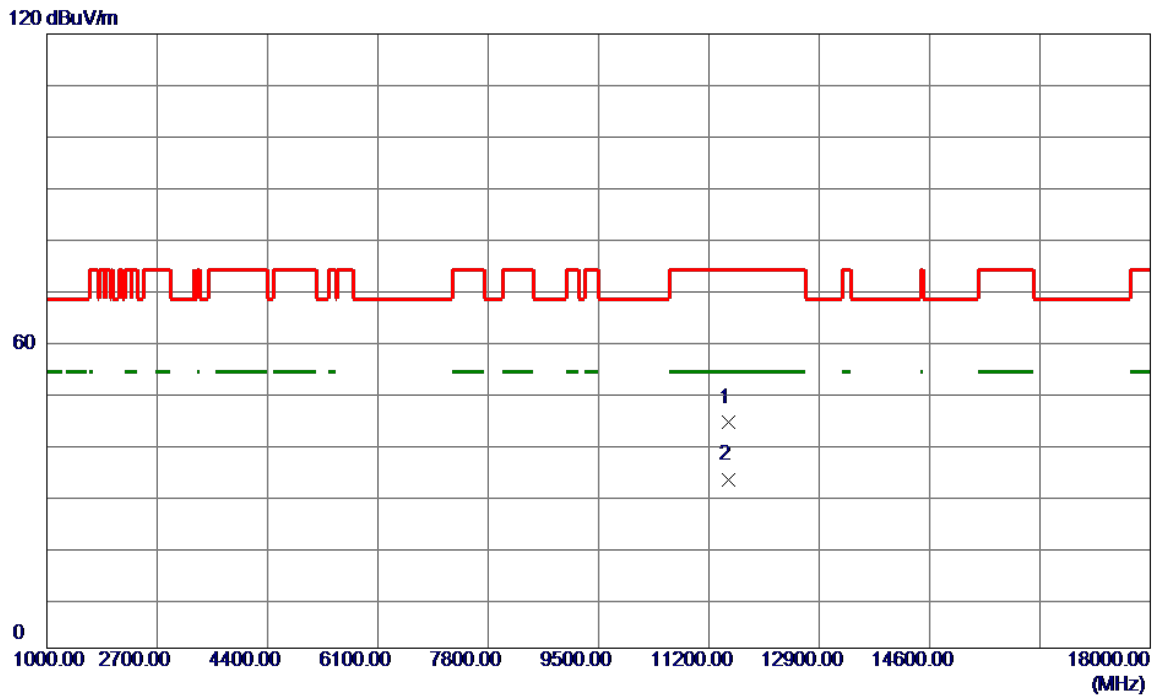


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11510.0000   | 43.41                      | 0.83                    | 44.24                     | 74.00           | -29.76       | Peak     |         |
| 2 * | 11510.0000   | 32.17                      | 0.83                    | 33.00                     | 54.00           | -21.00       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5795MHz              | Polarization | Vertical   |

120 dBuV/m

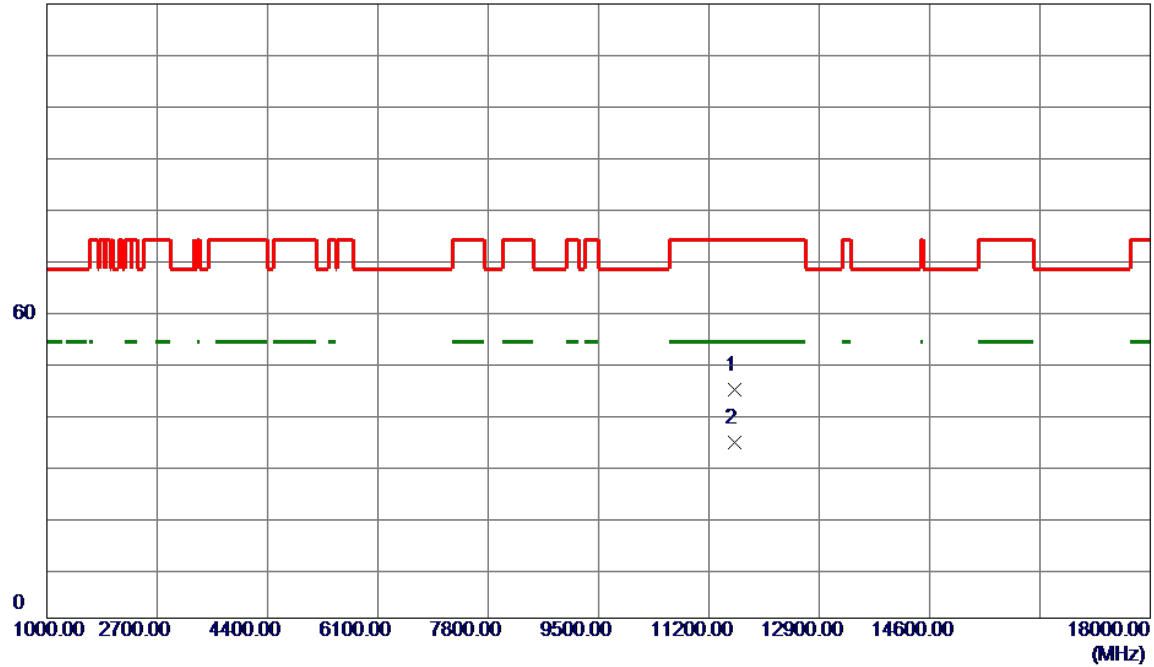


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11590.0000   | 43.70                      | 0.85                    | 44.55                     | 74.00           | -29.45       | Peak     |         |
| 2 * | 11590.0000   | 33.58                      | 0.85                    | 34.43                     | 54.00           | -19.57       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/26 |
| Test Frequency | 5795MHz              | Polarization | Horizontal |

120 dBuV/m

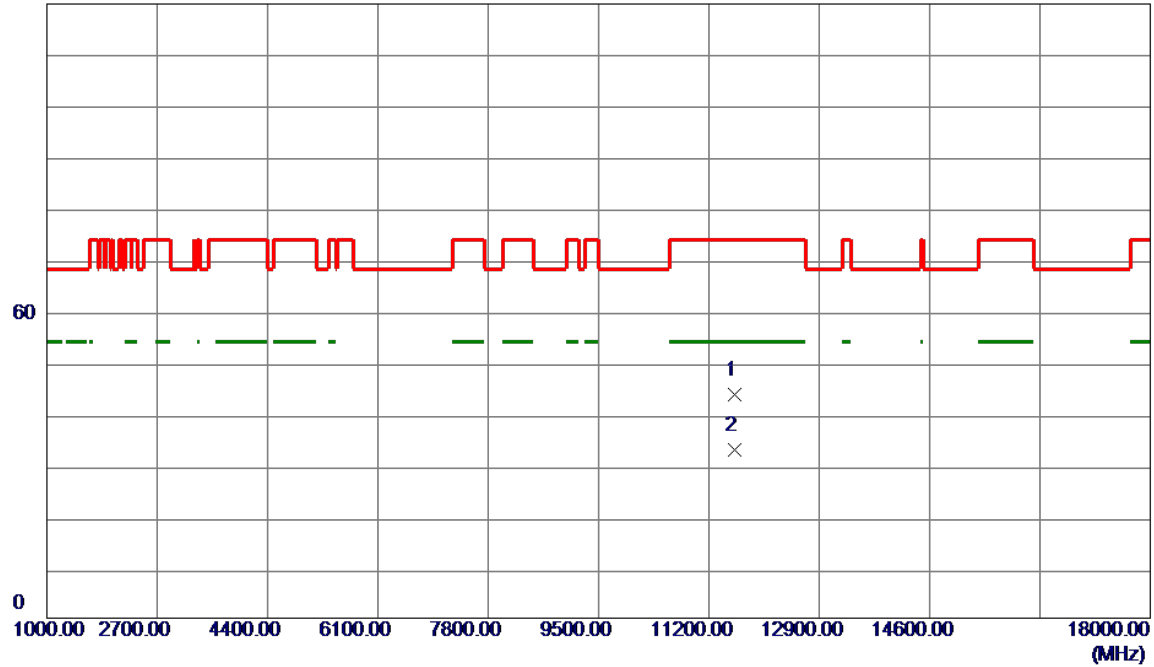

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11590.0000   | 42.91                      | 0.85                    | 43.76                     | 74.00           | -30.24       | Peak     |         |
| 2 * | 11590.0000   | 32.14                      | 0.85                    | 32.99                     | 54.00           | -21.01       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5210MHz              | Polarization | Vertical   |

120 dBuV/m

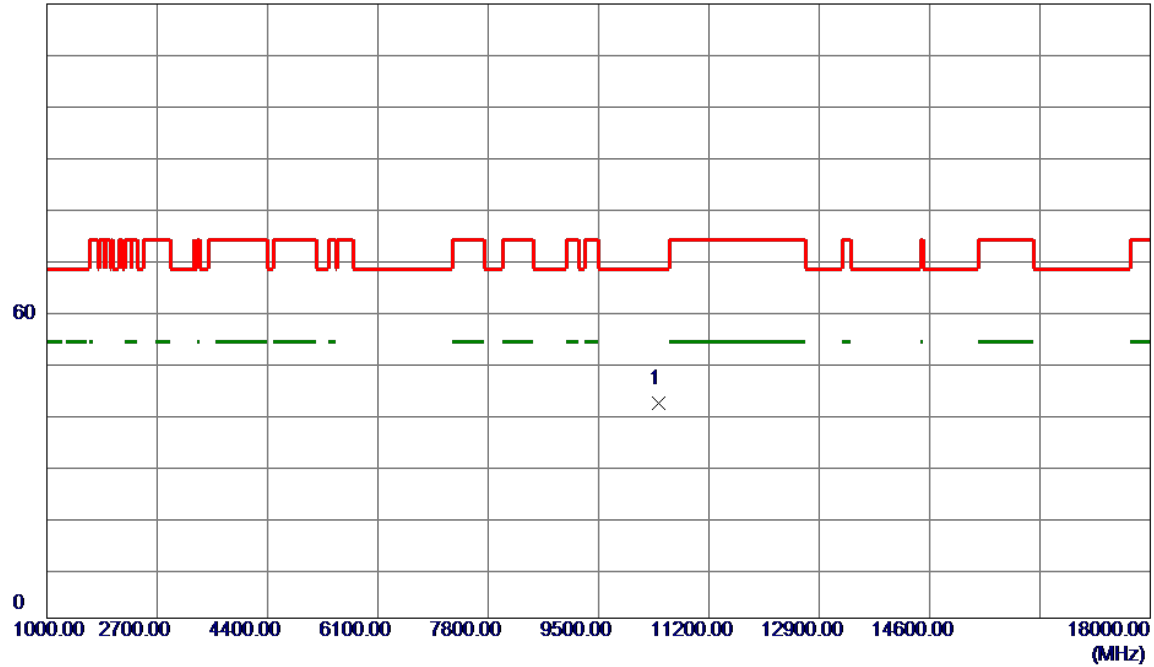


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.0000   | 42.45                      | -0.43                   | 42.02                     | 68.20           | -26.18       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5210MHz              | Polarization | Horizontal |

120 dBuV/m

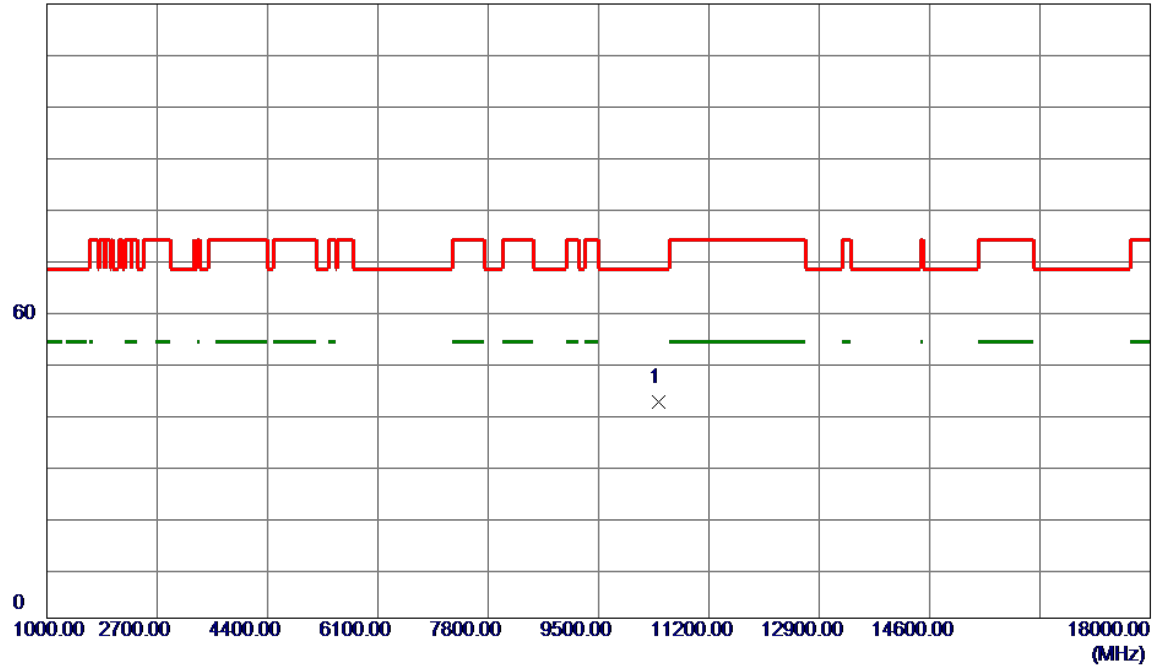


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10420.0000 | 42.67         | -0.43          | 42.24       | 68.20  | -25.96 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5290MHz              | Polarization | Vertical   |

120 dBuV/m

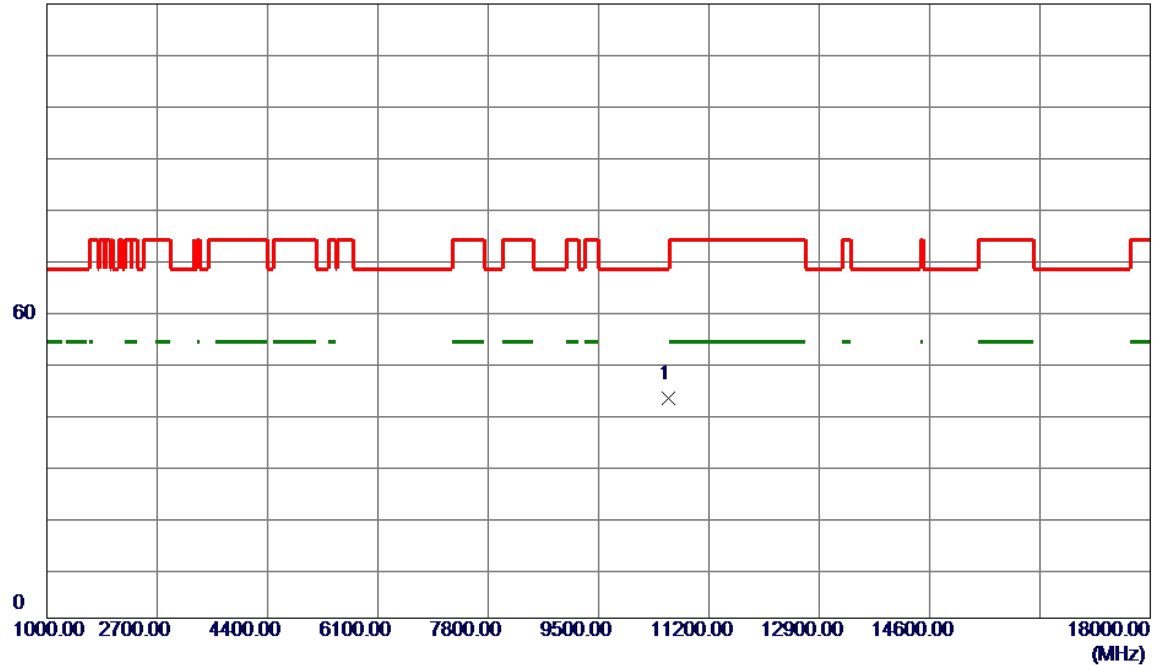


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10580.0000   | 43.23                      | -0.28                   | 42.95                     | 68.20           | -25.25       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5290MHz              | Polarization | Horizontal |

120 dBuV/m

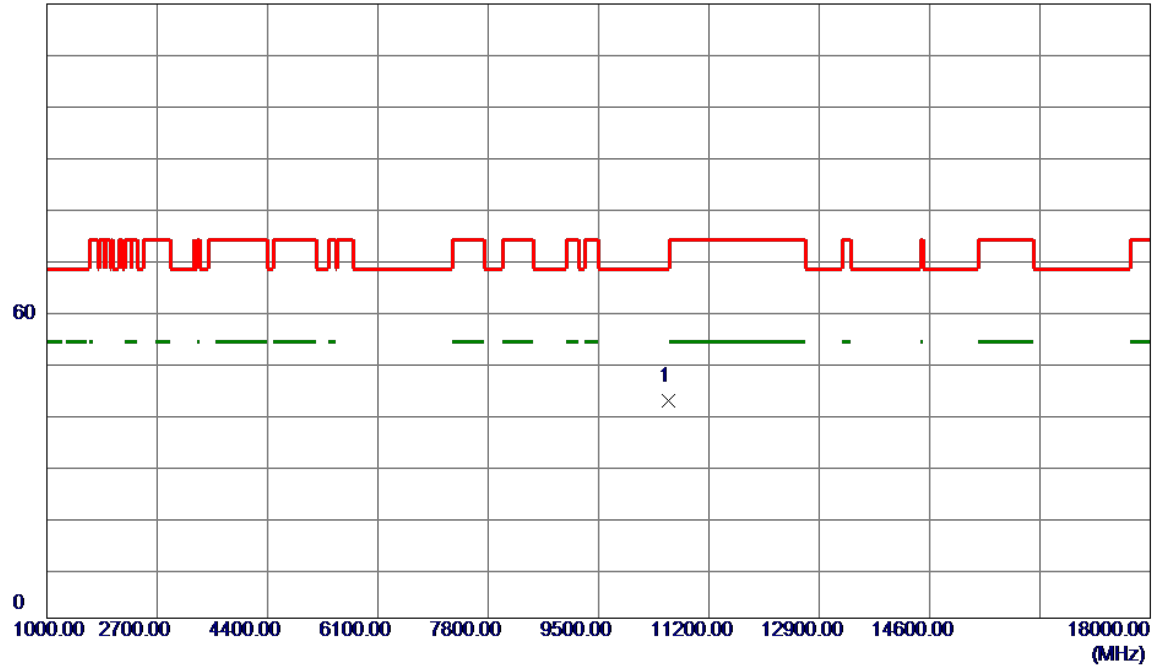


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10580.0000 | 42.69         | -0.28          | 42.41       | 68.20  | -25.79 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5530MHz              | Polarization | Vertical   |

120 dBuV/m

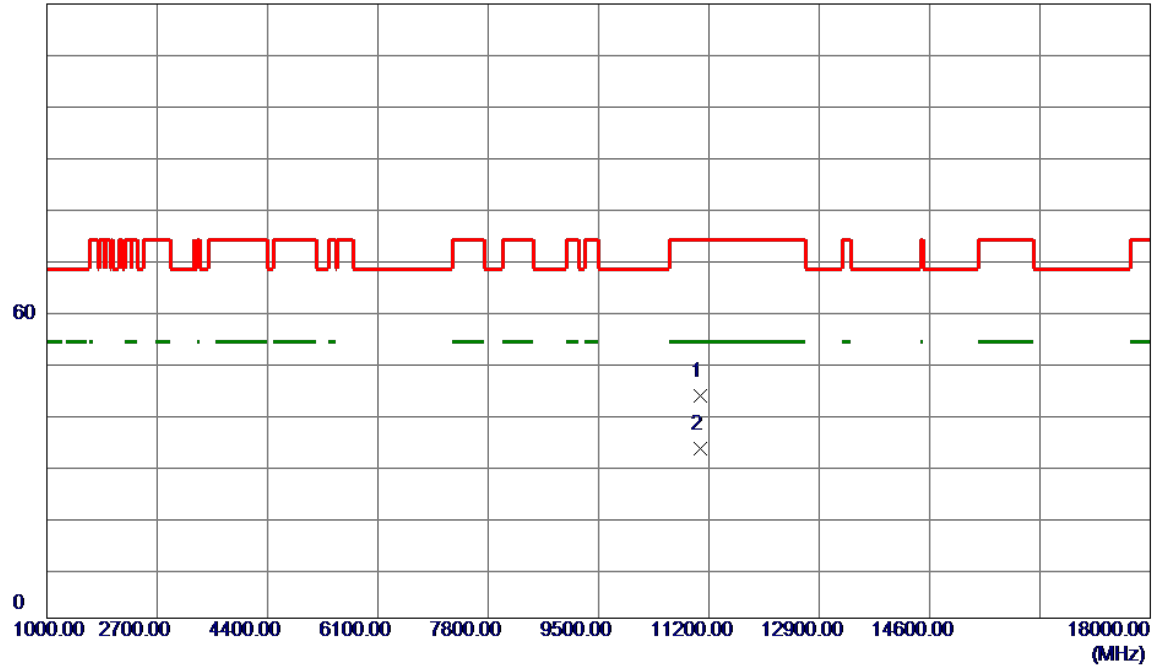


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.0000   | 43.39                      | -0.02                   | 43.37                     | 74.00           | -30.63       | Peak     |         |
| 2 * | 11060.0000   | 33.14                      | -0.02                   | 33.12                     | 54.00           | -20.88       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5530MHz              | Polarization | Horizontal |

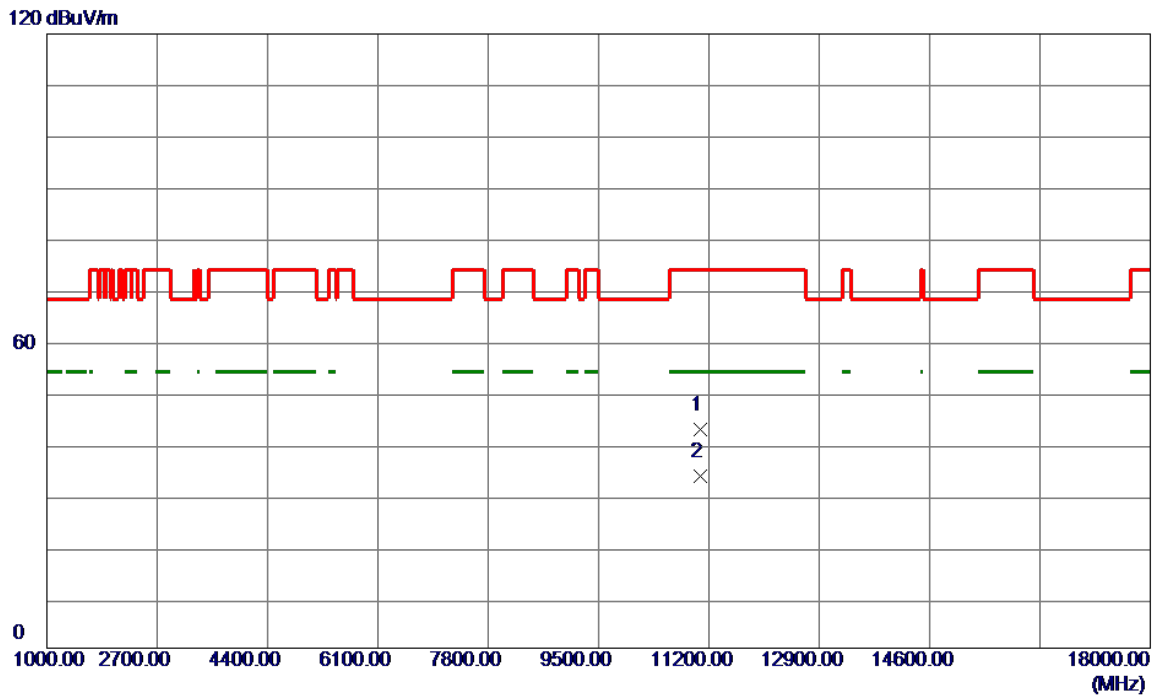


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.0000   | 42.79                      | -0.02                   | 42.77                     | 74.00           | -31.23       | Peak     |         |
| 2 * | 11060.0000   | 33.52                      | -0.02                   | 33.50                     | 54.00           | -20.50       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5610MHz              | Polarization | Vertical   |

120 dBuV/m

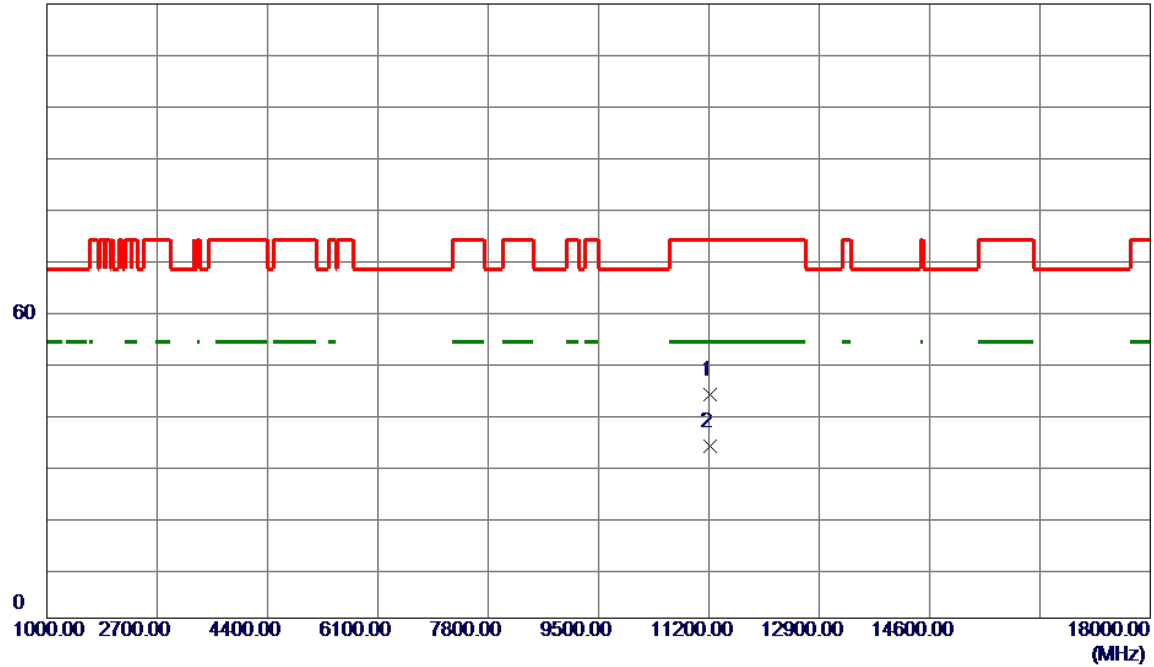


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.0000   | 43.35                      | 0.29                    | 43.64                     | 74.00           | -30.36       | Peak     |         |
| 2 * | 11220.0000   | 33.25                      | 0.29                    | 33.54                     | 54.00           | -20.46       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5610MHz              | Polarization | Horizontal |

120 dBuV/m

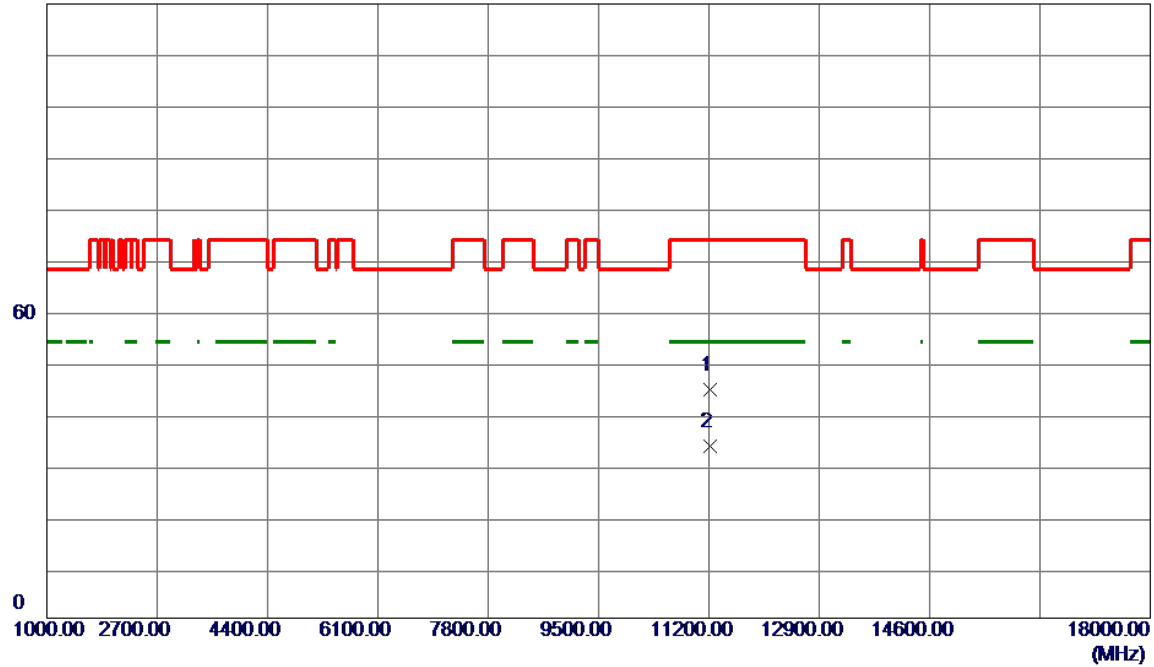


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.0000   | 44.35                      | 0.29                    | 44.64                     | 74.00           | -29.36       | Peak     |         |
| 2 * | 11220.0000   | 33.24                      | 0.29                    | 33.53                     | 54.00           | -20.47       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5775MHz              | Polarization | Vertical   |

120 dBuV/m

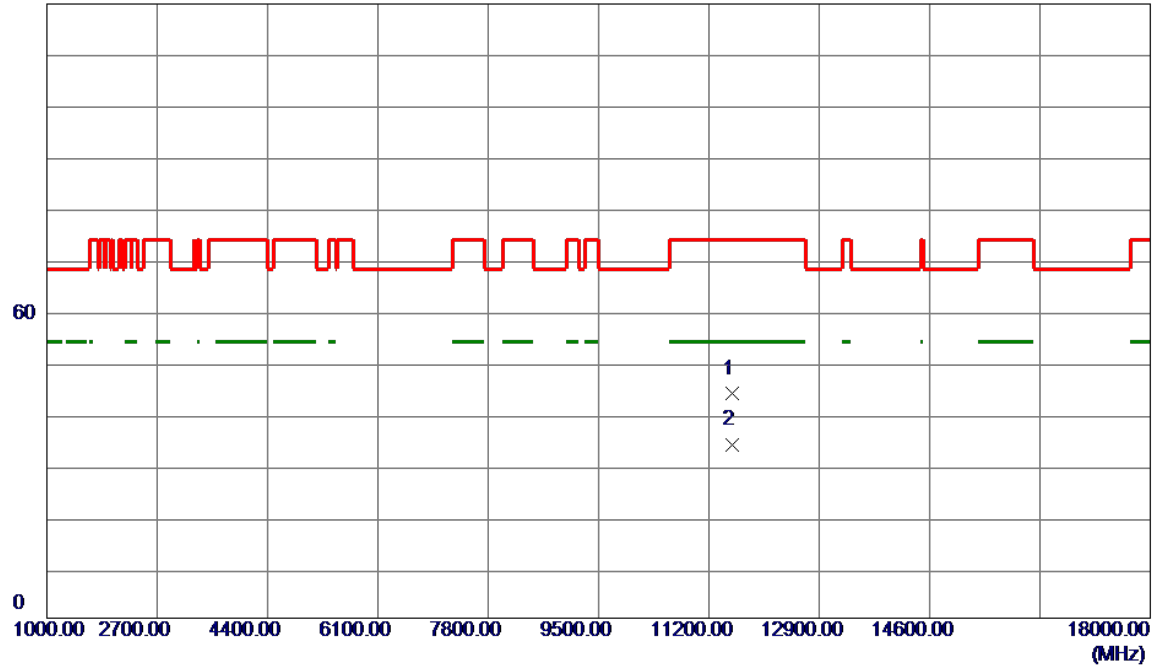


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.0000   | 43.18                      | 0.84                    | 44.02                     | 74.00           | -29.98       | Peak     |         |
| 2 * | 11550.0000   | 33.12                      | 0.84                    | 33.96                     | 54.00           | -20.04       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/26 |
| Test Frequency | 5775MHz              | Polarization | Horizontal |

120 dBuV/m

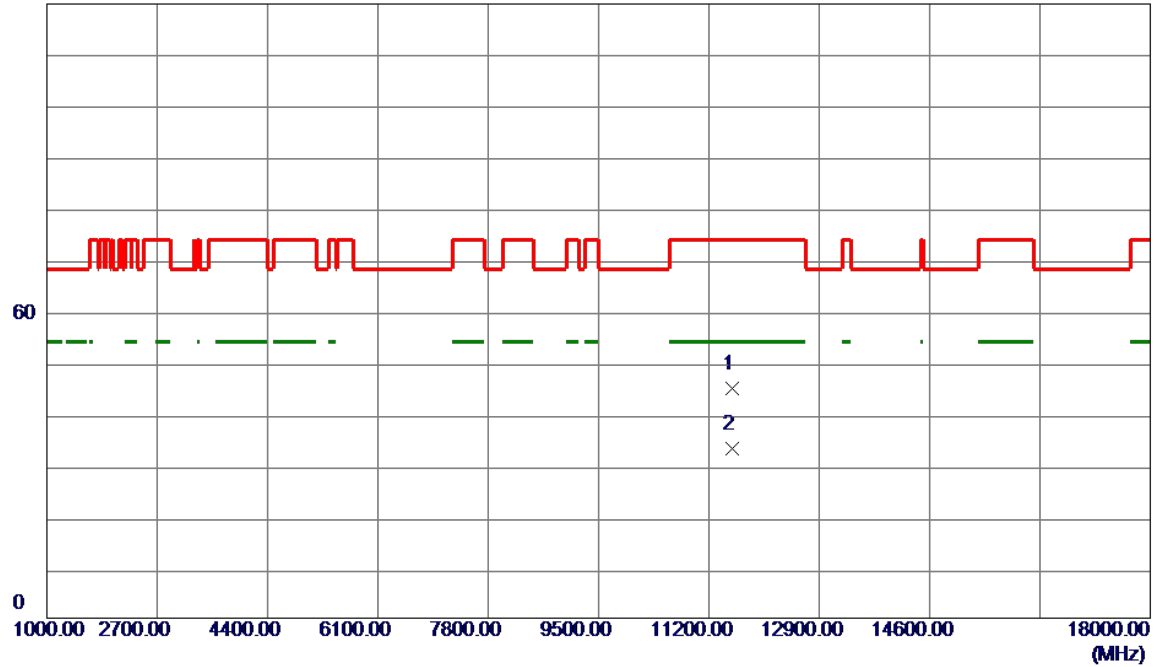


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.0000   | 43.97                      | 0.84                    | 44.81                     | 74.00           | -29.19       | Peak     |         |
| 2 * | 11550.0000   | 32.23                      | 0.84                    | 33.07                     | 54.00           | -20.93       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE160) | Test Date    | 2024/12/26 |
| Test Frequency | 5250MHz               | Polarization | Vertical   |

120 dBuV/m

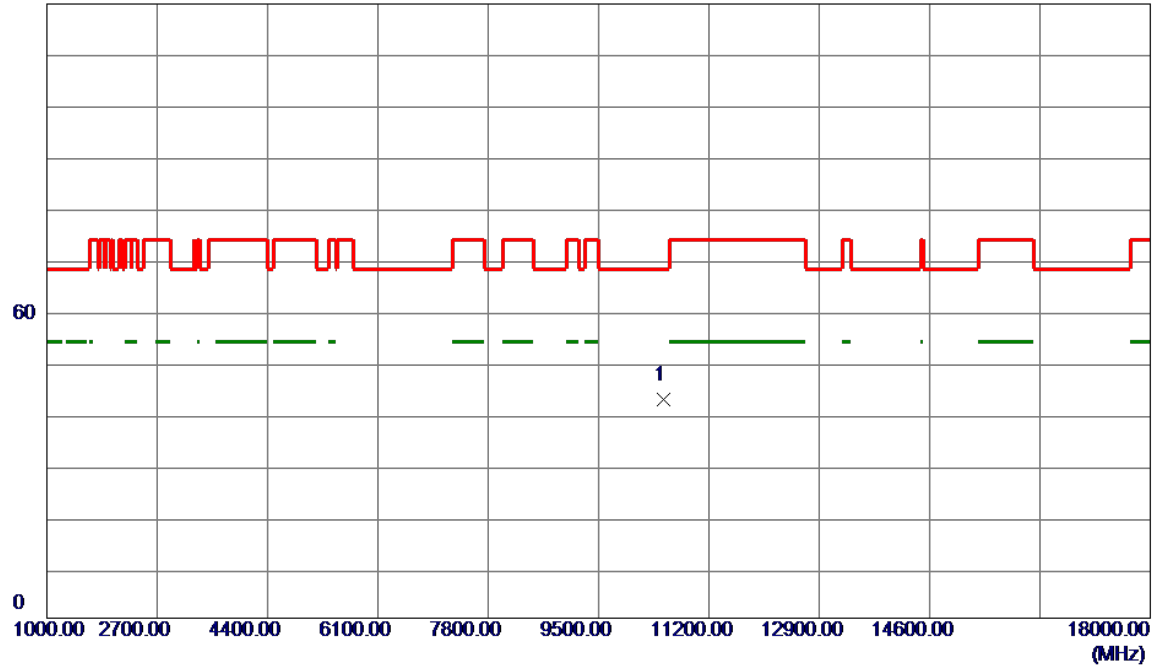


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10500.0000   | 42.93                      | -0.31                   | 42.62                     | 68.20           | -25.58       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE160) | Test Date    | 2024/12/26 |
| Test Frequency | 5250MHz               | Polarization | Horizontal |

120 dBuV/m

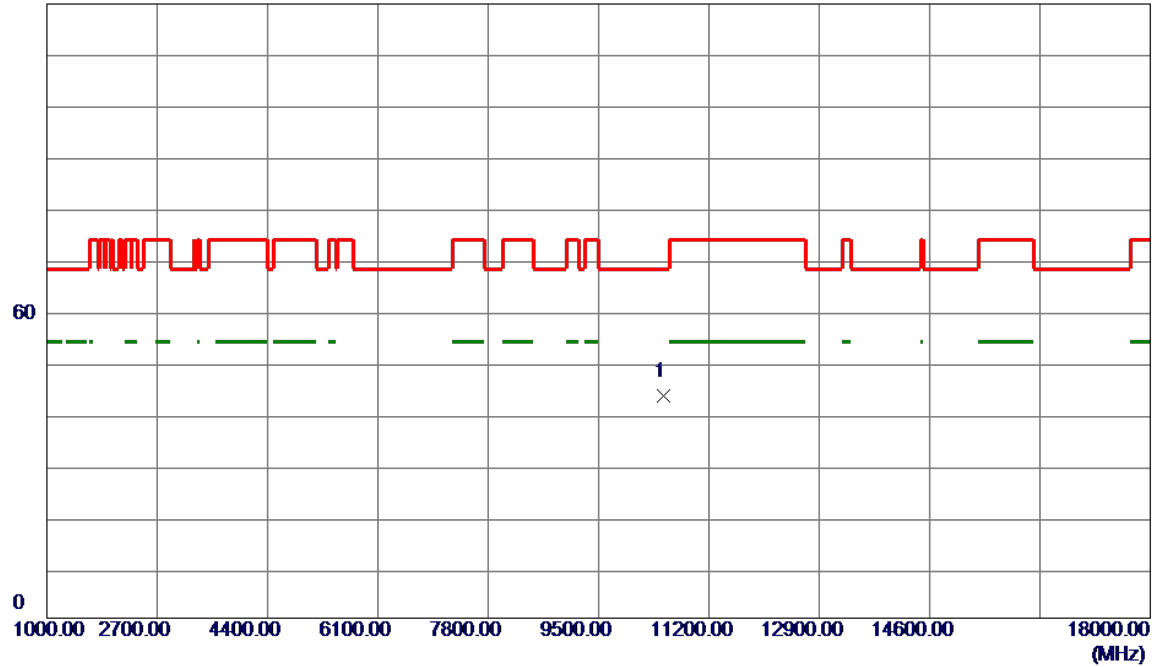


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10500.0000 | 43.74         | -0.31          | 43.43       | 68.20  | -24.77 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE160) | Test Date    | 2024/12/26 |
| Test Frequency | 5570MHz               | Polarization | Vertical   |

120 dBuV/m

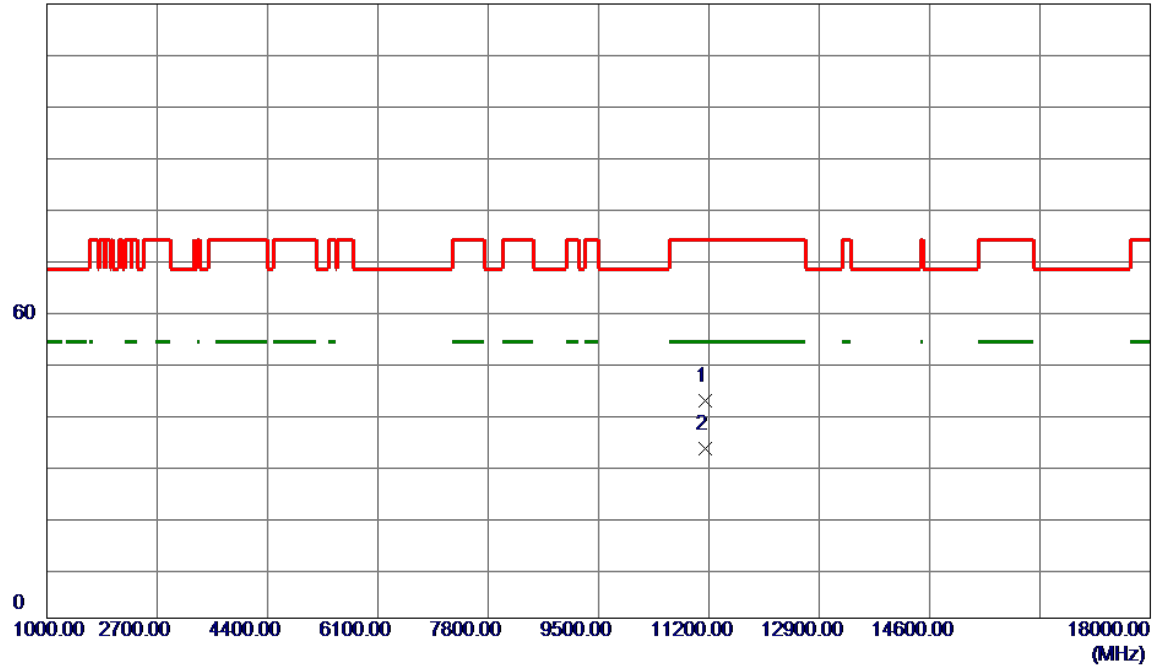

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11140.0000   | 42.43                      | 0.13                    | 42.56                     | 74.00           | -31.44       | Peak     |         |
| 2 * | 11140.0000   | 32.88                      | 0.13                    | 33.01                     | 54.00           | -20.99       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE160) | Test Date    | 2024/12/26 |
| Test Frequency | 5570MHz               | Polarization | Horizontal |

120 dBuV/m

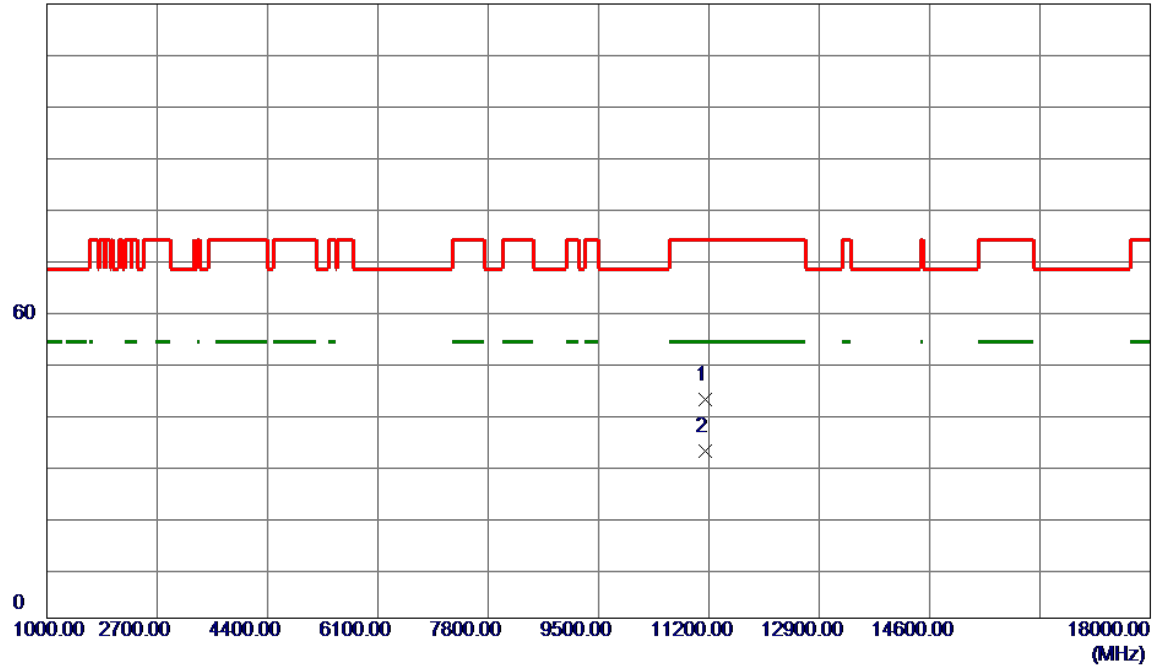


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11140.0000   | 42.70                      | 0.13                    | 42.83                     | 74.00           | -31.17       | Peak     |         |
| 2 * | 11140.0000   | 32.47                      | 0.13                    | 32.60                     | 54.00           | -21.40       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5180MHz               | Polarization | Vertical   |

120 dBuV/m

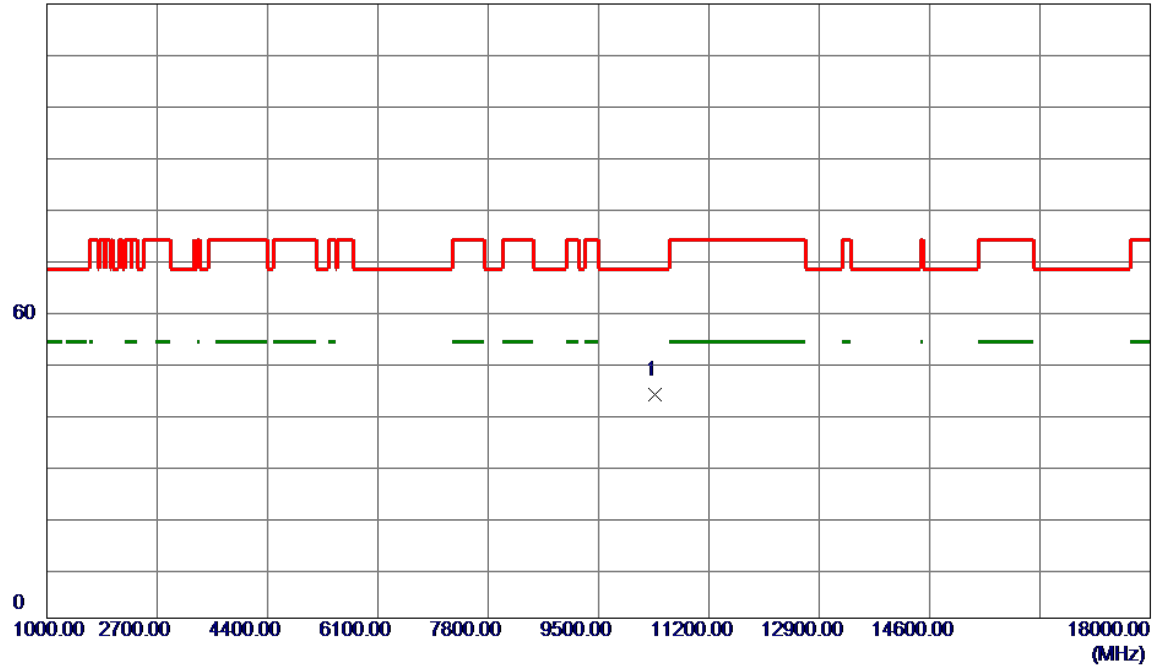


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10360.0000   | 44.25                      | -0.53                   | 43.72                     | 68.20           | -24.48       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5180MHz               | Polarization | Horizontal |

120 dBuV/m

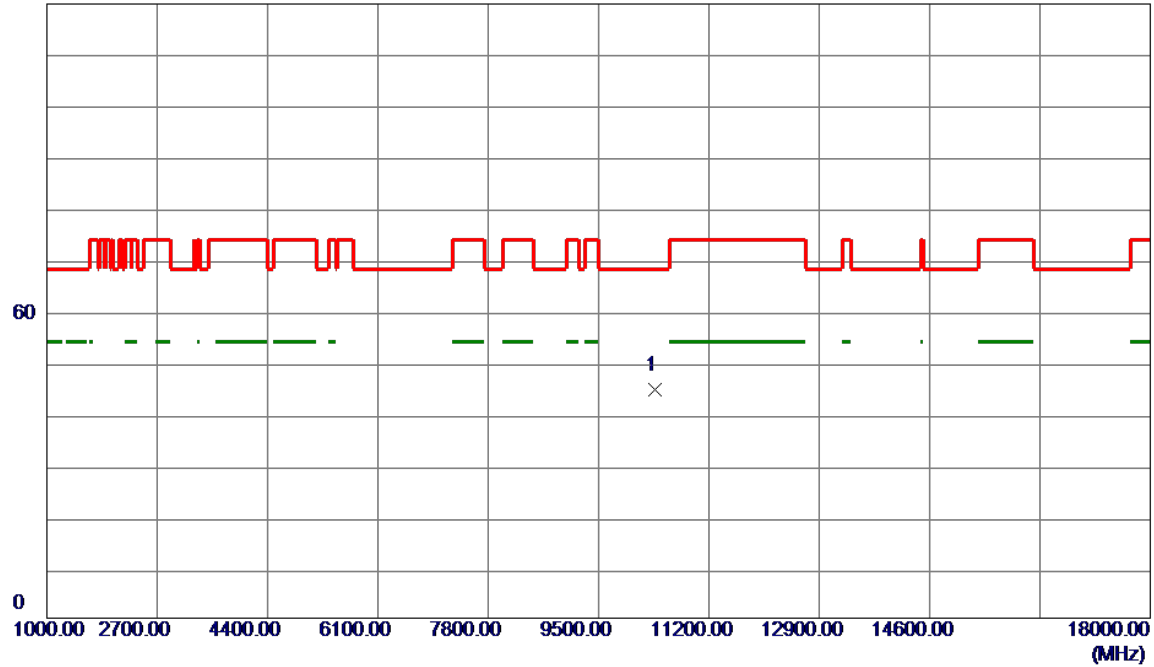


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10360.0000 | 45.08         | -0.53          | 44.55       | 68.20  | -23.65 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5200MHz               | Polarization | Vertical   |

120 dBuV/m

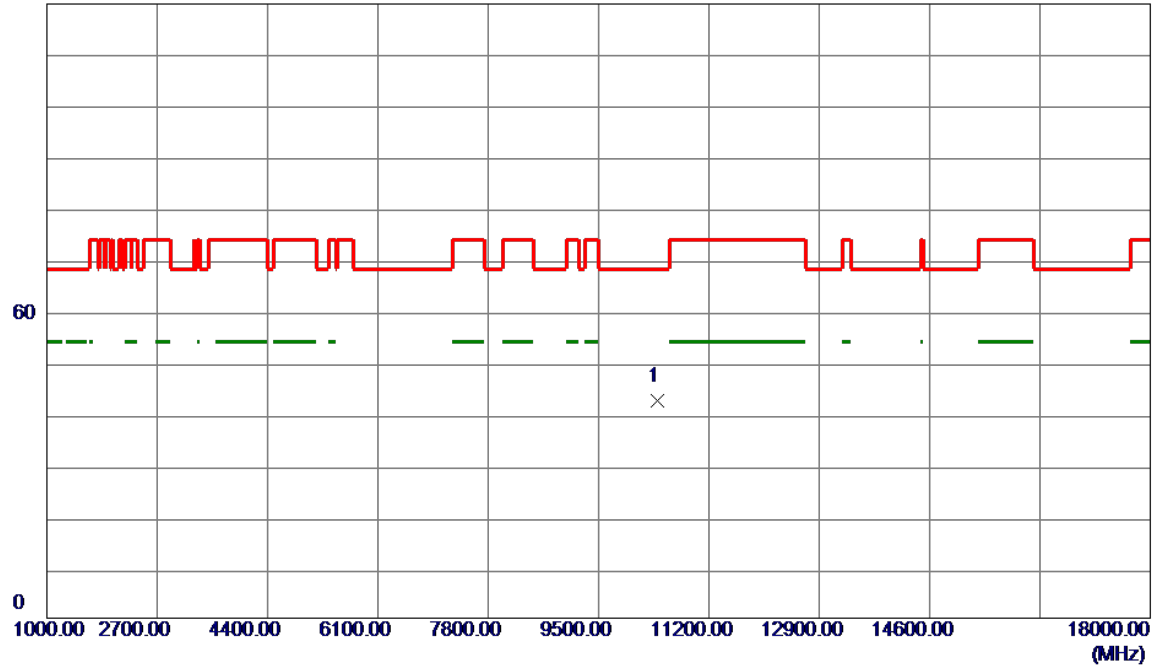


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.0000   | 42.90                      | -0.46                   | 42.44                     | 68.20           | -25.76       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5200MHz               | Polarization | Horizontal |

120 dBuV/m

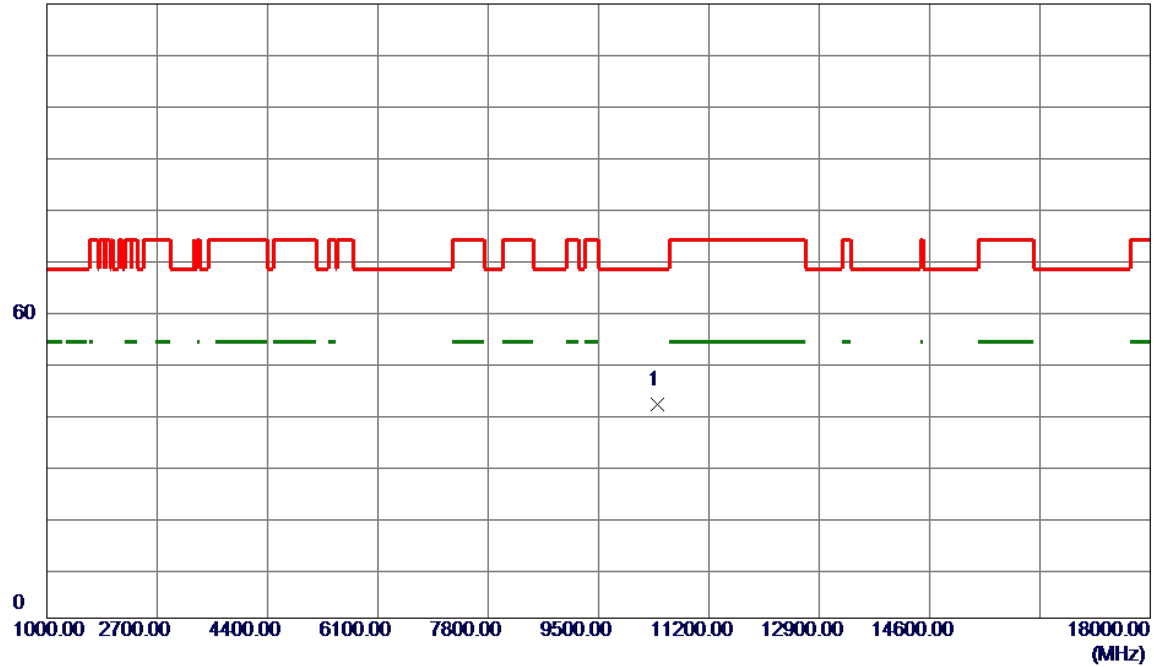


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10400.0000   | 42.33                      | -0.46                   | 41.87                     | 68.20           | -26.33       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5240MHz               | Polarization | Vertical   |

120 dBuV/m

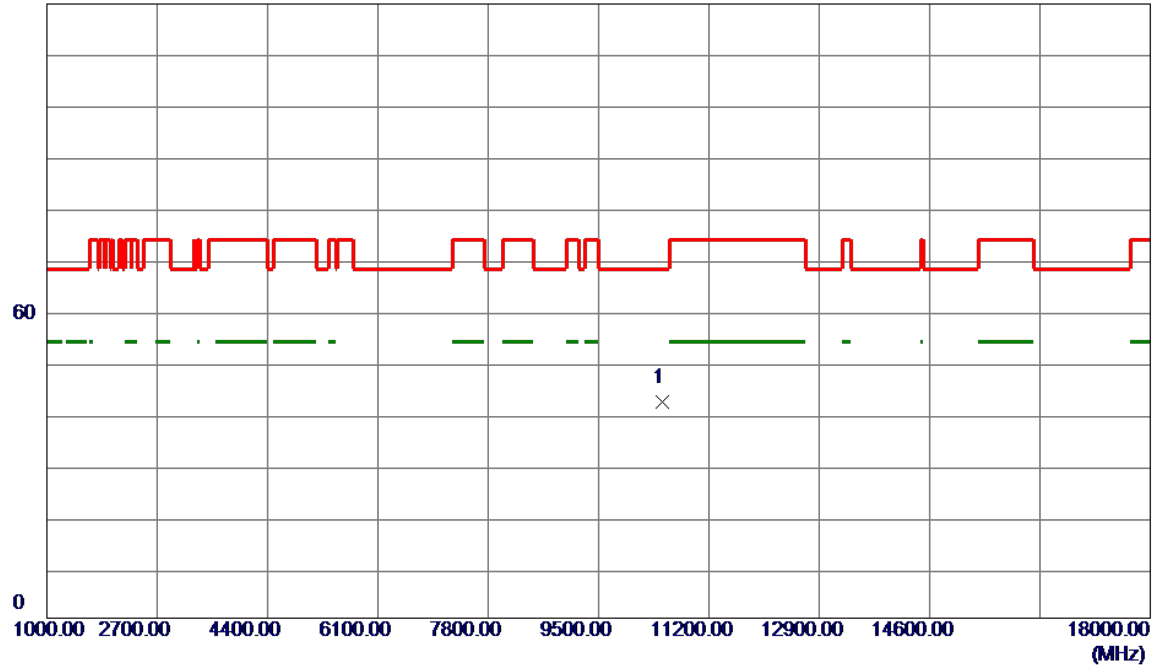


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10480.0000 | 42.54         | -0.34          | 42.20       | 68.20  | -26.00 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5240MHz               | Polarization | Horizontal |

120 dBuV/m

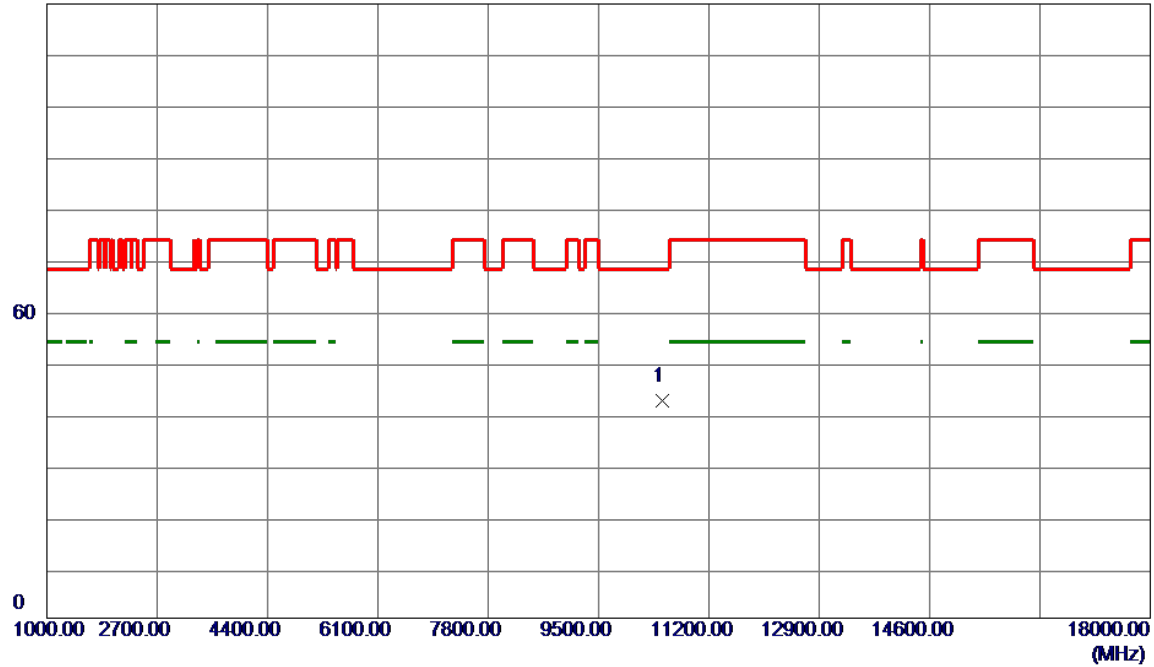


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10480.0000 | 42.80         | -0.34          | 42.46       | 68.20  | -25.74 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5260MHz               | Polarization | Vertical   |

120 dBuV/m

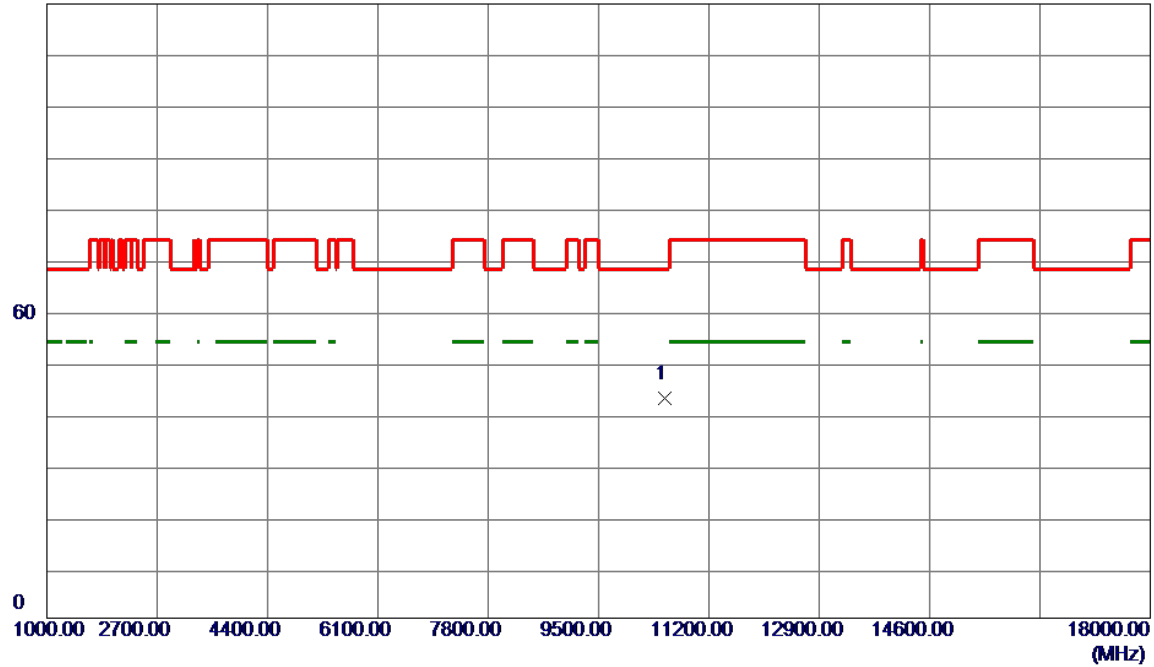


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10520.0000 | 43.33         | -0.30          | 43.03       | 68.20  | -25.17 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5260MHz               | Polarization | Horizontal |

120 dBuV/m

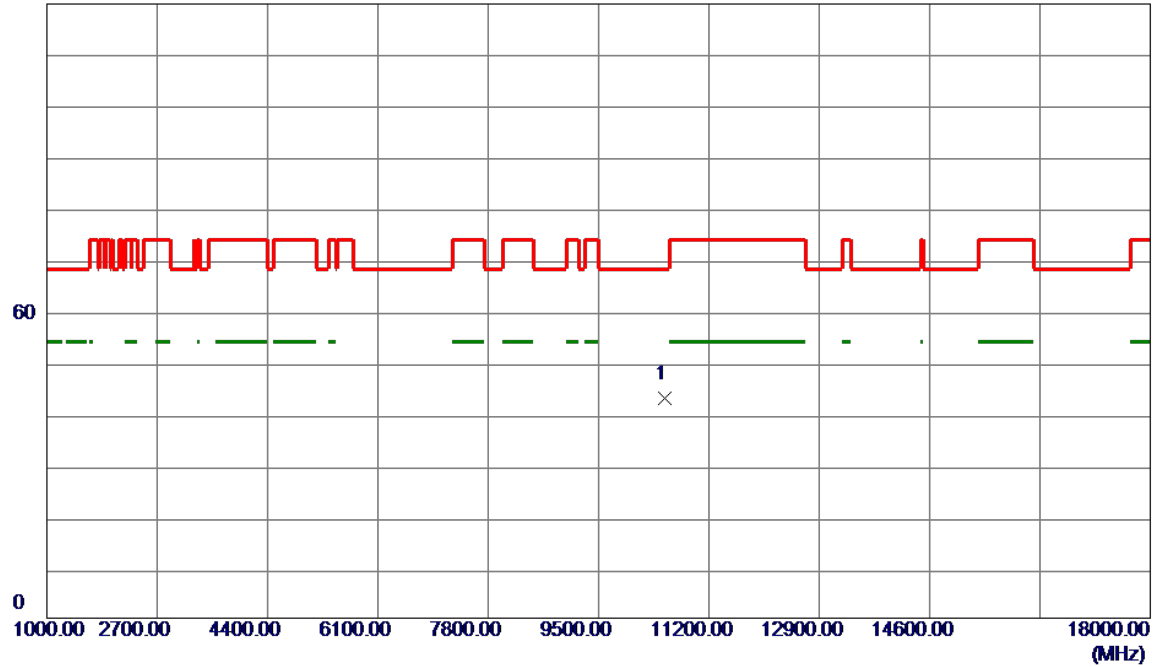


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10520.0000   | 43.16                      | -0.30                   | 42.86                     | 68.20           | -25.34       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5300MHz               | Polarization | Vertical   |

120 dBuV/m

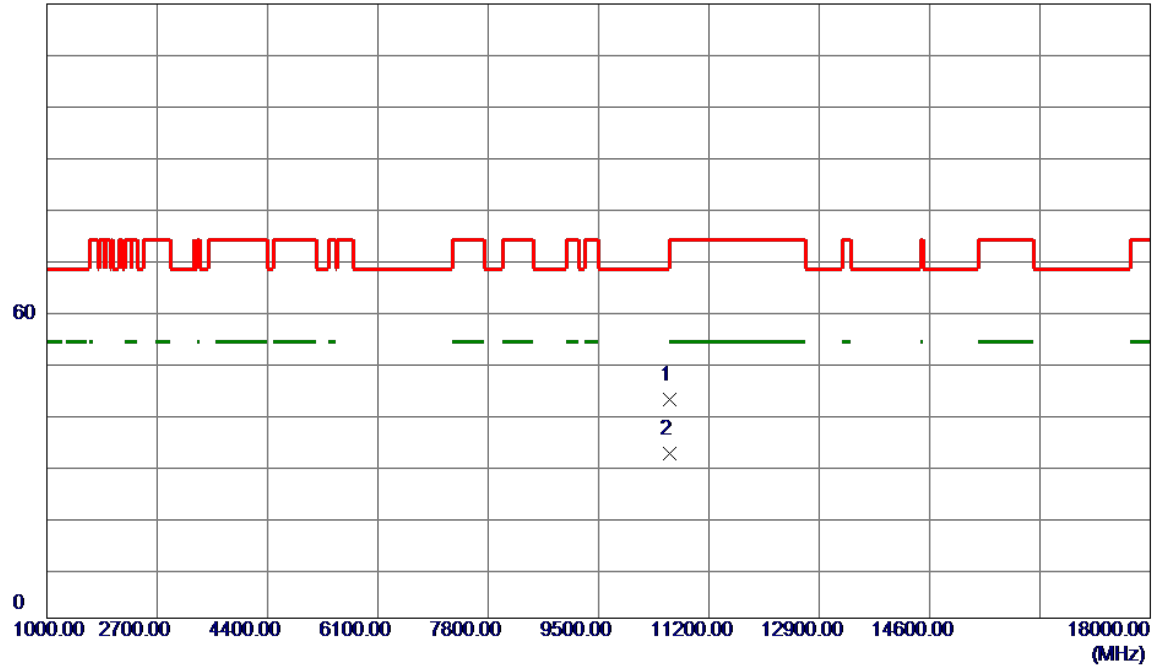

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10600.0000   | 43.10                      | -0.28                   | 42.82                     | 68.20           | -25.38       | Peak     |         |
| 2   | 10600.0000   | 32.52                      | -0.28                   | 32.24                     | 999.00          | -966.76      | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5300MHz               | Polarization | Horizontal |

120 dBuV/m

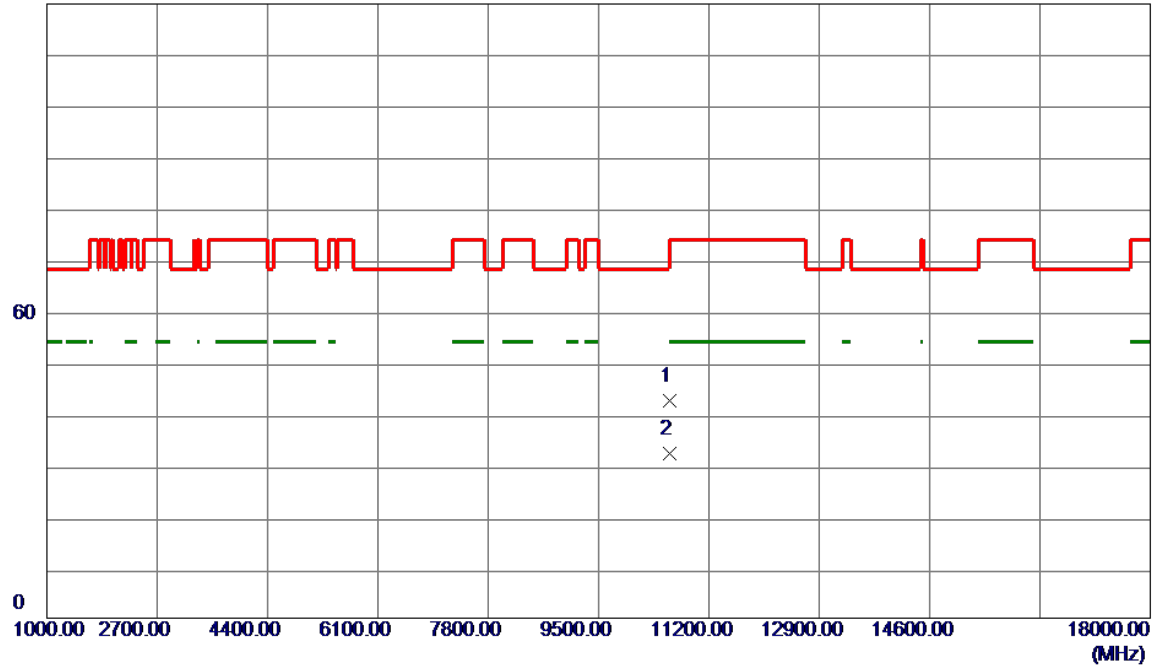


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10600.0000   | 42.86                      | -0.28                   | 42.58                     | 68.20           | -25.62       | Peak     |         |
| 2   | 10600.0000   | 32.55                      | -0.28                   | 32.27                     | 999.00          | -966.73      | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5320MHz               | Polarization | Vertical   |

120 dBuV/m

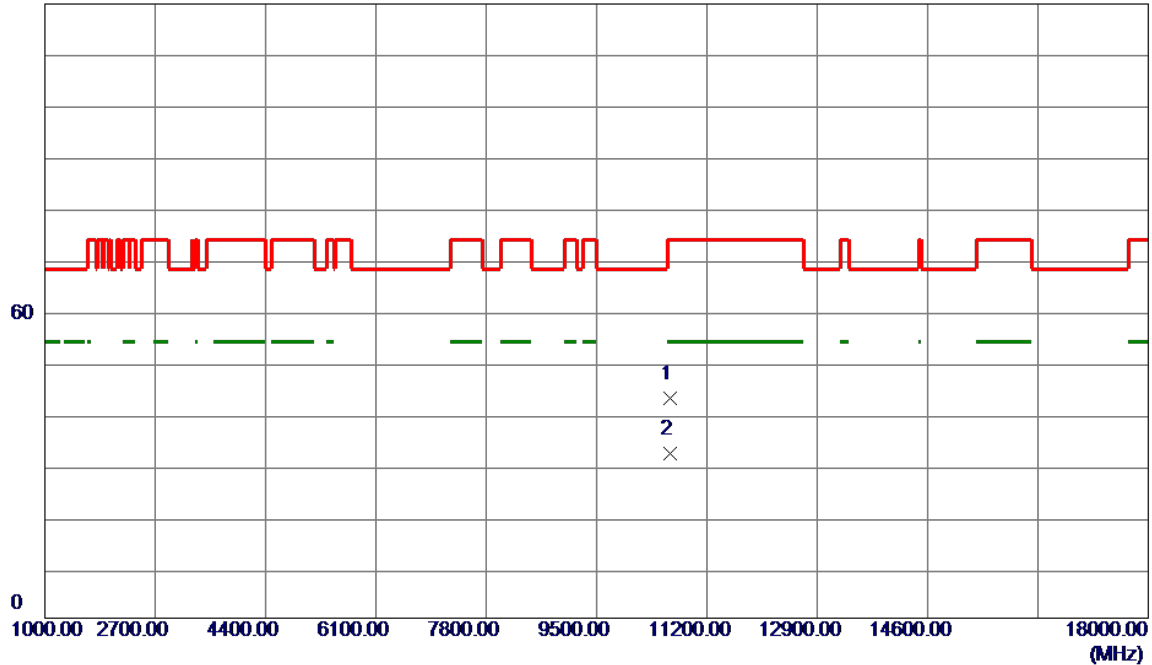


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10640.0000   | 43.25                      | -0.26                   | 42.99                     | 74.00           | -31.01       | Peak     |         |
| 2 * | 10640.0000   | 32.53                      | -0.26                   | 32.27                     | 54.00           | -21.73       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5320MHz               | Polarization | Horizontal |

120 dBuV/m

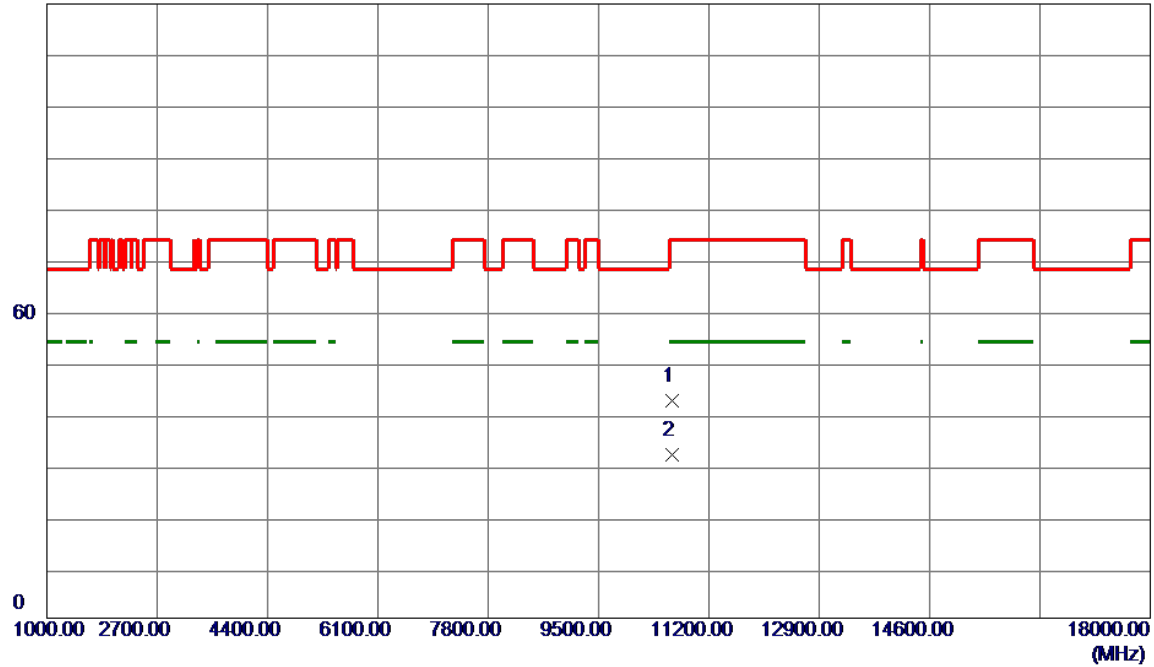


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10640.0000   | 42.78                      | -0.26                   | 42.52                     | 74.00           | -31.48       | Peak     |         |
| 2 * | 10640.0000   | 32.13                      | -0.26                   | 31.87                     | 54.00           | -22.13       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5500MHz               | Polarization | Vertical   |

120 dBuV/m

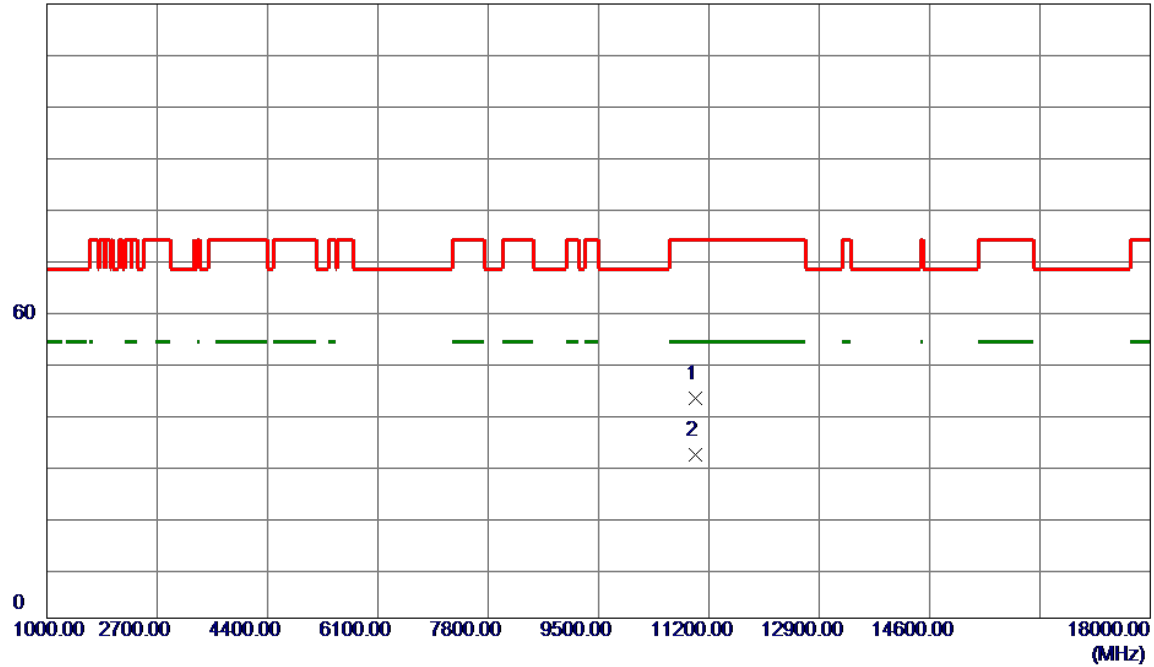


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11000.0000   | 42.99                      | -0.14                   | 42.85                     | 74.00           | -31.15       | Peak     |         |
| 2 * | 11000.0000   | 32.14                      | -0.14                   | 32.00                     | 54.00           | -22.00       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5500MHz               | Polarization | Horizontal |

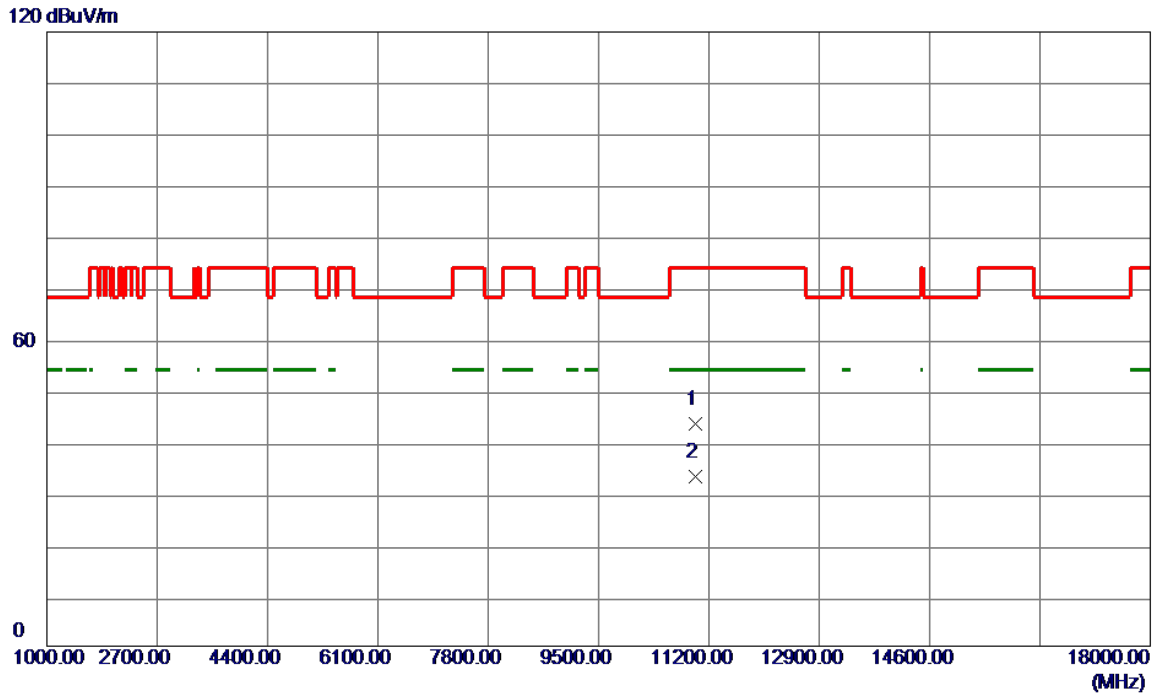

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11000.0000   | 43.62                      | -0.14                   | 43.48                     | 74.00           | -30.52       | Peak     |         |
| 2 * | 11000.0000   | 33.28                      | -0.14                   | 33.14                     | 54.00           | -20.86       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5580MHz               | Polarization | Vertical   |

120 dBuV/m

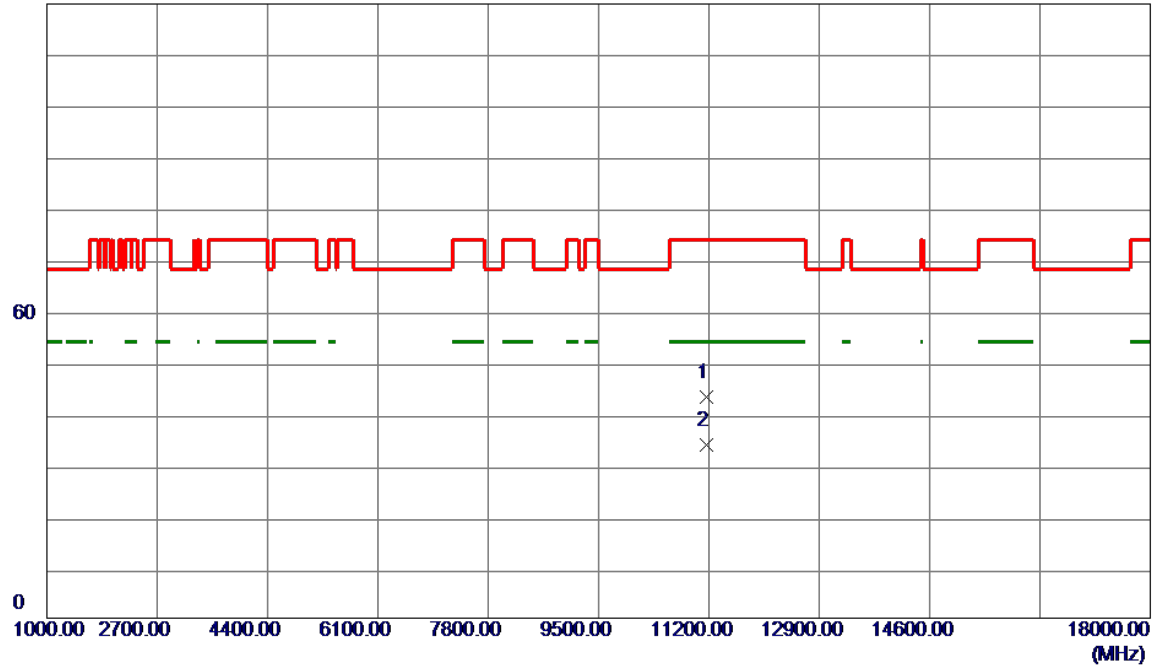


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11160.0000   | 43.06                      | 0.17                    | 43.23                     | 74.00           | -30.77       | Peak     |         |
| 2 * | 11160.0000   | 33.57                      | 0.17                    | 33.74                     | 54.00           | -20.26       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5580MHz               | Polarization | Horizontal |

120 dBuV/m

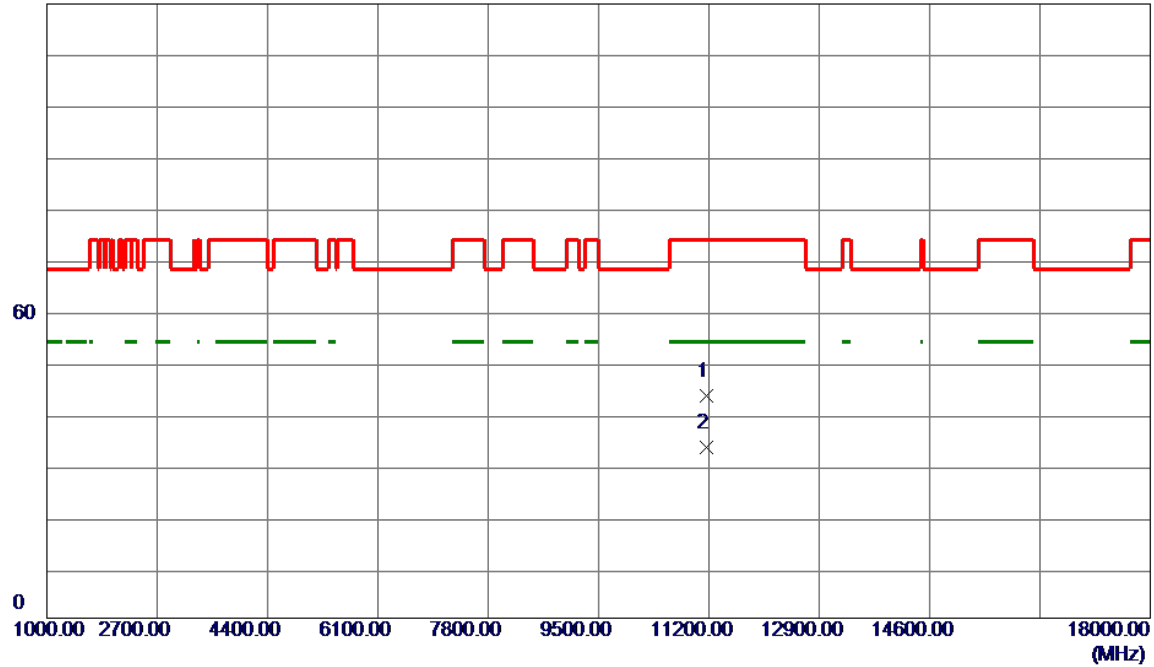


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11160.0000   | 43.21                      | 0.17                    | 43.38                     | 74.00           | -30.62       | Peak     |         |
| 2 * | 11160.0000   | 33.25                      | 0.17                    | 33.42                     | 54.00           | -20.58       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5700MHz               | Polarization | Vertical   |

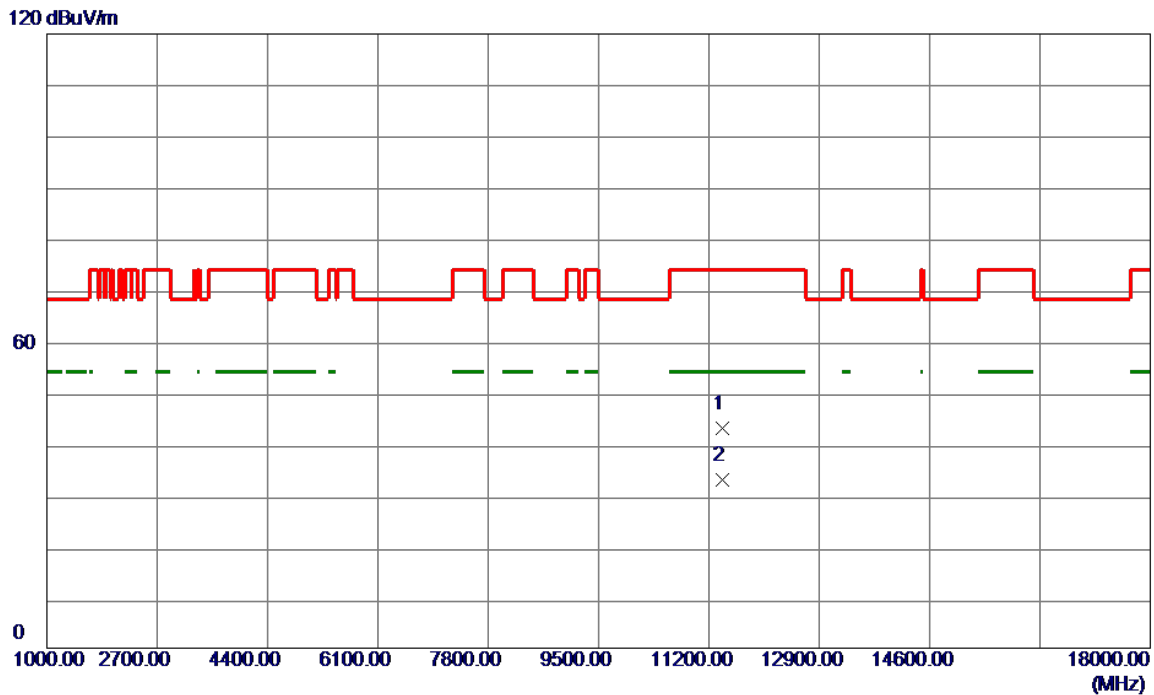


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11400.0000   | 42.40                      | 0.64                    | 43.04                     | 74.00           | -30.96       | Peak     |         |
| 2 * | 11400.0000   | 32.16                      | 0.64                    | 32.80                     | 54.00           | -21.20       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5700MHz               | Polarization | Horizontal |

120 dBuV/m

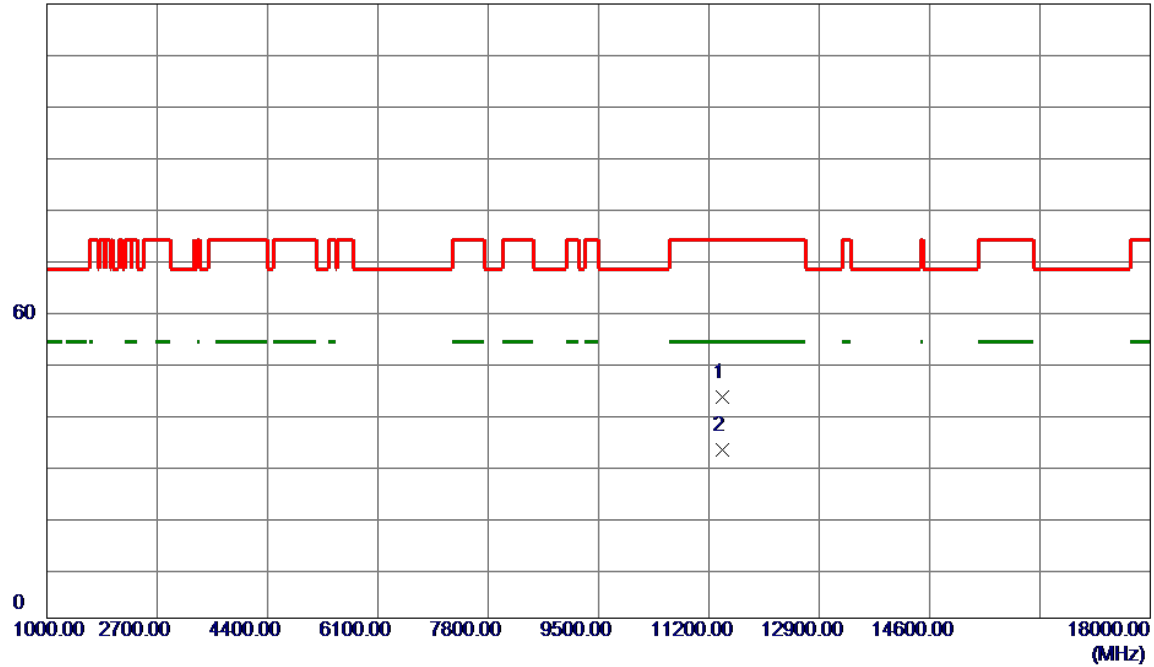


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11400.0000   | 42.54                      | 0.64                    | 43.18                     | 74.00           | -30.82       | Peak     |         |
| 2 * | 11400.0000   | 32.14                      | 0.64                    | 32.78                     | 54.00           | -21.22       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5745MHz               | Polarization | Vertical   |

120 dBuV/m

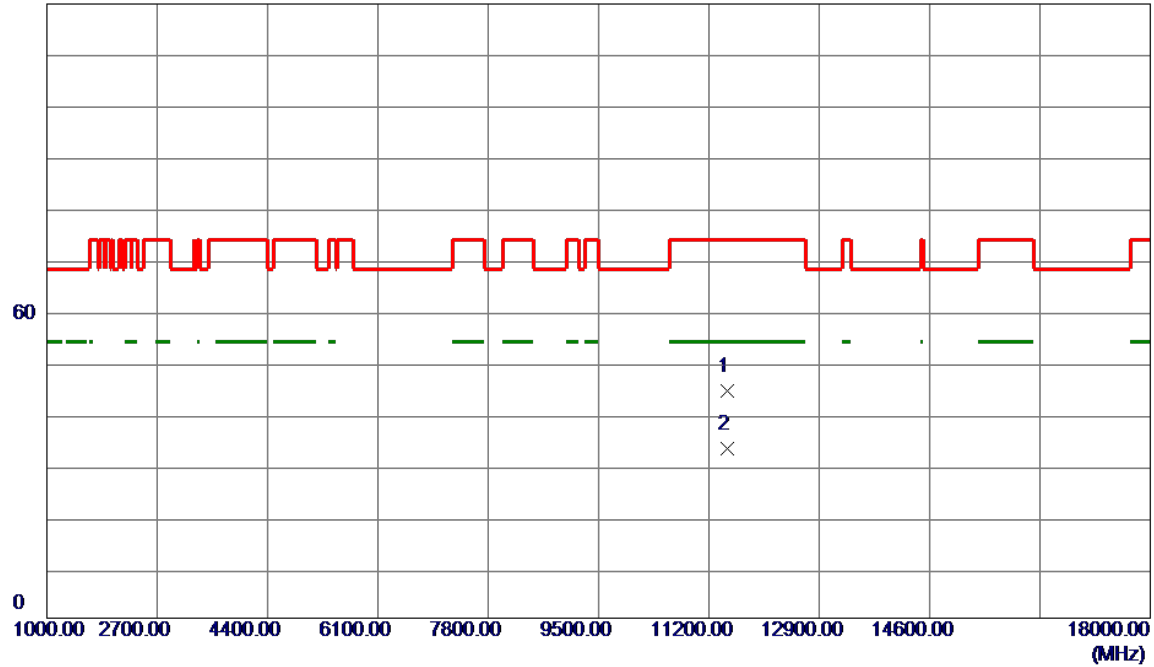


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11490.0000   | 43.63                      | 0.81                    | 44.44                     | 74.00           | -29.56       | Peak     |         |
| 2 * | 11490.0000   | 32.25                      | 0.81                    | 33.06                     | 54.00           | -20.94       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5745MHz               | Polarization | Horizontal |

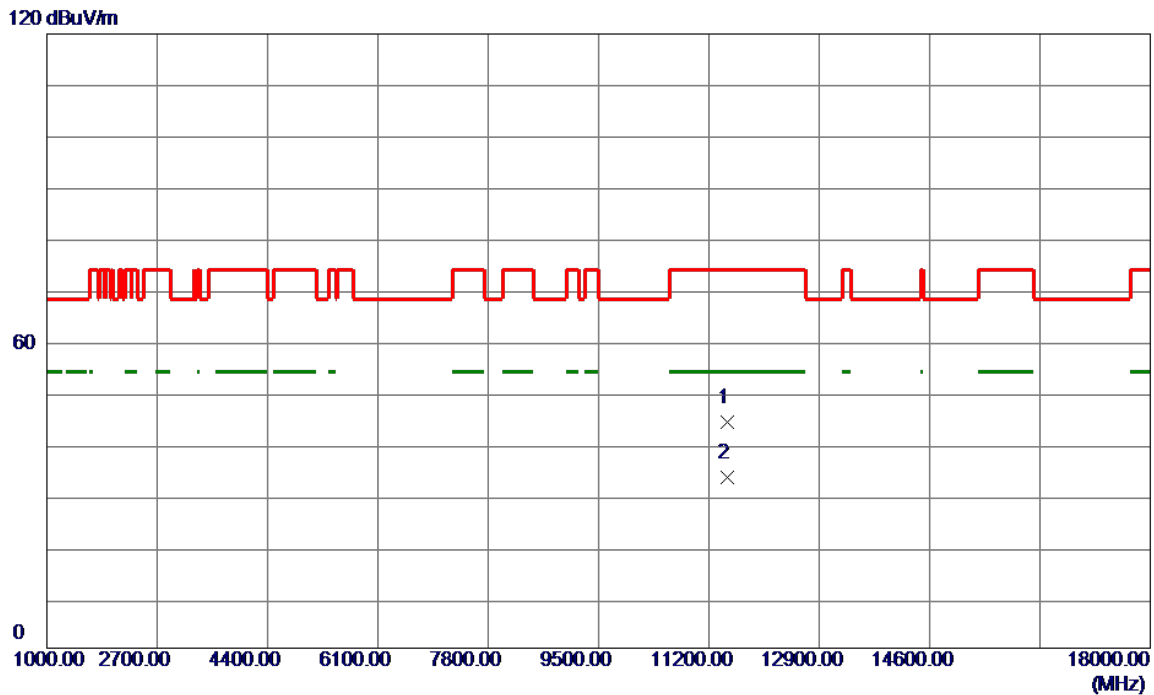

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11490.0000   | 43.30                      | 0.81                    | 44.11                     | 74.00           | -29.89       | Peak     |         |
| 2 * | 11490.0000   | 32.54                      | 0.81                    | 33.35                     | 54.00           | -20.65       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5785MHz               | Polarization | Vertical   |

120 dBuV/m

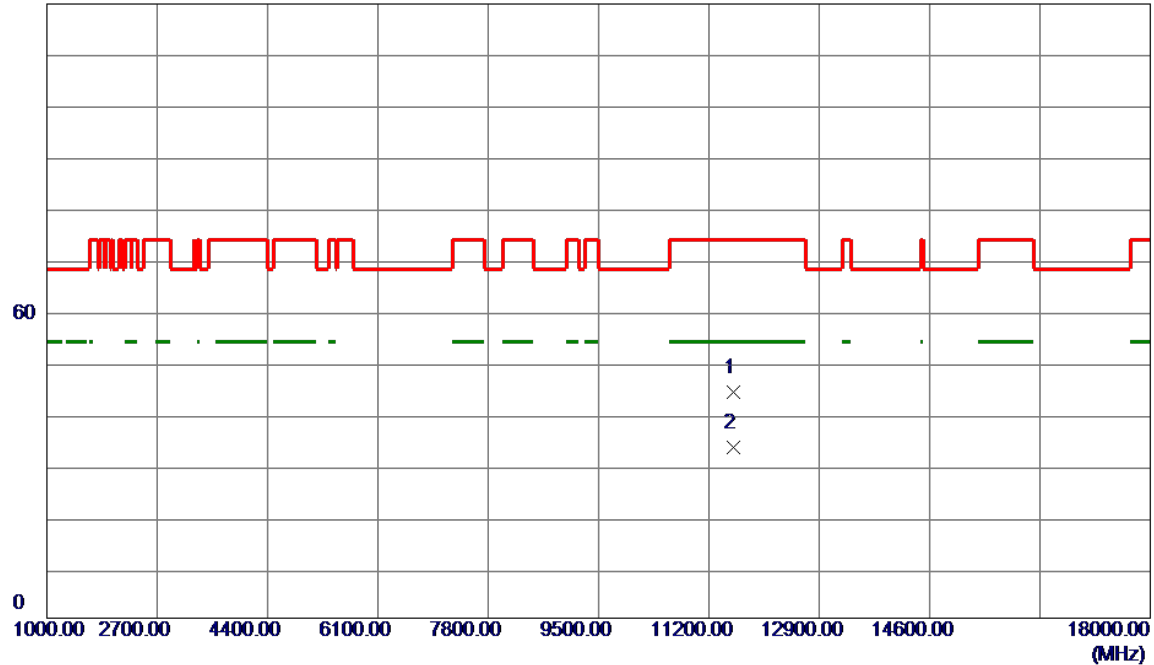


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11570.0000   | 43.36                      | 0.85                    | 44.21                     | 74.00           | -29.79       | Peak     |         |
| 2 * | 11570.0000   | 32.56                      | 0.85                    | 33.41                     | 54.00           | -20.59       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5785MHz               | Polarization | Horizontal |

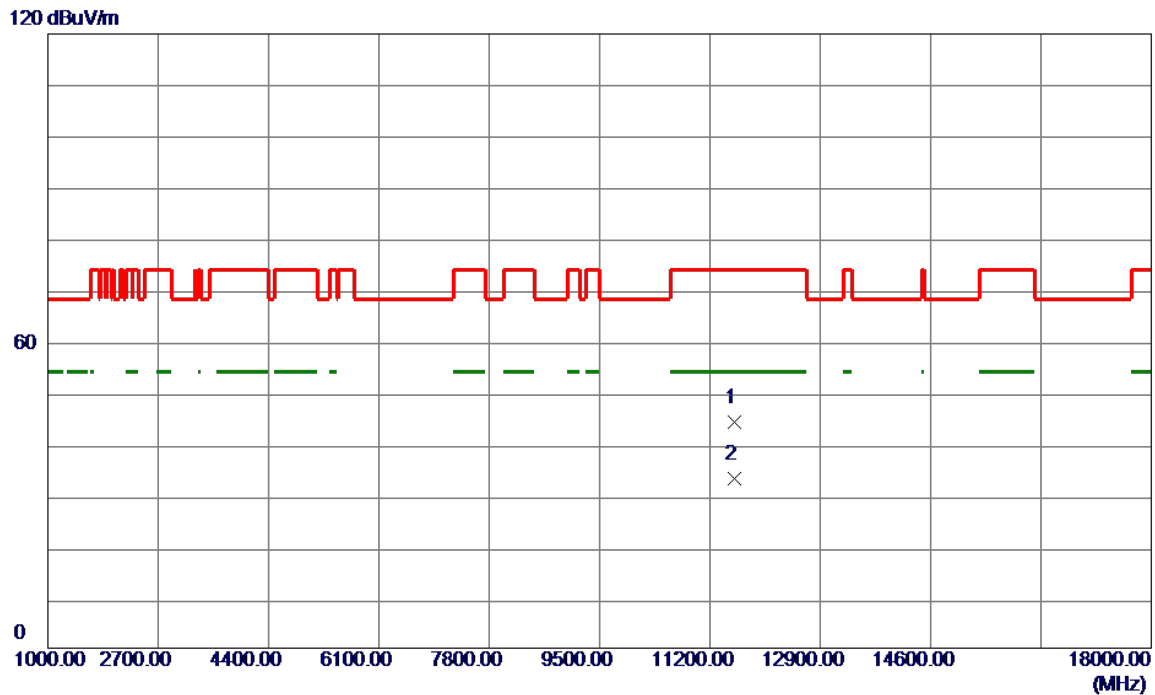


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11570.0000   | 43.35                      | 0.85                    | 44.20                     | 74.00           | -29.80       | Peak     |         |
| 2 * | 11570.0000   | 32.32                      | 0.85                    | 33.17                     | 54.00           | -20.83       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5825MHz               | Polarization | Vertical   |

120 dBuV/m

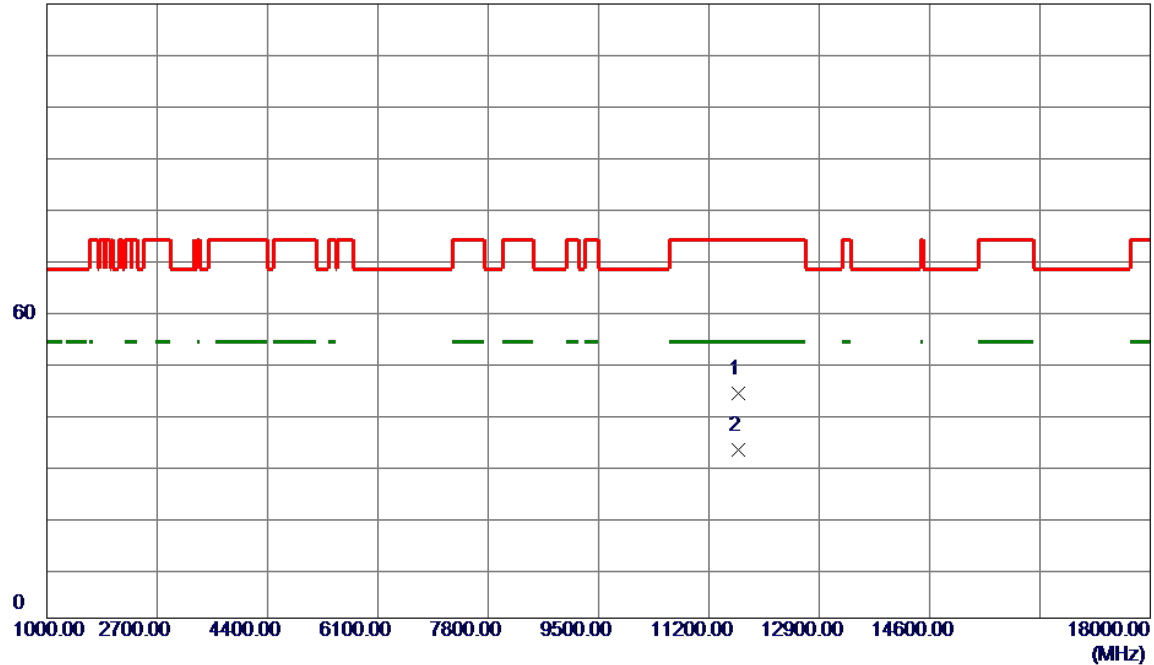


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11650.0000   | 43.15                      | 0.86                    | 44.01                     | 74.00           | -29.99       | Peak     |         |
| 2 * | 11650.0000   | 32.04                      | 0.86                    | 32.90                     | 54.00           | -21.10       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/26 |
| Test Frequency | 5825MHz               | Polarization | Horizontal |

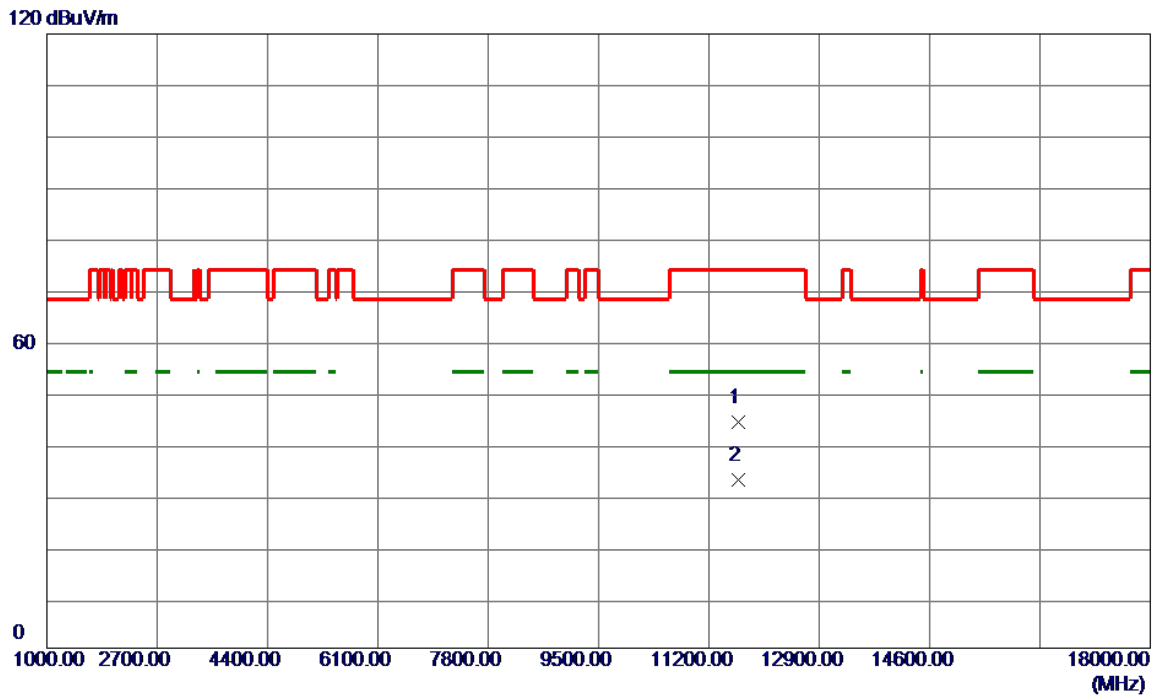


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11650.0000   | 43.29                      | 0.86                    | 44.15                     | 74.00           | -29.85       | Peak     |         |
| 2 * | 11650.0000   | 32.11                      | 0.86                    | 32.97                     | 54.00           | -21.03       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5190MHz               | Polarization | Vertical   |

120 dBuV/m

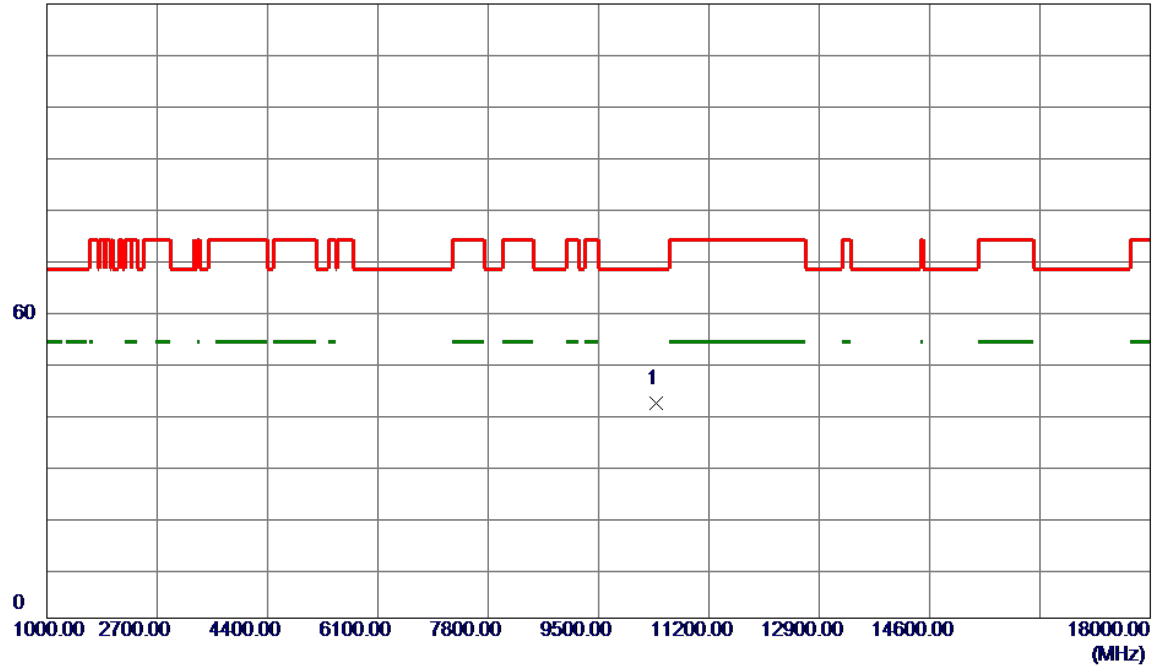


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.0000   | 42.47                      | -0.49                   | 41.98                     | 68.20           | -26.22       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5190MHz               | Polarization | Horizontal |

120 dBuV/m

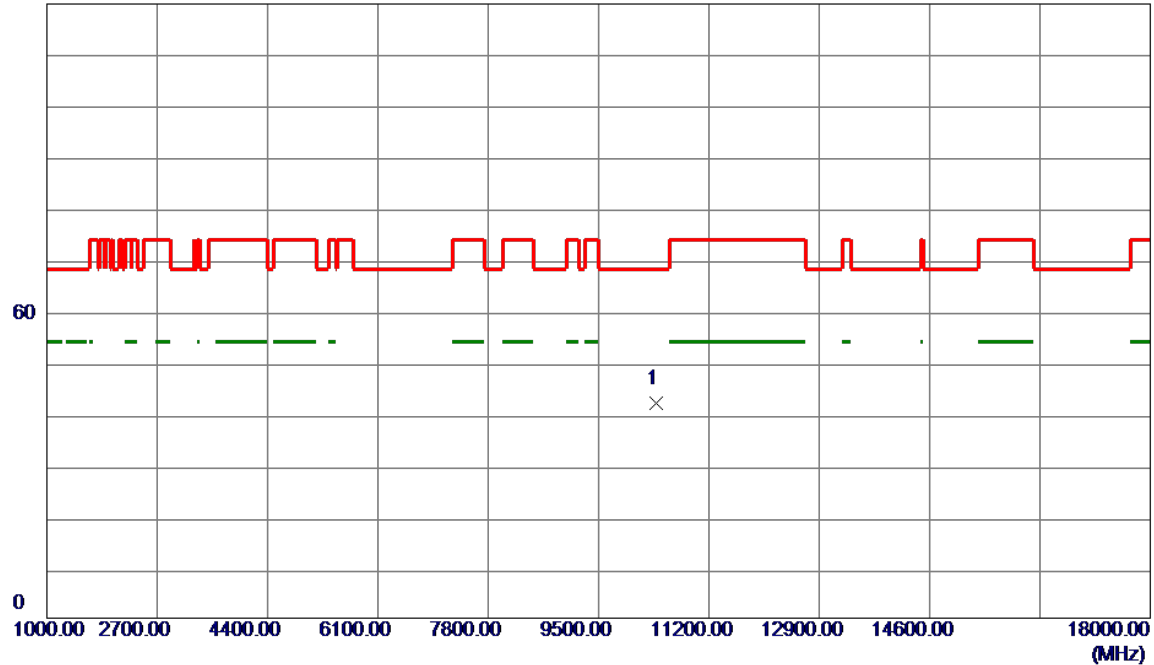


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.0000   | 42.42                      | -0.49                   | 41.93                     | 68.20           | -26.27       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5230MHz               | Polarization | Vertical   |

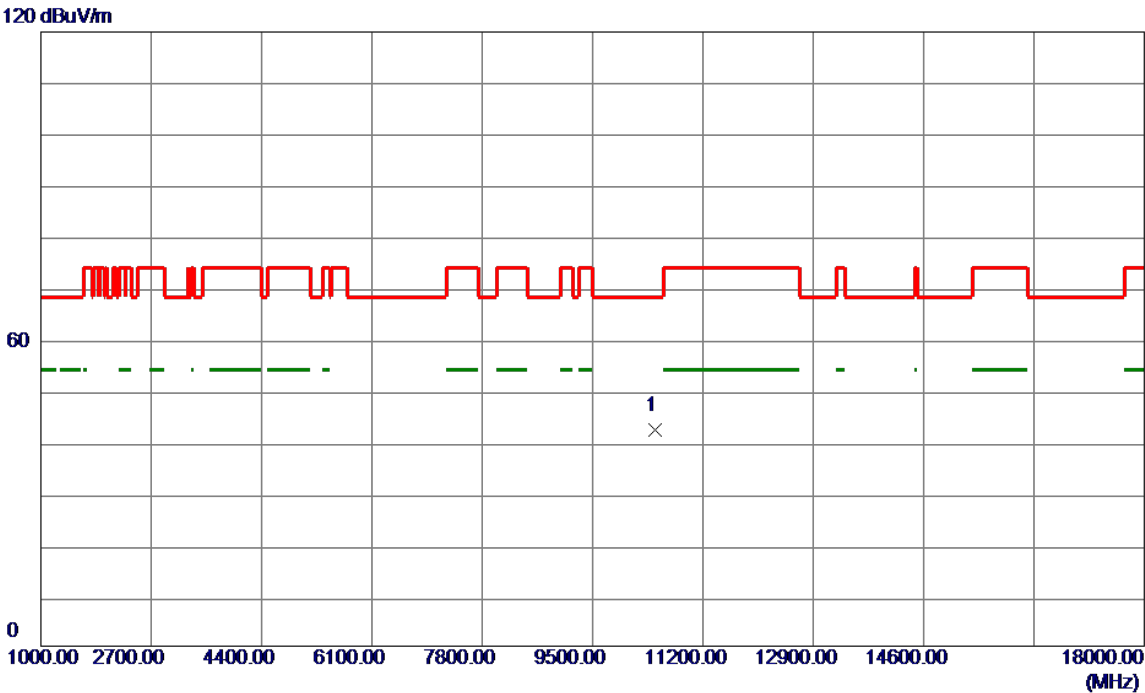


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.0000   | 42.72                      | -0.37                   | 42.35                     | 68.20           | -25.85       | Peak     |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5230MHz               | Polarization | Horizontal |

120 dBuV/m

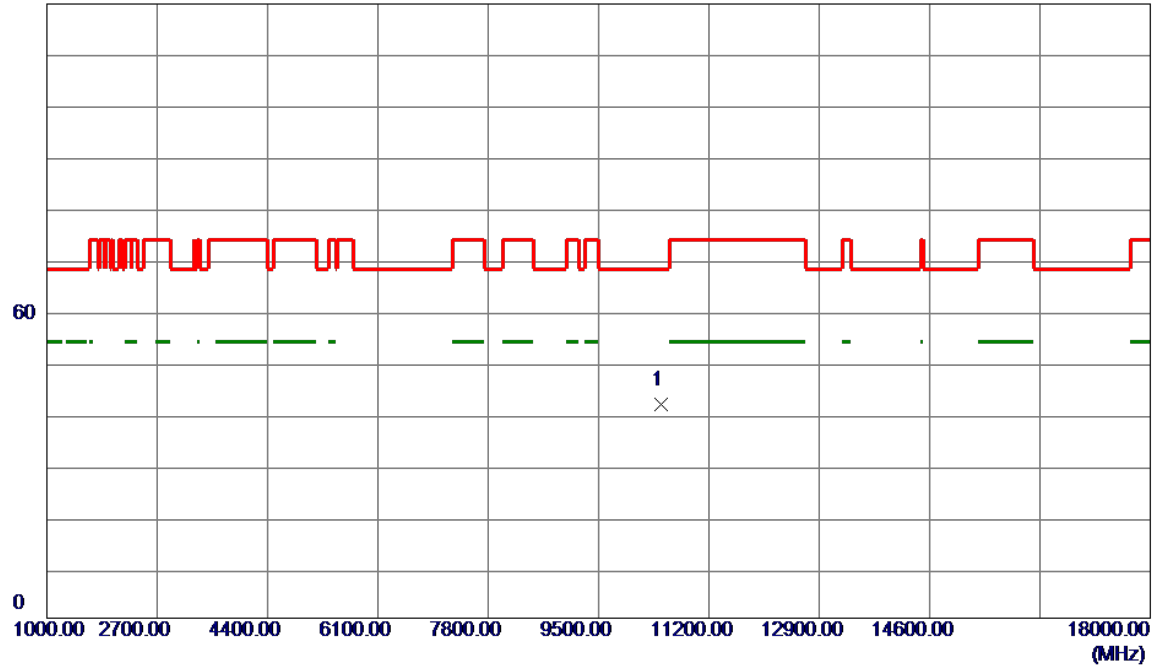


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.0000   | 42.21                      | -0.37                   | 41.84                     | 68.20           | -26.36       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5270MHz               | Polarization | Vertical   |

120 dBuV/m

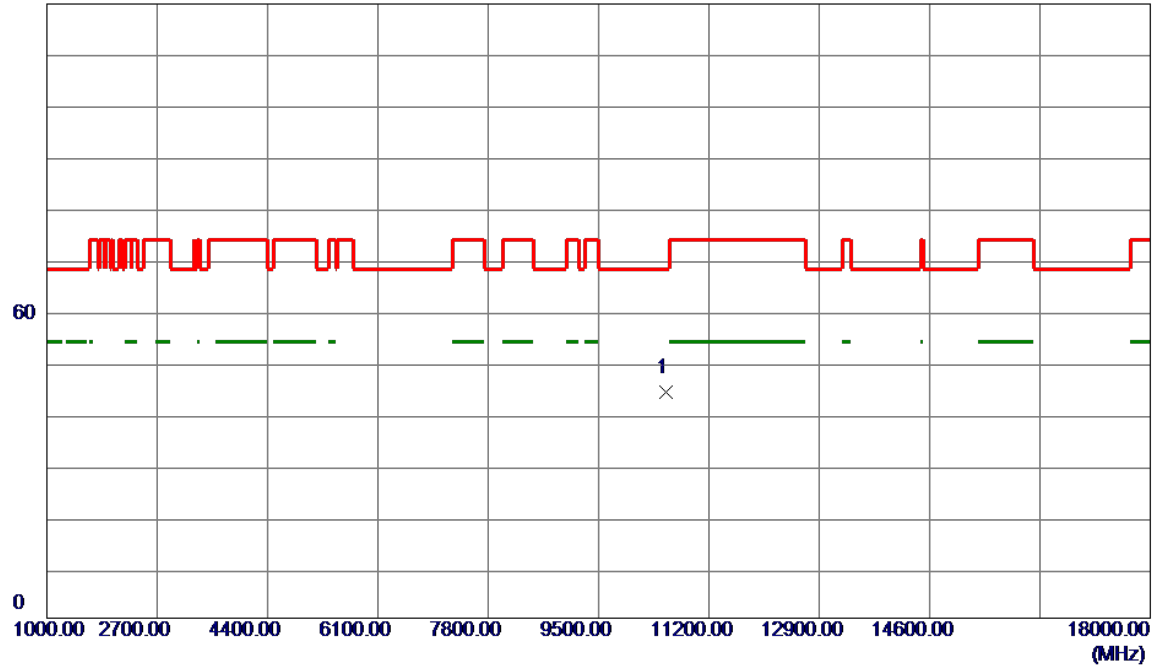


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10540.0000 | 44.38         | -0.30          | 44.08       | 68.20  | -24.12 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5270MHz               | Polarization | Horizontal |

120 dBuV/m

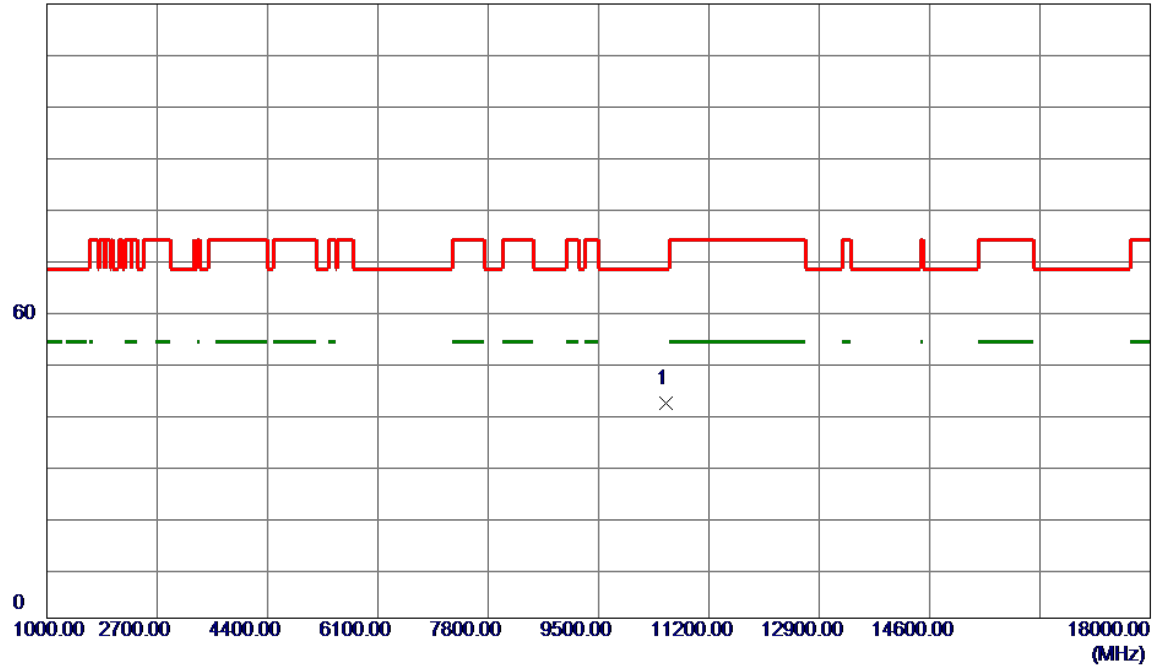


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10540.0000   | 42.21                      | -0.30                   | 41.91                     | 68.20           | -26.29       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5310MHz               | Polarization | Vertical   |

120 dBuV/m

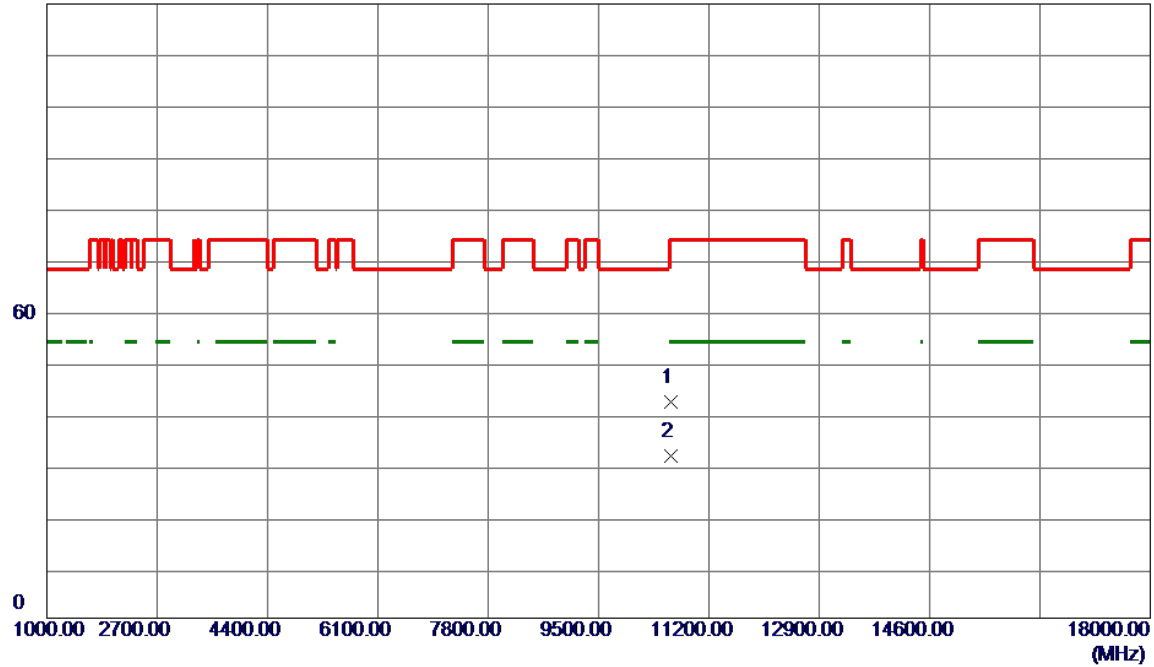


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10620.0000   | 42.44                      | -0.27                   | 42.17                     | 74.00           | -31.83       | Peak     |         |
| 2 * | 10620.0000   | 32.01                      | -0.27                   | 31.74                     | 54.00           | -22.26       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5310MHz               | Polarization | Horizontal |

120 dBuV/m

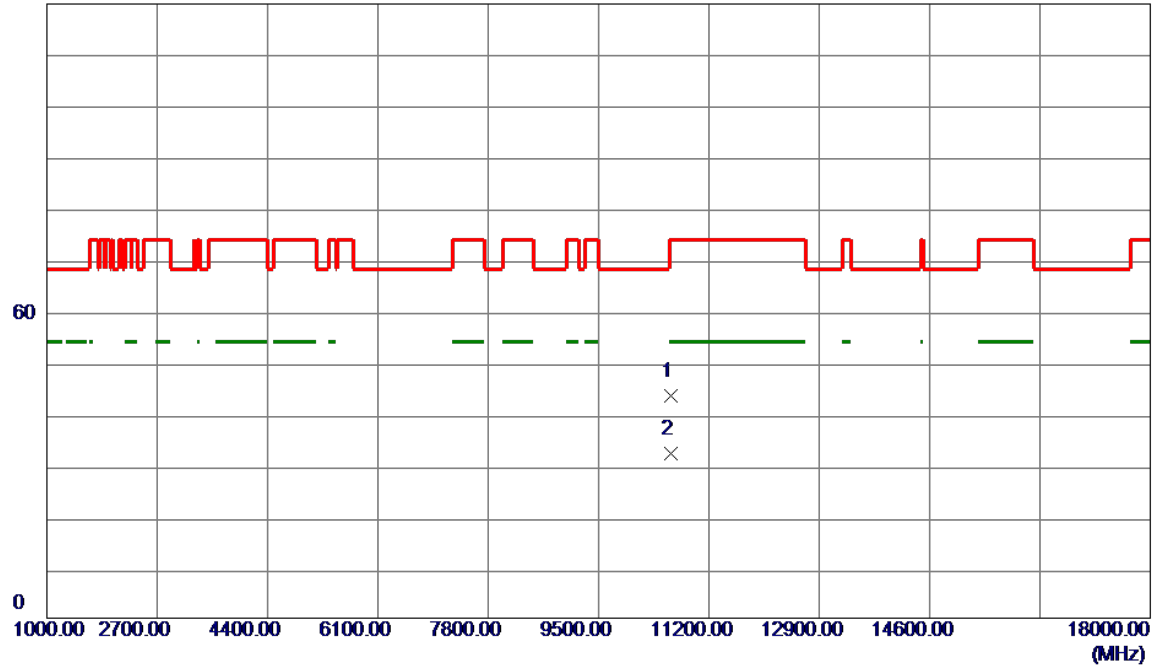


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 10620.0000   | 43.80                      | -0.27                   | 43.53                     | 74.00           | -30.47       | Peak     |         |
| 2 * | 10620.0000   | 32.47                      | -0.27                   | 32.20                     | 54.00           | -21.80       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5510MHz               | Polarization | Vertical   |

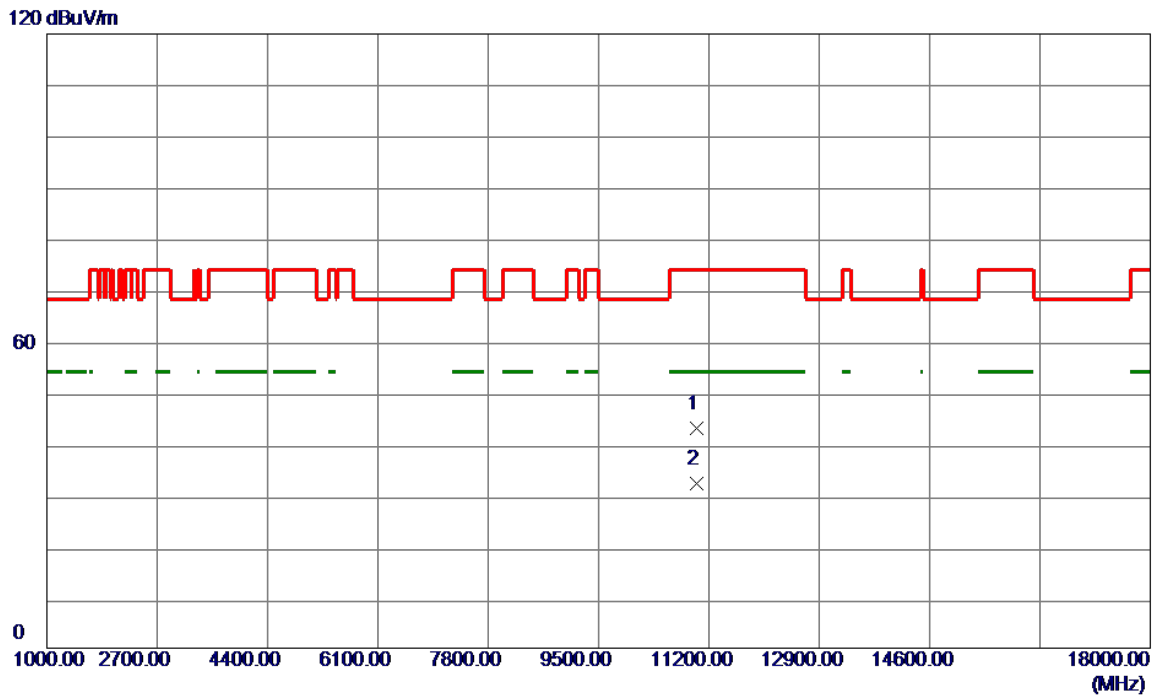


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11020.0000   | 42.96                      | -0.10                   | 42.86                     | 74.00           | -31.14       | Peak     |         |
| 2 * | 11020.0000   | 32.18                      | -0.10                   | 32.08                     | 54.00           | -21.92       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5510MHz               | Polarization | Horizontal |

120 dBuV/m

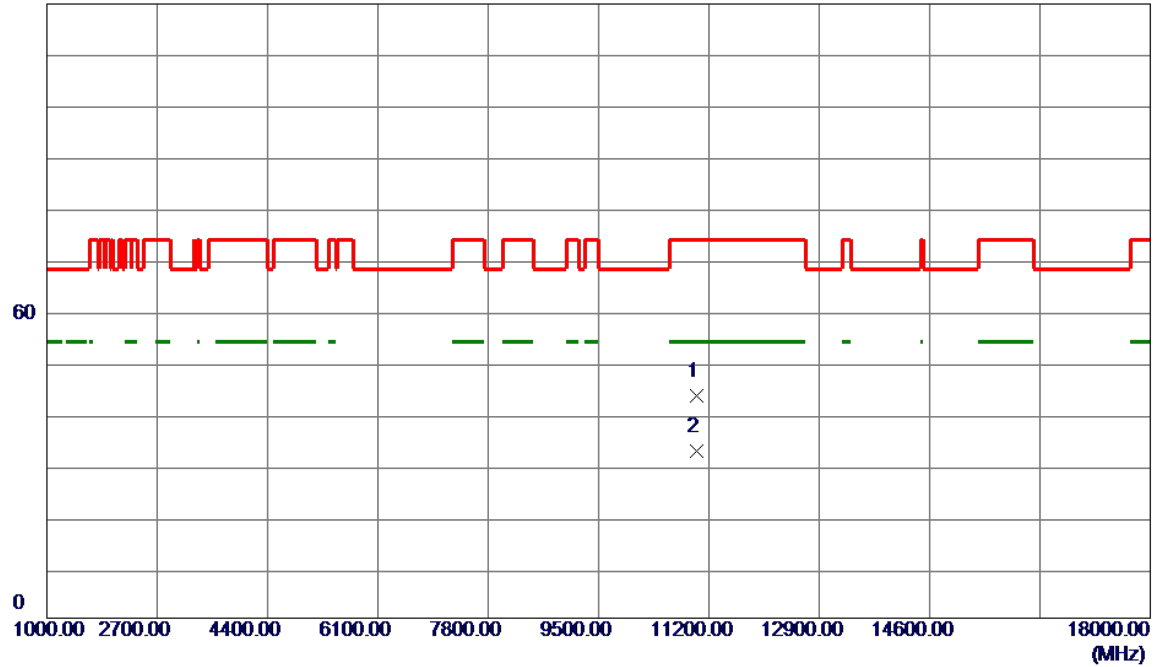


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11020.0000   | 43.43                      | -0.10                   | 43.33                     | 74.00           | -30.67       | Peak     |         |
| 2 * | 11020.0000   | 32.63                      | -0.10                   | 32.53                     | 54.00           | -21.47       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5550MHz               | Polarization | Vertical   |

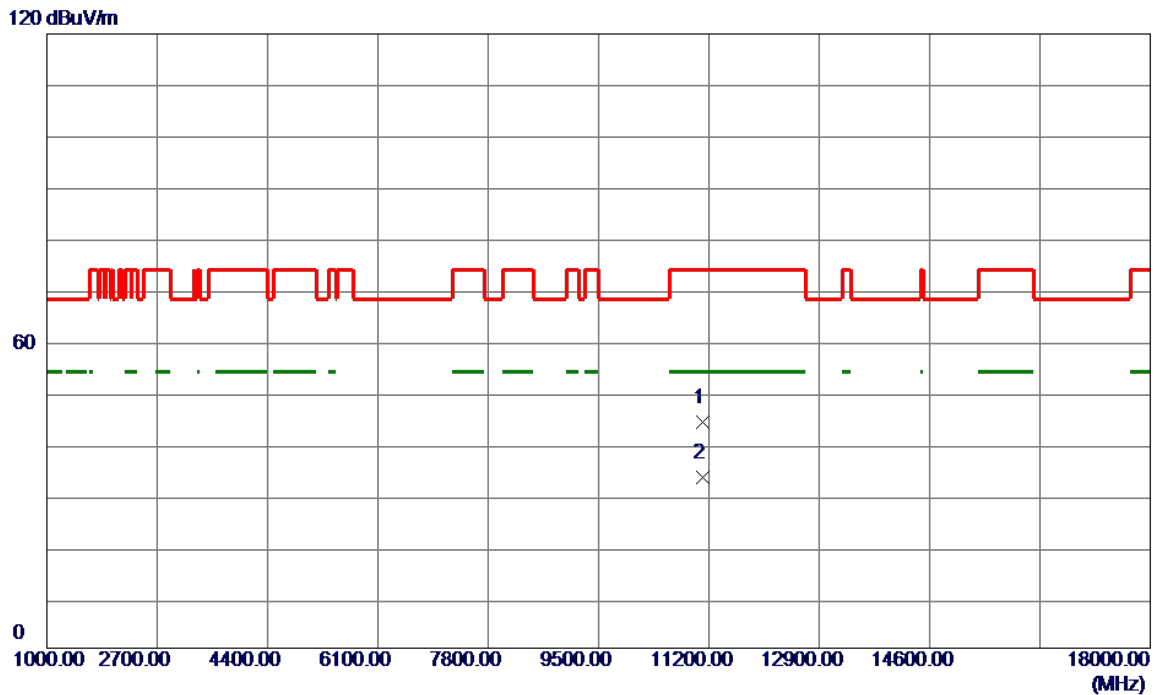


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11100.0000   | 44.13                      | 0.05                    | 44.18                     | 74.00           | -29.82       | Peak     |         |
| 2 * | 11100.0000   | 33.26                      | 0.05                    | 33.31                     | 54.00           | -20.69       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5550MHz               | Polarization | Horizontal |

120 dBuV/m

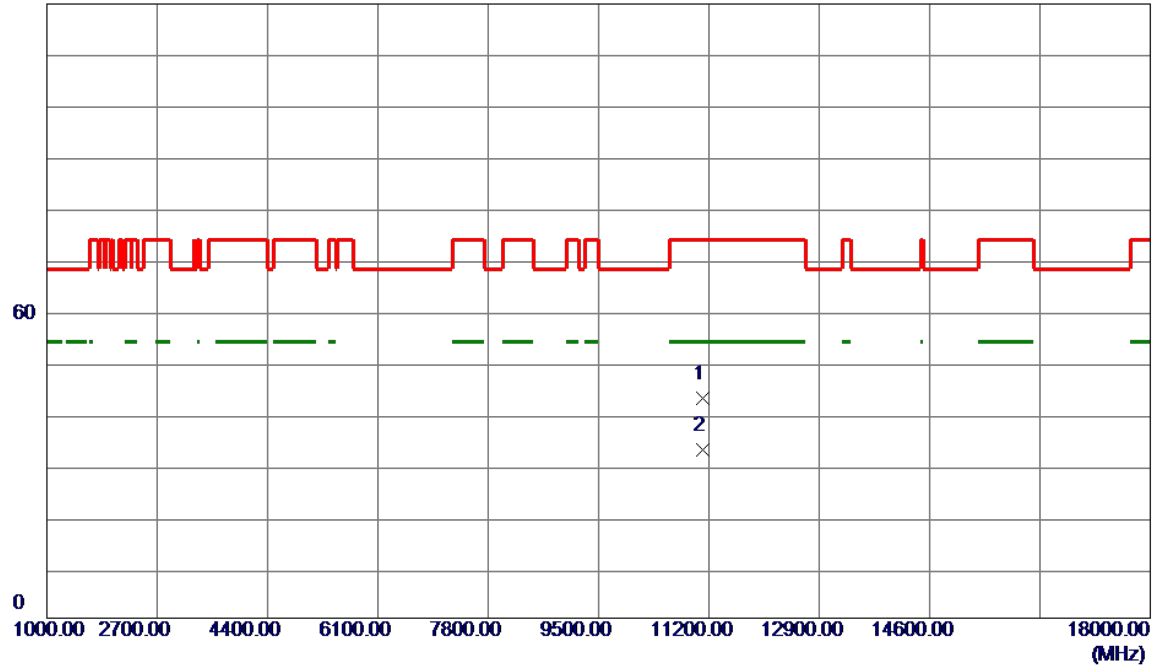


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11100.0000   | 42.92                      | 0.05                    | 42.97                     | 74.00           | -31.03       | Peak     |         |
| 2 * | 11100.0000   | 32.88                      | 0.05                    | 32.93                     | 54.00           | -21.07       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5670MHz               | Polarization | Vertical   |

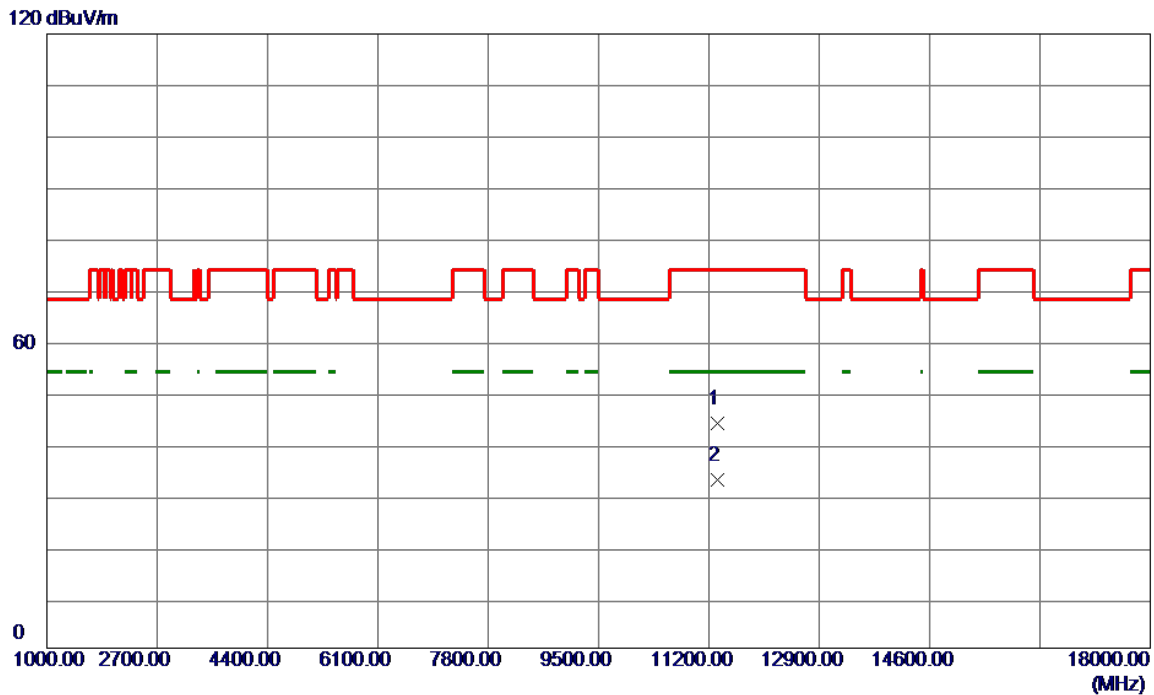


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11340.0000   | 43.42                      | 0.52                    | 43.94                     | 74.00           | -30.06       | Peak     |         |
| 2 * | 11340.0000   | 32.30                      | 0.52                    | 32.82                     | 54.00           | -21.18       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5670MHz               | Polarization | Horizontal |

120 dBuV/m

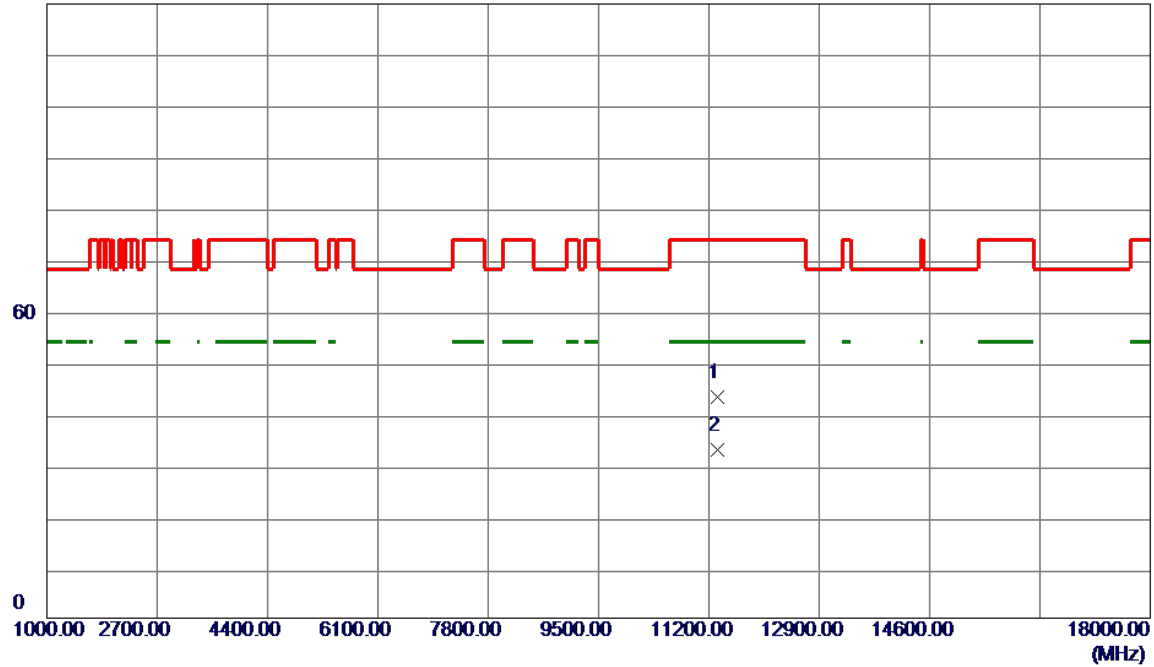


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11340.0000   | 42.68                      | 0.52                    | 43.20                     | 74.00           | -30.80       | Peak     |         |
| 2 * | 11340.0000   | 32.44                      | 0.52                    | 32.96                     | 54.00           | -21.04       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5755MHz               | Polarization | Vertical   |

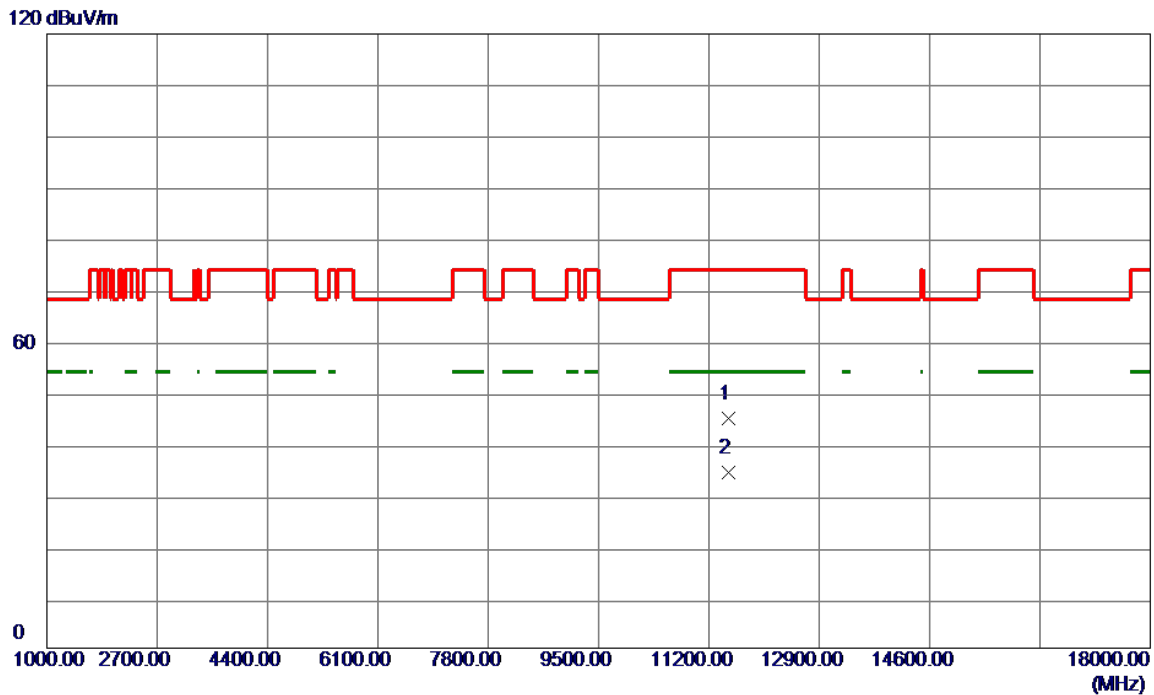


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11510.0000   | 44.14                      | 0.83                    | 44.97                     | 74.00           | -29.03       | Peak     |         |
| 2 * | 11510.0000   | 33.38                      | 0.83                    | 34.21                     | 54.00           | -19.79       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5755MHz               | Polarization | Horizontal |

120 dBuV/m

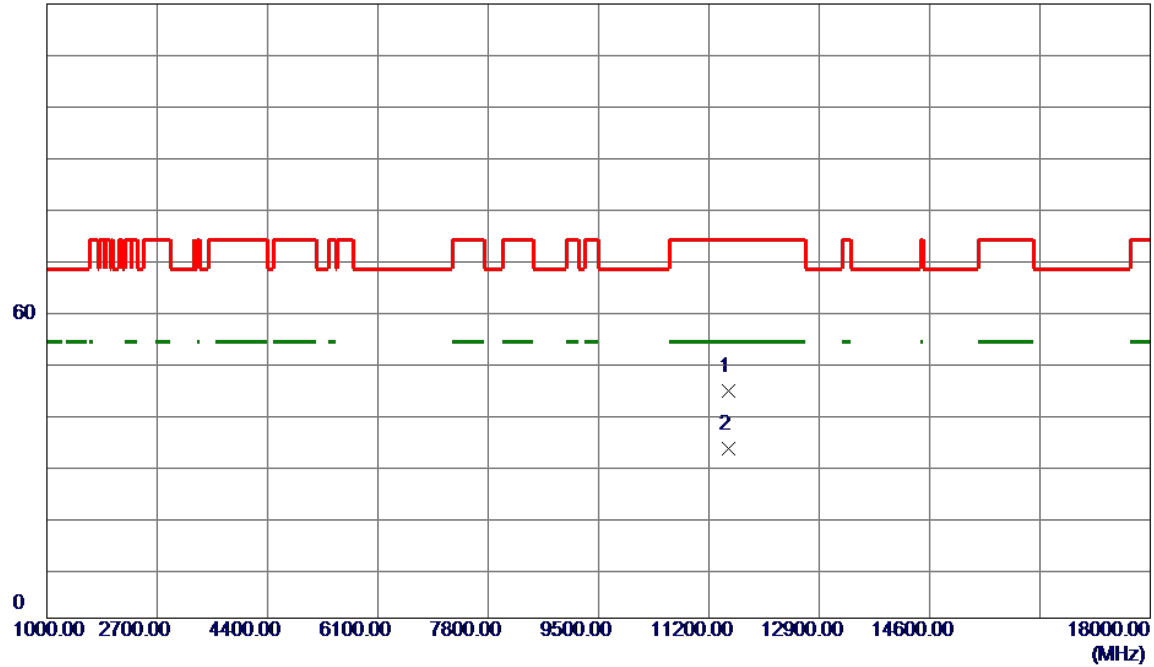


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11510.0000   | 43.51                      | 0.83                    | 44.34                     | 74.00           | -29.66       | Peak     |         |
| 2 * | 11510.0000   | 32.28                      | 0.83                    | 33.11                     | 54.00           | -20.89       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5795MHz               | Polarization | Vertical   |

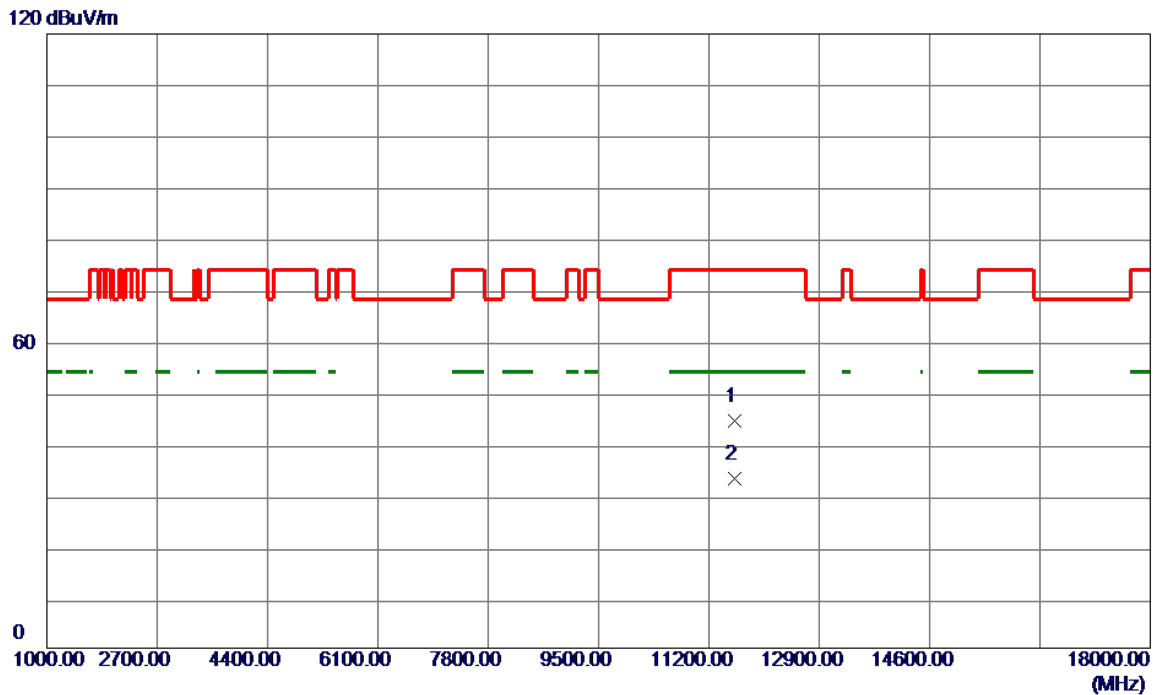


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11590.0000   | 43.59                      | 0.85                    | 44.44                     | 74.00           | -29.56       | Peak     |         |
| 2 * | 11590.0000   | 32.25                      | 0.85                    | 33.10                     | 54.00           | -20.90       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/26 |
| Test Frequency | 5795MHz               | Polarization | Horizontal |

120 dBuV/m

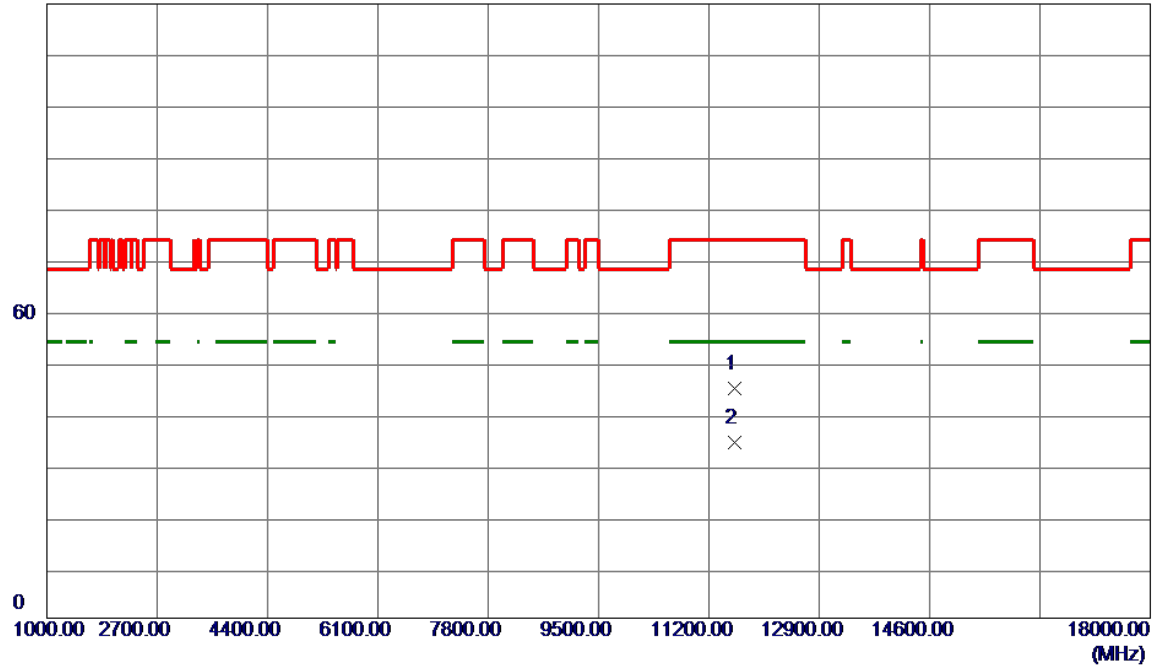

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11590.0000   | 44.05                      | 0.85                    | 44.90                     | 74.00           | -29.10       | Peak     |         |
| 2 * | 11590.0000   | 33.54                      | 0.85                    | 34.39                     | 54.00           | -19.61       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5210MHz               | Polarization | Vertical   |

120 dBuV/m

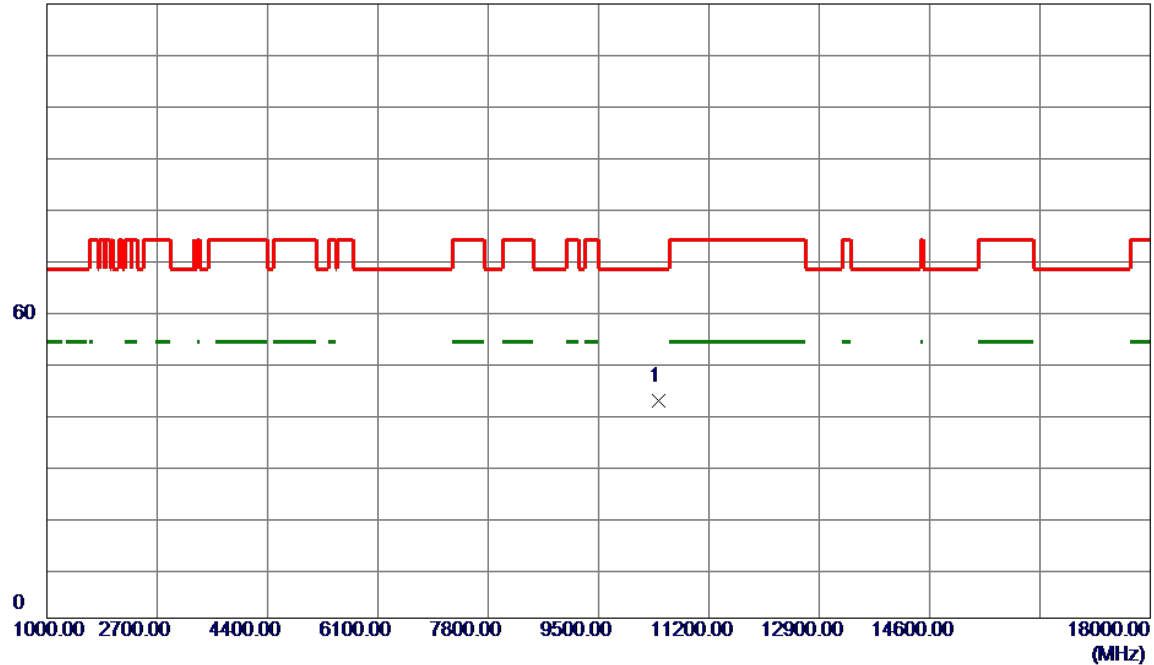


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.0000   | 42.90                      | -0.43                   | 42.47                     | 68.20           | -25.73       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5210MHz               | Polarization | Horizontal |

120 dBuV/m

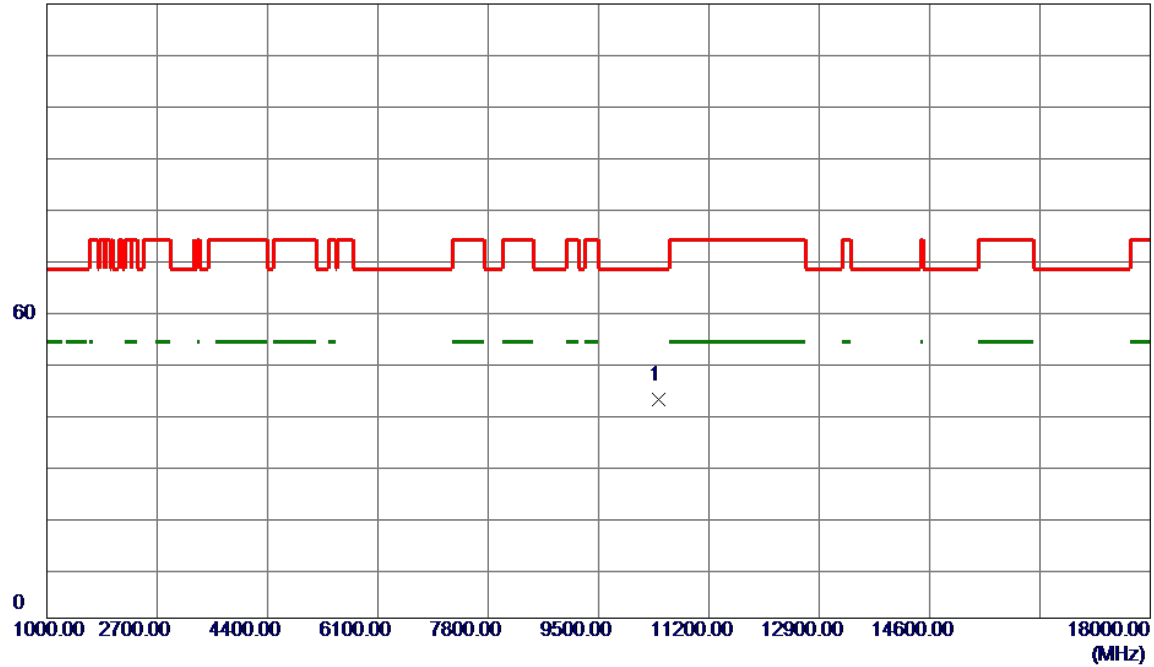


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10420.0000   | 43.11                      | -0.43                   | 42.68                     | 68.20           | -25.52       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5290MHz               | Polarization | Vertical   |

120 dBuV/m

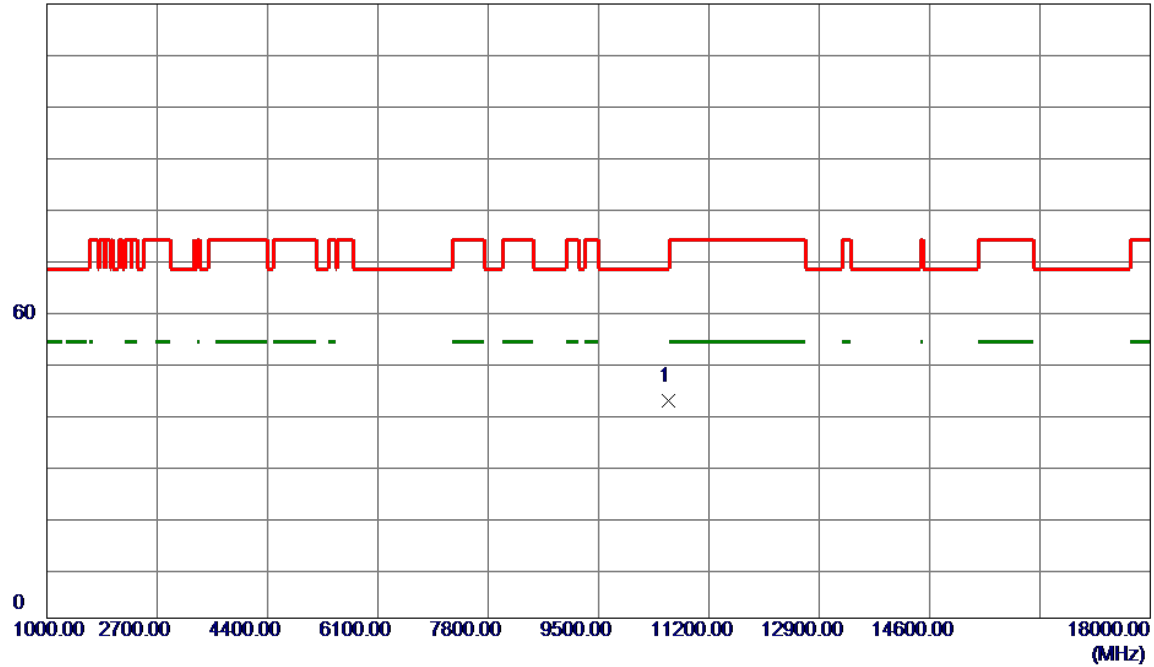


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10580.0000   | 42.84                      | -0.28                   | 42.56                     | 68.20           | -25.64       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5290MHz               | Polarization | Horizontal |

120 dBuV/m

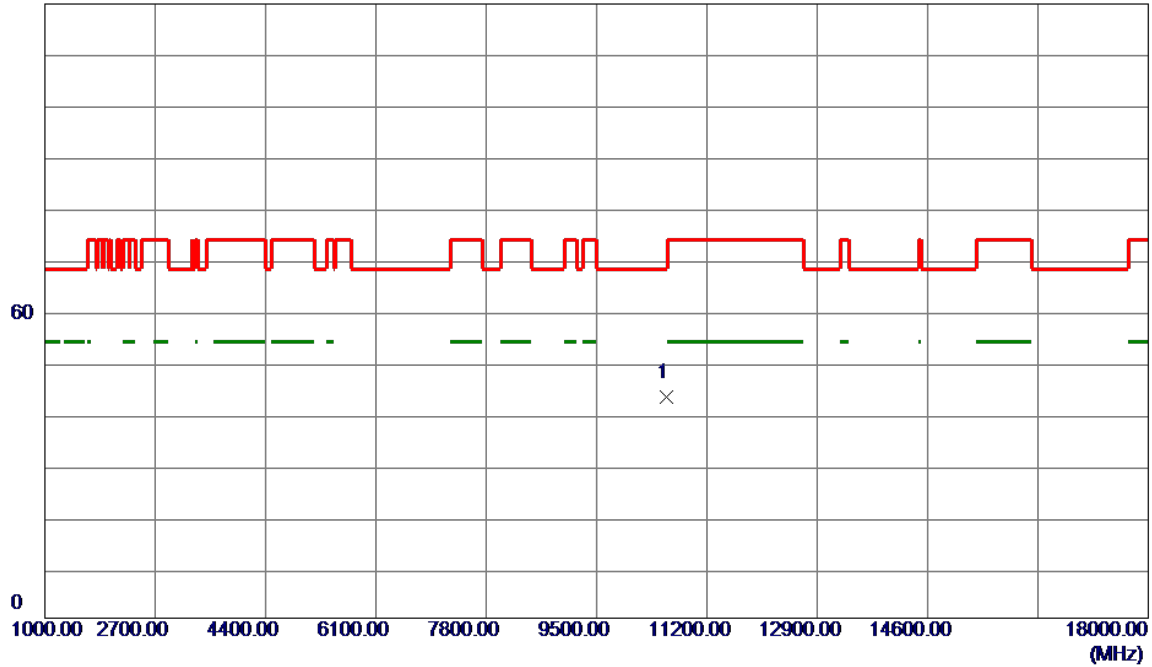


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin | Detector | Comment |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     |          |         |
| 1 * | 10580.0000 | 43.48         | -0.28          | 43.20       | 68.20  | -25.00 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5530MHz               | Polarization | Vertical   |

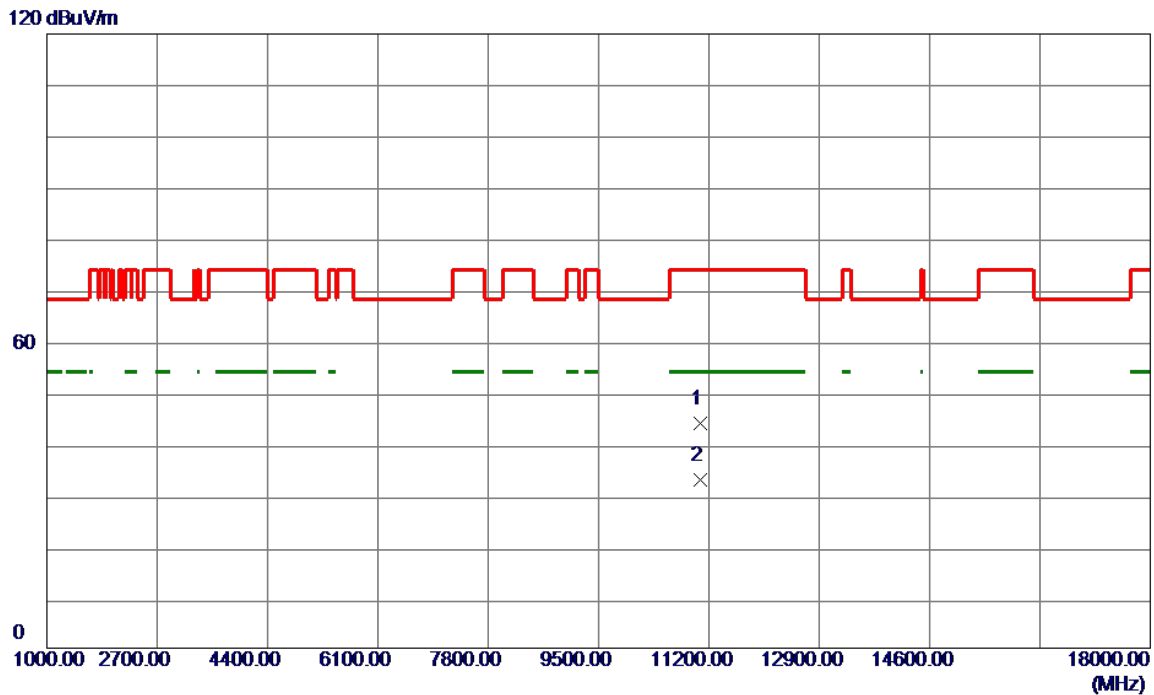


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.0000   | 43.90                      | -0.02                   | 43.88                     | 74.00           | -30.12       | Peak     |         |
| 2 * | 11060.0000   | 32.81                      | -0.02                   | 32.79                     | 54.00           | -21.21       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5530MHz               | Polarization | Horizontal |

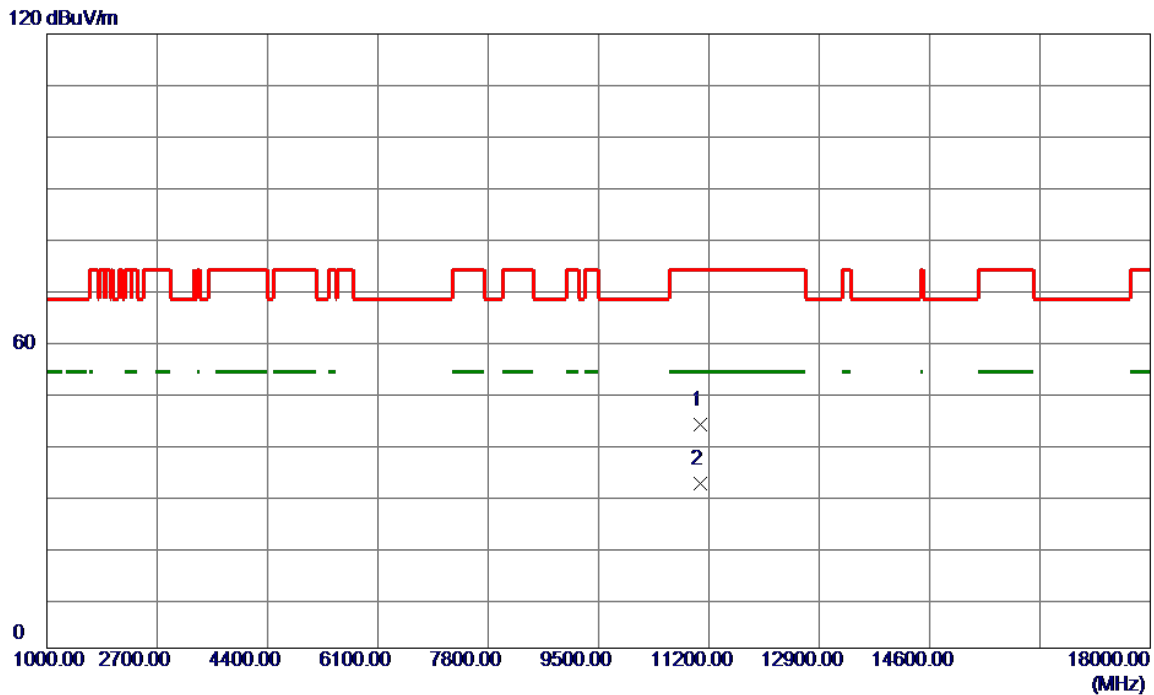


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11060.0000   | 43.70                      | -0.02                   | 43.68                     | 74.00           | -30.32       | Peak     |         |
| 2 * | 11060.0000   | 32.28                      | -0.02                   | 32.26                     | 54.00           | -21.74       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5610MHz               | Polarization | Vertical   |

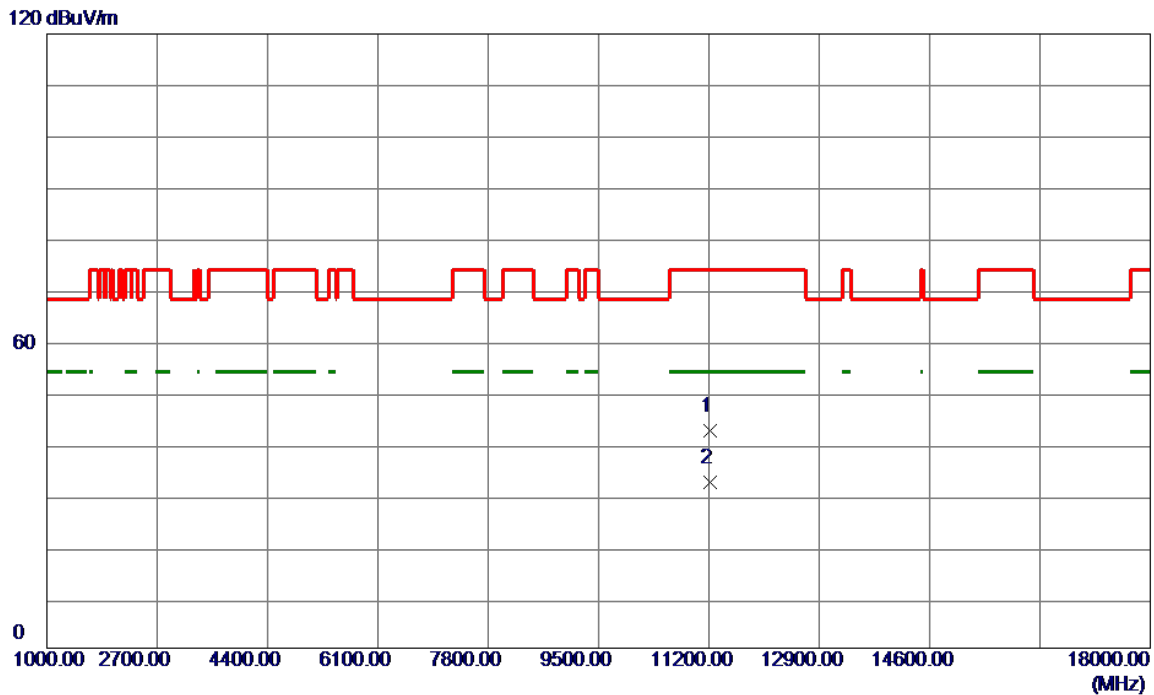


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.0000   | 42.28                      | 0.29                    | 42.57                     | 74.00           | -31.43       | Peak     |         |
| 2 * | 11220.0000   | 32.04                      | 0.29                    | 32.33                     | 54.00           | -21.67       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5610MHz               | Polarization | Horizontal |

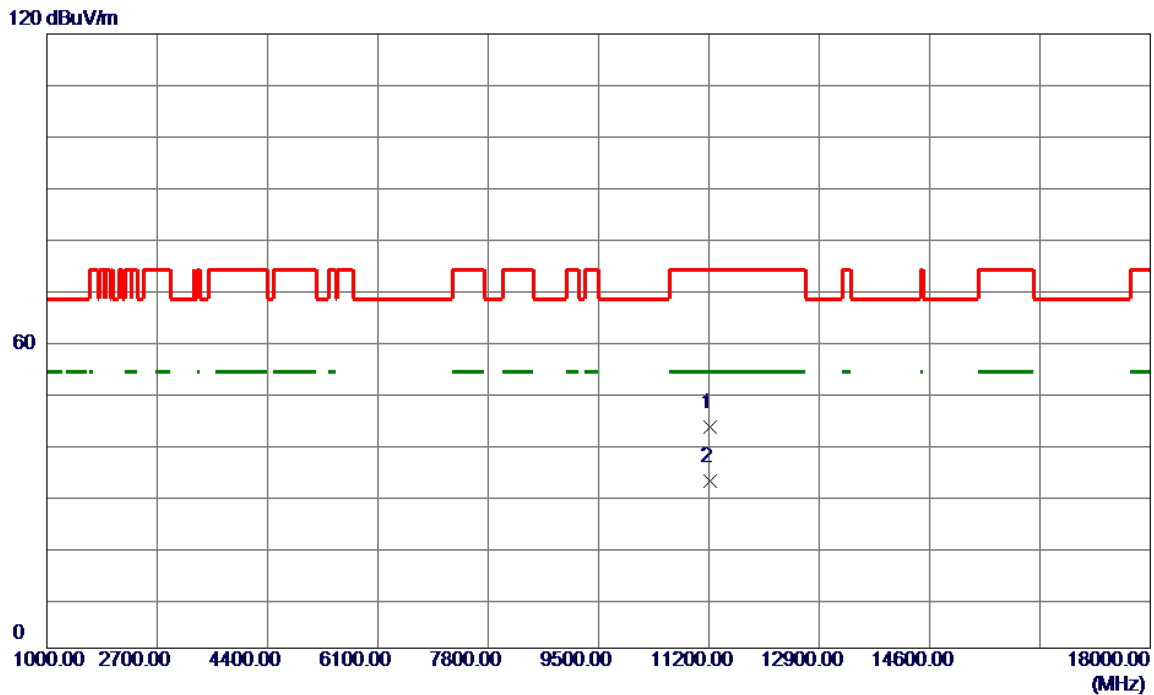


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11220.0000   | 42.82                      | 0.29                    | 43.11                     | 74.00           | -30.89       | Peak     |         |
| 2 * | 11220.0000   | 32.38                      | 0.29                    | 32.67                     | 54.00           | -21.33       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5775MHz               | Polarization | Vertical   |

120 dBuV/m

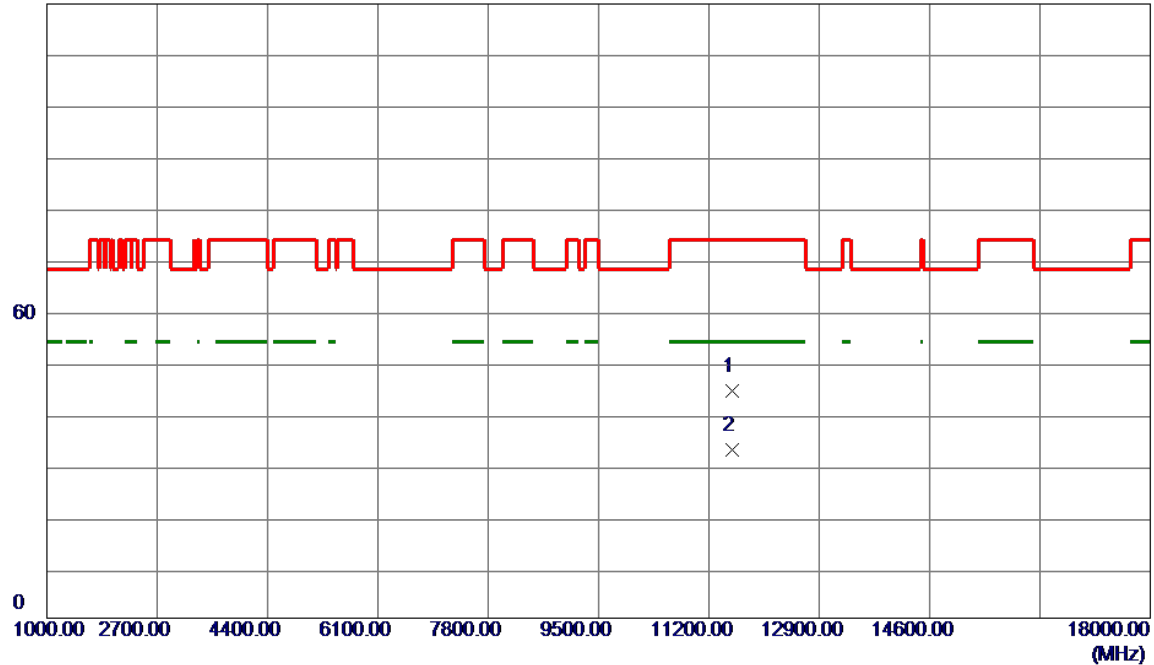


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.0000   | 43.46                      | 0.84                    | 44.30                     | 74.00           | -29.70       | Peak     |         |
| 2 * | 11550.0000   | 32.11                      | 0.84                    | 32.95                     | 54.00           | -21.05       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/26 |
| Test Frequency | 5775MHz               | Polarization | Horizontal |

120 dBuV/m

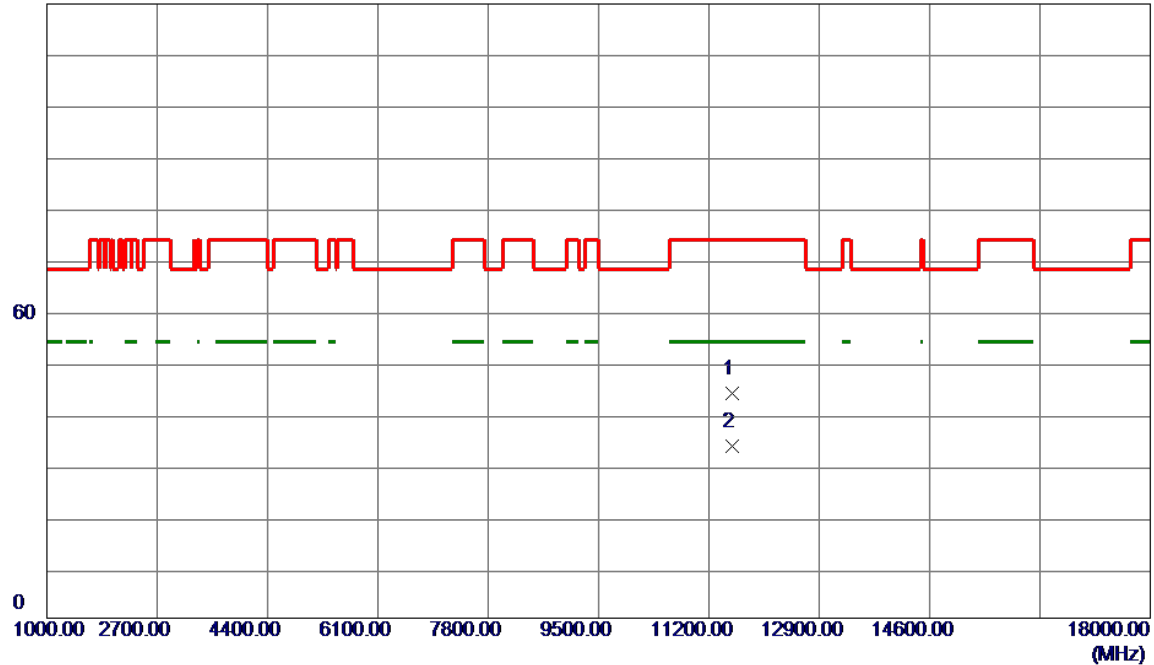

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11550.0000   | 43.19                      | 0.84                    | 44.03                     | 74.00           | -29.97       | Peak     |         |
| 2 * | 11550.0000   | 32.80                      | 0.84                    | 33.64                     | 54.00           | -20.36       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5250MHz                | Polarization | Vertical   |

120 dBuV/m

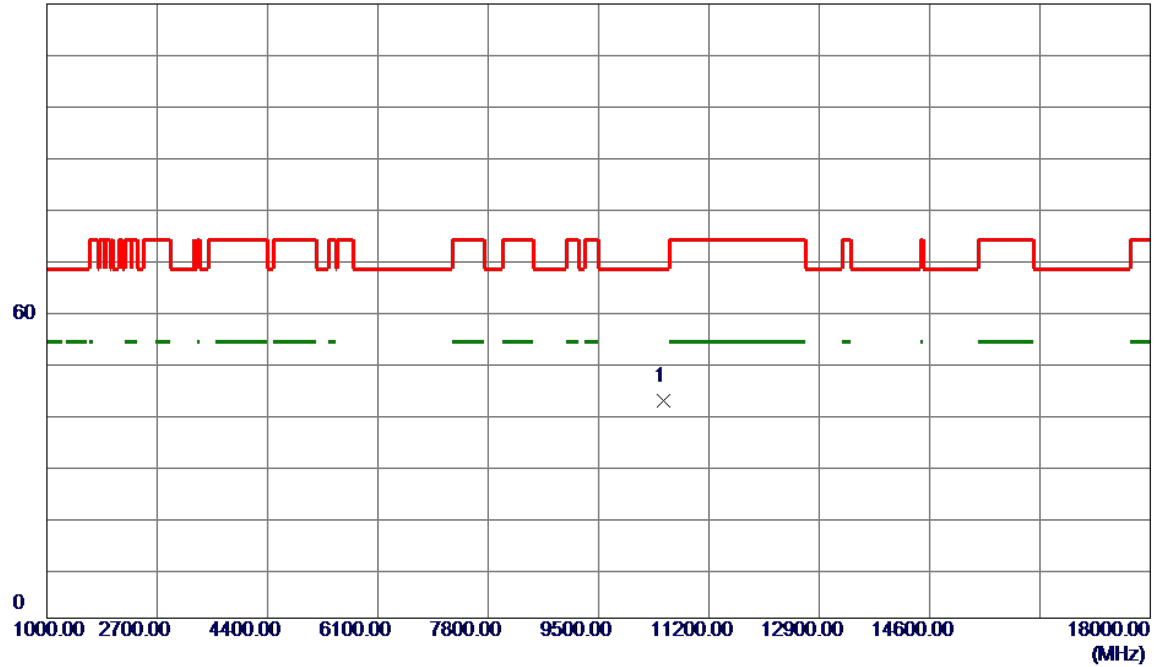


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10500.0000   | 42.82                      | -0.31                   | 42.51                     | 68.20           | -25.69       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5250MHz                | Polarization | Horizontal |

120 dBuV/m

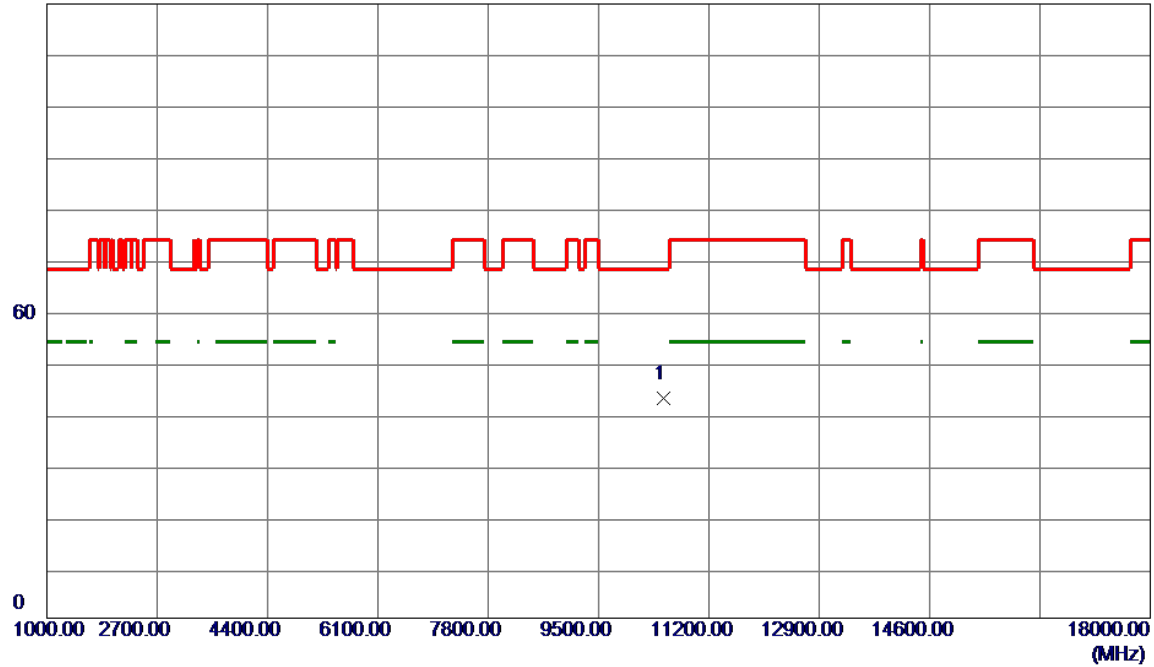


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10500.0000   | 43.31                      | -0.31                   | 43.00                     | 68.20           | -25.20       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5570MHz                | Polarization | Vertical   |

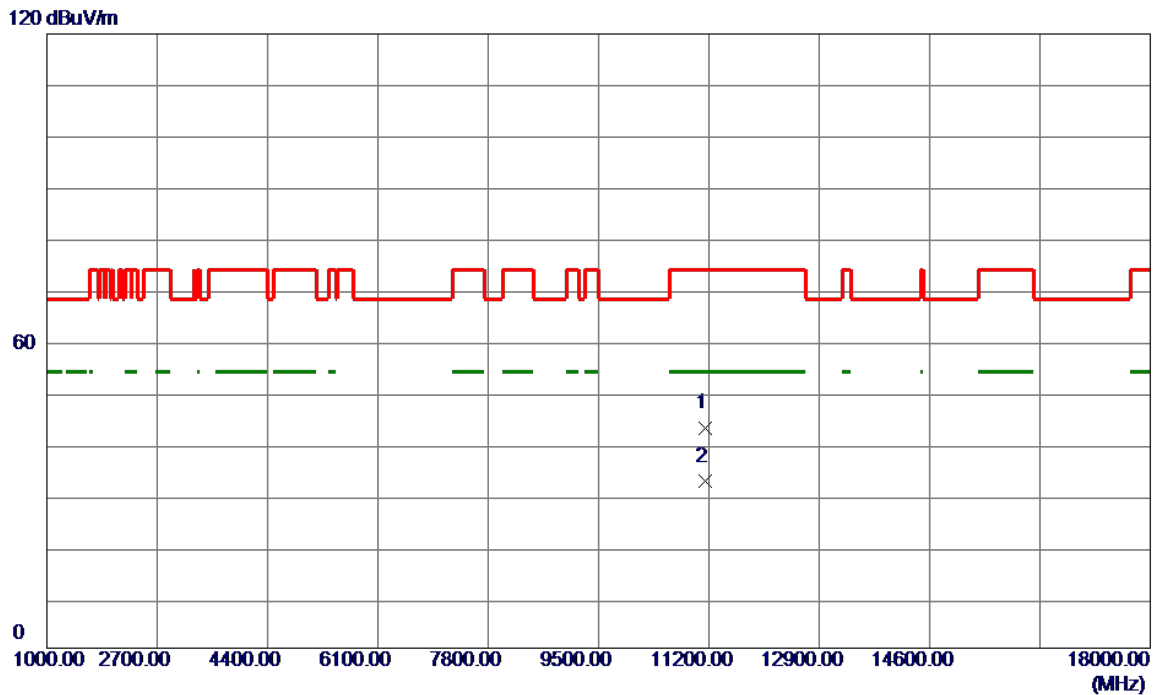


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11140.0000   | 42.95                      | 0.13                    | 43.08                     | 74.00           | -30.92       | Peak     |         |
| 2 * | 11140.0000   | 32.55                      | 0.13                    | 32.68                     | 54.00           | -21.32       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |                        |              |            |
|----------------|------------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT160) | Test Date    | 2024/12/26 |
| Test Frequency | 5570MHz                | Polarization | Horizontal |

120 dBuV/m

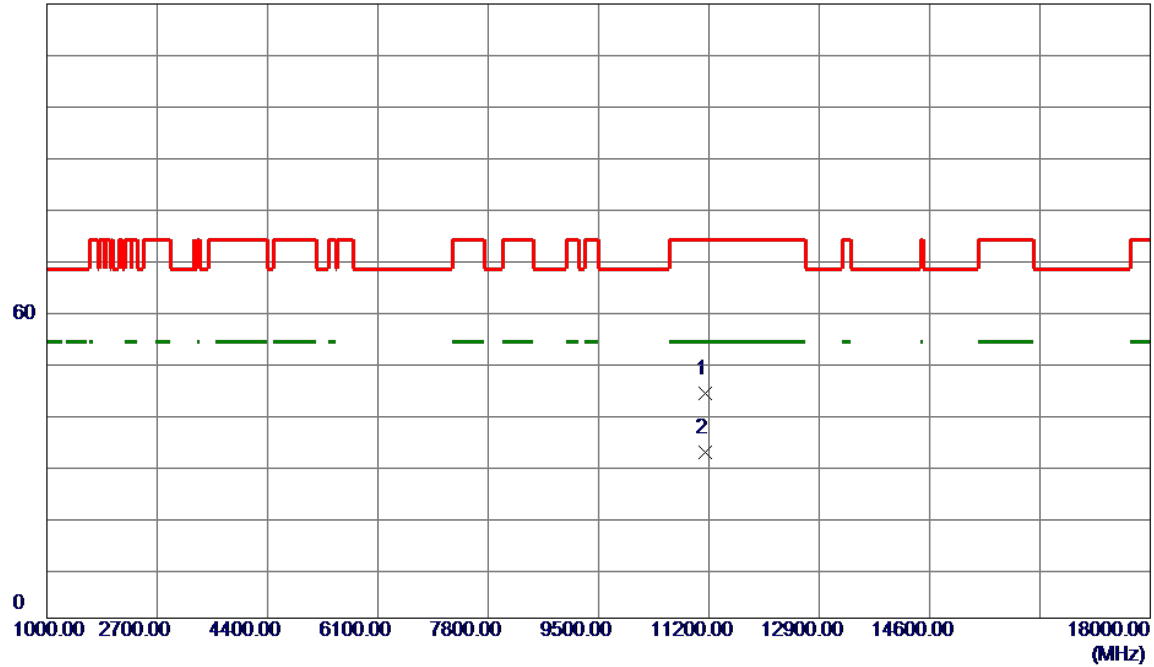


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11140.0000   | 43.70                      | 0.13                    | 43.83                     | 74.00           | -30.17       | Peak     |         |
| 2 * | 11140.0000   | 32.28                      | 0.13                    | 32.41                     | 54.00           | -21.59       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

## Straddle Channel:

|                |              |              |            |
|----------------|--------------|--------------|------------|
| Test Mode      | IEEE 802.11a | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz       | Polarization | Vertical   |

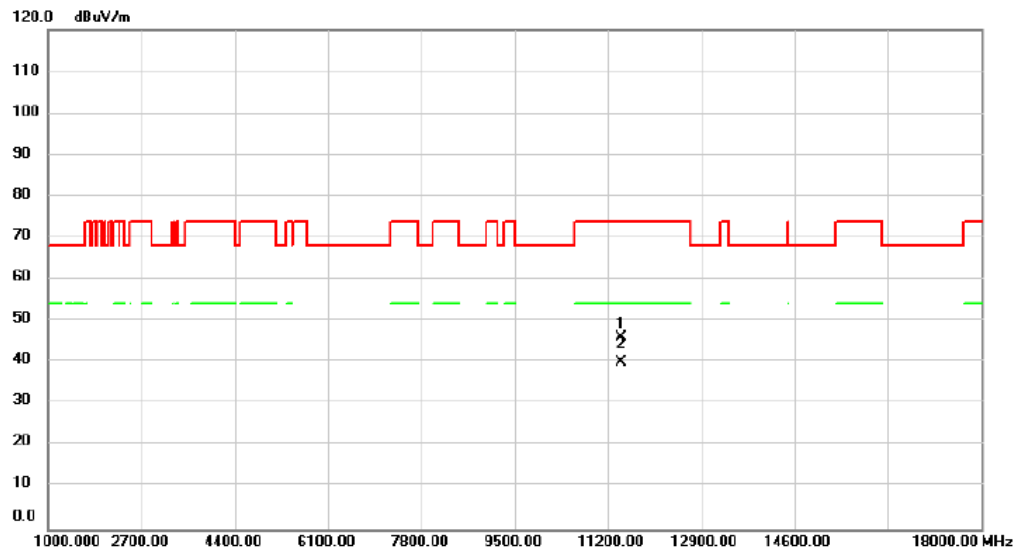


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 45.37                    | 0.71                    | 46.08                      | 74.00           | -27.92       | peak     |         |
| 2   | *   | 11440.00     | 39.30                    | 0.71                    | 40.01                      | 54.00           | -13.99       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |              |              |            |
|----------------|--------------|--------------|------------|
| Test Mode      | IEEE 802.11a | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz       | Polarization | Horizontal |

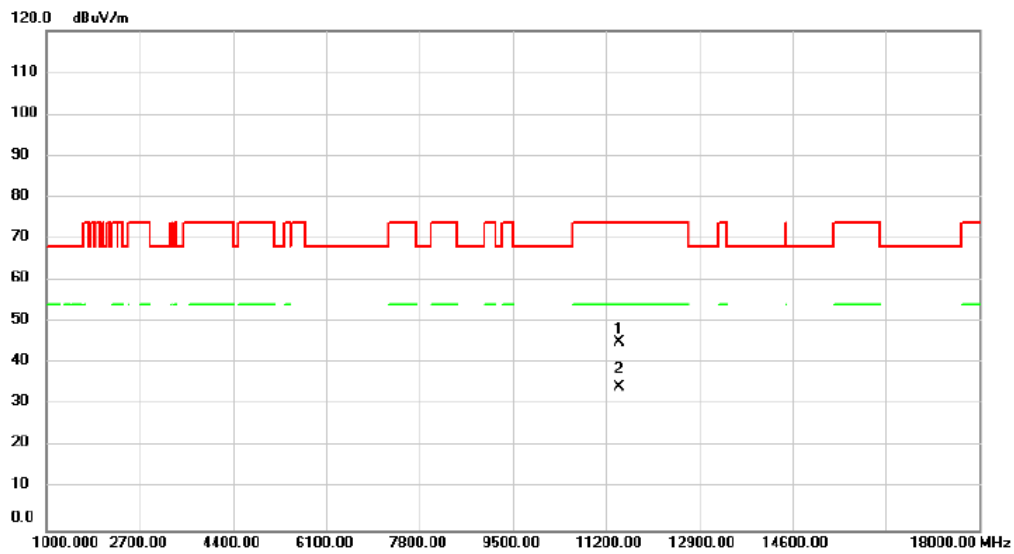


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 44.47                    | 0.71                    | 45.18                      | 74.00           | -28.82       | peak     |         |
| 2   | *   | 11440.00     | 33.55                    | 0.71                    | 34.26                      | 54.00           | -19.74       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT20) | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz                | Polarization | Vertical   |

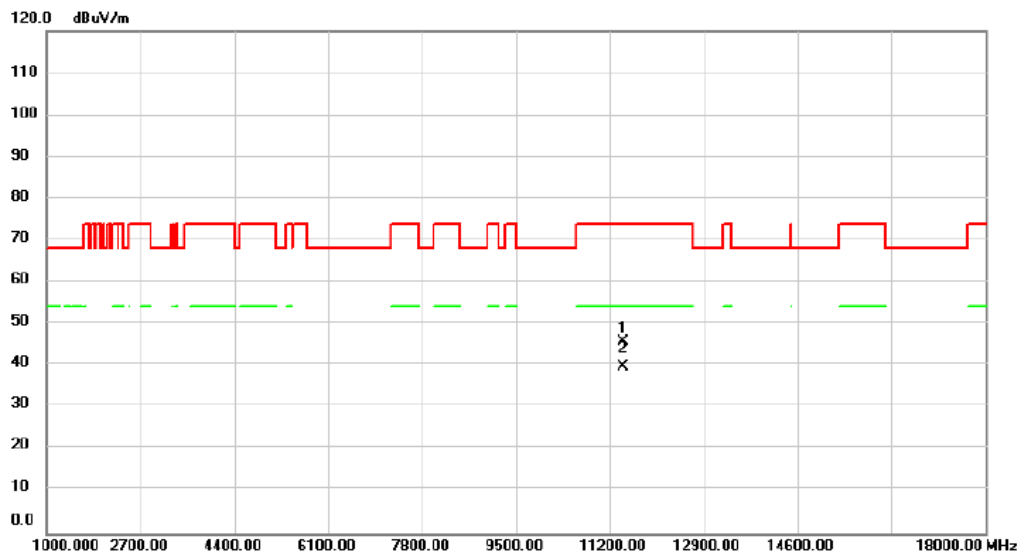


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 11440.00 | 44.91         | 0.71           | 45.62       | 74.00  | -28.38 | peak     |         |
| 2   | *   | 11440.00 | 39.14         | 0.71           | 39.85       | 54.00  | -14.15 | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT20) | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz                | Polarization | Horizontal |

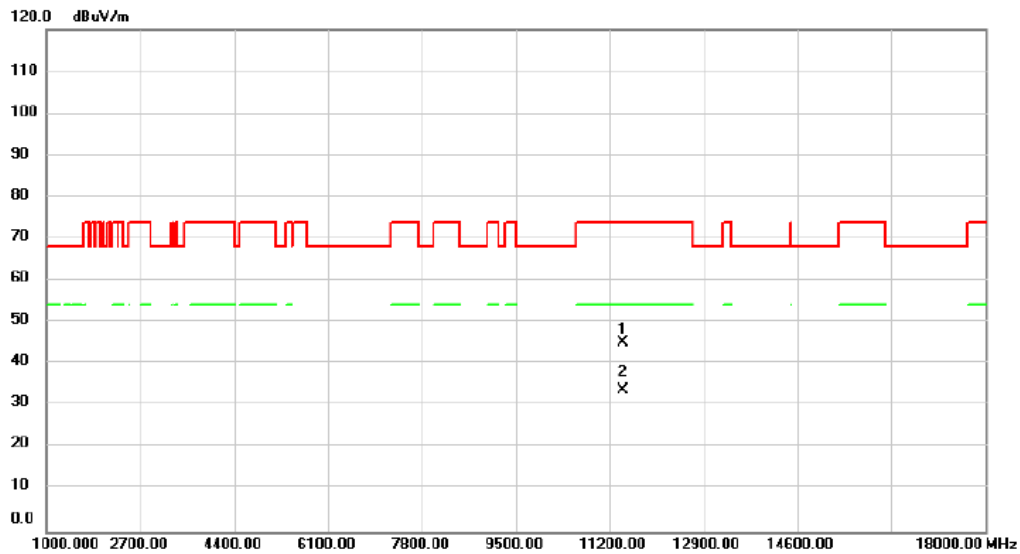


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 44.52                    | 0.71                    | 45.23                      | 74.00           | -28.77       | peak     |         |
| 2   | *   | 11440.00     | 33.04                    | 0.71                    | 33.75                      | 54.00           | -20.25       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT40) | Test Date    | 2024/12/30 |
| Test Frequency | 5710Hz                | Polarization | Vertical   |

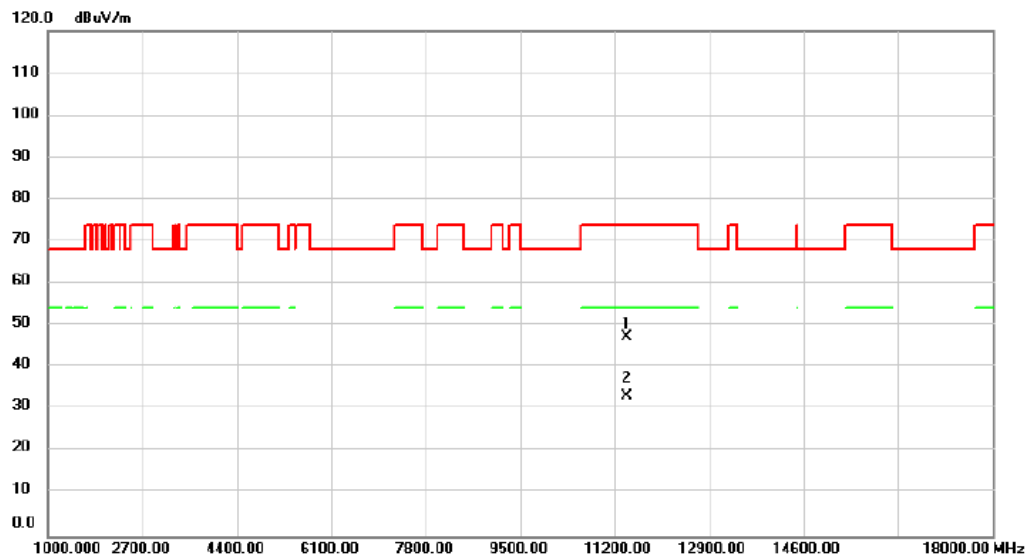


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 11420.00 | 46.69         | 0.68           | 47.37       | 74.00  | -26.63 | peak     |         |
| 2   | *   | 11420.00 | 32.35         | 0.68           | 33.03       | 54.00  | -20.97 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT40) | Test Date    | 2024/12/30 |
| Test Frequency | 5710Hz                | Polarization | Horizontal |

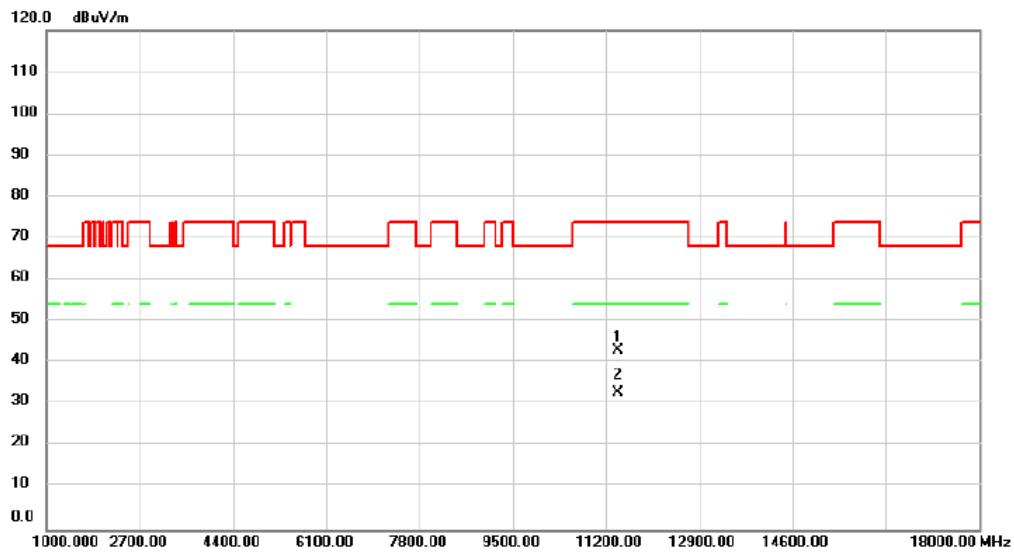


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11420.00     | 42.34                    | 0.68                    | 43.02                      | 74.00           | -30.98       | peak     |         |
| 2   | *   | 11420.00     | 32.31                    | 0.68                    | 32.99                      | 54.00           | -21.01       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/30 |
| Test Frequency | 5690Hz                | Polarization | Vertical   |

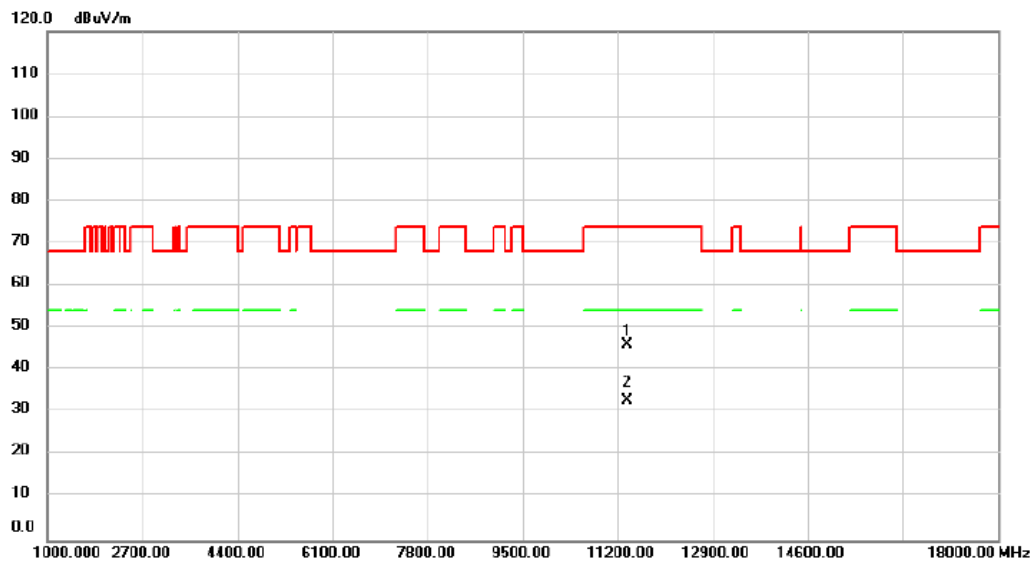


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.00     | 45.35                    | 0.59                    | 45.94                      | 74.00           | -28.06       | peak     |         |
| 2   | *   | 11380.00     | 32.41                    | 0.59                    | 33.00                      | 54.00           | -21.00       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ac (VHT80) | Test Date    | 2024/12/30 |
| Test Frequency | 5690Hz                | Polarization | Horizontal |

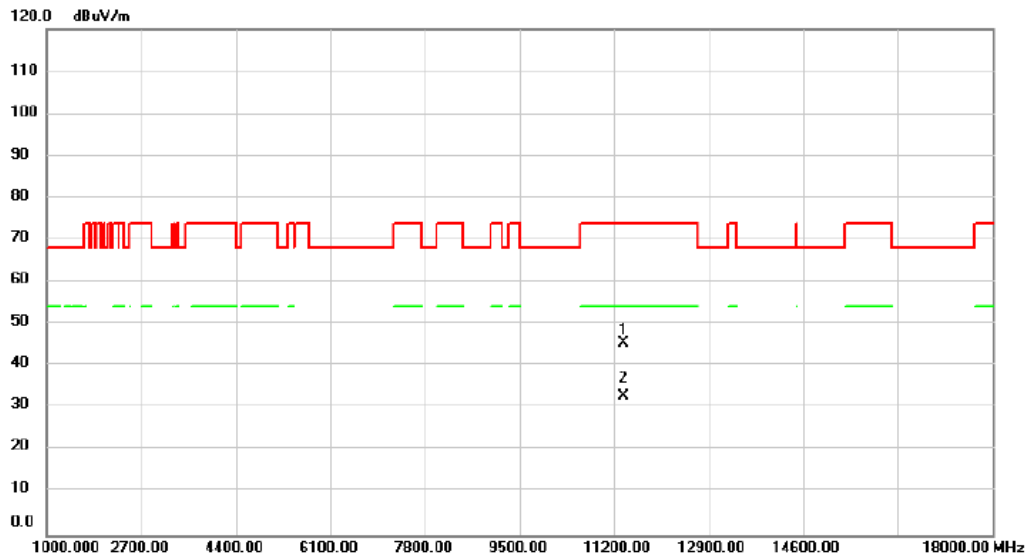


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.00     | 45.00                    | 0.59                    | 45.59                      | 74.00           | -28.41       | peak     |         |
| 2   | *   | 11380.00     | 32.40                    | 0.59                    | 32.99                      | 54.00           | -21.01       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz               | Polarization | Vertical   |

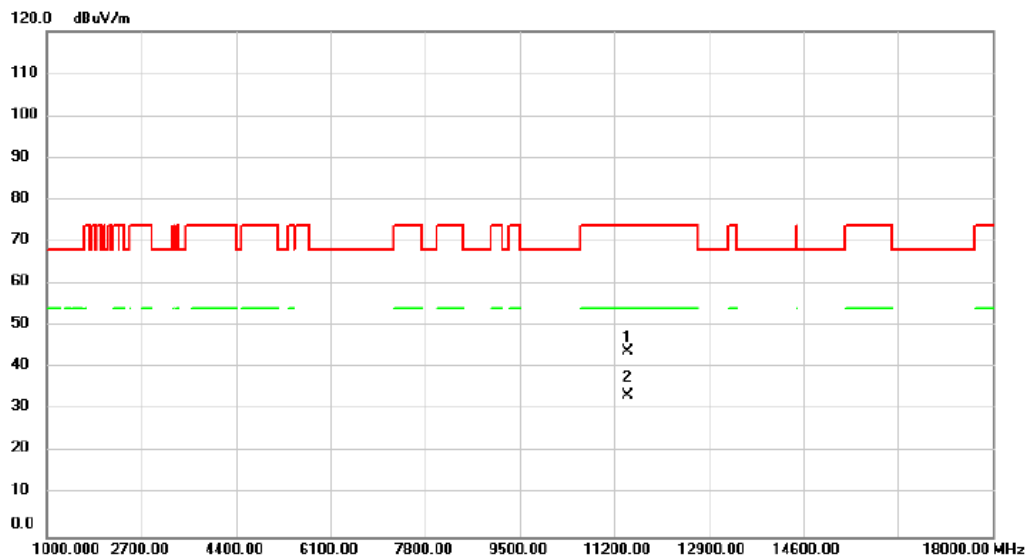


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 43.11                    | 0.71                    | 43.82                      | 74.00           | -30.18       | peak     |         |
| 2   | *   | 11440.00     | 32.65                    | 0.71                    | 33.36                      | 54.00           | -20.64       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE20) | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz               | Polarization | Horizontal |

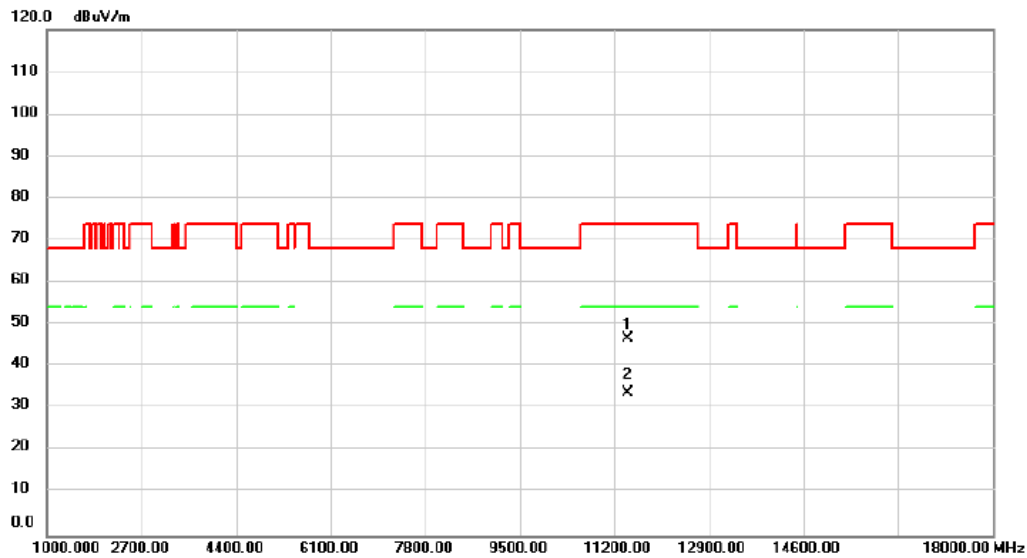


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 45.94                    | 0.71                    | 46.65                      | 74.00           | -27.35       | peak     |         |
| 2   | *   | 11440.00     | 33.11                    | 0.71                    | 33.82                      | 54.00           | -20.18       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/30 |
| Test Frequency | 5710Hz               | Polarization | Vertical   |

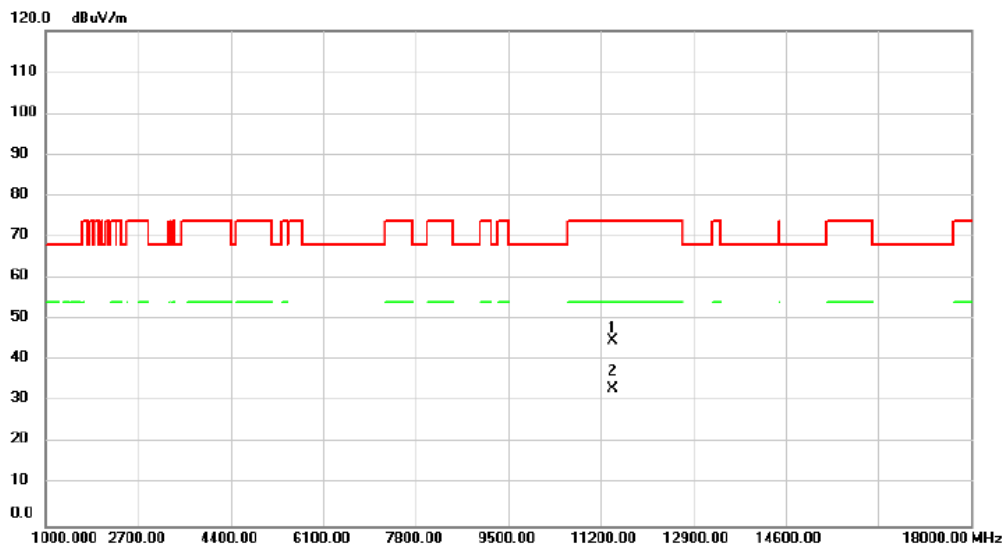


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11420.00     | 44.05                    | 0.68                    | 44.73                      | 74.00           | -29.27       | peak     |         |
| 2   | *   | 11420.00     | 32.44                    | 0.68                    | 33.12                      | 54.00           | -20.88       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE40) | Test Date    | 2024/12/30 |
| Test Frequency | 5710Hz               | Polarization | Horizontal |

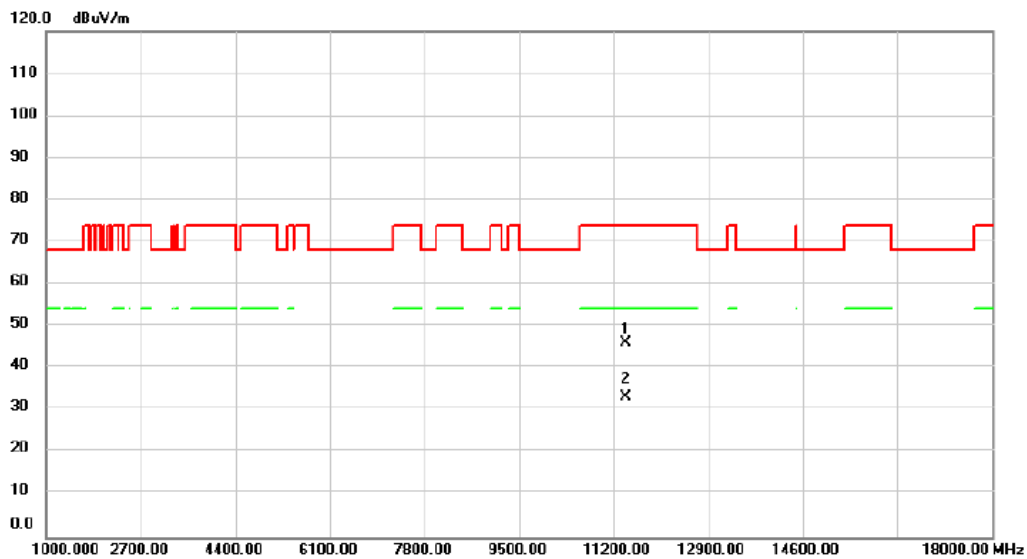


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11420.00     | 45.34                    | 0.68                    | 46.02                      | 74.00           | -27.98       | peak     |         |
| 2   | *   | 11420.00     | 32.39                    | 0.68                    | 33.07                      | 54.00           | -20.93       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/30 |
| Test Frequency | 5690Hz               | Polarization | Vertical   |

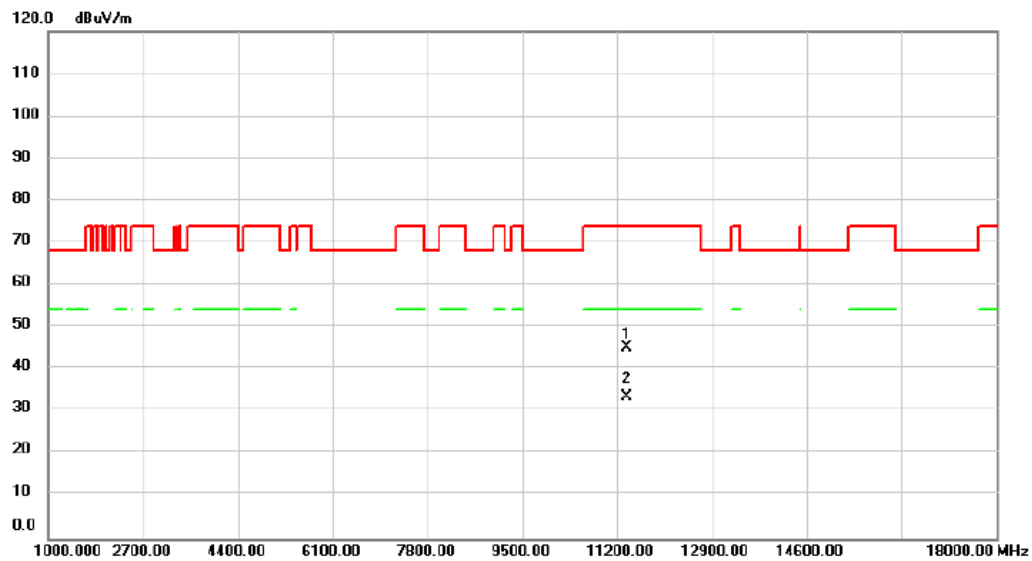


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.00     | 44.48                    | 0.59                    | 45.07                      | 74.00           | -28.93       | peak     |         |
| 2   | *   | 11380.00     | 32.77                    | 0.59                    | 33.36                      | 54.00           | -20.64       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                      |              |            |
|----------------|----------------------|--------------|------------|
| Test Mode      | IEEE 802.11ax (HE80) | Test Date    | 2024/12/30 |
| Test Frequency | 5690Hz               | Polarization | Horizontal |

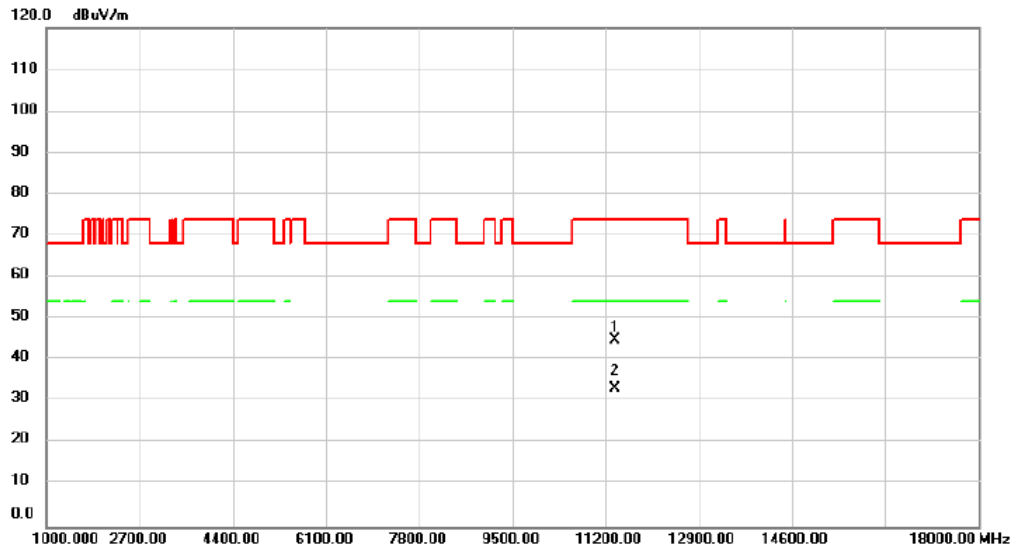


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.00     | 44.39                    | 0.59                    | 44.98                      | 74.00           | -29.02       | peak     |         |
| 2   | *   | 11380.00     | 32.48                    | 0.59                    | 33.07                      | 54.00           | -20.93       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz                | Polarization | Vertical   |

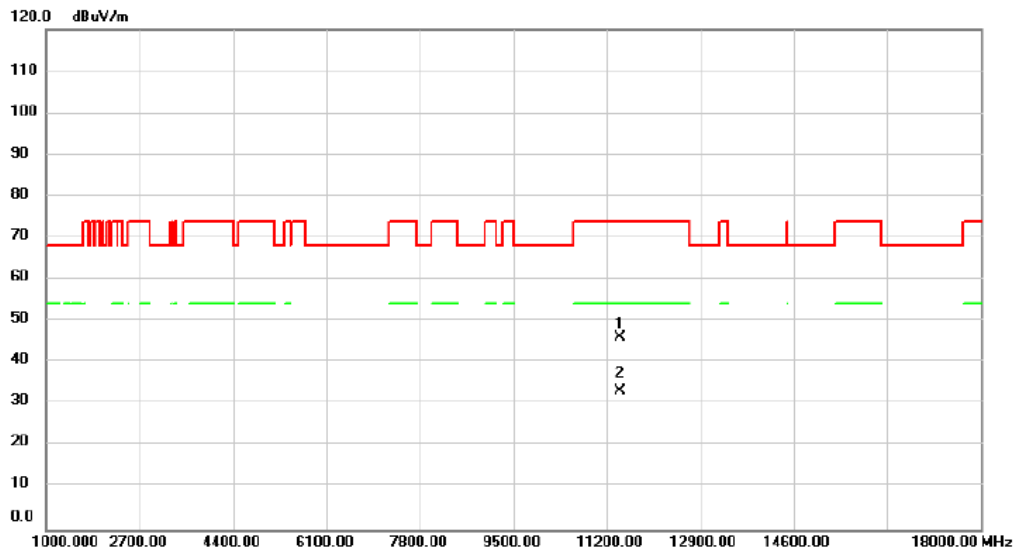


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 45.31                    | 0.71                    | 46.02                      | 74.00           | -27.98       | peak     |         |
| 2   | *   | 11440.00     | 32.56                    | 0.71                    | 33.27                      | 54.00           | -20.73       | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT20) | Test Date    | 2024/12/30 |
| Test Frequency | 5720Hz                | Polarization | Horizontal |

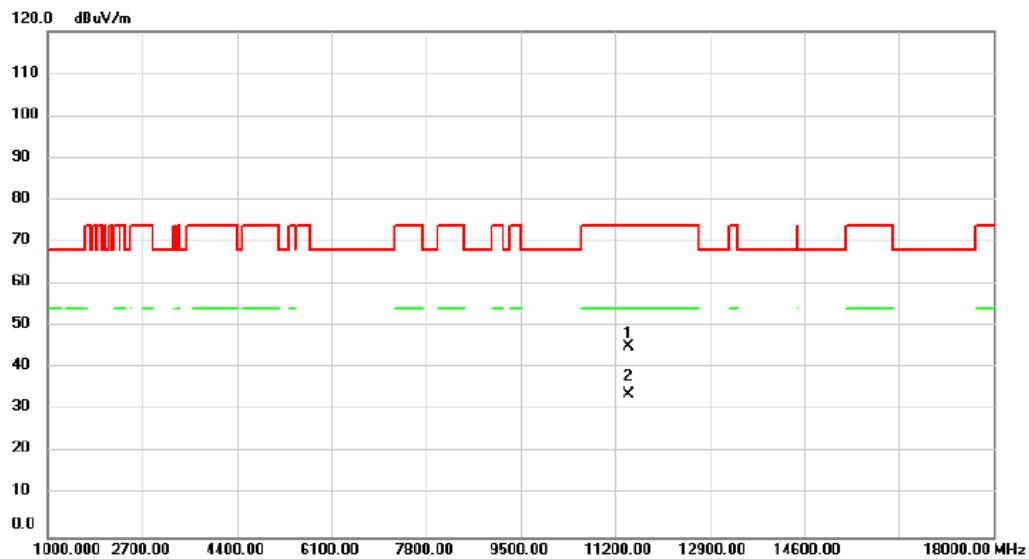


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11440.00     | 44.38                    | 0.71                    | 45.09                      | 74.00           | -28.91       | peak     |         |
| 2   | *   | 11440.00     | 33.03                    | 0.71                    | 33.74                      | 54.00           | -20.26       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/30 |
| Test Frequency | 5710Hz                | Polarization | Vertical   |

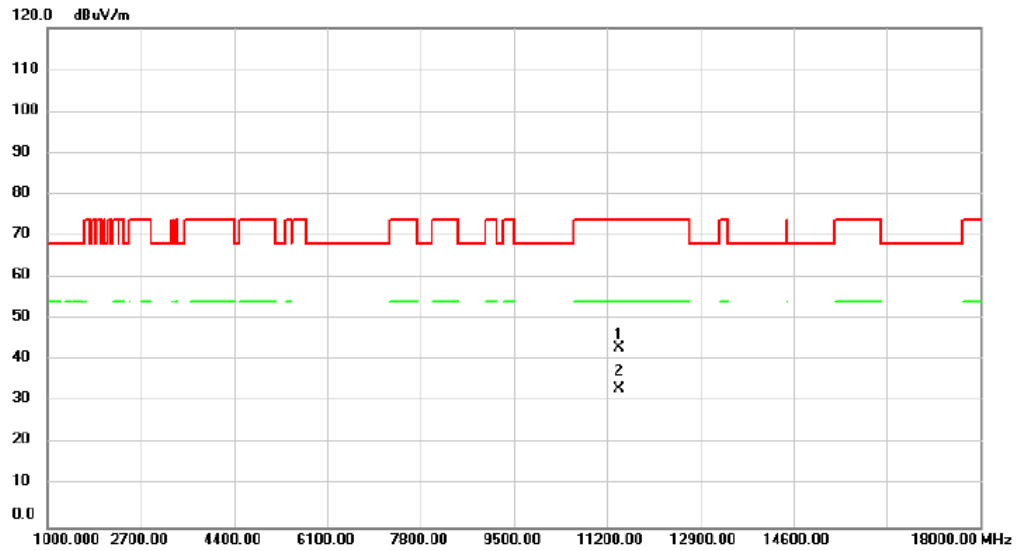


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11420.00     | 42.39                    | 0.68                    | 43.07                      | 74.00           | -30.93       | peak     |         |
| 2   | *   | 11420.00     | 32.47                    | 0.68                    | 33.15                      | 54.00           | -20.85       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT40) | Test Date    | 2024/12/30 |
| Test Frequency | 5710Hz                | Polarization | Horizontal |

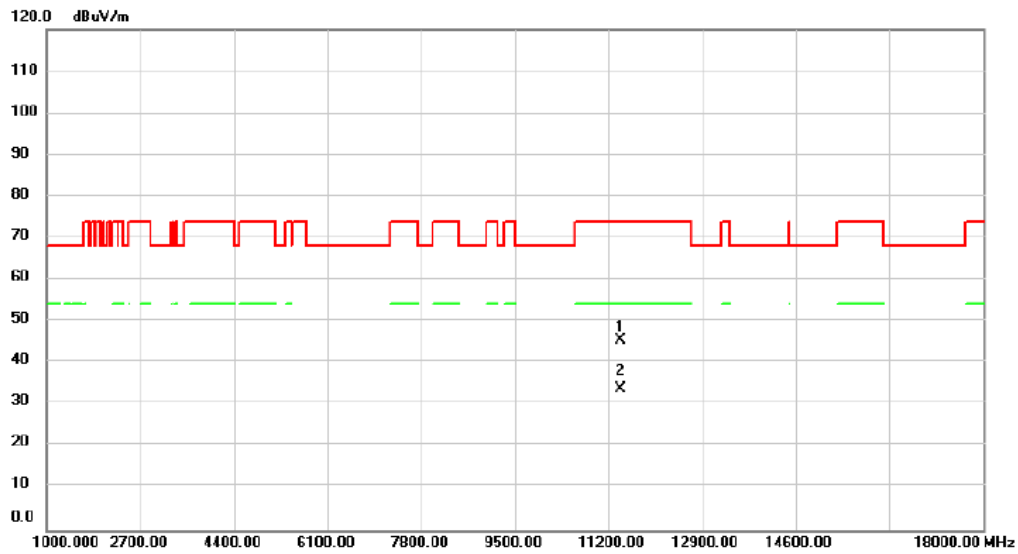


| No. Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|---------|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|         | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1       | 11420.00 | 44.79         | 0.68           | 45.47       | 74.00  | -28.53 | peak     |         |
| 2 *     | 11420.00 | 33.07         | 0.68           | 33.75       | 54.00  | -20.25 | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/30 |
| Test Frequency | 5690Hz                | Polarization | Vertical   |

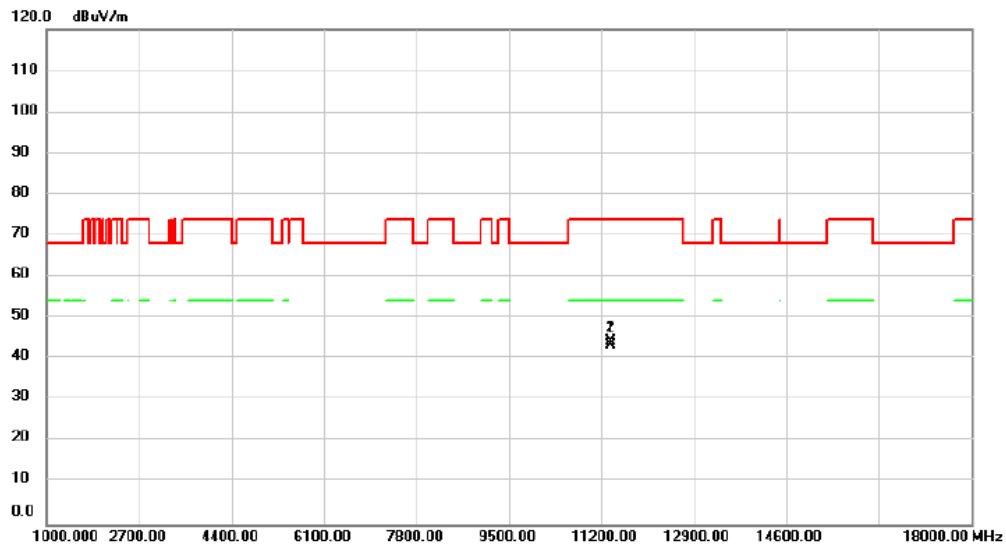


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.00     | 43.55                    | 0.59                    | 44.14                      | 74.00           | -29.86       | peak     |         |
| 2   | *   | 11380.00     | 42.63                    | 0.59                    | 43.22                      | 54.00           | -10.78       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                |                       |              |            |
|----------------|-----------------------|--------------|------------|
| Test Mode      | IEEE 802.11be (EHT80) | Test Date    | 2024/12/30 |
| Test Frequency | 5690Hz                | Polarization | Horizontal |

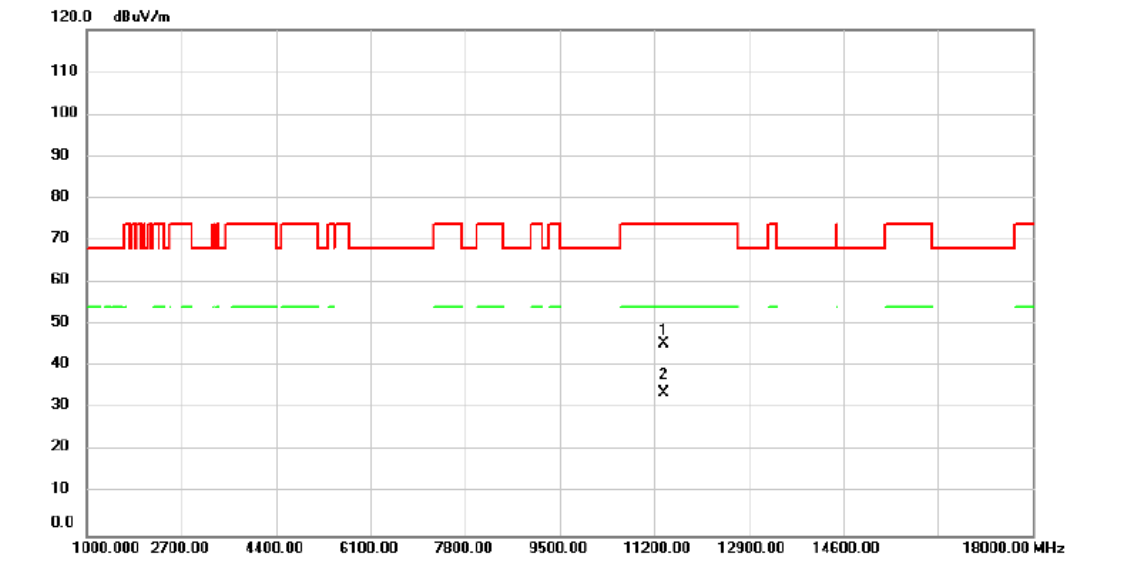


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 11380.00     | 44.81                    | 0.59                    | 45.40                      | 74.00           | -28.60       | peak     |         |
| 2   | *   | 11380.00     | 33.13                    | 0.59                    | 33.72                      | 54.00           | -20.28       | AVG      |         |

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                |              |              |            |
|----------------|--------------|--------------|------------|
| Test Mode      | IEEE 802.11a | Test Date    | 2024/12/26 |
| Test Frequency | 5745MHz      | Polarization | Vertical   |

120 dBuV/m

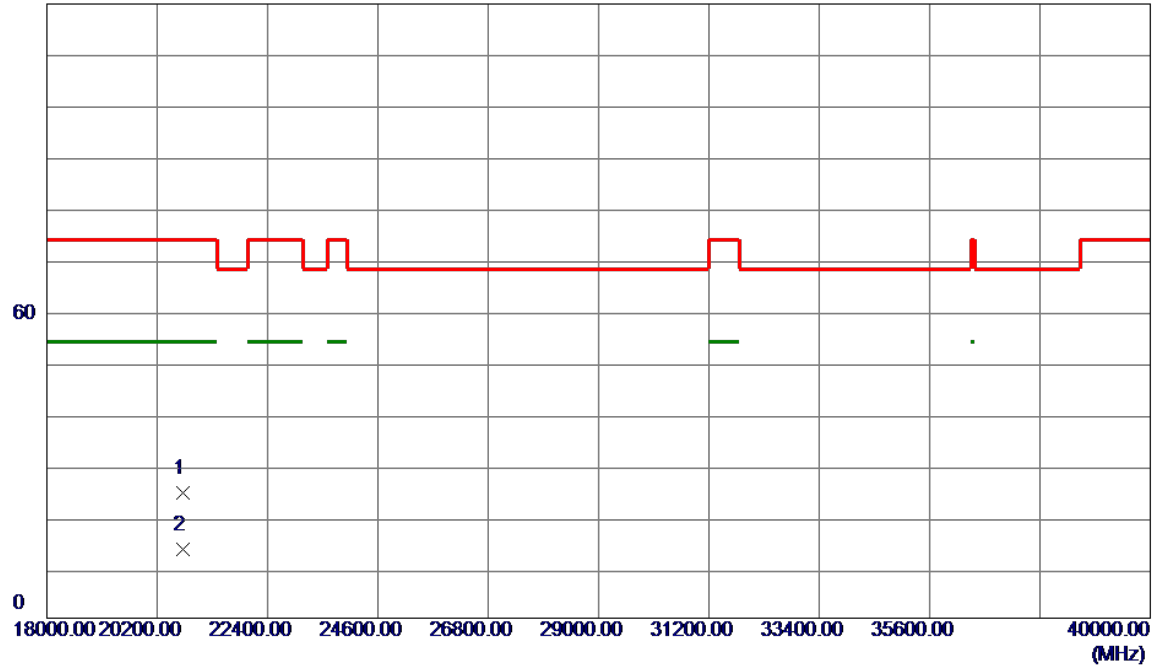


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 20720.0000   | 33.49                      | -9.03                   | 24.46                     | 74.00           | -49.54       | Peak     |         |
| 2 * | 20720.0000   | 22.47                      | -9.03                   | 13.44                     | 54.00           | -40.56       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                |              |              |            |
|----------------|--------------|--------------|------------|
| Test Mode      | IEEE 802.11a | Test Date    | 2024/12/26 |
| Test Frequency | 5745MHz      | Polarization | Horizontal |

120 dBuV/m

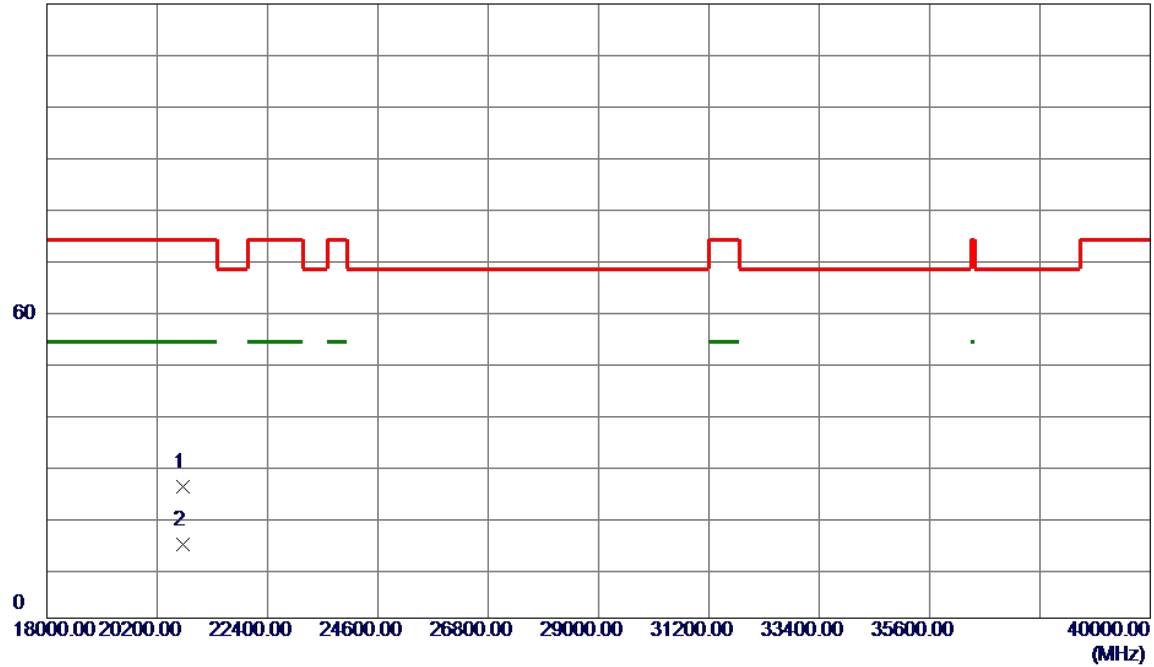

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 20720.0000   | 34.78                      | -9.03                   | 25.75                     | 74.00           | -48.25       | Peak     |         |
| 2 * | 20720.0000   | 23.54                      | -9.03                   | 14.51                     | 54.00           | -39.49       | AVG      |         |

## REMARKS:



- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D    BANDWIDTH**


|           |                    |
|-----------|--------------------|
| Test Mode | IEEE 802.11a_Ant.1 |
|-----------|--------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 23.189                | 17.100                        |
| 40      | 5200            | 23.449                | 17.200                        |
| 48      | 5240            | 23.350                | 17.200                        |




CH36

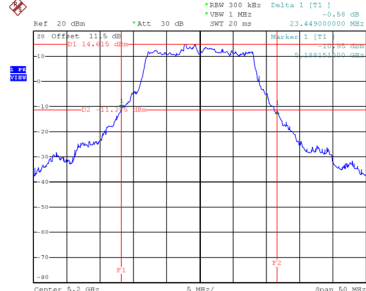
CH40  
26 dB Bandwidth


CH48




99 % Occupied Bandwidth

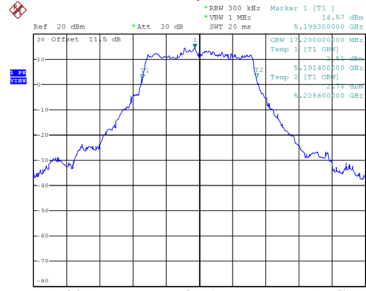


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 23.650                | 17.200                        |
| 60      | 5300            | 22.990                | 17.200                        |
| 64      | 5320            | 23.349                | 17.200                        |

CH52




Date: 24.DEC.2024 17:13:58

CH60  
26 dB Bandwidth

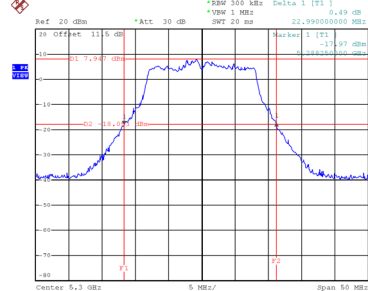


Date: 24.DEC.2024 17:15:59

CH64

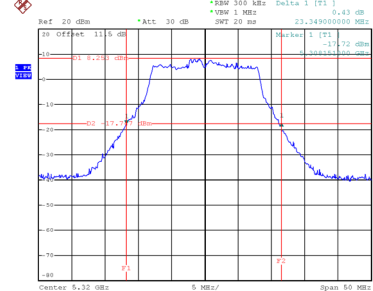


Date: 24.DEC.2024 17:17:02


99 % Occupied Bandwidth



Date: 24.DEC.2024 17:13:34

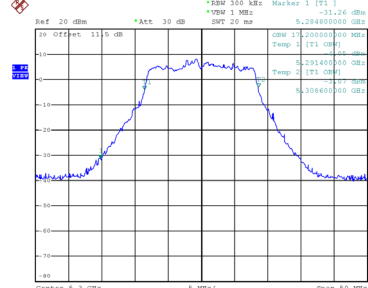


Date: 24.DEC.2024 17:15:33

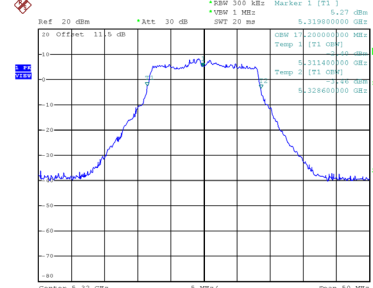


Date: 24.DEC.2024 17:16:37

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 22.750                | 17.100                        |
| 116     | 5580            | 23.550                | 17.100                        |
| 140     | 5700            | 23.249                | 17.300                        |
| 144     | 5720            | 23.350                | 17.100                        |

CH100




Date: 24.DEC.2024 17:18:26

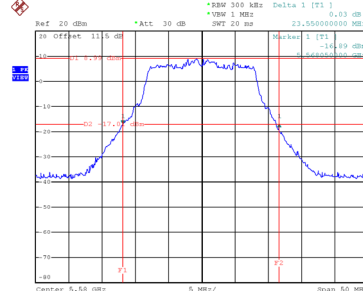CH116  
26 dB Bandwidth



Date: 24.DEC.2024 17:19:31

CH140




Date: 26.DEC.2024 14:17:19


99 % Occupied Bandwidth



Date: 24.DEC.2024 17:18:00

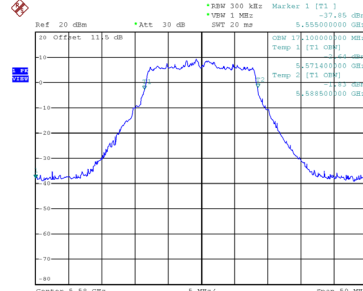


Date: 24.DEC.2024 17:19:07




Date: 26.DEC.2024 14:16:54

26 dB Bandwidth

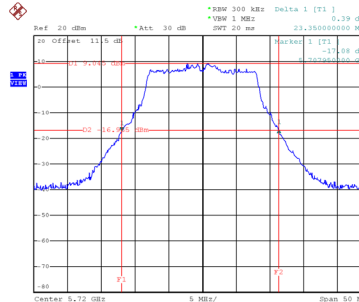

Date: 26.DEC.2024 14:19:14


99 % Occupied Bandwidth

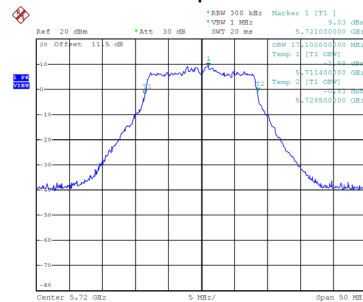


Date: 26.DEC.2024 14:18:49

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 149     | 5745            | 15.500               | 18.900                        | 0.5                             | Complies |
| 157     | 5785            | 16.189               | 20.200                        | 0.5                             | Complies |
| 165     | 5825            | 15.559               | 20.800                        | 0.5                             | Complies |

CH149

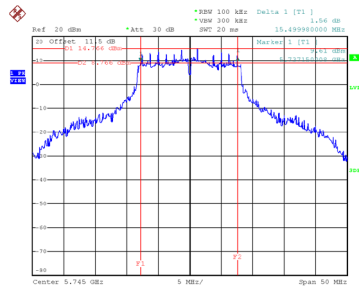


Date: 24.DEC.2024 17:22:34

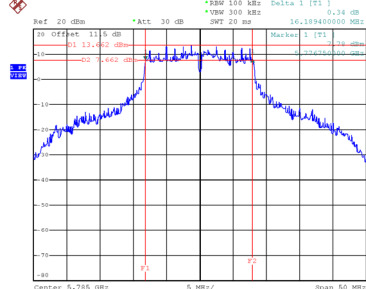CH157  
6 dB Bandwidth



Date: 24.DEC.2024 17:23:50

CH165

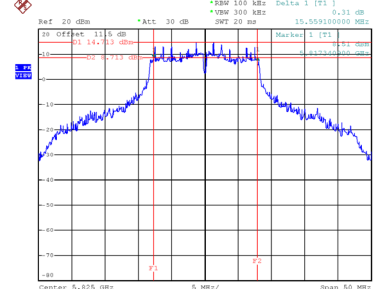


Date: 24.DEC.2024 17:25:42


99 % Occupied Bandwidth



Date: 24.DEC.2024 17:22:05

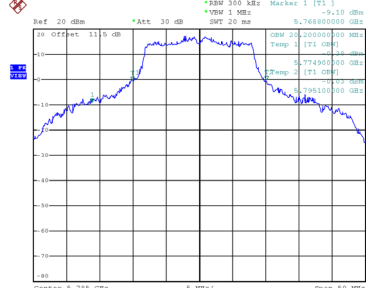

Date: 24.DEC.2024 17:23:22

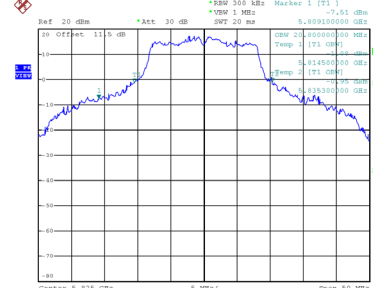


Date: 24.DEC.2024 17:25:13

|           |                             |
|-----------|-----------------------------|
| Test Mode | IEEE 802.11ac (VHT20)_Ant.1 |
|-----------|-----------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 24.550                | 18.400                        |
| 40      | 5200            | 24.450                | 18.400                        |
| 48      | 5240            | 24.008                | 18.300                        |

CH36




Date: 25.DEC.2024 11:37:10

CH40  
26 dB Bandwidth

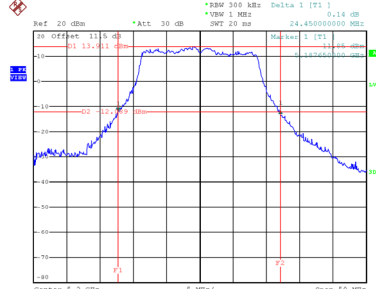


Date: 25.DEC.2024 11:38:32

CH48

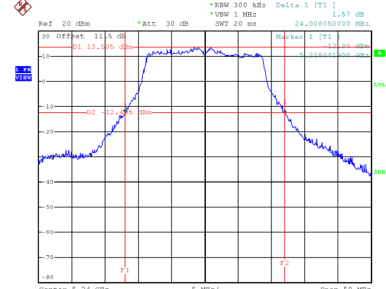


Date: 25.DEC.2024 11:41:56


99 % Occupied Bandwidth



Date: 25.DEC.2024 11:36:46

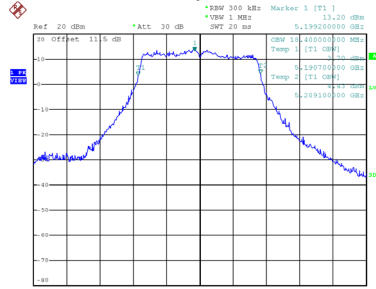


Date: 25.DEC.2024 11:38:08

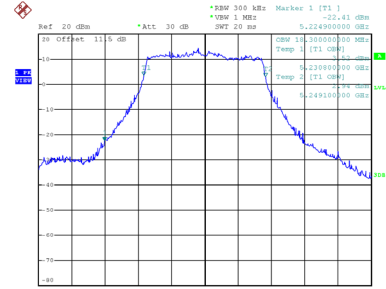


Date: 25.DEC.2024 11:41:31

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 24.089                | 18.300                        |
| 60      | 5300            | 24.390                | 18.300                        |
| 64      | 5320            | 24.008                | 18.300                        |

CH52




Date: 25.DEC.2024 11:44:30

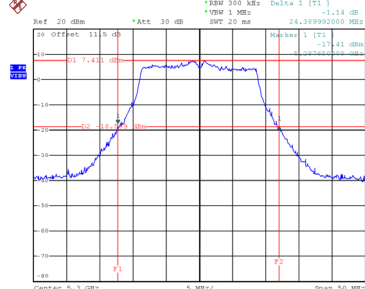CH60  
26 dB Bandwidth



Date: 25.DEC.2024 11:47:59

CH64

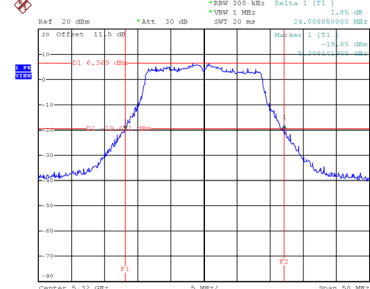


Date: 25.DEC.2024 11:55:07


99 % Occupied Bandwidth



Date: 25.DEC.2024 11:44:05

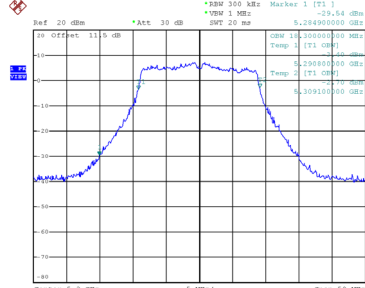

Date: 25.DEC.2024 11:47:34

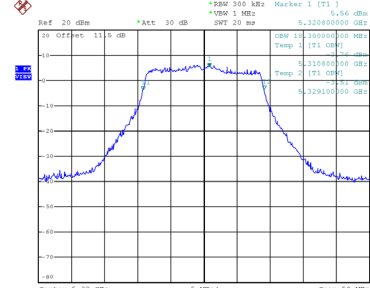

Date: 25.DEC.2024 11:54:43