

FCC TEST REPORT

For

BLUE IDEA LIMITED

SMART WATCH

Model No.: V01, L020, V02, V05, V06B, V07, V08B, V09, A8B

Prepared for : BLUE IDEA LIMITED
Address : ROOMS 1318-19, 13/F, HOLLYWOOD PLAZA, 610
NATHAN ROAD, KOWLOON, HONG KONG

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road,
Nanshan District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : R011605145X
Date of Test : May 10~ 31, 2016
Date of Report : Jul. 08, 2016

TABLE OF CONTENT

Description

Page

Test Report

1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
1.2. Auxiliary Equipment Used during Test.....	6
1.3. Description of Test Facility.....	6
1.4. Measurement Uncertainty.....	6
2. TECHNICAL TEST.....	7
2.1. Summary of Test Results.....	7
2.2. Test Report.....	7
3. RF OUTPUT POWER.....	8
3.1 Applicable Standard.....	8
3.2 Test Procedure.....	8
3.3 Test Setup.....	8
3.5 Test Results.....	9
4. PEAK-AVERAGE RATIO.....	12
4.1 Applicable Standard	12
4.2 Test Procedure.....	12
4.3 Test Setup.....	12
4.4 Test Equipment.....	12
4.5 Test Results.....	12
5. OCCUPIED BANDWIDTH.....	14
5.1 Applicable Standard	14
5.2 Test Procedure.....	14
5.3 Test Setup.....	14
5.4 Test Equipment.....	14
5.5 Test Results.....	14
6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	18
6.1 Applicable Standard	18
6.2 Test Procedure.....	18
6.3 Test Setup.....	18
6.4 Test Equipment.....	18
6.5 Test Results.....	18
7. SPURIOUS RADIATED EMISSIONS.....	21
7.1 Definition and Requirement	21
7.2 Test setup.....	21
7.3 Test Equipment.....	23
7.4 Test Results.....	23

8. BAND EDGE.....	25
8.1 Standard Application.....	25
8.2 Test Procedure.....	25
8.3 Test Setup.....	25
8.4 Test Equipment.....	25
8.5 Test Results.....	25
9. FREQUENCY STABILITY.....	28
9.1 Standard Application.....	28
9.2 Test Procedure.....	28
9.3 Test Setup.....	28
9.4 Test Equipment.....	28
9.5 Test Results.....	28
APPENDIX I (TEST PHOTOGRAPHS).....	31

TEST REPORT

Applicant : BLUE IDEA LIMITED
Manufacturer : BLUE IDEA LIMITED
EUT : SMART WATCH
Model No. : V01
Serial No. : L020, V02, V05, V06B, V07, V08B, V09, A8B
Trade Mark : N/A
Rating : DC 5.0V, 500mA by USB Cable from Host System
Li-ion Battery DC 3.7V, 420mAh


Measurement Procedure Used:


FCC Part 2, FCC Part 22 Subpart H, FCC Part 24 Subpart E, ANSI/TIA 603-D (2010)


The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 22(H):2015; FCC Part 24(E):2015 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : May 10~ 31, 2016

Prepared by : 
(Tested Engineer / Baron Wen)

Reviewer : 
(Project Manager / Dolly Mo)

Approved & Authorized Signer : 
(Manager/Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: SMART WATCH
Model Number	: V01, L020, V02, V05, V06B, V07, V08B, V09, A8B (Note: All samples are the same except the model number and colour, so we prepare "V01" for test only.)
Test Voltage	: DC 5.0V, 500mA by USB Cable from Host System Li-ion Battery DC 3.7V, 420mAh
Frequency	: WiFi: 2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz (802.11n(HT40)) GSM850 TX: 824.2~848.8MHz; RX: 869.2~893.8MHz PCS1900 TX: 1850.2~1909.8MHz; RX: 1930.2~1989.8MHz
Number of Channels:	: WiFi: 11 For (802.11b/802.11g/802.11n(HT20)) 7 For (802.11n(HT40)) GSM 850: 124CH PCS1900: 299CH
Modulation Type	: GSM/GPRS:GFSK
Antenna Gain	: WiFi: 1.4dBi GSM: GSM 850: 1.8dBi PCS 1900: 1.5dBi
Applicant Address	: BLUE IDEA LIMITED ROOMS 1318-19, 13/F, HOLLYWOOD PLAZA, 610 NATHAN ROAD, KOWLOON, HONG KONG
Manufacturer Address	: BLUE IDEA LIMITED ROOMS 1318-19, 13/F, HOLLYWOOD PLAZA, 610 NATHAN ROAD, KOWLOON, HONG KONG
Date of receipt	: May 05, 2016
Date of Test	: May 10~ 31, 2016

1.2. Auxiliary Equipment Used during Test

N/A

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, Jun. 13, 2016.

Test Location

All Emissions tests were performed at Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.1 dB (Horizontal)
Ur = 4.3 dB (Vertical)

Conduction Uncertainty : Uc = 3.4dB

2. Technical test

2.1. Summary of Test Results

No Deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (only "Pass" if all single measurements are "Pass")	Pass

2.2. Test Report

The EUT has been tested according to the following specifications:
The radiated emission testing was performed according to the procedures of ANSI/TIA-603-D:2010, KDB 971168 D01 v02r02 and KDB 648474 D03 v01r04

Standard	Test Type	Result	Notes
2.1049	Conducted emission	Pass	
1.1307 2.1093	RF Exposure (SAR)	Pass	Note 1
2.1046 22.913(a) 24.232(c) 27.50(c.10)	RF Output Power	Pass	Complies
24.232 (d)	Peak-Average Ratio	Pass	Complies
2.1049 22.905 22.917 24.238	99% & -26 dB Occupied Bandwidth	Pass	Complies
2.1051 22.917(a) 24.238(a)	Spurious Emissions at Antenna Terminal	Pass	Complies
22.917(a) 24.238(a)	Out of band emission, Band Edge	Pass	Complies
2.1053 22.917(a) 24.238(a)	Band edge test	Pass	Complies
2.1055 22.355 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Pass	Complies

Note1: Please refer to RF SAR Report.

3. RF Output Power

3.1 Applicable Standard

According to FCC PART 22.913 (a), Max EIRP: 38.45dBm; FCC PART 24.232 (c), Max EIRP: 33.00dBm

3.2 Test Procedure

For Conducted Power:

The transmitter output port was connected to base station.

Set EUT at maximum power through base station.

Select lowest, middle, and highest channels for each band and different test mode.

For ERP/EIRP:

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.


The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \log (\text{TX power in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$.

3.3 Test Setup



3.4 Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Apr. 17, 2016	1 Year
2.	Preamplifier	Instruments corporation	EMC011830	980100	Apr. 17, 2016	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Apr. 17, 2016	1 Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 20, 2016	1 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Apr. 20, 2016	1 Year
6.	Pre-amplifier	SONOMA	310N	186860	Apr. 17, 2016	1 Year
7.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun 30, 2016	1 Year
8.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun. 30, 2016	1 Year
9.	DC Power supply	IV	IV-8080	YQSB0096	Jun. 30, 2016	1 Year
10.	Temp & Humidity programmable Chamber	Longan	LA-H005F	L0407008	Dec. 20, 2015	1 Year
11.	Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	114196	Jun. 30, 2016	1 Year
12.	Universal Radio Communication Tester	Rohde & Schwarz	CMU 500	114196	Jun. 30, 2016	1 Year
13.	Filter	COM-MW	ZHPF-BM1100-6000-0730	1307006523	Jun. 25, 2016	1 Year
14.	Filter	COM-MW	COM-MW/ZHPF-M3.5-18G-3834	B2015094550	Jun. 25, 2016	1 Year

3.5 Test Results

Pass

Test Data as following:

Conducted Power

Burst Average Power (dBm)								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	32.12	32.23	32.07	32±1	28.32	28.43	28.25	29±1
GPRS Multi-Slot Class 8 (1 uplink),GMSK	32.14	32.15	32.01	32±1	28.26	28.35	28.14	28±1
GPRS Multi-Slot Class 10 (2 uplink) GMSK	29.12	29.23	29.25	30±1	26.14	26.27	26.10	27±1
GPRS Multi-Slot Class 12 (4 uplink) GMSK (4 uplink),GMSK	27.37	27.14	27.19	27±1	24.83	24.94	24.68	24±1
Remark : GPRS, CS1 coding scheme. Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link								

Note: Since GSM mode has higher power, so the test items below were not performed to GPRS and EGPRS mode.

ERP & EIRP						
ERP for Cellular Band (Part 22H)						
GSM						
Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	19.59	V	7.1	0.55	26.14	38.45
824.2	18.22	H	7.1	0.55	24.77	38.45
836.6	19.27	V	7.1	0.57	25.80	38.45
836.6	18.54	H	7.1	0.57	25.07	38.45
848.8	19.38	V	7.2	0.57	26.07	38.45
848.8	18.75	H	7.2	0.57	25.38	38.45
GPRS						
824.2	18.93	V	7.1	0.55	25.48	33
824.2	18.12	H	7.1	0.55	24.67	33
836.6	19.18	V	7.1	0.57	25.71	33
836.6	18.24	H	7.1	0.57	24.77	33
848.8	19.25	V	7.2	0.57	25.88	33
848.8	18.69	H	7.2	0.57	25.32	33

ERP & EIRP EIRP for PCS Band (Part 24E) GSM						
Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	16.31	V	10.3	1.02	25.59	33
1850.2	14.27	H	10.3	1.02	23.55	33
1880	16.49	V	10.3	1.10	25.69	33
1880	14.72	H	10.3	1.10	23.92	33
1909.8	16.17	V	10.3	1.15	25.52	33
1909.8	14.53	H	10.3	1.15	23.68	33
GPRS						
1850.2	16.20	V	10.3	1.02	25.48	33
1850.2	14.23	H	10.3	1.02	23.51	33
1880	16.37	V	10.3	1.10	25.57	33
1880	14.64	H	10.3	1.10	23.84	33
1909.8	16.11	V	10.3	1.15	25.26	33
1909.8	14.50	H	10.3	1.15	23.65	33

4. Peak-Average Ratio


4.1 Applicable Standard

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.2 Test Procedure

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

4.3 Test Setup

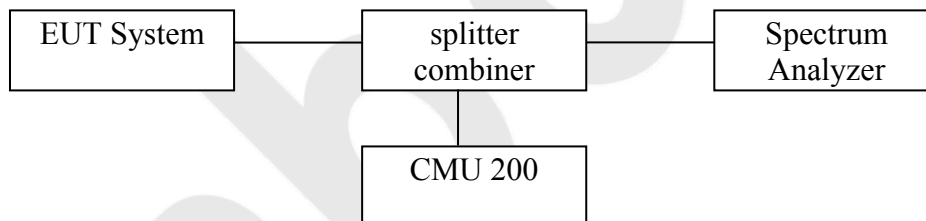

4.4 Test Equipment

Same as the equipment listed in section 3.4

4.5 Test Results

Pass

Test Data as following:

**PCS1900
GSM**

Frequency (MHz)	Conducted power (dBm)		Peak-Average Ratio (PAR)
	Peak	Average	
1850.2	28.27	27.25	1.02
1880	28.36	27.10	1.26
1909.8	28.19	27.13	1.06

GPRS

Frequency (MHz)	Conducted power (dBm)		Peak-Average Ratio (PAR)
	Peak	Average	
1850.2	28.15	27.12	1.03
1880	28.23	27.14	1.09
1909.8	28.0	27.05	0.95

5. Occupied Bandwidth


5.1 Applicable Standard

According to FCC PART 2.1049, PART 22.917, PART 22.905, PART 24.238; 99% Occupied Bandwidth (kHz)

5.2 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.
The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.

5.3 Test Setup

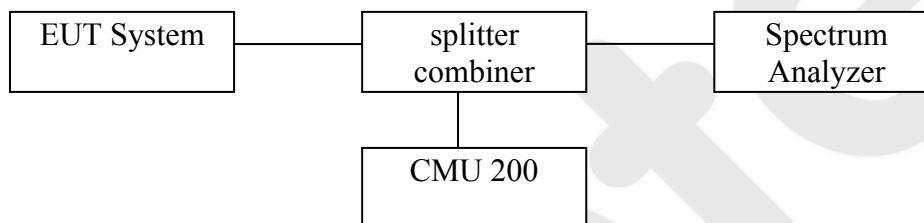

5.4 Test Equipment

Same as the equipment listed in section 3.4.

5.5 Test Results

Pass

Test Data as following


Cellular Band (Part 22H) Result


GSM			
Channel	Frequency (MHz)	26 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.2	318.1	245.49
190	836.6	311.3	243.47
251	848.8	317.8	244.95
GPRS			
Channel	Frequency (MHz)	26 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.2	317.5	247.37
190	836.6	311.4	241.48
251	848.8	312.6	247.07

PCS Band (Part 24E) Result


GSM			
Channel	Frequency (MHz)	26 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.2	321.3	244.40
661	1880.0	315.3	244.66
810	1909.8	320.4	245.76
Channel	Frequency (MHz)	26 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.2	314.6	244.47
661	1880.0	318.5	247.30
810	1909.8	319.1	245.06

Test Plots

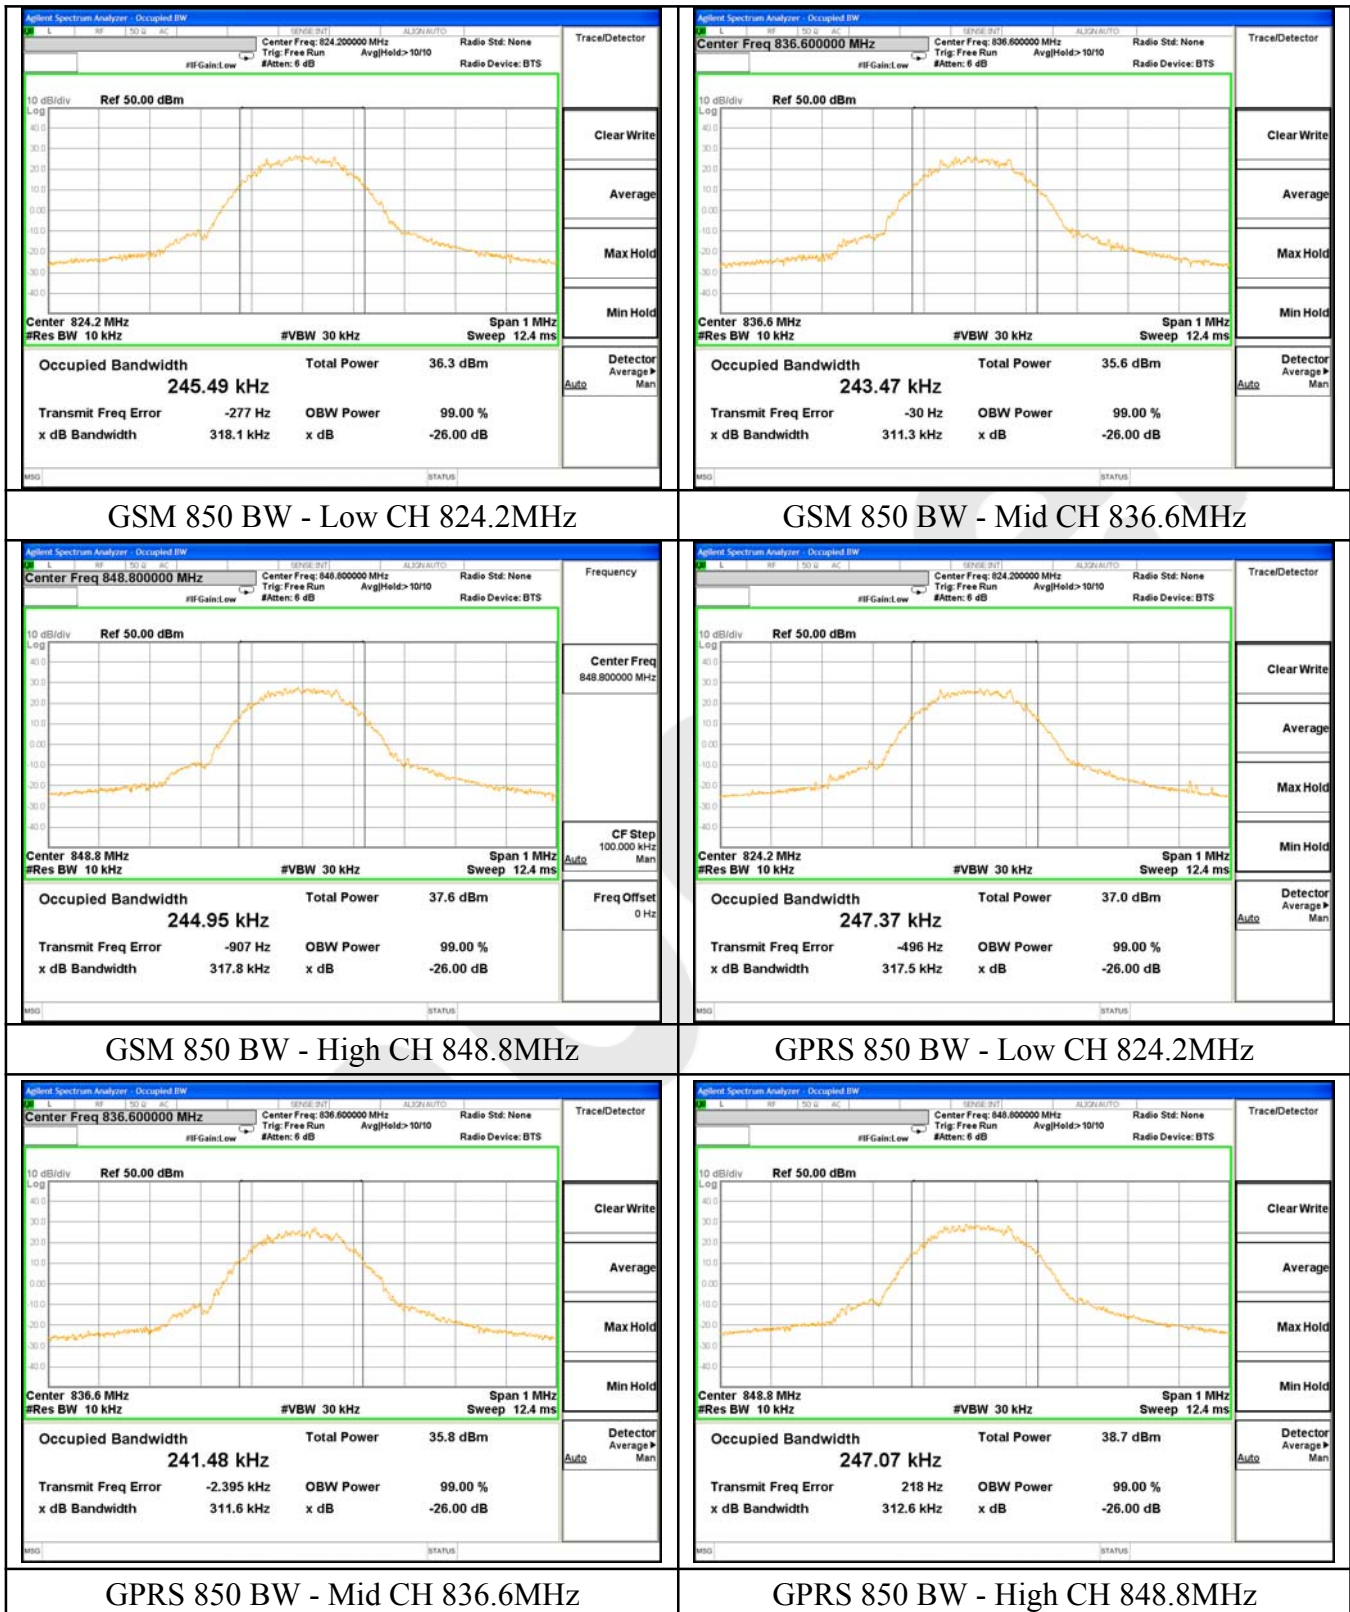


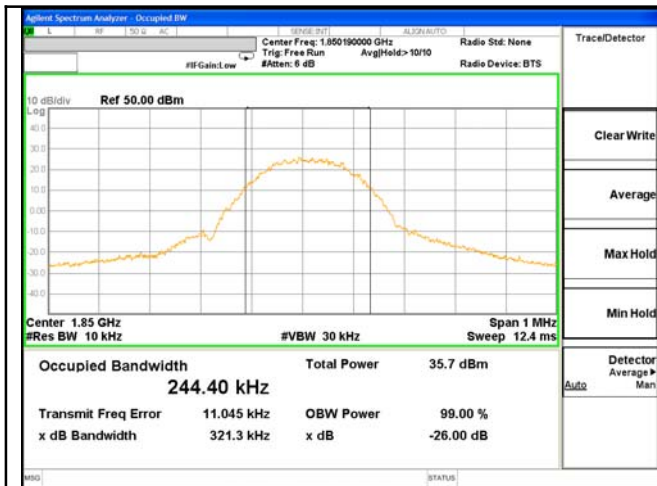


PCS 1900 BW - Low CH 1850.2MHz

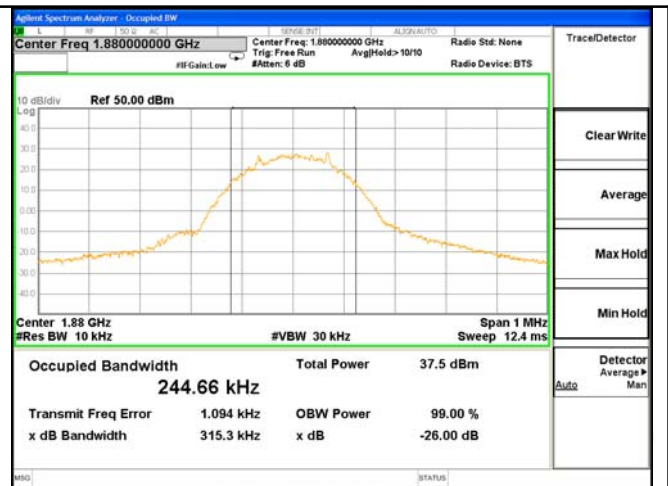


PCS 1900 BW - Mid CH 1880MHz

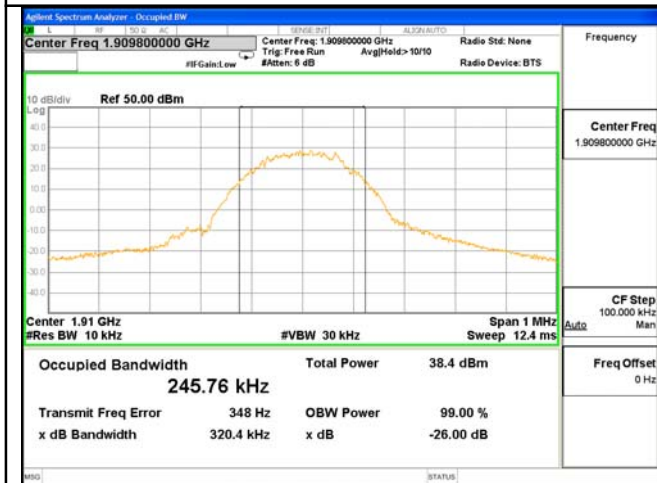


PCS 1900 BW - High CH 1909.8MHz

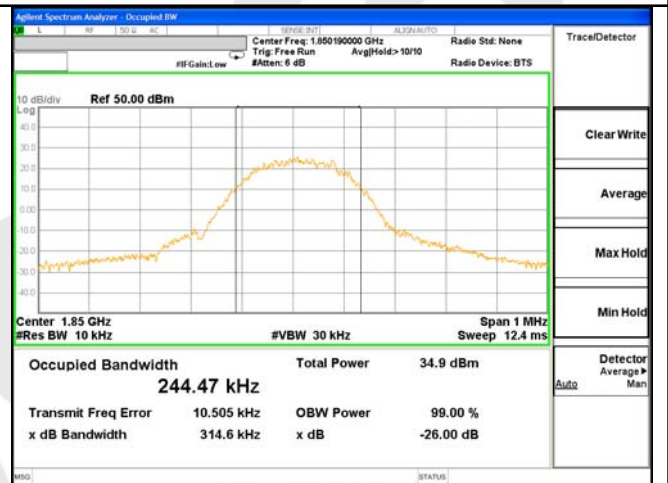

GPRS 1900 BW - Low CH 1850.2MHz

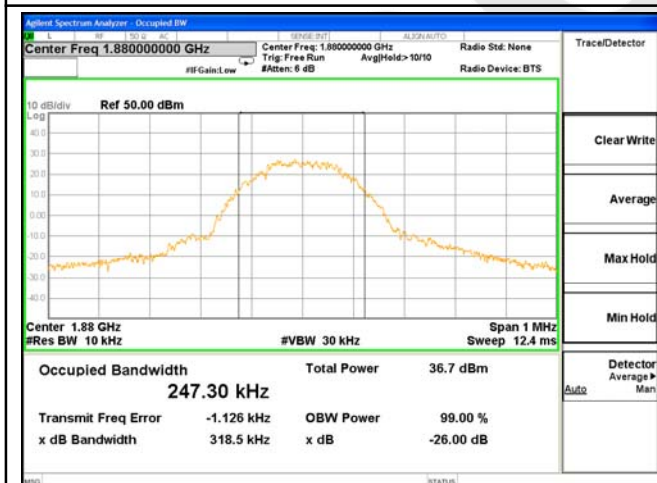

GPRS 1900 BW - Mid CH 1880MHz

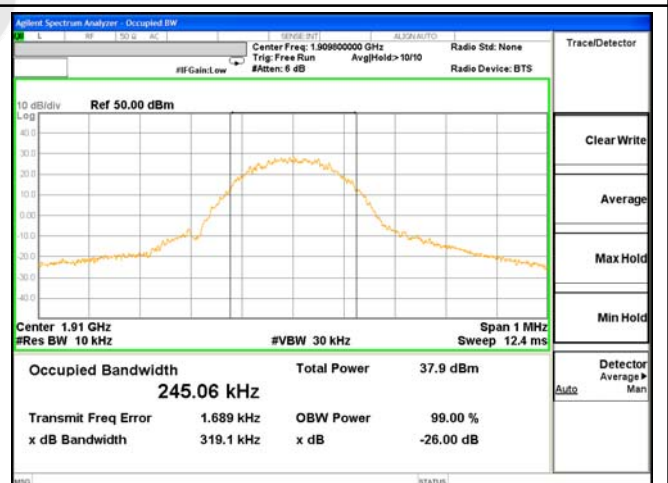

GPRS 1900 BW - High CH 1909.8MHz

6. Spurious Emissions at Antenna Terminals


6.1 Applicable Standard

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB

6.2 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.
The Band Edges of low and high channels for the highest RF powers were measured.
Setting RBW as roughly BW/100.

6.3 Test Setup

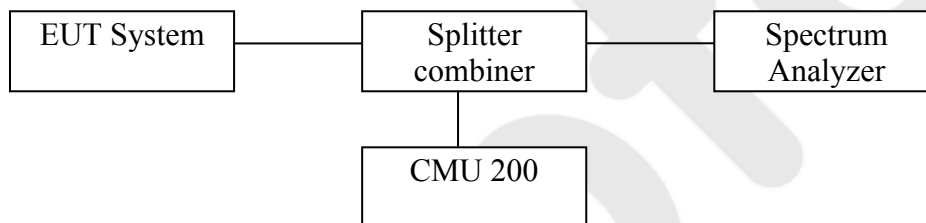

6.4 Test Equipment

Same as the equipment listed in section 3.4.

6.5 Test Results


Pass

Test Data as following:


The EUT was tested on (GSM Mode, GPRS Mode) modes, only the worst data of (GSM Mode) is attached in the following pages.

Test Plots

Cellular Band (Part 22H) Result

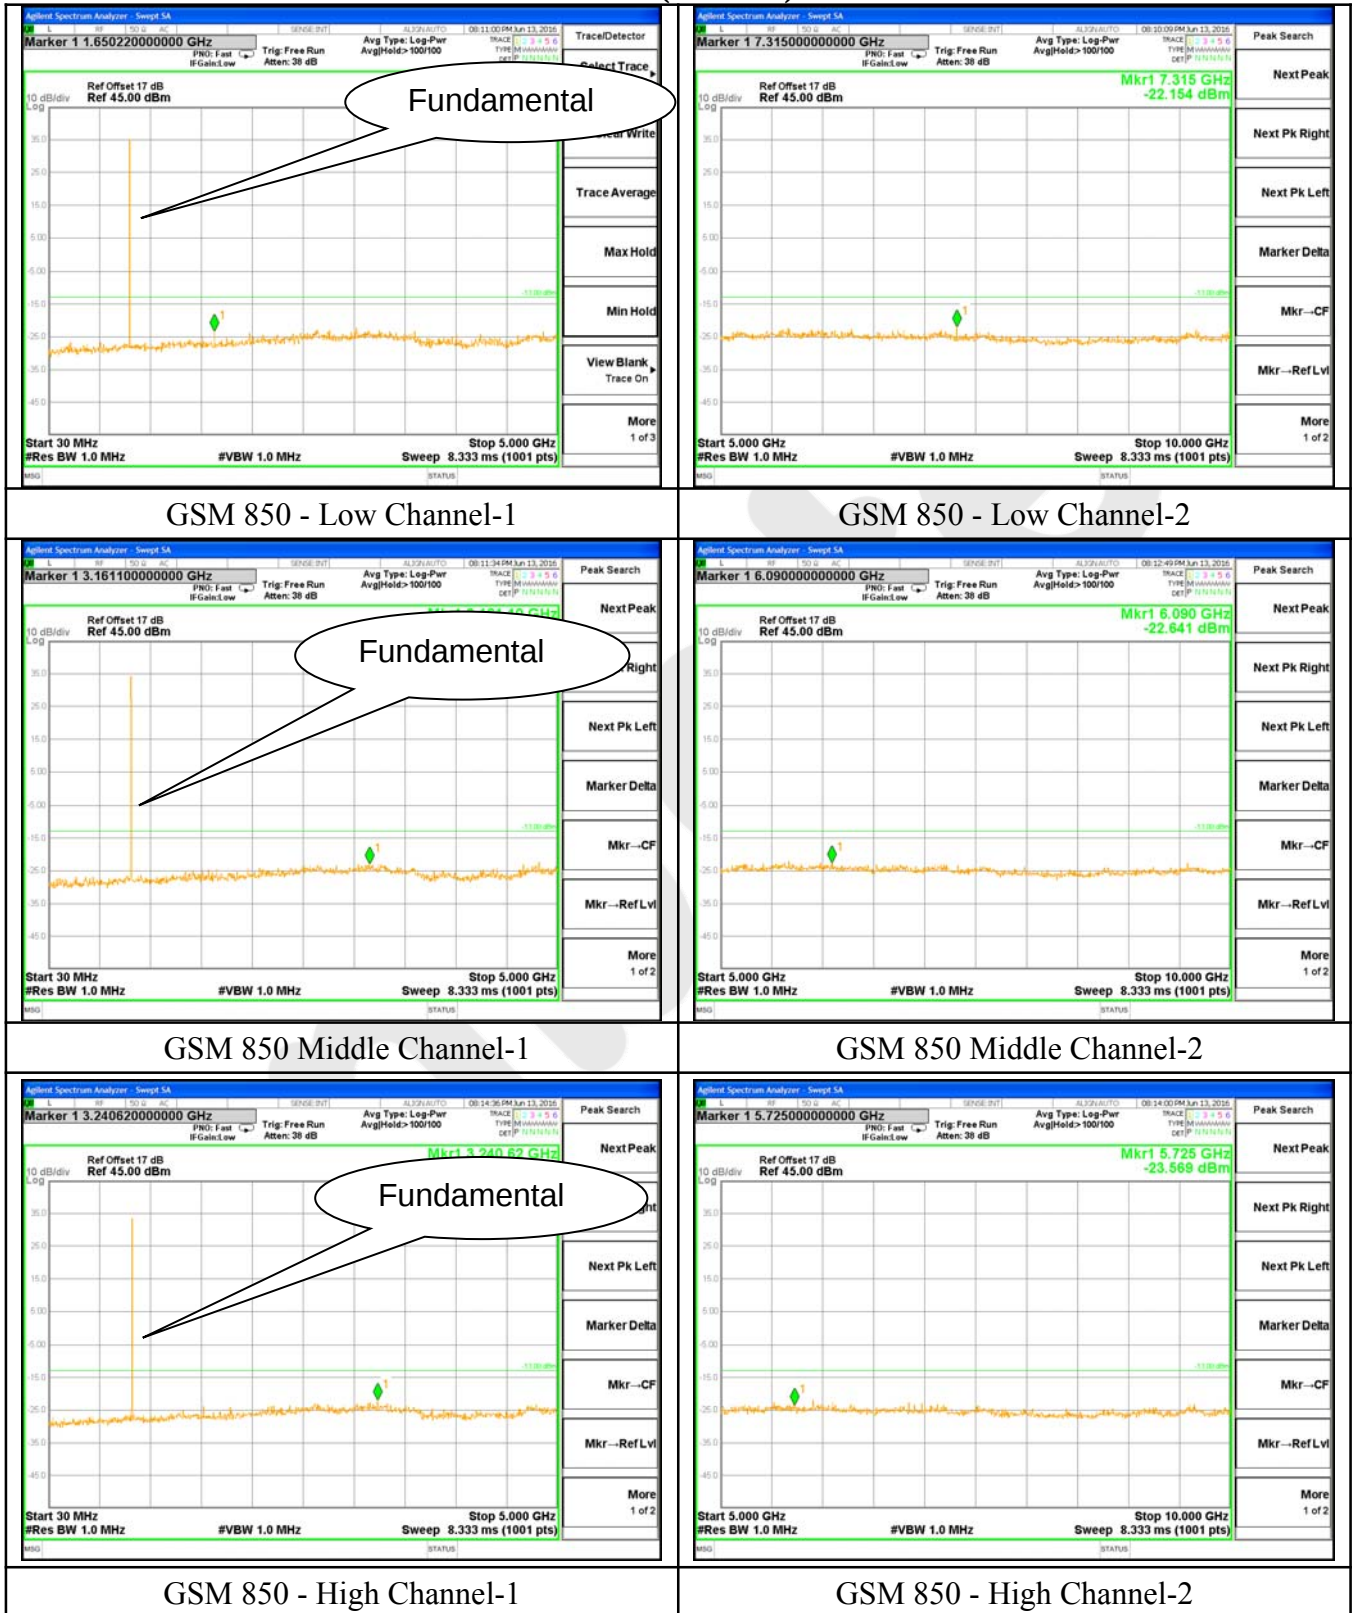

PCS Band (Part24E) Result

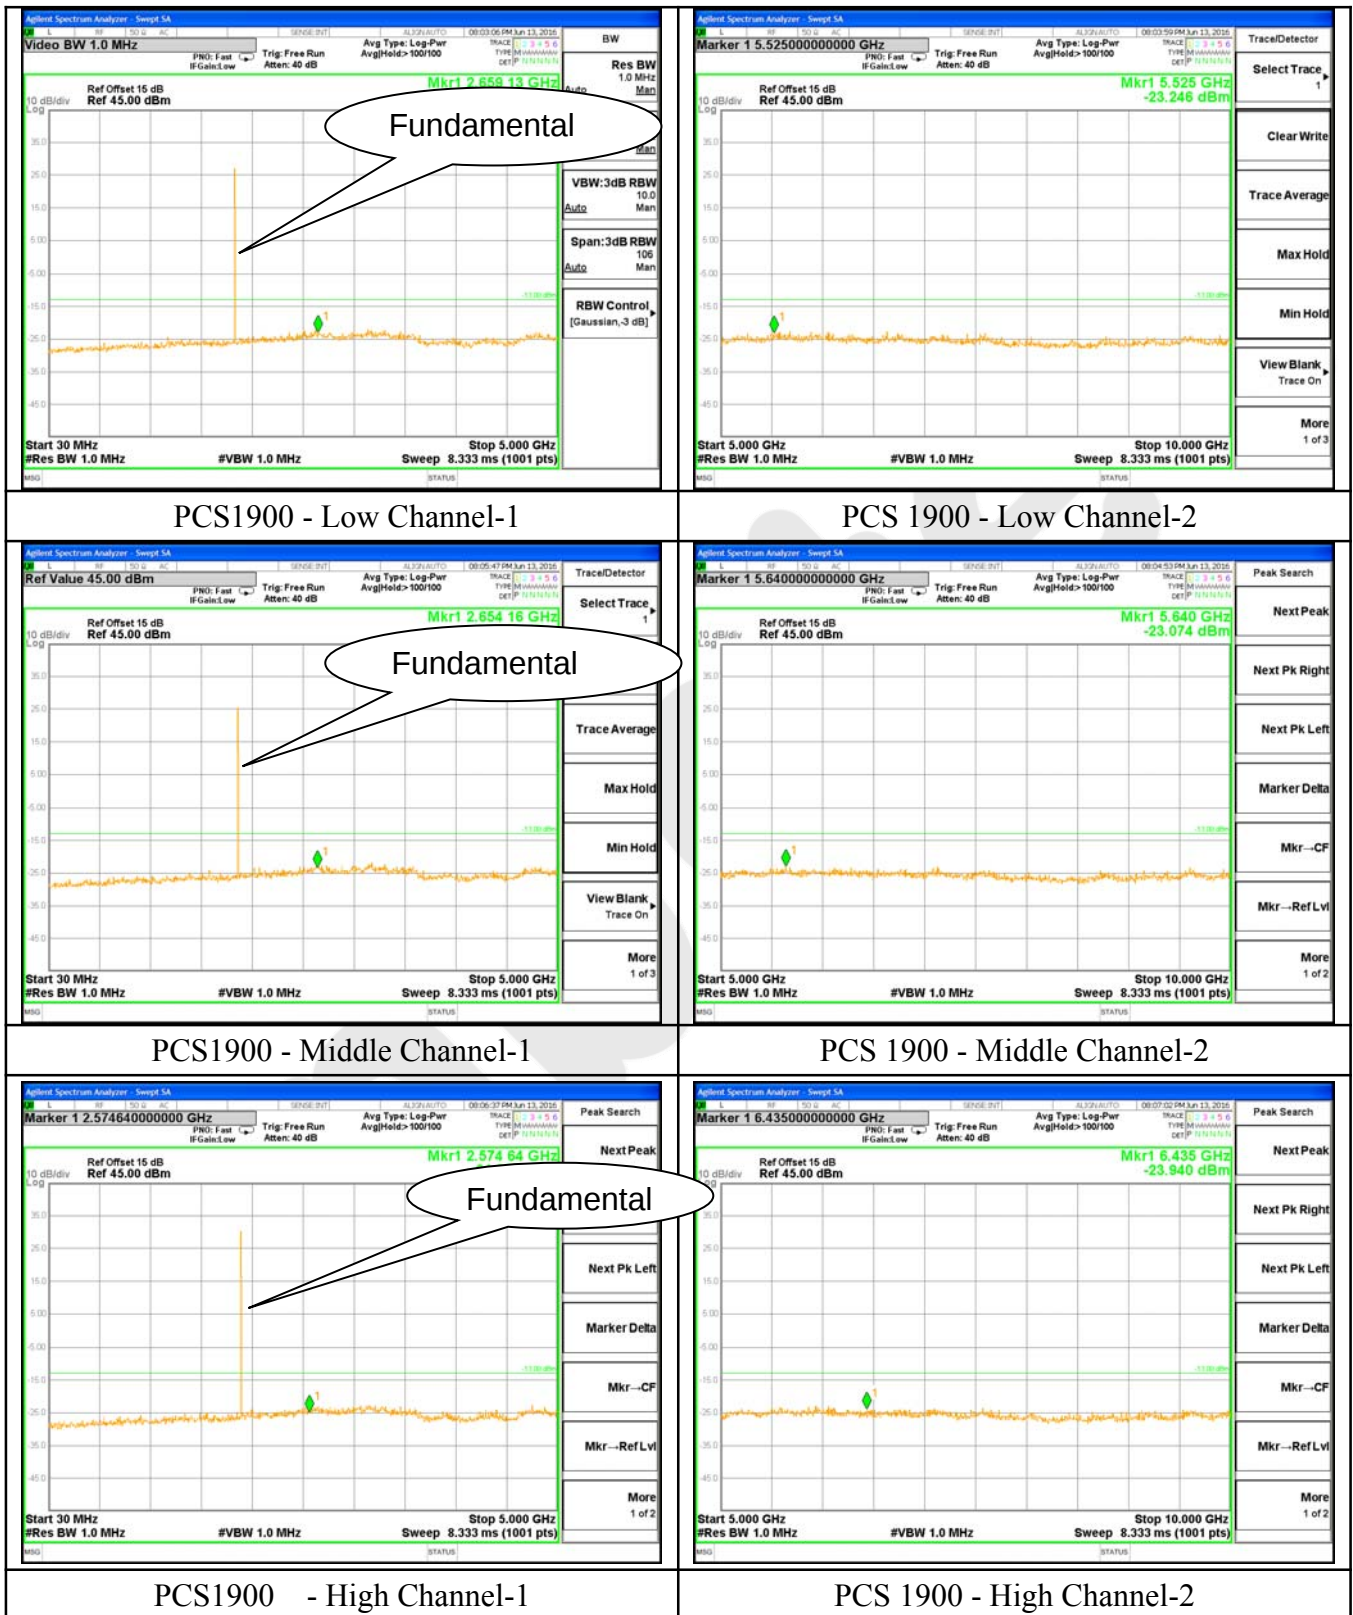

7. Spurious Radiated Emissions

7.1 Definition and Requirement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

7.2 Test setup


1. Conducted Method:

- 1) Set RBW=100KHz, VBW=300KHz
- 2) Detector=peak
- 3) Sweep time= auto
- 4) Trace mode=max hold.


2. Radiated Method:

- 1) For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane. The EUT is tested in 9*6*6 Chamber.
For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane. The EUT is tested in 9*6*6 Chamber.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Peak detector: RBW=1MHz, VBW=3MHz, SWT=AUTO
Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO
The EUT is tested in 9*6*6 Chamber.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


(A) Radiated Emission Test Set-Up, Frequency below 30MHz

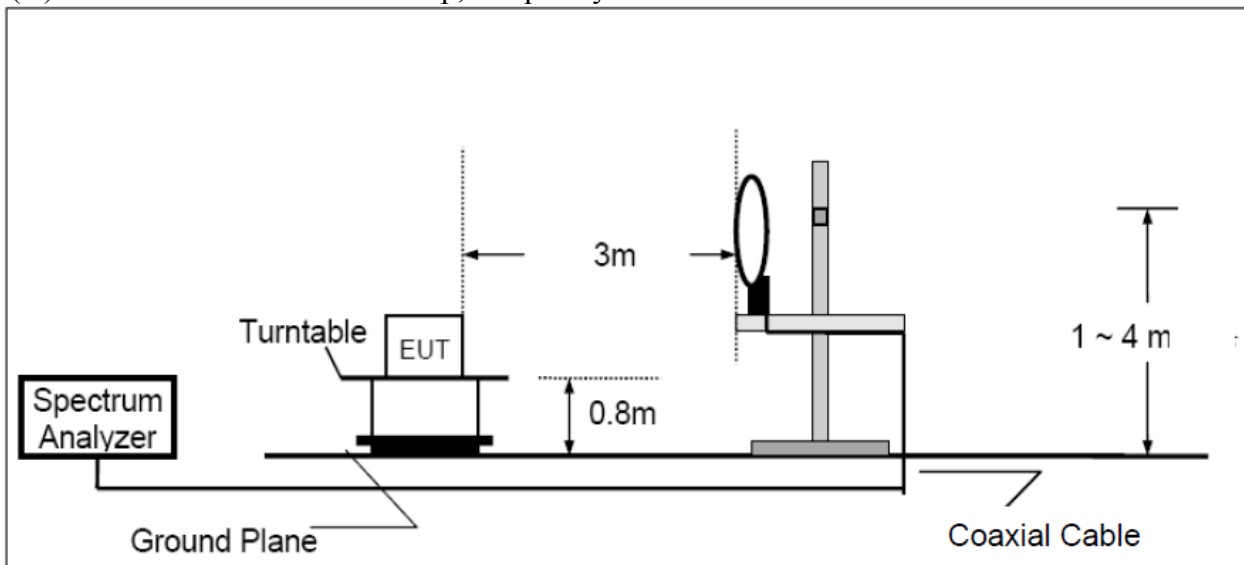

(B) Radiated Emission Test Set-Up, Frequency 30-1000MHz

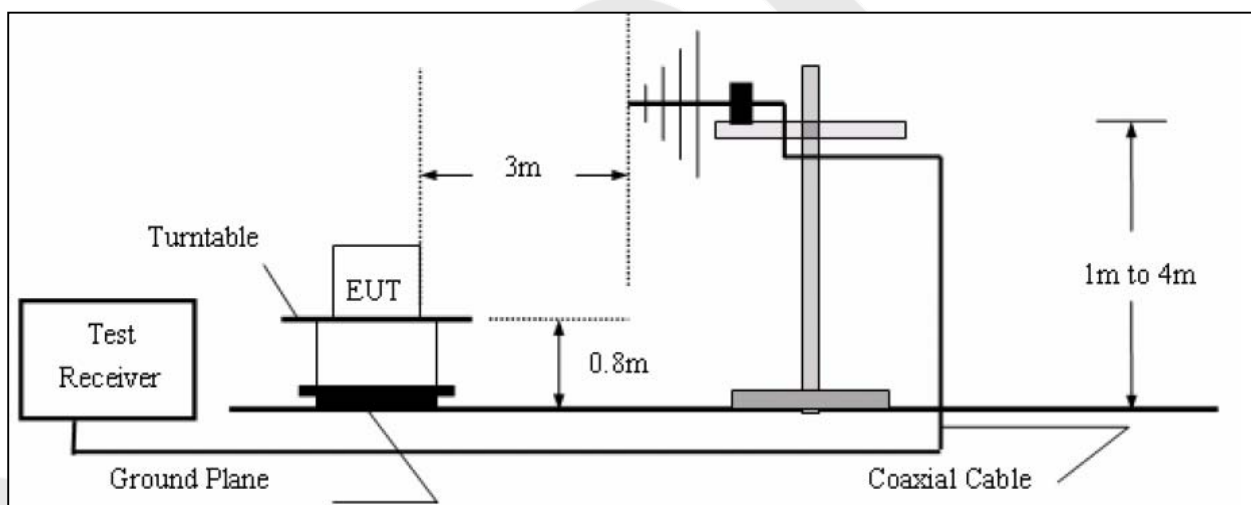

(C) Radiated Emission Test Set-Up, Frequency 1G to 40GHz

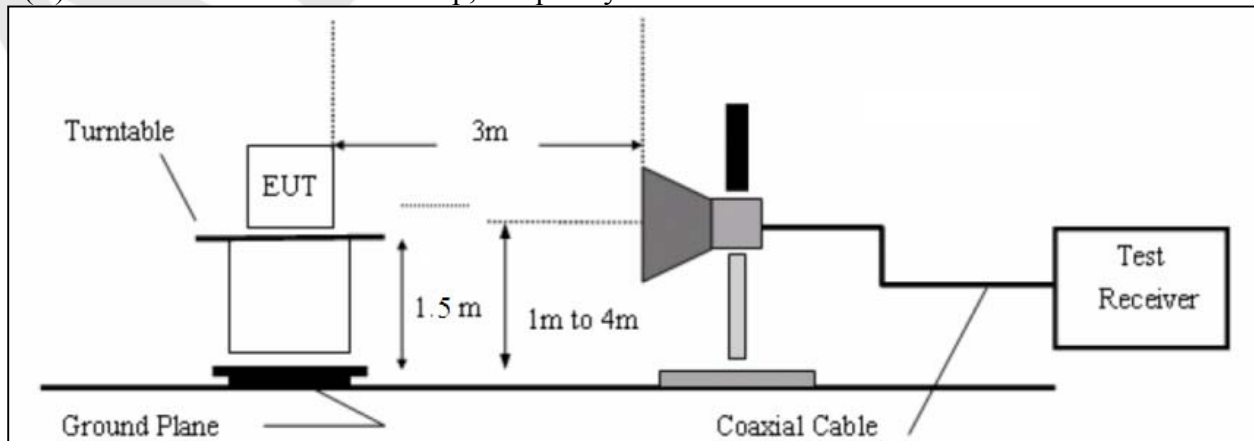

7.3 Test Equipment

Same as the equipment listed in section 3.4.

7.4 Test Results

Pass.

Test Data as following:

The EUT was tested on (GSM Mode, GPRS Mode) modes, only the worst data of (GSM Mode) is attached in the following pages.

Cellular Band (Part 22H) Result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-43.83	V	7.95	0.78	-36.66	-13	-23.66
1648.4	-44.76	H	7.95	0.78	-37.59	-13	-24.59
420.5	-56.99	V	6.5	0.3	-50.79	-13	-37.79
711.6	-51.43	H	6.8	0.41	-45.04	-13	-32.04

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-43.59	V	7.95	0.78	-36.42	-13	-23.42
1673.2	-44.52	H	7.95	0.78	-37.35	-13	-24.35
419.2	-57.11	V	6.5	0.3	-50.91	-13	-37.91
710.3	-52.81	H	6.8	0.41	-46.42	-13	-33.42

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-44.02	V	7.95	0.78	-36.85	-13	-23.85
1697.6	-45.27	H	7.95	0.78	-38.1	-13	-25.1
421.2	-57.29	V	6.5	0.3	-51.09	-13	-38.09
709.8	-51.73	H	6.8	0.41	-45.34	-13	-32.34

Cellular Band (Part 24H) Result

Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-46.22	V	10.25	2.73	-38.7	-13	-25.7
3700.4	-47.59	H	10.25	2.73	-40.07	-13	-27.07
418.3	-57.55	V	6.5	0.3	-51.35	-13	-38.35
712.5	-51.43	H	6.8	0.41	-45.04	-13	-32.04

Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-46.13	V	10.25	2.73	-38.61	-13	-25.61
3760	-47.25	H	10.25	2.73	-39.73	-13	-26.73
419.1	-58.11	V	6.5	0.3	-51.91	-13	-38.91
712.4	-52.49	H	6.8	0.41	-46.1	-13	-33.1

High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-45.86	V	10.36	2.73	-38.23	-13	-25.23
3819.6	-46.77	H	10.36	2.73	-39.14	-13	-26.14
419.3	-56.84	V	6.5	0.3	-50.64	-13	-37.64
712.4	-51.37	H	6.8	0.41	-44.98	-13	-31.98

8. Band Edge


8.1 Standard Application

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

8.2 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.
The Band Edges of low and high channels for the highest RF powers were measured.
Setting RBW as roughly BW/100.

8.3 Test Setup

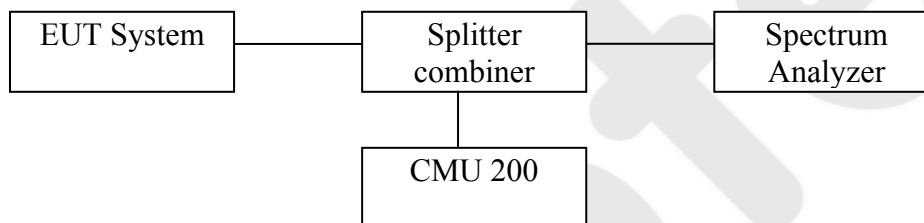

8.4 Test Equipment

Same as the equipment listed in section 3.4.

8.5 Test Results


Pass

Test Data as following:

Cellular Band (Part 22H) Result

GSM 850		
Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9950	-20.334	-13
849.0150	-18.888	-13
GPRS 850		
Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9767	-21.176	-13
849.0233	-20.447	-13


Test Plots

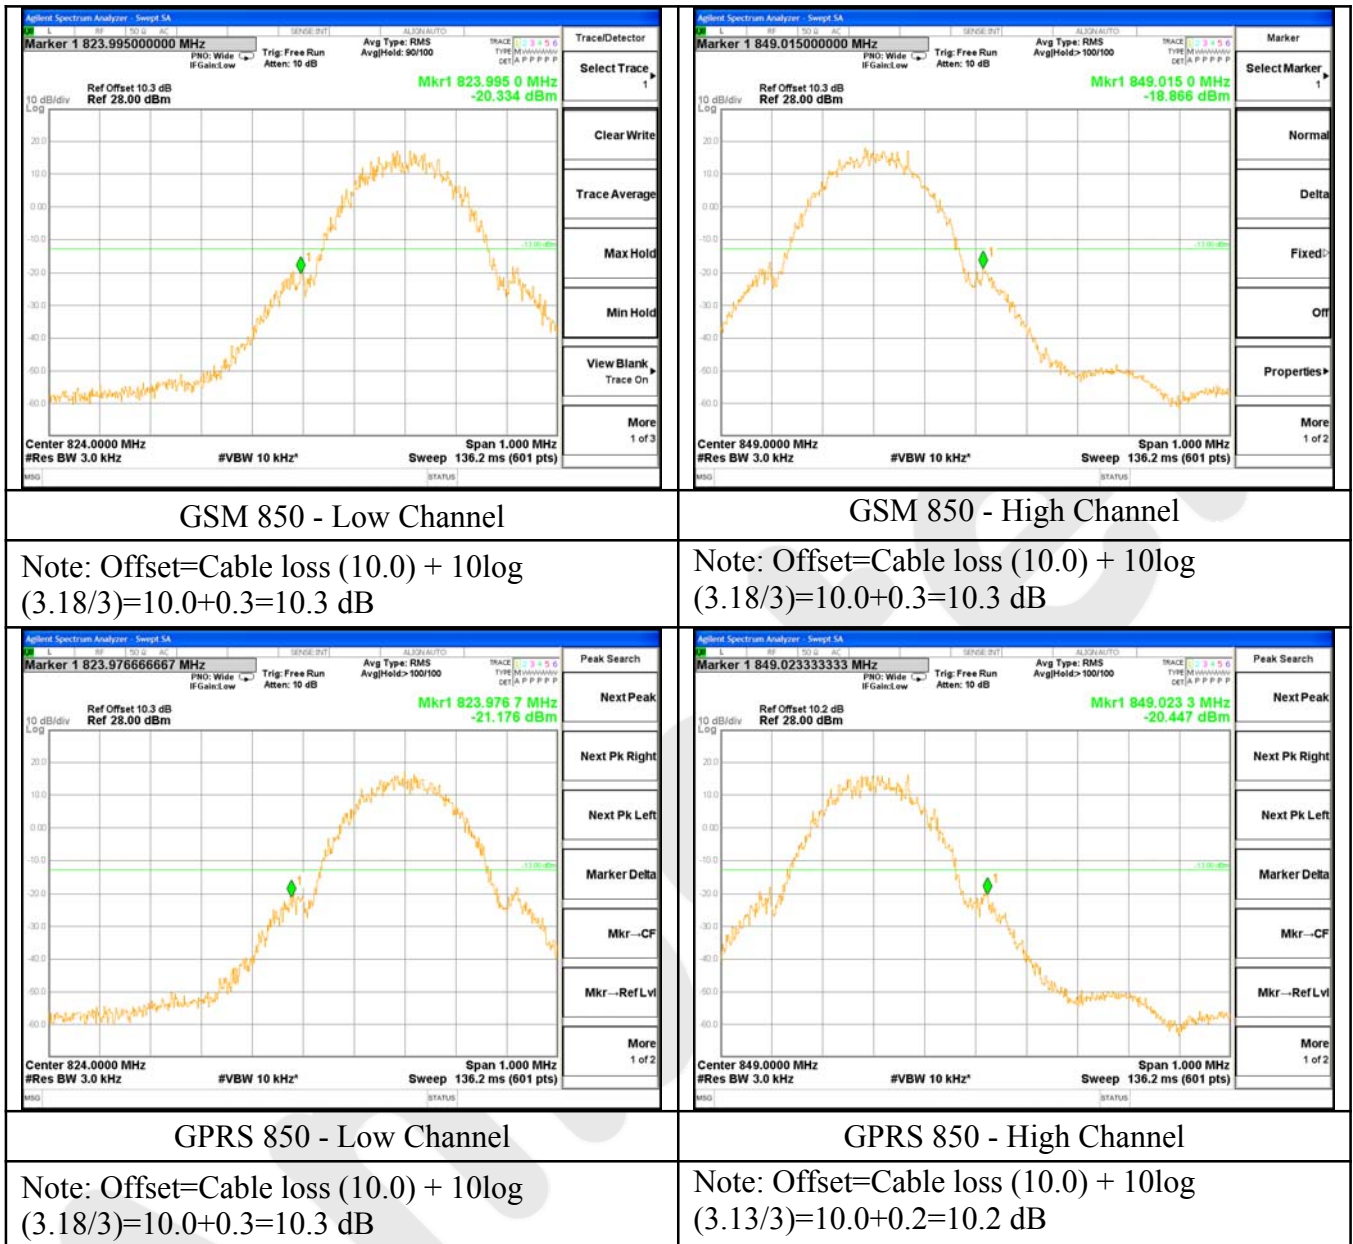

PCS Band (Part24E) Result


PCS 1900		
Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9993	-18.238	-13
1910.0230	-14.827	-13
GPRS 1900		
Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9950	-17.634	-13
1910.0200	-14.843	-13

Test Plots

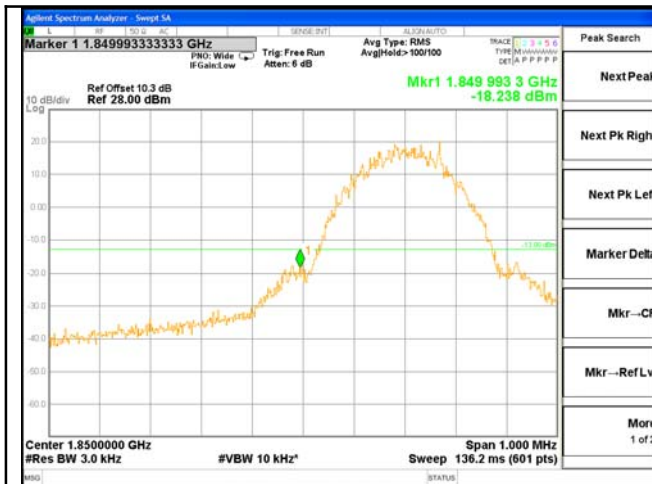


PCS 1900 - Low Channel

Note: Offset=Cable loss (10.0) + 10log (3.21/3)=10.0+0.3=10.3 dB

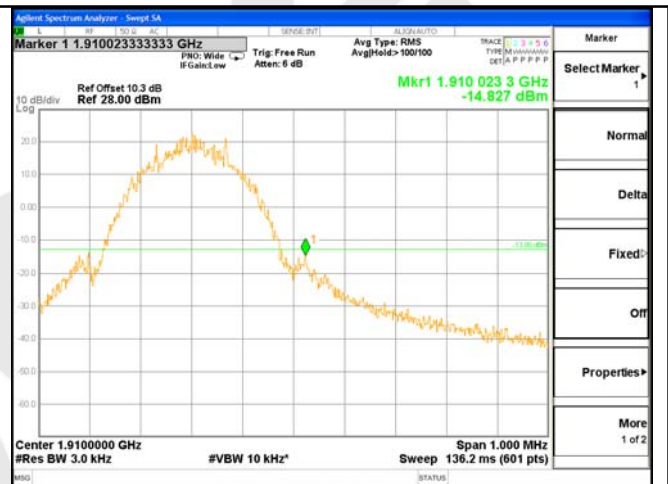


PCS 1900 - High Channel

Note: Offset=Cable loss (10.0) + 10log (3.20/3)=10.0+0.3=10.3 dB

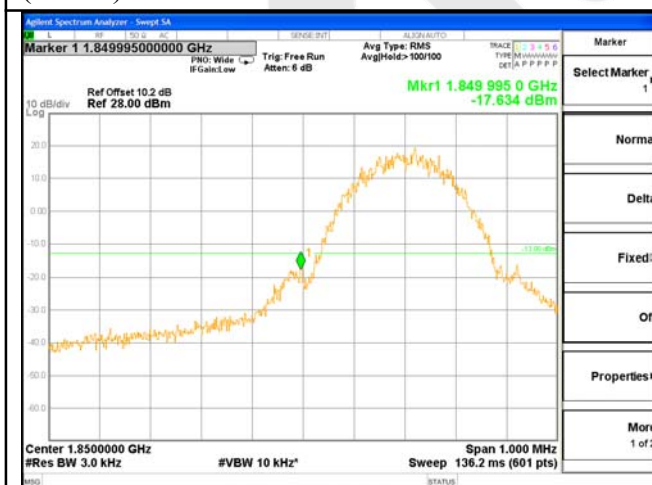

GPRS 1900 - Low Channel

Note: Offset=Cable loss (10.0) + 10log (3.15/3)=10.0+0.2=10.2 dB

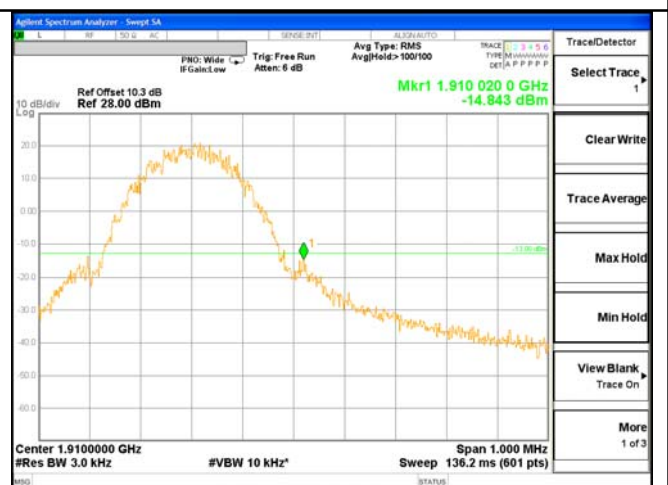

GPRS 1900 - High Channel

Note: Offset=Cable loss (10.0) + 10log (3.19/3)=10.0+0.3=10.3 dB

9. Frequency Stability

9.1 Standard Application

According to FCC PART 22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

According to FCC PART 24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.


Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

9.2 Test Procedure

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

9.3 Test Setup

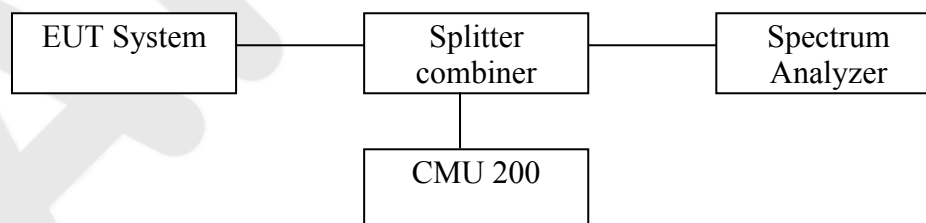

9.4 Test Equipment

Same as the equipment listed in section 4.3.

9.5 Test Results

Pass. Test Data as following:

Cellular Band (Part 22H) Result

GSM 850				
Middle Channel, fo = 836.6 MHz				
Temperature(°C)	Power Supplied (Vdc)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	12	0.014	2.5
0		14	0.017	2.5
10		10	0.012	2.5
20		7	0.008	2.5
30		18	0.022	2.5
40		15	0.018	2.5
50		13	0.016	2.5
55		8	0.010	2.5
25	4.2	11	0.013	2.5
	3.5	17	0.020	2.5

GPRS 850				
Middle Channel, fo = 836.6 MHz				
Temperature(°C)	Power Supplied (Vdc)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	17	0.020	2.5
0		19	0.023	2.5
10		21	0.025	2.5
20		14	0.017	2.5
30		22	0.026	2.5
40		9	0.011	2.5
50		11	0.013	2.5
55		18	0.022	2.5
25	4.2	14	0.017	2.5
	3.5	18	0.022	2.5

PCS Band (Part 24E) Result

PCS 1900				
Middle Channel, fo =1880 MHz				
Temperature(°C)	Power Supplied (Vdc)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	25	0.013	2.5
0		27	0.014	2.5
10		26	0.014	2.5
20		30	0.016	2.5
30		17	0.009	2.5
40		18	0.010	2.5
50		24	0.013	2.5
55		26	0.014	2.5
25	4.2	29	0.015	2.5
	3.5	32	0.017	2.5

GPRS 1900				
Middle Channel, fo =1880 MHz				
Temperature(°C)	Power Supplied (Vdc)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	33	0.018	2.5
0		37	0.020	2.5
10		25	0.013	2.5
20		19	0.010	2.5
30		18	0.010	2.5
40		22	0.012	2.5
50		30	0.016	2.5
55		34	0.018	2.5
25	4.2	35	0.019	2.5
	3.5	36	0.019	2.5

APPENDIX I (TEST PHOTOGRAPHS)

Photo of Emission Test

