

RF TEST REPORT for Intentional Radiator
No. 160600514SHA-001

Applicant : Shanghai Ruipai Intelligent Technology Co.,Ltd.
B105, Building 9, Wusong Science Park, No.69 Tieshan Rd., Baoshan District, Shanghai, China

Manufacturer : JIAYING ARTS & CRAFTS INDUSTRIAL CO.,LTD.
North Pengjiang Rd., Chenghai Dist., Shantou City, Guangdong Province, China

Product Name : Smart Phone Handheld Gimbal

Type/Model : SIGHT 2

TEST RESULT : PASS

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2015): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices


Date of issue: August 10, 2016

Prepared by:



Wade Zhang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233,
P.R. China
FCC Registration Number: 236597
IC Assigned Code: 2042B-1
Name of contact: Jonny Jing
Tel: +86 21 61278271
Fax: +86 21 54262353

Content

SUMMARY	1
DESCRIPTION OF TEST FACILITY	2
1. TEST SUMMARY.....	4
2. GENERAL INFORMATION.....	5
2.1 Applicant Information	5
2.2 Identification of the EUT and Technical specification.....	5
2.3 Channel List.....	6
2.4 Test software and Power Setting	6
3. TEST SPECIFICATION	7
3.1 Instrument list.....	7
3.2 Test Standard	7
3.3 Mode of operation during the test / Test peripherals used	8
4. MINIMUM 6dB BANDWIDTH	9
4.1 Limit	9
4.2 Test Configuration.....	9
4.3 Test Procedure and test setup	9
4.4 Test Protocol.....	10
5. MAXIMUM CONDUCTED OUTPUT POWER	12
5.1 Test limit.....	12
5.2 Test Configuration.....	12
5.3 Test procedure and test setup	12
5.4 Test protocol.....	13
6. MAXIMUM POWER SPECTRUM DENSITY	15
6.1 Test limit.....	15
6.2 Test Configuration.....	15
6.3 Test procedure and test setup	15
6.4 Test Protocol.....	16
7. EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	18
7.1 Test limit.....	18
7.2 Test Configuration.....	18
7.3 Test procedure and test setup	19
7.4 Test Protocol.....	20
8. RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS	26
8.1 Test limit.....	26
8.2 Test Configuration.....	26
8.3 Test procedure and test setup	27
8.4 Test Protocol.....	28
9. POWER LINE CONDUCTED EMISSION.....	32
9.1 Limit	32
9.2 Test configuration.....	32
9.3 Test procedure and test set up	33
9.4 Test protocol	34
10. ANTENNA REQUIREMENT.....	36

1. Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

Test Items	FCC Reference	Result
Minimum 6dB Bandwidth	15.247(a)(2)	Pass
Output power	15.247(b)	Pass
Power spectrum density	15.247(e)	Pass
Emissions in non-restricted frequency bands	15.247(d)	Pass
Emissions in restricted frequency bands	15.247(d) & 15.205 & 15.209	Pass
Power line conducted emission	15.207	Pass

Note: "NA" means "not applied".

2. General Information

2.1 Applicant Information

Applicant : Shanghai Ruipai Intelligent Technology Co.,Ltd.
B105, Building 9, Wusong Science Park, No.69 Tieshan Rd.,
Baoshan District, Shanghai, China
Name of contact : Huang Shaoang
Tel : 13809676077
Fax : /
Manufacturer : JIAYING ARTS & CRAFTS INDUSTRIAL CO.,LTD.
North Pengjiang Rd., Chenghai Dist., Shantou City, Guangdong
Province, China

2.2 Identification of the EUT and Technical specification

Equipment : Smart Phone Handheld Gimbal
Type/model : SIGHT 2
Operation Frequency : 2402-2480MHz
EUT Modes of : BT4.0 BLE
Modulation
Type of Modulation : GFSK
Transfer Rate : 1Mbps
Power Class : Class II
Channel Number : 40 (0-39)
Antenna : 0dBi Internal antenna
Description of EUT : The EUT supports BT4.0 function and there has only one
model, we tested it and listed the BLE result in this report.
Port identification : Mini USB*1
Rating : 5V DC
Category of EUT : Class B
EUT type : ☒ Table top ☐ Floor standing
Sample received date : June 27, 2016
Sample Identification : *0160627-16-001*
No
Date of test : June 27, 2016 ~ July 24, 2016

2.3 Channel List

Frequency Band (MHz)				2402 ~ 2480			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.4 Test software and Power Setting

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

Test software and Power Setting parameter			
Test Software	downboardv2_emi_V1.5_SRX		
Working Mode	BLE		
Test Channel	2402MHz	2440MHz	2480MHz
Power Setting	0	0	0

3. Test Specification

3.1 Instrument list

Selected	Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
☒	PXA Analyzer	N9030A	Agilent	EC5338	2016/3/4	2017/3/3
☒	Vector SG	N5182B	Agilent	EC5175	2016/3/4	2017/3/3
☒	Power sensor	U2021XA	Agilent	EC5338-1	2016/3/4	2017/3/3
☒	MXG Analog SG	N5181A	Agilent	EC5338-2	2016/3/4	2017/3/3
☒	Power meter	N1911A/N1921A	Agilent	EC4318	2016/4/10	2017/4/9
☒	EMI Receiver	ESCS 30	R&S	EC 2107	2015/10/20	2016/10/19
☒	A.M.N.	ESH2-Z5	R&S	EC 3119	2015/12/16	2017/12/15
☒	I.S.N.	FCC-TLISN-T8-02	FCC	EC3756	2016/2/16	2017/2/15
☒	EMI chamber	3m	Albatross	EC 3048	2016/5/5	2017/5/4
☒	Test Receiver	ESIB 26	R&S	EC 3045	2015/10/20	2016/10/19
☒	Test Receiver	ESCI 7	R&S	EC4501	2016/2/24	2017/2/23
☒	Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2016/5/30	2017/5/29
☒	Horn antenna	HF 906	R&S	EC 3049	2015/9/12	2016/9/11
☒	Horn antenna	HAP18-26W	TOYO	EC 4792-3	2014/6/12	2017/6/11
☒	Pre-amplifier	Pre-amp 18	R&S	EC 5262	2016/5/24	2017/5/23
☒	Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2016/4/11	2017/4/10
☒	Shielded room	-	Zhongyu	EC 2838	2016/1/9	2017/1/8

3.2 Test Standard

47CFR Part 15 (2015): Radio Frequency Devices

ANSI C63.10 (2013): American National Standard for Testing Unlicensed Wireless Devices

3.3 Mode of operation during the test / Test peripherals used

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Radiated test mode:

Mode 1: EUT transmitted signal with BT antenna;

Conducted test mode:

Mode 2: EUT transmitted signal from BT RF port connected to SPA directly;

Test peripherals used:

Item No	Description	Band and Model	S/No
1	Laptop computer	HP ProBook 6470b	NA
2	Mobile phone	Iphone 5S/MEIZU NOTE2	NA
3	Adaptor	Apple	NA
Note: The accessories are used for configuration only and not used during test.			


4. Minimum 6dB Bandwidth

Test result: PASS

4.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.2 Test Configuration

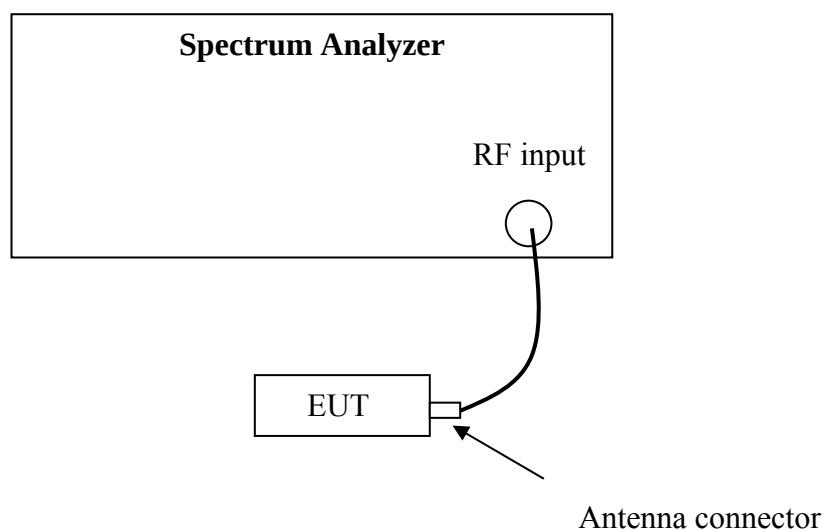

4.3 Test Procedure and test setup

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.4 Test Protocol


Temperature: 22°C

Relative Humidity: 53%


Modulation	Frequency (MHz)	Minimum 6dB Bandwidth (KHz)	Limits (KHz)
BLE	2402	799.7	> 500
	2440	802.2	> 500
	2480	820.8	> 500

Modulation	Frequency (MHz)	99% Occupied Bandwidth (MHz)
BLE	2402	1.0664
	2440	1.0834
	2480	1.1119


Channel L

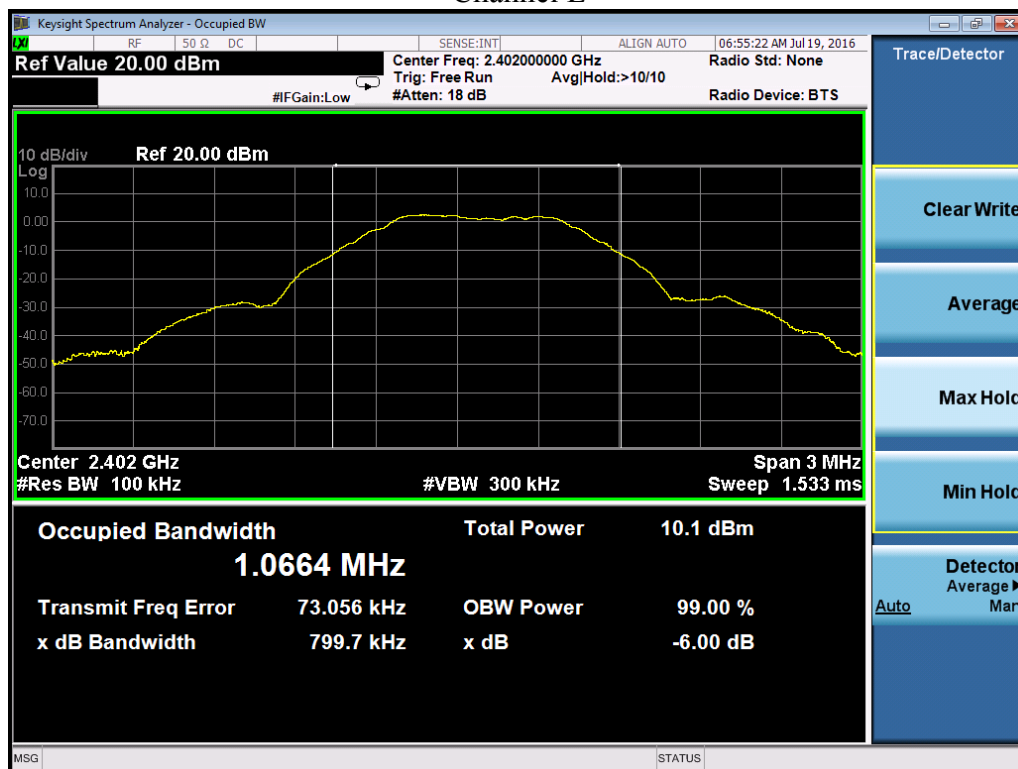

Channel M

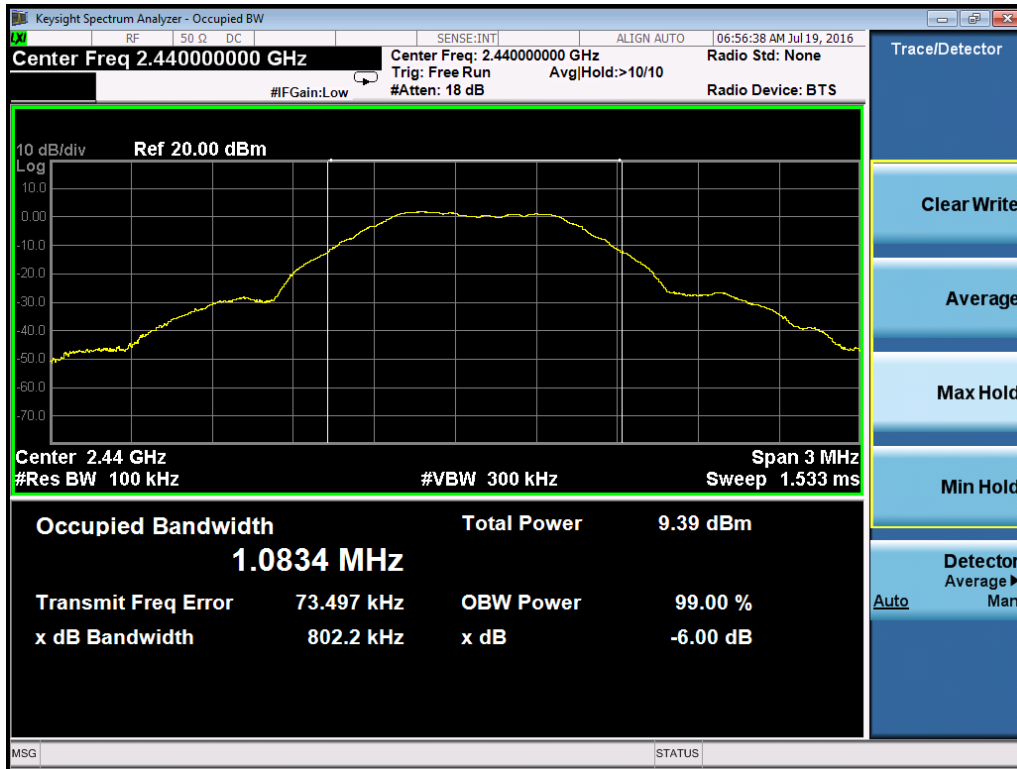

Channel H

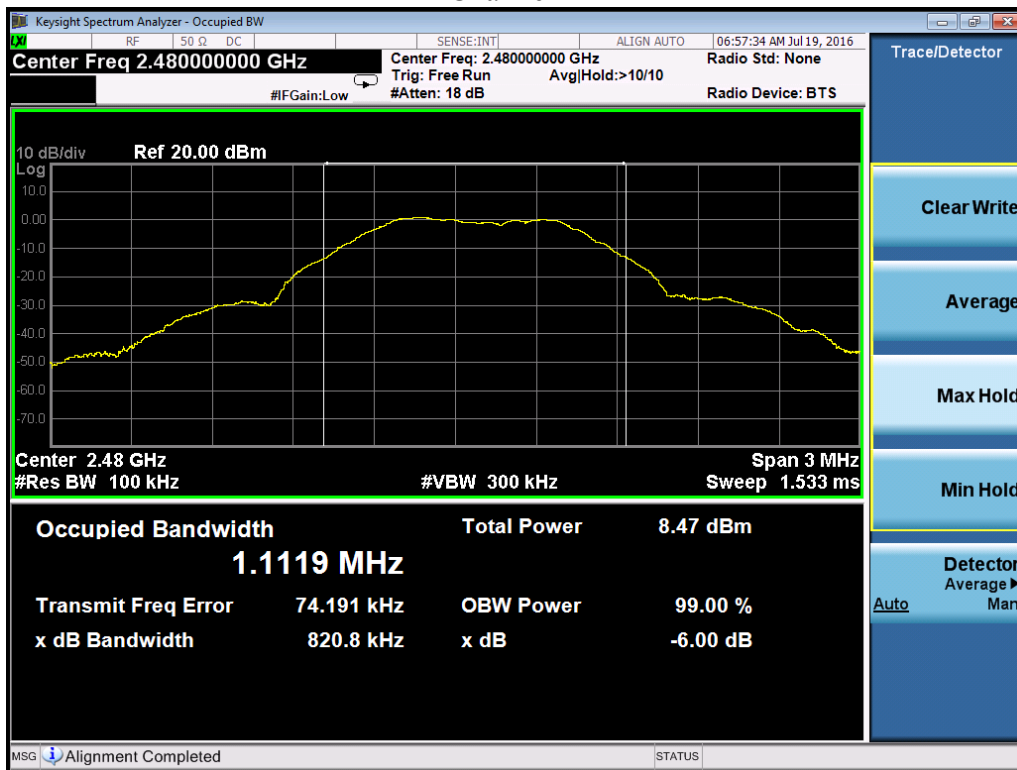


5. Maximum Conducted Output power

Test result: Pass

5.1 Test limit

- ☐ For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt
- ☐ For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts
- ☒ For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

5.2 Test Configuration

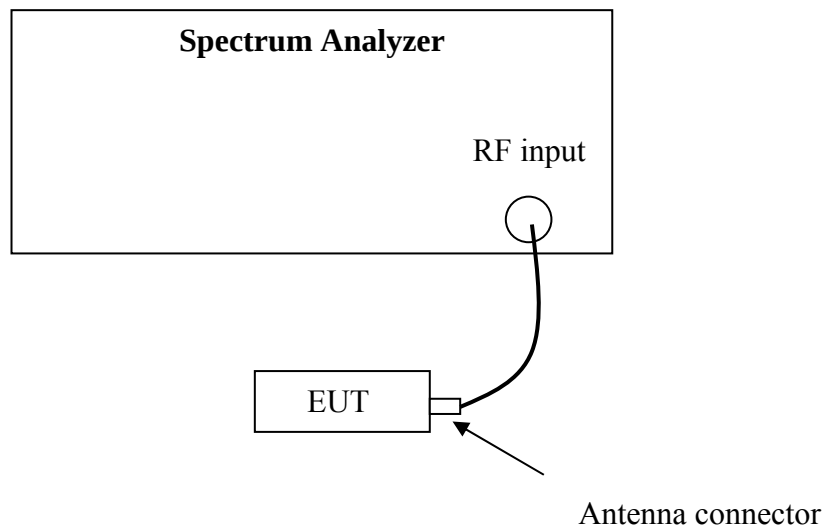

5.3 Test procedure and test setup

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


5.4 Test protocol

Temperature: 22 °C


Relative Humidity: 53 %

Modulation	Frequency (MHz)	MaxConducted Power (dBm)	Limit (dBm)
BLE	2402	4.634	30
	2440	3.978	30
	2480	2.965	30


Channel L

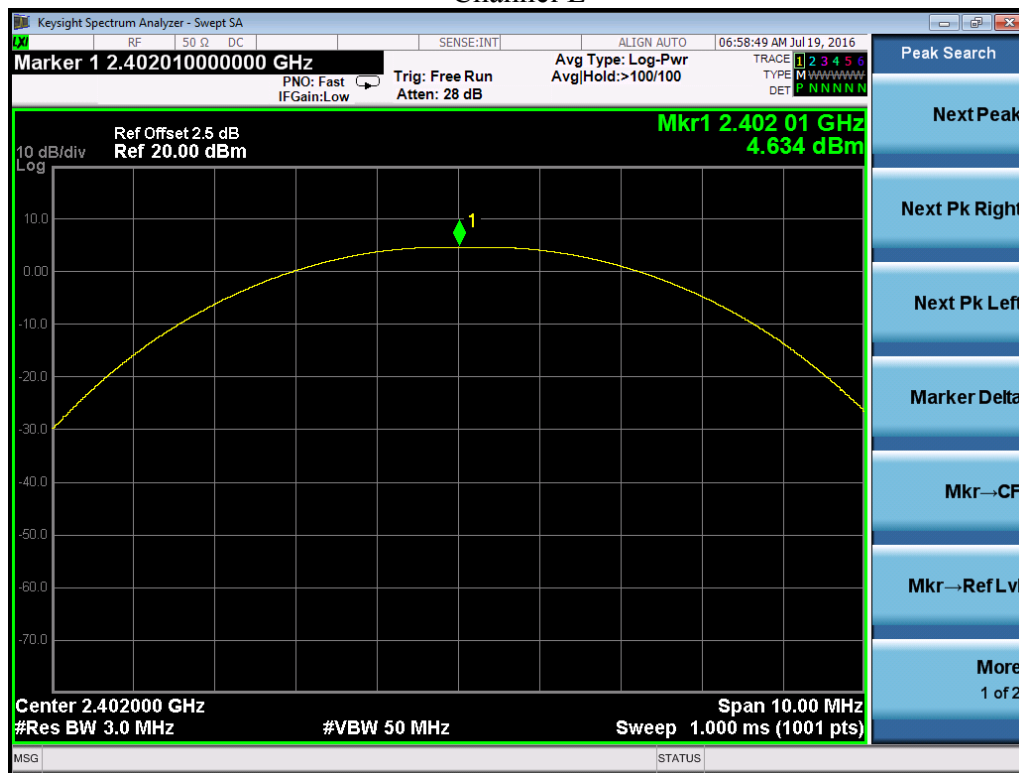

Channel M

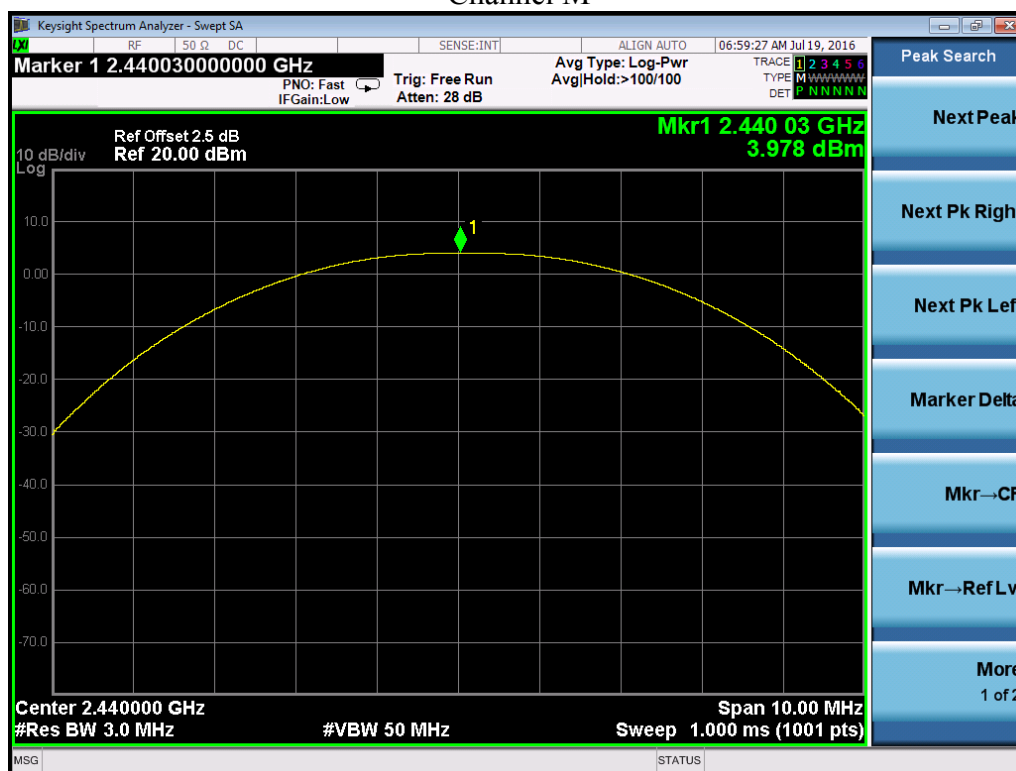

Channel H

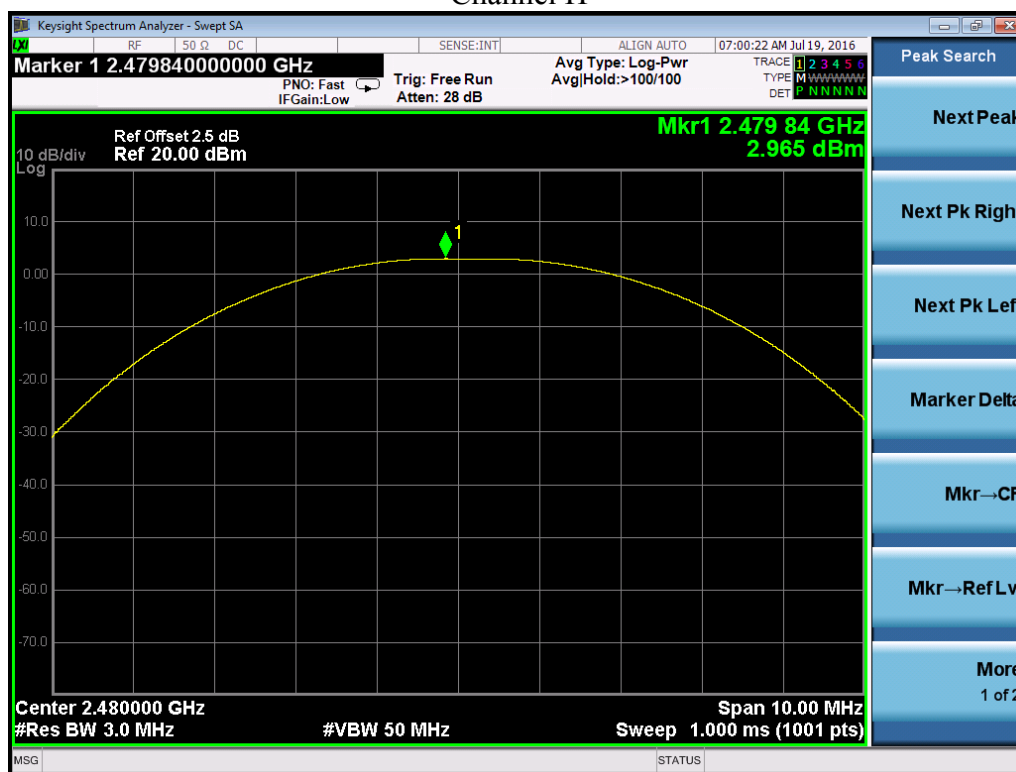

6. Maximum Power spectrum density


Test result: Pass

6.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain-beam forming gain})$.

6.2 Test Configuration

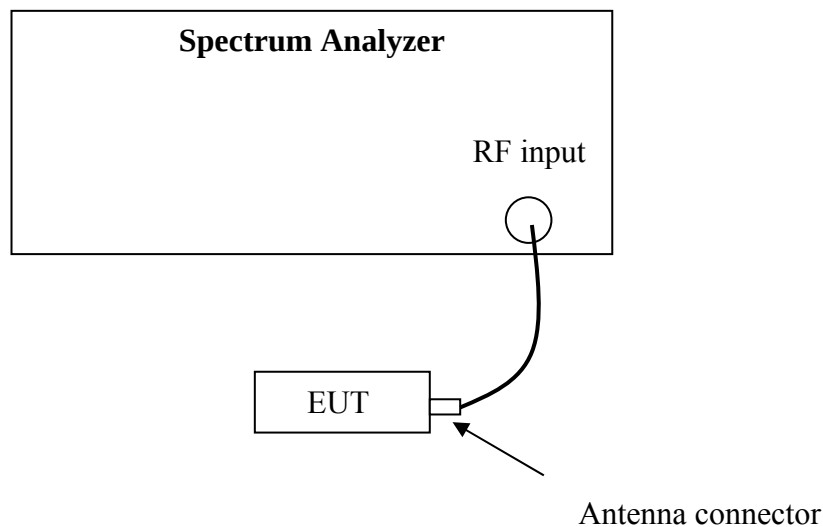

6.3 Test procedure and test setup

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


6.4 Test Protocol

Temperature: 22 °C


Relative Humidity: 53 %

Modulation	Frequency (MHz)	Maximum Power spectrum density (dBm/3KHz)	Limit (dBm/3KHz)
BLE	2402	-4.834	8
	2440	-5.885	8
	2480	-6.935	8


Channel L

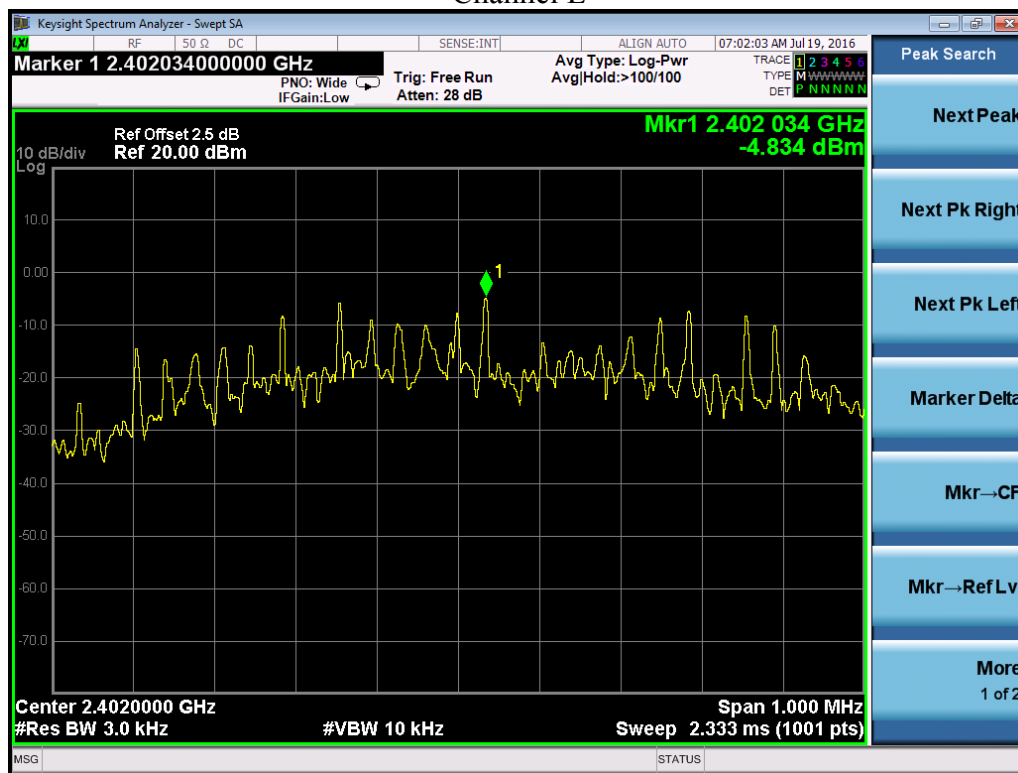

Channel M

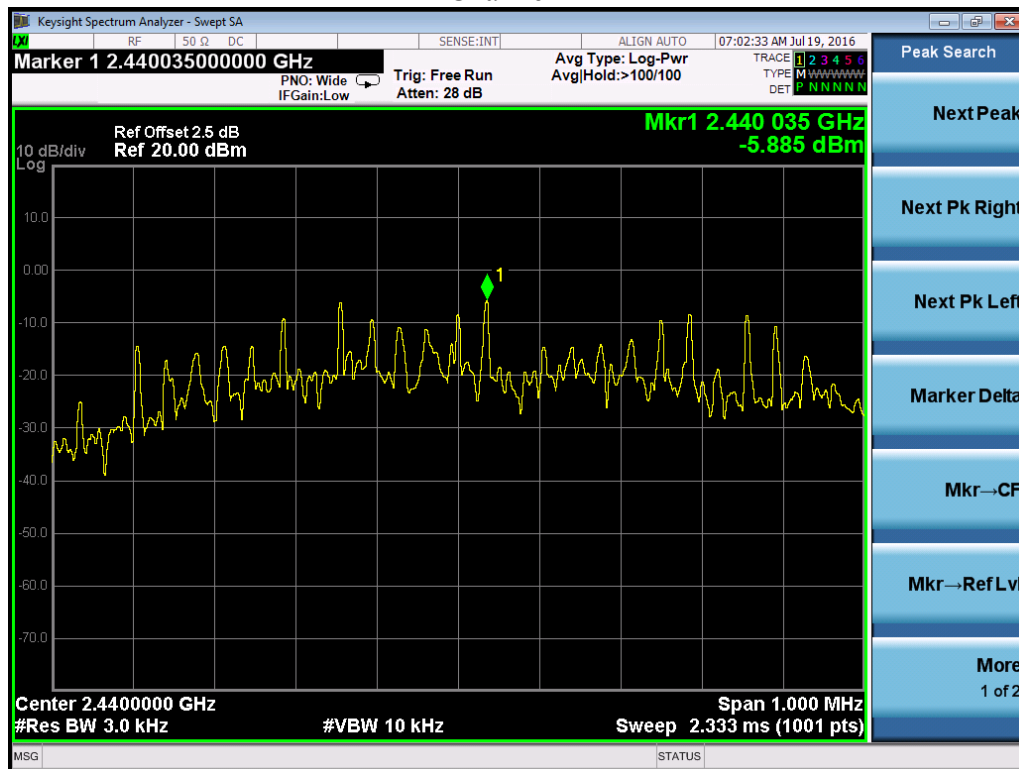

Channel H

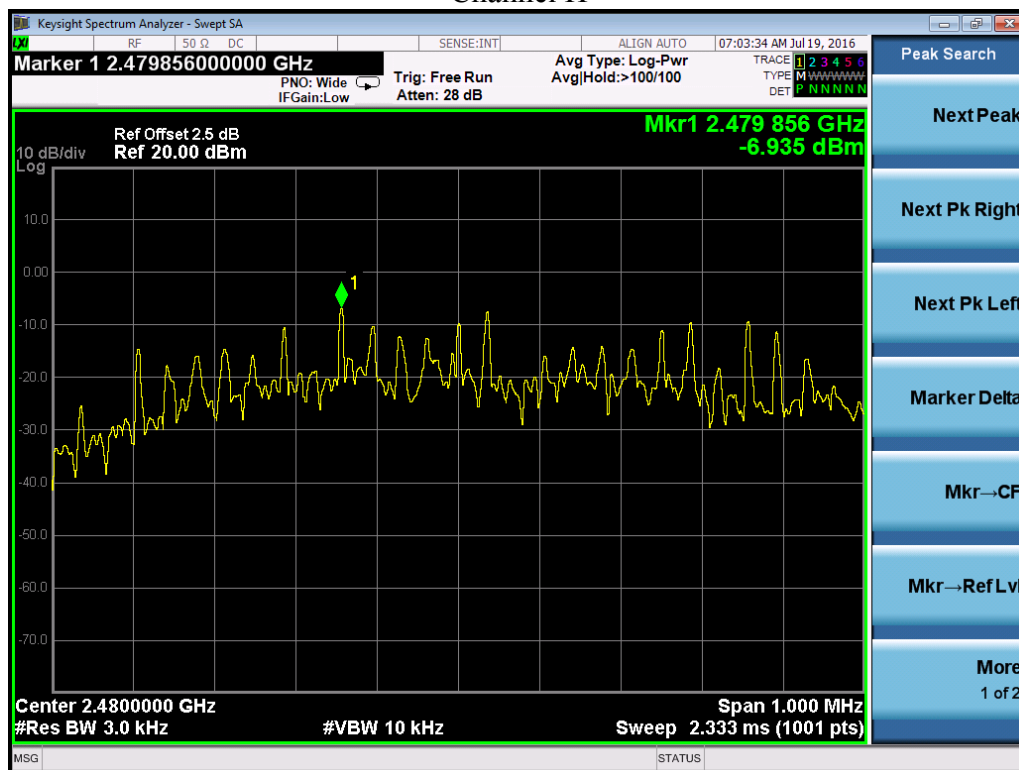


7. Emissions in non-restricted frequency bands

Test result: Pass

7.1 Test limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

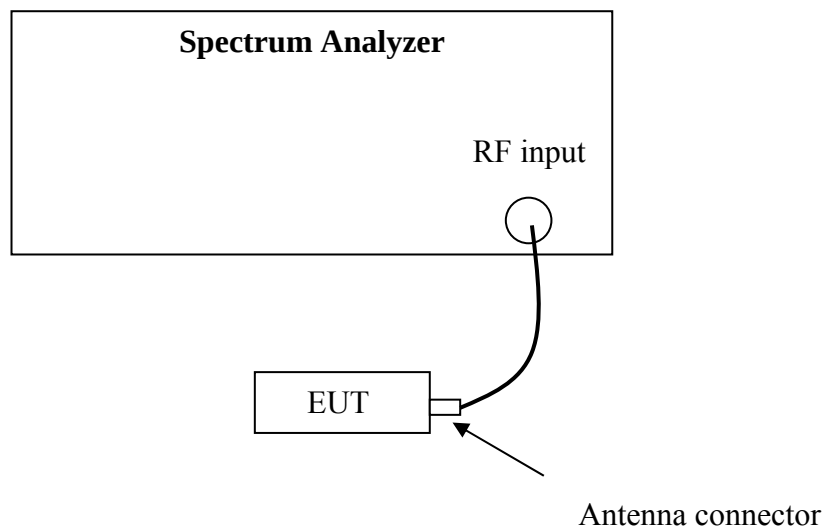

7.3 Test procedure and test setup

Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the *DTS bandwidth*.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement



- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Ensure that the number of measurement points $\geq$ span/RBW
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.



7.4 Test Protocol

Temperature: 22 °C



Relative Humidity: 53 %



Channel L

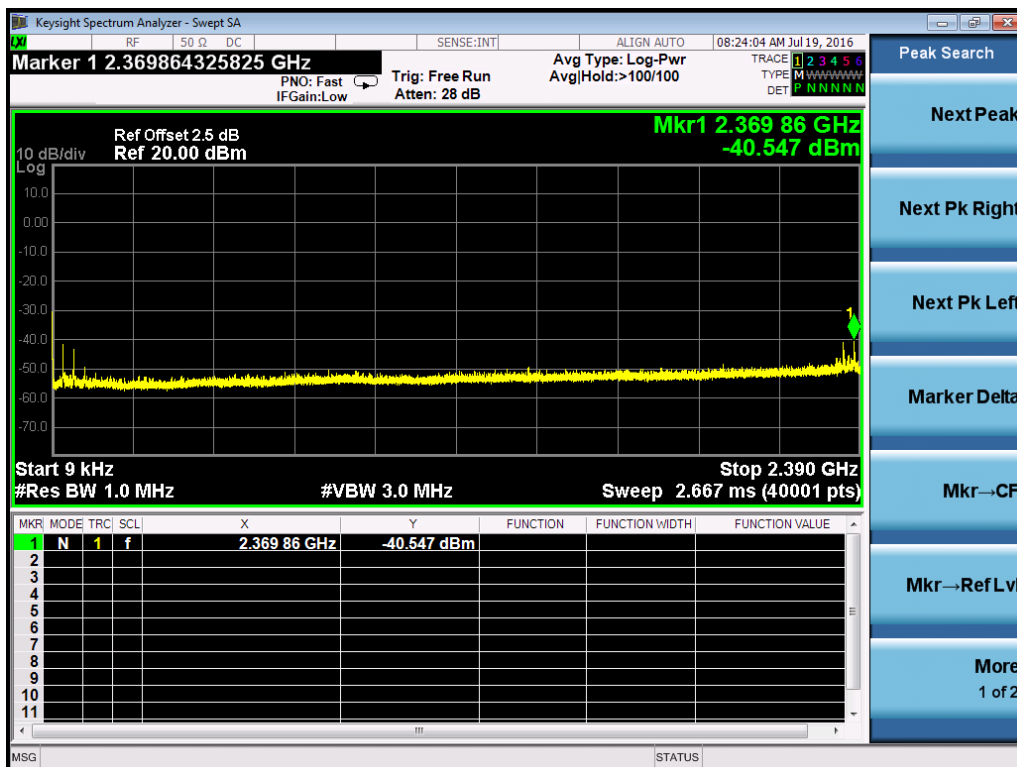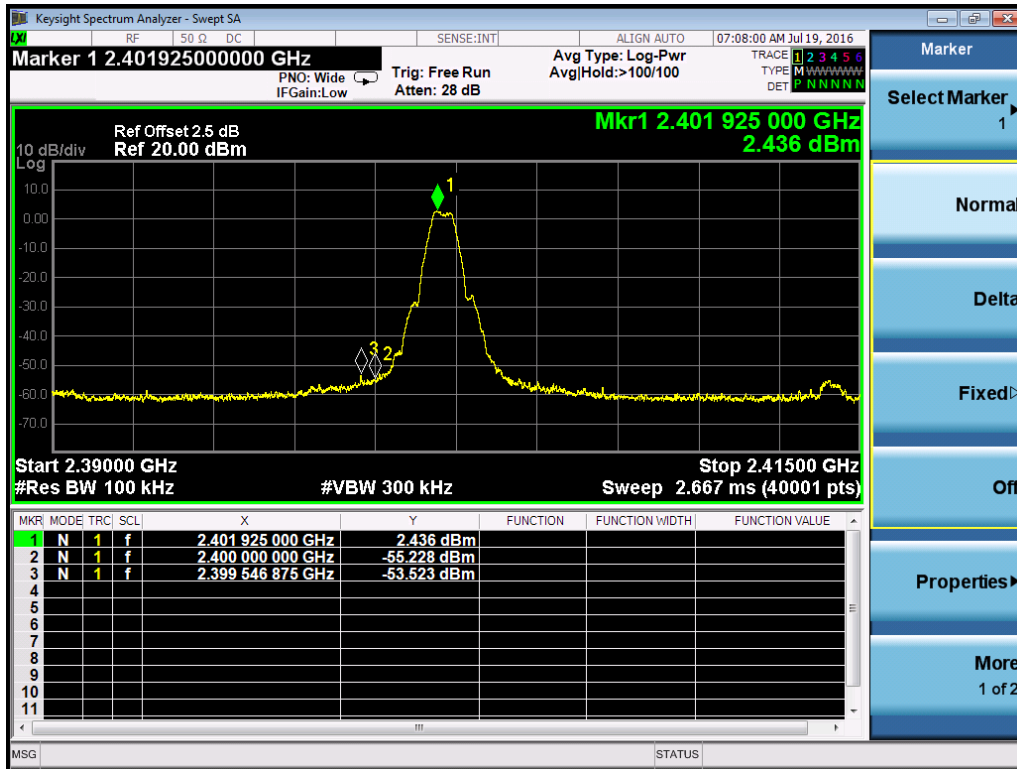

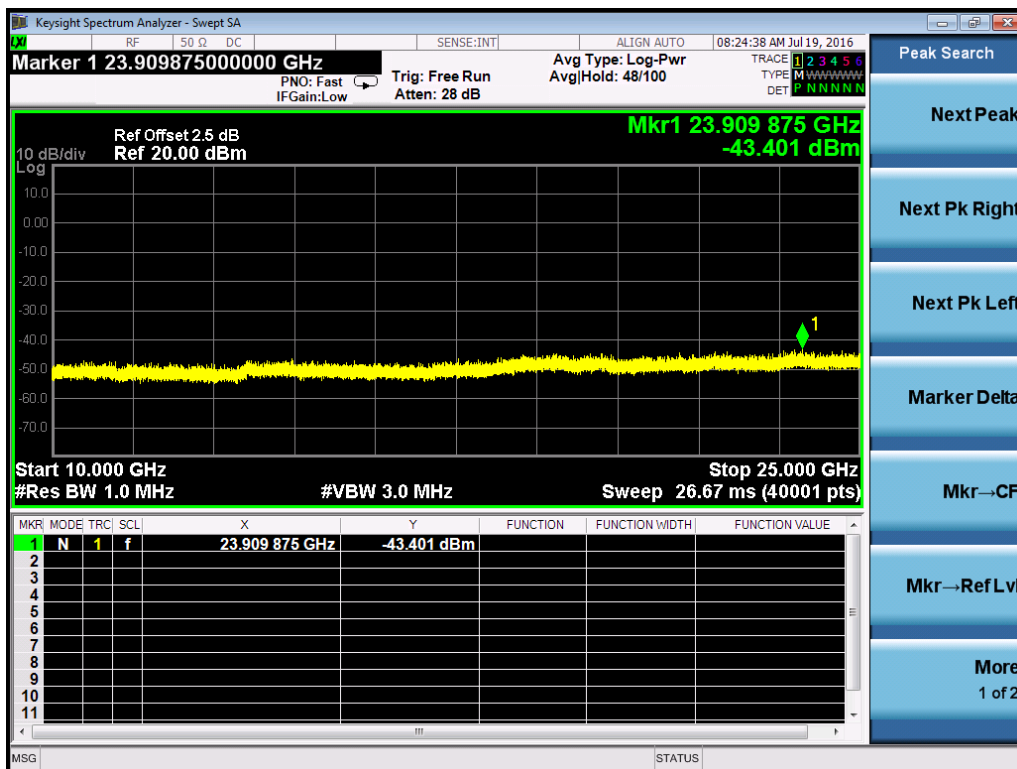
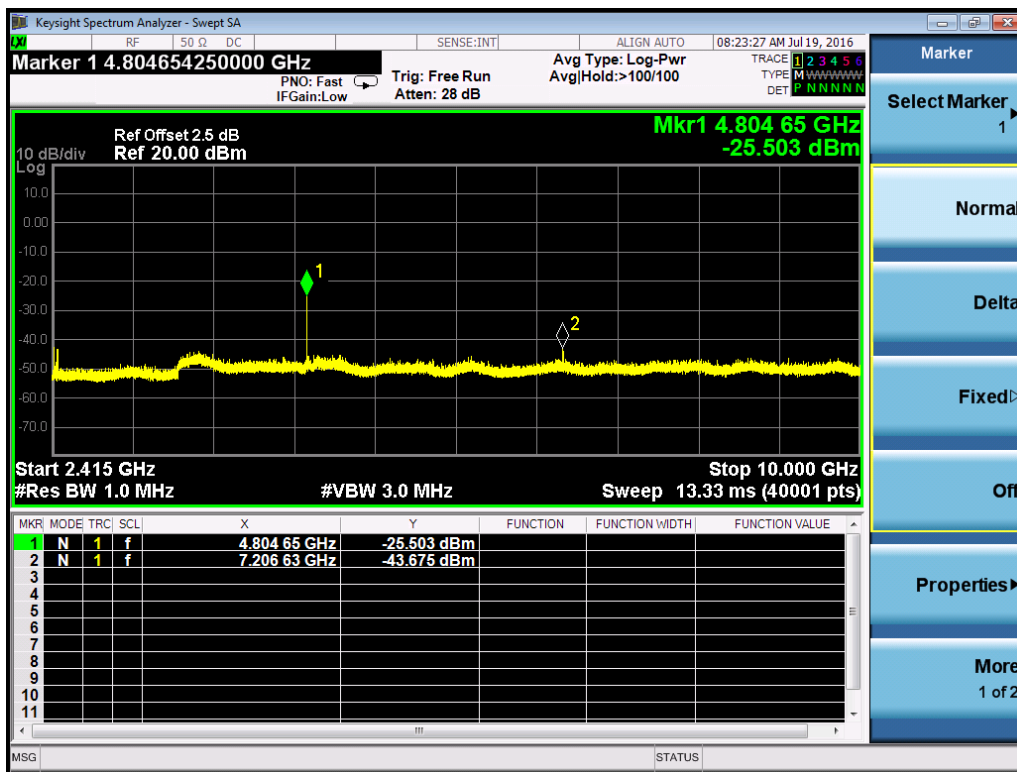




Channel M

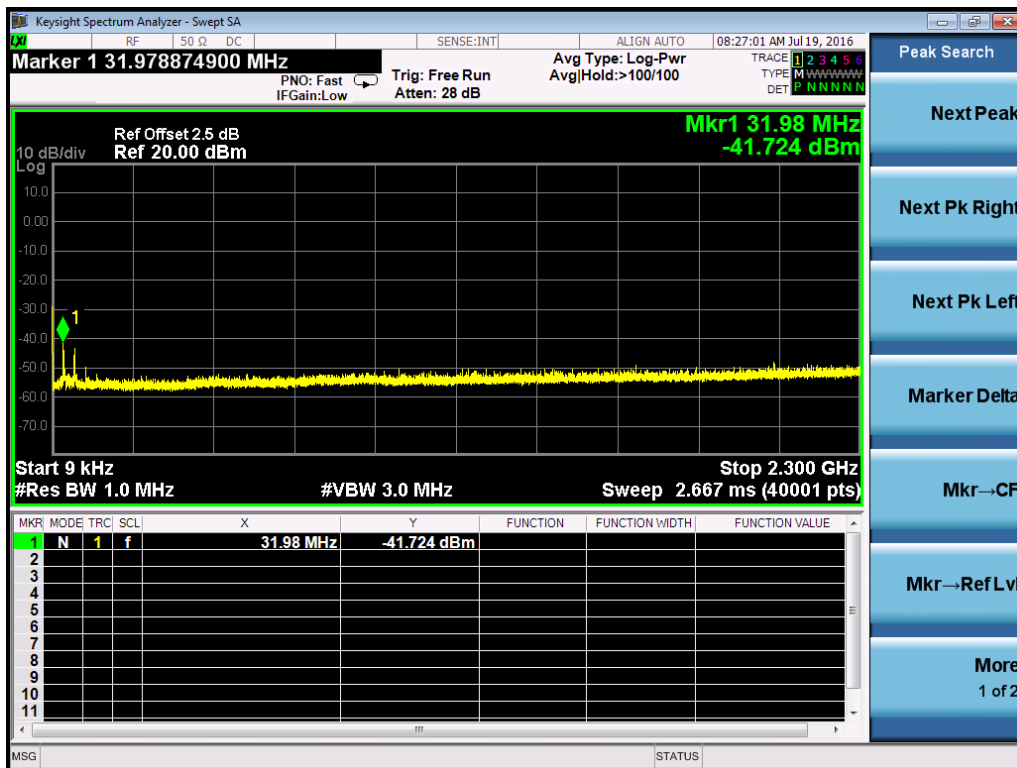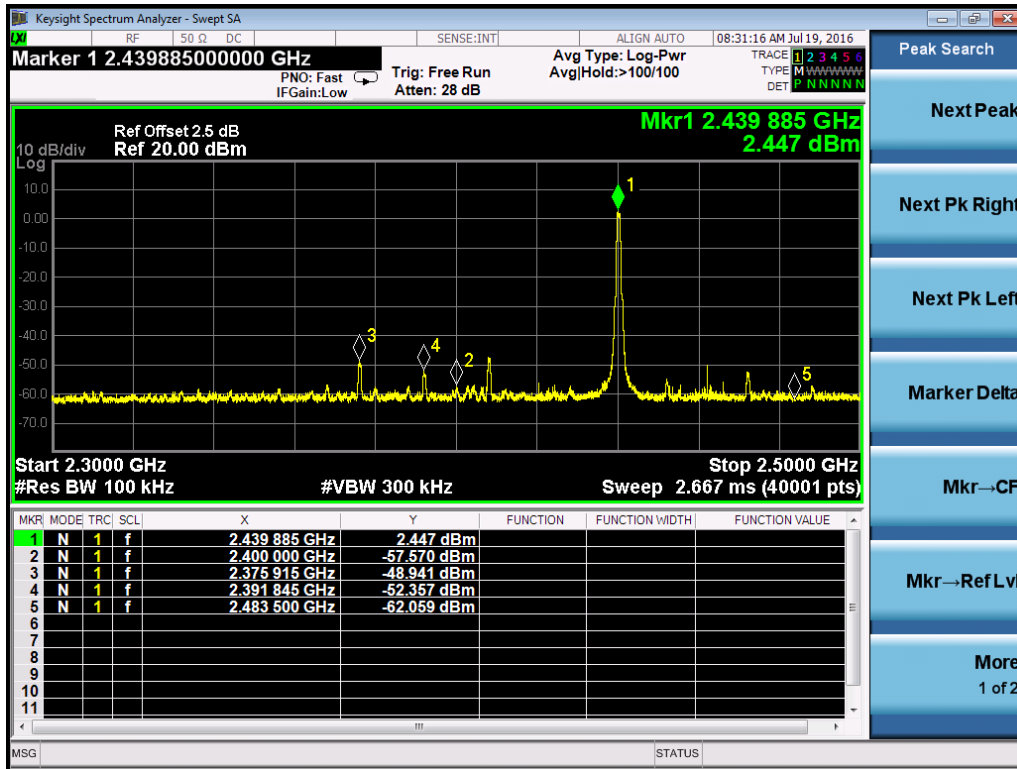

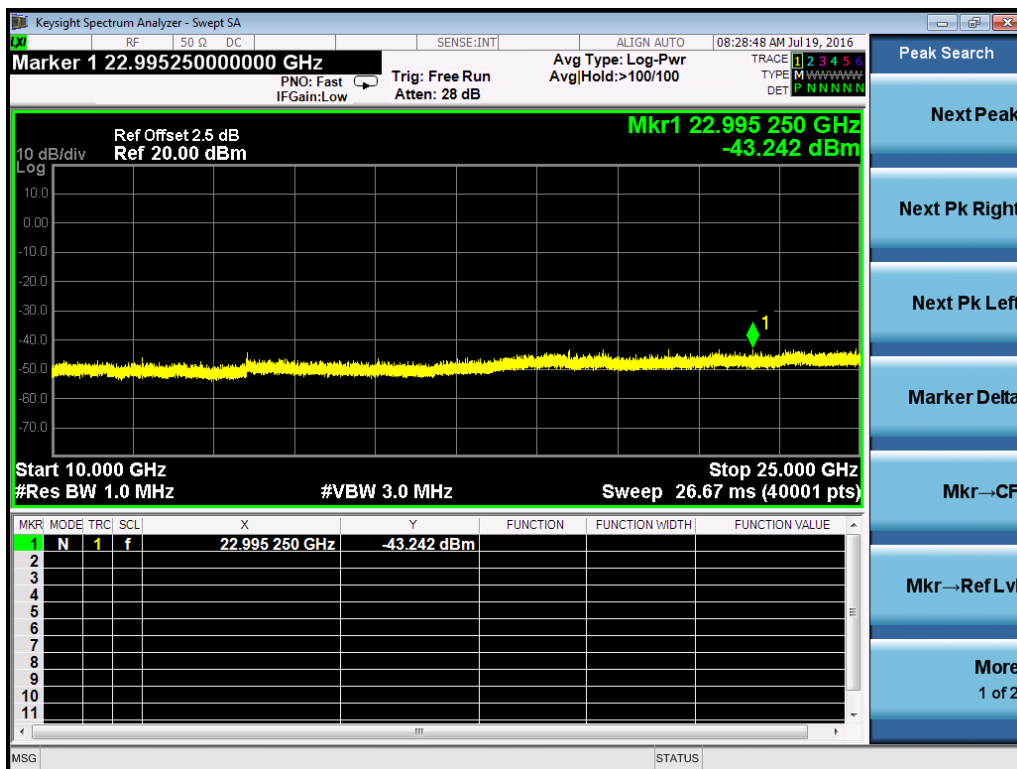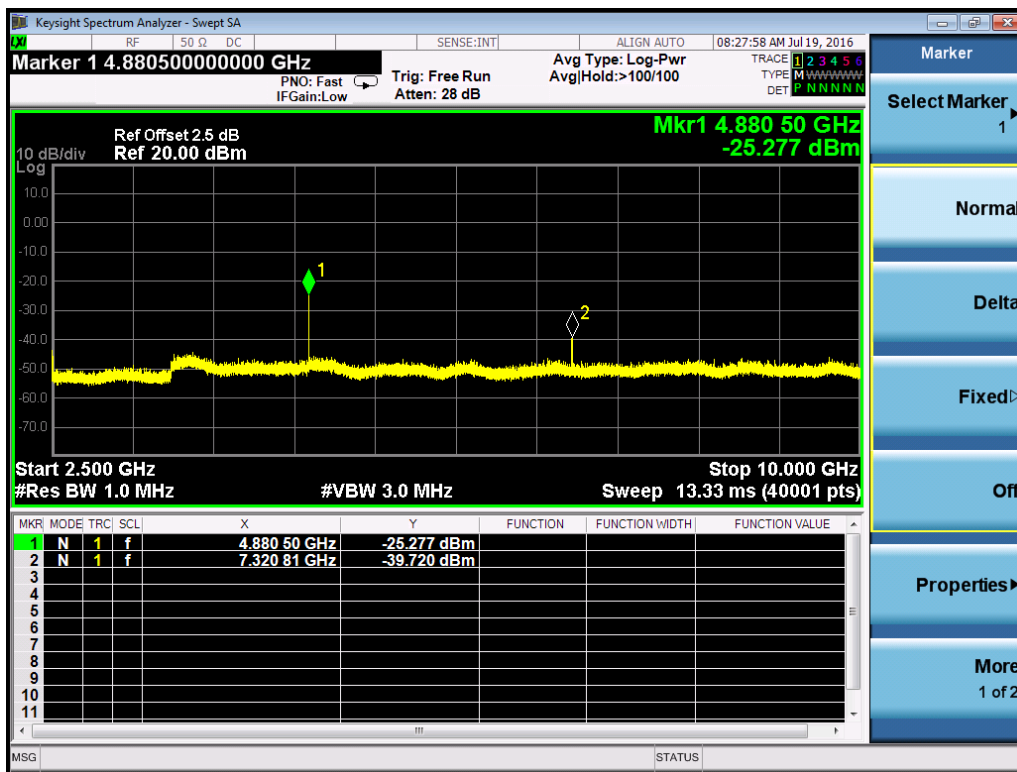

Channel H

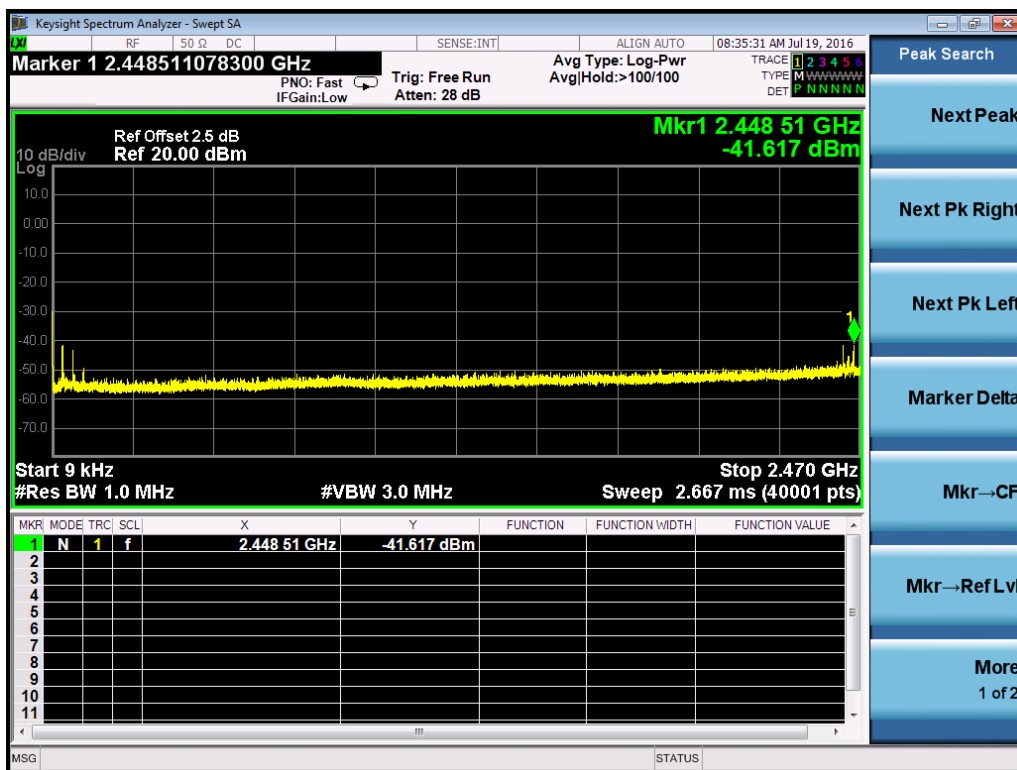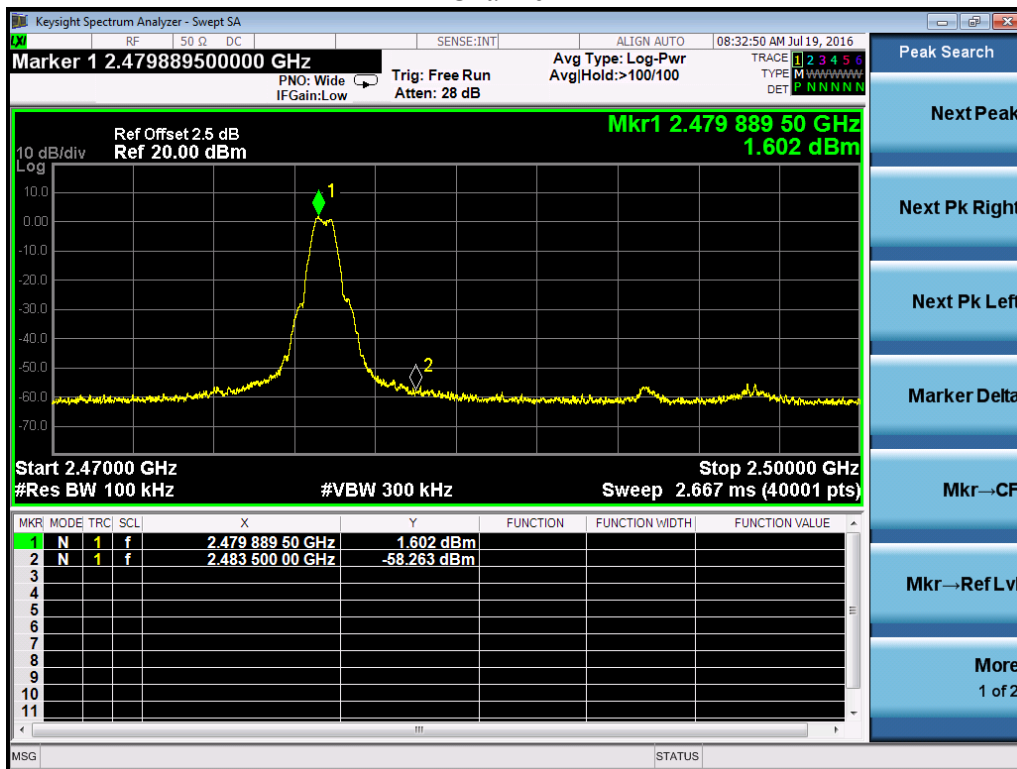

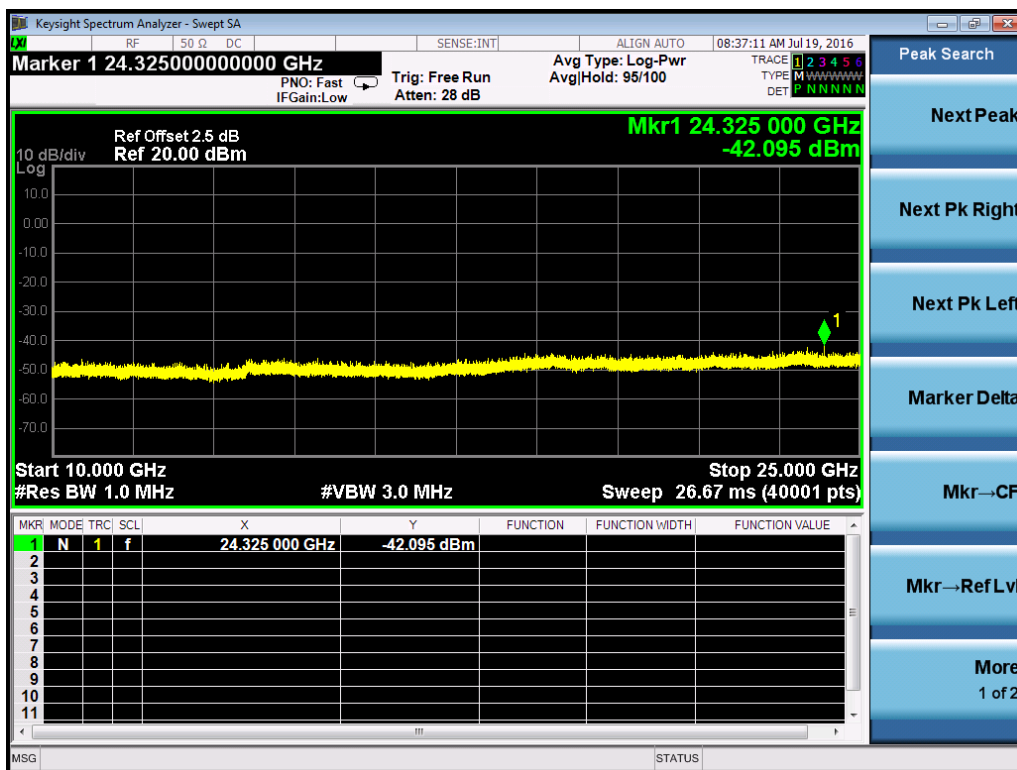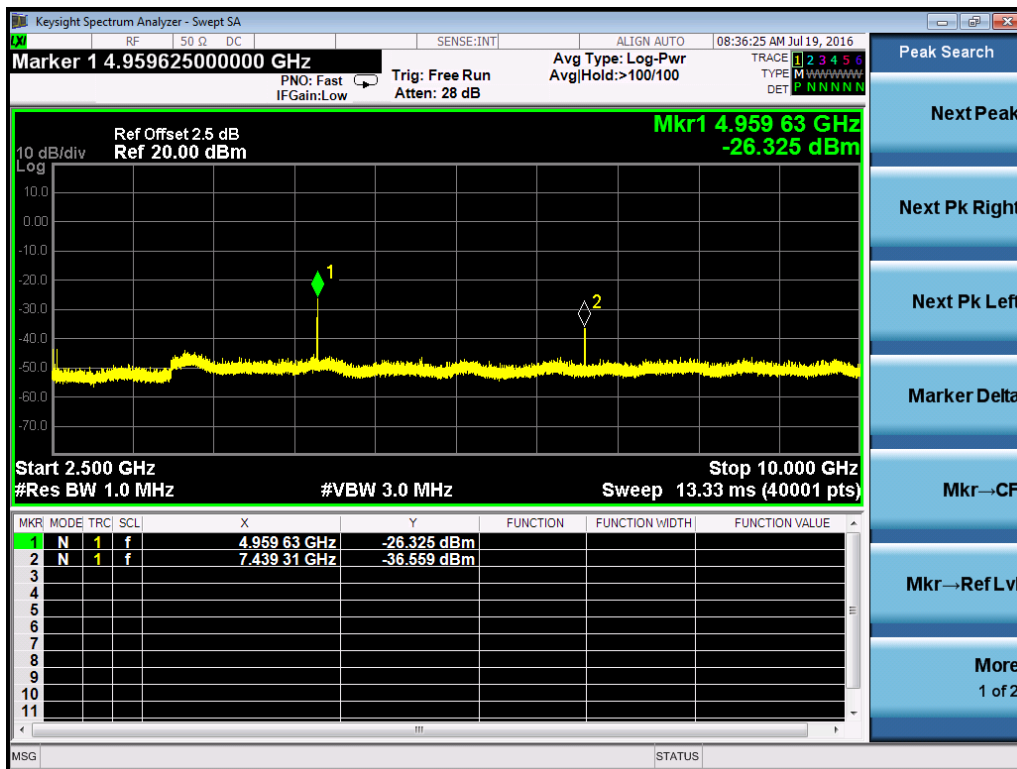


8. Radiated Emissions in restricted frequency bands

Test result: Pass

8.1 Test limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

8.2 Test Configuration

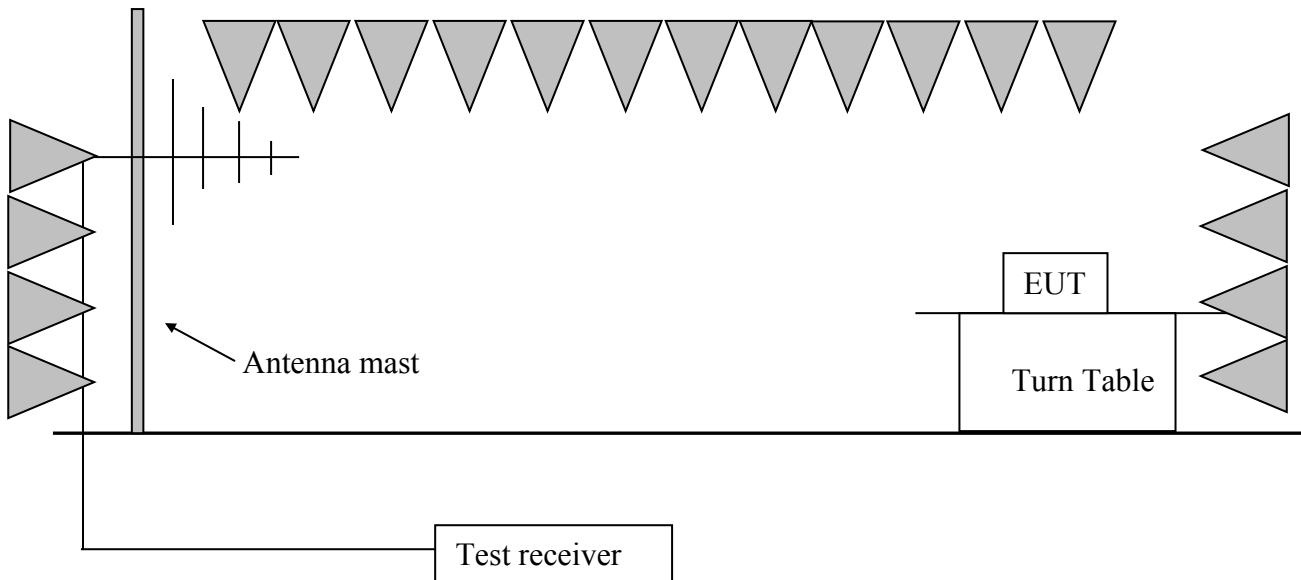

8.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100 kHz, VBW = 300 kHz (30MHz-1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

Remark:

1. Factor= Antenna Factor + Cable Loss (-Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = limit – Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided.

Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.

Then Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;

Measured level = 10dBuV + 0.20dB/m = 10.20dBuV/m

Assuming limit = 54dBuV/m,

Measured level = 10.20dBuV/m, then Margin = 54 -10.20 = 43.80dBuV/m.


8.4 Test Protocol

Temperature: 25 °C


Relative Humidity: 55 %

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line and not reported.

Horizontal

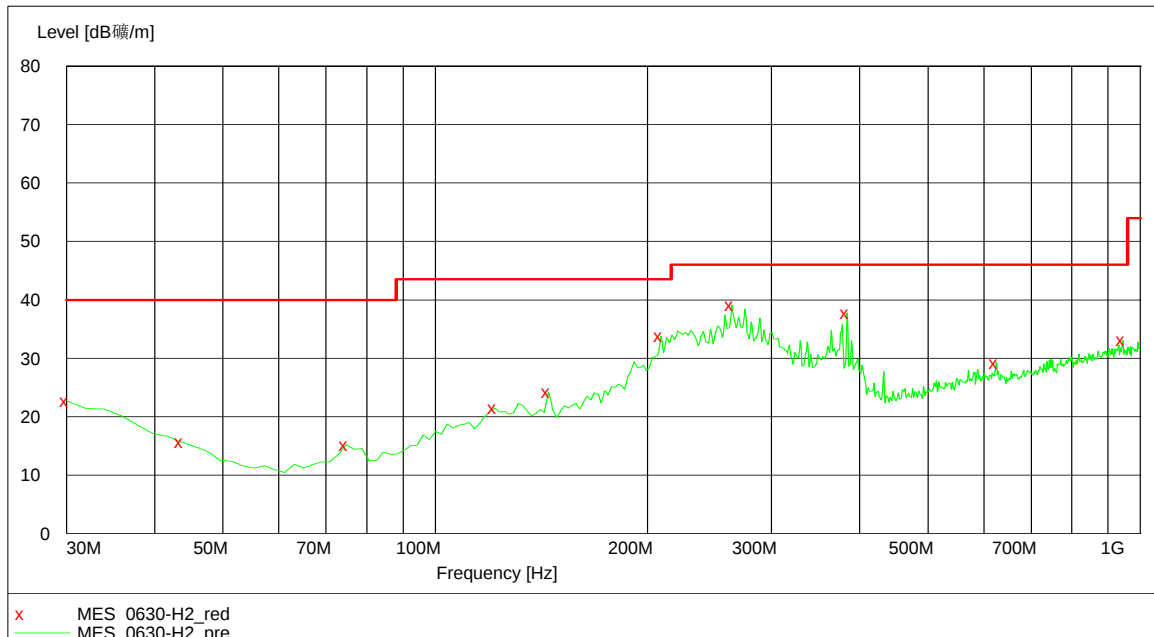

Vertical

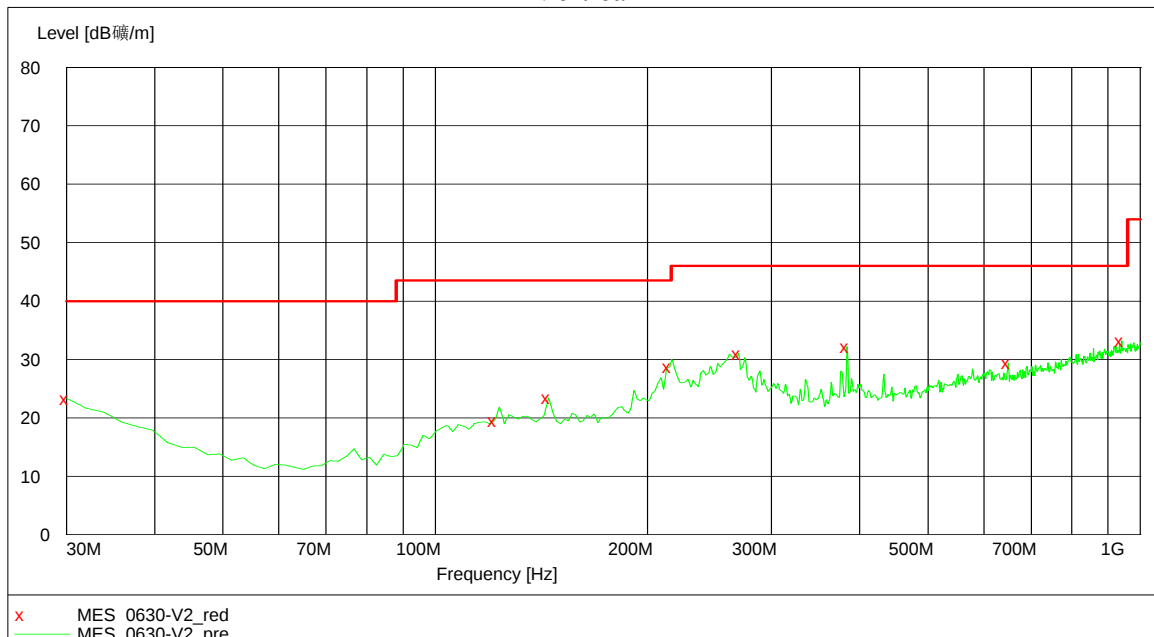

Test data at 30MHz~1GHz (Channel L):

Polarization	Frequency (MHz)	Measured level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
H	30.00	22.7	40.0	17.3	PK
	43.61	15.7	40.0	24.3	PK
	74.71	15.2	40.0	24.8	PK
	121.36	21.5	43.5	22.0	PK
	144.69	24.2	43.5	19.3	PK
	208.84	33.8	43.5	9.7	PK
	263.27	39.1	46.0	6.9	PK
	383.79	37.8	46.0	8.2	PK
	624.83	29.3	46.0	16.7	PK
	945.57	33.1	46.0	12.9	PK
V	30.00	23.3	40.0	16.7	PK
	121.36	19.6	43.5	23.9	PK
	144.69	23.4	43.5	20.1	PK
	214.67	28.7	43.5	14.8	PK
	269.10	31.0	46.0	15.0	PK
	383.79	32.2	46.0	13.8	PK
	650.10	29.4	46.0	16.6	PK
	941.68	33.2	46.0	12.8	PK

Note: The test result (30MHz to 1GHz) of channel L (2402MHz) chosen to list in the report as representative.

Test result above 1GHz:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	30.70	99.60	Fundamental	/	PK
	V	2402.00	30.70	98.30	Fundamental	/	PK
	H	2390.00	30.30	53.20	74.00	20.80	PK
	H	2390.00	30.30	42.40	54.00	11.60	AV
	V	2390.00	30.30	52.10	74.00	21.90	PK
	V	2390.00	30.30	42.10	54.00	11.90	AV
	H	4804.00	-1.50	51.20	74.00	22.80	PK
	H	7206.00	3.50	45.60	74.00	28.40	PK
	V	4804.00	-1.50	46.10	74.00	27.90	PK
	V	7206.00	3.50	43.20	74.00	30.80	PK
M	H	2440.00	30.70	98.70	Fundamental	/	PK
	V	2440.00	30.70	95.60	Fundamental	/	PK
	H	4880.00	-1.10	50.80	74.00	23.20	PK
	H	7320.00	3.60	47.20	74.00	26.80	PK
	V	4880.00	-1.10	48.50	74.00	25.50	PK
	V	7320.00	3.60	45.60	74.00	28.40	PK
H	H	2480.00	30.70	97.30	Fundamental	/	PK
	V	2480.00	30.70	95.20	Fundamental	/	PK
	H	2483.50	30.80	48.20	74.00	25.80	PK
	H	2483.50	30.80	41.50	54.00	12.50	AV
	V	2483.50	30.80	47.60	74.00	26.40	PK
	V	2483.50	30.80	39.80	54.00	14.20	AV
	H	4960.00	-0.80	50.30	74.00	23.70	PK
	H	7440.00	3.80	42.90	74.00	31.10	PK
	V	4960.00	-0.80	49.40	74.00	24.60	PK
	V	7440.00	3.80	42.60	74.00	31.40	PK

- Remark: 1. For fundamental emission, no amplifier is employed.
2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
3. Corrected Reading = Original Receiver Reading + Correct Factor
4. Margin = limit – Corrected Reading
5. If the PK reading is lower than AV limit, the AV test can be elided.
6. The emission was conducted from 30MHz to 25GHz.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$; Corrected Reading =
 $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin = $54 - 10.20 = 43.80\text{dBuV/m}$


9. Power line conducted emission

Test result: **Pass**

9.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBUV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

9.2 Test configuration

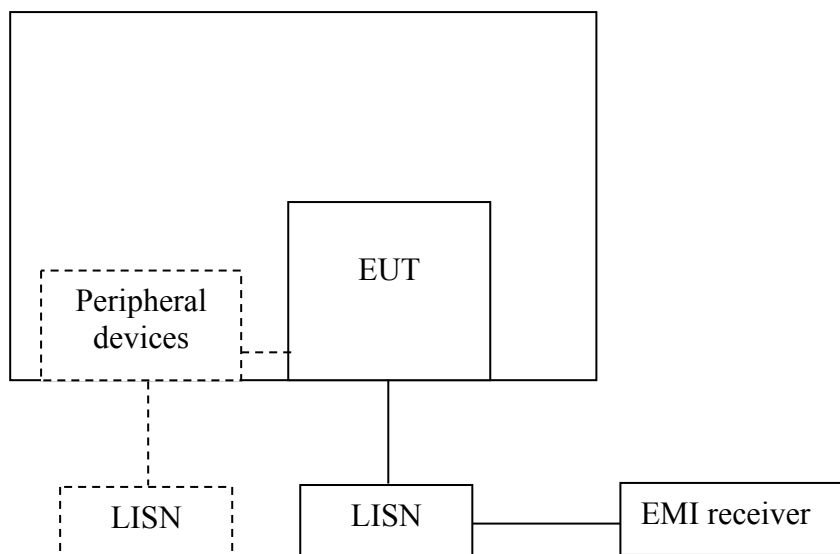

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.


9.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to RSS-gen on conducted measurement.


The bandwidth of the test receiver is set at 9 kHz.

9.4 Test protocol

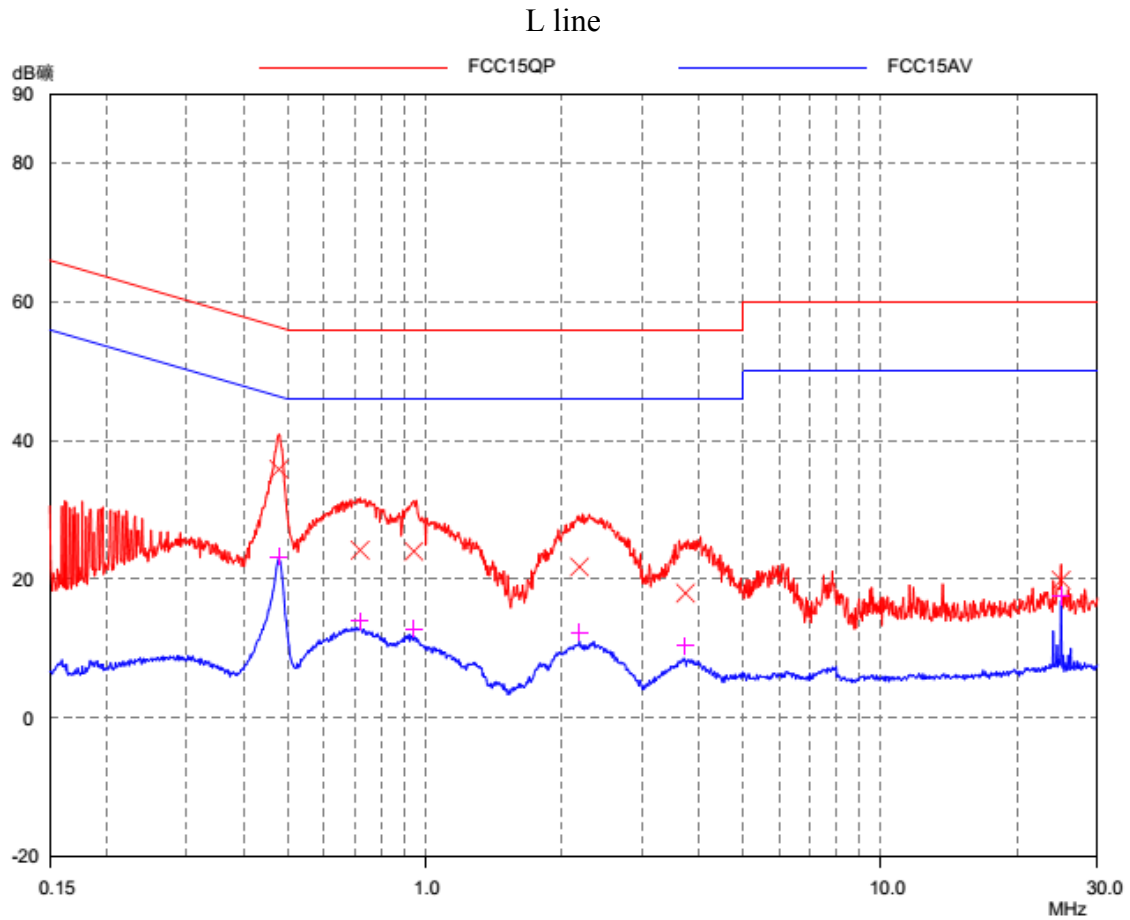

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.48	35.9	56.4	20.5	23.2	46.4	23.1
0.72	24.2	56.0	31.8	13.9	46.0	32.1
0.94	24.1	56.0	31.9	12.9	46.0	33.1
2.18	21.8	56.0	34.2	12.3	46.0	33.7
3.73	18.0	56.0	38.0	10.4	46.0	35.6
24.94	19.9	60.0	40.1	17.6	50.0	32.4

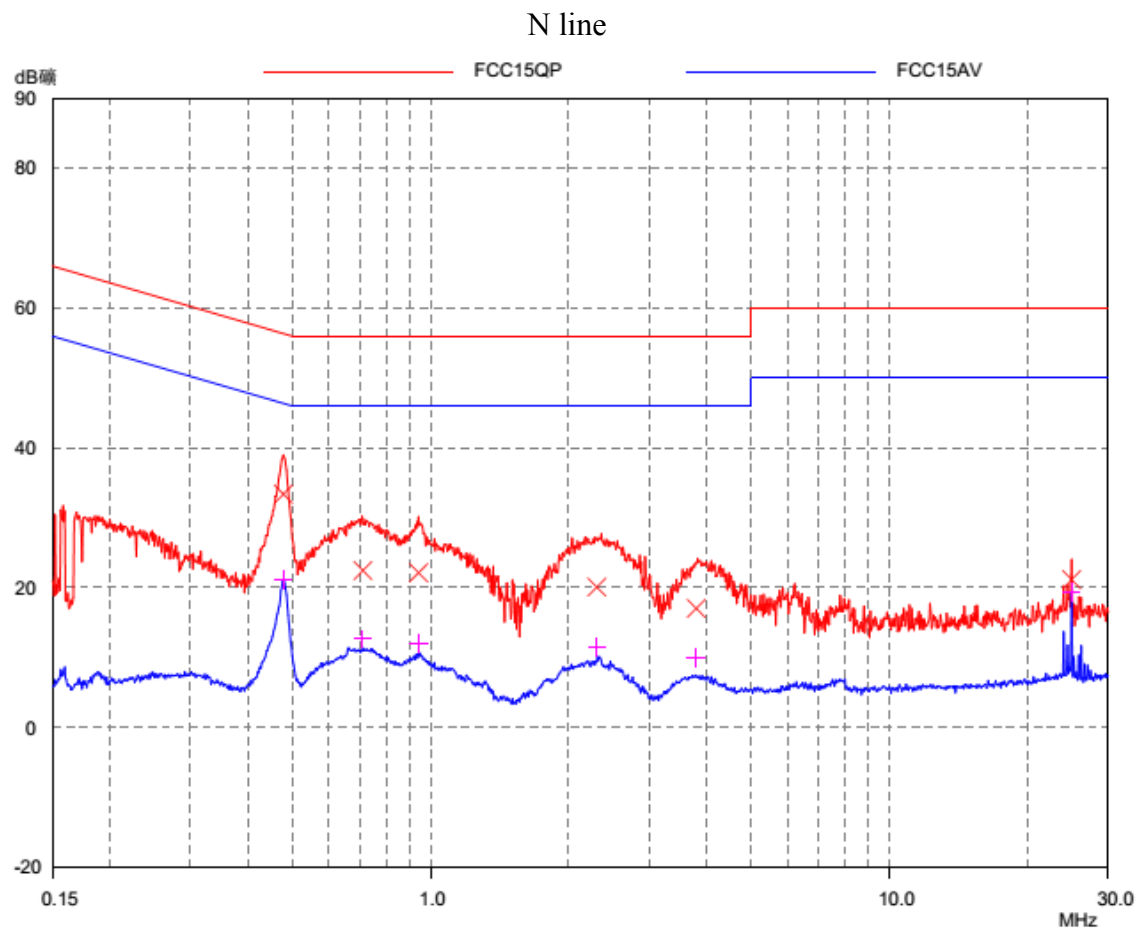

Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.48	33.4	56.4	23.0	21.1	46.4	25.3
0.71	22.5	56.0	33.5	12.7	46.0	33.4
0.94	22.2	56.0	33.8	12.0	46.0	34.1
2.30	20.1	56.0	35.9	11.6	46.0	34.5
3.79	17.1	56.0	38.9	10.0	46.0	36.0
24.94	21.2	60.0	38.8	19.4	50.0	30.6

Note: The worst test results of channel L (2402MHz) was chosen to list in the report as representative.

10. Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The manufacturer used a permanently attached antenna, so fulfill this requirement.