

FCC TEST REPORT

For

Envic Inc

Android phone

Test Model: ESP-01

Additional Model No.: ESP-02, ESP-03


Prepared for : Envic Inc
Address : 20 Truman, Suite 211 Irvine, CA 92620 USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China
Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 06, 2016
Number of tested samples : 1
Sample number : 16060309
Date of Test : June 06, 2016~July 11, 2016
Date of Report : July 11, 2016

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.247): 2015****Report Reference No. : LCS1607020114E****Date of Issue : July 11, 2016****Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.****Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China****Testing Location/ Procedure..... : Full application of Harmonised standards ☒
Partial application of Harmonised standards ☐
Other standard testing method ☐****Applicant's Name..... : Envic Inc****Address : 20 Truman, Suite 211 Irvine, CA 92620 USA****Test Specification****Standard : FCC CFR 47 PART 15 C(15.247): 2015 / ANSI C63.10: 2013****Test Report Form No..... : LCSEMC-1.0****TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.****Master TRF : Dated 2011-03****Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**


This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Android phone**Trade Mark : ENVIC****Test Model : ESP-01****Ratings : DC 3.8V by Li-ion Battery(2000mAh)
Recharge Voltage: DC 5V/2.4A****Result : Positive****Compiled by:**

Calvin Weng/ Administrators

Supervised by:

Glin Lu/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT**Test Report No. : LCS1607020114E**July 11, 2016

Date of issue

Test Model..... : ESP-01

EUT..... : Android phone

Applicant..... : Envic Inc

Address..... : 20 Truman, Suite 211 Irvine, CA 92620 USA

Telephone..... : /

Fax..... : /

Manufacturer..... : SHENZHEN BOWAY ELECTRONICS CO., LTDAddress..... : 11/10F ZHONGXIN TECHNOLOGY BUILDING, 31 BAGUA RD,
FUTIAN DISTRICT SHENZHEN CHINA

Telephone..... : /

Fax..... : /

Factory..... : SHENZHEN BOWAY ELECTRONICS CO., LTDAddress..... : 11/10F ZHONGXIN TECHNOLOGY BUILDING, 31 BAGUA RD,
FUTIAN DISTRICT SHENZHEN CHINA

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-07-11	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	7
1.3. EXTERNAL I/O	7
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. LIST OF MEASURING EQUIPMENT	8
1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
1.7. MEASUREMENT UNCERTAINTY	9
1.8. DESCRIPTION OF TEST MODES	9
2. TEST METHODOLOGY	11
2.1. EUT CONFIGURATION	11
2.2. EUT EXERCISE	11
2.3. GENERAL TEST PROCEDURES	11
3. SYSTEM TEST CONFIGURATION	12
3.1. JUSTIFICATION	12
3.2. EUT EXERCISE SOFTWARE	12
3.3. SPECIAL ACCESSORIES	12
3.4. BLOCK DIAGRAM/SCHEMATICS	12
3.5. EQUIPMENT MODIFICATIONS	12
3.6. TEST SETUP	12
4. SUMMARY OF TEST RESULTS.....	13
5. TEST RESULT	14
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	14
5.2. POWER SPECTRAL DENSITY MEASUREMENT	16
5.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT	21
5.4. RADIATED EMISSIONS MEASUREMENT	26
5.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST	45
5.6. POWER LINE CONDUCTED EMISSIONS	51
5.7. ANTENNA REQUIREMENTS.....	53

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Android phone
Test Model	: ESP-01
Hardware Version	: V95_03_150503
Software Version	: B3500_M_ENVIC_ESP-01_H01_V1.06_20160713
Power Supply	: DC 3.8V by Li-ion Battery(2000mAh) Recharge Voltage: DC 5V/2.4A
EUT Supports	: GSM/GPRS/EGPRS/WCDMA/HSDPA/HSUPA/LTE/
Radios Application	2.4GHz WIFI/Bluetooth/GPS(RX Only)
Bluetooth	:
Operating Frequency	: 2.402-2.480GHz
Channel Number	: 79 channels for Bluetooth V3.0 (DSS) 40 channels for Bluetooth V4.0 (DTS)
Channel Spacing	: 1MHz for Bluetooth V3.0 (DSS) 2MHz for Bluetooth V4.0 (DTS)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V3.0 (DSS) GFSK for Bluetooth V4.0 (DTS)
Bluetooth Version	: V4.0
Antenna Description	: PIFA Antenna, 2.1dBi (Max.) For 2.4GHz Band
WIFI(2.4GHz Band)	:
Operating Frequency	: 2412-2462MHz
Channel Spacing	: 5MHz
Channel Number	: 11 Channel for 20MHz bandwidth(2412~2462MHz) 7 channels for 40MHz bandwidth(2422~2452MHz)
Modulation Type	: 802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	: PIFA Antenna, 2.1dBi (Max.) For 2.4GHz Band

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Wall Charger	Adapter	IRG-UW09	/	FCC VOC

1.3. External I/O

I/O Port Description	Quantity	Cable
Earphone Jack	1	1.0m, unshielded
USB Port	1	1.0m, unshielded

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4: 2014, CISPR 22/EN 55022 and CISPR16-1-4 SVSWR requirements.

1.5. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 17,2016	June 16,2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2015	July 15,2016
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 17,2016	June 16,2017
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 17,2016	June 16,2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 17,2016	June 16,2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 17,2016	June 16,2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 17,2016	June 16,2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 17,2016	June 16,2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2015	July 15,2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2015	July 15,2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2015	July 15,2016
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2015	Oct. 26, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 17,2016	June 16,2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 09,2016	June 08,2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 09,2016	June 08,2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 09,2016	June 08,2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 17,2016	June 16,2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 17,2016	June 16,2017
Power Meter	R&S	NRVS	100444	DC-40GHz	June 17,2016	June 16,2017
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 17,2016	June 16,2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 17,2016	June 16,2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 17,2016	June 16,2017
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 17,2016	June 16,2017

Note: All equipment through GRGT EST calibration

1.6. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item		Frequency Range	Uncertainty	Note
Radiation Uncertainty	:	9KHz~30MHz	3.10dB	(1)
		30MHz~200MHz	2.96dB	(1)
		200MHz~1000MHz	3.10dB	(1)
		1GHz~26.5GHz	3.80dB	(1)
		26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	:	150kHz~30MHz	1.63dB	(1)
Power disturbance	:	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description of Test Modes

The EUT has been tested under operating condition.

For pre-testing, when performed power line conducted emission measurement, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

The EUT was set to transmit at 100% duty cycle. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Y position.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be 802.11b mode (TX-High Channel).

Pre-test AC conducted emission at both power adapter and charge from PC mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case.

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be 802.11b mode (TX-High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

BLE 4.0: 1Mbps, GFSK

802.11b Mode: 1 Mbps, DSSS.

802.11g Mode: 6 Mbps, OFDM.

802.11n Mode HT20: MCS0, OFDM.

802.11n Mode HT40: MCS0, OFDM.

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

Channel List & Frequency
BLE 4.0

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2402~2480MHz	1	2402	21	2442
	2	2404	--	--
	3	2406	--	--
	--	--	38	2476
	--	--	39	2478
	20	2440	40	2480

802.11b/g/n(HT20)

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2412~2462MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	--	--

802.11n(HT40)

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
2422~2452MHz	1	--	7	2442
	2	--	8	2447
	3	2422	9	2452
	4	2427	10	--
	5	2432	11	--
	6	2437	--	--

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas Guidance v03r05 is required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant
<i>Note: This is a DTS test report for Android phone, please refer to other document for the DSS test report(LCS1606060436E).</i>		

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement


5.1.1. Standard Applicable

According to §15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt.

5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.3. Test Setup Layout

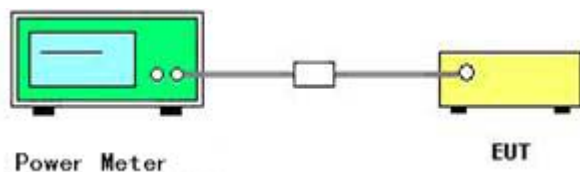

5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Chaz	Configurations	BLE 4.0; 802.11b/g/n

Mode	Channel	Frequency (MHz)	Conducted Power (dBm, Peak)	Max. Limit (dBm)	Result
BLE 4.0	1	2402	-6.81	30	Complies
	20	2440	-4.73	30	Complies
	40	2480	-4.80	30	Complies
802.11b	1	2412	17.99	30	Complies
	6	2437	18.62	30	Complies
	11	2462	18.23	30	Complies
802.11g	1	2412	16.60	30	Complies
	6	2437	16.00	30	Complies
	11	2462	16.63	30	Complies
802.11n HT20	1	2412	15.19	30	Complies
	6	2437	15.80	30	Complies
	11	2462	15.35	30	Complies
802.11n HT40	3	2422	15.73	30	Complies
	6	2437	15.10	30	Complies
	9	2452	15.34	30	Complies

5.2. Power Spectral Density Measurement


5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW = 3 kHz.
- 4) Set the VBW $\geq 3 \times$ RBW
- 5) Set the span to 1.5 times the DTS channel bandwidth.
- 6) Detector = peak.
- 7) Sweep time = auto couple.
- 8) Trace mode = max hold.
- 9) Allow trace to fully stabilize.
- 10) Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.2.3. Test Setup Layout

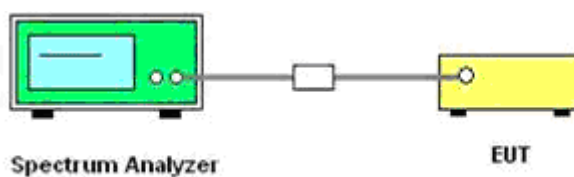

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.2.5. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Chaz	Configurations	BLE 4.0; 802.11b/g/n



Mode	Channel	Frequency (MHz)	Power Density (dBm/3KHz)	Max. Limit (dBm/3KHz)	Result
BLE 4.0	1	2402	-21.95	8	Complies
	20	2440	-20.11	8	Complies
	40	2480	-20.04	8	Complies
802.11b	1	2412	-11.71	8	Complies
	6	2437	-9.34	8	Complies
	11	2462	-10.20	8	Complies
802.11g	1	2412	-16.47	8	Complies
	6	2437	-14.74	8	Complies
	11	2462	-15.37	8	Complies
802.11n HT20	1	2412	-18.35	8	Complies
	6	2437	-16.21	8	Complies
	11	2462	-16.96	8	Complies
802.11n HT40	3	2422	-19.30	8	Complies
	6	2437	-18.79	8	Complies
	9	2452	-20.04	8	Complies

Note: The measured power density (dBm) has the offset with cable loss already.

Test Result of Power Spectral Density


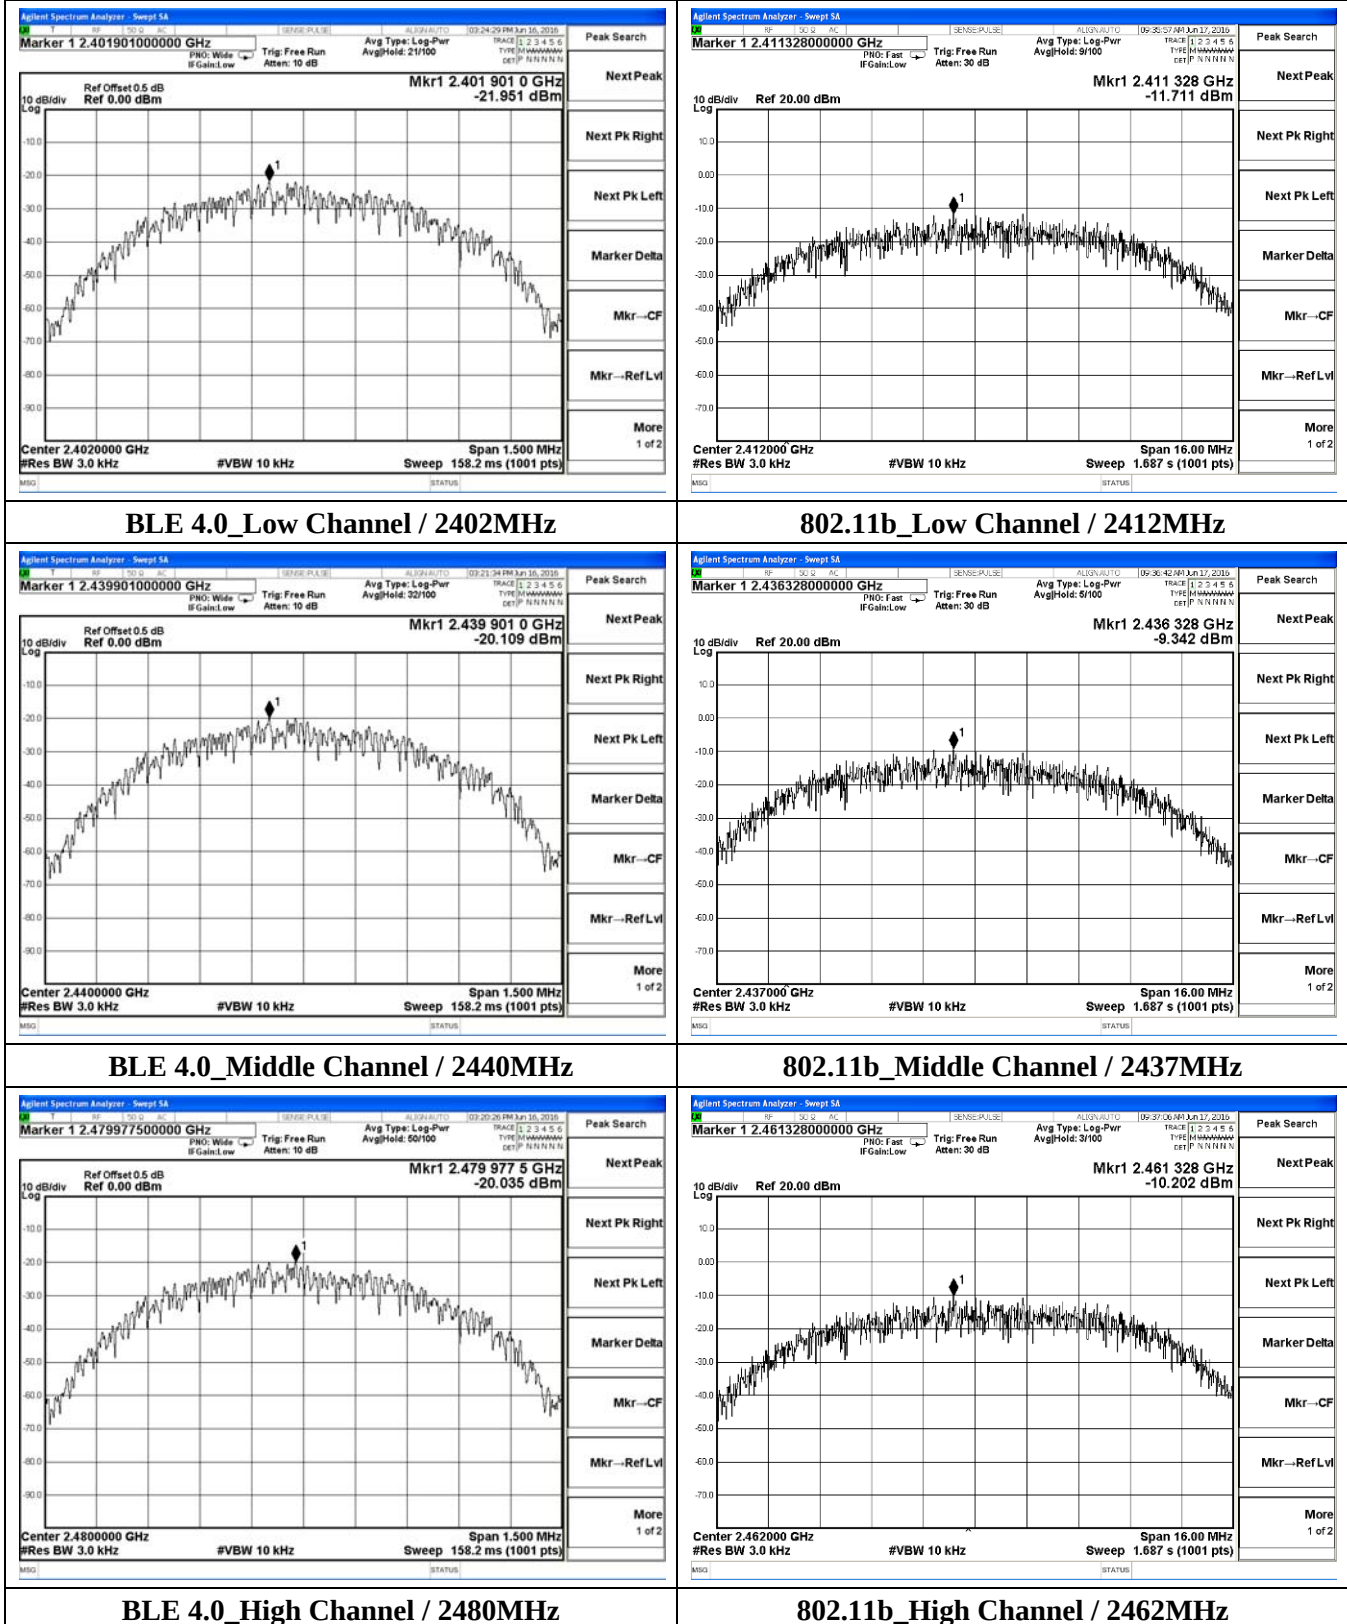


Test Result of Power Spectral Density

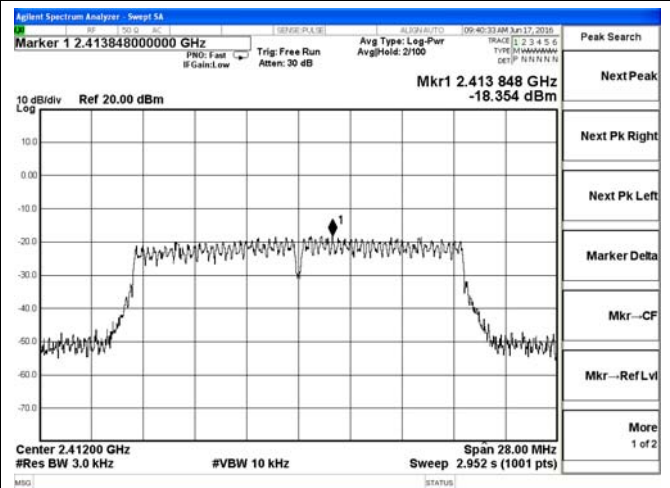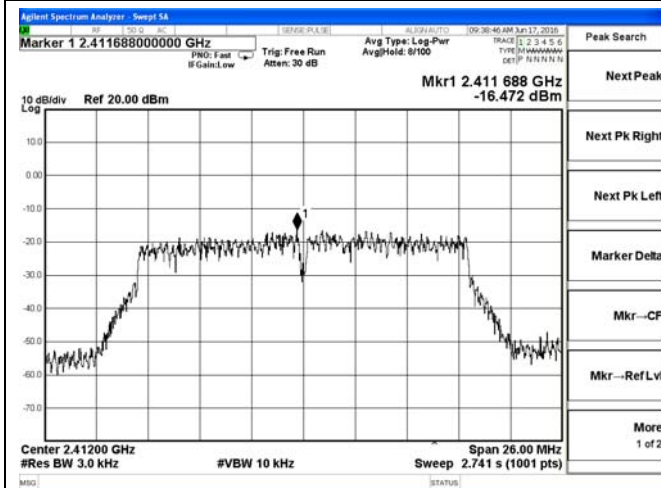



802.11g_Low Channel / 2412MHz

802.11n HT20_Low Channel / 2412MHz

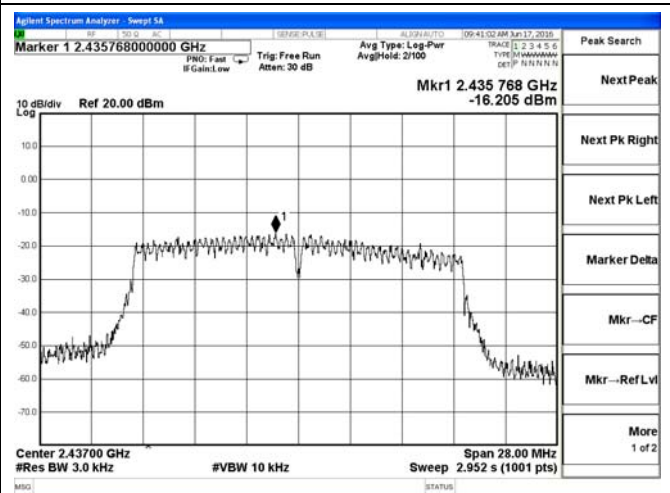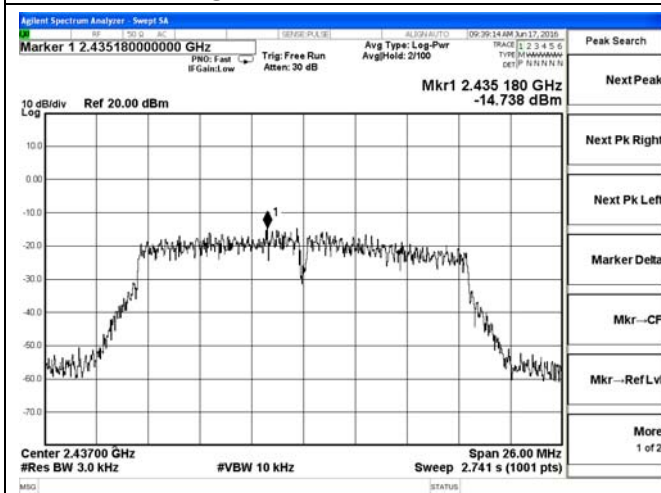

802.11g_Middle Channel / 2437MHz


802.11n HT20_Middle Channel / 2437MHz

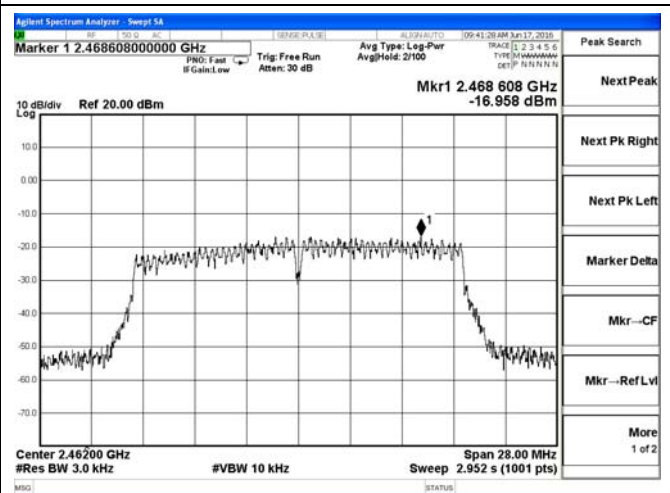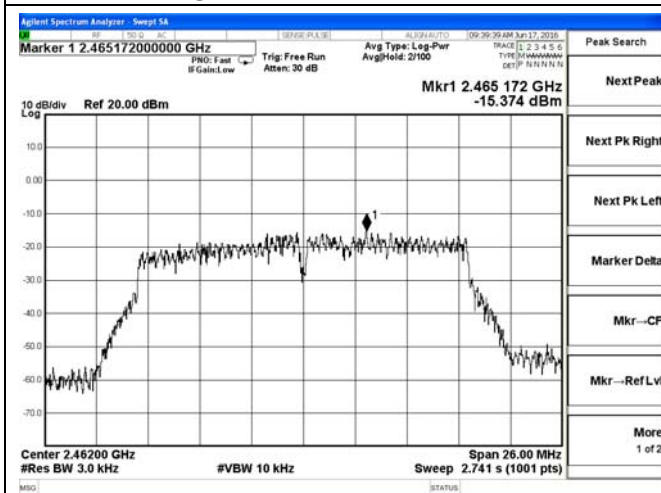

802.11g_High Channel / 2462MHz

802.11n HT20_High Channel / 2462MHz

Test Result of Power Spectral Density

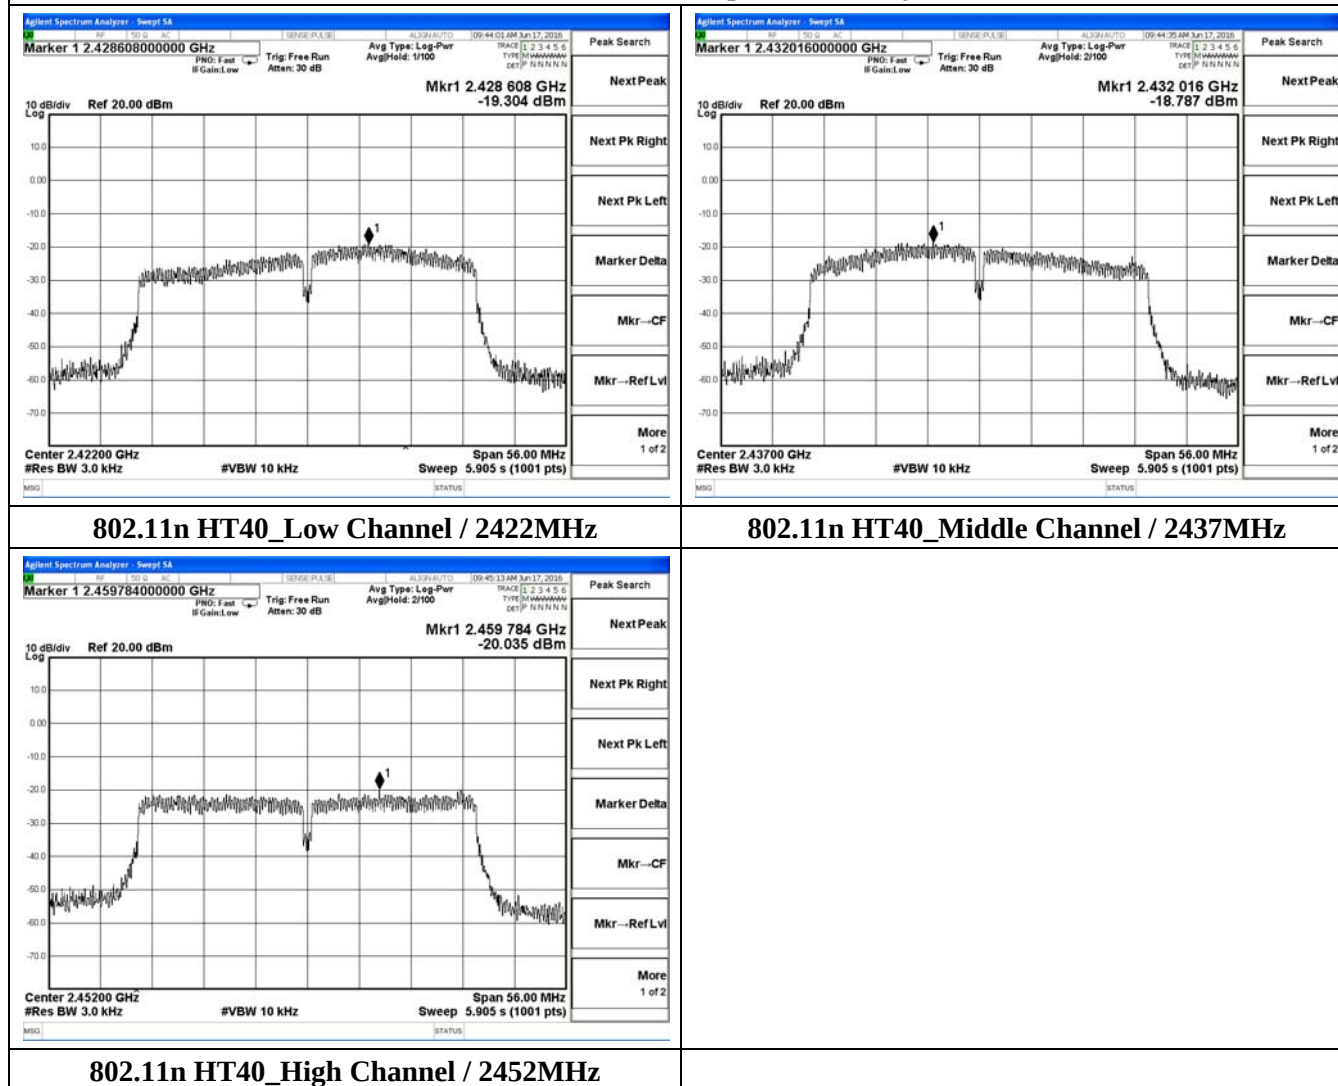

5.3. 6 dB Spectrum Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2. Instruments Setting


The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

5.3.3. Test Procedures

- 1) The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
- 2) The resolution bandwidth and the video bandwidth were set according to KDB558074 D01 DTS Meas. Guidance v03r05.
- 3) Measured the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.3.4. Test Setup Layout

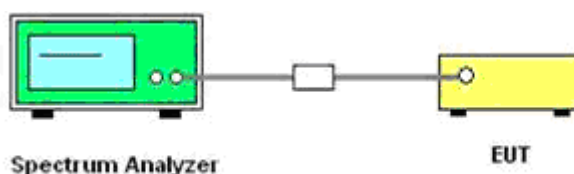

5.3.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Spectrum Bandwidth


Temperature	25°C	Humidity	60%
Test Engineer	Chaz	Configurations	BLE 4.0; 802.11b/g/n

Mode	Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
BLE 4.0	1	2402	0.6879	500	Complies
	20	2440	0.6918	500	Complies
	40	2480	0.6852	500	Complies
802.11b	1	2412	9.347	500	Complies
	6	2437	8.844	500	Complies
	11	2462	9.284	500	Complies
802.11g	1	2412	16.52	500	Complies
	6	2437	15.21	500	Complies
	11	2462	16.47	500	Complies
802.11n HT20	1	2412	17.74	500	Complies
	6	2437	17.23	500	Complies
	11	2462	17.42	500	Complies
802.11n HT40	3	2422	35.96	500	Complies
	6	2437	35.17	500	Complies
	9	2452	35.66	500	Complies


Test Result of 6dB Bandwidth

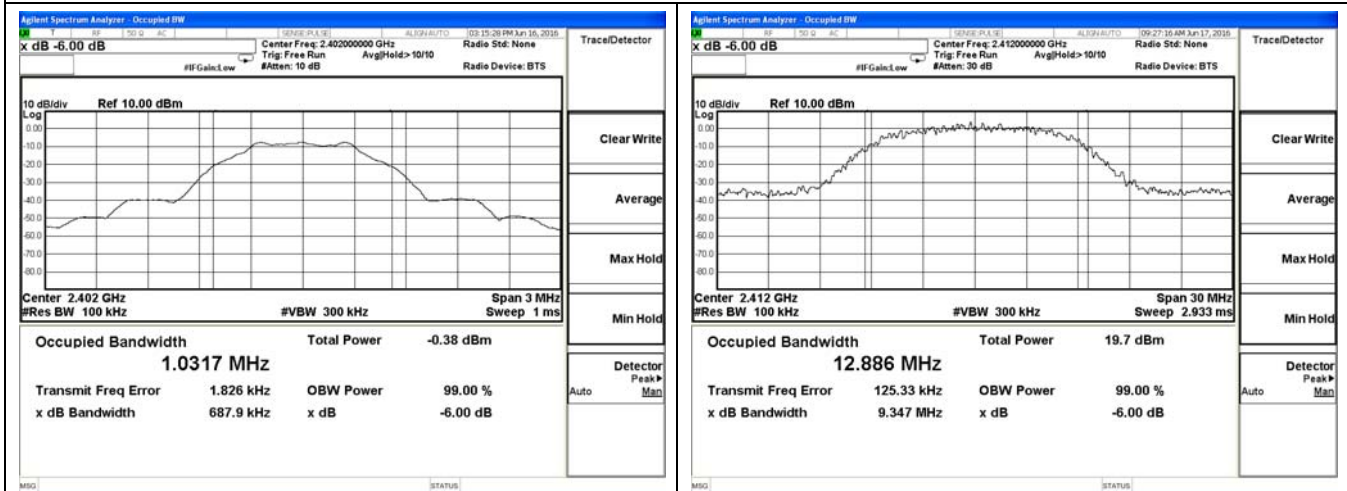


BLE 4.0_Low Channel / 2402MHz

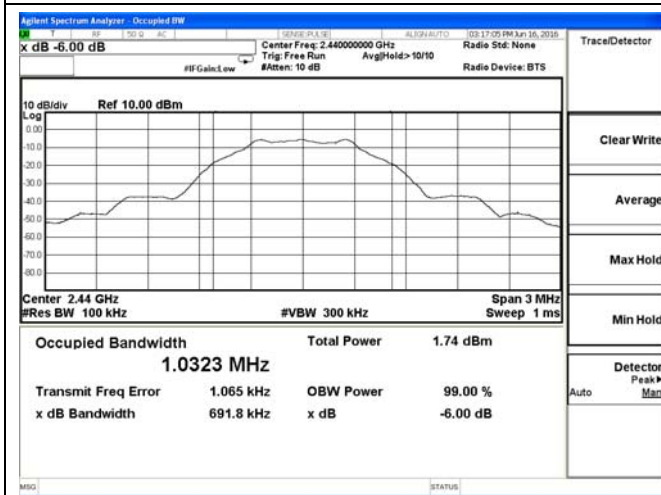

802.11b_Low Channel / 2412MHz

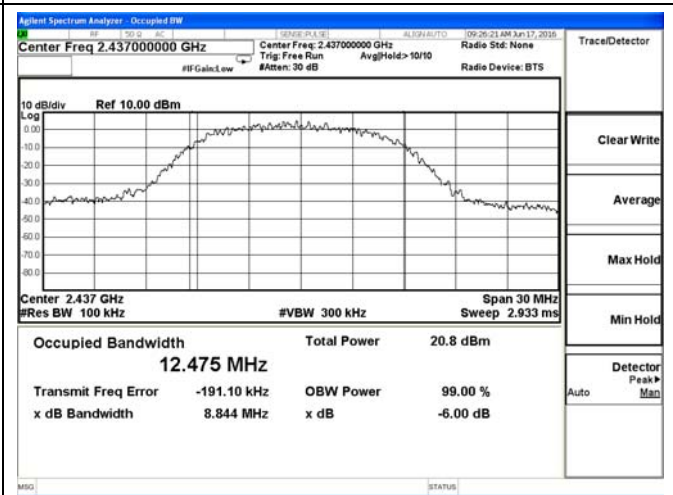


BLE 4.0_Middle Channel / 2440MHz

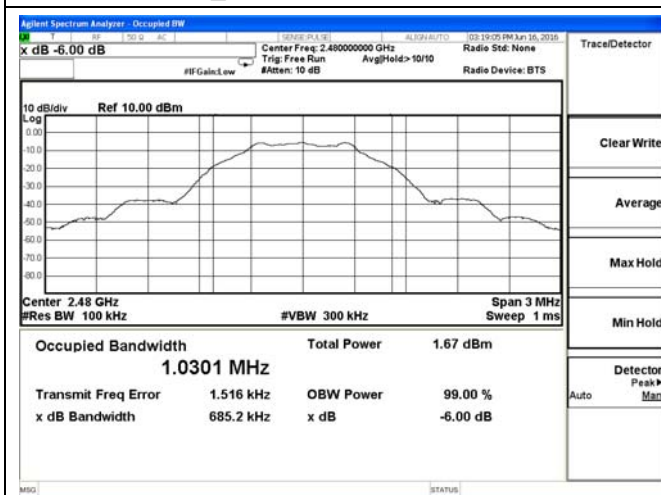


802.11b_Middle Channel / 2437MHz




BLE 4.0_High Channel / 2480MHz



802.11b_High Channel / 2462MHz




Test Result of 6dB Bandwidth

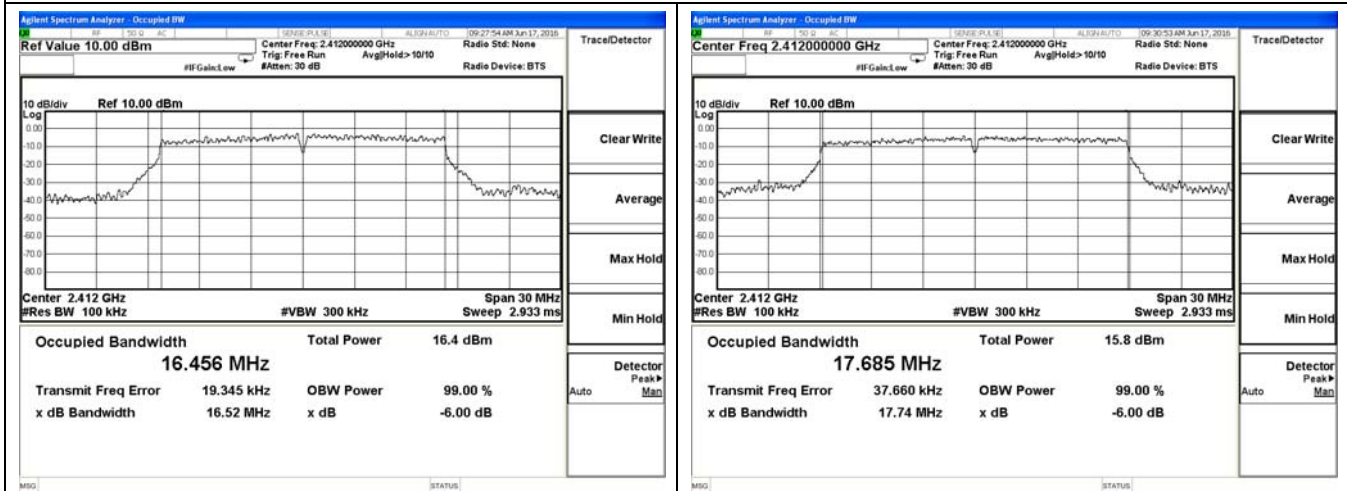


802.11g_Low Channel / 2412MHz

802.11n HT20_Low Channel / 2412MHz

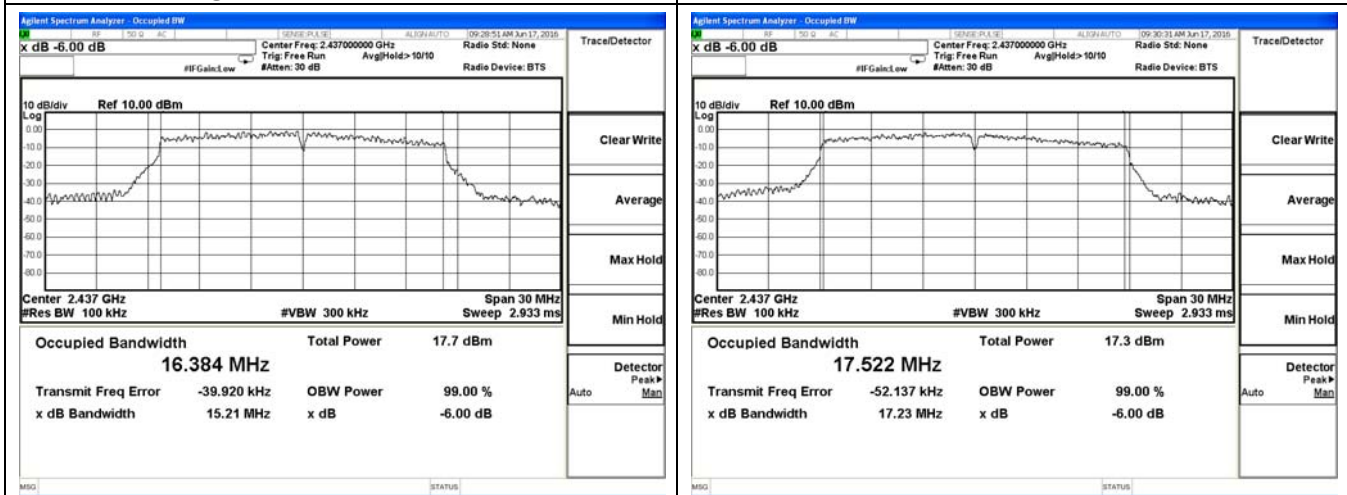

802.11g_Middle Channel / 2437MHz


802.11n HT20_Middle Channel / 2437MHz

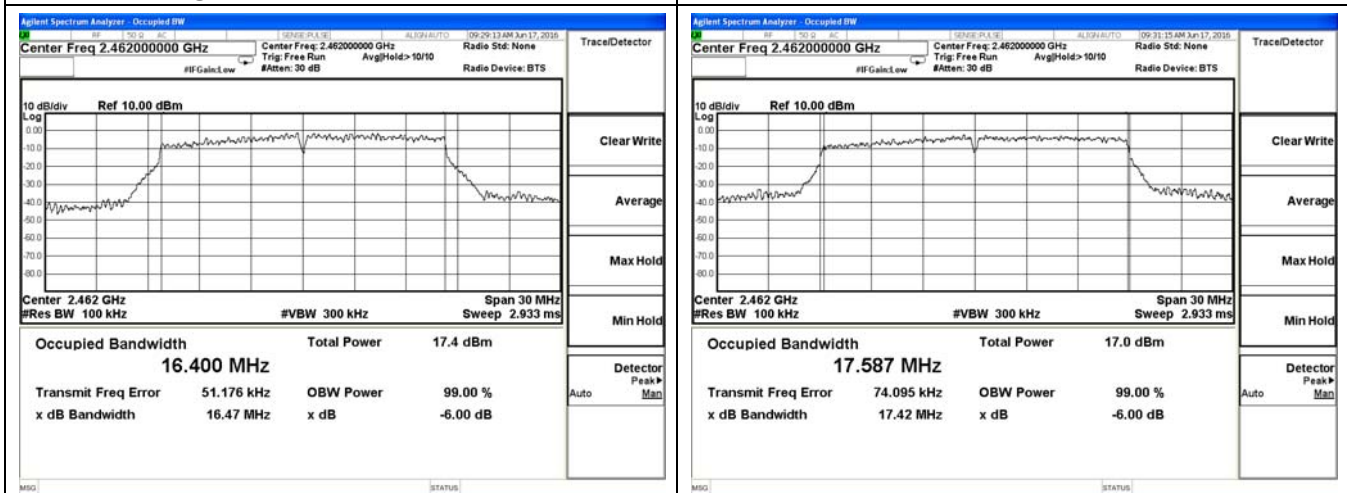


802.11g_High Channel / 2462MHz

802.11n HT20_High Channel / 2462MHz

Test Result of 6dB Bandwidth

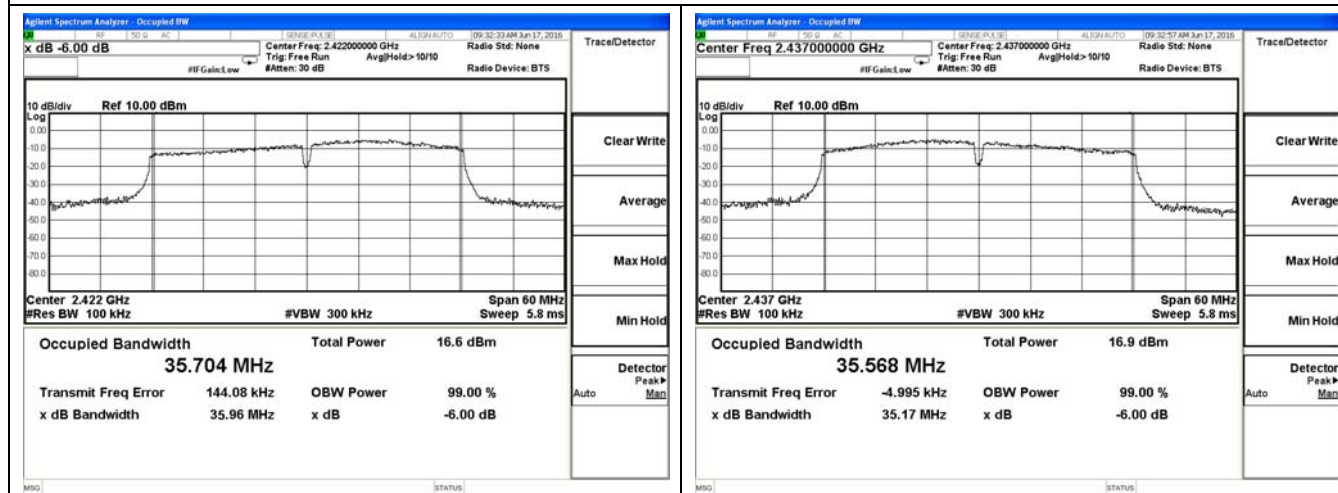

802.11n HT40_Low Channel / 2422MHz

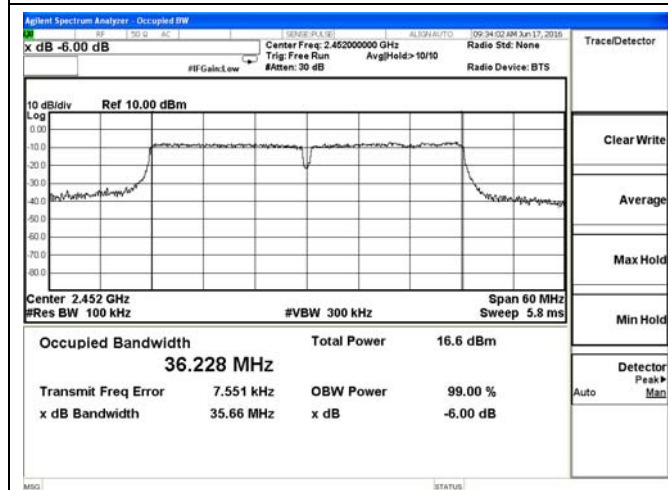

802.11n HT40_Middle Channel / 2437MHz



802.11n HT40_High Channel / 2452MHz



5.4. Radiated Emissions Measurement

5.4.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

5.4.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.



Premeasurement:


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.4.4. Test Setup Layout

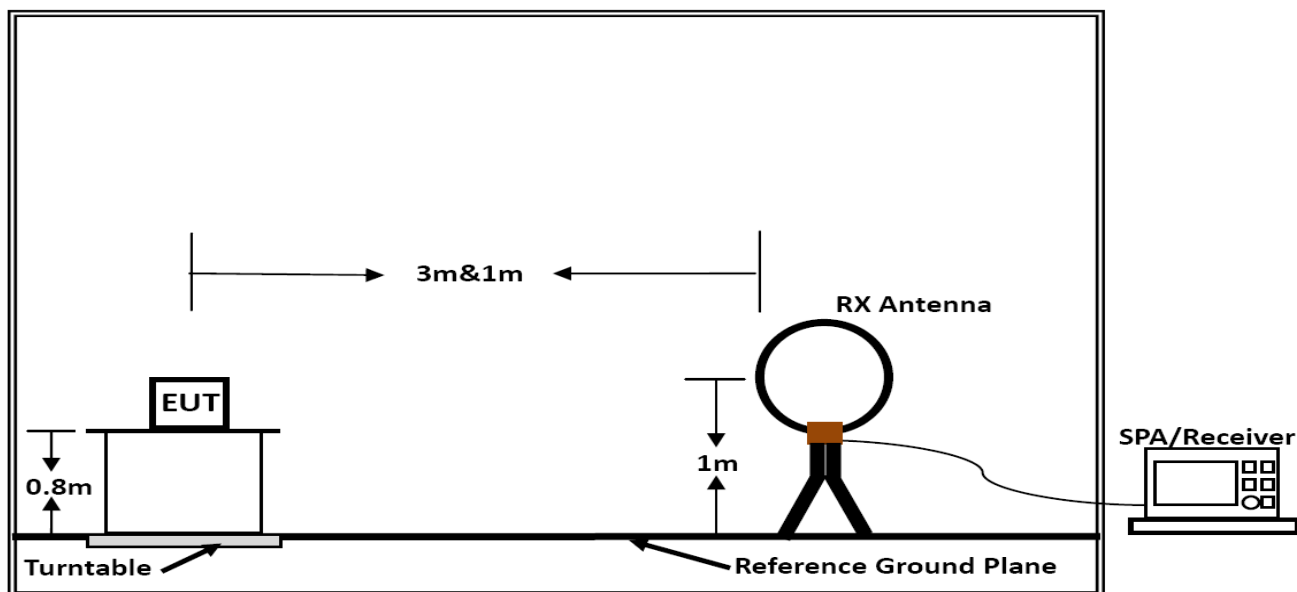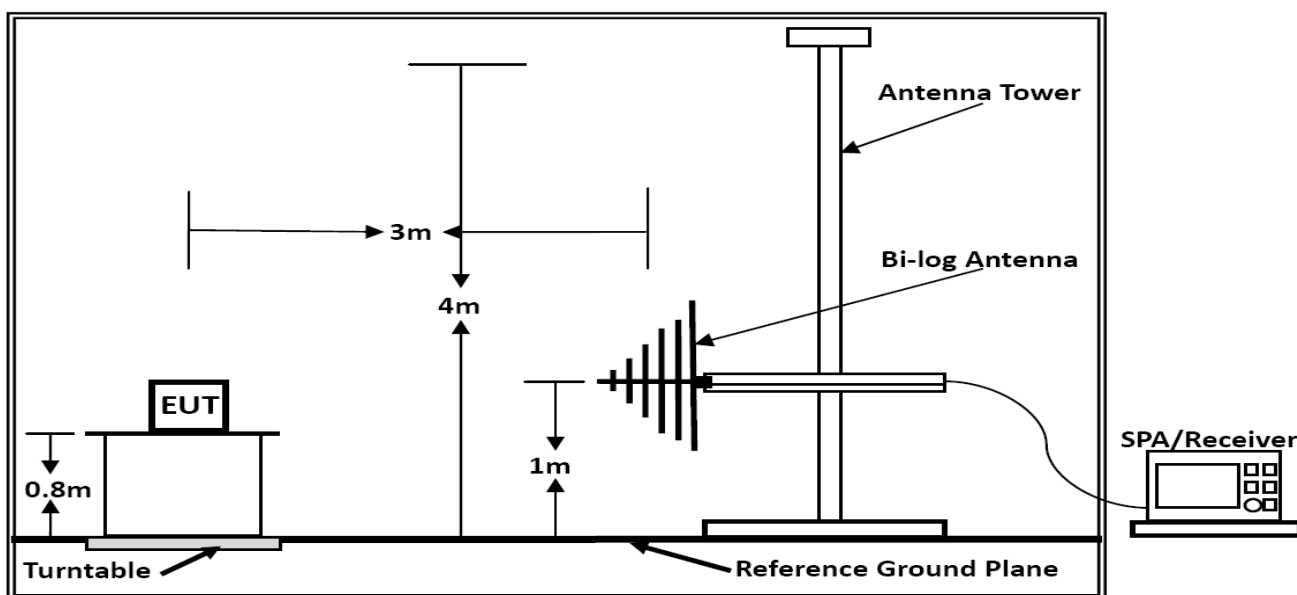**Below 30MHz****Below 1GHz**

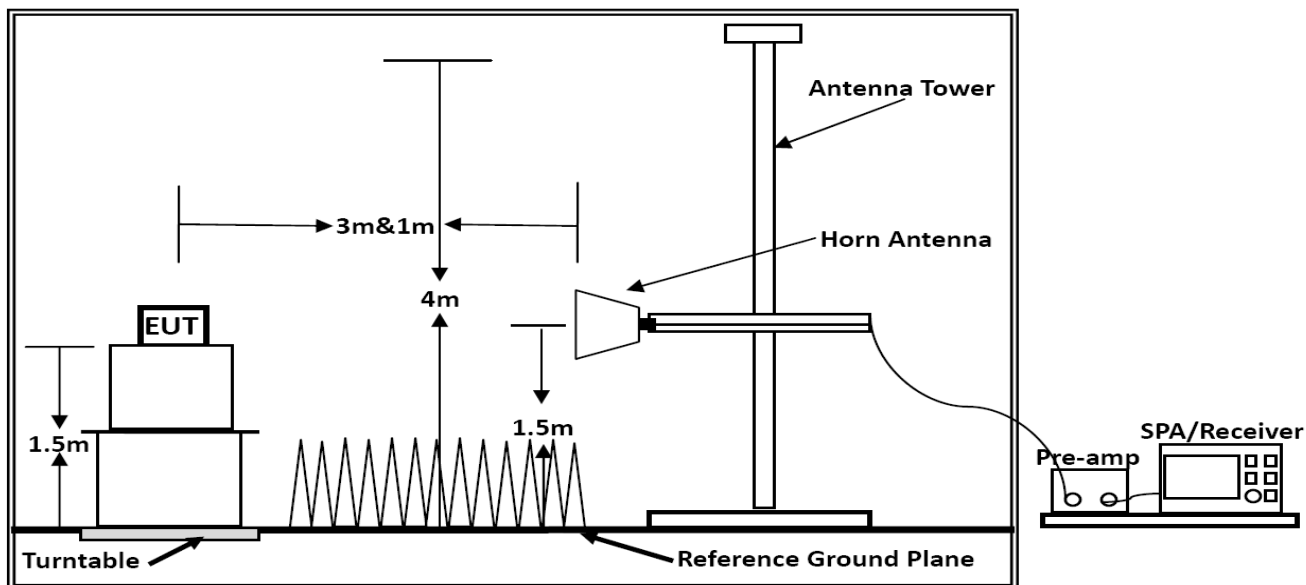

Above 1GHz

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Results of Radiated Emissions (9 kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Chaz	Configurations	BLE 4.0; 802.11b/g/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The radiated emissions from 9 kHz to 30MHz are at least 20dB below the official limit and no need to report.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	60%
Test Engineer	Chaz	Configurations	BLE 4.0 (High Channel)

Horizontal:

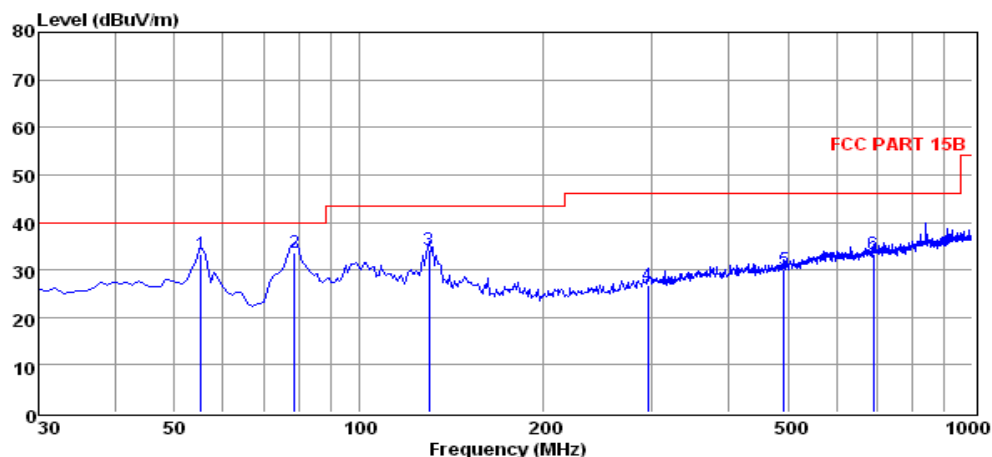


	Freq MHz	Reading dBUV	CabLos dB	Antfac dB/m	Measured dBUV/m	Limit dBUV/m	Over dB	Remark
1	55.22	19.70	0.46	13.01	33.17	40.00	-6.83	QP
2	78.50	24.81	0.47	8.32	33.60	40.00	-6.40	QP
3	129.91	24.43	0.76	8.94	34.13	43.50	-9.37	QP
4	295.78	12.59	1.08	12.98	26.65	46.00	-19.35	QP
5	492.69	12.08	1.50	16.39	29.97	46.00	-16.03	QP
6	690.57	12.93	1.60	18.78	33.31	46.00	-12.69	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

Vertical:

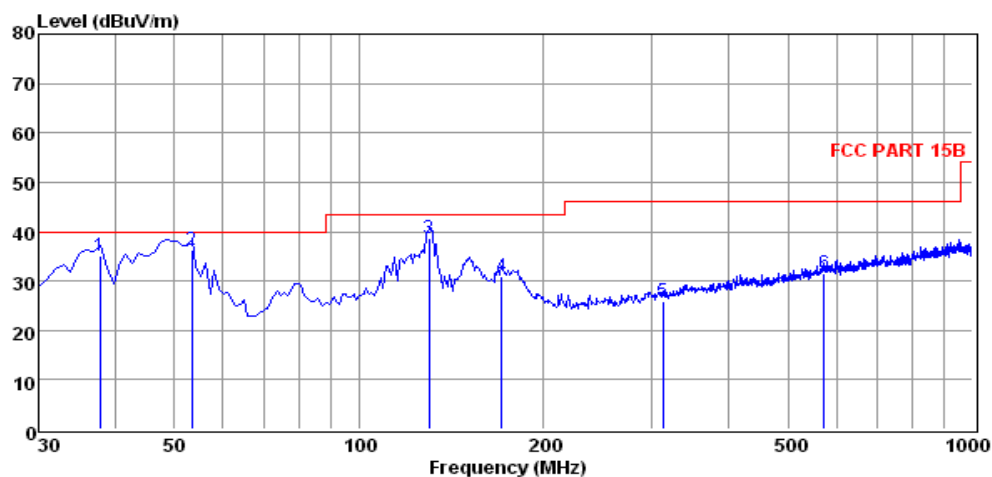

	Freq MHz	Reading dBUV	CabLos dB	Antfac dB/m	Measured dBUV/m	Limit dBUV/m	Over dB	Remark
1	37.76	21.85	0.38	13.01	35.24	40.00	-4.76	QP
2	53.28	22.77	0.46	13.10	36.33	40.00	-3.67	QP
3	129.91	28.98	0.76	8.94	38.68	43.50	-4.82	QP
4	170.65	21.05	0.80	9.02	30.87	43.50	-12.63	QP
5	313.24	11.53	1.09	13.24	25.86	46.00	-20.14	QP
6	572.23	12.08	1.49	17.93	31.50	46.00	-14.50	QP


Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

Temperature	25°C	Humidity	60%
Test Engineer	Chaz	Configurations	802.11b (Middle Channel)

Horizontal:

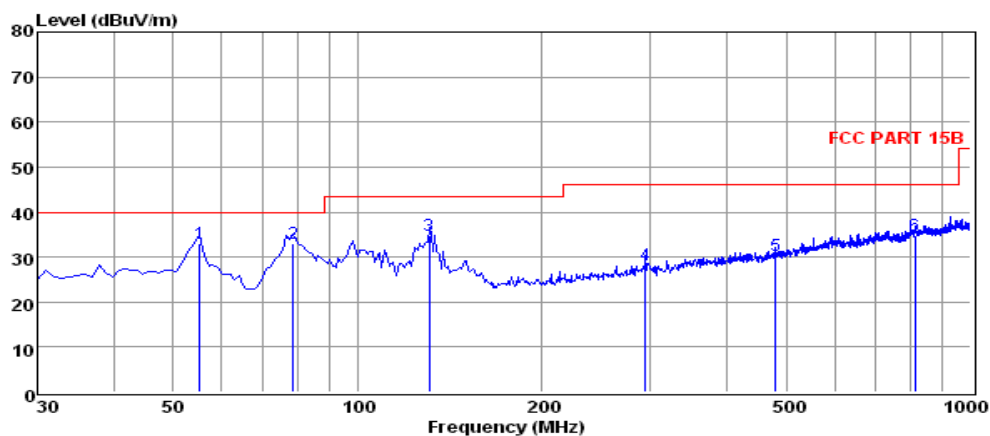


	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	55.22	19.56	0.46	13.01	33.03	40.00	-6.97	QP
2	78.50	24.31	0.47	8.32	33.10	40.00	-6.90	QP
3	130.88	25.06	0.76	8.86	34.68	43.50	-8.82	QP
4	294.81	14.32	1.08	12.96	28.36	46.00	-17.64	QP
5	480.08	12.83	1.31	16.07	30.21	46.00	-15.79	QP
6	812.79	12.86	1.78	20.19	34.83	46.00	-11.17	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

Vertical:

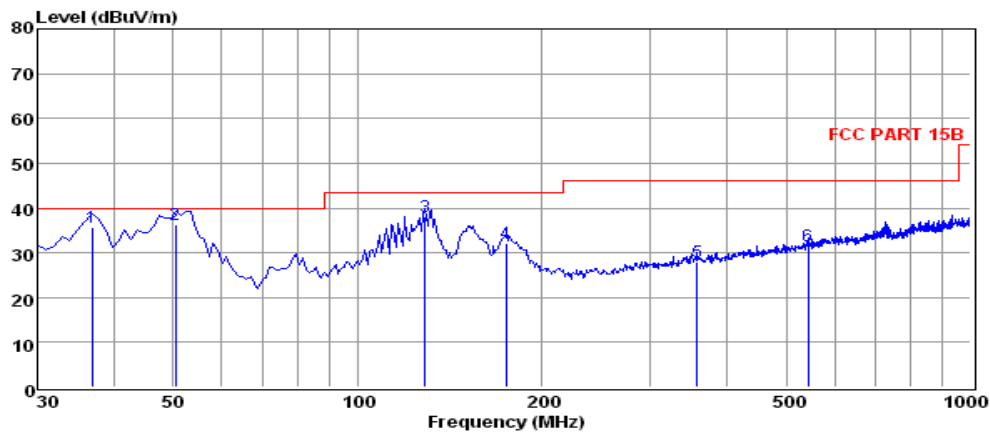

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	36.79	22.43	0.41	12.76	35.60	40.00	-4.40	QP
2	50.37	22.43	0.54	13.23	36.20	40.00	-3.80	QP
3	128.94	28.18	0.67	9.09	37.94	43.50	-5.56	QP
4	174.53	22.19	0.73	9.29	32.21	43.50	-11.29	QP
5	357.86	12.32	1.18	14.40	27.90	46.00	-18.10	QP
6	543.13	12.60	1.44	17.39	31.43	46.00	-14.57	QP

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

***Note:

Pre-scan all modes and recorded the worst case results in this report (802.11b (TX-High Channel)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.4.8. Results for Radiated Emissions (Above 1GHz)

Note: Only recorded the worst test result.

BLE 4.0

TX-Low Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.0	45.30	33.06	35.04	3.94	47.26	74	-26.74	Peak	Horizontal
4804.0	35.57	33.06	35.04	3.94	37.53	54	-16.47	Average	Horizontal
4804.0	47.02	33.06	35.04	3.94	48.98	74	-25.02	Peak	Vertical
4804.0	37.22	33.06	35.04	3.94	39.18	54	-14.82	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.0	44.15	33.16	35.15	3.96	46.12	74	-27.88	Peak	Horizontal
4880.0	34.58	33.16	35.15	3.96	36.55	54	-17.45	Average	Horizontal
4880.0	46.12	33.16	35.15	3.96	48.09	74	-25.91	Peak	Vertical
4880.0	36.21	33.16	35.15	3.96	38.18	54	-15.82	Average	Vertical

TX-High Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.0	44.42	33.26	35.14	3.98	46.52	74	-27.48	Peak	Horizontal
4960.0	34.67	33.26	35.14	3.98	36.77	54	-17.23	Average	Horizontal
4960.0	46.15	33.26	35.14	3.98	48.25	74	-25.75	Peak	Vertical
4960.0	36.54	33.26	35.14	3.98	38.64	54	-15.36	Average	Vertical

802.11b

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.0	50.14	33.06	35.04	3.94	52.10	74	-21.90	Peak	Horizontal
4824.0	38.47	33.06	35.04	3.94	40.43	54	-13.57	Average	Horizontal
4824.0	51.23	33.06	35.04	3.94	53.19	74	-20.81	Peak	Vertical
4824.0	42.21	33.06	35.04	3.94	44.17	54	-9.83	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.0	48.82	33.16	35.15	3.96	50.79	74	-23.21	Peak	Horizontal
4874.0	39.58	33.16	35.15	3.96	41.55	54	-12.45	Average	Horizontal
4874.0	50.19	33.16	35.15	3.96	52.16	74	-21.84	Peak	Vertical
4874.0	40.60	33.16	35.15	3.96	42.57	54	-11.43	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.0	48.74	33.26	35.14	3.98	50.84	74	-23.16	Peak	Horizontal
4924.0	38.26	33.26	35.14	3.98	40.36	54	-13.64	Average	Horizontal
4924.0	50.18	33.26	35.14	3.98	52.28	74	-21.72	Peak	Vertical
4924.0	40.39	33.26	35.14	3.98	42.49	54	-11.51	Average	Vertical

802.11g

TX-Low Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.0	48.77	33.06	35.04	3.94	50.73	74	-23.27	Peak	Horizontal
4824.0	39.16	33.06	35.04	3.94	41.12	54	-12.88	Average	Horizontal
4824.0	50.02	33.06	35.04	3.94	51.98	74	-22.02	Peak	Vertical
4824.0	40.45	33.06	35.04	3.94	42.41	54	-11.59	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.0	47.23	33.16	35.15	3.96	49.20	74	-24.80	Peak	Horizontal
4874.0	38.52	33.16	35.15	3.96	40.49	54	-13.51	Average	Horizontal
4874.0	49.06	33.16	35.15	3.96	51.03	74	-22.97	Peak	Vertical
4874.0	39.26	33.16	35.15	3.96	41.23	54	-12.77	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.0	49.39	33.26	35.14	3.98	51.49	74	-22.51	Peak	Horizontal
4924.0	39.54	33.26	35.14	3.98	41.64	54	-12.36	Average	Horizontal
4924.0	50.55	33.26	35.14	3.98	52.65	74	-21.35	Peak	Vertical
4924.0	40.88	33.26	35.14	3.98	42.98	54	-11.02	Average	Vertical

802.11n HT20

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.0	49.67	33.06	35.04	3.94	51.63	74	-22.37	Peak	Horizontal
4824.0	39.23	33.06	35.04	3.94	41.19	54	-12.81	Average	Horizontal
4824.0	50.22	33.06	35.04	3.94	52.18	74	-21.82	Peak	Vertical
4824.0	40.37	33.06	35.04	3.94	42.33	54	-11.67	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.0	46.43	33.16	35.15	3.96	48.40	74	-25.60	Peak	Horizontal
4874.0	36.43	33.16	35.15	3.96	38.40	54	-15.60	Average	Horizontal
4874.0	48.38	33.16	35.15	3.96	50.35	74	-23.65	Peak	Vertical
4874.0	39.26	33.16	35.15	3.96	41.23	54	-12.77	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.0	48.44	33.26	35.14	3.98	50.54	74	-23.46	Peak	Horizontal
4924.0	38.96	33.26	35.14	3.98	41.06	54	-12.94	Average	Horizontal
4924.0	49.99	33.26	35.14	3.98	52.09	74	-21.91	Peak	Vertical
4924.0	40.51	33.26	35.14	3.98	42.61	54	-11.39	Average	Vertical

802.11n HT40

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4844.0	47.70	33.06	35.04	3.94	49.66	74	-24.34	Peak	Horizontal
4844.0	37.43	33.06	35.04	3.94	39.39	54	-14.61	Average	Horizontal
4844.0	49.05	33.06	35.04	3.94	51.01	74	-22.99	Peak	Vertical
4844.0	39.06	33.06	35.04	3.94	41.02	54	-12.98	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.0	48.16	33.16	35.15	3.96	50.13	74	-23.87	Peak	Horizontal
4874.0	38.08	33.16	35.15	3.96	40.05	54	-13.95	Average	Horizontal
4874.0	49.11	33.16	35.15	3.96	51.08	74	-22.92	Peak	Vertical
4874.0	38.87	33.16	35.15	3.96	40.84	54	-13.16	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4904.0	46.82	33.26	35.14	3.98	48.92	74	-25.08	Peak	Horizontal
4904.0	36.81	33.26	35.14	3.98	38.91	54	-15.09	Average	Horizontal
4904.0	47.77	33.26	35.14	3.98	49.87	74	-24.13	Peak	Vertical
4904.0	38.45	33.26	35.14	3.98	40.55	54	-13.45	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 25GHz are at least 20dB below the official limit and no need to report.

5.4.9. Results of Band Edges Test (Radiated)

Note: Only recorded the worst test result.

BLE 4.0

TX-Low Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2375.8	43.27	32.89	35.16	3.51	44.51	74	-29.49	Peak	Horizontal
2377.8	34.31	32.90	35.16	3.51	35.56	54	-18.44	Average	Horizontal
2390.0	45.44	32.92	35.16	3.54	46.74	74	-27.26	Peak	Horizontal
2390.0	36.23	32.92	35.16	3.54	37.53	54	-16.47	Average	Horizontal
2400.0	51.20	32.92	35.16	3.54	52.50	74	-21.50	Peak	Horizontal
2400.0	41.43	32.92	35.16	3.54	42.73	54	-11.27	Average	Horizontal
2375.8	43.27	32.89	35.16	3.51	44.51	74	-29.49	Peak	Vertical
2377.8	34.19	32.90	35.16	3.51	35.44	54	-18.56	Average	Vertical
2390.0	45.67	32.92	35.16	3.54	46.97	74	-27.03	Peak	Vertical
2390.0	35.66	32.92	35.16	3.54	36.96	54	-17.04	Average	Vertical
2400.0	51.95	32.92	35.16	3.54	53.25	74	-20.75	Peak	Vertical
2400.0	42.69	32.92	35.16	3.54	43.99	54	-10.01	Average	Vertical

TX-High Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.5	45.23	33.06	35.18	3.60	46.71	74	-27.29	Peak	Horizontal
2483.5	35.82	33.08	35.18	3.60	37.32	54	-16.68	Average	Horizontal
2487.5	42.65	33.08	35.18	3.62	44.17	74	-29.83	Peak	Horizontal
2487.5	32.44	33.08	35.18	3.62	33.96	54	-20.04	Average	Horizontal
2483.5	46.44	33.06	35.18	3.60	47.92	74	-26.08	Peak	Vertical
2483.5	36.83	33.08	35.18	3.60	38.33	54	-15.67	Average	Vertical
2487.5	43.81	33.08	35.18	3.62	45.33	74	-28.67	Peak	Vertical
2487.5	34.32	33.08	35.18	3.62	35.84	54	-18.16	Average	Vertical

802.11b

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2377.1	44.66	32.89	35.16	3.51	45.90	74	-28.10	Peak	Horizontal
2377.1	35.14	32.90	35.16	3.51	36.39	54	-17.61	Average	Horizontal
2390.0	48.16	32.92	35.16	3.54	49.46	74	-24.54	Peak	Horizontal
2390.0	37.35	32.92	35.16	3.54	38.65	54	-15.35	Average	Horizontal
2400.0	54.09	32.92	35.16	3.54	55.39	74	-18.61	Peak	Horizontal
2400.0	43.81	32.92	35.16	3.54	45.11	54	-8.89	Average	Horizontal
2377.1	45.47	32.89	35.16	3.51	46.71	74	-27.29	Peak	Vertical
2377.1	36.23	32.90	35.16	3.51	37.48	54	-16.52	Average	Vertical
2390.0	48.12	32.92	35.16	3.54	49.42	74	-24.58	Peak	Vertical
2390.0	37.96	32.92	35.16	3.54	39.26	54	-14.74	Average	Vertical
2400.0	55.95	32.92	35.16	3.54	57.25	74	-16.75	Peak	Vertical
2400.0	46.05	32.92	35.16	3.54	47.35	54	-6.65	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.5	47.42	33.06	35.18	3.60	48.90	74	-25.10	Peak	Horizontal
2483.5	36.64	33.08	35.18	3.60	38.14	54	-15.86	Average	Horizontal
2487.3	45.46	33.08	35.18	3.62	46.98	74	-27.02	Peak	Horizontal
2487.3	34.48	33.08	35.18	3.62	36.00	54	-18.00	Average	Horizontal
2483.5	48.67	33.06	35.18	3.60	50.15	74	-23.85	Peak	Vertical
2483.5	37.75	33.08	35.18	3.60	39.25	54	-14.75	Average	Vertical
2487.3	46.08	33.08	35.18	3.62	47.60	74	-26.40	Peak	Vertical
2487.3	37.00	33.08	35.18	3.62	38.52	54	-15.48	Average	Vertical

802.11g

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2378.5	45.08	32.89	35.16	3.51	46.32	74	-27.68	Peak	Horizontal
2378.5	34.54	32.90	35.16	3.51	35.79	54	-18.21	Average	Horizontal
2390.0	48.49	32.92	35.16	3.54	49.79	74	-24.21	Peak	Horizontal
2390.0	38.15	32.92	35.16	3.54	39.45	54	-14.55	Average	Horizontal
2400.0	52.53	32.92	35.16	3.54	53.83	74	-20.17	Peak	Horizontal
2400.0	42.09	32.92	35.16	3.54	43.39	54	-10.61	Average	Horizontal
2378.5	46.67	32.89	35.16	3.51	47.91	74	-26.09	Peak	Vertical
2378.5	36.35	32.90	35.16	3.51	37.60	54	-16.40	Average	Vertical
2390.0	50.02	32.92	35.16	3.54	51.32	74	-22.68	Peak	Vertical
2390.0	38.20	32.92	35.16	3.54	39.50	54	-14.50	Average	Vertical
2400.0	54.18	32.92	35.16	3.54	55.48	74	-18.52	Peak	Vertical
2400.0	43.70	32.92	35.16	3.54	45.00	54	-9.00	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.5	46.03	33.06	35.18	3.60	47.51	74	-26.49	Peak	Horizontal
2483.5	35.02	33.08	35.18	3.60	36.52	54	-17.48	Average	Horizontal
2486.7	47.93	33.08	35.18	3.62	49.45	74	-24.55	Peak	Horizontal
2486.7	35.39	33.08	35.18	3.62	36.91	54	-17.09	Average	Horizontal
2483.5	46.13	33.06	35.18	3.60	47.61	74	-26.39	Peak	Vertical
2483.5	35.93	33.08	35.18	3.60	37.43	54	-16.57	Average	Vertical
2486.7	48.34	33.08	35.18	3.62	49.86	74	-24.14	Peak	Vertical
2486.7	37.29	33.08	35.18	3.62	38.81	54	-15.19	Average	Vertical

802.11n (HT20)

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2377.5	46.92	32.89	35.16	3.51	48.16	74	-25.84	Peak	Horizontal
2377.5	35.54	32.9	35.16	3.51	36.79	54	-17.21	Average	Horizontal
2390.0	49.05	32.92	35.16	3.54	50.35	74	-23.65	Peak	Horizontal
2390.0	38.02	32.92	35.16	3.54	39.32	54	-14.68	Average	Horizontal
2400.0	55.54	32.92	35.16	3.54	56.84	74	-17.16	Peak	Horizontal
2400.0	44.84	32.92	35.16	3.54	46.14	54	-7.86	Average	Horizontal
2377.5	47.38	32.89	35.16	3.51	48.62	74	-25.38	Peak	Vertical
2377.5	36.68	32.9	35.16	3.51	37.93	54	-16.07	Average	Vertical
2390.0	49.69	32.92	35.16	3.54	50.99	74	-23.01	Peak	Vertical
2390.0	39.29	32.92	35.16	3.54	40.59	54	-13.41	Average	Vertical
2400.0	56.79	32.92	35.16	3.54	58.09	74	-15.91	Peak	Vertical
2400.0	45.81	32.92	35.16	3.54	47.11	54	-6.89	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.5	46.20	33.06	35.18	3.60	47.68	74	-26.32	Peak	Horizontal
2483.5	36.11	33.08	35.18	3.60	37.61	54	-16.39	Average	Horizontal
2487.4	47.70	33.08	35.18	3.62	49.22	74	-24.78	Peak	Horizontal
2487.4	37.47	33.08	35.18	3.62	38.99	54	-15.01	Average	Horizontal
2483.5	47.26	33.06	35.18	3.60	48.74	74	-25.26	Peak	Vertical
2483.5	37.86	33.08	35.18	3.60	39.36	54	-14.64	Average	Vertical
2487.4	48.63	33.08	35.18	3.62	50.15	74	-23.85	Peak	Vertical
2487.4	37.89	33.08	35.18	3.62	39.41	54	-14.59	Average	Vertical

802.11n (HT40)

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2378.6	48.63	32.89	35.16	3.51	49.87	74	-24.13	Peak	Horizontal
2378.6	37.87	32.90	35.16	3.51	39.12	54	-14.88	Average	Horizontal
2390.0	50.51	32.92	35.16	3.54	51.81	74	-22.19	Peak	Horizontal
2390.0	39.57	32.92	35.16	3.54	40.87	54	-13.13	Average	Horizontal
2400.0	51.69	32.92	35.16	3.54	52.99	74	-21.01	Peak	Horizontal
2400.0	41.77	32.92	35.16	3.54	43.07	54	-10.93	Average	Horizontal
2378.6	49.54	32.89	35.16	3.51	50.78	74	-23.22	Peak	Vertical
2378.6	39.64	32.90	35.16	3.51	40.89	54	-13.11	Average	Vertical
2390.0	51.25	32.92	35.16	3.54	52.55	74	-21.45	Peak	Vertical
2390.0	40.76	32.92	35.16	3.54	42.06	54	-11.94	Average	Vertical
2400.0	53.36	32.92	35.16	3.54	54.66	74	-19.34	Peak	Vertical
2400.0	44.65	32.92	35.16	3.54	45.95	54	-8.05	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.5	48.08	33.06	35.18	3.60	49.56	74	-24.44	Peak	Horizontal
2483.5	38.32	33.08	35.18	3.60	39.82	54	-14.18	Average	Horizontal
2488.8	49.19	33.08	35.18	3.62	50.71	74	-23.29	Peak	Horizontal
2488.8	38.99	33.08	35.18	3.62	40.51	54	-13.49	Average	Horizontal
2483.5	49.09	33.06	35.18	3.60	50.57	74	-23.43	Peak	Vertical
2483.5	38.75	33.08	35.18	3.60	40.25	54	-13.75	Average	Vertical
2488.8	49.73	33.08	35.18	3.62	51.25	74	-22.75	Peak	Vertical
2488.8	39.92	33.08	35.18	3.62	41.44	54	-12.56	Average	Vertical

5.5. Conducted Spurious Emissions and Band Edges Test

5.5.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.5.2. Instruments Setting

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.5.4. Test Setup Layout


This test setup layout is the same as that shown in section 5.3.4.

5.5.5. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

5.5.6. Test Results of Conducted Spurious Emissions


Test Result of Conducted Spurious Emissions

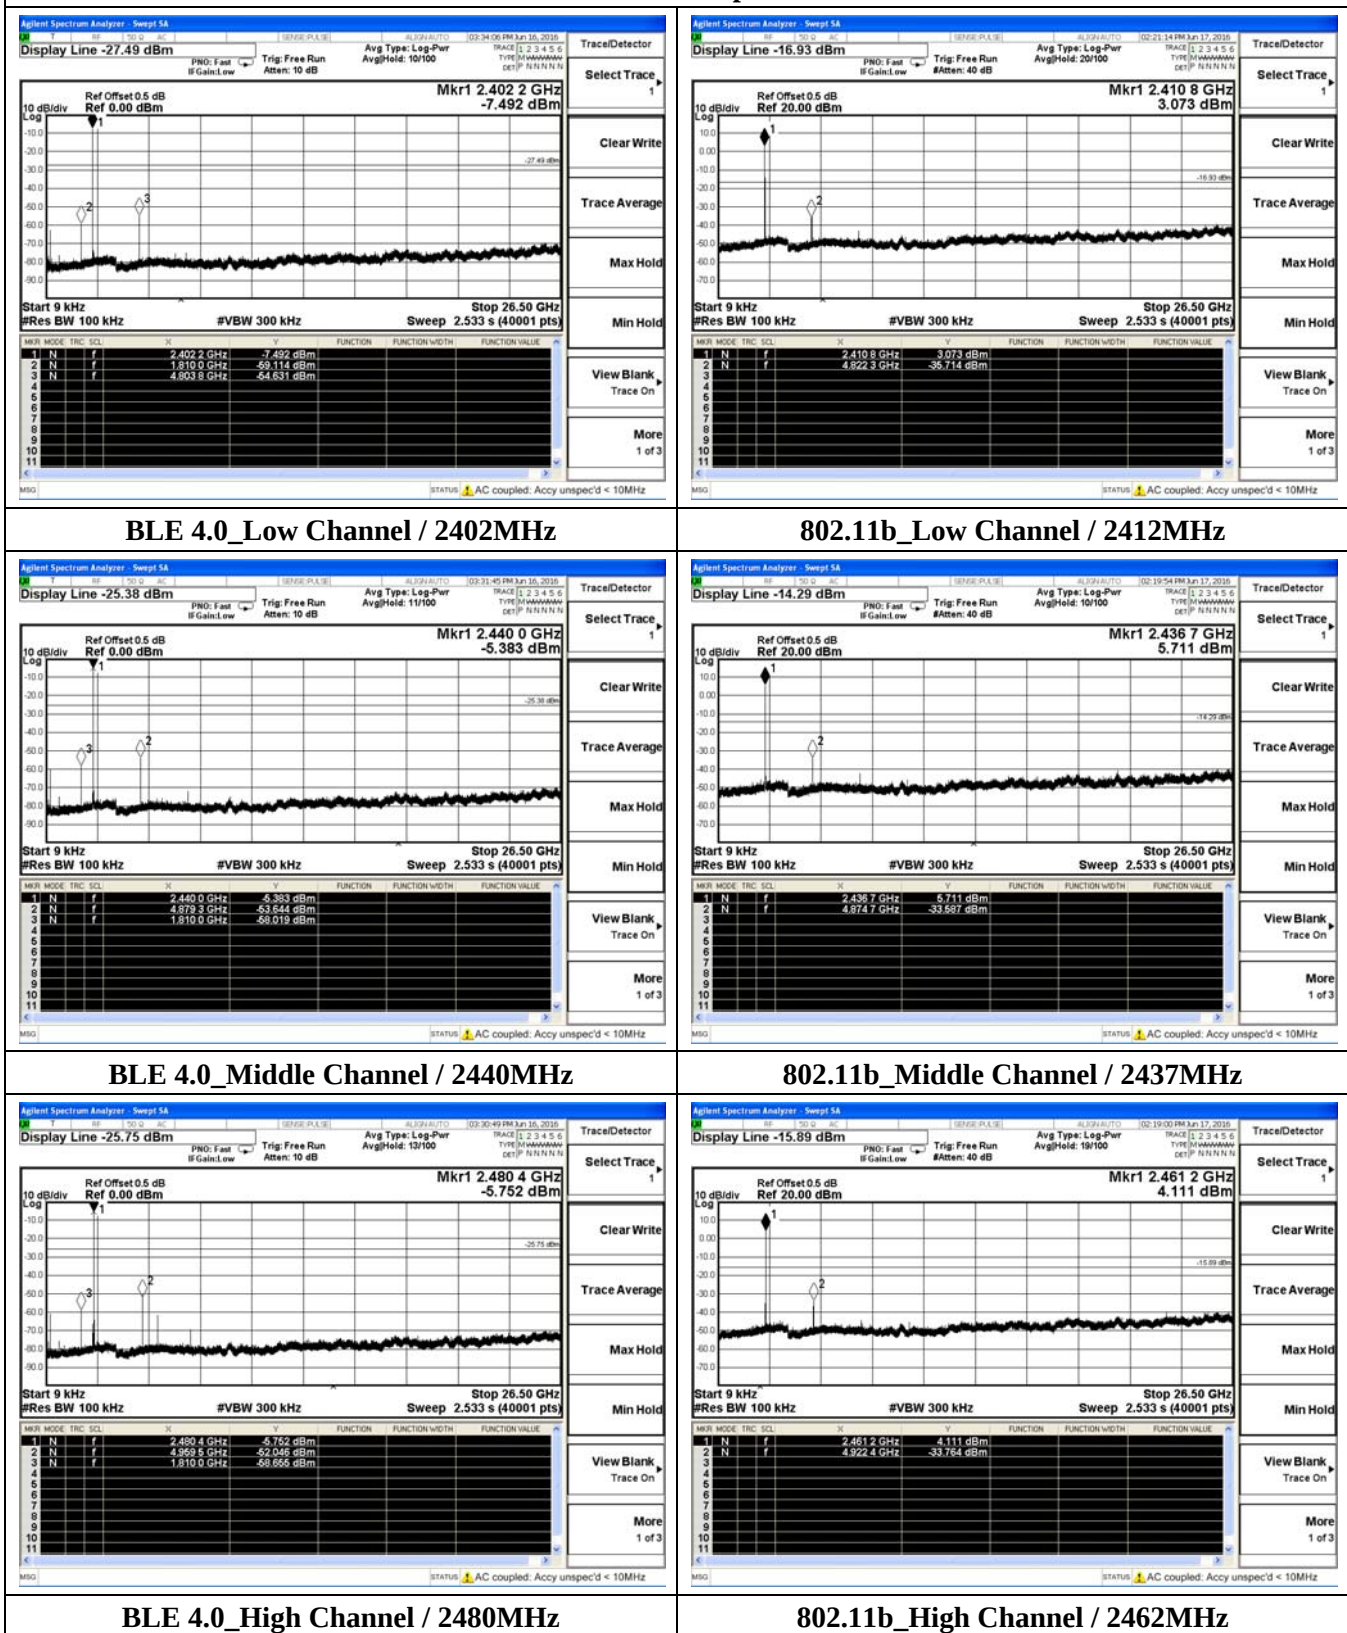

Test Result of Conducted Spurious Emissions

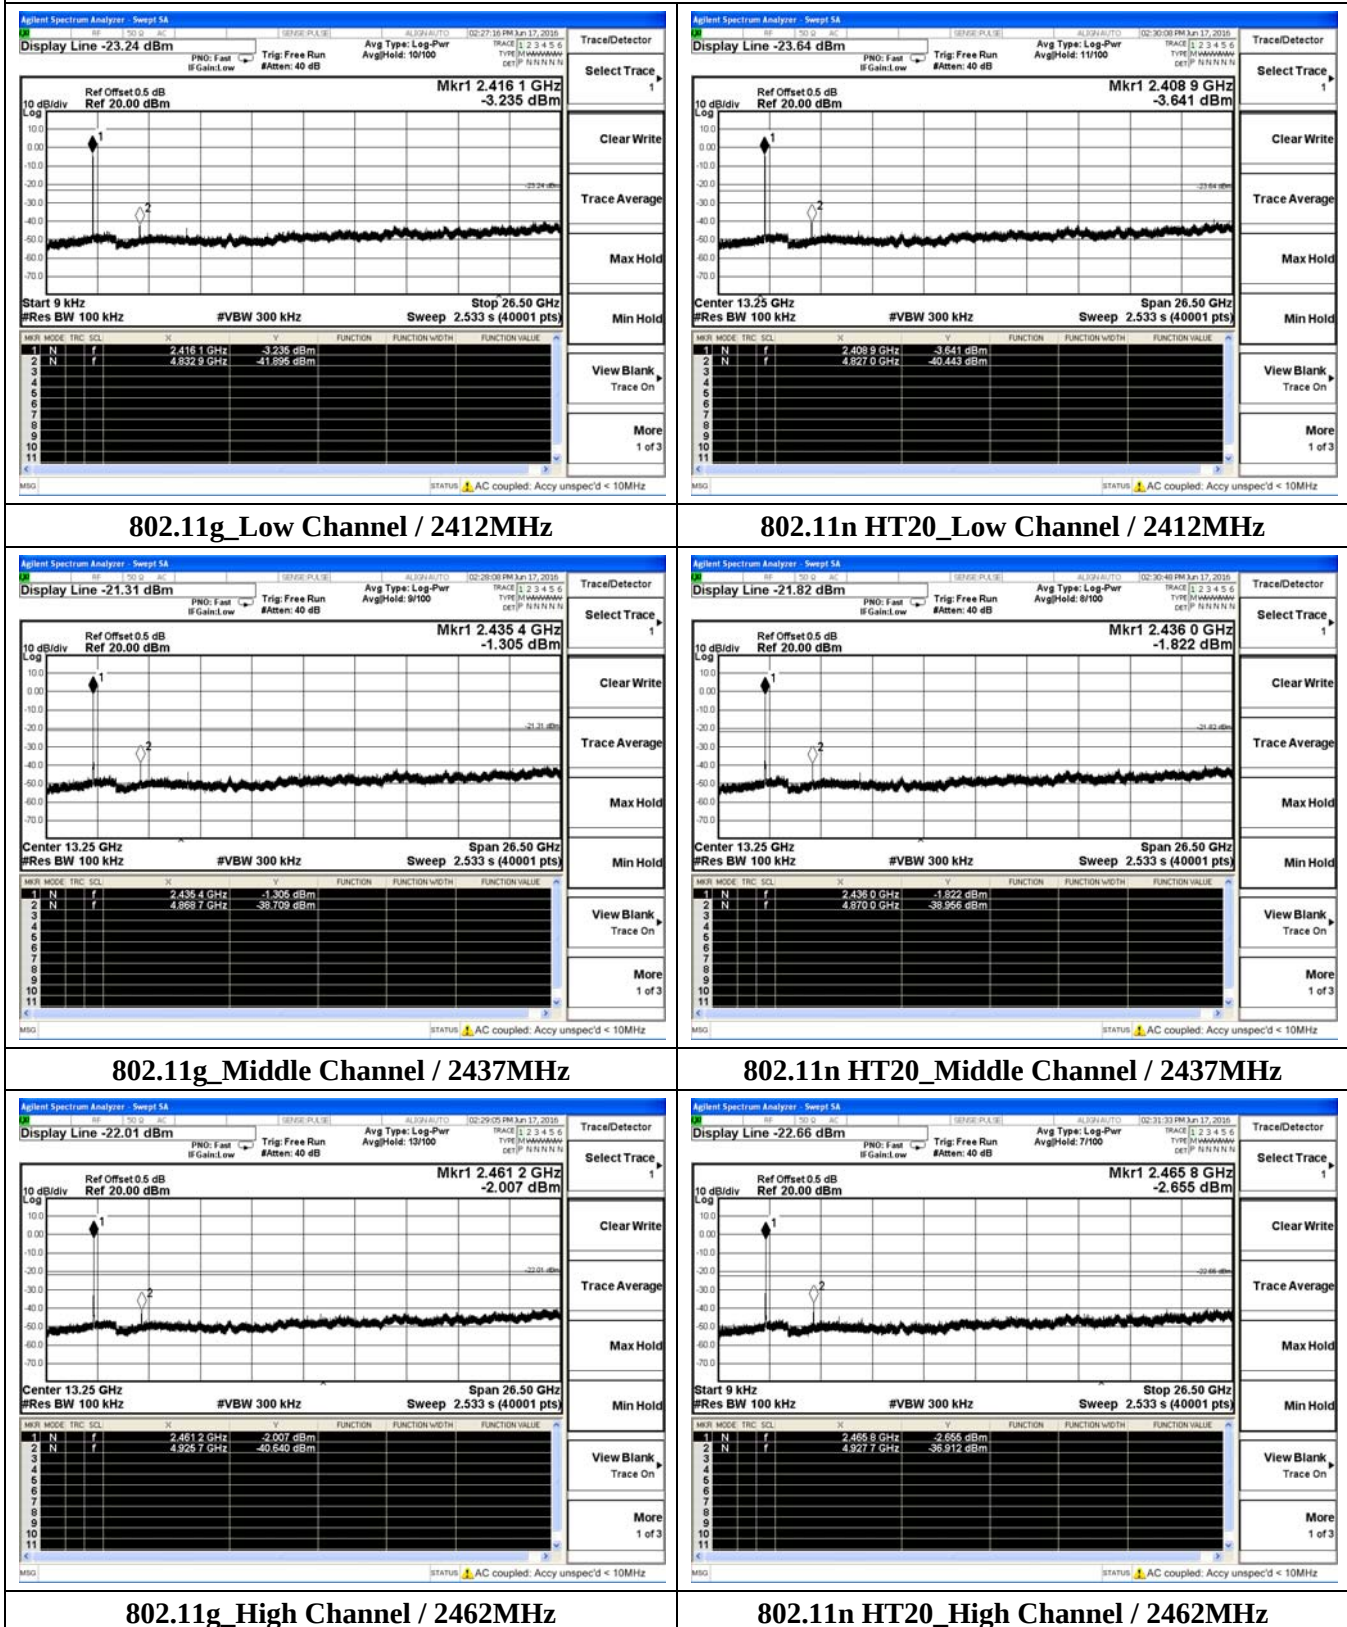


Test Result of Conducted Spurious Emissions

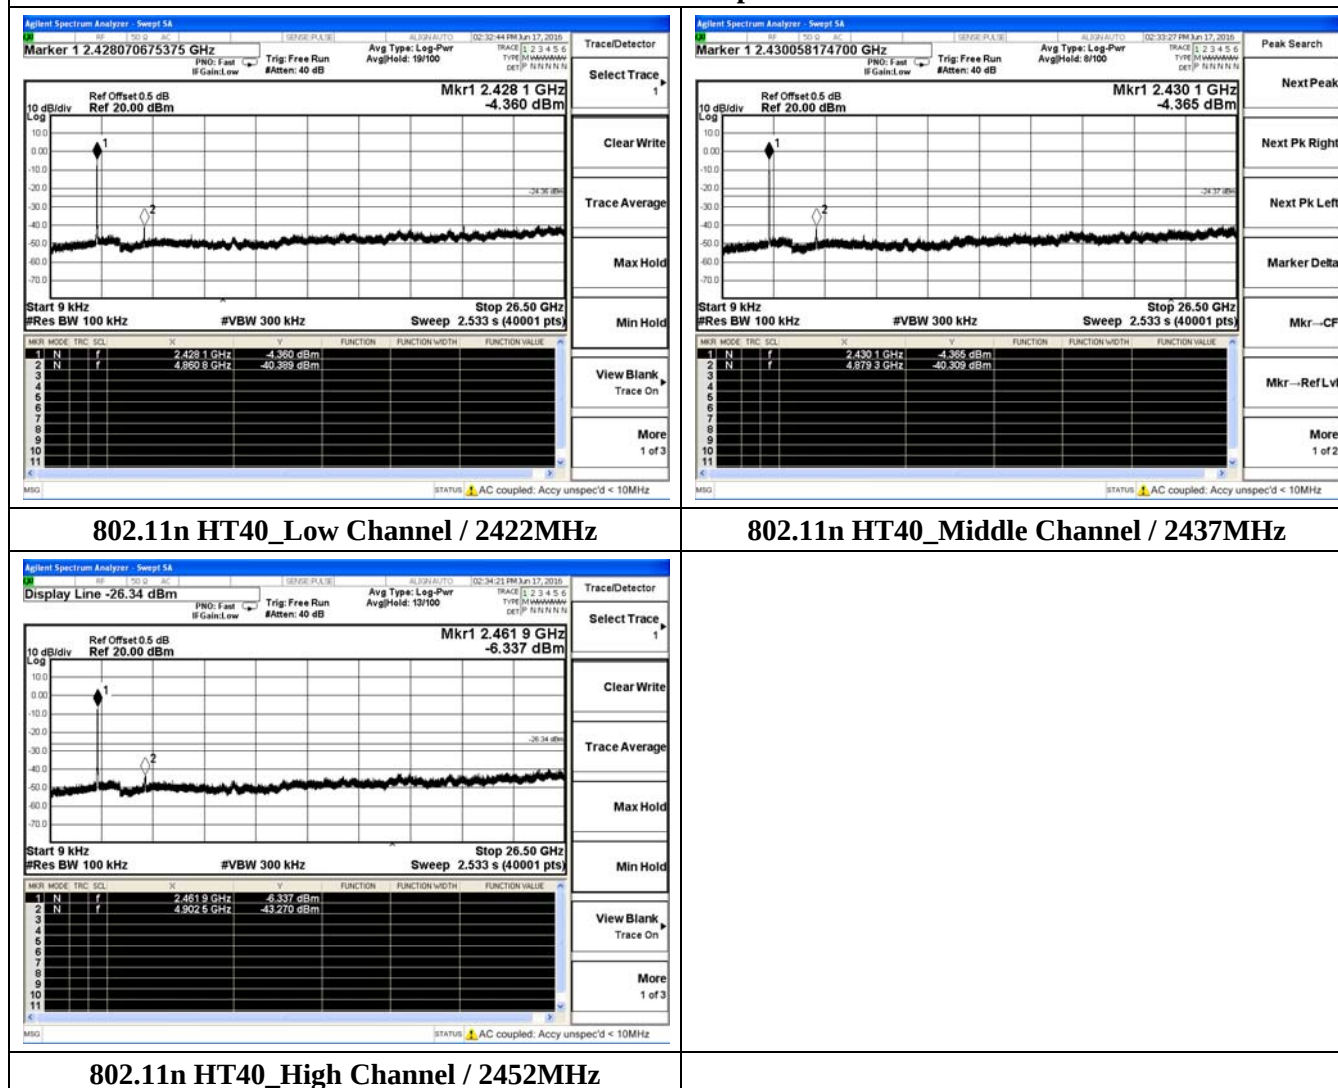


5.5.7. Test Results of Band Edges Test

Test Result of Band Edges Test

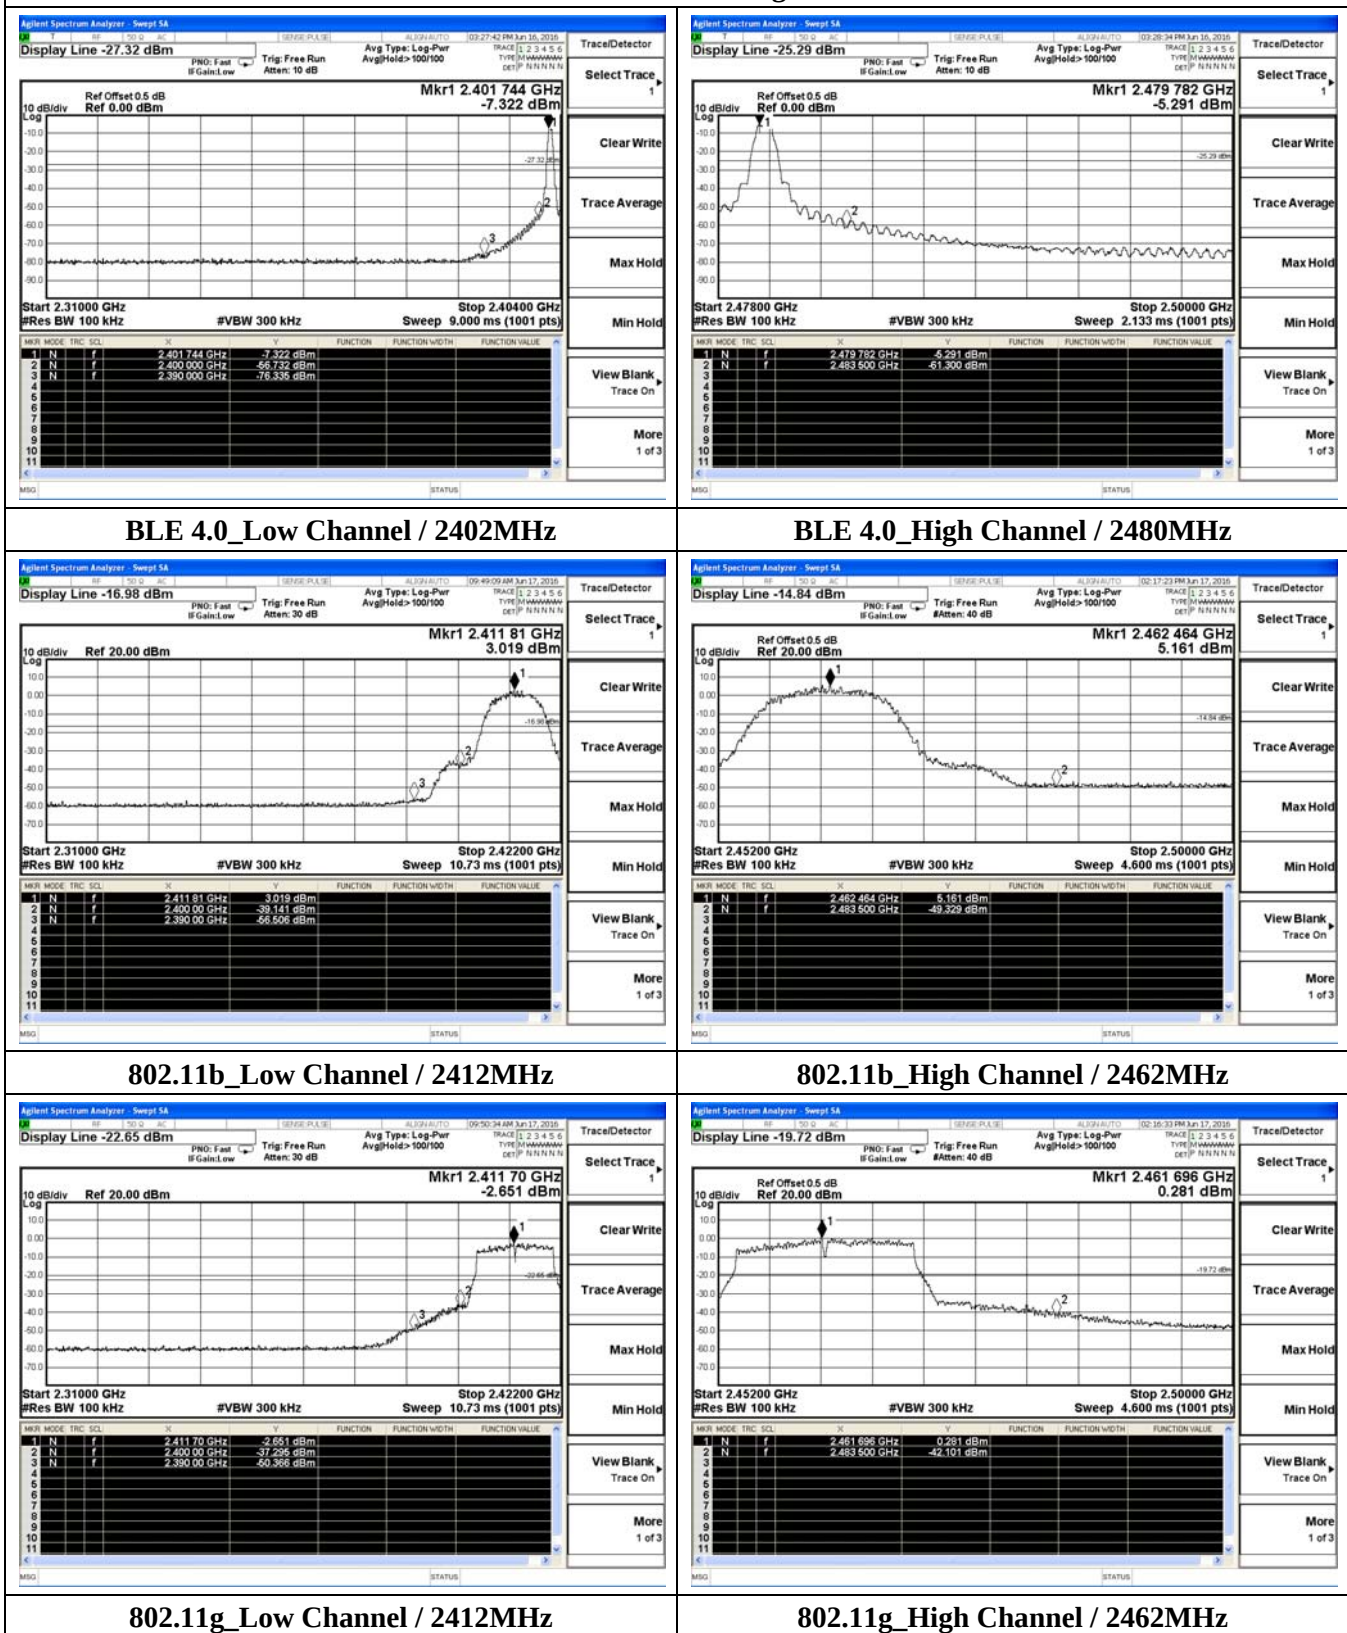


Test Result of Band Edges Test

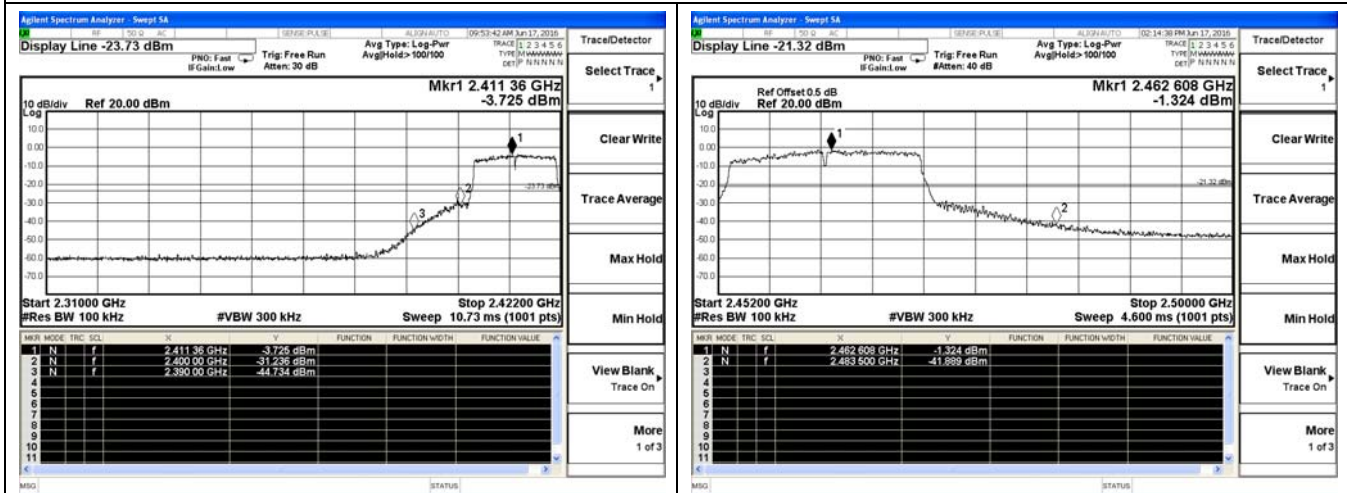

802.11n HT20_Low Channel / 2412MHz

802.11n HT20_High Channel / 2462MHz

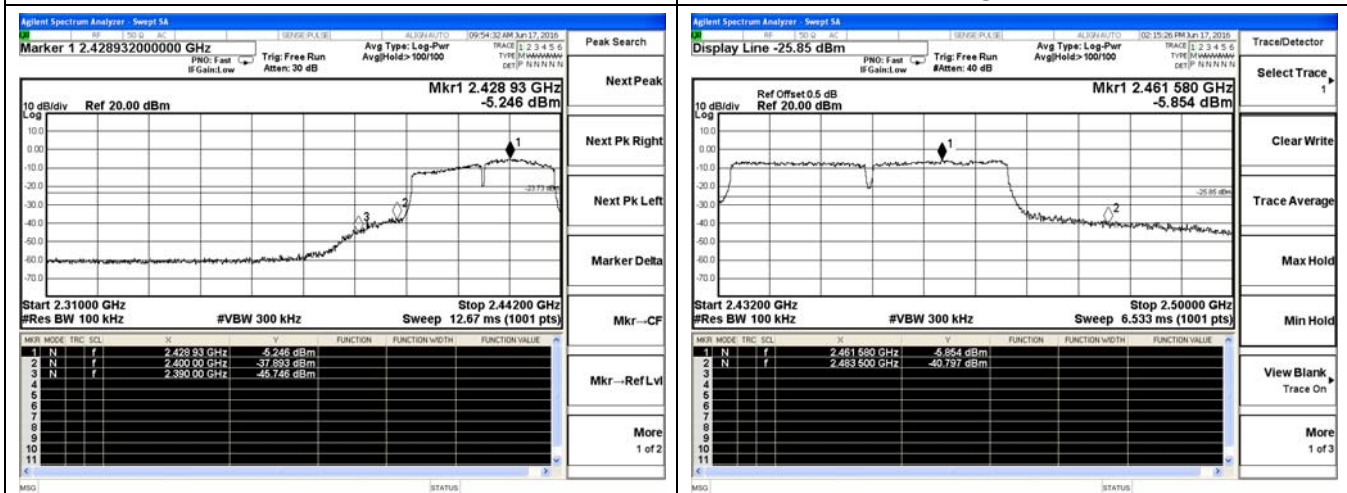

802.11n HT40_Low Channel / 2422MHz

802.11n HT40_High Channel / 2452MHz


5.6. Power line conducted emissions

5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.6.2 Block Diagram of Test Setup

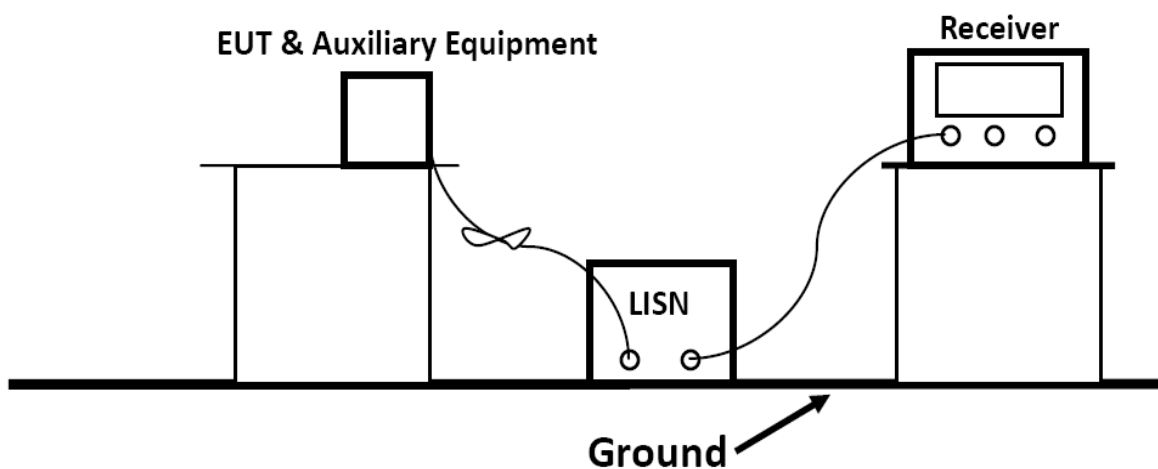

5.6.3 Test Results


PASS.

The test data please refer to following page.

AC Conducted Emission of power adapter

Test Result for Line Power Input AC 120V/60Hz (Worst Case)


Line:

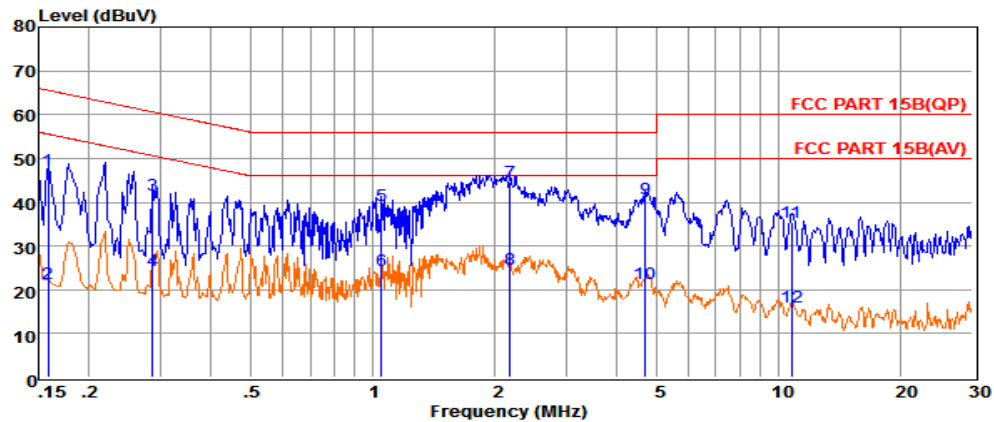

	Freq MHz	Reading dBuV	LisnFac dB	CabLos dB	Atten_Fac dB	Measured dBuV	Limit dBuV	Over dB	Remark
1	0.15816	27.54	9.58	0.02	10.00	47.14	65.56	-18.42	QP
2	0.15826	1.82	9.58	0.02	10.00	21.42	55.55	-34.13	Average
3	0.28630	21.97	9.63	0.03	10.00	41.63	60.63	-19.00	QP
4	0.28640	4.86	9.63	0.03	10.00	24.52	50.63	-26.11	Average
5	1.04850	19.68	9.63	0.05	10.00	39.36	56.00	-16.64	QP
6	1.04950	4.79	9.63	0.05	10.00	24.47	46.00	-21.53	Average
7	2.17827	24.86	9.64	0.05	10.00	44.55	56.00	-11.45	QP
8	2.17927	4.86	9.64	0.05	10.00	24.55	46.00	-21.45	Average
9	4.69635	21.10	9.65	0.06	10.00	40.81	56.00	-15.19	QP
10	4.69735	1.65	9.65	0.06	10.00	21.36	46.00	-24.64	Average
11	10.73301	15.56	9.69	0.08	10.00	35.33	60.00	-24.67	QP
12	10.73401	-3.83	9.69	0.08	10.00	15.94	50.00	-34.06	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

Neutral:

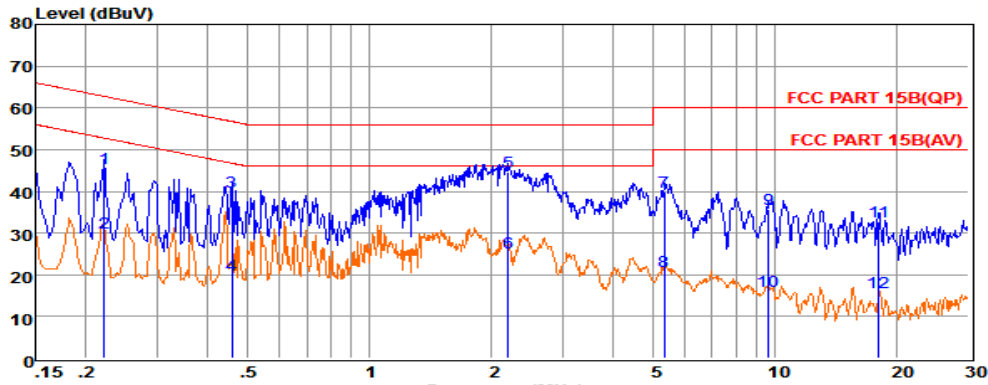

	Freq MHz	Reading dBuV	LisnFac dB	CabLos dB	Atten_Fac dB	Measured dBuV	Limit dBuV	Over dB	Remark
1	0.22201	25.87	9.59	0.03	10.00	45.49	62.74	-17.25	QP
2	0.22211	10.43	9.59	0.03	10.00	30.05	52.74	-22.69	Average
3	0.45878	20.20	9.62	0.04	10.00	39.86	56.71	-16.85	QP
4	0.45888	0.19	9.62	0.04	10.00	19.85	46.71	-26.86	Average
5	2.20147	25.05	9.63	0.05	10.00	44.73	56.00	-11.27	QP
6	2.20247	5.59	9.63	0.05	10.00	25.27	46.00	-20.73	Average
7	5.33317	20.12	9.67	0.06	10.00	39.85	60.00	-20.15	QP
8	5.33417	1.21	9.67	0.06	10.00	20.94	50.00	-29.06	Average
9	9.65386	16.03	9.72	0.08	10.00	35.83	60.00	-24.17	QP
10	9.65486	-3.87	9.72	0.08	10.00	15.93	50.00	-34.07	Average
11	118.03941	12.91	9.81	0.11	10.00	32.83	60.00	-27.17	QP
12	118.04041	-4.10	9.81	0.11	10.00	15.82	50.00	-34.18	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report (802.11b (TX-High Channel)).

5.7. Antenna Requirements

5.7.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.7.2. Antenna Connector Construction

The sample use PIFA antenna and maximum antenna gain is 2.1dBi. Please see EUT photo for details.

The WLAN and Bluetooth share same modular and same antenna.

5.7.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For WLAN devices, the DSSS mode is used; as lower power Bluetooth use frequency range same as normal Bluetooth, please refer to normal Bluetooth test report for antenna results information.

T _{nom}	V _{nom}	Lowest Channel 2412 MHz	Middle Channel 2437 MHz	Highest Channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		11.31	11.07	11.26
Radiated power [dBm] Measured with DSSS modulation		10.24	10.54	10.27
Gain [dBi] Calculated		-1.07	-0.53	-0.99
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

T _{nom}	V _{nom}	Lowest channel 2402 MHz	Middle channel 2440 MHz	Highest channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		-6.75	-4.59	-4.77
Radiated power [dBm] Measured with GFSK modulation		-8.28	-5.00	-6.15
Gain [dBi] Calculated		-1.53	-0.41	-1.38
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

Result: -/-

-----THE END OF REPORT-----