


Wireless Interconnected Smoke Alarm Quick Start Manual

01 Appearance Diagram

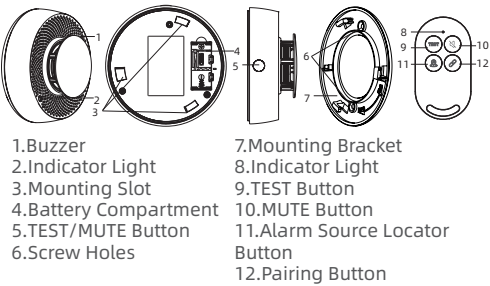

02 Factory Configuration and Installation Notes

The alarms are factory-interconnected and paired with the remote control. Before installation, test all wireless alarms to ensure proper interconnection. To add accessories, refer to the detailed user manual.

03 Test Functions

(1) Self-check Test: Press the [TEST/MUTE] button on any alarm or the remote control. All interconnected alarms will trigger audible and visual alarms in sequence, indicating normal functionality.

(2) Smoke Alarm Test: Bring test smoke close to any alarm. All interconnected devices will trigger audible and visual alarms in sequence, indicating normal functionality.

04 Installation

Mark and drill holes using the mounting bracket, then rotate the device clockwise in the "OPEN→CLOSE" direction to secure. Finally, press the "TEST/MUTE" button to confirm operation.

05 Technical Specifications

Operating Voltage:DC 3V (Replaceable CR123A Lithium Battery)
Standby Current: < 35μA
Alarm Current: < 100mA
Battery Life: 3 years
Alarm Sound Level: >85dB
Wireless Frequency: 433.92 MHz
Transmission Distance: ≥200 m (in open area)
Max. Number of Interconnected Devices: 200 units
Installation Method: Ceiling mount
Operating Temperature: -10°C ~ 55°C
Operating Humidity: ≤95%RH
Safety Standards:UL 217

06 More Help & Support

Scan QR code for detailed manual and videos.



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that .

Interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Important: Change or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

* RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Note: The pictures in this manual are for reference only, and the actual product shall prevail.