



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V04

Report Template Revision Date: 2018-07-06

Test Report

Report No. : CQASZ20190901002E-04
Applicant: Avantree Technology Co., Ltd.
Address of Applicant: The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, China
Equipment Under Test (EUT):
EUT Name: Wireless Stereo Headphones
All Model No.: BTHS-AS90, BTHS-AS90B, BTHS-AS90C, BTHS-AS90M, BTHS-ANC033, BTHS-035
Test Model No.: BTHS-AS90
Brand Name: Avantree
FCC ID: 2AITF-BTHS-AS90
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2019-12-13
Date of Test: 2019-12-13 to 2019-12-24
Date of Issue: 2019-12-24
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Tom Chen

(Tom chen)

Reviewed By:

Aaron Ma

(Aaron Ma)

Approved By:

Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190901002E-04	Rev.01	Initial report	2019-12-24

2 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209, RSS-Gen Issue 5	ANSI C63.10 2013	PASS

Note: The simultaneously transmission mode

3 Contents

	Page
1 VERSION.....	2
2 TEST SUMMARY.....	3
3 CONTENTS.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF EUT.....	5
4.3 GENERAL DESCRIPTION OF BT.....	5
4.4 GENERAL DESCRIPTION OF NFC.....	5
4.5 TEST ENVIRONMENT AND MODE.....	6
4.6 DESCRIPTION OF SUPPORT UNITS.....	6
4.7 TEST LOCATION.....	7
4.8 TEST FACILITY.....	7
4.9 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	8
4.10 DEVIATION FROM STANDARDS.....	8
4.11 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
4.12 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	8
4.13 EQUIPMENT LIST.....	9
5 TEST RESULTS AND MEASUREMENT DATA.....	10
5.1 RADIATED SPURIOUS EMISSIONS.....	10
5.1.1 Radiated emission below 1GHz.....	13
5.1.2 Transmitter emission above 1GHz.....	15
6 PHOTOGRAPHS - EUT TEST SETUP.....	16
6.1 RADIATED SPURIOUS EMISSION.....	16

4 General Information

4.1 Client Information

Applicant:	Avantree Technology Co., Ltd.
Address of Applicant:	The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, China
Manufacturer:	Avantree Technology Co., Ltd.
Address of Manufacturer:	The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, China

4.2 General Description of EUT

Product Name:	Wireless Stereo Headphones
All Model No.:	BTHS-AS90, BTHS-AS90B, BTHS-AS90C, BTHS-AS90M, BTHS-ANC033, BTHS-035
Test Model No.:	BTHS-AS90
Trade Mark:	Avantree
Hardware Version:	Rer 2.7
Software Version:	BT5.0
USB Cable:	98cm(Unshielded)
AUX Cable:	148cm(Unshielded)
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location
Power Supply:	lithium battery:DC3.7V, Charge by DC5V

4.3 General Description of BT

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Transfer Rate:	1Mbps/2Mbps/3Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Software of EUT:	Blue test 3 (manufacturer declare)
Antenna Type:	Integral antenna
Antenna Gain:	0.9dBi

4.4 General Description of NFC

Operation Frequency:	13.56MHz
Modulation Type:	ASK
Antenna Type:	Induction coil
Antenna Gain:	0dBi

4.5 Test Environment and Mode

Operating Environment:	
Temperature:	24.2 °C
Humidity:	36 % RH
Atmospheric Pressure:	1015mbar
The following test modes were adjusted during the tests:	
Operation mode	Description of the operation mode
Mode 1 (BT+NFC)	Transmission at BT (GFSK-DH5-2402MHz)
	Transmission at NFC (13.56MHz)

4.6 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	FCC ID and DOC	CQA

4.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.8 Test Facility

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.9 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

Test	Range	Uncertainty	Notes
Radiated Emission	Below 1GHz	5.12dB	(1)
Radiated Emission	Above 1GHz	4.60dB	(1)
Conducted Disturbance	0.15~30MHz	3.34dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.10 Deviation from Standards

None.

4.11 Abnormalities from Standard Conditions

None.

4.12 Other Information Requested by the Customer

None.

4.13 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2019/10/25	2020/10/24
Spectrum analyzer	R&S	FSU26	CQA-038	2019/10/25	2020/10/24
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2019/10/25	2020/10/24
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2019/10/21	2020/10/20
Bilog Antenna	R&S	HL562	CQA-011	2019/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2019/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/9/25	2020/9/24
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2019/9/26	2020/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2019/9/26	2020/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2019/9/26	2020/9/25
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2019/9/26	2020/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2019/9/26	2020/9/25

5 Test results and Measurement Data

5.1 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205, RSS-Gen Issue 5				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

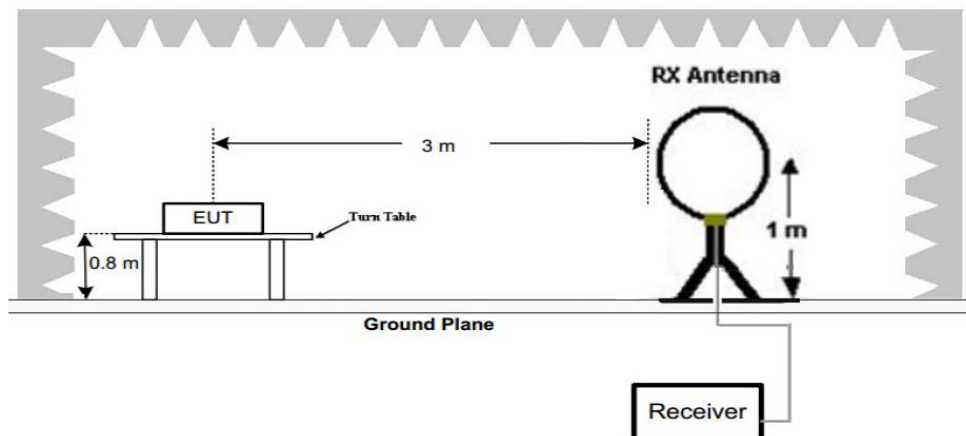


Figure 1. Below 30MHz

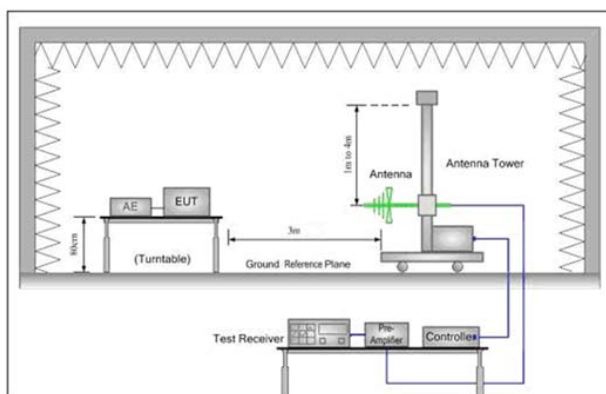


Figure 2. 30MHz to 1GHz

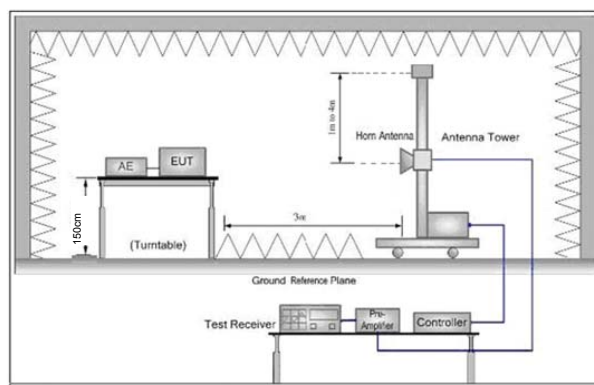


Figure 3. Above 1 GHz


Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
Note: For the radiated emission test above 1GHz:
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Pretest the EUT at Mode 1 For below 1GHz, through Pre-scan, find Mode 1 is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass


5.1.1 Radiated emission below 1GHz

30MHz~1GHz_mode 1 is the worst case		
Test mode:	mode 1	Vertical

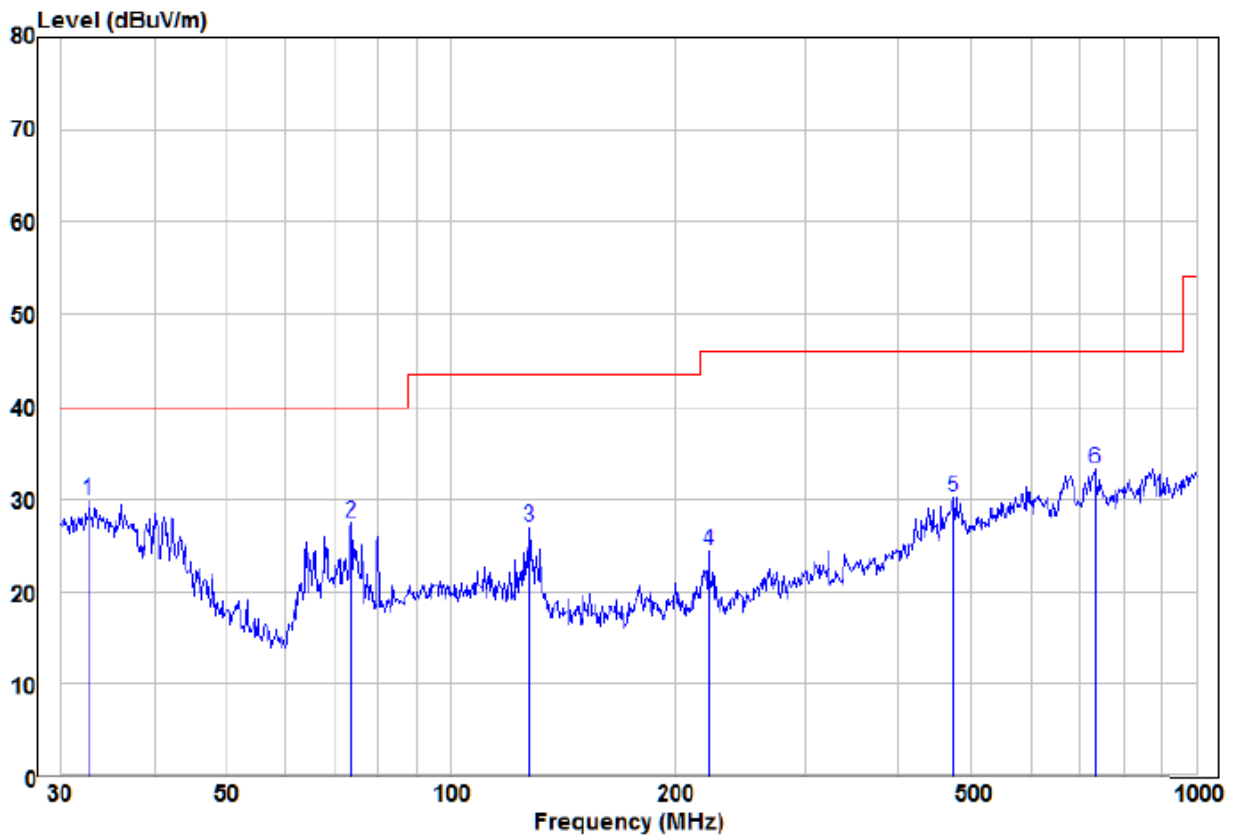

		Read		Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	pp	32.75	12.44	17.42	29.86	40.00	-10.14 Peak	VERTICAL
2		73.62	18.79	8.75	27.54	40.00	-12.46 Peak	VERTICAL
3		127.66	16.60	10.41	27.01	43.50	-16.49 Peak	VERTICAL
4		222.17	15.13	9.20	24.33	46.00	-21.67 Peak	VERTICAL
5		472.18	13.82	16.41	30.23	46.00	-15.77 Peak	VERTICAL
6		731.92	12.89	20.30	33.19	46.00	-12.81 Peak	VERTICAL

Test mode:	mode 1	Horizontal
------------	--------	------------

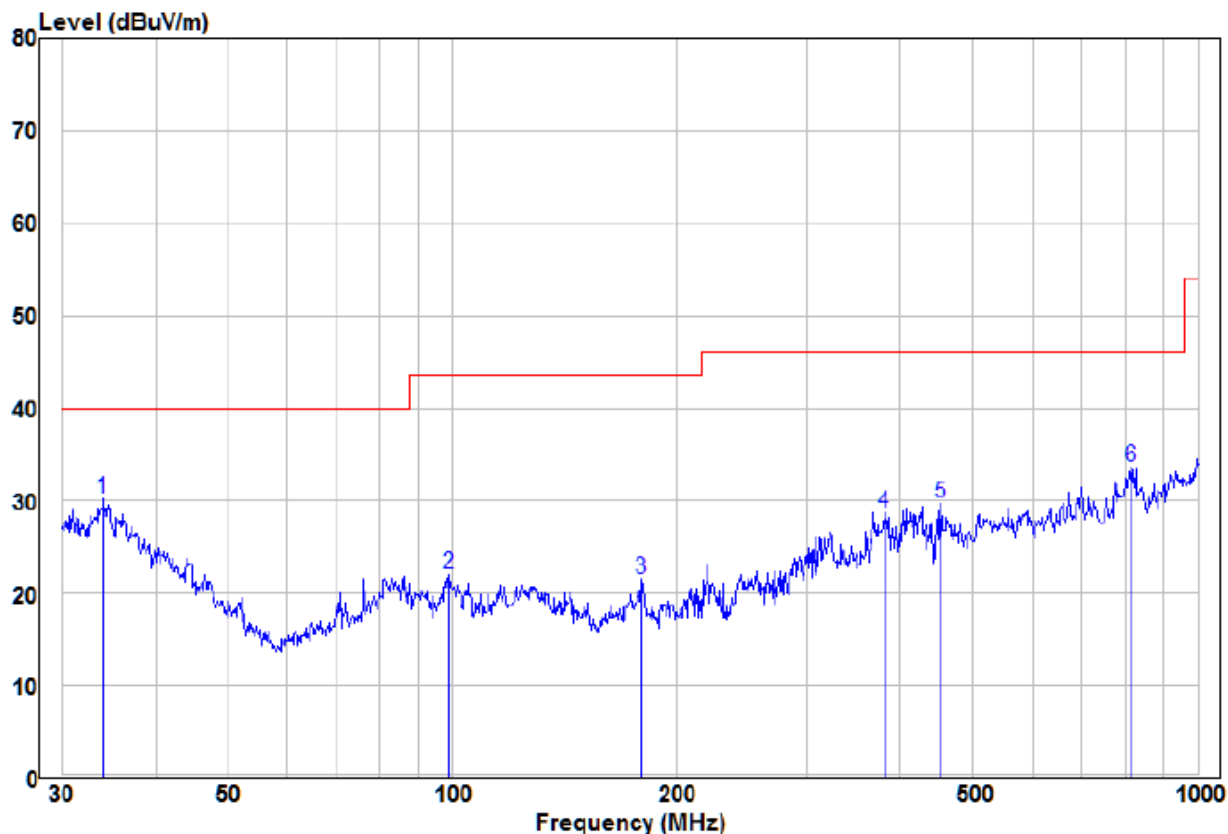

		Read		Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	pp	34.04	13.22	16.96	30.18	40.00	-9.82 Peak	HORIZONTAL
2		99.18	11.43	10.60	22.03	43.50	-21.47 Peak	HORIZONTAL
3		179.39	13.12	8.30	21.42	43.50	-22.08 Peak	HORIZONTAL
4		379.91	15.04	13.67	28.71	46.00	-17.29 Peak	HORIZONTAL
5		452.72	13.89	15.82	29.71	46.00	-16.29 Peak	HORIZONTAL
6		815.97	12.89	20.73	33.62	46.00	-12.38 Peak	HORIZONTAL

5.1.2 Transmitter emission above 1GHz

Test mode:				Mode 1			
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390	53.61	-9.2	44.41	74	-29.59	Peak	H
2400	55.50	-9.39	46.11	74	-27.89	Peak	H
2390	55.29	-9.2	46.09	74	-27.91	Peak	V
2400	55.44	-9.39	46.05	74	-27.95	Peak	V
4804	53.73	-4.33	49.40	74	-24.60	peak	H
7206	50.43	1.01	51.44	74	-22.56	peak	H
4804	52.63	-4.33	48.30	74	-25.70	peak	V
7206	49.52	1.01	50.53	74	-23.47	peak	V
2483.5	55.26	-9.29	45.97	74	-28.03	Peak	H
2483.5	54.17	-9.29	44.88	74	-29.12	Peak	V

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

6 Photographs - EUT Test Setup

6.1 Radiated Spurious Emission

9KHz~30MHz



30MHz~1GHz:



Above 1GHz:



THE END