

Produkte
Products

Prüfbericht - Nr.: 14044555 001 <i>Test Report No.:</i>			Seite 1 von 15 <i>Page 1 of 15</i>		
Auftraggeber: <i>Client:</i>			BRIO AB BOX 305 SE-201 23 MALMO SWEDEN		
Gegenstand der Prüfung: <i>Test Item:</i>			Bluetooth Low Energy device - App-Enabled Engine (toy)		
Bezeichnung: <i>Identification:</i>		33863	Serien-Nr.: <i>Serial No.:</i>		Engineering sample
Wareneingangs-Nr.: <i>Receipt No.:</i>		A000377500-001	Eingangsdatum: <i>Date of Receipt:</i>		15.06.2016
Prüfört: <i>Testing Location:</i>			TÜV Rheinland Hong Kong Ltd. 8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong		
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>			Test samples are not damaged and suitable for testing.		
Prüfgrundlage: <i>Test Specification:</i>			FCC Part 15 Subpart C RSS-247 Issue 1 ANSI C63.10-2013		
Prüfergebnis: <i>Test Results:</i>			Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .		
Prüflaboratorium: <i>Testing Laboratory:</i>			TÜV Rheinland Hong Kong Ltd. 8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong		
geprüft/ tested by:			kontrolliert/ reviewed by:		
11.07.2016 Benny Lau Senior Project Manager			11.07.2016 Sharon Li Department Manager		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges: <i>Other Aspects</i>			FCC ID: 2AITT33863 IC: 21632-33863		
Abkürzungen:			Abbreviations:		
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode.....	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C / RSS-247 Issue 1.....	11
FCC 15.203 – Antenna Requirement 1.....	Pass..... 11
FCC 15.204 – Antenna Requirement 2.....	N/A..... 11
RSS-Gen 6.3 – External Control.....	Pass..... 11
RSS-Gen 8.3 – Antenna Requirement	Pass..... 11
FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains.....	N/A..... 12
FCC 15.247 (a)(2) / RSS-247 5.2(1) – 6dB Bandwidth Measurement	Pass..... 12
RSS-Gen 6.6 – Occupied Bandwidth	Pass..... 12
FCC 15.247(b)(3) / RSS-247 5.4(4) – Maximum Peak Conducted Output Power	Pass..... 13
FCC 15.247(e) / RSS-247 5.2(2) – Power Spectral Density	Pass..... 13

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions	Pass.....	14
FCC 15.205/ RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands	Pass.....	14
Appendix 1 – Test protocols		17 pages
Appendix 2 – Test setup		2 pages
Appendix 3 – EUT External Photos		3 pages
Appendix 4 – EUT Internal Photos		4 pages
Appendix 5 – RF exposure information		2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	PCB Antenna
Antenna gain (dBi)	-1 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	No
Nominal voltage	V_{nor} : 3.0 VDC (2 x 1.5V AA batteries)
Independent Operation Modes	Transmitting

Product function and intended use

The equipment under test (EUT) is a Bluetooth low energy device.

FCC ID: 2AITT33863/ IC: 21632-33863

Models	Product description
33863	Bluetooth Low Energy device - App-Enabled Engine (toy)

Submitted documents

Circuit Diagram
Block Diagram
User manual
Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Others digital function which is independent from the transmitter is authorized under verification procedure (refer to test report 14044595 001 issued by TÜV Rheinland Hong Kong Ltd.)

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

- None

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

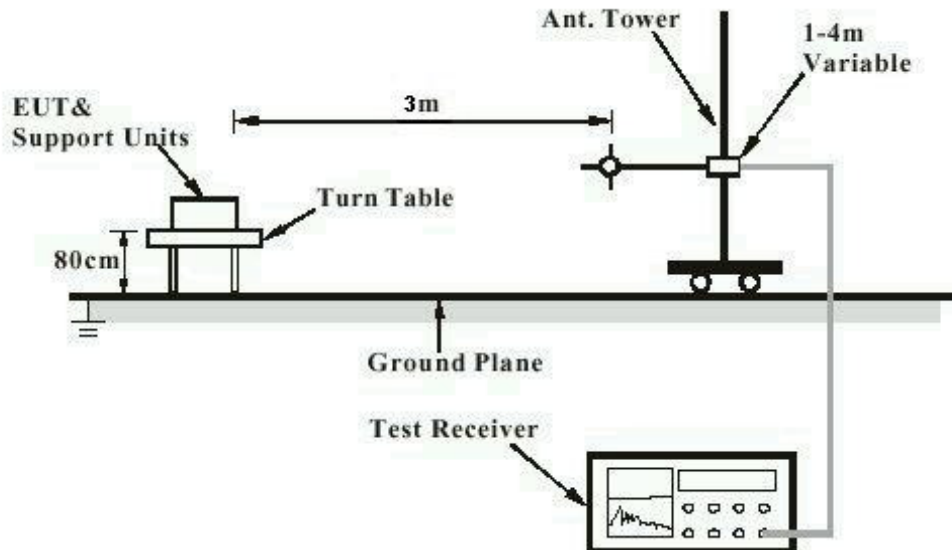

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


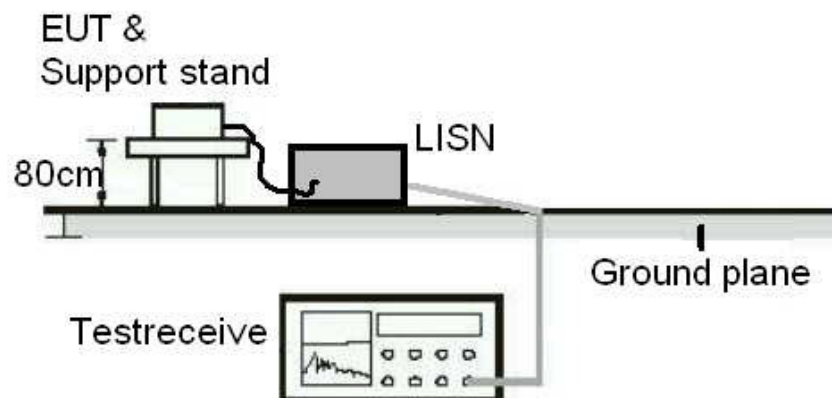


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

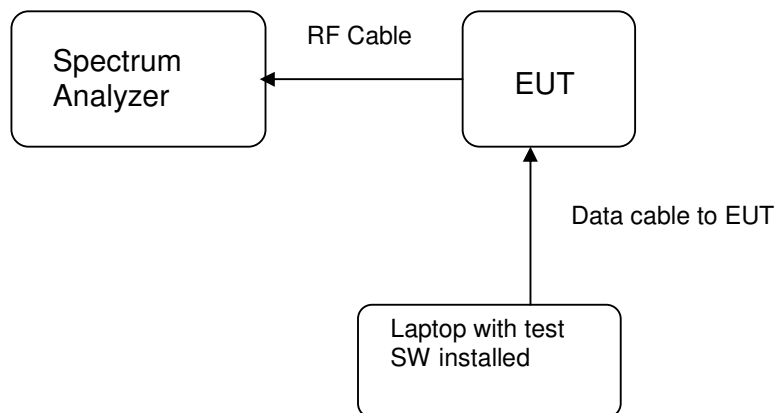

List of Test and Measurement Instruments

Hong Kong Productivity Council (Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-16	25-Apr-17
New Fully Anchoic Chamber	TDK	N/A	19-Apr-16	19-Apr-17
Cable	Hubersuhner	SUCOFLEX 104	31-Mar-16	31-Mar-18
Test Receiver	R & S	ESU26	7-Dec-15	7-Dec-16
Bi-conical Antenna	R & S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R & S	HL223	1-Sep-15	1-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	17-Jul-14	17-Jul-16
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17
Horn Antenna	EMCO	3115	26-Aug-15	26-Aug-17
Active Loop Antenna	EMCO	6502	15-Aug-15	15-Aug-16

AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Test Receiver	R & S	ESU40	7-Dec-15	7-Dec-16
RF Voltage Probe	Schwarzbeck	TK9416	11-Feb-16	11-Feb-17
LISN	R&S	ESH3-Z5	15-Jun-16	15-Jun-17
Double Shield Cable	Radiall	RG142	14-Sep-15	14-Sep-17
Pulse Limiter	R&S	ESH3-Z2	3-Jun-16	3-Jun-18

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	18-Jan-16	19-Jan-2017

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 3.43\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 5.10\text{dB}$ (30MHz to 200MHz) and $\pm 5.08\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.10\text{dB}$ (30MHz to 200MHz) and $\pm 5.08\text{dB}$ (above 1GHz).

The estimated combined standard uncertainty for antenna conducted emission is $\pm 1.56\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-247 Issue 1

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: Integral PCB antenna b) Manufacturer and model no: N/A c) Peak Gain: -1 dBi	
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

RSS-Gen 6.3 – External Control		Pass
IC Requirement: The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the limits prescribed in the applicable RSS.		
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	Pass	

RSS-Gen 8.3 – Antenna Requirement		Pass
IC Requirement: When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.		
Results:	a) Antenna type: Integral PCB antenna b) Manufacturer: N/A c) model no: N/A d) Gain with reference to an isotropic radiator: -1 dBi	
Verdict:	Pass	

FCC 15.207/ RSS-Gen 8.8 – Conducted Emission on AC Mains	N/A
There is no AC power input or output ports on the EUT.	

FCC 15.247 (a)(2) / RSS-247 5.2(1) – 6dB Bandwidth Measurement	Pass		
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100KHz/ 300KHz Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2402	2401.560	2402.63	1070
2440	2439.590	2440.62	1030
2480	2479.890	2480.73	840

RSS-Gen 6.6 – Occupied Bandwidth			Pass
FCC/ IC Requirement : N/A			
Test Specification : RSS-Gen Mode of operation : Tx mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 120VAC Temperature : 23°C Humidity : 50%			
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.			
Frequency (MHz)	Left (MHz)	Right (MHz)	99% bandwidth (MHz)
2402	2400.740	2403.040	2.30
2440	2438.800	2441.040	2.24
2480	2479.060	2480.940	1.88

FCC 15.247(b)(3) / RSS-247 5.4(4) – Maximum Peak Conducted Output Power			Pass
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	2.15	1 / 30.0	Pass
2440	2.43	1 / 30.0	Pass
2480	2.67	1 / 30.0	Pass

FCC 15.247(e) / RSS-247 5.2(2) – Power Spectral Density			Pass
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : ≥100 KHz / ≥3xRBW span : ≥1.5 x DTS BW Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	1.93	8.0	Pass
2440	2.13	8.0	Pass
2480	2.45	8.0	Pass

FCC 15.247(d) / RSS-247 5.5 – Spurious Conducted Emissions					Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7 Vdc Temperature : 23 °C Humidity : 50 %					
FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	2400.000	-29.34	1.93	31.27	Pass
2440	24640.000	-29.18	2.13	31.31	Pass
2480	24568.000	-29.94	2.45	32.39	Pass

FCC 15.205/ RSS-Gen 8.9 – Radiated Emissions in Restricted Frequency Bands					Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for $f < 1$ GHz 1 MHz / 3 MHz for $f > 1$ GHz Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%					
FCC Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.					
Mode: 2402MHz TX			Vertical Polarization		

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2390.000	53.67	74.0 / PK
2390.000	33.26	54.0 / AV
4804.000	57.23	74.0 / PK
4804.000	48.70	54.0 / AV
Mode: 2402 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2390.000	48.83	74.0 / PK
2390.000	32.95	54.0 / AV
4804.000	54.75	74.0 / PK
4804.000	41.37	54.0 / AV
Mode: 2440 MHz TX Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4880.000	57.34	74.0 / PK
4880.000	47.84	54.0 / AV
Mode: 2440 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4880.000	56.36	74.0 / PK
4880.000	39.82	54.0 / AV
Mode: 2480MHz TX Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	70.66	74.0 / PK
2483.500	49.87	54.0 / AV
4960.000	56.51	74.0 / PK
4960.000	45.97	54.0 / AV
Mode: 2480 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	66.53	74.0 / PK
2483.500	46.13	54.0 / AV
4960.000	54.17	74.0 / PK
4960.000	39.78	54.0 / AV