



Report No.SH16050078E01

FCC EMC TEST REPORT

Issued to

**Shanghai Information Technology Co., Ltd.
Titanium gong**

For

TV

Model Name : M5500
Trade Name : TTV
Brand Name : TTV
Standard : 47 CFR Part 15 Subpart B
FCC ID : 2AIWA-M5500
Test date : Jun.22, 2016
Issue date : Aug.9, 2016

By

Shanghai Skylabs Co., Ltd.

Tested by

Fang Min

Approved by

[Signature]

Review by

Leonard Bao



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shanghai Skylabs Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shanghai Skylabs Co., Ltd to his customer. Supplier or others persons directly concerned. Shanghai Skylabs Co., Ltd will not, without the consent of the client enters into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shanghai Skylabs Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



DIRECTORY

1.	General Information	4
1.1	Applicant	4
1.2	Manufacturer	4
1.3	Description of EUT	5
2.	Facilities and Accreditations	6
2.1	Test Facility	6
2.2	Environmental Conditions	6
2.3	Measurement Uncertainty	6
2.4	List of Equipments Used	7
2.5	Test Standards and Results	8
3.	Test Conditions Setting	9
3.1	Test Mode	9
4.	Emission Tests	10
4.1	Conducted Emission Measurement	10
4.2	Radiated Emission Measurement	14
Annex A	Photos of the EUT	17
Annex B	Photos of Test Setup	18

**Change History**

Issue	Date	Reason for change
1.0	Jun.30,2016	First edition
2.0	Jul.30,2016	Second edition
3.0	Aug.9,2016	3 rd edition, updated setup photos



1. General Information

1.1 Applicant

Shanghai Information Technology Co., Ltd. Titanium gong

2150 Trade Zone Blvd, Suite 104, San Jose, CA 95131, USA

1.2 Manufacturer

Titanium gong Information Technology

Baoshan District, Shanghai Yangtze River Road 180 A6646 Room



1.3 Description of EUT

EUT Name.....: TV
Model Name: M5500
Brand Name.....: TTV
Trade Name: TTV
Hardware Version: PQ1210_M5500
Software Version: 2.1.0-R-20160222.1801
Modulation Type: DSSS (802.11b), OFDM (802.11g)
Frequency Range.....: 2.412GHz - 2.462GHz (at interval of 5 MHz)
Channel Number.....: 11

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2. Facilities and Accreditations

2.1 Test Facility

Shanghai Skylabs Co., Ltd. Skylabs Laboratory is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6644. A 9*6*6(m) fully anechoic chamber was used for the radiated spurious emissions test.

2.2 Environmental Conditions

Ambient temperature: 15~35°C

Relative humidity: 30~60%

Atmosphere pressure: 86-106kPa

2.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission: $\pm 1.76\text{dB}$

Uncertainty of Radiated Emission: $\pm 3.16\text{dB}$



2.4 List of Equipments Used

Description	Manufacturer	Model	Serial No.	the date of calibration	Expiry Date
Shielding Room*	CHENGYU	5m×4m×3m	CR	2016.4.11	2017.09.13
EMI Test Receiver	R&S	ESCI7	100787	2016.2.28	2017.02.24
Artificial Mains Network	TESEQ	NNB 51	33285	2016.2.28	2017.02.24
3m Semi-anechoic Chamber**	CHENGYU	9.2×6.25×6.15 m	SAR	2016.4.11	2017.09.13
Broadband Log Antenna*	Schwarzbeck	VULB 9163	9163-561	2015.07.25	2017.07.24
Broadband Horn Antenna*	Schwarzbeck	BBHA 9120 D	9120D-1033	2015.07.25	2017.07.24
Power Supplier*	NF	ES2000S	9087735	2014.9.26	2016.09.25
Laptop	ACER	Aspire 4376ZG	LXPFY0C00 49352912216 01	/	/
Laptop Adapter	LITEON	PA-1650-22	9801016502	/	/
USB Data Cable	/	/	/	/	/

remark: equipment item with * should be calibrated within 2 years and ** within 3 years.

NOTE:

Equipments listed above have been calibrated and are in the period of validation.



2.5 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 (e-CFR data is current as of July 20, 2016)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS
3	ANSI C63.4-2014	Radiated Emission	PASS



3. Test Conditions Setting

3.1 Test Mode

Mode 1: FULL LOAD

In this test mode, the EUT is connected with a PC via a USB , HDMI, 1394, Ethernet cable supplied by applicant. During the measurement, a communication link was established between the EUT and a System Simulator (SS), simultaneity, the data is transmitting between the PC and the EUT. During the testing, the transmitter is switched off.

NOTE:

All configurations and test modes are performed, only the worst case is recorded in this report.



4. Emission Tests

4.1 Conducted Emission Measurement

4.1.1 Limits of Conducted Emission:

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency (MHz)	CLASS B (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

(1) The lower limit shall apply at the band edges.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

4.1.2 Test Procedure

The EUT and support equipment, if needed, were set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor standing equipment, it is placed on the ground plane, which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

EUT connected to Class B Computer/Laptop via USB data cable and data exchange mode. The Computer/Laptop installed by US power 120V/60Hz, through a Line Impedance Stabilization Network (LISN), which was supplied power source and was grounded to the ground plane.

The test program of the EUT was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.


The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.



4.1.3 Test Setup

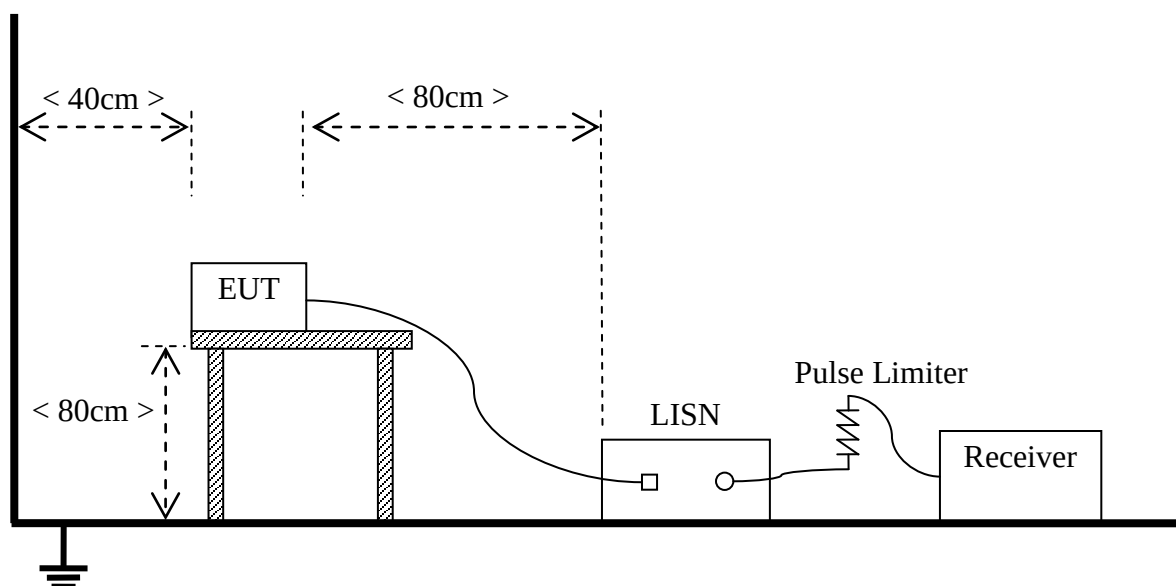

4.1.4 Test Result


Test Verdict Recorded for Suspicious Points:

Line	Freq MHz	Result dBuV	Limit dBuV	Margin dB
QP	0.20	41.12	63.82	22.70
Average	0.20	35.00	53.80	18.80
Average	0.38	33.76	48.23	14.47
QP	0.38	36.42	58.21	21.79
QP	0.45	37.87	56.92	19.05
Average	0.71	33.26	46.00	12.74
QP	0.76	32.46	56.00	23.54
Average	0.77	33.24	46.00	12.76
QP	0.90	31.37	56.00	24.63
QP	1.22	36.21	56.00	19.79
Average	1.22	33.30	46.00	12.70
Average	1.66	30.50	46.00	15.50




Neutral	Freq MHz	Result dBuV	Limit dBuV	Margin dB
Average	0.19	35.68	54.05	18.37
QP	0.19	43.41	64.03	20.62
Average	0.45	35.02	46.93	11.91
QP	0.45	37.42	56.92	19.50
QP	0.71	36.30	56.00	19.70
Average	0.90	33.28	46.00	12.72
QP	0.96	32.80	56.00	23.20
QP	1.22	37.34	56.00	18.66
Average	1.54	32.84	46.00	13.16
QP	1.60	31.50	56.00	24.50
Average	3.01	24.01	46.00	21.99
Average	3.39	20.59	46.00	25.41

Test Plot:

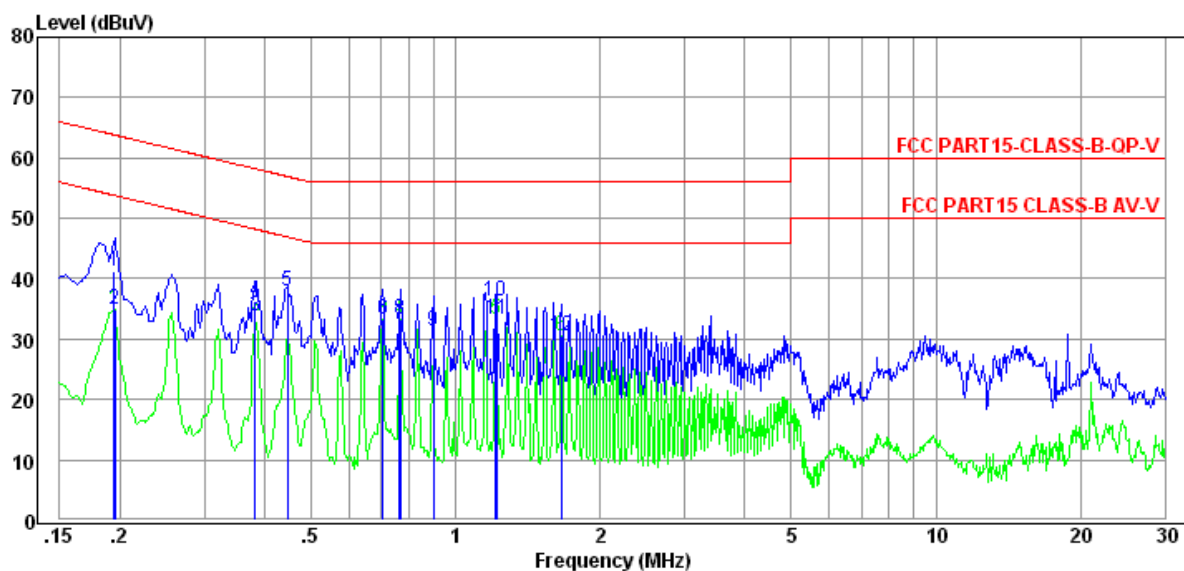

(Plot A: L Phase)

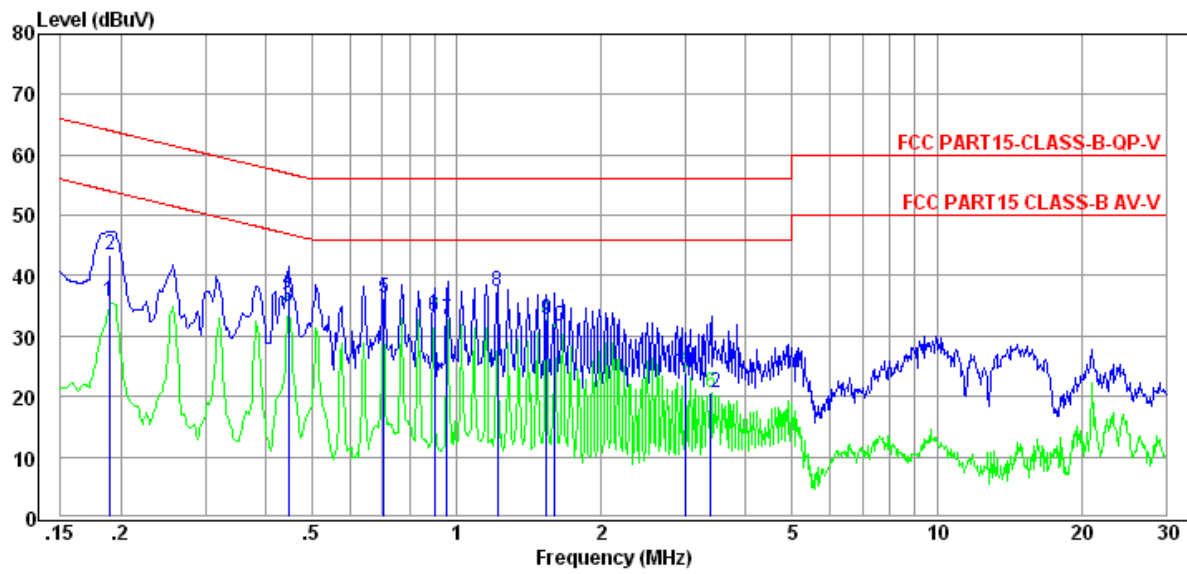

(Plot B: N Phase)



4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a certain distance shall not exceed the following values:

Frequency (MHz)	Field Strength CLASS B (at 3m)	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

NOTE:

(1) Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.

(2) In the emission tables above, the tighter limit applies at the band edges.

Frequency range of radiated measurements (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Note:

The highest frequency is 2472MHz , So 5th harmonic is 12.36GHz, the frequency range is from 30MHz to 13GHz



4.2.2 Test Procedure

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per ANSI C63.4.

All I/O cables were positioned to simulate typical usage as per ANSI C63.4.

The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.

The antenna was placed at 3 or 10 meter away from the EUT as stated in ANSI C63.4. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.


The Analyzer / Receiver quickly scanned from 30MHz to 40GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test

4.2.3 Test Setup

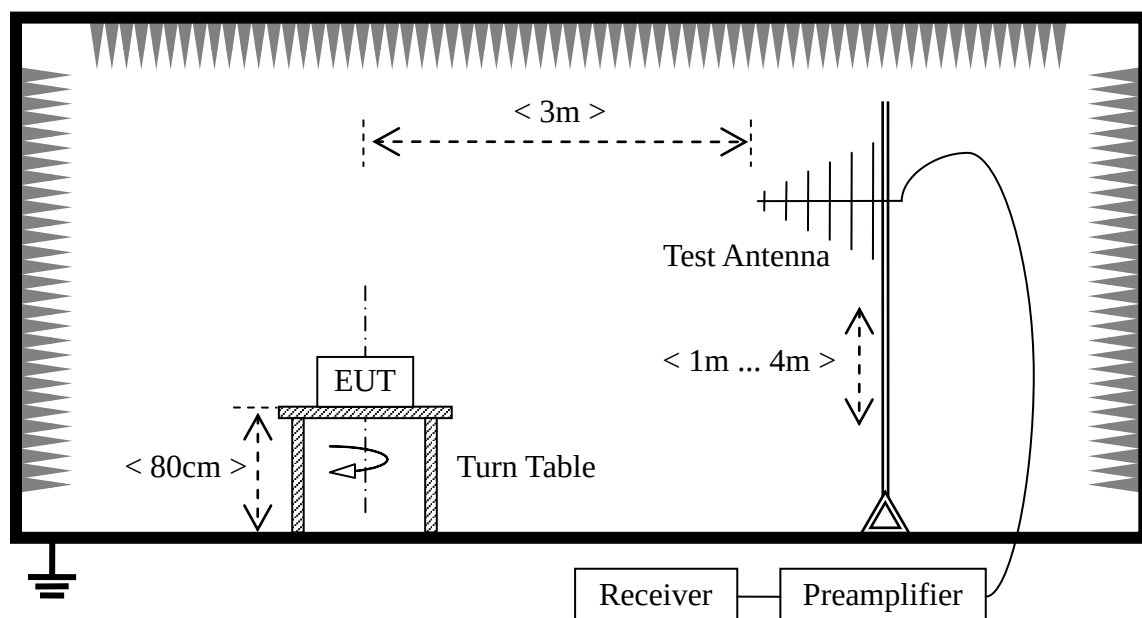



Test Verdict Recorded for Suspicious Points (30MHz~13GHz): Antenna Vertical

Frequency (MHz)	Level (dBuV)	Limit Line (dBuV)	Margin (dB)	Antenna Polarization	Result
30.21	32.27	40.00	7.73	Vertical	PASS
53.51	34.90	40.00	5.10	Vertical	PASS
163.18	35.75	43.50	7.75	Vertical	PASS
259.23	35.94	46.00	10.06	Vertical	PASS
501.18	37.54	46.00	8.46	Vertical	PASS
842.13	37.43	46.00	8.57	Vertical	PASS
1076.23	29.99	54.00	24.01	Vertical	PASS
1972.06	30.38	54.00	23.62	Vertical	PASS
2983.13	33.92	54.00	20.08	Vertical	PASS
3555.75	31.23	54.00	22.77	Vertical	PASS
5967.84	30.74	54.00	23.26	Vertical	PASS

Test Verdict Recorded for Suspicious Points (30MHz~13GHz): Antenna Horizontal

Frequency (MHz)	Level (dBuV)	Limit Line (dBuV)	Margin (dB)	Antenna Polarization	Result
54.07	26.48	40.00	13.52	Horizontal	PASS
86.81	28.27	40.00	11.73	Horizontal	PASS
188.41	35.81	43.50	7.69	Horizontal	PASS
252.95	36.79	46.00	9.21	Horizontal	PASS
499.43	38.40	46.00	7.60	Horizontal	PASS
810.27	36.59	46.00	9.41	Horizontal	PASS
1080.09	28.96	54.00	25.04	Horizontal	PASS
1954.47	38.88	54.00	15.12	Horizontal	PASS
2893.64	36.00	54.00	18.00	Horizontal	PASS
3327.66	31.02	54.00	22.98	Horizontal	PASS
5967.84	29.31	54.00	24.69	Horizontal	PASS



Annex A Photos of the EUT





Annex B Photos of Test Setup

1. Conducted Emission



2. Radiated Emission





** END OF REPORT **