

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_08.27.40

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

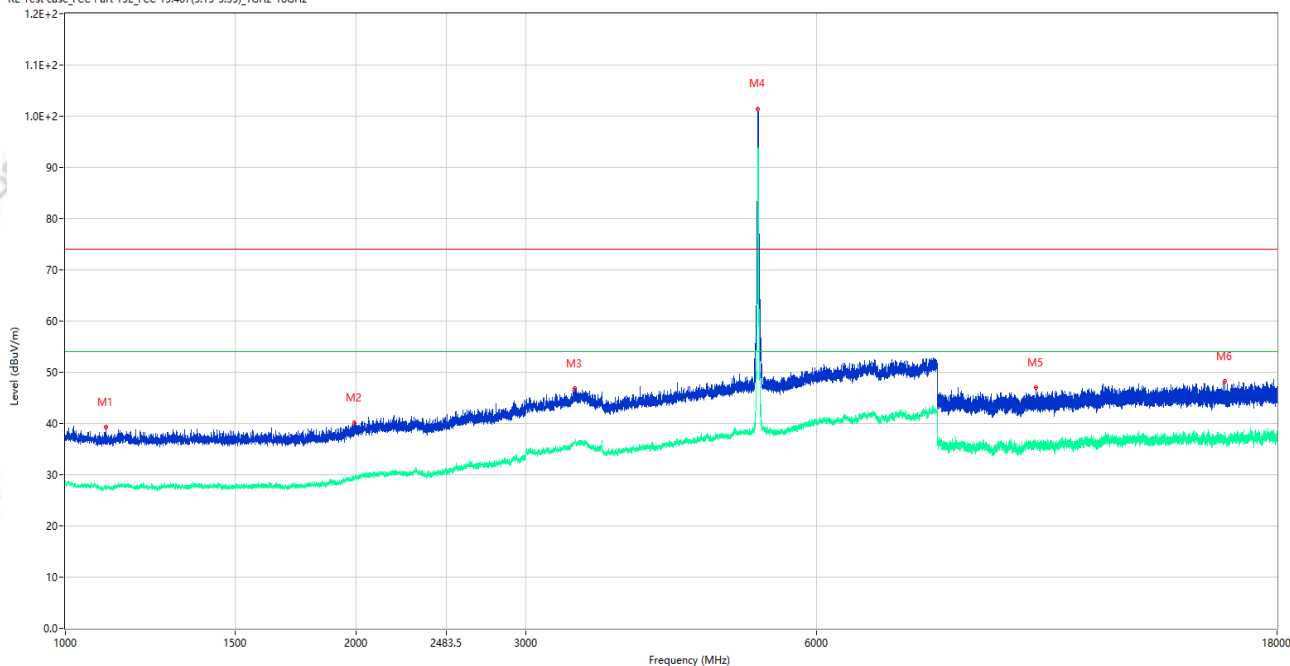

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1102.250	39.22	-15.74	74.0	34.78	Peak	260.00	150	Vertical	Pass
1**	1102.250	27.43	-15.74	54.0	26.57	AV	260.00	150	Vertical	Pass
2	1991.250	40.26	-14.70	74.0	33.74	Peak	298.00	150	Vertical	Pass
2**	1991.250	29.29	-14.70	54.0	24.71	AV	298.00	150	Vertical	Pass
3	3372.500	46.83	-4.81	74.0	27.17	Peak	1.00	150	Vertical	Pass
3**	3372.500	36.17	-4.81	54.0	17.83	AV	1.00	150	Vertical	Pass
4	5219.000	101.46	-2.36	74.0	-27.46	Peak	159.00	150	Vertical	N/A
4**	5219.000	93.60	-2.36	54.0	-39.60	AV	159.00	150	Vertical	N/A
5	10131.800	46.97	-3.88	74.0	27.03	Peak	60.00	150	Vertical	Pass
5**	10131.800	36.16	-3.88	54.0	17.84	AV	60.00	150	Vertical	Pass
6	15881.099	48.19	-1.44	74.0	25.81	Peak	320.00	150	Vertical	Pass
6**	15881.099	37.38	-1.44	54.0	16.62	AV	320.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_08.18.21

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

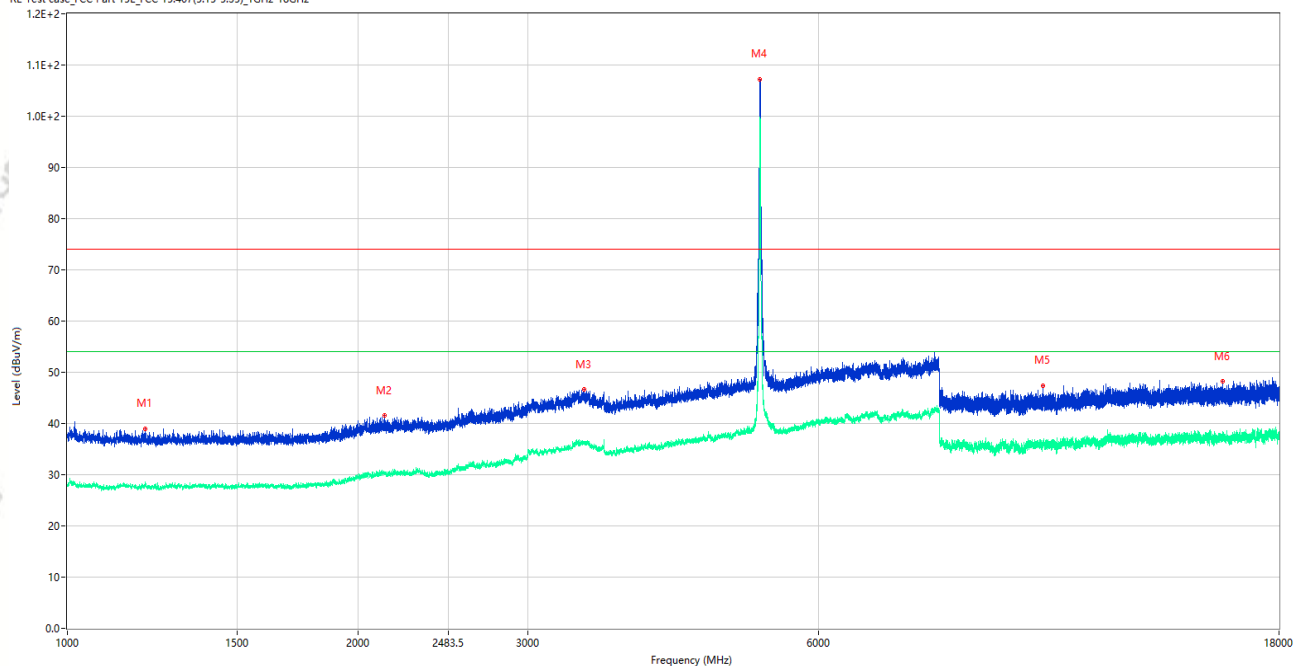

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.000	39.01	-15.75	74.0	34.99	Peak	301.00	150	Horizontal	Pass
1**	1203.000	27.66	-15.75	54.0	26.34	AV	301.00	150	Horizontal	Pass
2	2133.250	41.52	-13.38	74.0	32.48	Peak	154.00	150	Horizontal	Pass
2**	2133.250	30.00	-13.38	54.0	24.00	AV	154.00	150	Horizontal	Pass
3	3432.000	46.59	-5.06	74.0	27.41	Peak	17.00	150	Horizontal	Pass
3**	3432.000	36.33	-5.06	54.0	17.67	AV	17.00	150	Horizontal	Pass
4	5218.500	107.22	-2.37	74.0	-33.22	Peak	186.00	150	Horizontal	N/A
4**	5218.500	99.20	-2.37	54.0	-45.20	AV	186.00	150	Horizontal	N/A
5	10242.475	47.45	-3.32	74.0	26.55	Peak	183.00	150	Horizontal	Pass
5**	10242.475	35.81	-3.32	54.0	18.19	AV	183.00	150	Horizontal	Pass
6	15742.500	48.19	-2.22	74.0	25.81	Peak	118.00	150	Horizontal	Pass
6**	15742.500	37.19	-2.22	54.0	16.81	AV	118.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_08.39.01

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

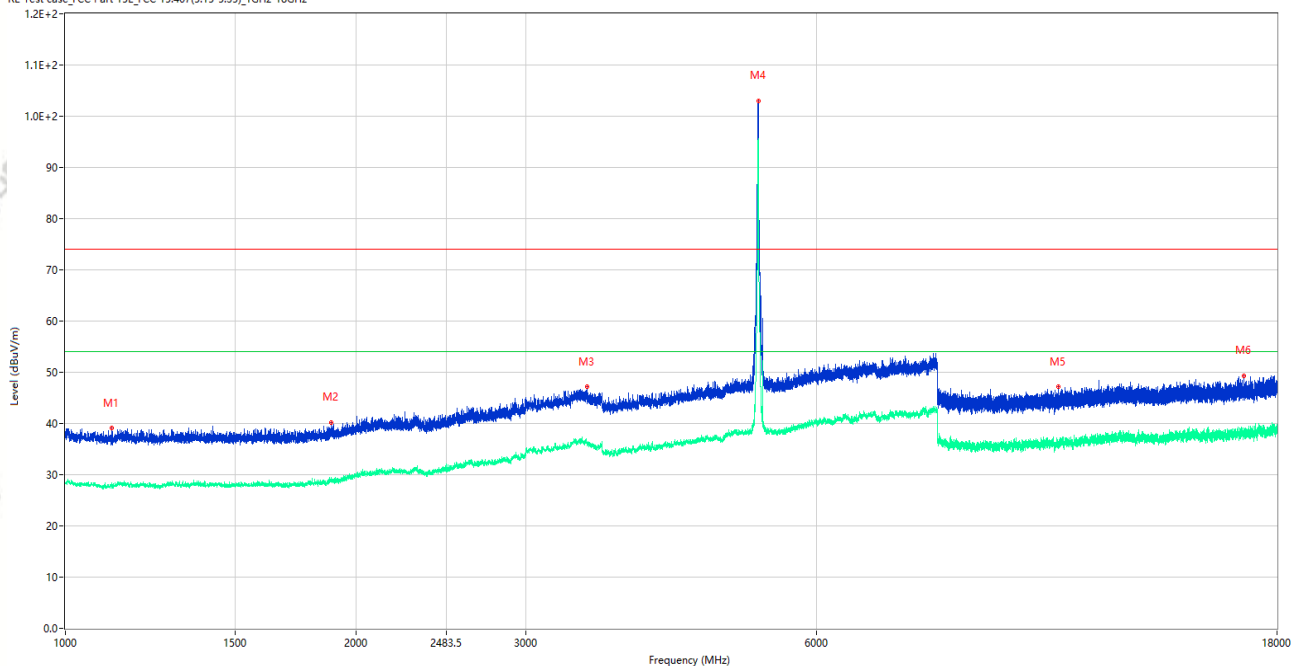

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1116.250	39.08	-15.78	74.0	34.92	Peak	245.00	150	Vertical	Pass
1**	1116.250	27.94	-15.78	54.0	26.06	AV	245.00	150	Vertical	Pass
2	1886.250	40.25	-15.32	74.0	33.75	Peak	137.00	150	Vertical	Pass
2**	1886.250	29.18	-15.32	54.0	24.82	AV	137.00	150	Vertical	Pass
3	3470.500	47.13	-5.60	74.0	26.87	Peak	50.00	150	Vertical	Pass
3**	3470.500	36.22	-5.60	54.0	17.78	AV	50.00	150	Vertical	Pass
4	5221.000	102.99	-2.36	74.0	-28.99	Peak	155.00	150	Vertical	N/A
4**	5221.000	95.09	-2.36	54.0	-41.09	AV	155.00	150	Vertical	N/A
5	10685.175	47.11	-4.14	74.0	26.89	Peak	113.00	150	Vertical	Pass
5**	10685.175	35.96	-4.14	54.0	18.04	AV	113.00	150	Vertical	Pass
6	16637.886	49.37	-1.04	74.0	24.63	Peak	246.00	150	Vertical	Pass
6**	16637.886	38.42	-1.04	54.0	15.58	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_08.44.00

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

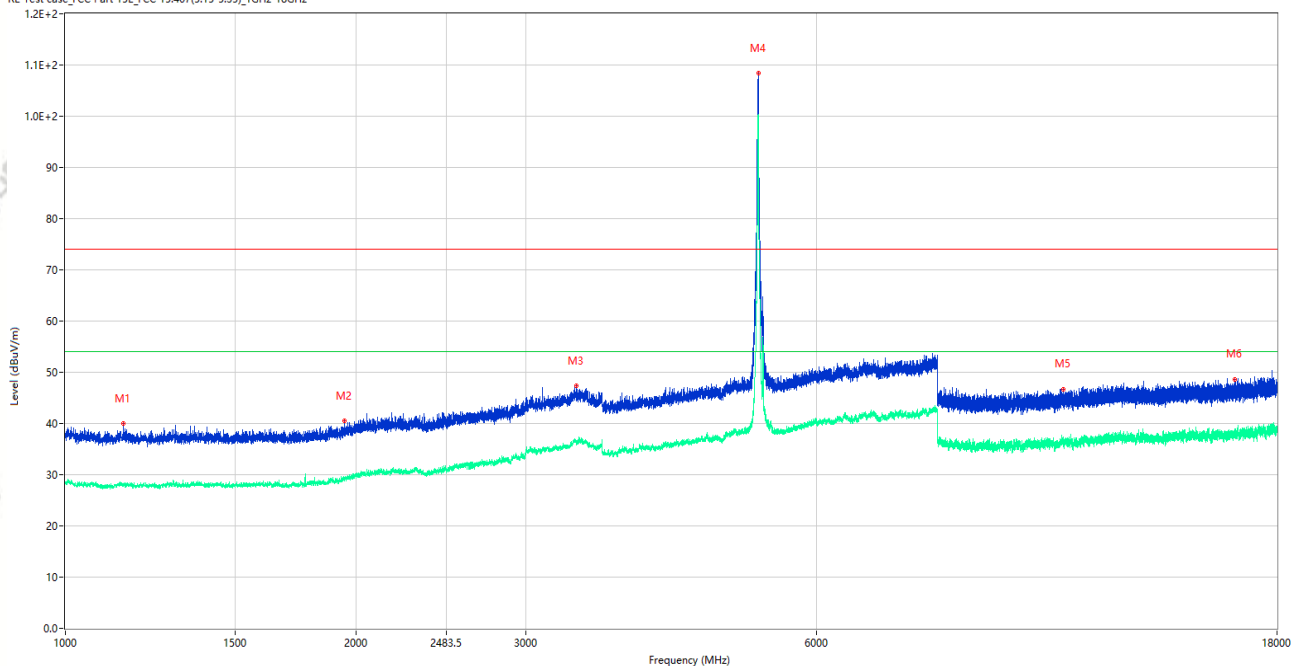

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1148.500	39.97	-15.66	74.0	34.03	Peak	307.00	150	Horizontal	Pass
1**	1148.500	27.80	-15.66	54.0	26.20	AV	307.00	150	Horizontal	Pass
2	1947.250	40.44	-14.86	74.0	33.56	Peak	75.00	150	Horizontal	Pass
2**	1947.250	29.36	-14.86	54.0	24.64	AV	75.00	150	Horizontal	Pass
3	3382.500	47.33	-5.25	74.0	26.67	Peak	282.00	150	Horizontal	Pass
3**	3382.500	36.37	-5.25	54.0	17.63	AV	282.00	150	Horizontal	Pass
4	5222.000	108.33	-2.36	74.0	-34.33	Peak	192.00	150	Horizontal	N/A
4**	5222.000	100.17	-2.36	54.0	-46.17	AV	192.00	150	Horizontal	N/A
5	10810.100	46.74	-3.20	74.0	27.26	Peak	252.00	150	Horizontal	Pass
5**	10810.100	35.87	-3.20	54.0	18.13	AV	252.00	150	Horizontal	Pass
6	16287.713	48.67	-1.40	74.0	25.33	Peak	193.00	150	Horizontal	Pass
6**	16287.713	37.89	-1.40	54.0	16.11	AV	193.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_09.01.15

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

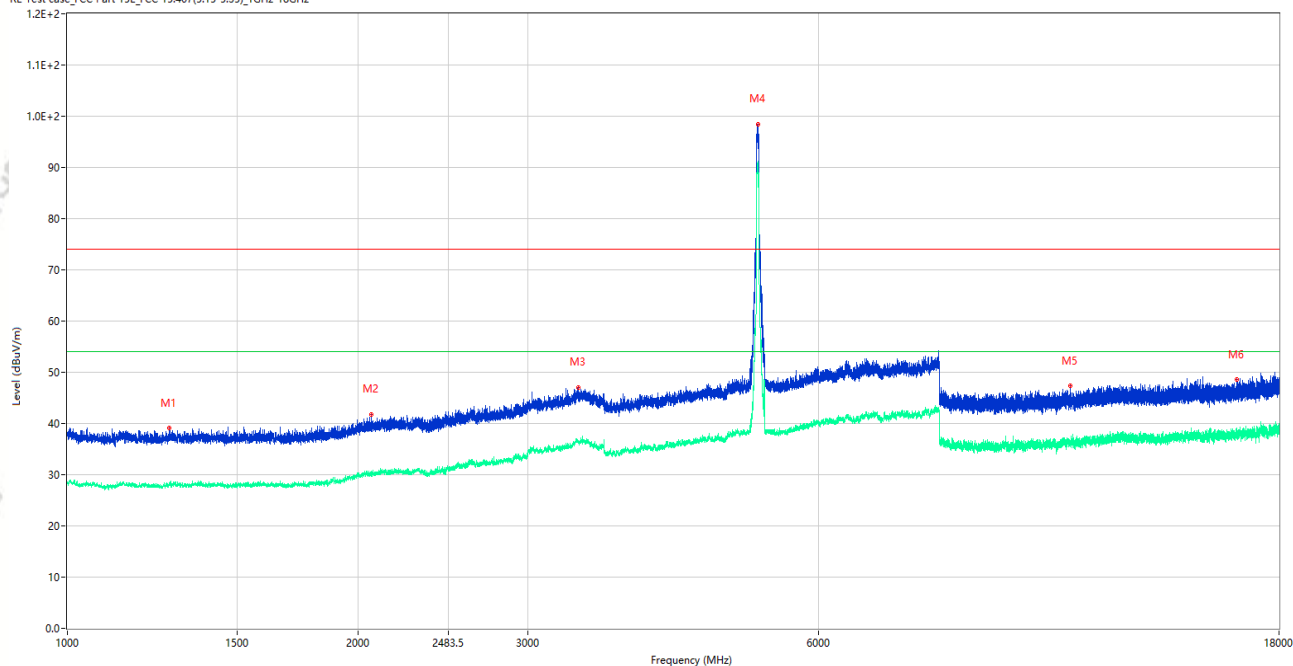

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1275.250	39.09	-15.83	74.0	34.91	Peak	173.00	150	Vertical	Pass
1**	1275.250	28.11	-15.83	54.0	25.89	AV	173.00	150	Vertical	Pass
2	2065.250	41.77	-13.81	74.0	32.23	Peak	358.00	150	Vertical	Pass
2**	2065.250	29.98	-13.81	54.0	24.02	AV	358.00	150	Vertical	Pass
3	3382.000	47.08	-5.22	74.0	26.92	Peak	269.00	150	Vertical	Pass
3**	3382.000	36.51	-5.22	54.0	17.49	AV	269.00	150	Vertical	Pass
4	5192.000	98.44	-2.30	74.0	-24.44	Peak	155.00	150	Vertical	N/A
4**	5192.000	90.95	-2.30	54.0	-36.95	AV	155.00	150	Vertical	N/A
5	10943.337	47.30	-3.26	74.0	26.70	Peak	220.00	150	Vertical	Pass
5**	10943.337	35.72	-3.26	54.0	18.28	AV	220.00	150	Vertical	Pass
6	16268.026	48.68	-1.75	74.0	25.32	Peak	246.00	150	Vertical	Pass
6**	16268.026	38.18	-1.75	54.0	15.82	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_08.55.08

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

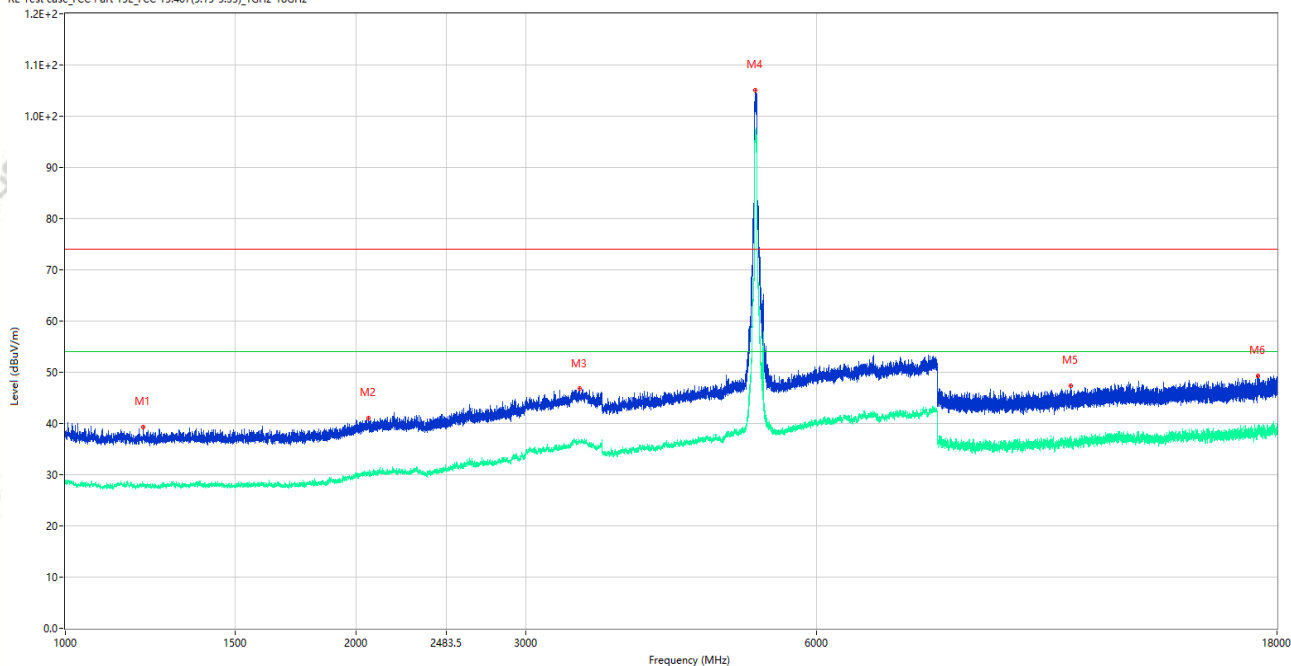

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1203.250	39.32	-15.76	74.0	34.68	Peak	288.00	150	Horizontal	Pass
1**	1203.250	27.80	-15.76	54.0	26.20	AV	288.00	150	Horizontal	Pass
2	2062.250	41.06	-13.84	74.0	32.94	Peak	16.00	150	Horizontal	Pass
2**	2062.250	30.30	-13.84	54.0	23.70	AV	16.00	150	Horizontal	Pass
3	3409.500	46.81	-5.34	74.0	27.19	Peak	165.00	150	Horizontal	Pass
3**	3409.500	36.70	-5.34	54.0	17.30	AV	165.00	150	Horizontal	Pass
4	5187.500	105.09	-2.34	74.0	-31.09	Peak	193.00	150	Horizontal	N/A
4**	5187.500	97.07	-2.34	54.0	-43.07	AV	193.00	150	Horizontal	N/A
5	11005.325	47.37	-3.03	74.0	26.63	Peak	130.00	150	Horizontal	Pass
5**	11005.325	36.24	-3.03	54.0	17.76	AV	130.00	150	Horizontal	Pass
6	17188.874	49.35	0.17	74.0	24.65	Peak	118.00	150	Horizontal	Pass
6**	17188.874	38.26	0.17	54.0	15.74	AV	118.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_09.08.52

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ac80 CH38 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

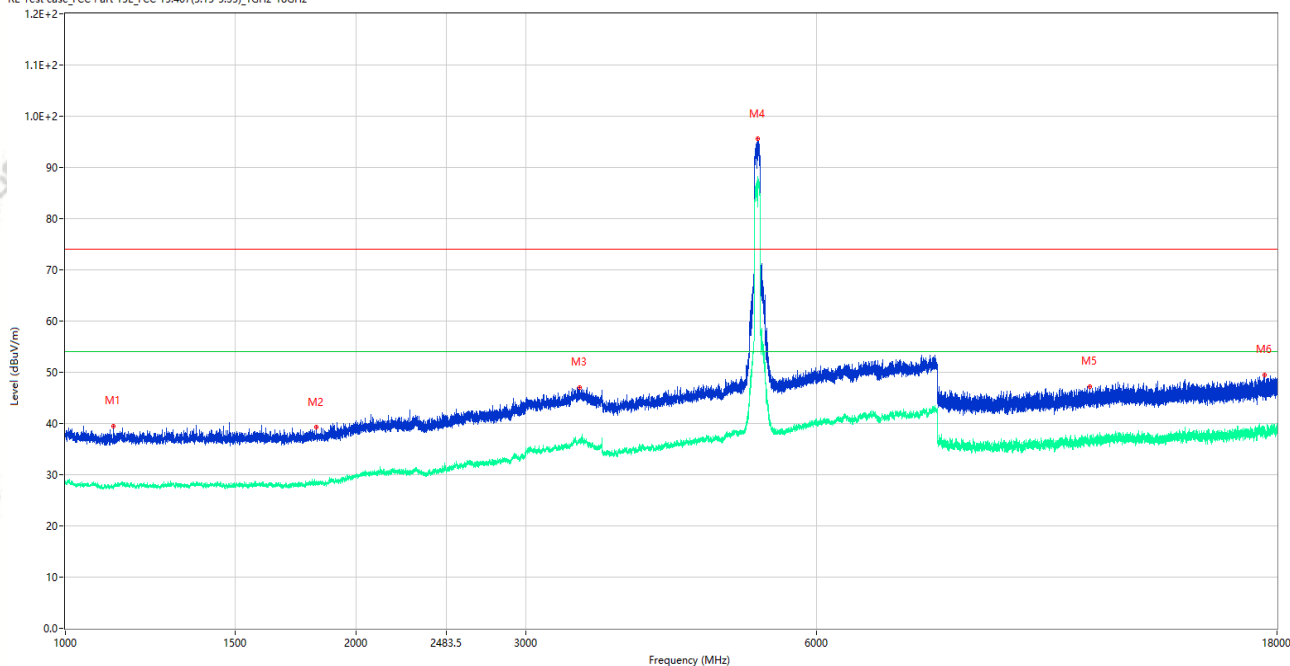

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1121.250	39.53	-15.74	74.0	34.47	Peak	77.00	150	Vertical	Pass
1**	1121.250	27.41	-15.74	54.0	26.59	AV	77.00	150	Vertical	Pass
2	1818.500	39.24	-16.03	74.0	34.76	Peak	42.00	150	Vertical	Pass
2**	1818.500	28.25	-16.03	54.0	25.75	AV	42.00	150	Vertical	Pass
3	3411.000	47.09	-5.30	74.0	26.91	Peak	163.00	150	Vertical	Pass
3**	3411.000	36.62	-5.30	54.0	17.38	AV	163.00	150	Vertical	Pass
4	5220.000	95.54	-2.36	74.0	-21.54	Peak	163.00	150	Vertical	N/A
4**	5220.000	87.60	-2.36	54.0	-33.60	AV	163.00	150	Vertical	N/A
5	11515.950	47.24	-2.81	74.0	26.76	Peak	290.00	150	Vertical	Pass
5**	11515.950	36.69	-2.81	54.0	17.31	AV	290.00	150	Vertical	Pass
6	17475.525	49.49	0.21	74.0	24.51	Peak	42.00	150	Vertical	Pass
6**	17475.525	37.93	0.21	54.0	16.07	AV	42.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_09.15.47

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=18


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

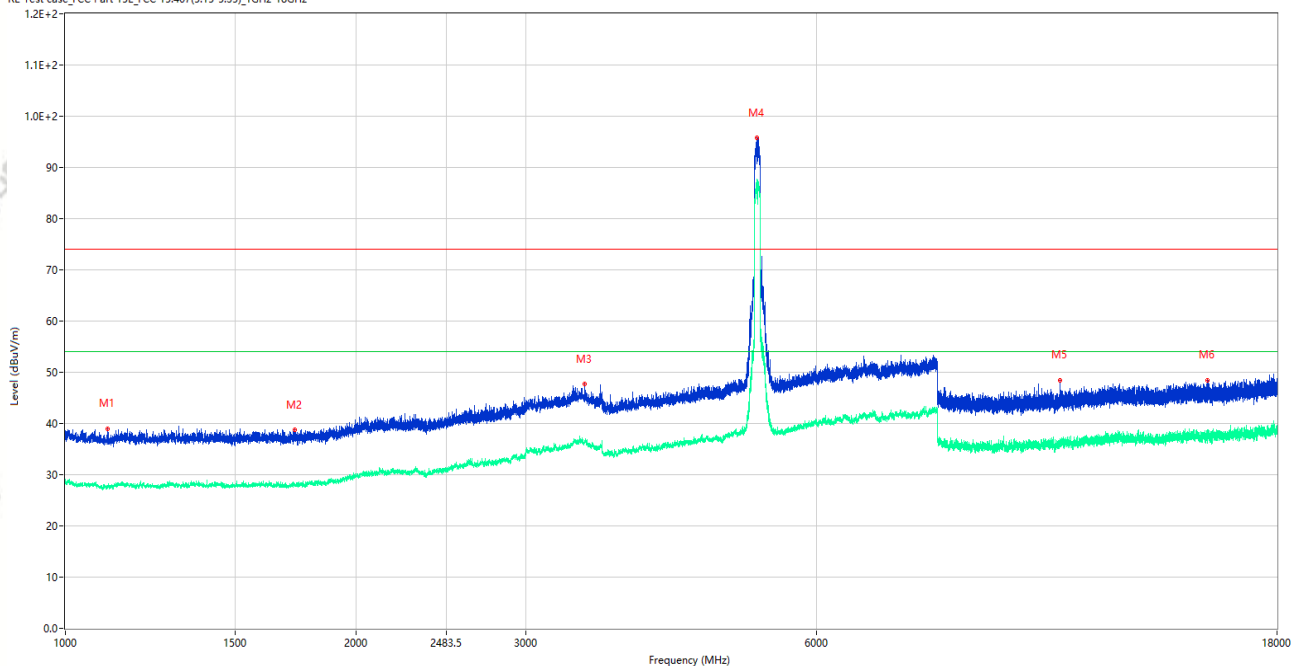

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1106.250	39.00	-15.76	74.0	35.00	Peak	242.00	150	Horizontal	Pass
1**	1106.250	27.87	-15.76	54.0	26.13	AV	242.00	150	Horizontal	Pass
2	1727.000	38.71	-16.19	74.0	35.29	Peak	0.00	150	Horizontal	Pass
2**	1727.000	28.16	-16.19	54.0	25.84	AV	0.00	150	Horizontal	Pass
3	3452.000	47.64	-4.95	74.0	26.36	Peak	136.00	150	Horizontal	Pass
3**	3452.000	36.15	-4.95	54.0	17.85	AV	136.00	150	Horizontal	Pass
4	5206.500	95.76	-2.33	74.0	-21.76	Peak	158.00	150	Horizontal	N/A
4**	5206.500	87.61	-2.33	54.0	-33.61	AV	158.00	150	Horizontal	N/A
5	10728.162	48.49	-3.76	74.0	25.51	Peak	0.00	150	Horizontal	Pass
5**	10728.162	36.20	-3.76	54.0	17.80	AV	0.00	150	Horizontal	Pass
6	15260.812	48.48	-1.03	74.0	25.52	Peak	164.00	150	Horizontal	Pass
6**	15260.812	38.03	-1.03	54.0	15.97	AV	164.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_10.25.06

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 52

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: Normal working Link(5.2G WIFI)

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

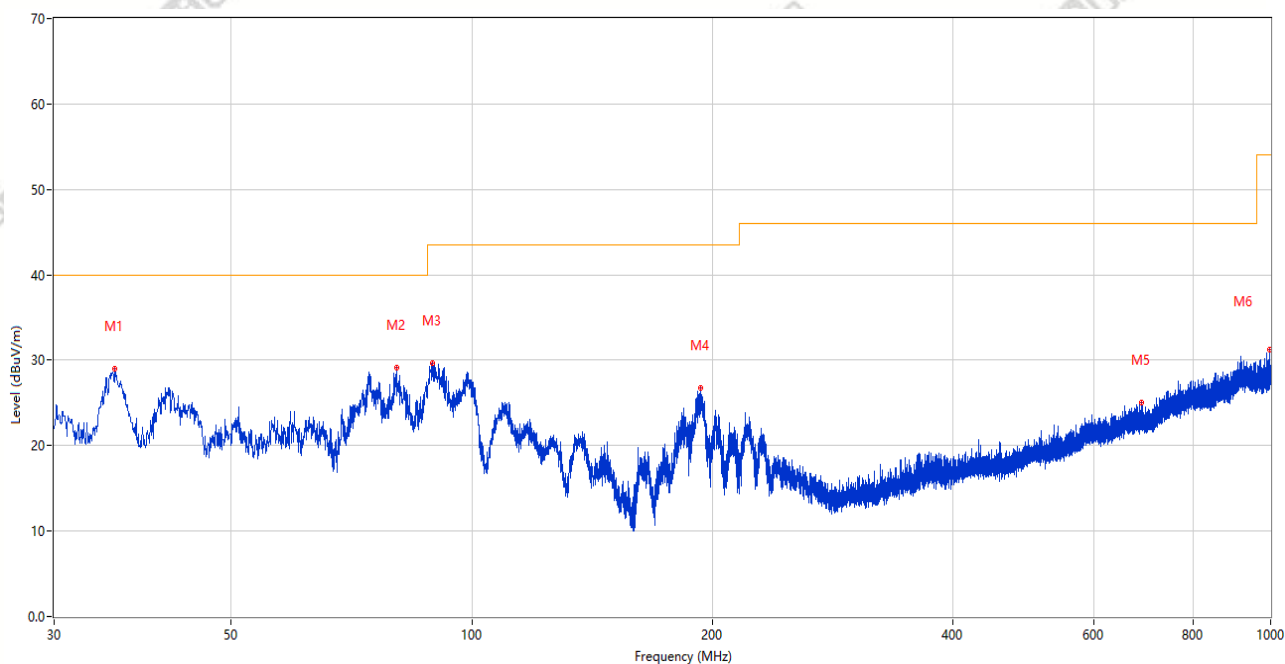

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.772	28.95	-28.79	40.0	11.05	Peak	218.00	100	Vertical	Pass
2	80.586	29.15	-31.77	40.0	10.85	Peak	111.00	100	Vertical	Pass
3	89.267	29.65	-29.24	43.5	13.85	Peak	108.00	100	Vertical	Pass
4	193.300	26.75	-26.65	43.5	16.75	Peak	0.00	200	Vertical	Pass
5	689.988	25.11	-14.44	46.0	20.89	Peak	313.00	100	Vertical	Pass
6	996.265	31.22	-8.84	54.0	22.78	Peak	307.00	100	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_10.31.58

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 52

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Test Voltage: AC 120V/60Hz

Test Site: 966#1

Test Mode: Normal working Link(5.2G WIFI)

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

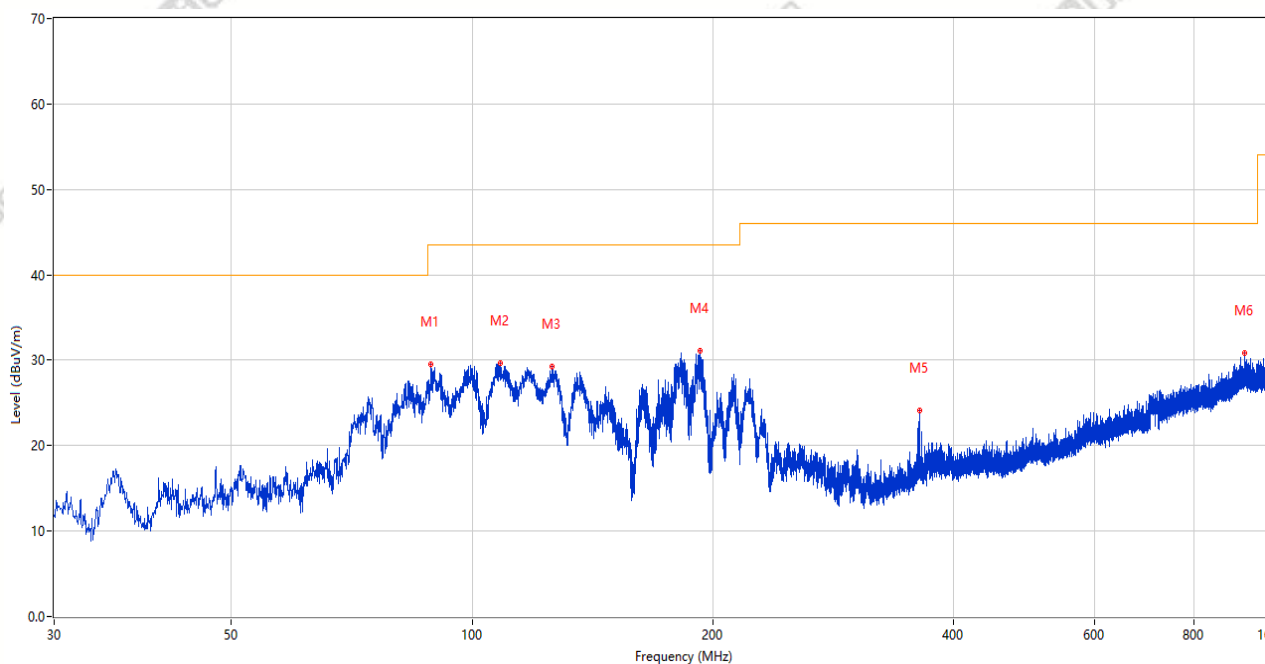

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	88.879	29.55	-29.38	43.5	13.95	Peak	161.00	200	Horizontal	Pass
2	108.327	29.64	-27.21	43.5	13.86	Peak	129.00	200	Horizontal	Pass
3	125.739	29.21	-29.55	43.5	14.29	Peak	149.00	100	Horizontal	Pass
4	192.718	31.17	-26.75	43.5	12.33	Peak	302.00	100	Horizontal	Pass
5	362.565	24.11	-22.39	46.0	21.89	Peak	226.00	200	Horizontal	Pass
6	925.504	30.83	-9.13	46.0	15.17	Peak	43.00	100	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_10.39.23

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

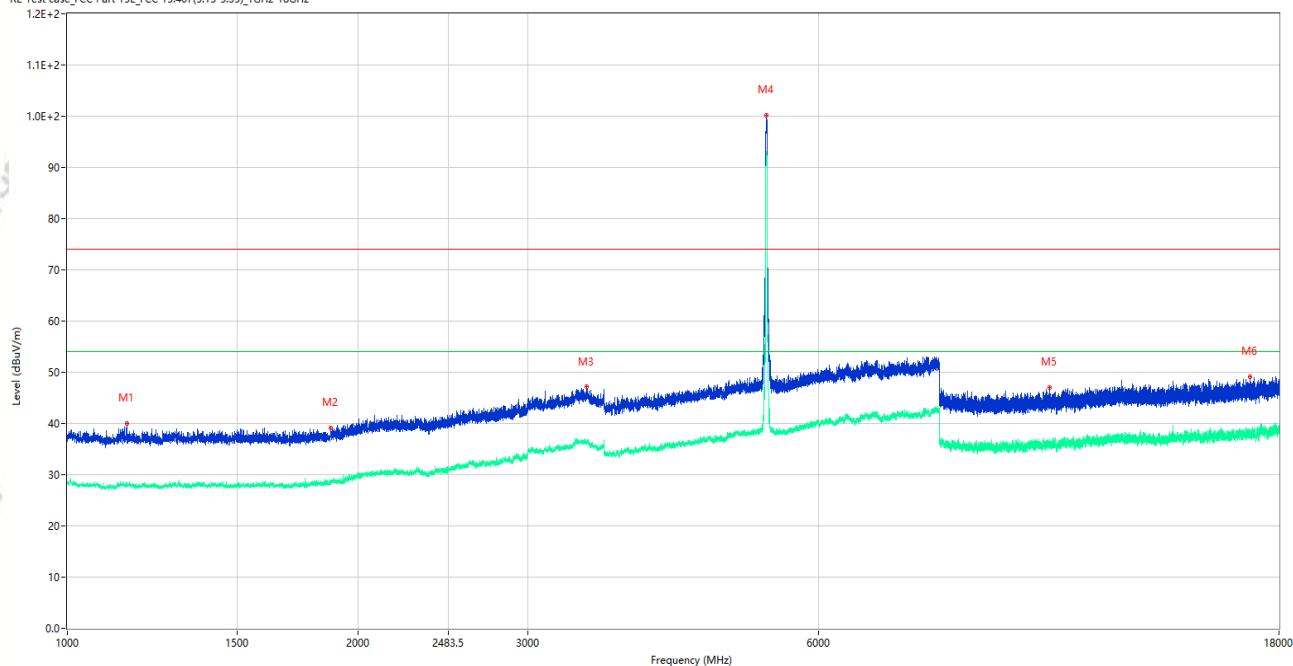

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1152.750	40.06	-15.67	74.0	33.94	Peak	247.00	150	Vertical	Pass
1**	1152.750	27.90	-15.67	54.0	26.10	AV	247.00	150	Vertical	Pass
2	1875.250	39.19	-15.50	74.0	34.81	Peak	246.00	150	Vertical	Pass
2**	1875.250	28.58	-15.50	54.0	25.42	AV	246.00	150	Vertical	Pass
3	3453.500	47.16	-4.94	74.0	26.84	Peak	23.00	150	Vertical	Pass
3**	3453.500	36.33	-4.94	54.0	17.67	AV	23.00	150	Vertical	Pass
4	5302.500	100.23	-2.04	74.0	-26.23	Peak	164.00	150	Vertical	N/A
4**	5302.500	92.57	-2.04	54.0	-38.57	AV	164.00	150	Vertical	N/A
5	10408.963	47.10	-3.21	74.0	26.90	Peak	355.00	150	Vertical	Pass
5**	10408.963	36.42	-3.21	54.0	17.58	AV	355.00	150	Vertical	Pass
6	16805.364	49.16	-1.28	74.0	24.84	Peak	63.00	150	Vertical	Pass
6**	16805.364	38.10	-1.28	54.0	15.90	AV	63.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_10.34.06

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11a CH60 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

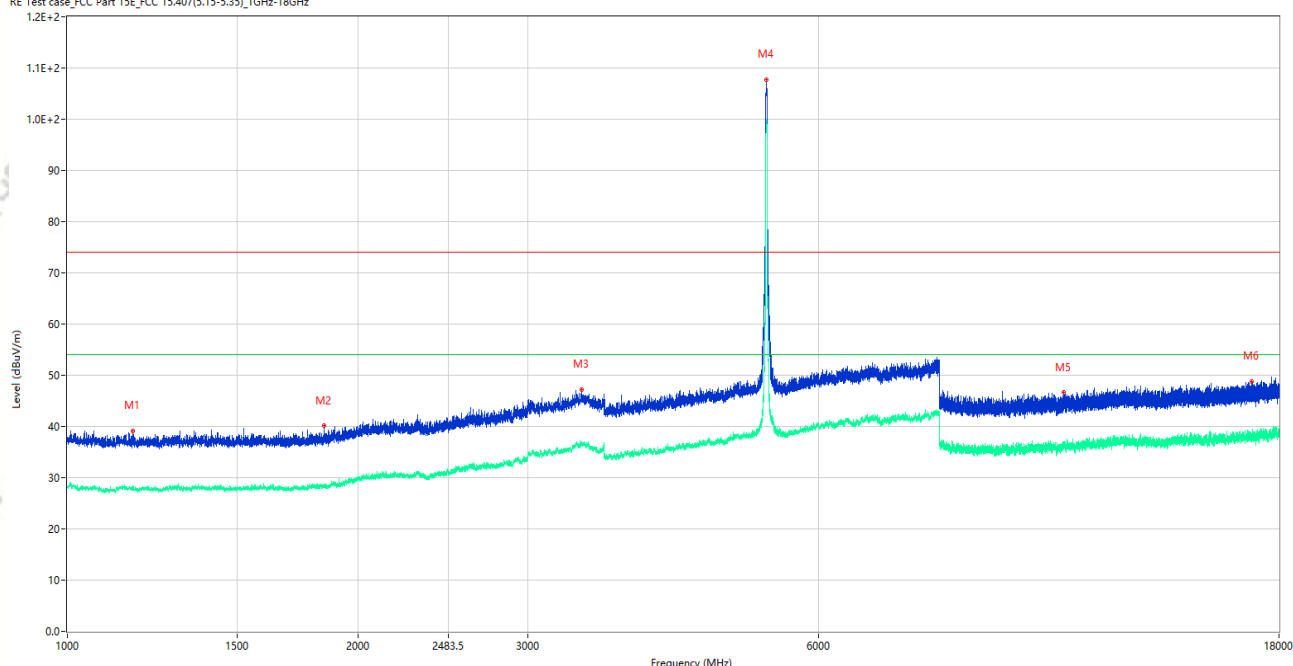

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1169.750	39.19	-15.51	74.0	34.81	Peak	340.00	150	Horizontal	Pass
1**	1169.750	28.02	-15.51	54.0	25.98	AV	340.00	150	Horizontal	Pass
2	1844.000	40.10	-15.83	74.0	33.90	Peak	7.00	150	Horizontal	Pass
2**	1844.000	28.28	-15.83	54.0	25.72	AV	7.00	150	Horizontal	Pass
3	3408.000	47.23	-5.34	74.0	26.77	Peak	32.00	150	Horizontal	Pass
3**	3408.000	36.80	-5.34	54.0	17.20	AV	32.00	150	Horizontal	Pass
4	5299.000	107.78	-2.01	74.0	-33.78	Peak	198.00	150	Horizontal	N/A
4**	5299.000	99.34	-2.01	54.0	-45.34	AV	198.00	150	Horizontal	N/A
5	10778.276	46.66	-3.00	74.0	27.34	Peak	321.00	150	Horizontal	Pass
5**	10778.276	36.46	-3.00	54.0	17.54	AV	321.00	150	Horizontal	Pass
6	16854.187	48.85	-1.38	74.0	25.15	Peak	358.00	150	Horizontal	Pass
6**	16854.187	37.70	-1.38	54.0	16.30	AV	358.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_10.47.04

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

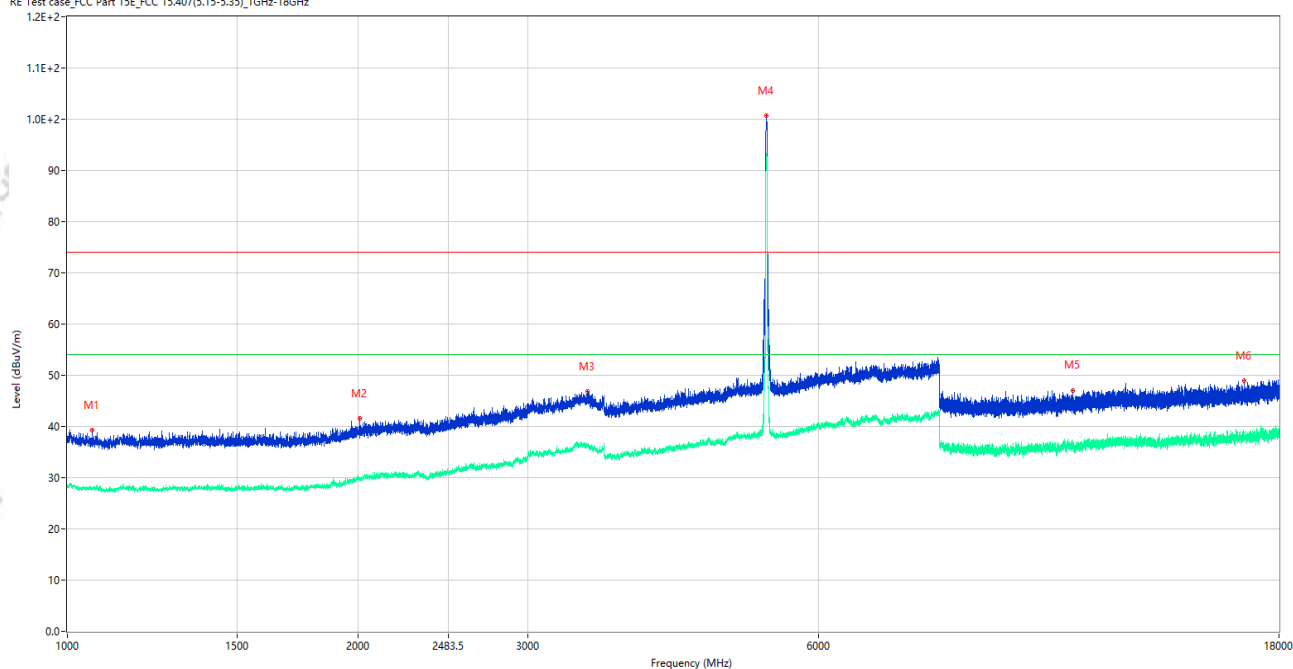

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1060.750	39.26	-15.27	74.0	34.74	Peak	181.00	150	Vertical	Pass
1**	1060.750	28.12	-15.27	54.0	25.88	AV	181.00	150	Vertical	Pass
2	2010.500	41.64	-14.22	74.0	32.36	Peak	214.00	150	Vertical	Pass
2**	2010.500	29.67	-14.22	54.0	24.33	AV	214.00	150	Vertical	Pass
3	3461.000	46.84	-4.96	74.0	27.16	Peak	159.00	150	Vertical	Pass
3**	3461.000	36.44	-4.96	54.0	17.56	AV	159.00	150	Vertical	Pass
4	5301.500	100.65	-2.07	74.0	-26.65	Peak	168.00	150	Vertical	N/A
4**	5301.500	93.32	-2.07	54.0	-39.32	AV	168.00	150	Vertical	N/A
5	10998.912	47.06	-2.73	74.0	26.94	Peak	230.00	150	Vertical	Pass
5**	10998.912	36.41	-2.73	54.0	17.59	AV	230.00	150	Vertical	Pass
6	16572.787	48.87	-0.73	74.0	25.13	Peak	64.00	150	Vertical	Pass
6**	16572.787	38.15	-0.73	54.0	15.85	AV	64.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_10.54.55

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n20 CH60 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

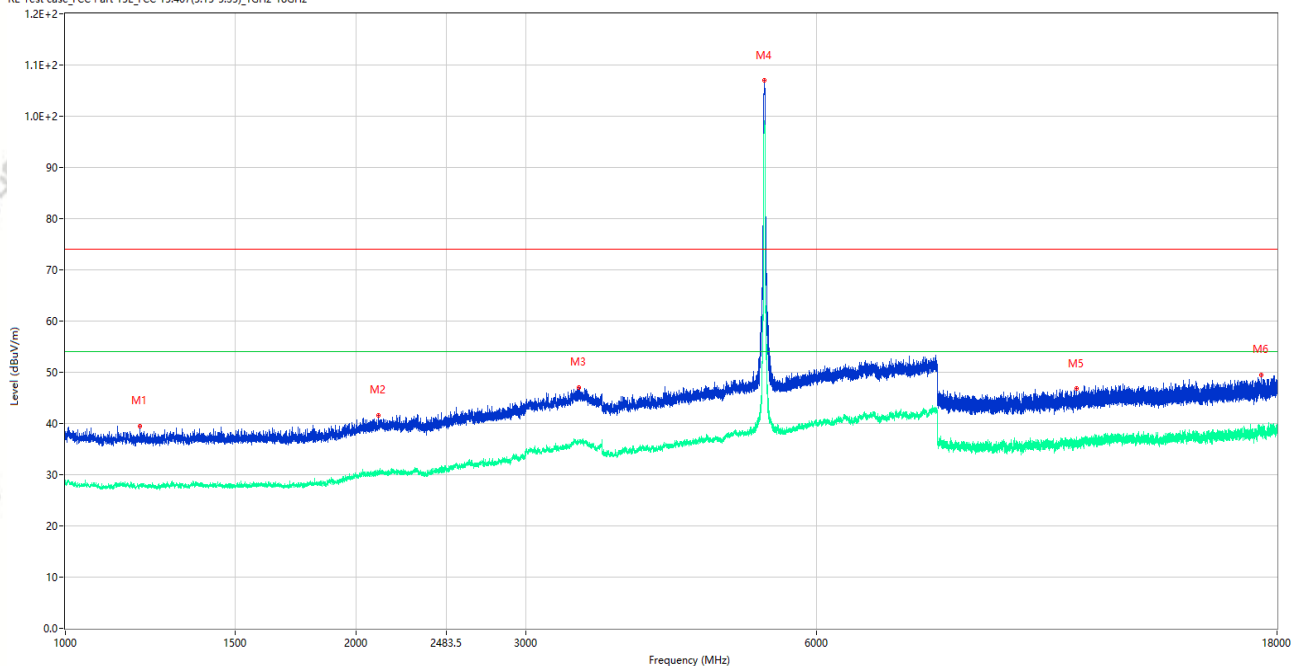

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.750	39.56	-15.78	74.0	34.44	Peak	271.00	150	Horizontal	Pass
1**	1193.750	27.83	-15.78	54.0	26.17	AV	271.00	150	Horizontal	Pass
2	2110.500	41.59	-13.59	74.0	32.41	Peak	174.00	150	Horizontal	Pass
2**	2110.500	30.36	-13.59	54.0	23.64	AV	174.00	150	Horizontal	Pass
3	3406.000	47.04	-5.41	74.0	26.96	Peak	25.00	150	Horizontal	Pass
3**	3406.000	36.52	-5.41	54.0	17.48	AV	25.00	150	Horizontal	Pass
4	5298.000	106.97	-2.04	74.0	-32.97	Peak	207.00	150	Horizontal	N/A
4**	5298.000	98.69	-2.04	54.0	-44.69	AV	207.00	150	Horizontal	N/A
5	11165.400	46.79	-4.09	74.0	27.21	Peak	144.00	150	Horizontal	Pass
5**	11165.400	35.96	-4.09	54.0	18.04	AV	144.00	150	Horizontal	Pass
6	17345.849	49.39	0.25	74.0	24.61	Peak	291.00	150	Horizontal	Pass
6**	17345.849	38.71	0.25	54.0	15.29	AV	291.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_11.10.14

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

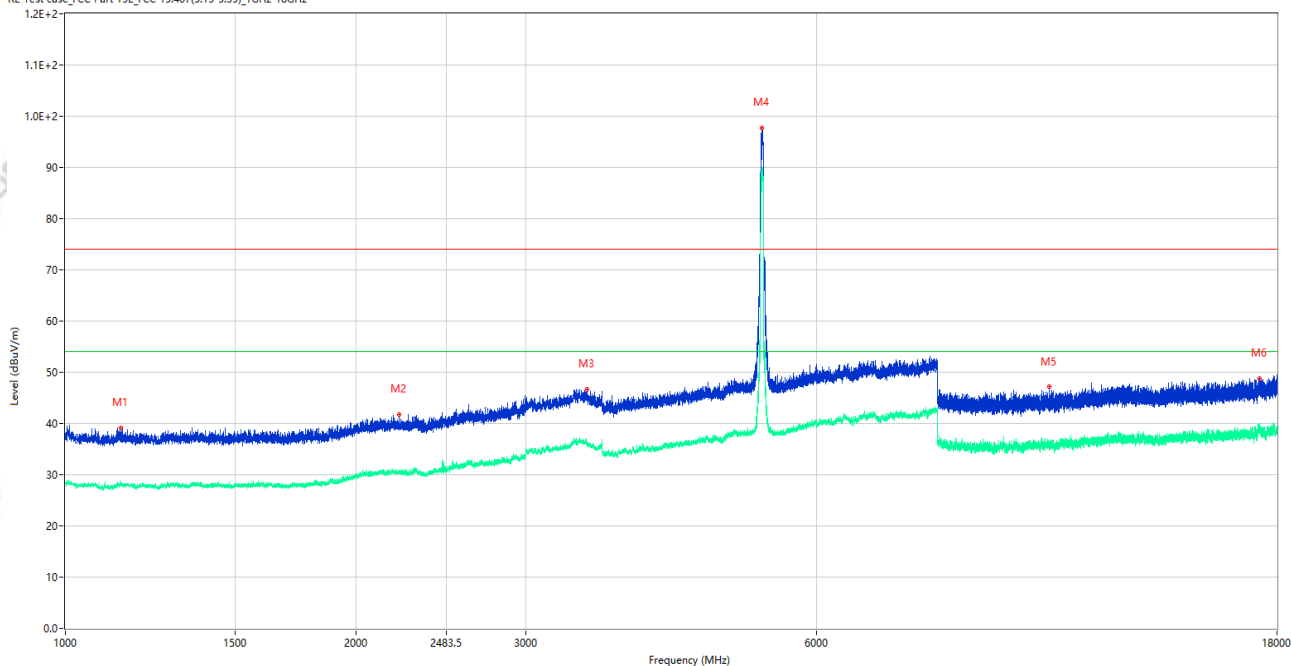

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1140.750	39.17	-15.59	74.0	34.83	Peak	85.00	150	Vertical	Pass
1**	1140.750	28.14	-15.59	54.0	25.86	AV	85.00	150	Vertical	Pass
2	2218.500	41.77	-13.09	74.0	32.23	Peak	7.00	150	Vertical	Pass
2**	2218.500	30.33	-13.09	54.0	23.67	AV	7.00	150	Vertical	Pass
3	3469.000	46.71	-5.42	74.0	27.29	Peak	239.00	150	Vertical	Pass
3**	3469.000	36.19	-5.42	54.0	17.81	AV	239.00	150	Vertical	Pass
4	5268.500	97.79	-2.44	74.0	-23.79	Peak	151.00	150	Vertical	N/A
4**	5268.500	89.99	-2.44	54.0	-35.99	AV	151.00	150	Vertical	N/A
5	10452.425	47.14	-3.36	74.0	26.86	Peak	302.00	150	Vertical	Pass
5**	10452.425	35.48	-3.36	54.0	18.52	AV	302.00	150	Vertical	Pass
6	17263.161	48.84	-1.48	74.0	25.16	Peak	358.00	150	Vertical	Pass
6**	17263.161	38.66	-1.48	54.0	15.34	AV	358.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_11.04.38

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11n40 CH54 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

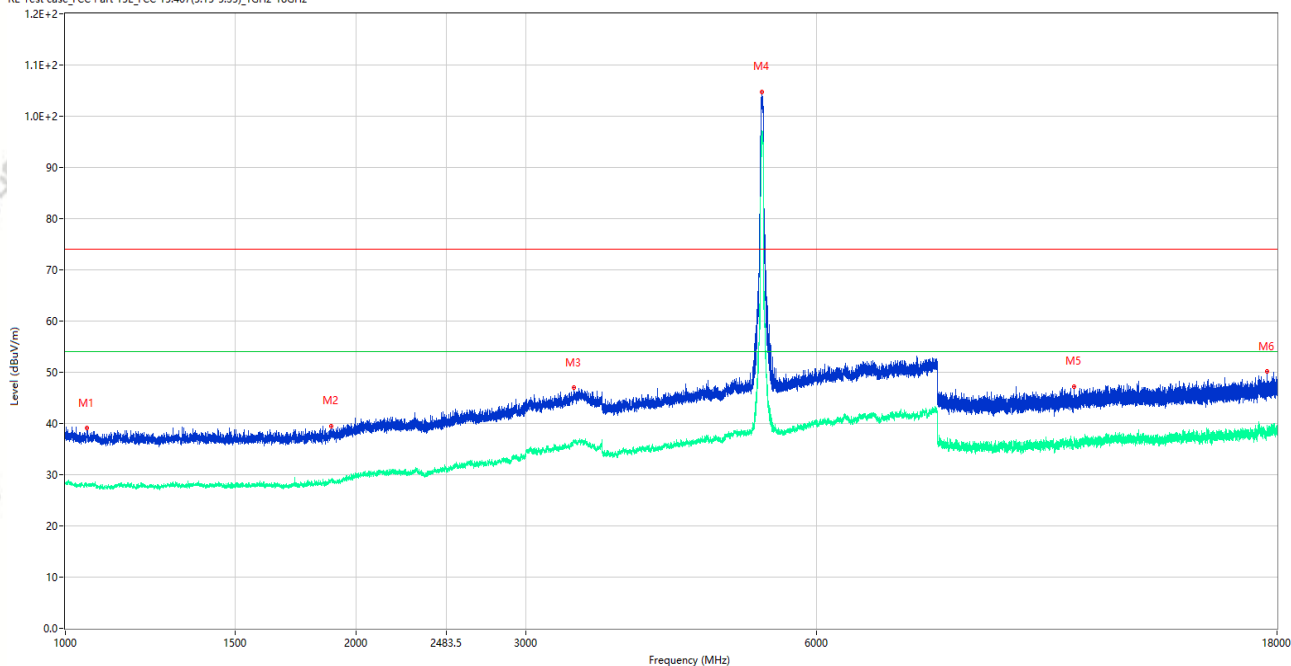

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1053.500	39.11	-15.44	74.0	34.89	Peak	205.00	150	Horizontal	Pass
1**	1053.500	27.71	-15.44	54.0	26.29	AV	205.00	150	Horizontal	Pass
2	1884.250	39.51	-15.31	74.0	34.49	Peak	20.00	150	Horizontal	Pass
2**	1884.250	28.82	-15.31	54.0	25.18	AV	20.00	150	Horizontal	Pass
3	3363.000	46.94	-5.43	74.0	27.06	Peak	220.00	150	Horizontal	Pass
3**	3363.000	36.41	-5.43	54.0	17.59	AV	220.00	150	Horizontal	Pass
4	5266.500	104.76	-2.39	74.0	-30.76	Peak	197.00	150	Horizontal	N/A
4**	5266.500	96.32	-2.39	54.0	-42.32	AV	197.00	150	Horizontal	N/A
5	11089.875	47.25	-3.73	74.0	26.75	Peak	74.00	150	Horizontal	Pass
5**	11089.875	36.02	-3.73	54.0	17.98	AV	74.00	150	Horizontal	Pass
6	17591.288	50.14	0.68	74.0	23.86	Peak	64.00	150	Horizontal	Pass
6**	17591.288	38.63	0.68	54.0	15.37	AV	64.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_11.18.42

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

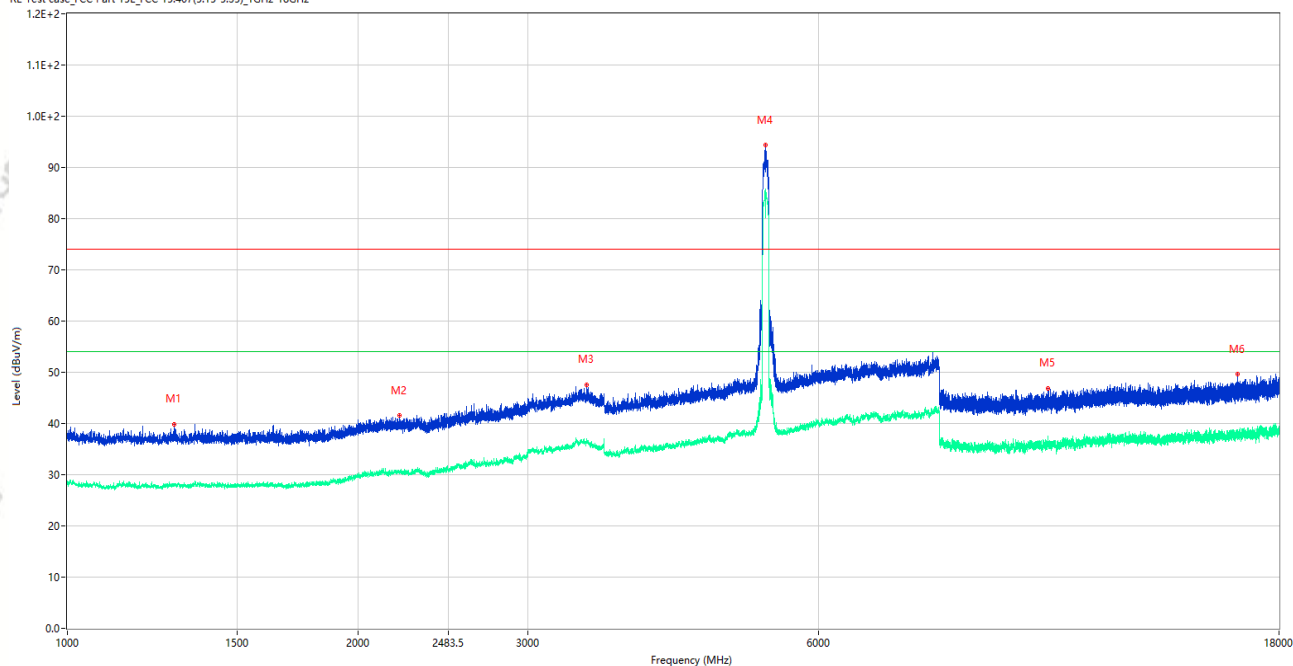

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1290.750	39.90	-15.82	74.0	34.10	Peak	360.00	150	Vertical	Pass
1**	1290.750	28.30	-15.82	54.0	25.70	AV	360.00	150	Vertical	Pass
2	2210.250	41.50	-13.31	74.0	32.50	Peak	360.00	150	Vertical	Pass
2**	2210.250	30.50	-13.31	54.0	23.50	AV	360.00	150	Vertical	Pass
3	3452.500	47.55	-4.95	74.0	26.45	Peak	302.00	150	Vertical	Pass
3**	3452.500	36.12	-4.95	54.0	17.88	AV	302.00	150	Vertical	Pass
4	5283.000	94.36	-2.20	74.0	-20.36	Peak	160.00	150	Vertical	N/A
4**	5283.000	84.65	-2.20	54.0	-30.65	AV	160.00	150	Vertical	N/A
5	10363.600	46.89	-3.17	74.0	27.11	Peak	216.00	150	Vertical	Pass
5**	10363.600	36.10	-3.17	54.0	17.90	AV	216.00	150	Vertical	Pass
6	16296.637	49.57	-1.49	74.0	24.43	Peak	138.00	150	Vertical	Pass
6**	16296.637	38.27	-1.49	54.0	15.73	AV	138.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_11.25.12

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.3G WIFI 11ac80 CH58 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

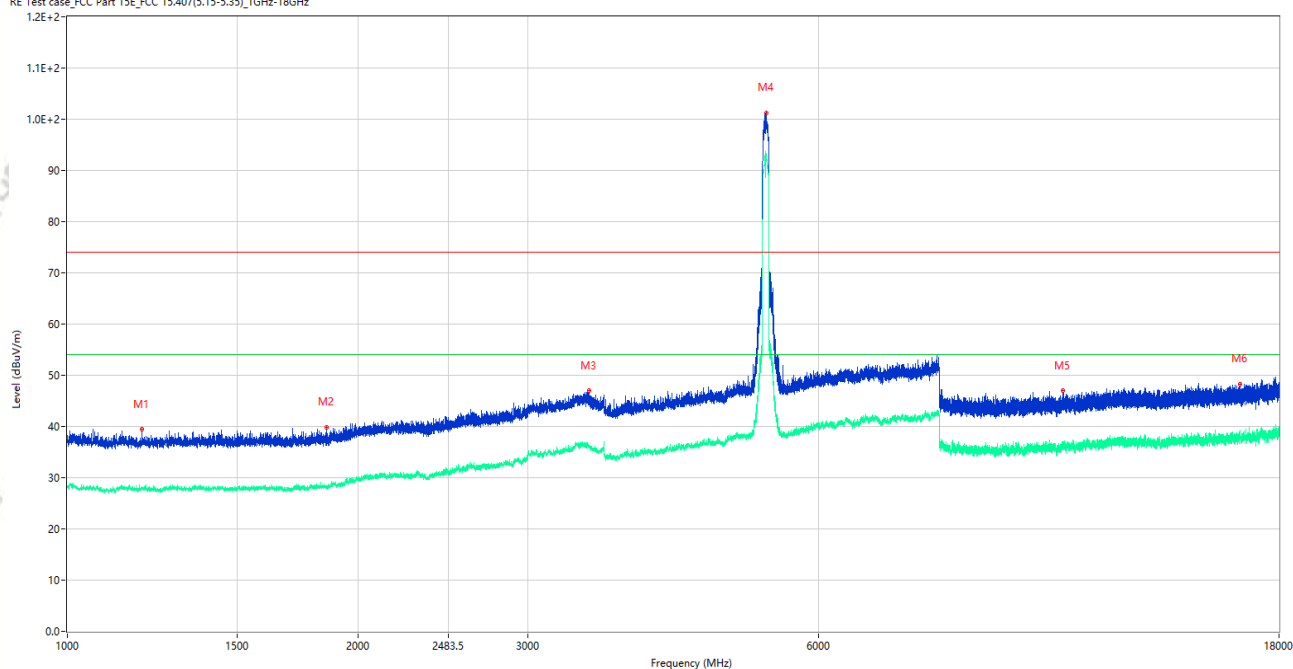

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1195.250	39.42	-15.75	74.0	34.58	Peak	335.00	150	Horizontal	Pass
1**	1195.250	28.17	-15.75	54.0	25.83	AV	335.00	150	Horizontal	Pass
2	1854.750	39.78	-15.82	74.0	34.22	Peak	272.00	150	Horizontal	Pass
2**	1854.750	28.30	-15.82	54.0	25.70	AV	272.00	150	Horizontal	Pass
3	3472.500	46.97	-5.80	74.0	27.03	Peak	340.00	150	Horizontal	Pass
3**	3472.500	35.82	-5.80	54.0	18.18	AV	340.00	150	Horizontal	Pass
4	5296.500	101.24	-2.01	74.0	-27.24	Peak	204.00	150	Horizontal	N/A
4**	5296.500	93.06	-2.01	54.0	-39.06	AV	204.00	150	Horizontal	N/A
5	10746.450	46.99	-3.40	74.0	27.01	Peak	161.00	150	Horizontal	Pass
5**	10746.450	36.00	-3.40	54.0	18.00	AV	161.00	150	Horizontal	Pass
6	16412.401	48.24	-1.56	74.0	25.76	Peak	116.00	150	Horizontal	Pass
6**	16412.401	38.11	-1.56	54.0	15.89	AV	116.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_13.40.36

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

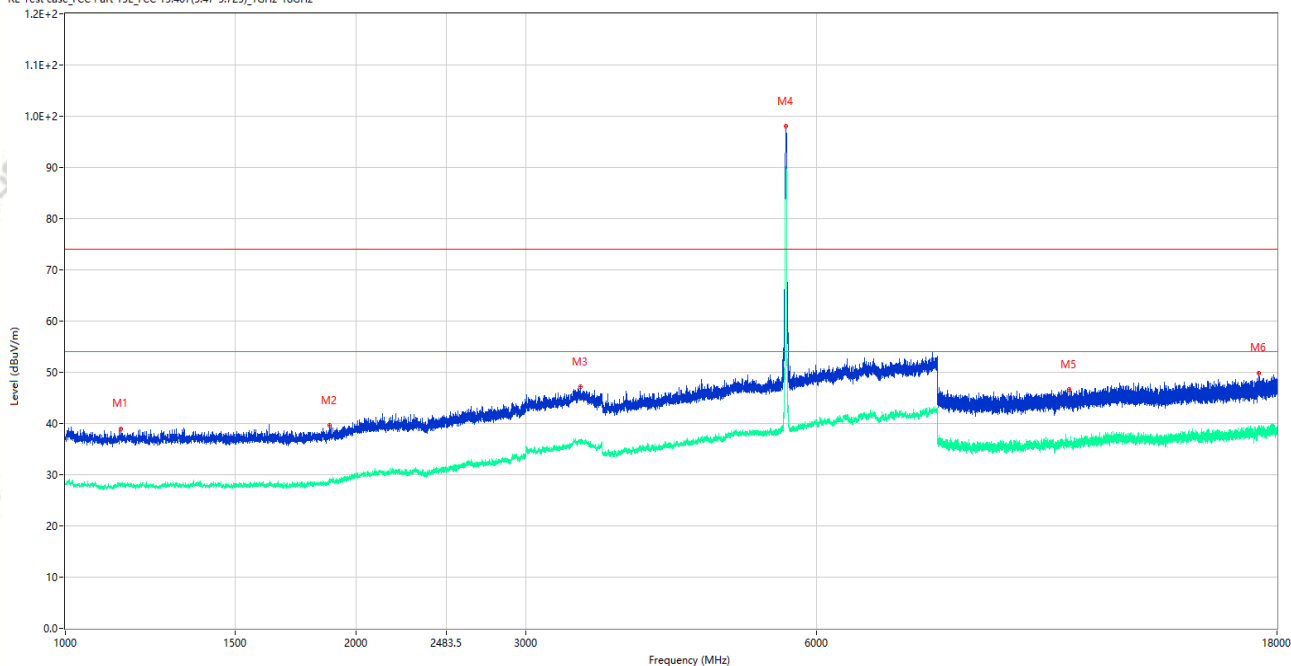

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1141.500	38.96	-15.57	74.0	35.04	Peak	0.00	150	Vertical	Pass
1**	1141.500	28.01	-15.57	54.0	25.99	AV	0.00	150	Vertical	Pass
2	1878.500	39.59	-15.41	74.0	34.41	Peak	349.00	150	Vertical	Pass
2**	1878.500	28.91	-15.41	54.0	25.09	AV	349.00	150	Vertical	Pass
3	3414.500	47.13	-5.24	74.0	26.87	Peak	253.00	150	Vertical	Pass
3**	3414.500	36.39	-5.24	54.0	17.61	AV	253.00	150	Vertical	Pass
4	5578.500	98.05	-2.88	74.0	-24.05	Peak	178.00	150	Vertical	N/A
4**	5578.500	89.81	-2.88	54.0	-35.81	AV	178.00	150	Vertical	N/A
5	10969.463	46.63	-3.22	74.0	27.37	Peak	6.00	150	Vertical	Pass
5**	10969.463	36.46	-3.22	54.0	17.54	AV	6.00	150	Vertical	Pass
6	17235.075	49.81	-0.53	74.0	24.19	Peak	3.00	150	Vertical	Pass
6**	17235.075	38.81	-0.53	54.0	15.19	AV	3.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_13.47.13

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11a CH116 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

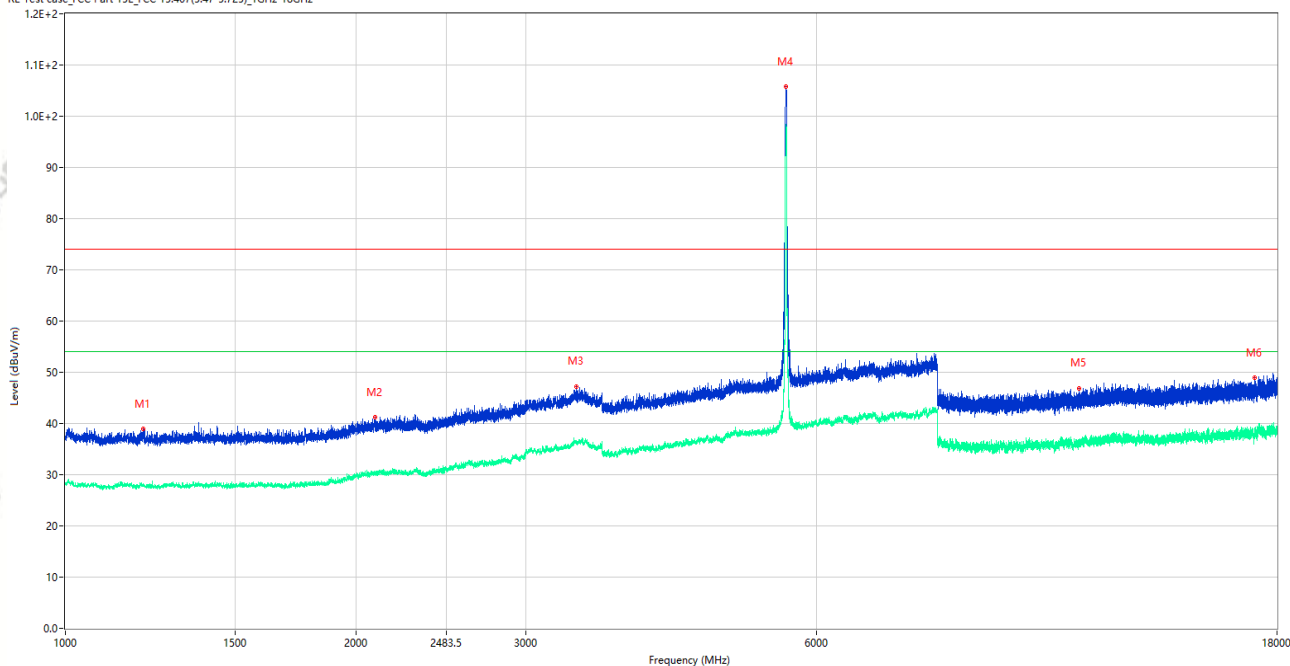

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1204.250	38.90	-15.77	74.0	35.10	Peak	203.00	150	Horizontal	Pass
1**	1204.250	27.98	-15.77	54.0	26.02	AV	203.00	150	Horizontal	Pass
2	2094.750	41.17	-13.63	74.0	32.83	Peak	307.00	150	Horizontal	Pass
2**	2094.750	30.10	-13.63	54.0	23.90	AV	307.00	150	Horizontal	Pass
3	3382.000	47.19	-5.22	74.0	26.81	Peak	103.00	150	Horizontal	Pass
3**	3382.000	36.32	-5.22	54.0	17.68	AV	103.00	150	Horizontal	Pass
4	5579.000	105.70	-2.87	74.0	-31.70	Peak	193.00	150	Horizontal	N/A
4**	5579.000	98.36	-2.87	54.0	-44.36	AV	193.00	150	Horizontal	N/A
5	11219.787	46.90	-4.06	74.0	27.10	Peak	74.00	150	Horizontal	Pass
5**	11219.787	36.26	-4.06	54.0	17.74	AV	74.00	150	Horizontal	Pass
6	17074.426	48.87	-0.74	74.0	25.13	Peak	195.00	150	Horizontal	Pass
6**	17074.426	38.54	-0.74	54.0	15.46	AV	195.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_14.06.39

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

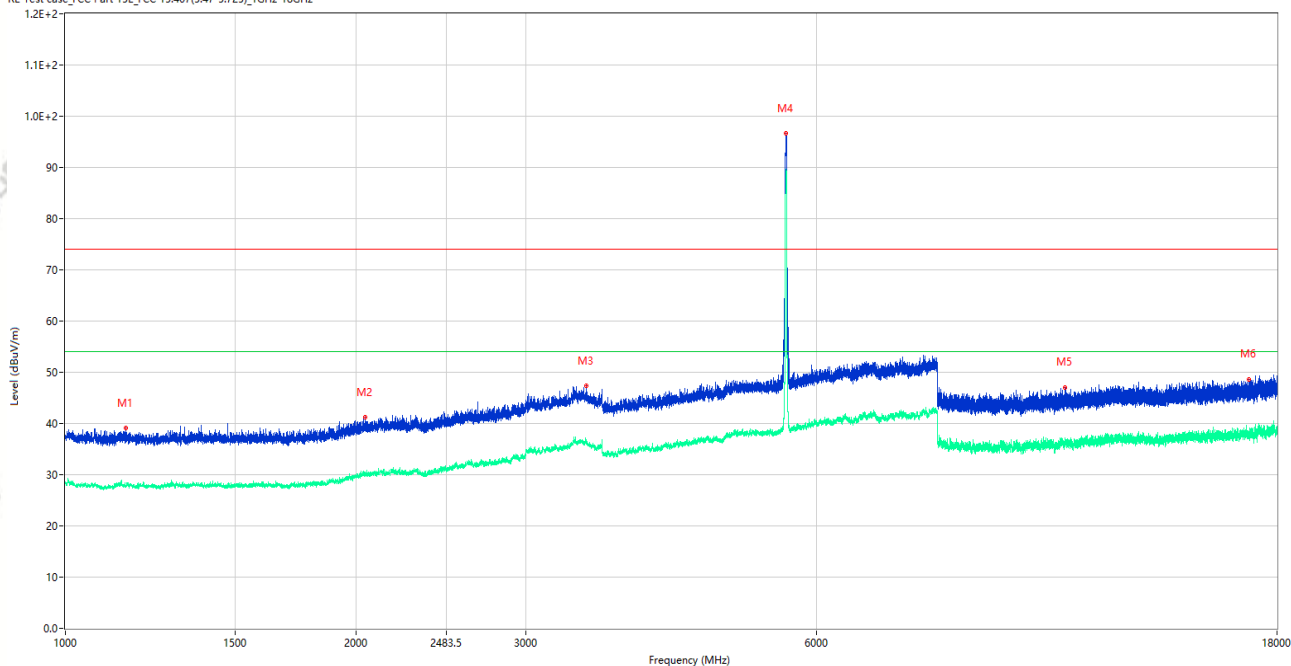

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1155.500	39.10	-15.61	74.0	34.90	Peak	71.00	150	Vertical	Pass
1**	1155.500	27.82	-15.61	54.0	26.18	AV	71.00	150	Vertical	Pass
2	2043.750	41.19	-13.38	74.0	32.81	Peak	359.00	150	Vertical	Pass
2**	2043.750	30.50	-13.38	54.0	23.50	AV	359.00	150	Vertical	Pass
3	3468.000	47.30	-5.31	74.0	26.70	Peak	360.00	150	Vertical	Pass
3**	3468.000	36.32	-5.31	54.0	17.68	AV	360.00	150	Vertical	Pass
4	5581.000	96.58	-2.85	74.0	-22.58	Peak	179.00	150	Vertical	N/A
4**	5581.000	89.25	-2.85	54.0	-35.25	AV	179.00	150	Vertical	N/A
5	10853.562	47.07	-3.42	74.0	26.93	Peak	181.00	150	Vertical	Pass
5**	10853.562	36.22	-3.42	54.0	17.78	AV	181.00	150	Vertical	Pass
6	16823.474	48.64	-1.22	74.0	25.36	Peak	360.00	150	Vertical	Pass
6**	16823.474	37.80	-1.22	54.0	16.20	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_13.57.56

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n20 CH116 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

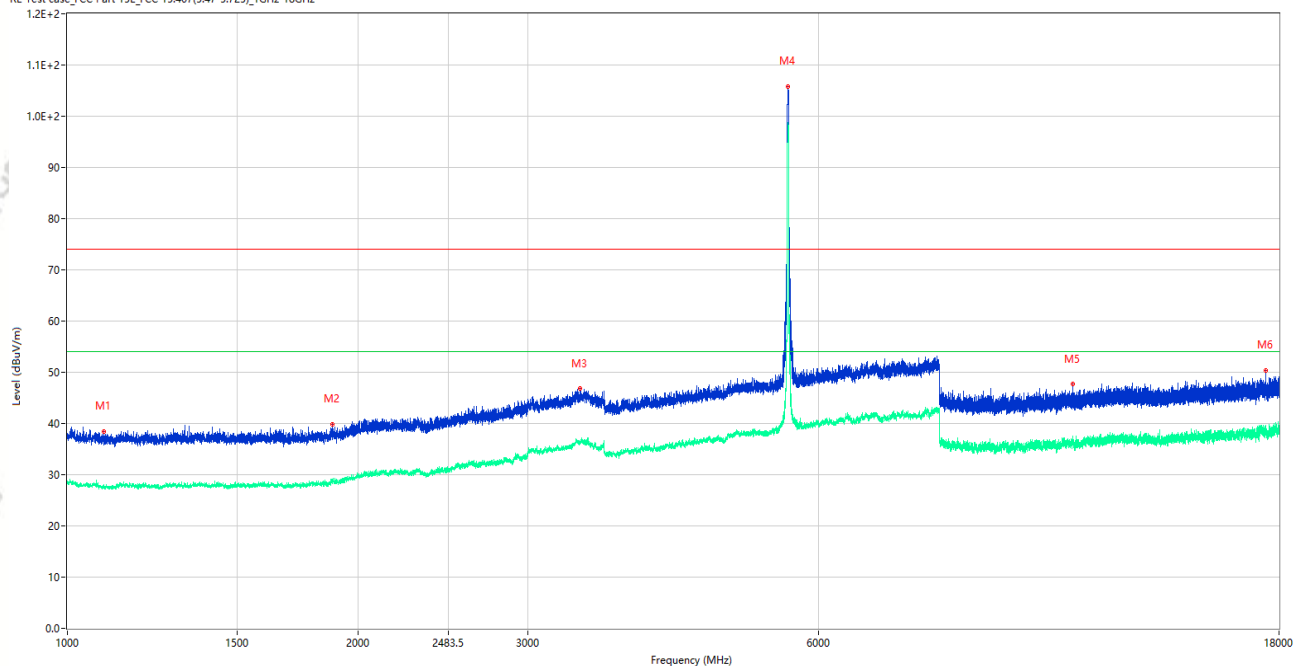

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1091.750	38.46	-15.84	74.0	35.54	Peak	217.00	150	Horizontal	Pass
1**	1091.750	27.45	-15.84	54.0	26.55	AV	217.00	150	Horizontal	Pass
2	1883.500	39.87	-15.31	74.0	34.13	Peak	147.00	150	Horizontal	Pass
2**	1883.500	28.89	-15.31	54.0	25.11	AV	147.00	150	Horizontal	Pass
3	3396.500	46.83	-5.83	74.0	27.17	Peak	1.00	150	Horizontal	Pass
3**	3396.500	36.22	-5.83	54.0	17.78	AV	1.00	150	Horizontal	Pass
4	5581.500	105.83	-2.85	74.0	-31.83	Peak	203.00	150	Horizontal	N/A
4**	5581.500	98.34	-2.85	54.0	-44.34	AV	203.00	150	Horizontal	N/A
5	10996.300	47.67	-2.85	74.0	26.33	Peak	111.00	150	Horizontal	Pass
5**	10996.300	36.58	-2.85	54.0	17.42	AV	111.00	150	Horizontal	Pass
6	17449.275	50.41	0.30	74.0	23.59	Peak	346.00	150	Horizontal	Pass
6**	17449.275	38.64	0.30	54.0	15.36	AV	346.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_14.14.03

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

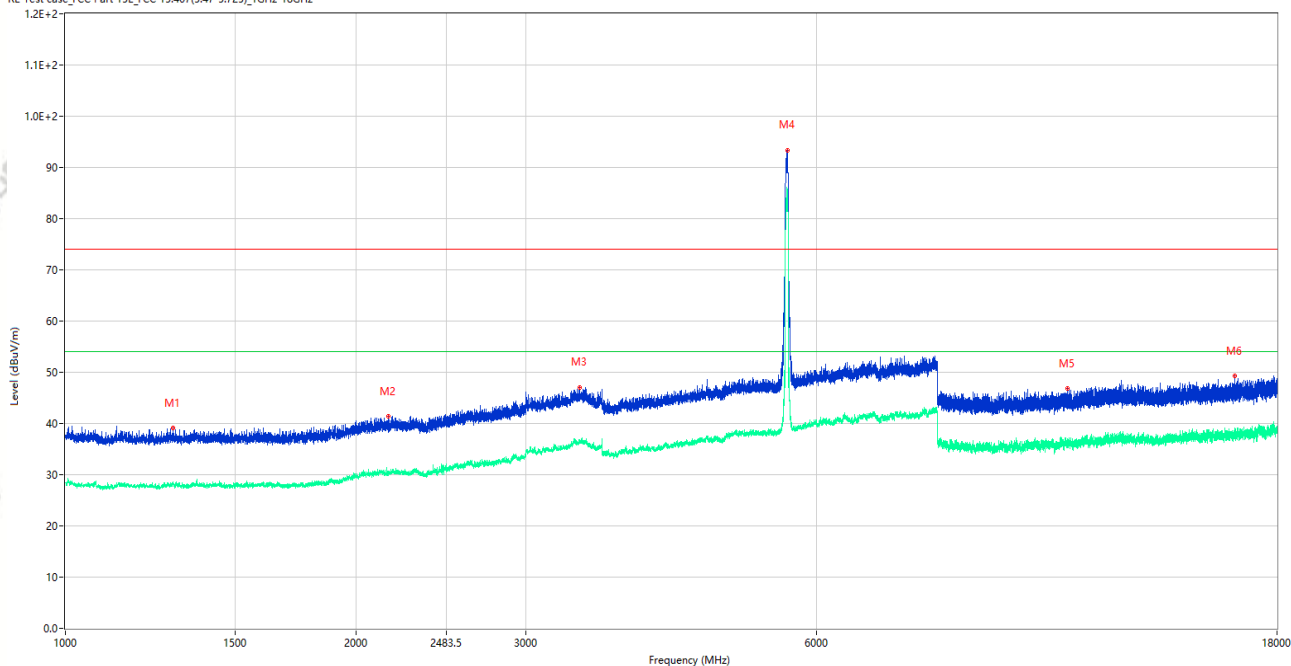

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1292.500	39.09	-15.79	74.0	34.91	Peak	0.00	150	Vertical	Pass
1**	1292.500	27.99	-15.79	54.0	26.01	AV	0.00	150	Vertical	Pass
2	2162.750	41.38	-13.24	74.0	32.62	Peak	101.00	150	Vertical	Pass
2**	2162.750	30.22	-13.24	54.0	23.78	AV	101.00	150	Vertical	Pass
3	3412.000	47.06	-5.29	74.0	26.94	Peak	181.00	150	Vertical	Pass
3**	3412.000	36.43	-5.29	54.0	17.57	AV	181.00	150	Vertical	Pass
4	5595.000	93.39	-2.82	74.0	-19.39	Peak	181.00	150	Vertical	N/A
4**	5595.000	85.51	-2.82	54.0	-31.51	AV	181.00	150	Vertical	N/A
5	10918.400	46.79	-3.37	74.0	27.21	Peak	0.00	150	Vertical	Pass
5**	10918.400	35.88	-3.37	54.0	18.12	AV	0.00	150	Vertical	Pass
6	16264.612	49.29	-1.64	74.0	24.71	Peak	221.00	150	Vertical	Pass
6**	16264.612	37.59	-1.64	54.0	16.41	AV	221.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_14.20.17

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11n40 CH118 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725)_1GHz-18GHz

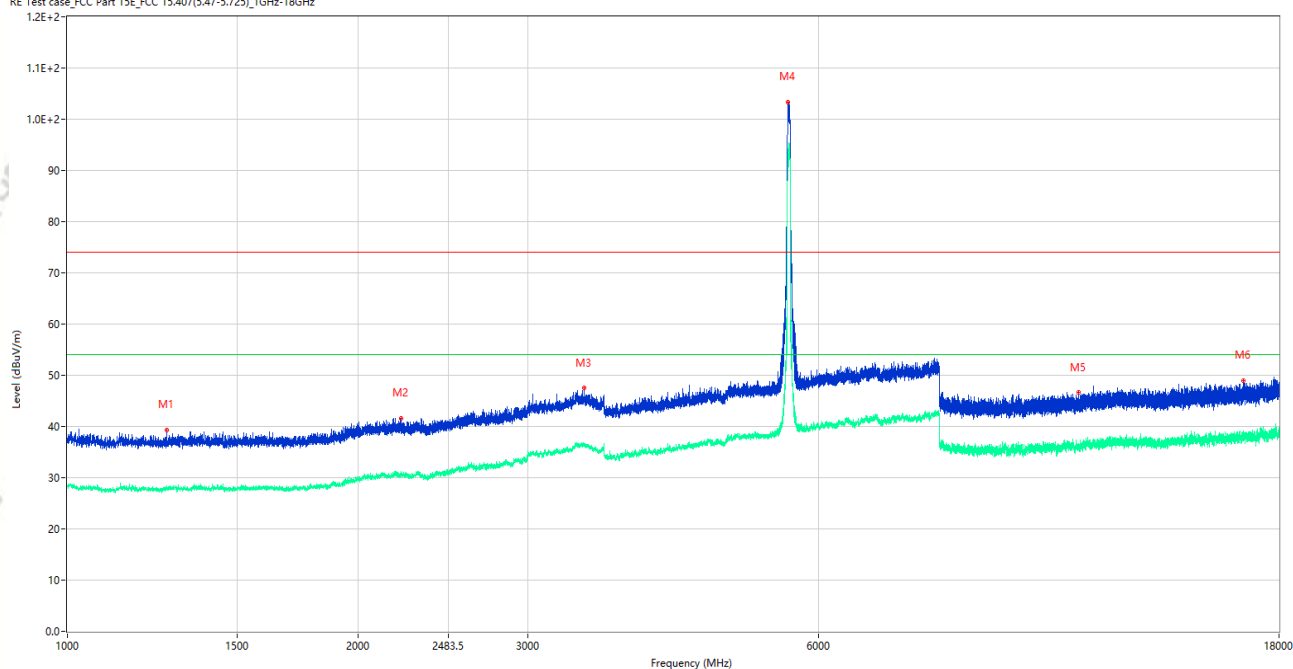

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1266.500	39.36	-15.95	74.0	34.64	Peak	294.00	150	Horizontal	Pass
1**	1266.500	28.35	-15.95	54.0	25.65	AV	294.00	150	Horizontal	Pass
2	2218.500	41.66	-13.09	74.0	32.34	Peak	0.00	150	Horizontal	Pass
2**	2218.500	30.30	-13.09	54.0	23.70	AV	0.00	150	Horizontal	Pass
3	3429.000	47.52	-5.01	74.0	26.48	Peak	69.00	150	Horizontal	Pass
3**	3429.000	36.57	-5.01	54.0	17.43	AV	69.00	150	Horizontal	Pass
4	5583.000	103.39	-2.83	74.0	-29.39	Peak	203.00	150	Horizontal	N/A
4**	5583.000	94.05	-2.83	54.0	-40.05	AV	203.00	150	Horizontal	N/A
5	11156.138	46.65	-4.03	74.0	27.35	Peak	359.00	150	Horizontal	Pass
5**	11156.138	35.90	-4.03	54.0	18.10	AV	359.00	150	Horizontal	Pass
6	16528.949	49.03	-1.68	74.0	24.97	Peak	272.00	150	Horizontal	Pass
6**	16528.949	38.06	-1.68	54.0	15.94	AV	272.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_14.27.05

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH122

P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.47-5.725).1GHz-18GHz

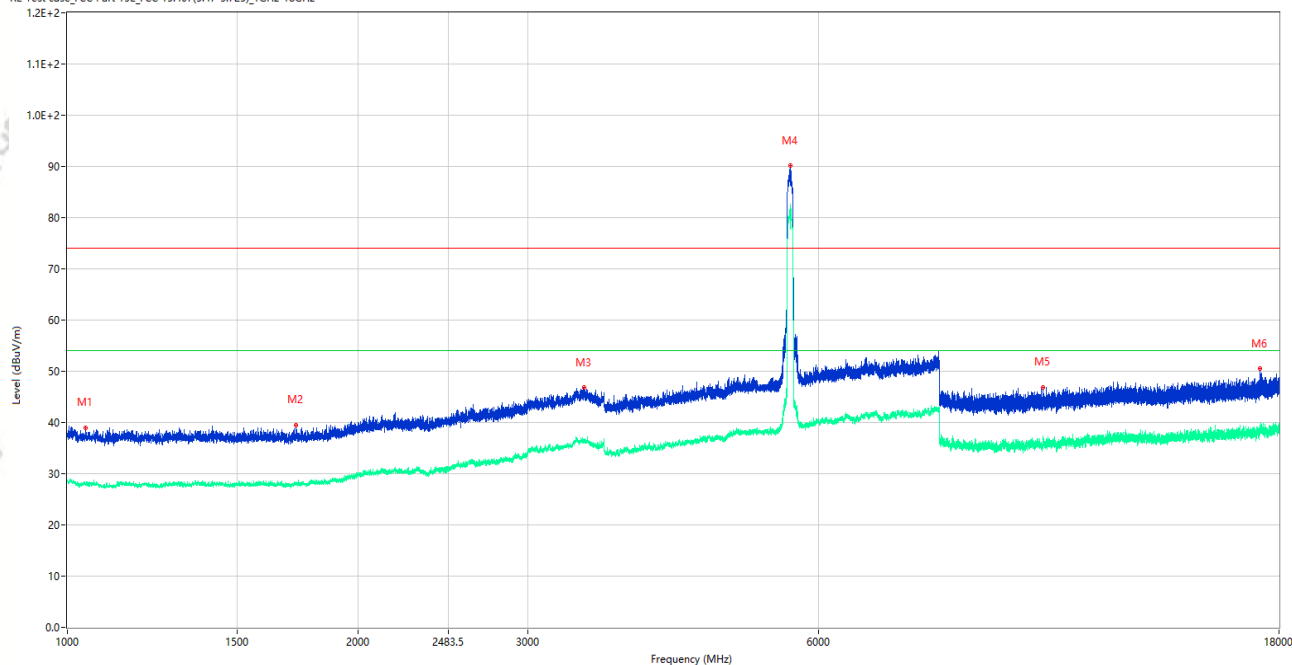

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1044.250	39.02	-15.43	74.0	34.98	Peak	86.00	150	Vertical	Pass
1**	1044.250	27.83	-15.43	54.0	26.17	AV	86.00	150	Vertical	Pass
2	1726.500	39.48	-16.17	74.0	34.52	Peak	146.00	150	Vertical	Pass
2**	1726.500	28.14	-16.17	54.0	25.86	AV	146.00	150	Vertical	Pass
3	3432.500	46.82	-5.09	74.0	27.18	Peak	11.00	150	Vertical	Pass
3**	3432.500	36.16	-5.09	54.0	17.84	AV	11.00	150	Vertical	Pass
4	5614.000	90.10	-2.39	74.0	-16.10	Peak	313.00	150	Vertical	N/A
4**	5614.000	82.32	-2.39	54.0	-28.32	AV	313.00	150	Vertical	N/A
5	10252.687	46.92	-3.16	74.0	27.08	Peak	354.00	150	Vertical	Pass
5**	10252.687	35.87	-3.16	54.0	18.13	AV	354.00	150	Vertical	Pass
6	17186.511	50.47	0.14	74.0	23.53	Peak	144.00	150	Vertical	Pass
6**	17186.511	38.54	0.14	54.0	15.46	AV	144.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_14.27.05

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.6G WIFI 11ac80 CH122

P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Zhang Zhongqiu

Remark: 适配器: A10+数据线: A01

RE Test case FCC Part 15E FCC 15.407(5.47-5.725).1GHz-18GHz

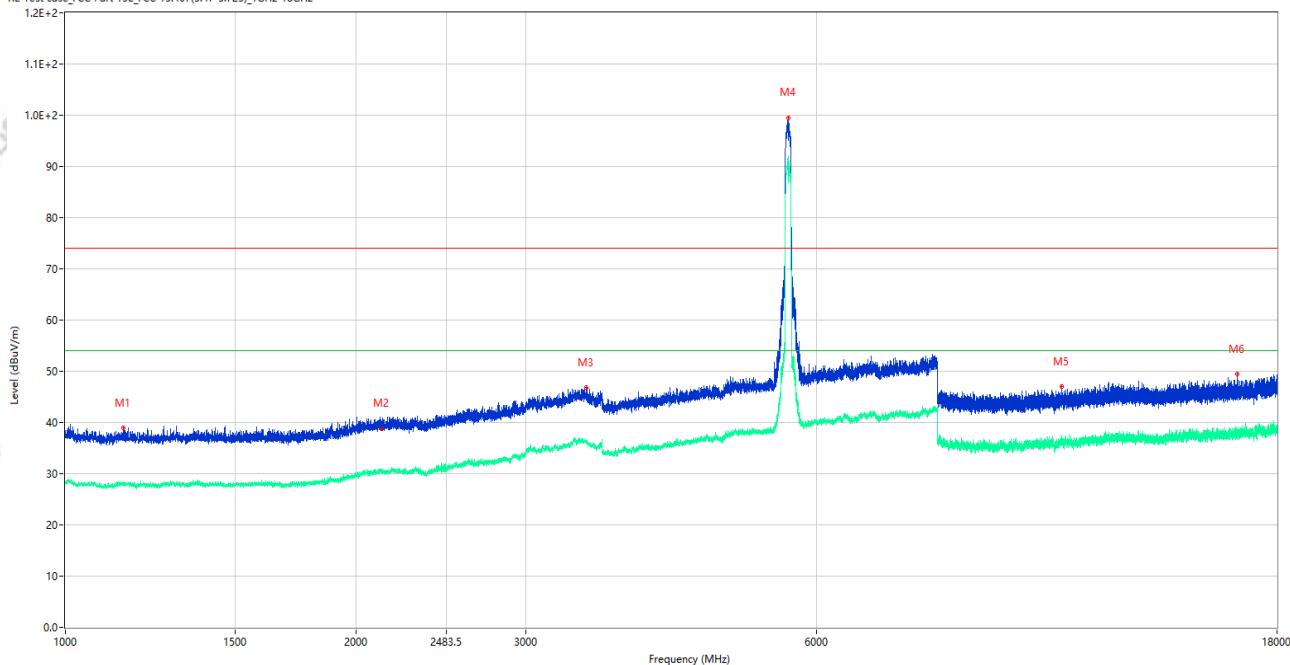

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1148.500	38.99	-15.66	74.0	35.01	Peak	138.00	150	Horizontal	Pass
1**	1148.500	27.87	-15.66	54.0	26.13	AV	138.00	150	Horizontal	Pass
2	2125.000	41.25	-13.29	74.0	32.75	Peak	0.00	150	Horizontal	Pass
2**	2125.000	30.48	-13.29	54.0	23.52	AV	0.00	150	Horizontal	Pass
3	3465.000	46.78	-5.10	74.0	27.22	Peak	31.00	150	Horizontal	Pass
3**	3465.000	36.52	-5.10	54.0	17.48	AV	31.00	150	Horizontal	Pass
4	5606.500	99.50	-2.62	74.0	-25.50	Peak	202.00	150	Horizontal	N/A
4**	5606.500	91.99	-2.62	54.0	-37.99	AV	202.00	150	Horizontal	N/A
5	10776.138	46.95	-2.94	74.0	27.05	Peak	288.00	150	Horizontal	Pass
5**	10776.138	36.78	-2.94	54.0	17.22	AV	288.00	150	Horizontal	Pass
6	16380.637	49.47	-1.36	74.0	24.53	Peak	360.00	150	Horizontal	Pass
6**	16380.637	38.26	-1.36	54.0	15.74	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.28.44

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

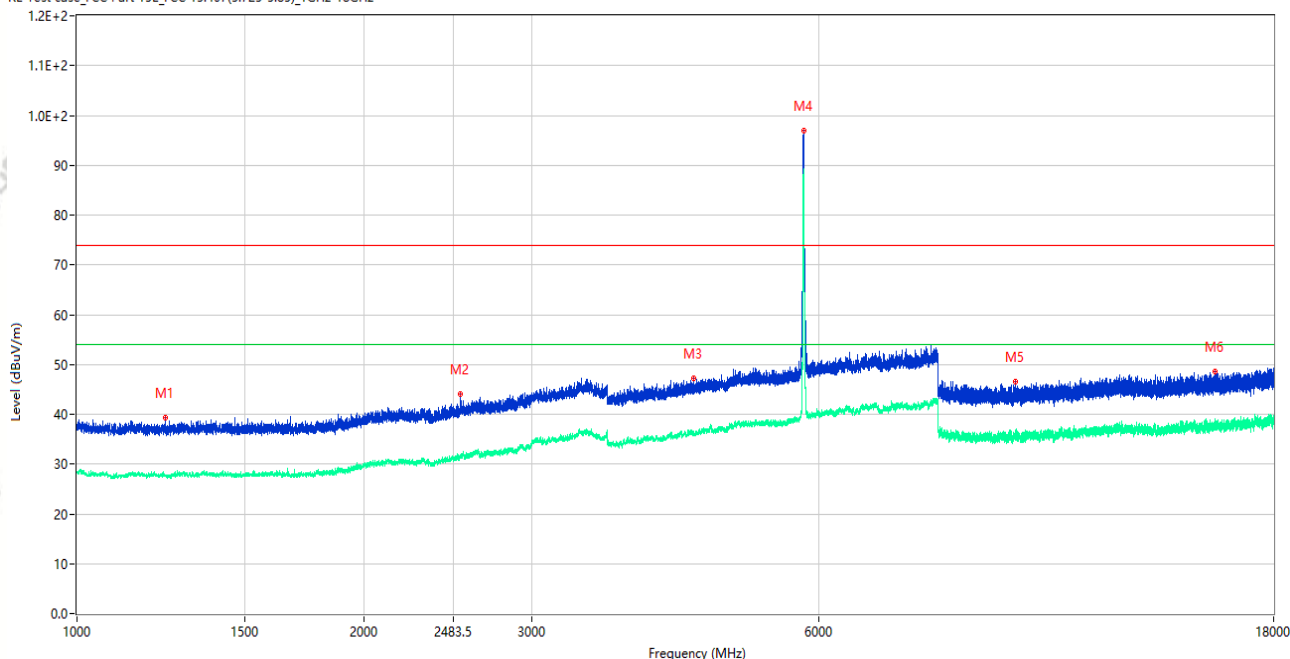

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1237.500	39.34	-16.02	74.0	34.66	Peak	167.00	150	Vertical	Pass
1**	1237.500	27.46	-16.02	54.0	26.54	AV	167.00	150	Vertical	Pass
2	2522.750	43.97	-11.97	74.0	30.03	Peak	174.00	150	Vertical	Pass
2**	2522.750	31.76	-11.97	54.0	22.24	AV	174.00	150	Vertical	Pass
3	4431.000	47.25	-3.02	74.0	26.75	Peak	260.00	150	Vertical	Pass
3**	4431.000	36.29	-3.02	54.0	17.71	AV	260.00	150	Vertical	Pass
4	5783.500	97.02	-1.54	74.0	-23.02	Peak	312.00	150	Vertical	N/A
4**	5783.500	88.89	-1.54	54.0	-34.89	AV	312.00	150	Vertical	N/A
5	9656.563	46.53	-3.14	74.0	27.47	Peak	146.00	150	Vertical	Pass
5**	9656.563	35.68	-3.14	54.0	18.32	AV	146.00	150	Vertical	Pass
6	15622.537	48.54	-1.73	74.0	25.46	Peak	360.00	150	Vertical	Pass
6**	15622.537	38.66	-1.73	54.0	15.34	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.35.20

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

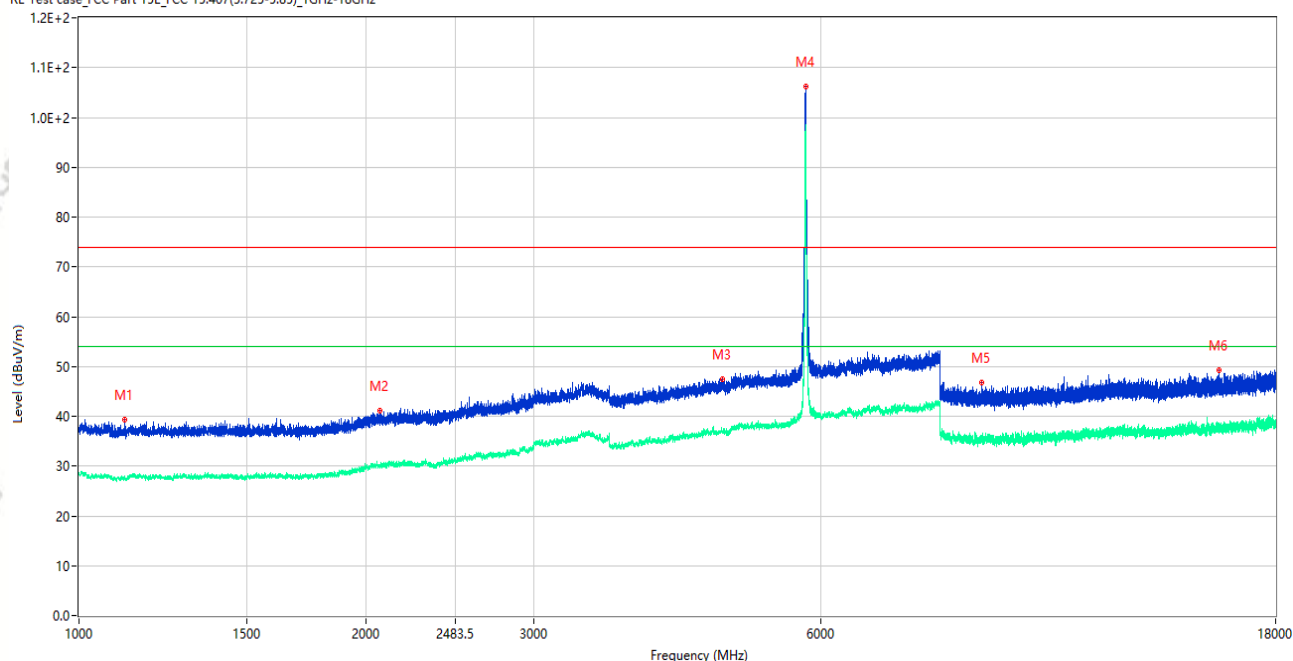

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1115.750	39.37	-15.78	74.0	34.63	Peak	343.00	150	Horizontal	Pass
1**	1115.750	27.69	-15.78	54.0	26.31	AV	343.00	150	Horizontal	Pass
2	2069.750	41.20	-13.78	74.0	32.80	Peak	137.00	150	Horizontal	Pass
2**	2069.750	30.10	-13.78	54.0	23.90	AV	137.00	150	Horizontal	Pass
3	4731.000	47.44	-3.41	74.0	26.56	Peak	357.00	150	Horizontal	Pass
3**	4731.000	37.00	-3.41	54.0	17.00	AV	357.00	150	Horizontal	Pass
4	5783.500	106.29	-1.54	74.0	-32.29	Peak	186.00	150	Horizontal	N/A
4**	5783.500	98.38	-1.54	54.0	-44.38	AV	186.00	150	Horizontal	N/A
5	8843.362	46.68	-4.60	74.0	27.32	Peak	360.00	150	Horizontal	Pass
5**	8843.362	35.42	-4.60	54.0	18.58	AV	360.00	150	Horizontal	Pass
6	15700.763	49.16	-1.85	74.0	24.84	Peak	296.00	150	Horizontal	Pass
6**	15700.763	37.99	-1.85	54.0	16.01	AV	296.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.46.55

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)_1GHz-18GHz

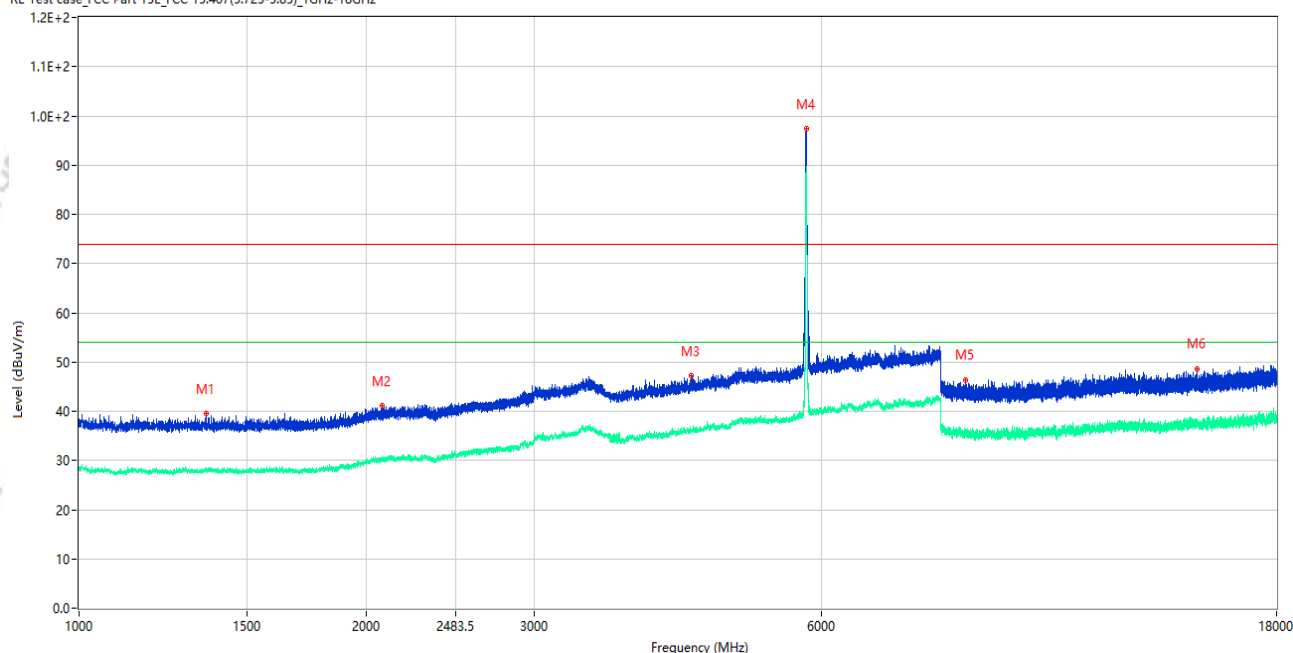

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1360.250	39.48	-15.86	74.0	34.52	Peak	324.00	150	Vertical	Pass
1**	1360.250	27.75	-15.86	54.0	26.25	AV	324.00	150	Vertical	Pass
2	2079.250	41.13	-13.82	74.0	32.87	Peak	161.00	150	Vertical	Pass
2**	2079.250	30.13	-13.82	54.0	23.87	AV	161.00	150	Vertical	Pass
3	4386.000	47.19	-3.70	74.0	26.81	Peak	321.00	150	Vertical	Pass
3**	4386.000	35.90	-3.70	54.0	18.10	AV	321.00	150	Vertical	Pass
4	5783.500	97.32	-1.54	74.0	-23.32	Peak	321.00	150	Vertical	N/A
4**	5783.500	89.47	-1.54	54.0	-35.47	AV	321.00	150	Vertical	N/A
5	8498.988	46.44	-4.62	74.0	27.56	Peak	40.00	150	Vertical	Pass
5**	8498.988	36.21	-4.62	54.0	17.79	AV	40.00	150	Vertical	Pass
6	14856.825	48.69	-1.00	74.0	25.31	Peak	2.00	150	Vertical	Pass
6**	14856.825	37.90	-1.00	54.0	16.10	AV	2.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.41.44

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)_1GHz-18GHz

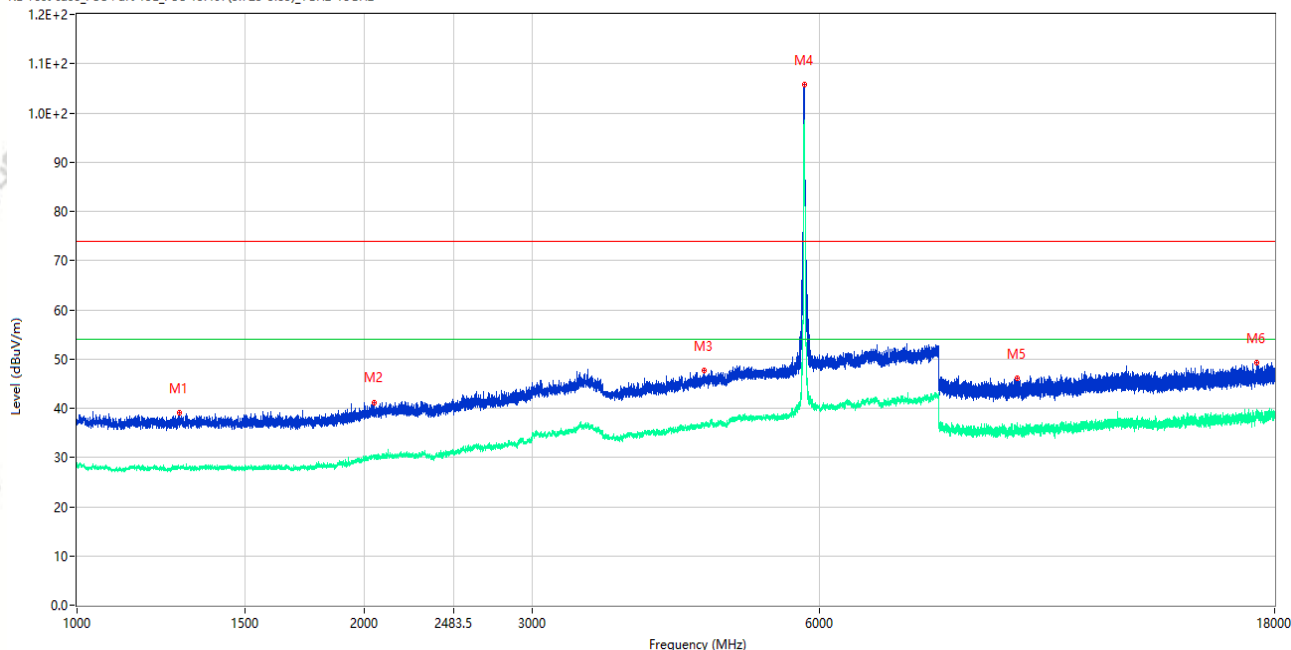

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1280.750	39.04	-15.88	74.0	34.96	Peak	314.00	150	Horizontal	Pass
1**	1280.750	27.79	-15.88	54.0	26.21	AV	314.00	150	Horizontal	Pass
2	2049.500	41.24	-13.62	74.0	32.76	Peak	61.00	150	Horizontal	Pass
2**	2049.500	30.22	-13.62	54.0	23.78	AV	61.00	150	Horizontal	Pass
3	4537.500	47.69	-2.94	74.0	26.31	Peak	290.00	150	Horizontal	Pass
3**	4537.500	36.22	-2.94	54.0	17.78	AV	290.00	150	Horizontal	Pass
4	5787.000	105.76	-1.54	74.0	-31.76	Peak	208.00	150	Horizontal	N/A
4**	5787.000	98.36	-1.54	54.0	-44.36	AV	208.00	150	Horizontal	N/A
5	9659.888	46.04	-3.18	74.0	27.96	Peak	110.00	150	Horizontal	Pass
5**	9659.888	35.74	-3.18	54.0	18.26	AV	110.00	150	Horizontal	Pass
6	17230.350	49.22	-0.38	74.0	24.78	Peak	95.00	150	Horizontal	Pass
6**	17230.350	38.90	-0.38	54.0	15.10	AV	95.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.54.06

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n40 CH151 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)_1GHz-18GHz

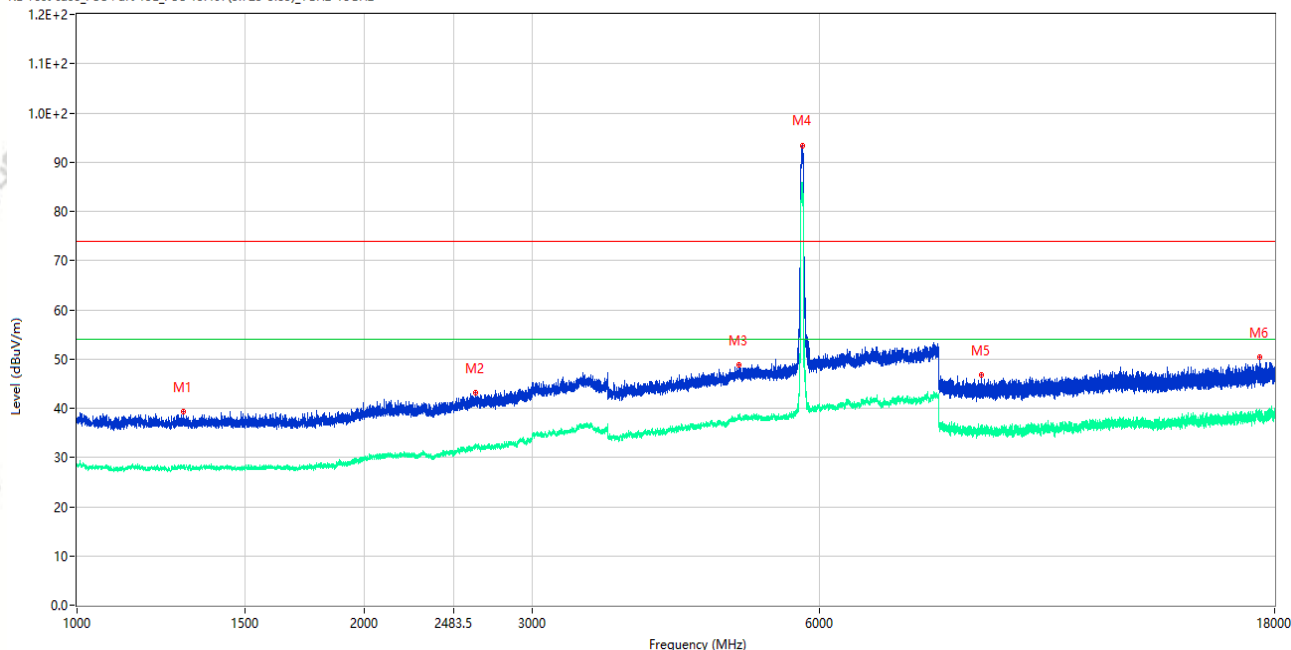

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1293.000	39.22	-15.77	74.0	34.78	Peak	145.00	150	Vertical	Pass
1**	1293.000	28.55	-15.77	54.0	25.45	AV	145.00	150	Vertical	Pass
2	2616.000	43.12	-10.42	74.0	30.88	Peak	258.00	150	Vertical	Pass
2**	2616.000	32.50	-10.42	54.0	21.50	AV	258.00	150	Vertical	Pass
3	4941.500	48.88	-1.76	74.0	25.12	Peak	360.00	150	Vertical	Pass
3**	4941.500	38.07	-1.76	54.0	15.93	AV	360.00	150	Vertical	Pass
4	5757.000	93.43	-2.02	74.0	-19.43	Peak	178.00	150	Vertical	N/A
4**	5757.000	85.94	-2.02	54.0	-31.94	AV	178.00	150	Vertical	N/A
5	8870.674	46.73	-4.63	74.0	27.27	Peak	200.00	150	Vertical	Pass
5**	8870.674	35.69	-4.63	54.0	18.31	AV	200.00	150	Vertical	Pass
6	17344.012	50.40	0.36	74.0	23.60	Peak	67.00	150	Vertical	Pass
6**	17344.012	38.95	0.36	54.0	15.05	AV	67.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.59.05

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n40 CH151 P=16.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)_1GHz-18GHz

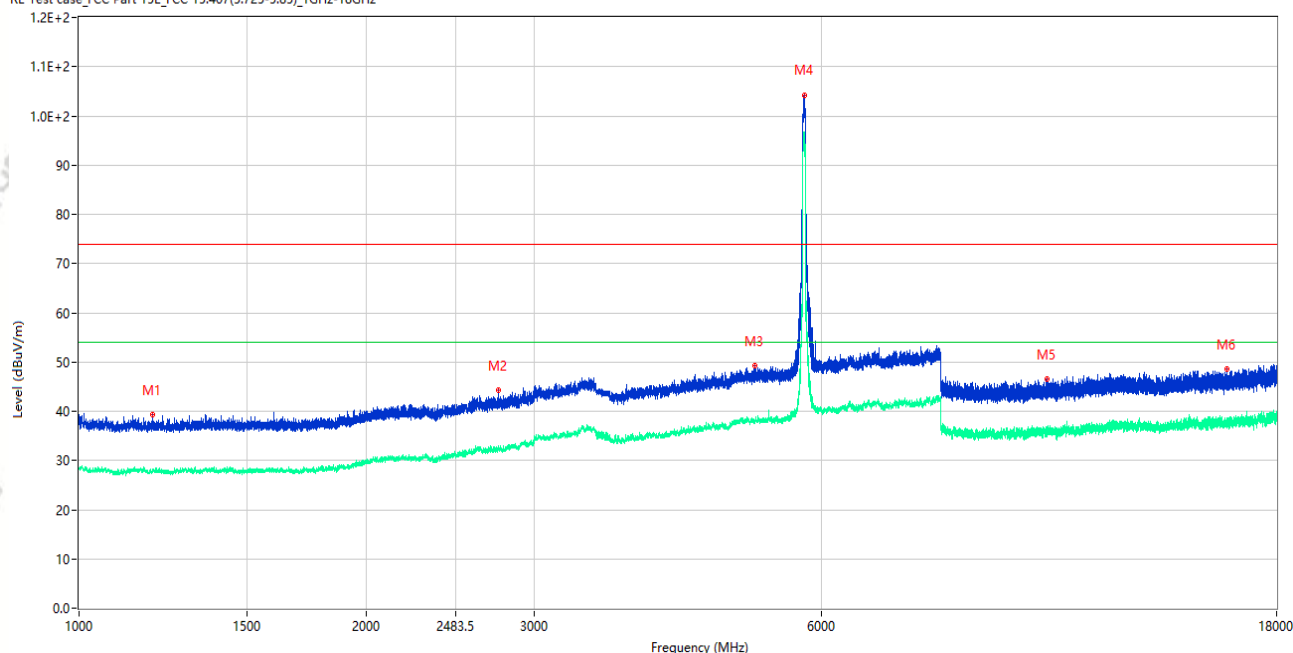

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1193.250	39.26	-15.80	74.0	34.74	Peak	0.00	150	Horizontal	Pass
1**	1193.250	28.06	-15.80	54.0	25.94	AV	0.00	150	Horizontal	Pass
2	2753.000	44.22	-10.63	74.0	29.78	Peak	187.00	150	Horizontal	Pass
2**	2753.000	32.30	-10.63	54.0	21.70	AV	187.00	150	Horizontal	Pass
3	5115.500	49.23	-2.34	74.0	24.77	Peak	135.00	150	Horizontal	Pass
3**	5115.500	38.14	-2.34	54.0	15.86	AV	135.00	150	Horizontal	Pass
4	5757.000	104.29	-2.02	74.0	-30.29	Peak	195.00	150	Horizontal	N/A
4**	5757.000	96.44	-2.02	54.0	-42.44	AV	195.00	150	Horizontal	N/A
5	10354.099	46.61	-3.32	74.0	27.39	Peak	0.00	150	Horizontal	Pass
5**	10354.099	36.29	-3.32	54.0	17.71	AV	0.00	150	Horizontal	Pass
6	15949.350	48.51	-2.56	74.0	25.49	Peak	321.00	150	Horizontal	Pass
6**	15949.350	37.70	-2.56	54.0	16.30	AV	321.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.15.43

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155

P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

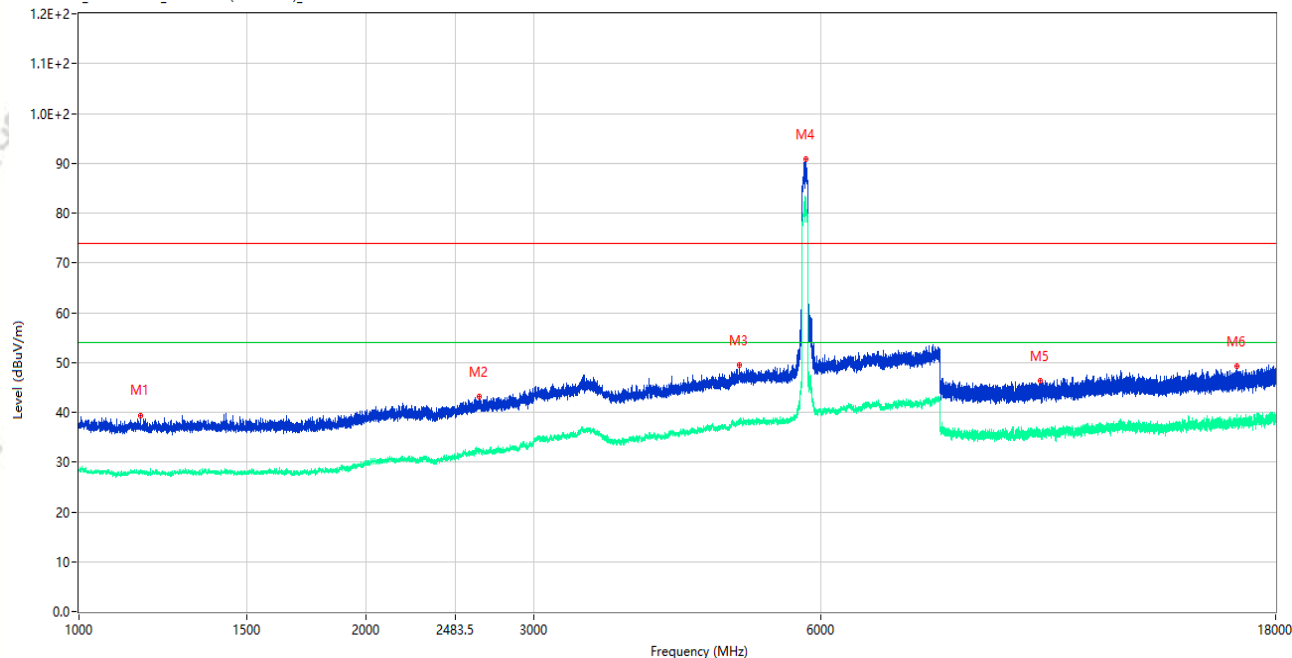

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.000	39.42	-15.47	74.0	34.58	Peak	0.00	100	Vertical	Pass
1**	1161.000	28.21	-15.47	54.0	25.79	AV	0.00	100	Vertical	Pass
2	2626.500	43.12	-9.86	74.0	30.88	Peak	20.00	100	Vertical	Pass
2**	2626.500	32.49	-9.86	54.0	21.51	AV	20.00	100	Vertical	Pass
3	4928.500	49.56	-2.23	74.0	24.44	Peak	360.00	100	Vertical	Pass
3**	4928.500	38.32	-2.23	54.0	15.68	AV	360.00	100	Vertical	Pass
4	5782.000	90.79	-1.54	74.0	-16.79	Peak	312.00	100	Vertical	N/A
4**	5782.000	83.16	-1.54	54.0	-29.16	AV	312.00	100	Vertical	N/A
5	10199.012	46.40	-3.49	74.0	27.60	Peak	148.00	100	Vertical	Pass
5**	10199.012	35.35	-3.49	54.0	18.65	AV	148.00	100	Vertical	Pass
6	16408.989	49.26	-1.78	74.0	24.74	Peak	297.00	100	Vertical	Pass
6**	16408.989	37.98	-1.78	54.0	16.02	AV	297.00	100	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.20.46

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 51

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac80 CH155

P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

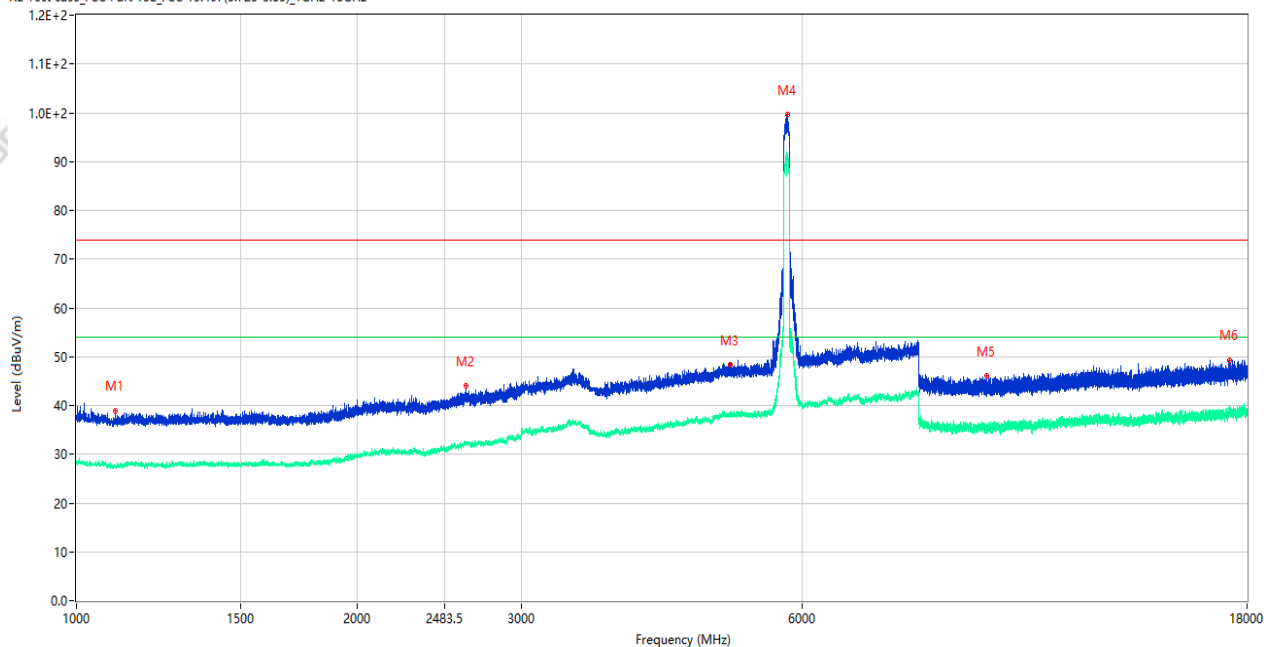

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1100.750	38.98	-15.72	74.0	35.02	Peak	87.00	100	Horizontal	Pass
1**	1100.750	27.70	-15.72	54.0	26.30	AV	87.00	100	Horizontal	Pass
2	2614.000	43.97	-10.57	74.0	30.03	Peak	159.00	100	Horizontal	Pass
2**	2614.000	32.35	-10.57	54.0	21.65	AV	159.00	100	Horizontal	Pass
3	5021.000	48.36	-2.21	74.0	25.64	Peak	350.00	100	Horizontal	Pass
3**	5021.000	38.28	-2.21	54.0	15.72	AV	350.00	100	Horizontal	Pass
4	5781.500	99.55	-1.53	74.0	-25.55	Peak	193.00	100	Horizontal	N/A
4**	5781.500	91.45	-1.53	54.0	-37.45	AV	193.00	100	Horizontal	N/A
5	9456.588	46.12	-4.32	74.0	27.88	Peak	24.00	100	Horizontal	Pass
5**	9456.588	35.51	-4.32	54.0	18.49	AV	24.00	100	Horizontal	Pass
6	17253.450	49.35	-0.84	74.0	24.65	Peak	115.00	100	Horizontal	Pass
6**	17253.450	39.21	-0.84	54.0	14.79	AV	115.00	100	Horizontal	Pass