


Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_09.29.28

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH36 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

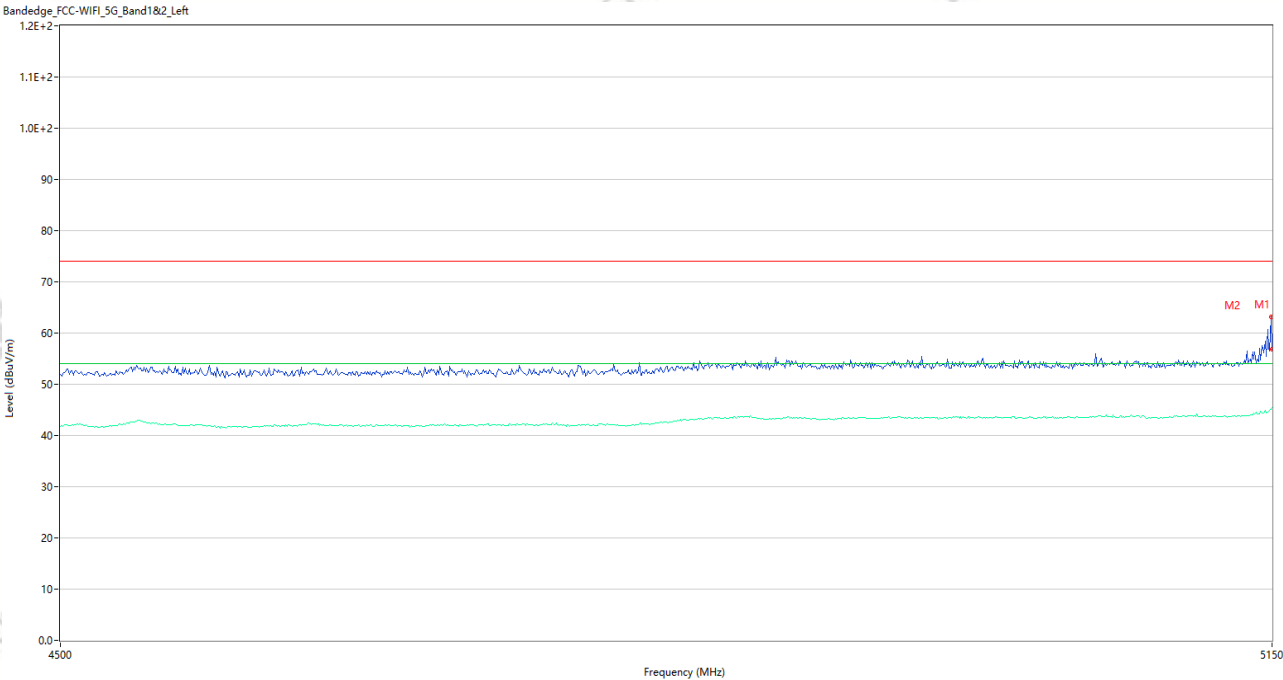


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	56.89	3.82	74.0	17.11	Peak	307.97	150	Vertical	Pass
1**	5150.000	45.39	3.82	54.0	8.61	AV	307.97	150	Vertical	Pass
2	5149.350	63.19	3.84	74.0	10.81	Peak	158.00	150	Vertical	Pass
2**	5149.350	45.01	3.84	54.0	8.99	AV	158.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_09.34.08

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH36 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

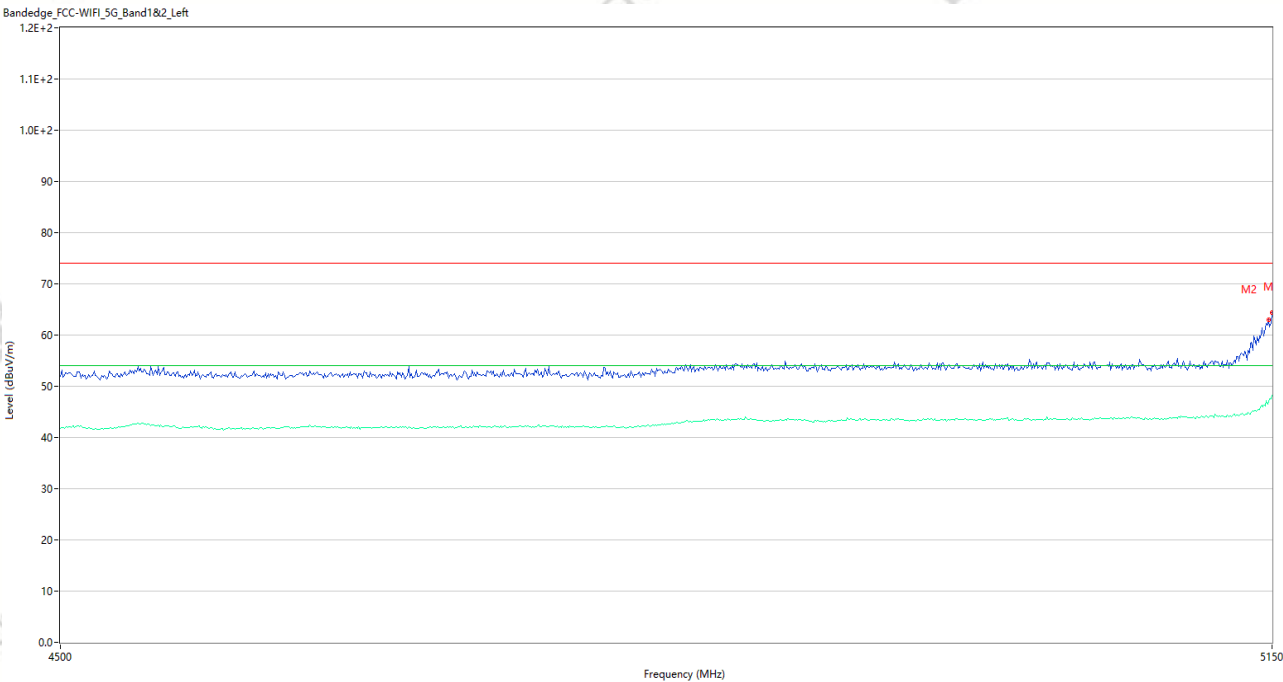


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	64.39	3.82	74.0	9.61	Peak	187.00	150	Horizontal	Pass
1**	5150.000	48.29	3.82	54.0	5.71	AV	187.00	150	Horizontal	Pass
2	5148.050	62.99	3.87	74.0	11.01	Peak	212.00	150	Horizontal	Pass
2**	5148.050	46.97	3.87	54.0	7.03	AV	212.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_09.42.09

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH48 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

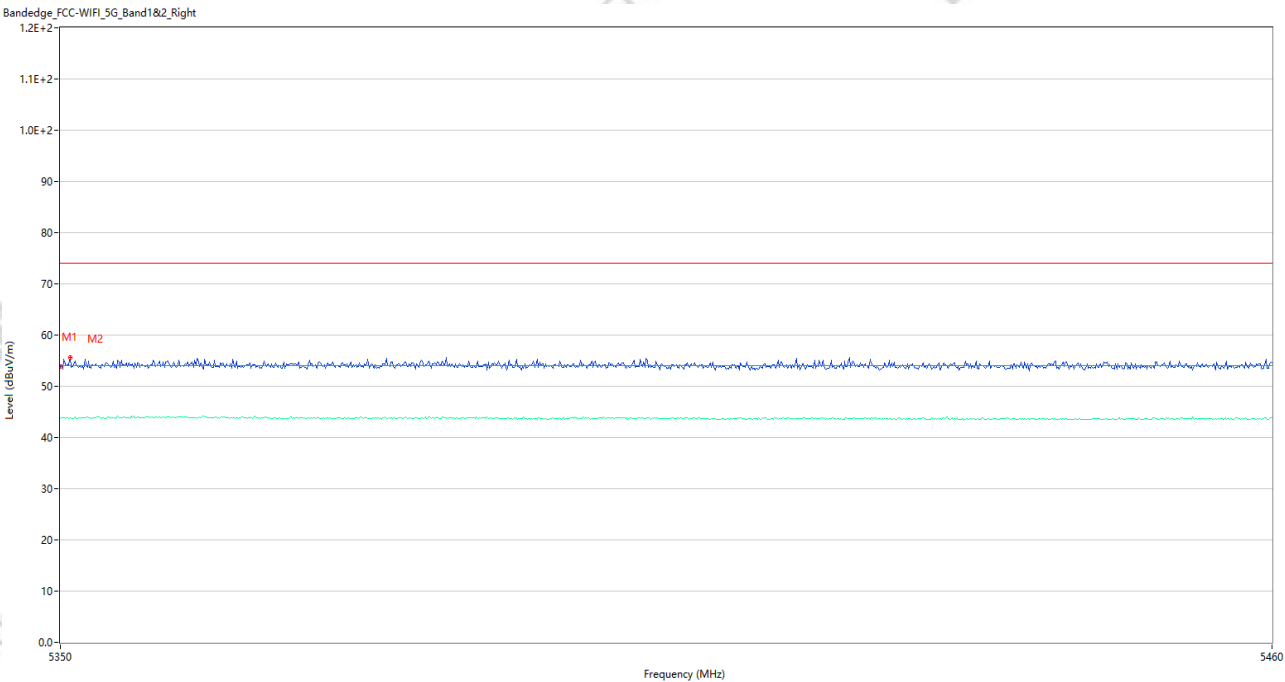

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	53.92	4.04	74.0	20.08	Peak	360.00	150	Vertical	Pass
1**	5350.000	43.75	4.04	54.0	10.25	AV	360.00	150	Vertical	Pass
2	5350.880	55.59	4.06	74.0	18.41	Peak	134.00	150	Vertical	Pass
2**	5350.880	43.88	4.06	54.0	10.12	AV	134.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_09.38.13

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH48 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	54.22	4.04	74.0	19.78	Peak	58.00	150	Horizontal	Pass
1**	5350.000	44.20	4.04	54.0	9.80	AV	58.00	150	Horizontal	Pass
2	5355.720	55.44	4.16	74.0	18.56	Peak	167.00	150	Horizontal	Pass
2**	5355.720	44.06	4.16	54.0	9.94	AV	167.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_09.49.53

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH36 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

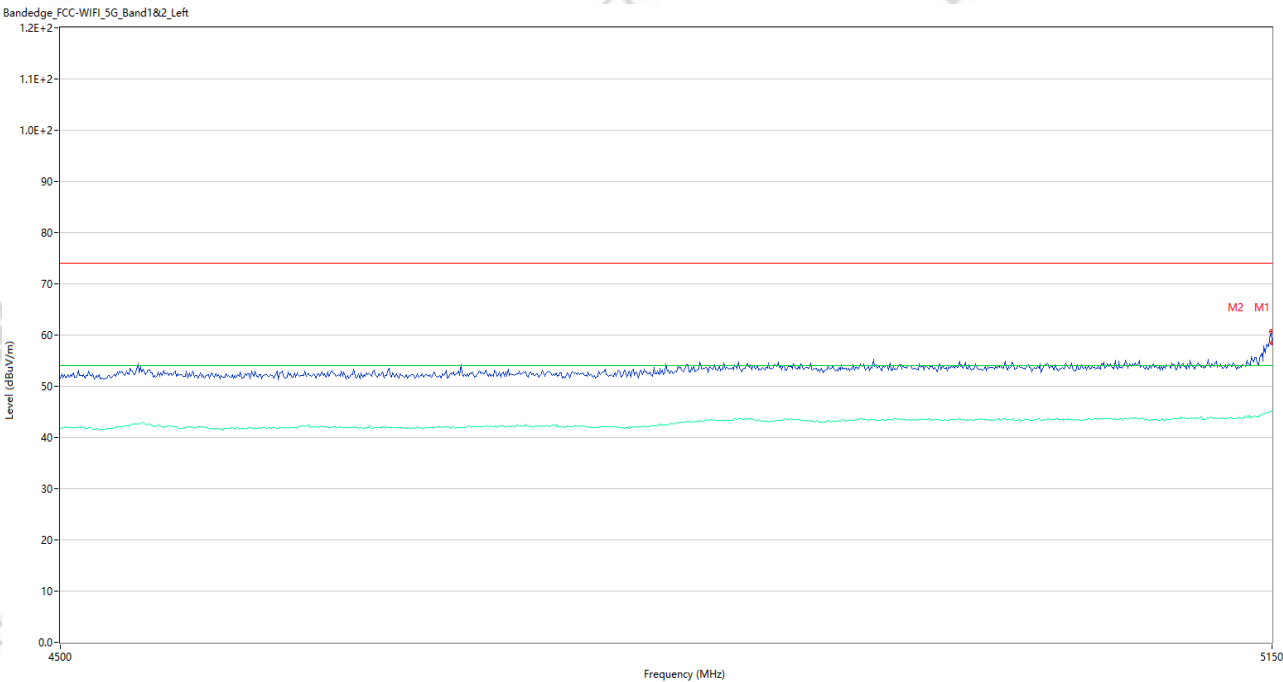


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	58.36	3.82	74.0	15.64	Peak	298.97	150	Vertical	Pass
1**	5150.000	45.49	3.82	54.0	8.51	AV	298.97	150	Vertical	Pass
2	5149.350	60.69	3.84	74.0	13.31	Peak	154.00	150	Vertical	Pass
2**	5149.350	45.07	3.84	54.0	8.93	AV	154.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_09.52.41

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH36 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

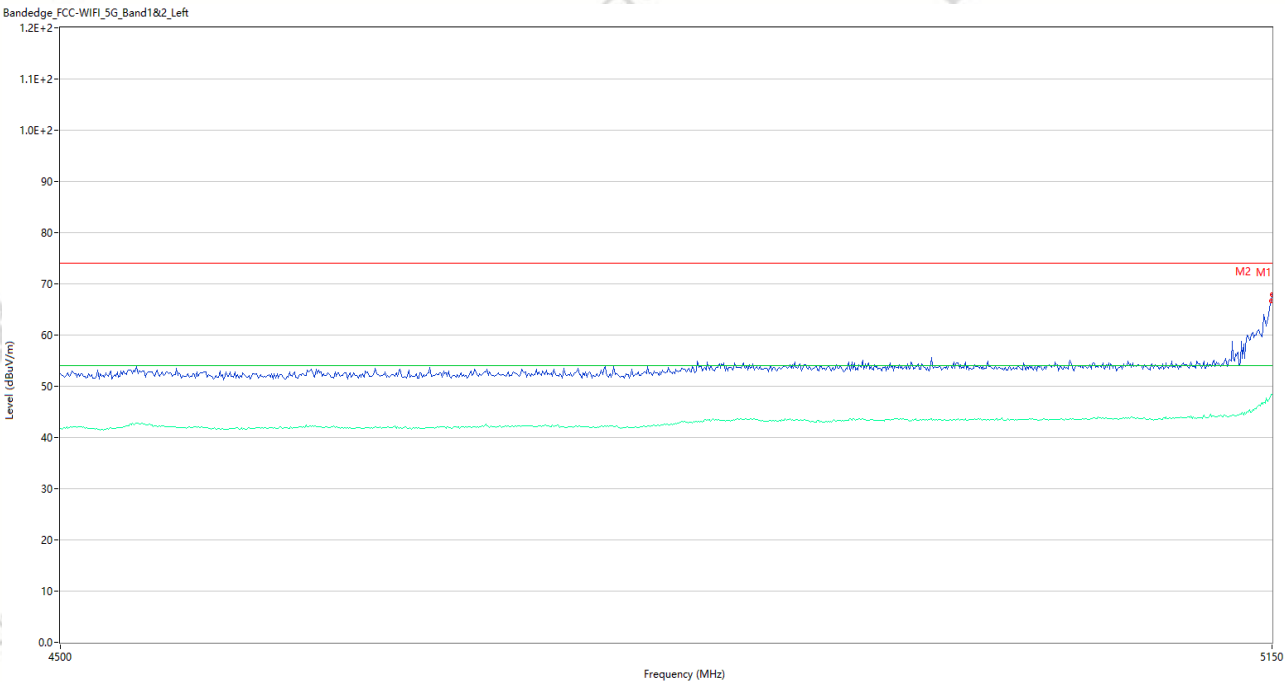


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	67.90	3.82	74.0	6.10	Peak	192.00	150	Horizontal	Pass
1**	5150.000	48.34	3.82	54.0	5.66	AV	192.00	150	Horizontal	Pass
2	5149.350	66.73	3.84	74.0	7.27	Peak	195.00	150	Horizontal	Pass
2**	5149.350	48.43	3.84	54.0	5.57	AV	195.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_10.00.07

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH48 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

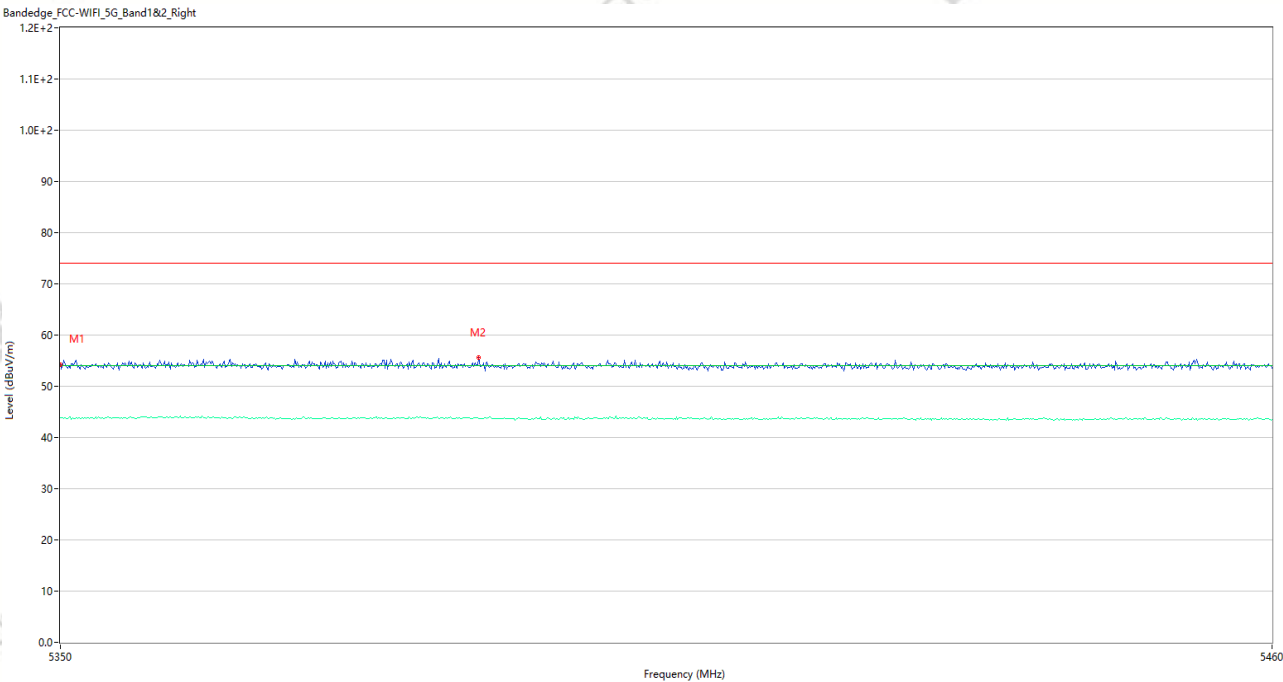

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	54.29	4.04	74.0	19.71	Peak	270.00	150	Vertical	Pass
1**	5350.000	43.86	4.04	54.0	10.14	AV	270.00	150	Vertical	Pass
2	5387.730	55.58	4.04	74.0	18.42	Peak	360.00	150	Vertical	Pass
2**	5387.730	43.77	4.04	54.0	10.23	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_09.56.43

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH48 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	53.88	4.04	74.0	20.12	Peak	205.00	150	Horizontal	Pass
1**	5350.000	44.21	4.04	54.0	9.79	AV	205.00	150	Horizontal	Pass
2	5387.730	56.05	4.04	74.0	17.95	Peak	357.00	150	Horizontal	Pass
2**	5387.730	44.17	4.04	54.0	9.83	AV	357.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_10.04.13

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH38 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

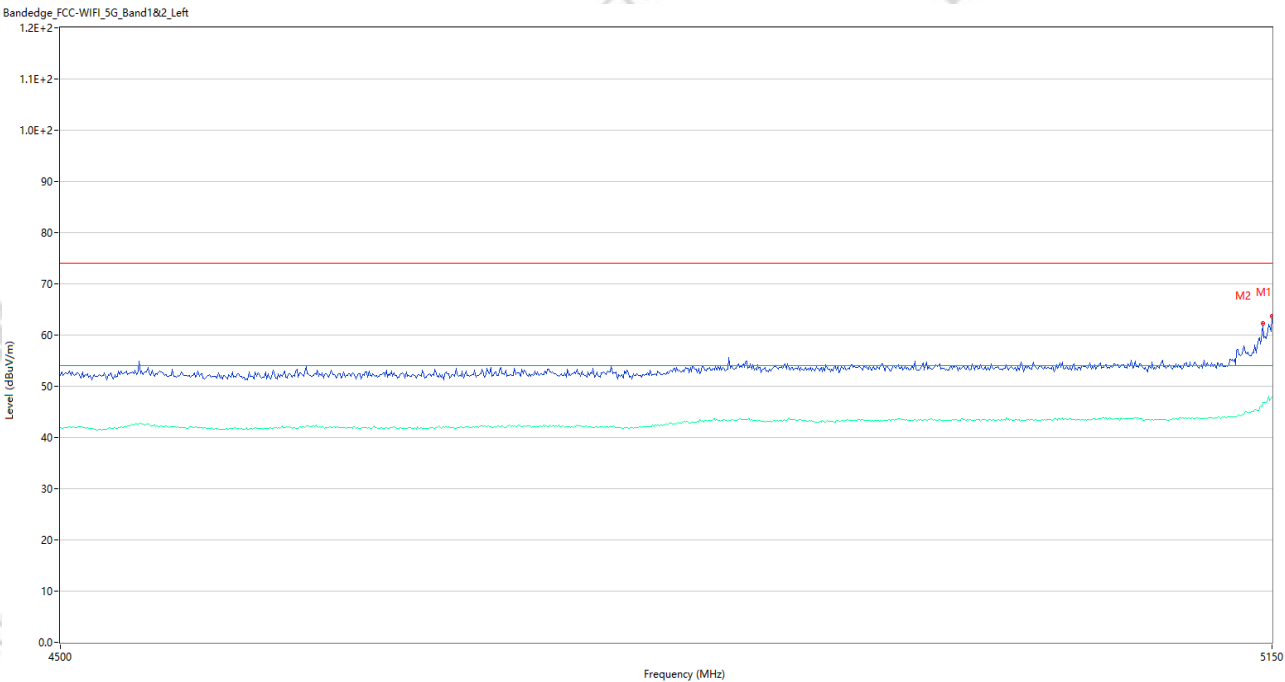


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	63.76	3.82	74.0	10.24	Peak	164.00	150	Vertical	Pass
1**	5150.000	47.93	3.82	54.0	6.07	AV	164.00	150	Vertical	Pass
2	5144.800	62.24	3.97	74.0	11.76	Peak	167.00	150	Vertical	Pass
2**	5144.800	46.77	3.97	54.0	7.23	AV	167.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_10.10.32

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH38 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

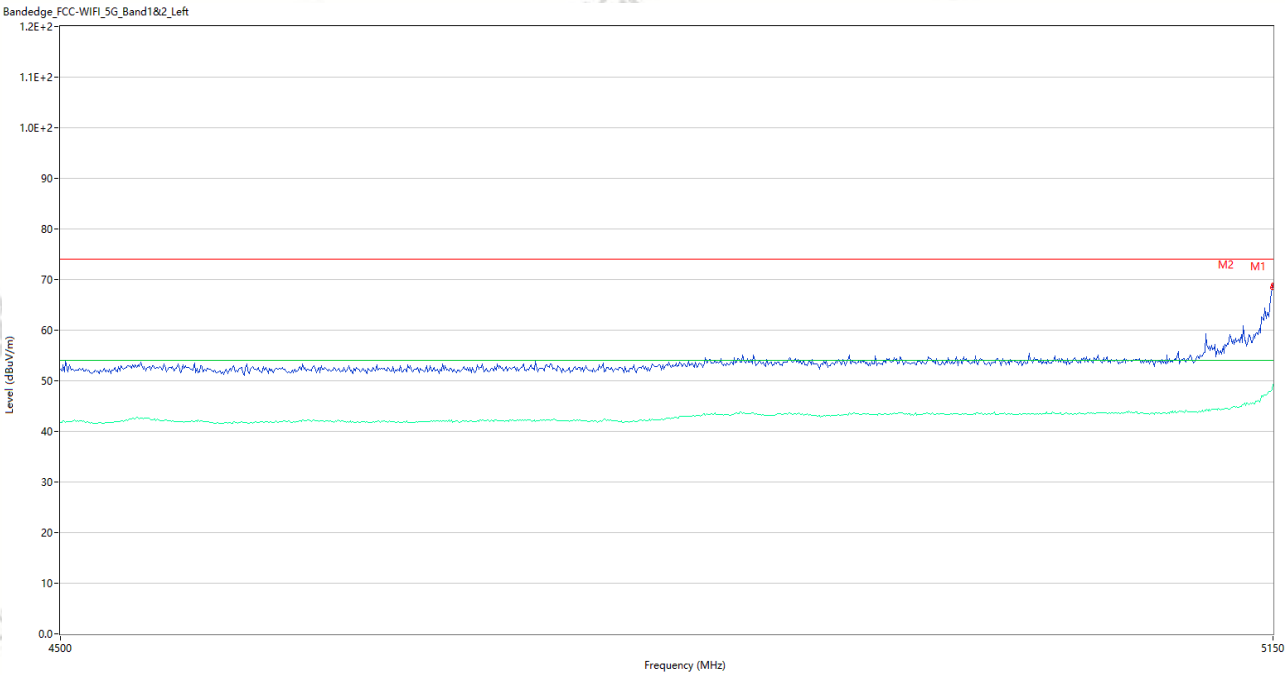


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	68.93	3.82	74.0	5.07	Peak	193.00	150	Horizontal	Pass
1**	5150.000	49.36	3.82	54.0	4.64	AV	193.00	150	Horizontal	Pass
2	5149.350	68.48	3.84	74.0	5.52	Peak	200.00	150	Horizontal	Pass
2**	5149.350	48.31	3.84	54.0	5.69	AV	200.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_10.18.30

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH46 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

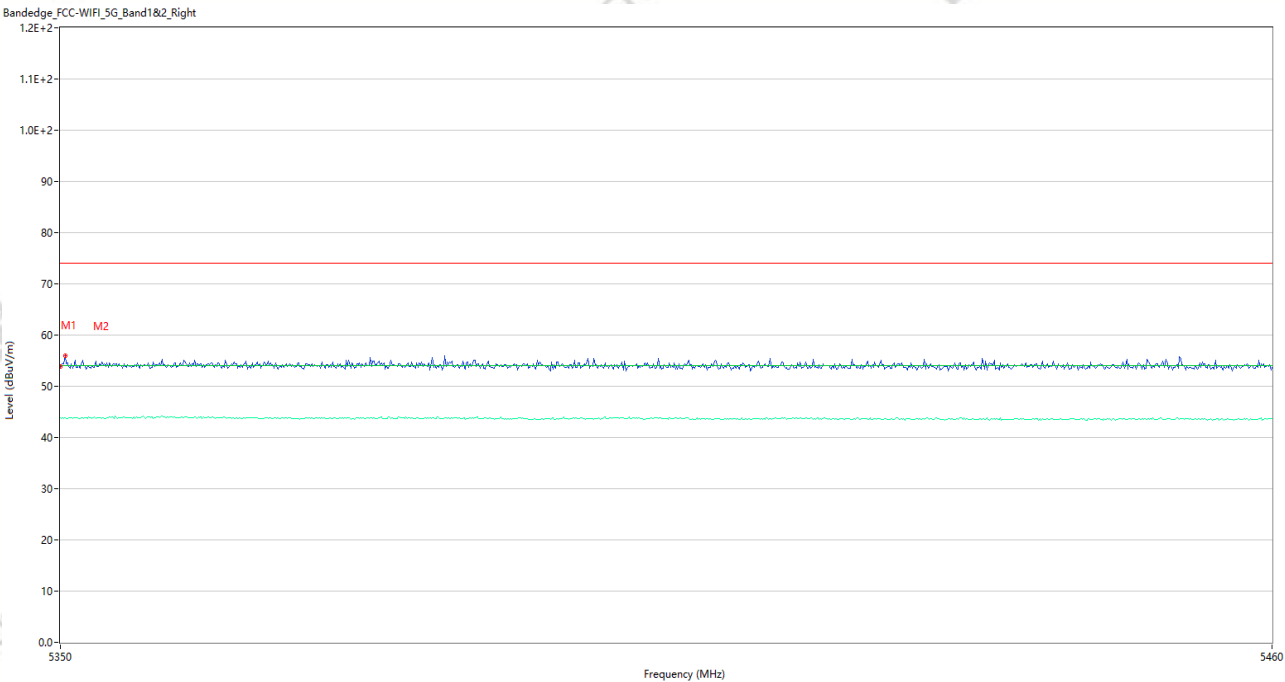

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	53.79	4.04	74.0	20.21	Peak	349.00	150	Vertical	Pass
1**	5350.000	43.87	4.04	54.0	10.13	AV	349.00	150	Vertical	Pass
2	5350.440	56.04	4.05	74.0	17.96	Peak	208.00	150	Vertical	Pass
2**	5350.440	43.81	4.05	54.0	10.19	AV	208.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_10.14.35

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH46 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	54.47	4.04	74.0	19.53	Peak	360.00	150	Horizontal	Pass
1**	5350.000	44.47	4.04	54.0	9.53	AV	360.00	150	Horizontal	Pass
2	5387.510	55.61	4.04	74.0	18.39	Peak	265.00	150	Horizontal	Pass
2**	5387.510	44.05	4.04	54.0	9.95	AV	265.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_10.22.31

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac80 CH42 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

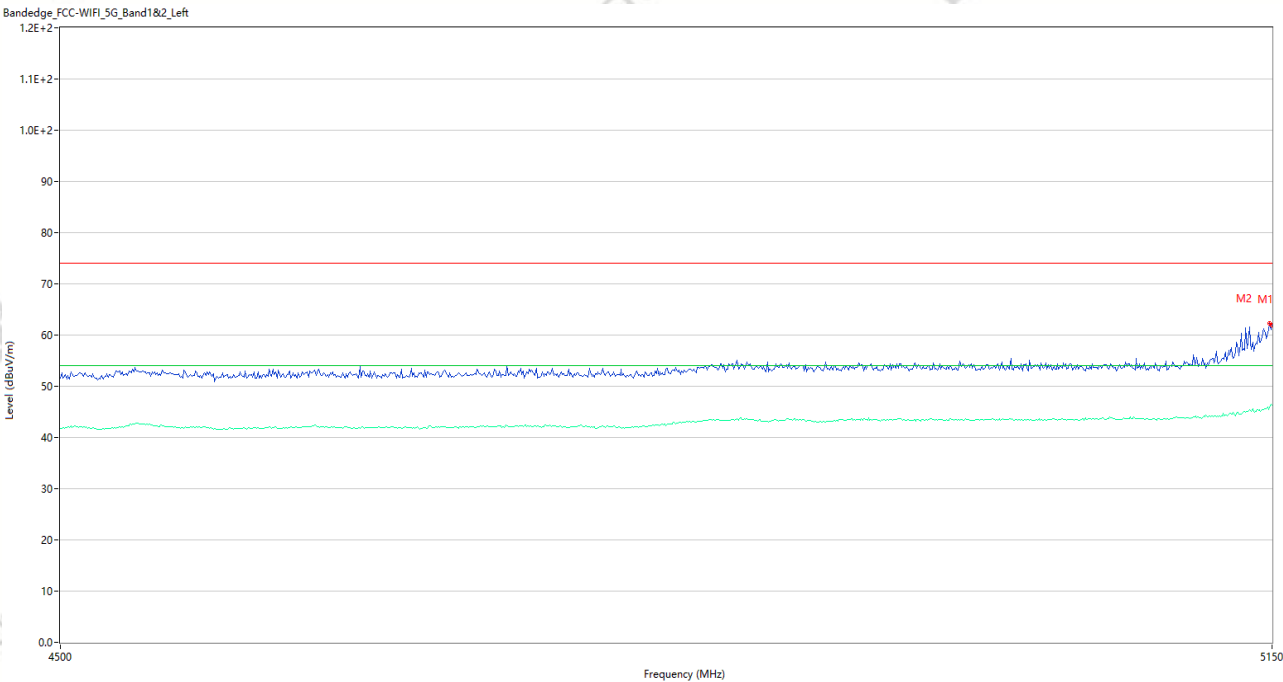


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	61.90	3.82	74.0	12.10	Peak	179.00	150	Vertical	Pass
1**	5150.000	46.31	3.82	54.0	7.69	AV	179.00	150	Vertical	Pass
2	5148.700	62.20	3.85	74.0	11.80	Peak	179.00	150	Vertical	Pass
2**	5148.700	46.02	3.85	54.0	7.98	AV	179.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_10.26.50

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ac80 CH42 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

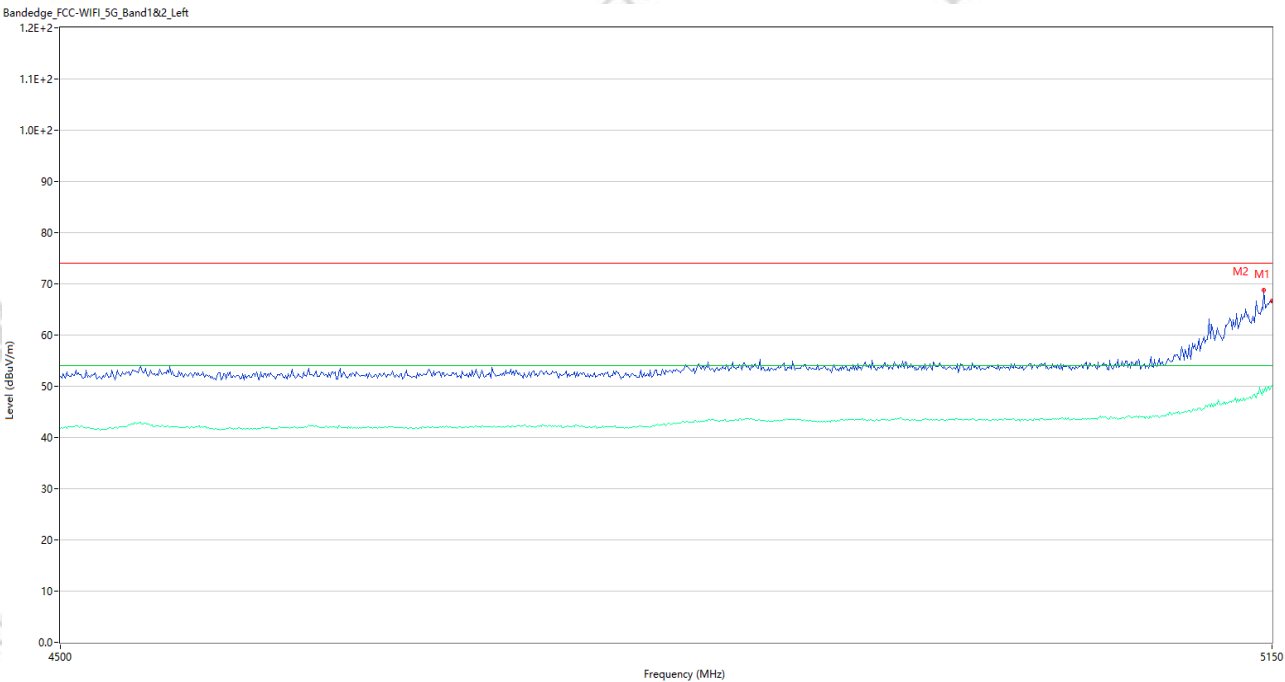


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	66.60	3.82	74.0	7.40	Peak	201.00	150	Horizontal	Pass
1**	5150.000	50.13	3.82	54.0	3.87	AV	201.00	150	Horizontal	Pass
2	5145.450	68.78	3.95	74.0	5.22	Peak	154.00	150	Horizontal	Pass
2**	5145.450	48.84	3.95	54.0	5.16	AV	154.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_11.45.32

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11a CH52 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

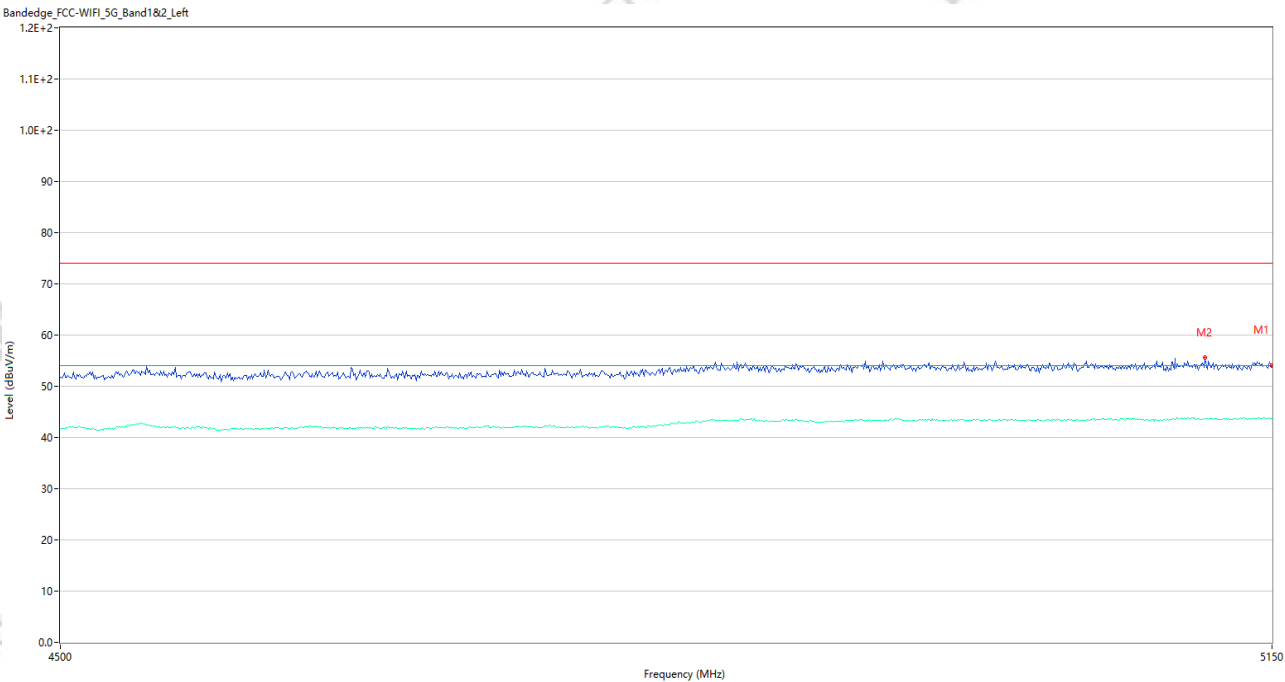


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	54.14	3.82	74.0	19.86	Peak	197.97	150	Vertical	Pass
1**	5150.000	43.69	3.82	54.0	10.31	AV	197.97	150	Vertical	Pass
2	5111.650	55.53	3.60	74.0	18.47	Peak	101.00	150	Vertical	Pass
2**	5111.650	43.53	3.60	54.0	10.47	AV	101.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_11.47.36

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11a CH52 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

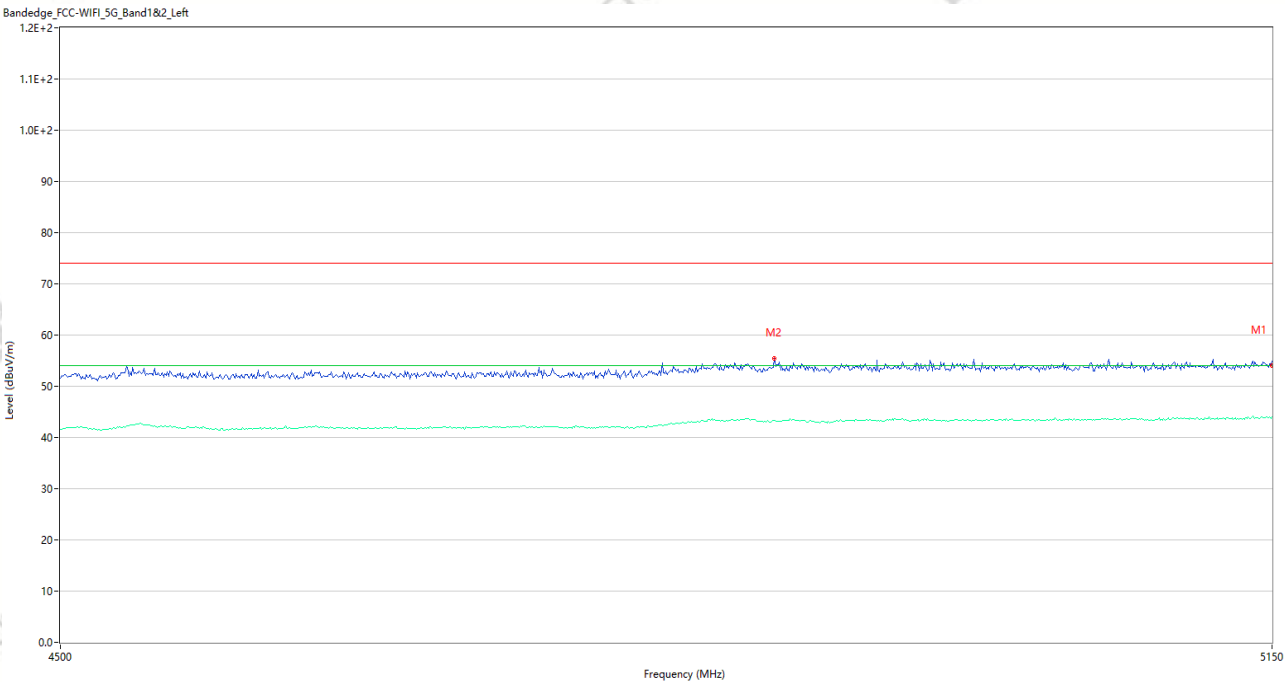


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	54.86	3.82	74.0	19.14	Peak	225.98	150	Horizontal	Pass
1**	5150.000	44.06	3.82	54.0	9.94	AV	225.98	150	Horizontal	Pass
2	4872.450	55.49	3.92	74.0	18.51	Peak	18.00	150	Horizontal	Pass
2**	4872.450	43.35	3.92	54.0	10.65	AV	18.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_12.01.30

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11a CH64 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

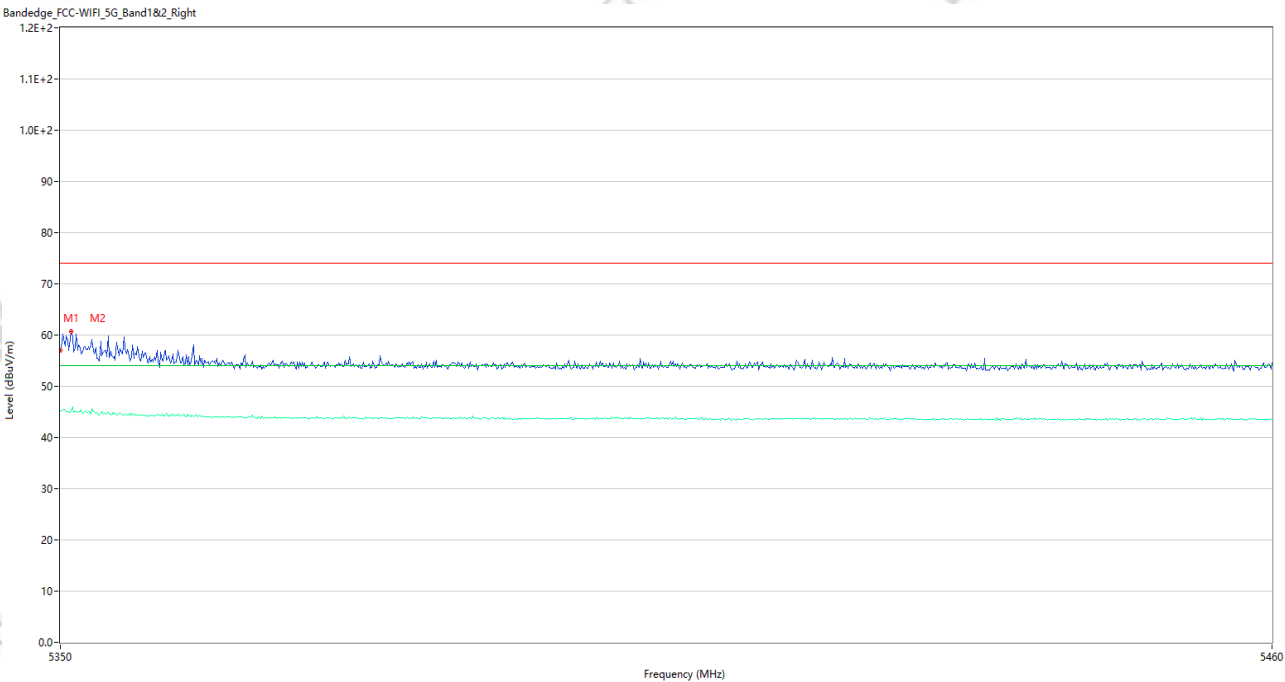


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	56.99	4.04	74.0	17.01	Peak	142.00	150	Vertical	Pass
1**	5350.000	45.34	4.04	54.0	8.66	AV	142.00	150	Vertical	Pass
2	5350.990	60.63	4.06	74.0	13.37	Peak	147.00	150	Vertical	Pass
2**	5350.990	45.20	4.06	54.0	8.80	AV	147.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_11.59.44

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11a CH64 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

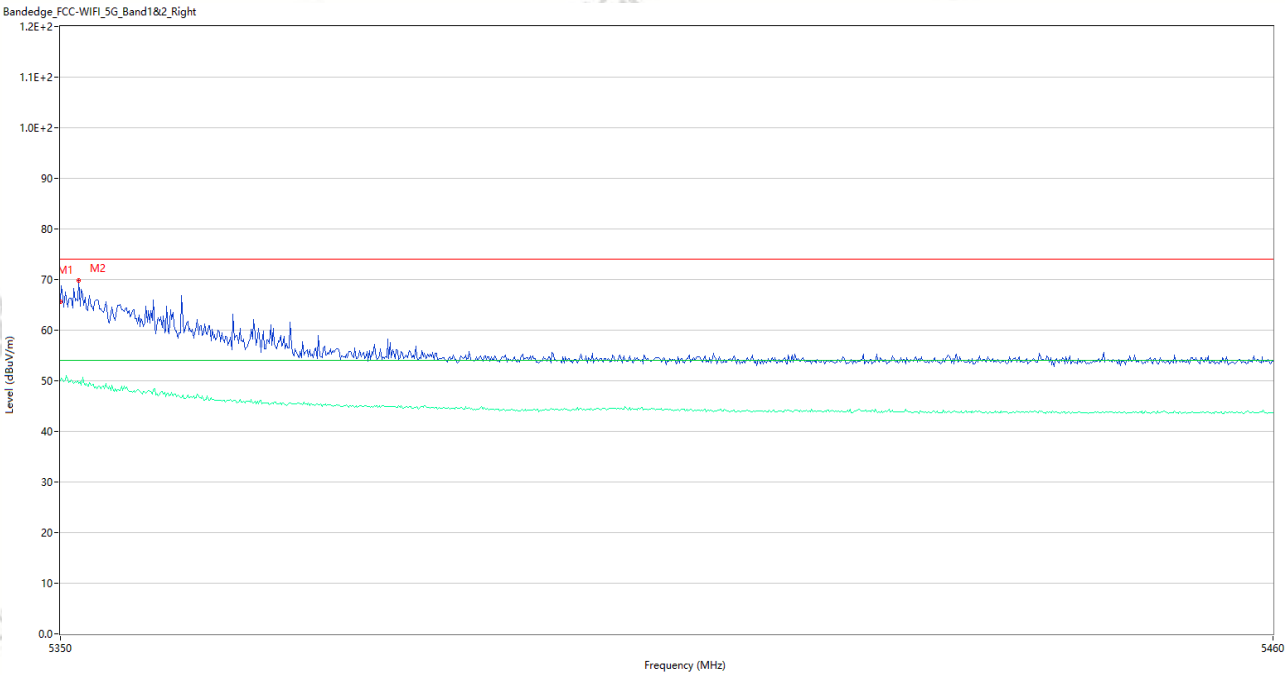

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	65.54	4.04	74.0	8.46	Peak	134.00	150	Horizontal	Pass
1**	5350.000	49.98	4.04	54.0	4.02	AV	134.00	150	Horizontal	Pass
2	5351.650	69.76	4.07	74.0	4.24	Peak	182.00	150	Horizontal	Pass
2**	5351.650	49.44	4.07	54.0	4.56	AV	182.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_12.52.13

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH52 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01



No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	54.15	3.82	74.0	19.85	Peak	359.97	150	Vertical	Pass
1**	5150.000	43.90	3.82	54.0	10.10	AV	359.97	150	Vertical	Pass
2	4973.850	55.37	3.67	74.0	18.63	Peak	218.00	150	Vertical	Pass
2**	4973.850	43.31	3.67	54.0	10.69	AV	218.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_12.55.22

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH52 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	54.62	3.82	74.0	19.38	Peak	281.98	150	Horizontal	Pass
1**	5150.000	43.90	3.82	54.0	10.10	AV	281.98	150	Horizontal	Pass
2	4878.950	55.37	4.20	74.0	18.63	Peak	39.00	150	Horizontal	Pass
2**	4878.950	43.66	4.20	54.0	10.34	AV	39.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_13.06.06

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH64 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

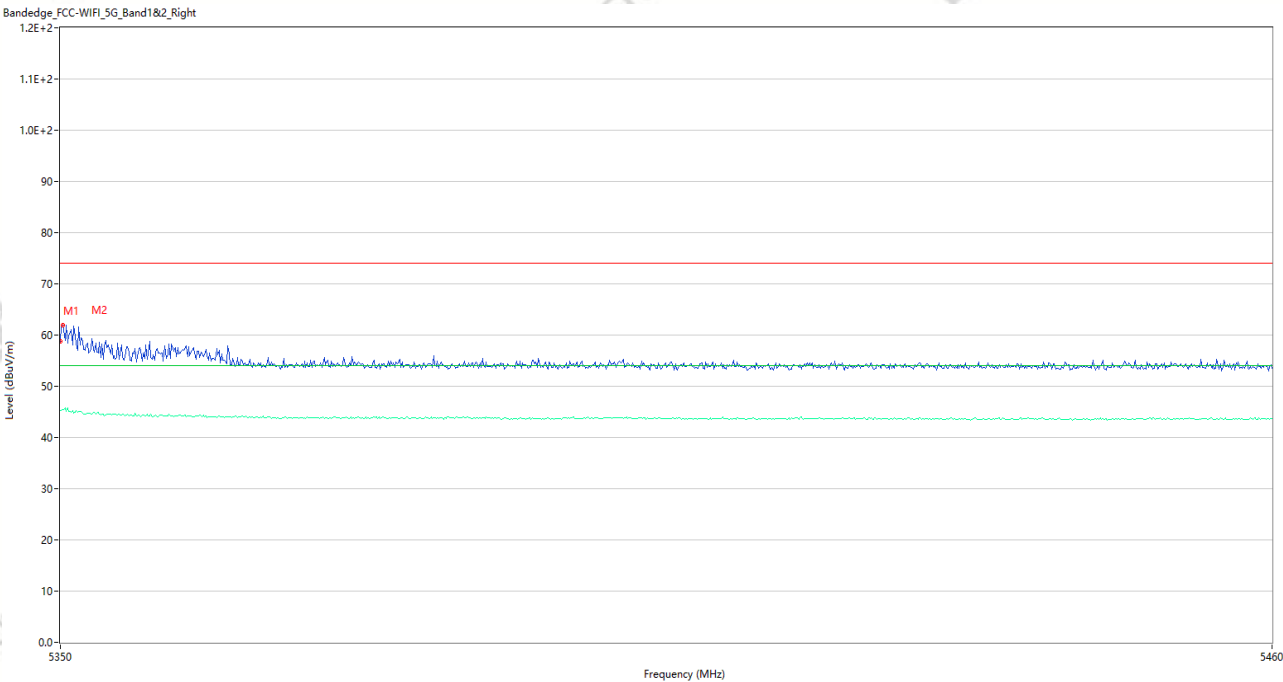


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	58.73	4.04	74.0	15.27	Peak	358.00	150	Vertical	Pass
1**	5350.000	45.29	4.04	54.0	8.71	AV	358.00	150	Vertical	Pass
2	5350.220	62.01	4.04	74.0	11.99	Peak	150.00	150	Vertical	Pass
2**	5350.220	45.50	4.04	54.0	8.50	AV	150.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_13.01.04

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n20 CH64 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

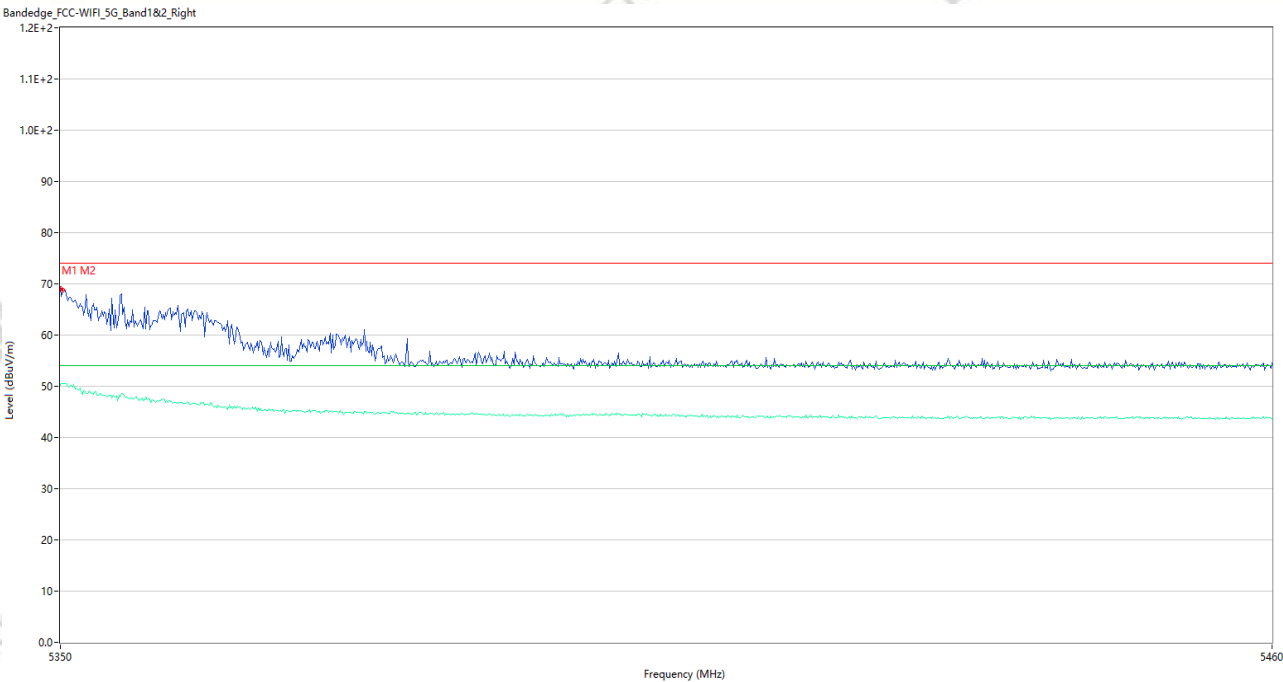


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	69.07	4.04	74.0	4.93	Peak	193.00	150	Horizontal	Pass
1**	5350.000	50.13	4.04	54.0	3.87	AV	193.00	150	Horizontal	Pass
2	5350.220	68.83	4.04	74.0	5.17	Peak	197.00	150	Horizontal	Pass
2**	5350.220	50.55	4.04	54.0	3.45	AV	197.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_13.22.02

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n40 CH54 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

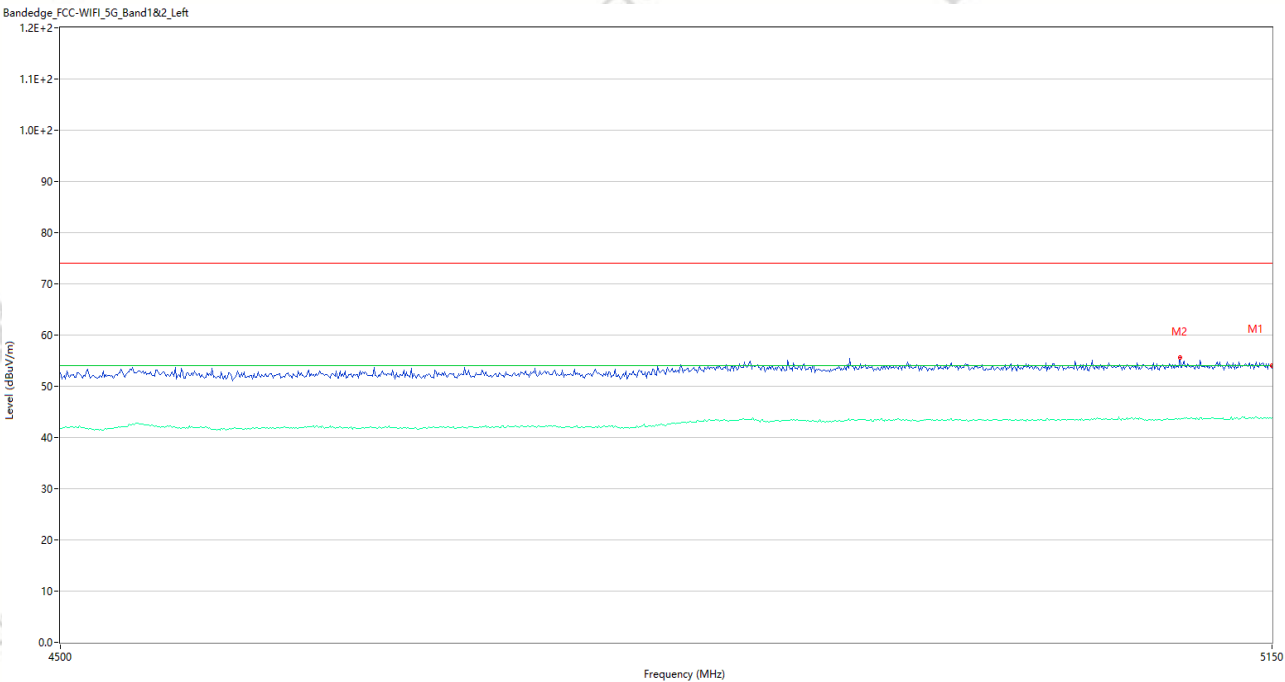


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	53.49	3.82	74.0	20.51	Peak	284.96	150	Vertical	Pass
1**	5150.000	43.83	3.82	54.0	10.17	AV	284.96	150	Vertical	Pass
2	5097.350	55.66	3.82	74.0	18.34	Peak	230.00	150	Vertical	Pass
2**	5097.350	43.57	3.82	54.0	10.43	AV	230.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_13.17.45

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n40 CH54 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

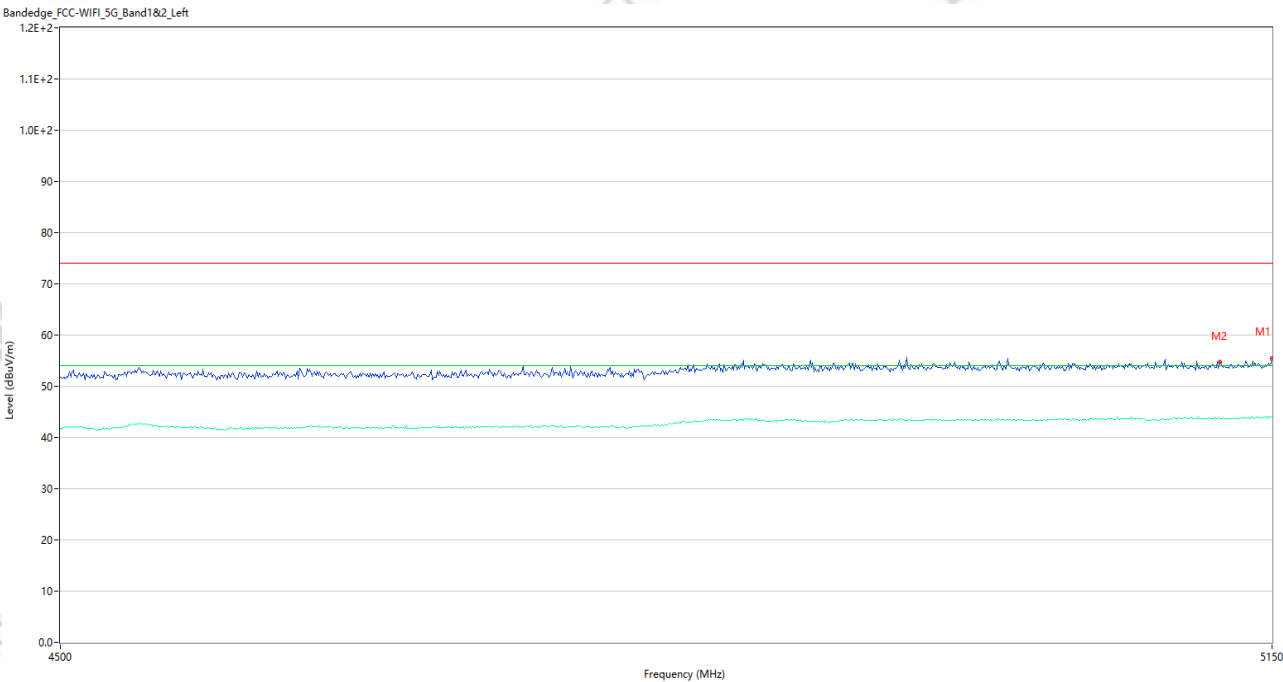

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5150.000	55.43	3.82	74.0	18.57	Peak	176.01	150	Horizontal	Pass
1**	5150.000	43.99	3.82	54.0	10.01	AV	176.01	150	Horizontal	Pass
2	5120.100	54.67	3.71	74.0	19.33	Peak	45.00	150	Horizontal	Pass
2**	5120.100	43.76	3.71	54.0	10.24	AV	45.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_13.34.26

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n40 CH62 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	61.81	4.04	74.0	12.19	Peak	111.00	150	Vertical	Pass
1**	5350.000	45.49	4.04	54.0	8.51	AV	111.00	150	Vertical	Pass
2	5350.110	62.62	4.04	74.0	11.38	Peak	147.00	150	Vertical	Pass
2**	5350.110	45.24	4.04	54.0	8.76	AV	147.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_13.31.04

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11n40 CH62 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

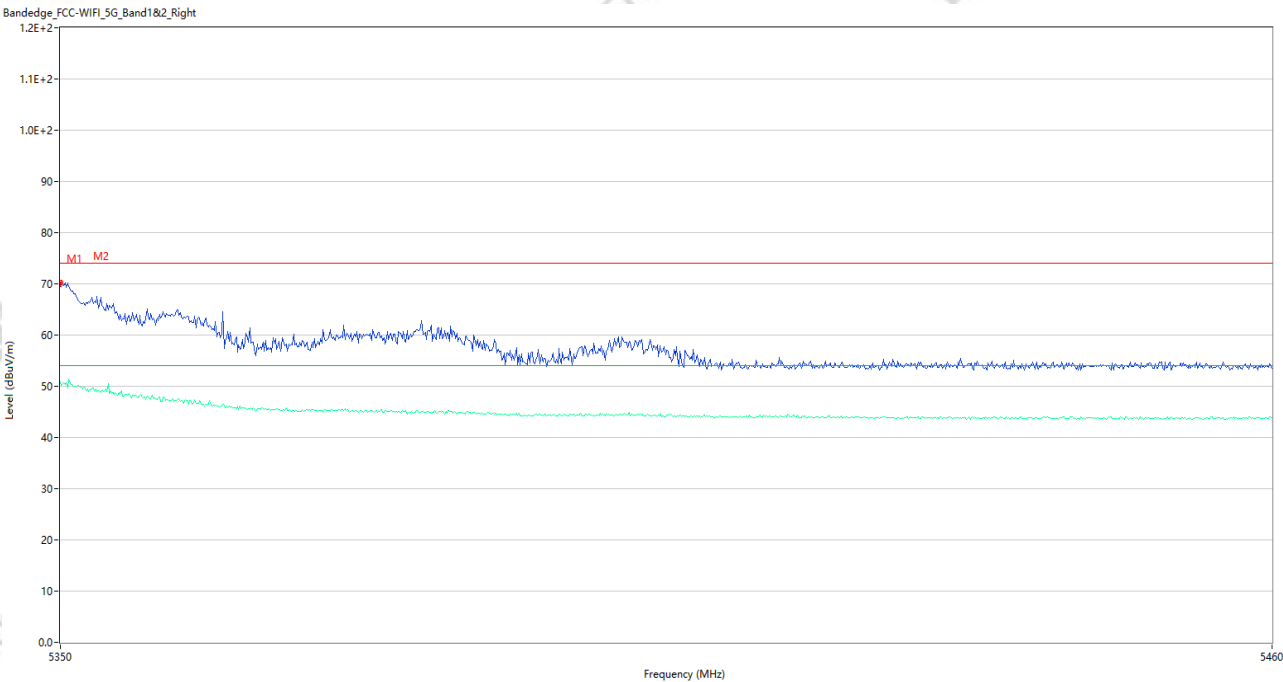


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	69.80	4.04	74.0	4.20	Peak	191.00	150	Horizontal	Pass
1**	5350.000	50.82	4.04	54.0	3.18	AV	191.00	150	Horizontal	Pass
2	5350.110	70.37	4.04	74.0	3.63	Peak	184.00	150	Horizontal	Pass
2**	5350.110	50.12	4.04	54.0	3.88	AV	184.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_11.39.33

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11ac80 CH58 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

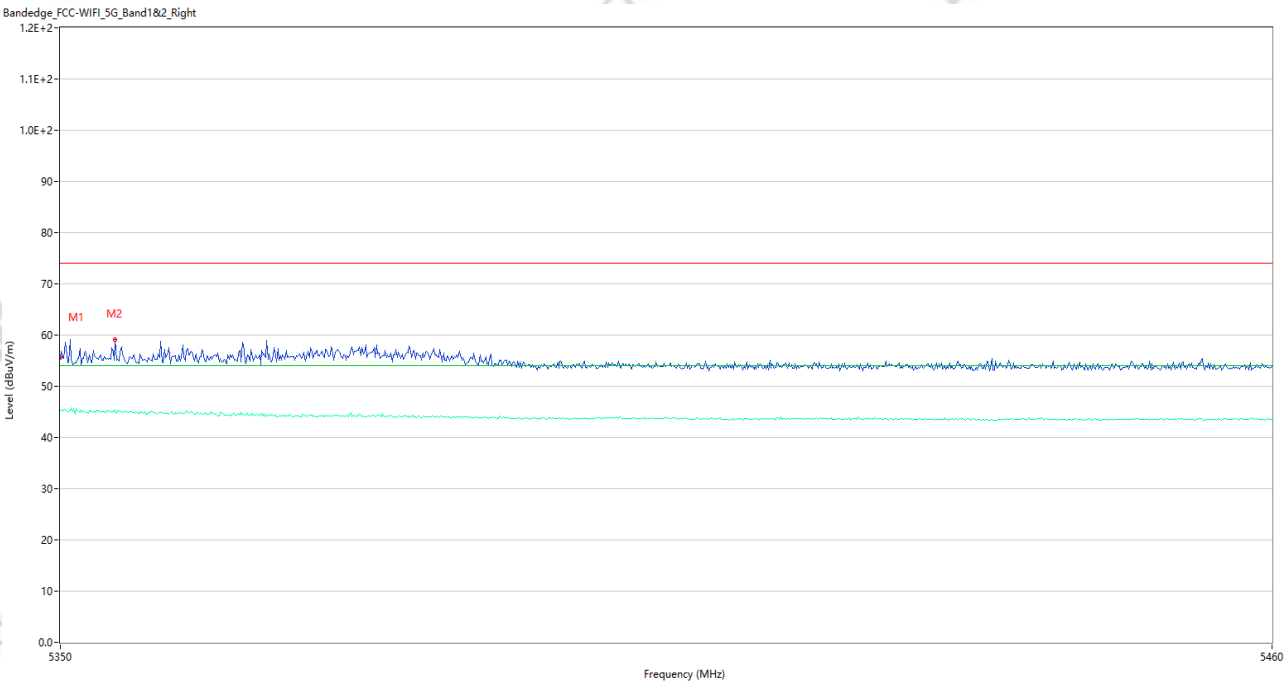


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	55.53	4.04	74.0	18.47	Peak	324.00	150	Vertical	Pass
1**	5350.000	45.24	4.04	54.0	8.76	AV	324.00	150	Vertical	Pass
2	5354.950	59.15	4.14	74.0	14.85	Peak	165.00	150	Vertical	Pass
2**	5354.950	45.37	4.14	54.0	8.63	AV	165.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_11.36.13

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.3G WIFI 11ac80 CH58 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

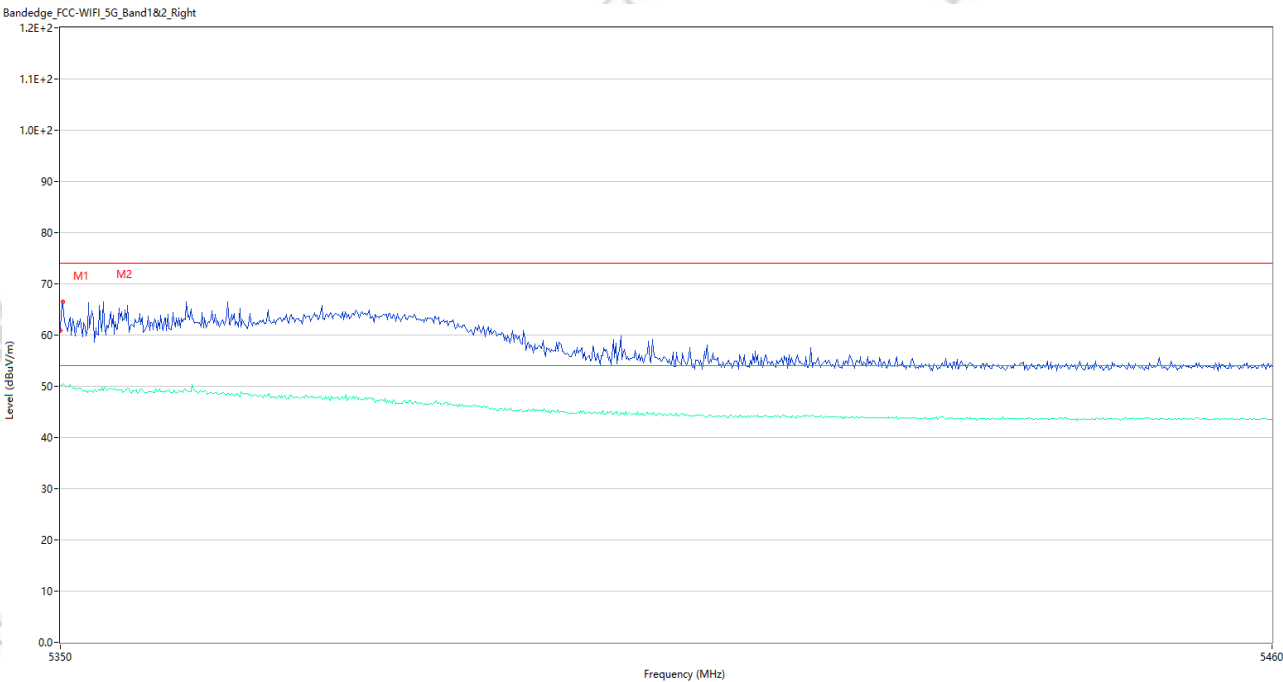


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5350.000	60.84	4.04	74.0	13.16	Peak	191.00	150	Horizontal	Pass
1**	5350.000	50.25	4.04	54.0	3.75	AV	191.00	150	Horizontal	Pass
2	5350.220	66.55	4.04	74.0	7.45	Peak	207.00	150	Horizontal	Pass
2**	5350.220	50.56	4.04	54.0	3.44	AV	207.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_14.41.38

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11a CH100 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

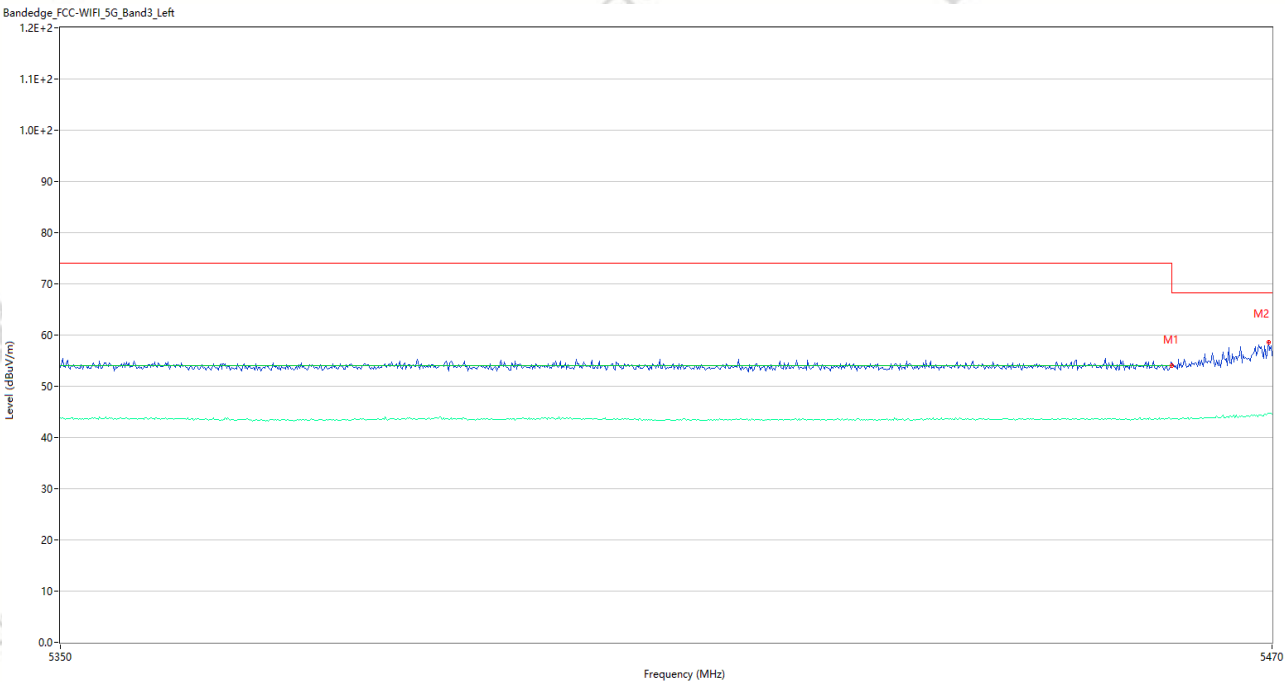


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.45	3.78	68.2	13.75	Peak	0.00	150	Vertical	Pass
1**	5460.000	43.62	3.78	54.0	10.38	AV	0.00	150	Vertical	Pass
2	5469.640	58.61	4.08	68.2	9.59	Peak	346.00	150	Vertical	Pass
2**	5469.640	44.71	4.08	--	-44.71	AV	346.00	150	Vertical	N/A

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_14.46.44

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11a CH100 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

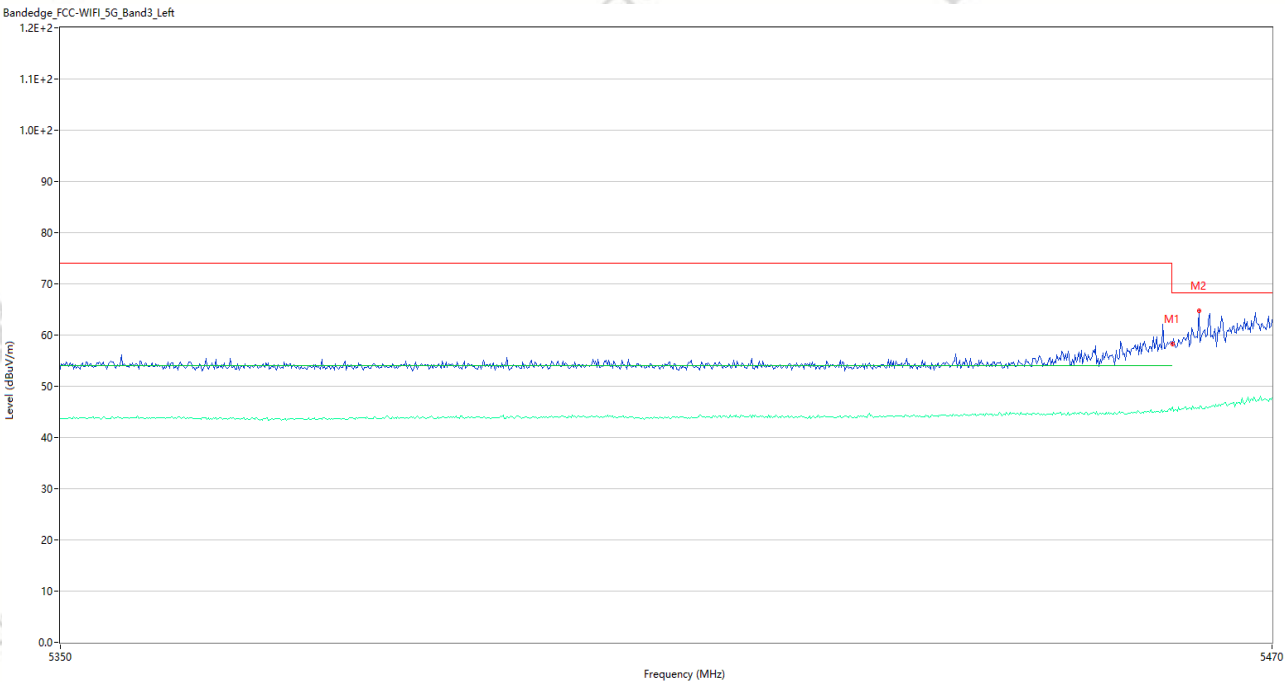


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	58.40	3.78	68.2	9.80	Peak	195.33	150	Horizontal	Pass
1**	5460.000	45.72	3.78	54.0	8.28	AV	195.33	150	Horizontal	Pass
2	5462.680	64.69	3.86	68.2	3.51	Peak	183.00	150	Horizontal	Pass
2**	5462.680	45.64	3.86	--	-45.64	AV	183.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_15.02.01

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11a CH140 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

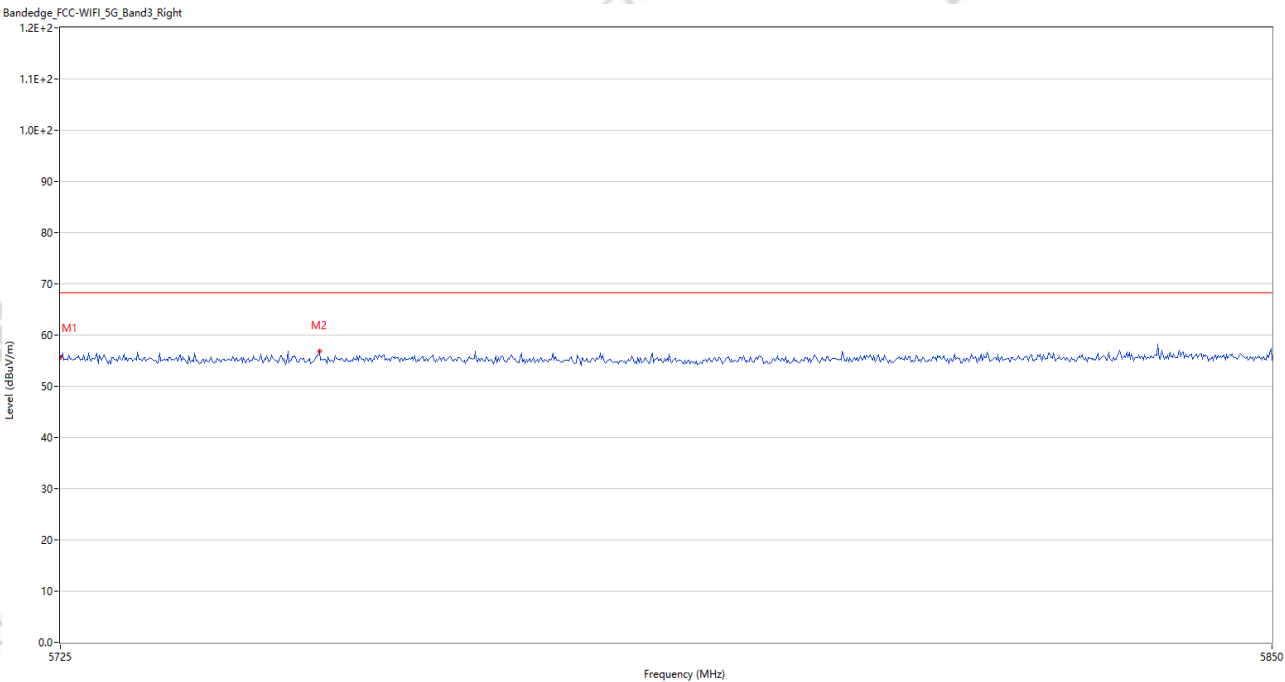


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	55.70	4.31	68.2	12.50	Peak	221.00	150	Vertical	Pass
2	5751.500	56.76	4.23	68.2	11.44	Peak	105.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_14.59.23

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11a CH140 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

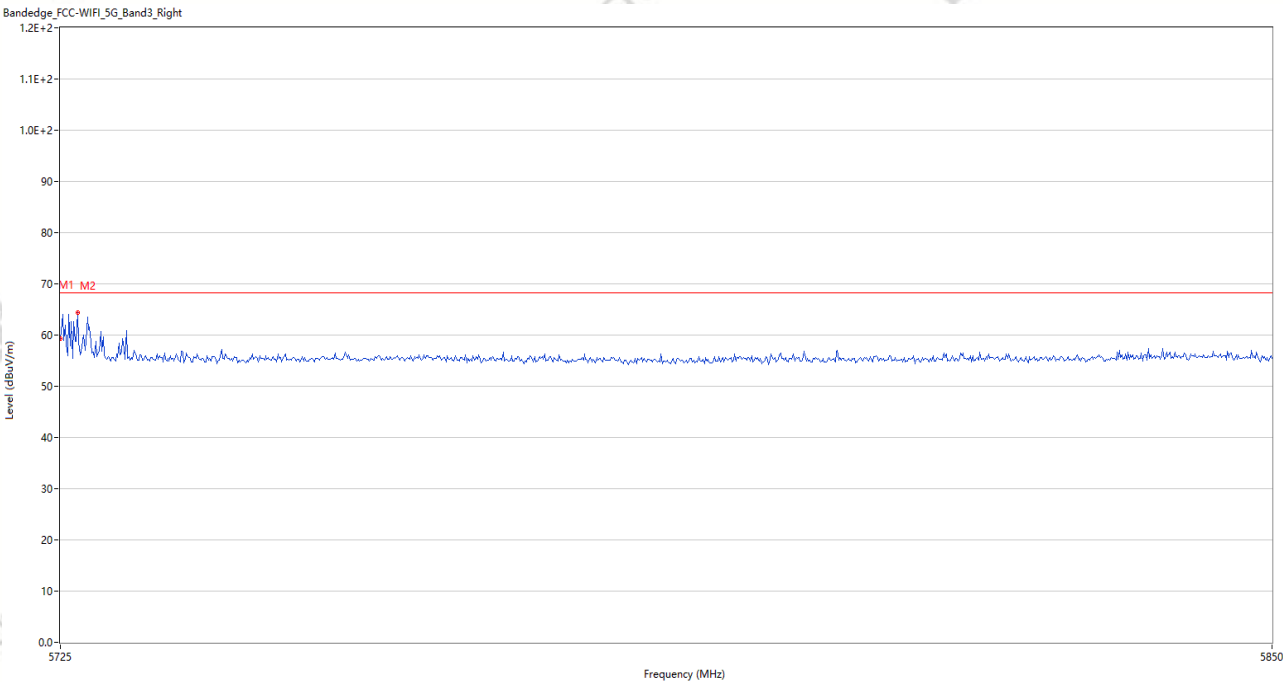


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	59.24	4.31	68.2	8.96	Peak	199.00	150	Horizontal	Pass
2	5726.750	64.35	4.25	68.2	3.85	Peak	201.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_15.05.42

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n20 CH100 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

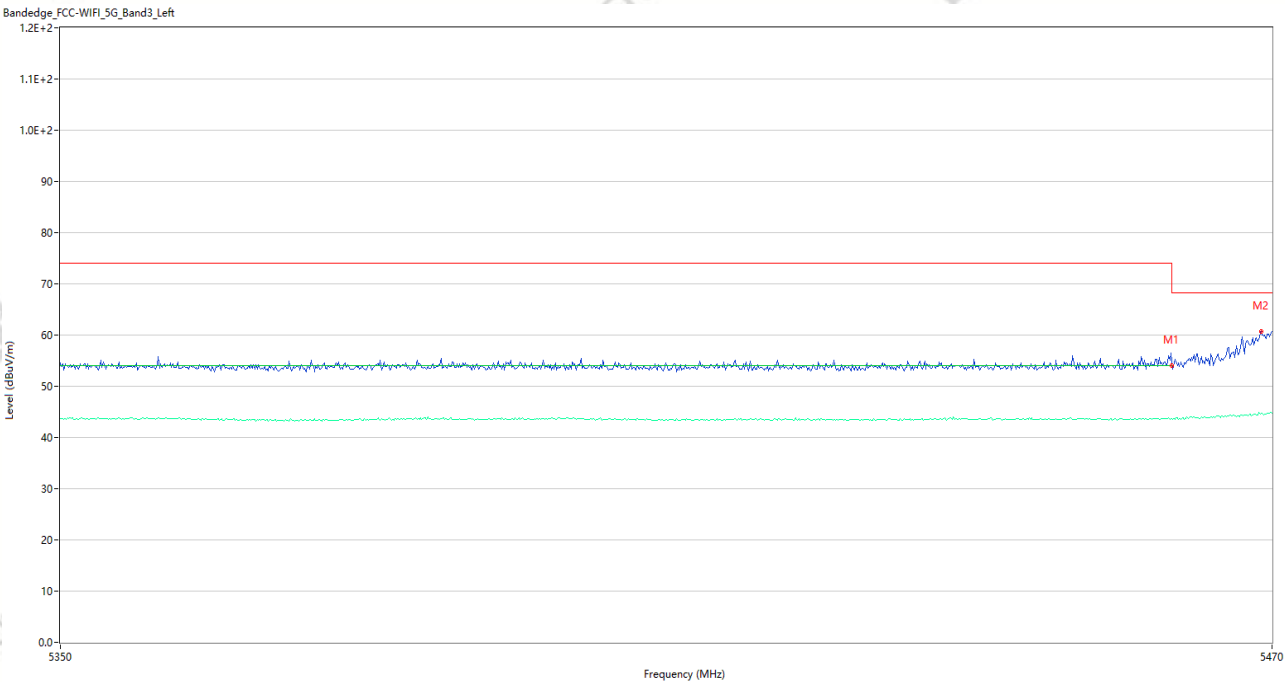

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	54.46	3.78	68.2	13.74	Peak	360.00	150	Vertical	Pass
1**	5460.000	43.61	3.78	54.0	10.39	AV	360.00	150	Vertical	Pass
2	5468.920	60.77	4.07	68.2	7.43	Peak	360.00	150	Vertical	Pass
2**	5468.920	44.69	4.07	--	-44.69	AV	360.00	150	Vertical	N/A

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_15.13.18

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n20 CH100 P=15
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	57.13	3.78	68.2	11.07	Peak	187.36	150	Horizontal	Pass
1**	5460.000	44.35	3.78	54.0	9.65	AV	187.36	150	Horizontal	Pass
2	5465.920	64.85	3.97	68.2	3.35	Peak	208.00	150	Horizontal	Pass
2**	5465.920	45.53	3.97	--	-45.53	AV	208.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_15.32.55

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n20 CH140 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

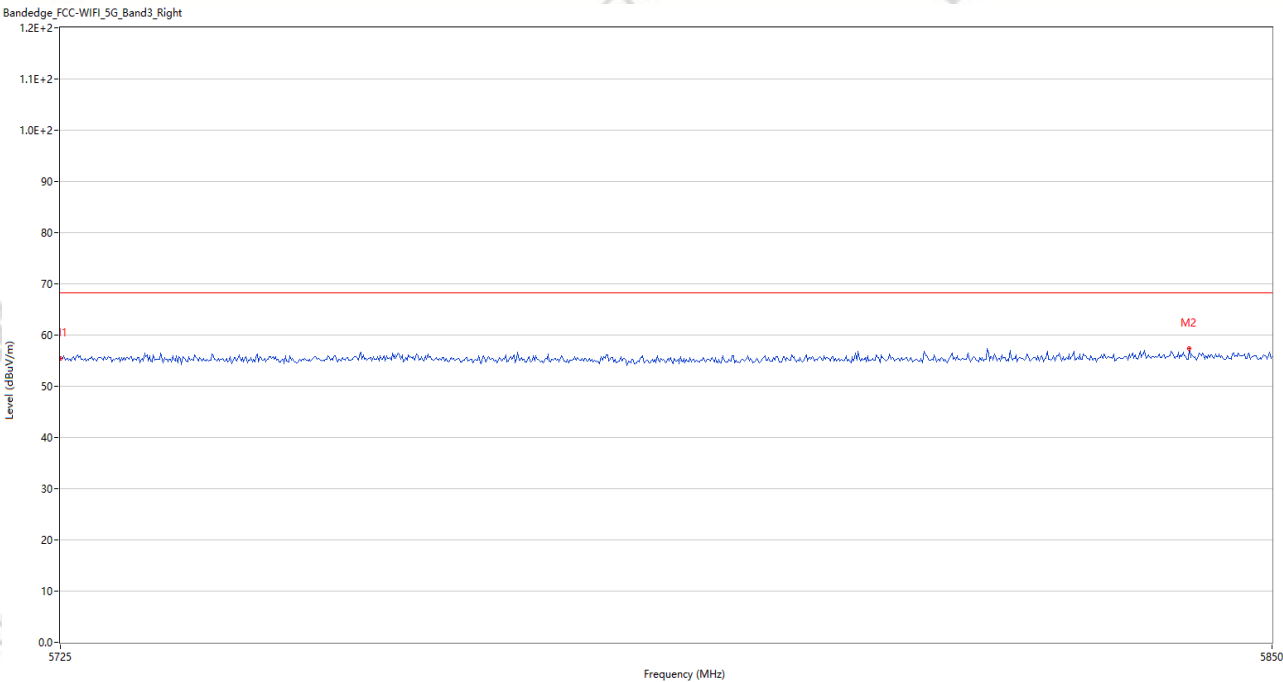


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	55.39	4.31	68.2	12.81	Peak	20.00	150	Vertical	Pass
2	5841.375	57.39	5.39	68.2	10.81	Peak	144.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_15.28.16

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n20 CH140 P=14
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Zhang Zhongqiu	Remark:	适配器: A10+数据线: A01

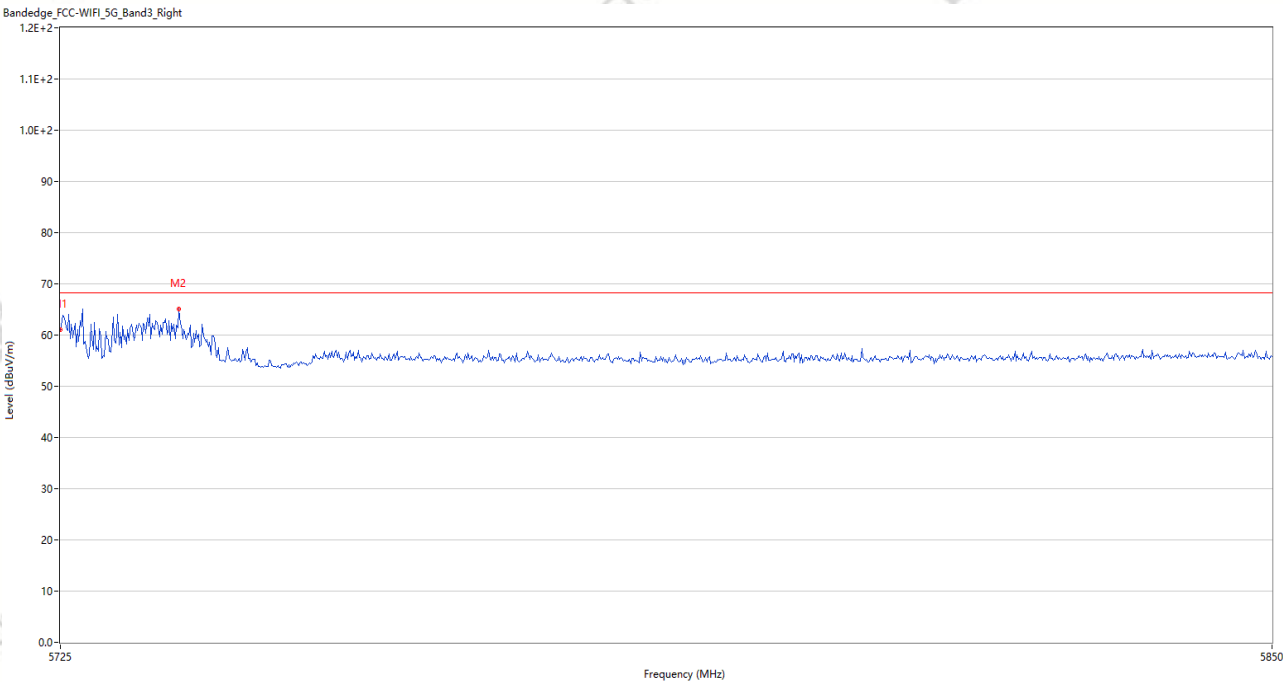


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	60.99	4.31	68.2	7.21	Peak	180.00	150	Horizontal	Pass
2	5737.125	65.15	4.26	68.2	3.05	Peak	79.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.02.23

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n40 CH102 P=12.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

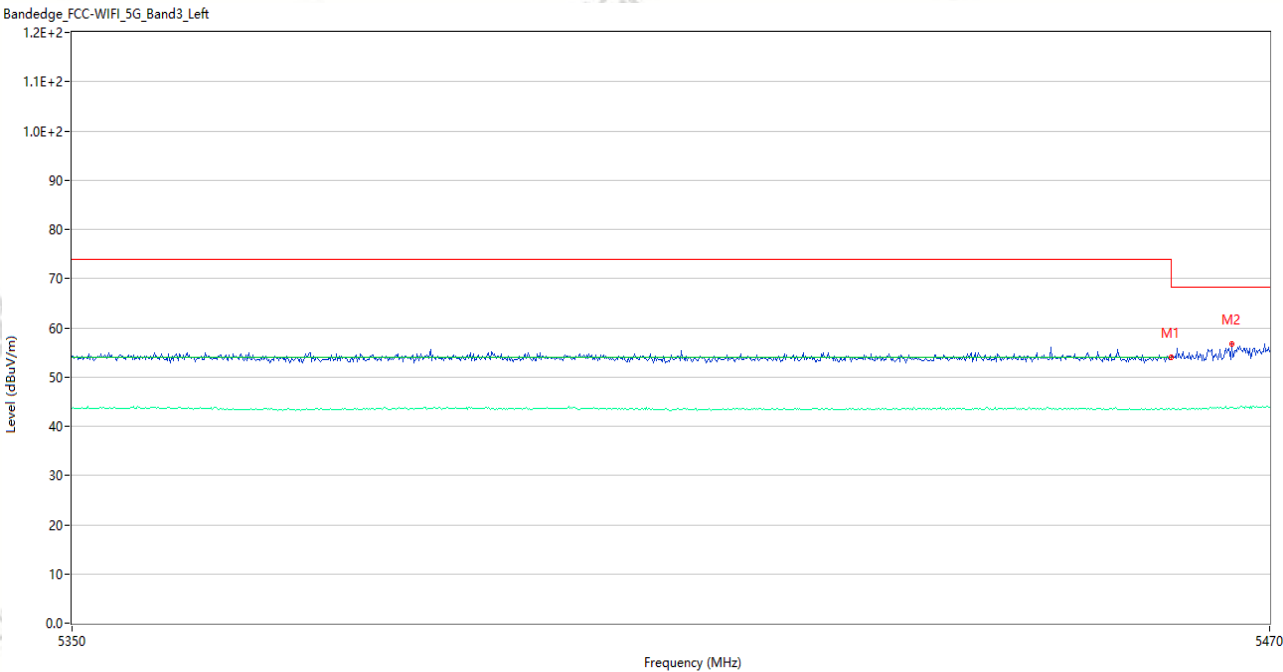


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	53.69	3.78	68.2	14.51	Peak	352.67	150	Vertical	Pass
1**	5460.000	43.49	3.78	54.0	10.51	AV	352.67	150	Vertical	Pass
2	5466.160	56.62	3.98	68.2	11.58	Peak	360.00	150	Vertical	Pass
2**	5466.160	43.87	3.98	--	-43.87	AV	360.00	150	Vertical	N/A

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.00.23

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n40 CH102 P=12.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

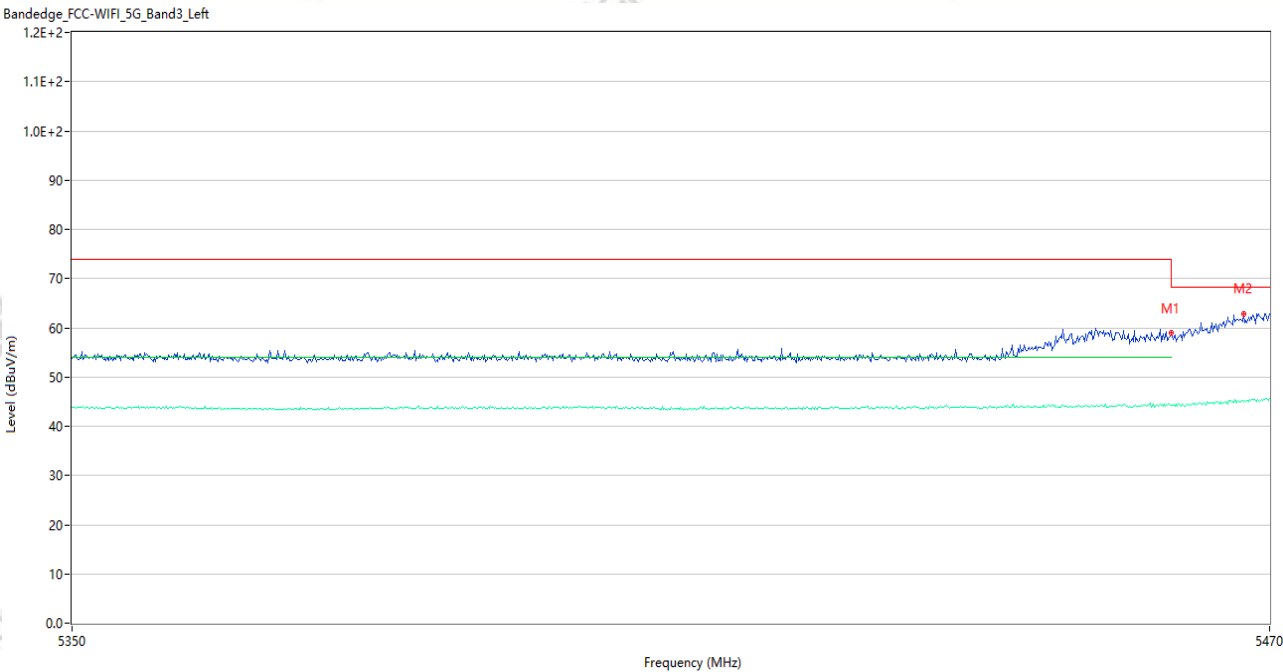


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	58.68	3.78	68.2	9.52	Peak	192.68	150	Horizontal	Pass
1**	5460.000	44.24	3.78	54.0	9.76	AV	192.68	150	Horizontal	Pass
2	5467.360	62.92	4.02	68.2	5.28	Peak	203.00	150	Horizontal	Pass
2**	5467.360	44.98	4.02	--	-44.98	AV	203.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_15.45.42

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n40 CH134 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

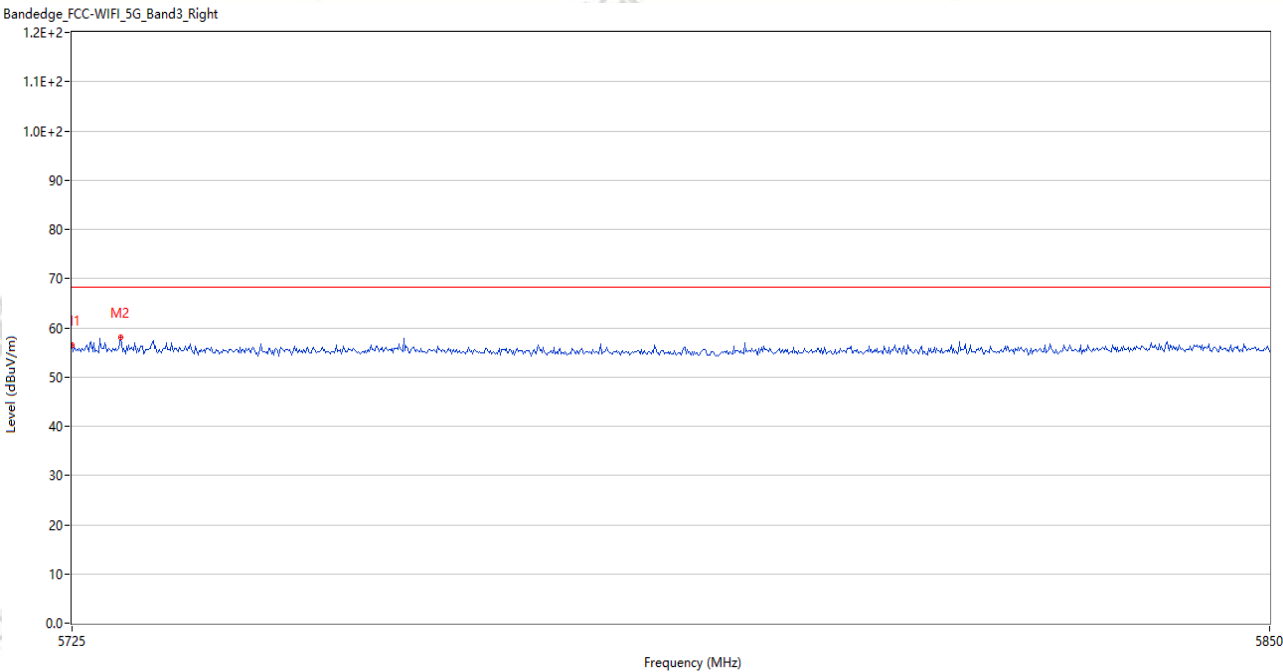

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	56.41	4.31	68.2	11.79	Peak	317.00	150	Vertical	Pass
2	5730.000	57.97	4.16	68.2	10.23	Peak	317.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_15.44.00

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11n40 CH134 P=16
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	63.02	4.31	68.2	5.18	Peak	179.00	150	Horizontal	Pass
2	5725.750	64.88	4.28	68.2	3.32	Peak	209.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_16.13.18

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac80 CH106 P=13.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

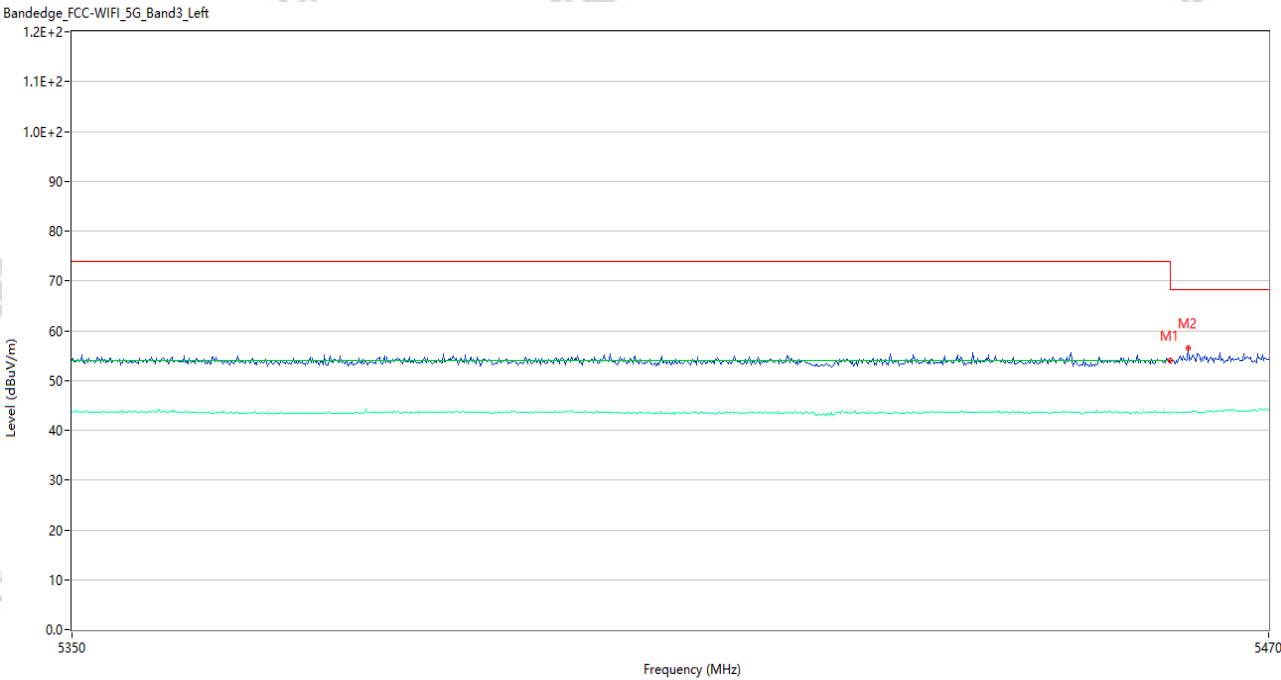


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	53.78	3.78	68.2	14.42	Peak	184.19	150	Vertical	Pass
1**	5460.000	43.59	3.78	54.0	10.41	AV	184.19	150	Vertical	Pass
2	5461.840	56.59	3.84	68.2	11.61	Peak	349.00	150	Vertical	Pass
2**	5461.840	43.65	3.84	--	-43.65	AV	349.00	150	Vertical	N/A

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_16.11.16

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac80 CH106 P=13.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

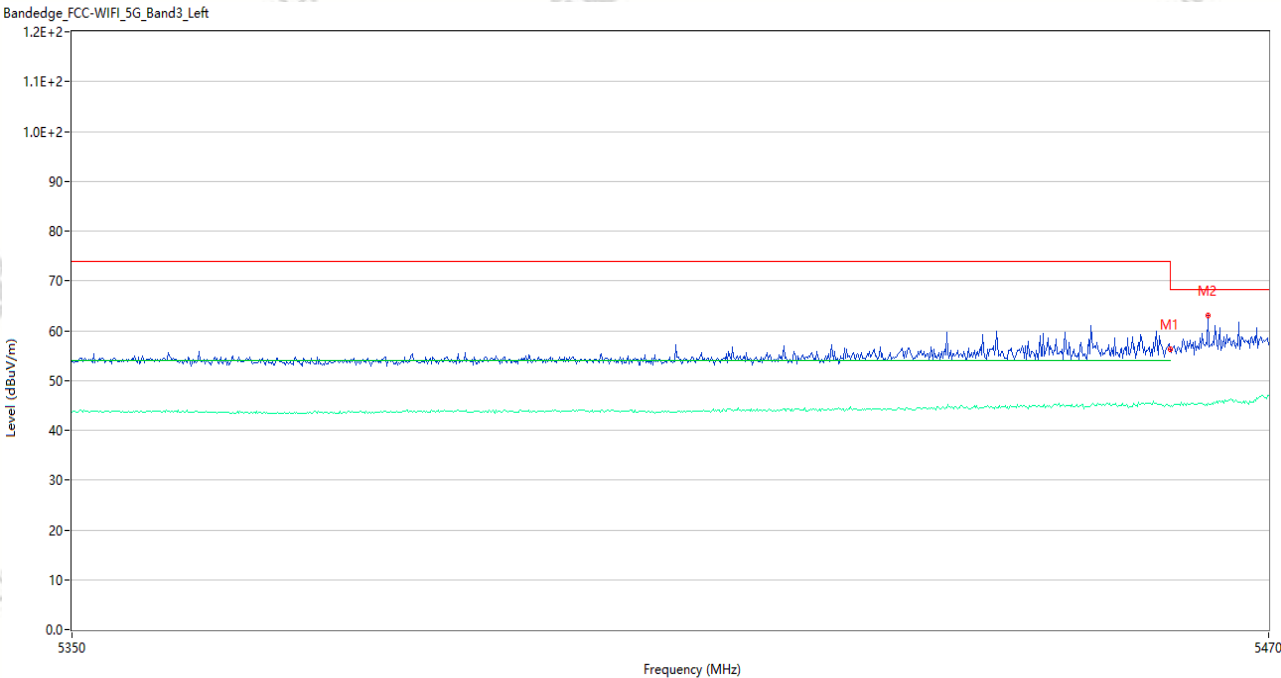


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5460.000	56.67	3.78	68.2	11.53	Peak	192.66	150	Horizontal	Pass
1**	5460.000	44.84	3.78	54.0	9.16	AV	192.66	150	Horizontal	Pass
2	5463.880	63.01	3.90	68.2	5.19	Peak	198.00	150	Horizontal	Pass
2**	5463.880	45.52	3.90	--	-45.52	AV	198.00	150	Horizontal	N/A

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_16.21.23

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac80 CH122 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

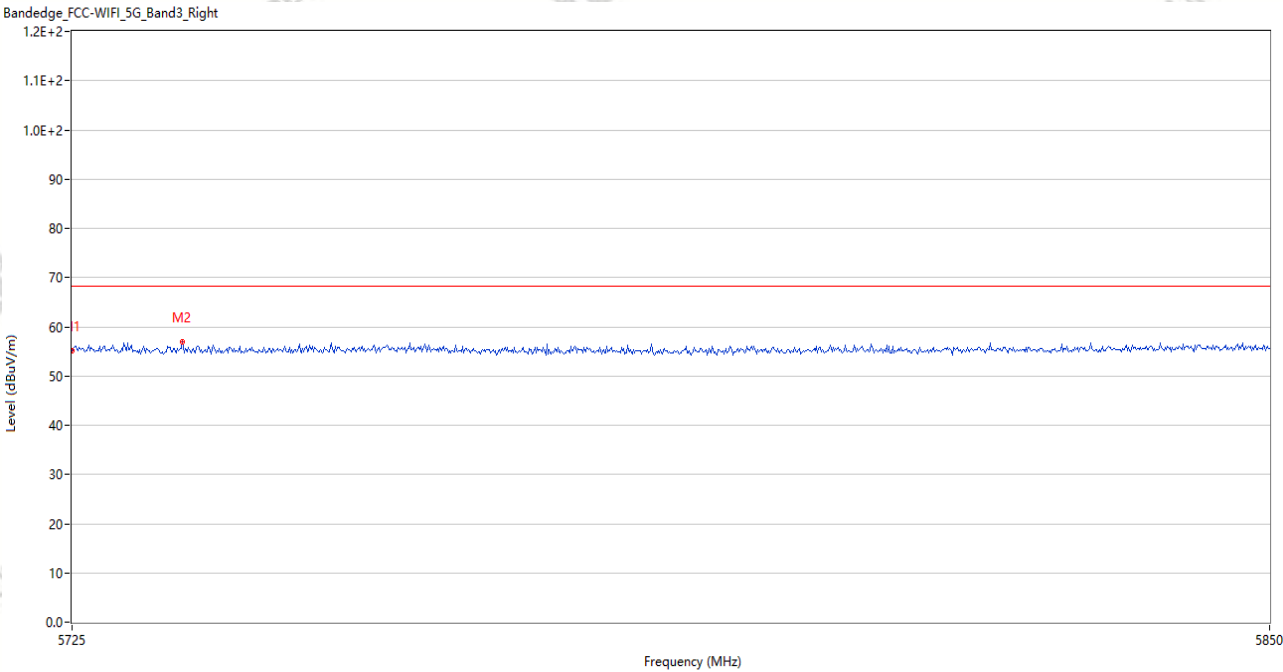


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	55.08	4.31	68.2	13.12	Peak	74.00	150	Vertical	Pass
2	5736.375	56.93	4.24	68.2	11.27	Peak	7.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_16.20.02

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.6G WIFI 11ac80 CH122
		P=15.5	
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

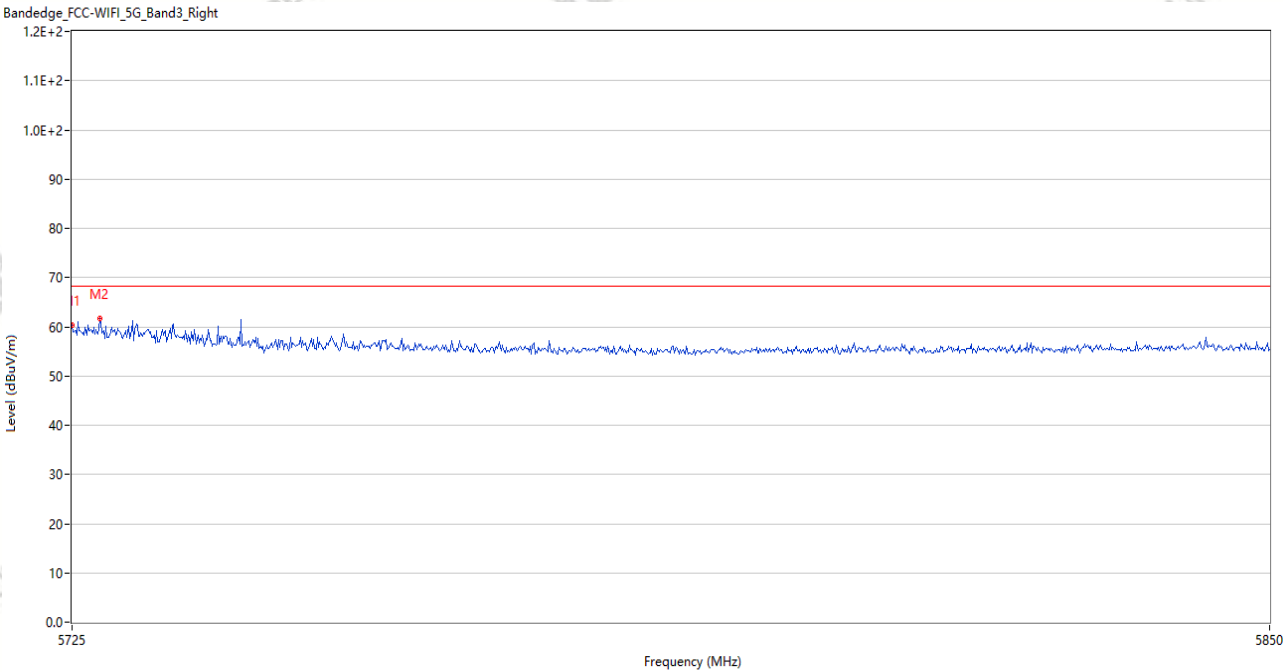


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5725.000	60.40	4.31	68.2	7.80	Peak	191.00	150	Horizontal	Pass
2	5727.875	61.75	4.23	68.2	6.45	Peak	196.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.46.28

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a CH149 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

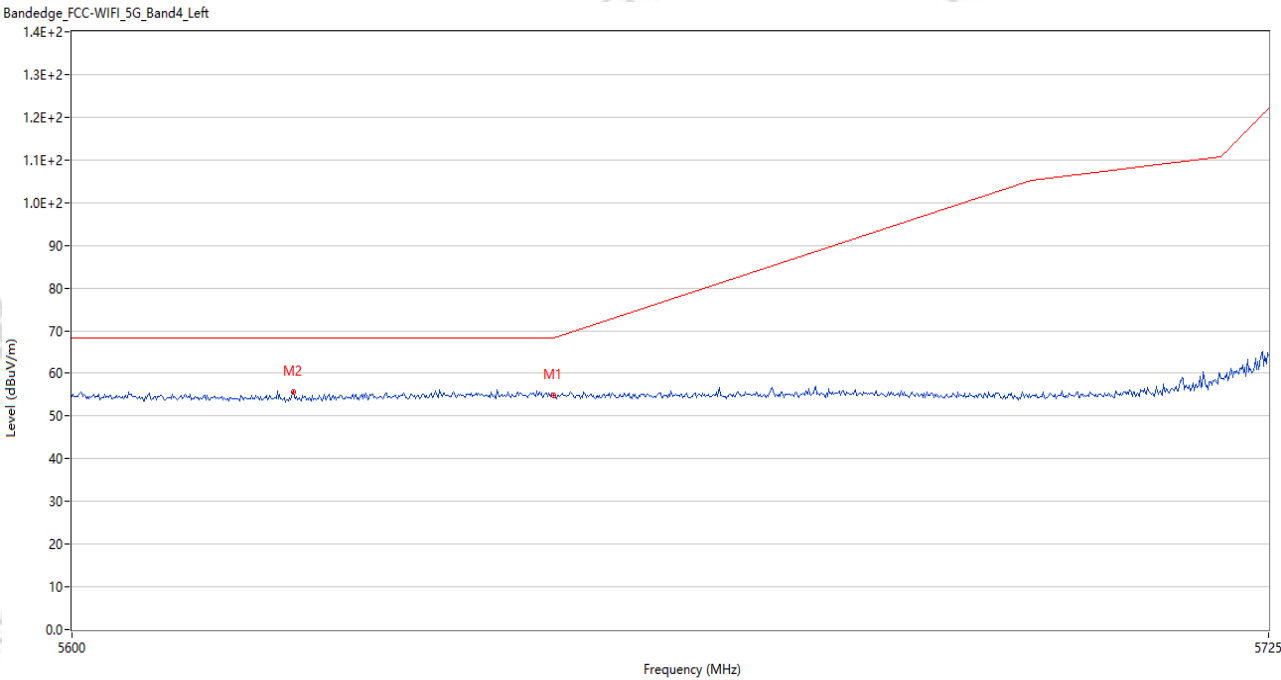


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	54.81	3.81	68.2	13.39	Peak	1.23	150	Vertical	Pass
2	5622.875	55.54	3.63	68.2	12.66	Peak	227.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.47.56

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a CH149 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

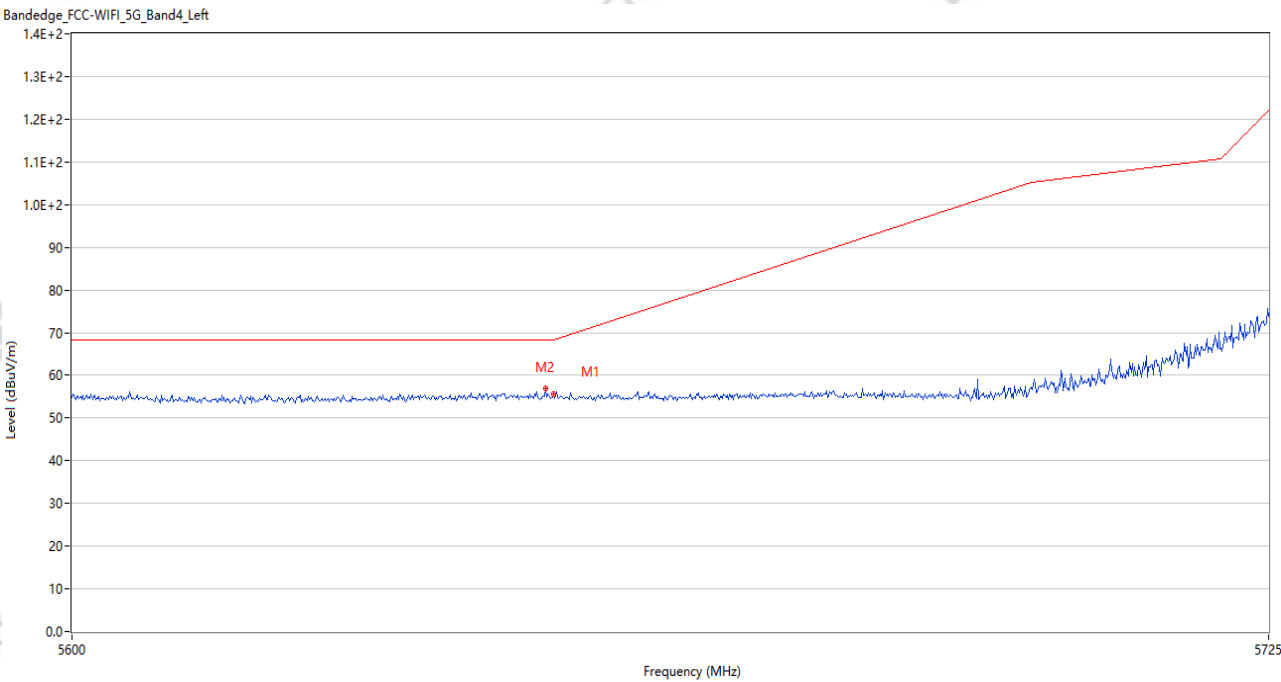


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	55.71	3.81	68.2	12.49	Peak	207.97	150	Horizontal	Pass
2	5649.125	56.91	3.81	68.2	11.29	Peak	227.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.42.23

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a CH165 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

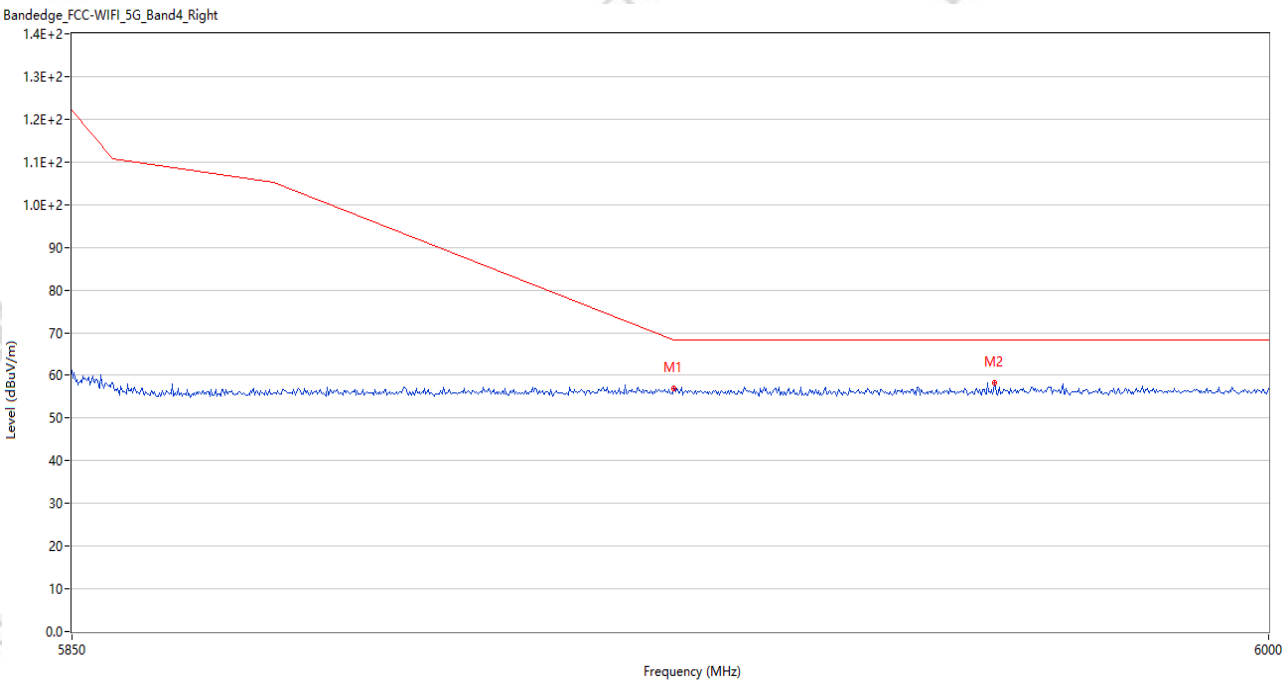


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	56.86	6.44	68.2	11.34	Peak	40.41	150	Vertical	Pass
2	5965.350	58.18	6.22	68.2	10.02	Peak	128.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.39.56

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11a20 CH165 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

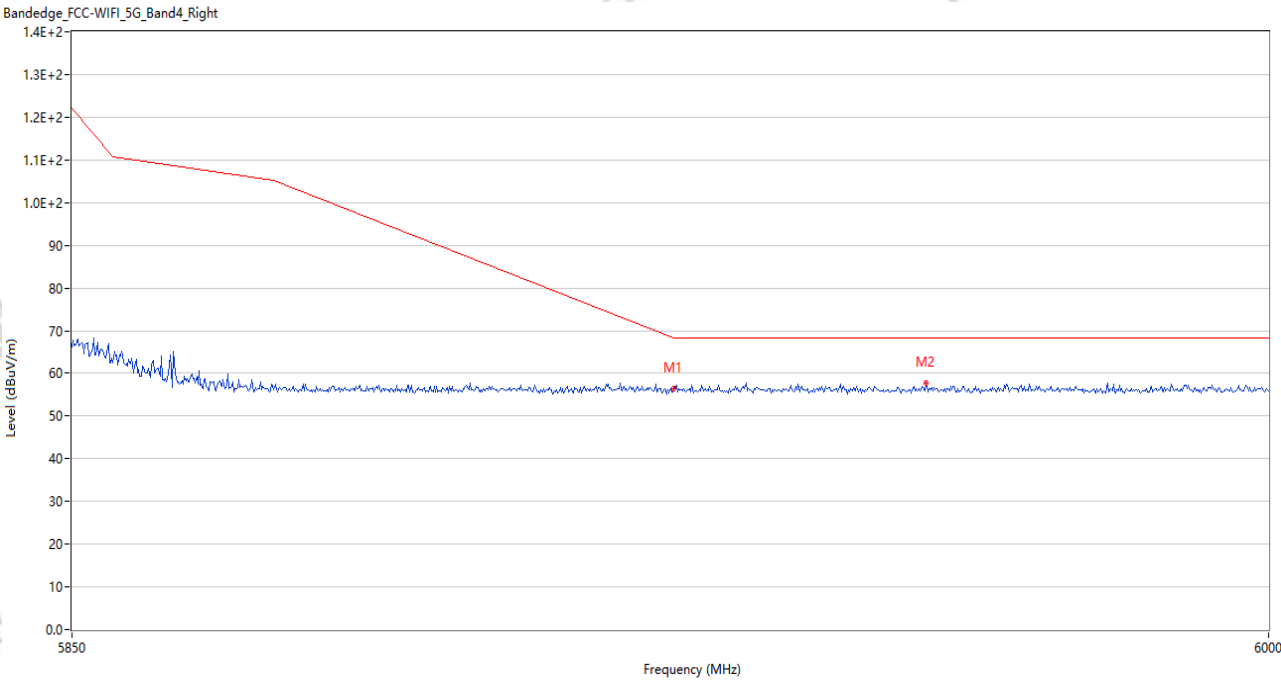


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	56.33	6.44	68.2	11.87	Peak	0.00	150	Horizontal	Pass
2	5956.650	57.64	6.13	68.2	10.56	Peak	94.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.51.56

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n20 CH149 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

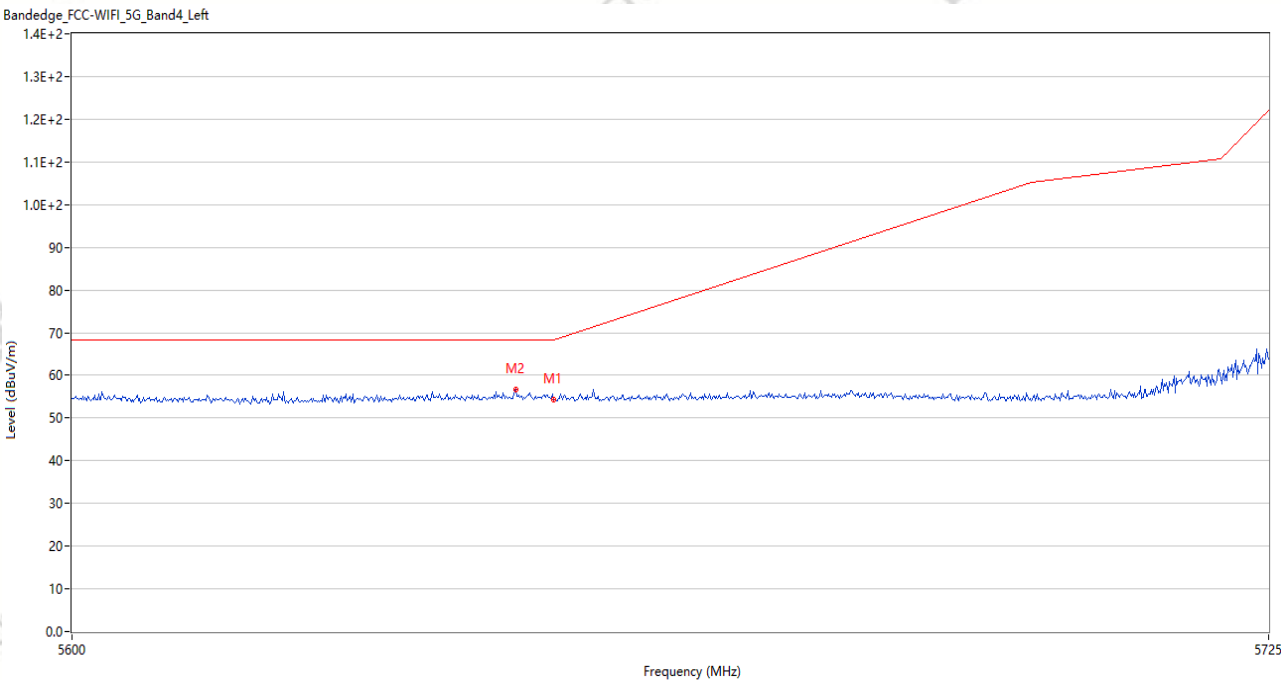


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	54.43	3.81	68.2	13.77	Peak	353.64	150	Vertical	Pass
2	5646.000	56.63	3.78	68.2	11.57	Peak	186.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.50.09

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n20 CH149 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

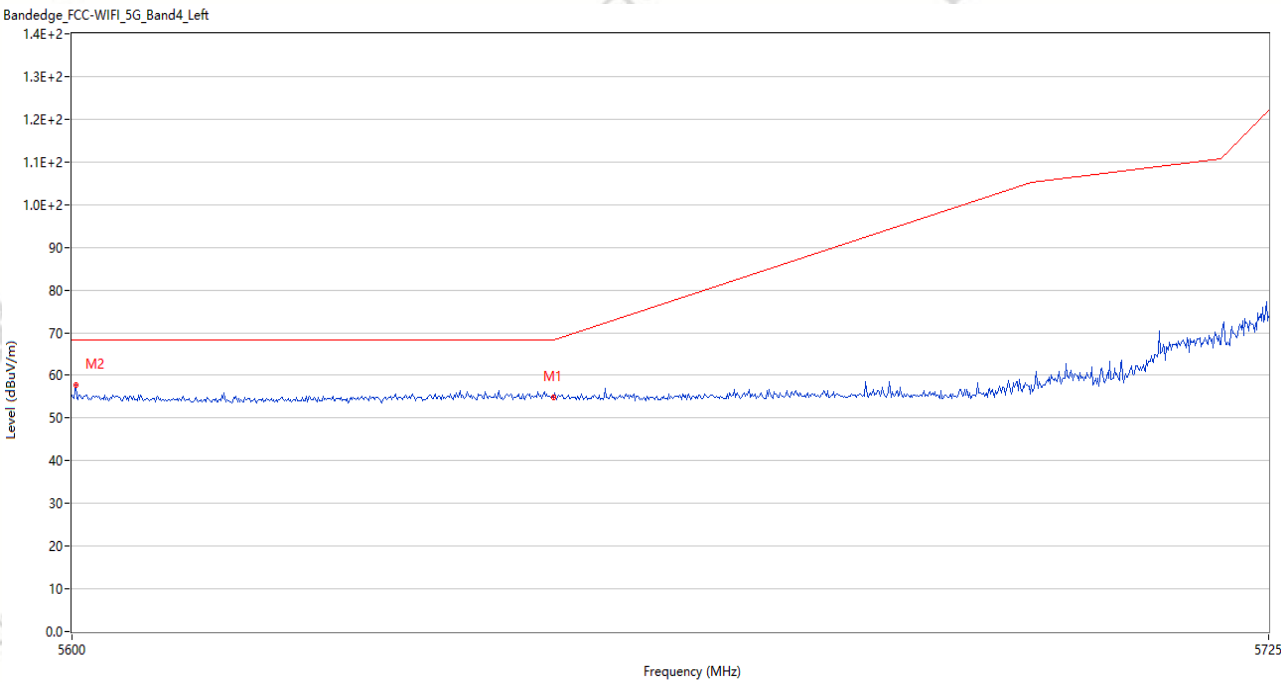


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	54.82	3.81	68.2	13.38	Peak	12.10	150	Horizontal	Pass
2	5600.375	57.69	3.77	68.2	10.51	Peak	237.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.35.16

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n20 CH165 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

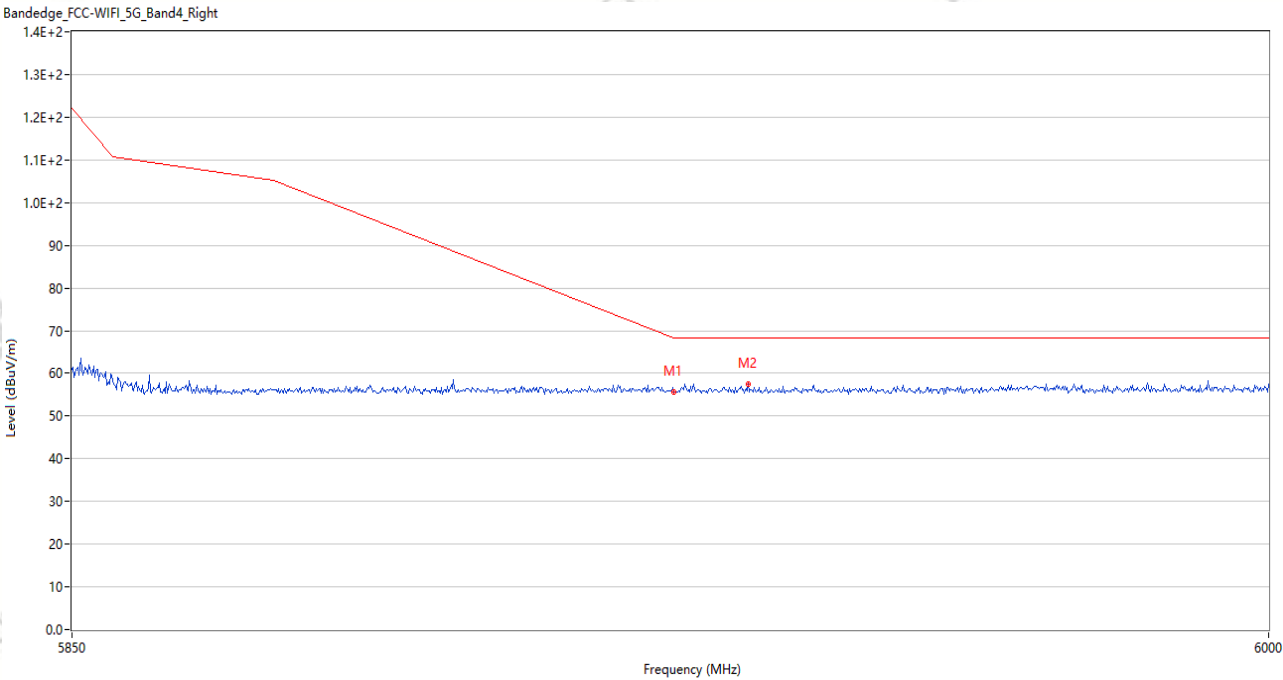


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	55.56	6.44	68.2	12.64	Peak	313.91	150	Vertical	Pass
2	5934.300	57.50	6.20	68.2	10.70	Peak	17.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.37.54

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n20 CH165 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

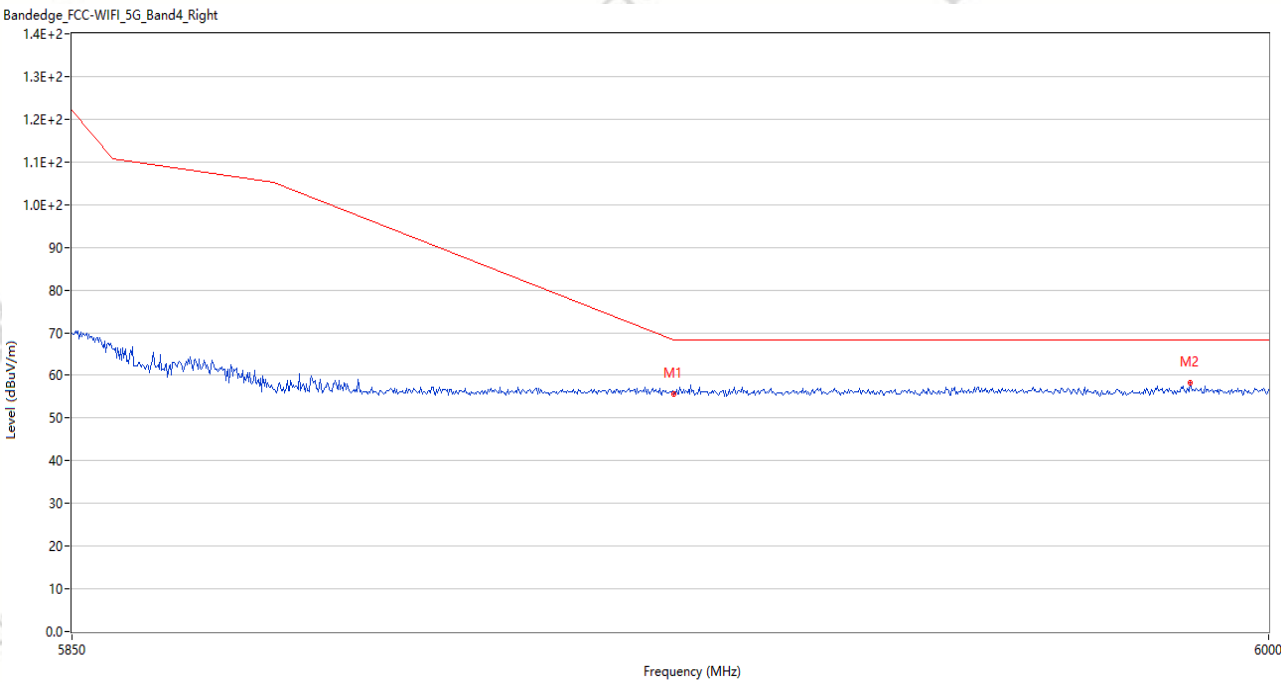


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	55.72	6.44	68.2	12.48	Peak	316.64	150	Horizontal	Pass
2	5990.100	58.19	6.39	68.2	10.01	Peak	159.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.07.43

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n40 CH151 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

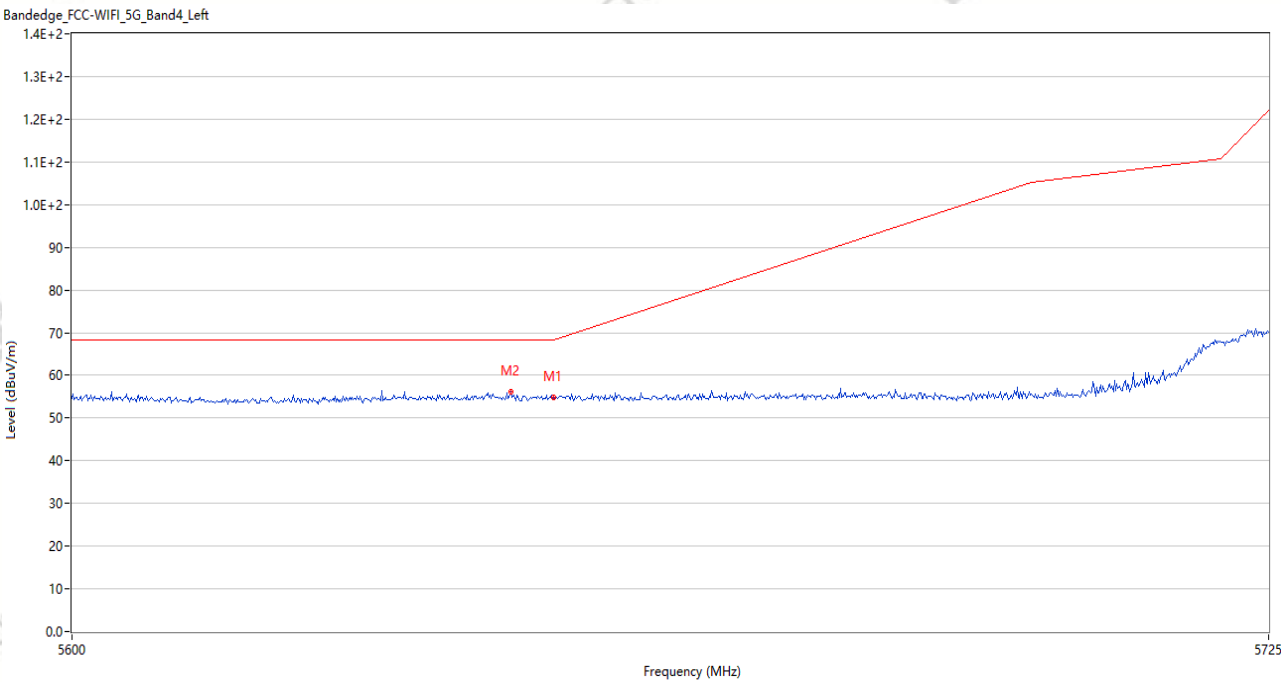


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	54.94	3.81	68.2	13.26	Peak	95.91	150	Vertical	Pass
2	5645.500	56.07	3.77	68.2	12.13	Peak	127.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.04.36

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n40 CH151 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

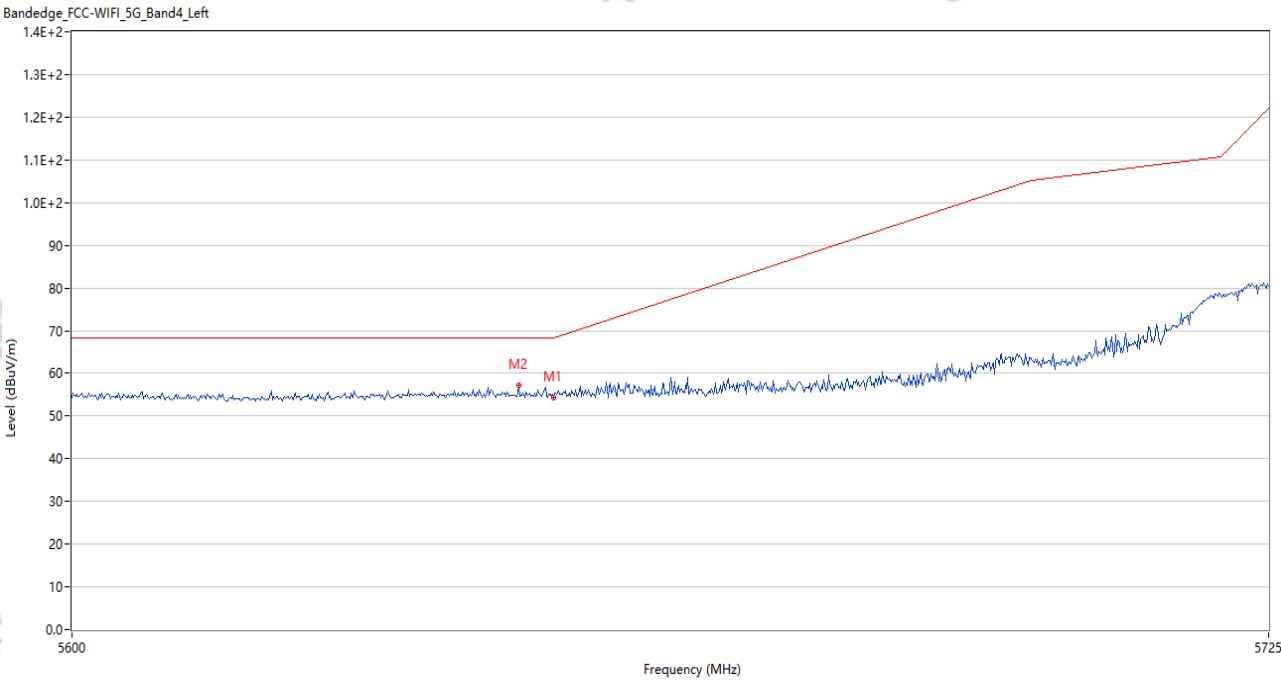


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	54.24	3.81	68.2	13.96	Peak	130.08	150	Horizontal	Pass
2	5646.375	57.21	3.78	68.2	10.99	Peak	190.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.32.45

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n40 CH159 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

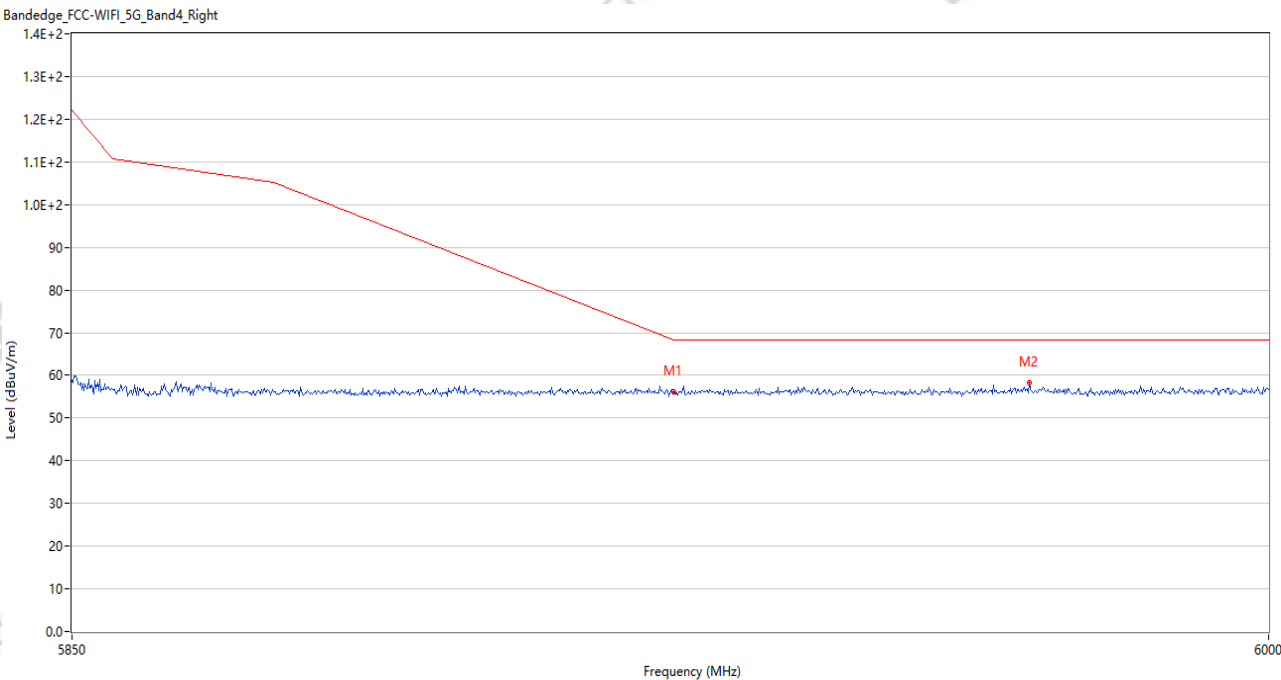


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	56.08	6.44	68.2	12.12	Peak	196.75	150	Vertical	Pass
2	5969.700	58.19	6.32	68.2	10.01	Peak	59.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.30.34

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11n40 CH159 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

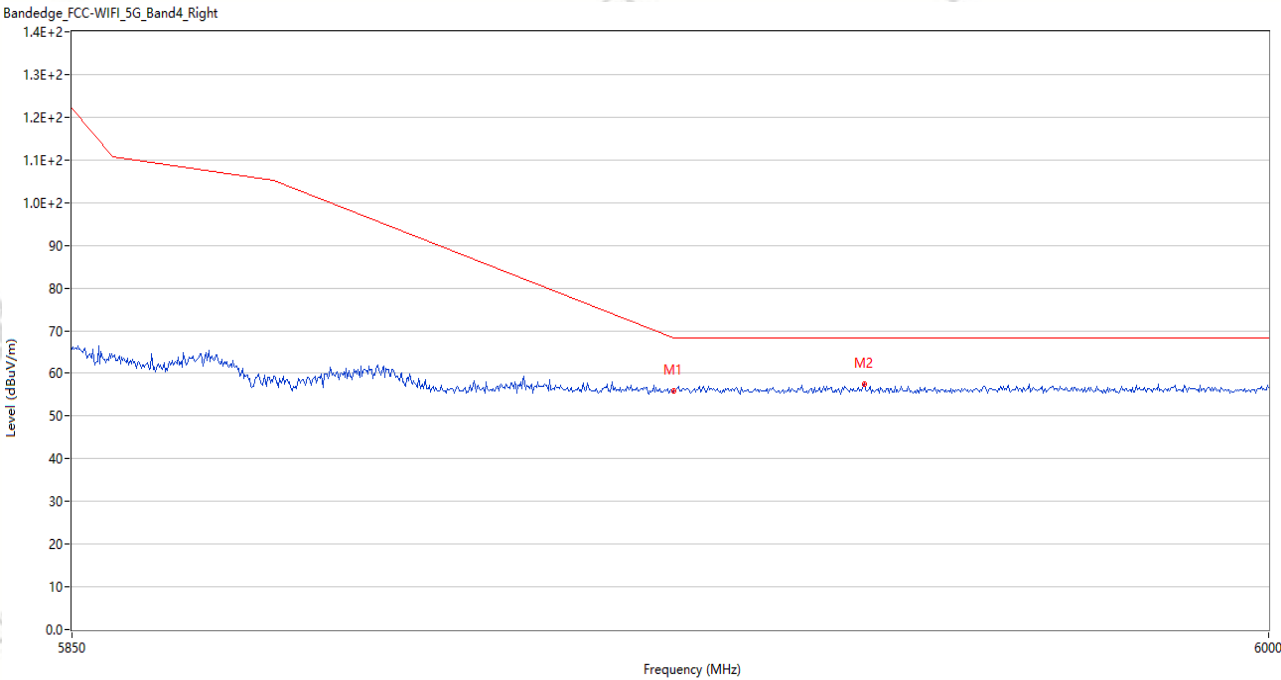


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5925.000	56.00	6.44	68.2	12.20	Peak	204.10	150	Horizontal	Pass
2	5948.850	57.57	6.20	68.2	10.63	Peak	102.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-13_17.12.39

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac80 CH155 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

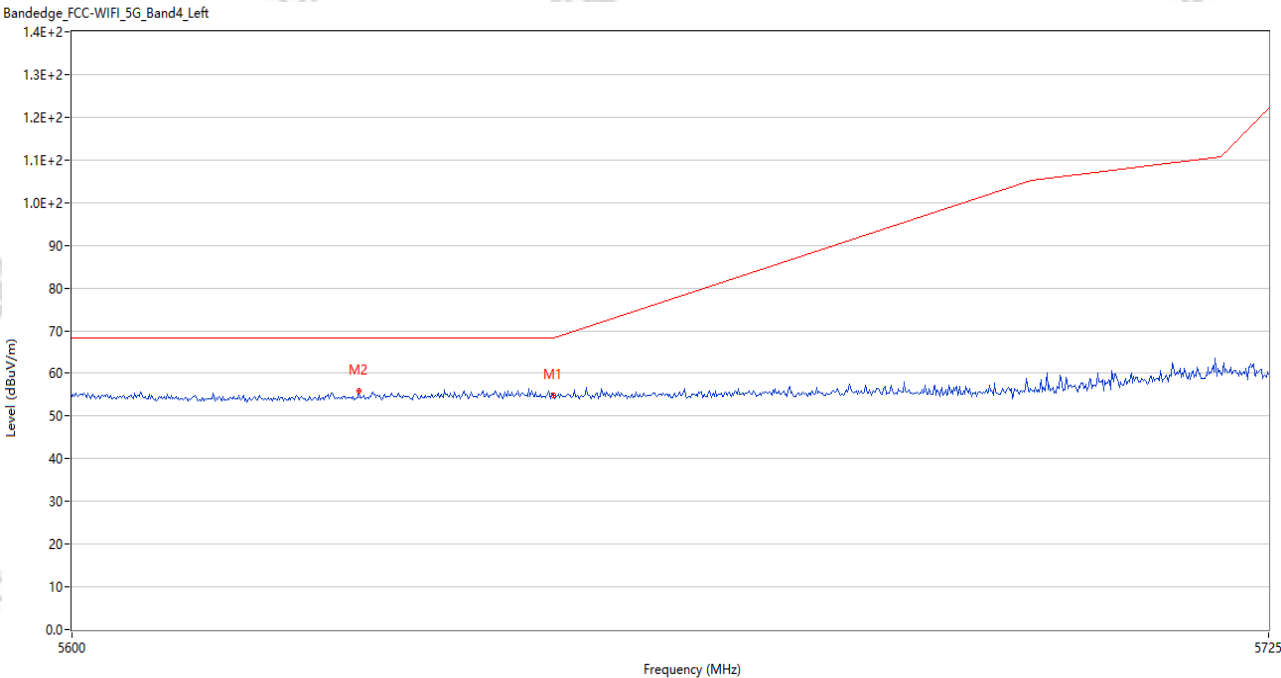


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	54.74	3.81	68.2	13.46	Peak	7.35	150	Vertical	Pass
2	5629.750	55.88	3.68	68.2	12.32	Peak	283.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-13_17.14.13

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.4
Model Number:	X1103	Humidity (%RH):	51
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac80 CH155 P=15.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

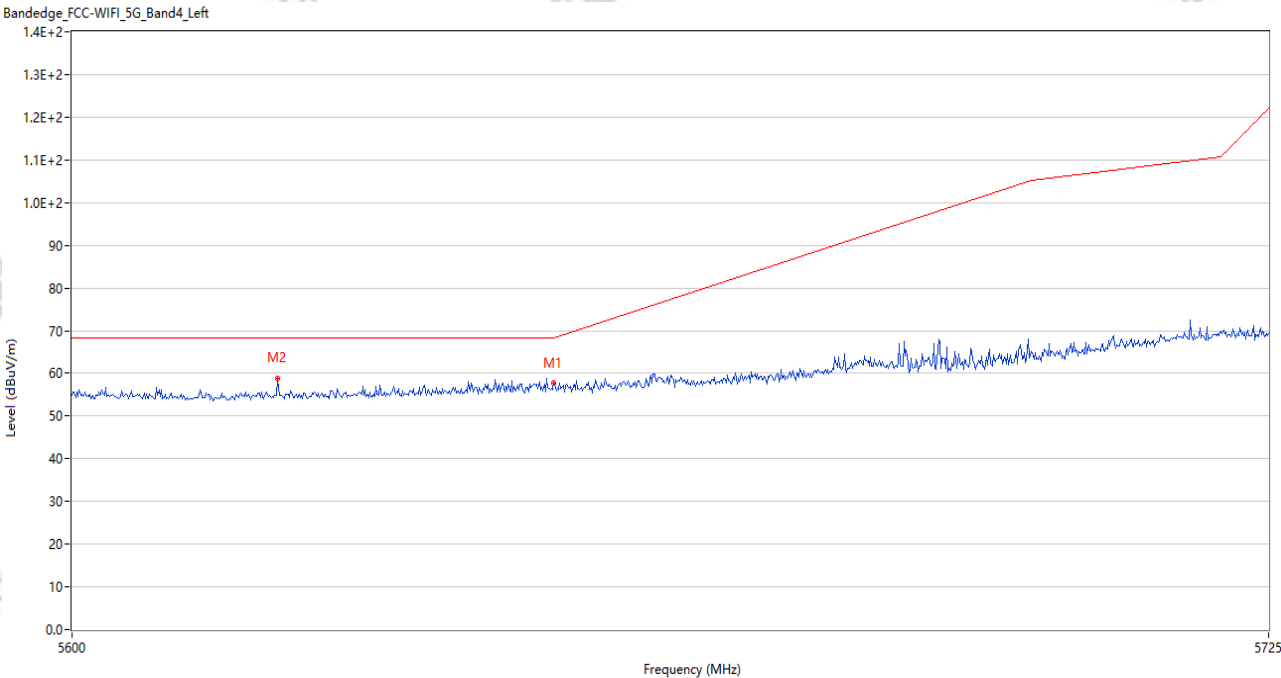

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	5650.000	57.61	3.81	68.2	10.59	Peak	203.99	150	Horizontal	Pass
2	5621.250	58.85	3.61	68.2	9.35	Peak	203.00	150	Horizontal	Pass