

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_11.30.21

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

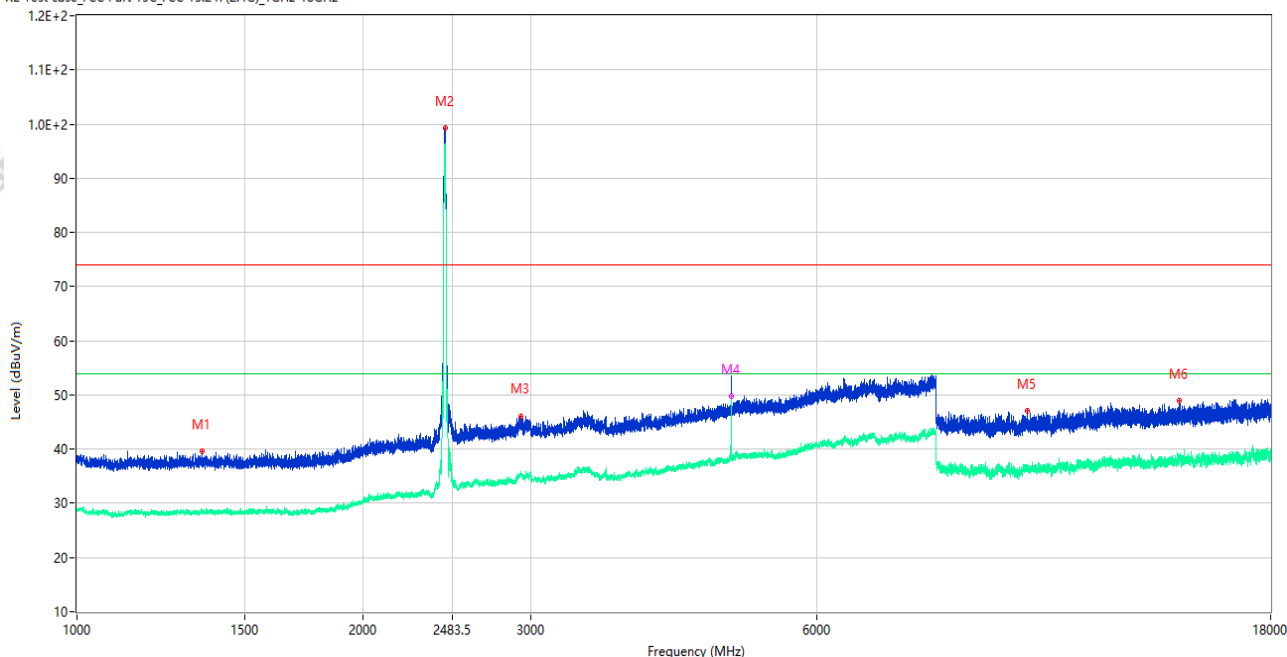

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1353.500	39.62	-15.90	74.0	34.38	Peak	46.00	150	Vertical	Pass
1**	1353.500	28.34	-15.90	54.0	25.66	AV	46.00	150	Vertical	Pass
2	2438.250	99.22	-12.38	74.0	-25.22	Peak	171.00	150	Vertical	N/A
2**	2438.250	96.39	-12.38	54.0	-42.39	AV	171.00	150	Vertical	N/A
3	2927.000	46.13	-8.10	74.0	27.87	Peak	289.00	150	Vertical	Pass
3**	2927.000	35.28	-8.10	54.0	18.72	AV	289.00	150	Vertical	Pass
4	4874.500	52.54	-2.25	74.0	21.46	Peak	179.00	150	Vertical	Pass
4**	4874.500	49.84	-2.25	54.0	4.16	AV	179.00	150	Vertical	Pass
5	9992.500	46.98	-3.79	74.0	27.02	Peak	45.00	150	Vertical	Pass
5**	9992.500	36.49	-3.79	54.0	17.51	AV	45.00	150	Vertical	Pass
6	14415.500	48.93	-2.72	74.0	25.07	Peak	360.00	150	Vertical	Pass
6**	14415.500	38.20	-2.72	54.0	15.80	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_11.37.49

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=15.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

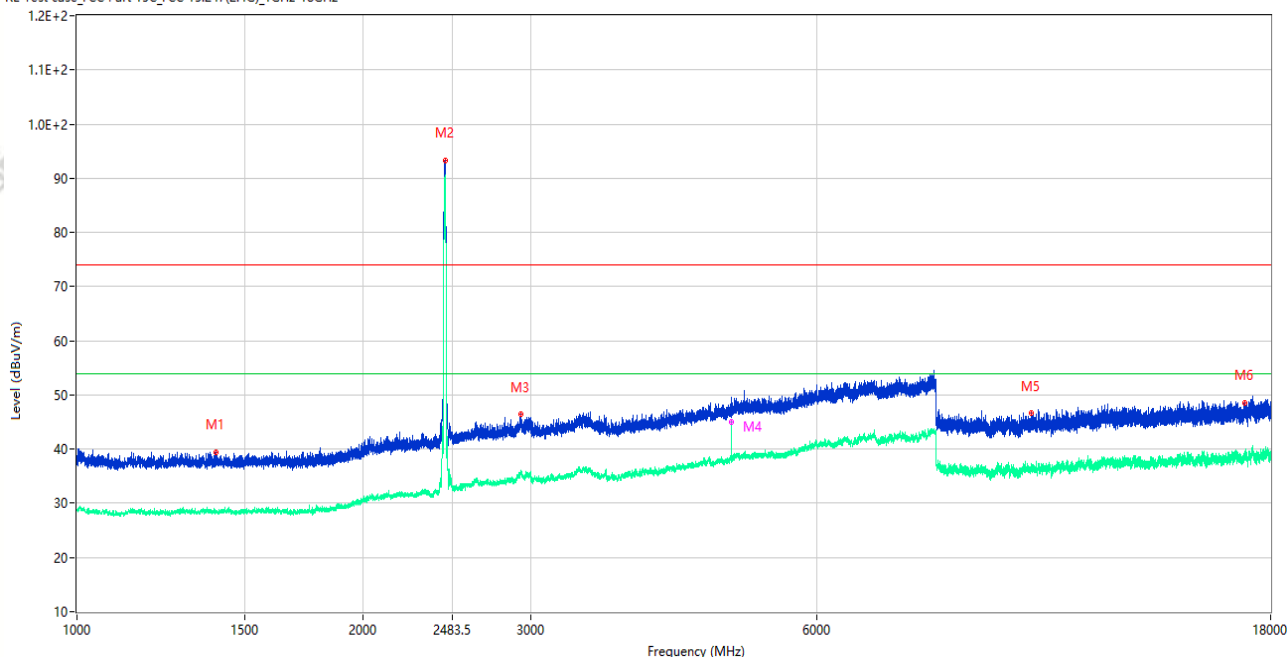

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1401.000	39.51	-15.97	74.0	34.49	Peak	241.00	150	Horizontal	Pass
1**	1401.000	28.43	-15.97	54.0	25.57	AV	241.00	150	Horizontal	Pass
2	2438.250	93.38	-12.38	74.0	-19.38	Peak	192.00	150	Horizontal	N/A
2**	2438.250	90.55	-12.38	54.0	-36.55	AV	192.00	150	Horizontal	N/A
3	2930.500	46.52	-7.95	74.0	27.48	Peak	192.00	150	Horizontal	Pass
3**	2930.500	35.45	-7.95	54.0	18.55	AV	192.00	150	Horizontal	Pass
4	4874.500	48.76	-2.25	74.0	25.24	Peak	159.00	150	Horizontal	Pass
4**	4874.500	44.96	-2.25	54.0	9.04	AV	159.00	150	Horizontal	Pass
5	10076.000	46.64	-3.81	74.0	27.36	Peak	360.00	150	Horizontal	Pass
5**	10076.000	36.62	-3.81	54.0	17.38	AV	360.00	150	Horizontal	Pass
6	16894.000	48.62	-0.53	74.0	25.38	Peak	360.00	150	Horizontal	Pass
6**	16894.000	38.85	-0.53	54.0	15.15	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_11.58.54

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

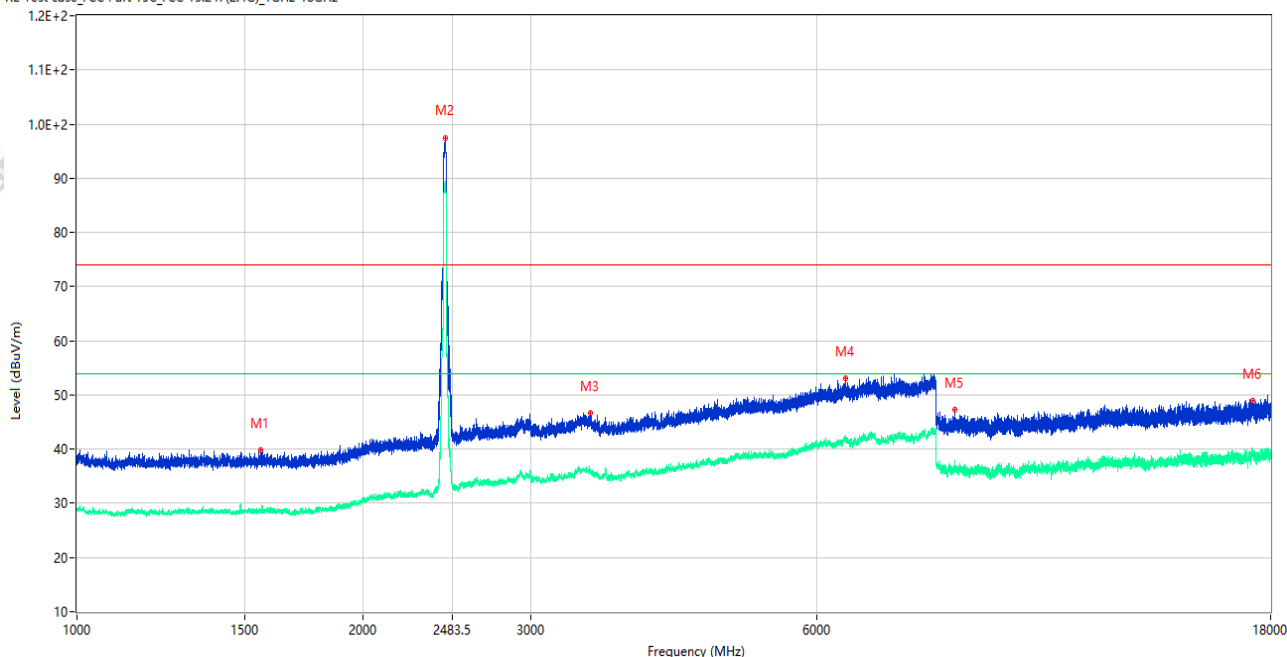

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1559.750	39.82	-16.04	74.0	34.18	Peak	0.00	150	Vertical	Pass
1**	1559.750	28.84	-16.04	54.0	25.16	AV	0.00	150	Vertical	Pass
2	2438.250	97.51	-12.38	74.0	-23.51	Peak	177.00	150	Vertical	N/A
2**	2438.250	89.17	-12.38	54.0	-35.17	AV	177.00	150	Vertical	N/A
3	3465.000	46.69	-5.10	74.0	27.31	Peak	360.00	150	Vertical	Pass
3**	3465.000	36.02	-5.10	54.0	17.98	AV	360.00	150	Vertical	Pass
4	6424.000	53.10	-0.01	74.0	20.90	Peak	291.00	150	Vertical	Pass
4**	6424.000	41.75	-0.01	54.0	12.25	AV	291.00	150	Vertical	Pass
5	8373.500	47.33	-4.43	74.0	26.67	Peak	34.00	150	Vertical	Pass
5**	8373.500	36.89	-4.43	54.0	17.11	AV	34.00	150	Vertical	Pass
6	17234.999	48.94	-0.53	74.0	25.06	Peak	0.00	150	Vertical	Pass
6**	17234.999	39.39	-0.53	54.0	14.61	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_11.42.52

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

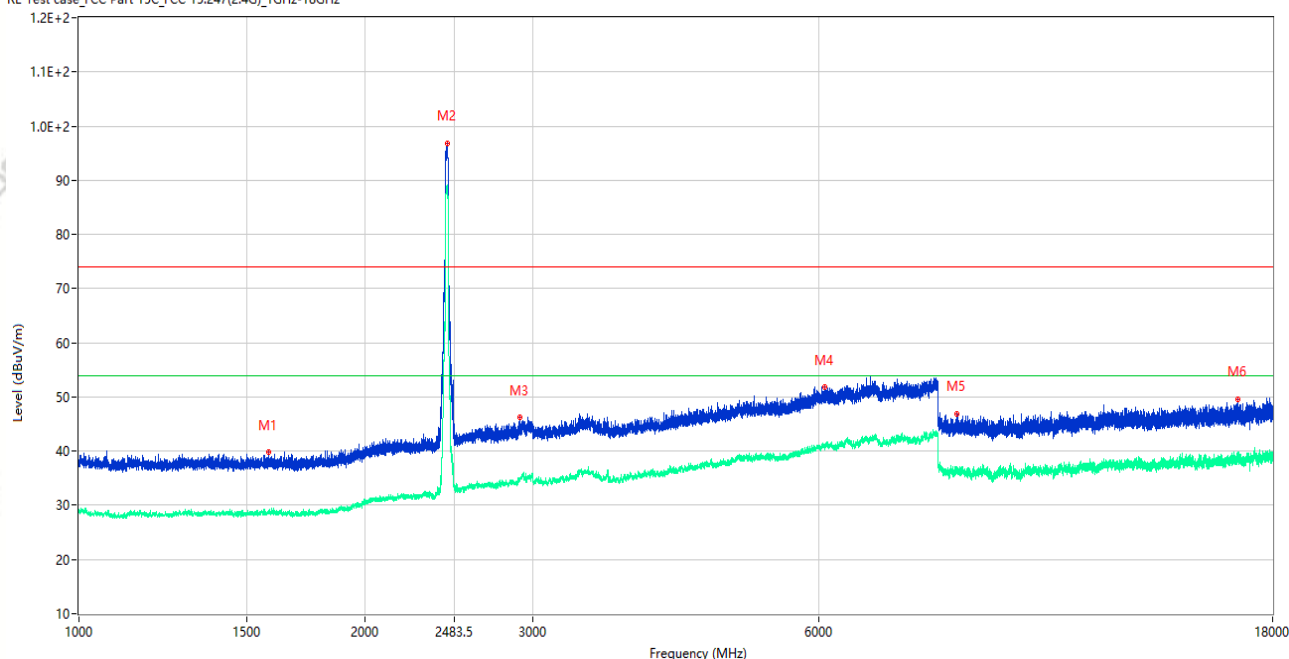

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1581.250	39.75	-16.11	74.0	34.25	Peak	0.00	150	Horizontal	Pass
1**	1581.250	28.60	-16.11	54.0	25.40	AV	0.00	150	Horizontal	Pass
2	2438.000	96.89	-12.38	74.0	-22.89	Peak	189.00	150	Horizontal	N/A
2**	2438.000	88.86	-12.38	54.0	-34.86	AV	189.00	150	Horizontal	N/A
3	2906.750	46.26	-9.48	74.0	27.74	Peak	141.00	150	Horizontal	Pass
3**	2906.750	34.55	-9.48	54.0	19.45	AV	141.00	150	Horizontal	Pass
4	6087.500	51.84	-0.42	74.0	22.16	Peak	360.00	150	Horizontal	Pass
4**	6087.500	40.90	-0.42	54.0	13.10	AV	360.00	150	Horizontal	Pass
5	8371.000	46.98	-4.43	74.0	27.02	Peak	31.00	150	Horizontal	Pass
5**	8371.000	36.86	-4.43	54.0	17.14	AV	31.00	150	Horizontal	Pass
6	16558.000	49.65	-0.91	74.0	24.35	Peak	353.00	150	Horizontal	Pass
6**	16558.000	39.06	-0.91	54.0	14.94	AV	353.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_11.54.53

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

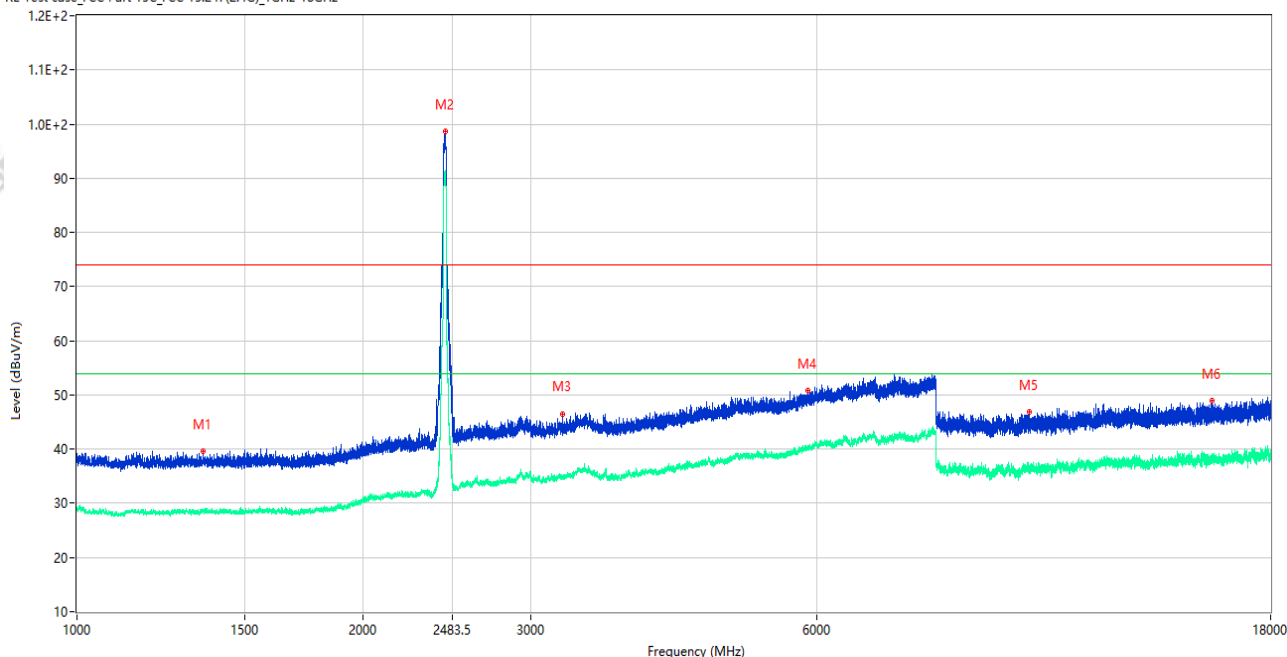

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1358.250	39.68	-15.84	74.0	34.32	Peak	138.00	150	Vertical	Pass
1**	1358.250	28.94	-15.84	54.0	25.06	AV	138.00	150	Vertical	Pass
2	2438.500	98.57	-12.37	74.0	-24.57	Peak	144.00	150	Vertical	N/A
2**	2438.500	91.37	-12.37	54.0	-37.37	AV	144.00	150	Vertical	N/A
3	3240.000	46.54	-7.07	74.0	27.46	Peak	293.00	150	Vertical	Pass
3**	3240.000	34.69	-7.07	54.0	19.31	AV	293.00	150	Vertical	Pass
4	5869.500	50.85	-1.15	74.0	23.15	Peak	70.00	150	Vertical	Pass
4**	5869.500	40.22	-1.15	54.0	13.78	AV	70.00	150	Vertical	Pass
5	10045.500	46.81	-3.90	74.0	27.19	Peak	350.00	150	Vertical	Pass
5**	10045.500	36.18	-3.90	54.0	17.82	AV	350.00	150	Vertical	Pass
6	15629.500	48.88	-1.71	74.0	25.12	Peak	360.00	150	Vertical	Pass
6**	15629.500	38.26	-1.71	54.0	15.74	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_11.51.05

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=18.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

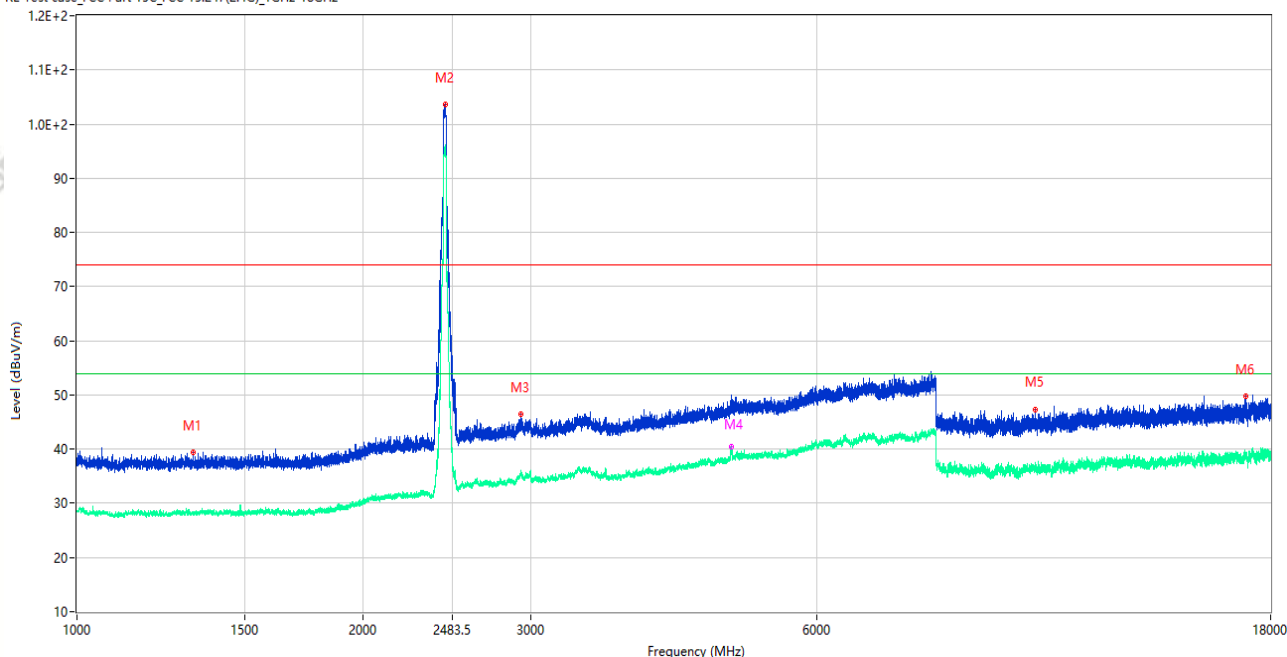

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1324.750	39.44	-15.89	74.0	34.56	Peak	107.00	150	Horizontal	Pass
1**	1324.750	28.08	-15.89	54.0	25.92	AV	107.00	150	Horizontal	Pass
2	2438.250	103.58	-12.38	74.0	-29.58	Peak	167.00	150	Horizontal	N/A
2**	2438.250	96.02	-12.38	54.0	-42.02	AV	167.00	150	Horizontal	N/A
3	2926.750	46.53	-8.11	74.0	27.47	Peak	357.00	150	Horizontal	Pass
3**	2926.750	35.27	-8.11	54.0	18.73	AV	357.00	150	Horizontal	Pass
4	4873.000	47.61	-2.22	74.0	26.39	Peak	192.00	150	Horizontal	Pass
4**	4873.000	40.49	-2.22	54.0	13.51	AV	192.00	150	Horizontal	Pass
5	10181.500	47.38	-3.63	74.0	26.62	Peak	228.00	150	Horizontal	Pass
5**	10181.500	36.79	-3.63	54.0	17.21	AV	228.00	150	Horizontal	Pass
6	16956.500	49.84	-0.91	74.0	24.16	Peak	96.00	150	Horizontal	Pass
6**	16956.500	38.33	-0.91	54.0	15.67	AV	96.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_10.21.14

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 52

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: Normal working Link(2.4G WIFI)

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

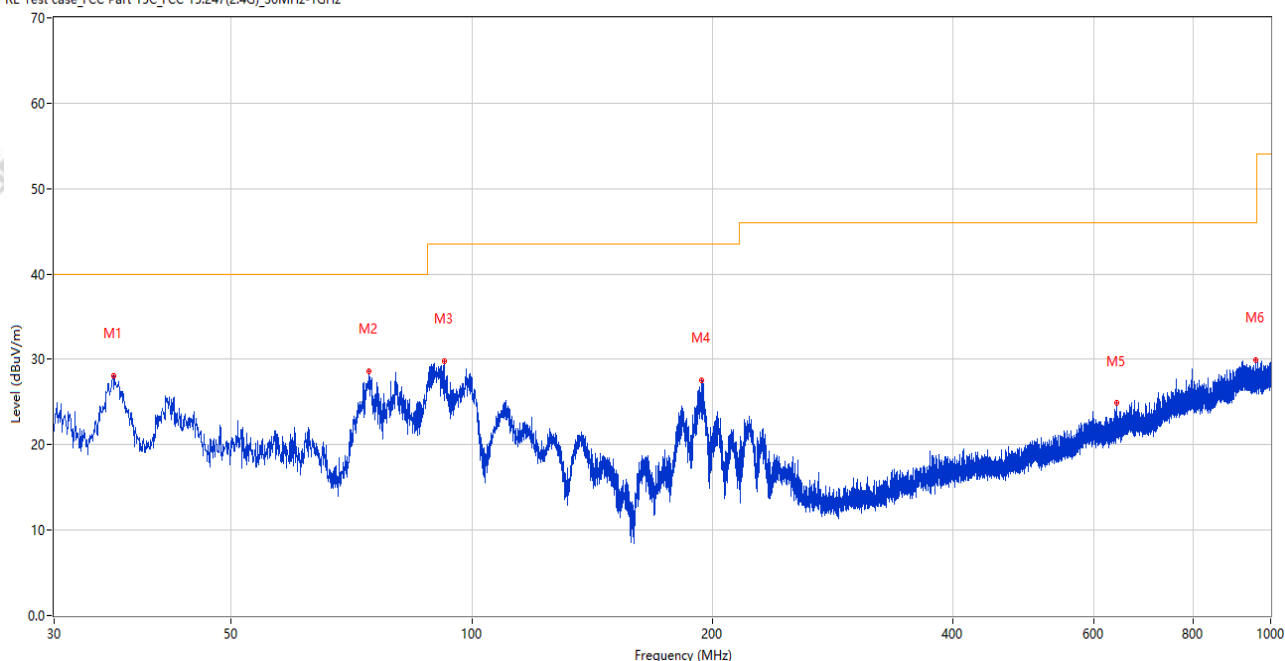

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	35.578	28.09	-28.87	40.0	11.91	Peak	71.00	100	Vertical	Pass
2	74.426	28.56	-31.09	40.0	11.44	Peak	78.00	200	Vertical	Pass
3	92.274	29.75	-28.30	43.5	13.75	Peak	68.00	100	Vertical	Pass
4	194.172	27.52	-26.52	43.5	15.98	Peak	16.00	200	Vertical	Pass
5	641.052	24.85	-15.15	46.0	21.15	Peak	321.00	200	Vertical	Pass
6	957.951	29.96	-9.31	46.0	16.04	Peak	9.00	100	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_10.28.16

EUT Name: XPAD 30 Pro

Temp.(°C): 23.4

Model Number: X1103

Humidity (%RH): 52

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Test Voltage: AC 120V/60Hz


Test Site: 966#1

Test Mode: Normal working Link(2.4G WIFI)

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

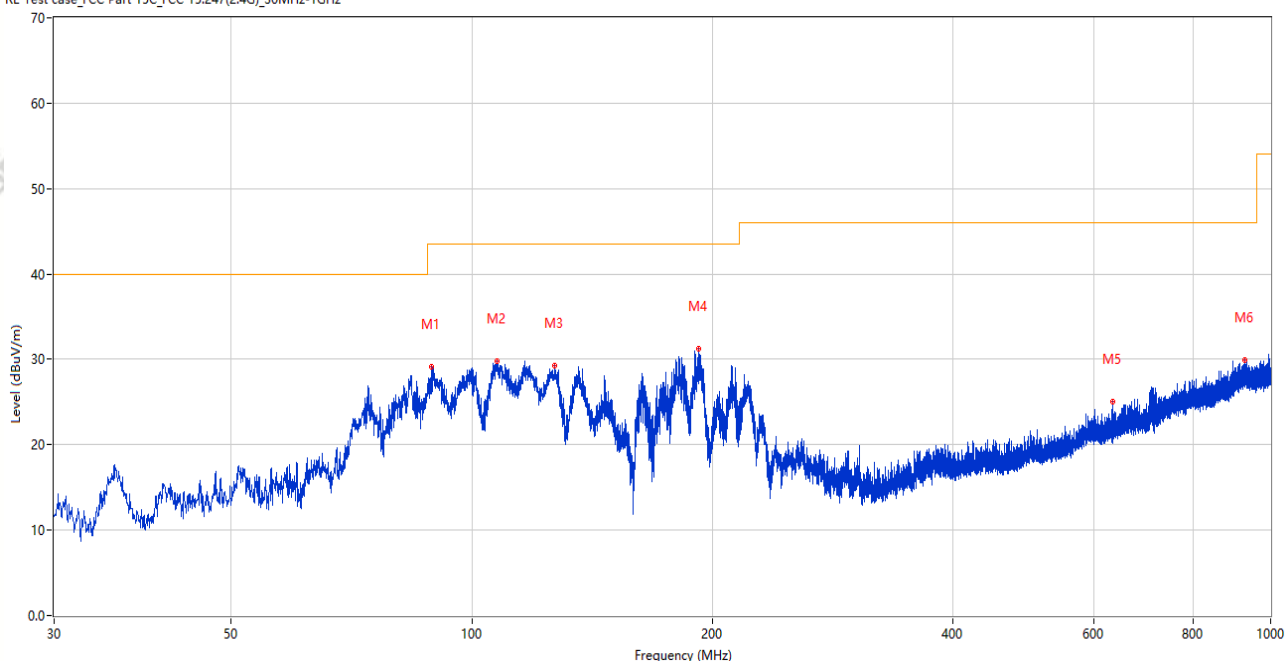

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	89.121	29.12	-29.29	43.5	14.38	Peak	157.00	200	Horizontal	Pass
2	107.600	29.86	-27.11	43.5	13.64	Peak	149.00	200	Horizontal	Pass
3	126.903	29.22	-29.66	43.5	14.28	Peak	155.00	100	Horizontal	Pass
4	192.426	31.28	-26.80	43.5	12.22	Peak	291.00	100	Horizontal	Pass
5	635.086	25.06	-15.45	46.0	20.94	Peak	58.00	200	Horizontal	Pass
6	927.929	29.90	-9.17	46.0	16.10	Peak	84.00	100	Horizontal	Pass