


Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.26.50

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

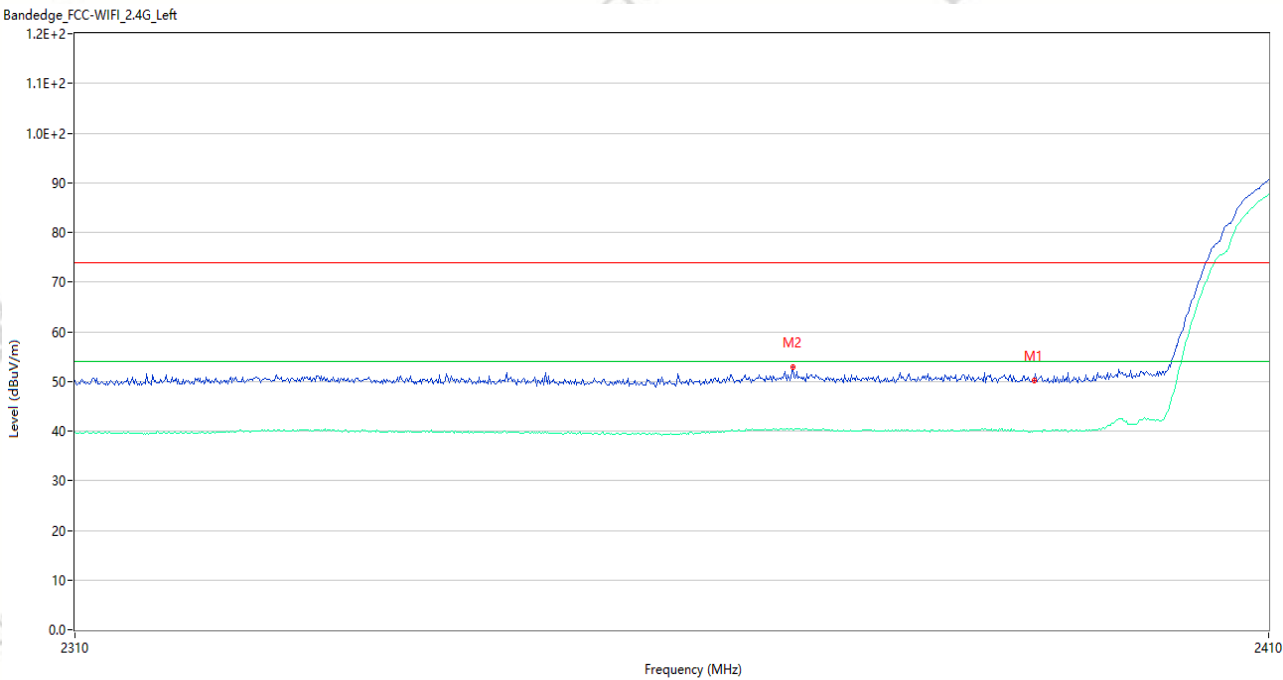

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.10	-4.87	74.0	23.90	Peak	222.99	150	Vertical	Pass
1**	2390.000	40.07	-4.87	54.0	13.93	AV	222.99	150	Vertical	Pass
2	2369.600	52.78	-4.05	74.0	21.22	Peak	262.00	150	Vertical	Pass
2**	2369.600	40.33	-4.05	54.0	13.67	AV	262.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.25.14

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH1 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	50.59	-4.87	74.0	23.41	Peak	155.88	150	Horizontal	Pass
1**	2390.000	40.26	-4.87	54.0	13.74	AV	155.88	150	Horizontal	Pass
2	2369.800	52.17	-4.02	74.0	21.83	Peak	226.00	150	Horizontal	Pass
2**	2369.800	40.25	-4.02	54.0	13.75	AV	226.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-12_12.18.14

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

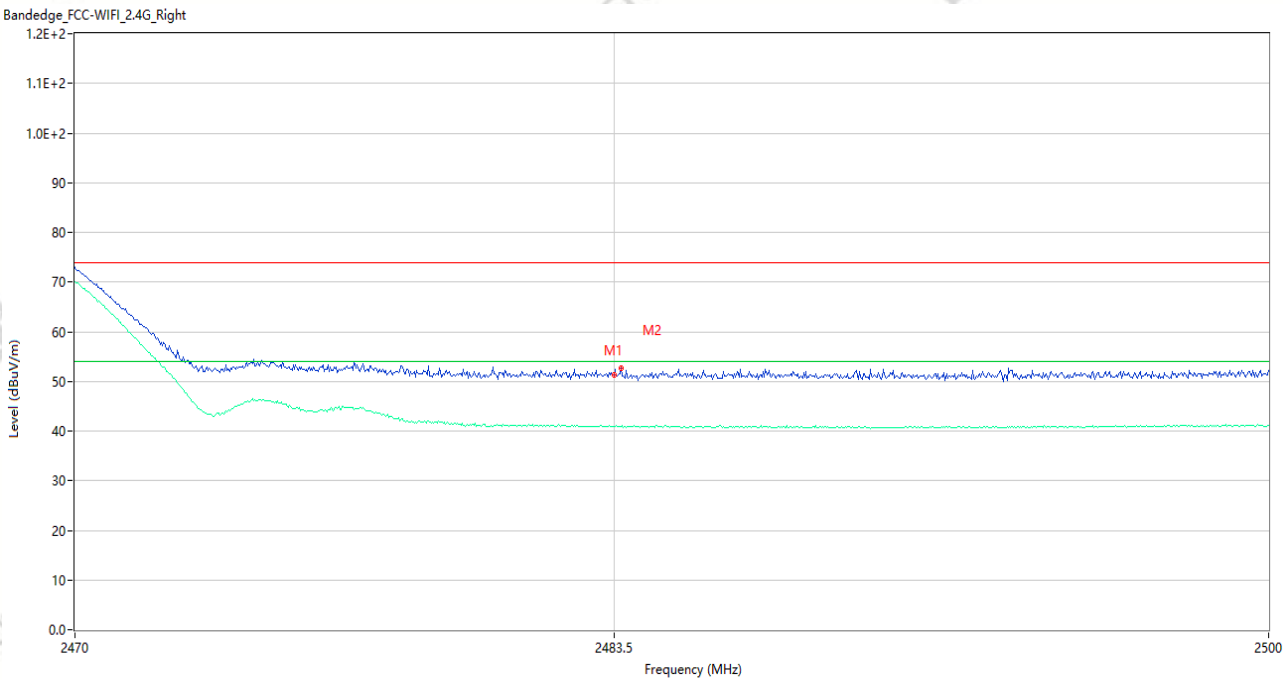


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.40	-3.78	74.0	22.60	Peak	165.00	150	Vertical	Pass
1**	2483.500	40.93	-3.78	54.0	13.07	AV	165.00	150	Vertical	Pass
2	2483.680	52.58	-3.78	74.0	21.42	Peak	253.00	150	Vertical	Pass
2**	2483.680	40.90	-3.78	54.0	13.10	AV	253.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.21.04

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11b CH11 P=18.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

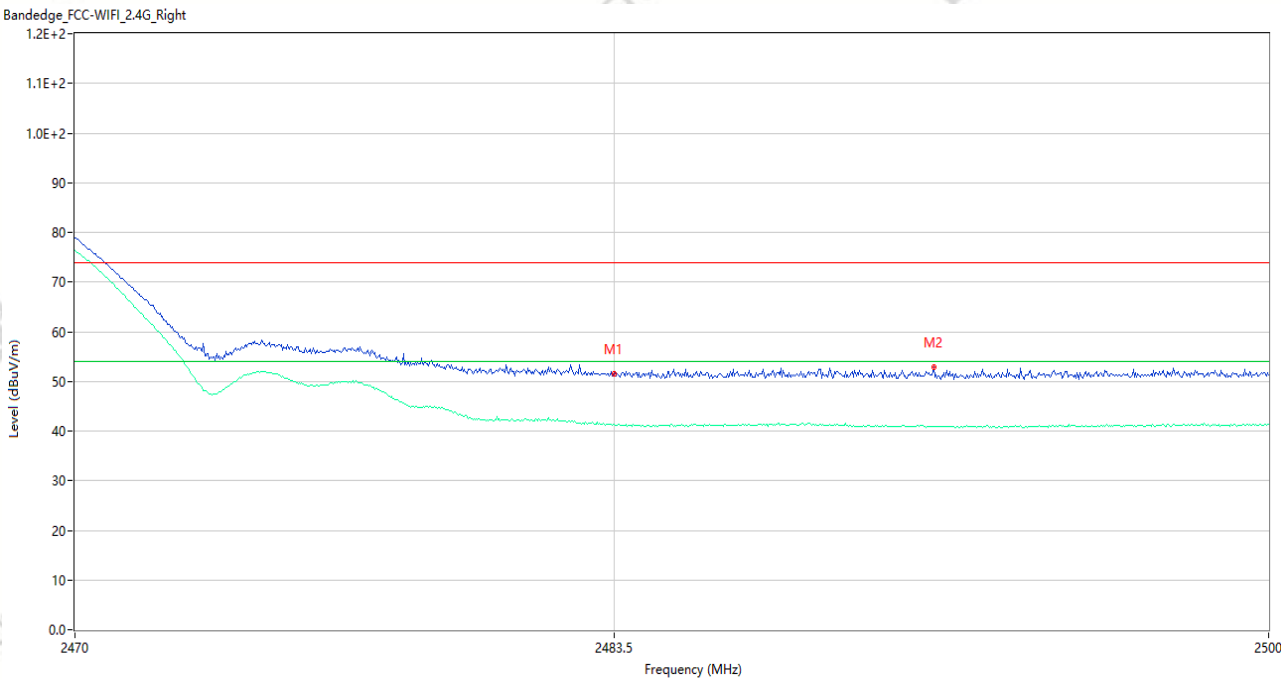

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	51.63	-3.78	74.0	22.37	Peak	86.00	150	Horizontal	Pass
1**	2483.500	41.31	-3.78	54.0	12.69	AV	86.00	150	Horizontal	Pass
2	2491.540	52.79	-3.86	74.0	21.21	Peak	47.00	150	Horizontal	Pass
2**	2491.540	40.87	-3.86	54.0	13.13	AV	47.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.29.10

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=17.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01




No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	55.04	-4.87	74.0	18.96	Peak	359.80	150	Vertical	Pass
1**	2390.000	42.27	-4.87	54.0	11.73	AV	359.80	150	Vertical	Pass
2	2389.900	58.40	-4.87	74.0	15.60	Peak	203.00	150	Vertical	Pass
2**	2389.900	41.90	-4.87	54.0	12.10	AV	203.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079
Test Time: 2026-04-12_12.30.44

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH1 P=17.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

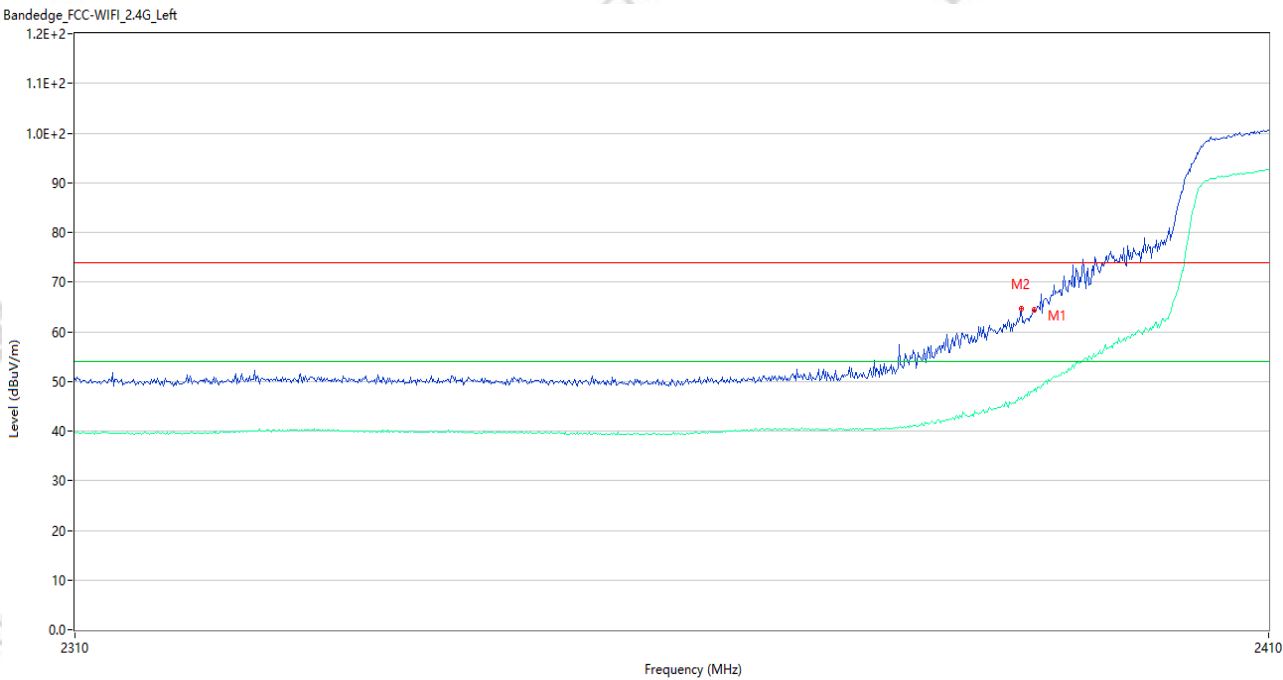


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	64.47	-4.87	74.0	9.53	Peak	242.89	150	Horizontal	Pass
1**	2390.000	48.12	-4.87	54.0	5.88	AV	242.89	150	Horizontal	Pass
2	2388.900	64.72	-4.81	74.0	9.28	Peak	260.00	150	Horizontal	Pass
2**	2388.900	46.85	-4.81	54.0	7.15	AV	260.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.04.19

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11g CH11 P=17.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

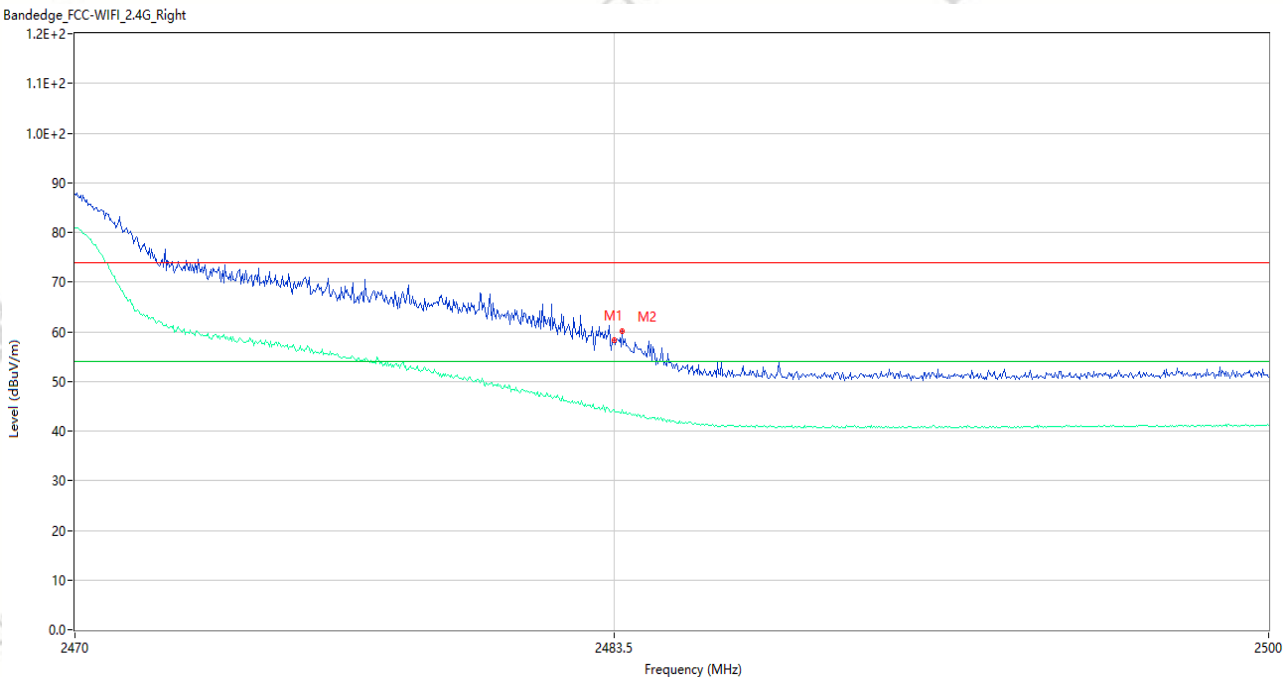

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	58.37	-3.78	74.0	15.63	Peak	359.00	150	Vertical	Pass
1**	2483.500	44.39	-3.78	54.0	9.61	AV	359.00	150	Vertical	Pass
2	2483.710	60.18	-3.78	74.0	13.82	Peak	112.00	150	Vertical	Pass
2**	2483.710	44.38	-3.78	54.0	9.62	AV	112.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.06.31

EUT Name: XPAD 30 Pro

Temp.(°C): 23.2

Model Number: X1103

Humidity (%RH): 54

Sample Number: CC26040057-001-S10

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH11 P=17.5


Test Site: 966#2

Test Voltage: AC 120V/60Hz

Test Engineer: Liu Yabo

Remark: 适配器: A10+数据线: A01

Bandedge_FCC-WIFI_2.4G_Right

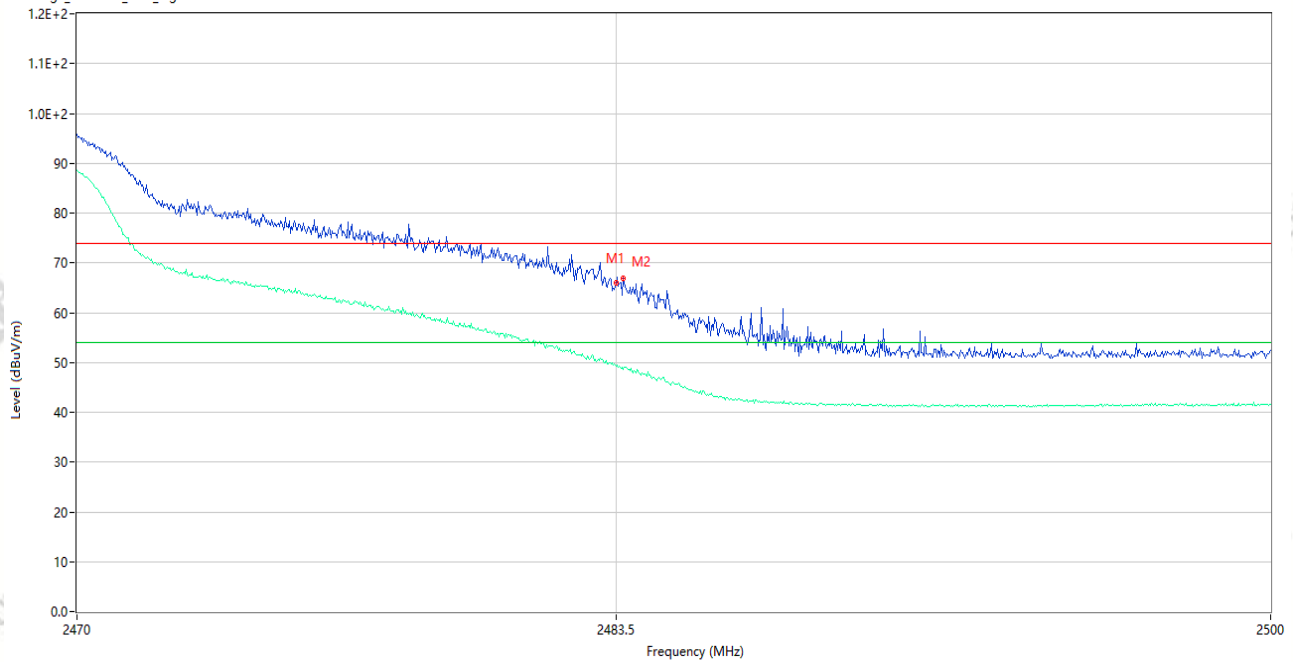


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	66.01	-3.78	74.0	7.99	Peak	59.00	150	Horizontal	Pass
1**	2483.500	49.36	-3.78	54.0	4.64	AV	59.00	150	Horizontal	Pass
2	2483.680	66.95	-3.78	74.0	7.05	Peak	56.00	150	Horizontal	Pass
2**	2483.680	48.62	-3.78	54.0	5.38	AV	56.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.36.47

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=17.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

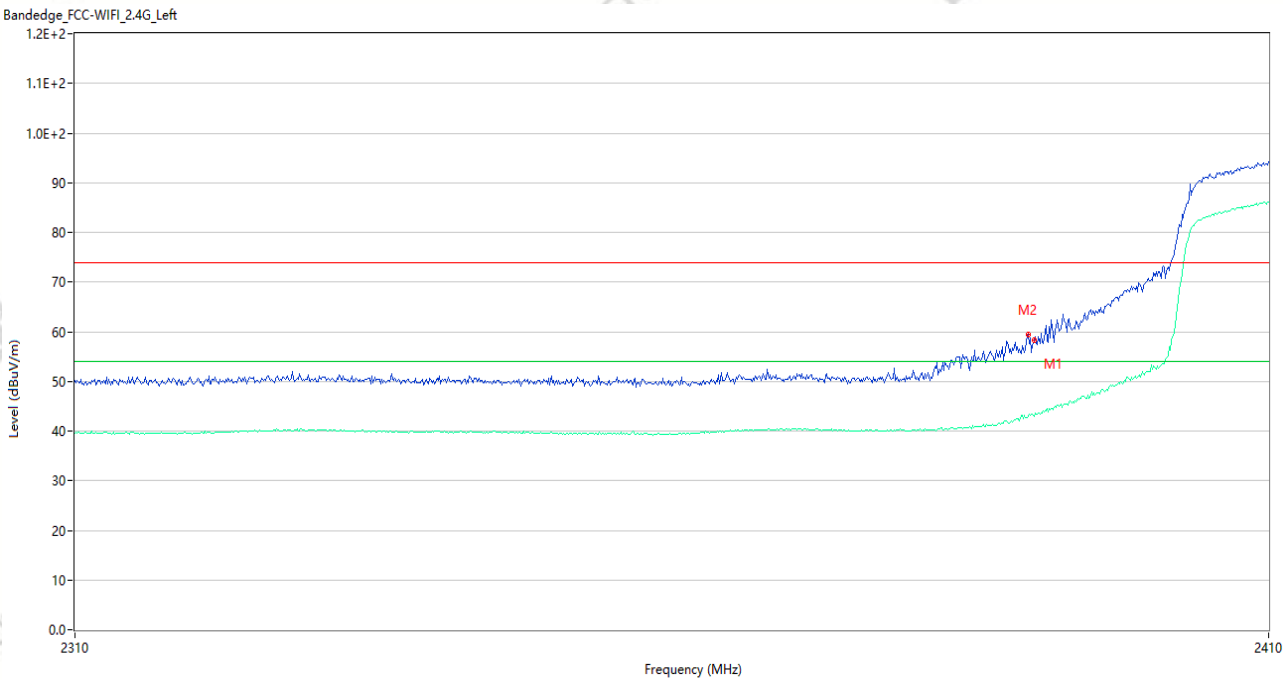


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	58.39	-4.87	74.0	15.61	Peak	162.99	150	Vertical	Pass
1**	2390.000	42.90	-4.87	54.0	11.10	AV	162.99	150	Vertical	Pass
2	2389.500	59.41	-4.85	74.0	14.59	Peak	161.00	150	Vertical	Pass
2**	2389.500	42.97	-4.85	54.0	11.03	AV	161.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.35.16

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH1 P=17.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

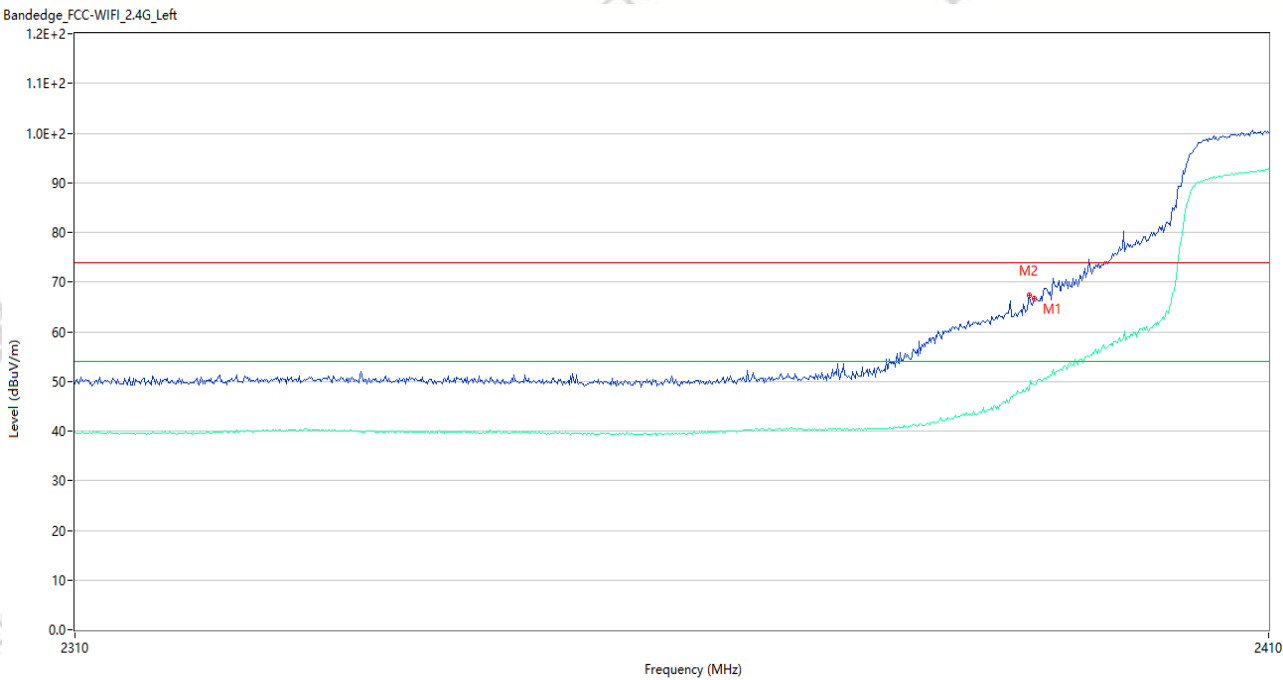


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2390.000	66.77	-4.87	74.0	7.23	Peak	69.01	150	Horizontal	Pass
1**	2390.000	49.20	-4.87	54.0	4.80	AV	69.01	150	Horizontal	Pass
2	2389.600	67.30	-4.85	74.0	6.70	Peak	252.00	150	Horizontal	Pass
2**	2389.600	48.43	-4.85	54.0	5.57	AV	252.00	150	Horizontal	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.15.43

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

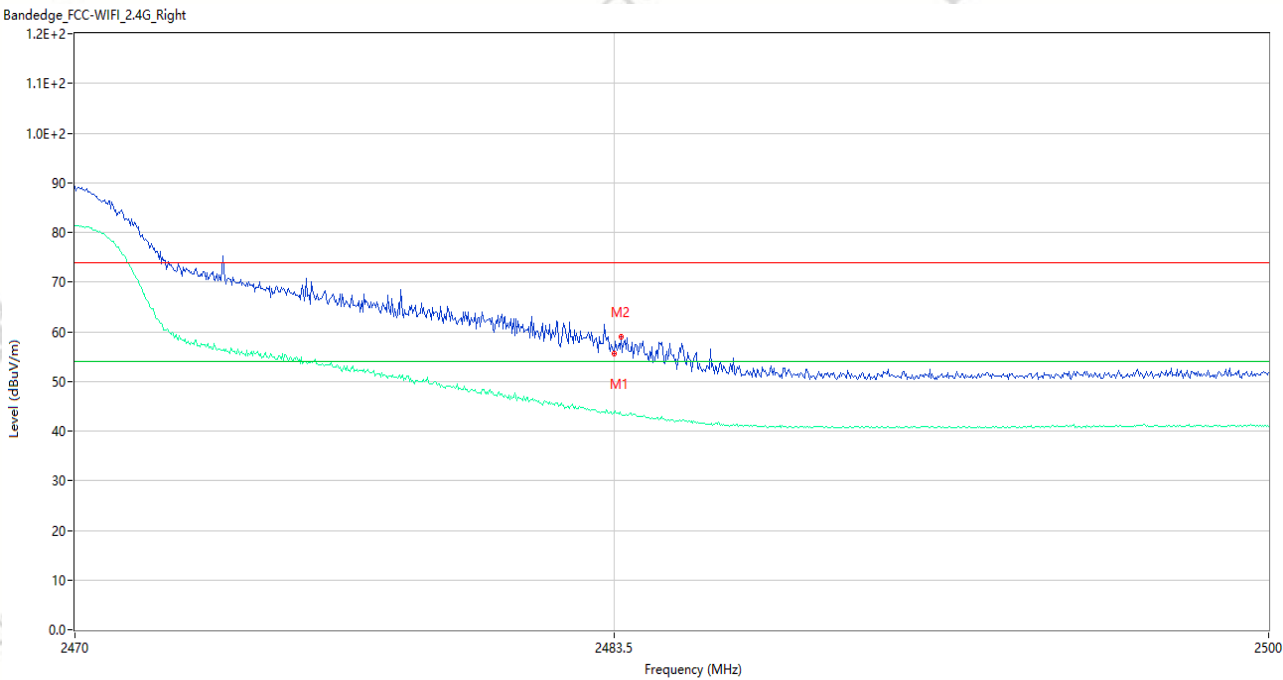


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	55.60	-3.78	74.0	18.40	Peak	158.00	150	Vertical	Pass
1**	2483.500	43.63	-3.78	54.0	10.37	AV	158.00	150	Vertical	Pass
2	2483.680	58.95	-3.78	74.0	15.05	Peak	223.00	150	Vertical	Pass
2**	2483.680	43.31	-3.78	54.0	10.69	AV	223.00	150	Vertical	Pass

Test Result

Project Number: P-CC26040079

Test Time: 2026-04-12_12.13.25

EUT Name:	XPAD 30 Pro	Temp.(°C):	23.2
Model Number:	X1103	Humidity (%RH):	54
Sample Number:	CC26040057-001-S10	Pressure(kPa):	101
Test Standard:	47 CFR Part 15C	Work Mode:	2.4G WIFI 11n20 CH11 P=16.5
Test Site:	966#2	Test Voltage:	AC 120V/60Hz
Test Engineer:	Liu Yabo	Remark:	适配器: A10+数据线: A01

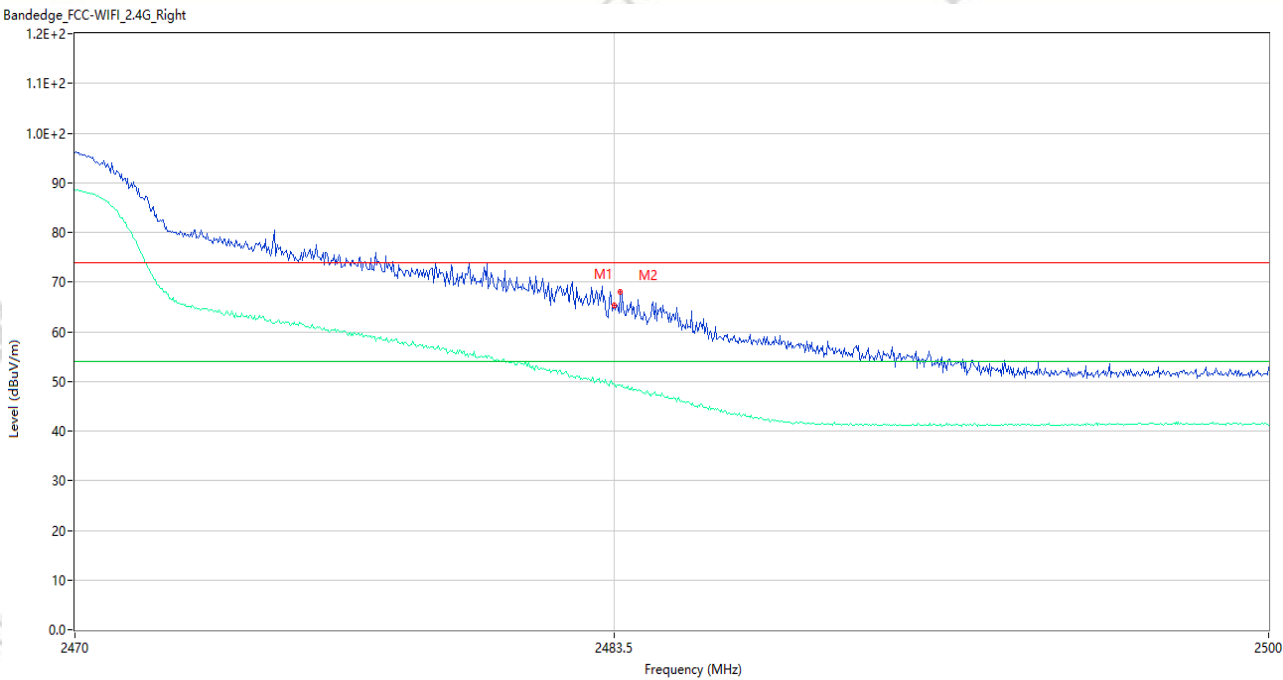

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	65.37	-3.78	74.0	8.63	Peak	54.00	150	Horizontal	Pass
1**	2483.500	49.54	-3.78	54.0	4.46	AV	54.00	150	Horizontal	Pass
2	2483.650	68.07	-3.78	74.0	5.93	Peak	168.00	150	Horizontal	Pass
2**	2483.650	49.23	-3.78	54.0	4.77	AV	168.00	150	Horizontal	Pass