




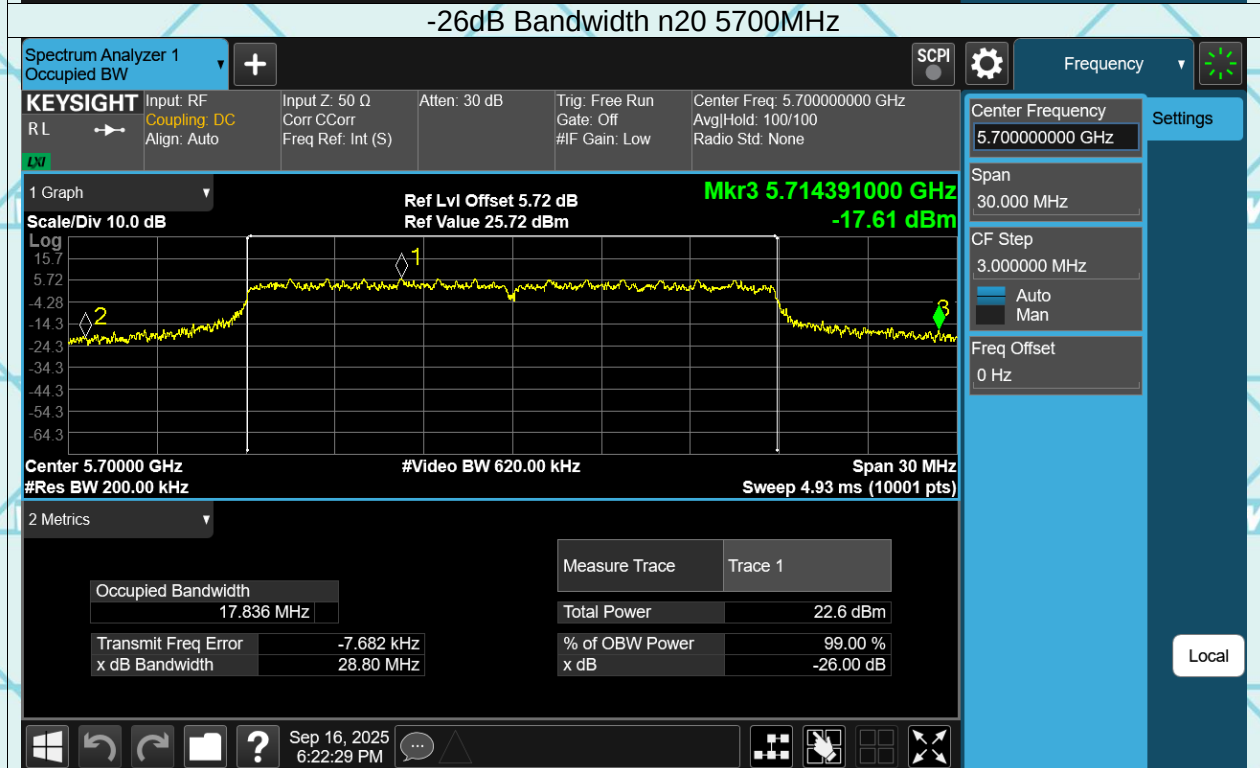
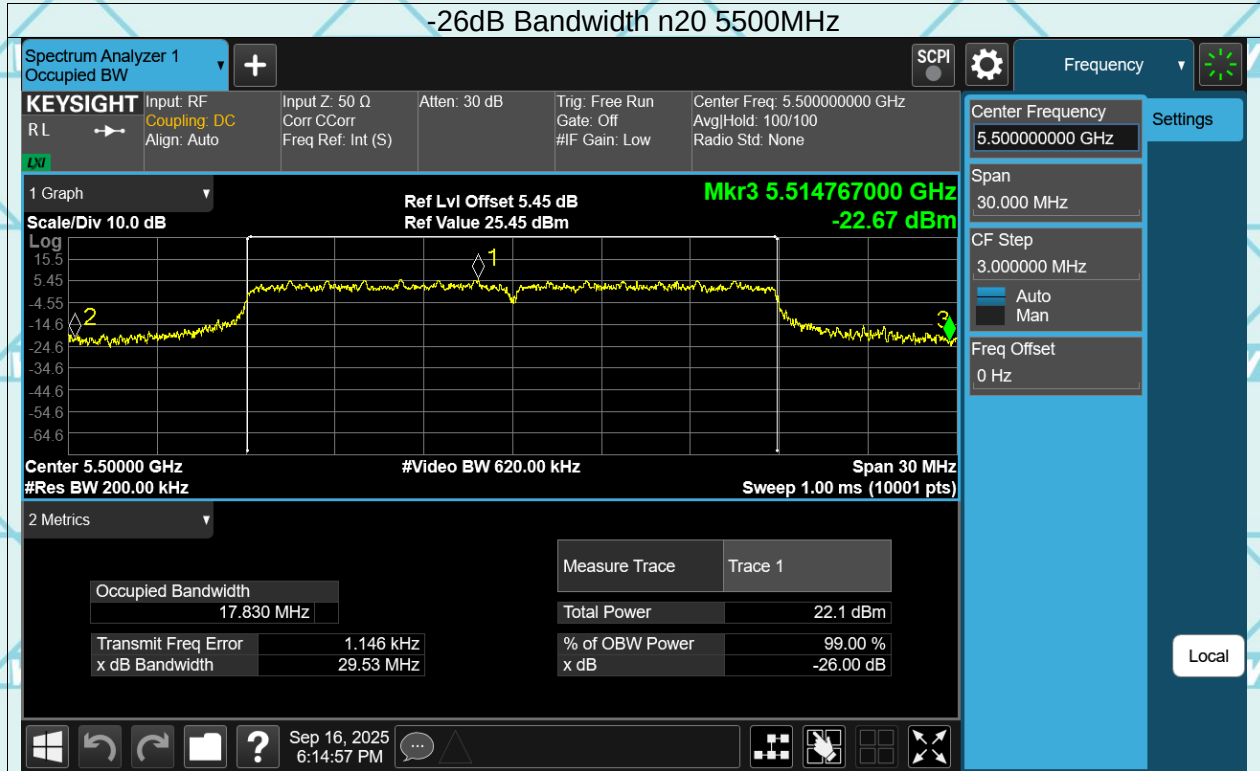
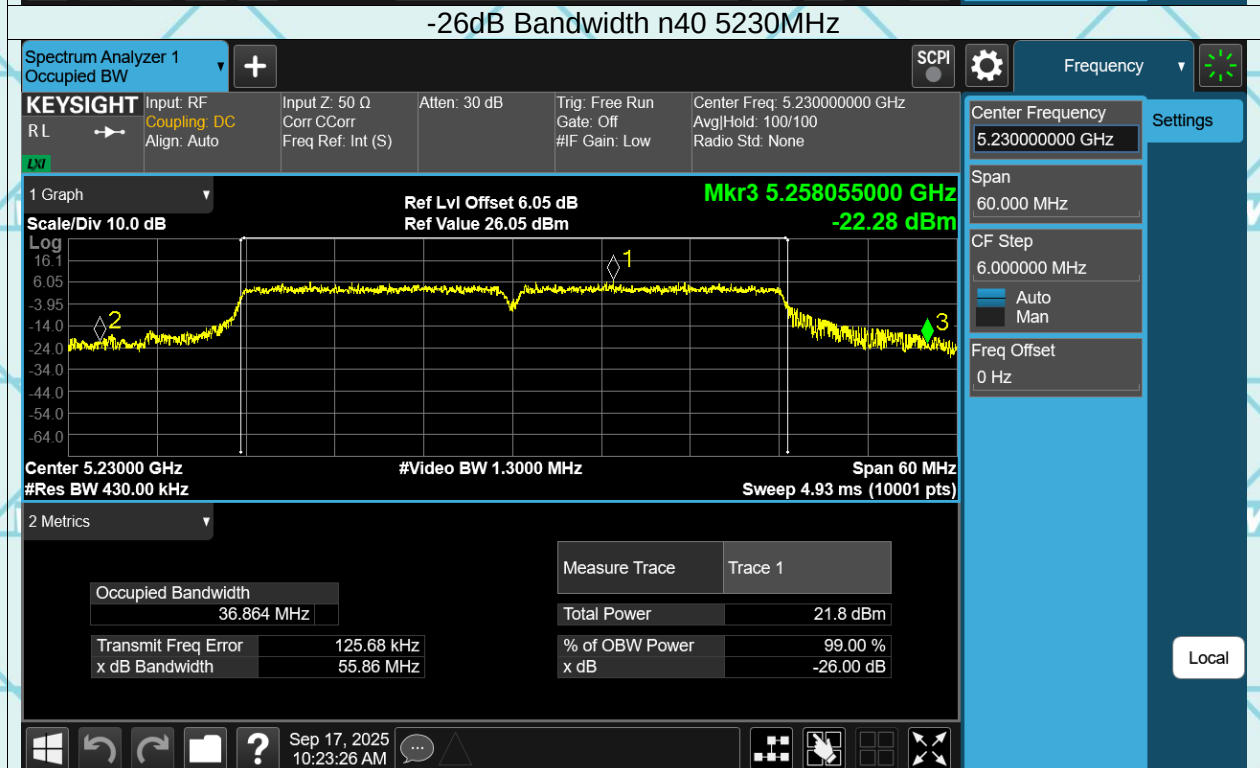
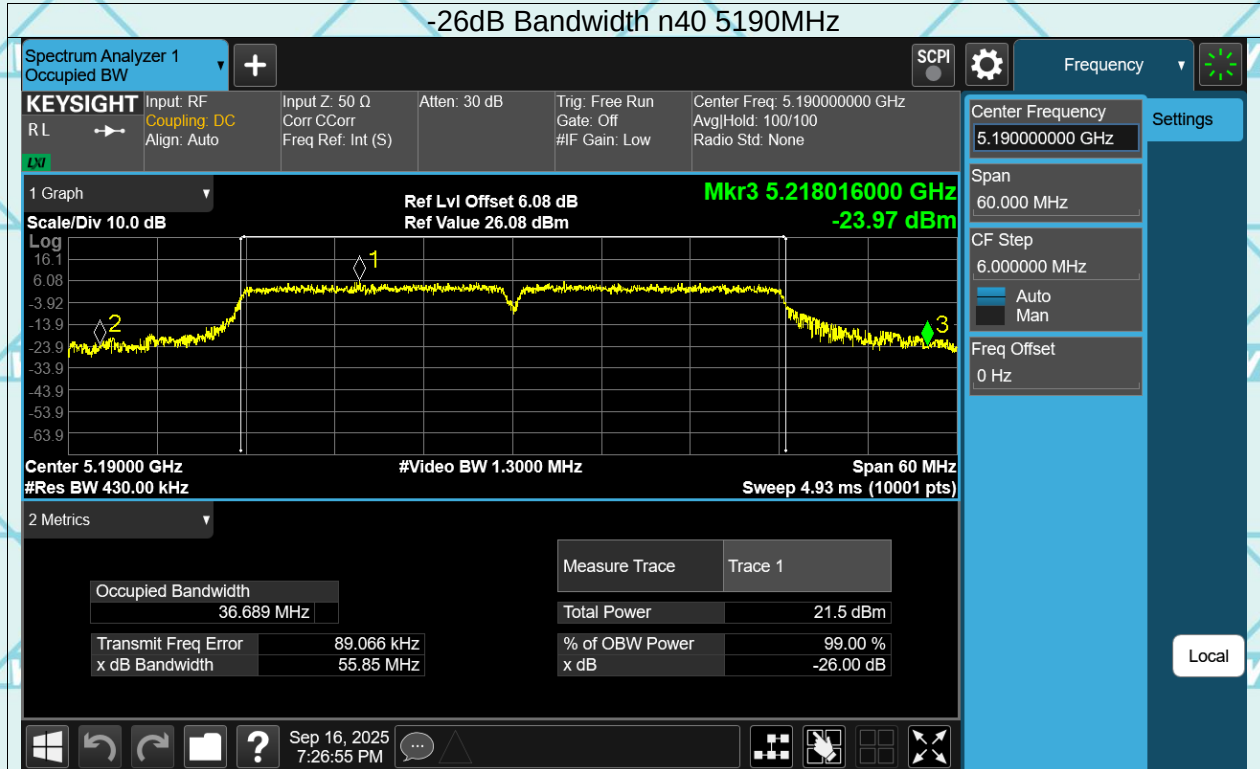
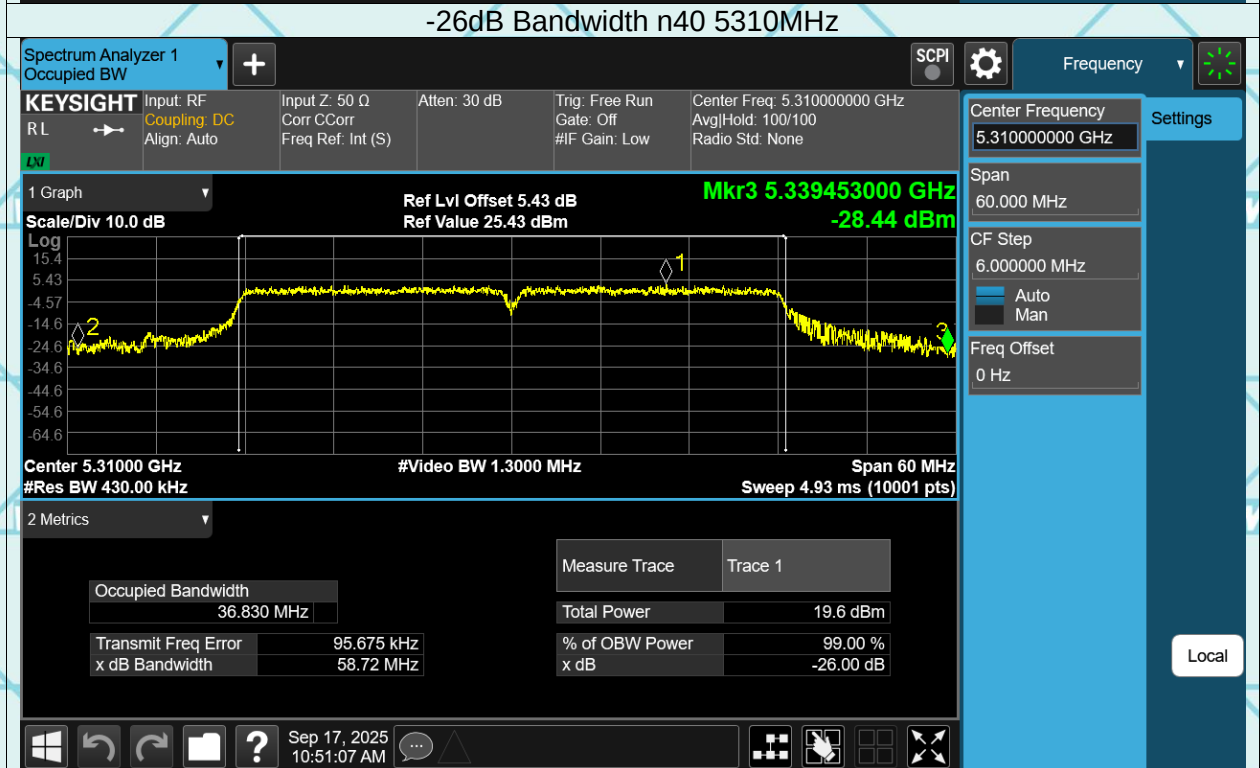



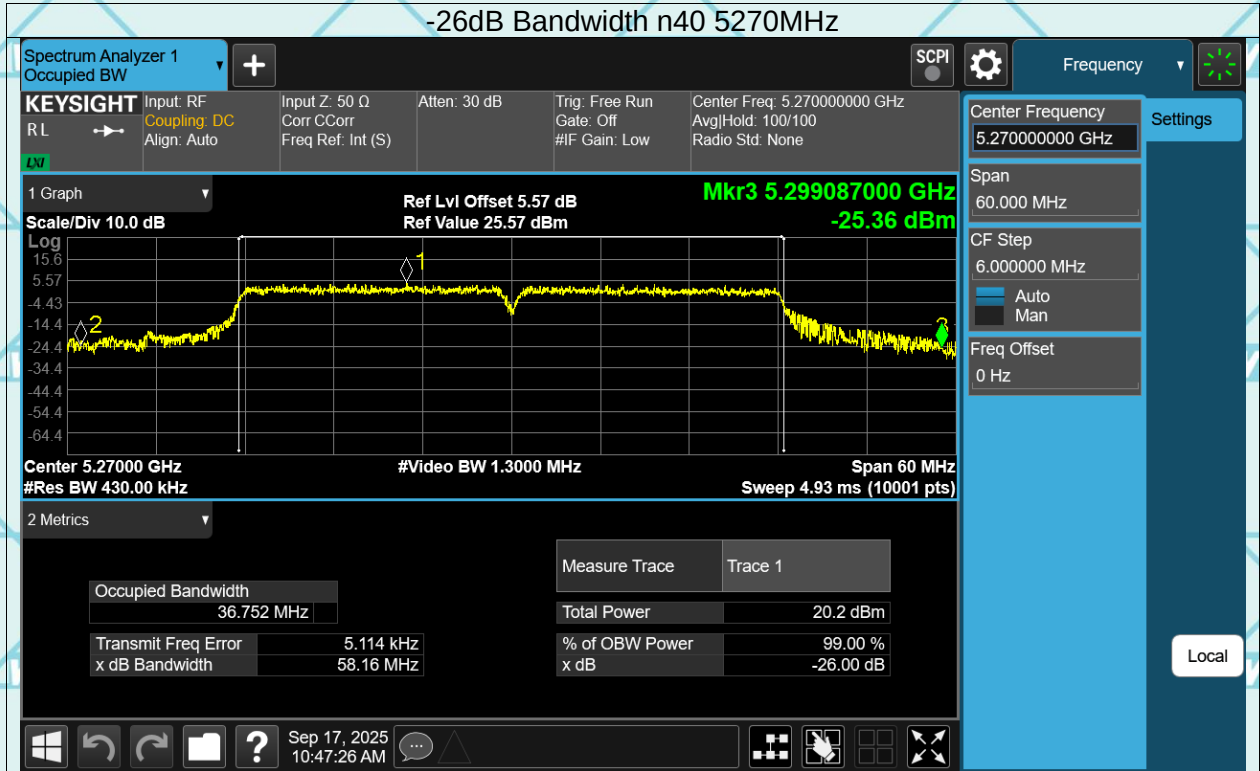



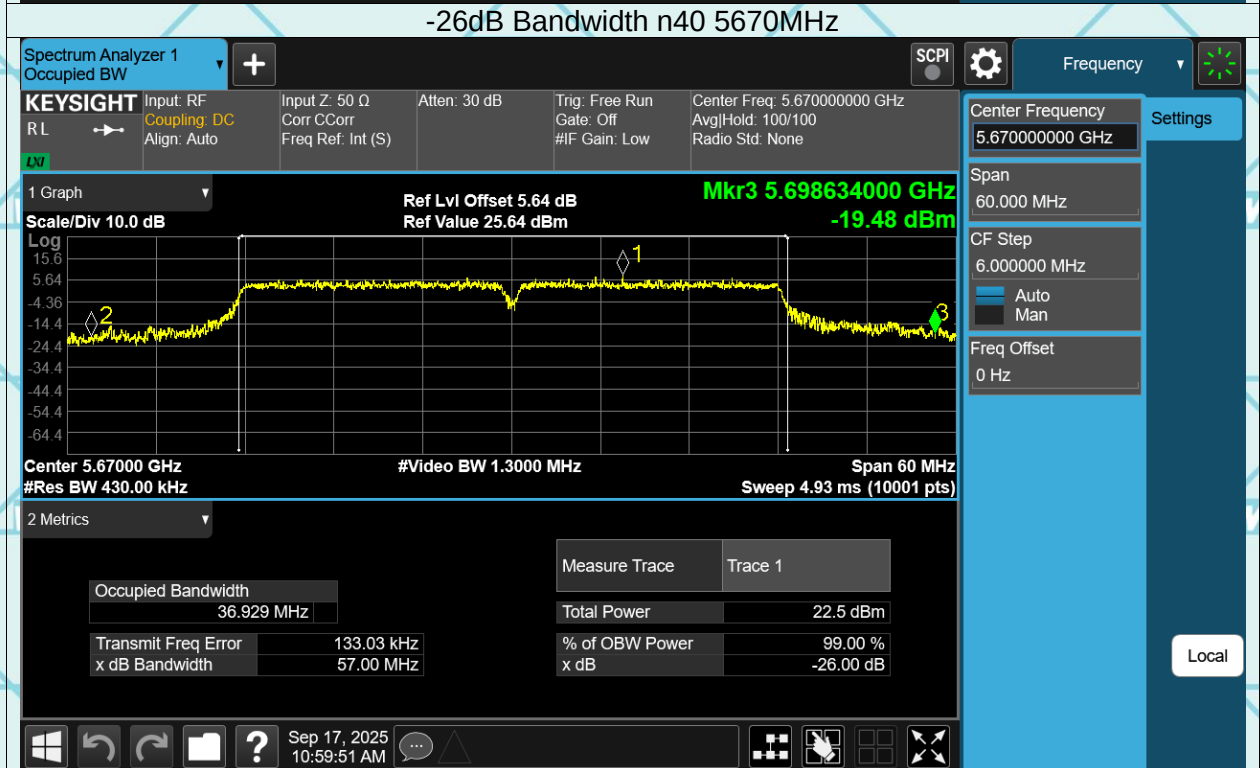



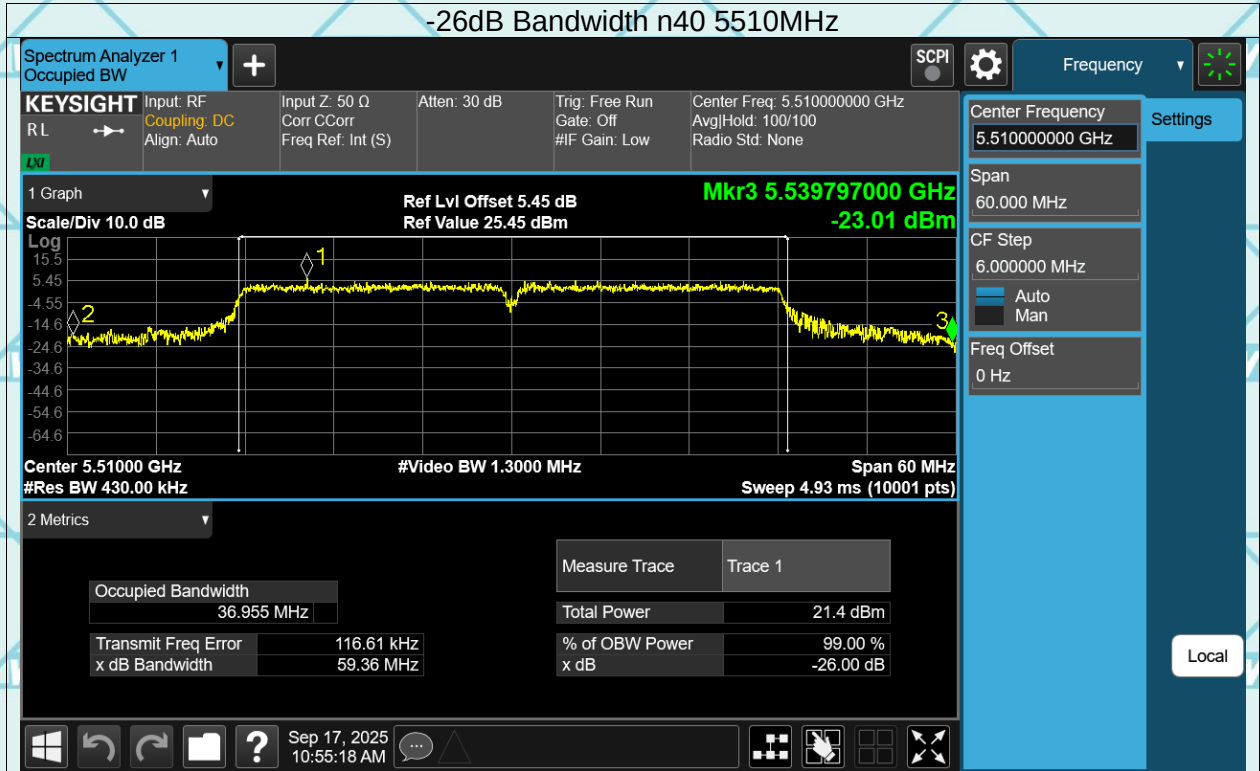



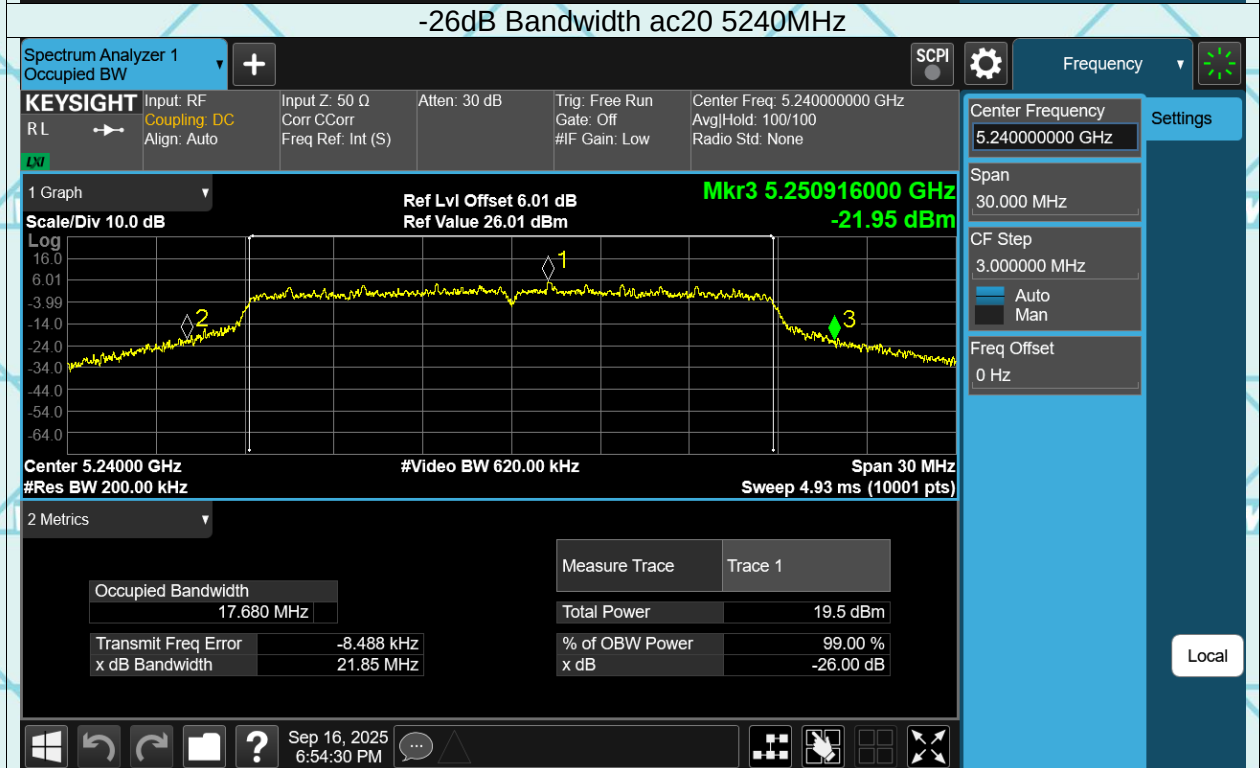



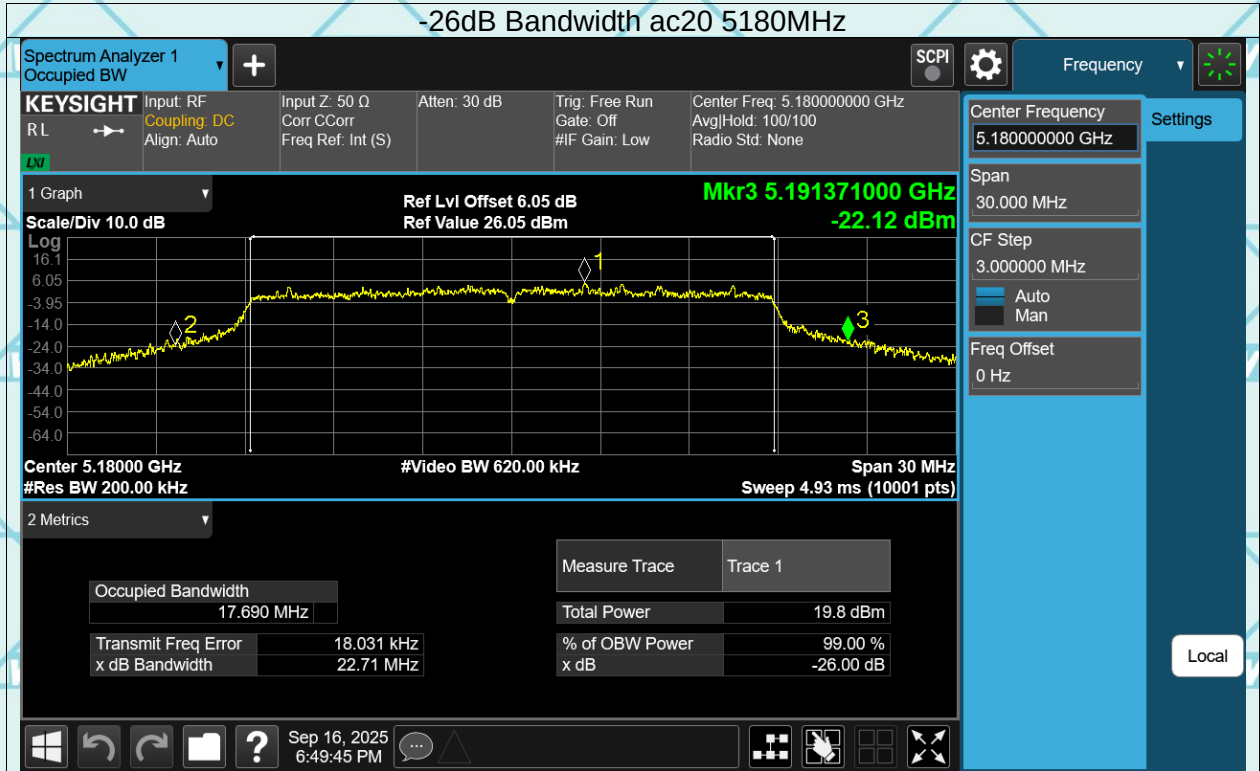


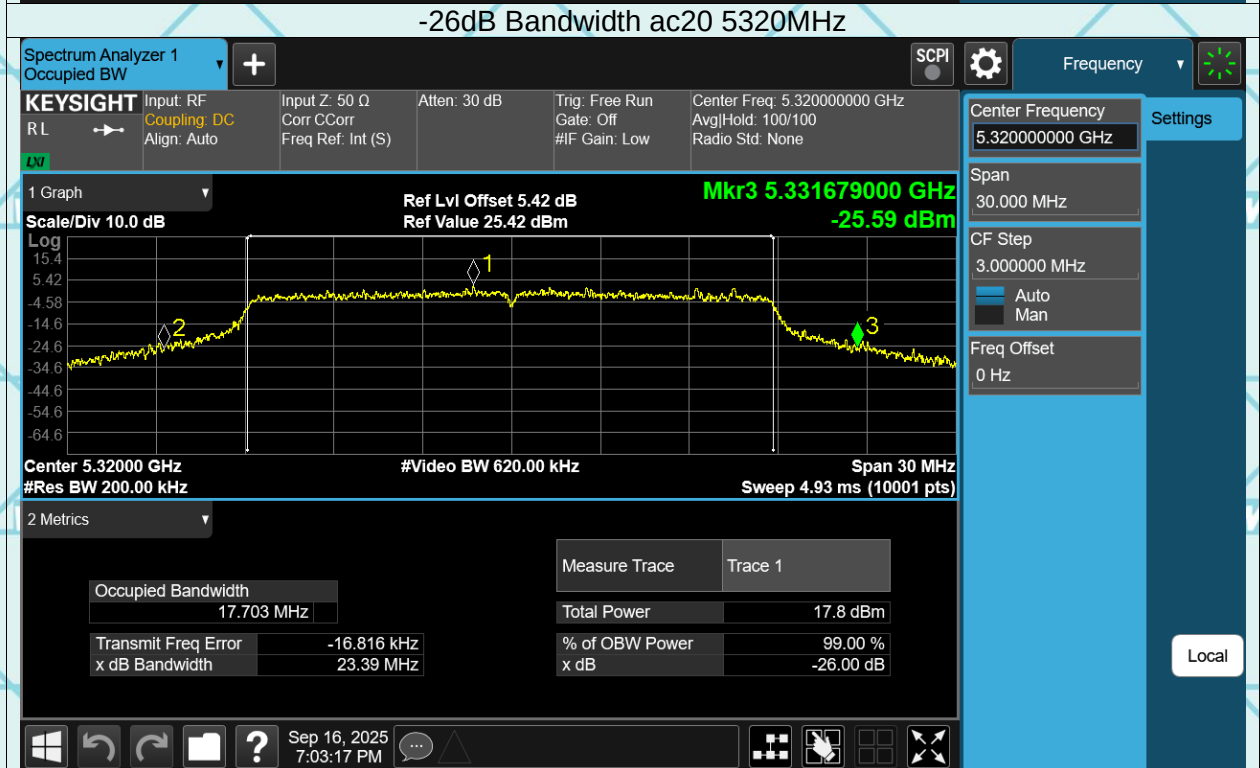
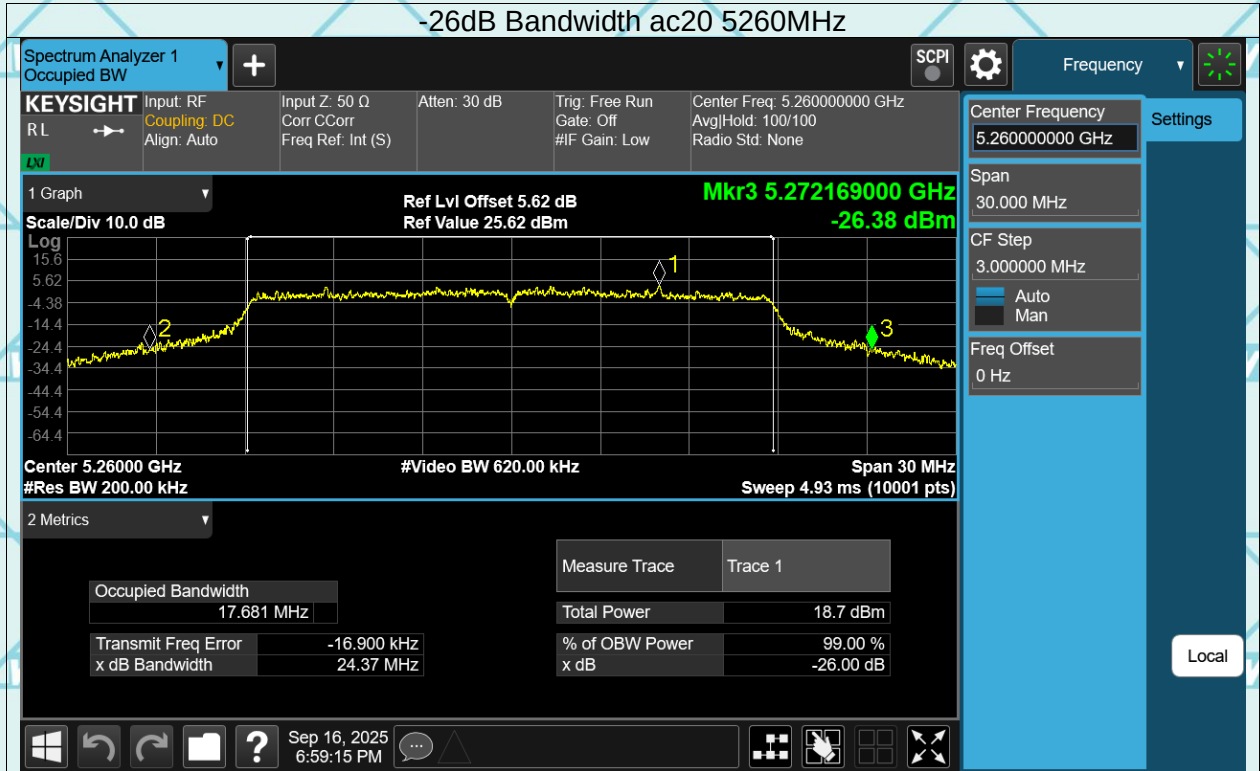


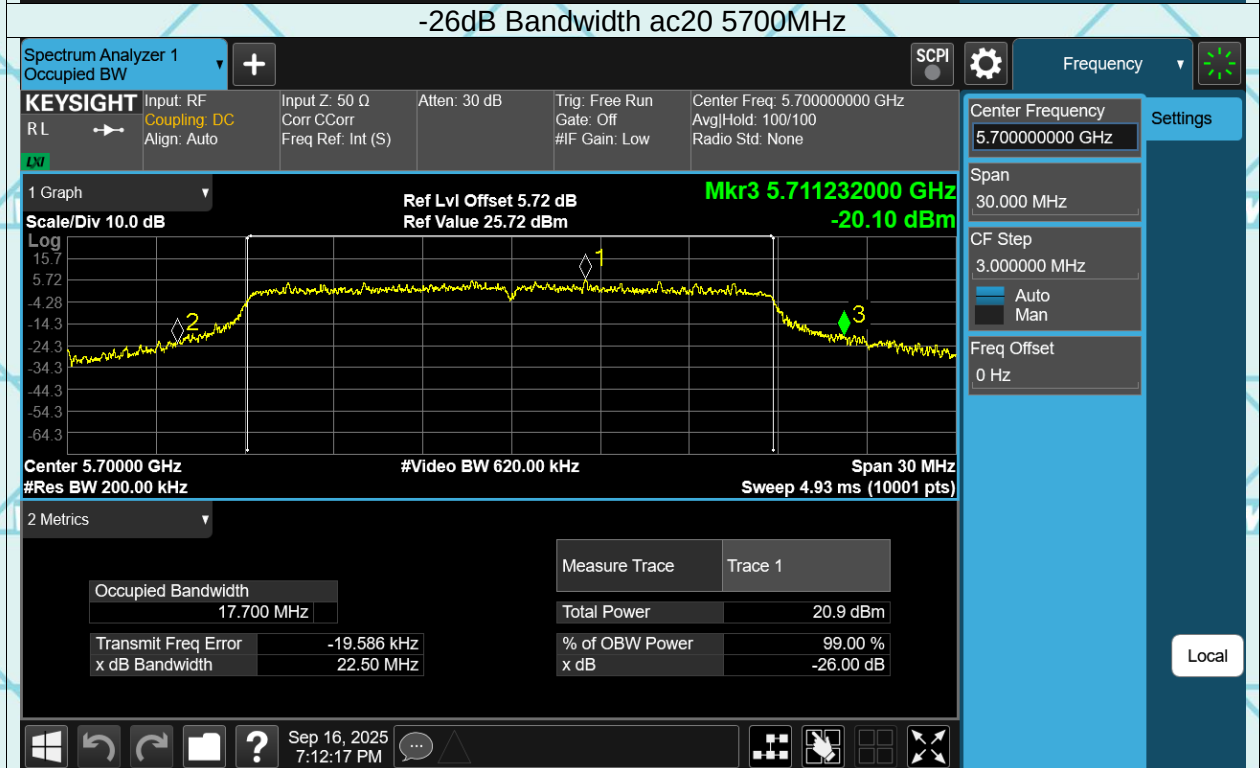
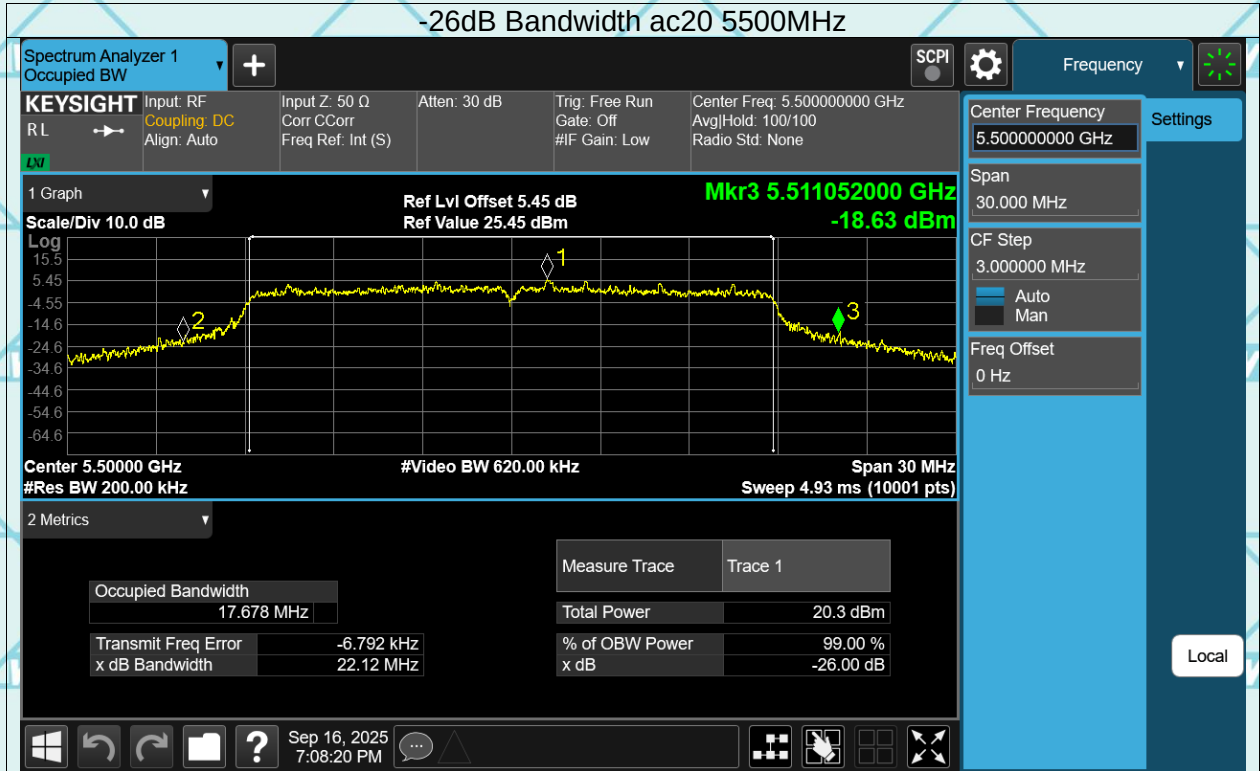


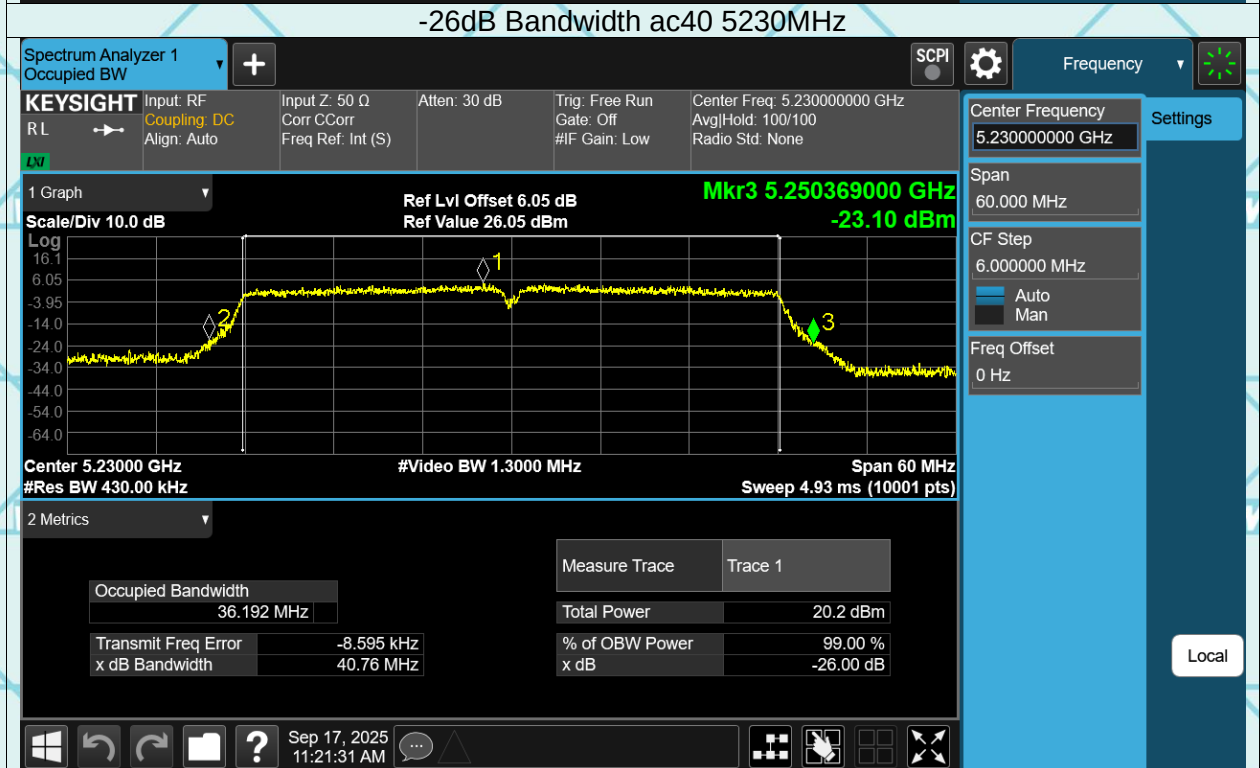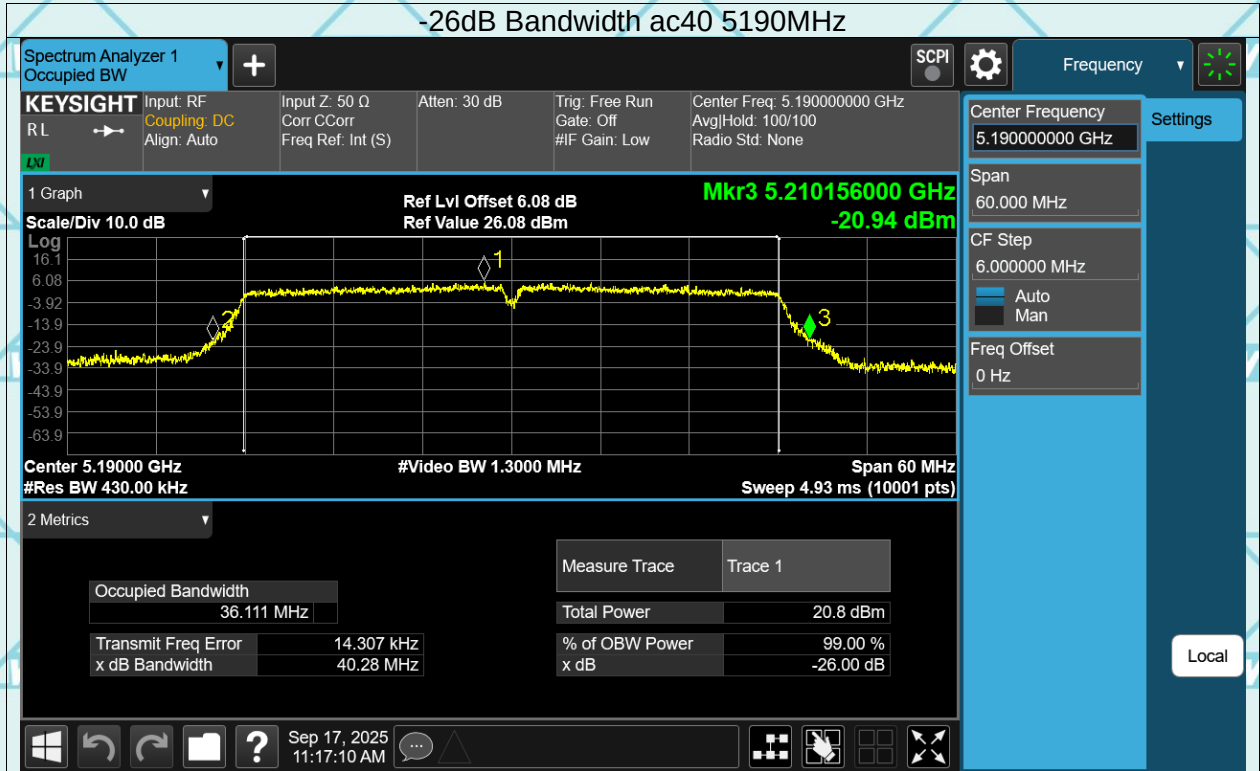

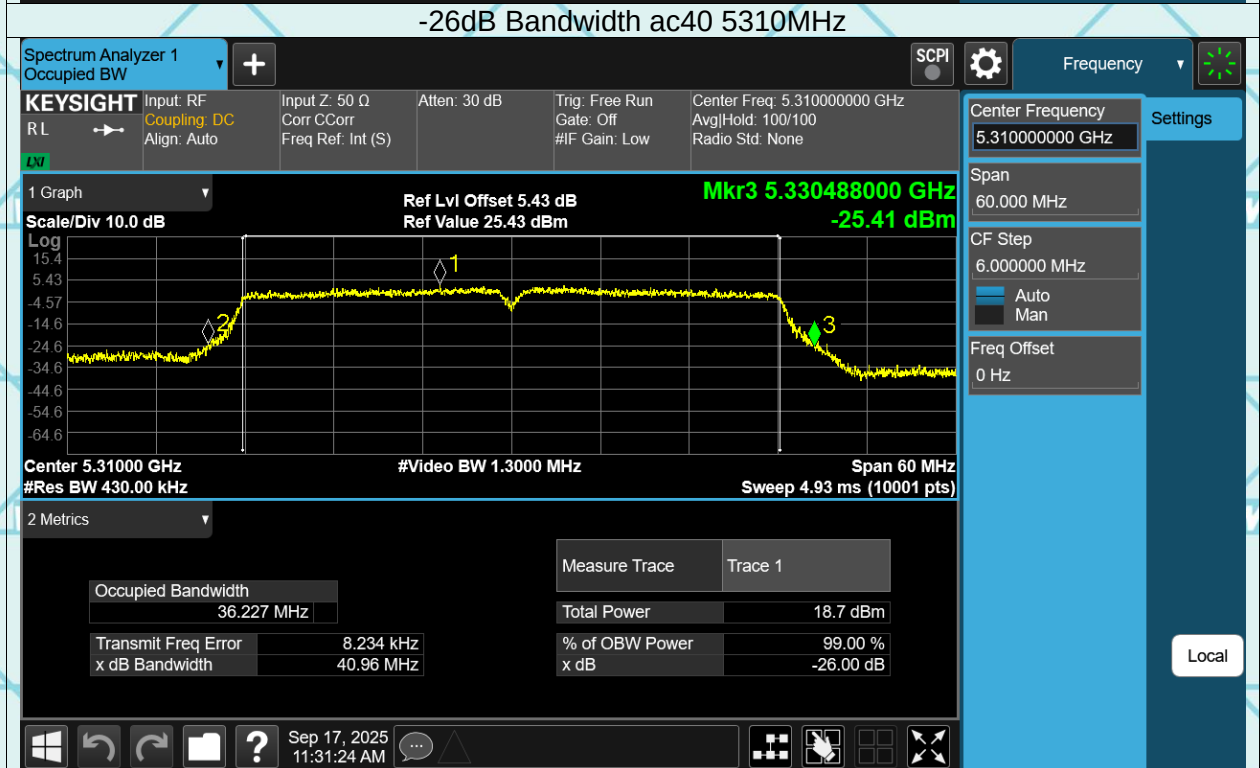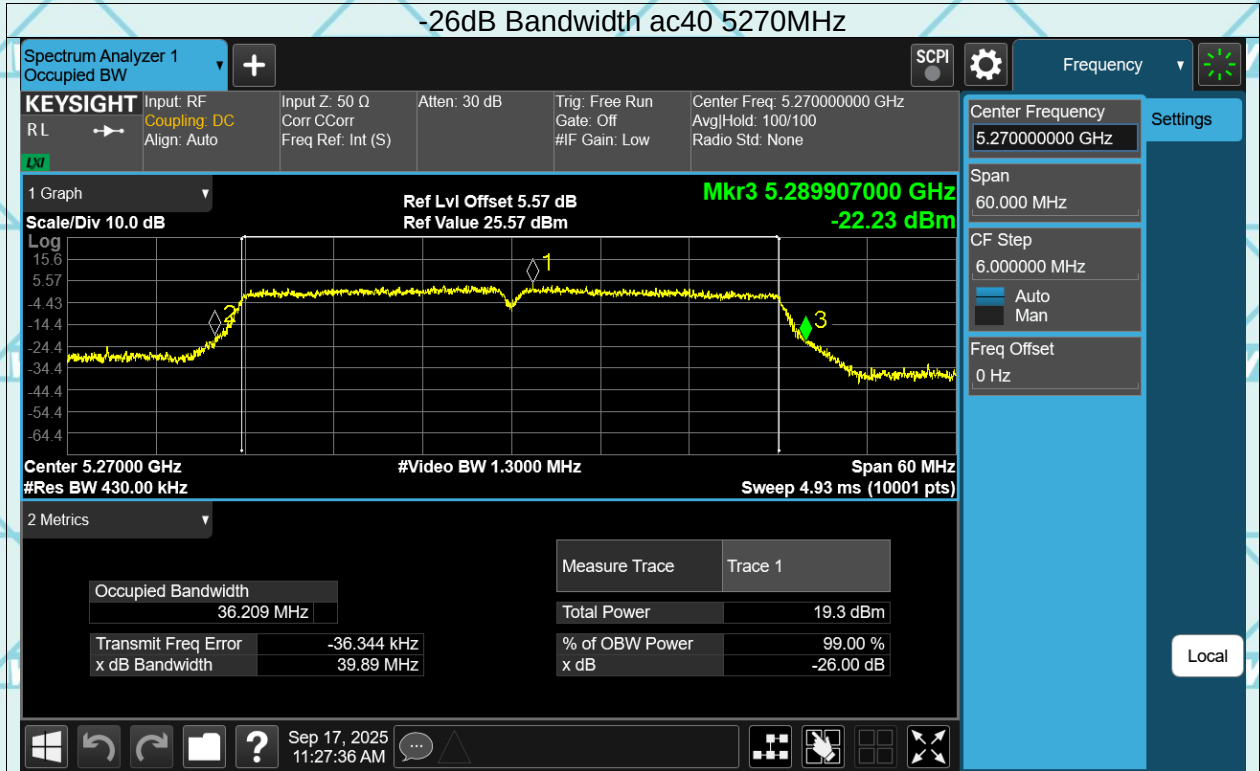

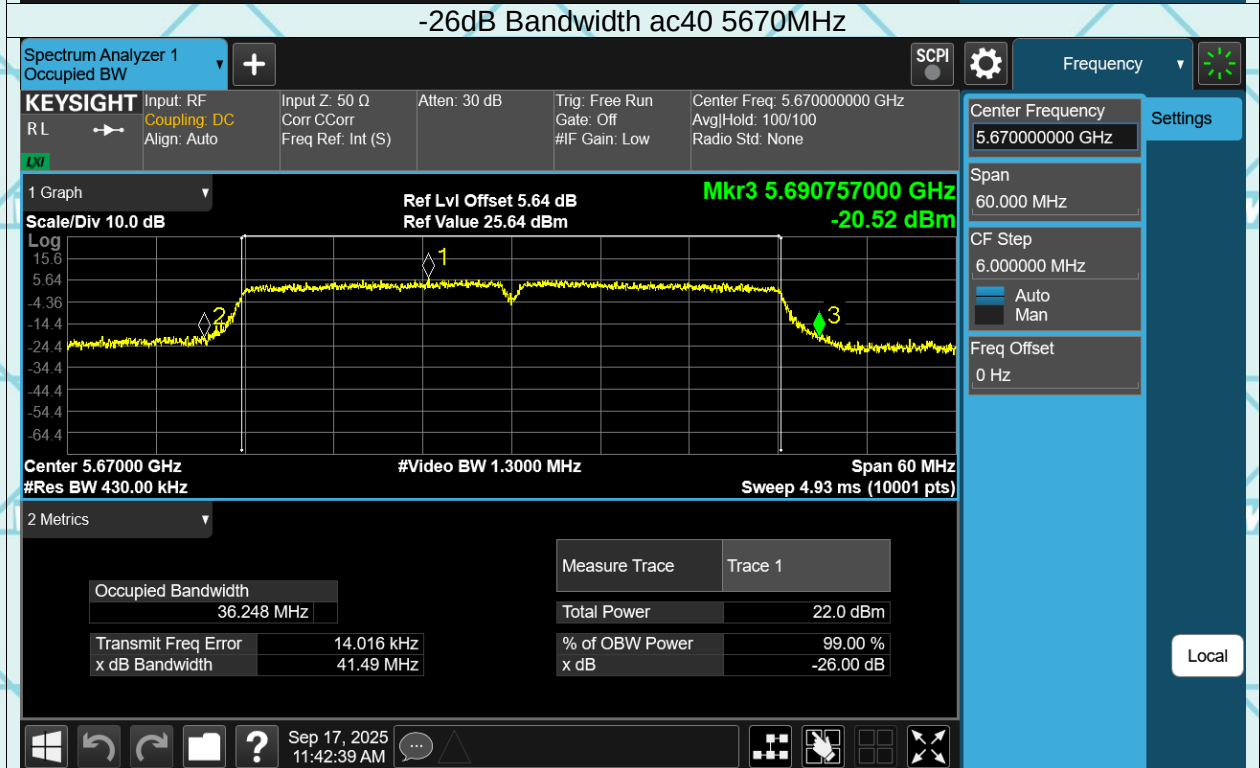
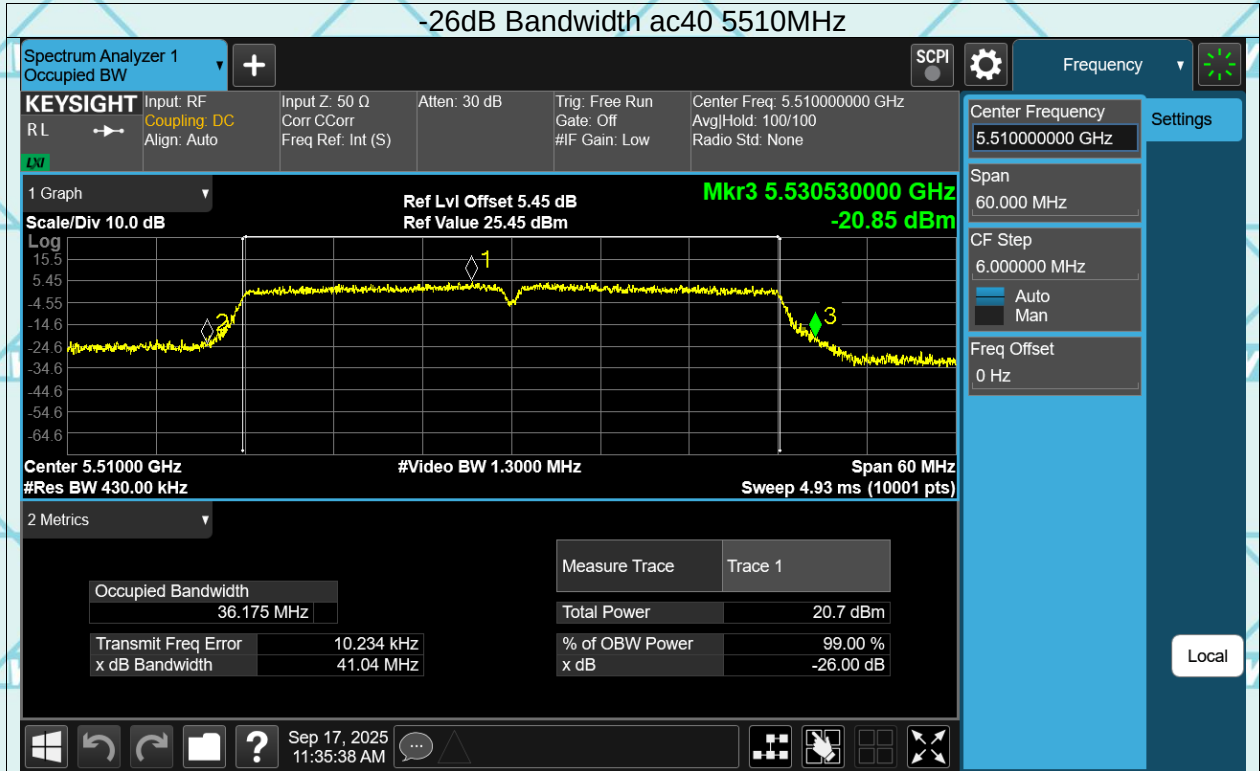


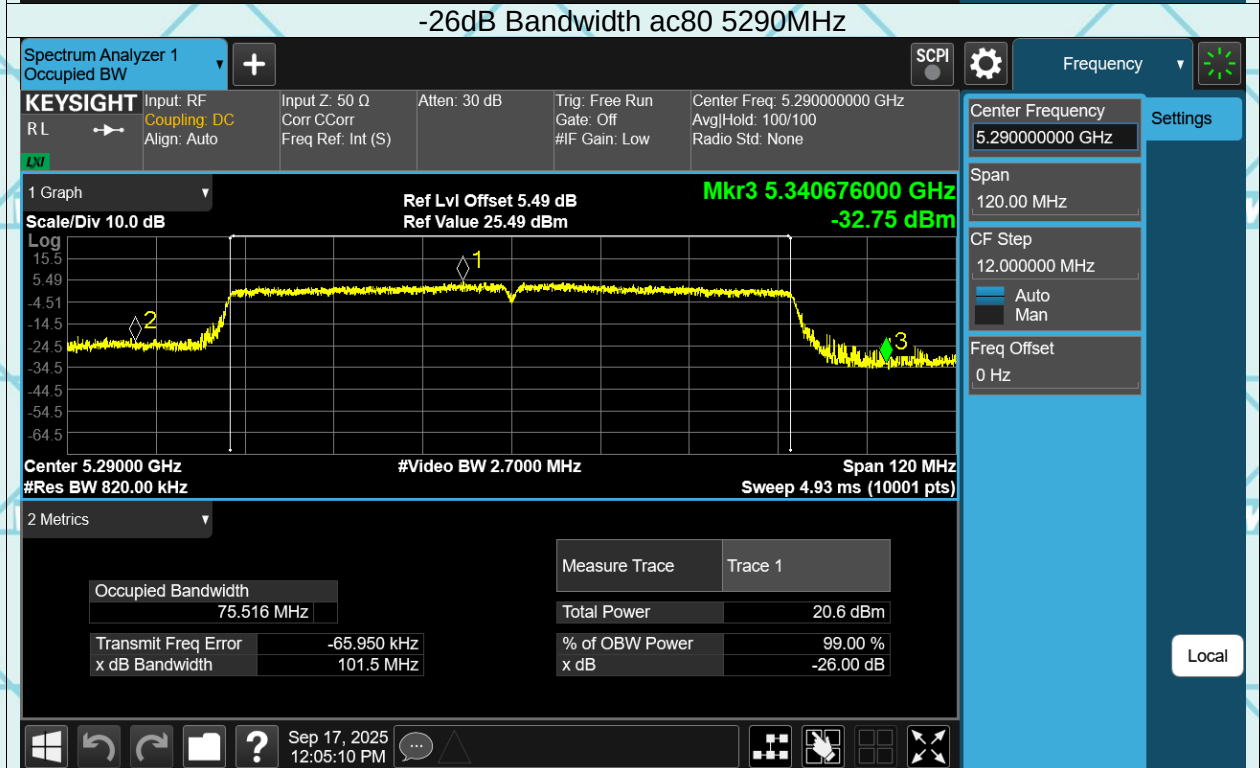
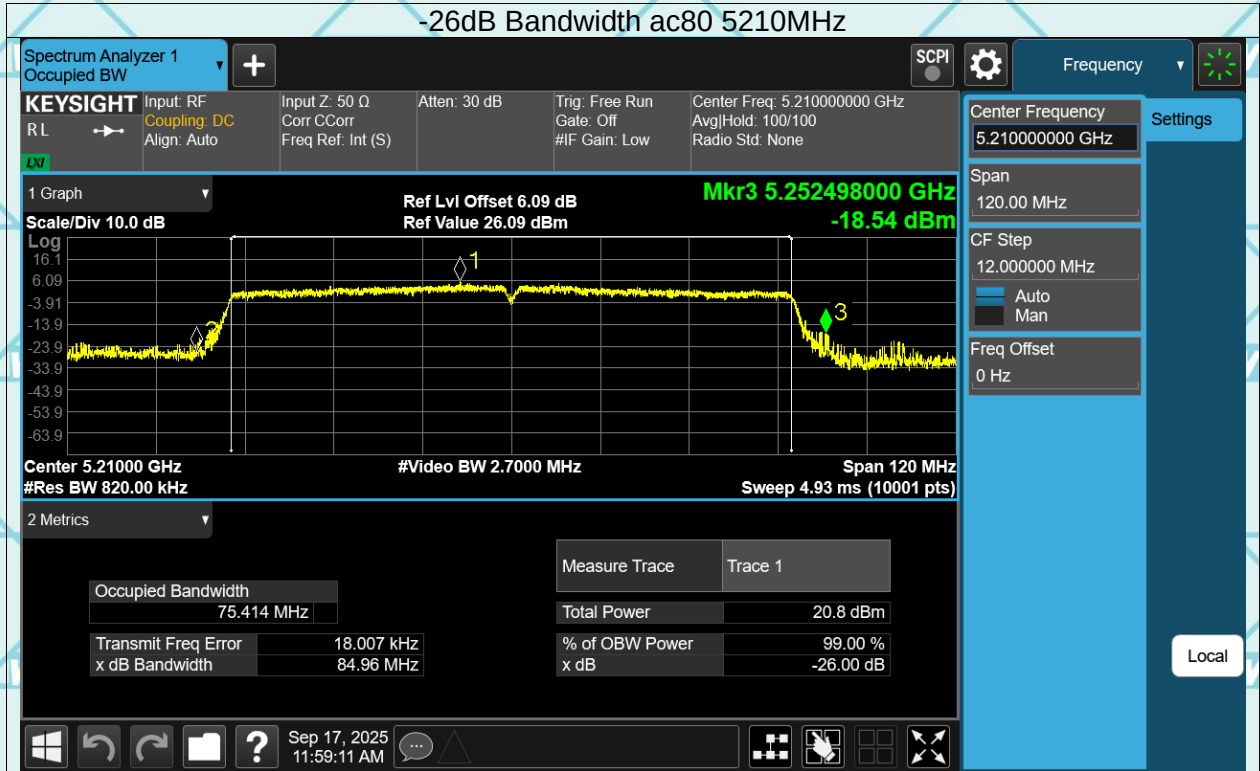


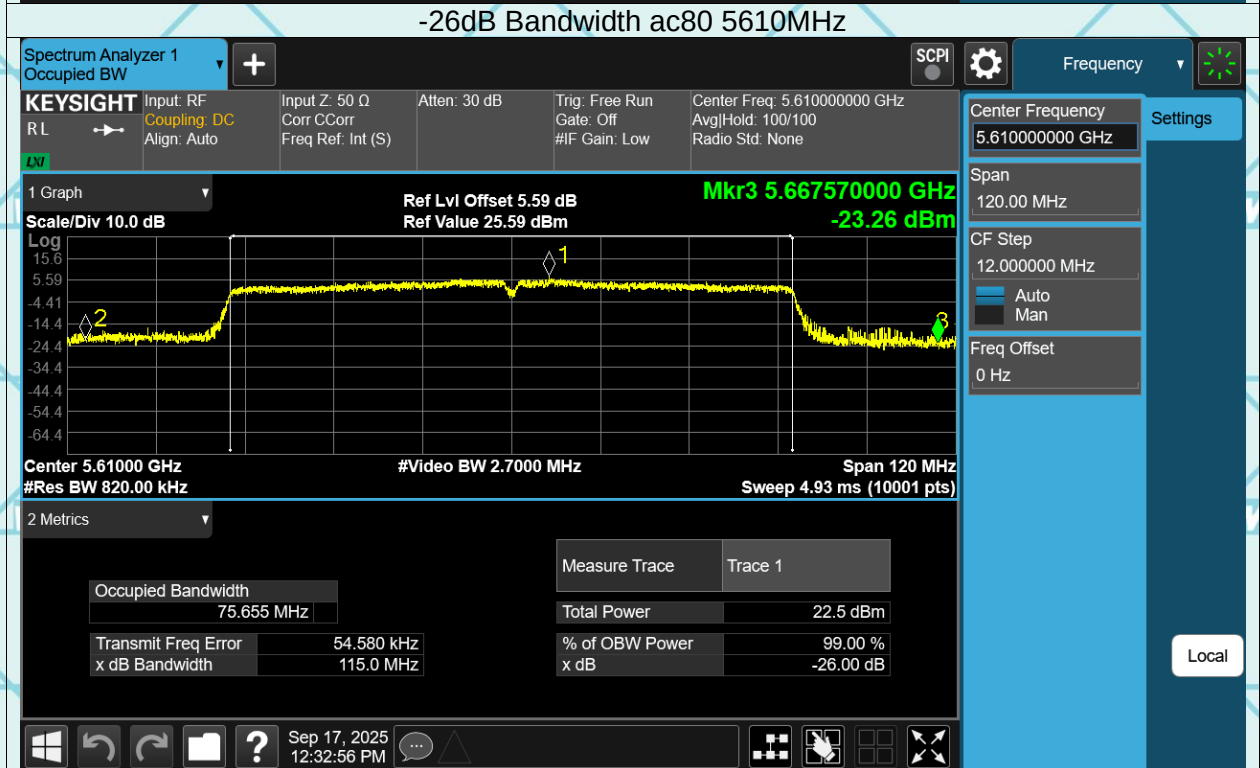
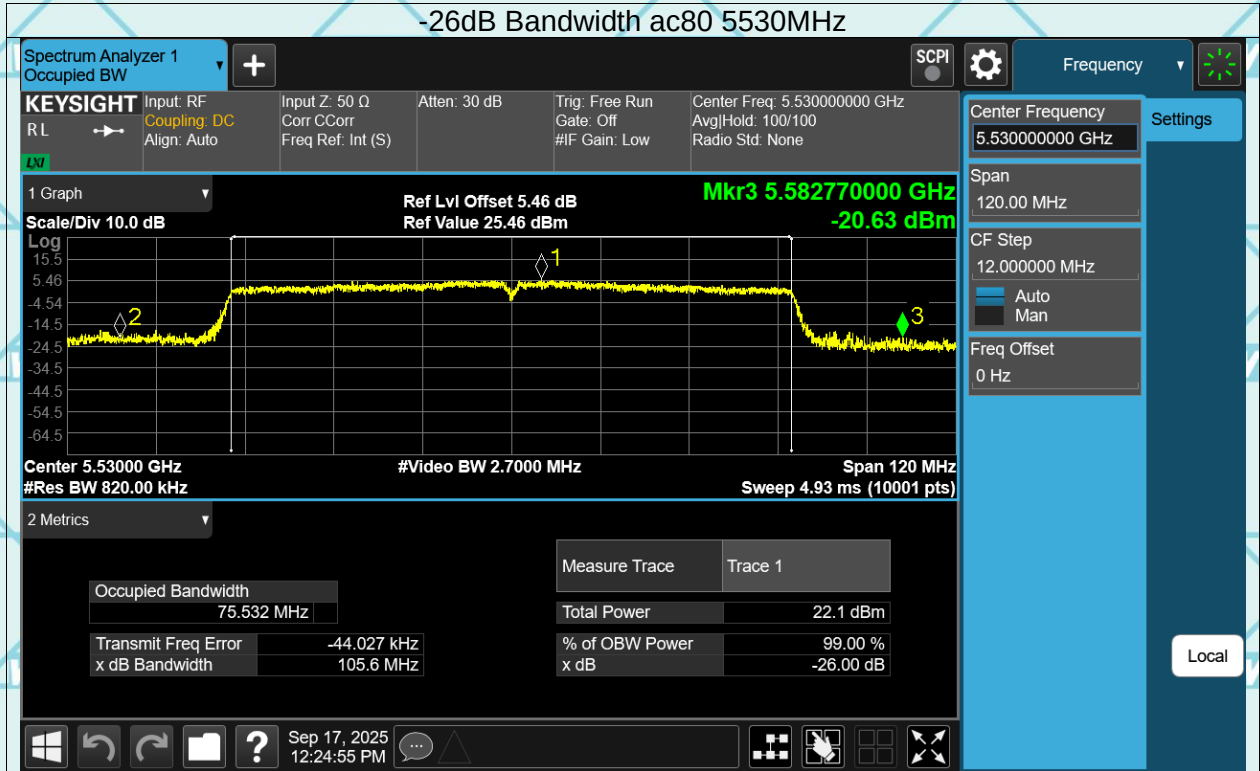




Report No.: WSCT-ANAB-R&E250800070A-Wi-Fi2 Issued Date: 14 November 2025



-6dB&99% Bandwidth

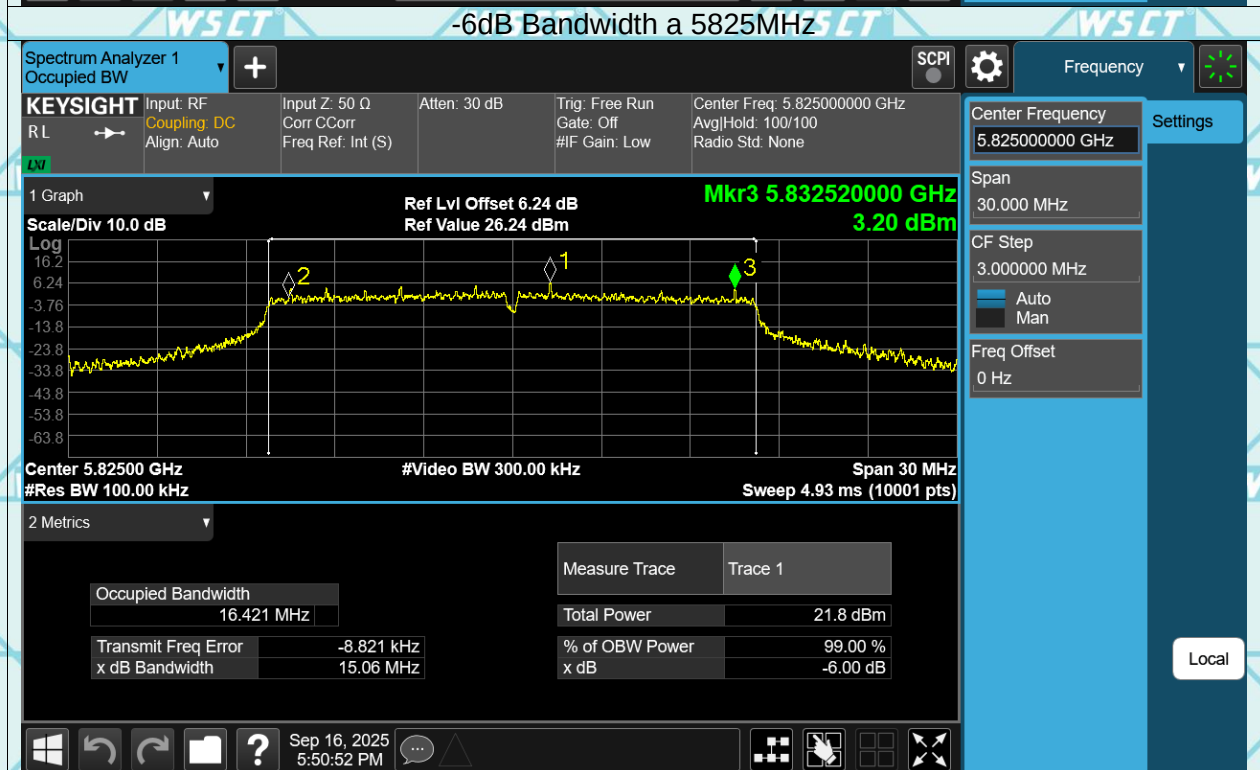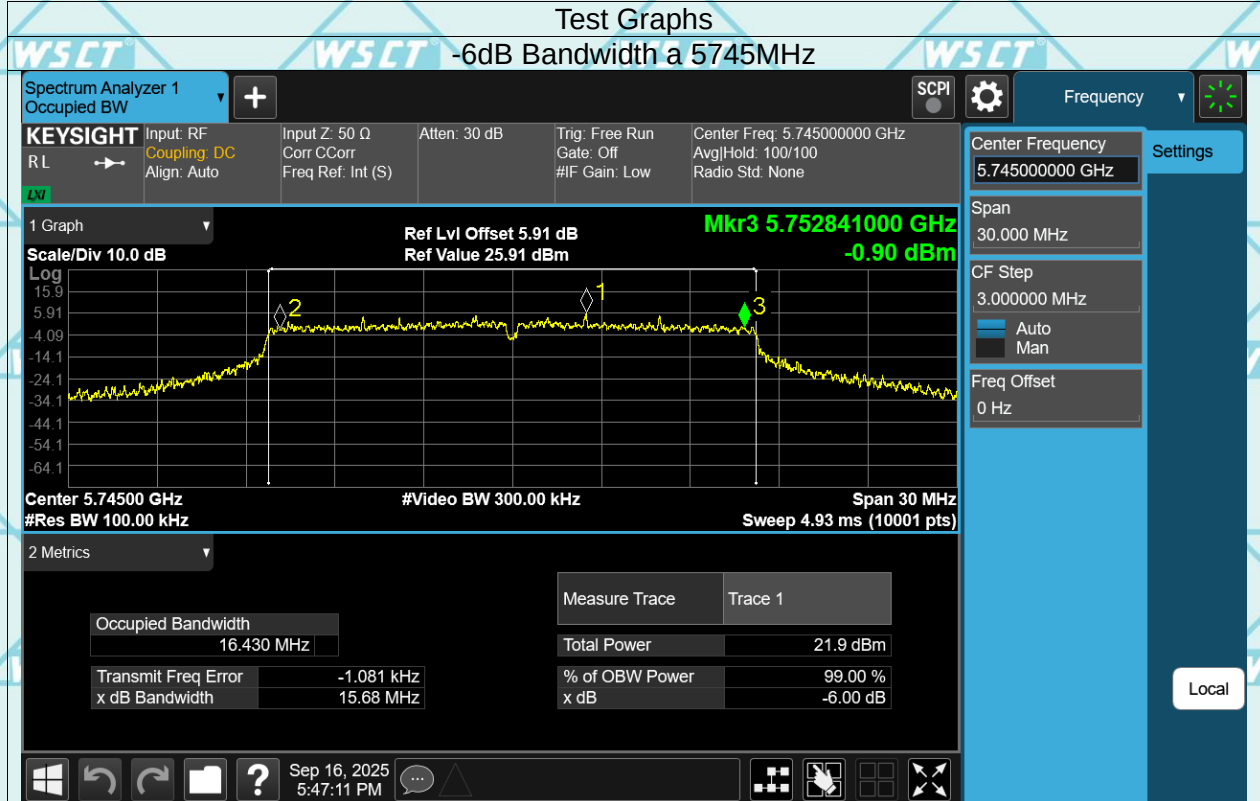


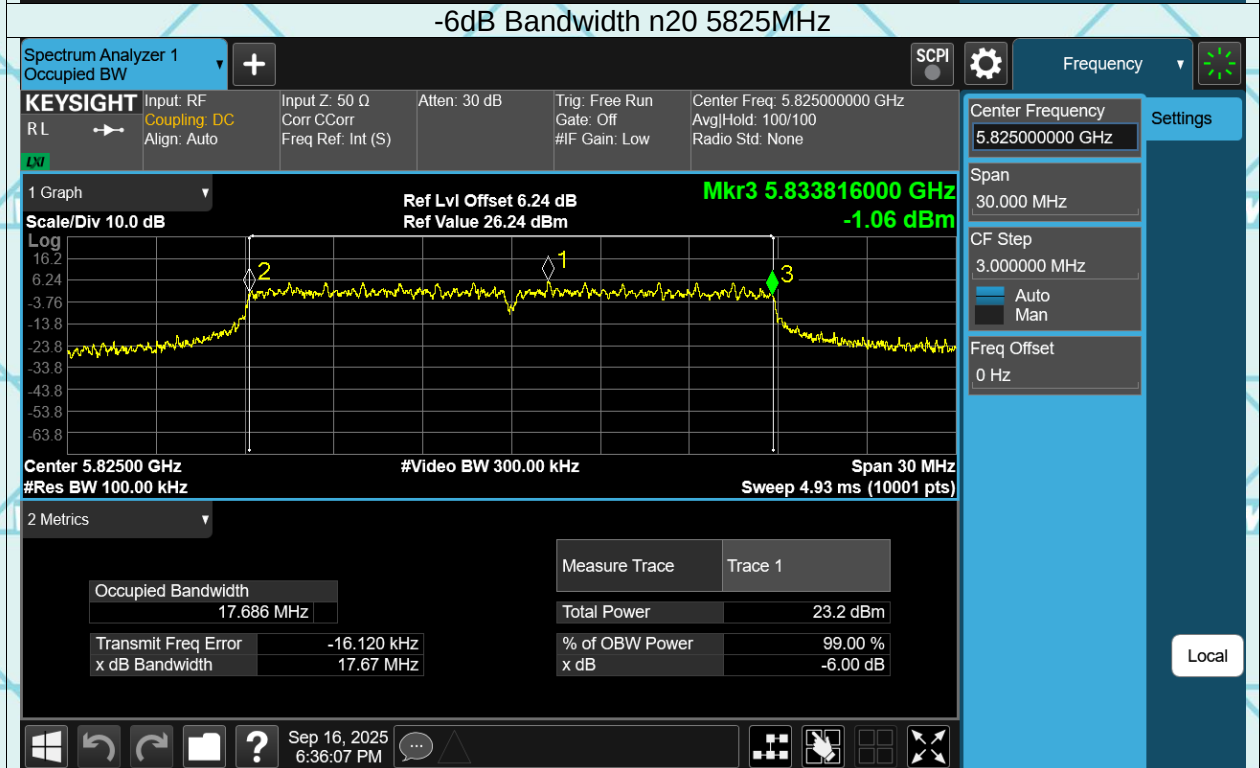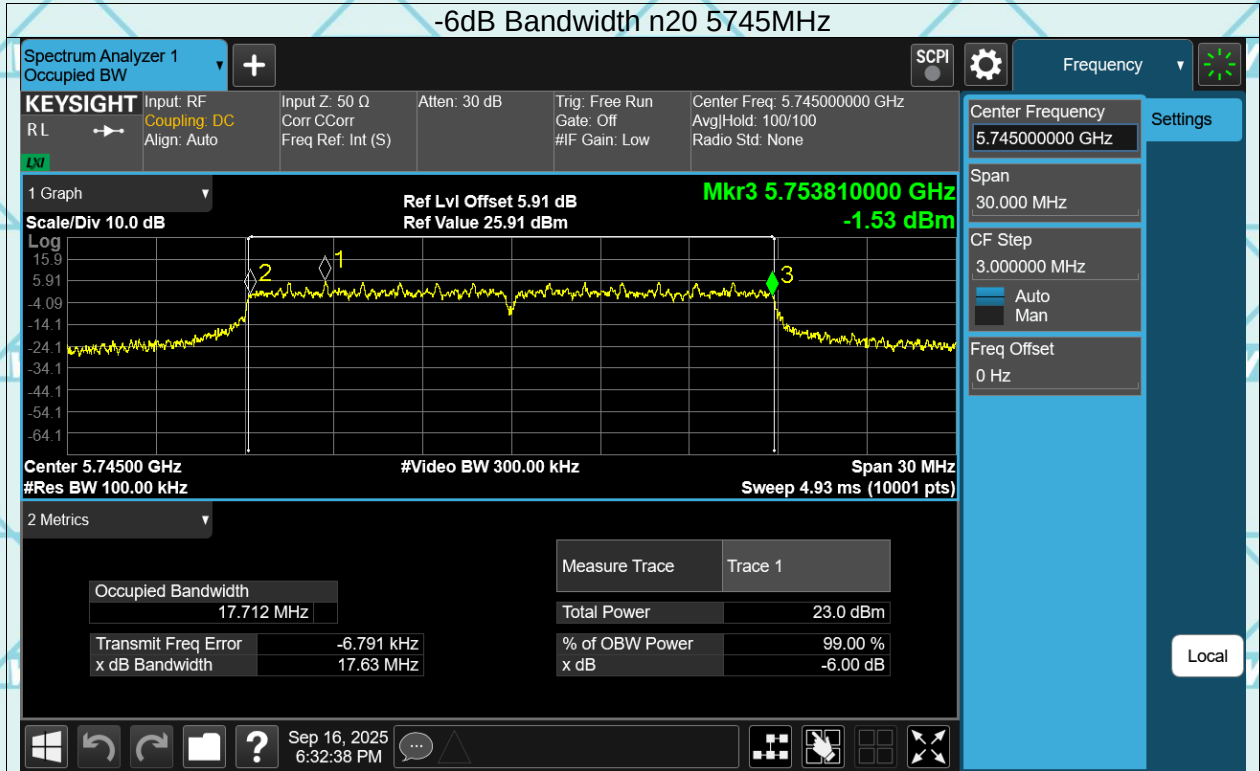

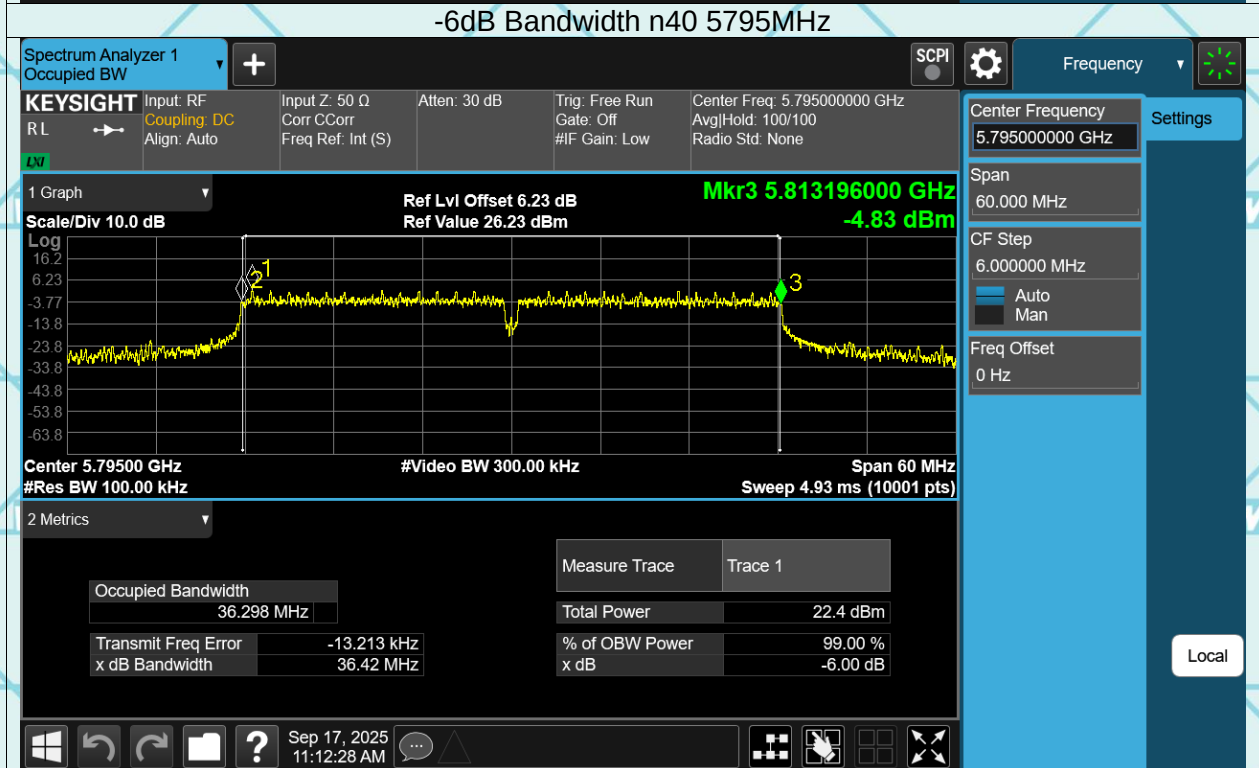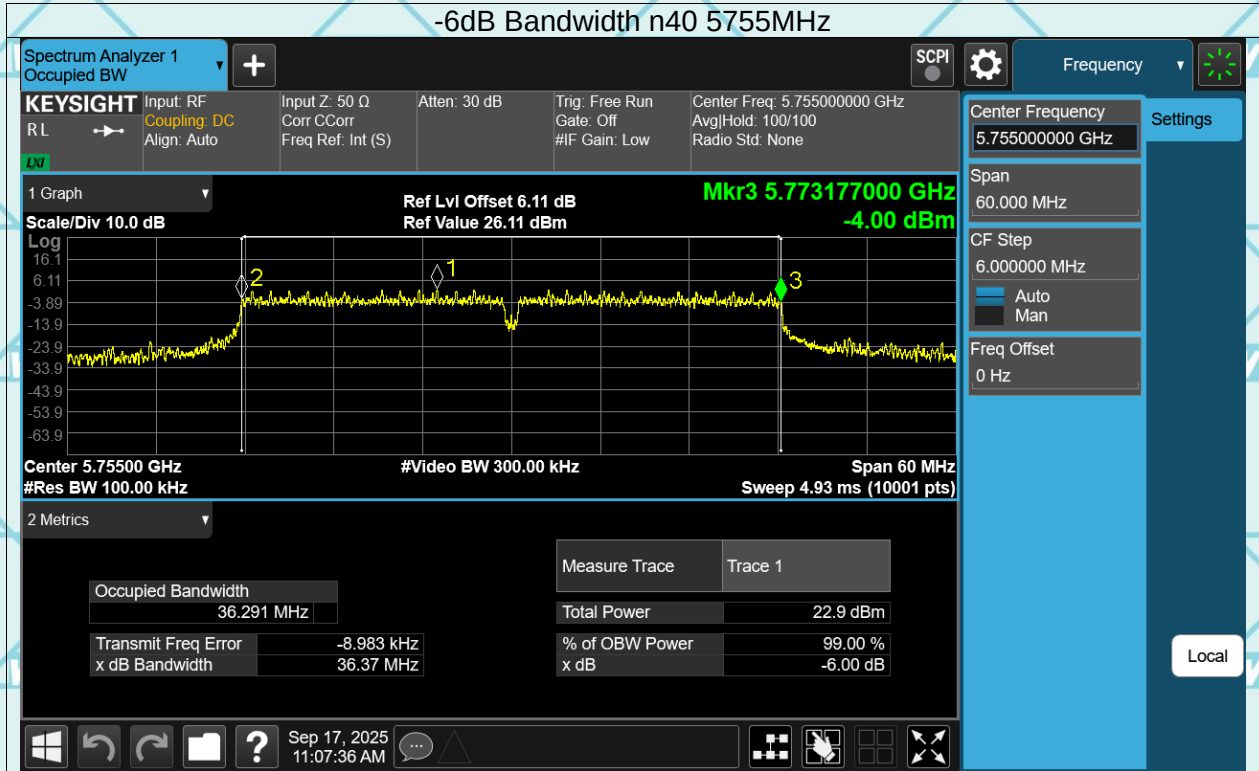

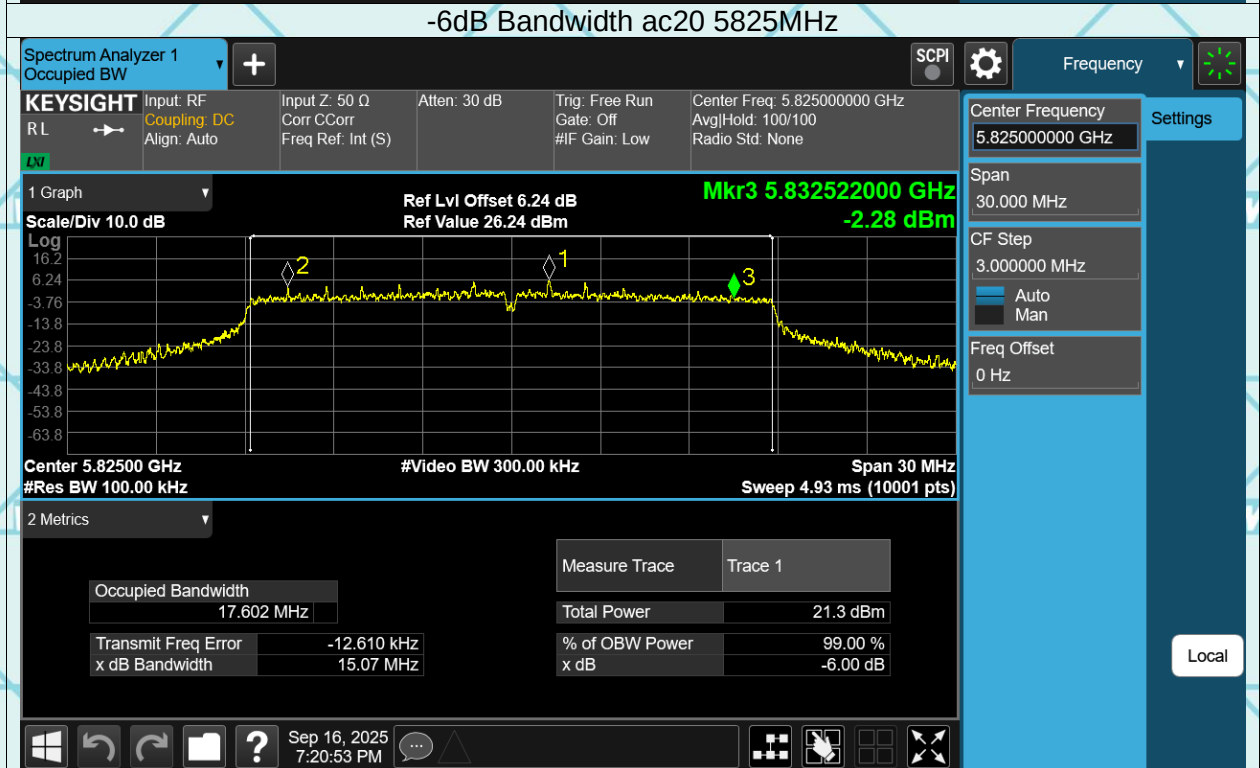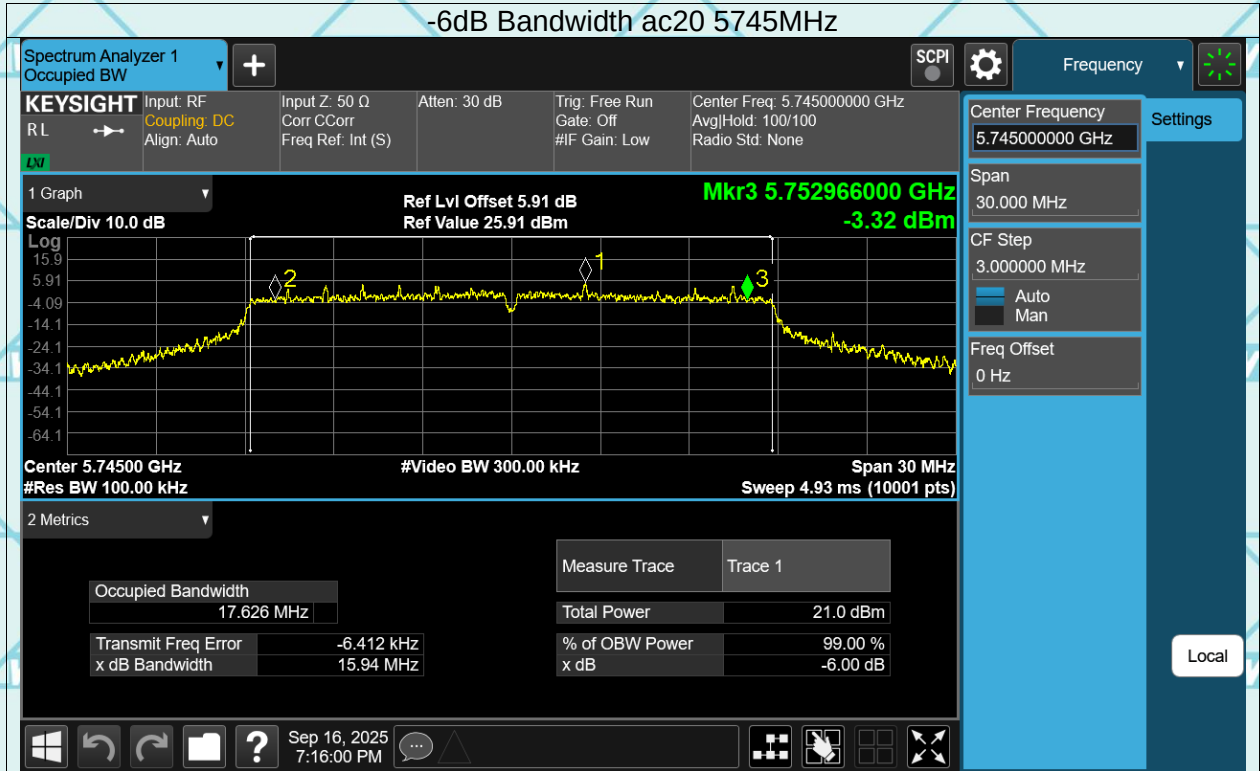

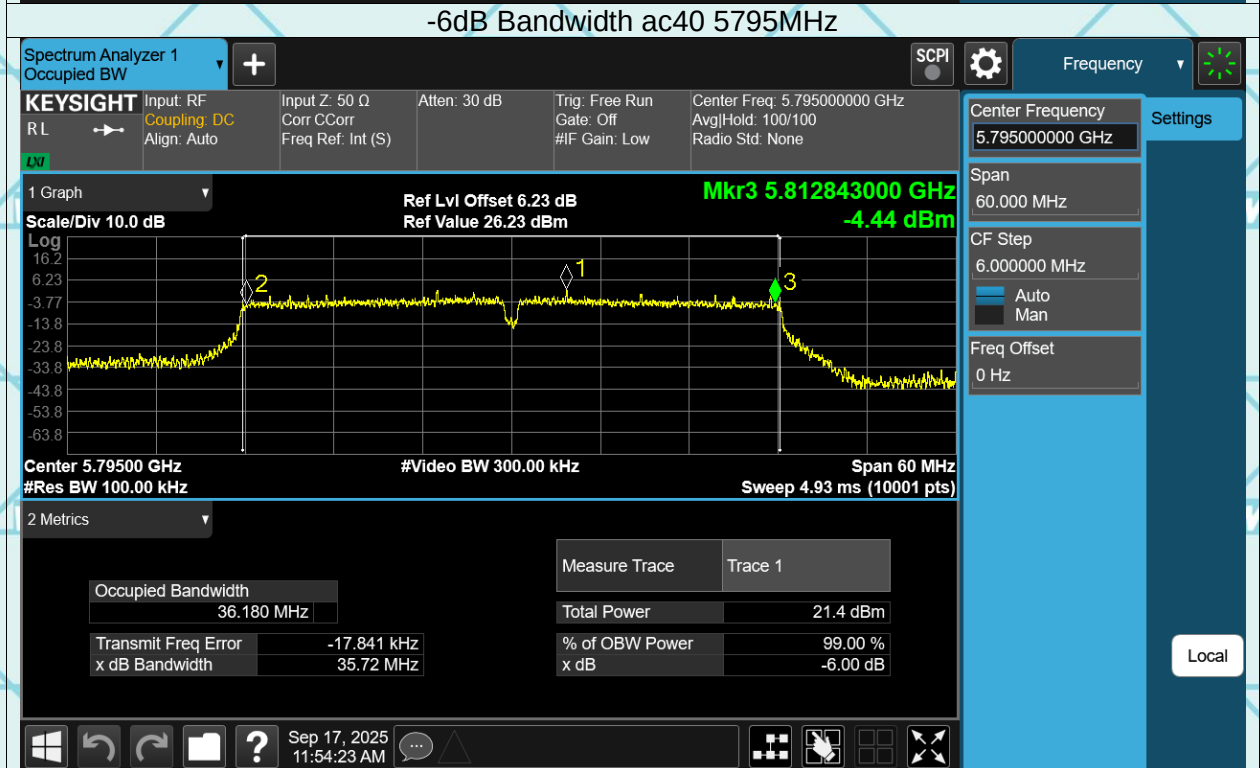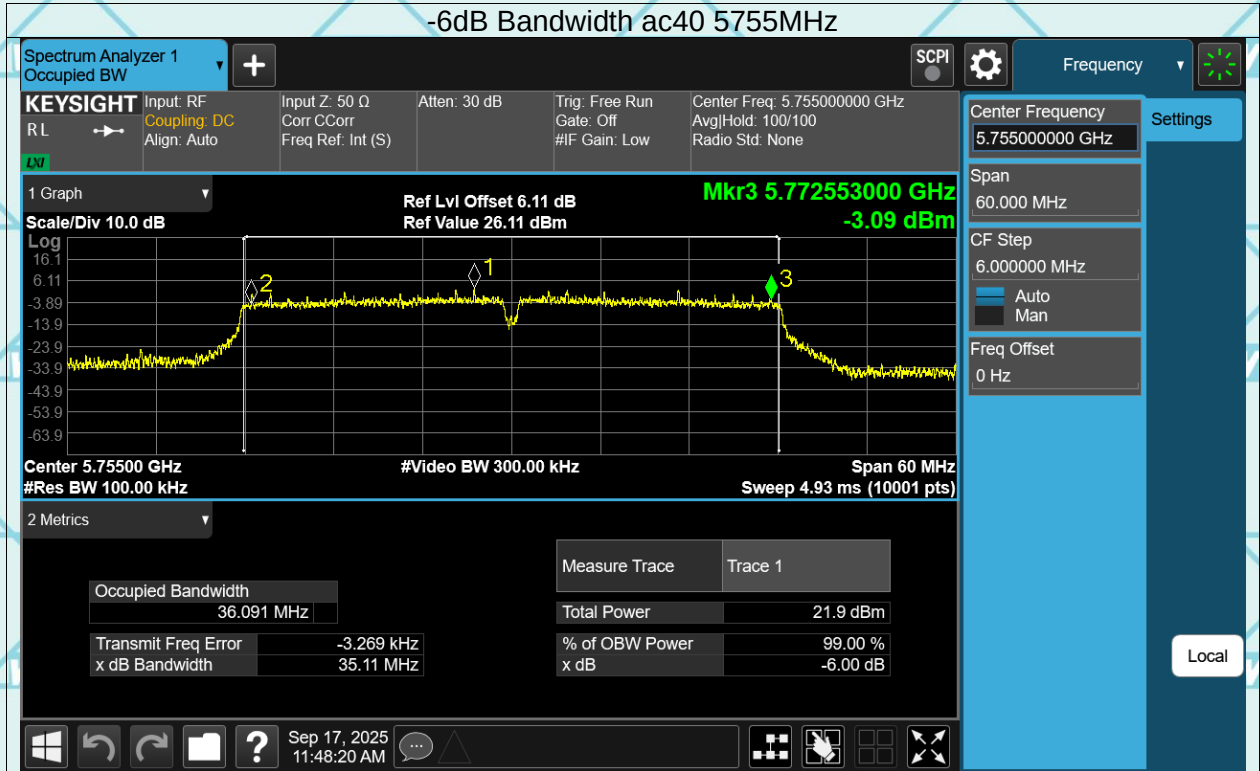

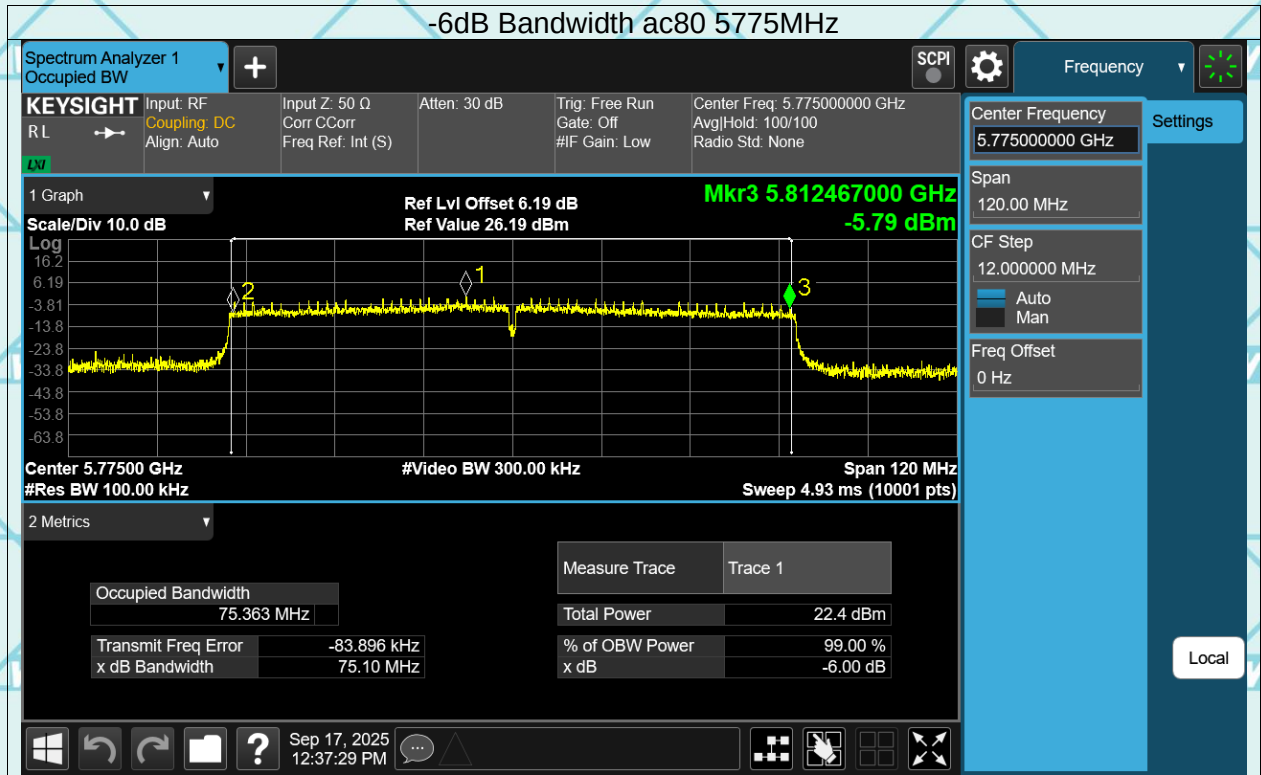

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.85V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	15.09	0.11	15.20	24	Pass
a	5240	14.71	0.11	14.82	24	Pass
a	5260	13.96	0.11	14.07	24	Pass
a	5320	13.17	0.11	13.28	24	Pass
a	5500	15.3	0.11	15.41	24	Pass
a	5700	16.39	0.11	16.50	24	Pass
a	5745	16.21	0.11	16.32	30	Pass
a	5825	15.93	0.11	16.04	30	Pass
n20	5180	15.03	0.81	15.84	24	Pass
n20	5240	14.46	0.81	15.27	24	Pass
n20	5260	13.86	0.81	14.67	24	Pass
n20	5320	12.96	0.81	13.77	24	Pass
n20	5500	15.19	0.81	16.00	24	Pass
n20	5700	15.96	0.81	16.77	24	Pass
n20	5745	15.87	0.81	16.68	30	Pass
n20	5825	15.71	0.81	16.52	30	Pass
n40	5190	14.03	1.25	15.28	24	Pass
n40	5230	14.35	1.25	15.60	24	Pass
n40	5270	12.98	1.29	14.27	24	Pass
n40	5310	12.17	1.25	13.42	24	Pass
n40	5510	14.03	1.29	15.32	24	Pass
n40	5670	15.14	1.28	16.42	24	Pass
n40	5755	15.17	1.25	16.42	30	Pass
n40	5795	14.43	1.25	15.68	30	Pass
ac20	5180	14.08	0.11	14.19	24	Pass
ac20	5240	13.5	0.11	13.61	24	Pass
ac20	5260	12.87	0.11	12.98	24	Pass
ac20	5320	11.95	0.12	12.07	24	Pass
ac20	5500	14.47	0.11	14.58	24	Pass
ac20	5700	15.3	0.11	15.41	24	Pass
ac20	5745	15	0.11	15.11	30	Pass
ac20	5825	14.99	0.11	15.10	30	Pass
ac40	5190	14.73	0.22	14.95	24	Pass
ac40	5230	14.14	0.22	14.36	24	Pass
ac40	5270	13.27	0.22	13.49	24	Pass
ac40	5310	12.63	0.22	12.85	24	Pass
ac40	5510	14.7	0.22	14.92	24	Pass
ac40	5670	15.94	0.22	16.16	24	Pass
ac40	5755	15.87	0.22	16.09	30	Pass
ac40	5795	15.2	0.23	15.43	30	Pass
ac80	5210	14.03	0.43	14.46	24	Pass
ac80	5290	14.59	0.44	15.03	24	Pass
ac80	5530	15.31	0.44	15.75	24	Pass
ac80	5610	15.68	0.44	16.12	24	Pass
ac80	5775	15.77	0.44	16.21	30	Pass

