


Report No.: WSCT-ANAB-R&E250800070A-BT Issued Date: 14 November 2025

Vertical:

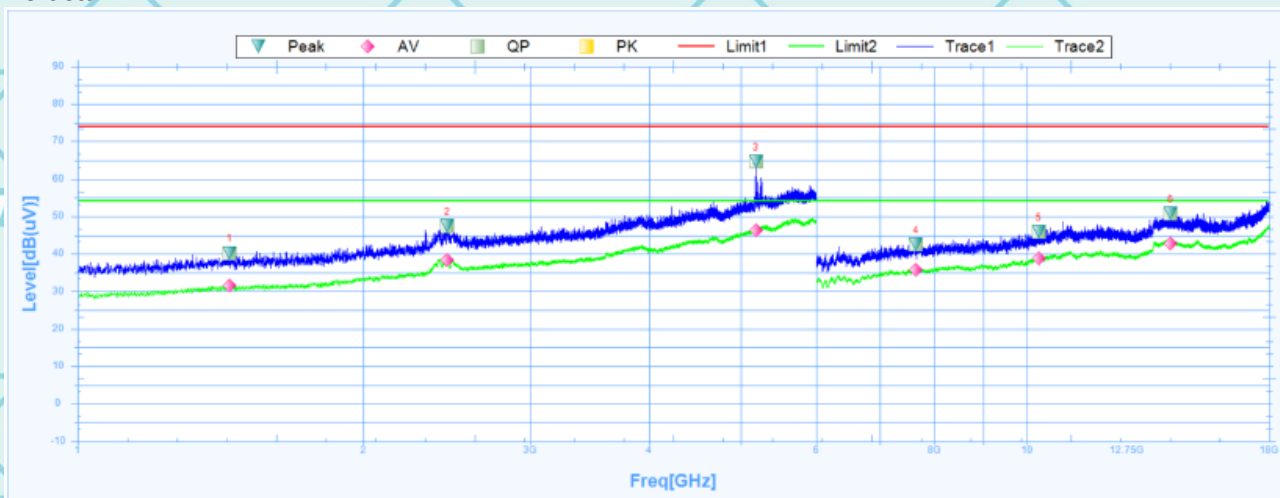


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1445.0000	40.26	25.06	15.2	74	-33.74	124.8	Vertical	PK	Pass
1	1445.0000	31.62	25.06	6.56	54	-22.38	124.8	Vertical	AV	Pass
2	2452.5000	47.35	27.44	19.91	74	-26.65	7.6	Vertical	PK	Pass
2	2452.5000	38.34	27.44	10.9	54	-15.66	7.6	Vertical	AV	Pass
3	5186.8750	64.72	31.75	32.97	74	-9.28	68.6	Vertical	PK	Pass
3	5186.8750	46.45	31.75	14.7	54	-7.55	68.6	Vertical	AV	Pass
4	7645.5000	42.5	7.96	34.54	74	-31.5	116.9	Vertical	PK	Pass
4	7645.5000	35.8	7.96	27.84	54	-18.2	116.9	Vertical	AV	Pass
5	10297.5000	45.8	13.28	32.52	74	-28.2	344.2	Vertical	PK	Pass
5	10297.5000	38.85	13.28	25.57	54	-15.15	344.2	Vertical	AV	Pass
6	14179.5000	50.85	18.95	31.9	74	-23.15	226.9	Vertical	PK	Pass
6	14179.5000	42.8	18.95	23.85	54	-11.2	226.9	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250800070A-BT Issued Date: 14 November 2025

Middle channel: 2441MHz

Horizontal:

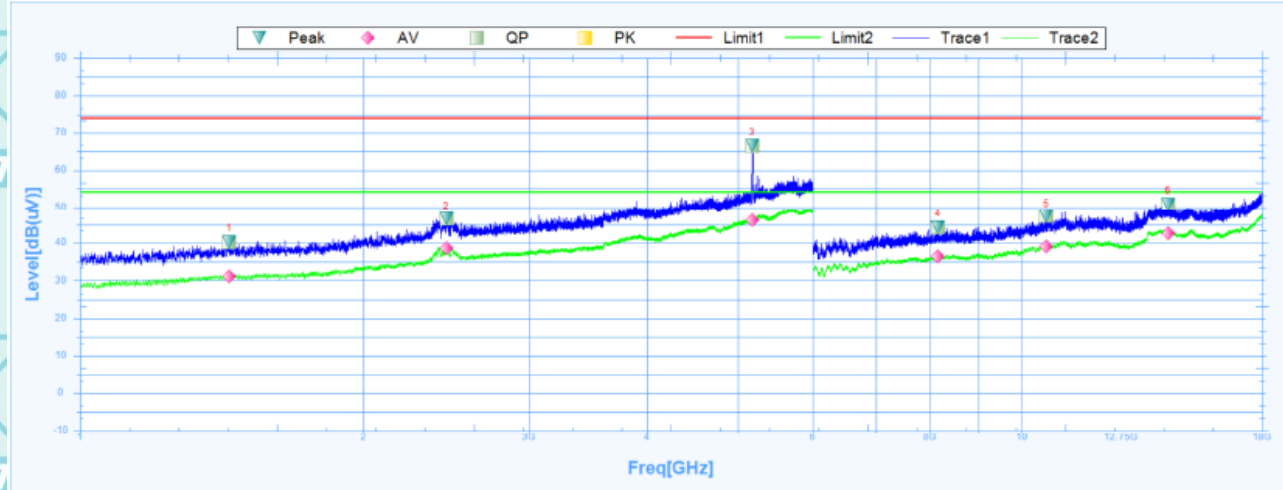


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1440.0000	40.24	25.06	15.18	74	-33.76	48.3	Horizontal	PK	Pass
1	1440.0000	31.04	25.06	5.98	54	-22.96	48.3	Horizontal	AV	Pass
2	2448.1250	46.63	27.42	19.21	74	-27.37	237.2	Horizontal	PK	Pass
2	2448.1250	38.63	27.42	11.21	54	-15.37	237.2	Horizontal	AV	Pass
3	5176.2500	66.46	31.74	34.72	74	-7.54	1.1	Horizontal	PK	Pass
3	5176.2500	46.19	31.74	14.45	54	-7.81	1.1	Horizontal	AV	Pass
4	8148.0000	44.15	8.61	35.54	74	-29.85	168.2	Horizontal	PK	Pass
4	8148.0000	36.4	8.61	27.79	54	-17.6	168.2	Horizontal	AV	Pass
5	10618.5000	47.2	14.39	32.81	74	-26.8	-0.1	Horizontal	PK	Pass
5	10618.5000	39.1	14.39	24.71	54	-14.9	-0.1	Horizontal	AV	Pass
6	14302.5000	50.72	18.82	31.9	74	-23.28	-0.1	Horizontal	PK	Pass
6	14302.5000	42.56	18.82	23.74	54	-11.44	-0.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250800070A-BT Issued Date: 14 November 2025

Vertical:

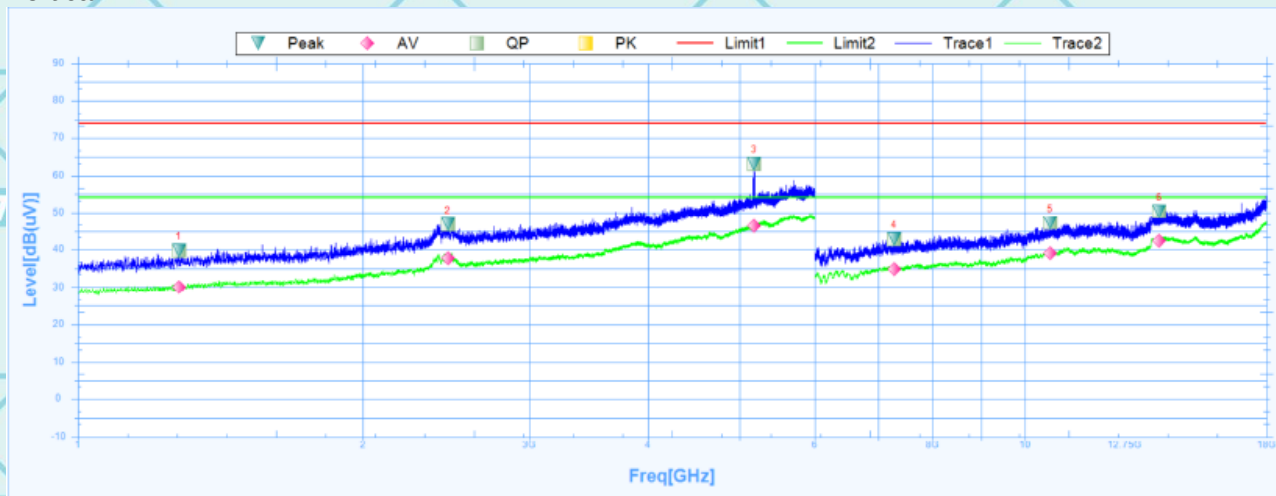


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1278.1250	39.74	24.67	15.07	74	-34.26	132	Vertical	PK	Pass
1	1278.1250	29.93	24.67	5.26	54	-24.07	132	Vertical	AV	Pass
2	2458.7500	46.74	27.46	19.28	74	-27.26	215.7	Vertical	PK	Pass
2	2458.7500	37.78	27.46	10.32	54	-16.22	215.7	Vertical	AV	Pass
3	5180.6250	63.18	31.74	31.44	74	-10.82	28.1	Vertical	PK	Pass
3	5180.6250	46.28	31.74	14.54	54	-7.72	28.1	Vertical	AV	Pass
4	7275.0000	42.74	6.9	35.84	74	-31.26	355.9	Vertical	PK	Pass
4	7275.0000	34.81	6.9	27.91	54	-19.19	355.9	Vertical	AV	Pass
5	10633.5000	47.14	14.45	32.69	74	-26.86	82.2	Vertical	PK	Pass
5	10633.5000	39.15	14.45	24.7	54	-14.85	82.2	Vertical	AV	Pass
6	13872.0000	50.33	18.75	31.58	74	-23.67	85.8	Vertical	PK	Pass
6	13872.0000	42.44	18.75	23.69	54	-11.56	85.8	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E250800070A-BT Issued Date: 14 November 2025

High channel: 2480MHz

Horizontal:

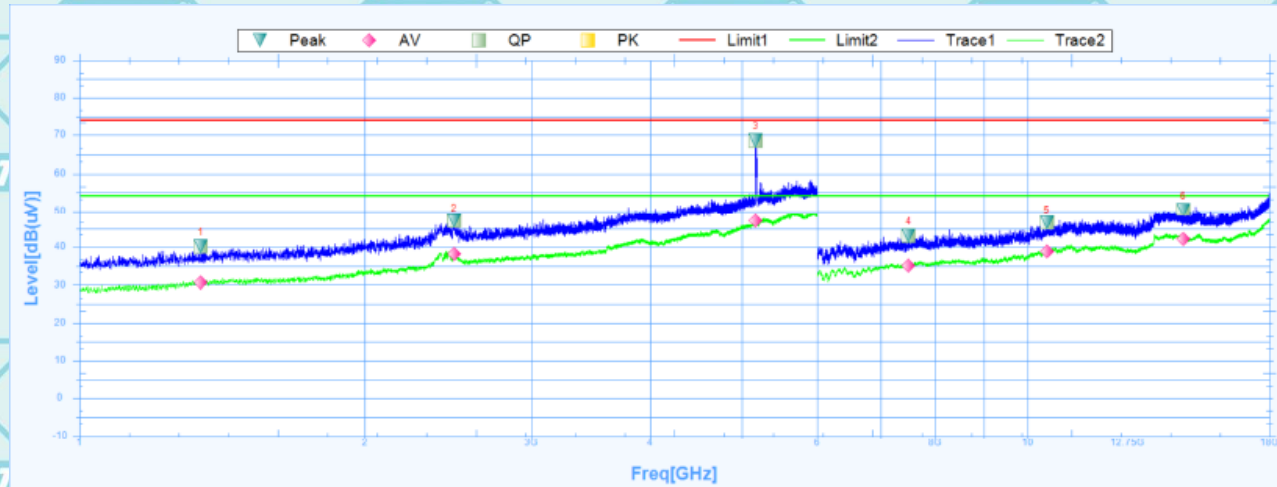


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1342.5000	40.15	24.9	15.25	74	-33.85	0.5	Horizontal	PK	Pass
1	1342.5000	30.65	24.9	5.75	54	-23.35	0.5	Horizontal	AV	Pass
2	2485.0000	46.99	27.55	19.44	74	-27.01	360	Horizontal	PK	Pass
2	2485.0000	38.15	27.55	10.6	54	-15.85	360	Horizontal	AV	Pass
3	5171.8750	68.6	31.74	36.86	74	-5.4	308.9	Horizontal	PK	Pass
3	5171.8750	47.01	31.74	15.27	54	-6.99	308.9	Horizontal	AV	Pass
4	7495.5000	43.07	7.51	35.56	74	-30.93	349.1	Horizontal	PK	Pass
4	7495.5000	35.15	7.51	27.64	54	-18.85	349.1	Horizontal	AV	Pass
5	10485.0000	46.58	13.88	32.7	74	-27.42	188.2	Horizontal	PK	Pass
5	10485.0000	38.87	13.88	24.99	54	-15.13	188.2	Horizontal	AV	Pass
6	14605.5000	50.22	18.54	31.68	74	-23.78	201.3	Horizontal	PK	Pass
6	14605.5000	42.08	18.54	23.54	54	-11.92	201.3	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E250800070A-BT Issued Date: 14 November 2025

Vertical:

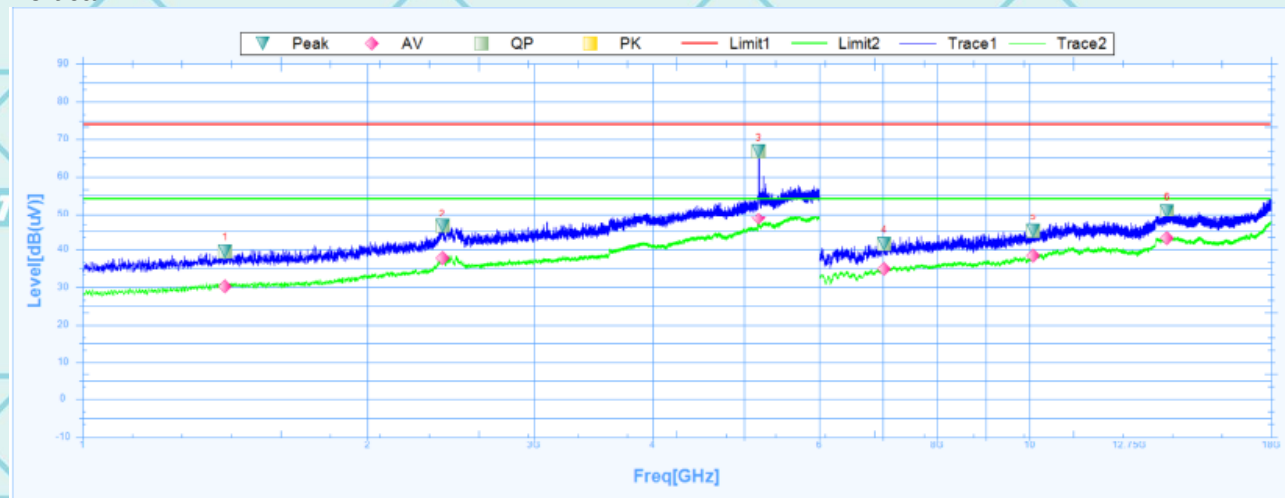

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1415.0000	39.55	25.08	14.47	74	-34.45	93	Vertical	PK	Pass
1	1415.0000	30.23	25.08	5.15	54	-23.77	93	Vertical	AV	Pass
2	2400.0000	46.42	27.26	19.16	74	-27.58	52.2	Vertical	PK	Pass
2	2400.0000	37.67	27.26	10.41	54	-16.33	52.2	Vertical	AV	Pass
3	5181.8750	66.61	31.75	34.86	74	-7.39	194.5	Vertical	PK	Pass
3	5181.8750	48.62	31.75	16.87	54	-5.38	194.5	Vertical	AV	Pass
4	7027.5000	41.4	6.42	34.98	74	-32.6	352.1	Vertical	PK	Pass
4	7027.5000	34.77	6.42	28.35	54	-19.23	352.1	Vertical	AV	Pass
5	10102.5000	44.95	12.66	32.29	74	-29.05	0.5	Vertical	PK	Pass
5	10102.5000	38.29	12.66	25.63	54	-15.71	0.5	Vertical	AV	Pass
6	13986.0000	50.7	19.08	31.62	74	-23.3	346	Vertical	PK	Pass
6	13986.0000	43.02	19.08	23.94	54	-10.98	346	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "----" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	66.31	-5.24	61.07	74	12.93	H	PK
2387	51.31	-5.24	46.07	54	7.93	H	AV
2387	67.84	-4.87	62.97	74	11.03	V	PK
2387	52.01	-4.87	47.14	54	6.86	V	AV
2390	69.16	-5.24	63.92	74	10.08	H	PK
2390	51.43	-5.24	46.19	54	7.81	H	AV
2390	69.60	-4.87	64.73	74	9.27	V	PK
2390	52.93	-4.87	48.06	54	5.94	V	AV
High Channel							
2483.5	66.58	-5.24	61.34	74	12.66	H	PK
2483.5	52.34	-5.24	47.10	54	6.90	H	AV
2483.5	65.40	-4.87	60.53	74	13.47	V	PK
2483.5	50.73	-4.87	45.86	54	8.14	V	AV

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E250800070A-BT Issued Date: 14 November 2025

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******