

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Channel	PCL	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GSM850	128	5	33.51	24.94	38.45	PASS
GSM850	190	5	33.51	24.94	38.45	PASS
GSM850	251	5	33.27	24.7	38.45	PASS
GSM1900	512	0	30.05	28.95	33.00	PASS
GSM1900	661	0	30.38	29.28	33.00	PASS
GSM1900	810	0	30.25	29.15	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GPRS850	128	5	1	33.49	24.92	38.45	PASS
GPRS850	128	5	2	32.68	24.11	38.45	PASS
GPRS850	128	5	3	30.83	22.26	38.45	PASS
GPRS850	128	5	4	29.67	21.1	38.45	PASS
GPRS850	190	5	1	33.48	24.91	38.45	PASS
GPRS850	190	5	2	32.68	24.11	38.45	PASS
GPRS850	190	5	3	30.84	22.27	38.45	PASS
GPRS850	190	5	4	29.72	21.15	38.45	PASS
GPRS850	251	5	1	33.24	24.67	38.45	PASS
GPRS850	251	5	2	32.47	23.9	38.45	PASS
GPRS850	251	5	3	30.68	22.11	38.45	PASS
GPRS850	251	5	4	29.58	21.01	38.45	PASS
GPRS1900	512	0	1	30.05	28.95	33.00	PASS
GPRS1900	512	0	2	29.00	27.9	33.00	PASS
GPRS1900	512	0	3	26.82	25.72	33.00	PASS
GPRS1900	512	0	4	25.58	24.48	33.00	PASS
GPRS1900	661	0	1	30.37	29.27	33.00	PASS
GPRS1900	661	0	2	29.36	28.26	33.00	PASS
GPRS1900	661	0	3	27.21	26.11	33.00	PASS
GPRS1900	661	0	4	26.04	24.94	33.00	PASS
GPRS1900	810	0	1	30.23	29.13	33.00	PASS
GPRS1900	810	0	2	29.28	28.18	33.00	PASS
GPRS1900	810	0	3	27.28	26.18	33.00	PASS
GPRS1900	810	0	4	26.16	25.06	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
EGPRS850	128	8	1	27.66	19.09	38.45	PASS
EGPRS850	128	8	2	26.63	18.06	38.45	PASS
EGPRS850	128	8	3	24.44	15.87	38.45	PASS
EGPRS850	128	8	4	23.07	14.5	38.45	PASS
EGPRS850	190	8	1	27.69	19.12	38.45	PASS
EGPRS850	190	8	2	26.63	18.06	38.45	PASS
EGPRS850	190	8	3	24.43	15.86	38.45	PASS
EGPRS850	190	8	4	23.10	14.53	38.45	PASS
EGPRS850	251	8	1	27.83	19.26	38.45	PASS
EGPRS850	251	8	2	26.76	18.19	38.45	PASS
EGPRS850	251	8	3	24.61	16.04	38.45	PASS
EGPRS850	251	8	4	23.24	14.67	38.45	PASS
EGPRS1900	512	2	1	24.89	23.79	33.00	PASS
EGPRS1900	512	2	2	23.63	22.53	33.00	PASS
EGPRS1900	512	2	3	21.50	20.4	33.00	PASS
EGPRS1900	512	2	4	20.18	19.08	33.00	PASS
EGPRS1900	661	2	1	25.35	24.25	33.00	PASS
EGPRS1900	661	2	2	24.12	23.02	33.00	PASS
EGPRS1900	661	2	3	21.99	20.89	33.00	PASS
EGPRS1900	661	2	4	20.63	19.53	33.00	PASS
EGPRS1900	810	2	1	25.60	24.5	33.00	PASS
EGPRS1900	810	2	2	24.36	23.26	33.00	PASS
EGPRS1900	810	2	3	22.19	21.09	33.00	PASS
EGPRS1900	810	2	4	20.89	19.79	33.00	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For GSM1900)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For GSM850)


Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

Band	Channel	PCL	Result(dB)	Limit(dB)	Verdict
GSM850	190	5	2.67	13	PASS
EGPRS850	190	8	5.49	13	PASS
GSM1900	661	0	2.67	13	PASS
EGPRS1900	661	2	5.91	13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.


Test Graphs

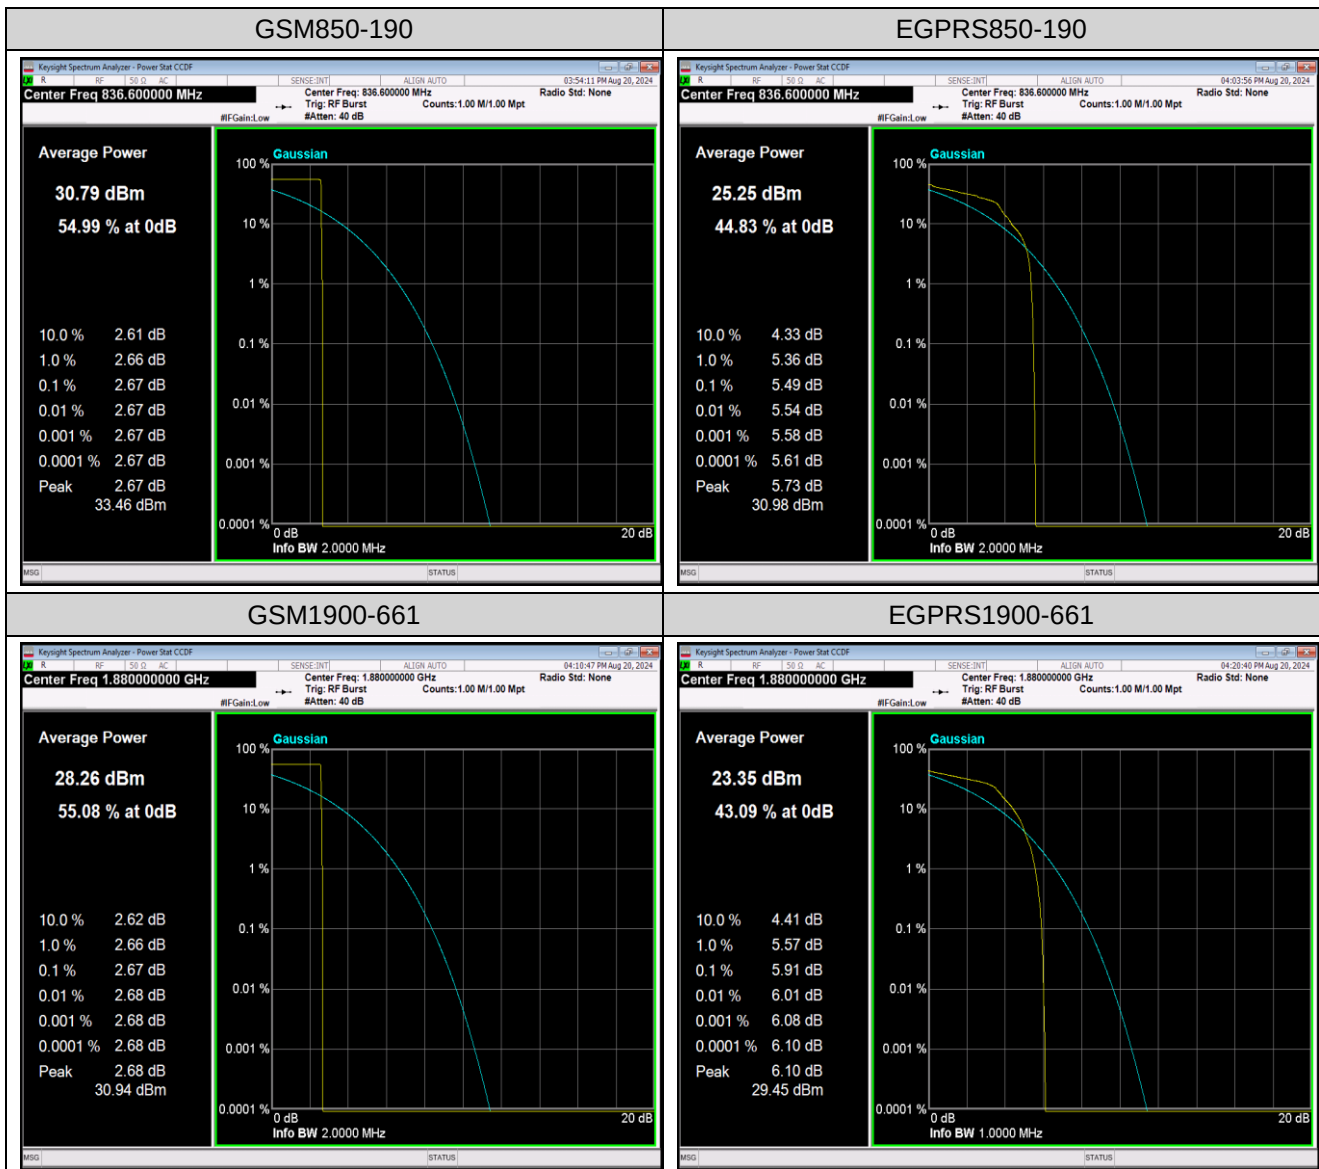


Appendix C: 26dB Bandwidth and Occupied Bandwidth**Test Result**

Band	Channel	PCL	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	5	0.24581	0.3149	---	PASS
GSM850	190	5	0.24553	0.3186	---	PASS
GSM850	251	5	0.24508	0.3132	---	PASS
EGPRS850	128	8	0.24924	0.3212	---	PASS
EGPRS850	190	8	0.25196	0.3121	---	PASS
EGPRS850	251	8	0.24950	0.3225	---	PASS
GSM1900	512	0	0.24691	0.3086	---	PASS
GSM1900	661	0	0.24706	0.3192	---	PASS
GSM1900	810	0	0.24492	0.3067	---	PASS
EGPRS1900	512	2	0.24809	0.3169	---	PASS
EGPRS1900	661	2	0.25121	0.3188	---	PASS
EGPRS1900	810	2	0.24824	0.3129	---	PASS

Test Graphs

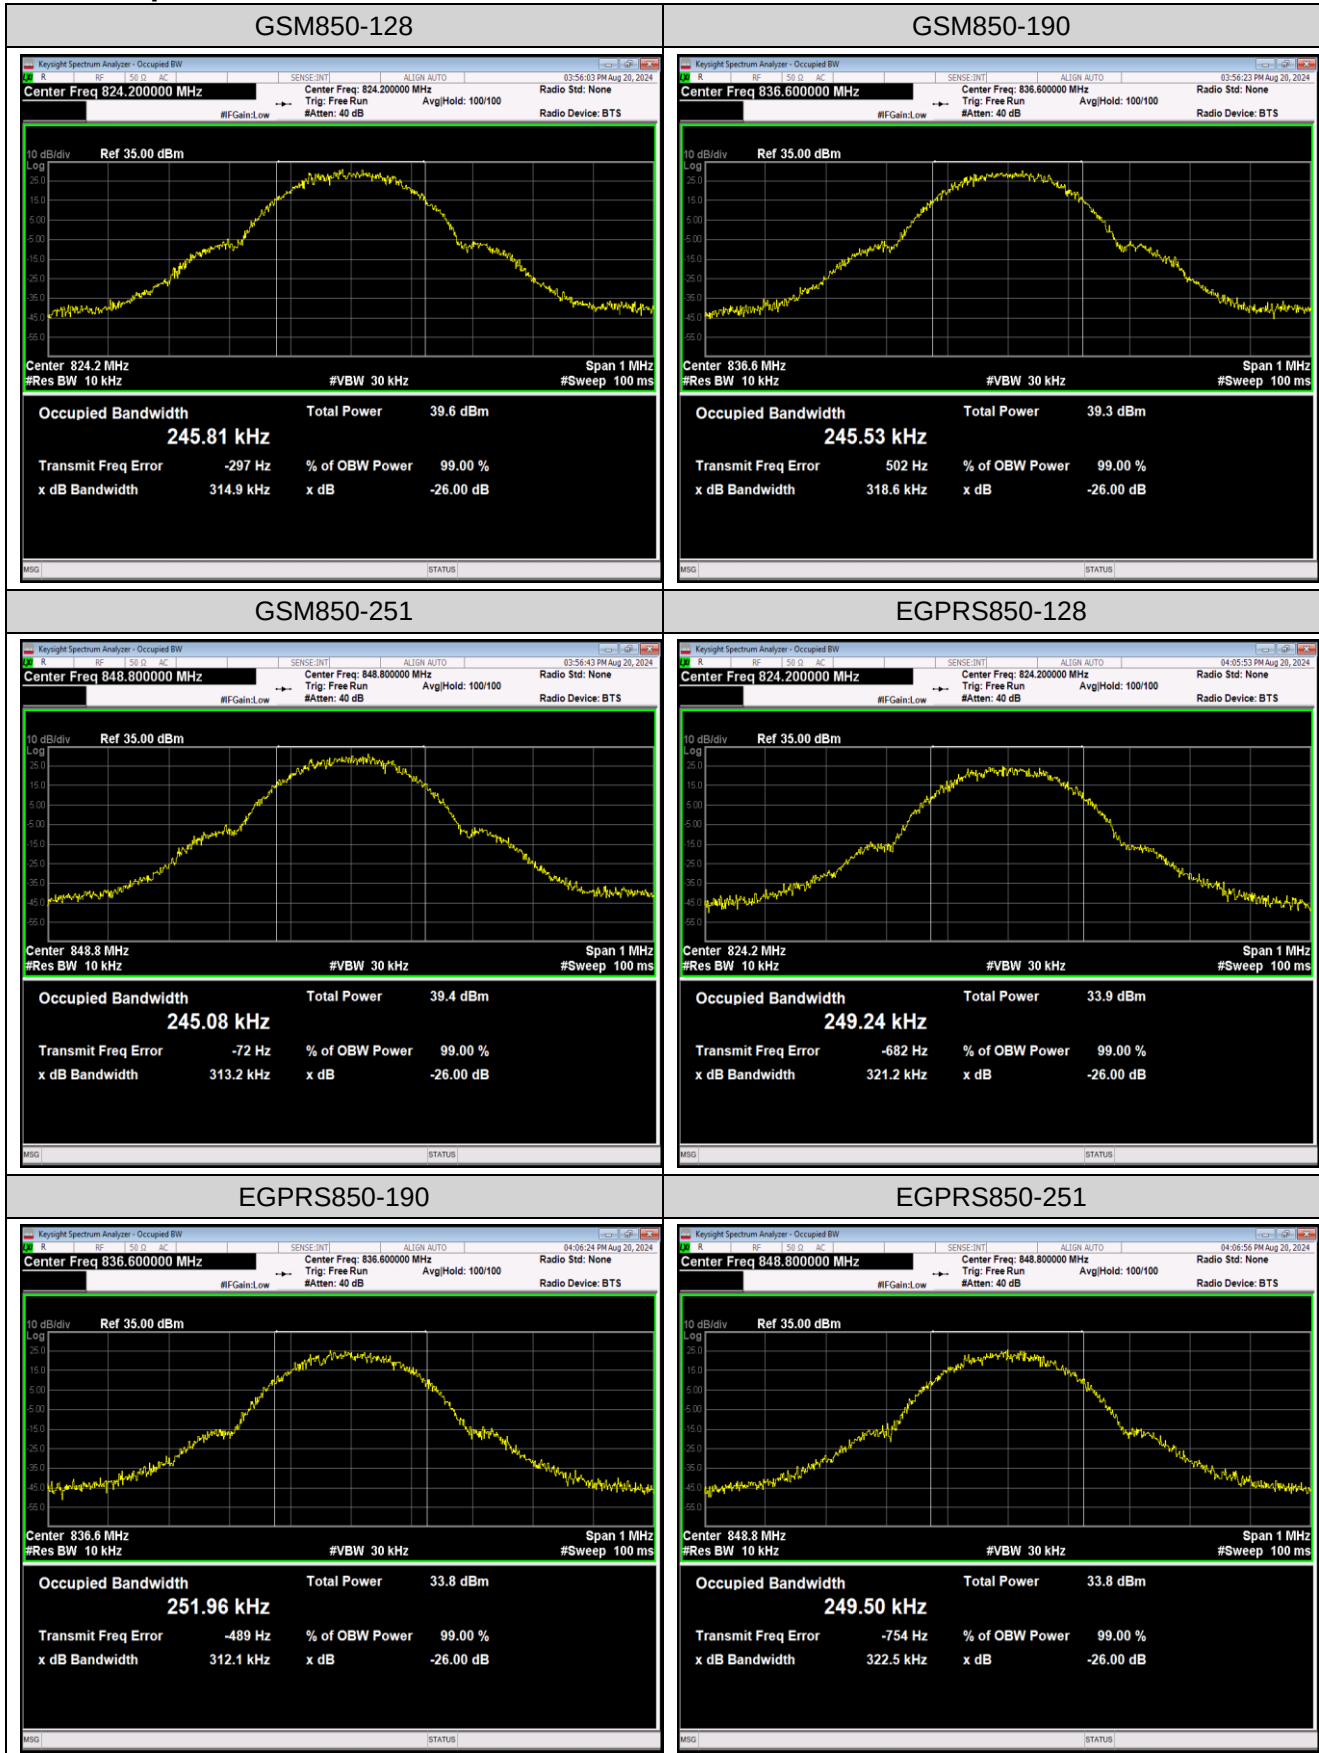

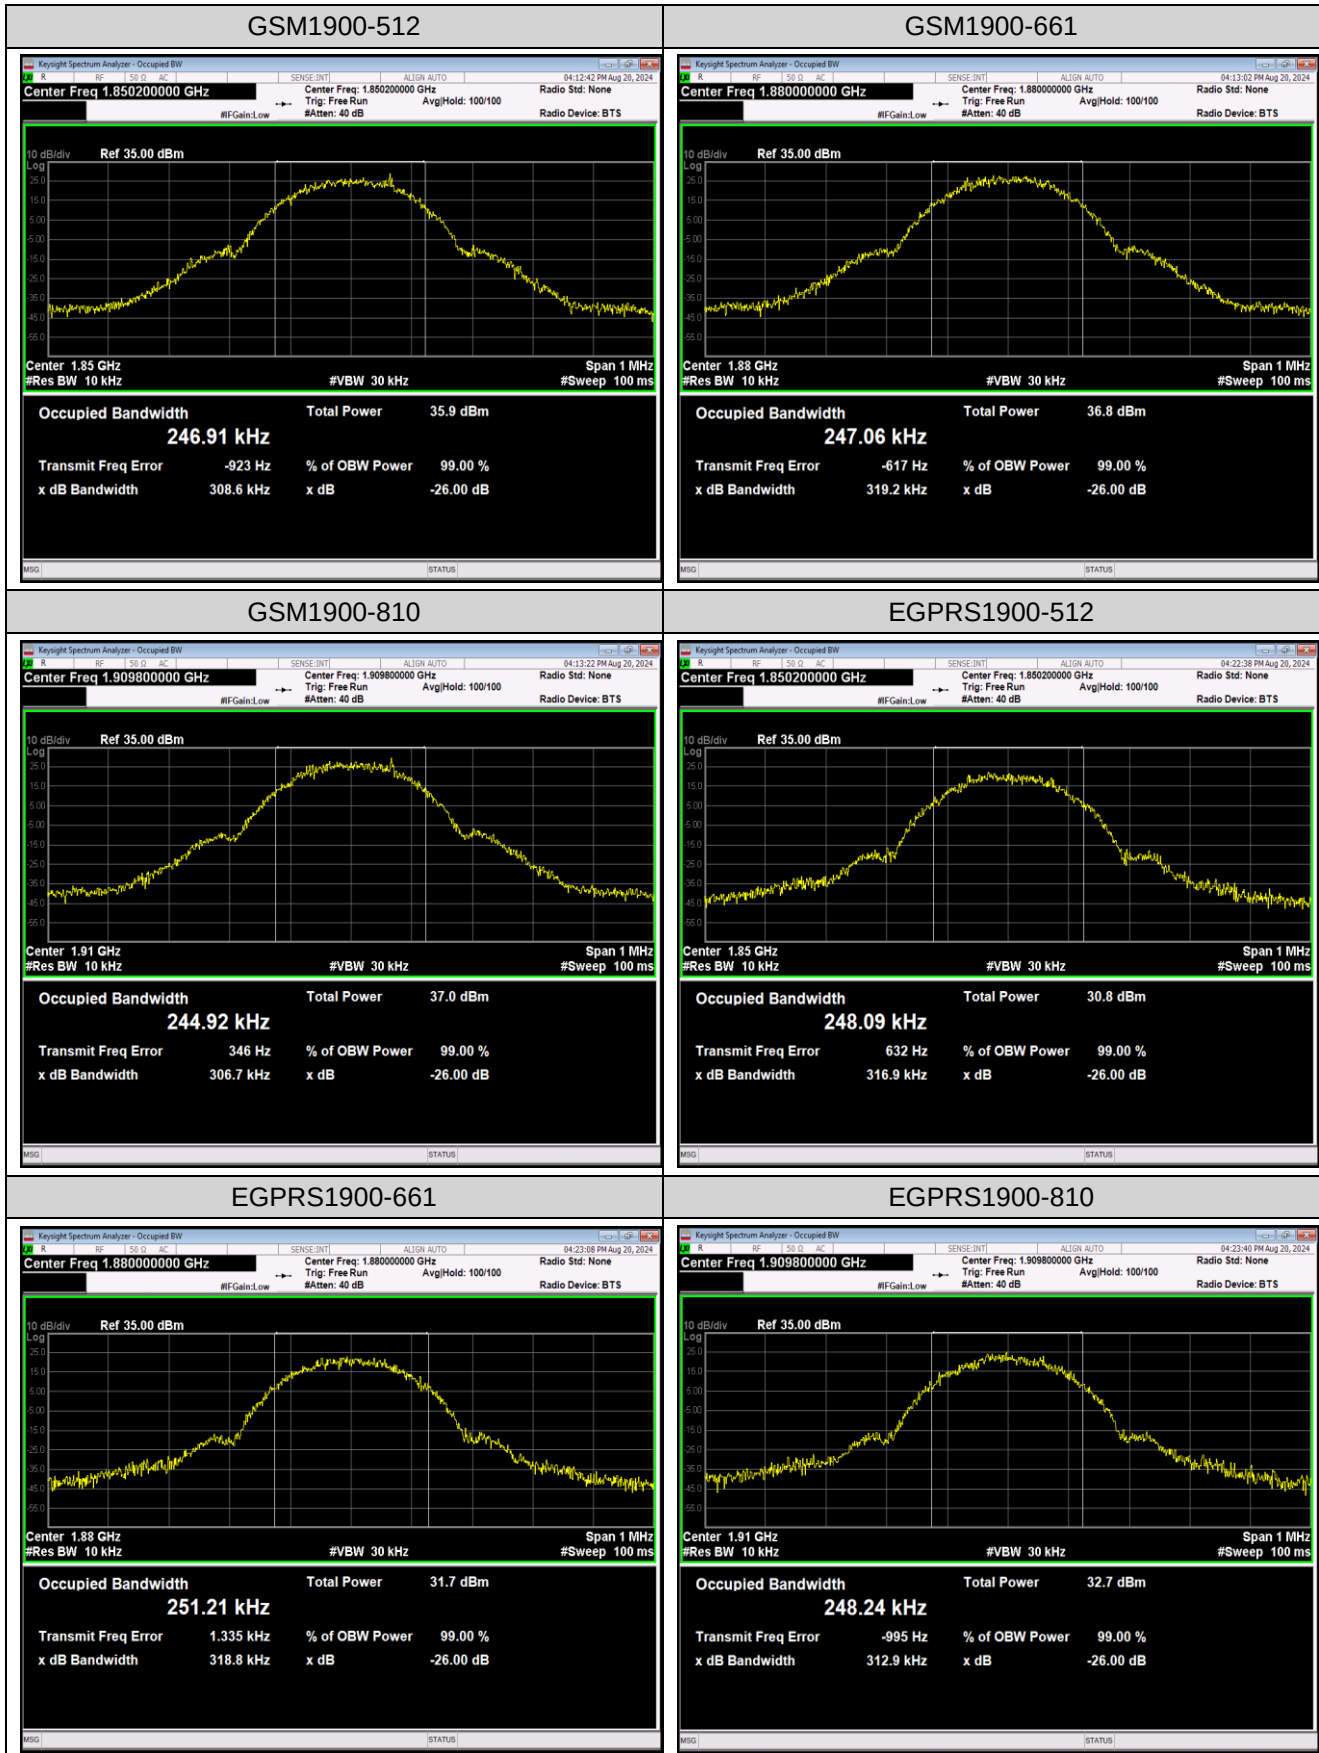



Appendix D: Band Edge

Test Result

Band	Channel	PCL	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	5	823.98	-25.05	-13	PASS
GSM850	251	5	849.02	-24.38	-13	PASS
EGPRS850	128	8	823.99	-33.37	-13	PASS
EGPRS850	251	8	849.00	-32.94	-13	PASS
GSM1900	512	0	1850.00	-27.14	-13	PASS
GSM1900	810	0	1910.02	-26.18	-13	PASS
EGPRS1900	512	2	1849.97	-36.90	-13	PASS
EGPRS1900	810	2	1910.01	-36.21	-13	PASS

Test Graphs

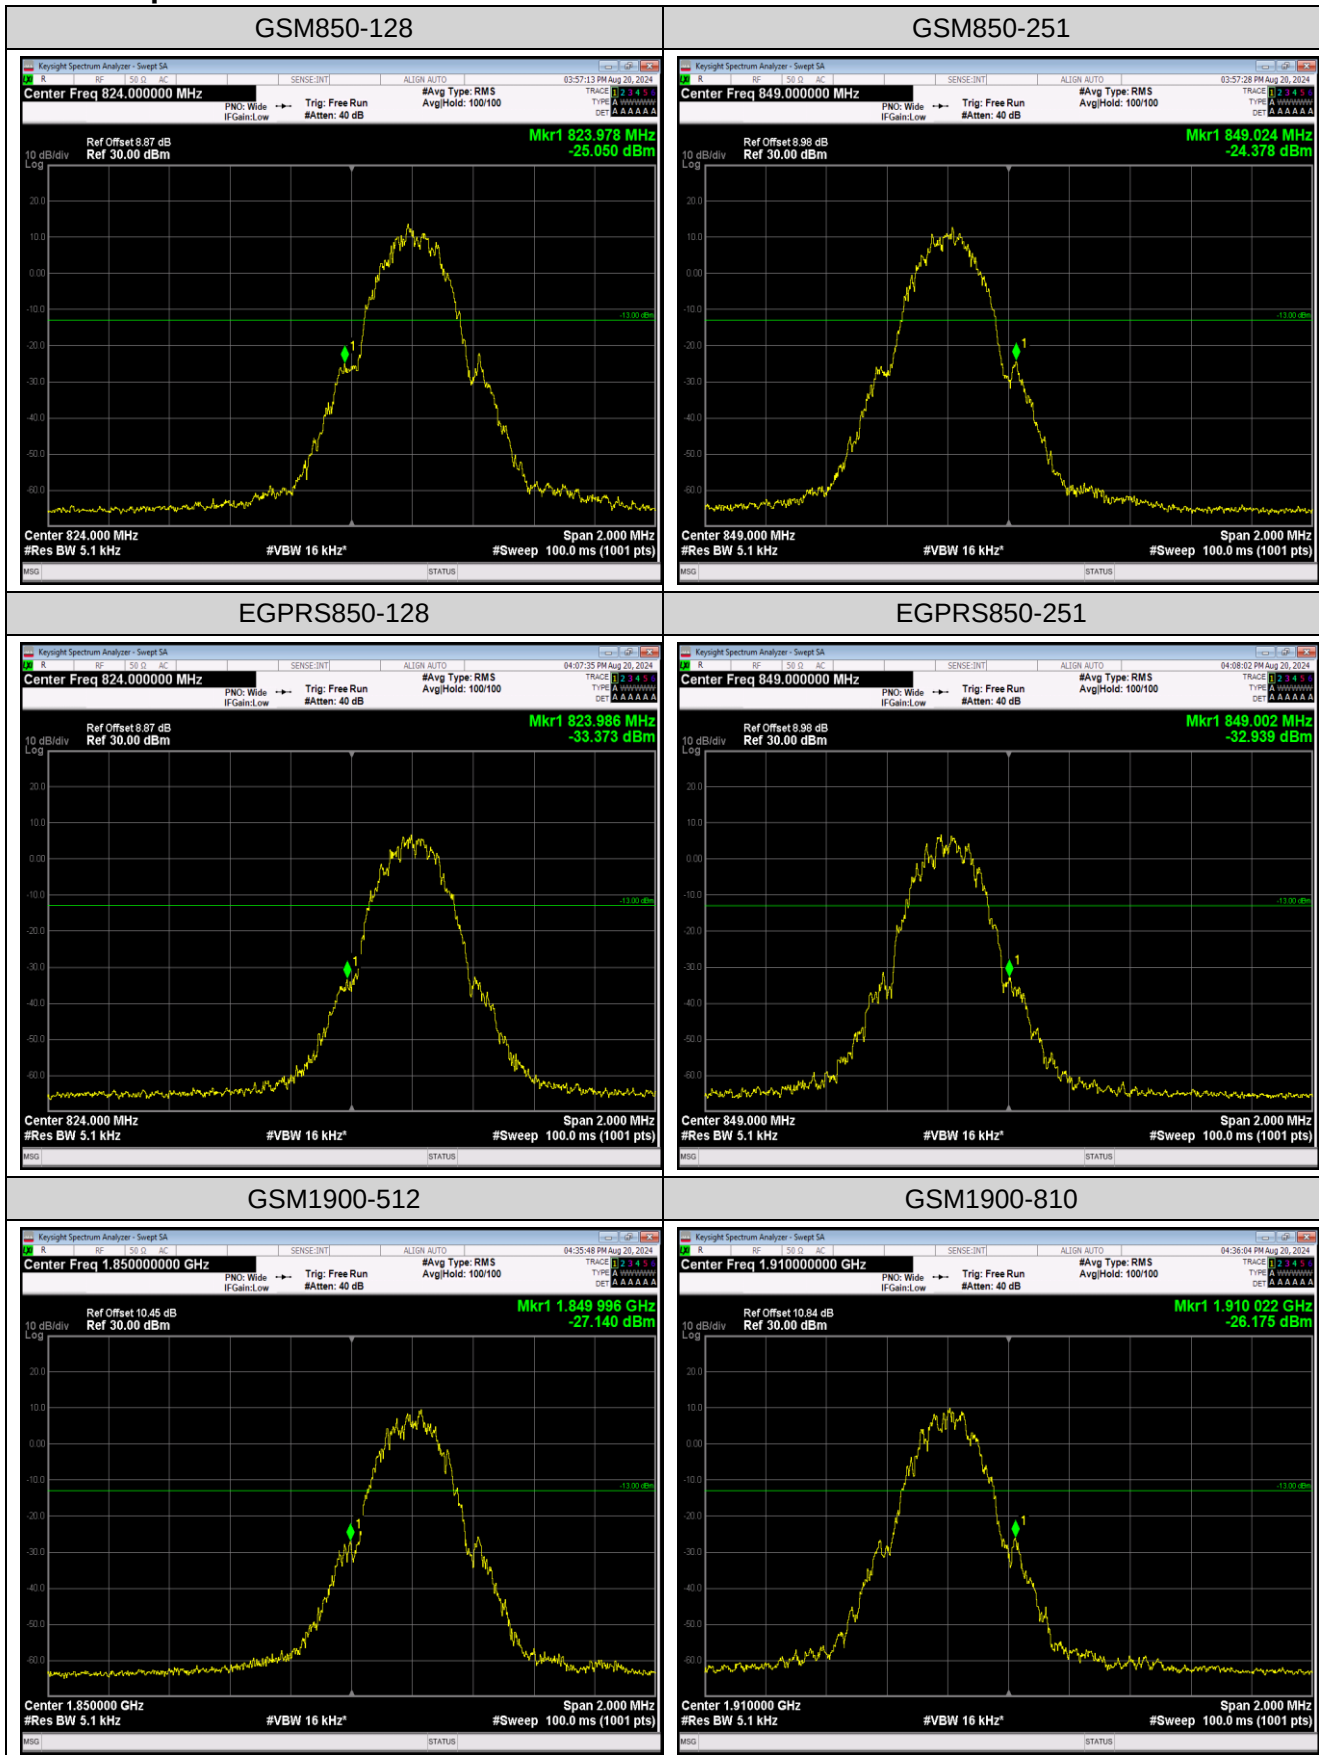

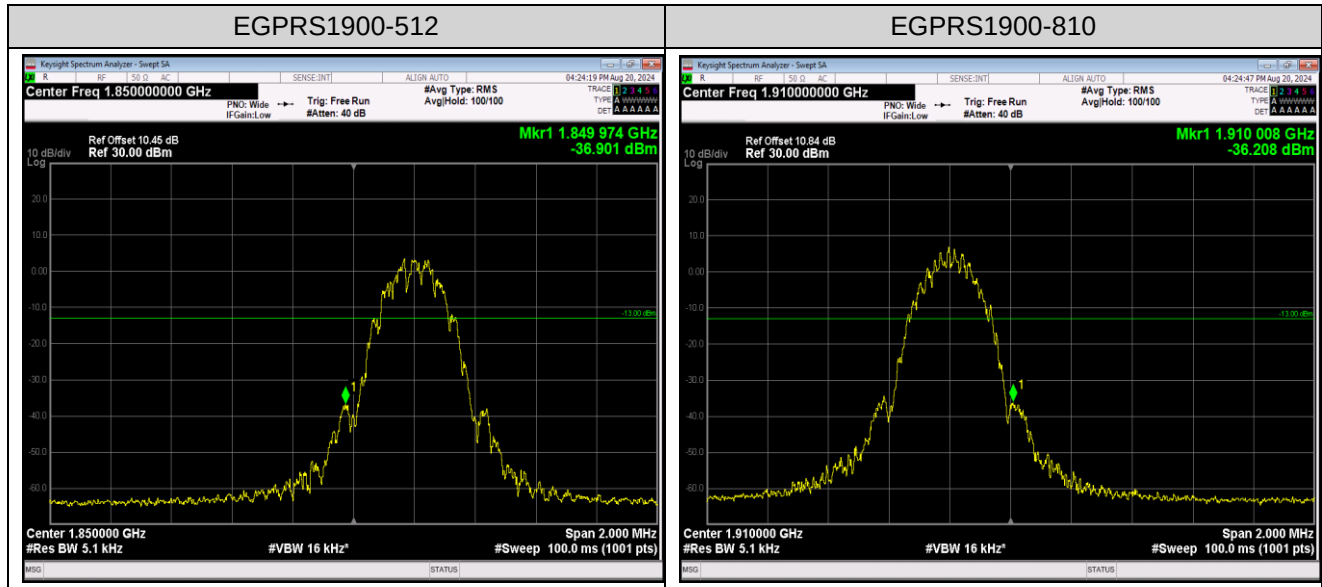


Appendix E: Conducted Spurious Emission

Test Result

Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-53.94	-33	PASS
GSM850	128	5	0.15~30MHz	0.15	-41.64	-13	PASS
GSM850	128	5	30~1000MHz	990.91	-44.05	-13	PASS
GSM850	128	5	1000~10000MHz	1648.3	-28.9	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-54.93	-33	PASS
GSM850	190	5	0.15~30MHz	0.16	-42.57	-13	PASS
GSM850	190	5	30~1000MHz	984.87	-44.89	-13	PASS
GSM850	190	5	1000~10000MHz	1673.2	-30.25	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-53.99	-33	PASS
GSM850	251	5	0.15~30MHz	0.15	-41.55	-13	PASS
GSM850	251	5	30~1000MHz	501.58	-45.28	-13	PASS
GSM850	251	5	1000~10000MHz	1697.8	-30.9	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-53.76	-43	PASS
GSM1900	512	0	0.15~30MHz	0.15	-38.76	-23	PASS
GSM1900	512	0	30~1000MHz	880.37	-46.09	-13	PASS
GSM1900	512	0	1000~18000MHz	16947.7	-21.54	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-53.21	-43	PASS
GSM1900	661	0	0.15~30MHz	0.15	-42.61	-23	PASS
GSM1900	661	0	30~1000MHz	774.99	-45.57	-13	PASS
GSM1900	661	0	1000~18000MHz	16203.67	-22.09	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-53.17	-43	PASS
GSM1900	810	0	0.15~30MHz	0.15	-43.13	-23	PASS
GSM1900	810	0	30~1000MHz	791.74	-45.21	-13	PASS
GSM1900	810	0	1000~18000MHz	16204.8	-22.34	-13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

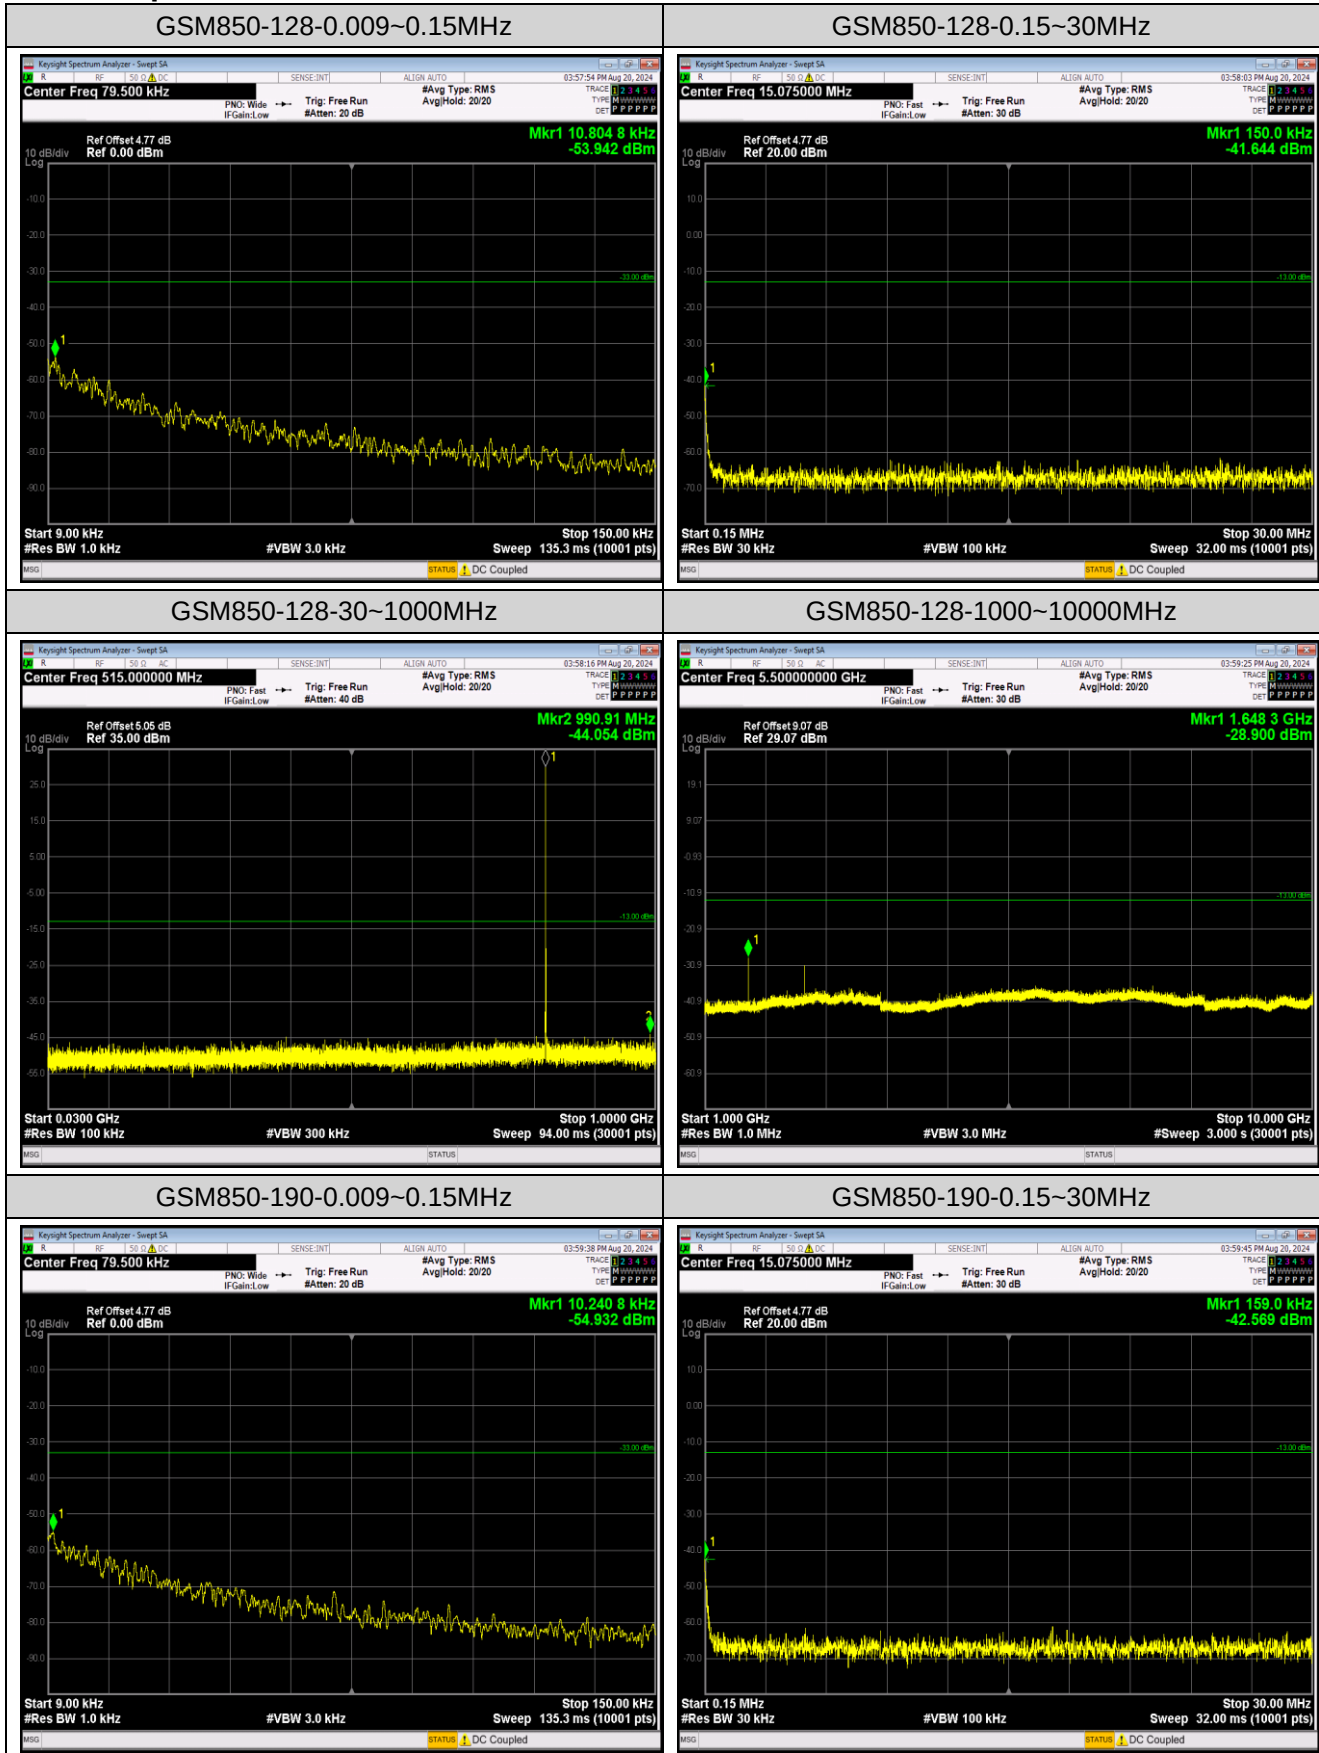



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2407073

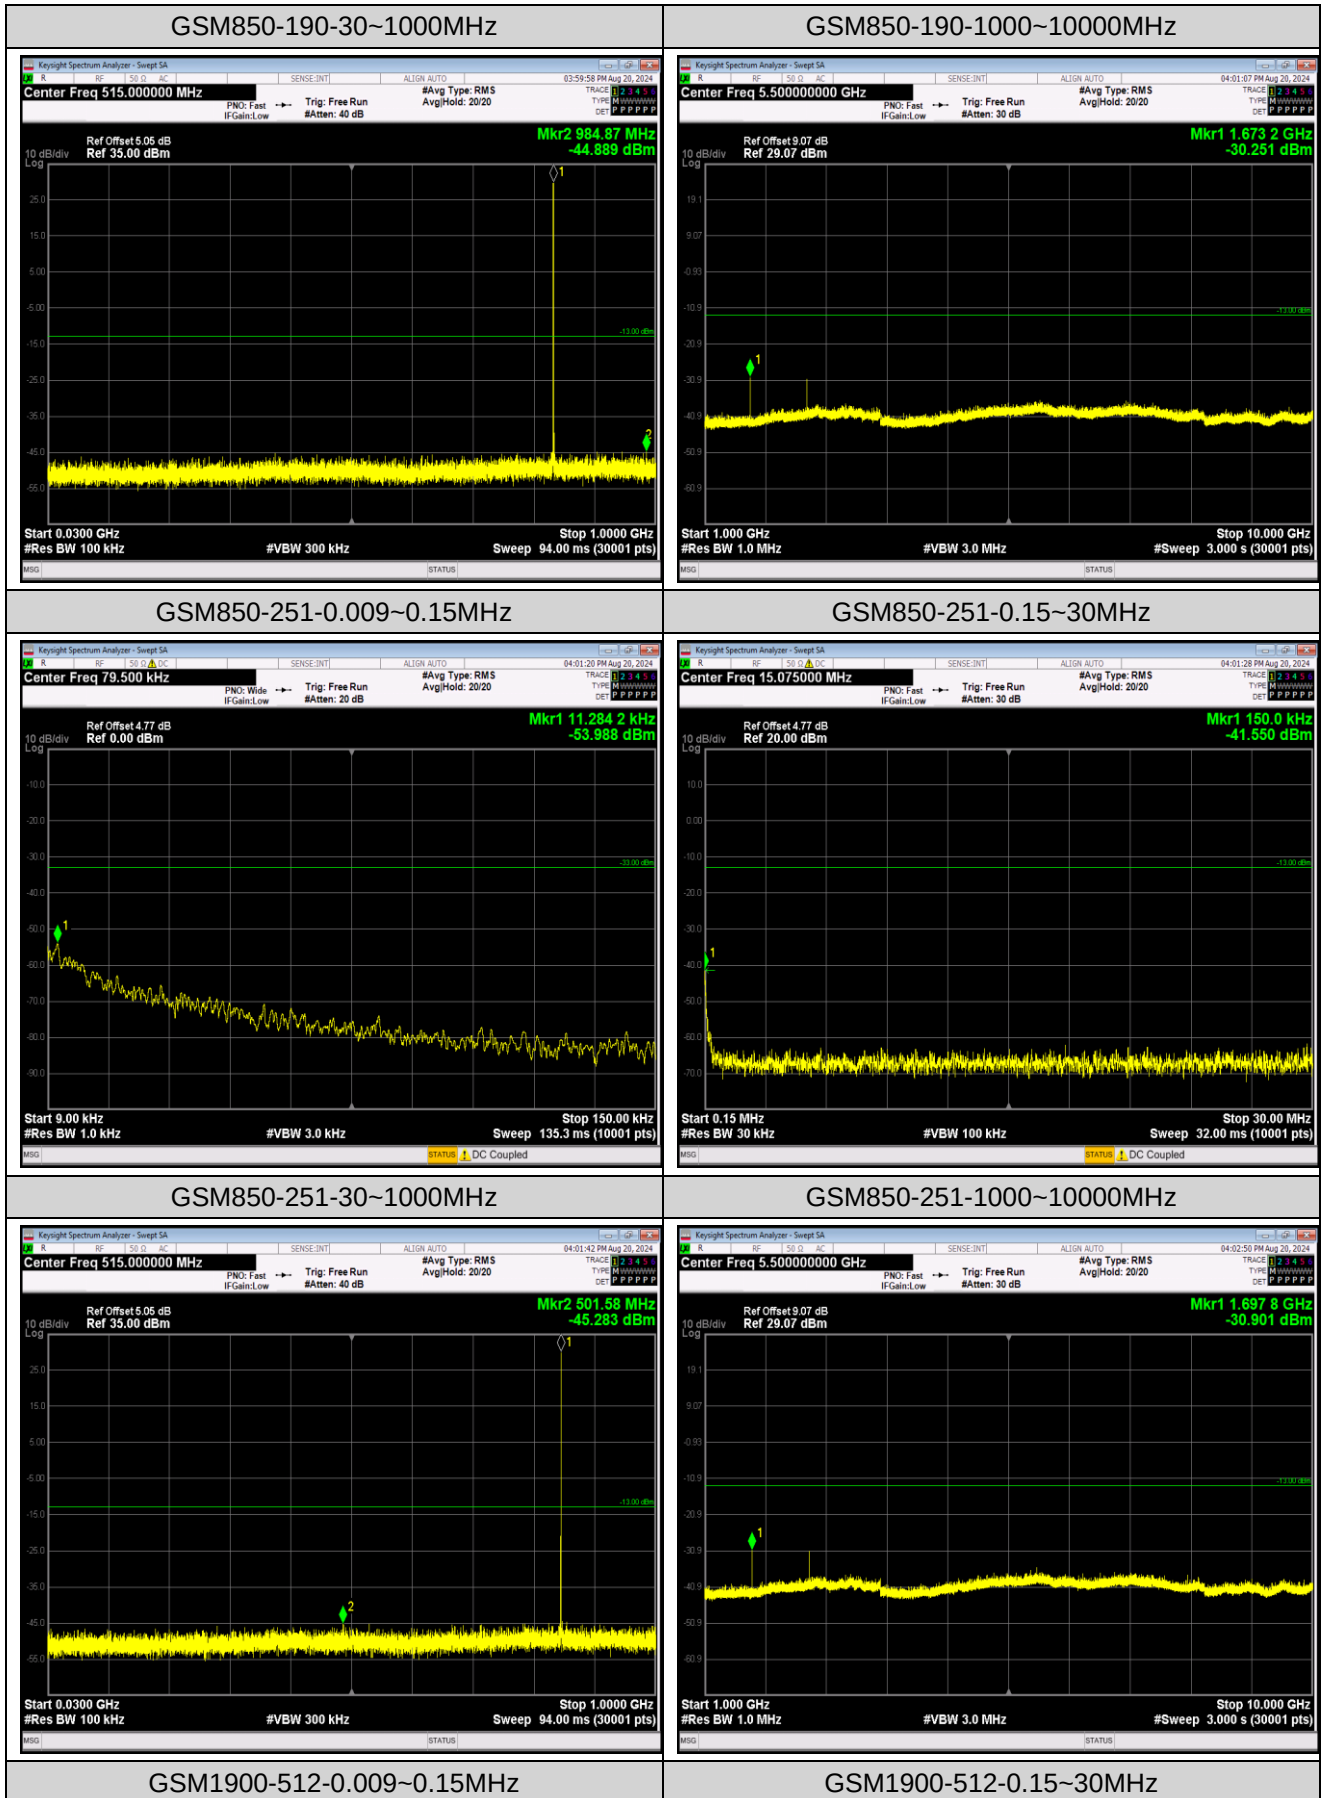

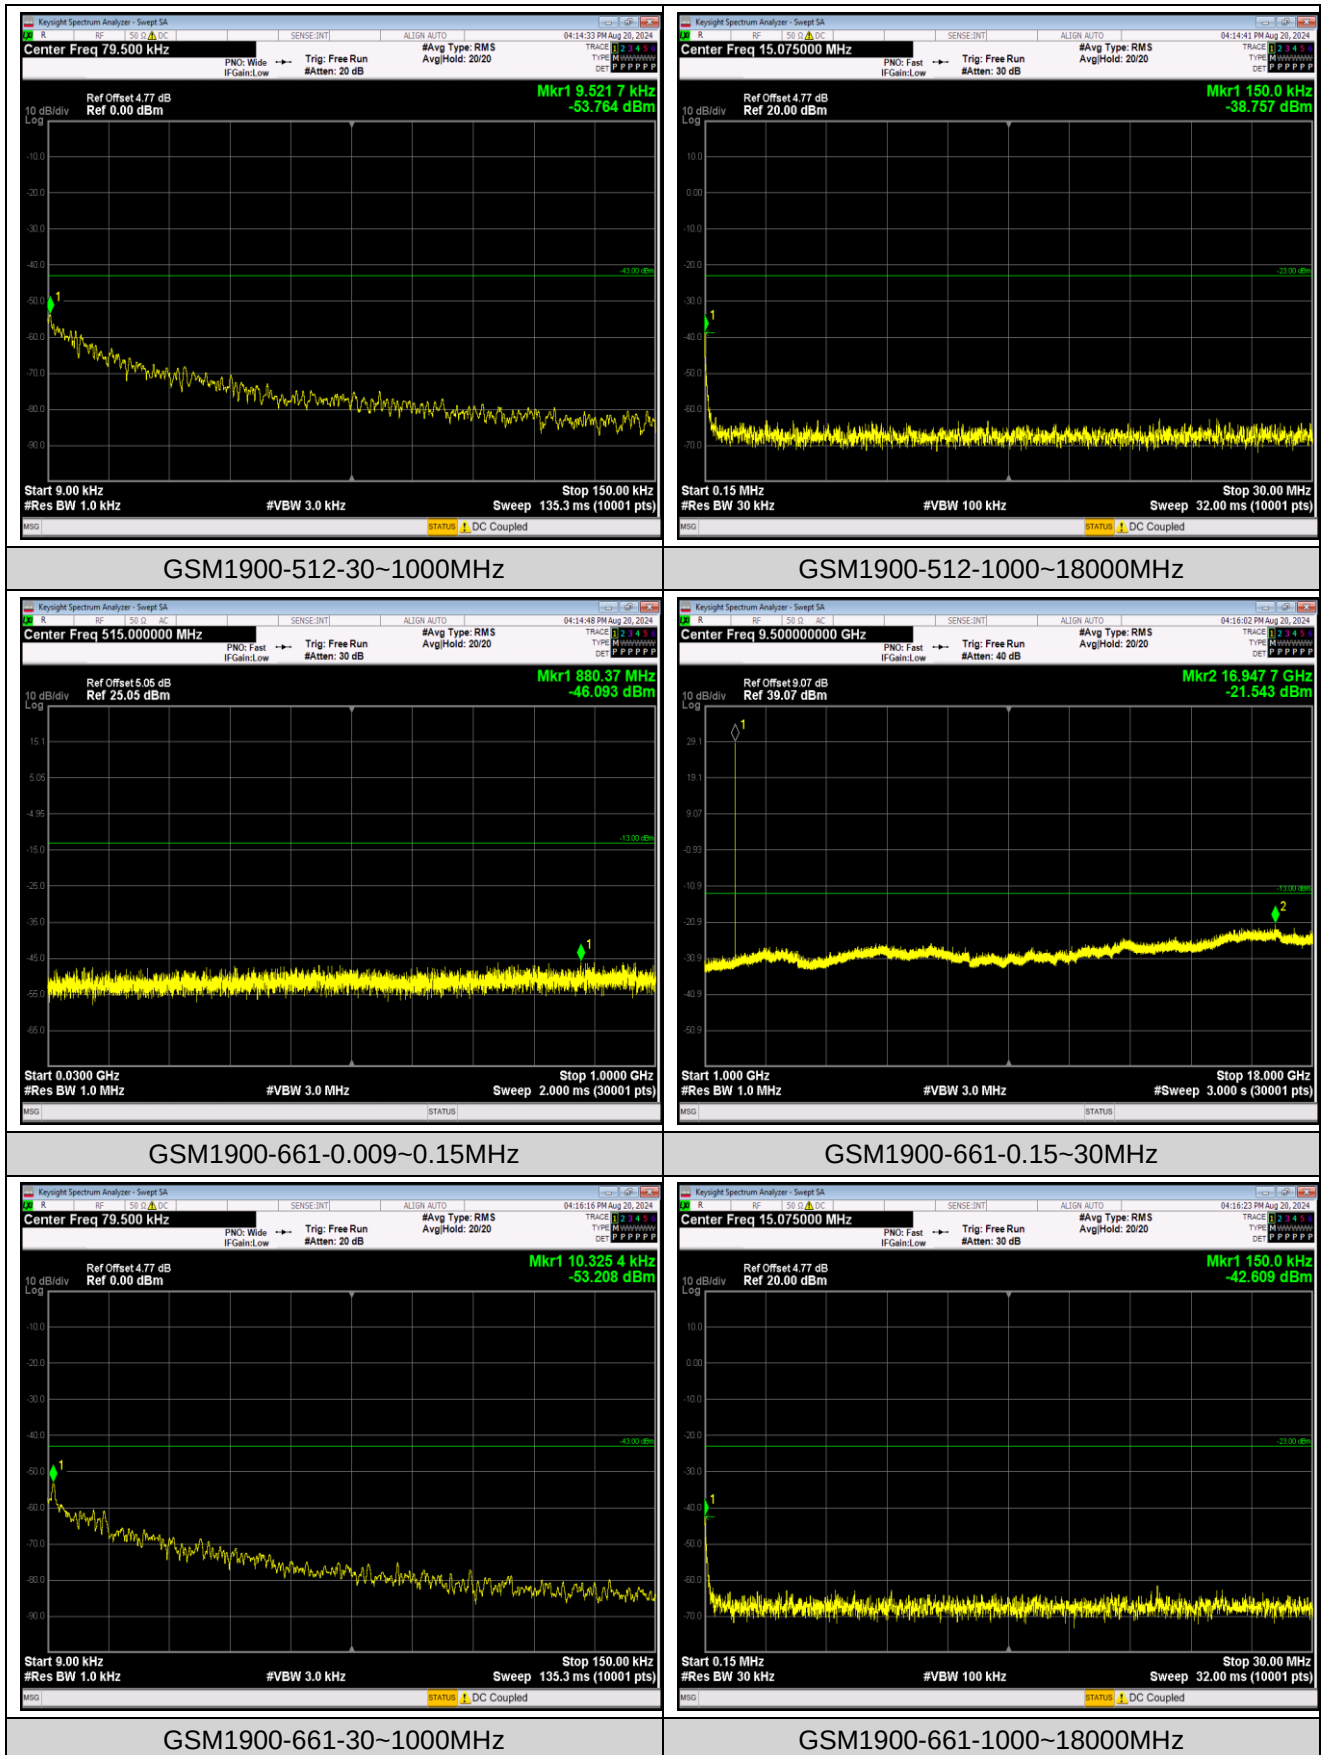

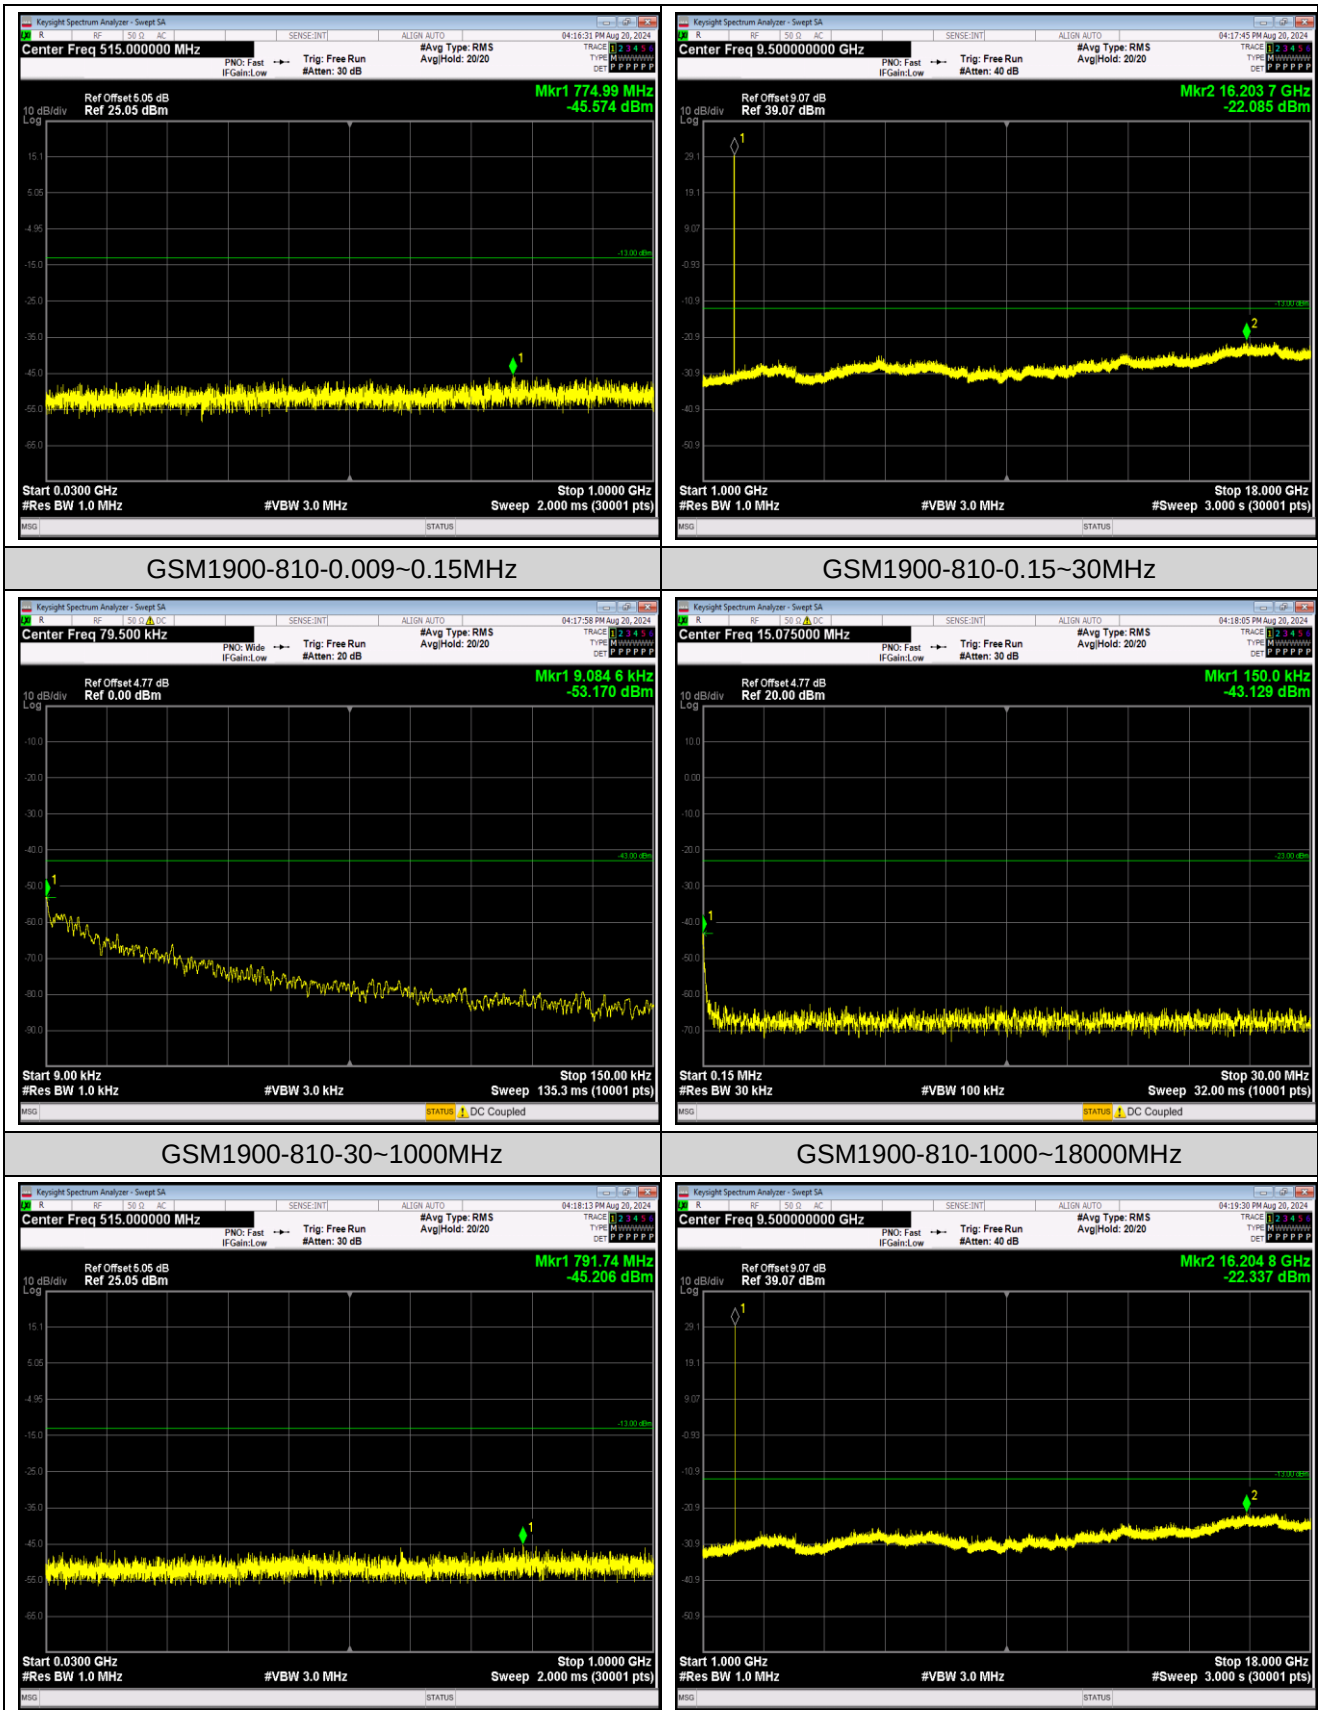

Appendix F: Frequency Stability

Test Result

Reference Frequency: GSM850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-8.68	-0.010375	±2.5	Pass
	-20	-5.97	-0.007136		
	-10	-3.91	-0.004674		
	0	-4.49	-0.005367		
	10	-5.42	-0.006479		
	20	-0.13	-0.000155		
	30	3.58	0.004279		
	40	-1.52	-0.001817		
	50	-4.10	-0.004901		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-7.33	-0.008762	±2.5	Pass
	3.87	-9.20	-0.010997		
	4.45	-7.88	-0.009419		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-2.39	-0.002857	±2.5	Pass
	-20	-4.39	-0.005247		
	-10	1.10	0.001315		
	0	3.75	0.004482		
	10	2.65	0.003168		
	20	2.78	0.003323		
	30	4.75	0.005678		
	40	6.07	0.007256		
	50	0.06	0.000072		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-1.55	-0.001853	±2.5	Pass
	3.87	0.65	0.000777		
	4.45	-2.10	-0.002510		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: PCS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-18.50	-0.009840	Within authorized band for PCS 1900	Pass
	-20	-15.79	-0.008399		
	-10	-20.63	-0.010973		
	0	-16.76	-0.008915		
	10	-17.69	-0.009410		
	20	-20.70	-0.011011		
	30	-14.75	-0.007846		
	40	-12.62	-0.006713		
	50	-8.88	-0.004723		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-17.89	-0.009516	Within authorized band for PCS 1900	Pass
	3.87	-19.44	-0.010340		
	4.45	-16.98	-0.009032		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-10.91	-0.005803	Within authorized band for PCS 1900	Pass
	-20	-13.14	-0.006989		
	-10	-11.49	-0.006112		
	0	-5.84	-0.003106		
	10	-8.81	-0.004686		
	20	-8.36	-0.004447		
	30	-10.30	-0.005479		
	40	-9.94	-0.005287		
	50	-4.00	-0.002128		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-2.32	-0.001234	Within authorized band for PCS 1900	Pass
	3.87	-9.72	-0.005170		
	4.45	-11.69	-0.006218		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
GSM850	190	PASS	PASS
EGPRS850	190	PASS	PASS
GSM1900	661	PASS	PASS
EGPRS1900	661	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

