

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Channel	PCL	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GSM850	128	5	33.58	24.53	38.45	PASS
GSM850	190	5	33.63	24.58	38.45	PASS
GSM850	251	5	33.51	24.46	38.45	PASS
GSM1900	512	0	30.26	28.76	33.00	PASS
GSM1900	661	0	30.44	28.94	33.00	PASS
GSM1900	810	0	30.27	28.77	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GPRS850	128	5	1	33.54	24.49	38.45	PASS
GPRS850	128	5	2	32.67	23.62	38.45	PASS
GPRS850	128	5	3	30.63	21.58	38.45	PASS
GPRS850	128	5	4	29.30	20.25	38.45	PASS
GPRS850	190	5	1	33.59	24.54	38.45	PASS
GPRS850	190	5	2	32.71	23.66	38.45	PASS
GPRS850	190	5	3	30.65	21.6	38.45	PASS
GPRS850	190	5	4	29.31	20.26	38.45	PASS
GPRS850	251	5	1	33.47	24.42	38.45	PASS
GPRS850	251	5	2	32.59	23.54	38.45	PASS
GPRS850	251	5	3	30.55	21.5	38.45	PASS
GPRS850	251	5	4	29.22	20.17	38.45	PASS
GPRS1900	512	0	1	30.24	28.74	33.00	PASS
GPRS1900	512	0	2	29.27	27.77	33.00	PASS
GPRS1900	512	0	3	27.20	25.7	33.00	PASS
GPRS1900	512	0	4	25.99	24.49	33.00	PASS
GPRS1900	661	0	1	30.41	28.91	33.00	PASS
GPRS1900	661	0	2	29.43	27.93	33.00	PASS
GPRS1900	661	0	3	27.36	25.86	33.00	PASS
GPRS1900	661	0	4	26.18	24.68	33.00	PASS
GPRS1900	810	0	1	30.23	28.73	33.00	PASS
GPRS1900	810	0	2	29.27	27.77	33.00	PASS
GPRS1900	810	0	3	27.25	25.75	33.00	PASS
GPRS1900	810	0	4	26.07	24.57	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
EGPRS850	128	8	1	28.09	19.04	38.45	PASS
EGPRS850	128	8	2	26.86	17.81	38.45	PASS
EGPRS850	128	8	3	24.44	15.39	38.45	PASS
EGPRS850	128	8	4	23.00	13.95	38.45	PASS
EGPRS850	190	8	1	28.24	19.19	38.45	PASS
EGPRS850	190	8	2	27.04	17.99	38.45	PASS
EGPRS850	190	8	3	24.59	15.54	38.45	PASS
EGPRS850	190	8	4	23.25	14.2	38.45	PASS
EGPRS850	251	8	1	28.43	19.38	38.45	PASS
EGPRS850	251	8	2	27.08	18.03	38.45	PASS
EGPRS850	251	8	3	24.67	15.62	38.45	PASS
EGPRS850	251	8	4	23.32	14.27	38.45	PASS
EGPRS1900	512	2	1	26.58	25.08	33.00	PASS
EGPRS1900	512	2	2	25.68	24.18	33.00	PASS
EGPRS1900	512	2	3	23.57	22.07	33.00	PASS
EGPRS1900	512	2	4	22.55	21.05	33.00	PASS
EGPRS1900	661	2	1	26.68	25.18	33.00	PASS
EGPRS1900	661	2	2	25.63	24.13	33.00	PASS
EGPRS1900	661	2	3	23.72	22.22	33.00	PASS
EGPRS1900	661	2	4	22.69	21.19	33.00	PASS
EGPRS1900	810	2	1	26.84	25.34	33.00	PASS
EGPRS1900	810	2	2	25.86	24.36	33.00	PASS
EGPRS1900	810	2	3	23.90	22.4	33.00	PASS
EGPRS1900	810	2	4	22.86	21.36	33.00	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For GSM1900)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For GSM850)


Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

Band	Channel	PCL	Result(dB)	Limit(dB)	Verdict
GSM850	190	5	2.61	13	PASS
EGPRS850	190	8	5.52	13	PASS
GSM1900	661	0	2.61	13	PASS
EGPRS1900	661	2	5.48	13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

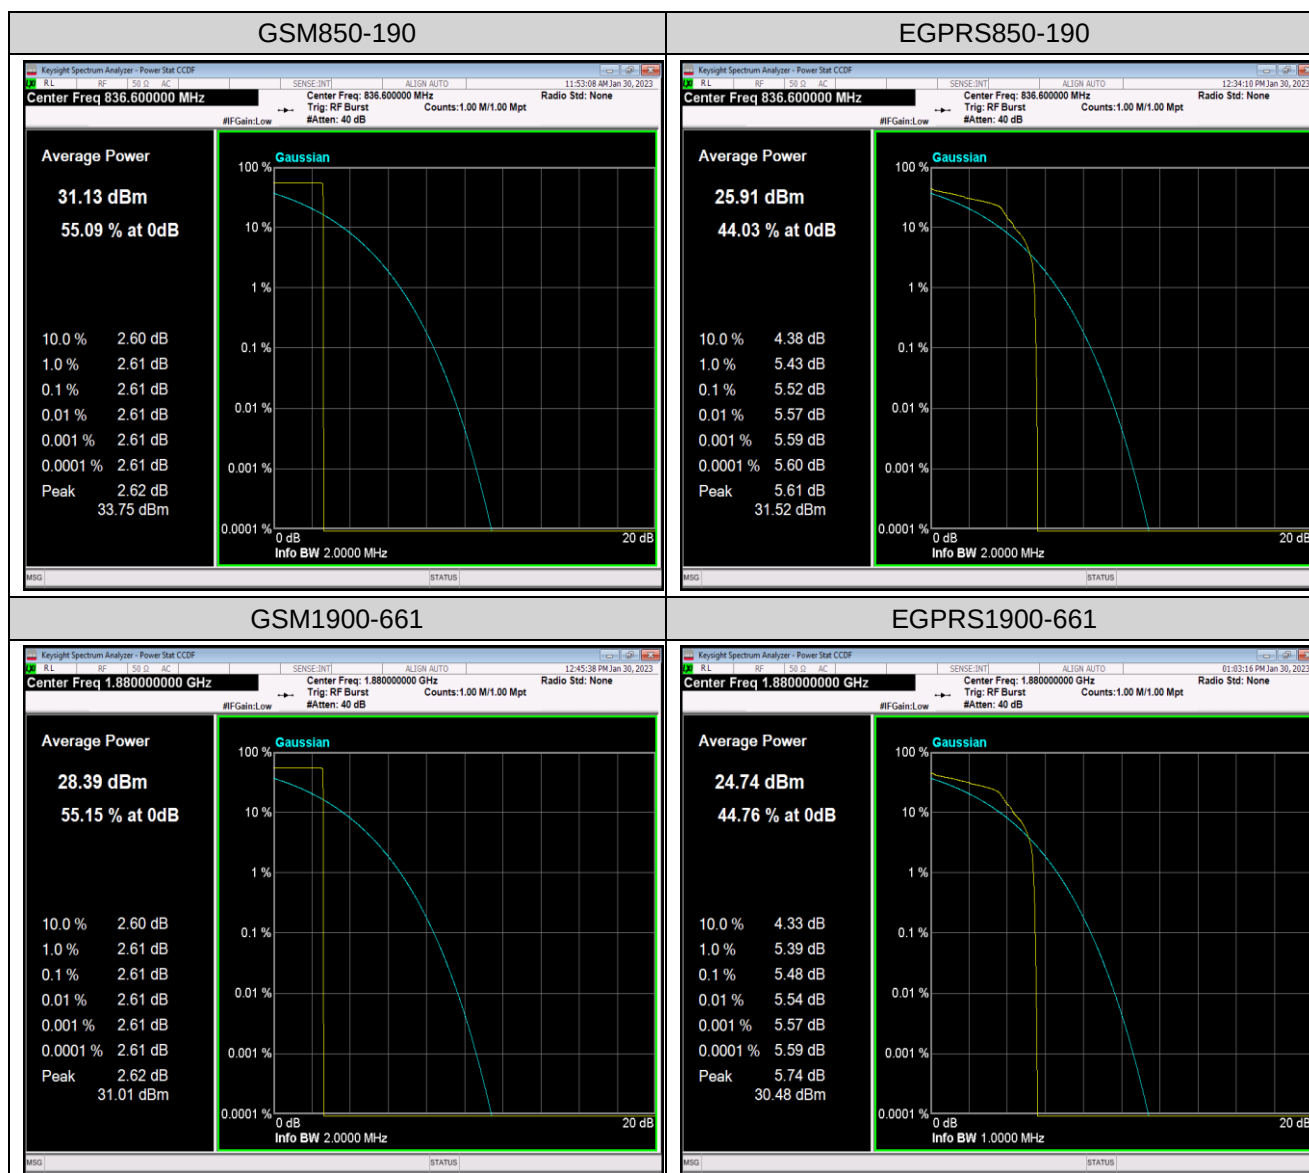



Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

Band	Channel	PCL	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	5	0.24852	0.3198	---	PASS
GSM850	190	5	0.24762	0.3163	---	PASS
GSM850	251	5	0.24469	0.3231	---	PASS
EGPRS850	128	8	0.24692	0.3141	---	PASS
EGPRS850	190	8	0.25054	0.3196	---	PASS
EGPRS850	251	8	0.24473	0.3135	---	PASS
GSM1900	512	0	0.24588	0.3131	---	PASS
GSM1900	661	0	0.24487	0.3175	---	PASS
GSM1900	810	0	0.24568	0.3180	---	PASS
EGPRS1900	512	2	0.25315	0.3219	---	PASS
EGPRS1900	661	2	0.25123	0.3191	---	PASS
EGPRS1900	810	2	0.25060	0.3143	---	PASS

Test Graphs

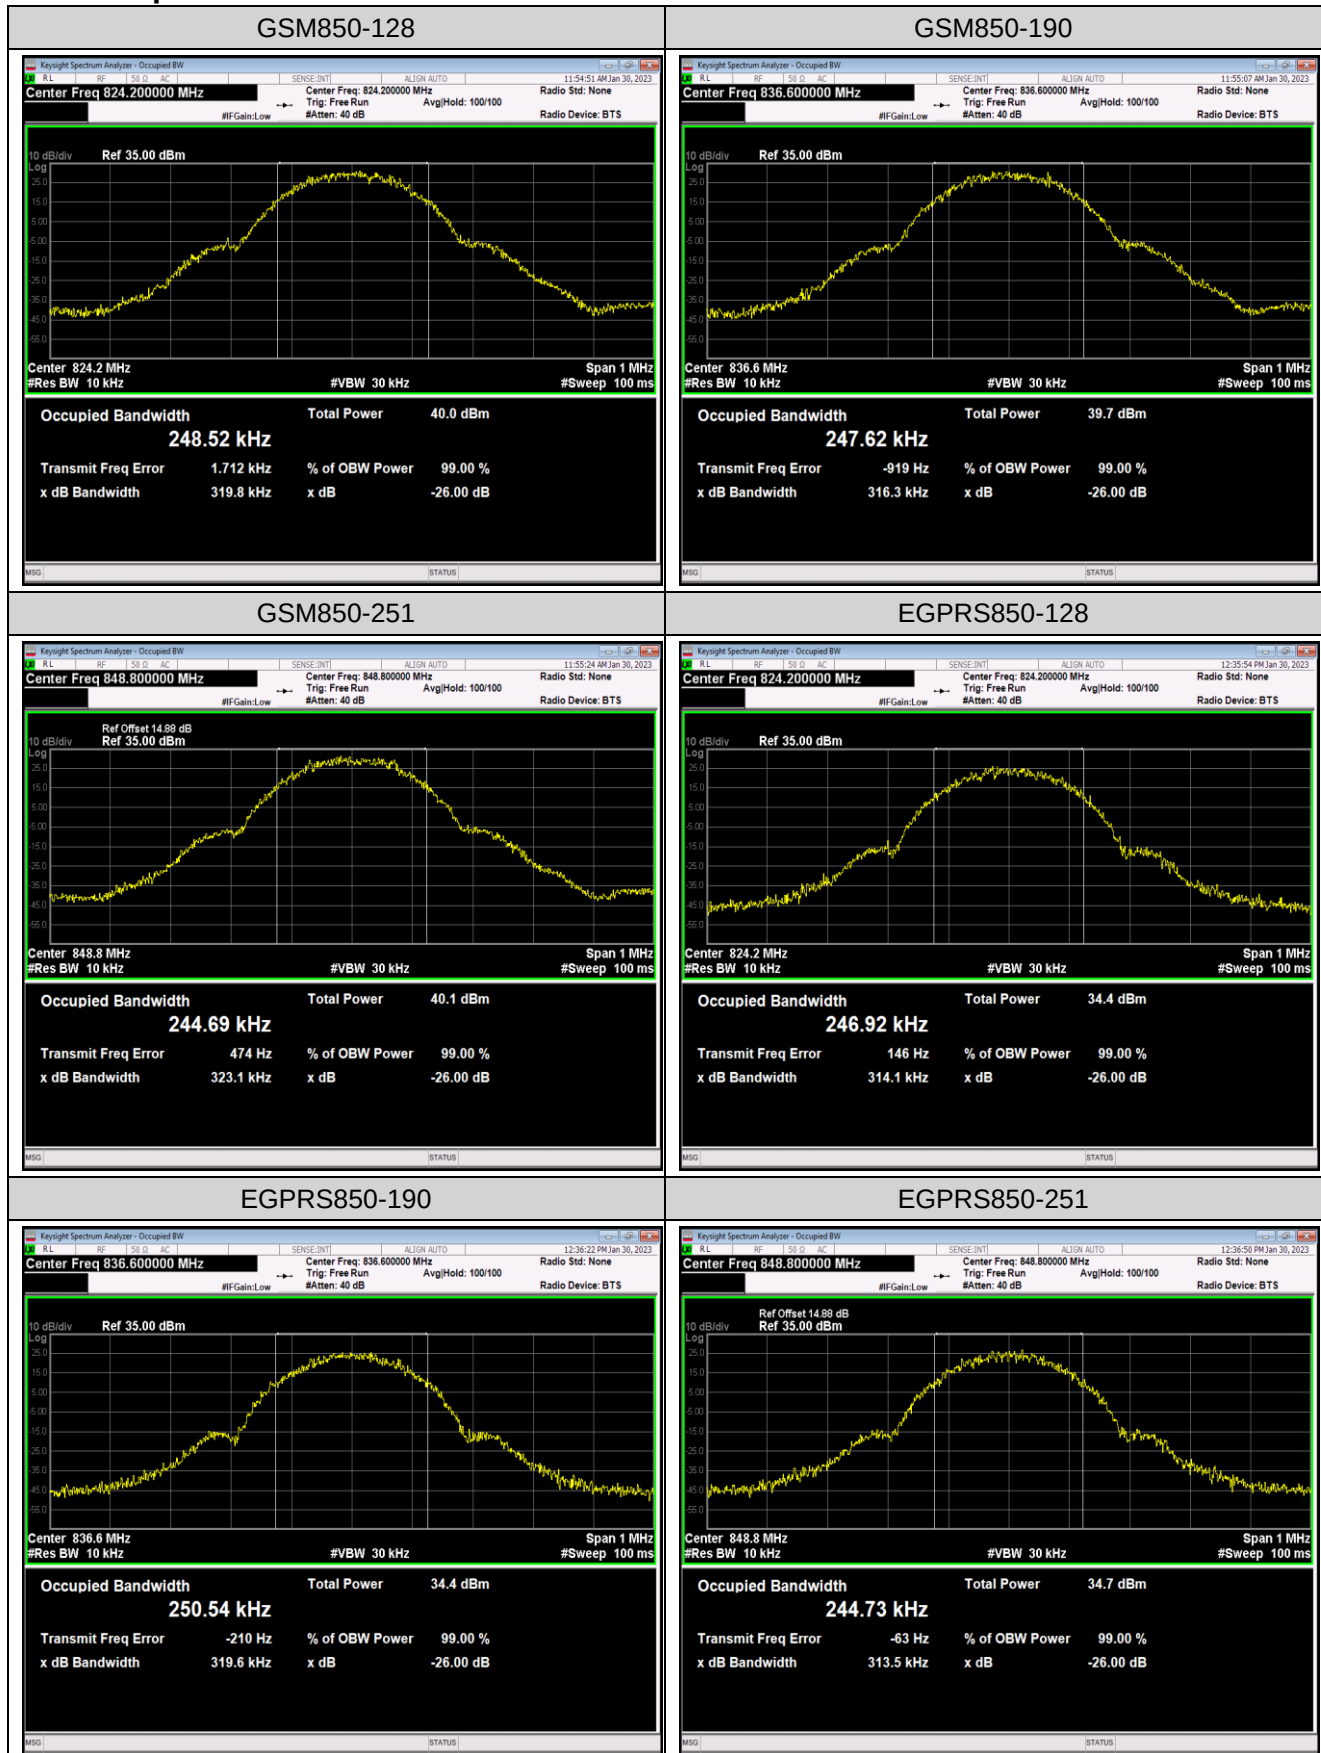

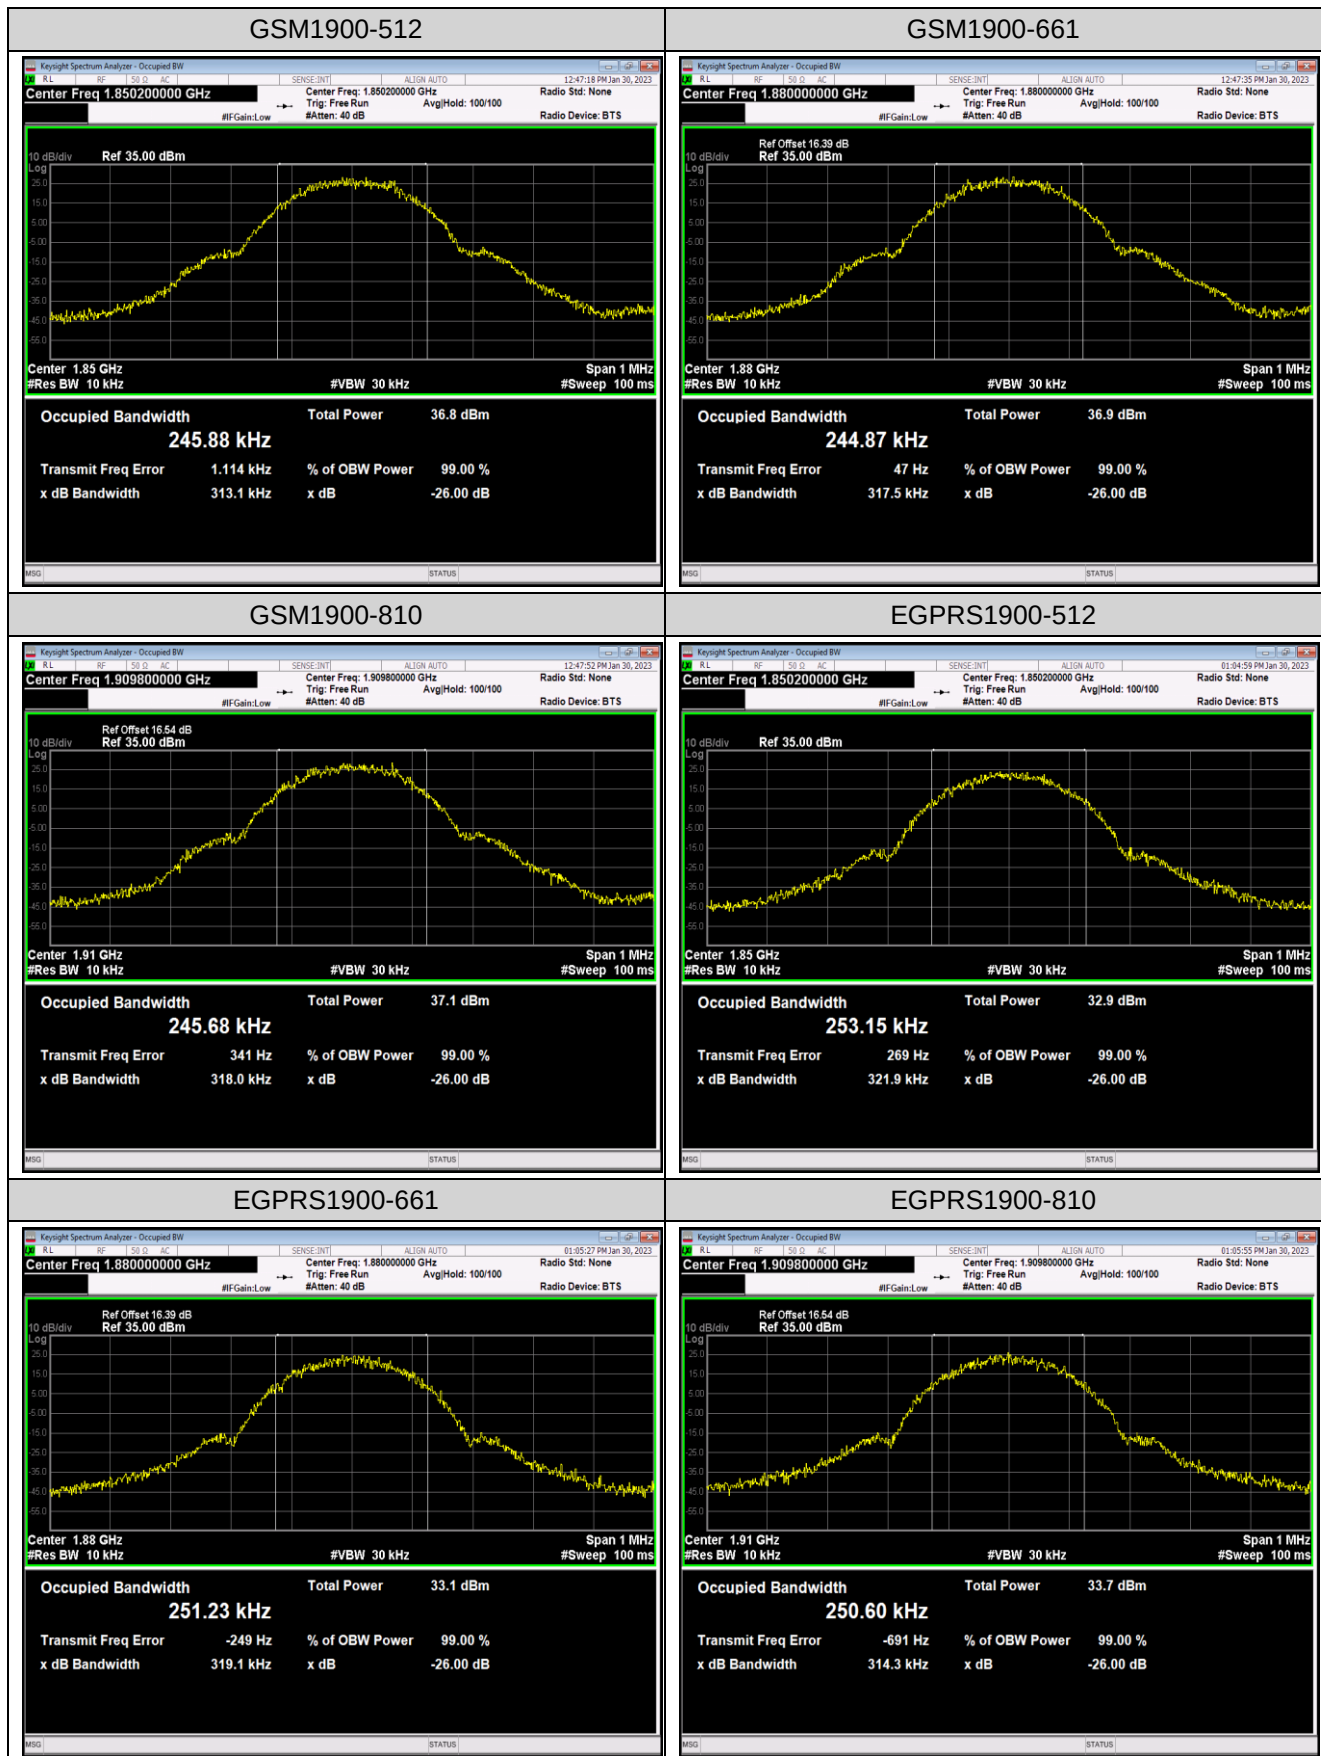



Appendix D: Band Edge

Test Result

Band	Channel	PCL	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	5	824.00	-22.40	-13	PASS
GSM850	251	5	849.02	-22.84	-13	PASS
EGPRS850	128	8	824.00	-32.67	-13	PASS
EGPRS850	251	8	849.02	-33.01	-13	PASS
GSM1900	512	0	1849.99	-26.93	-13	PASS
GSM1900	810	0	1910.02	-25.92	-13	PASS
EGPRS1900	512	2	1850.00	-22.25	-13	PASS
EGPRS1900	810	2	1910.00	-19.16	-13	PASS

Test Graphs

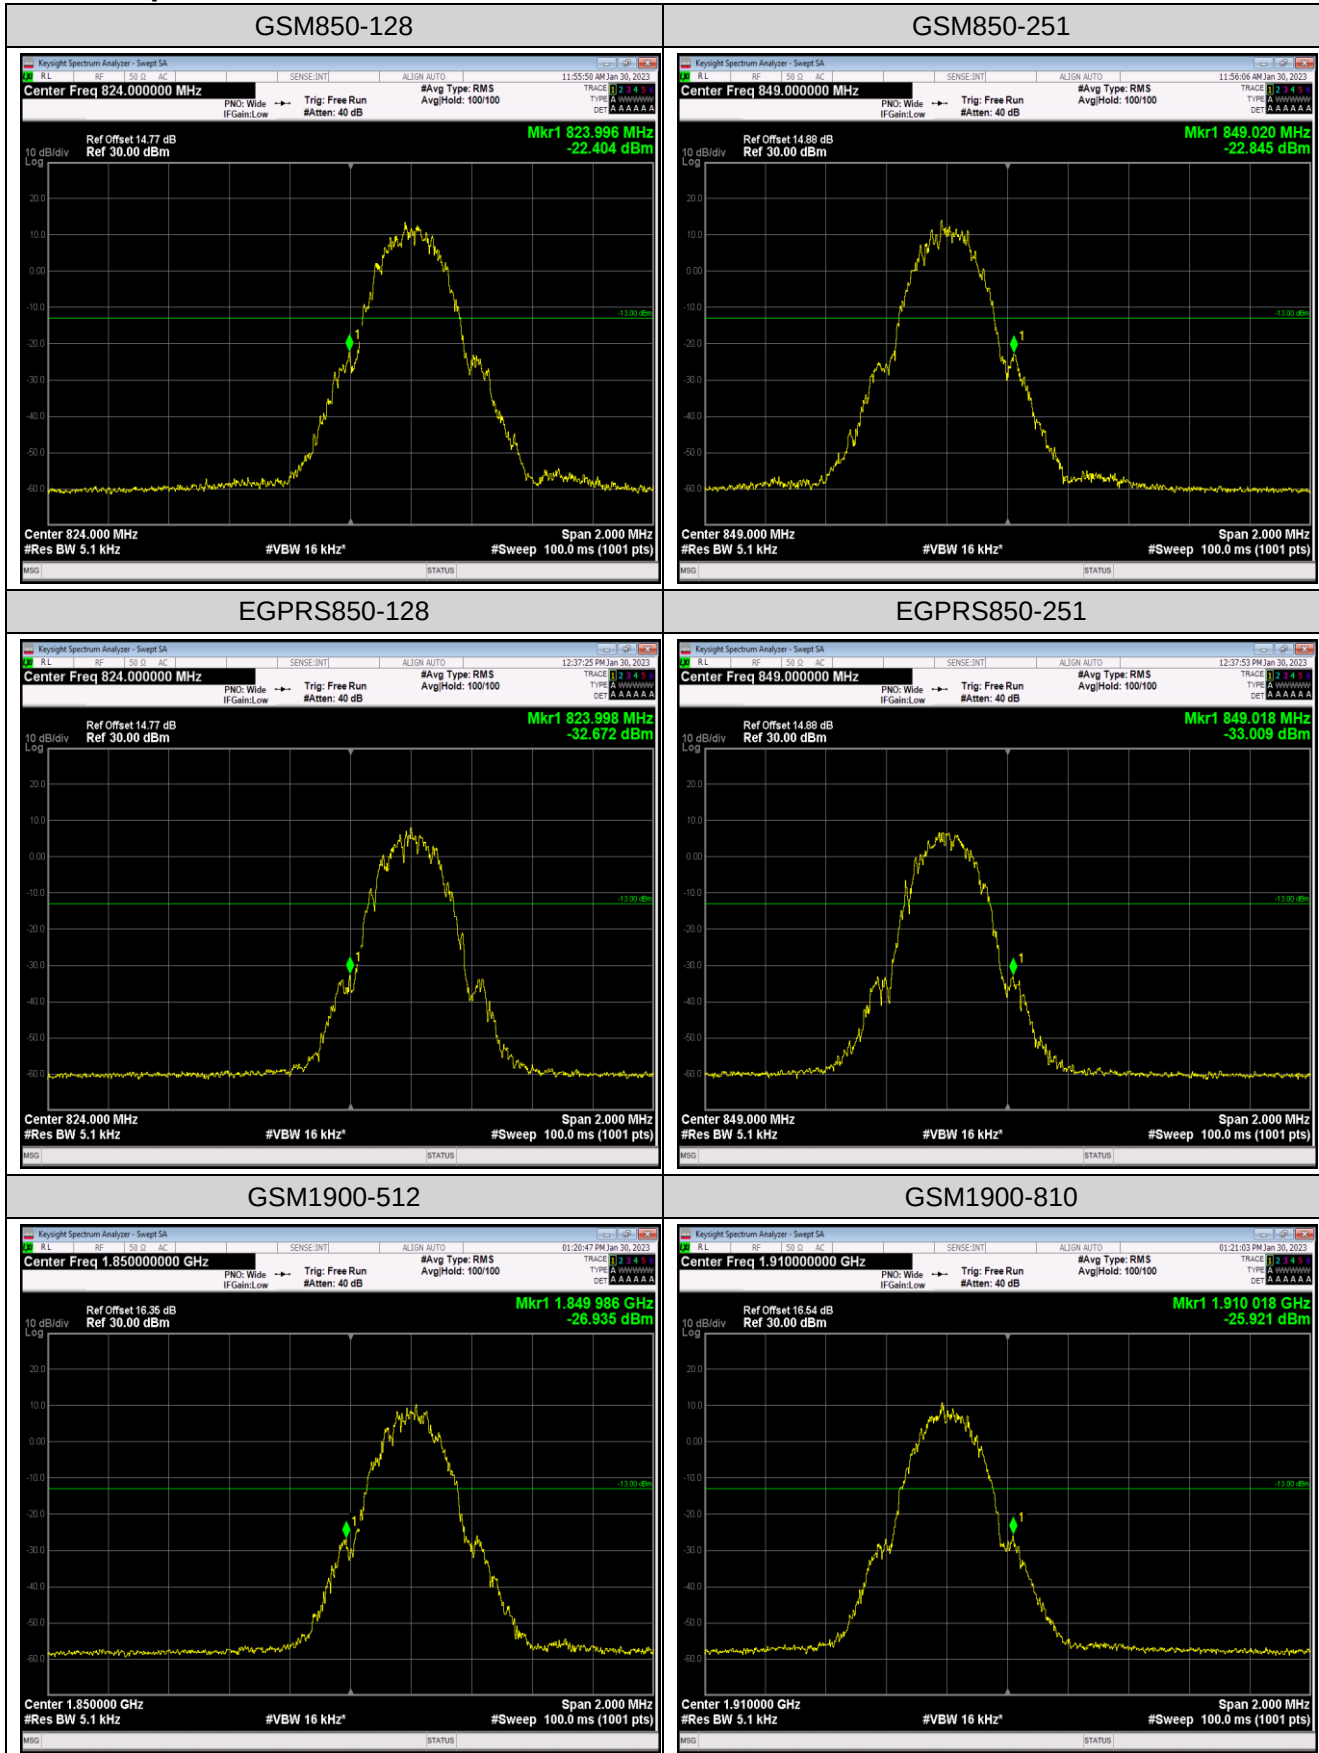

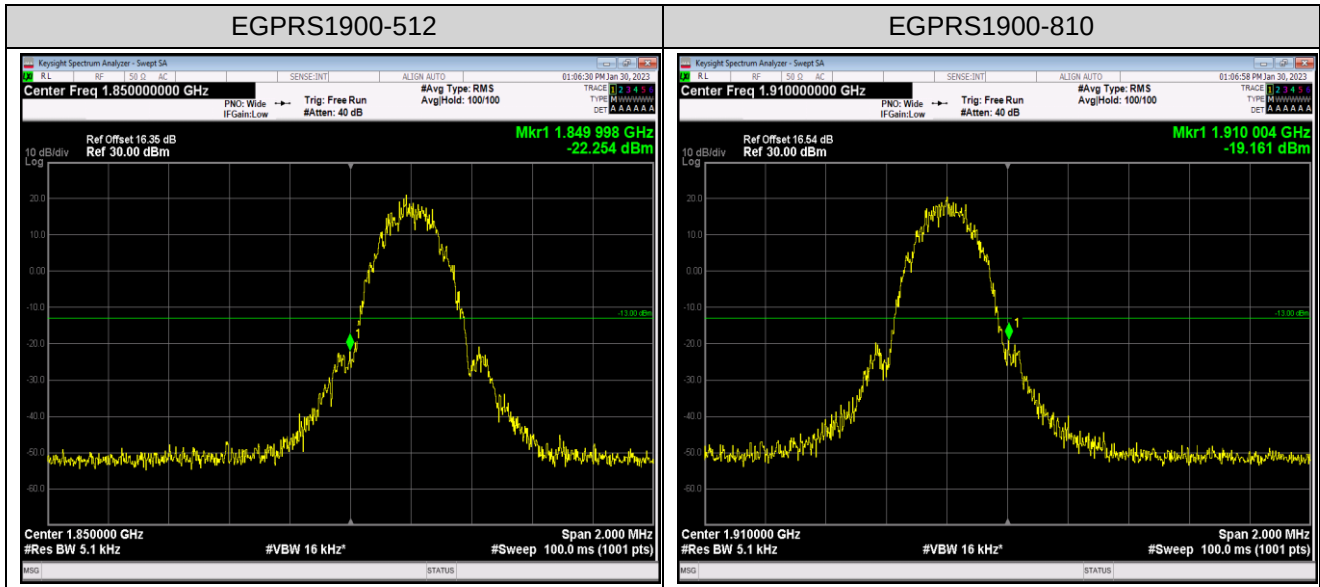

Appendix E: Conducted Spurious Emission

Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-52.74	-33	PASS
GSM850	128	5	0.15~30MHz	0.17	-41.47	-13	PASS
GSM850	128	5	30~1000MHz	953.38	-39.22	-13	PASS
GSM850	128	5	1000~10000MHz	5116.9	-31.3	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-53.75	-33	PASS
GSM850	190	5	0.15~30MHz	0.16	-42.64	-13	PASS
GSM850	190	5	30~1000MHz	954.41	-39.32	-13	PASS
GSM850	190	5	1000~10000MHz	5953.9	-31.25	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-54.99	-33	PASS
GSM850	251	5	0.15~30MHz	0.16	-41.74	-13	PASS
GSM850	251	5	30~1000MHz	986.26	-39.3	-13	PASS
GSM850	251	5	1000~10000MHz	5912.5	-30.77	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-52.57	-43	PASS
GSM1900	512	0	0.15~30MHz	0.15	-39.84	-23	PASS
GSM1900	512	0	30~1000MHz	992.85	-40.33	-13	PASS
GSM1900	512	0	1000~18000MHz	16190.63	-16.3	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-53.98	-43	PASS
GSM1900	661	0	0.15~30MHz	0.15	-41.77	-23	PASS
GSM1900	661	0	30~1000MHz	804.97	-41.12	-13	PASS
GSM1900	661	0	1000~18000MHz	16939.2	-16.7	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-53.97	-43	PASS
GSM1900	810	0	0.15~30MHz	0.15	-38.19	-23	PASS
GSM1900	810	0	30~1000MHz	835.33	-40.51	-13	PASS
GSM1900	810	0	1000~18000MHz	16151.53	-16	-13	PASS


Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-52.74	-33	PASS
GSM850	128	5	0.15~30MHz	0.17	-41.47	-13	PASS
GSM850	128	5	30~1000MHz	953.38	-39.22	-13	PASS
GSM850	128	5	1000~10000MHz	5116.9	-31.3	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-53.75	-33	PASS
GSM850	190	5	0.15~30MHz	0.16	-42.64	-13	PASS
GSM850	190	5	30~1000MHz	954.41	-39.32	-13	PASS
GSM850	190	5	1000~10000MHz	5953.9	-31.25	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-54.99	-33	PASS
GSM850	251	5	0.15~30MHz	0.16	-41.74	-13	PASS

GSM850	251	5	30~1000MHz	986.26	-39.3	-13	PASS
GSM850	251	5	1000~10000MHz	5912.5	-30.77	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-52.97	-43	PASS
GSM1900	512	0	0.15~30MHz	0.16	-41.43	-23	PASS
GSM1900	512	0	30~1000MHz	982.15	-39.92	-13	PASS
GSM1900	512	0	1000~18000MHz	16096.57	-26.02	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-55.1	-43	PASS
GSM1900	661	0	0.15~30MHz	0.15	-42.15	-23	PASS
GSM1900	661	0	30~1000MHz	890.97	-38.96	-13	PASS
GSM1900	661	0	1000~18000MHz	16405.97	-26.85	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-53.56	-43	PASS
GSM1900	810	0	0.15~30MHz	0.15	-40.07	-23	PASS
GSM1900	810	0	30~1000MHz	852.4	-39.09	-13	PASS
GSM1900	810	0	1000~18000MHz	16987.37	-26.4	-13	PASS

Test Result

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

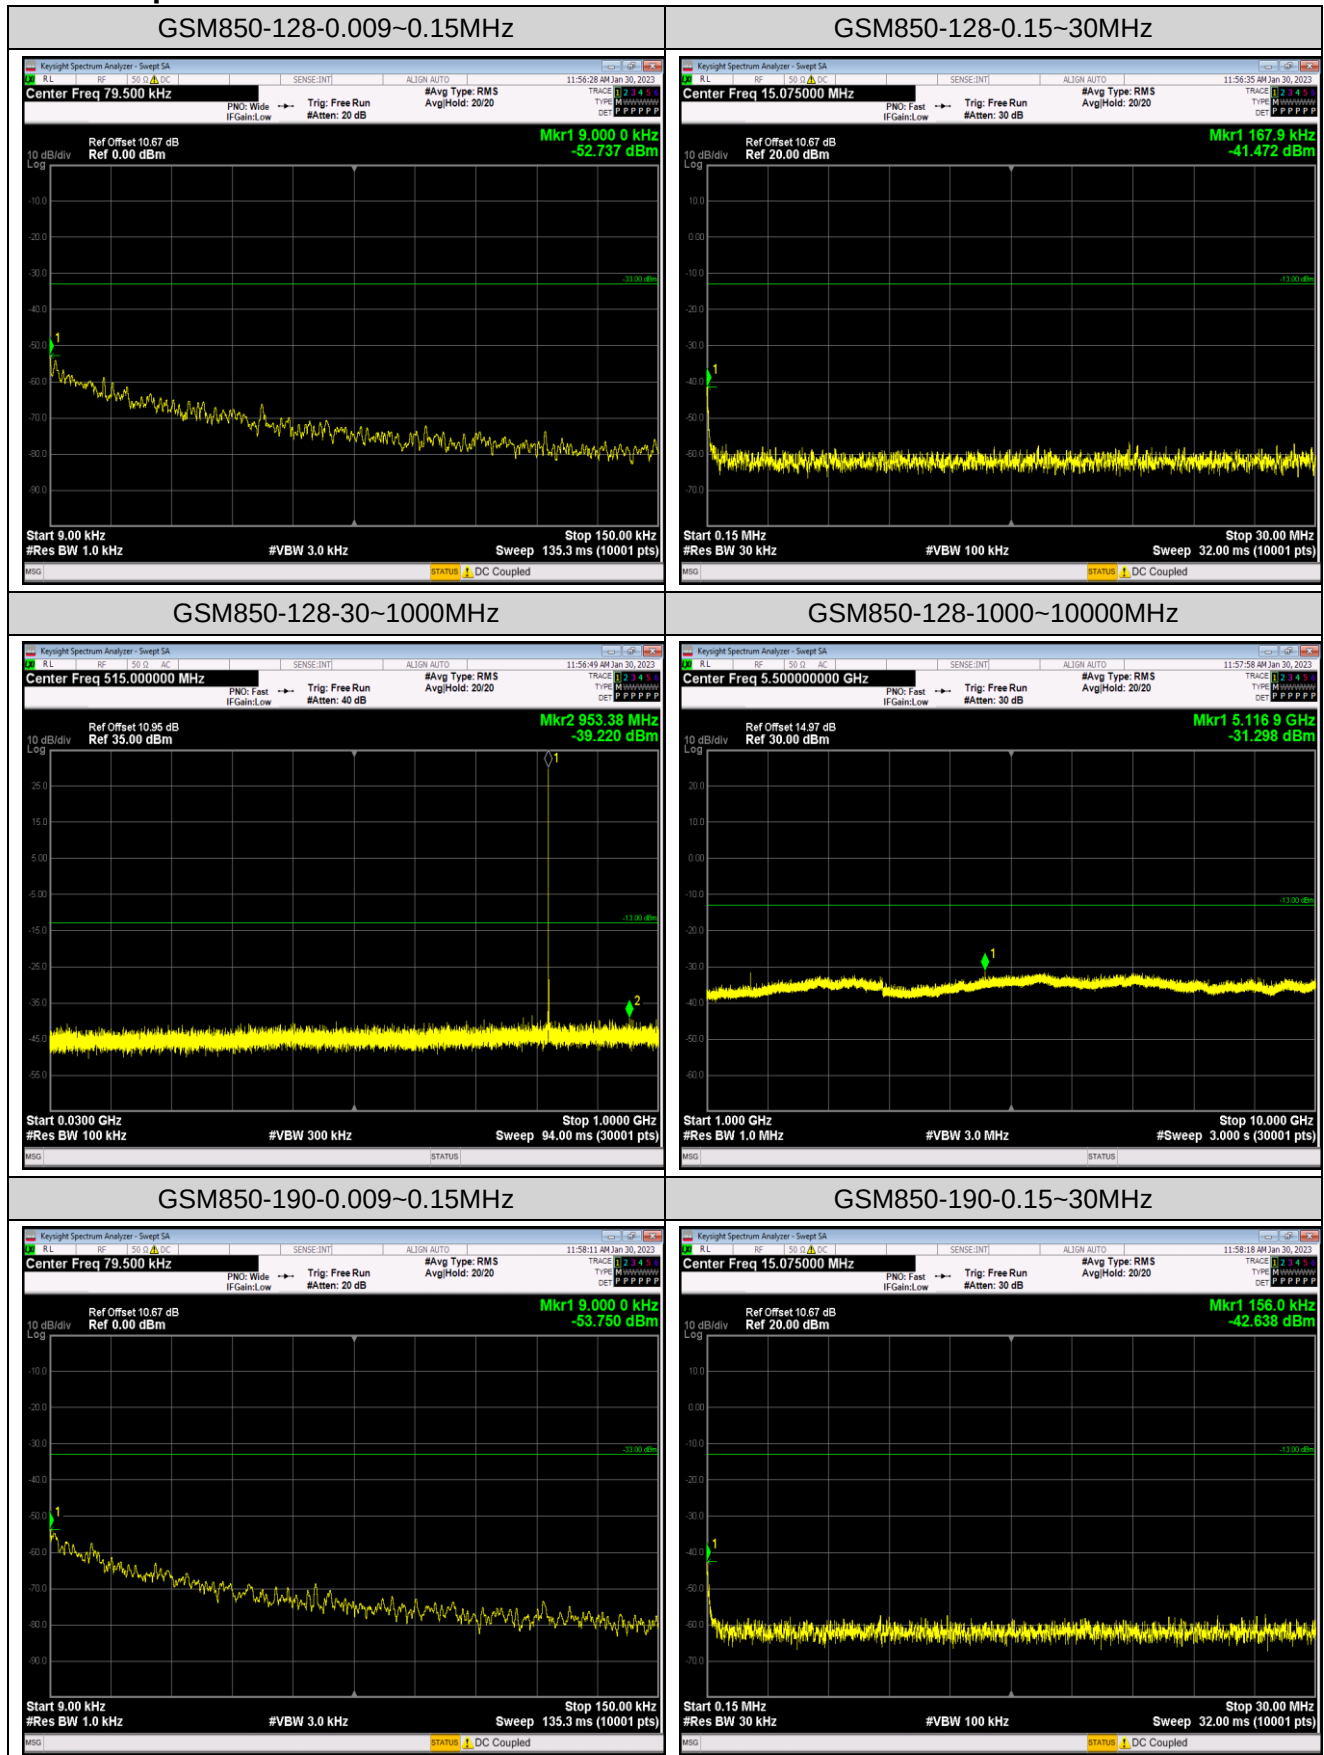



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.


Tel: +86-755-23118282, Fax: +86-755-23116366


Project No.: JYTSZR2301031

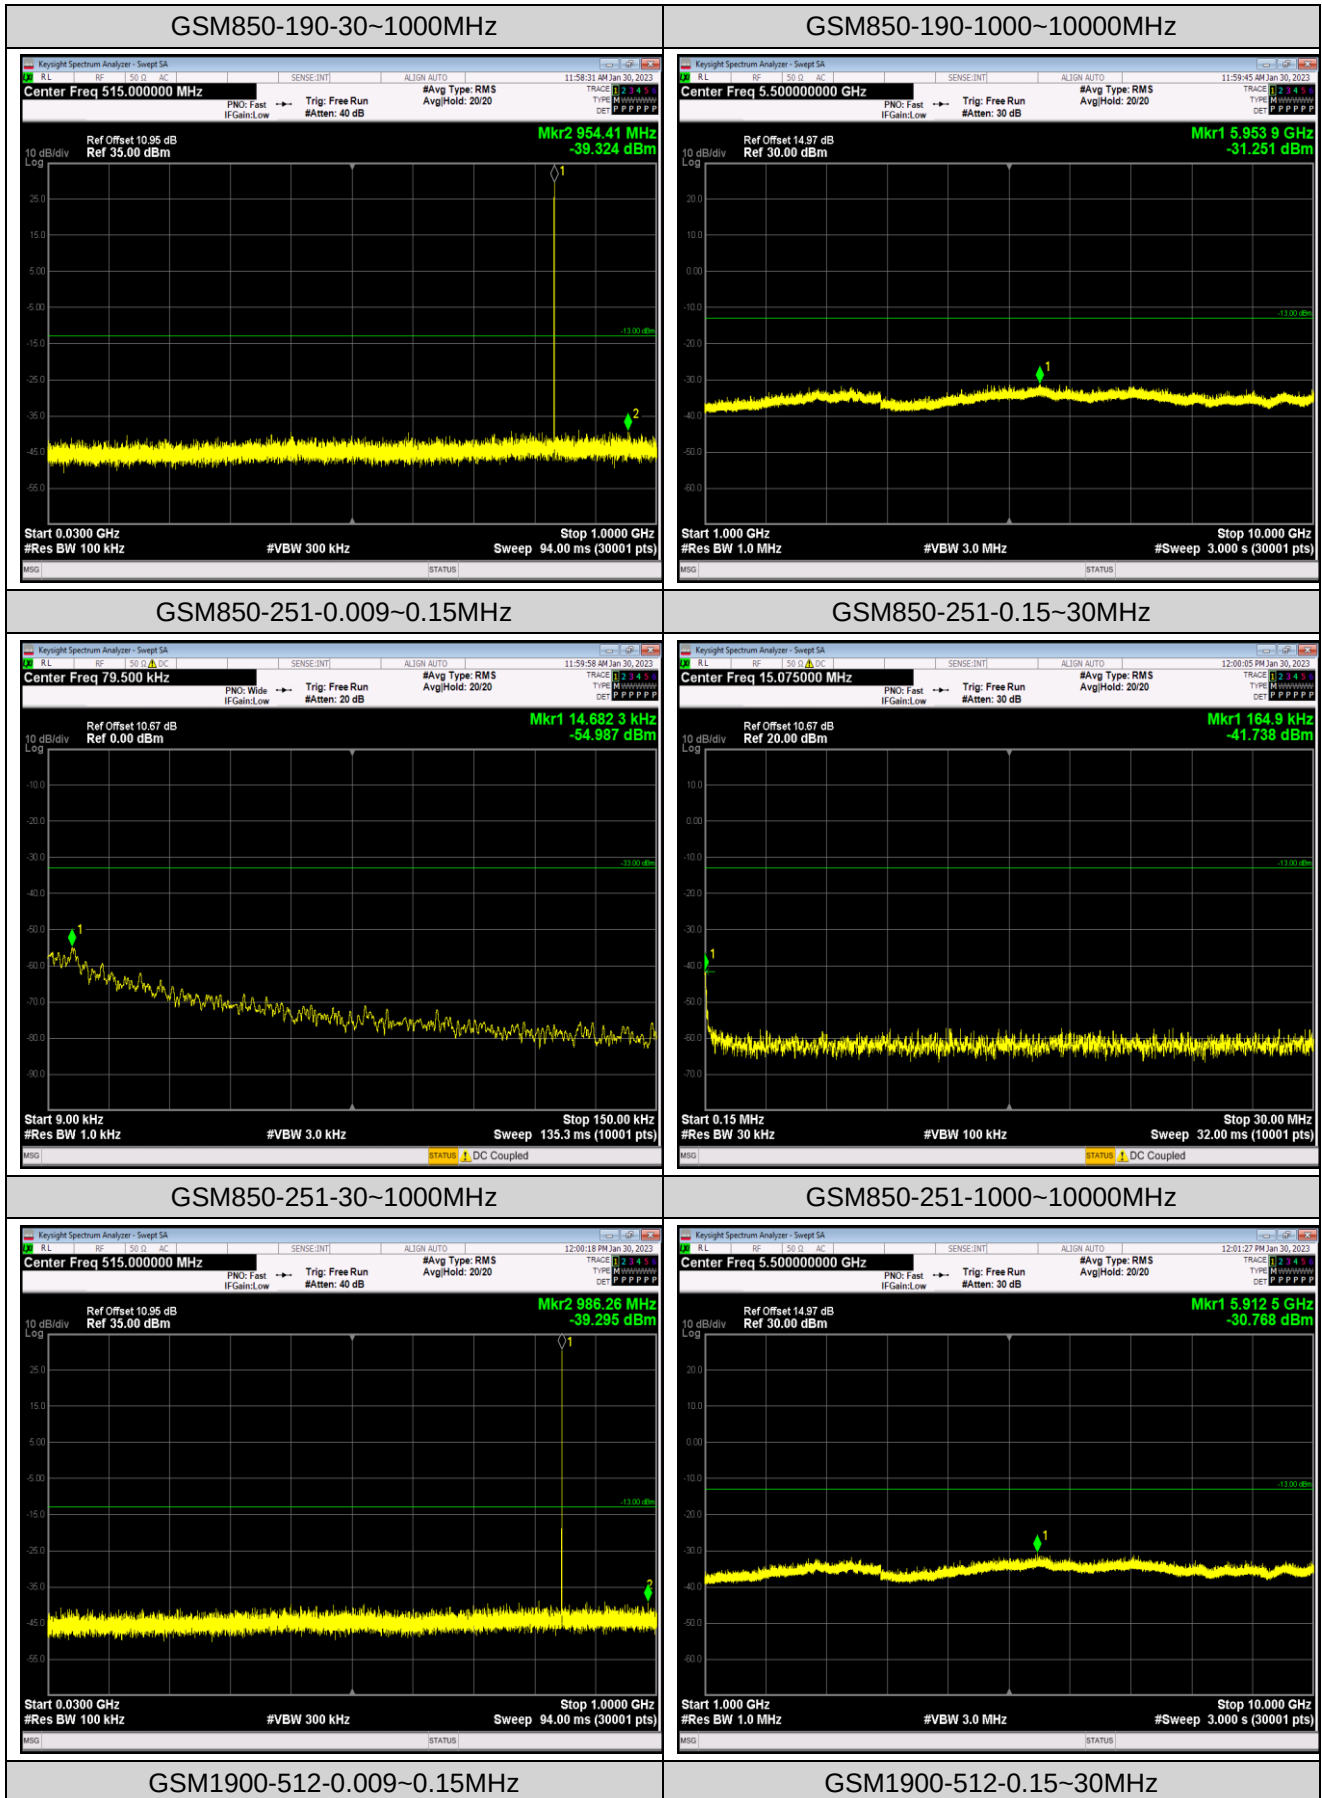


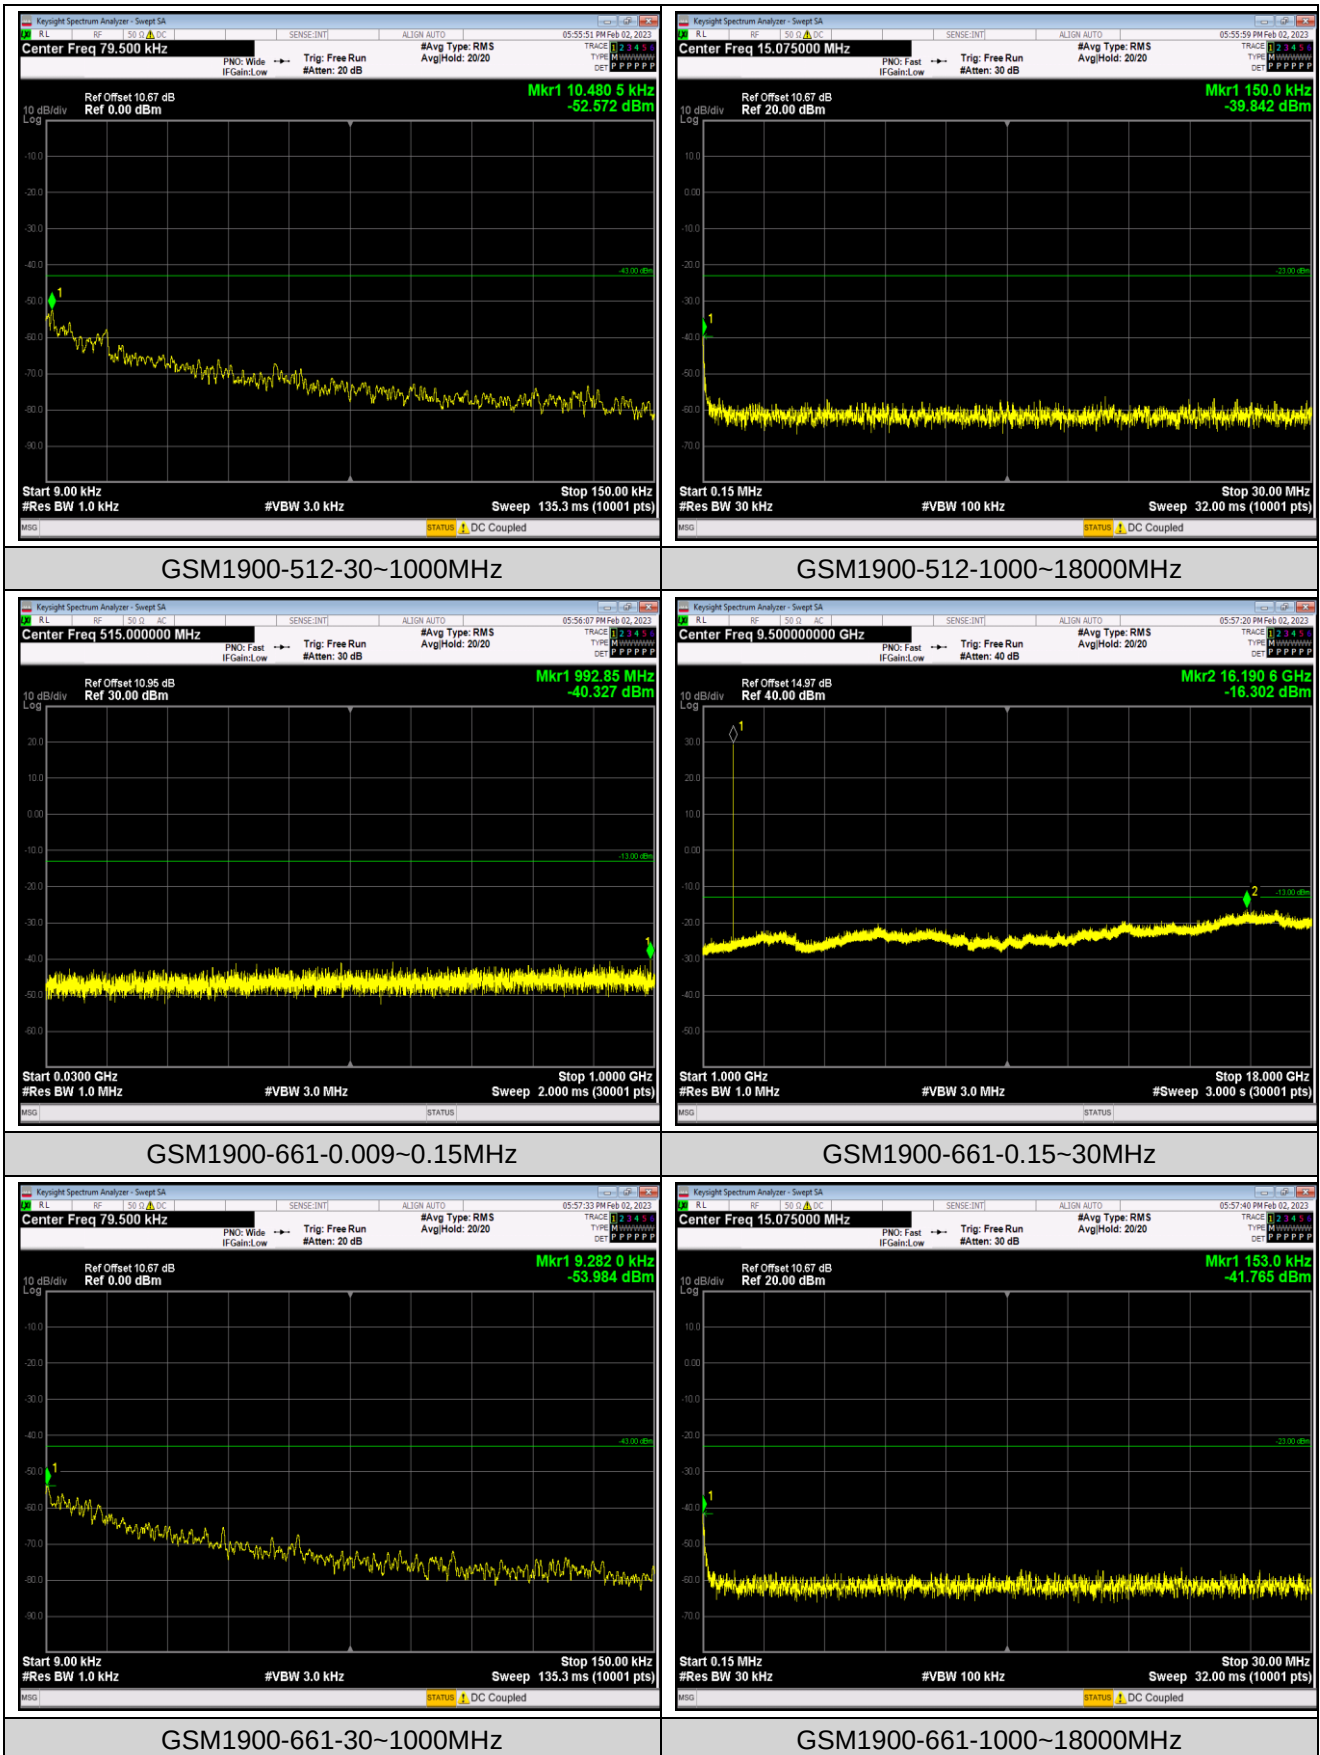


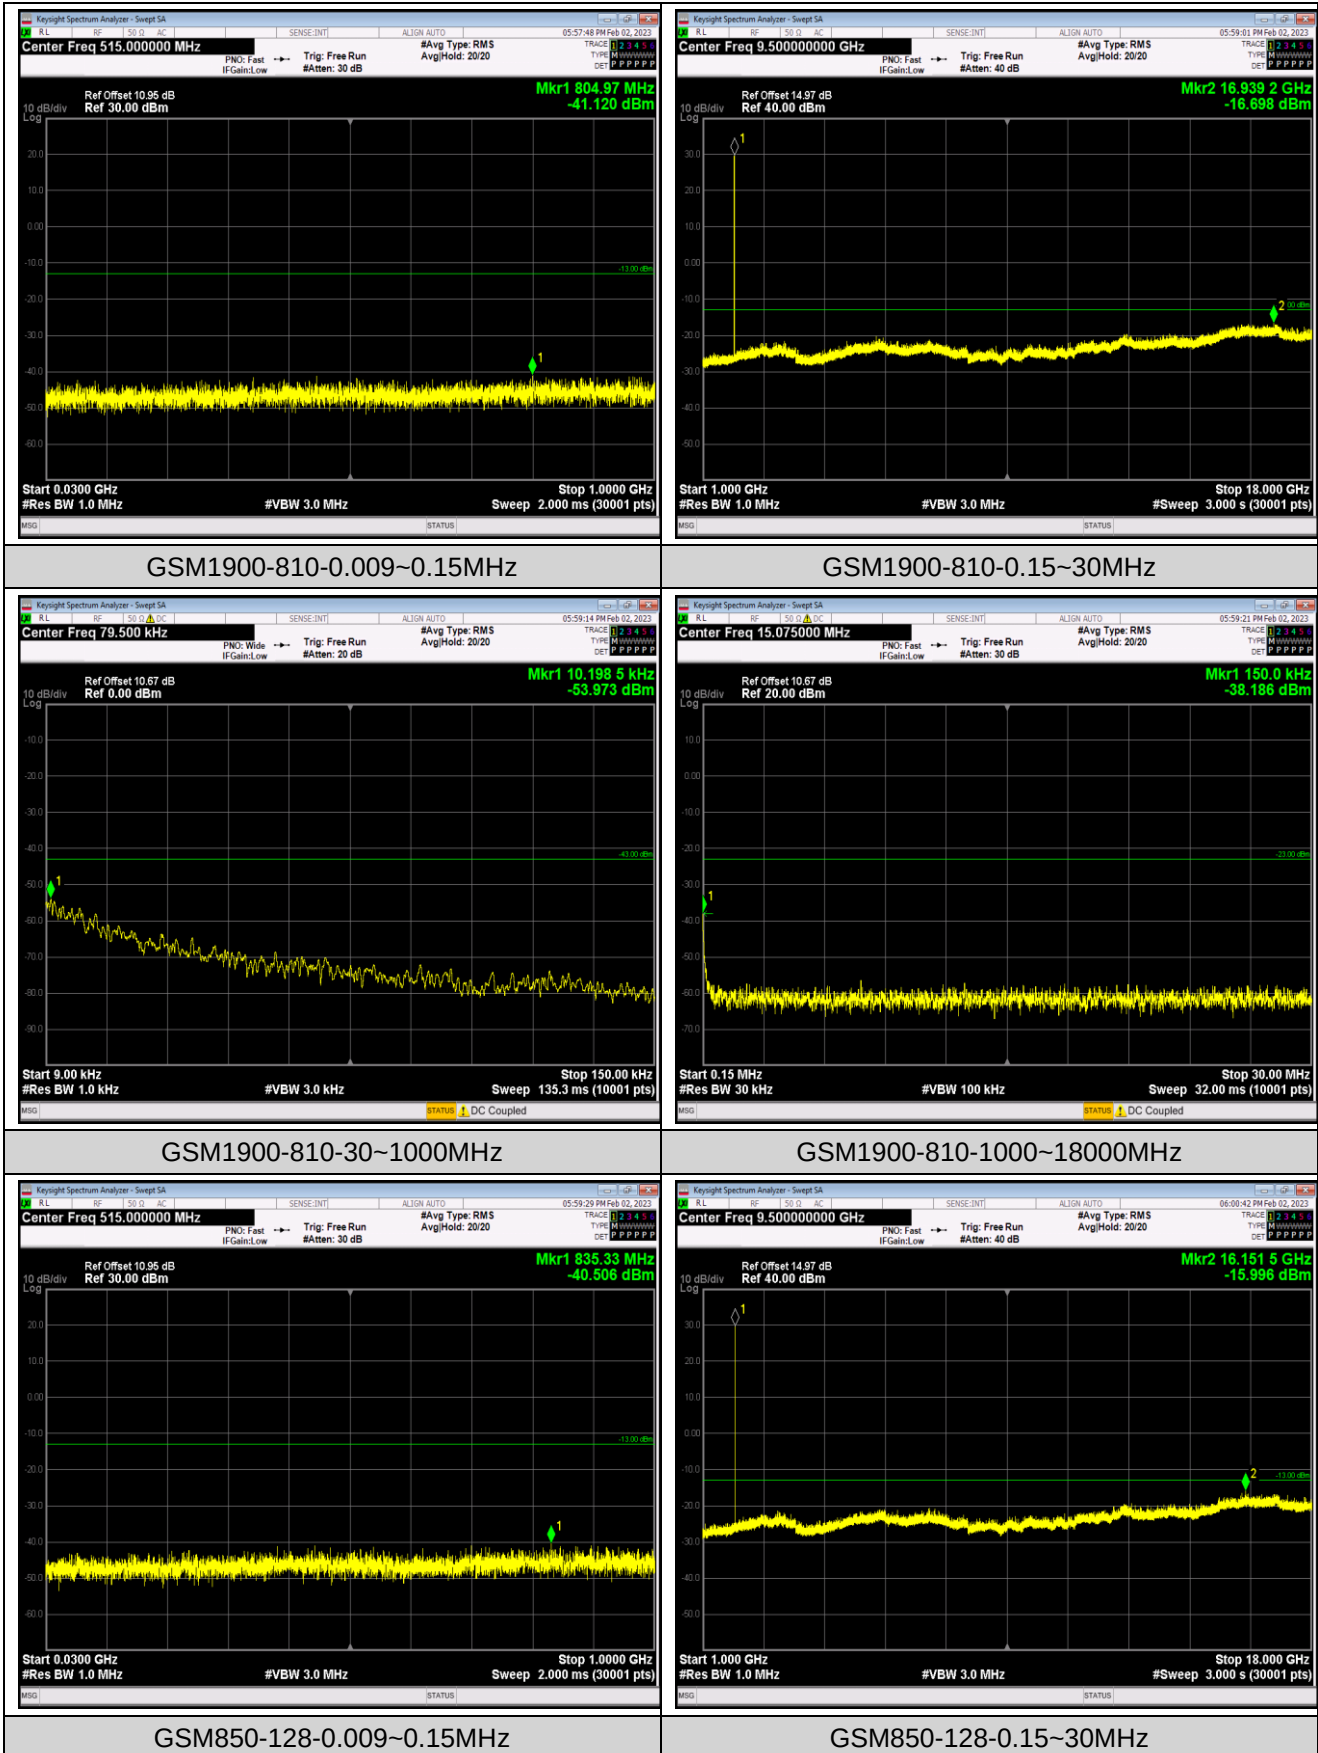

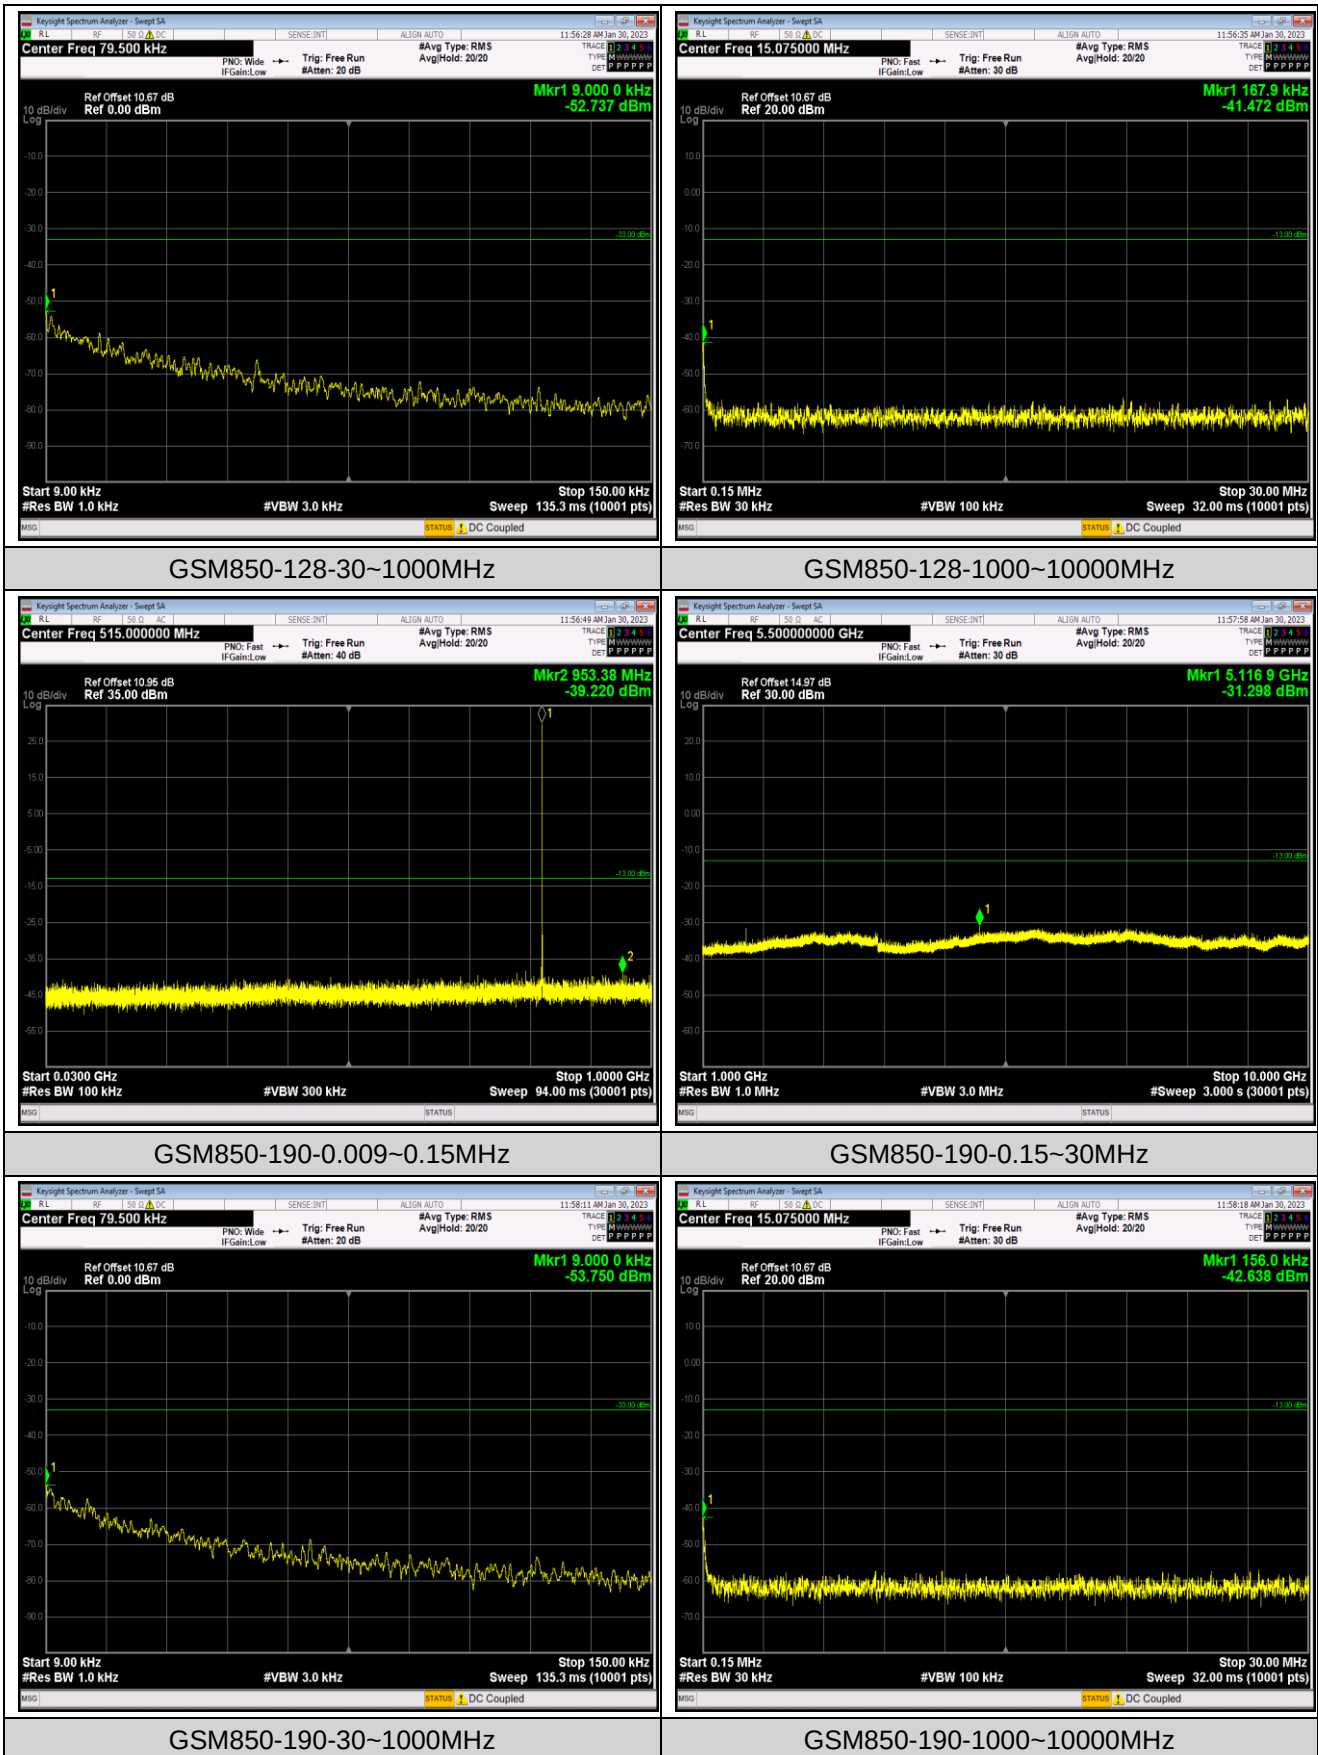

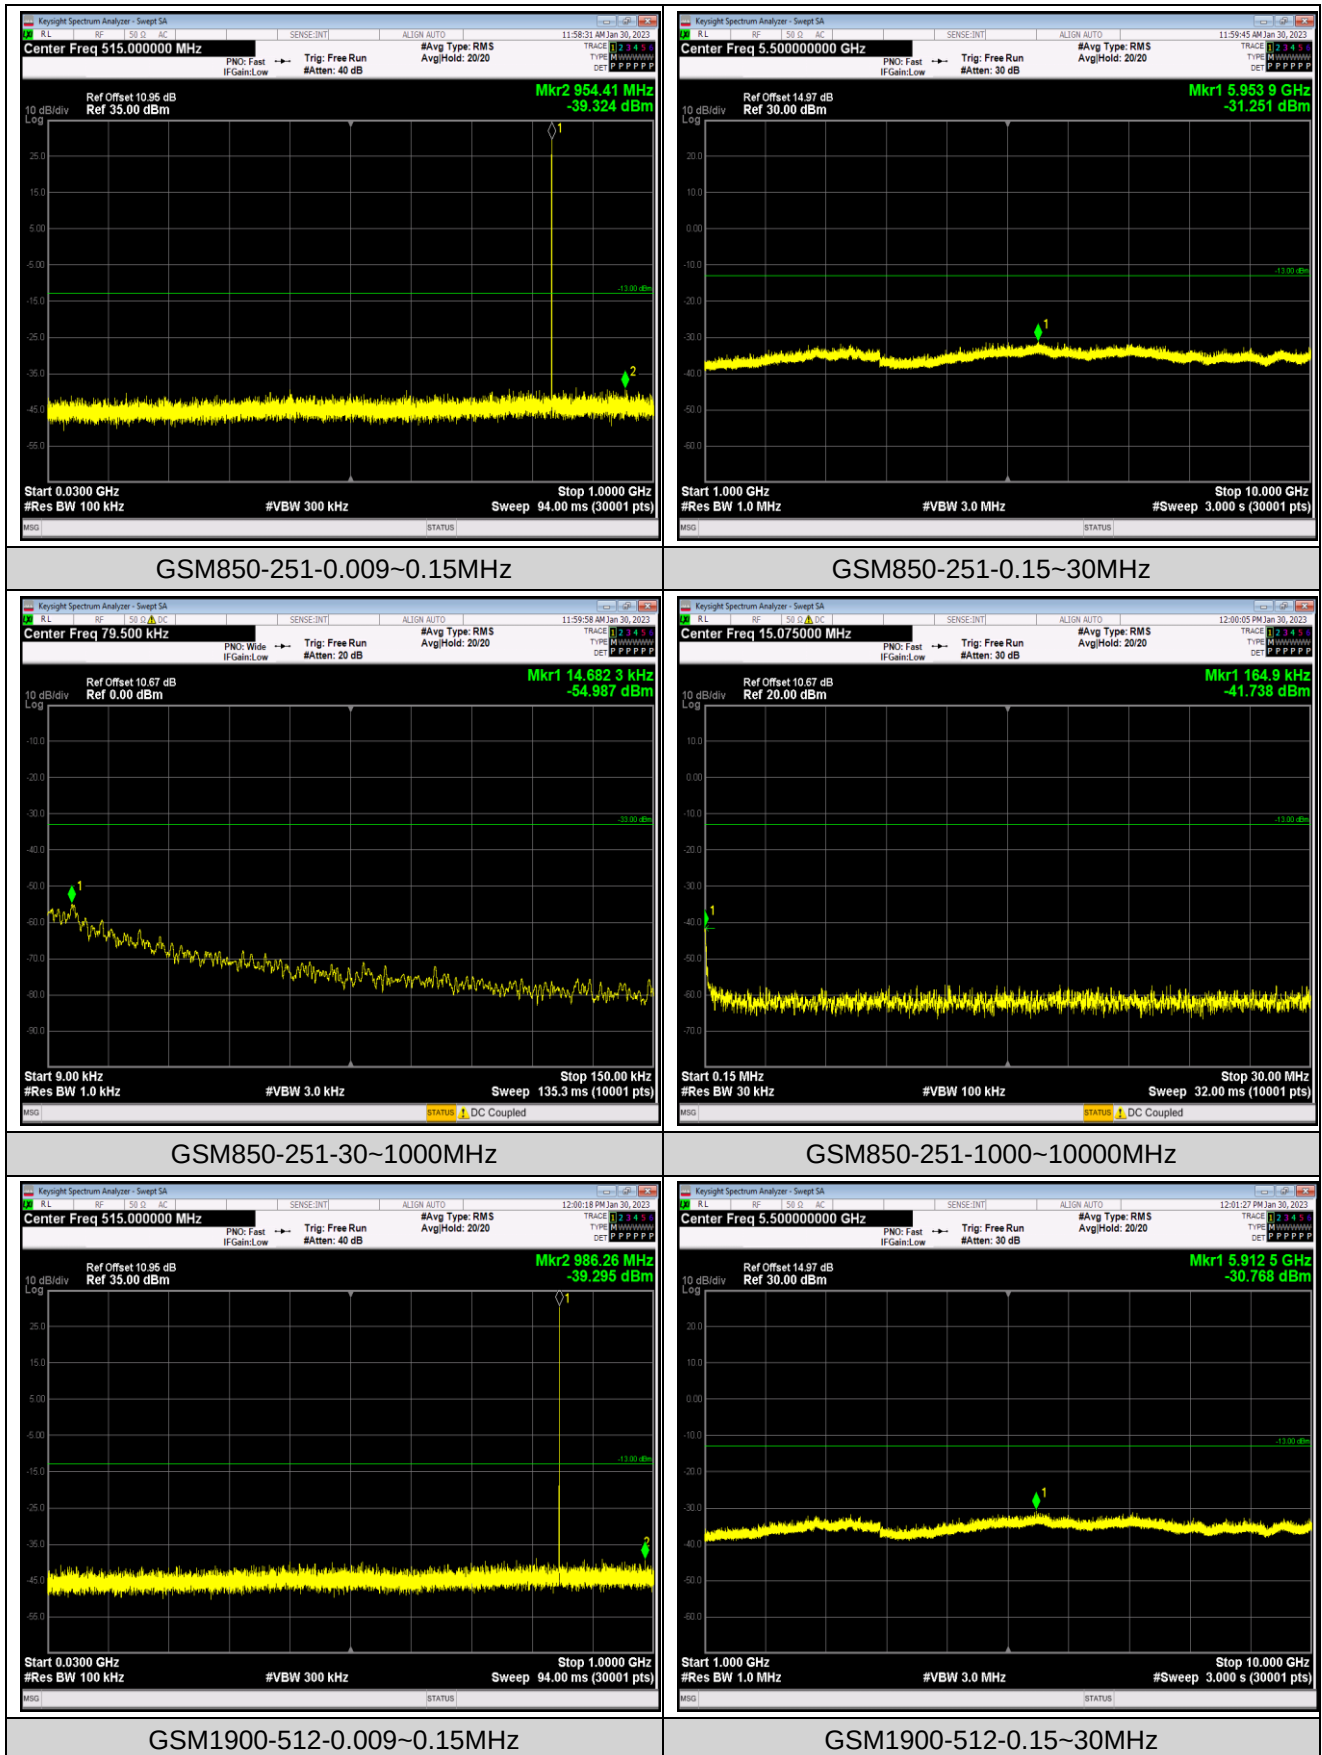

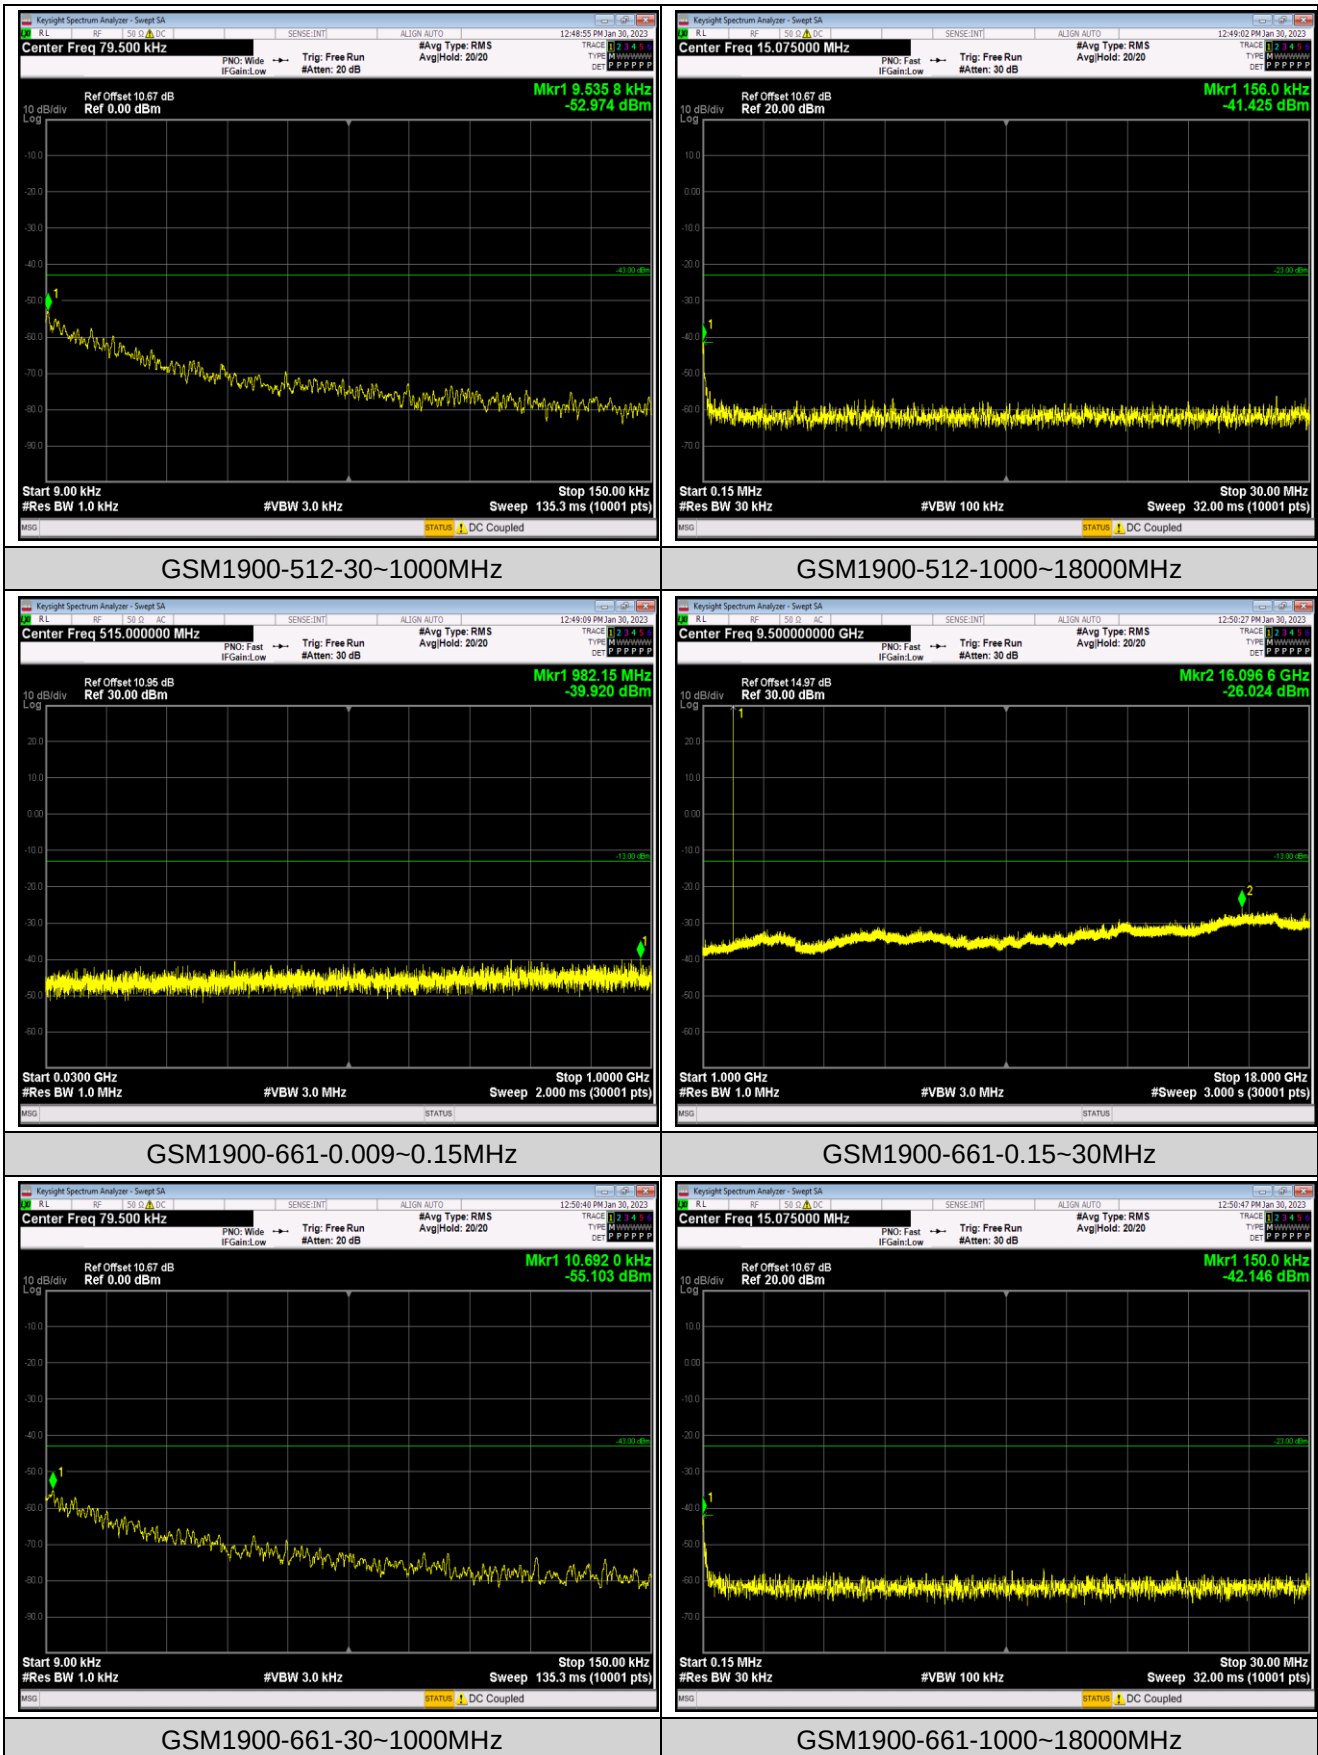

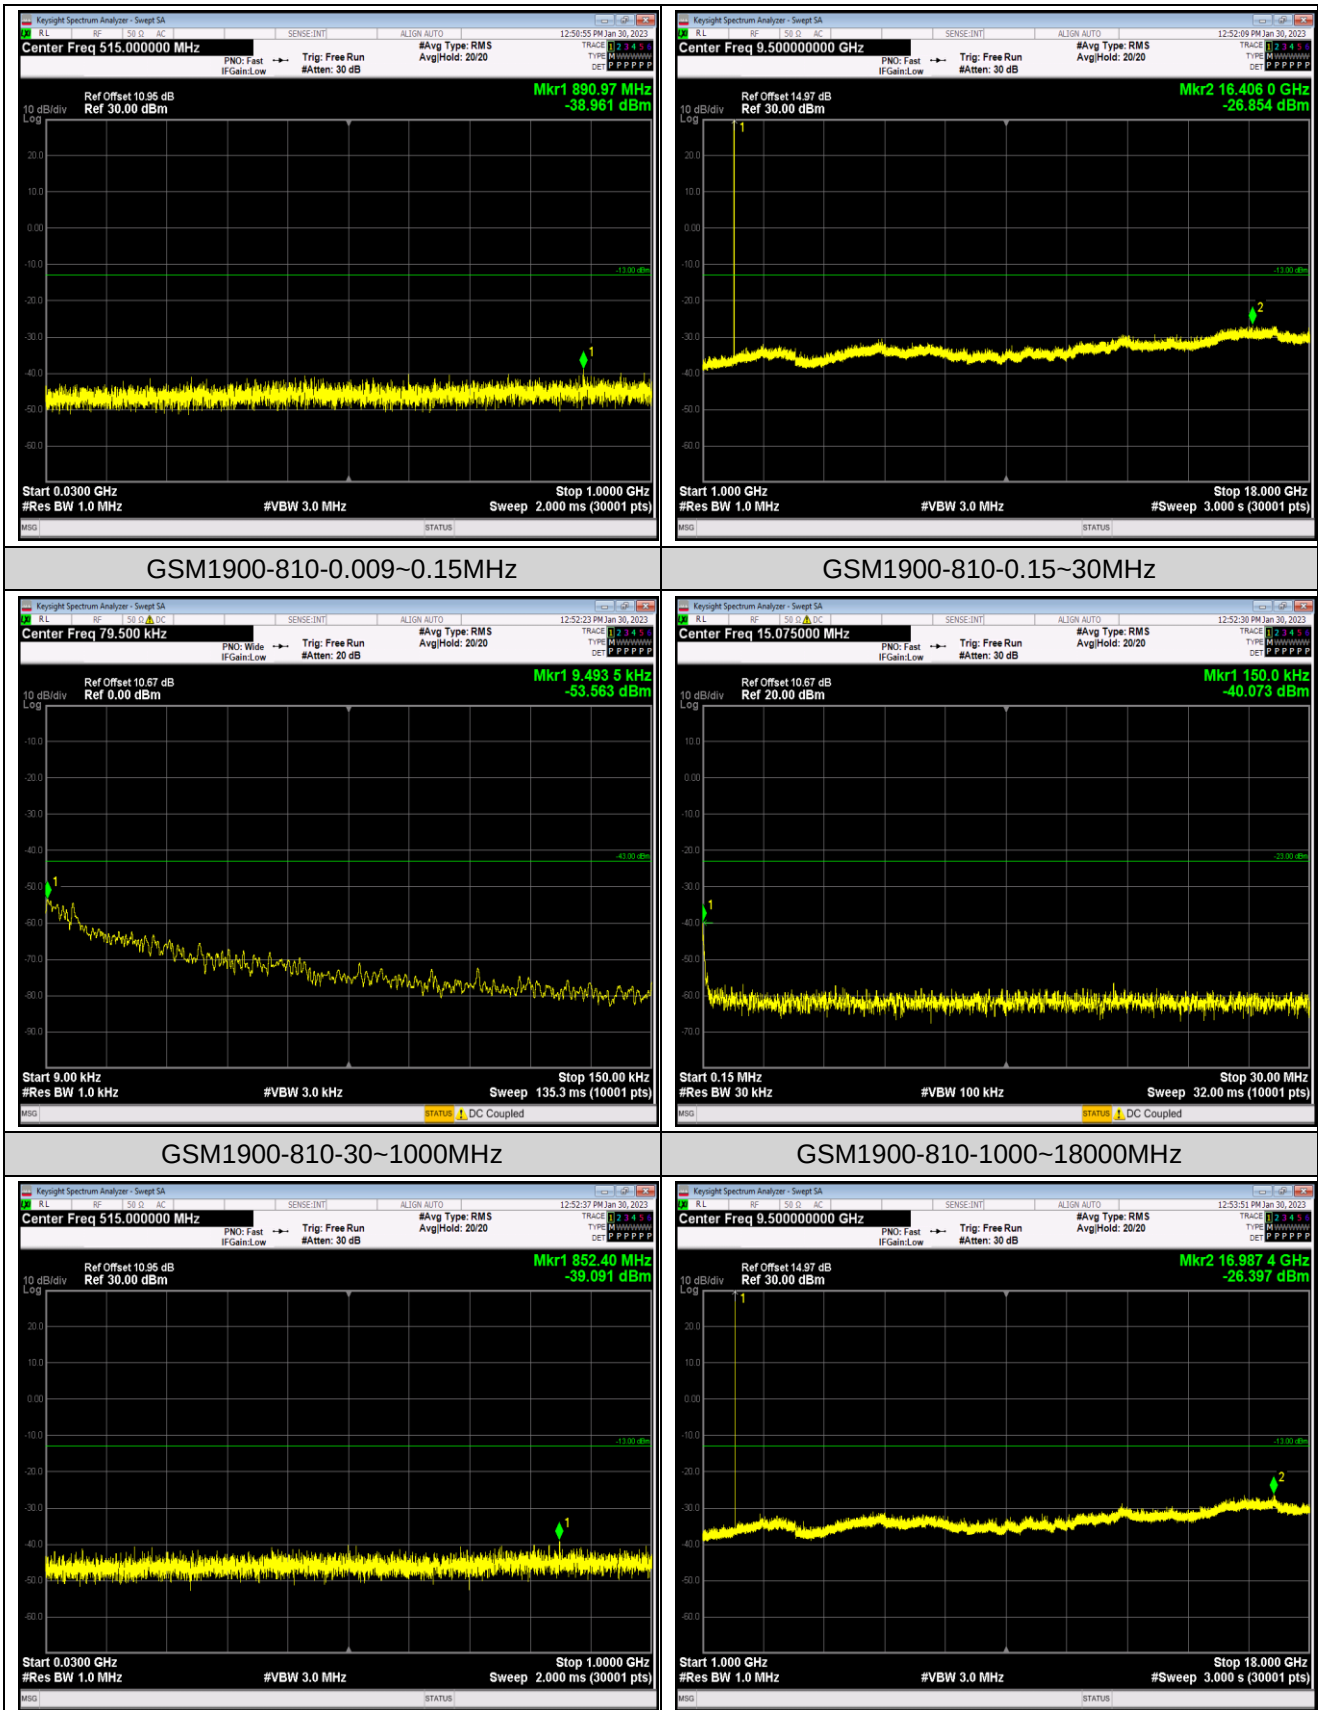

Appendix F: Frequency Stability

Test Result

Reference Frequency: GSM850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	2.36	0.002821	±2.5	Pass
	-20	2.58	0.003084		
	-10	-1.81	-0.002164		
	0	1.00	0.001195		
	10	2.94	0.003514		
	20	1.49	0.001781		
	30	0.77	0.000920		
	40	3.49	0.004172		
	50	1.61	0.001924		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	1.61	0.001924	±2.5	Pass
	3.85	5.29	0.006323		
	4.40	3.62	0.004327		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	2.03	0.002426	±2.5	Pass
	-20	0.77	0.000920		
	-10	-4.49	-0.005367		
	0	4.65	0.005558		
	10	3.42	0.004088		
	20	5.20	0.006216		
	30	9.72	0.011618		
	40	9.81	0.011726		
	50	10.23	0.012228		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	2.39	0.002857	±2.5	Pass
	3.85	2.94	0.003514		
	4.40	2.81	0.003359		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: PCS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	11.69	0.006218	Within authorized band for PCS 1900	Pass
	-20	17.82	0.009479		
	-10	11.07	0.005888		
	0	12.11	0.006441		
	10	19.24	0.010234		
	20	11.01	0.005856		
	30	10.82	0.005755		
	40	17.82	0.009479		
	50	19.37	0.010303		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	17.01	0.009048	Within authorized band for PCS 1900	Pass
	3.85	19.37	0.010303		
	4.40	13.17	0.007005		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	13.59	0.007229	Within authorized band for PCS 1900	Pass
	-20	17.47	0.009293		
	-10	14.08	0.007489		
	0	13.72	0.007298		
	10	13.62	0.007245		
	20	31.48	0.016745		
	30	33.80	0.017979		
	40	34.42	0.018309		
	50	29.80	0.015851		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	17.01	0.009048	Within authorized band for PCS 1900	Pass
	3.85	19.37	0.010303		
	4.40	13.17	0.007005		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
GSM850	190	PASS	PASS
EGPRS850	190	PASS	PASS
GSM1900	661	PASS	PASS
EGPRS1900	661	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

