

Appendix A: Effective (Isotropic) Radiated Power Output Data

Test Result

Band	Channel	PCL	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GSM850	128	5	33.74	30.09	38.45	PASS
GSM850	190	5	33.89	30.24	38.45	PASS
GSM850	251	5	33.77	30.12	38.45	PASS
GSM1900	512	0	30.78	30.28	33.00	PASS
GSM1900	661	0	30.77	30.27	33.00	PASS
GSM1900	810	0	30.54	30.04	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
GPRS850	128	5	1	33.72	30.07	38.45	PASS
GPRS850	128	5	2	32.74	29.09	38.45	PASS
GPRS850	128	5	3	30.73	27.08	38.45	PASS
GPRS850	128	5	4	29.66	26.01	38.45	PASS
GPRS850	190	5	1	33.87	30.22	38.45	PASS
GPRS850	190	5	2	32.89	29.24	38.45	PASS
GPRS850	190	5	3	30.92	27.27	38.45	PASS
GPRS850	190	5	4	29.88	26.23	38.45	PASS
GPRS850	251	5	1	33.74	30.09	38.45	PASS
GPRS850	251	5	2	32.81	29.16	38.45	PASS
GPRS850	251	5	3	30.87	27.22	38.45	PASS
GPRS850	251	5	4	29.82	26.17	38.45	PASS
GPRS1900	512	0	1	30.75	30.25	33.00	PASS
GPRS1900	512	0	2	29.64	29.14	33.00	PASS
GPRS1900	512	0	3	27.54	27.04	33.00	PASS
GPRS1900	512	0	4	26.50	26.00	33.00	PASS
GPRS1900	661	0	1	30.71	30.21	33.00	PASS
GPRS1900	661	0	2	29.60	29.10	33.00	PASS
GPRS1900	661	0	3	27.44	26.94	33.00	PASS
GPRS1900	661	0	4	26.41	25.91	33.00	PASS
GPRS1900	810	0	1	30.48	29.98	33.00	PASS
GPRS1900	810	0	2	29.37	28.87	33.00	PASS
GPRS1900	810	0	3	27.22	26.72	33.00	PASS
GPRS1900	810	0	4	26.18	25.68	33.00	PASS

Band	Channel	PCL	Slot	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP Limit (dBm)	Verdict
EGPRS850	128	8	1	27.67	24.02	38.45	PASS
EGPRS850	128	8	2	26.56	22.91	38.45	PASS
EGPRS850	128	8	3	24.55	20.9	38.45	PASS
EGPRS850	128	8	4	23.35	19.7	38.45	PASS
EGPRS850	190	8	1	27.77	24.12	38.45	PASS
EGPRS850	190	8	2	26.75	23.1	38.45	PASS
EGPRS850	190	8	3	24.68	21.03	38.45	PASS
EGPRS850	190	8	4	23.46	19.81	38.45	PASS
EGPRS850	251	8	1	27.87	24.22	38.45	PASS
EGPRS850	251	8	2	26.76	23.11	38.45	PASS
EGPRS850	251	8	3	24.70	21.05	38.45	PASS
EGPRS850	251	8	4	23.55	19.9	38.45	PASS
EGPRS1900	512	2	1	26.28	25.78	33.00	PASS
EGPRS1900	512	2	2	25.49	24.99	33.00	PASS
EGPRS1900	512	2	3	23.73	23.23	33.00	PASS
EGPRS1900	512	2	4	22.68	22.18	33.00	PASS
EGPRS1900	661	2	1	26.31	25.81	33.00	PASS
EGPRS1900	661	2	2	25.44	24.94	33.00	PASS
EGPRS1900	661	2	3	23.71	23.21	33.00	PASS
EGPRS1900	661	2	4	22.68	22.18	33.00	PASS
EGPRS1900	810	2	1	26.00	25.5	33.00	PASS
EGPRS1900	810	2	2	25.11	24.61	33.00	PASS
EGPRS1900	810	2	3	23.27	22.77	33.00	PASS
EGPRS1900	810	2	4	22.26	21.76	33.00	PASS

Remark: EIRP (dBm) = Conducted power (dBm) + Antenna Gain (dBi). (For GSM1900)

ERP (dBm) = EIRP (dBm) - 2.15 (dB). (For GSM850)


Appendix B: Peak-to-Average Ratio(CCDF)

Test Result

Band	Channel	PCL	Result(dB)	Limit(dB)	Verdict
GSM850	190	5	2.63	13	PASS
EGPRS850	190	8	5.66	13	PASS
GSM1900	661	0	2.63	13	PASS
EGPRS1900	661	2	5.18	13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

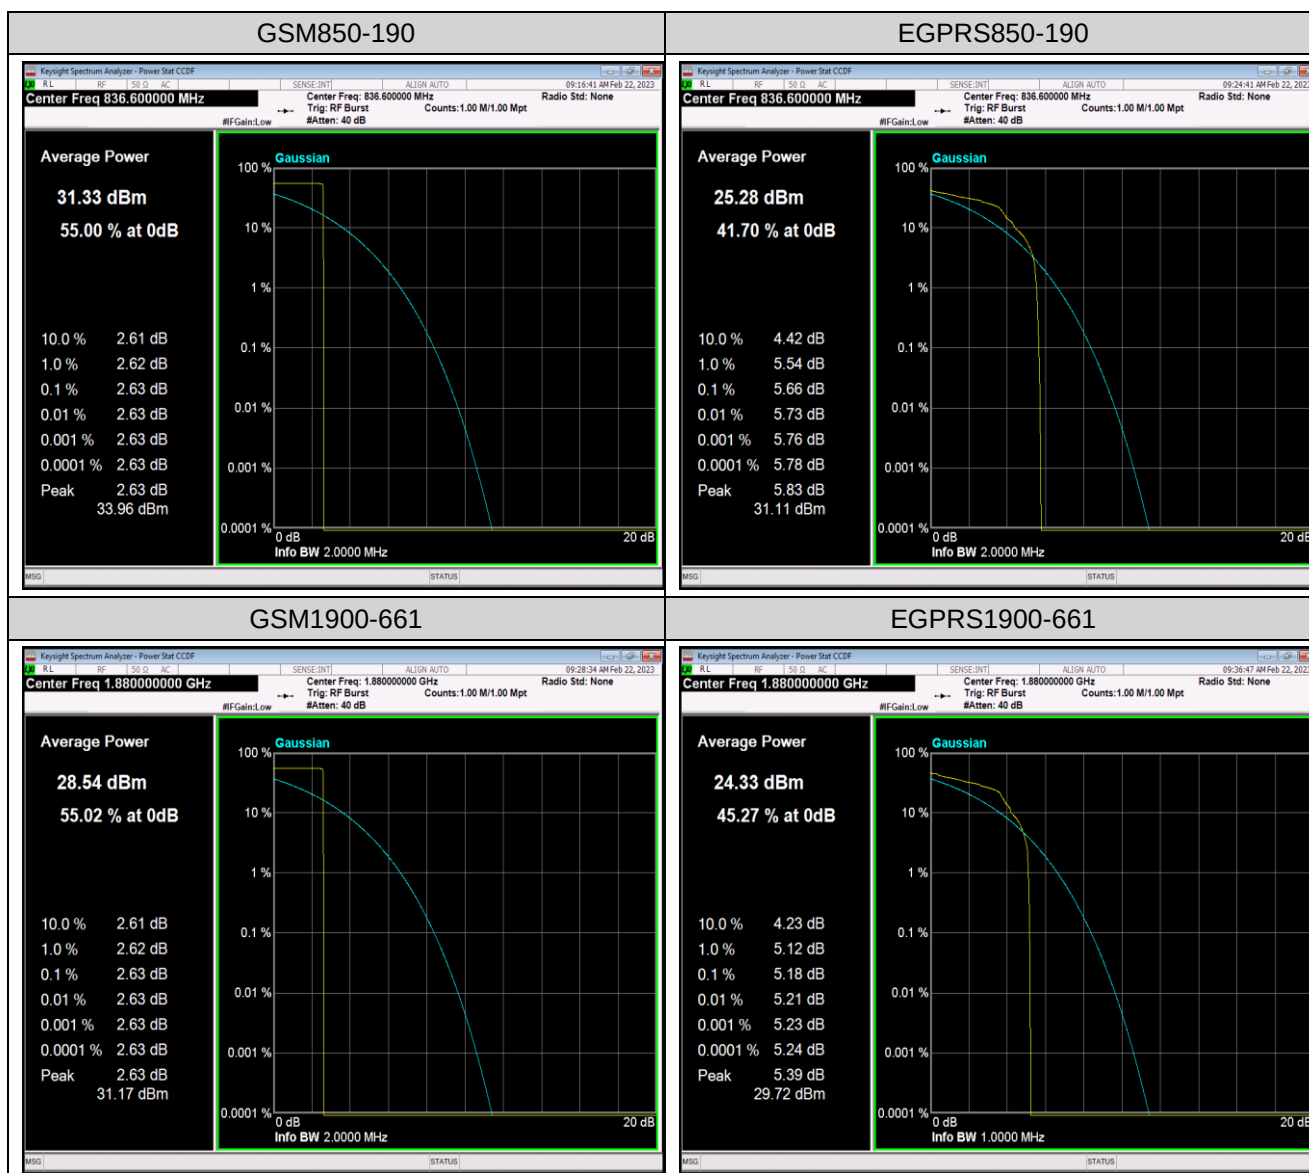



Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

Band	Channel	PCL	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM850	128	5	0.24232	0.3167	---	PASS
GSM850	190	5	0.24521	0.3123	---	PASS
GSM850	251	5	0.24622	0.3133	---	PASS
EGPRS850	128	8	0.24806	0.3106	---	PASS
EGPRS850	190	8	0.24889	0.3113	---	PASS
EGPRS850	251	8	0.24847	0.3182	---	PASS
GSM1900	512	0	0.24631	0.3153	---	PASS
GSM1900	661	0	0.24743	0.3153	---	PASS
GSM1900	810	0	0.24502	0.3155	---	PASS
EGPRS1900	512	2	0.25316	0.3260	---	PASS
EGPRS1900	661	2	0.25409	0.3224	---	PASS
EGPRS1900	810	2	0.24925	0.3110	---	PASS

Test Graphs

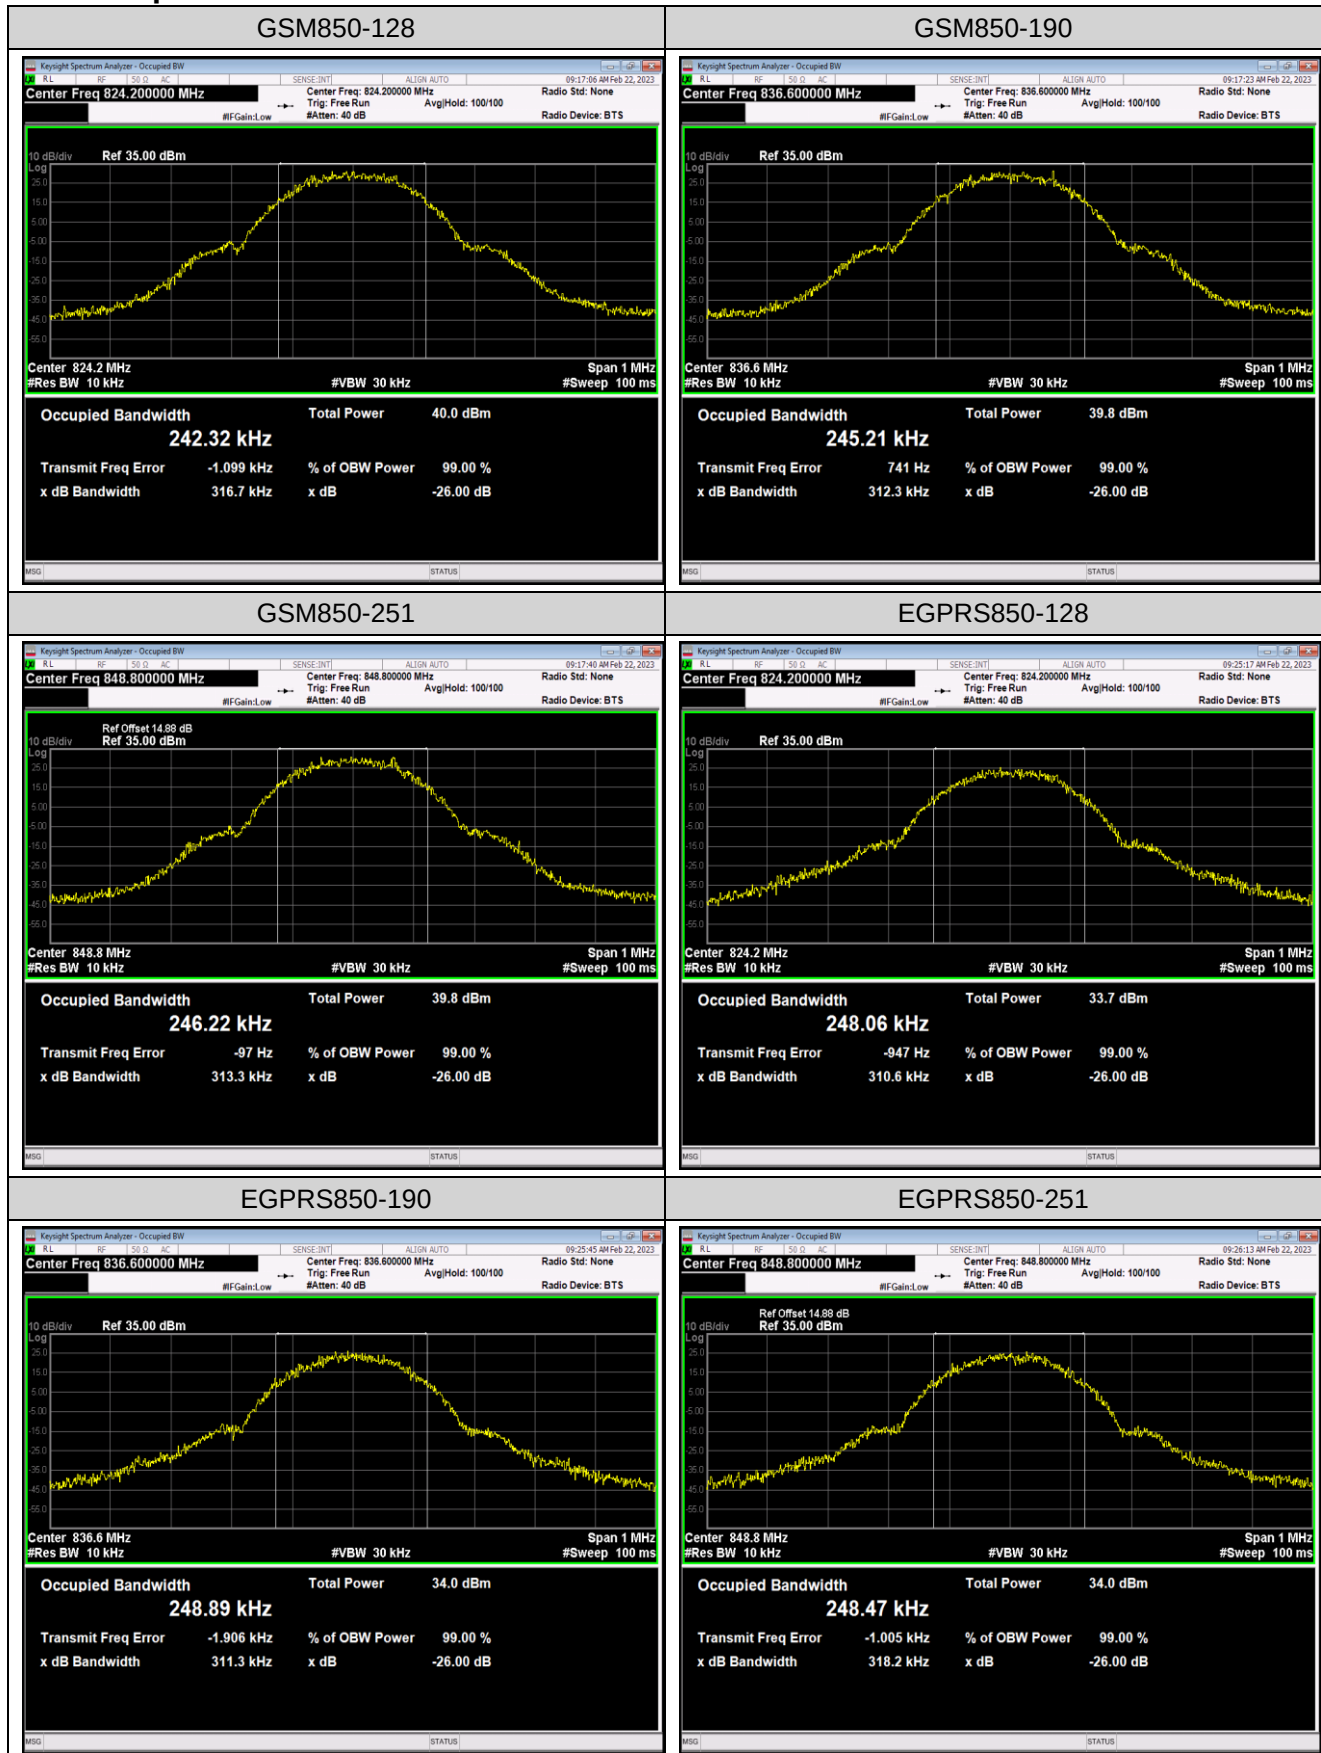

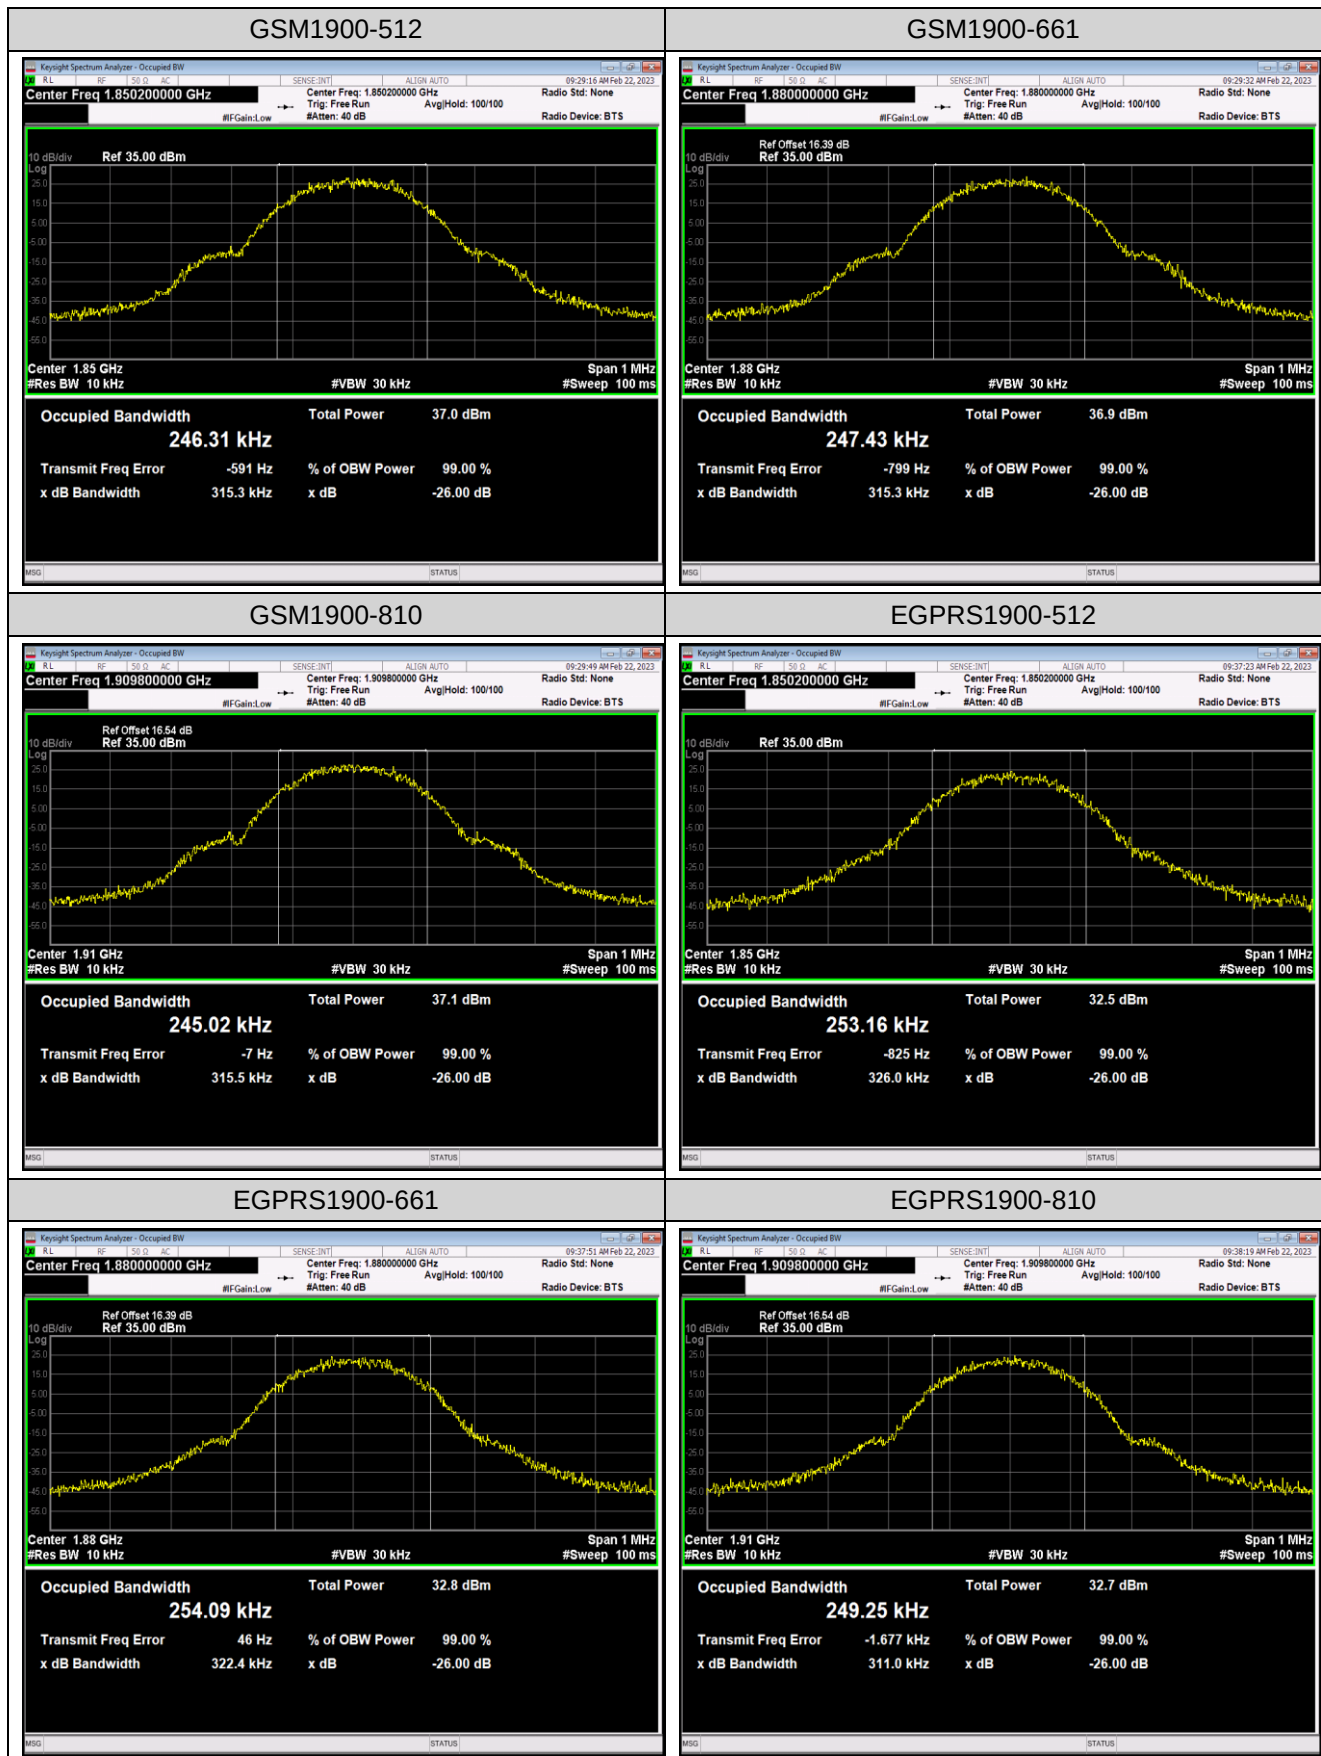



Appendix D: Band Edge

Test Result

Band	Channel	PCL	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	5	823.98	-24.96	-13	PASS
GSM850	251	5	849.02	-21.81	-13	PASS
EGPRS850	128	8	823.99	-29.66	-13	PASS
EGPRS850	251	8	849.03	-32.38	-13	PASS
GSM1900	512	0	1849.98	-27.86	-13	PASS
GSM1900	810	0	1910.02	-27.67	-13	PASS
EGPRS1900	512	2	1850.00	-19.34	-13	PASS
EGPRS1900	810	2	1910.01	-21.75	-13	PASS

Test Graphs

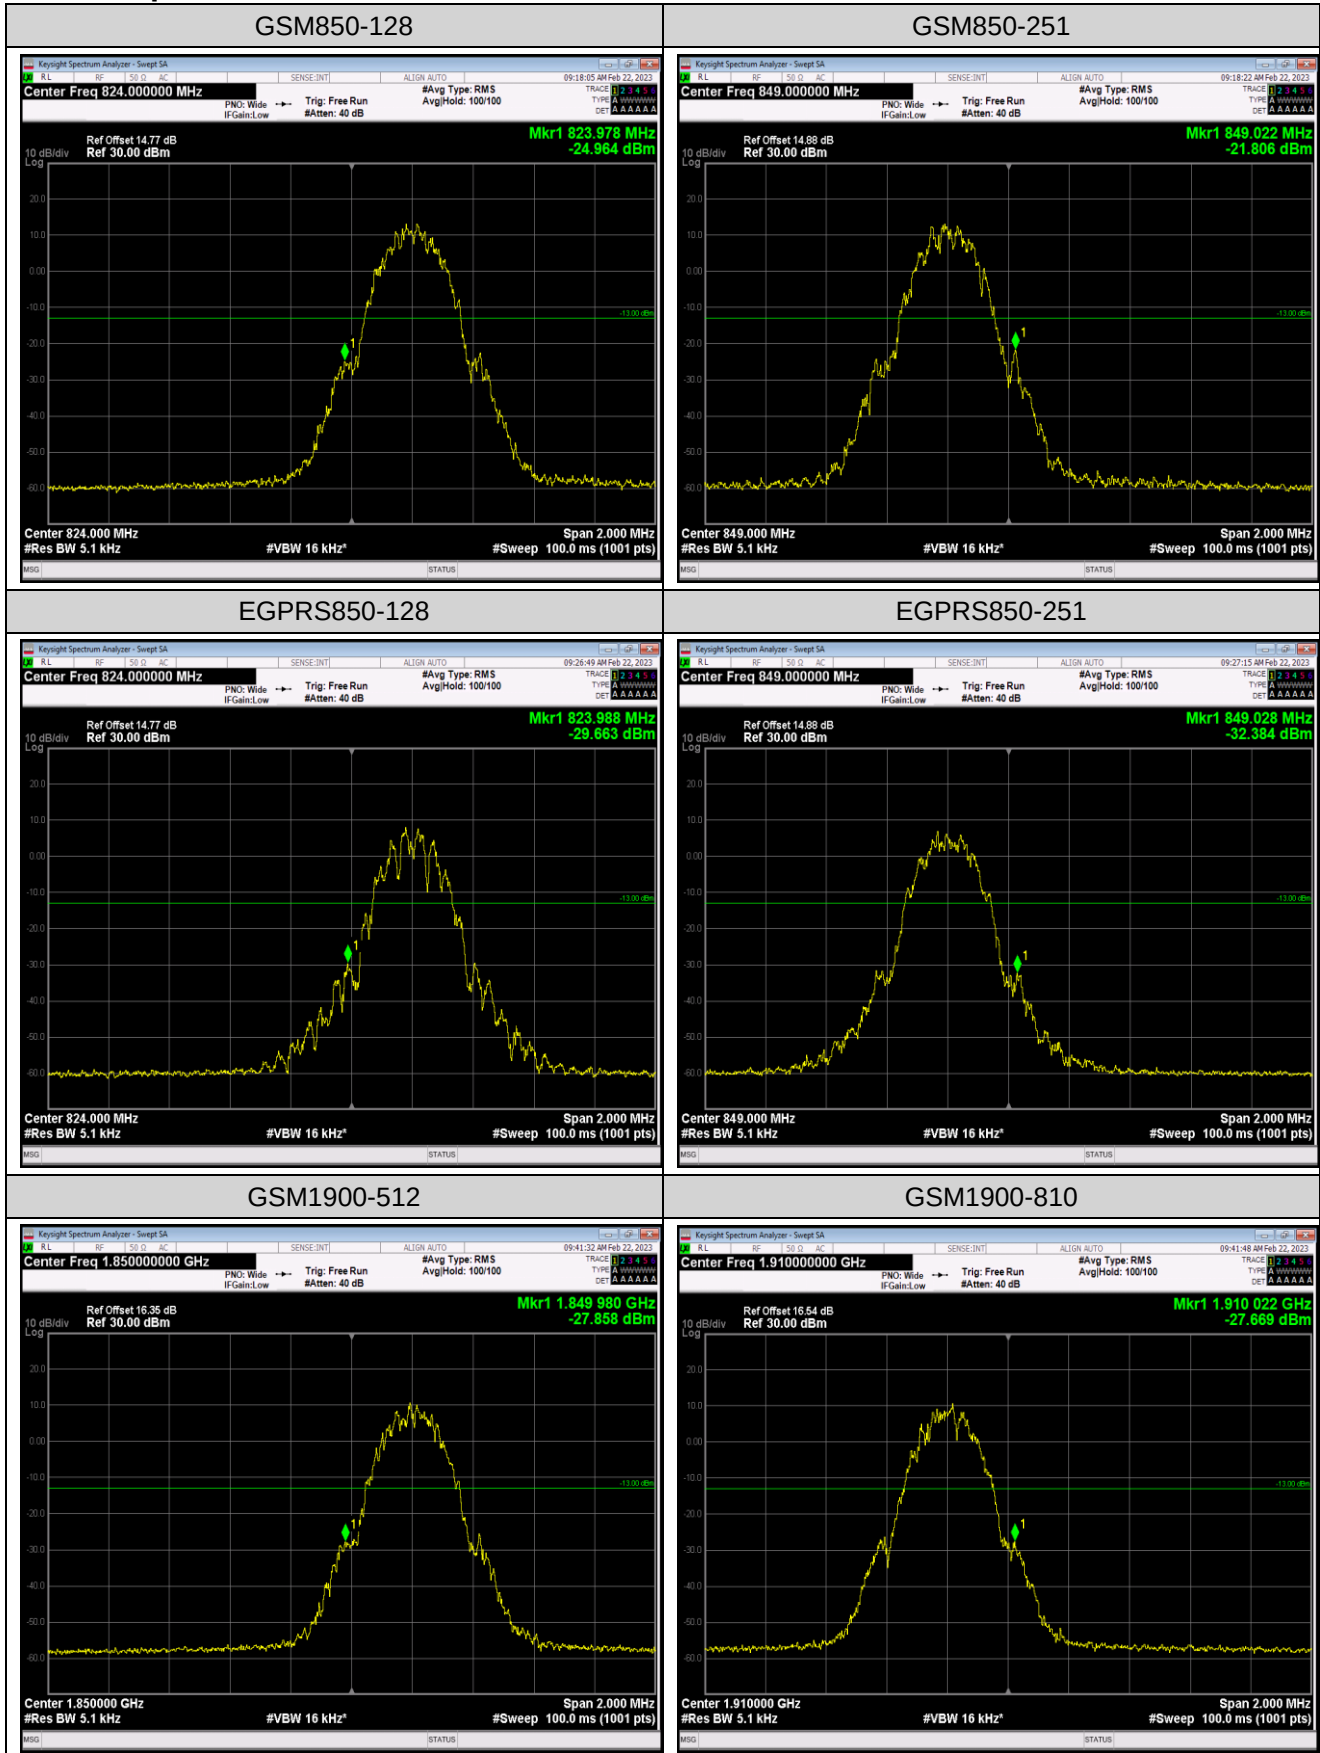

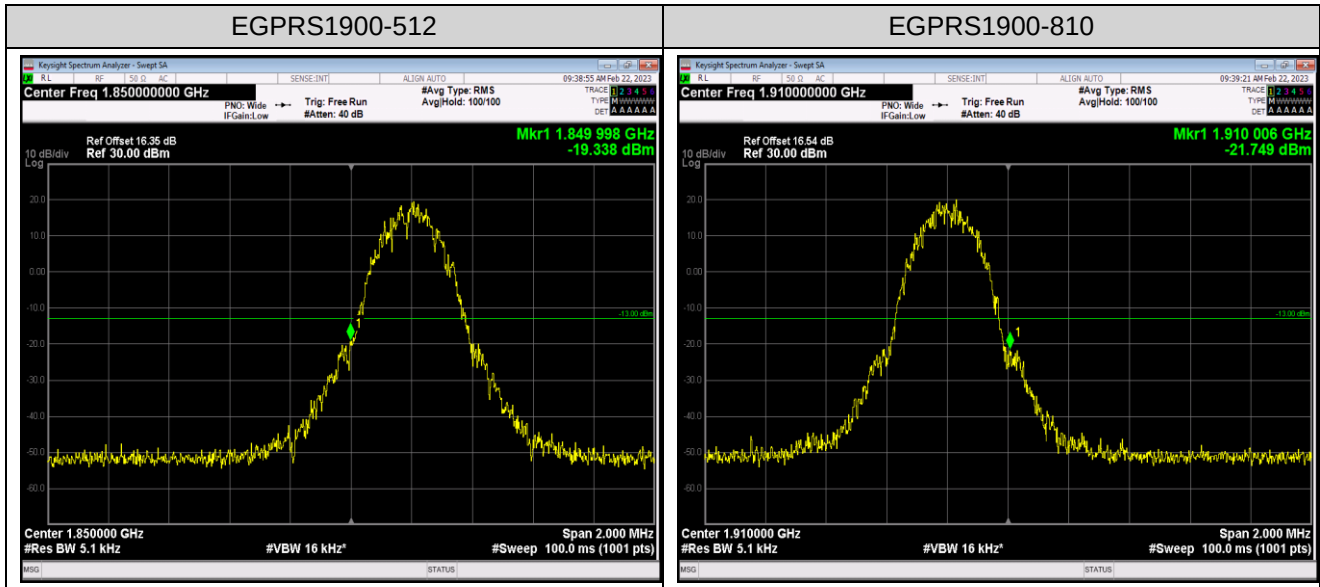


Appendix E: Conducted Spurious Emission

Test Result

Band	Channel	PCL	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	5	0.009~0.15MHz	0.01	-53.61	-33	PASS
GSM850	128	5	0.15~30MHz	0.15	-39.66	-13	PASS
GSM850	128	5	30~1000MHz	375.71	-38.44	-13	PASS
GSM850	128	5	1000~10000MHz	1648.3	-28.78	-13	PASS
GSM850	190	5	0.009~0.15MHz	0.01	-53.19	-33	PASS
GSM850	190	5	0.15~30MHz	0.15	-40.21	-13	PASS
GSM850	190	5	30~1000MHz	941.25	-37.99	-13	PASS
GSM850	190	5	1000~10000MHz	1672.9	-29.61	-13	PASS
GSM850	251	5	0.009~0.15MHz	0.01	-52.78	-33	PASS
GSM850	251	5	0.15~30MHz	0.16	-40.81	-13	PASS
GSM850	251	5	30~1000MHz	290.83	-39.03	-13	PASS
GSM850	251	5	1000~10000MHz	1697.8	-30.08	-13	PASS
GSM1900	512	0	0.009~0.15MHz	0.01	-52.68	-43	PASS
GSM1900	512	0	0.15~30MHz	0.15	-38.99	-23	PASS
GSM1900	512	0	30~1000MHz	954.47	-39.59	-13	PASS
GSM1900	512	0	1000~18000MHz	16199.13	-15.98	-13	PASS
GSM1900	661	0	0.009~0.15MHz	0.01	-54.13	-43	PASS
GSM1900	661	0	0.15~30MHz	0.15	-37.55	-23	PASS
GSM1900	661	0	30~1000MHz	908.53	-39.77	-13	PASS
GSM1900	661	0	1000~18000MHz	16909.17	-16.16	-13	PASS
GSM1900	810	0	0.009~0.15MHz	0.01	-54.23	-43	PASS
GSM1900	810	0	0.15~30MHz	0.15	-40.32	-23	PASS
GSM1900	810	0	30~1000MHz	999.19	-39.81	-13	PASS
GSM1900	810	0	1000~18000MHz	16785.63	-16.58	-13	PASS

Remark: All channel and all modulation had been tested, but only the worst case data displayed in this report.

Test Graphs

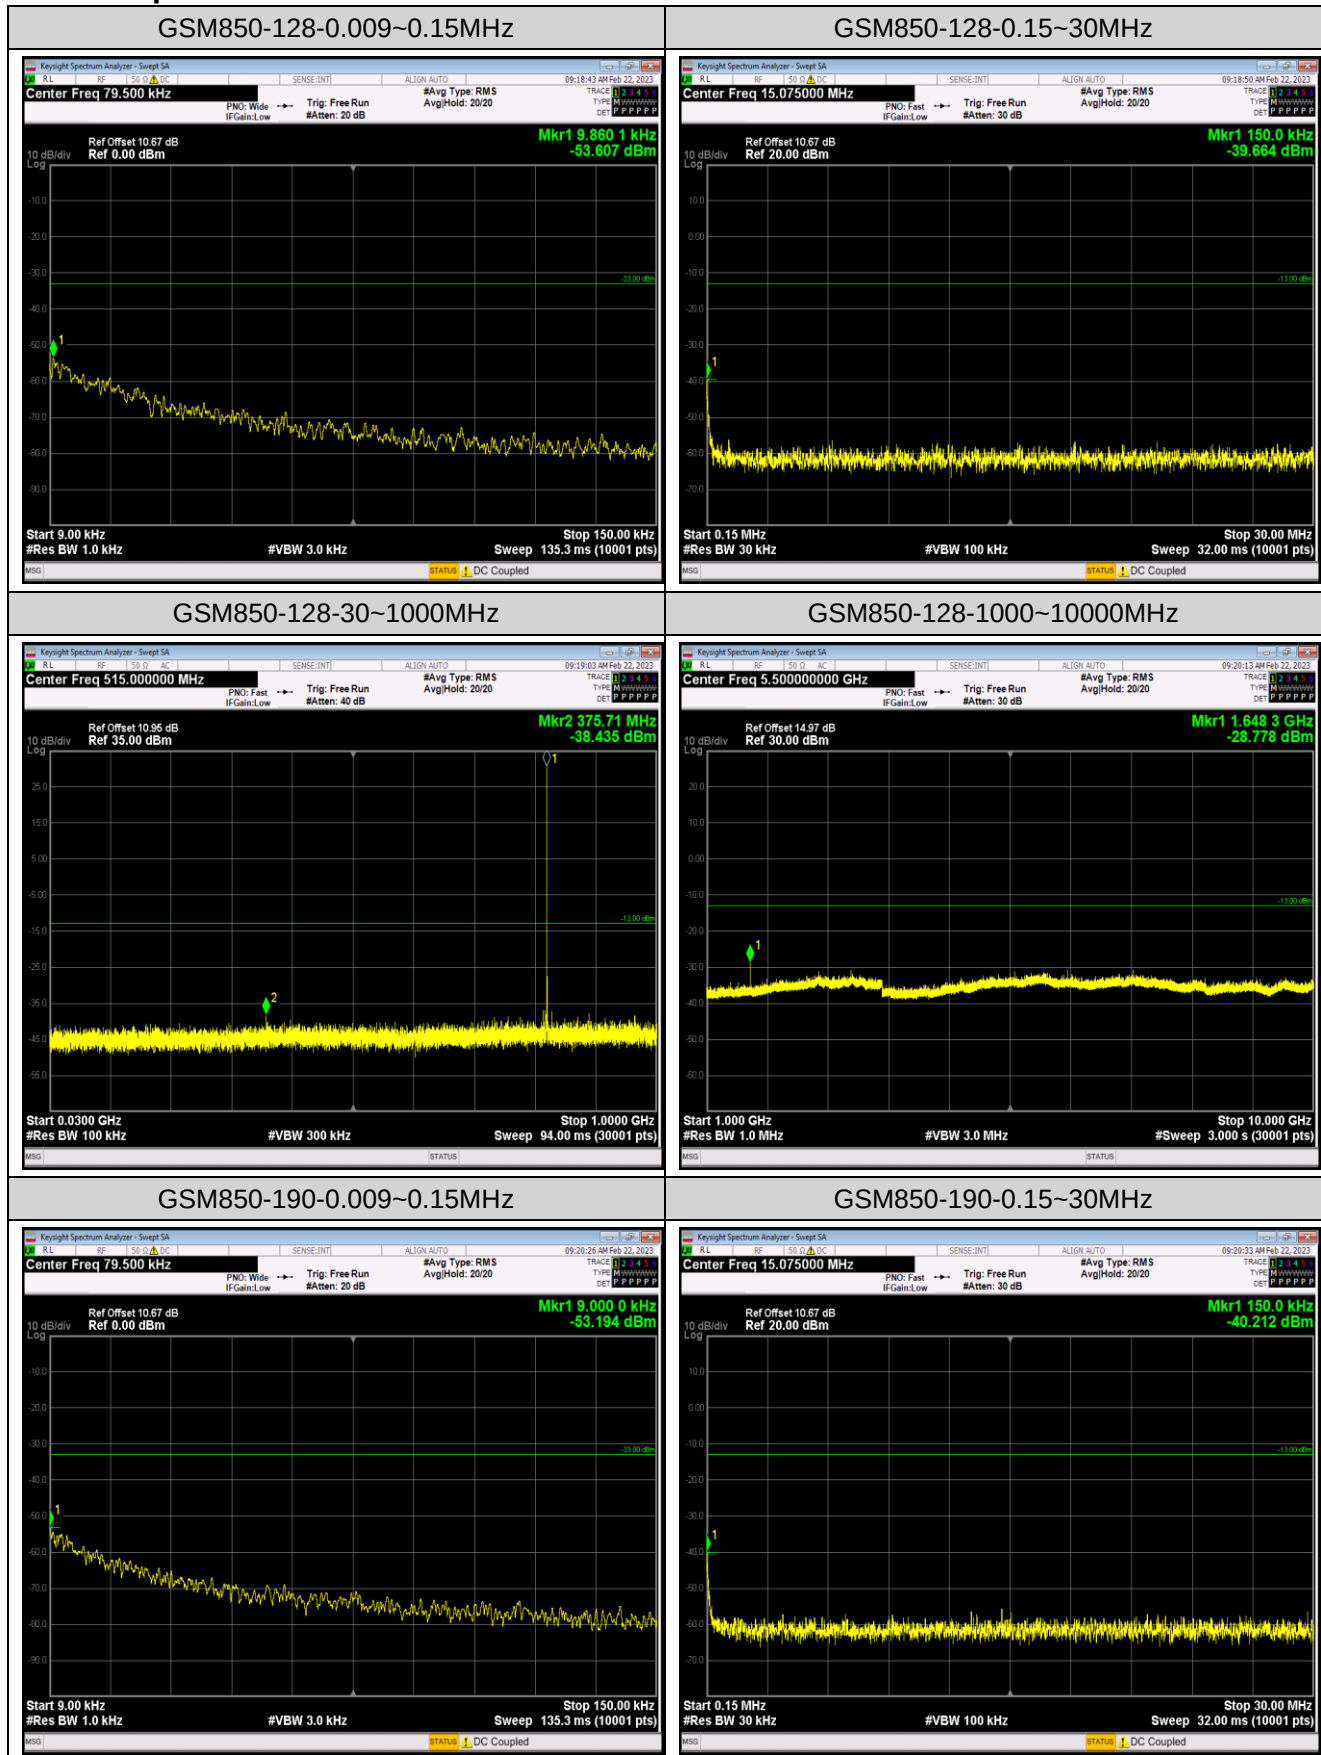



JianYan Testing Group Shenzhen Co., Ltd.


No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Project No.: JYTSZR2302027

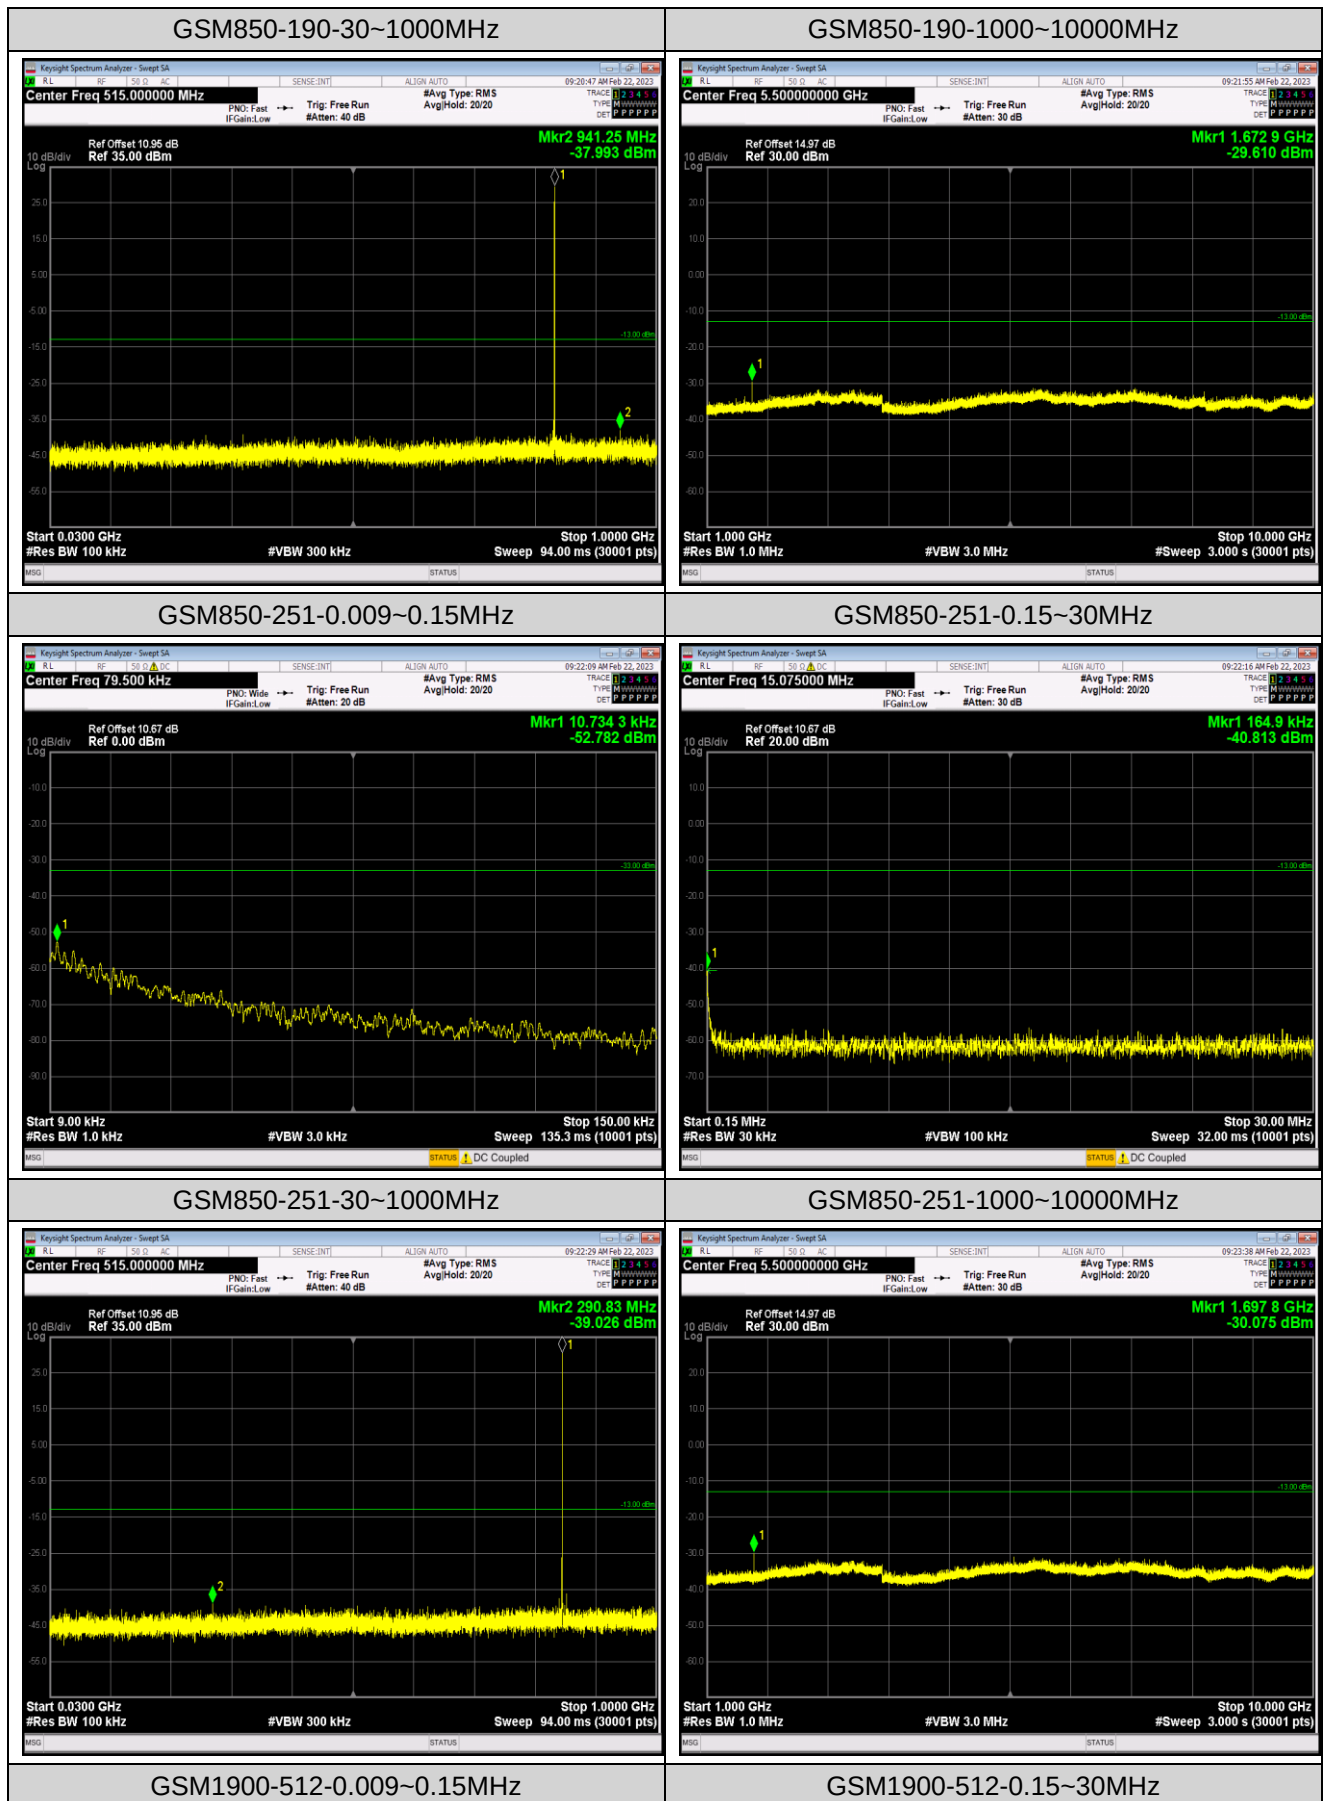

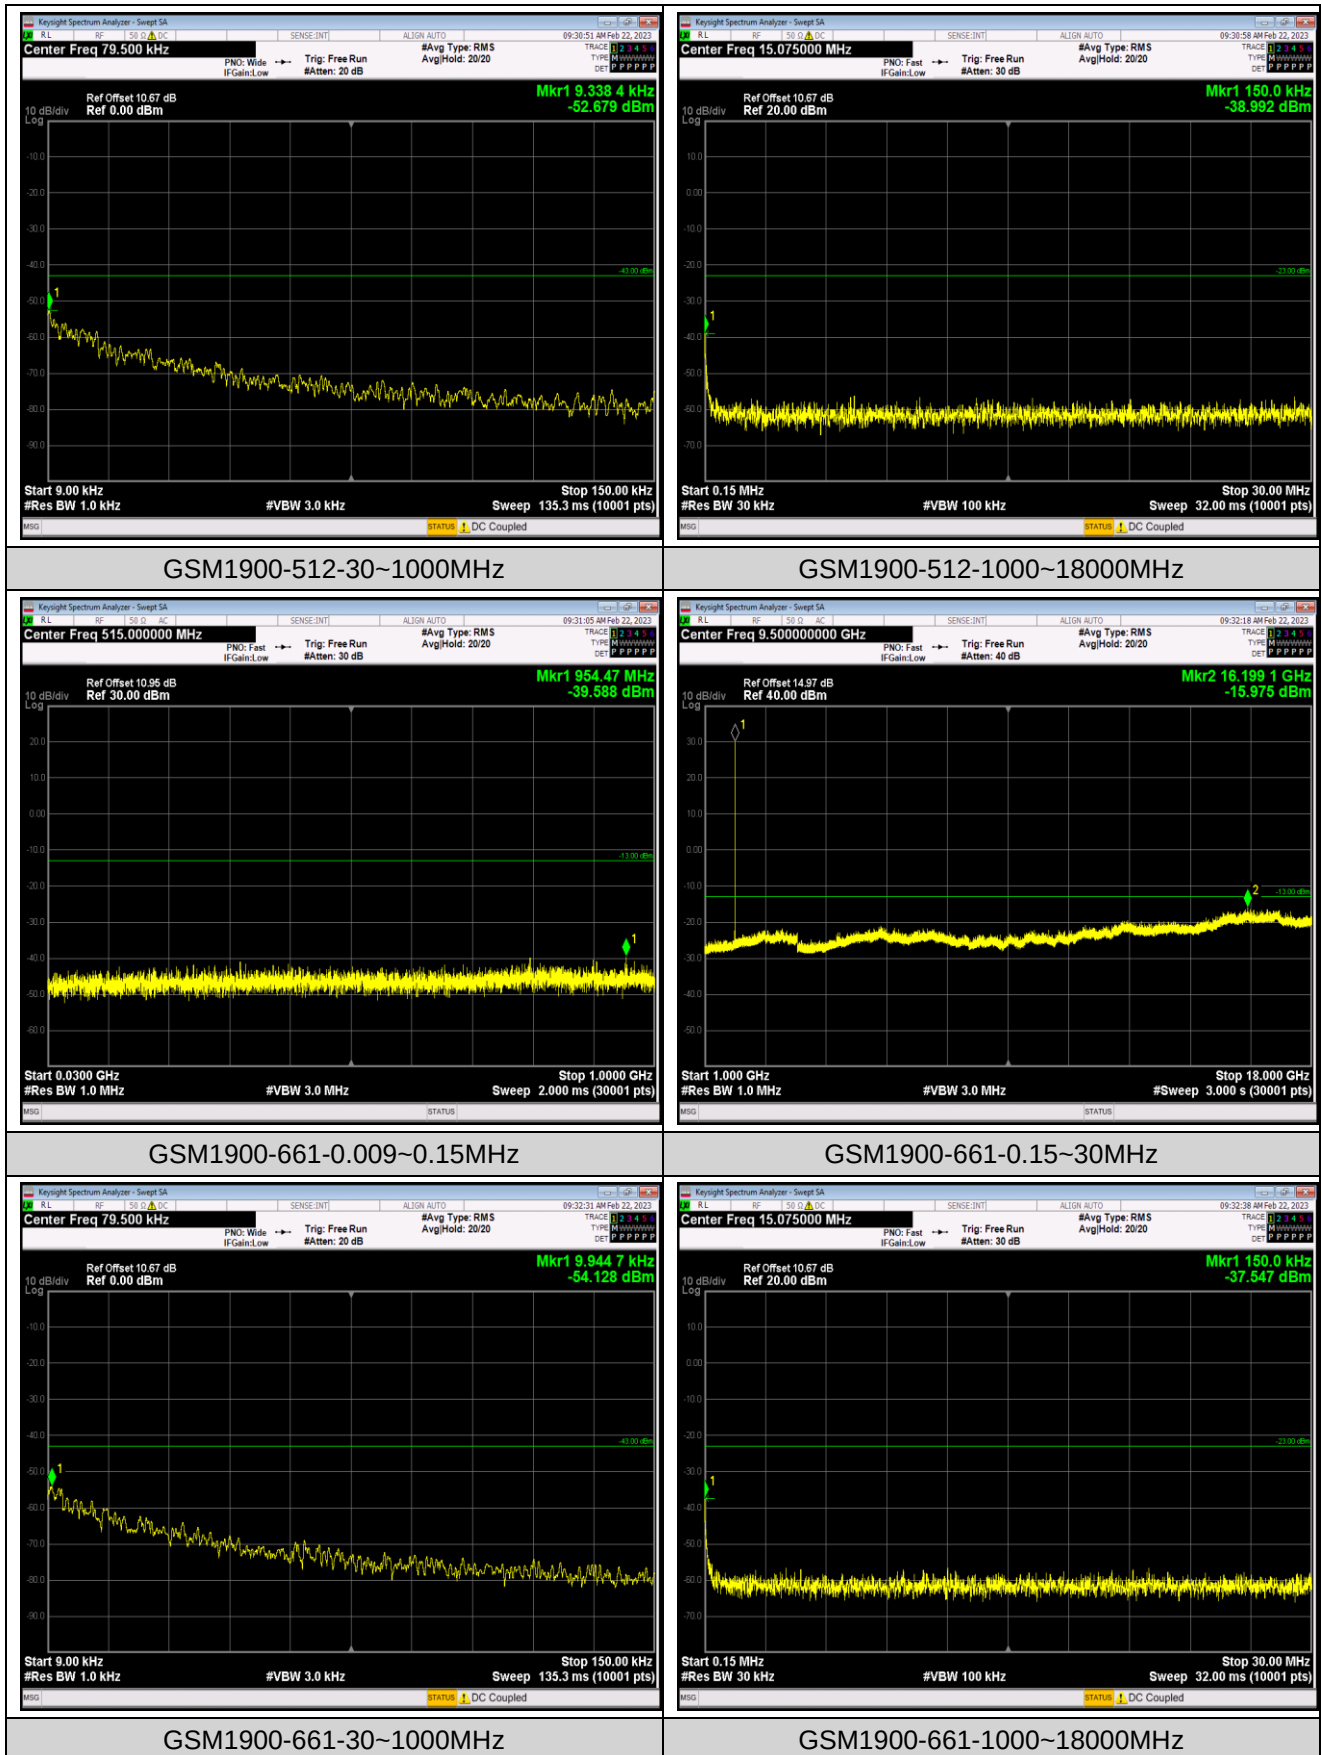

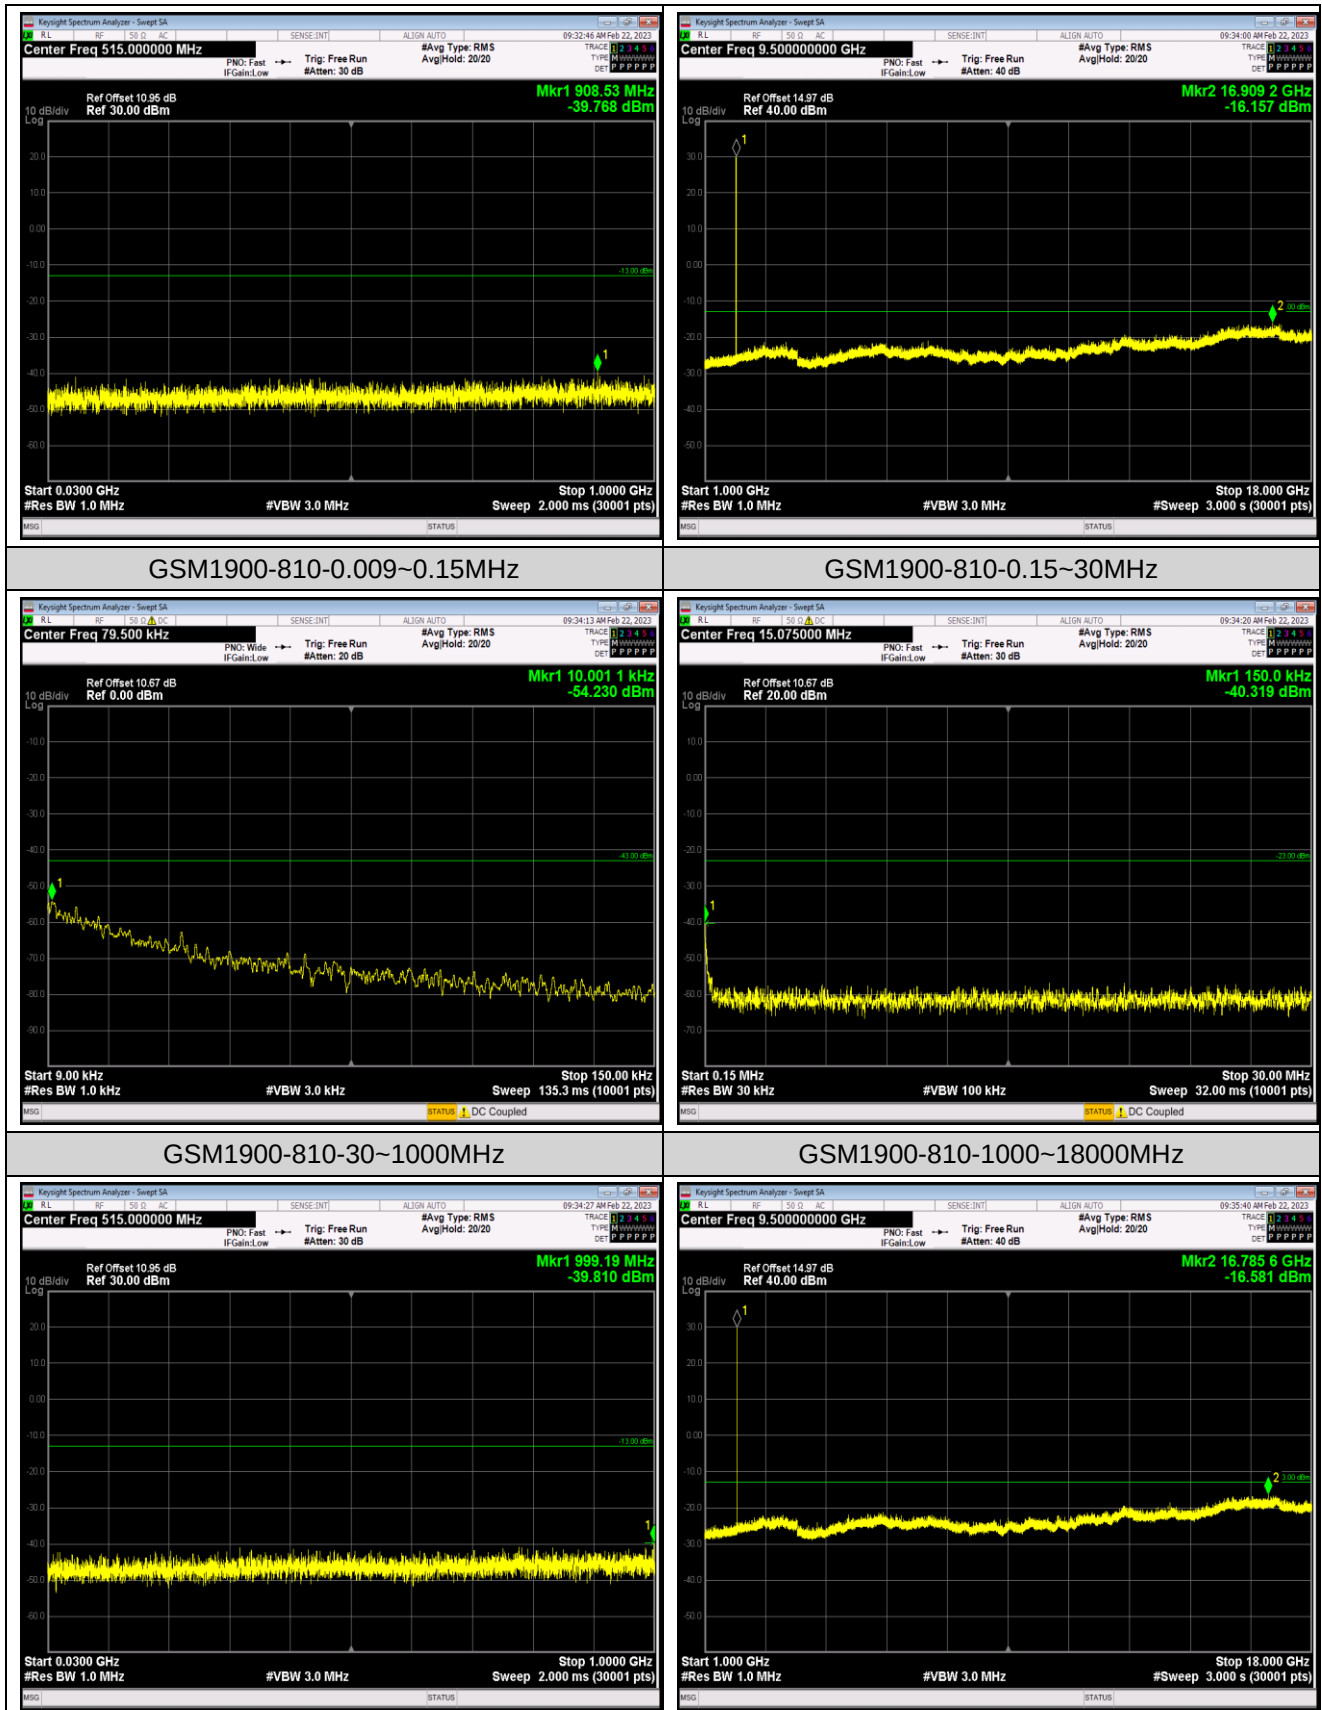

Appendix F: Frequency Stability

Test Result

Reference Frequency: GSM850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-2.62	-0.003132	±2.5	Pass
	-20	-3.07	-0.003670		
	-10	-11.43	-0.013662		
	0	-11.75	-0.014045		
	10	-11.30	-0.013507		
	20	-13.04	-0.015587		
	30	-8.27	-0.009885		
	40	-10.40	-0.012431		
	50	-9.94	-0.011881		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-1.16	-0.001387	±2.5	Pass
	3.87	-3.42	-0.004088		
	4.45	-3.00	-0.003586		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS850 Middle channel=190 Frequency=836.6MHz					
Temperature					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-2.13	-0.002546	±2.5	Pass
	-20	-0.61	-0.000729		
	-10	-8.36	-0.009993		
	0	-0.94	-0.001124		
	10	-1.52	-0.001817		
	20	9.98	0.011929		
	30	6.62	0.007913		
	40	3.91	0.004674		
	50	-5.13	-0.006132		
Voltage					
Temperature (℃)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-1.52	-0.001817	±2.5	Pass
	3.87	1.13	0.001351		
	4.45	-2.42	-0.002893		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: PCS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-10.14	-0.005394	Within authorized band for PCS 1900	Pass
	-20	-11.78	-0.006266		
	-10	-18.73	-0.009963		
	0	-23.47	-0.012484		
	10	-16.47	-0.008761		
	20	-14.04	-0.007468		
	30	-16.69	-0.008878		
	40	-16.76	-0.008915		
	50	-21.41	-0.011388		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-18.69	-0.009941	Within authorized band for PCS 1900	Pass
	3.87	-15.56	-0.008277		
	4.45	-12.79	-0.006803		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Reference Frequency: EGPRS1900 Middle channel=661 Frequency=1880MHz					
Temperature					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.87	-30	-9.72	-0.005170	Within authorized band for PCS 1900	Pass
	-20	-13.43	-0.007144		
	-10	-9.04	-0.004809		
	0	-11.14	-0.005926		
	10	-7.39	-0.003931		
	20	-8.78	-0.004670		
	30	9.52	0.005064		
	40	13.27	0.007059		
	50	5.94	0.003160		
Voltage					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	3.45	-4.20	-0.002234	Within authorized band for PCS 1900	Pass
	3.87	0.16	0.000085		
	4.45	-8.10	-0.004309		
Remark: All channel had been tested, but only the worst case data displayed in this report.					

Appendix G: Modulation Characteristics

Test Result

Band	Channel	Result	Verdict
GSM850	190	PASS	PASS
EGPRS850	190	PASS	PASS
GSM1900	661	PASS	PASS
EGPRS1900	661	PASS	PASS

Remark: All channel had been tested, but only the worst case data displayed in this report.

Test Graphs

