

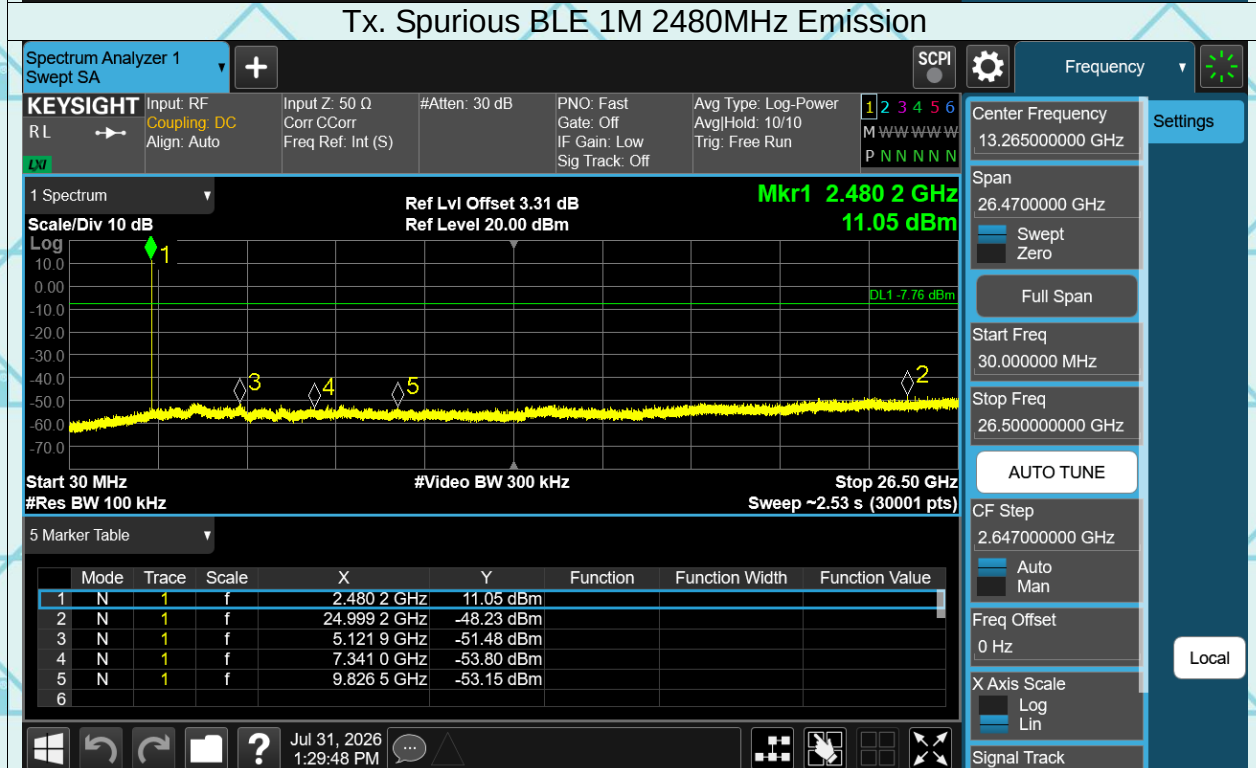
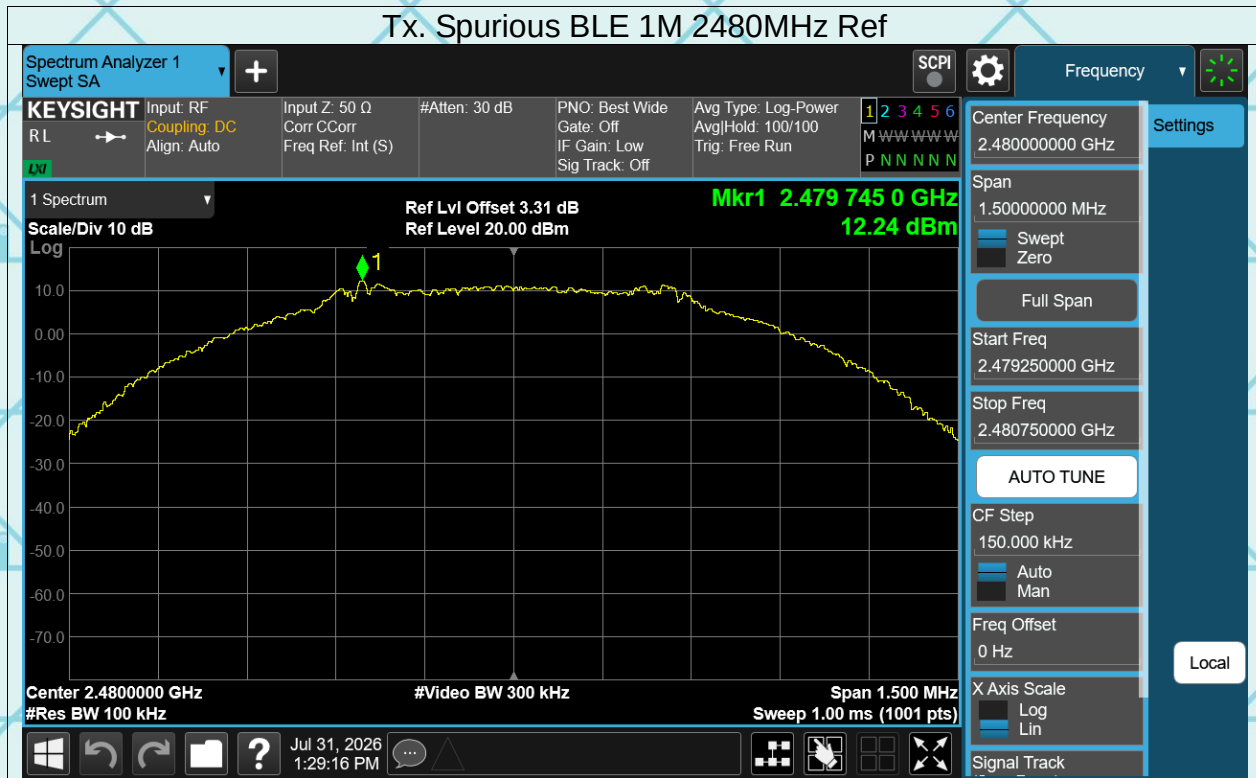




Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

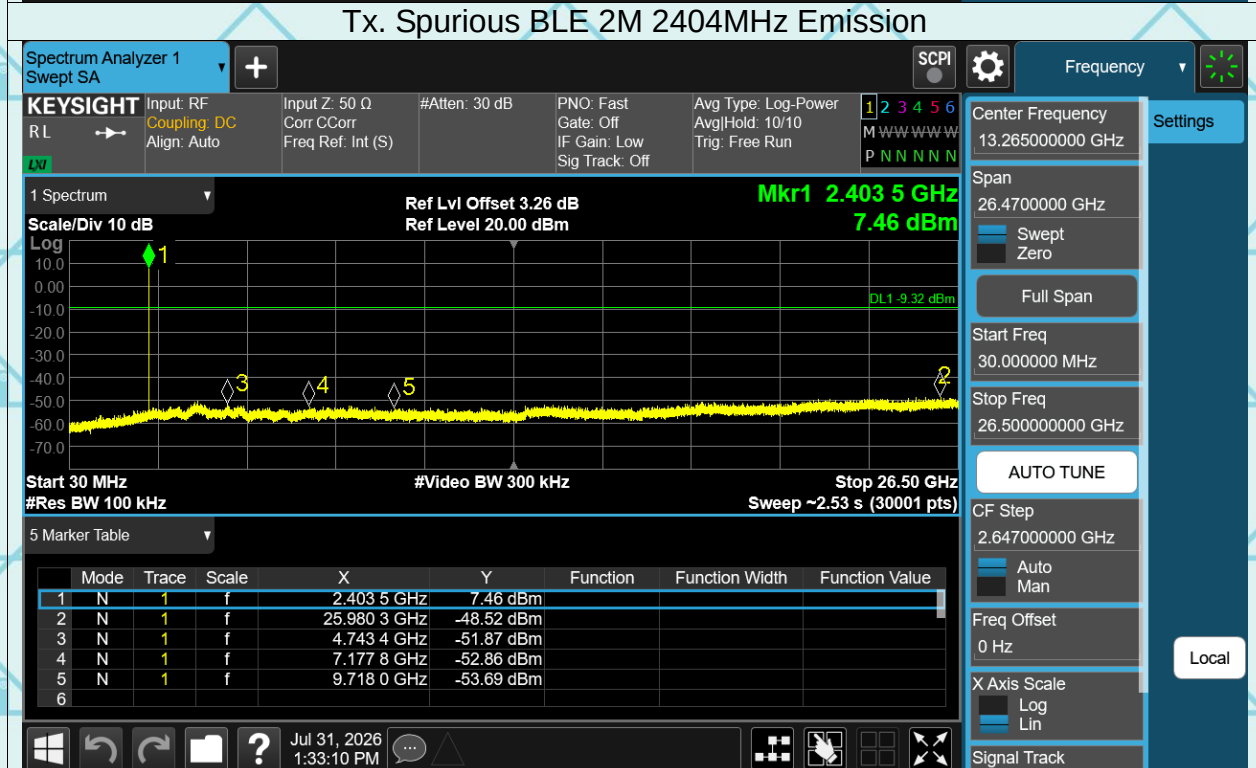



Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

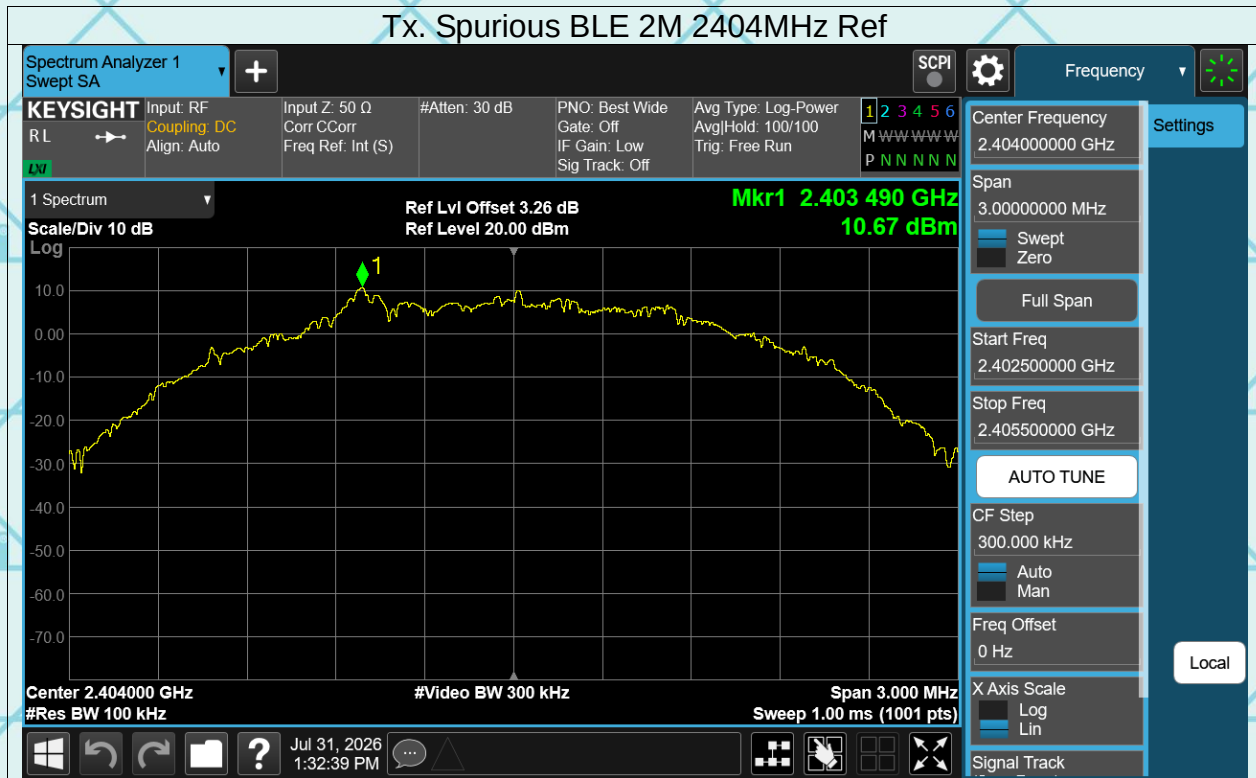

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

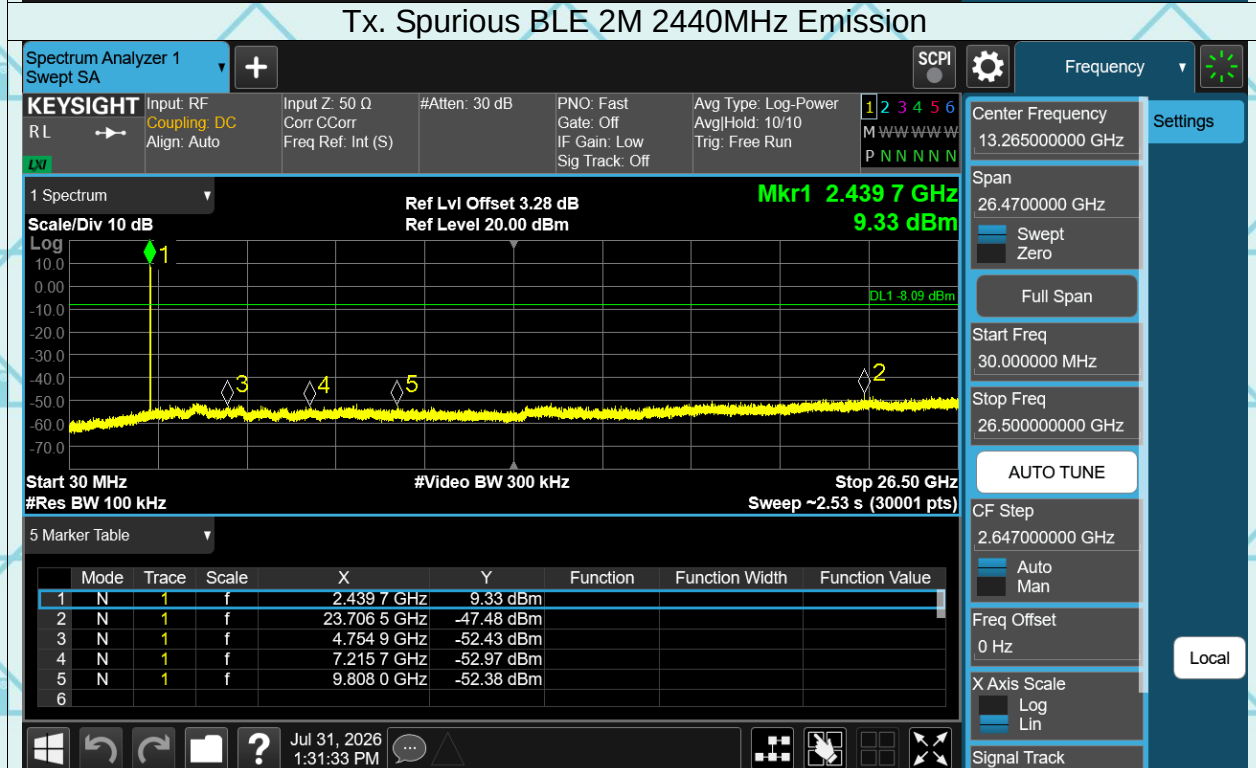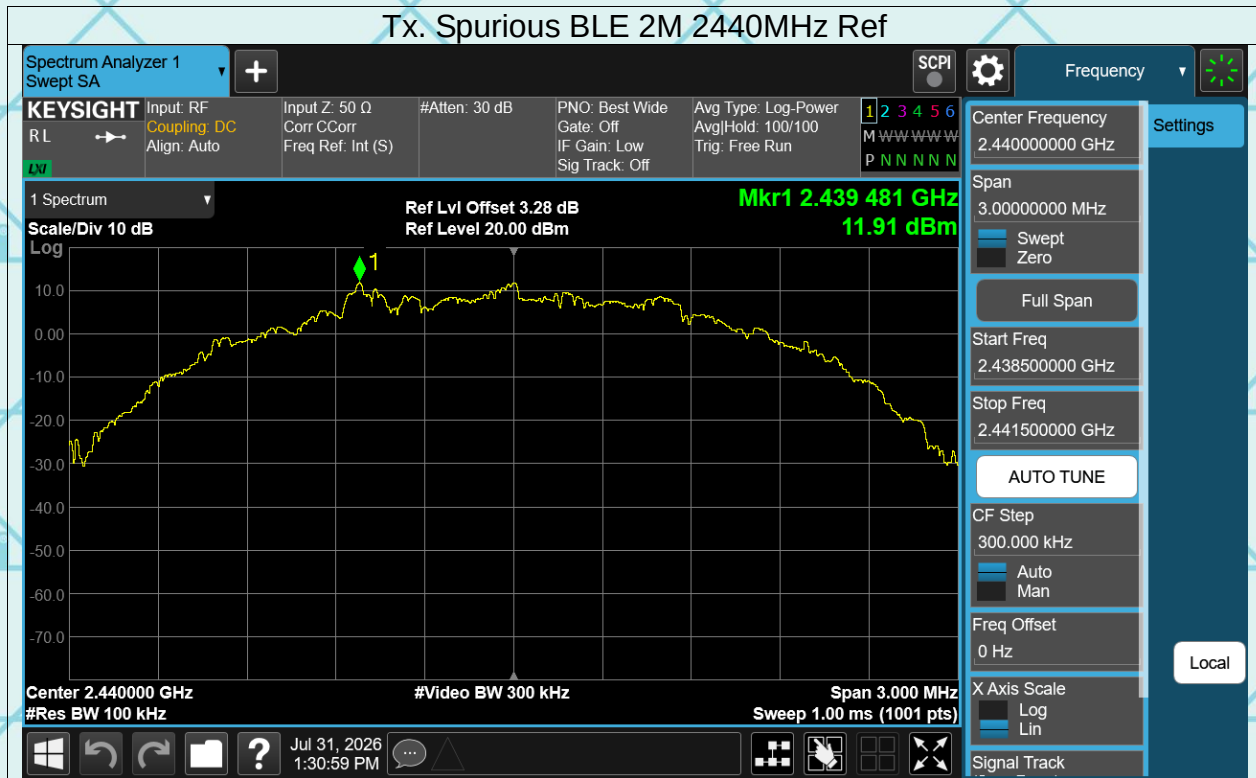



Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

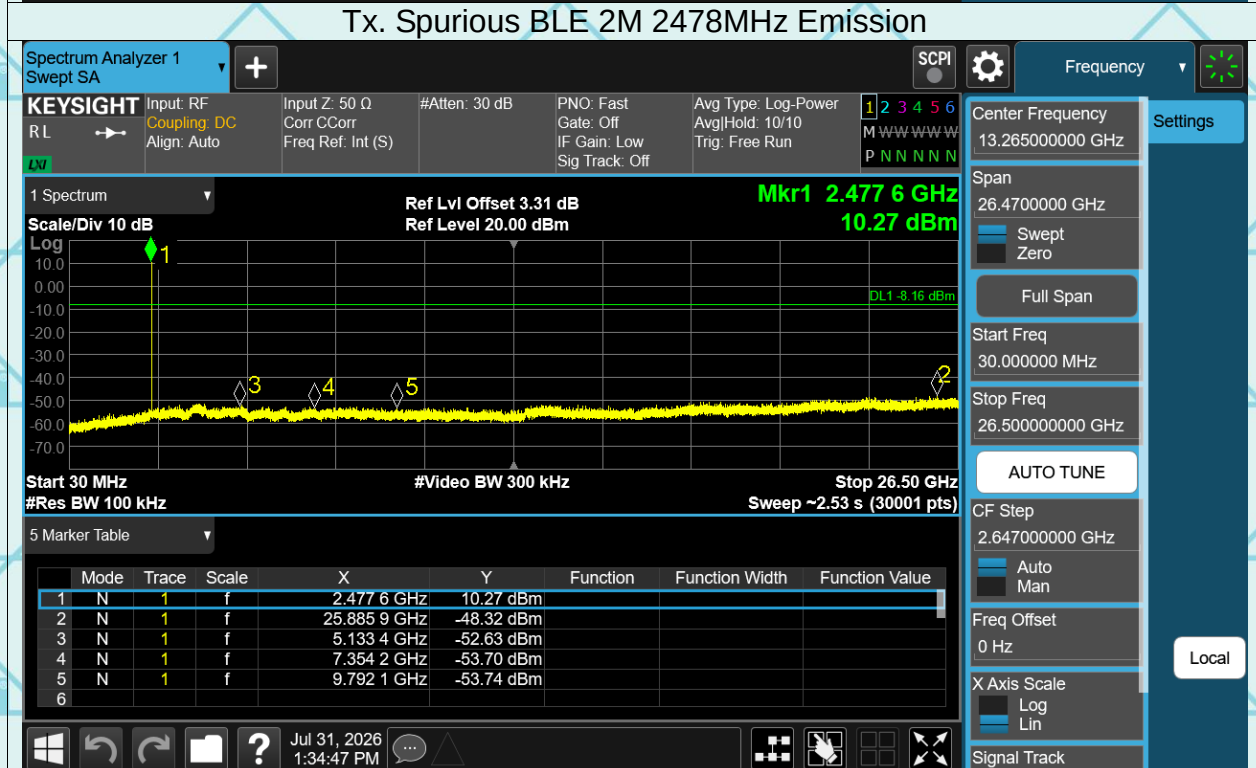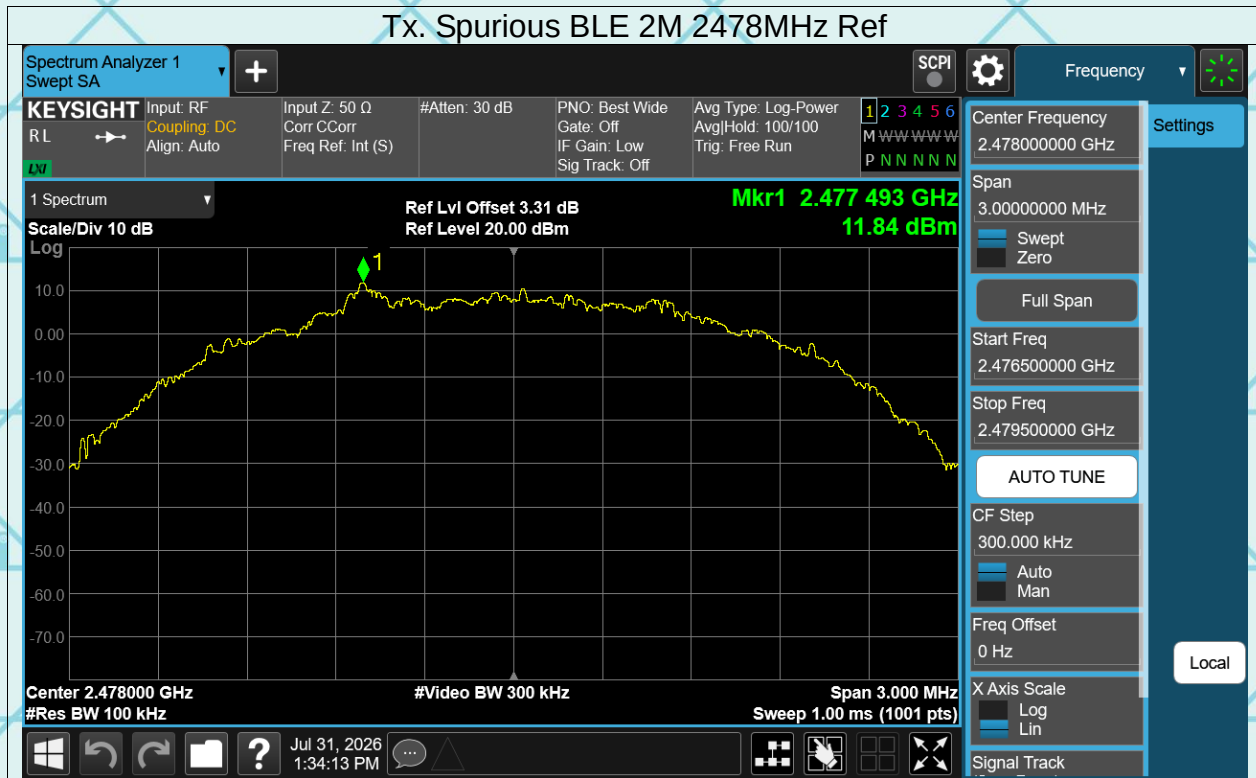


6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

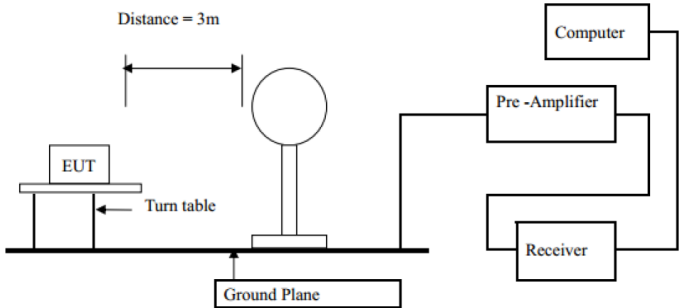Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10:2020			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Operation mode:	Refer to item 4.1			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:				Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Test setup:	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)	300	
	0.490-1.705	24000/F(KHz)	30	
	1.705-30	30	30	
	30-88	100	3	
Test setup:	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
For radiated emissions below 30MHz				
				
30MHz to 1GHz				

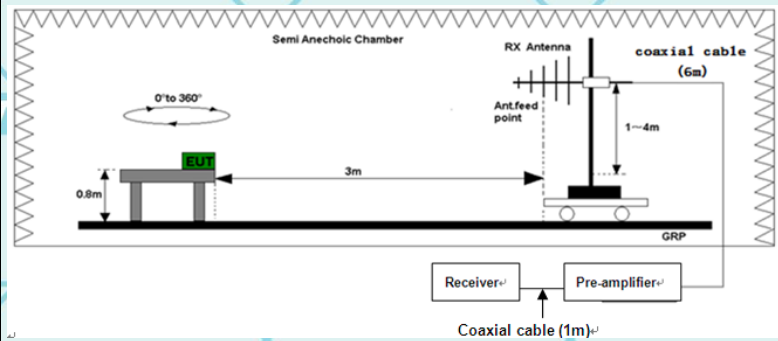

Above 1GHz

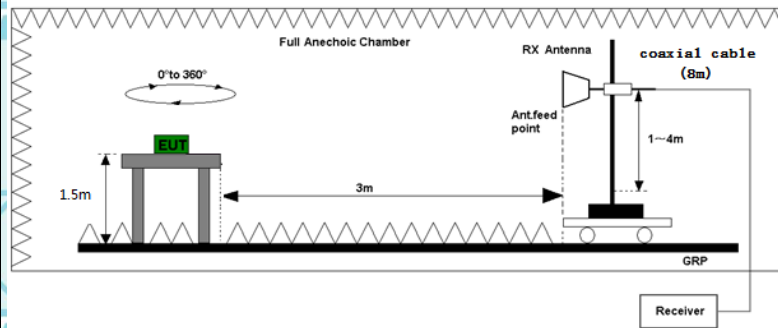

Test Procedure:

- For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.1 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- Corrected Reading: Antenna Factor + Cable Loss +

	Read Level - Preamplifier Factor = Level 3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026


6.7.2. Test Data(Worst case)

The worst mode is 2402MHz

Please refer to following diagram for individual

Below 1GHz


Horizontal:

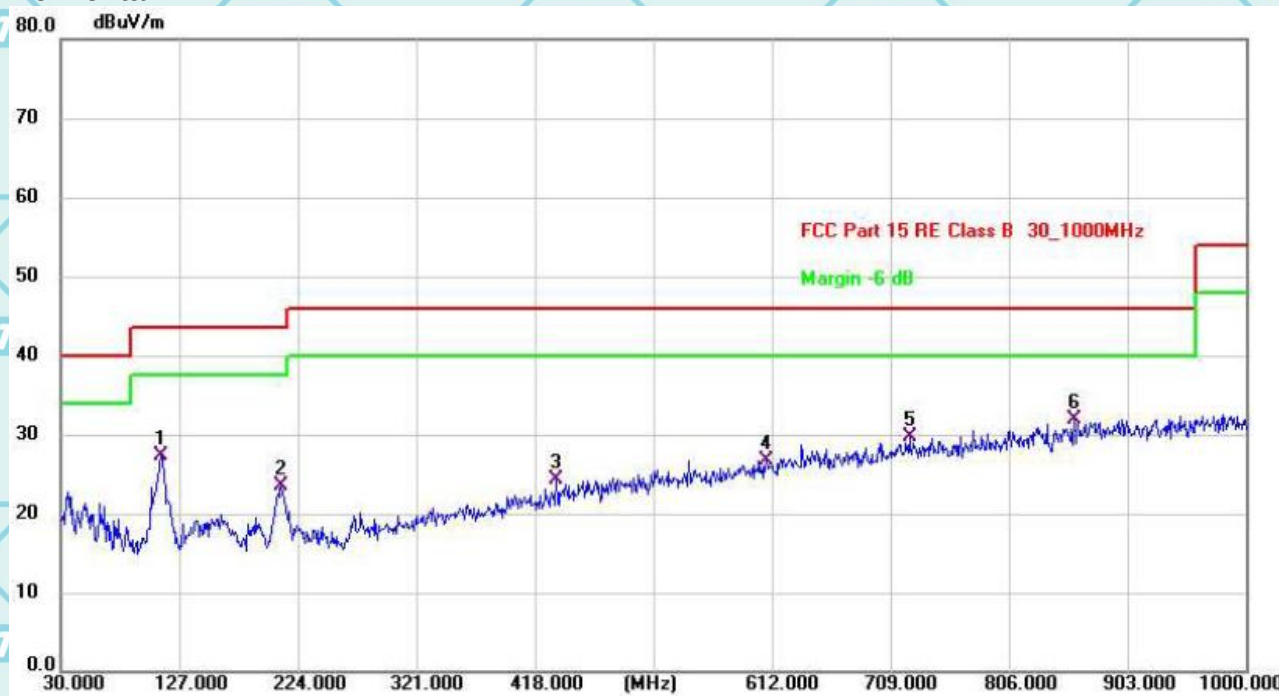

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		111.4800	37.20	-9.81	27.39	43.50	16.11	QP
2		210.4200	34.29	-10.74	23.55	43.50	19.95	QP
3		435.4600	26.88	-2.65	24.23	46.00	21.77	QP
4		607.1500	25.25	1.50	26.75	46.00	19.25	QP
5		724.5200	26.05	3.72	29.77	46.00	16.23	QP
6	*	859.3500	25.96	5.95	31.91	46.00	14.09	QP

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

Vertical:

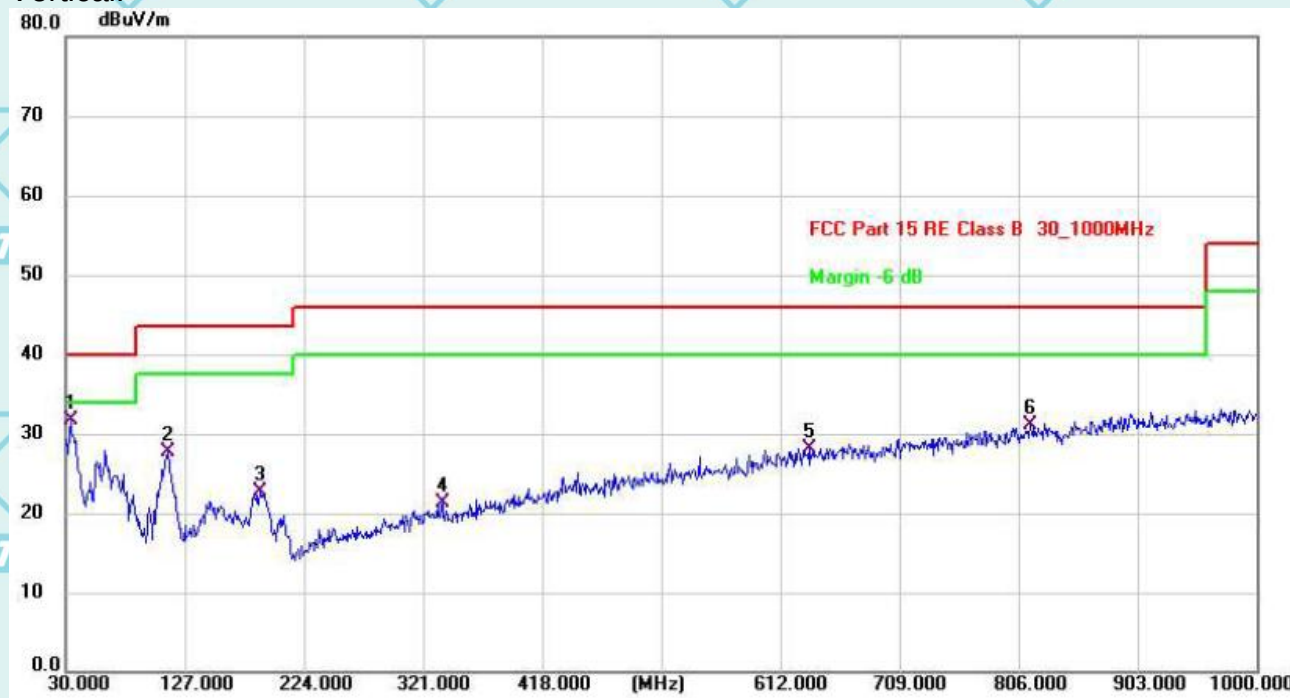

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	33.8800	52.14	-20.53	31.61	40.00	8.39	QP
2		113.4200	47.87	-20.14	27.73	43.50	15.77	QP
3		188.1100	42.45	-19.73	22.72	43.50	20.78	QP
4		336.5200	40.29	-19.08	21.21	46.00	24.79	QP
5		636.2500	45.73	-17.53	28.20	46.00	17.80	QP
6		815.7000	47.58	-16.56	31.02	46.00	14.98	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Over(dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

Above 1GHz

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.


Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3 The prototype has two BT antennas, with the worst antenna being . This project only reflects the worst antenna data

Note 4 BLE 1M and 2M both tested the report and only recorded the worst-case scenario 1M:

Low channel: 2402MHz

Horizontal:

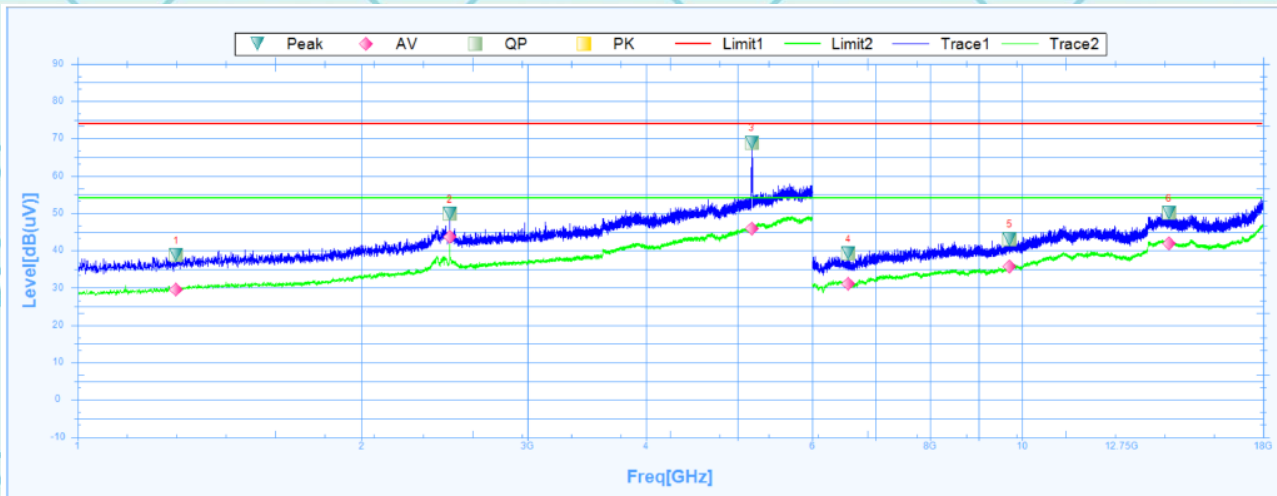


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1272.5000	38.82	24.65	14.17	74	-35.18	119.2	Vertical	PK	Pass
1	1272.5000	29.66	24.65	5.01	54	-24.34	119.2	Vertical	AV	Pass
2	2480.0000	49.79	27.53	22.26	74	-24.21	39.1	Vertical	PK	Pass
2	2480.0000	43.74	27.53	16.21	54	-10.26	39.1	Vertical	AV	Pass
3	5176.8750	68.98	31.74	37.24	74	-5.02	-0.1	Vertical	PK	Pass
3	5176.8750	45.9	31.74	14.16	54	-8.1	-0.1	Vertical	AV	Pass
4	6550.5000	39.23	4.69	34.54	74	-34.77	226.5	Vertical	PK	Pass
4	6550.5000	31.02	4.69	26.33	54	-22.98	226.5	Vertical	AV	Pass
5	9706.5000	43.13	11.64	31.49	74	-30.87	178.6	Vertical	PK	Pass
5	9706.5000	35.7	11.64	24.06	54	-18.3	178.6	Vertical	AV	Pass
6	14310.0000	50.18	18.81	31.37	74	-23.82	331.7	Vertical	PK	Pass
6	14310.0000	41.89	18.81	23.08	54	-12.11	331.7	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

Vertical:

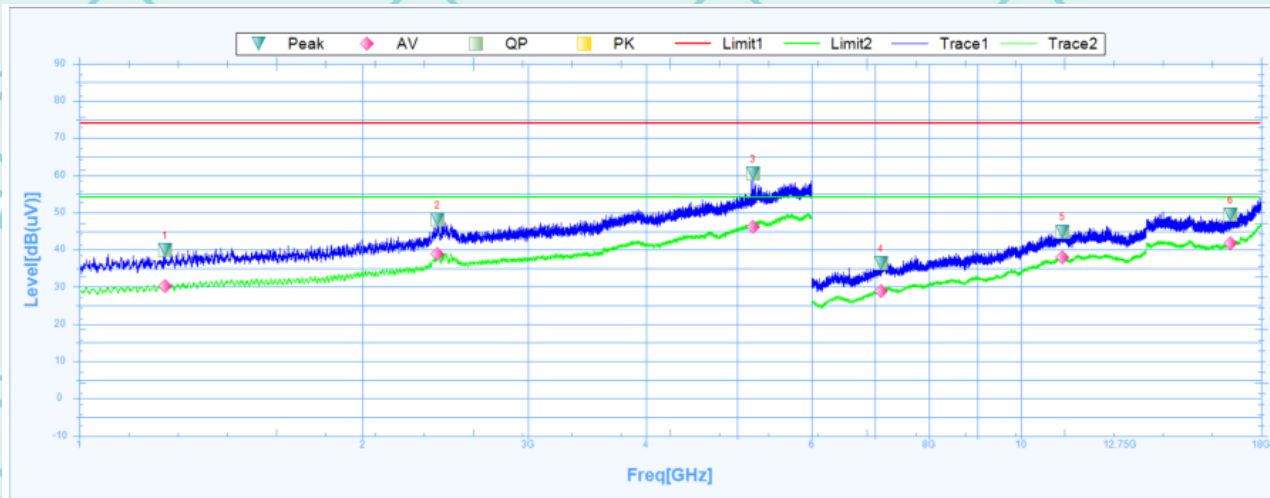


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1233.1250	39.91	24.52	15.39	74	-34.09	167.1	Horizontal	PK	Pass
1	1233.1250	30.12	24.52	5.6	54	-23.88	167.1	Horizontal	AV	Pass
2	2402.5000	48.14	27.27	20.87	74	-25.86	8	Horizontal	PK	Pass
2	2402.5000	38.81	27.27	11.54	54	-15.19	8	Horizontal	AV	Pass
3	5197.5000	60.38	31.76	28.62	74	-13.62	65.4	Horizontal	PK	Pass
3	5197.5000	46.22	31.76	14.46	54	-7.78	65.4	Horizontal	AV	Pass
4	7104.0000	36.33	6.76	29.57	74	-37.67	227.4	Horizontal	PK	Pass
4	7104.0000	28.89	6.76	22.13	54	-25.11	227.4	Horizontal	AV	Pass
5	11077.5000	44.89	15.87	29.02	74	-29.11	151	Horizontal	PK	Pass
5	11077.5000	37.9	15.87	22.03	54	-16.1	151	Horizontal	AV	Pass
6	16702.5000	49.39	19.42	29.97	74	-24.61	143.8	Horizontal	PK	Pass
6	16702.5000	41.67	19.42	22.25	54	-12.33	143.8	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

Middle channel: 2440MHz

Horizontal:

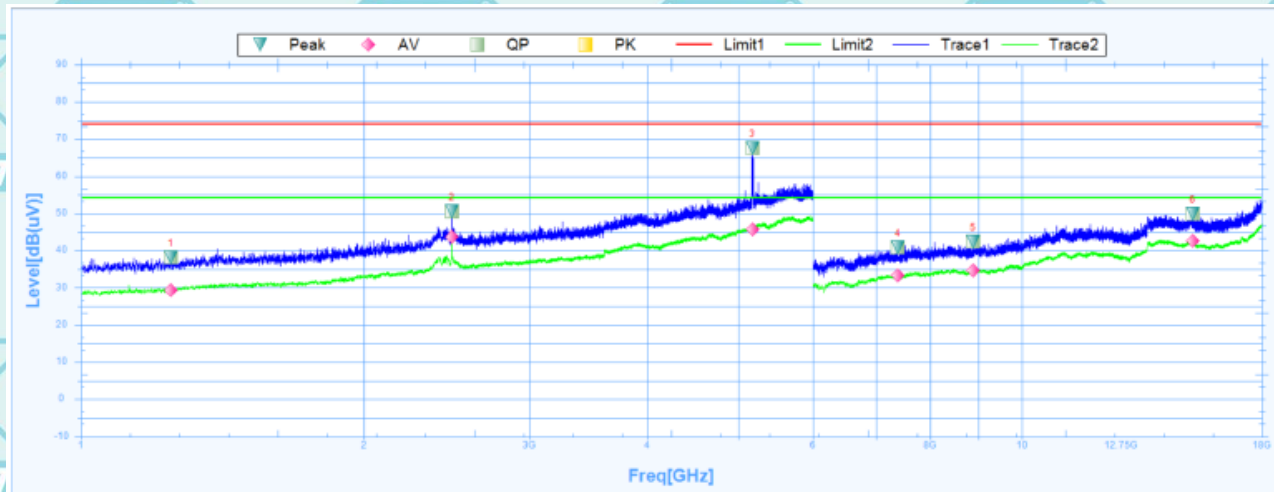


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1245.6250	38.14	24.56	13.58	74	-35.86	162.3	Horizontal	PK	Pass
1	1245.6250	29.39	24.56	4.83	54	-24.61	162.3	Horizontal	AV	Pass
2	2480.0000	50.46	27.53	22.93	74	-23.54	343.4	Horizontal	PK	Pass
2	2480.0000	43.79	27.53	16.26	54	-10.21	343.4	Horizontal	AV	Pass
3	5173.1250	67.51	31.74	35.77	74	-6.49	267.5	Horizontal	PK	Pass
3	5173.1250	45.62	31.74	13.88	54	-8.38	267.5	Horizontal	AV	Pass
4	7386.0000	40.72	7.11	33.61	74	-33.28	360.1	Horizontal	PK	Pass
4	7386.0000	33.29	7.11	26.18	54	-20.71	360.1	Horizontal	AV	Pass
5	8877.0000	42.28	9.69	32.59	74	-31.72	360.1	Horizontal	PK	Pass
5	8877.0000	34.56	9.69	24.87	54	-19.44	360.1	Horizontal	AV	Pass
6	15190.5000	49.96	19.22	30.74	74	-24.04	85.4	Horizontal	PK	Pass
6	15190.5000	42.66	19.22	23.44	54	-11.34	85.4	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

Vertical:

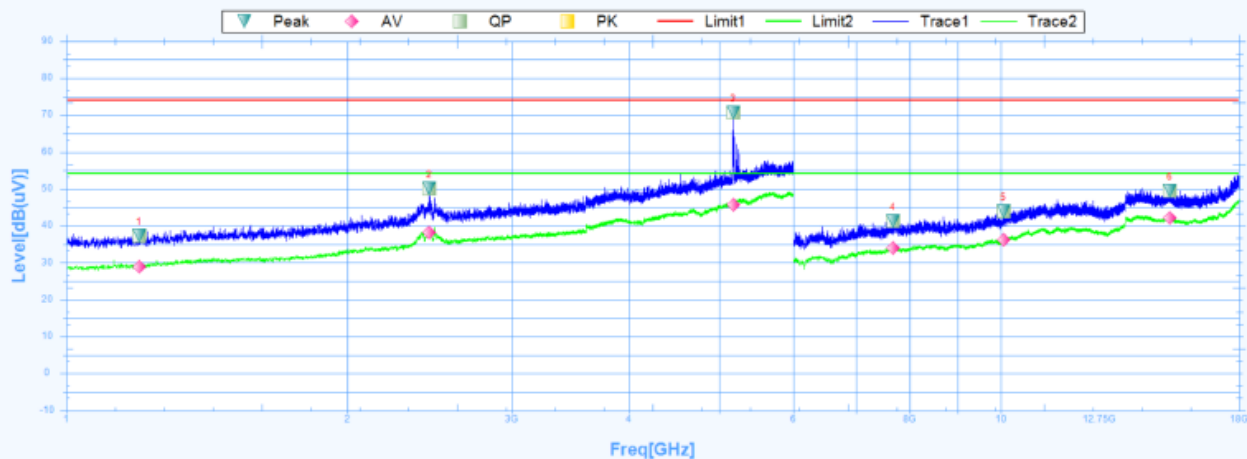


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1196.2500	37.37	24.4	12.97	74	-36.63	358.7	Vertical	PK	Pass
1	1196.2500	28.89	24.4	4.49	54	-25.11	358.7	Vertical	AV	Pass
2	2447.5000	49.99	27.42	22.57	74	-24.01	359.5	Vertical	PK	Pass
2	2447.5000	38.19	27.42	10.77	54	-15.81	359.5	Vertical	AV	Pass
3	5175.6250	70.7	31.74	38.96	74	-3.3	16.6	Vertical	PK	Pass
3	5175.6250	45.75	31.74	14.01	54	-8.25	16.6	Vertical	AV	Pass
4	7665.0000	41.27	7.96	33.31	74	-32.73	44.8	Vertical	PK	Pass
4	7665.0000	33.89	7.96	25.93	54	-20.11	44.8	Vertical	AV	Pass
5	10068.0000	43.84	12.56	31.28	74	-30.16	90.2	Vertical	PK	Pass
5	10068.0000	36.21	12.56	23.65	54	-17.79	90.2	Vertical	AV	Pass
6	15171.0000	49.51	19.37	30.14	74	-24.49	42.4	Vertical	PK	Pass
6	15171.0000	42.12	19.37	22.75	54	-11.88	42.4	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

High channel: 2480MHz

Horizontal:

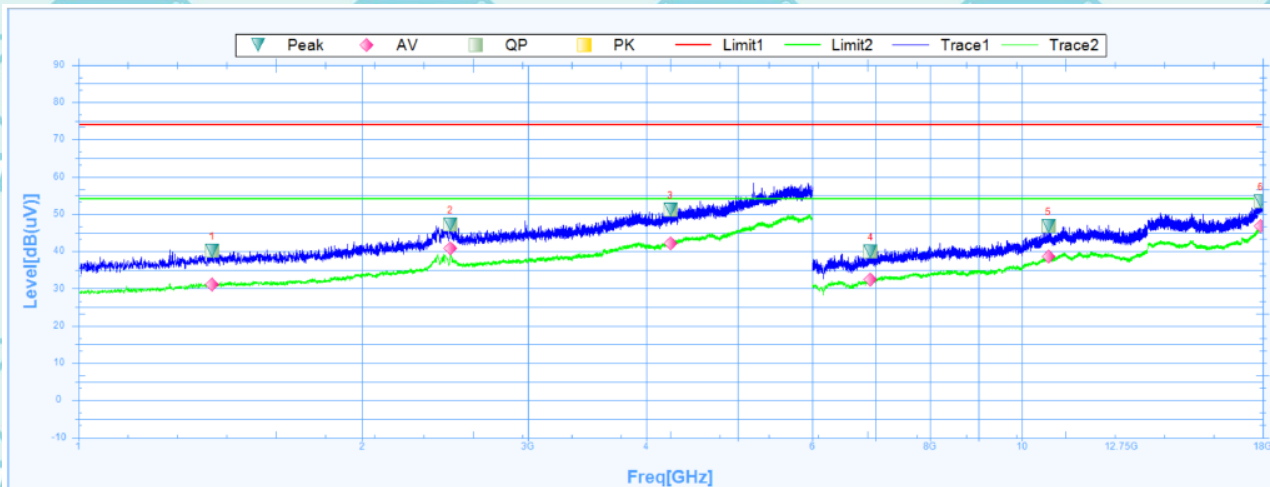


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1386.2500	40.09	25.05	15.04	74	-33.91	167	Horizontal	PK	Pass
1	1386.2500	31.09	25.05	6.04	54	-22.91	167	Horizontal	AV	Pass
2	2480.0000	47.27	27.53	19.74	74	-26.73	359.5	Horizontal	PK	Pass
2	2480.0000	40.88	27.53	13.35	54	-13.12	359.5	Horizontal	AV	Pass
3	4243.7500	51.17	30.14	21.03	74	-22.83	129.9	Horizontal	PK	Pass
3	4243.7500	42.09	30.14	11.95	54	-11.91	129.9	Horizontal	AV	Pass
4	6918.0000	39.92	6.09	33.83	74	-34.08	338.9	Horizontal	PK	Pass
4	6918.0000	32.44	6.09	26.35	54	-21.56	338.9	Horizontal	AV	Pass
5	10672.5000	46.73	14.55	32.18	74	-27.27	151.1	Horizontal	PK	Pass
5	10672.5000	38.56	14.55	24.01	54	-15.44	151.1	Horizontal	AV	Pass
6	17917.5000	53.47	23.37	30.1	74	-20.53	17.3	Horizontal	PK	Pass
6	17917.5000	46.69	23.37	23.32	54	-7.31	17.3	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026

Vertical:

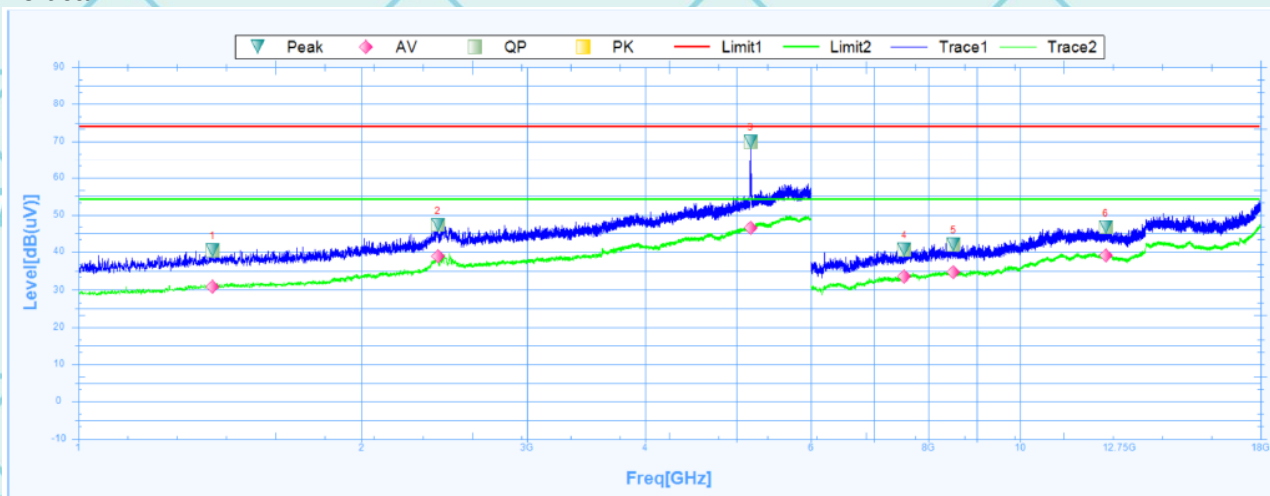

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1388.7500	40.39	25.06	15.33	74	-33.61	269.8	Vertical	PK	Pass
1	1388.7500	30.95	25.06	5.89	54	-23.05	269.8	Vertical	AV	Pass
2	2409.3750	47.14	27.29	19.85	74	-26.86	308.2	Vertical	PK	Pass
2	2409.3750	38.82	27.29	11.53	54	-15.18	308.2	Vertical	AV	Pass
3	5179.3750	70.03	31.74	38.29	74	-3.97	155.1	Vertical	PK	Pass
3	5179.3750	46.45	31.74	14.71	54	-7.55	155.1	Vertical	AV	Pass
4	7539.0000	40.54	7.68	32.86	74	-33.46	12	Vertical	PK	Pass
4	7539.0000	33.57	7.68	25.89	54	-20.43	12	Vertical	AV	Pass
5	8502.0000	42.01	9.22	32.79	74	-31.99	85.4	Vertical	PK	Pass
5	8502.0000	34.65	9.22	25.43	54	-19.35	85.4	Vertical	AV	Pass
6	12328.5000	46.59	16.47	30.12	74	-27.41	329.2	Vertical	PK	Pass
6	12328.5000	39.04	16.47	22.57	54	-14.96	329.2	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level + Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Level (dBμV) – Limits (dBμV)

6.7.3. Restricted Bands Requirements


Test result for GFSK Mode (BLE 1M the worst case)

Low channel

Horizontal:

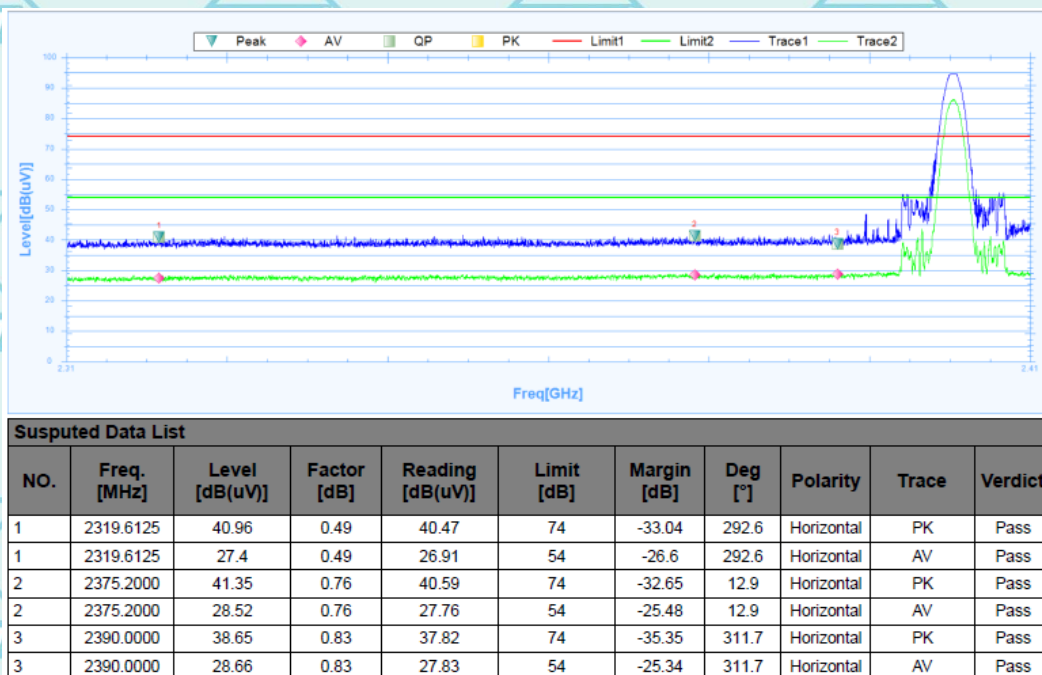


Vertical:

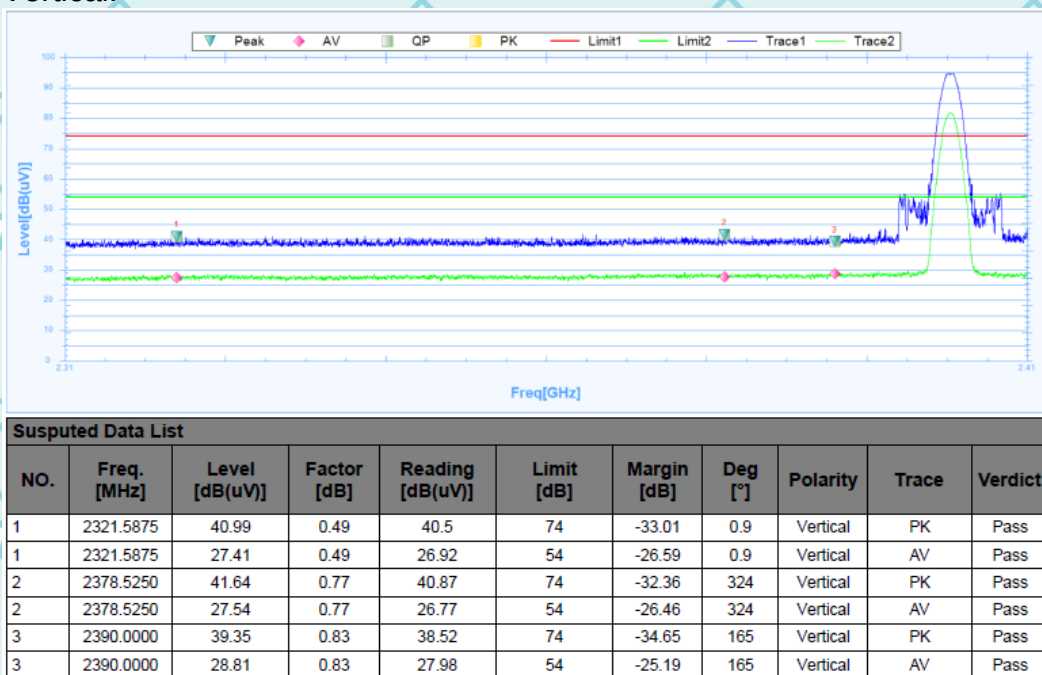

Report No.: WSCT-ANAB-R&E260700067A-LE Issued Date: 14 August 2026


High channel
Horizontal:

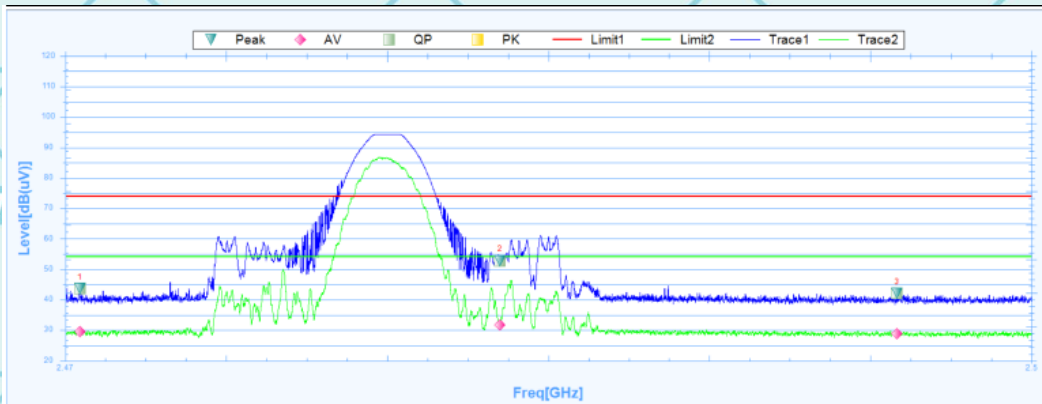

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2470.4500	43.63	1.31	42.32	74	-30.37	199	Horizontal	PK	Pass
1	2470.4500	29.46	1.31	28.15	54	-24.54	199	Horizontal	AV	Pass
2	2483.5000	52.81	1.38	51.43	74	-21.19	360.1	Horizontal	PK	Pass
2	2483.5000	31.79	1.38	30.41	54	-22.21	360.1	Horizontal	AV	Pass
3	2495.8300	42.12	1.47	40.65	74	-31.88	358.2	Horizontal	PK	Pass
3	2495.8300	28.85	1.47	27.38	54	-25.15	358.2	Horizontal	AV	Pass

Vertical:

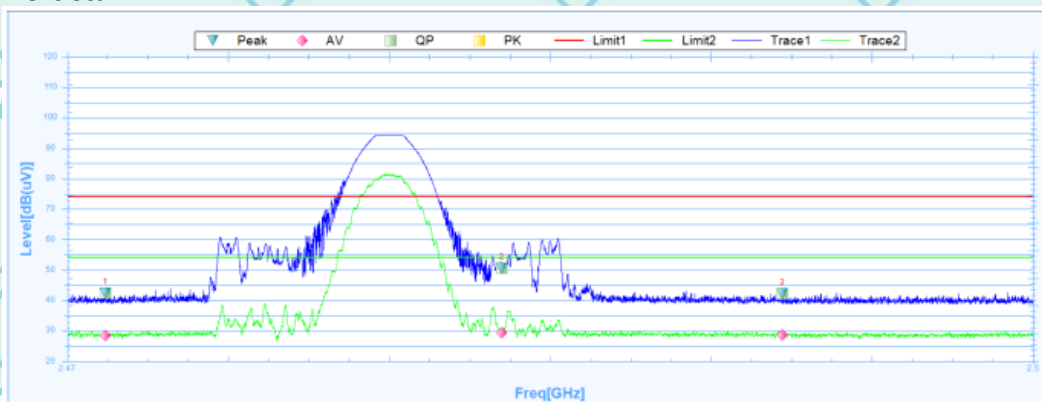

Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2471.1812	42.39	1.31	41.08	74	-31.61	89.4	Vertical	PK	Pass
1	2471.1812	28.39	1.31	27.08	54	-25.61	89.4	Vertical	AV	Pass
2	2483.5000	50.54	1.38	49.16	74	-23.46	271	Vertical	PK	Pass
2	2483.5000	29.19	1.38	27.81	54	-24.81	271	Vertical	AV	Pass
3	2492.2188	42.12	1.44	40.68	74	-31.88	91.8	Vertical	PK	Pass
3	2492.2188	28.57	1.44	27.13	54	-25.43	91.8	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
Reading level (dBμV) = Receiver reading
Corr. Factor (dB) = Attenuation factor + Cable loss
Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
Limit (dBμV) = Limit stated in standard
Margin (dB) = Level (dBμV) – Limits (dBμV)

Please refer to Annex "Set Up Photos-15C" for test setup photos

*****END OF REPORT*****