

7.5.6 TEST RESULT

-26dB Bandwidth and 99% Occupied Bandwidth

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: -26dB Bandwidth/-6dB Bandwidth and 99% Occupied Bandwidth	Temperature	: 25 °C
Test Voltage	: DC 3.82V	Humidity	: 56%RH
Test Result	: PASS		

-26Db&99% Bandwidth



Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	99%dB Bandwidth (MHz)	Verdict
a	5180	25.46	16.565	Pass
a	5240	24.592	16.520	Pass
a	5260	23.633	16.574	Pass
a	5320	23.452	16.575	Pass
a	5500	23.953	16.570	Pass
a	5700	21.188	16.531	Pass
n20	5180	26.638	17.642	Pass
n20	5240	25.2	17.611	Pass
n20	5260	25.684	17.624	Pass
n20	5320	25.751	17.608	Pass
n20	5500	25.904	17.627	Pass
n20	5700	24.692	17.620	Pass
n40	5190	54.986	36.303	Pass
n40	5230	47.132	36.022	Pass
n40	5270	49.868	36.243	Pass
n40	5310	55.076	36.287	Pass
n40	5510	55.145	36.335	Pass
n40	5670	47.025	36.255	Pass
ac20	5180	25.279	17.627	Pass
ac20	5240	24.245	17.611	Pass
ac20	5260	24.286	17.586	Pass
ac20	5320	24.413	17.601	Pass
ac20	5500	23.436	17.611	Pass
ac20	5700	22.843	17.593	Pass
ac40	5190	54.385	36.301	Pass
ac40	5230	49.25	36.050	Pass
ac40	5270	54.18	36.179	Pass
ac40	5310	53.592	36.241	Pass
ac40	5510	53.418	36.333	Pass
ac40	5670	52.996	36.281	Pass
ac80	5210	87.675	75.558	Pass
ac80	5290	80.727	75.377	Pass
ac80	5530	86.026	75.515	Pass
ac80	5610	79.627	75.264	Pass



-6dB&99% Bandwidth



Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	99%dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
a	5745	16.322	16.452	0.5	Pass
a	5825	16.341	16.472	0.5	Pass
n20	5745	16.871	17.556	0.5	Pass
n20	5825	17.162	17.577	0.5	Pass
n40	5755	36.439	36.142	0.5	Pass
n40	5795	36.303	36.161	0.5	Pass
ac20	5745	17.294	17.551	0.5	Pass
ac20	5825	17.232	17.559	0.5	Pass
ac40	5755	36.136	36.100	0.5	Pass
ac40	5795	35.717	36.162	0.5	Pass
ac80	5775	75.545	75.395	0.5	Pass



Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi2 Issued Date: 14 August 2026



-26Db&99% Bandwidth

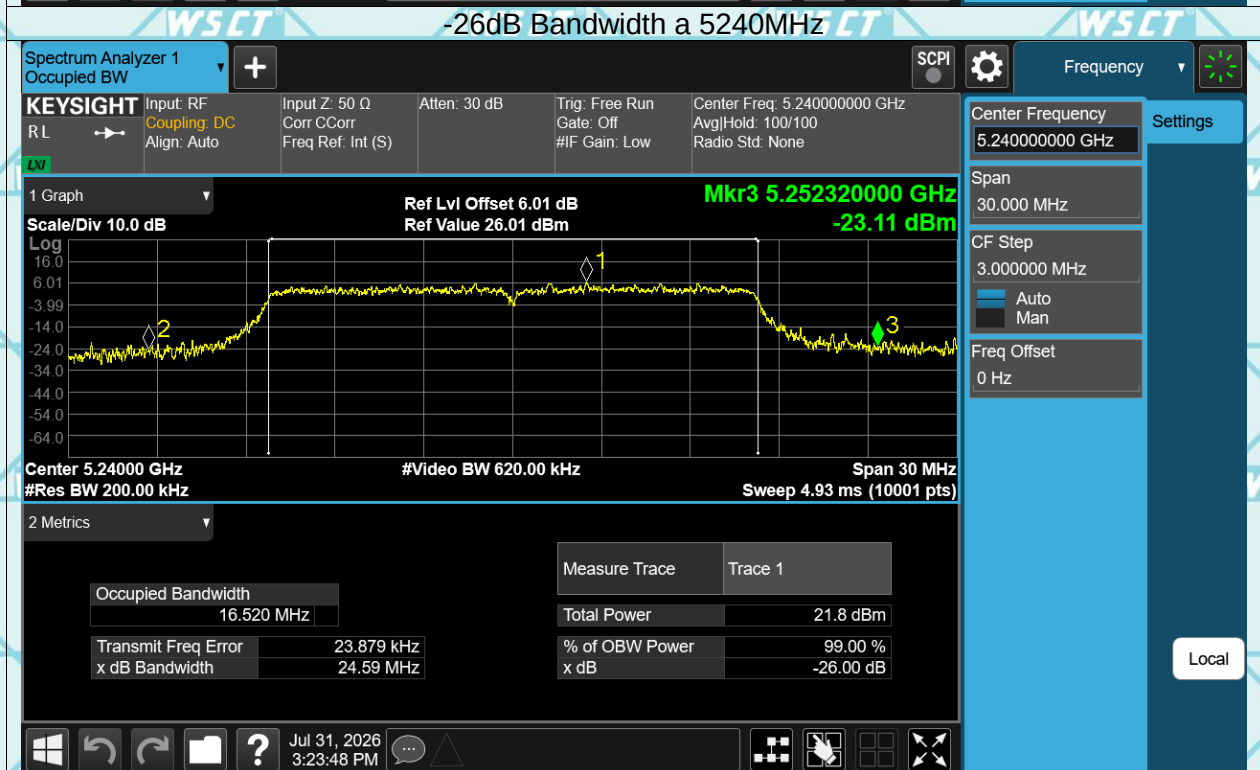
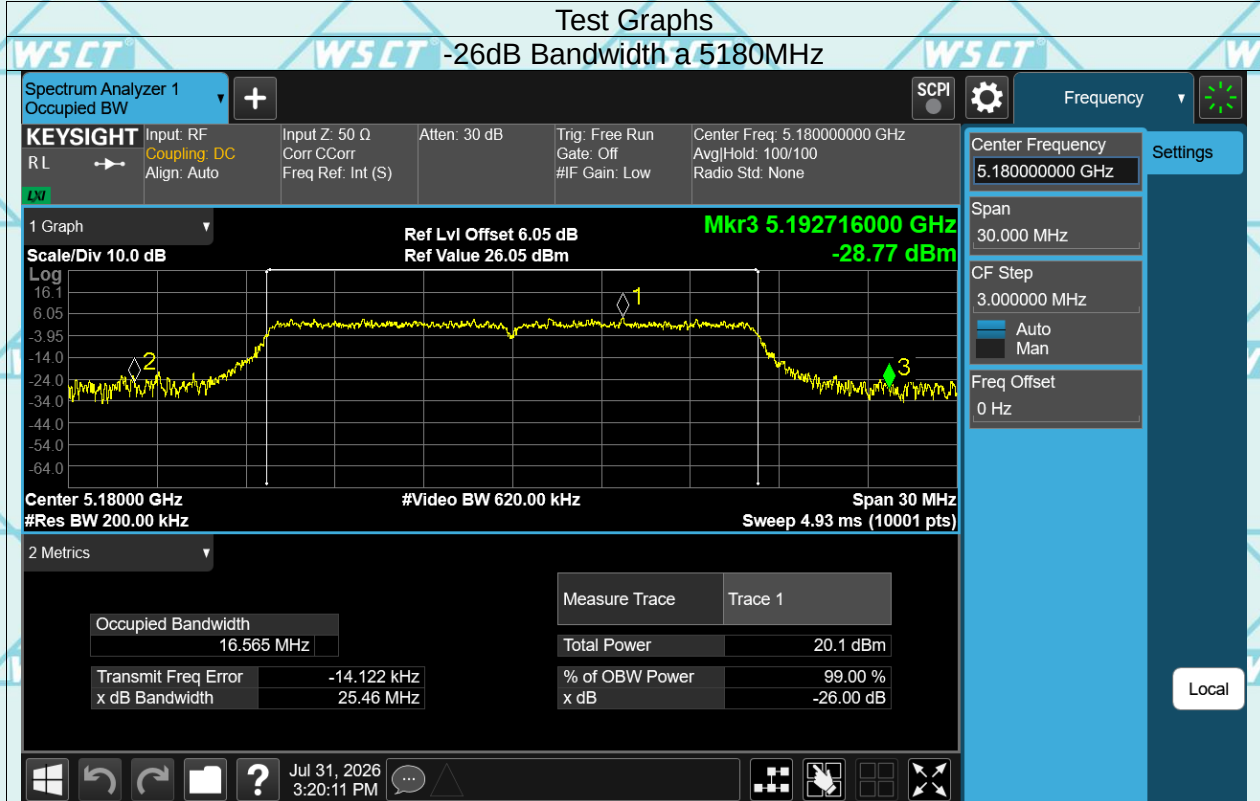


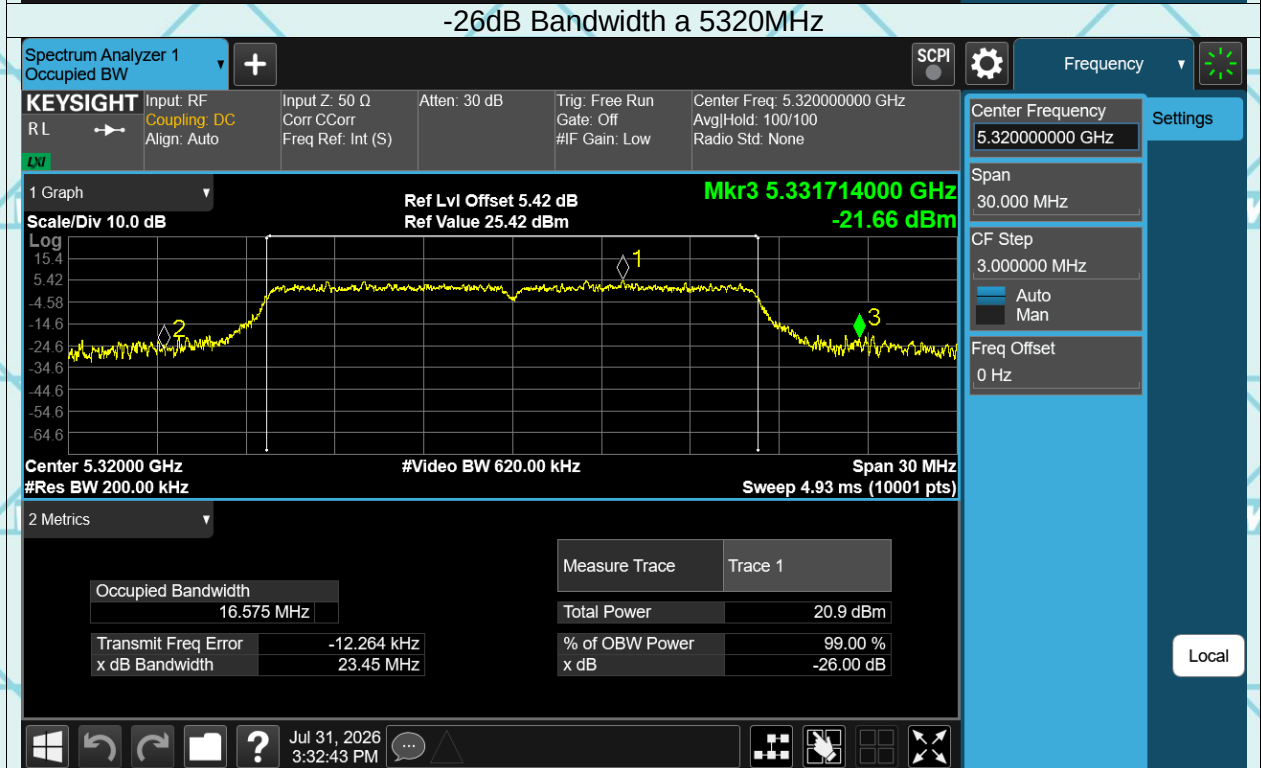
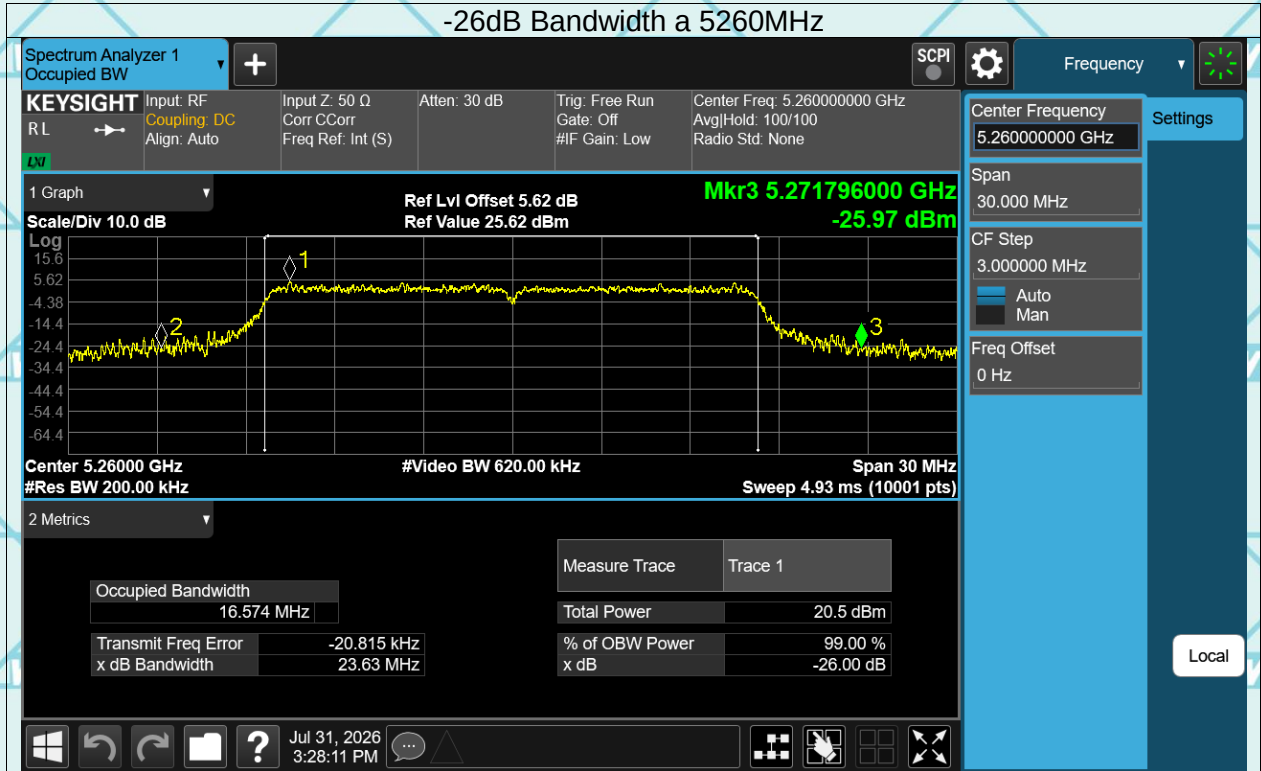


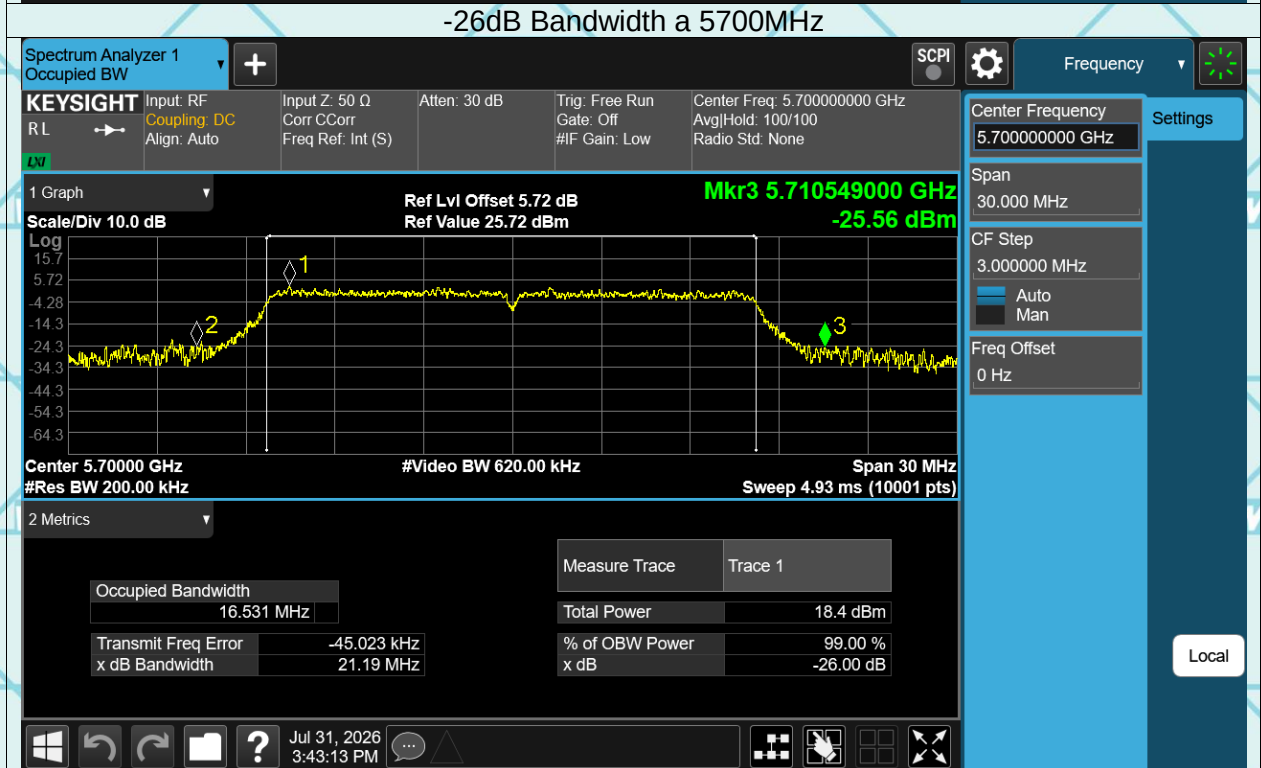
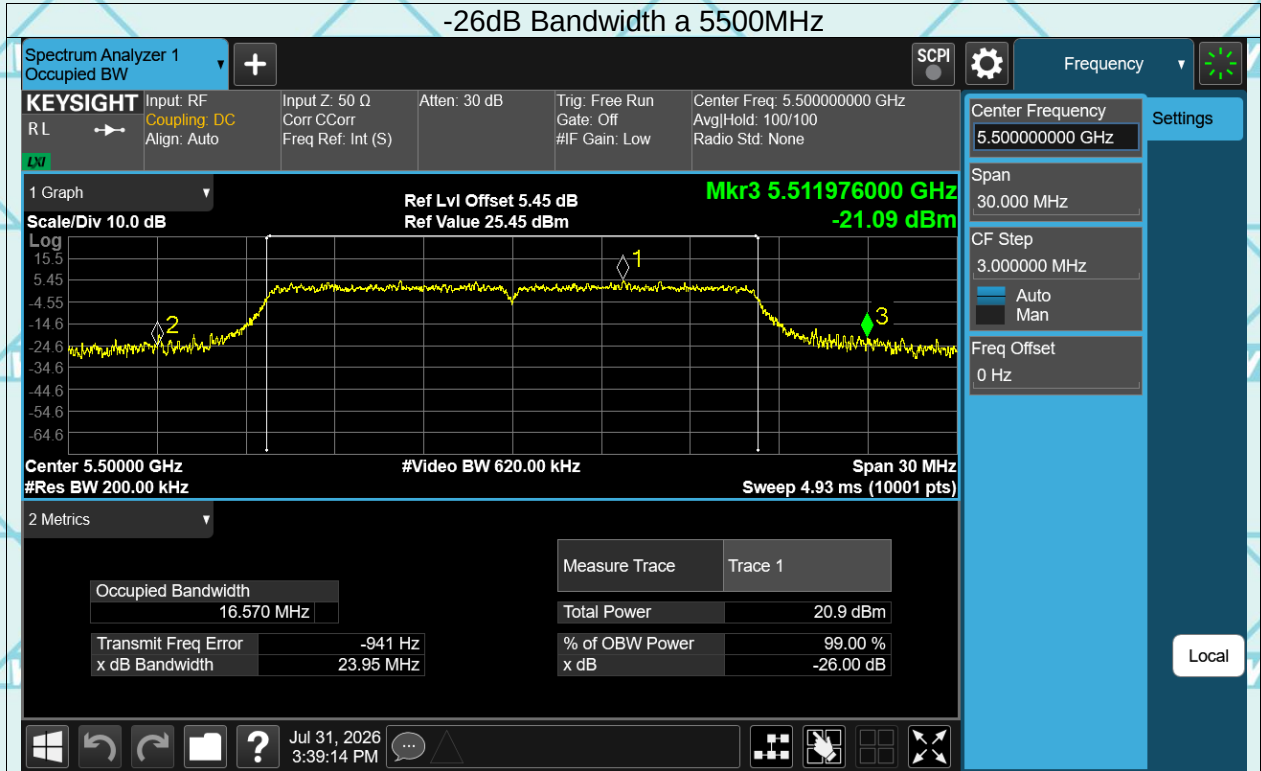


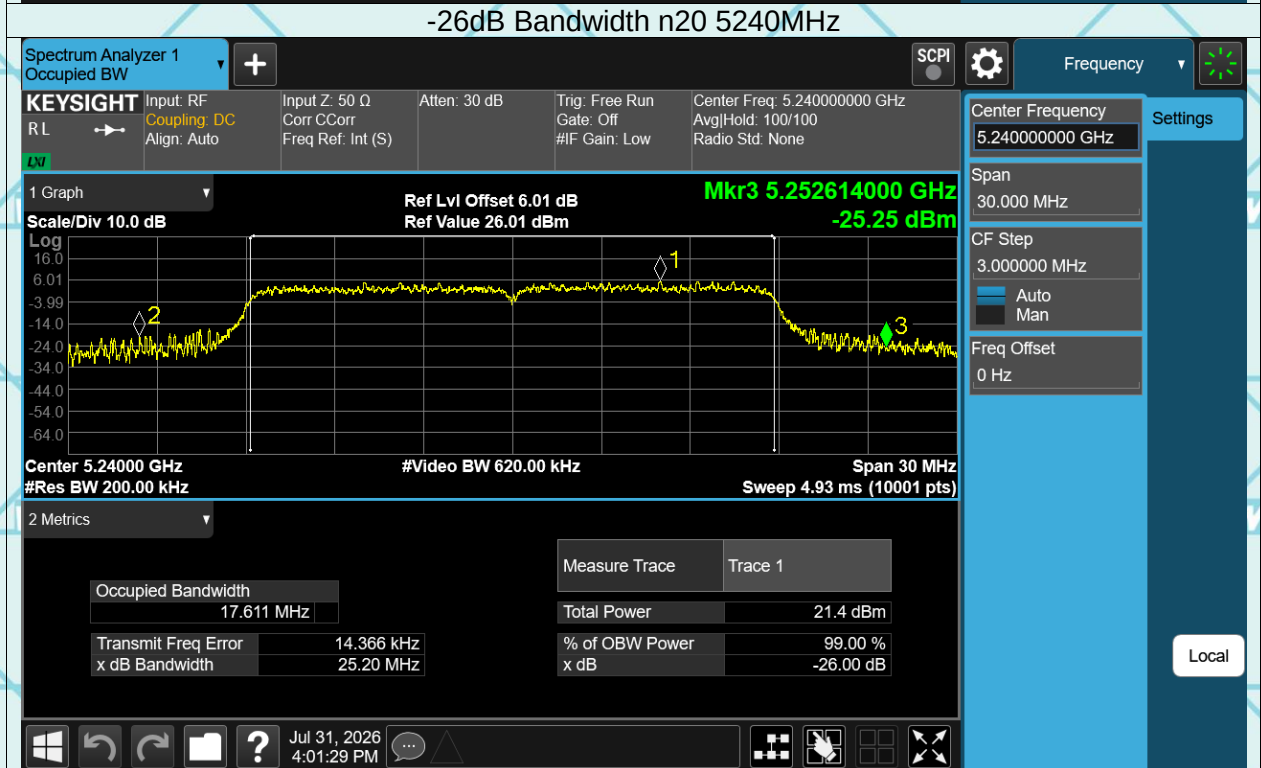
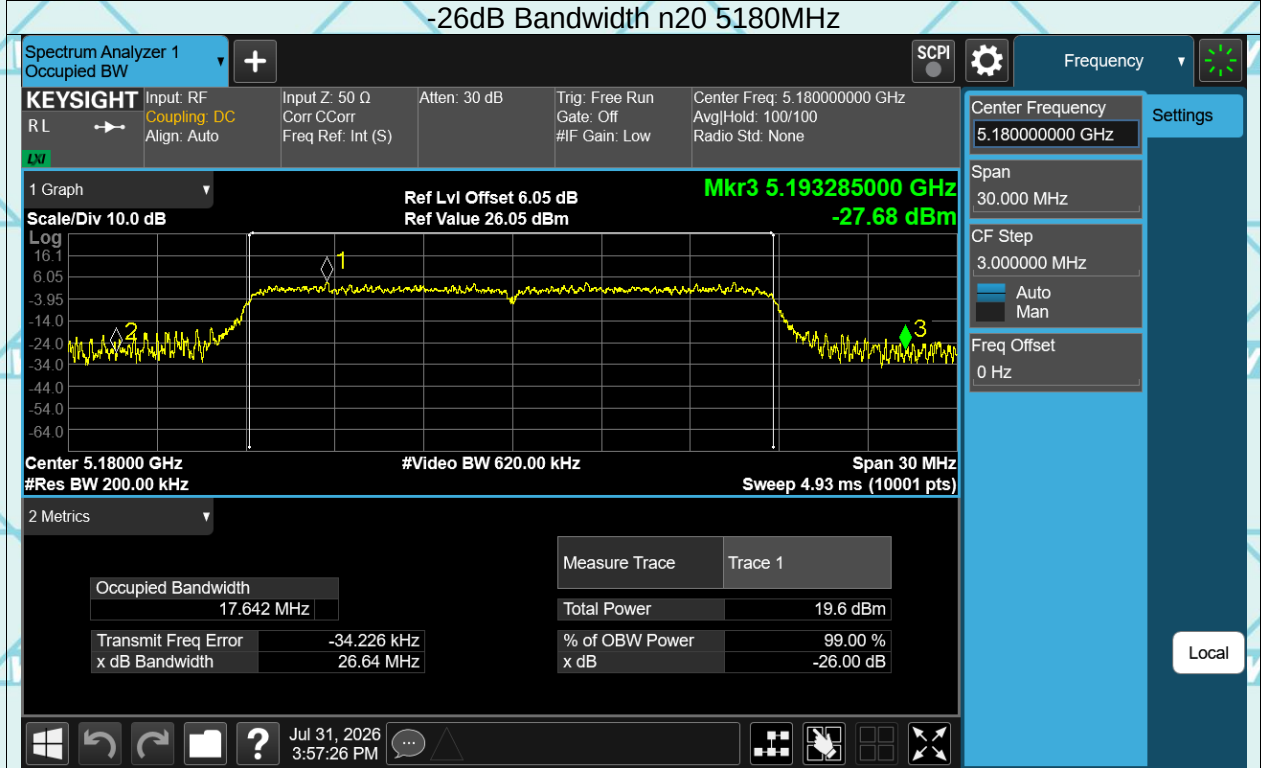


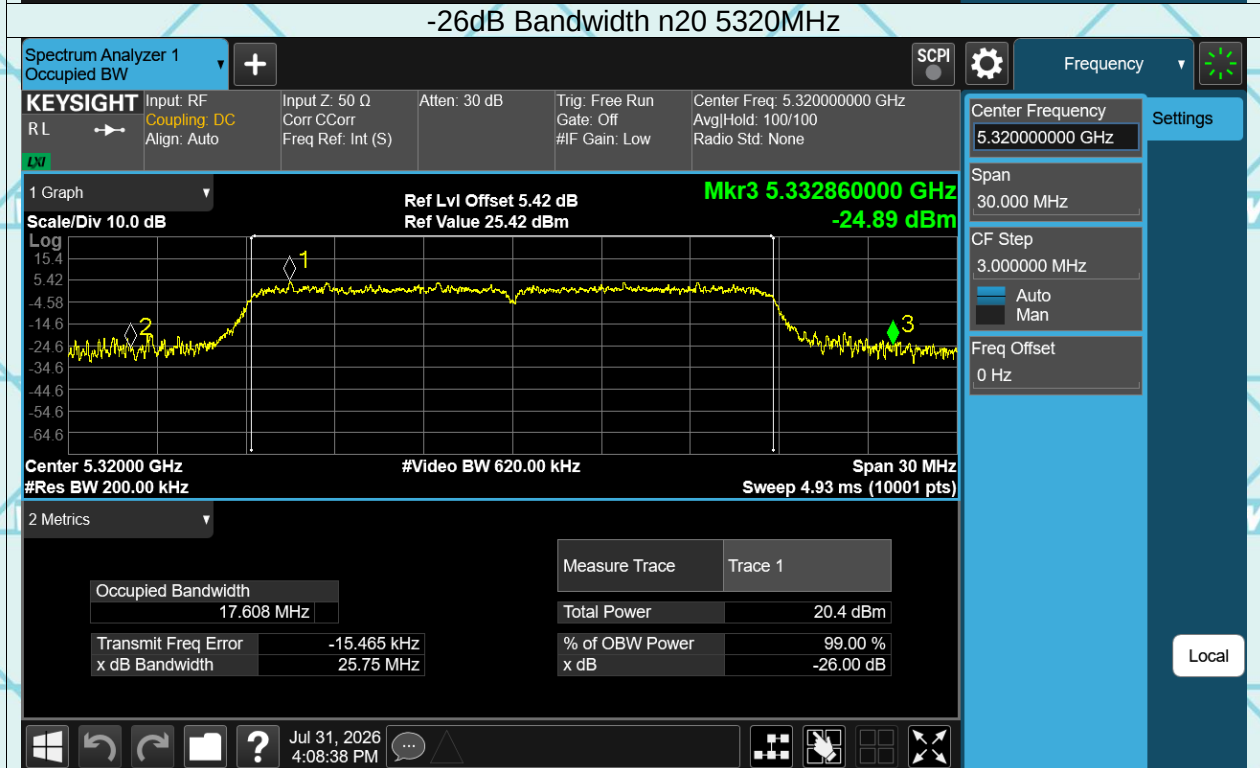
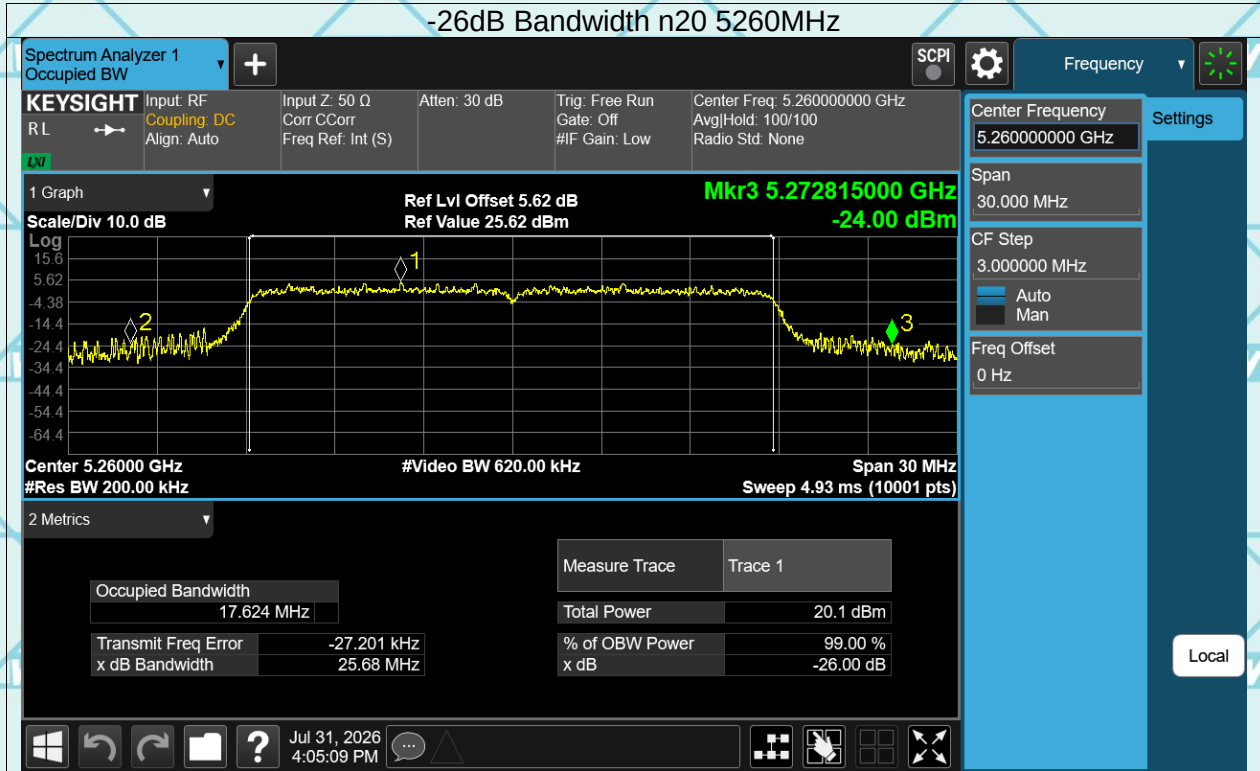


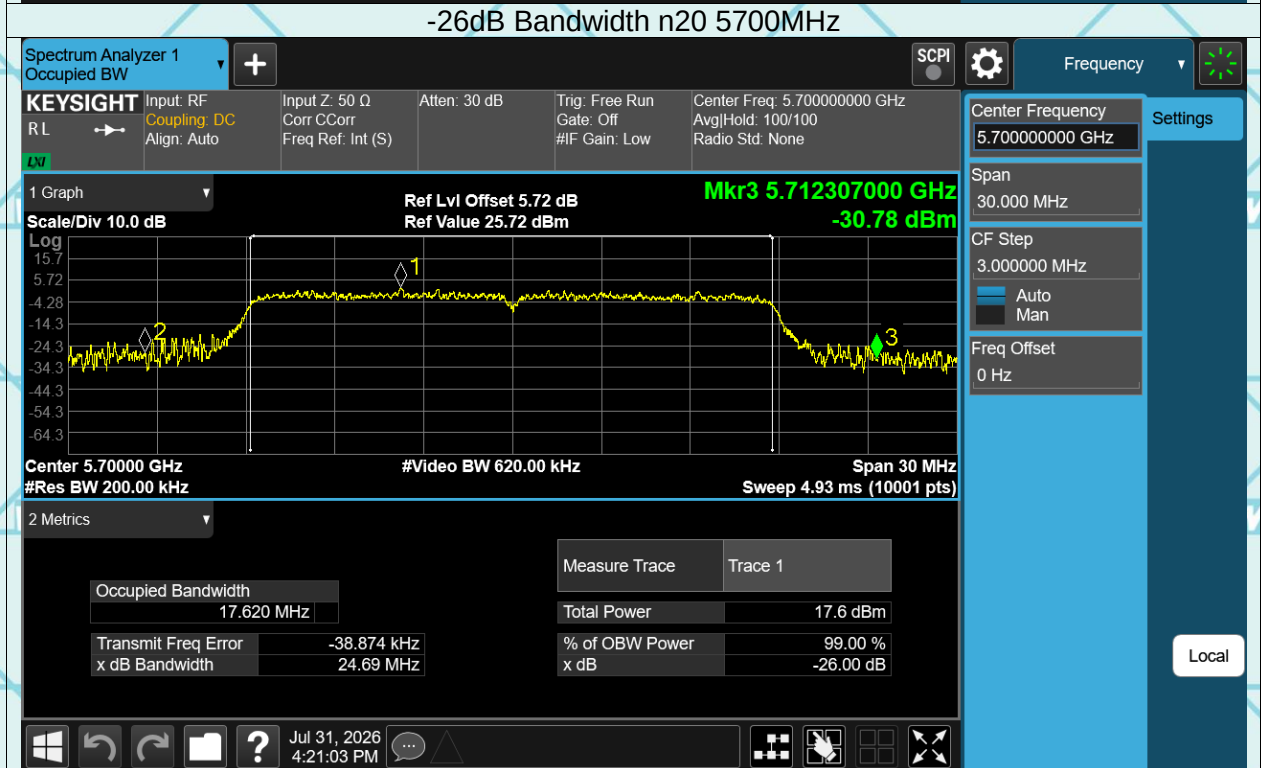
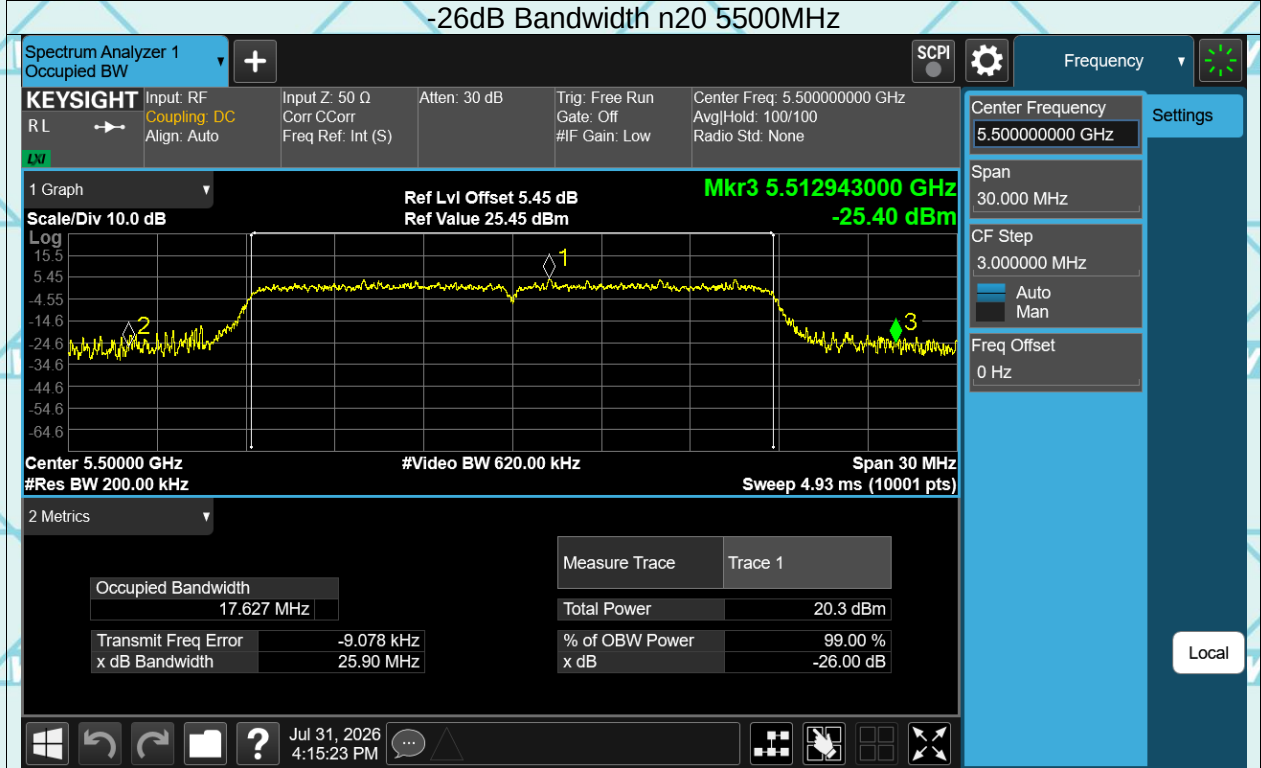


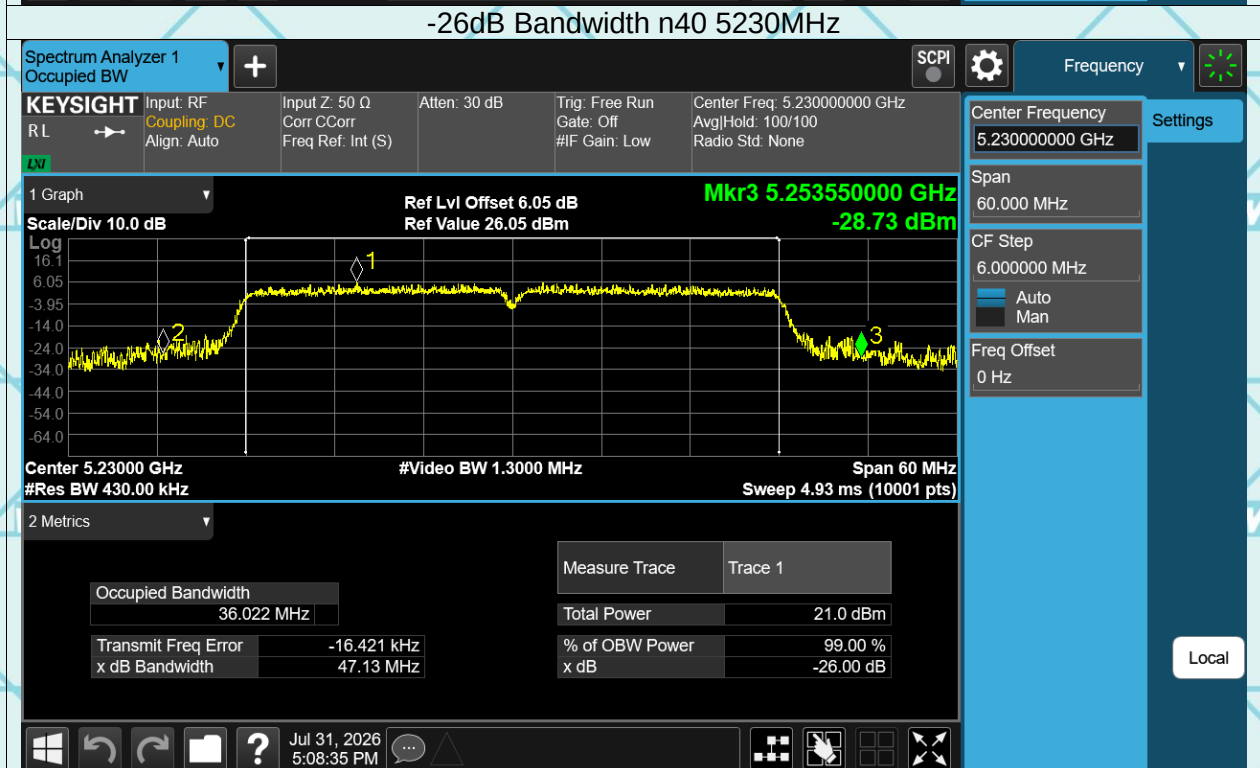
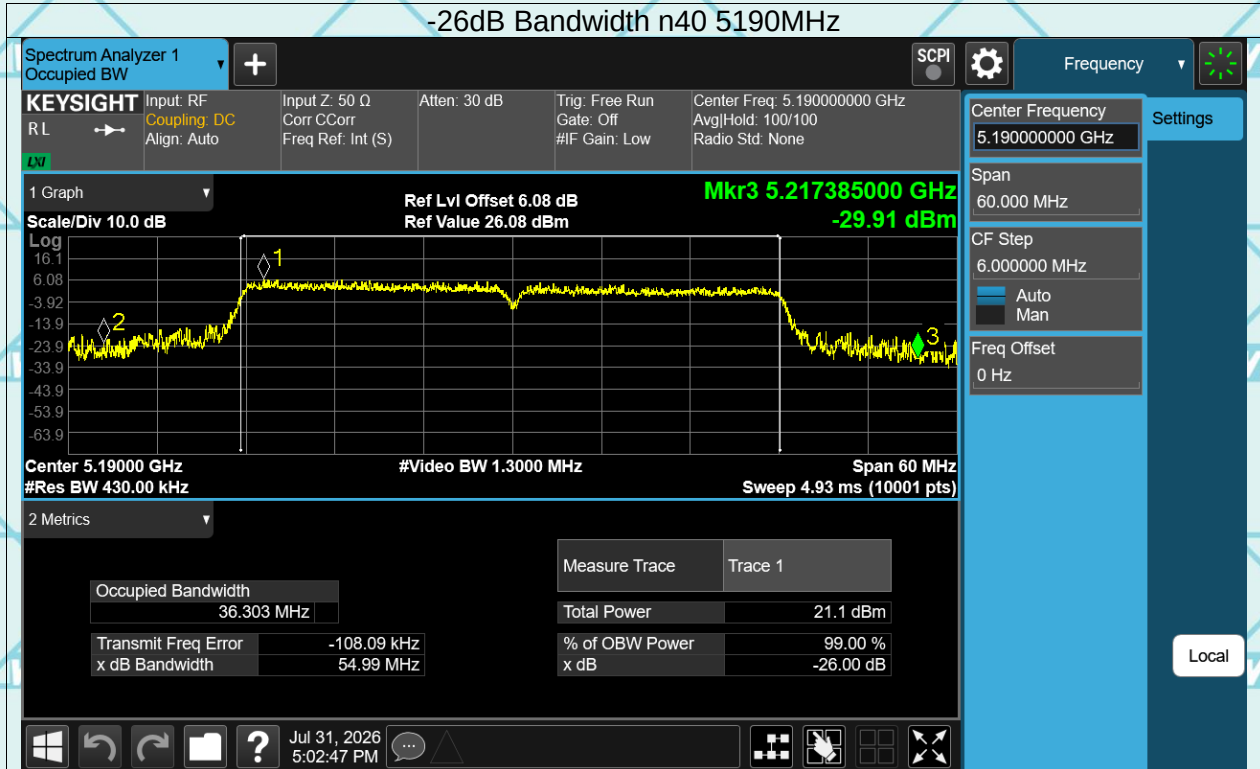


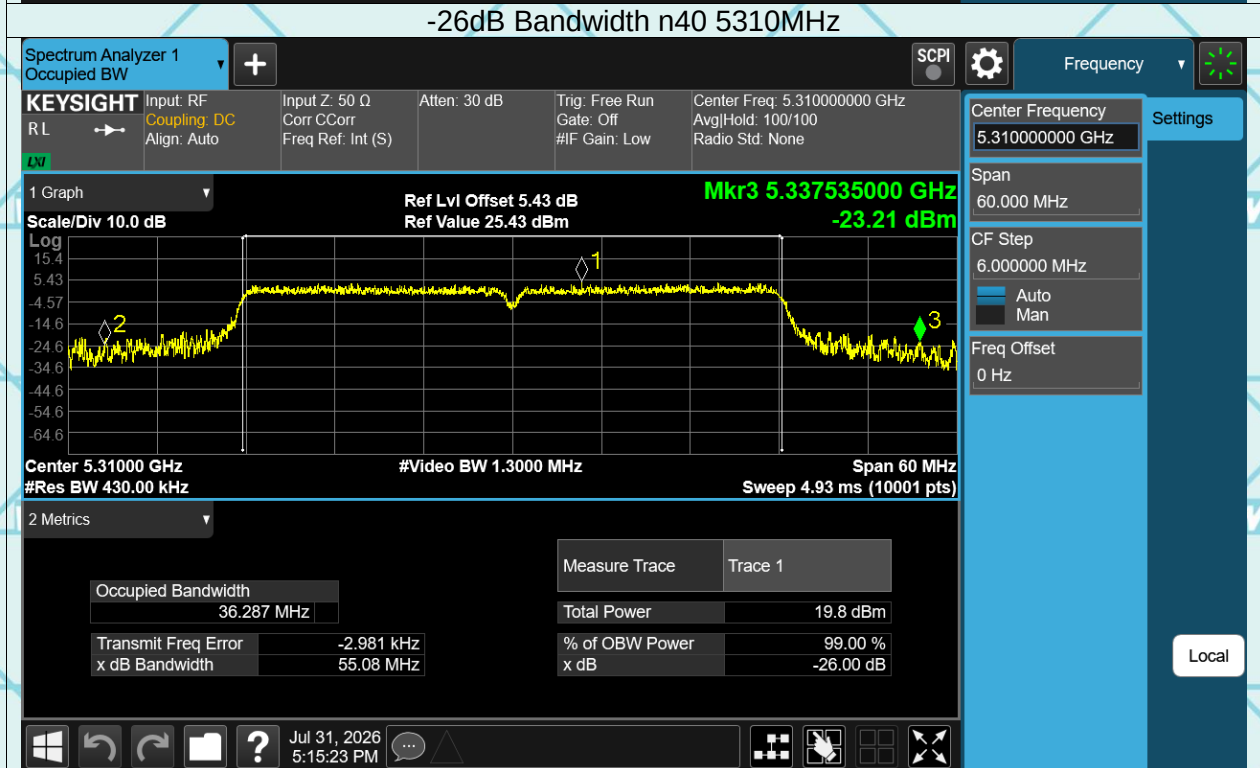
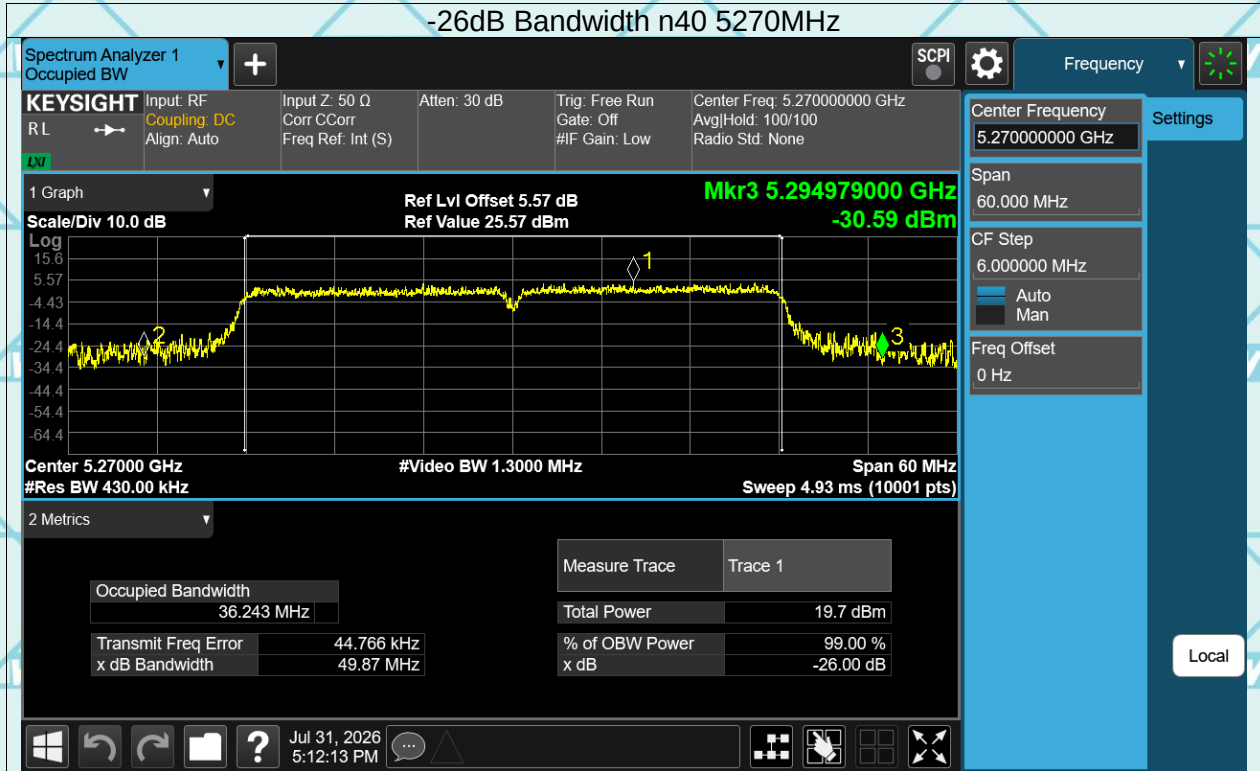


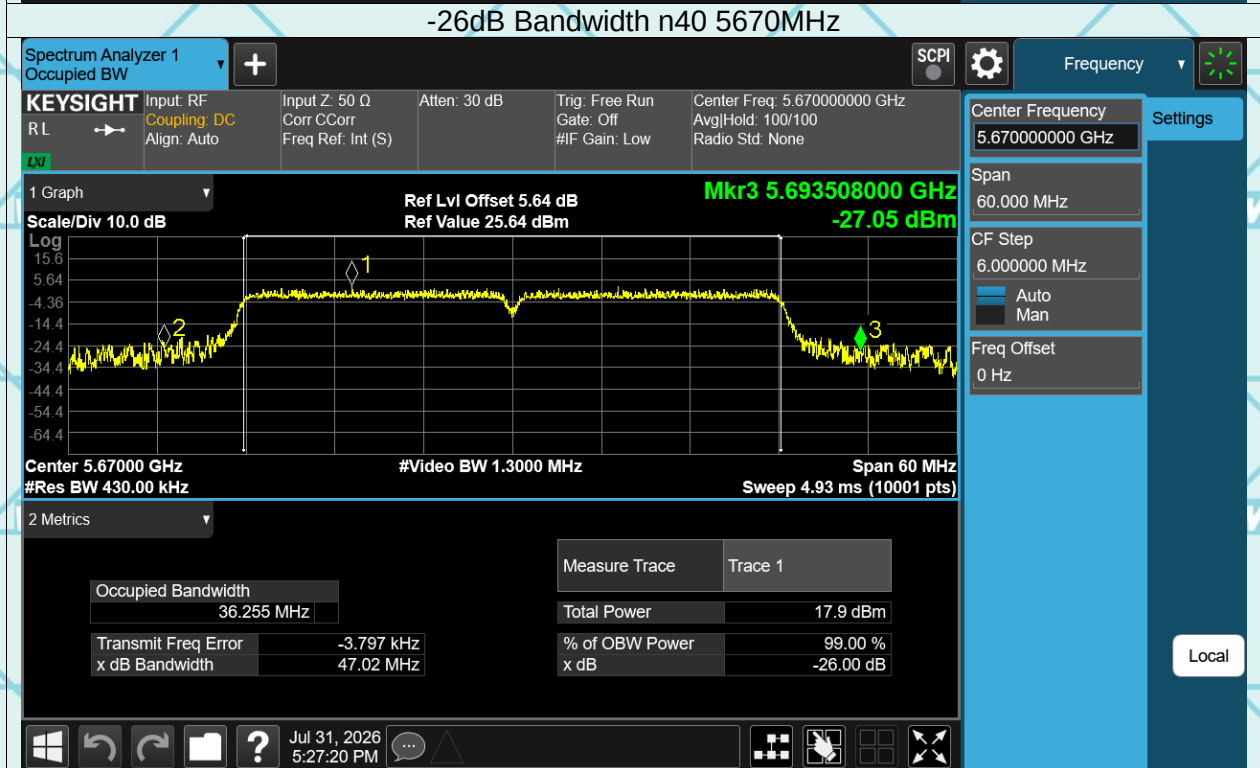
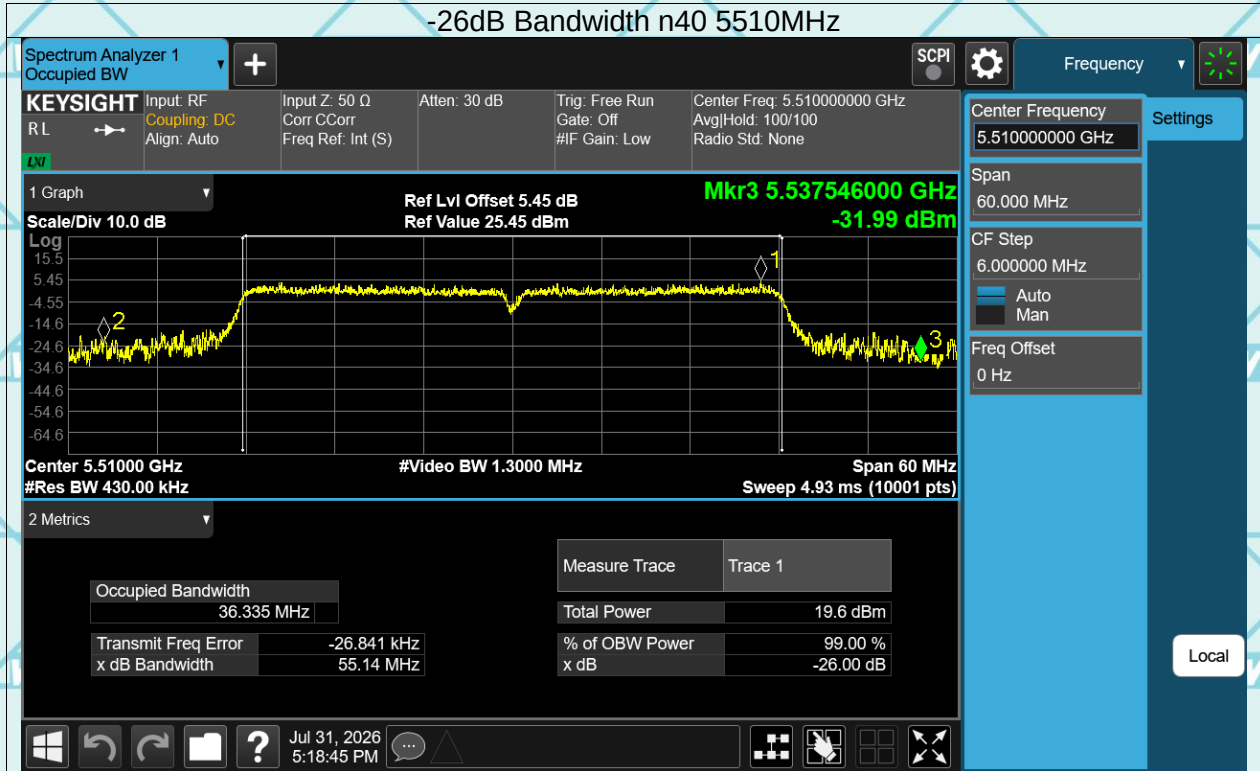


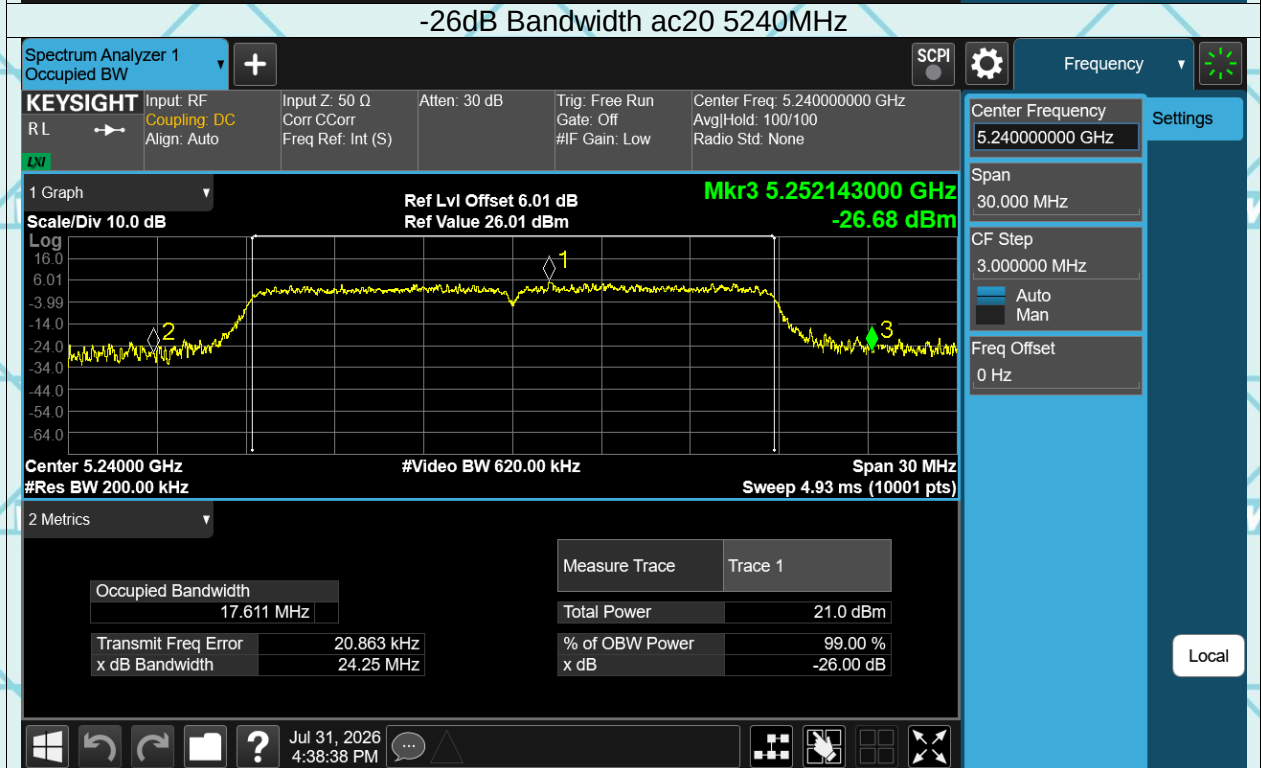
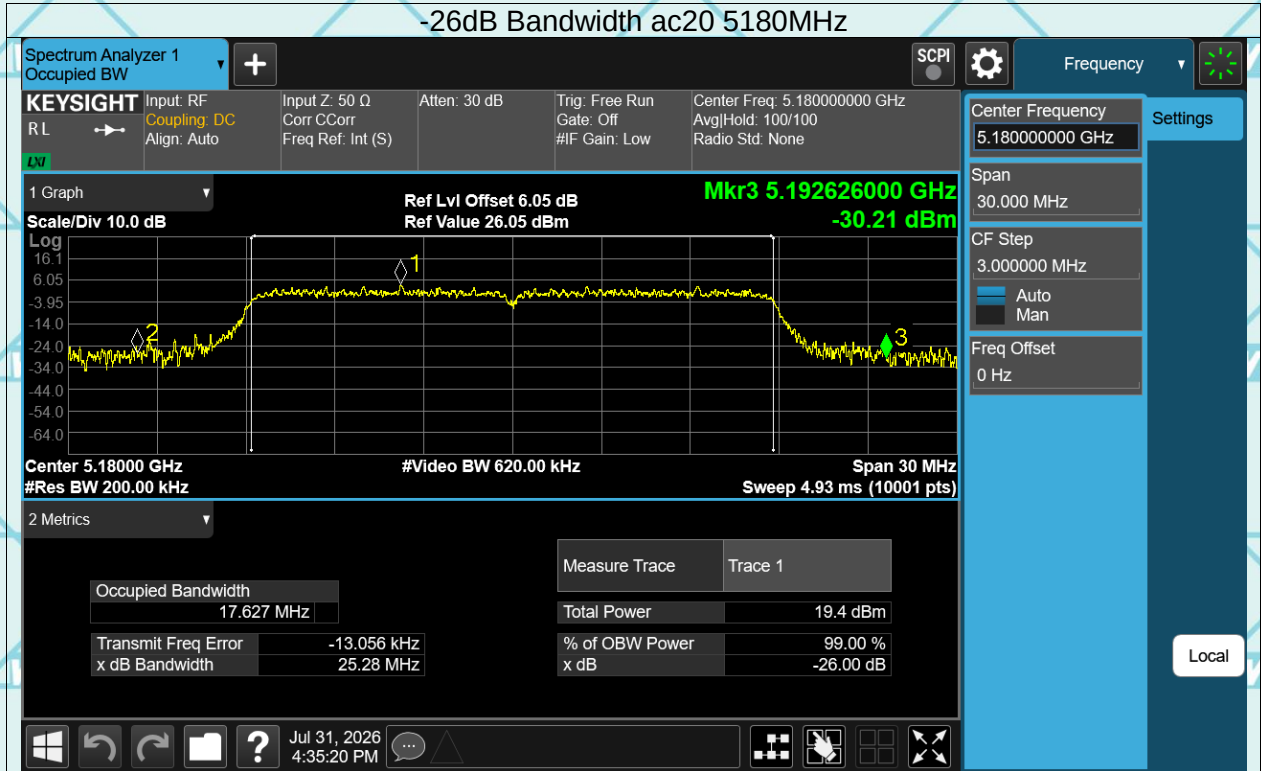


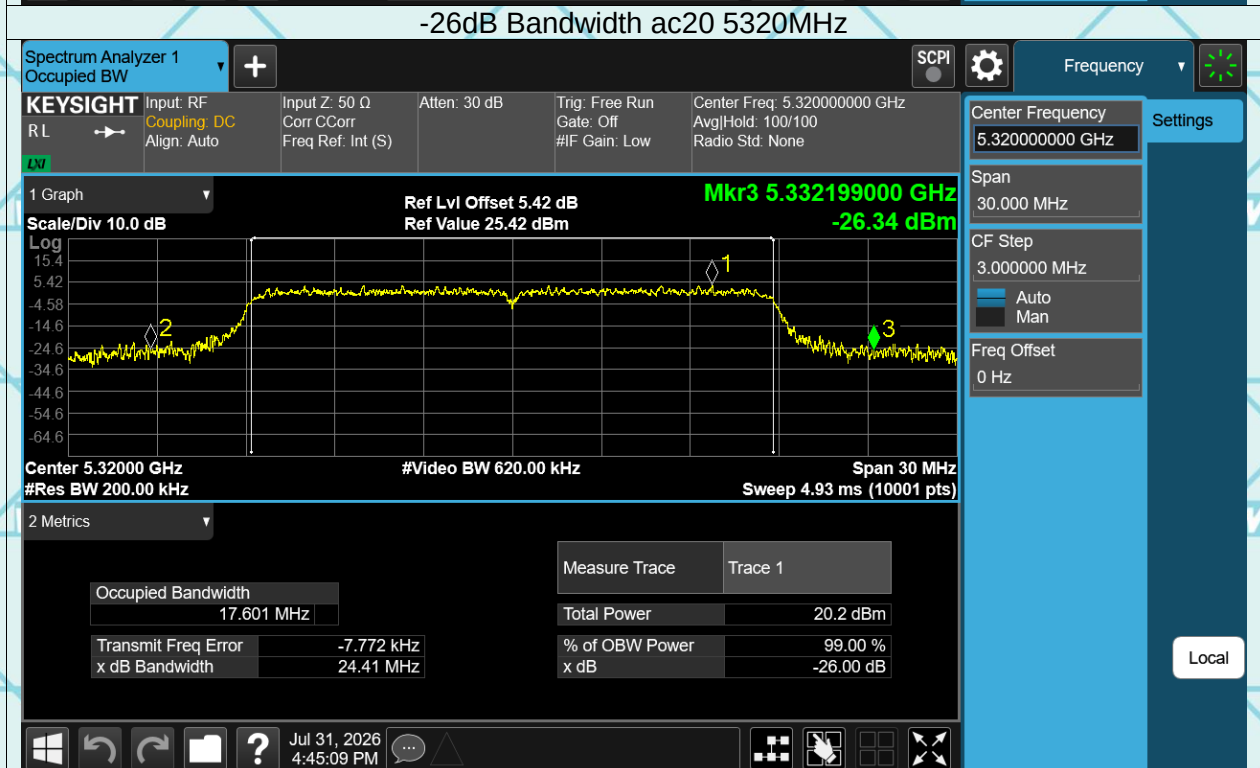
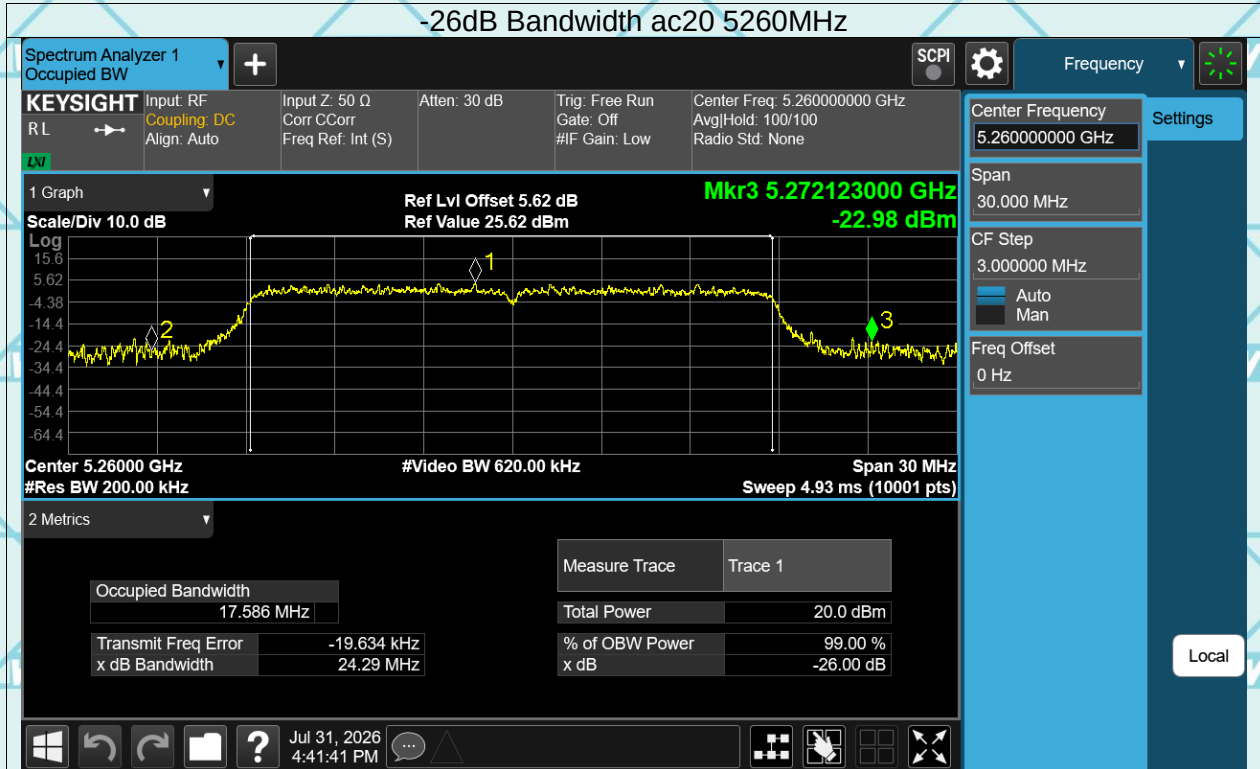


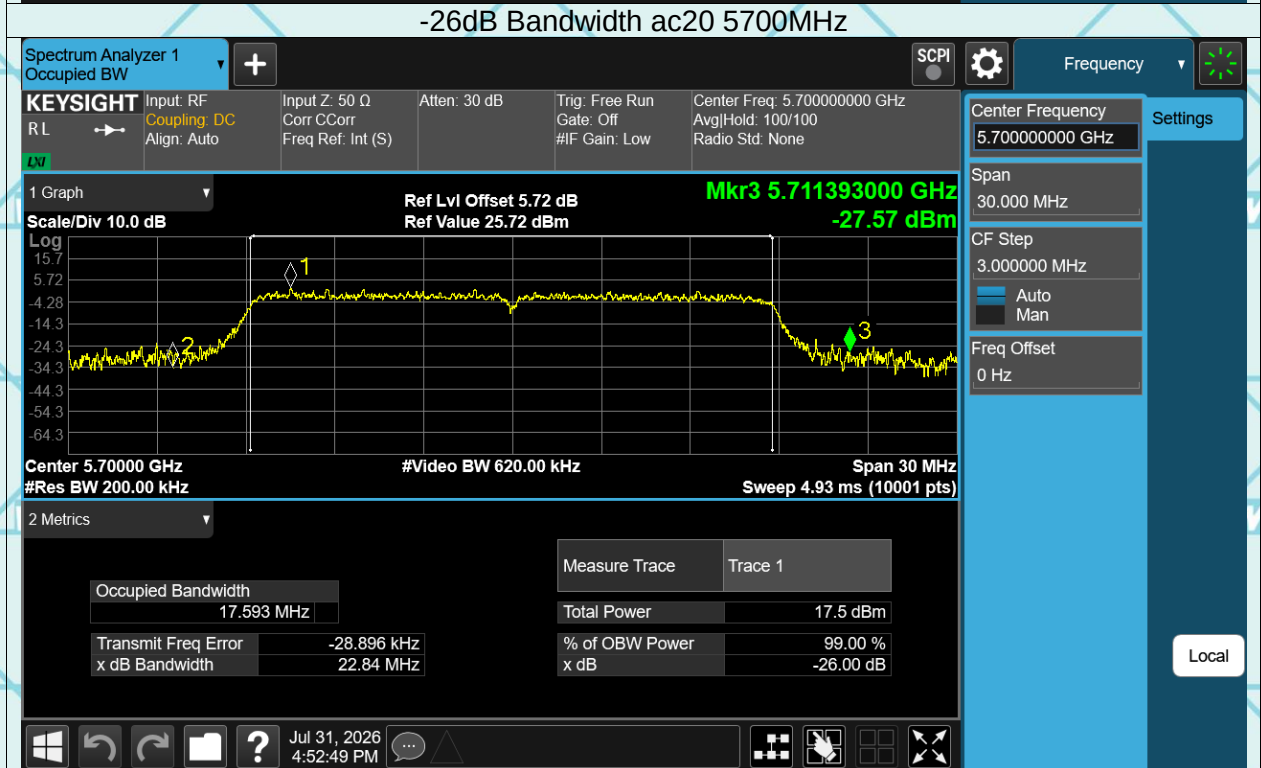
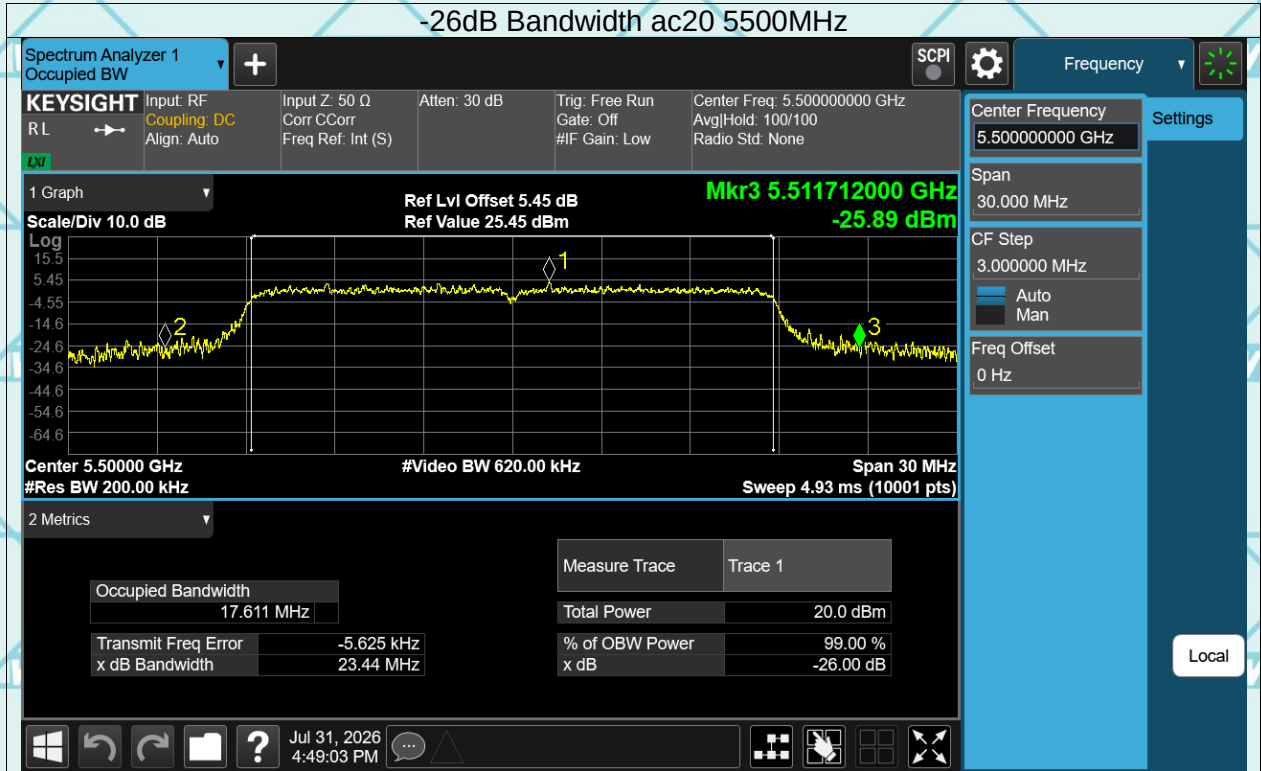


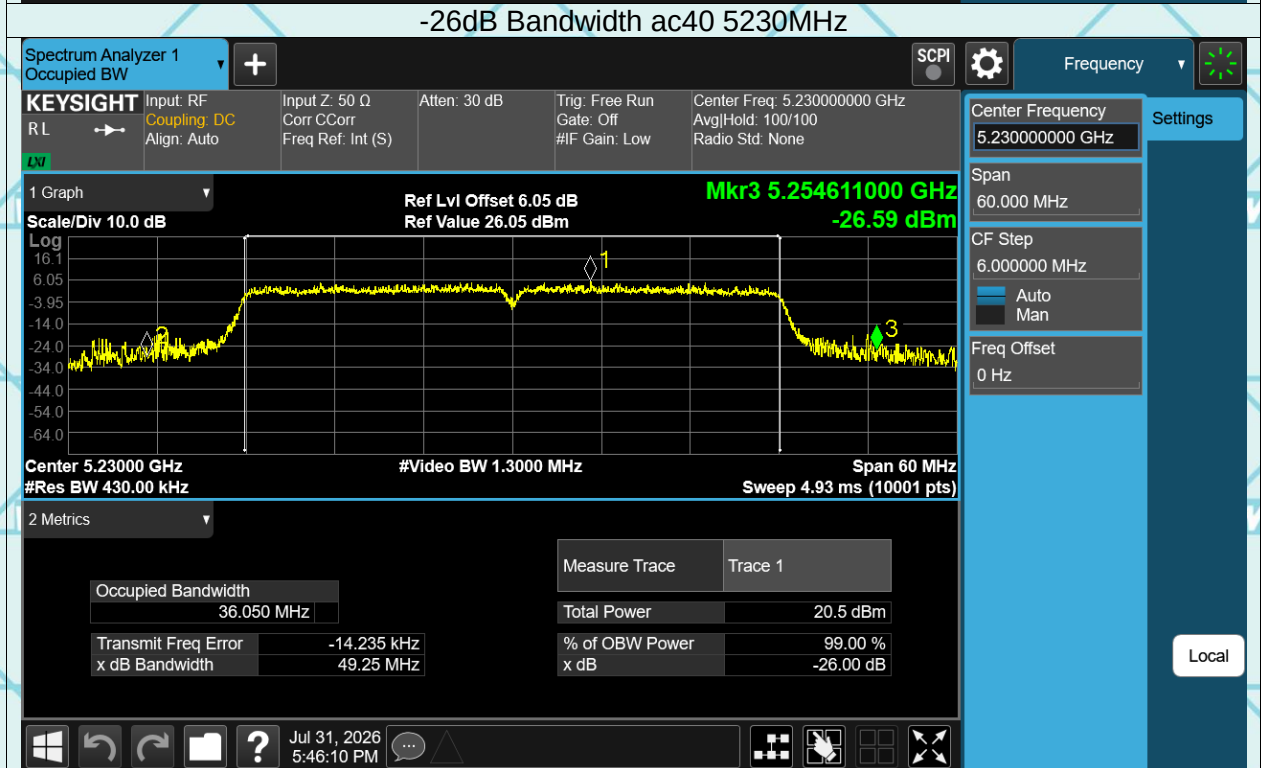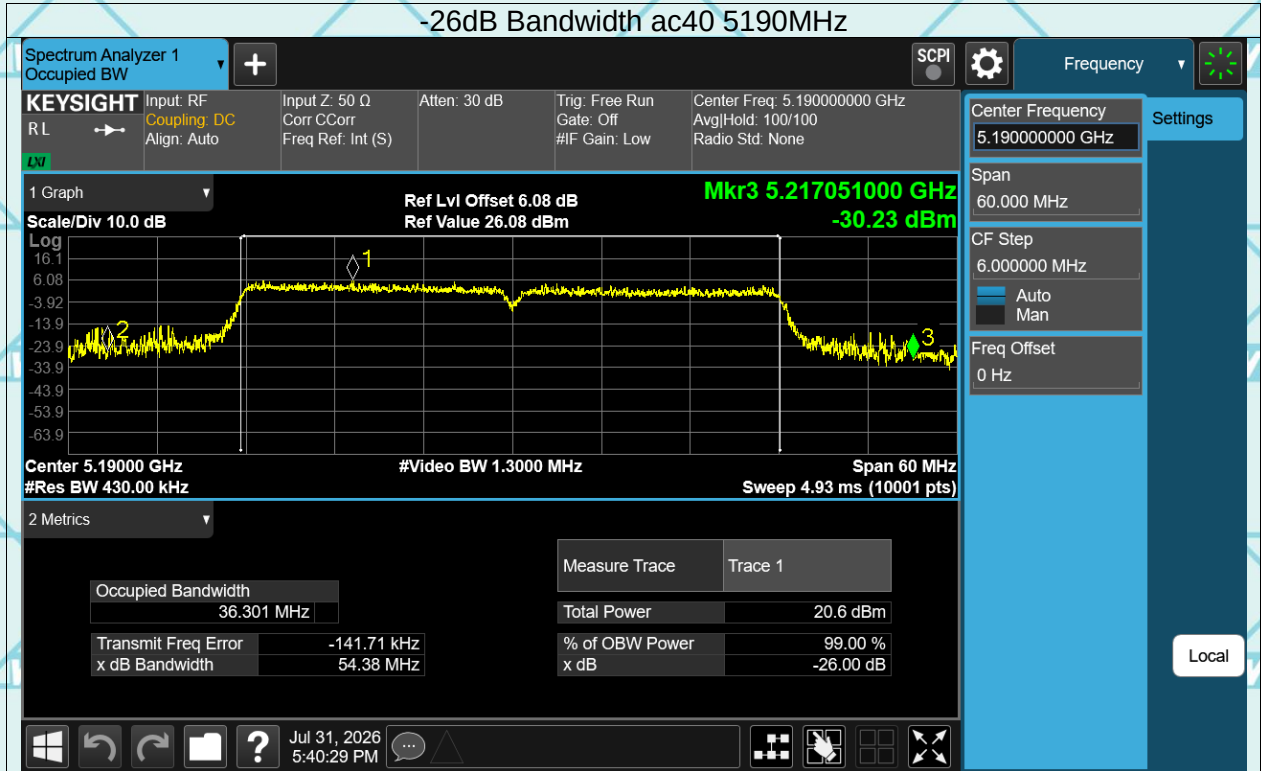

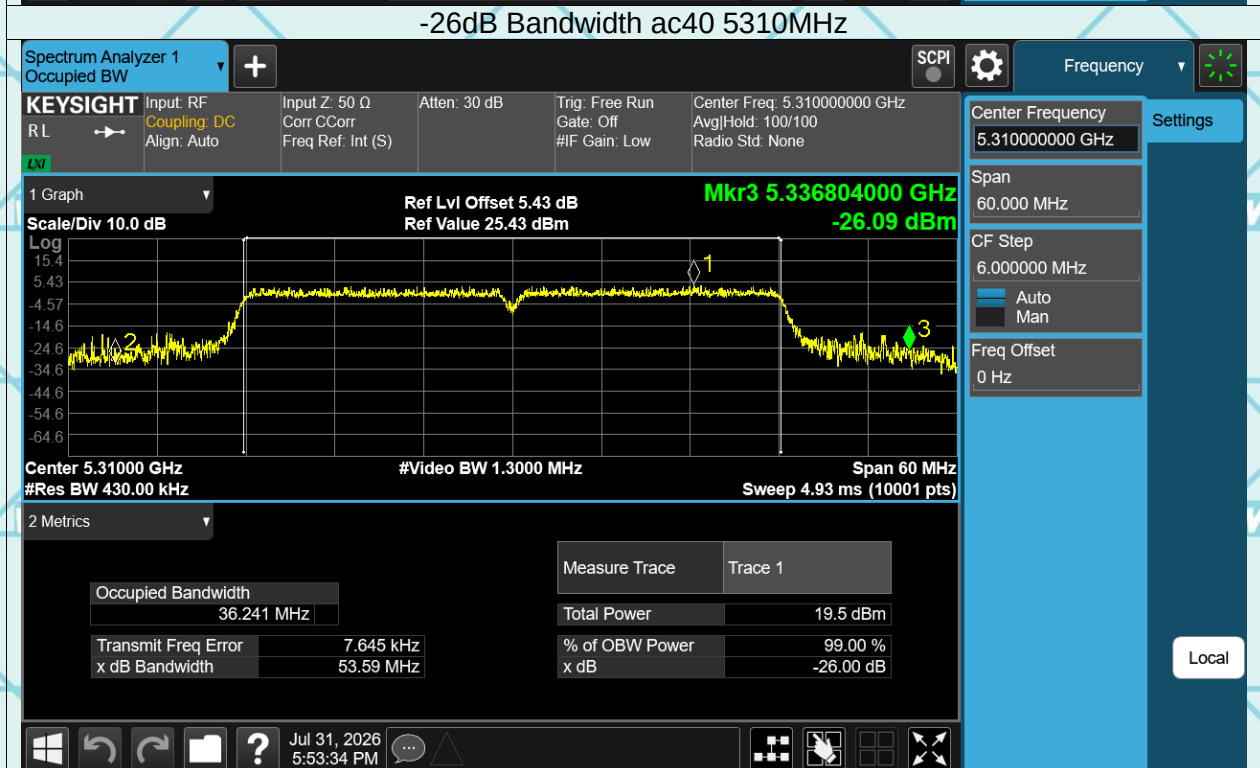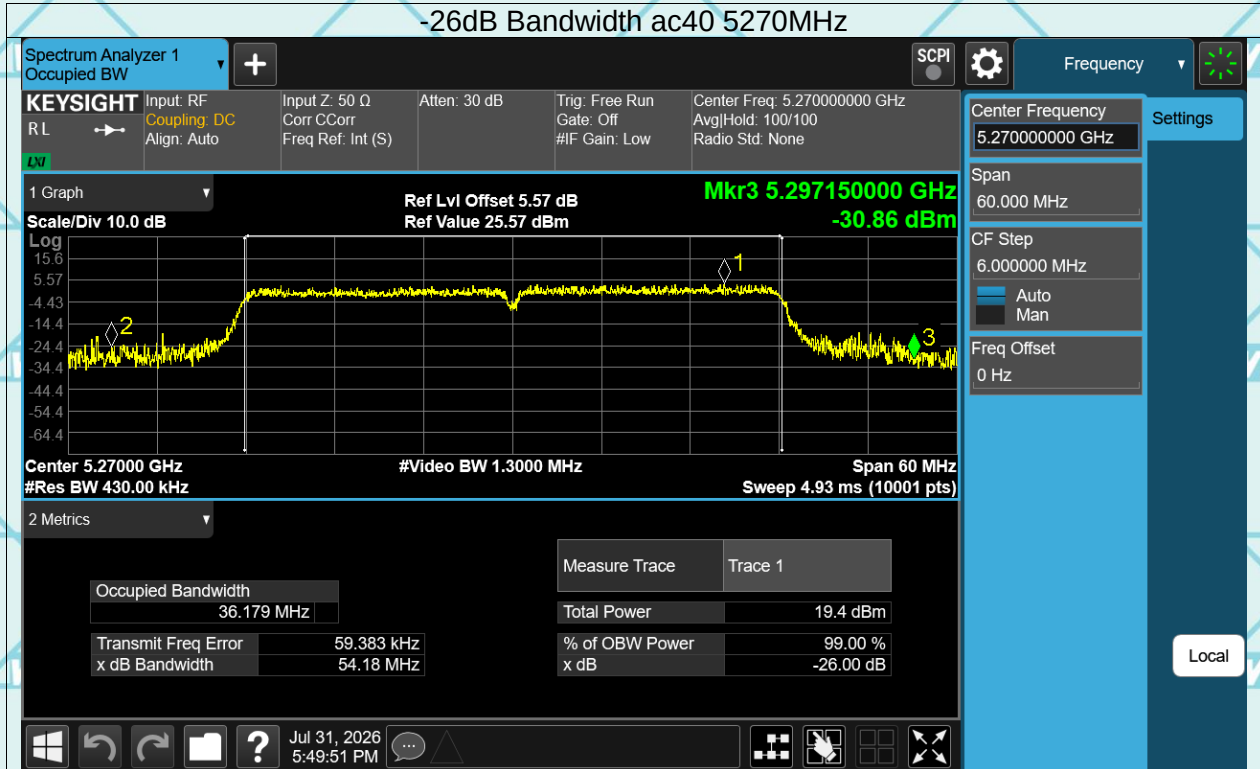

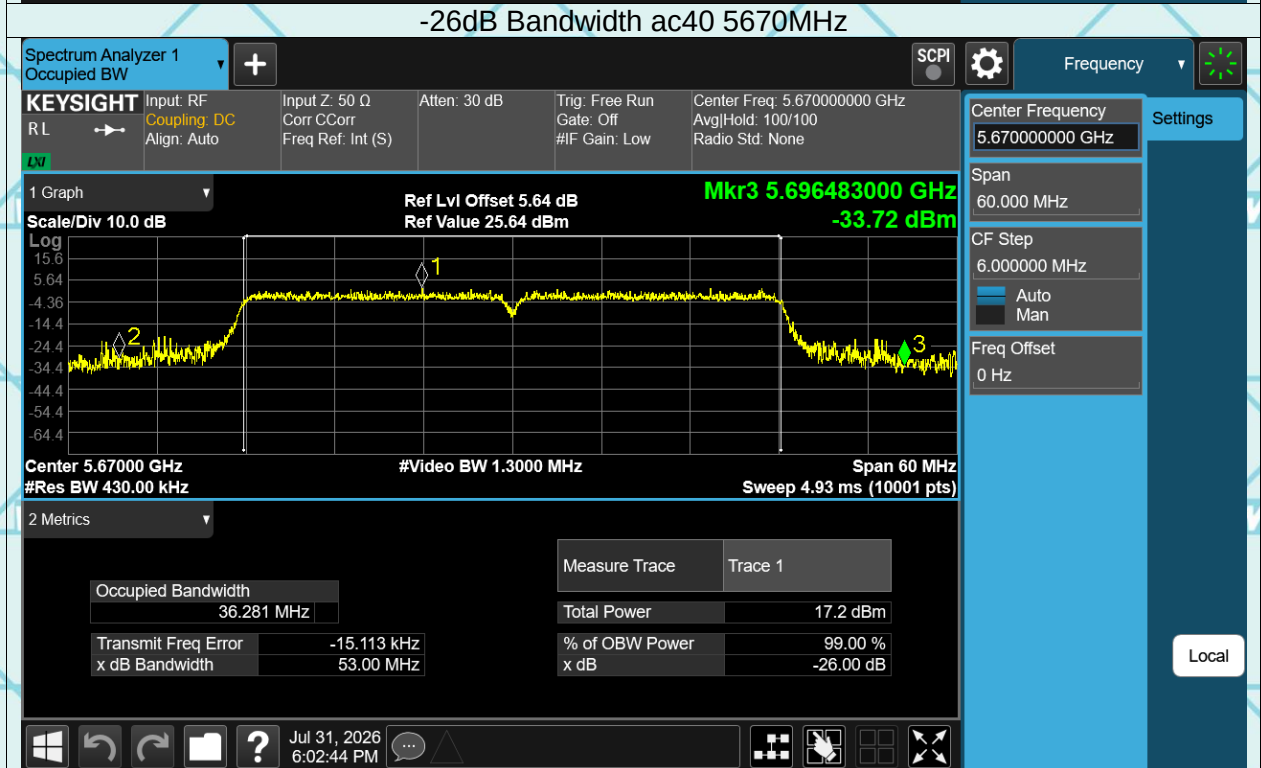
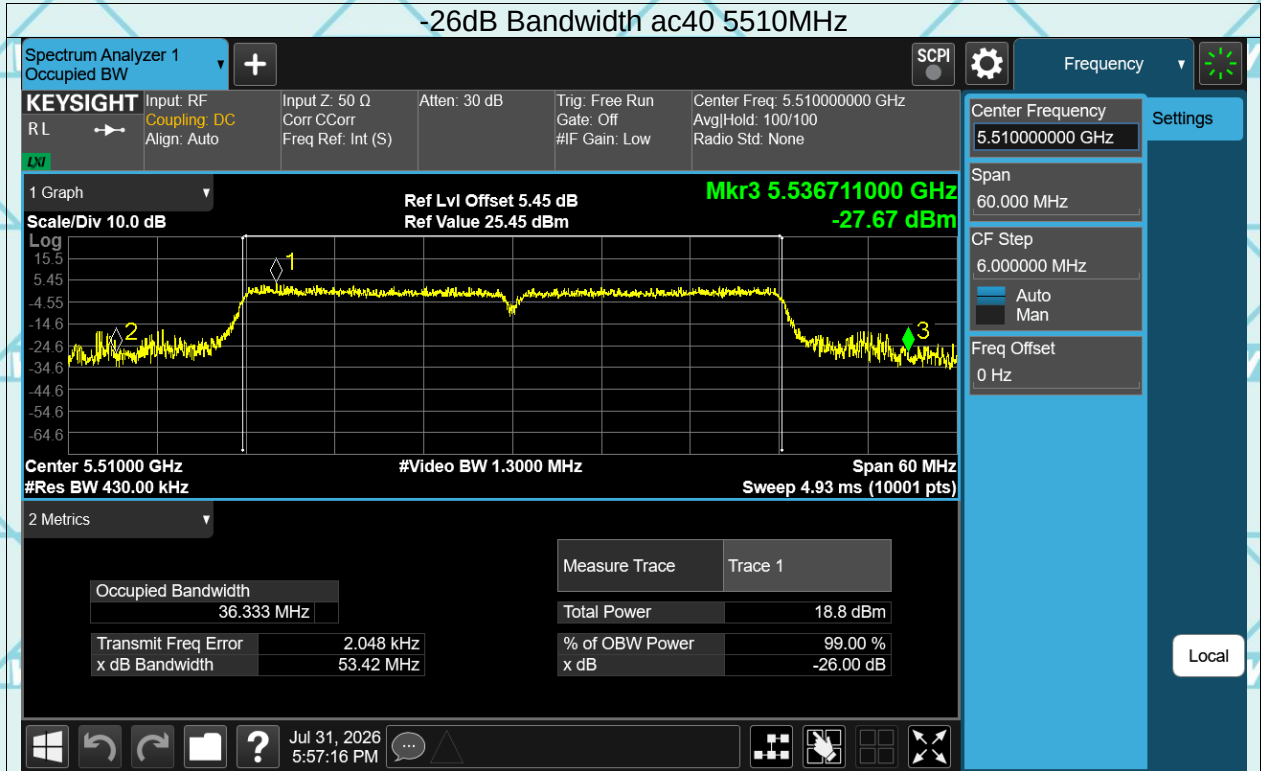


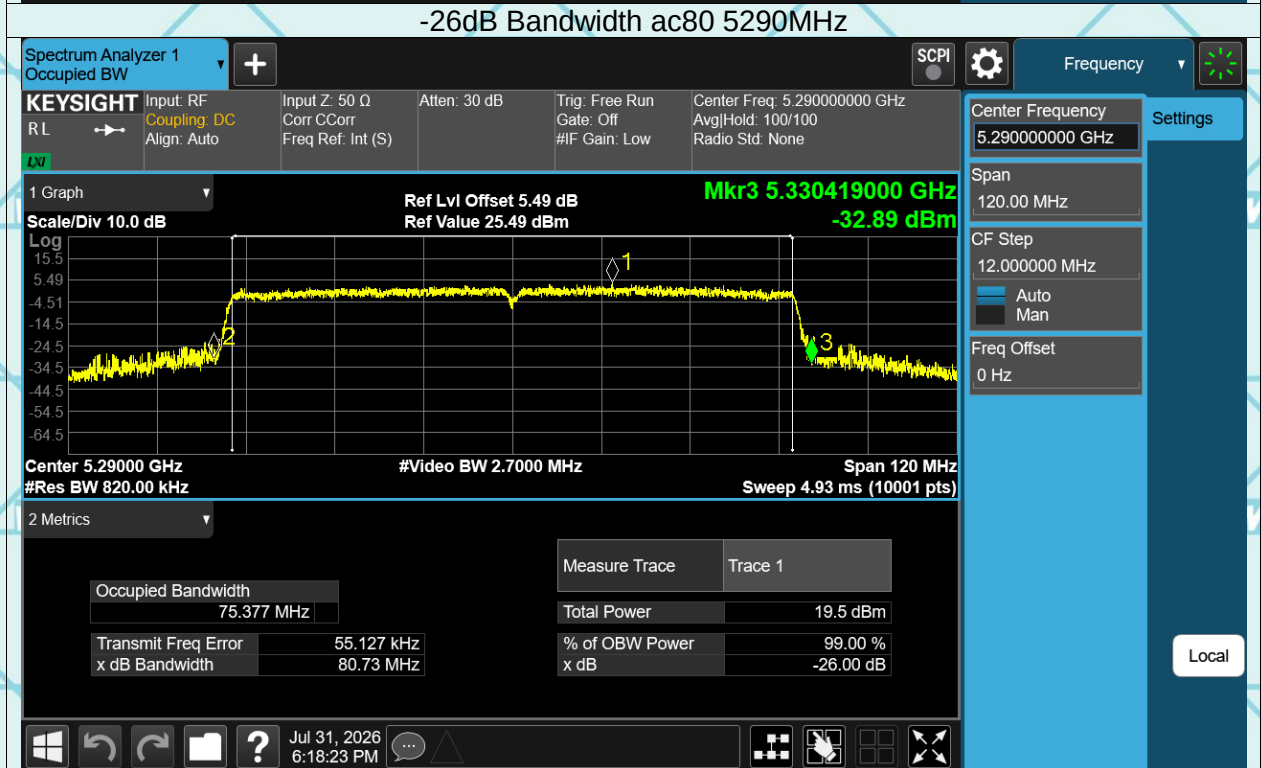
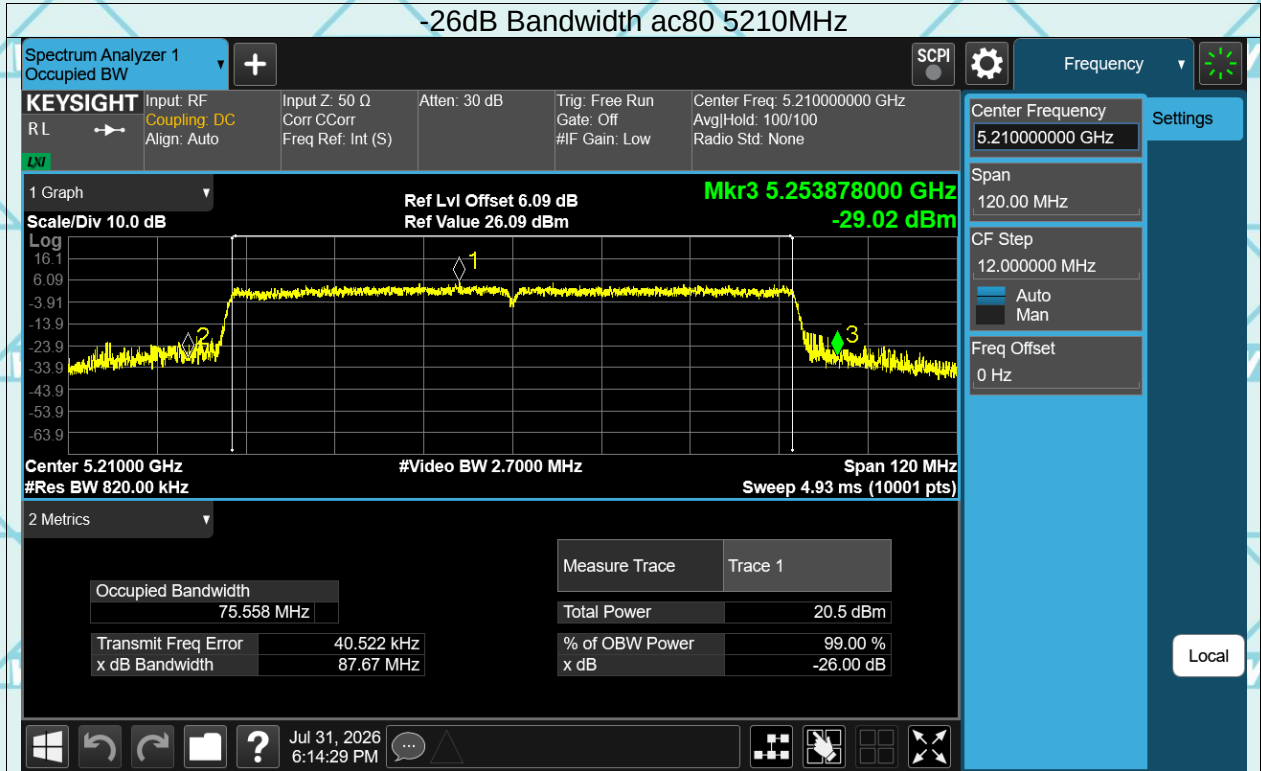


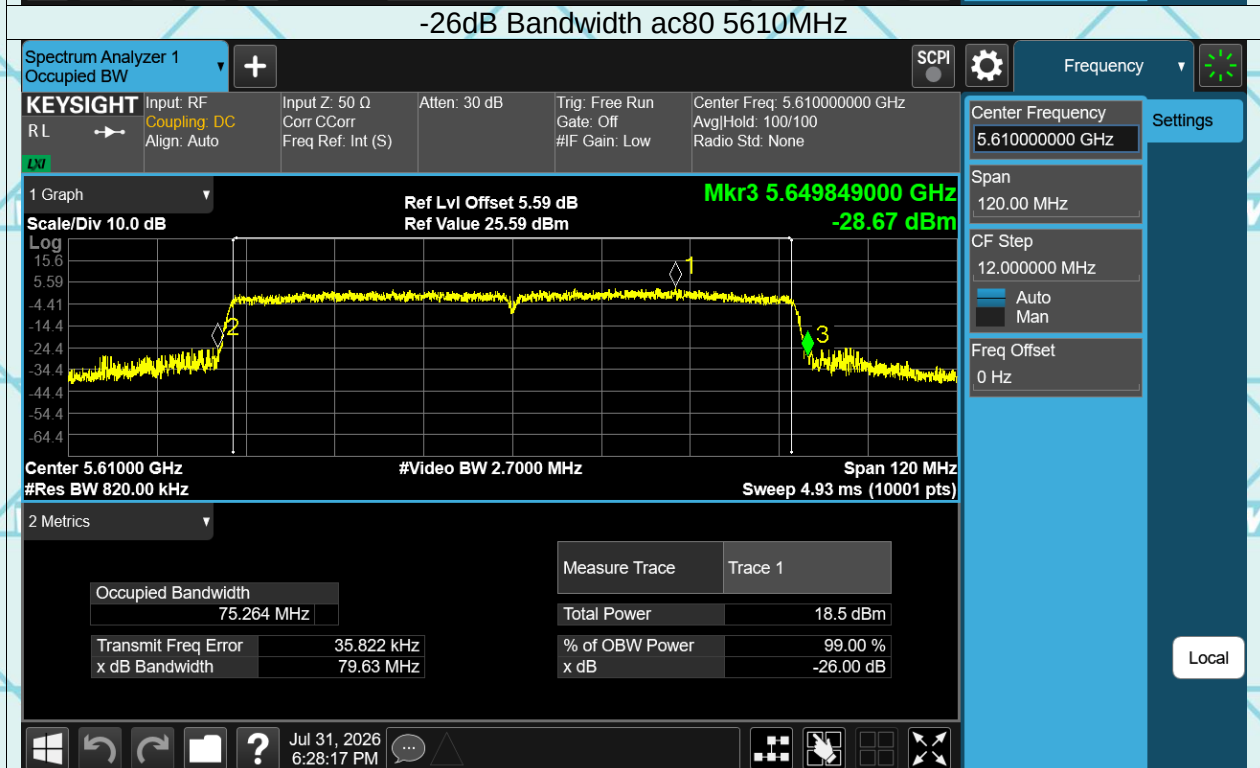
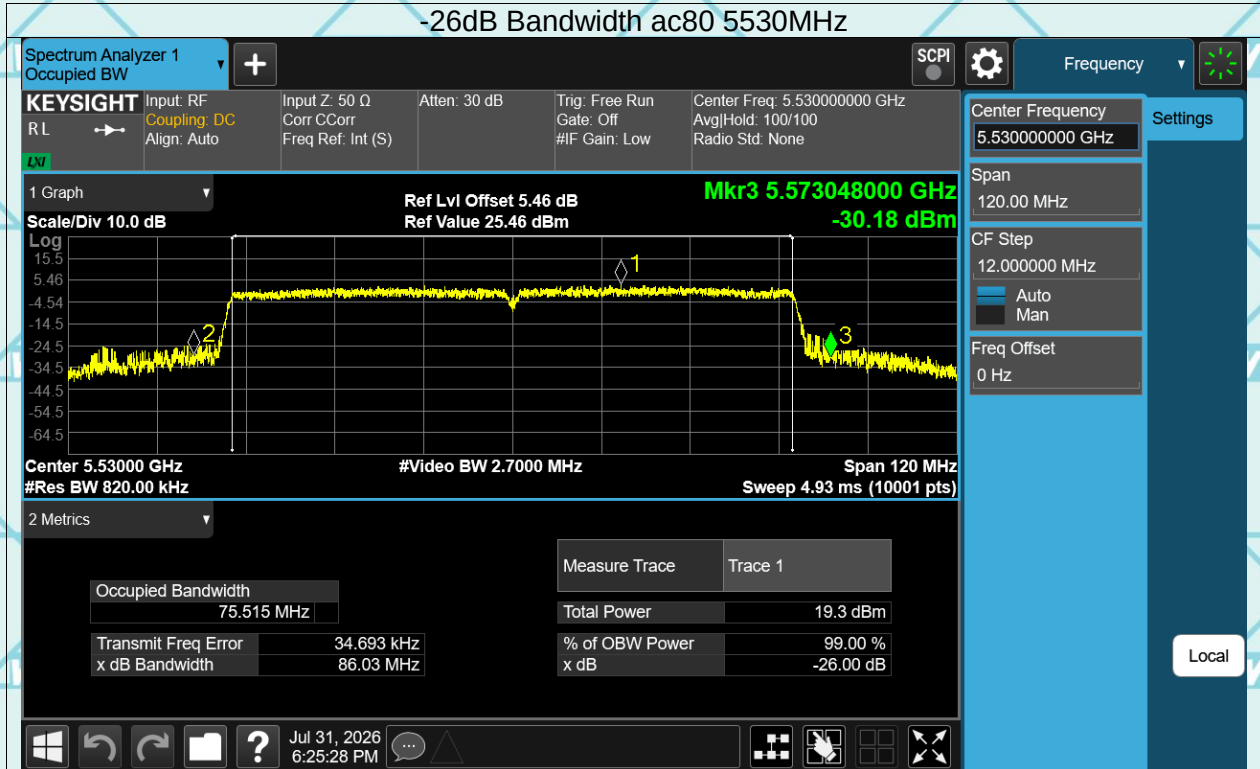




Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi2 Issued Date: 14 August 2026



-6dB&99% Bandwidth

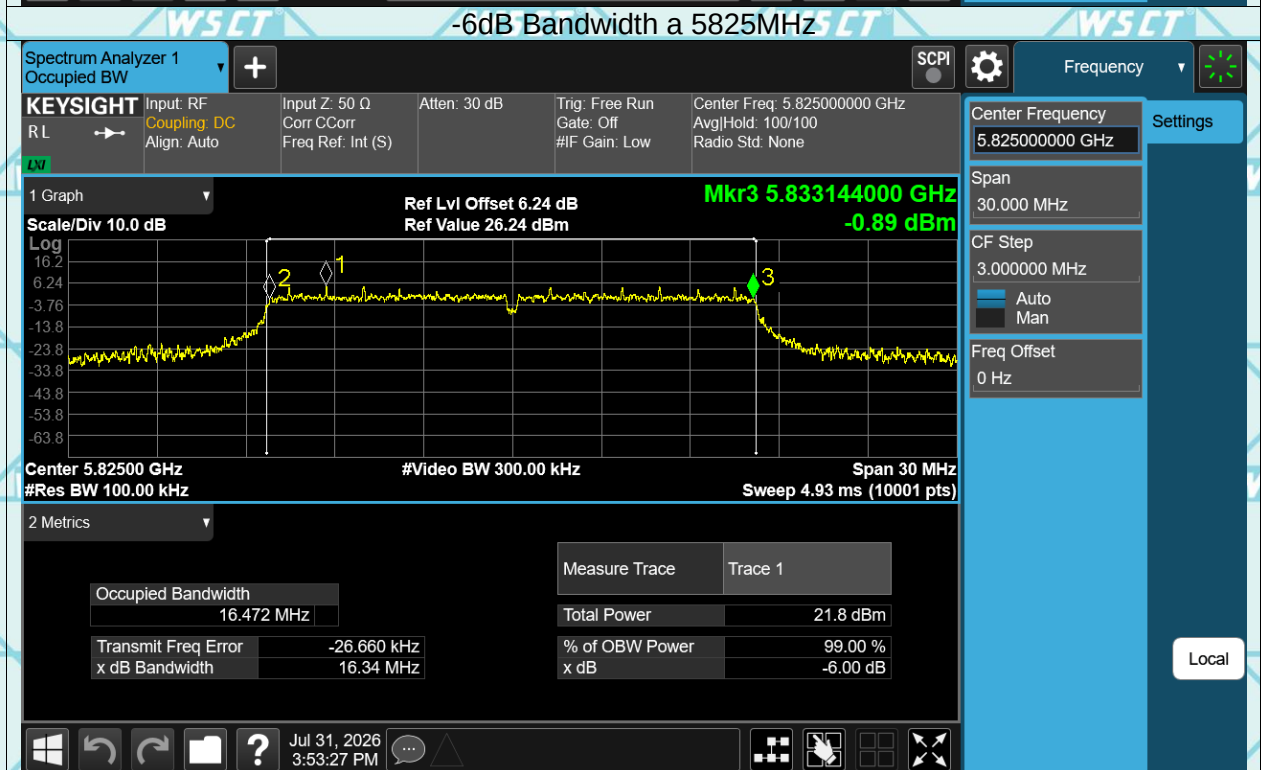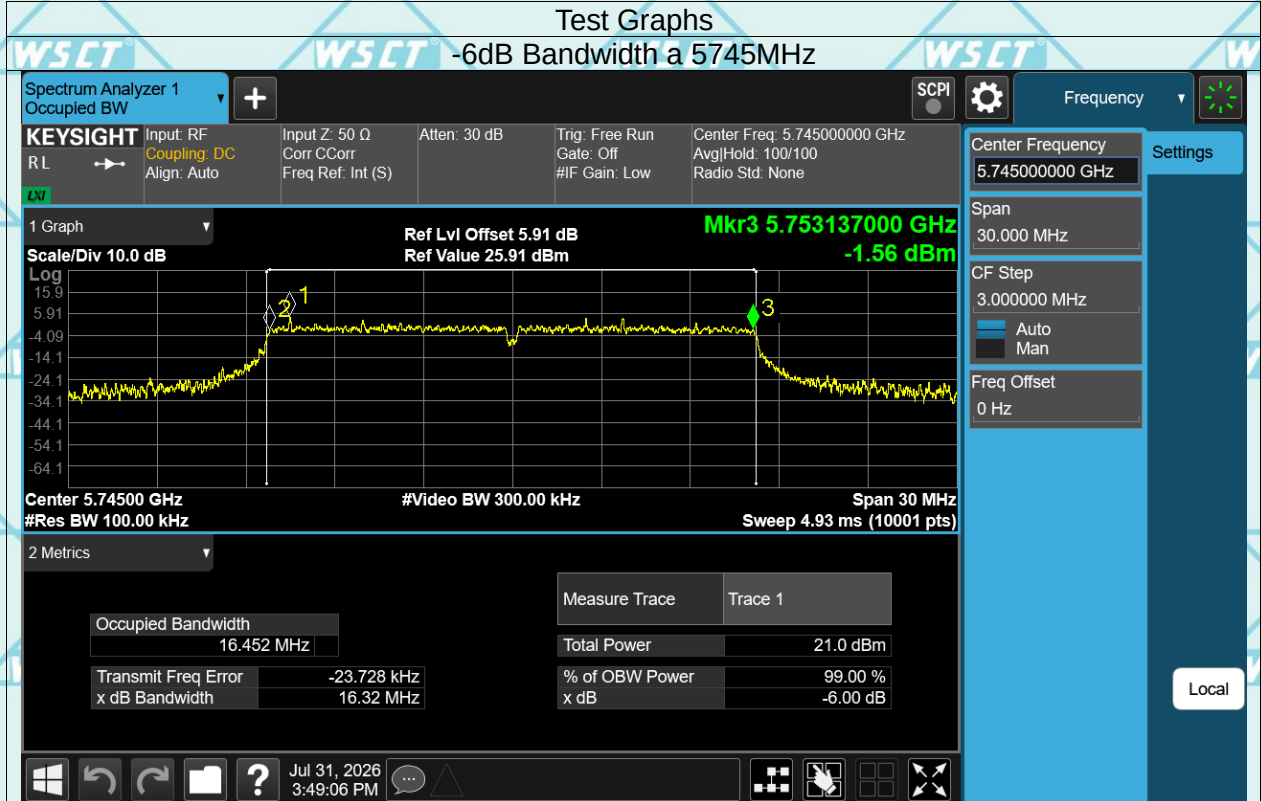


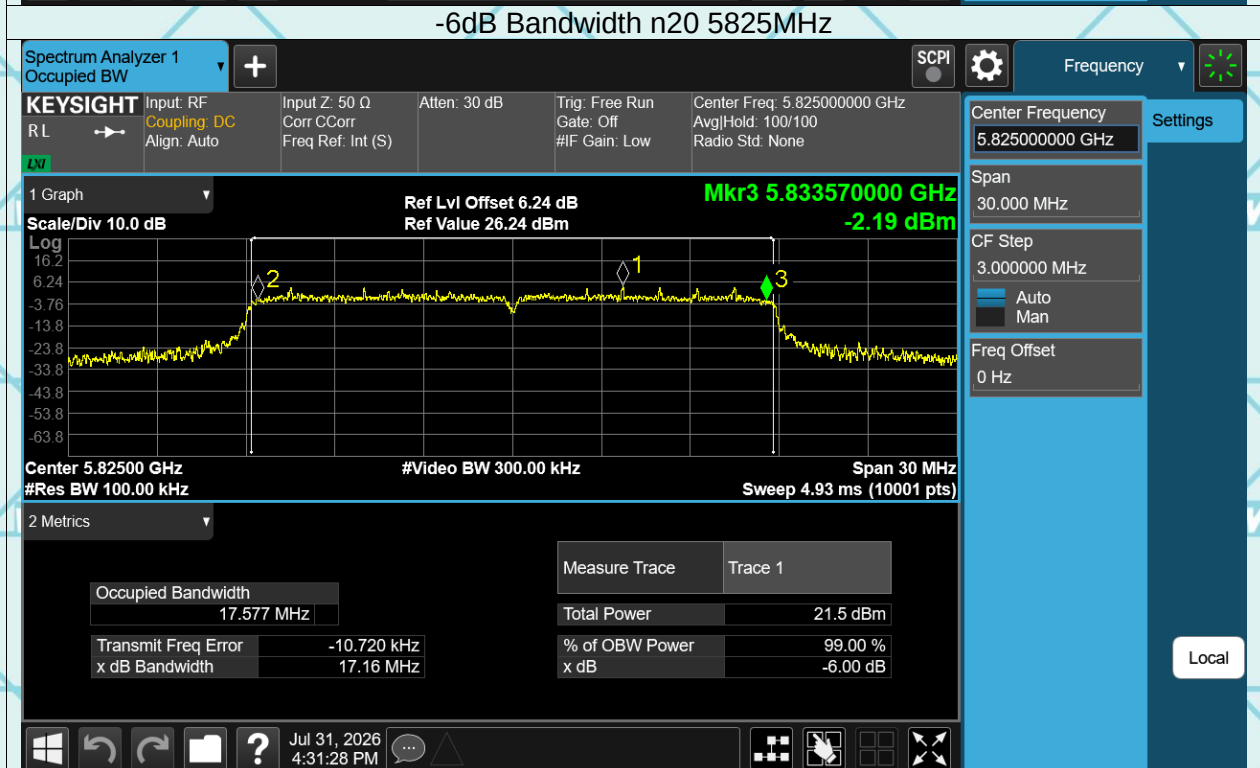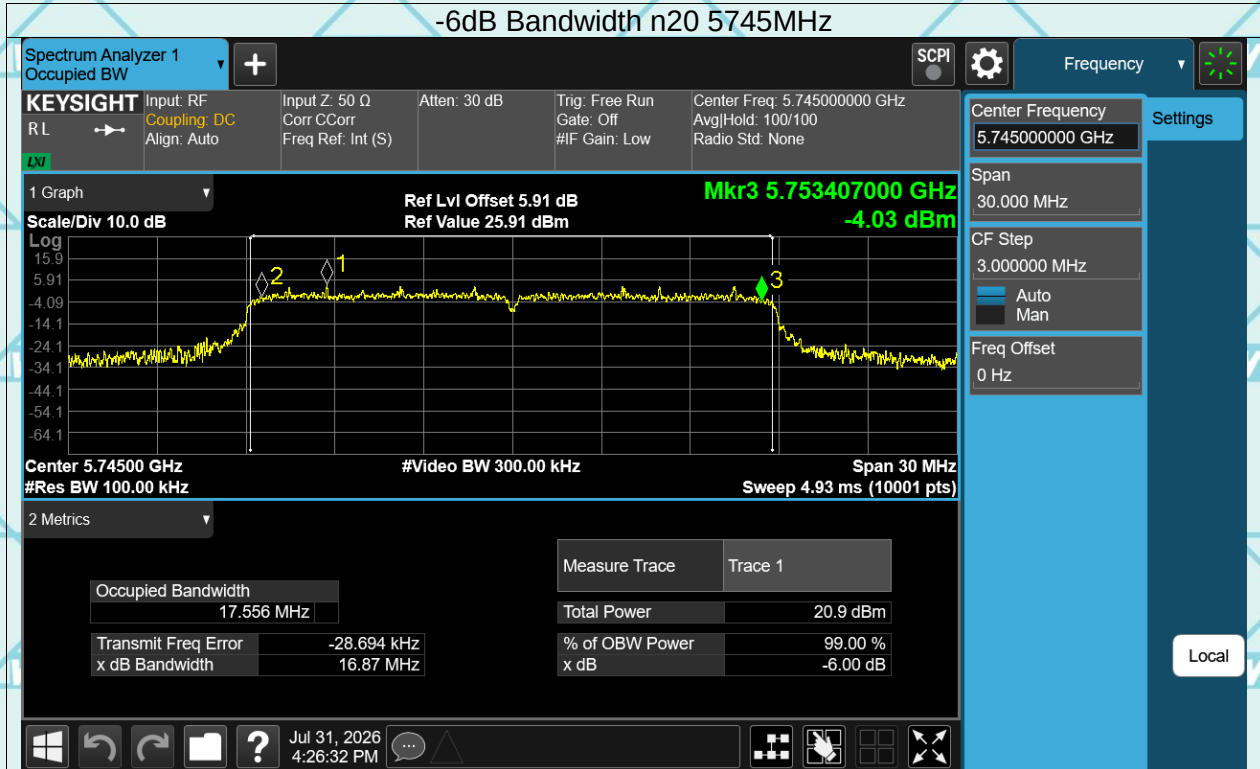

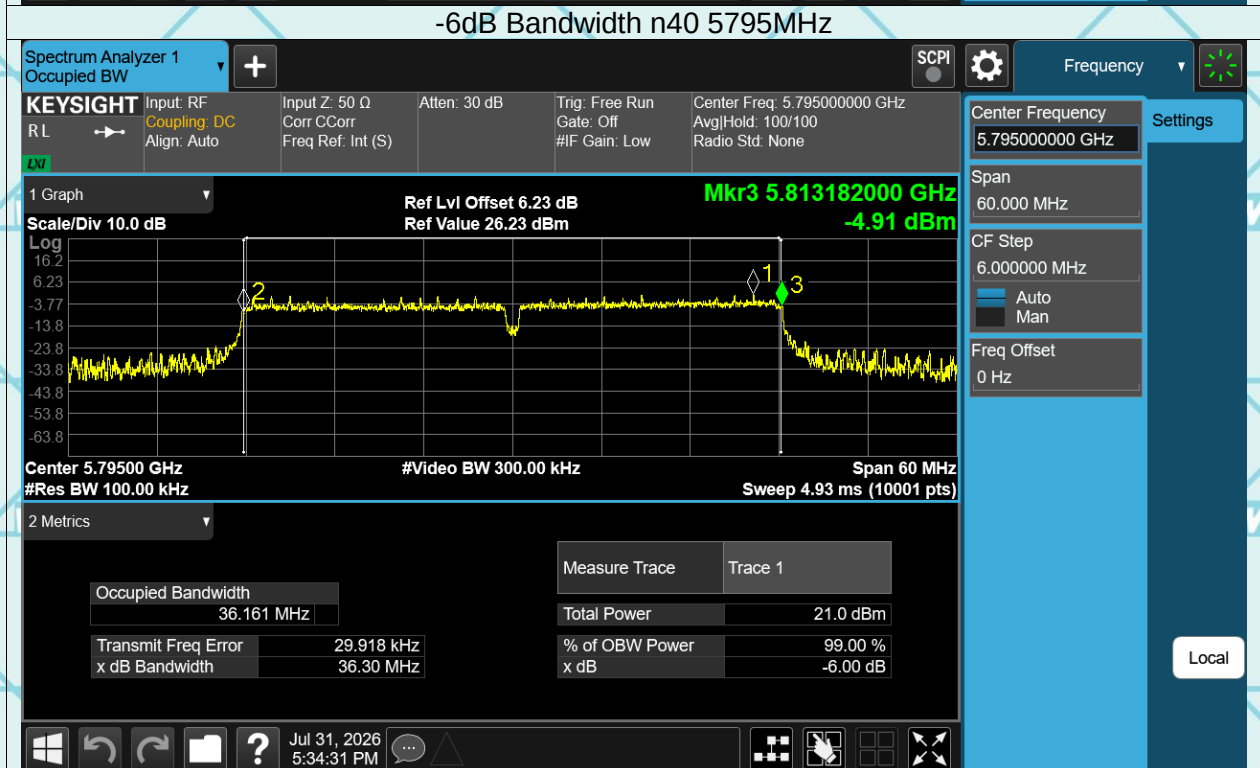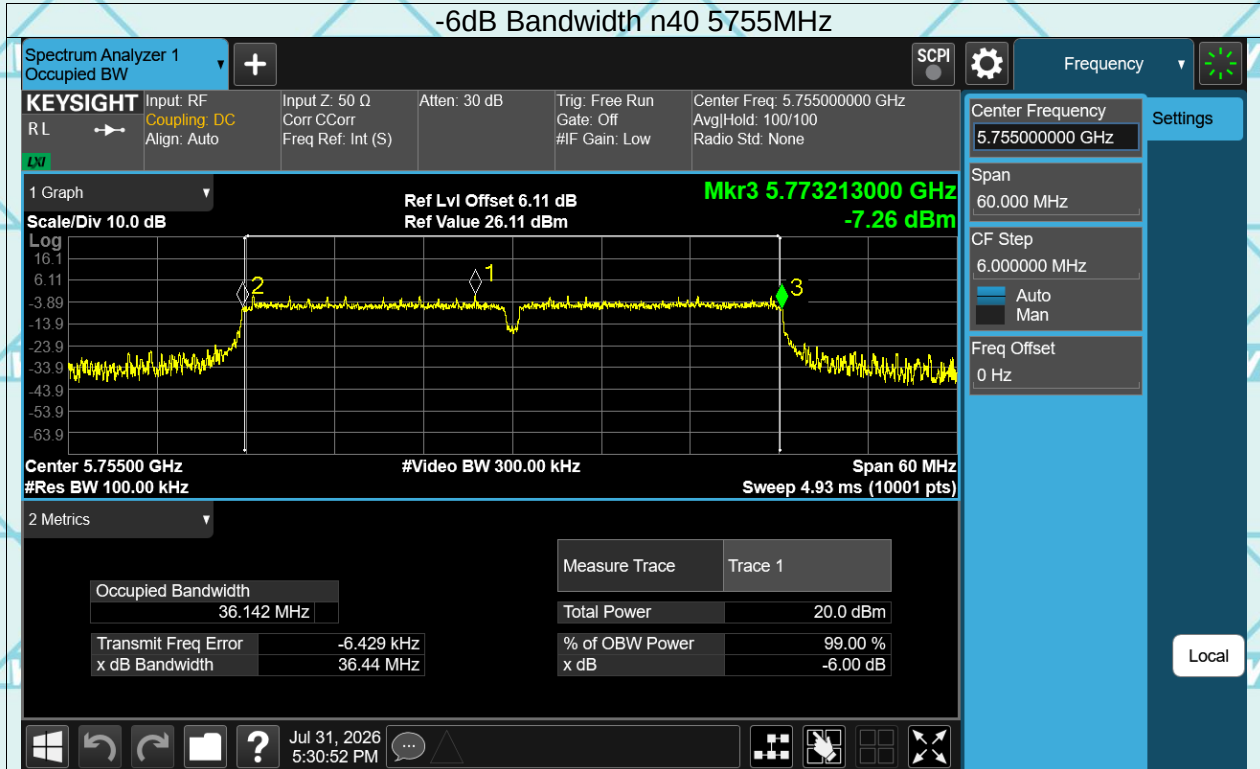

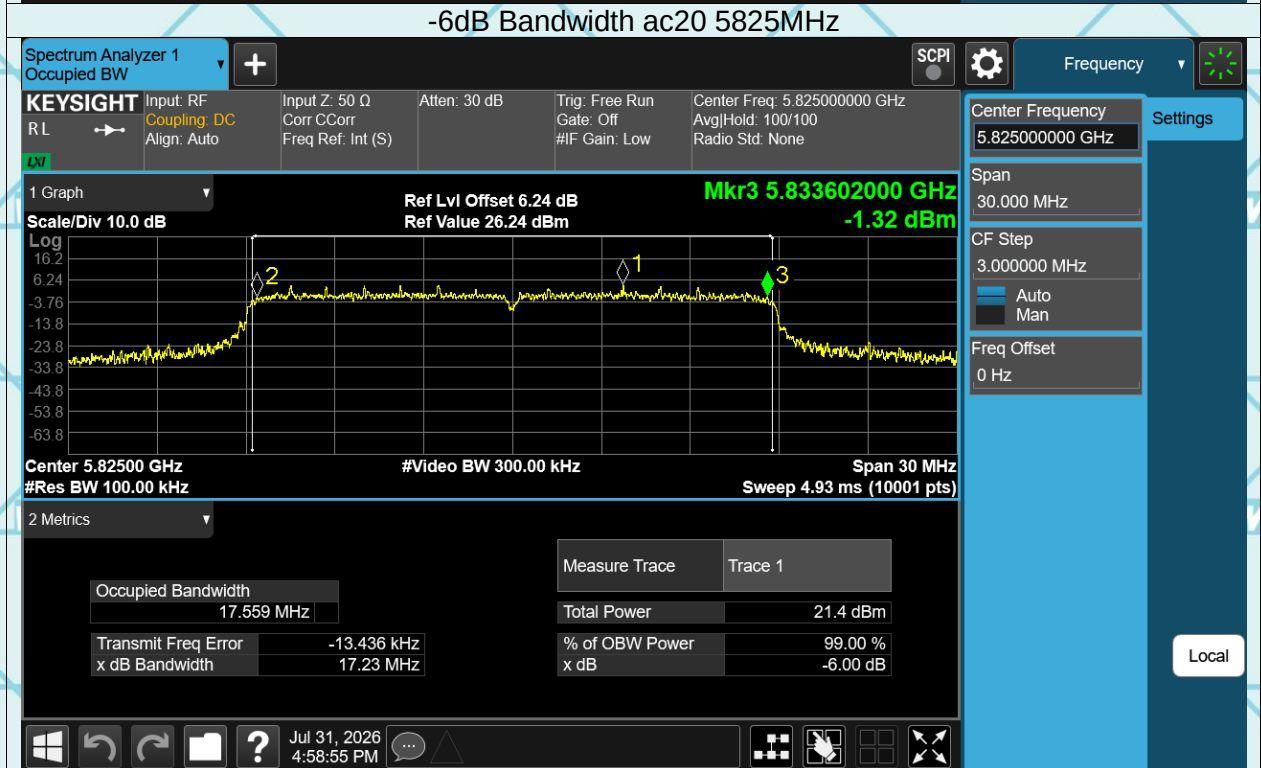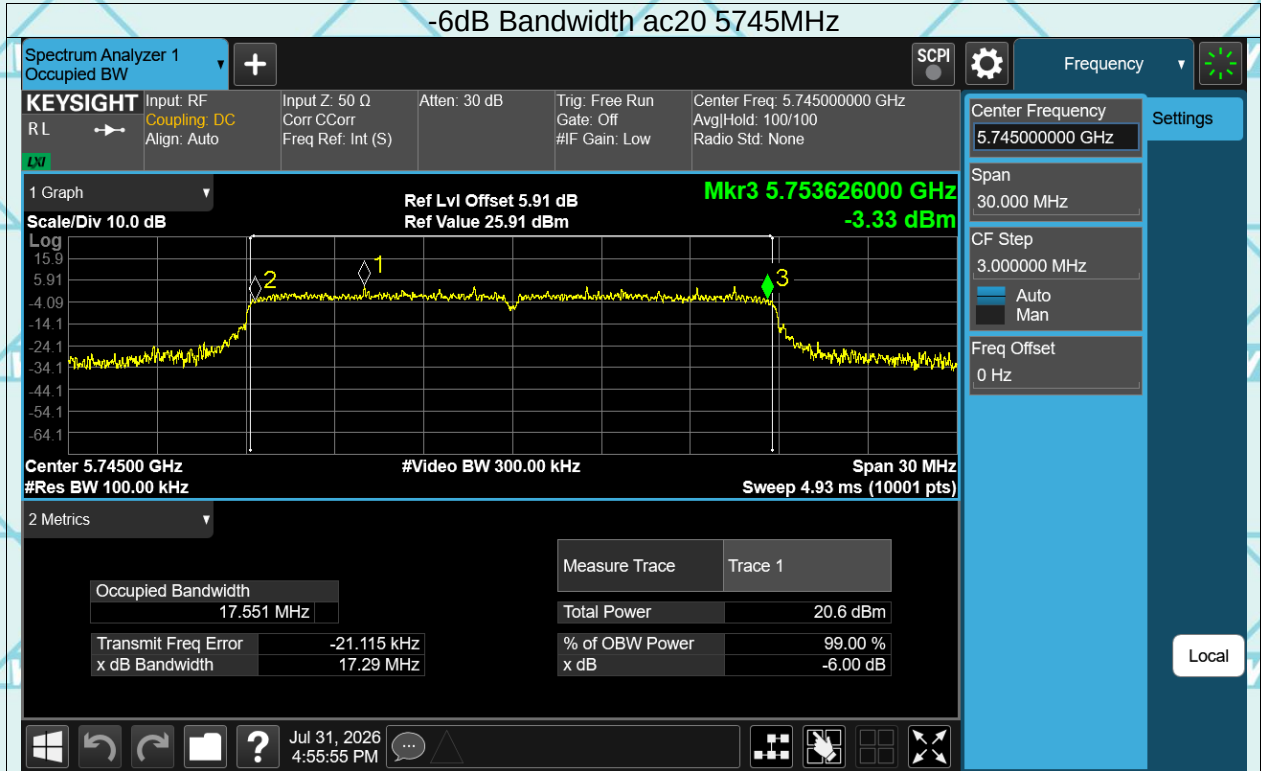

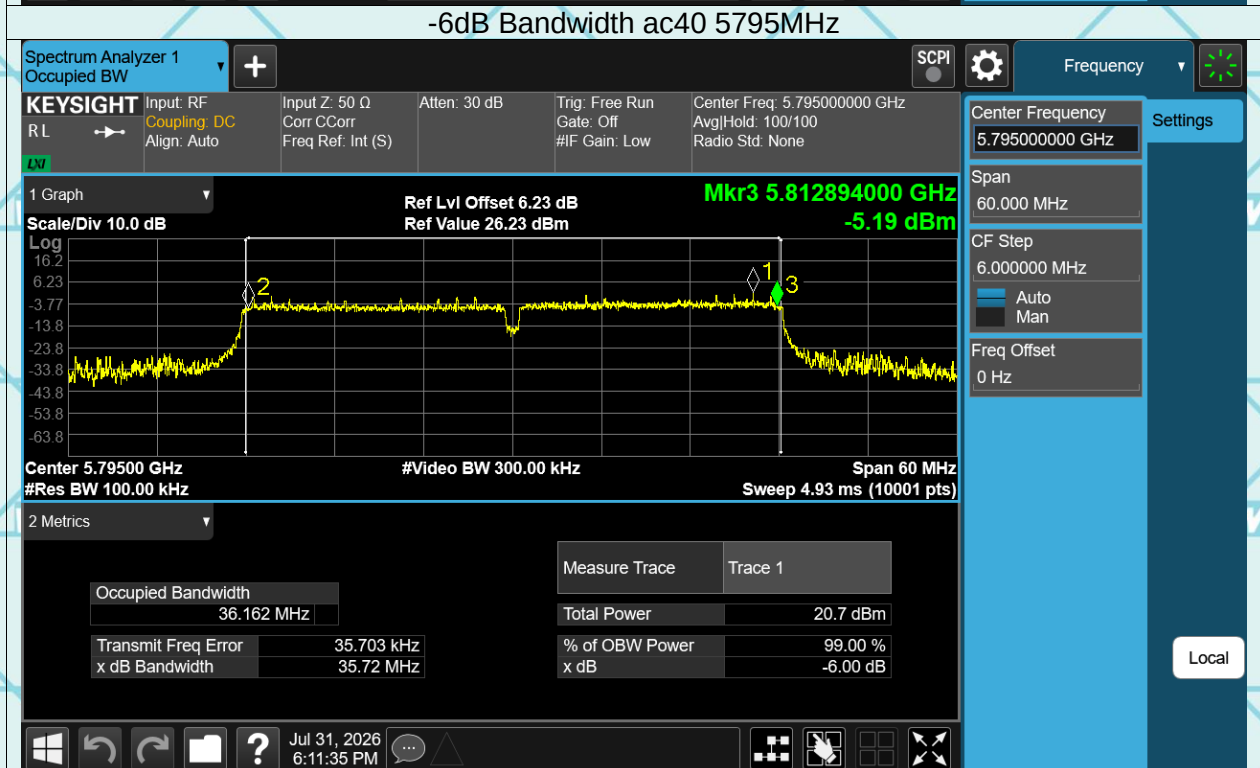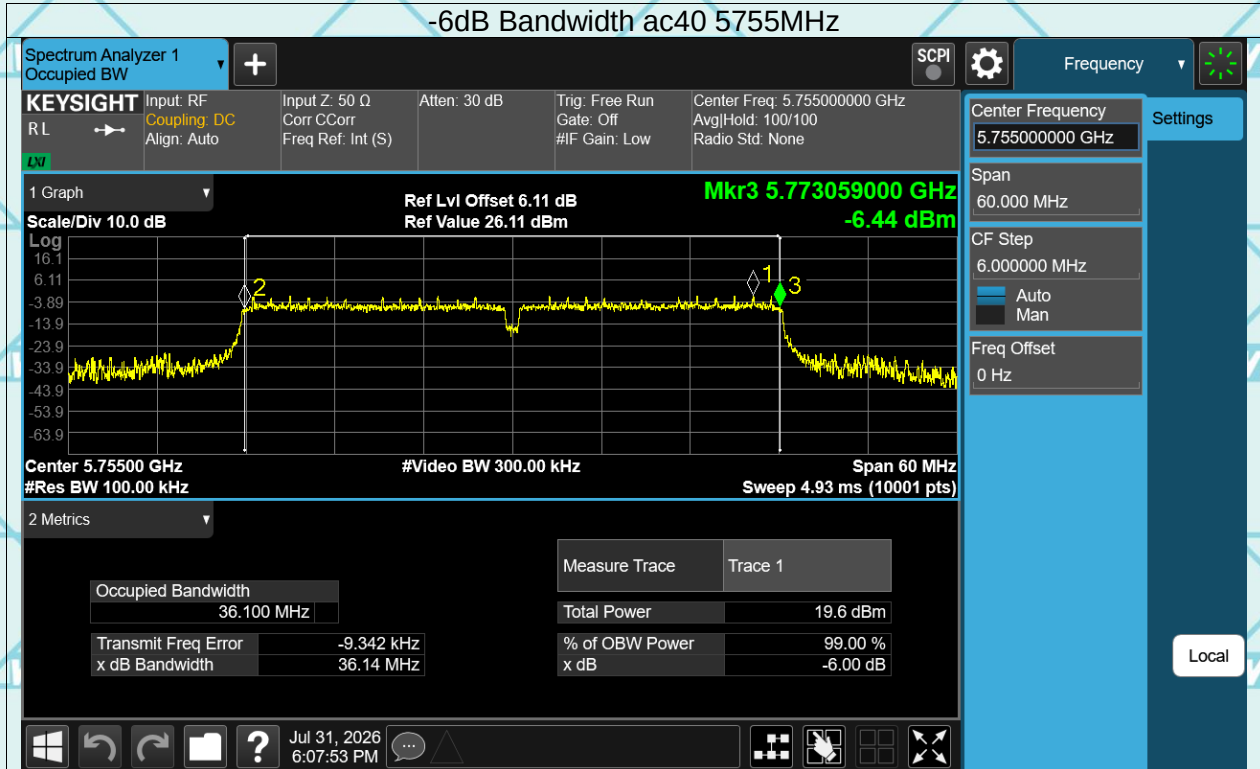

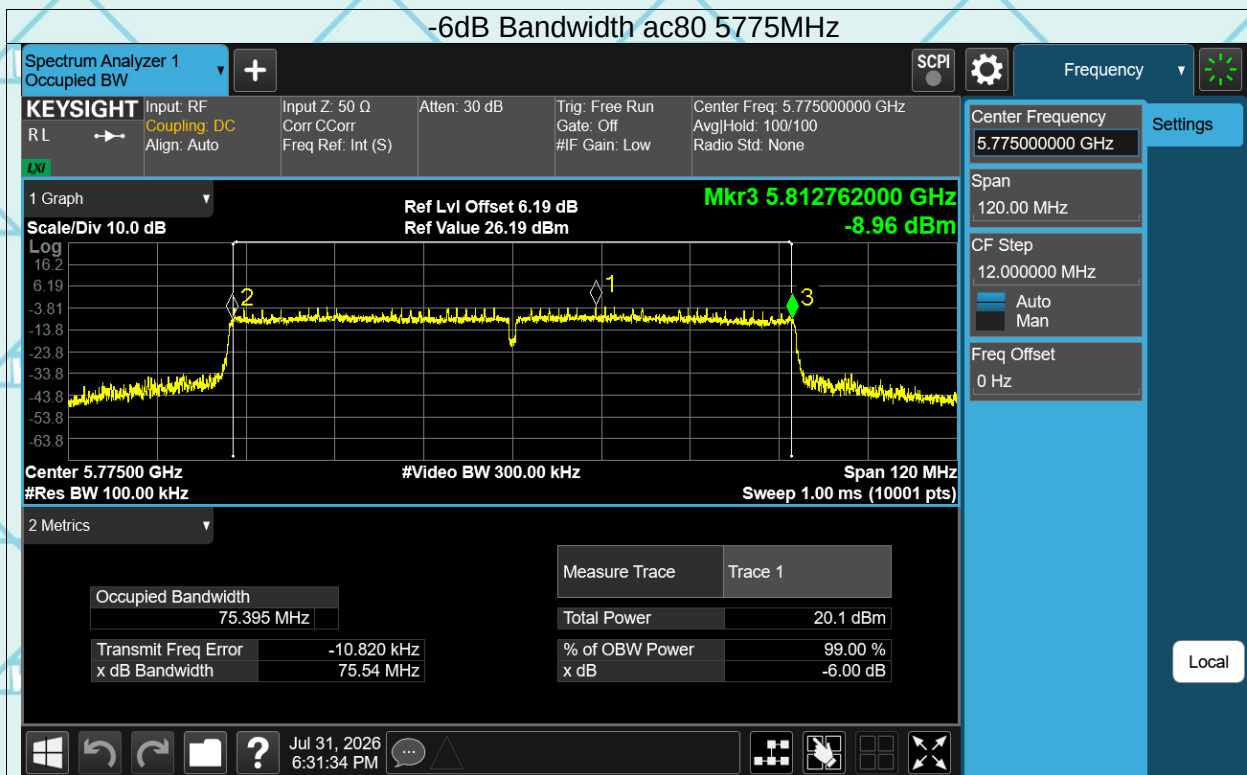

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.82V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	14.14	0.5	14.64	24	Pass
a	5240	15.84	0.5	16.34	24	Pass
a	5260	14.37	0.47	14.84	24	Pass
a	5320	14.71	0.47	15.18	24	Pass
a	5500	14.69	0.65	15.34	24	Pass
a	5700	12.68	0.67	13.35	24	Pass
a	5745	14.92	0.47	15.39	30	Pass
a	5825	15.89	0.47	16.36	30	Pass
n20	5180	13.54	0.59	14.13	24	Pass
n20	5240	15.09	0.56	15.65	24	Pass
n20	5260	13.72	0.79	14.51	24	Pass
n20	5320	14.01	0.56	14.57	24	Pass
n20	5500	14.04	0.56	14.6	24	Pass
n20	5700	12.09	0.59	12.68	24	Pass
n20	5745	14.24	0.56	14.8	30	Pass
n20	5825	14.99	0.67	15.66	30	Pass
n40	5190	14.22	1.1	15.32	24	Pass
n40	5230	14.25	1.44	15.69	24	Pass
n40	5270	12.95	1.05	14	24	Pass
n40	5310	13.1	1.05	14.15	24	Pass
n40	5510	12.97	1.05	14.02	24	Pass
n40	5670	11.17	1.05	12.22	24	Pass
n40	5755	13.83	0.24	14.07	30	Pass
n40	5795	13.88	1.05	14.93	30	Pass
ac20	5180	13.52	0.55	14.07	24	Pass
ac20	5240	14.94	0.55	15.49	24	Pass
ac20	5260	13.61	0.58	14.19	24	Pass
ac20	5320	14.06	0.58	14.64	24	Pass
ac20	5500	14.07	0.55	14.62	24	Pass
ac20	5700	11.74	0.58	12.32	24	Pass
ac20	5745	14.01	0.56	14.57	30	Pass
ac20	5825	14.96	0.55	15.51	30	Pass
ac40	5190	13.97	1.09	15.06	24	Pass
ac40	5230	13.86	1.19	15.05	24	Pass
ac40	5270	12.62	0	12.62	24	Pass
ac40	5310	12.84	0	12.84	24	Pass
ac40	5510	12.36	1.04	13.4	24	Pass
ac40	5670	10.48	1.09	11.57	24	Pass
ac40	5755	12.24	0.5	12.74	30	Pass
ac40	5795	13.37	0.5	13.87	30	Pass
ac80	5210	12.25	0.47	12.72	24	Pass
ac80	5290	11.24	0.47	11.71	24	Pass
ac80	5530	11.26	0.65	11.91	24	Pass
ac80	5610	10.31	0.67	10.98	24	Pass
ac80	5775	11.66	0.47	12.13	30	Pass

