


Report No.: WSCT-ANAB-R&E260700067A-BT Issued Date: 14 August 2026

Vertical:

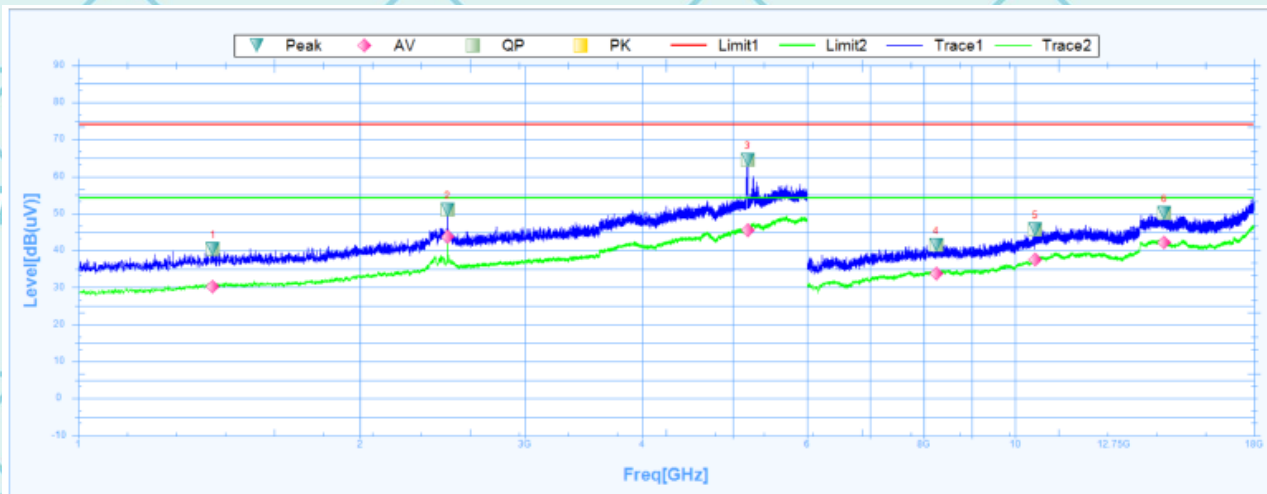


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1393.1250	40.33	25.08	15.25	74	-33.67	0	Vertical	PK	Pass
1	1393.1250	30.21	25.08	5.13	54	-23.79	0	Vertical	AV	Pass
2	2480.0000	50.9	27.53	23.37	74	-23.1	309.4	Vertical	PK	Pass
2	2480.0000	43.72	27.53	16.19	54	-10.28	309.4	Vertical	AV	Pass
3	5186.8750	64.49	31.75	32.74	74	-9.51	3.5	Vertical	PK	Pass
3	5186.8750	45.52	31.75	13.77	54	-8.48	3.5	Vertical	AV	Pass
4	8241.0000	41.45	8.85	32.6	74	-32.55	5.8	Vertical	PK	Pass
4	8241.0000	33.78	8.85	24.93	54	-20.22	5.8	Vertical	AV	Pass
5	10513.5000	45.71	13.99	31.72	74	-28.29	78.2	Vertical	PK	Pass
5	10513.5000	37.49	13.99	23.5	54	-16.51	78.2	Vertical	AV	Pass
6	14437.5000	50.08	18.68	31.4	74	-23.92	360.1	Vertical	PK	Pass
6	14437.5000	42.06	18.68	23.38	54	-11.94	360.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-BT Issued Date: 14 August 2026

High channel: 2480MHz

Horizontal:

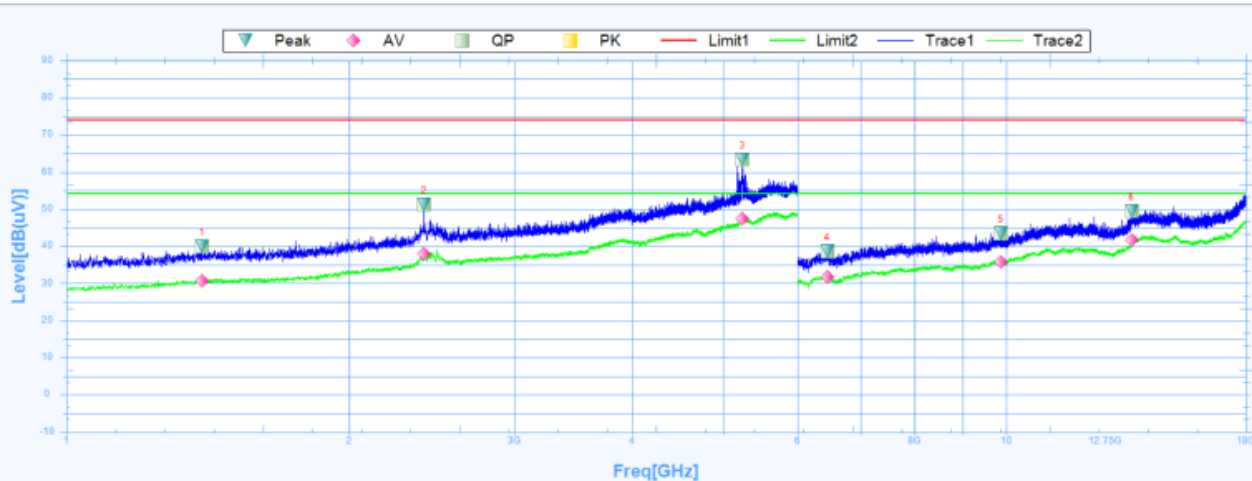


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1394.3750	39.99	25.08	14.91	74	-34.01	0.7	Horizontal	PK	Pass
1	1394.3750	30.72	25.08	5.64	54	-23.28	0.7	Horizontal	AV	Pass
2	2402.5000	51.28	27.27	24.01	74	-22.72	359.5	Horizontal	PK	Pass
2	2402.5000	38.04	27.27	10.77	54	-15.96	359.5	Horizontal	AV	Pass
3	5244.3750	63.26	31.8	31.46	74	-10.74	57	Horizontal	PK	Pass
3	5244.3750	47.34	31.8	15.54	54	-6.66	57	Horizontal	AV	Pass
4	6451.5000	38.57	4.63	33.94	74	-35.43	9.8	Horizontal	PK	Pass
4	6451.5000	31.72	4.63	27.09	54	-22.28	9.8	Horizontal	AV	Pass
5	9873.0000	43.56	12.07	31.49	74	-30.44	49.4	Horizontal	PK	Pass
5	9873.0000	35.84	12.07	23.77	54	-18.16	49.4	Horizontal	AV	Pass
6	13603.5000	49.51	17.98	31.53	74	-24.49	86.6	Horizontal	PK	Pass
6	13603.5000	41.75	17.98	23.77	54	-12.25	86.6	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-BT Issued Date: 14 August 2026

Vertical:

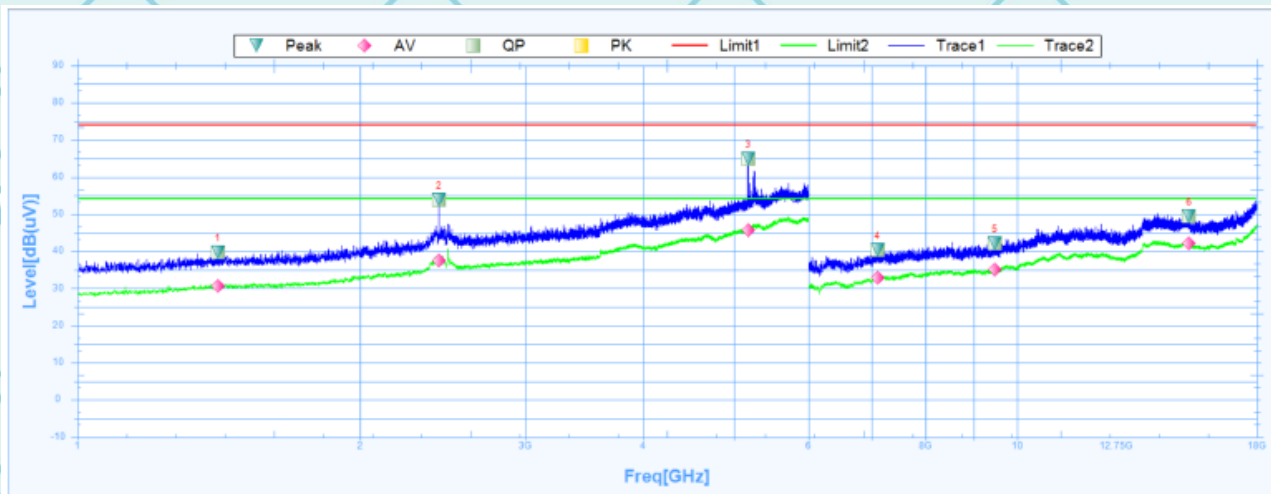

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1410.6250	39.76	25.09	14.67	74	-34.24	358.7	Vertical	PK	Pass
1	1410.6250	30.62	25.09	5.53	54	-23.38	358.7	Vertical	AV	Pass
2	2426.2500	53.76	27.35	26.41	74	-20.24	351.8	Vertical	PK	Pass
2	2426.2500	37.56	27.35	10.21	54	-16.44	351.8	Vertical	AV	Pass
3	5177.5000	64.84	31.74	33.1	74	-9.16	113.3	Vertical	PK	Pass
3	5177.5000	45.71	31.74	13.97	54	-8.29	113.3	Vertical	AV	Pass
4	7105.5000	40.3	6.76	33.54	74	-33.7	360	Vertical	PK	Pass
4	7105.5000	32.83	6.76	26.07	54	-21.17	360	Vertical	AV	Pass
5	9471.0000	42.14	11.08	31.06	74	-31.86	360	Vertical	PK	Pass
5	9471.0000	35.09	11.08	24.01	54	-18.91	360	Vertical	AV	Pass
6	15246.0000	49.43	18.8	30.63	74	-24.57	6.1	Vertical	PK	Pass
6	15246.0000	42.05	18.8	23.25	54	-11.95	6.1	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- The prototype has two BT antennas, with the worst antenna being . This project only reflects the worst antenna data
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) – Limits (dBμV)

Report No.: WSCT-ANAB-R&E260700067A-BT Issued Date: 14 August 2026


6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below


GFSK

Low channel

Horizontal:

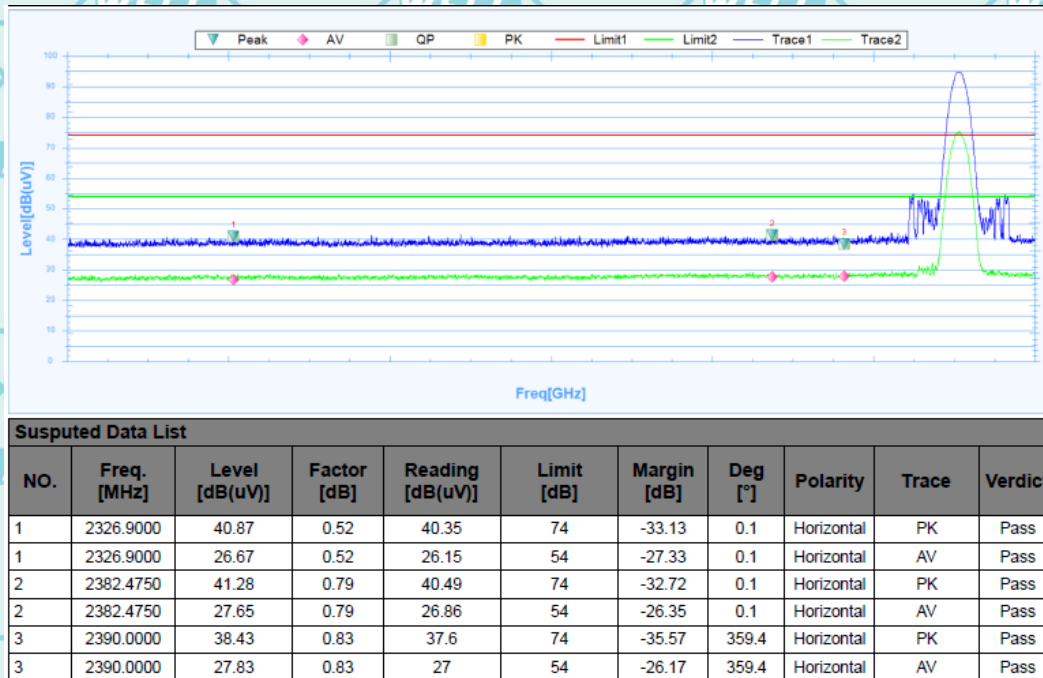


Vertical:

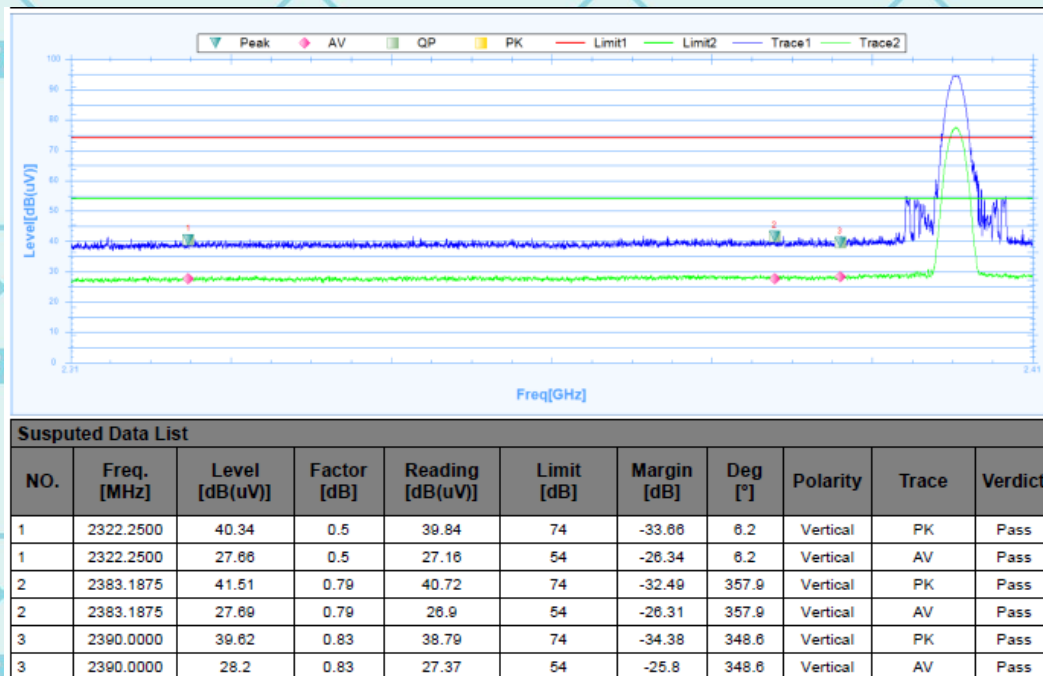


Report No.: WSCT-ANAB-R&E260700067A-BT Issued Date: 14 August 2026

High channel
Horizontal:

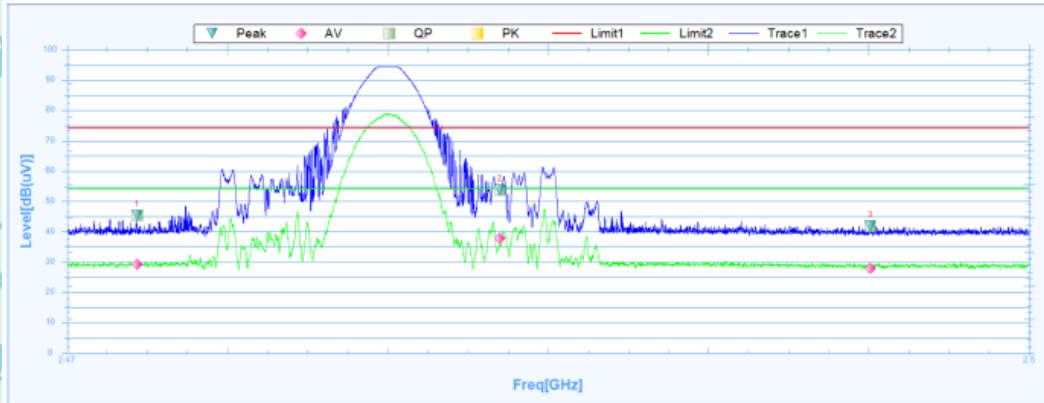

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.1825	45.38	1.32	44.06	74	-28.62	203.7	Horizontal	PK	Pass
1	2472.1825	29.24	1.32	27.92	54	-24.76	203.7	Horizontal	AV	Pass
2	2483.5000	53.7	1.38	52.32	74	-20.3	0.4	Horizontal	PK	Pass
2	2483.5000	37.73	1.38	36.35	54	-16.27	0.4	Horizontal	AV	Pass
3	2495.0575	41.66	1.46	40.2	74	-32.34	224	Horizontal	PK	Pass
3	2495.0575	27.87	1.46	26.41	54	-26.13	224	Horizontal	AV	Pass

Vertical:

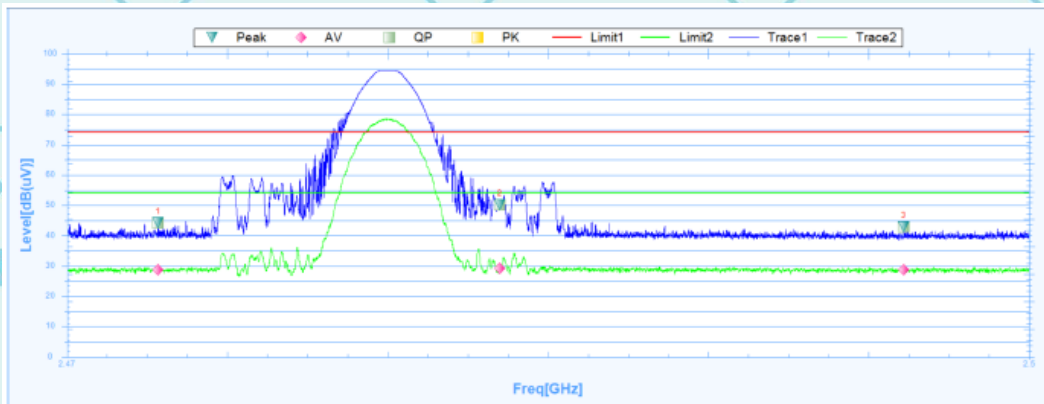

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2472.8388	44.13	1.32	42.81	74	-29.87	115.7	Vertical	PK	Pass
1	2472.8388	28.73	1.32	27.41	54	-25.27	115.7	Vertical	AV	Pass
2	2483.5000	50.08	1.38	48.7	74	-23.92	280.6	Vertical	PK	Pass
2	2483.5000	29.28	1.38	27.9	54	-24.72	280.6	Vertical	AV	Pass
3	2496.0962	42.85	1.47	41.38	74	-31.15	355	Vertical	PK	Pass
3	2496.0962	28.65	1.47	27.18	54	-25.35	355	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******