




Band Edge g 2462MHz Ref

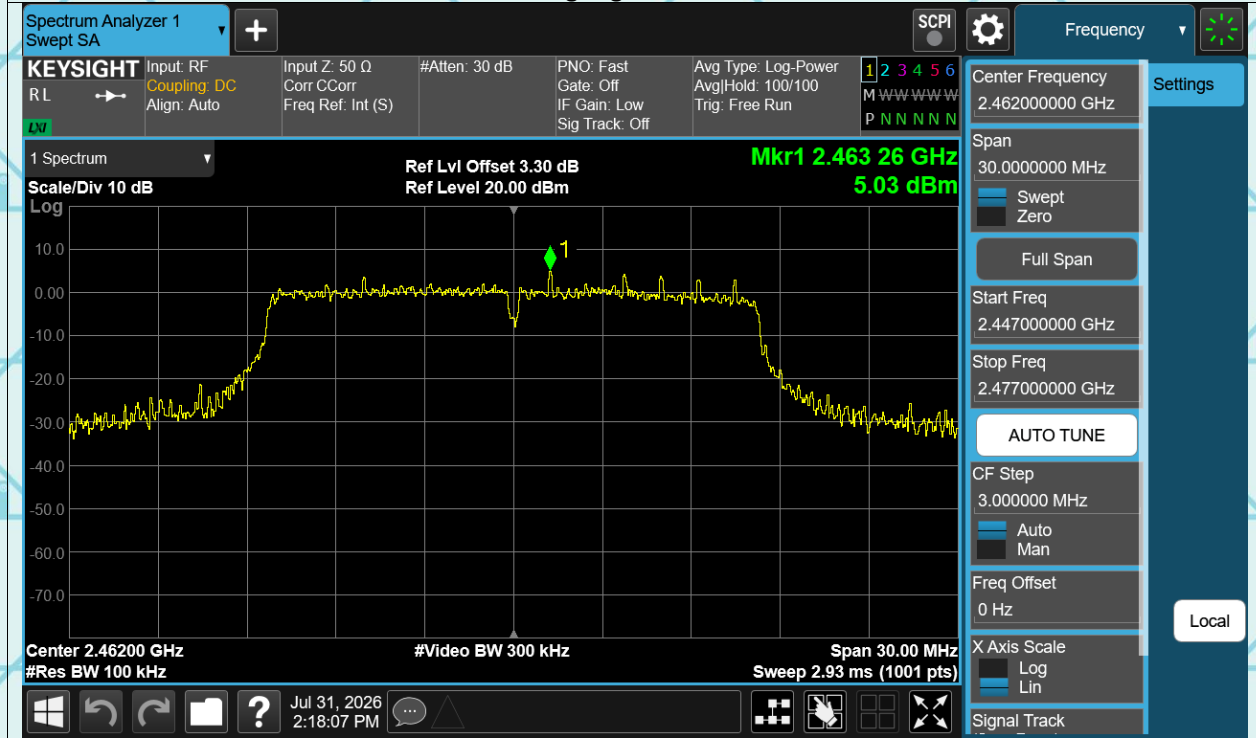

Band Edge g 2462MHz Emission

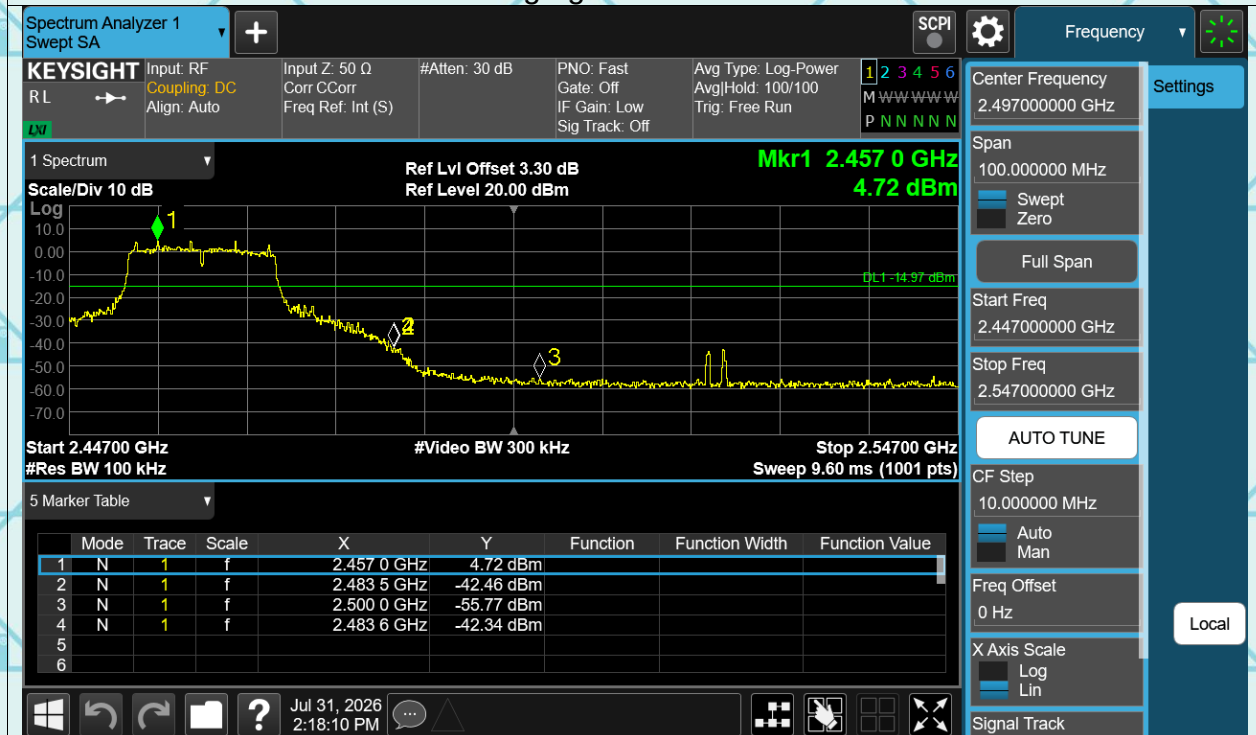


Band Edge n20 2412MHz Ref

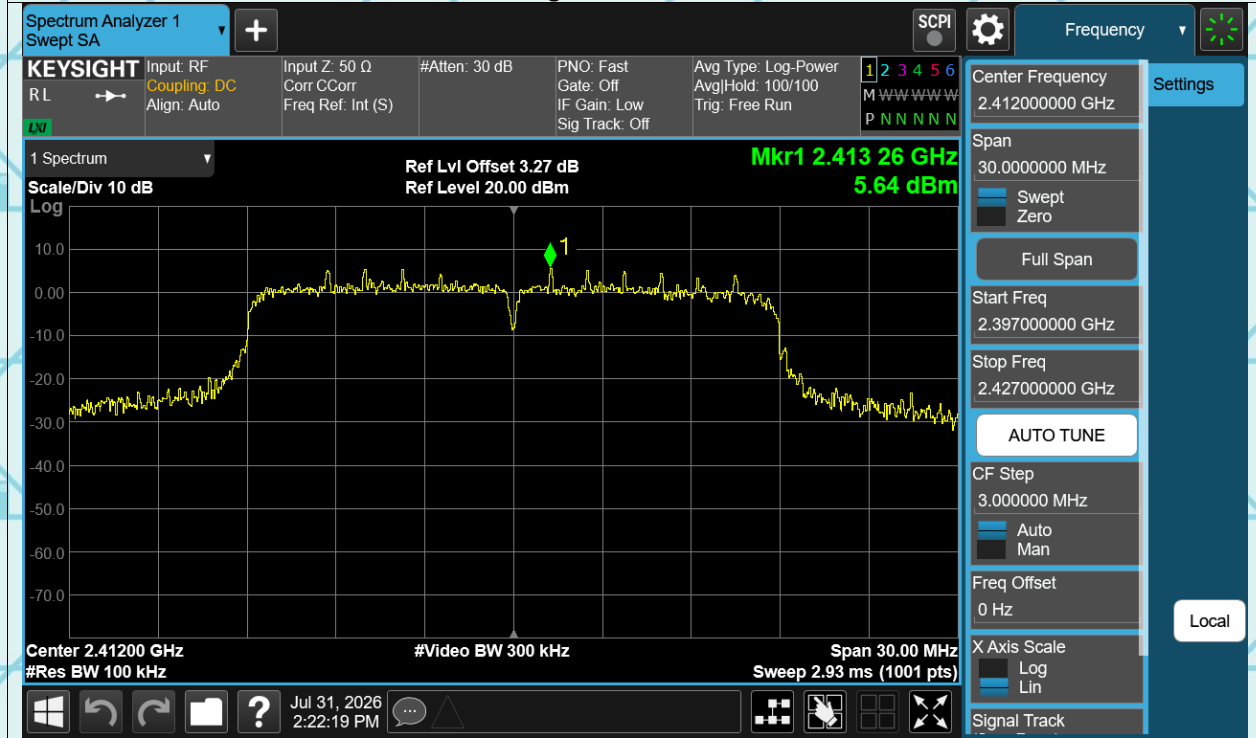

Band Edge n20 2412MHz Emission




Band Edge n20 2462MHz Ref

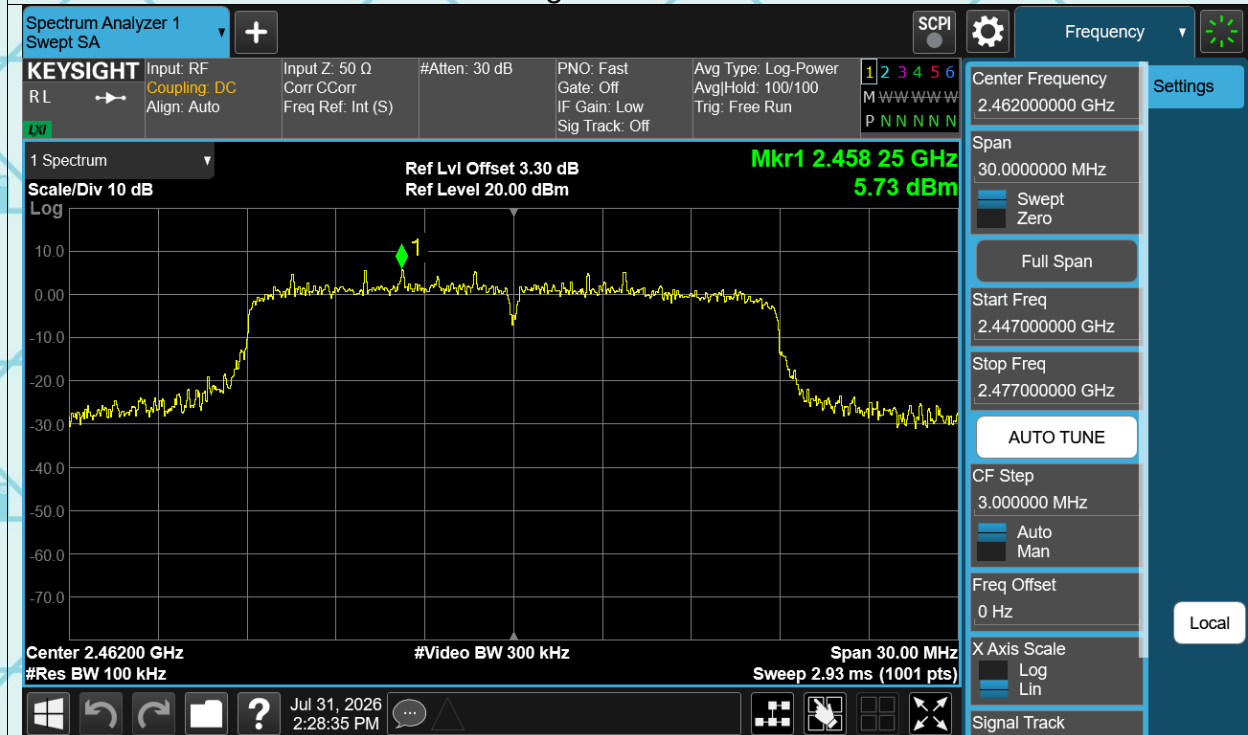

Band Edge n20 2462MHz Emission




Band Edge n40 2422MHz Ref

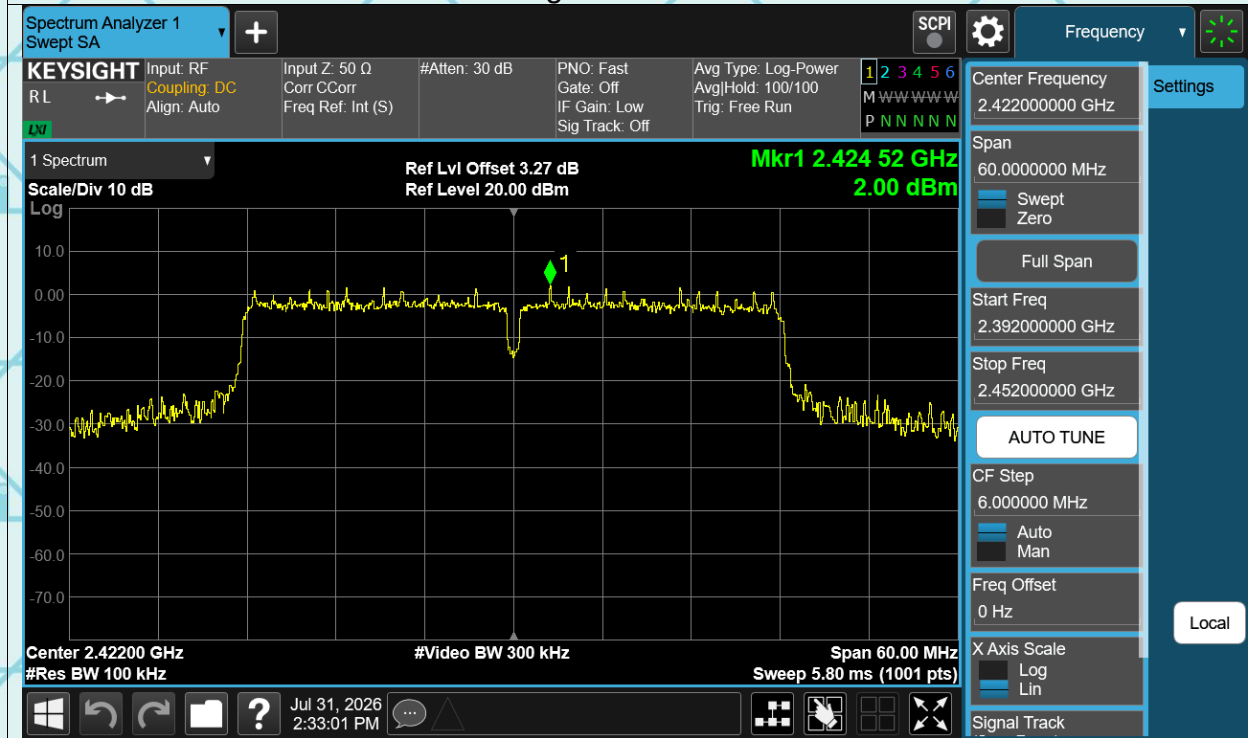

Band Edge n40 2422MHz Emission



Band Edge n40 2452MHz Ref

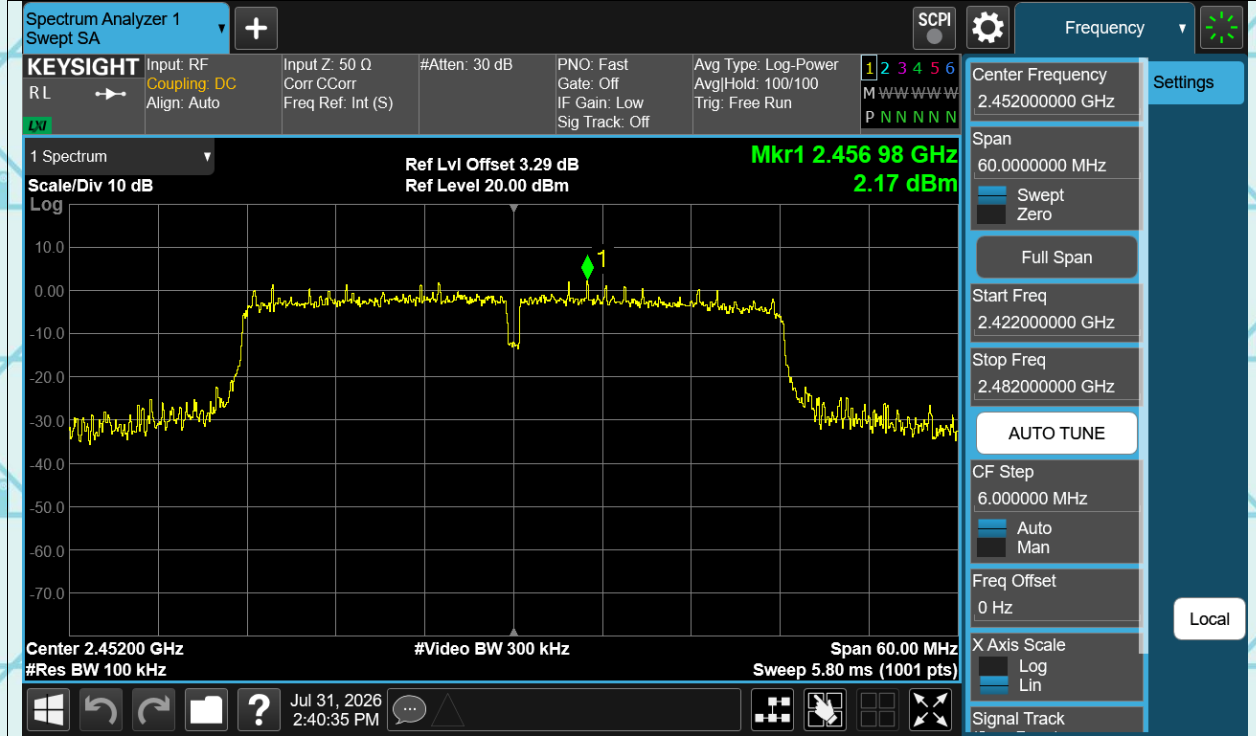

Band Edge n40 2452MHz Emission




Conducted RF Spurious Emission

Test Graphs


Tx. Spurious b 2412MHz Ref




Tx. Spurious b 2412MHz Emission

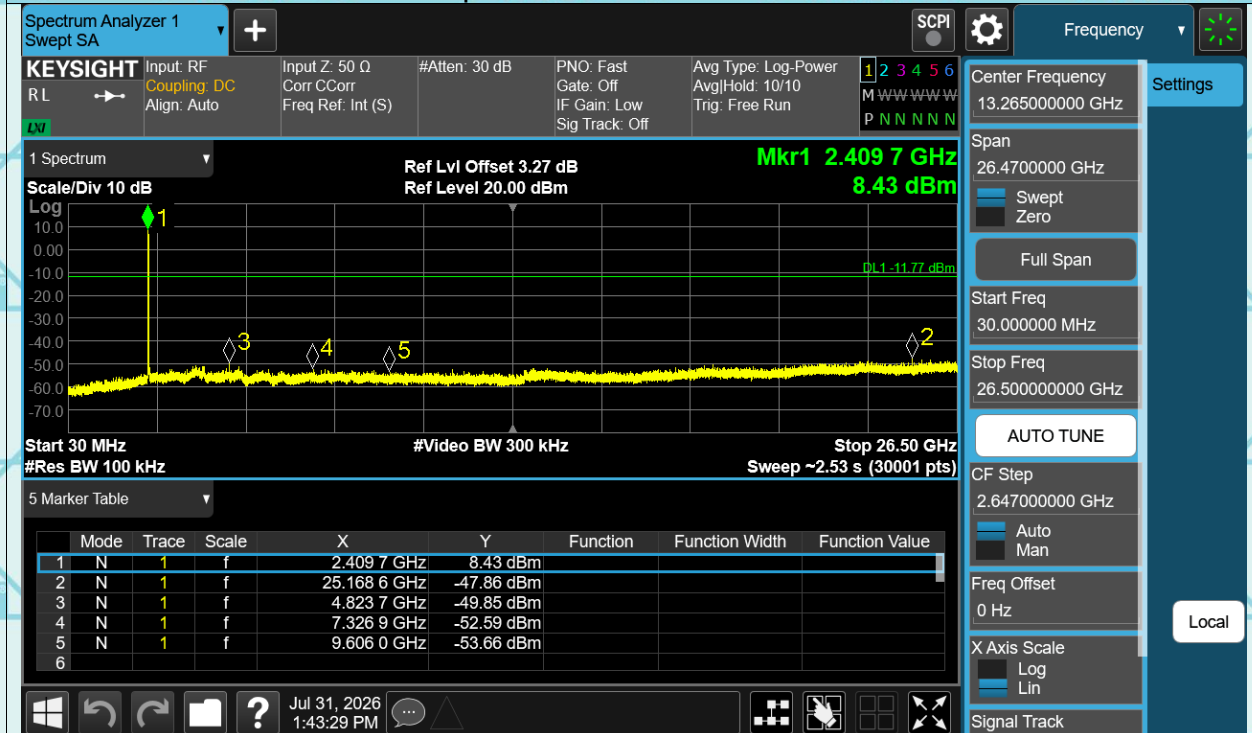


Tx. Spurious b 2437MHz Ref

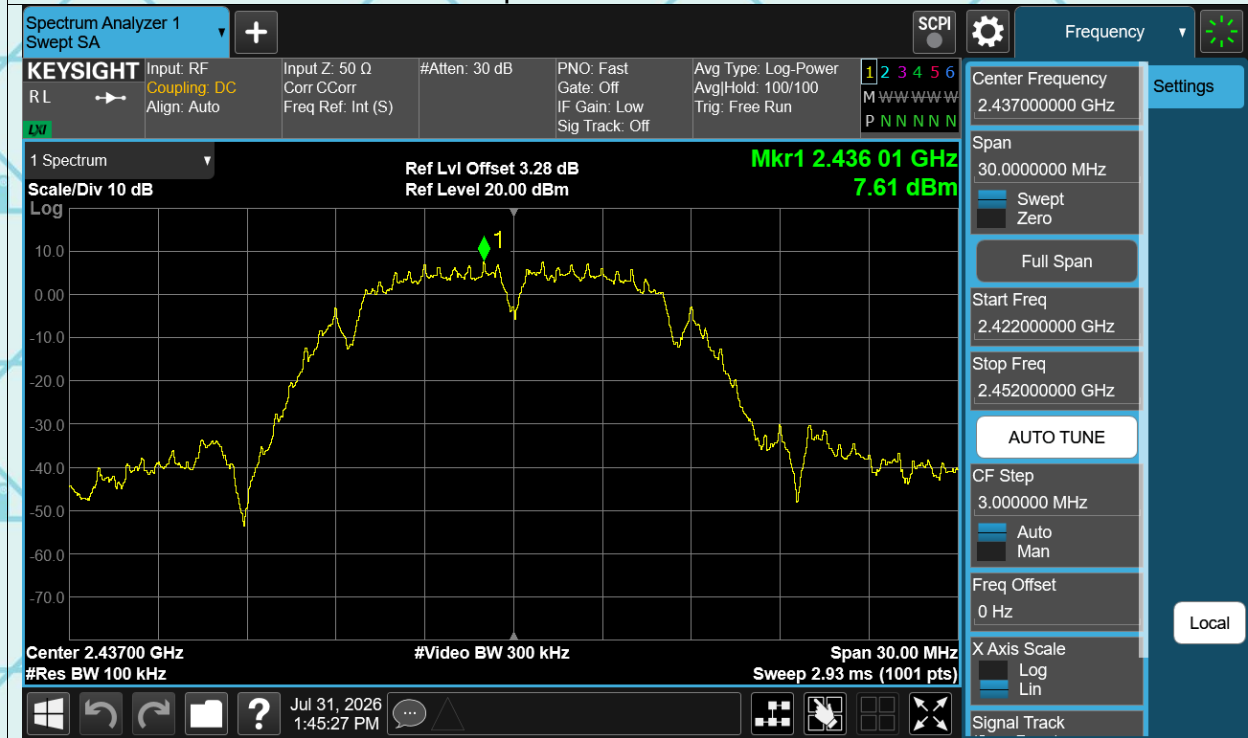


Tx. Spurious b 2437MHz Emission

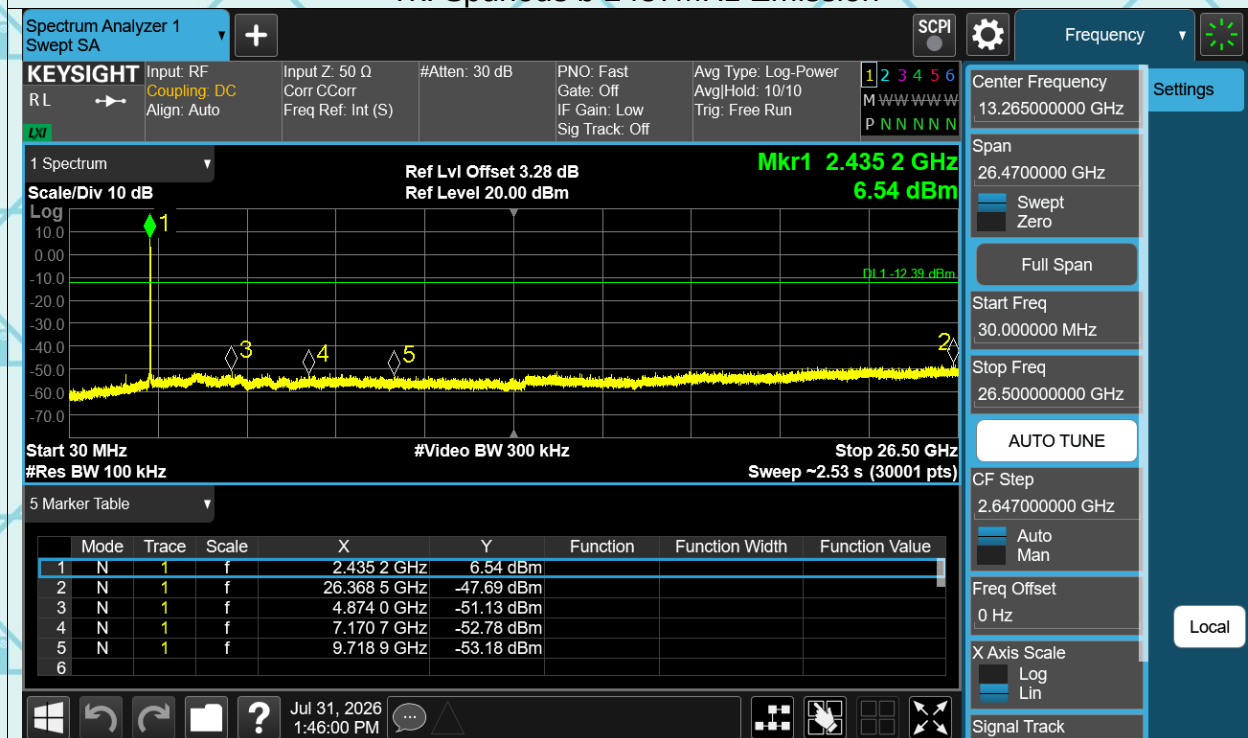


Tx. Spurious b 2462MHz Ref

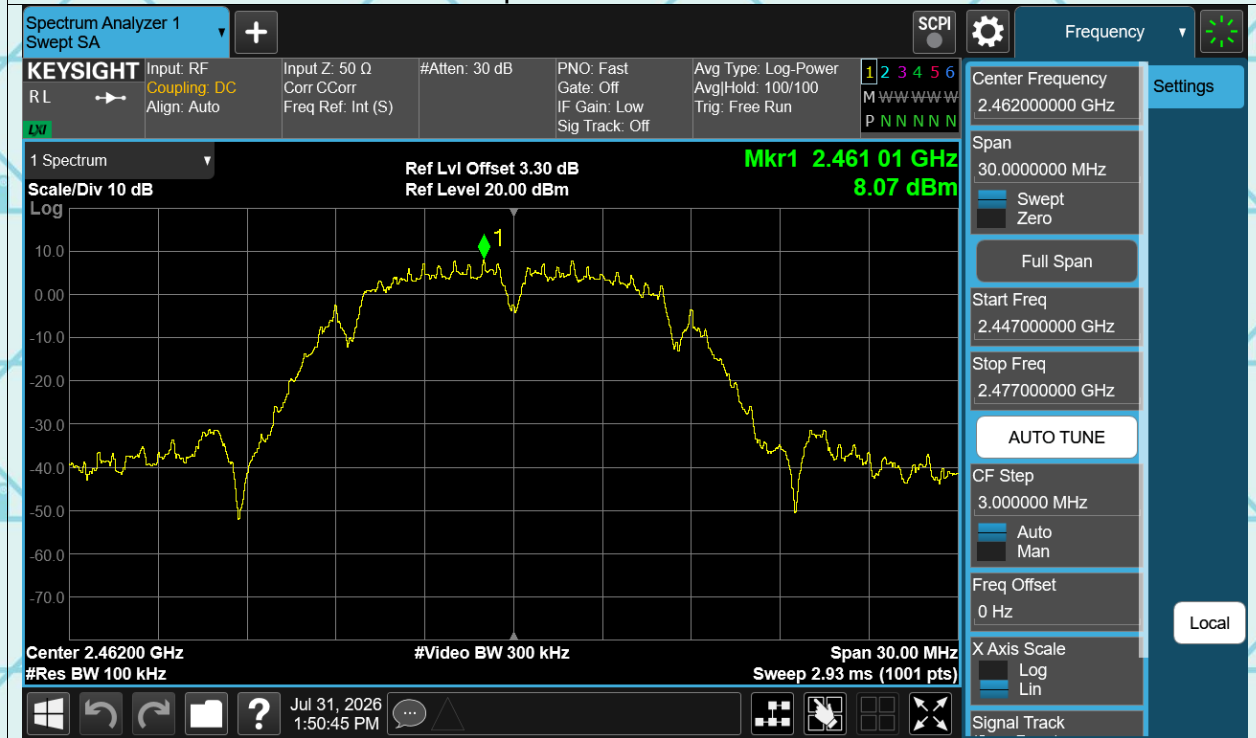


Tx. Spurious b 2462MHz Emission

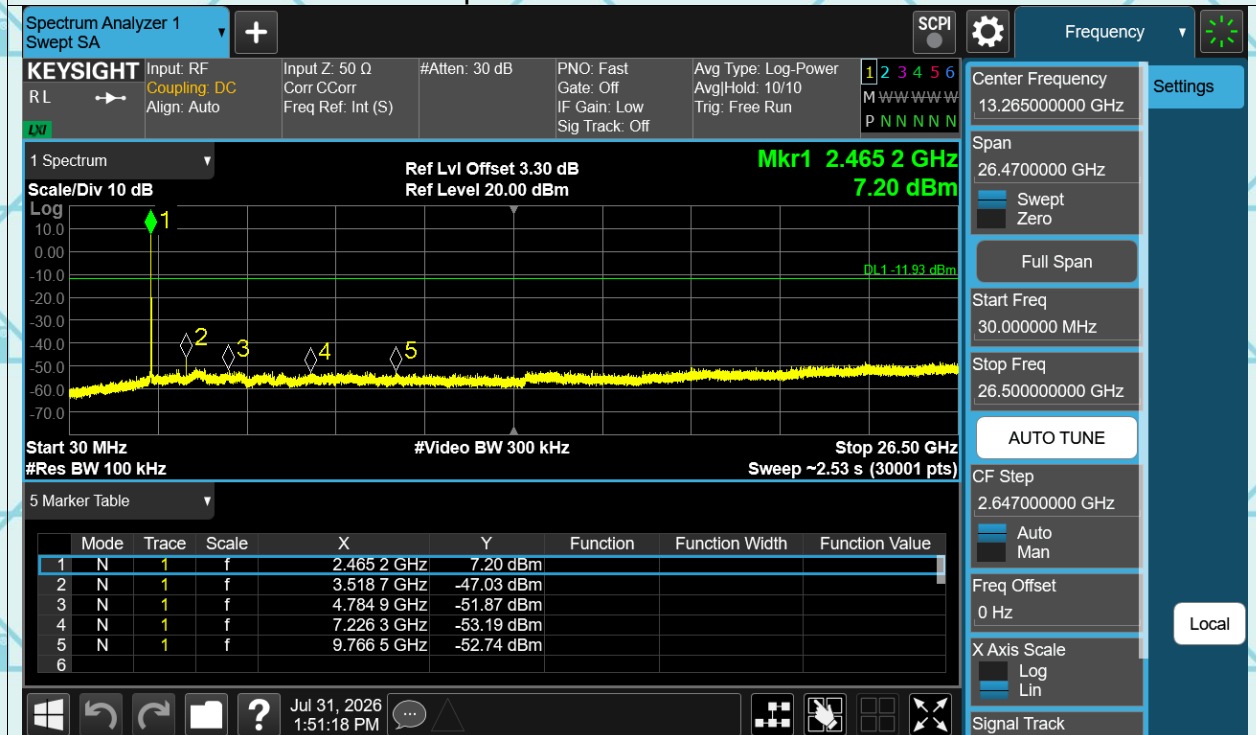


Tx. Spurious g 2412MHz Ref

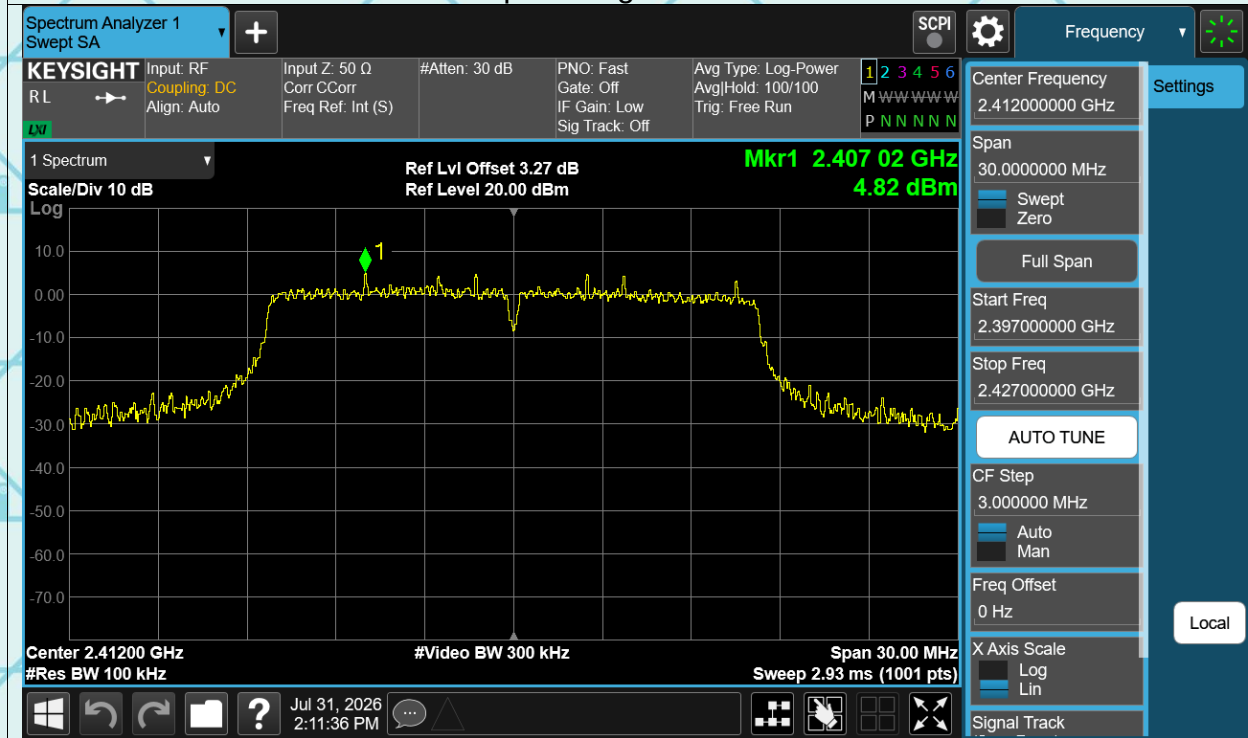


Tx. Spurious g 2412MHz Emission

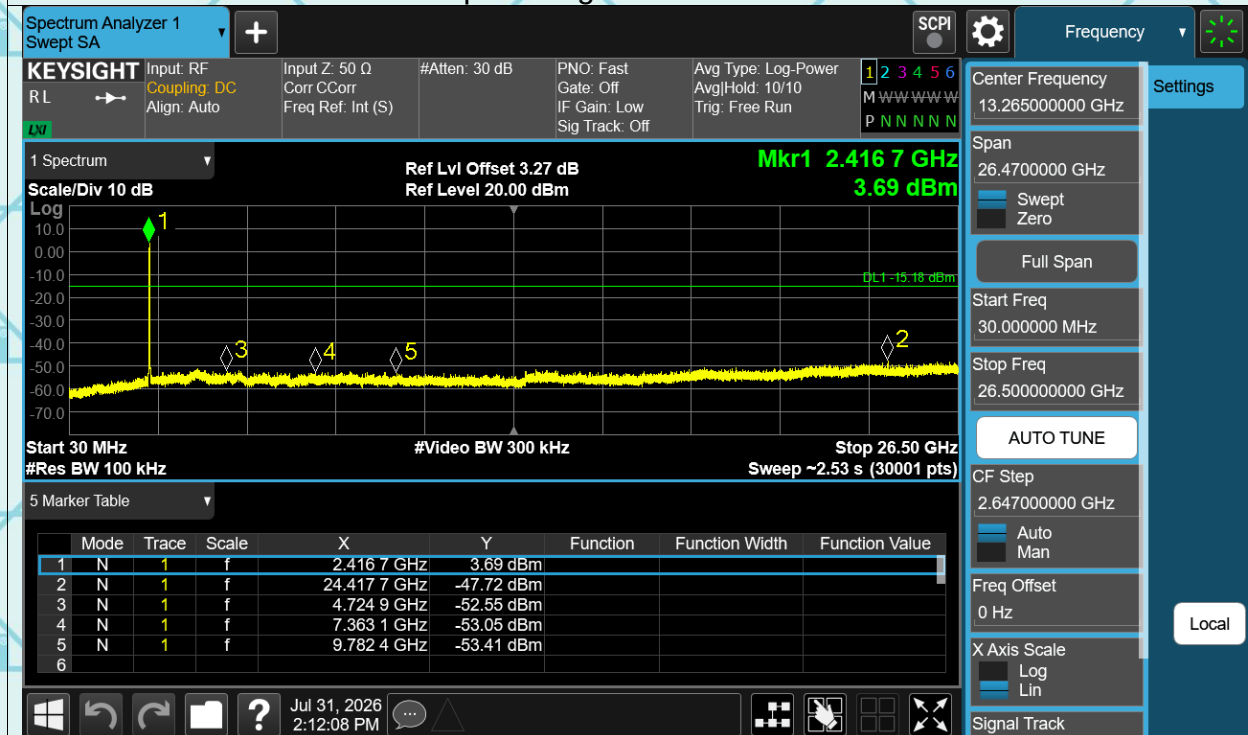


Tx. Spurious g 2437MHz Ref

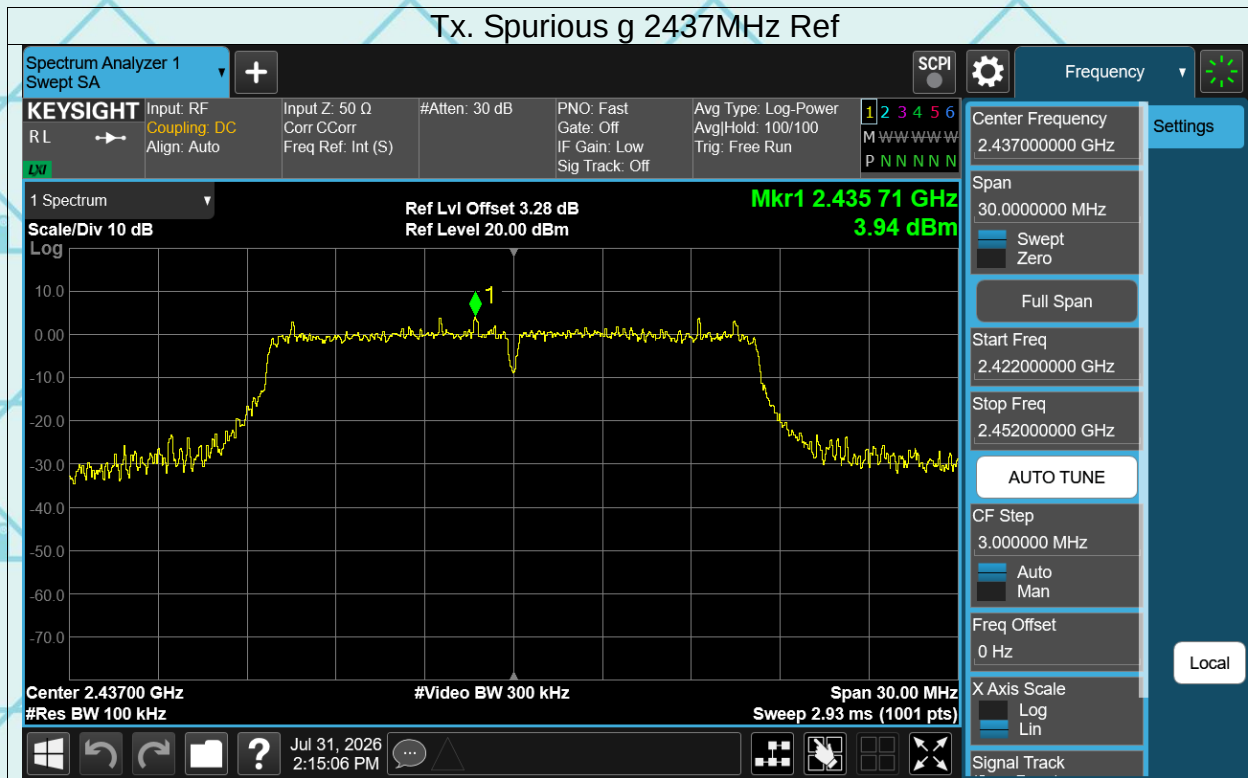


Tx. Spurious g 2437MHz Emission

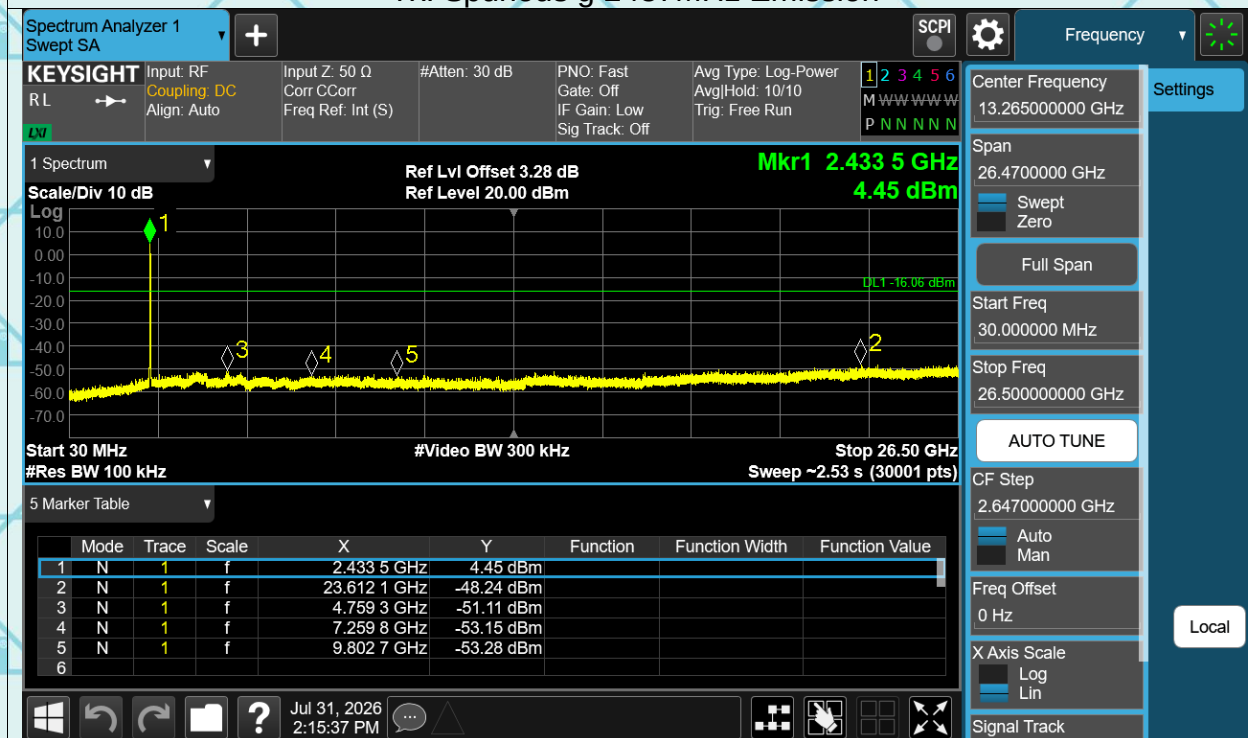


Tx. Spurious g 2462MHz Ref

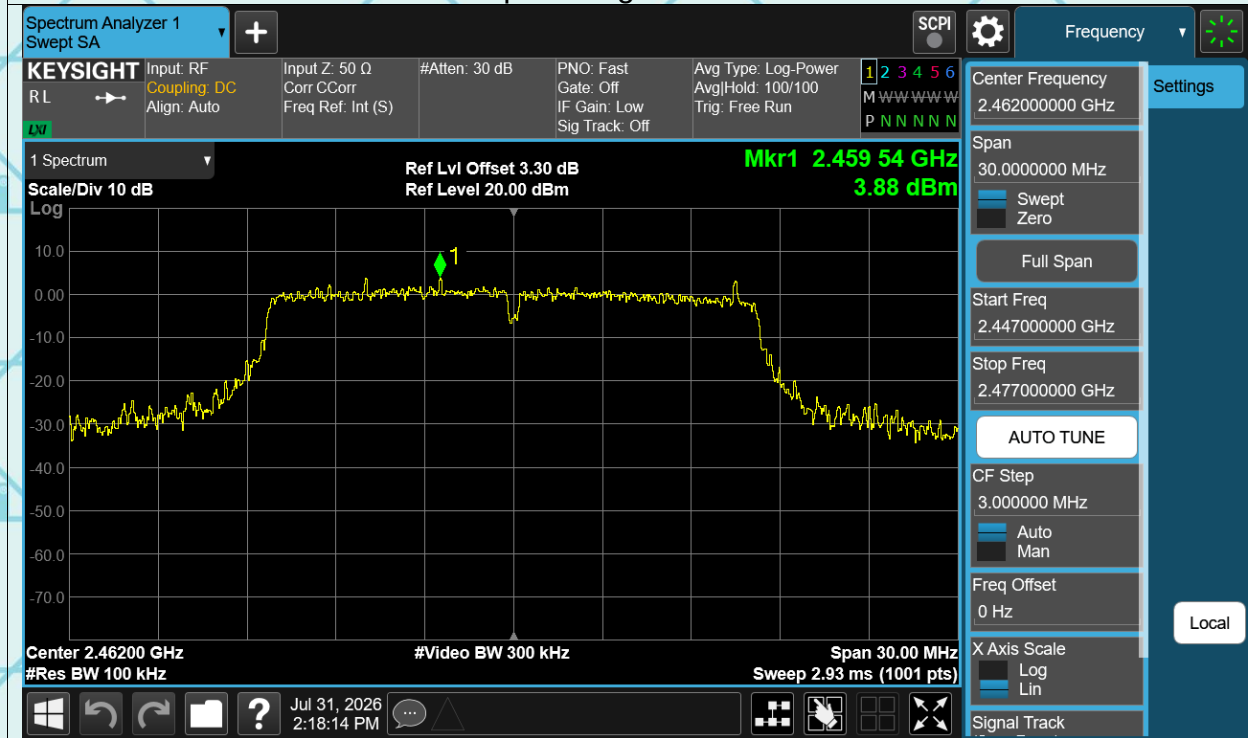


Tx. Spurious g 2462MHz Emission

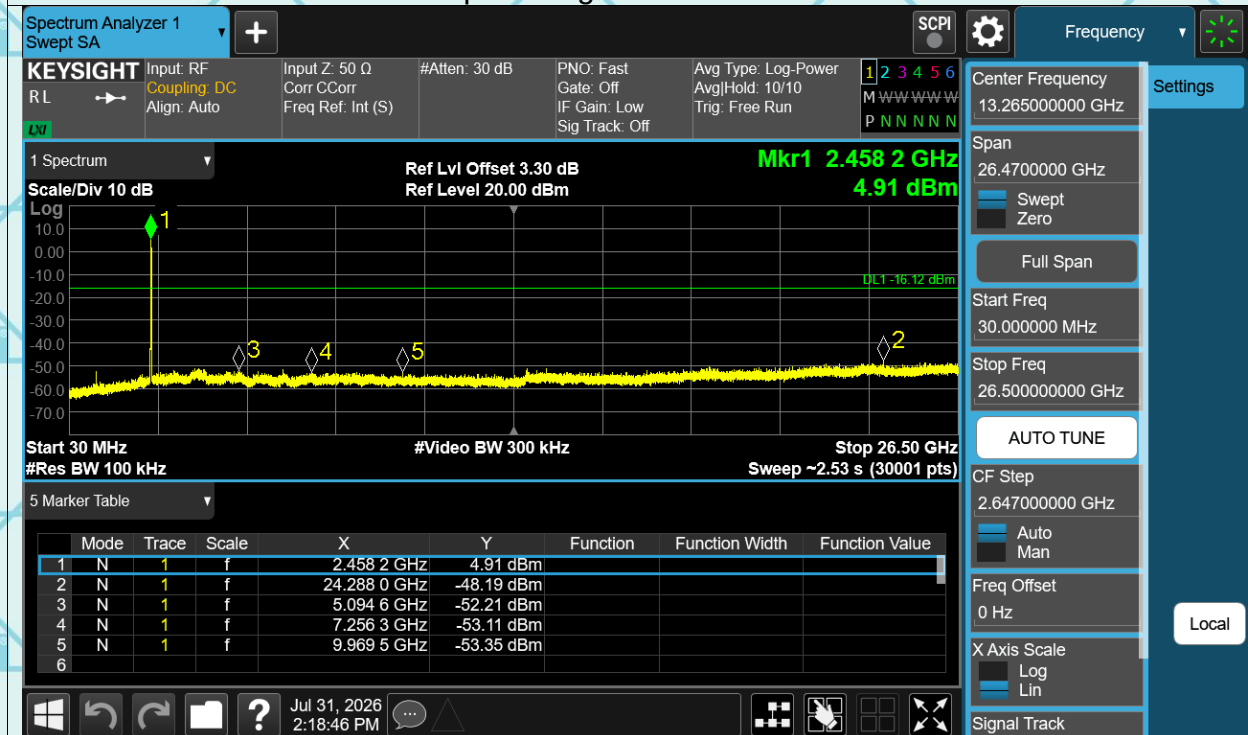


Tx. Spurious n20 2412MHz Ref

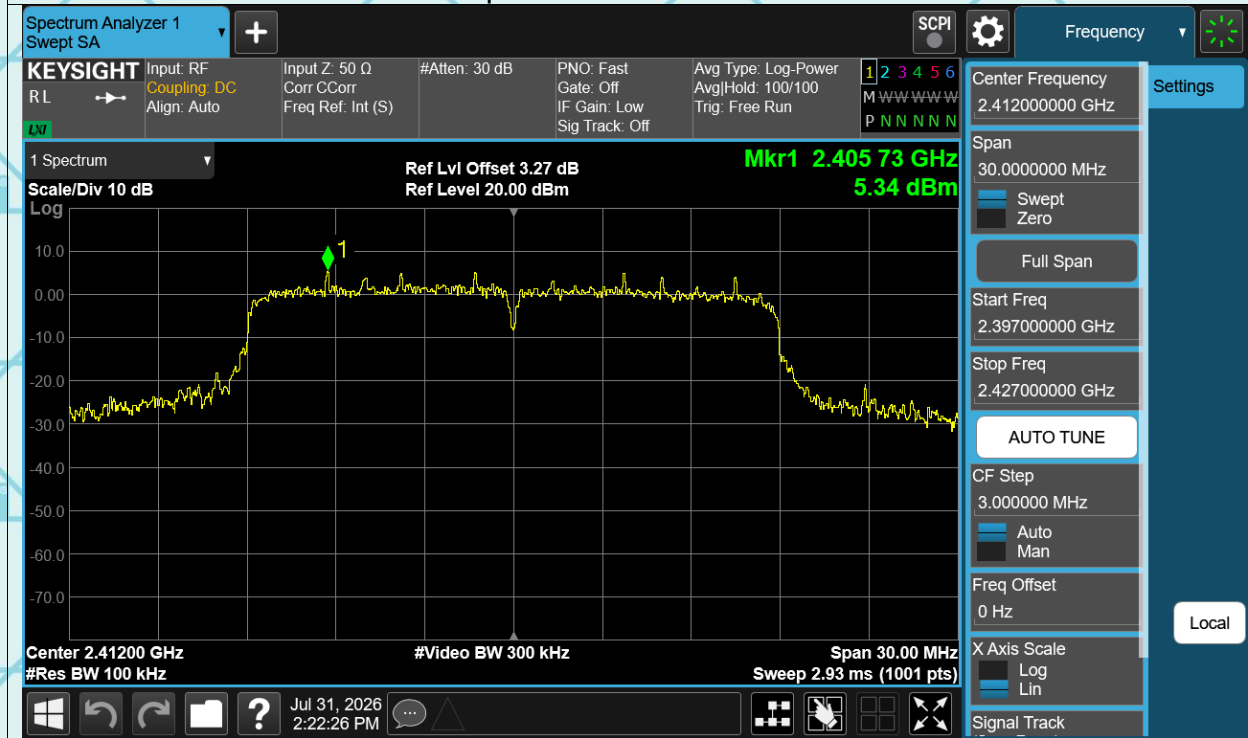


Tx. Spurious n20 2412MHz Emission

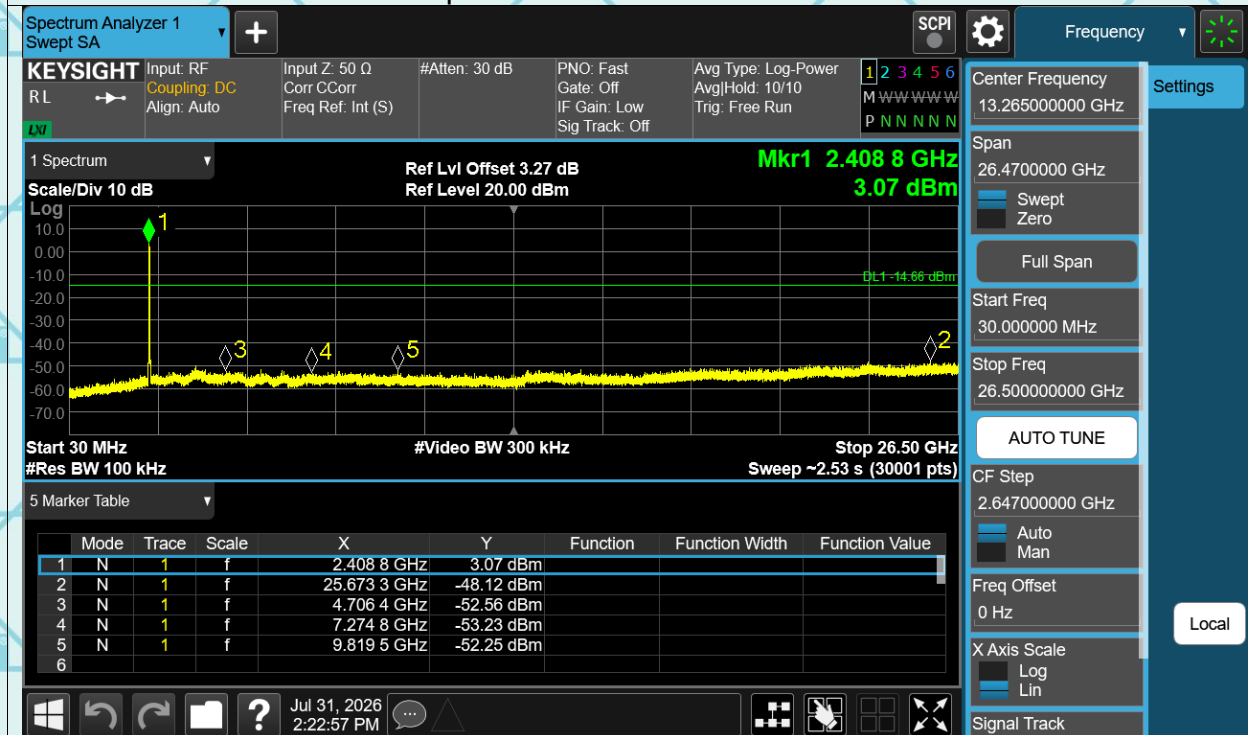


Tx. Spurious n20 2437MHz Ref

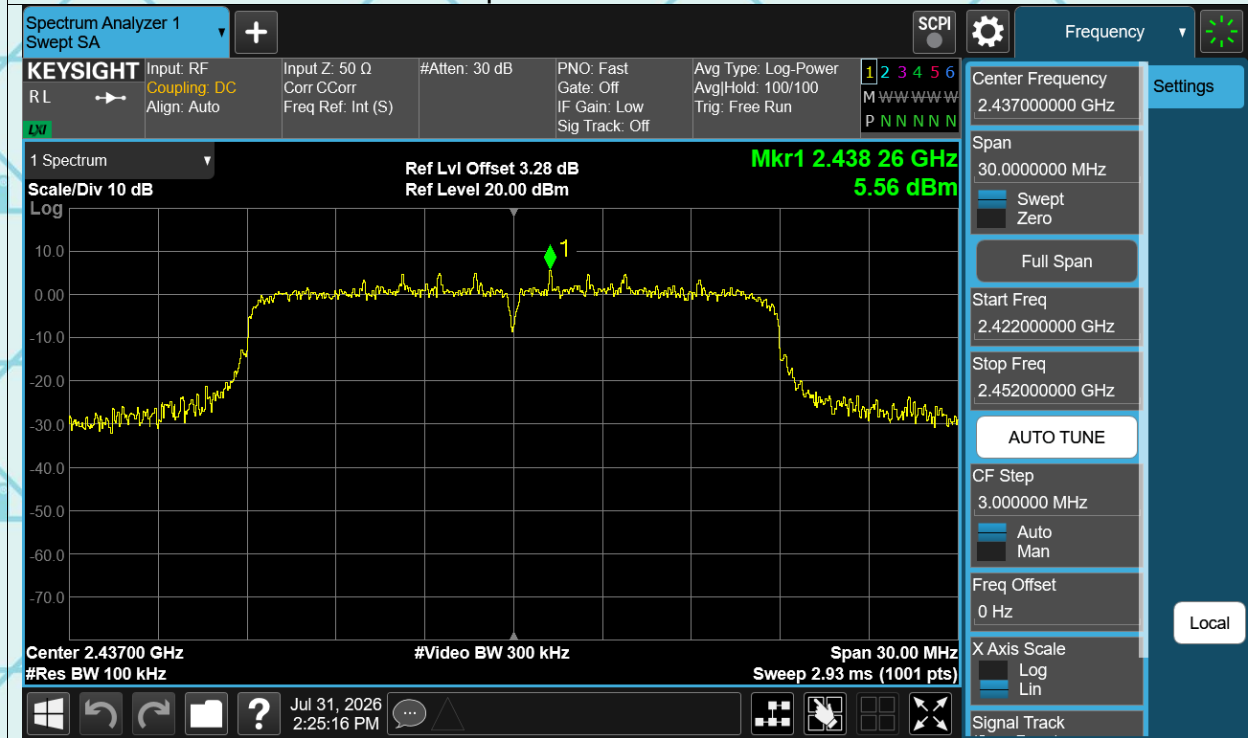


Tx. Spurious n20 2437MHz Emission

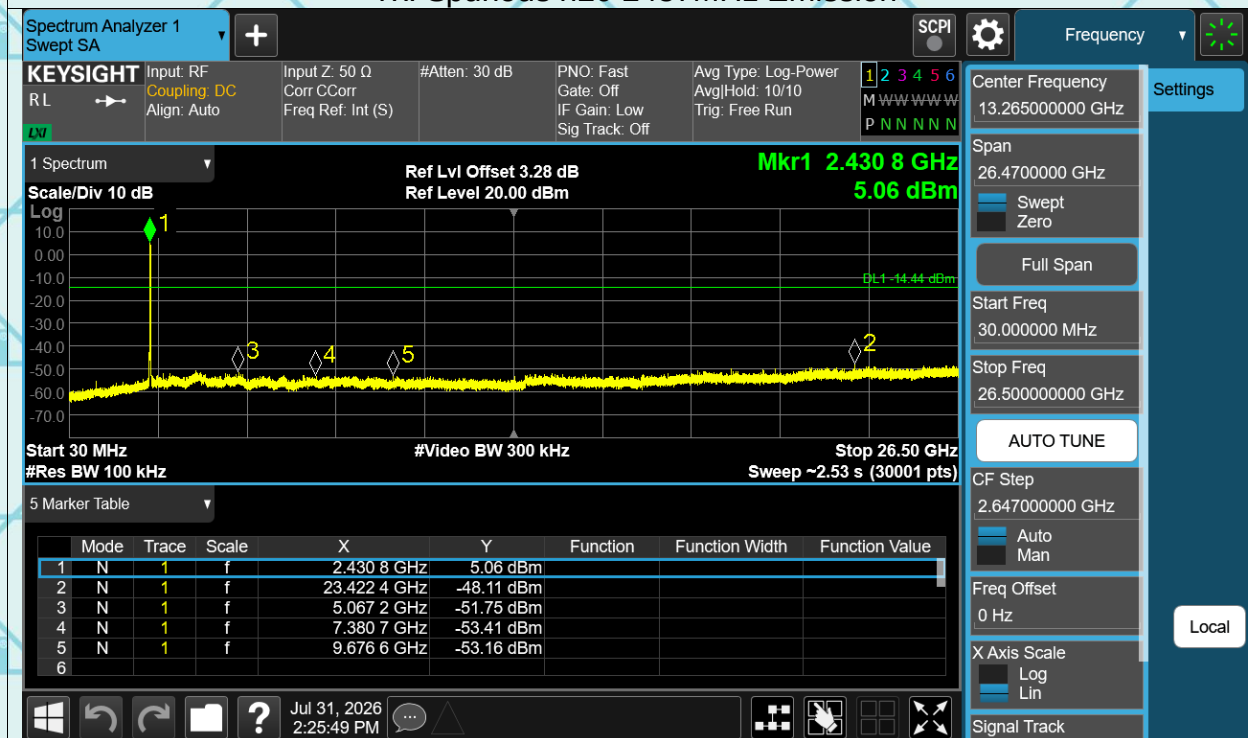


Tx. Spurious n20 2462MHz Ref

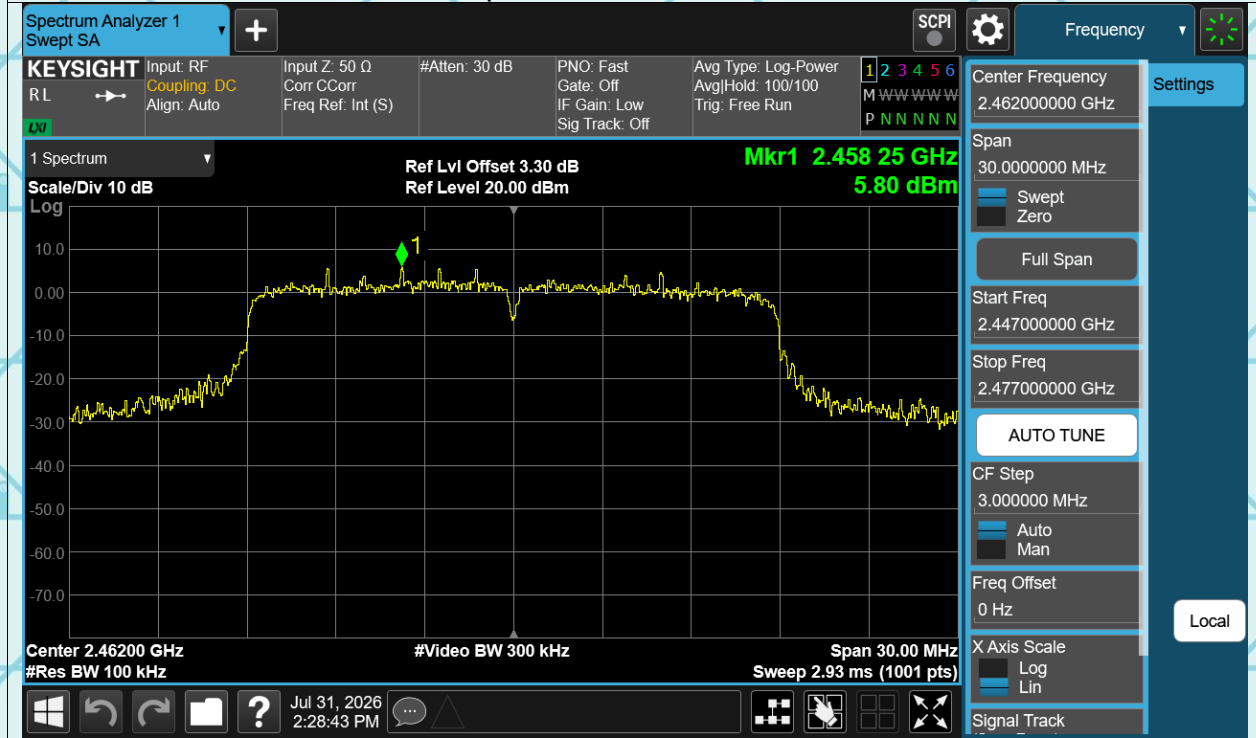


Tx. Spurious n20 2462MHz Emission

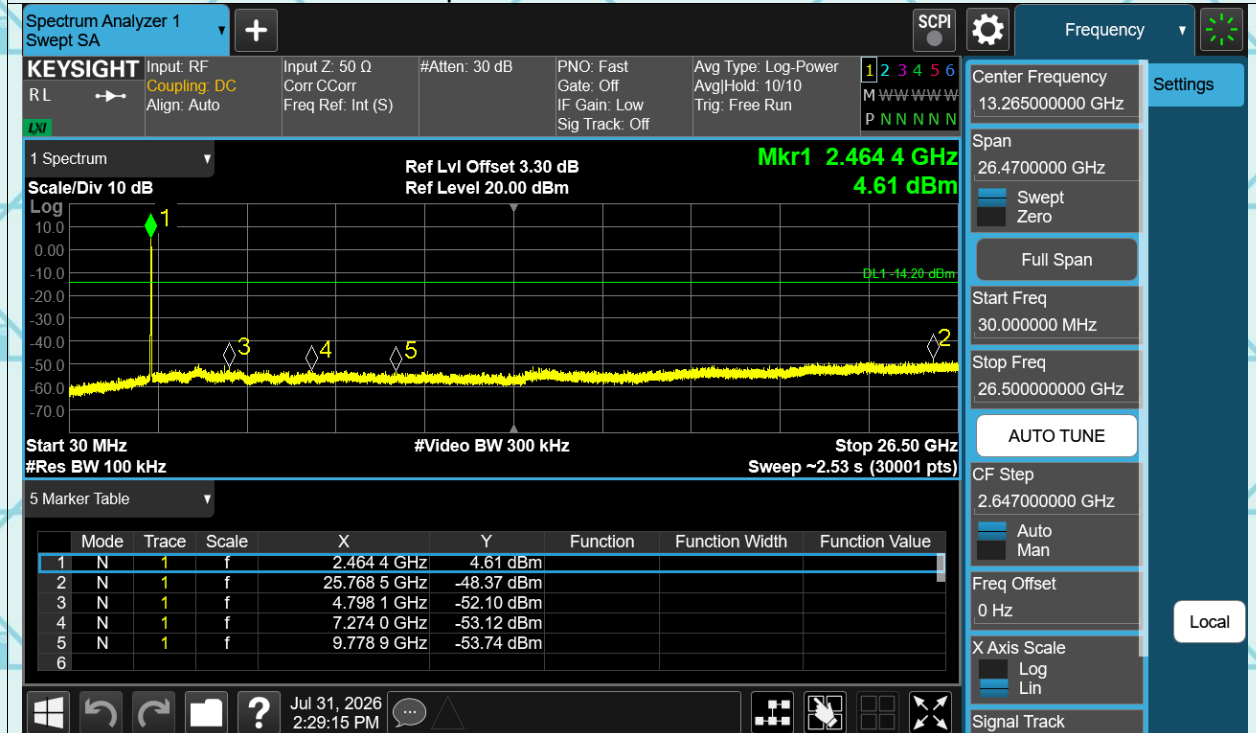


Tx. Spurious n40 2422MHz Ref

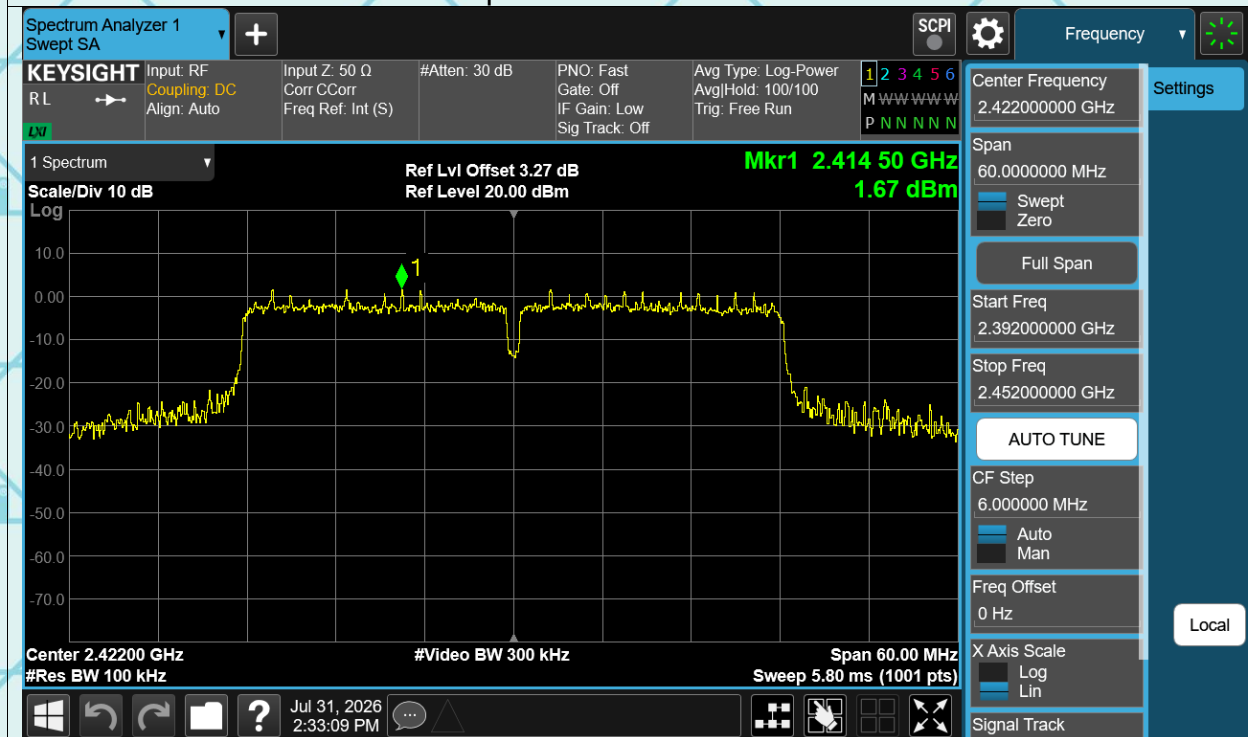


Tx. Spurious n40 2422MHz Emission

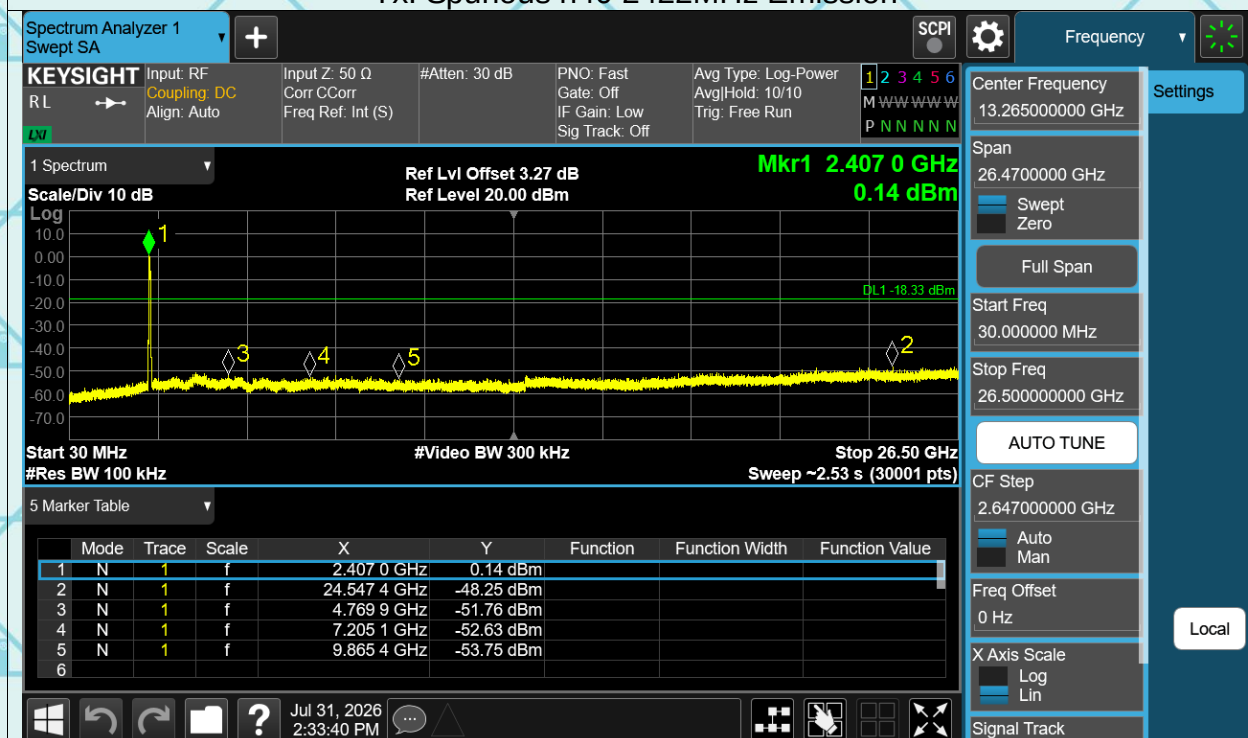


Tx. Spurious n40 2437MHz Ref

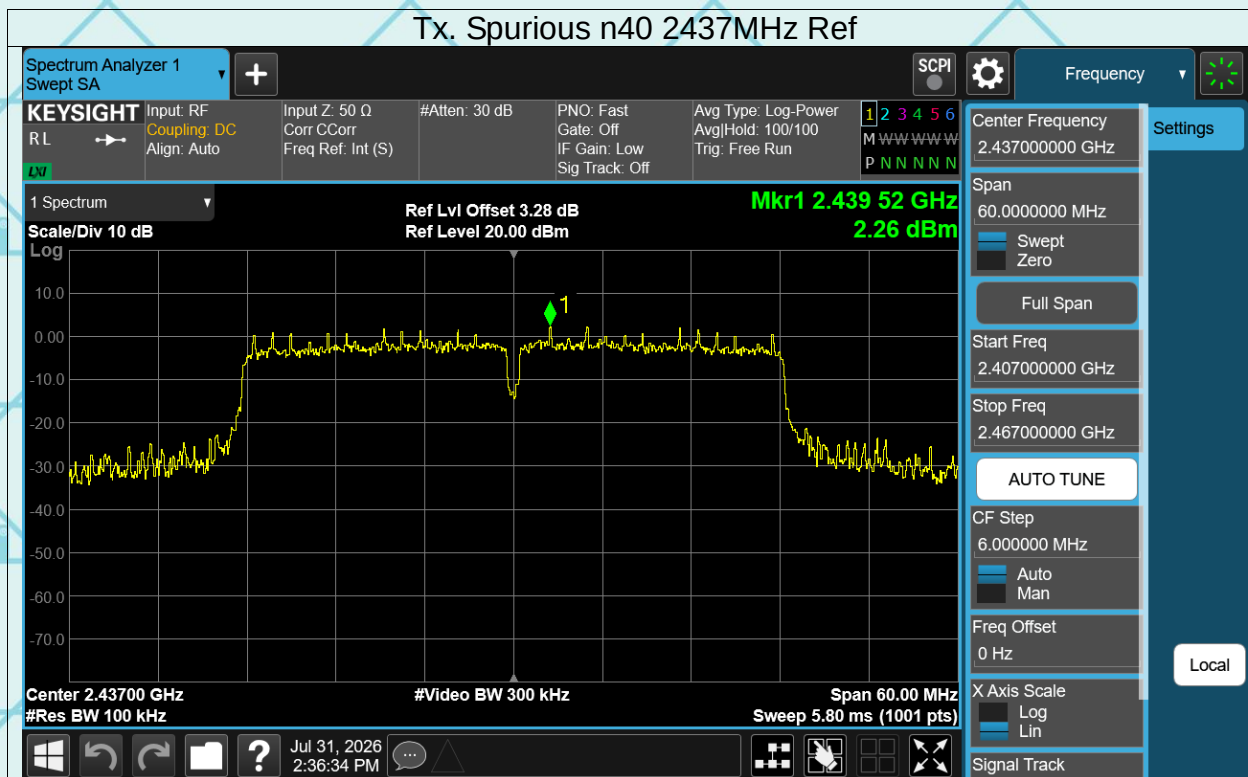


Tx. Spurious n40 2437MHz Emission

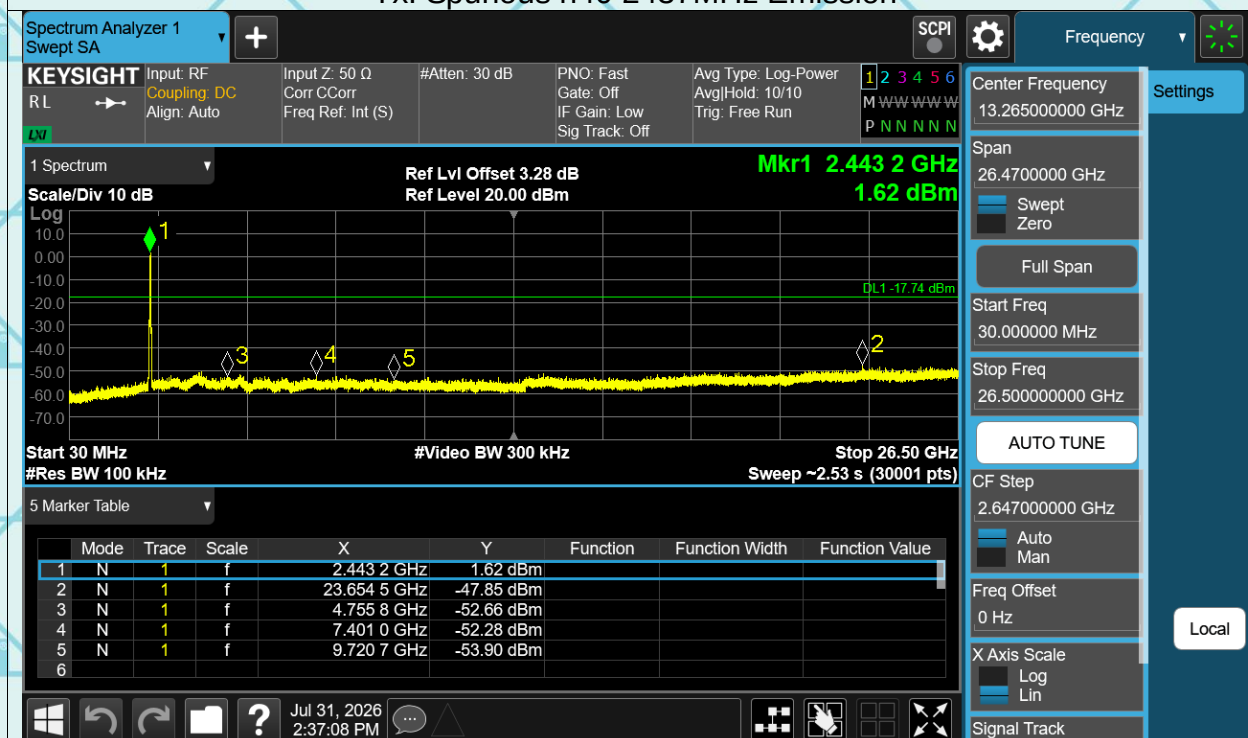

Tx. Spurious n40 2452MHz Ref

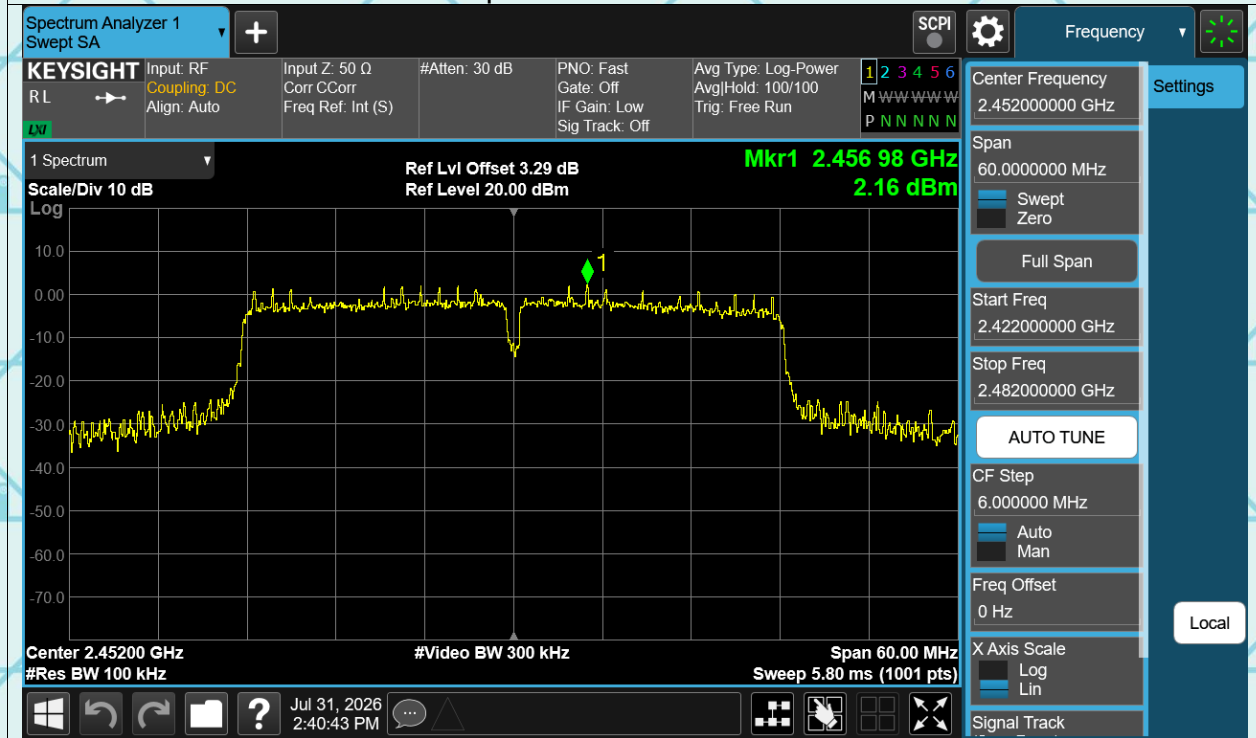



Tx. Spurious n40 2452MHz Emission

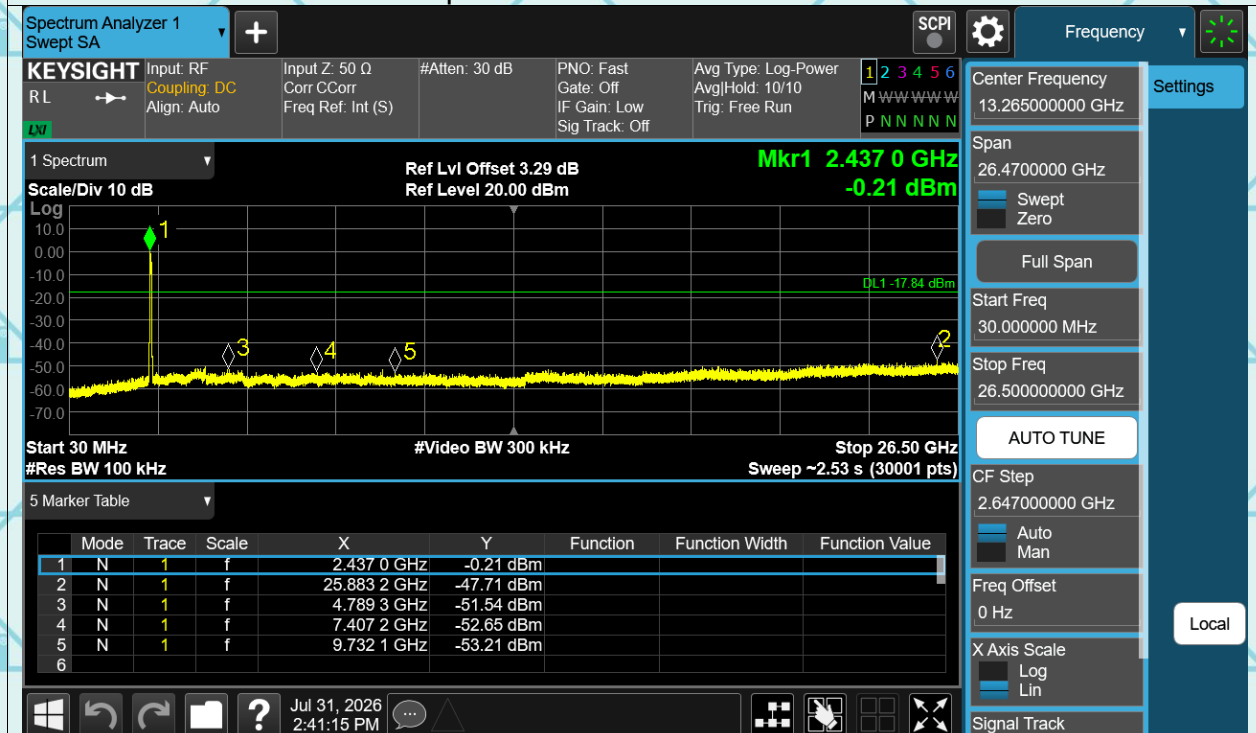


6.7. Radiated Spurious Emission Measurement

6.7.1. Test Specification

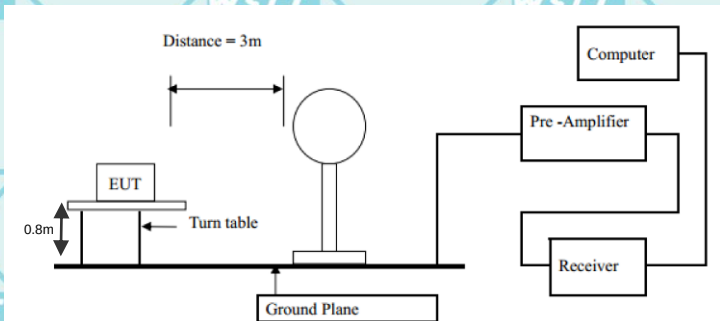Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Frequency Range:	9 kHz to 25 GHz				
Measurement Distance:	3 m				
Antenna Polarization:	Horizontal & Vertical				
Operation mode:	Transmitting mode with modulation				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:	Frequency		Field Strength (microvolts/meter)		Measurement Distance (meters)
	0.009-0.490		2400/F(KHz)		300
	0.490-1.705		24000/F(KHz)		30
	1.705-30		30		30
	30-88		100		3
	88-216		150		3
	216-960		200		3
	Above 960		500		3
	Frequency		Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz		500	3	Average
		5000	3	Peak	
Test setup:	For radiated emissions below 30MHz				
					
	30MHz to 1GHz				

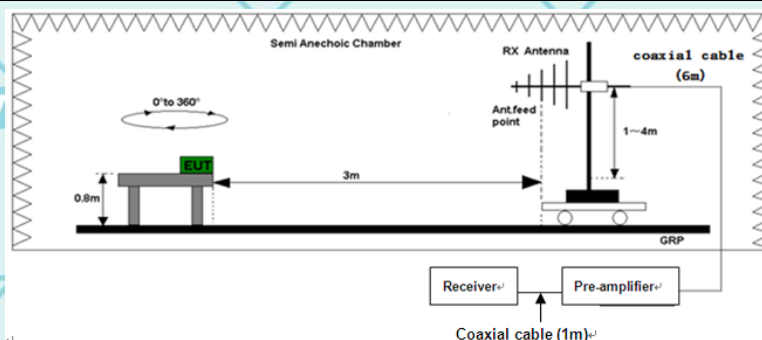

Above 1GHz

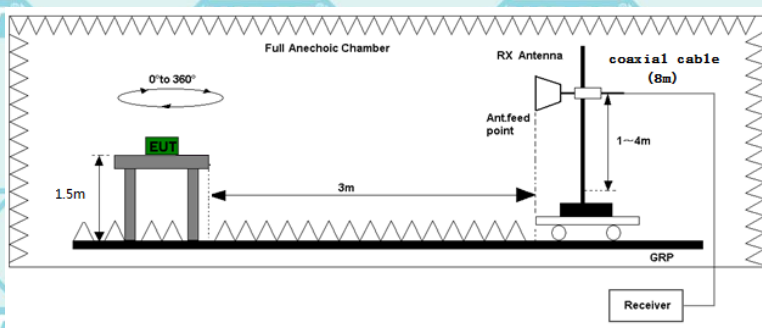

Test Procedure:

- For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- Corrected Reading: Antenna Factor + Cable Loss +

	Read Level - Preamp Factor = Level 4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 5. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test results:	PASS

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

6.7.2. Test Data(worst case)

Please refer to following diagram for individual
Below 1GHz


Horizontal:



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		114.3900	34.04	-9.46	24.58	43.50	18.92	QP
2		208.4800	35.09	-10.73	24.36	43.50	19.14	QP
3		444.1900	26.41	-2.17	24.24	46.00	21.76	QP
4		613.9400	26.38	1.73	28.11	46.00	17.89	QP
5		730.3400	26.19	3.76	29.95	46.00	16.05	QP
6	*	893.3000	26.80	6.59	33.39	46.00	12.61	QP

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1
Vertical:

Issued Date: 14 August 2026

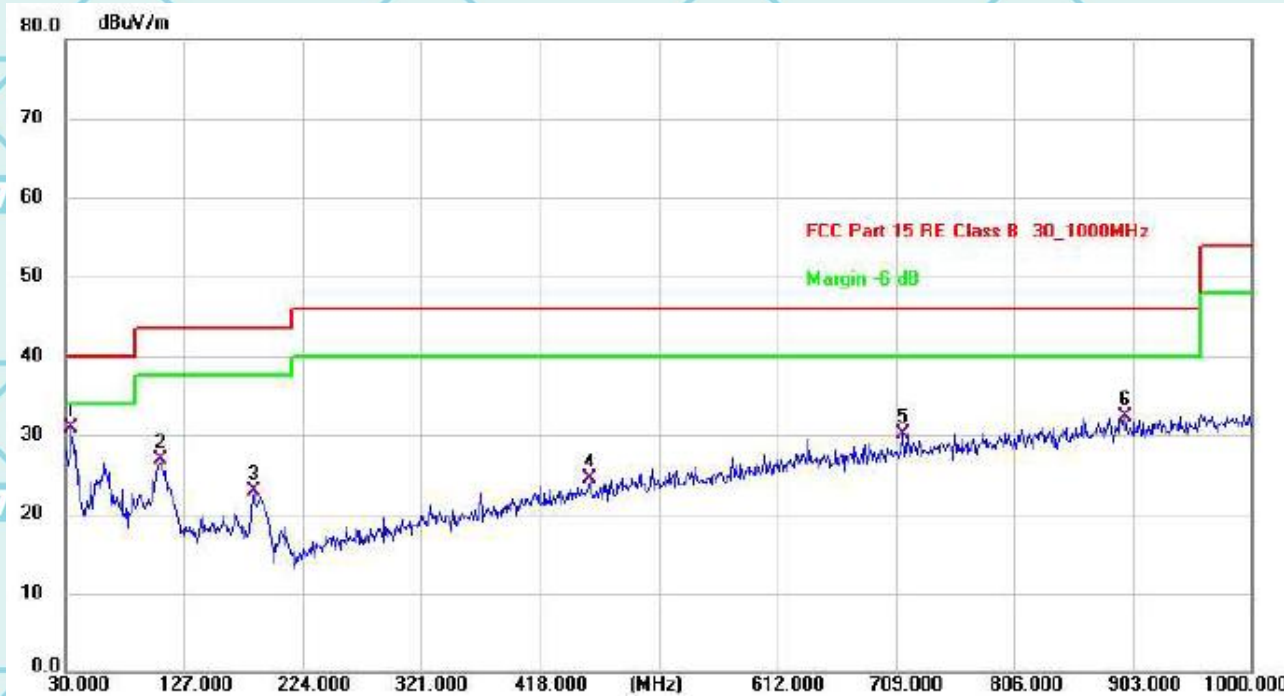

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	33.8800	51.52	-20.53	30.99	40.00	9.01	QP
2		108.5700	47.03	-20.16	26.87	43.50	16.63	QP
3		184.2300	42.68	-19.75	22.93	43.50	20.57	QP
4		459.7100	42.94	-18.46	24.48	46.00	21.52	QP
5		714.8200	47.20	-17.12	30.08	46.00	15.92	QP
6		897.1800	48.29	-15.99	32.30	46.00	13.70	QP

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Over(dB) = Measurement (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1

Issued Date: 14 August 2026

Above 1GHz(worst case)


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

Note 3: The report only recorded the worst-case scenario of 802.11b.

1 GHz to 18 GHz Low Channel

Horizontal:

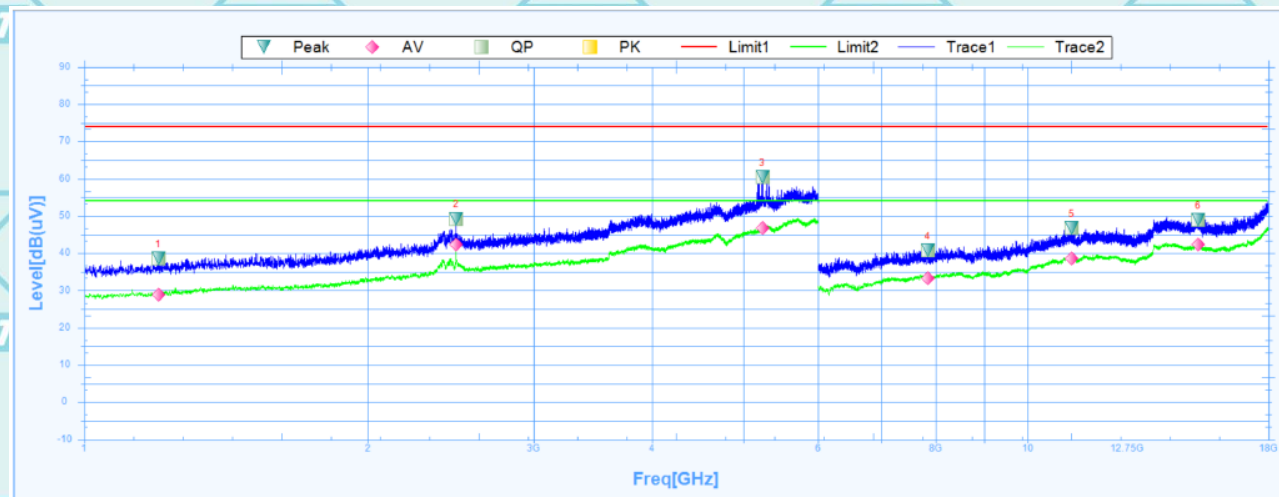


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1198.7500	38.62	24.4	14.22	74	-35.38	360.1	Horizontal	PK	Pass
1	1198.7500	28.88	24.4	4.48	54	-25.12	360.1	Horizontal	AV	Pass
2	2480.6250	49.31	27.53	21.78	74	-24.69	90.2	Horizontal	PK	Pass
2	2480.6250	42.39	27.53	14.86	54	-11.61	90.2	Horizontal	AV	Pass
3	5235.0000	60.47	31.79	28.68	74	-13.53	249.2	Horizontal	PK	Pass
3	5235.0000	46.72	31.79	14.93	54	-7.28	249.2	Horizontal	AV	Pass
4	7840.5000	40.89	8	32.89	74	-33.11	-0.1	Horizontal	PK	Pass
4	7840.5000	33.34	8	25.34	54	-20.66	-0.1	Horizontal	AV	Pass
5	11139.0000	46.74	15.82	30.92	74	-27.26	90.6	Horizontal	PK	Pass
5	11139.0000	38.71	15.82	22.89	54	-15.29	90.6	Horizontal	AV	Pass
6	15165.0000	49.04	19.42	29.62	74	-24.96	-0.1	Horizontal	PK	Pass
6	15165.0000	42.32	19.42	22.9	54	-11.68	-0.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1

Issued Date: 14 August 2026

Vertical :

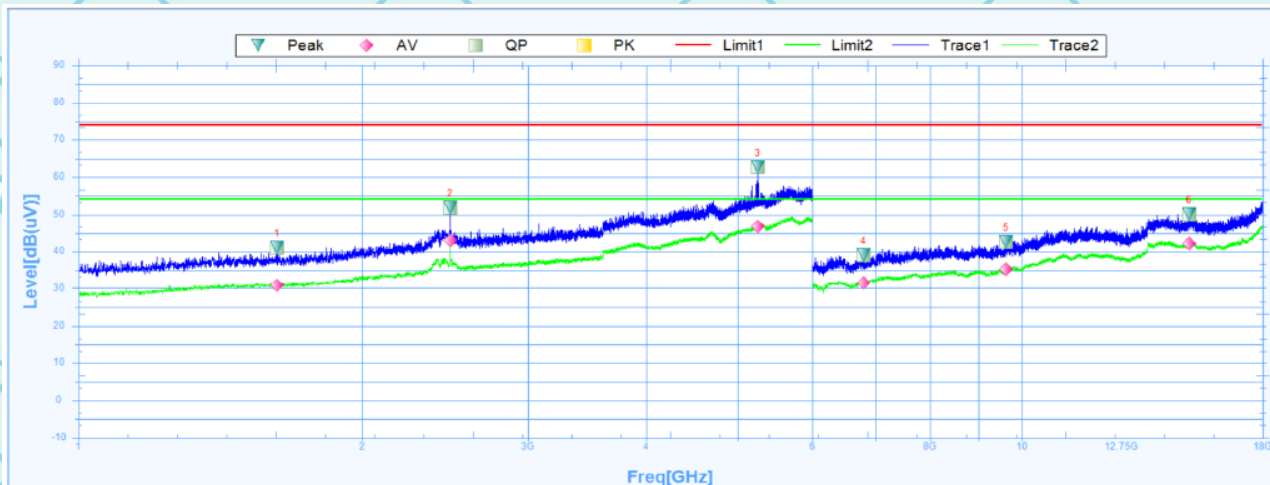

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1624.3750	41.01	24.91	16.1	74	-32.99	2.6	Vertical	PK	Pass
1	1624.3750	30.94	24.91	6.03	54	-23.06	2.6	Vertical	AV	Pass
2	2480.0000	51.92	27.53	24.39	74	-22.08	204.8	Vertical	PK	Pass
2	2480.0000	43.11	27.53	15.58	54	-10.89	204.8	Vertical	AV	Pass
3	5252.5000	62.65	31.8	30.85	74	-11.35	8.6	Vertical	PK	Pass
3	5252.5000	46.75	31.8	14.95	54	-7.25	8.6	Vertical	AV	Pass
4	6798.0000	39.02	5.6	33.42	74	-34.98	347.9	Vertical	PK	Pass
4	6798.0000	31.51	5.6	25.91	54	-22.49	347.9	Vertical	AV	Pass
5	9625.5000	42.5	11.44	31.06	74	-31.5	340.9	Vertical	PK	Pass
5	9625.5000	35.36	11.44	23.92	54	-18.64	340.9	Vertical	AV	Pass
6	15043.5000	50	19.22	30.78	74	-24	305.7	Vertical	PK	Pass
6	15043.5000	42.17	19.22	22.95	54	-11.83	305.7	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1

Issued Date: 14 August 2026

1 GHz to 18 GHz, H 802.11b Middle Channel

Horizontal:

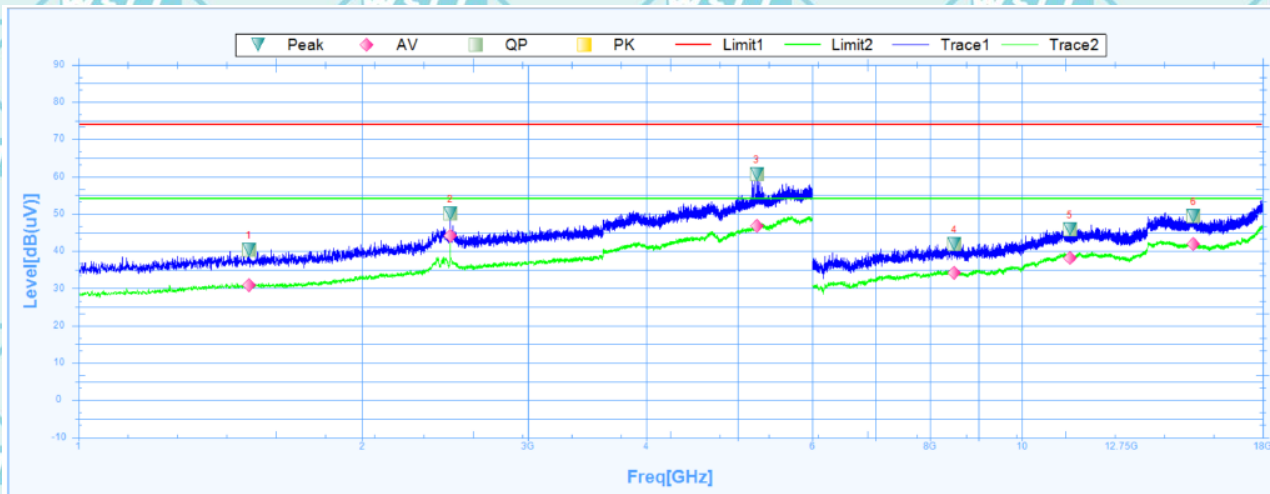


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1515.6250	40.27	24.98	15.29	74	-33.73	233.7	Horizontal	PK	Pass
1	1515.6250	30.9	24.98	5.92	54	-23.1	233.7	Horizontal	AV	Pass
2	2480.0000	50.13	27.53	22.6	74	-23.87	101	Horizontal	PK	Pass
2	2480.0000	44.2	27.53	16.67	54	-9.8	101	Horizontal	AV	Pass
3	5235.6250	60.74	31.79	28.95	74	-13.26	69.8	Horizontal	PK	Pass
3	5235.6250	46.86	31.79	15.07	54	-7.14	69.8	Horizontal	AV	Pass
4	8482.5000	41.93	9.19	32.74	74	-32.07	93	Horizontal	PK	Pass
4	8482.5000	34.27	9.19	25.08	54	-19.73	93	Horizontal	AV	Pass
5	11244.0000	45.92	15.68	30.24	74	-28.08	344.9	Horizontal	PK	Pass
5	11244.0000	38.12	15.68	22.44	54	-15.88	344.9	Horizontal	AV	Pass
6	15205.5000	49.38	19.1	30.28	74	-24.62	259.1	Horizontal	PK	Pass
6	15205.5000	41.95	19.1	22.85	54	-12.05	259.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1

Issued Date: 14 August 2026

Vertical :

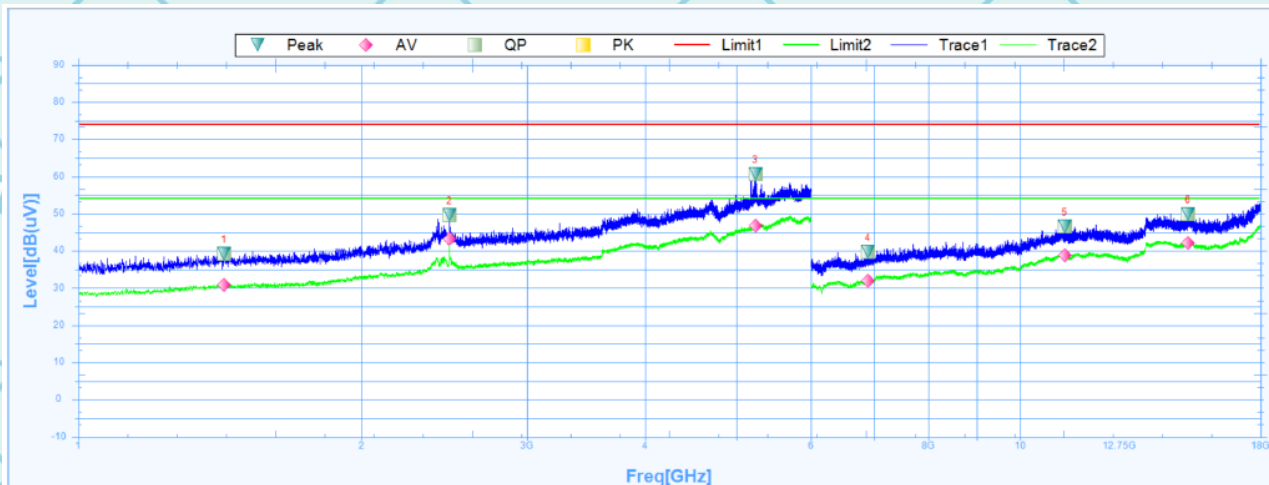

Suspected Data List


NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1428.1250	39.33	25.07	14.26	74	-34.67	1.2	Vertical	PK	Pass
1	1428.1250	30.83	25.07	5.76	54	-23.17	1.2	Vertical	AV	Pass
2	2480.0000	49.67	27.53	22.14	74	-24.33	182.1	Vertical	PK	Pass
2	2480.0000	43.35	27.53	15.82	54	-10.65	182.1	Vertical	AV	Pass
3	5236.2500	60.71	31.79	28.92	74	-13.29	14.2	Vertical	PK	Pass
3	5236.2500	46.88	31.79	15.09	54	-7.12	14.2	Vertical	AV	Pass
4	6895.5000	39.62	6.01	33.61	74	-34.38	156.3	Vertical	PK	Pass
4	6895.5000	32.02	6.01	26.01	54	-21.98	156.3	Vertical	AV	Pass
5	11152.5000	46.59	15.8	30.79	74	-27.41	358.9	Vertical	PK	Pass
5	11152.5000	38.84	15.8	23.04	54	-15.16	358.9	Vertical	AV	Pass
6	15076.5000	49.93	19.45	30.48	74	-24.07	0	Vertical	PK	Pass
6	15076.5000	42.19	19.45	22.74	54	-11.81	0	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1

Issued Date: 14 August 2026

1 GHz to 18 GHz, H 802.11b High Channel


Horizontal:

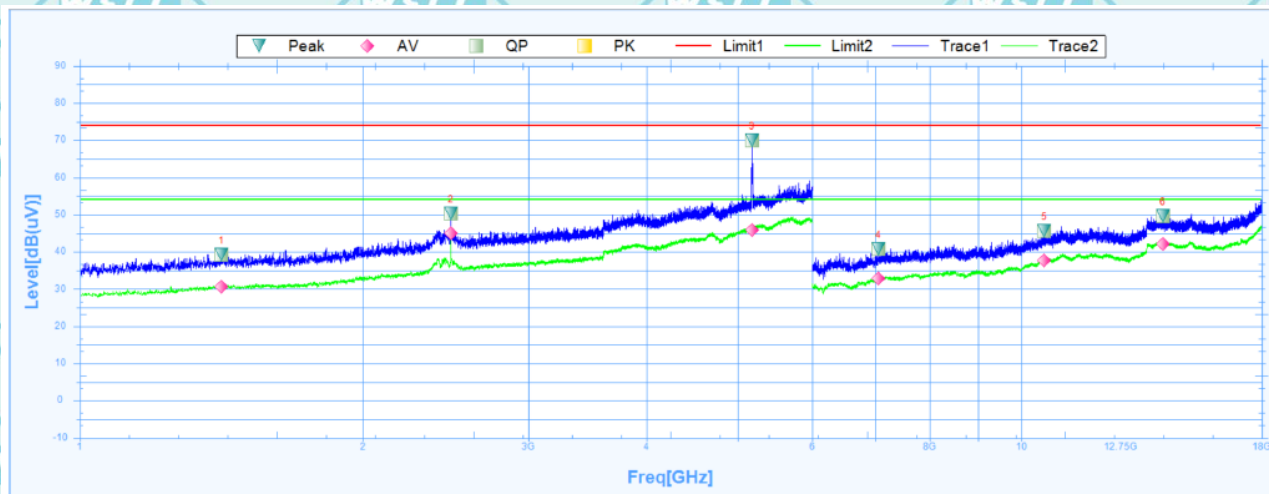

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1414.3750	39.34	25.09	14.25	74	-34.66	104.6	Horizontal	PK	Pass
1	1414.3750	30.57	25.09	5.48	54	-23.43	104.6	Horizontal	AV	Pass
2	2480.0000	50.41	27.53	22.88	74	-23.59	87.8	Horizontal	PK	Pass
2	2480.0000	45.12	27.53	17.59	54	-8.88	87.8	Horizontal	AV	Pass
3	5178.7500	69.94	31.74	38.2	74	-4.06	130.8	Horizontal	PK	Pass
3	5178.7500	45.92	31.74	14.18	54	-8.08	130.8	Horizontal	AV	Pass
4	7054.5000	40.91	6.53	34.38	74	-33.09	186.2	Horizontal	PK	Pass
4	7054.5000	32.92	6.53	26.39	54	-21.08	186.2	Horizontal	AV	Pass
5	10582.5000	45.68	14.26	31.42	74	-28.32	107.3	Horizontal	PK	Pass
5	10582.5000	37.74	14.26	23.48	54	-16.26	107.3	Horizontal	AV	Pass
6	14139.0000	49.55	18.99	30.56	74	-24.45	69	Horizontal	PK	Pass
6	14139.0000	42.13	18.99	23.14	54	-11.87	69	Horizontal	AV	Pass

Vertical :

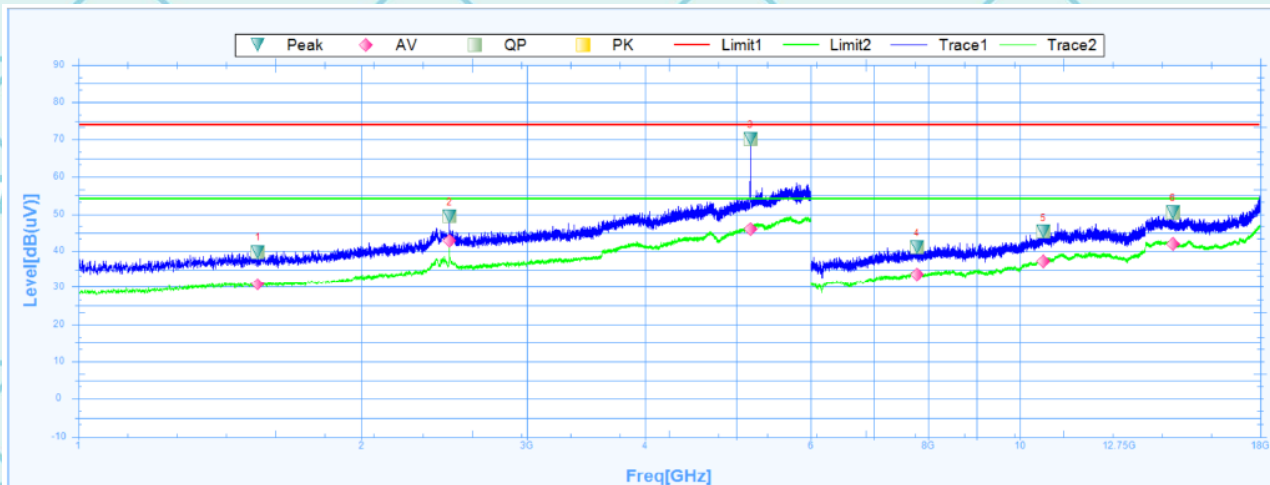

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1552.5000	39.82	24.95	14.87	74	-34.18	0.5	Vertical	PK	Pass
1	1552.5000	30.95	24.95	6	54	-23.05	0.5	Vertical	AV	Pass
2	2480.6250	49.44	27.53	21.91	74	-24.56	184.6	Vertical	PK	Pass
2	2480.6250	42.77	27.53	15.24	54	-11.23	184.6	Vertical	AV	Pass
3	5178.1250	70.19	31.74	38.45	74	-3.81	9.9	Vertical	PK	Pass
3	5178.1250	45.92	31.74	14.18	54	-8.08	9.9	Vertical	AV	Pass
4	7776.0000	41.07	7.97	33.1	74	-32.93	84.6	Vertical	PK	Pass
4	7776.0000	33.76	7.97	25.79	54	-20.24	84.6	Vertical	AV	Pass
5	10596.0000	45.26	14.3	30.96	74	-28.74	359.5	Vertical	PK	Pass
5	10596.0000	37.32	14.3	23.02	54	-16.68	359.5	Vertical	AV	Pass
6	14536.5000	50.6	18.59	32.01	74	-23.4	174.2	Vertical	PK	Pass
6	14536.5000	41.83	18.59	23.24	54	-12.17	174.2	Vertical	AV	Pass

Note:

1. All emissions not reported were more than 20dB below the specified limit or in the noise floor.
2. Emission Level= Reading Level+ Probe Factor +Cable Loss.
3. Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Level (dBμV) – Limits (dBμV)

6.7.3. Restricted Bands Requirements

Test result for 802.11b Mode (the worst case)

Low channel

Horizontal:

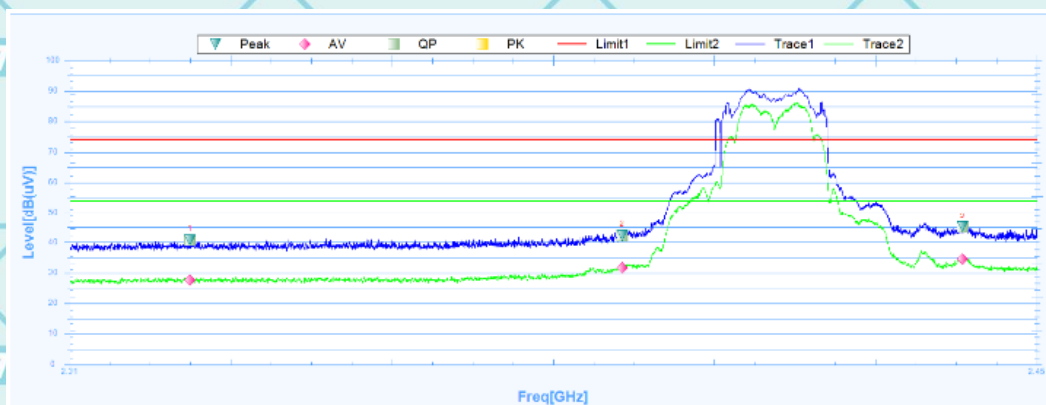

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2327.4125	40.56	0.52	40.04	74	-33.44	359.6	Horizontal	PK	Pass
1	2327.4125	27.6	0.52	27.08	54	-26.4	359.6	Horizontal	AV	Pass
2	2390.0000	42.22	0.83	41.39	74	-31.78	354.6	Horizontal	PK	Pass
2	2390.0000	31.66	0.83	30.83	54	-22.34	354.6	Horizontal	AV	Pass
3	2439.2900	45.14	1.11	44.03	74	-28.86	-0.1	Horizontal	PK	Pass
3	2439.2900	34.56	1.11	33.45	54	-19.44	-0.1	Horizontal	AV	Pass

Vertical:



Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2326.3275	40.66	0.52	40.14	74	-33.34	339.9	Vertical	PK	Pass
1	2326.3275	27.74	0.52	27.22	54	-26.26	339.9	Vertical	AV	Pass
2	2390.0000	40.77	0.83	39.94	74	-33.23	21.3	Vertical	PK	Pass
2	2390.0000	29.47	0.83	28.64	54	-24.53	21.3	Vertical	AV	Pass
3	2439.5525	44.39	1.11	43.28	74	-29.61	249.5	Vertical	PK	Pass
3	2439.5525	30.36	1.11	29.25	54	-23.64	249.5	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E260700067A-Wi-Fi1


Issued Date: 14 August 2026

High channel
Horizontal:



Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2476.6812	61.54	1.34	60.2	74	-12.46	206.1	Horizontal	PK	Pass
1	2476.6812	32.48	1.34	31.14	54	-21.52	206.1	Horizontal	AV	Pass
2	2483.5000	49.25	1.38	47.87	74	-24.75	189.4	Horizontal	PK	Pass
2	2483.5000	30.32	1.38	28.94	54	-23.68	189.4	Horizontal	AV	Pass
3	2495.2688	50.34	1.46	48.88	74	-23.66	360	Horizontal	PK	Pass
3	2495.2688	28.27	1.46	26.81	54	-25.73	360	Horizontal	AV	Pass

Vertical:

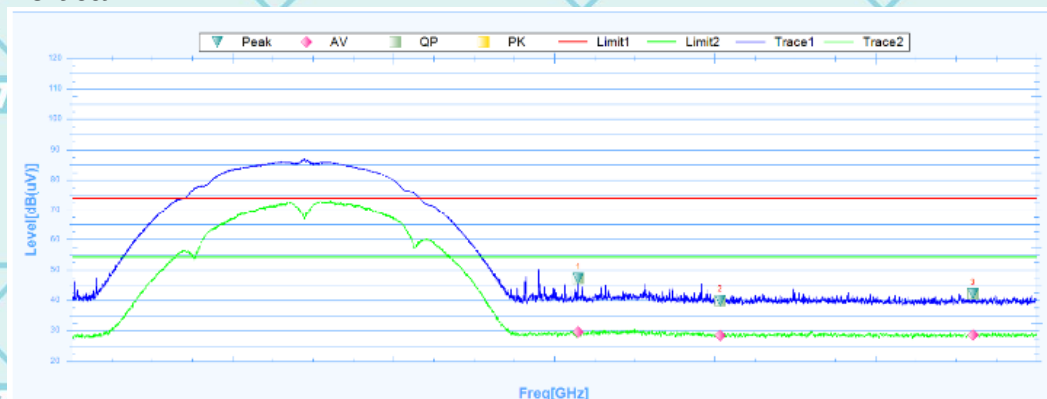

Suspected Data List										
NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2476.1312	47.14	1.34	45.8	74	-26.86	-0.1	Vertical	PK	Pass
1	2476.1312	29.54	1.34	28.2	54	-24.46	-0.1	Vertical	AV	Pass
2	2483.5000	39.91	1.38	38.53	74	-34.09	97.8	Vertical	PK	Pass
2	2483.5000	28.38	1.38	27	54	-25.62	97.8	Vertical	AV	Pass
3	2496.7000	42.07	1.47	40.6	74	-31.93	250.7	Vertical	PK	Pass
3	2496.7000	28.62	1.47	27.15	54	-25.38	250.7	Vertical	AV	Pass

Note: Freq. = Emission frequency in MHz
 Reading level (dBμV) = Receiver reading
 Corr. Factor (dB) = Attenuation factor + Cable loss
 Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)
 Limit (dBμV) = Limit stated in standard
 Margin (dB) = Level (dBμV) – Limits (dBμV)

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******