




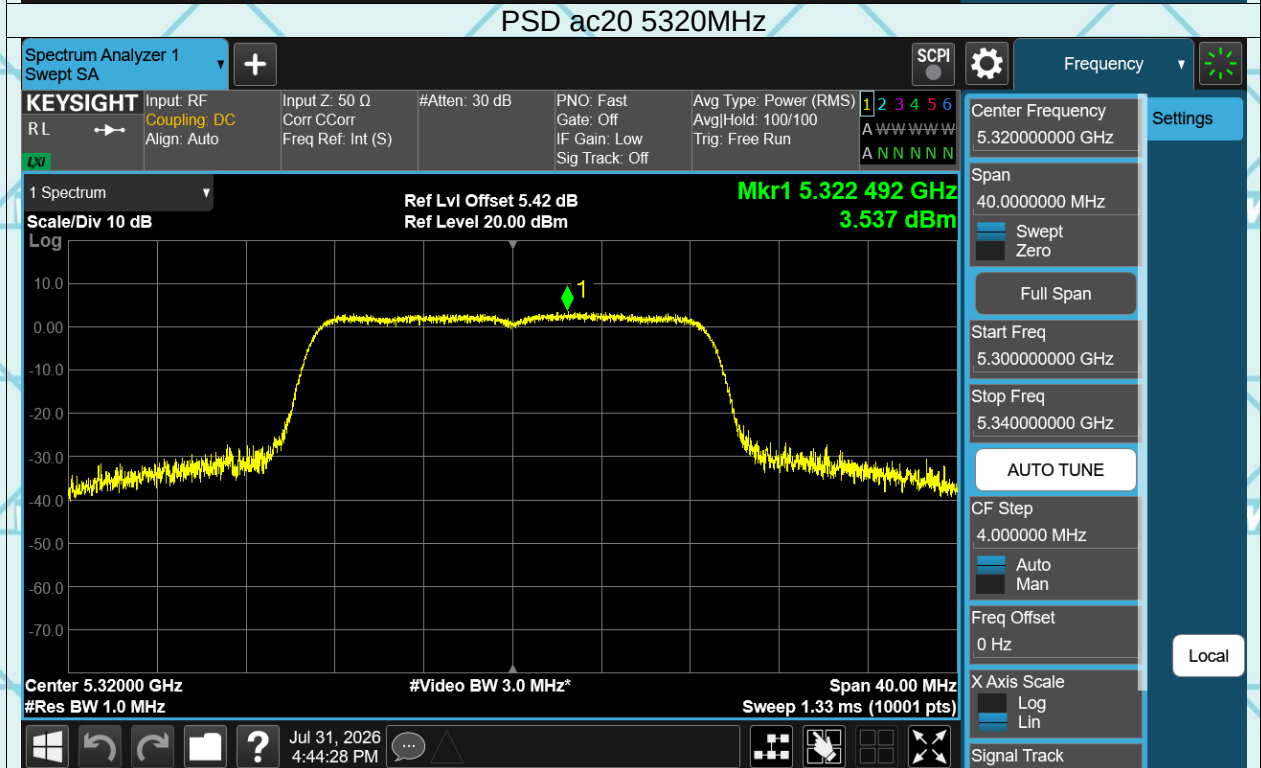
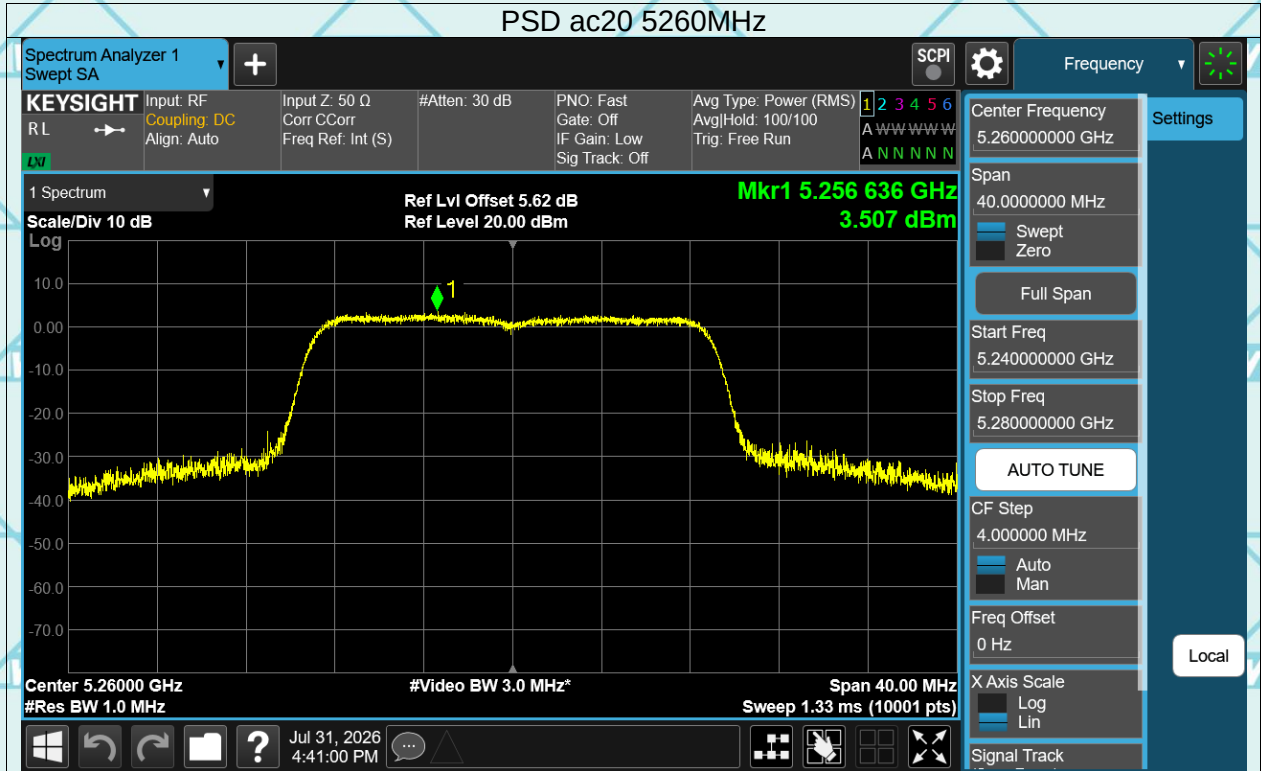
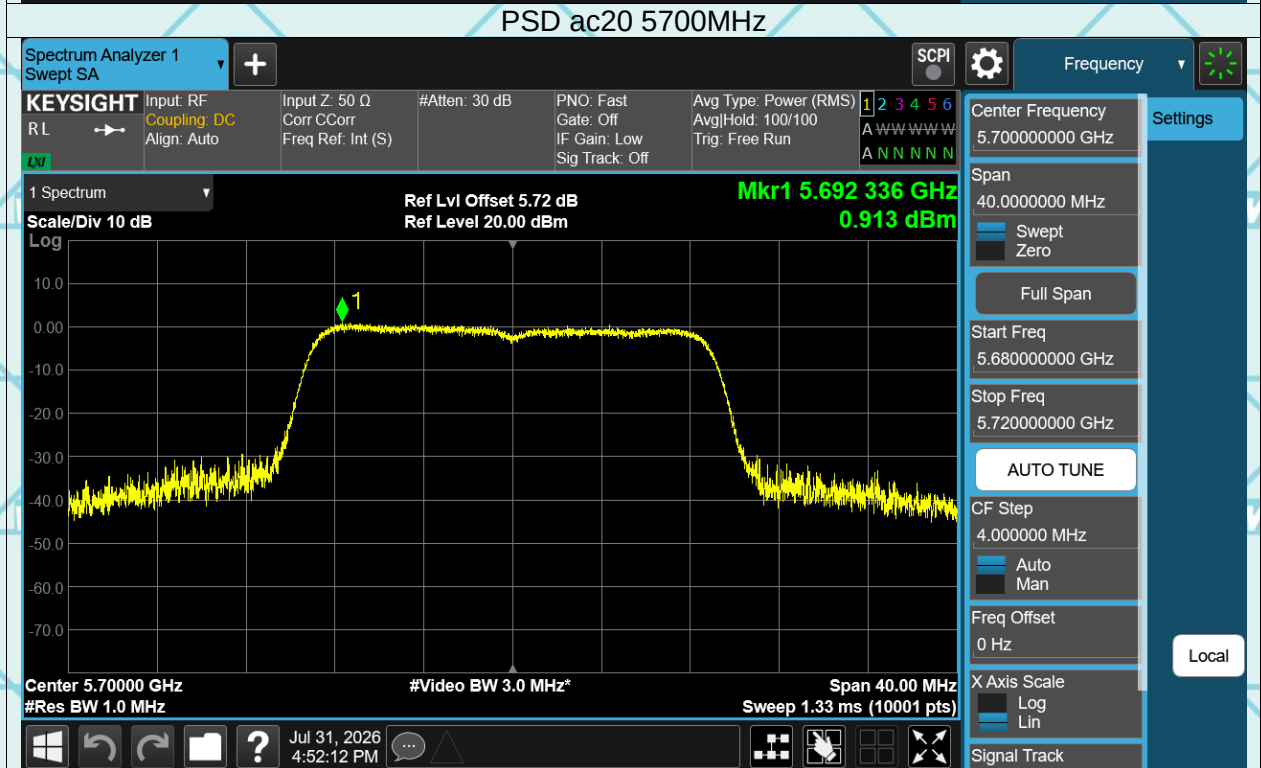
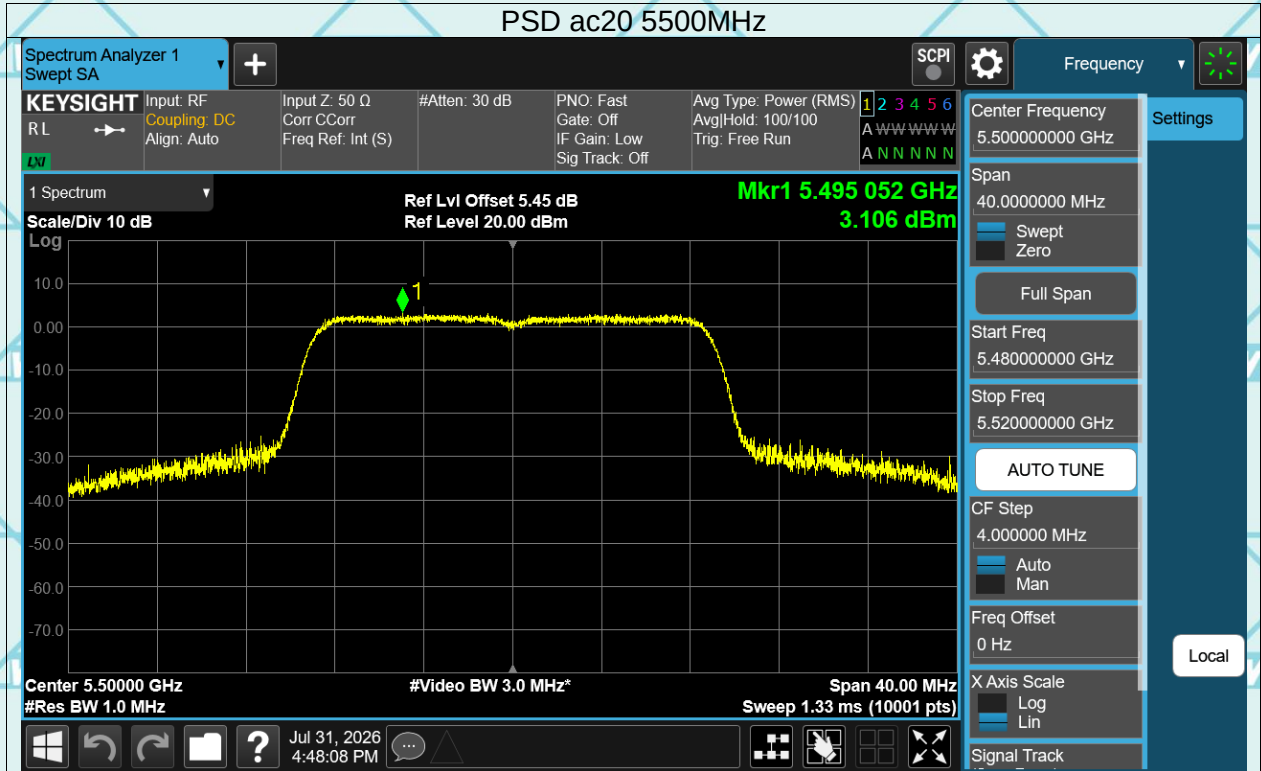
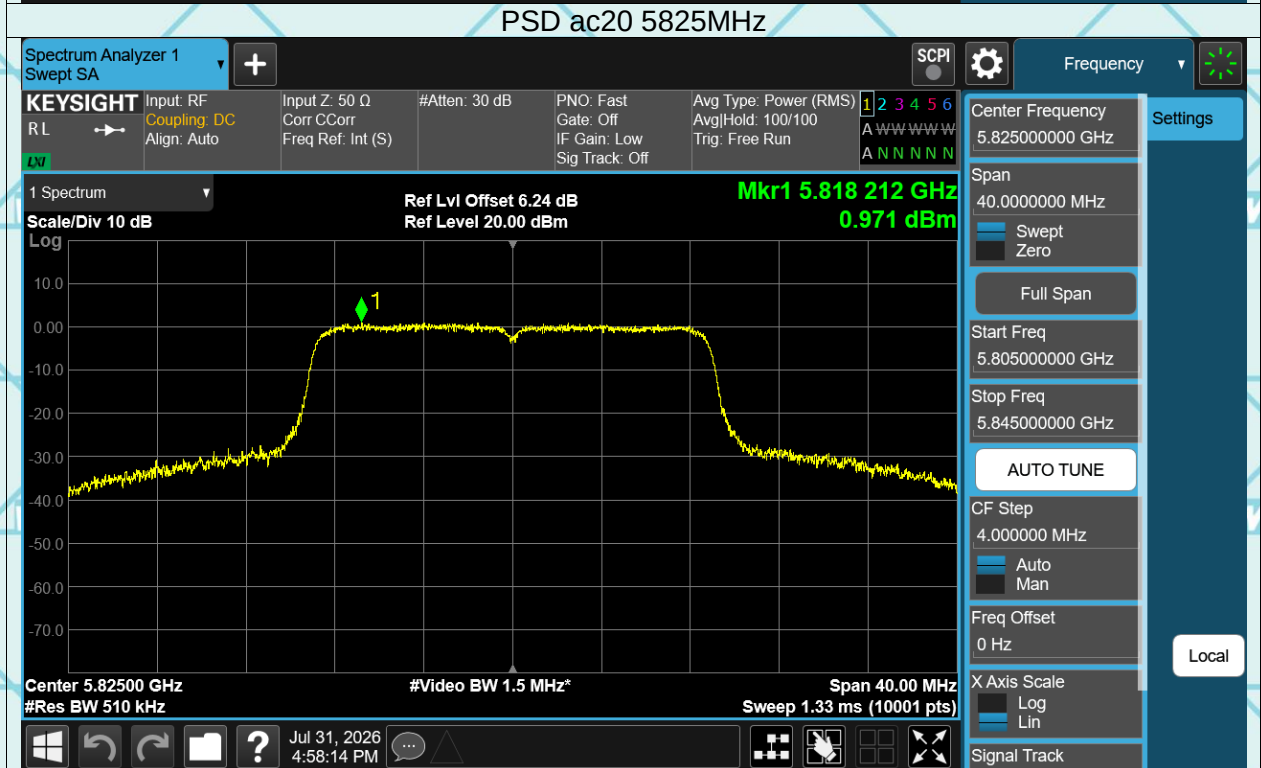



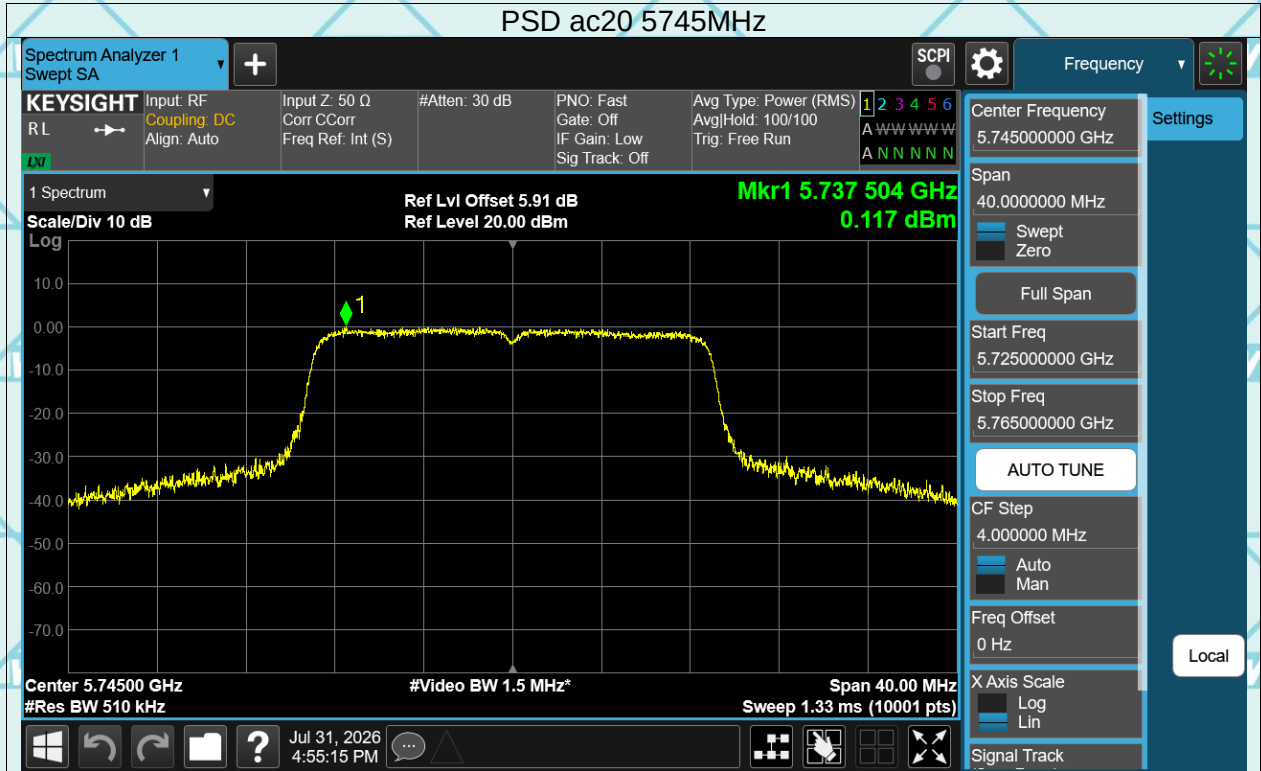



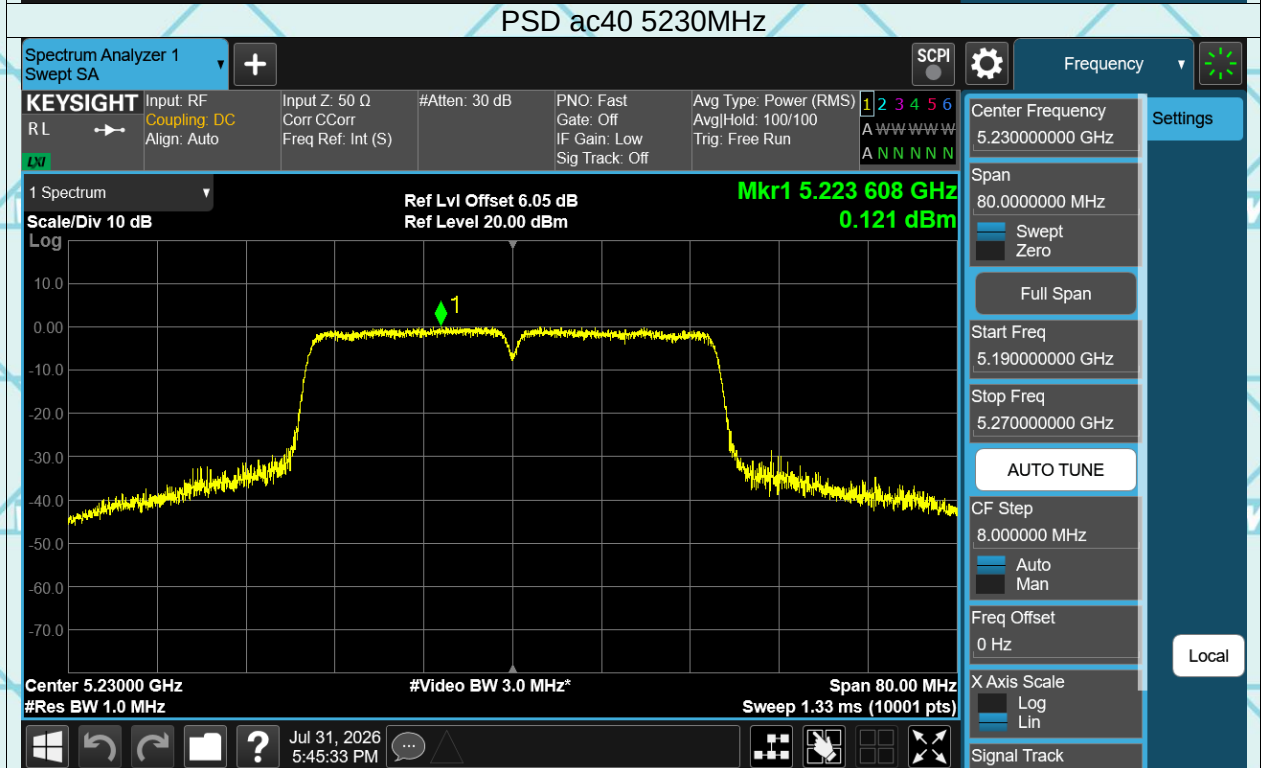



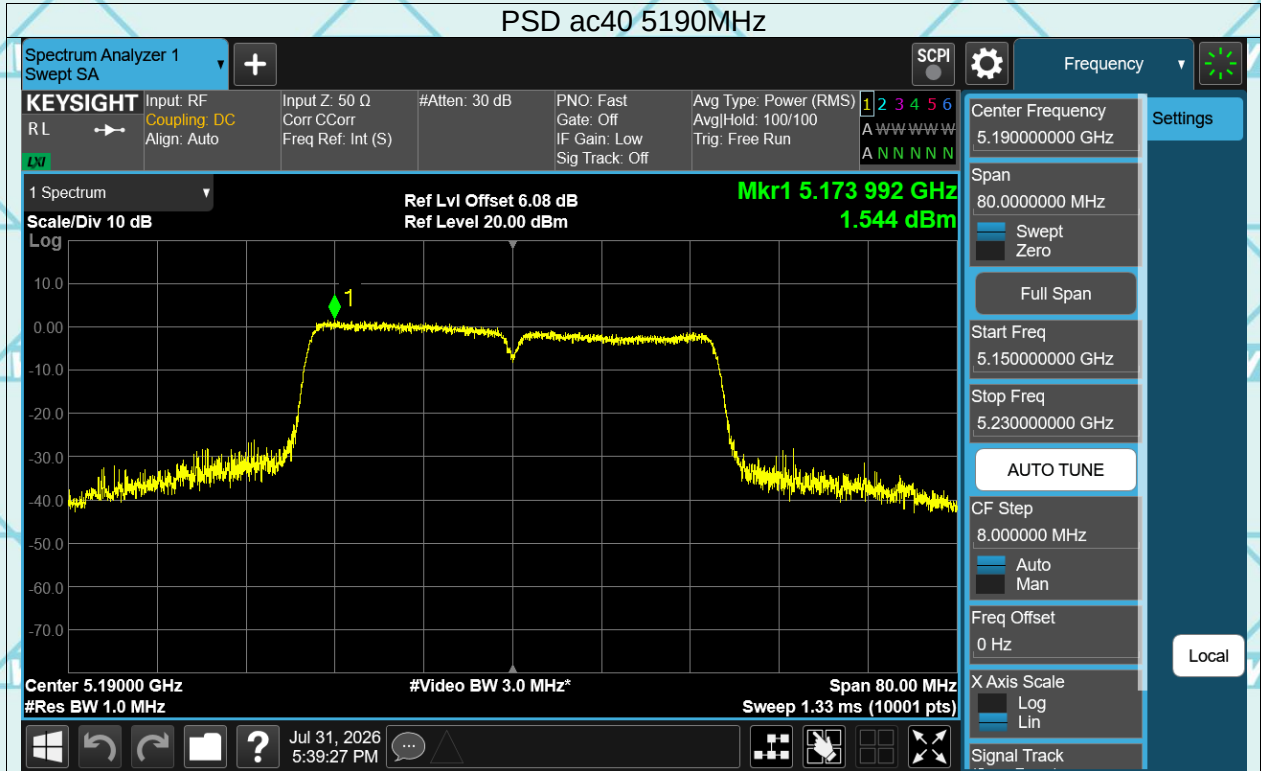



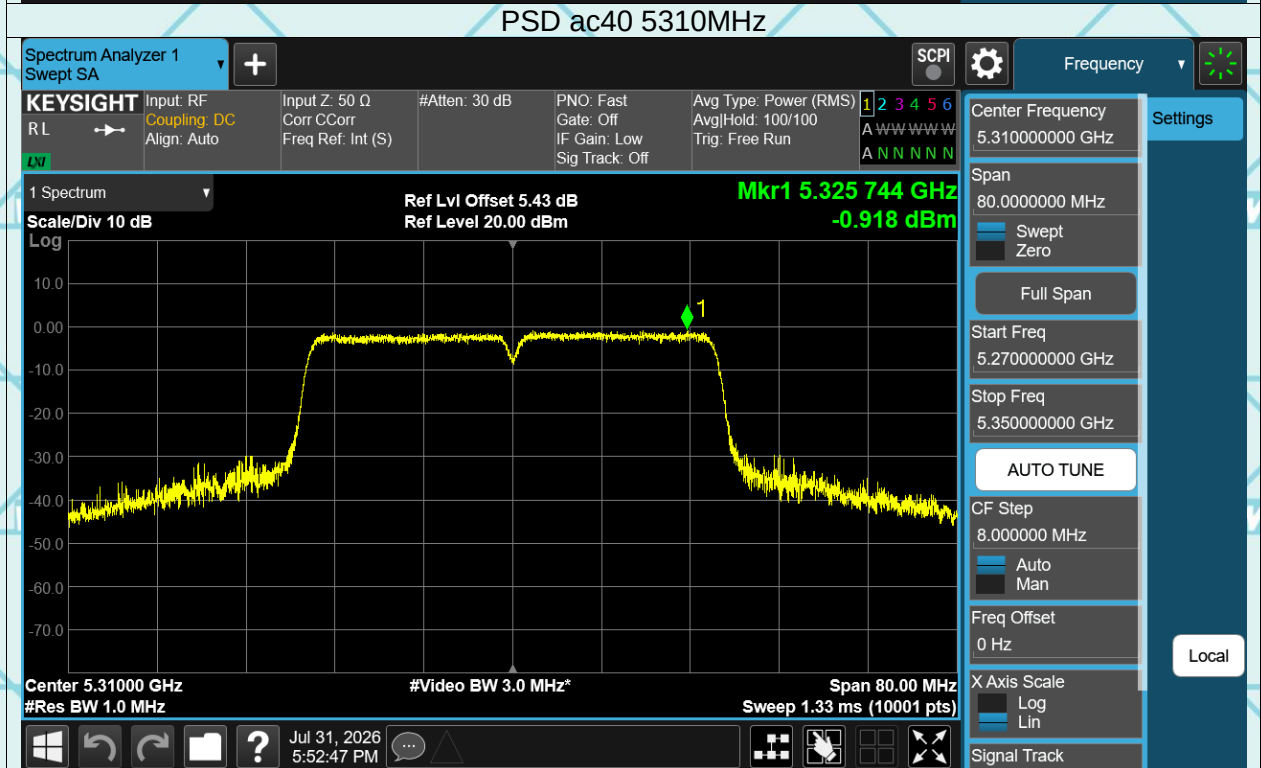


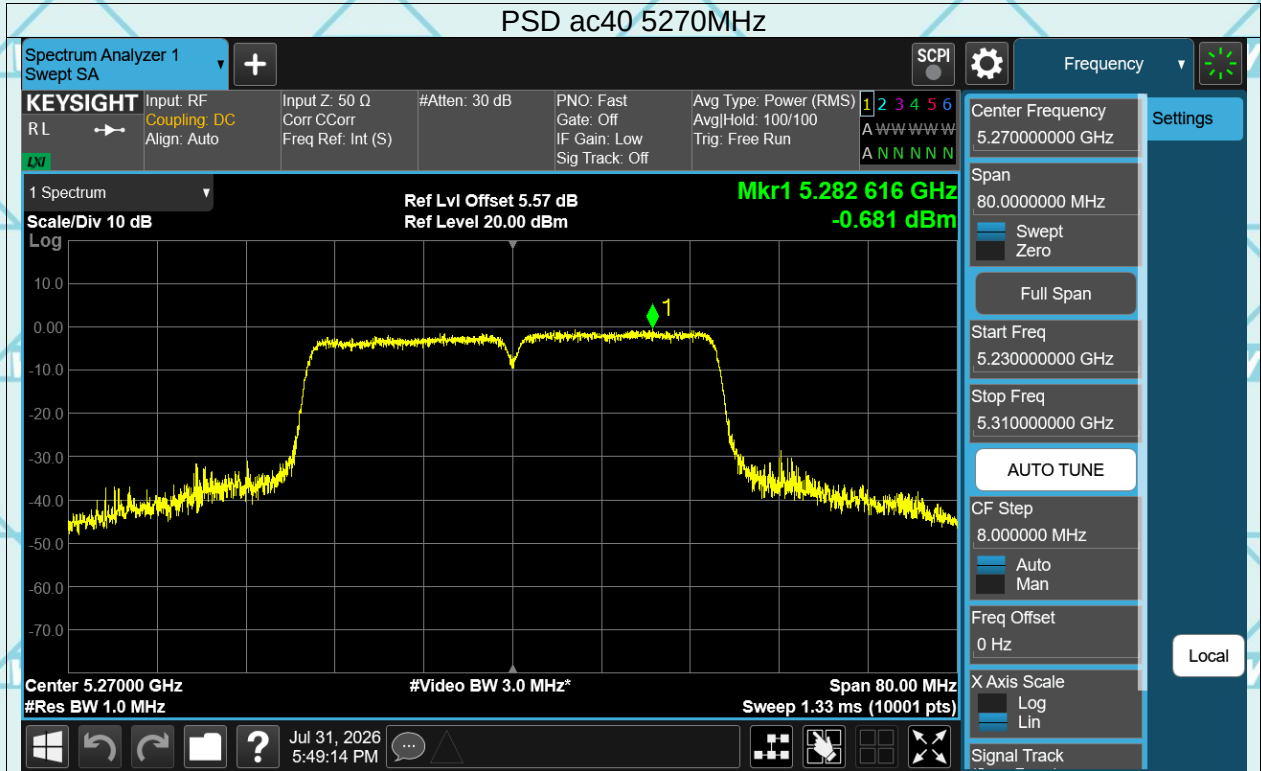


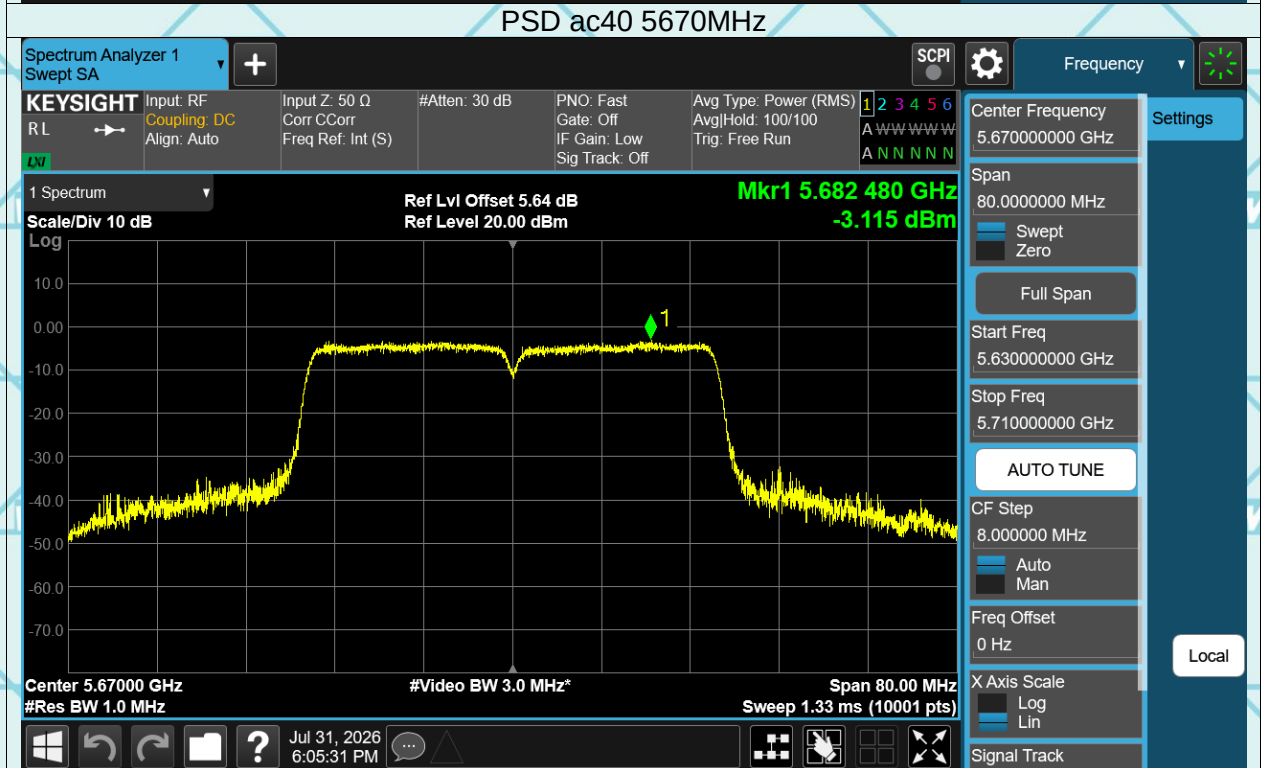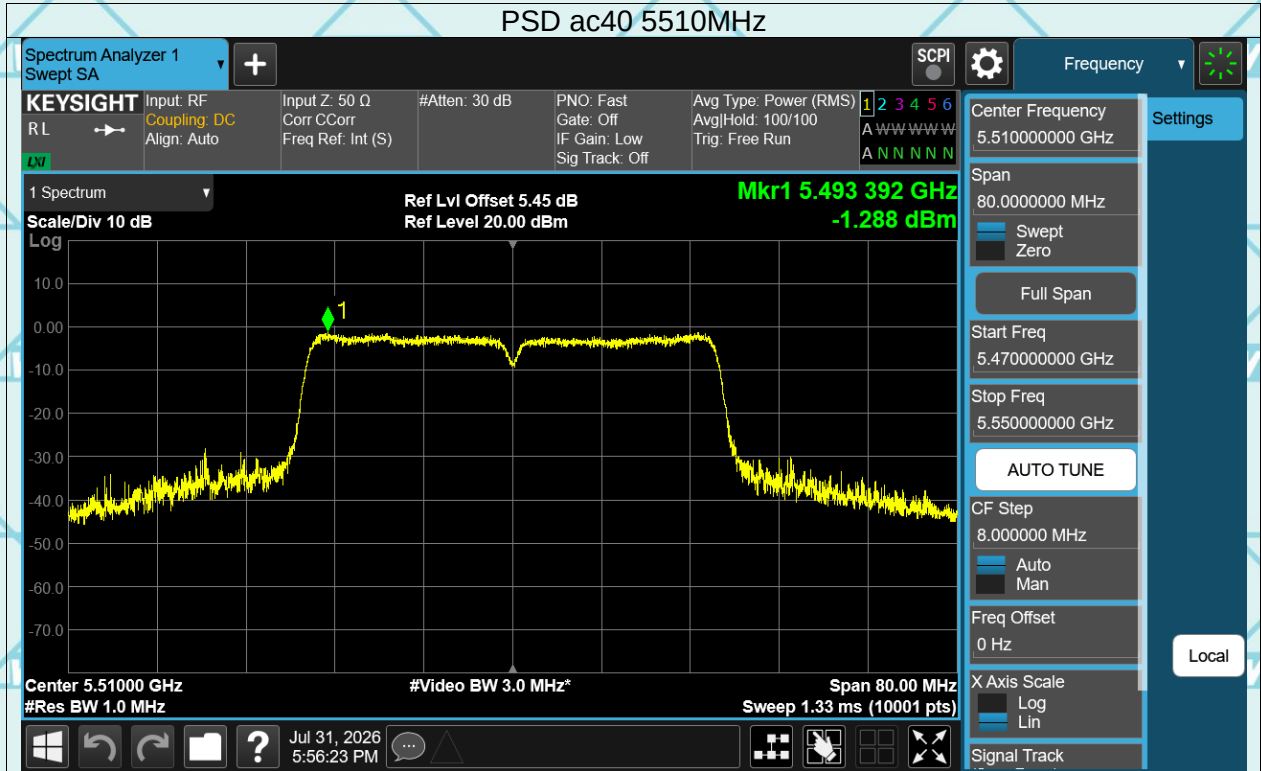

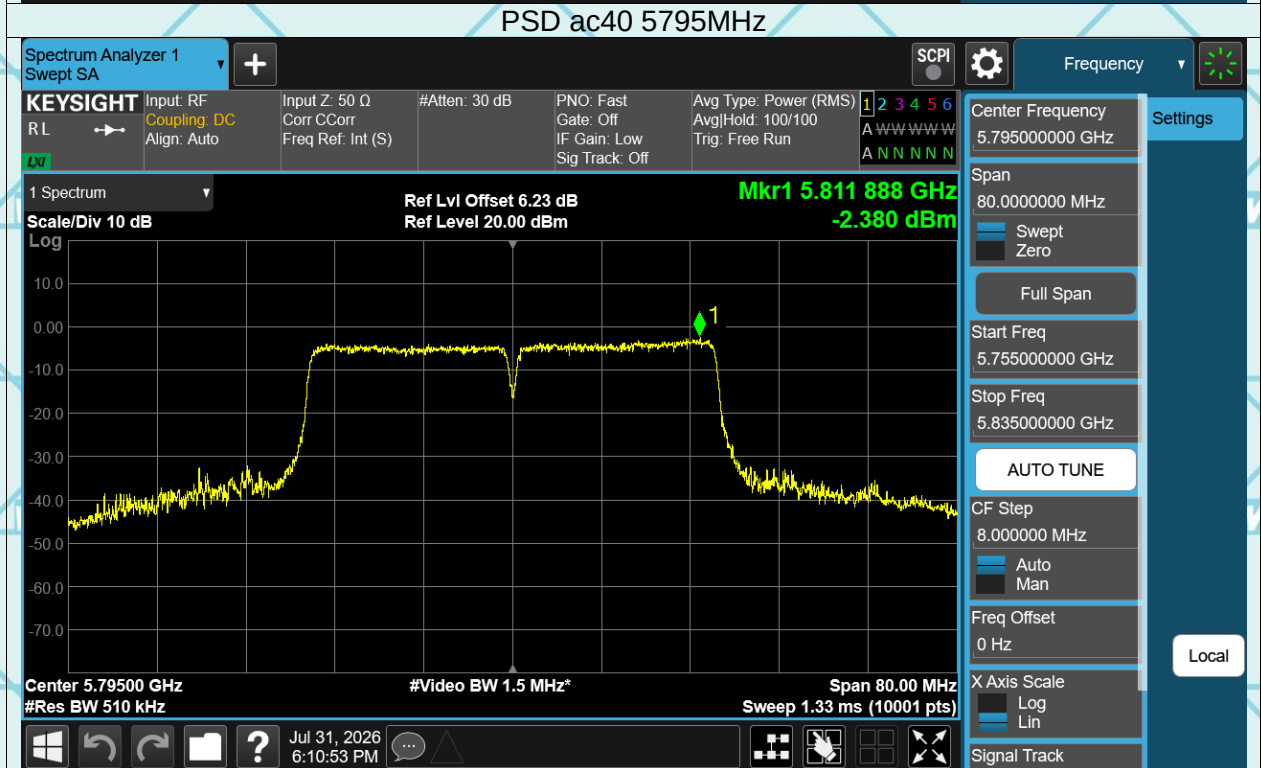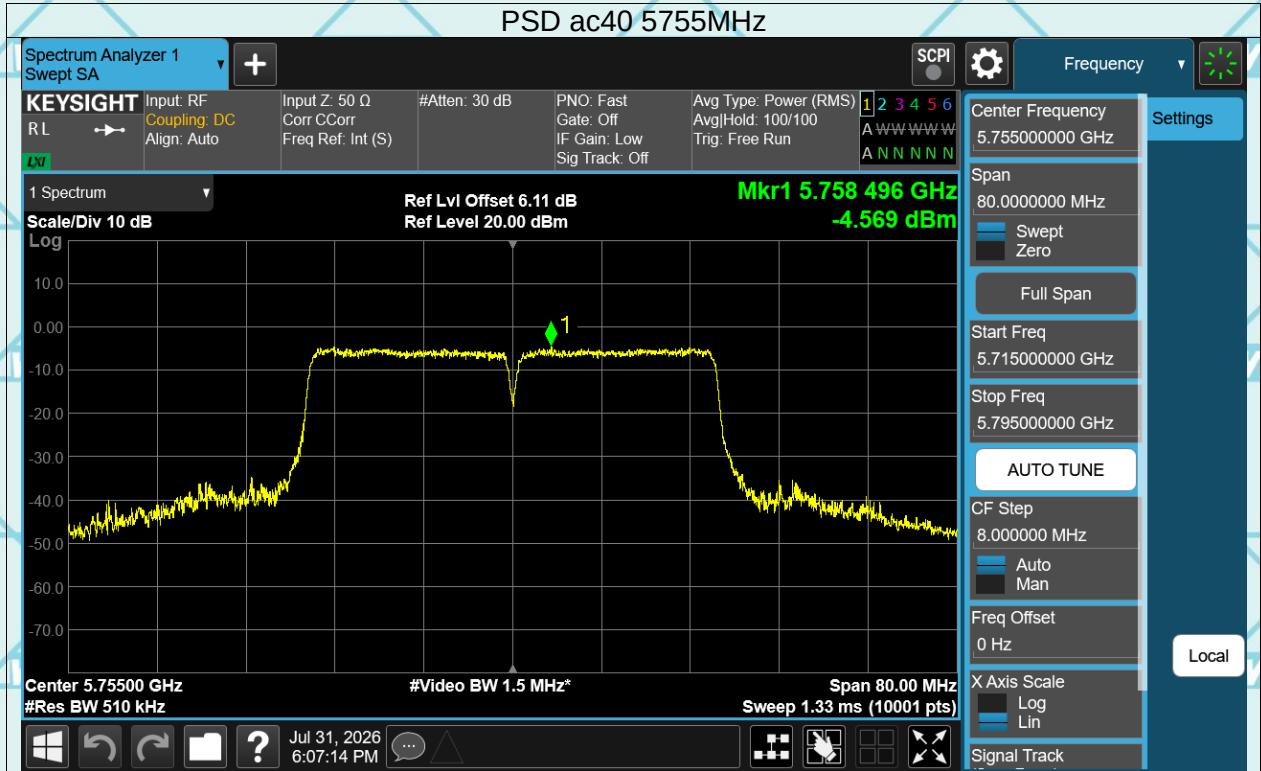

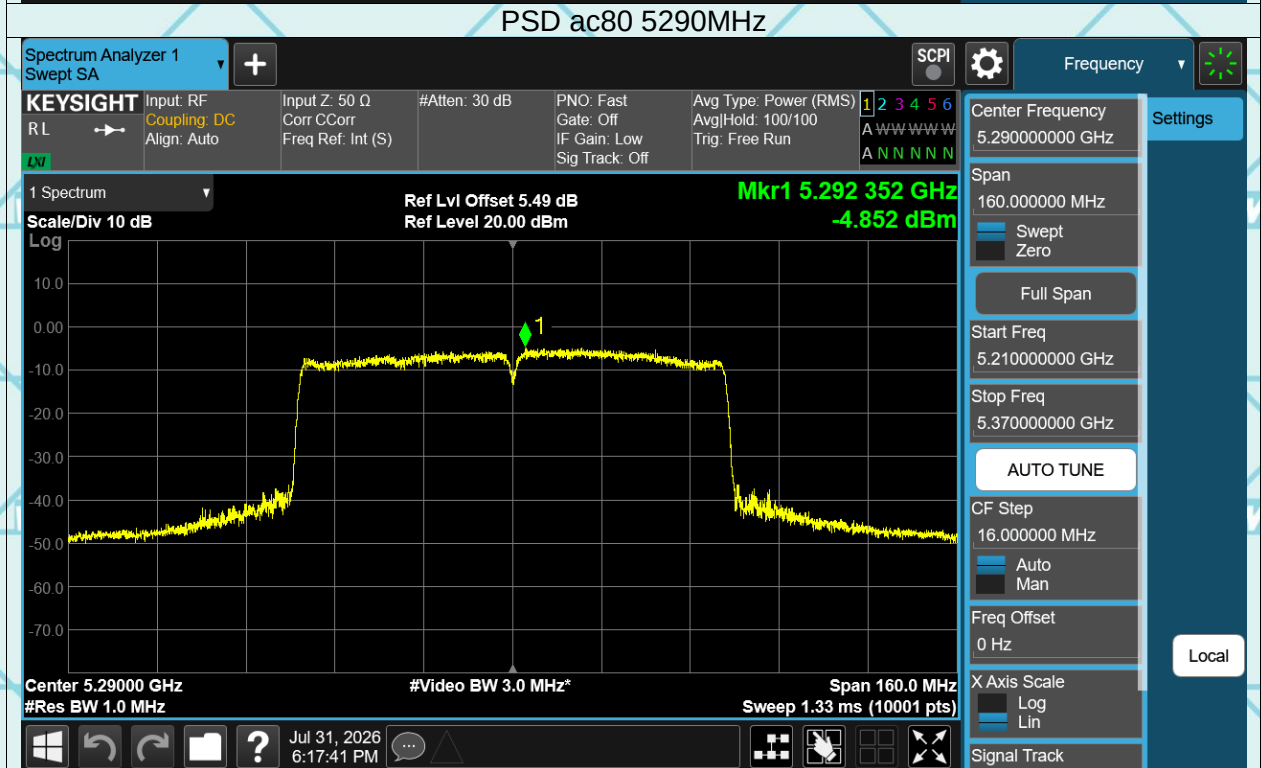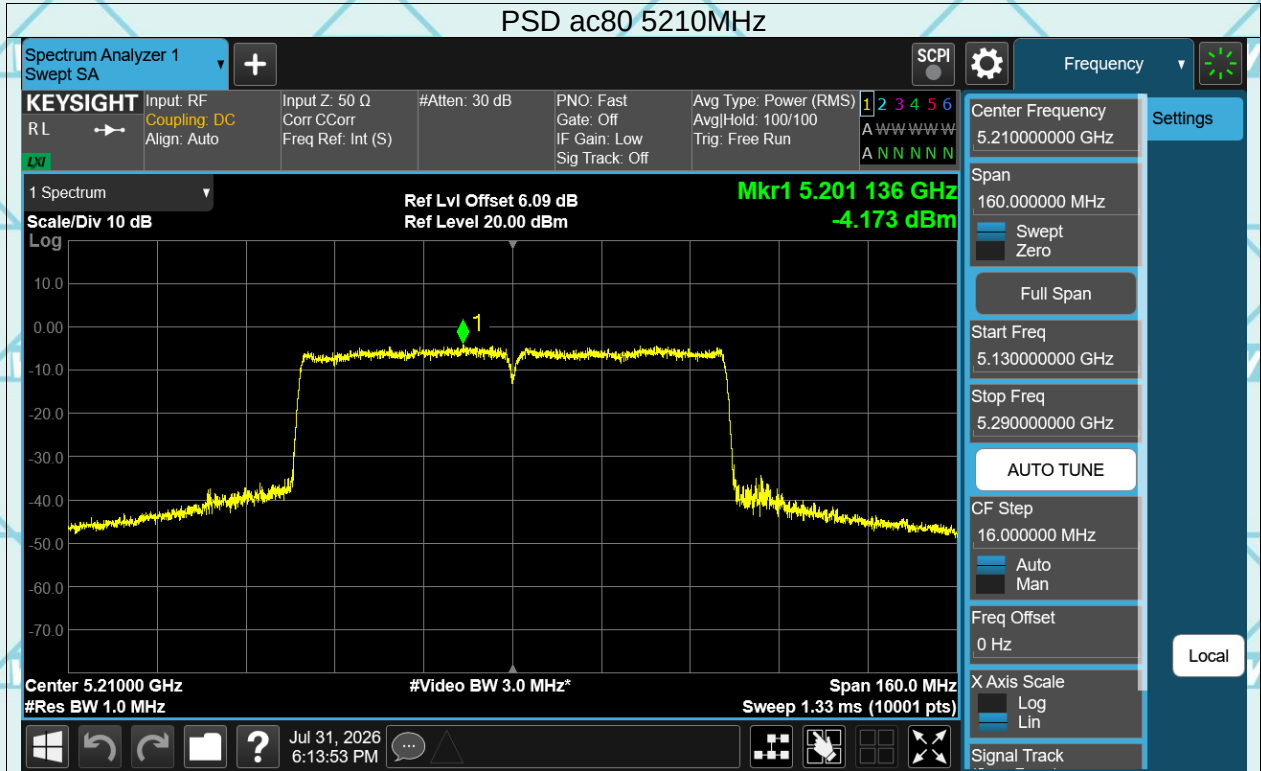

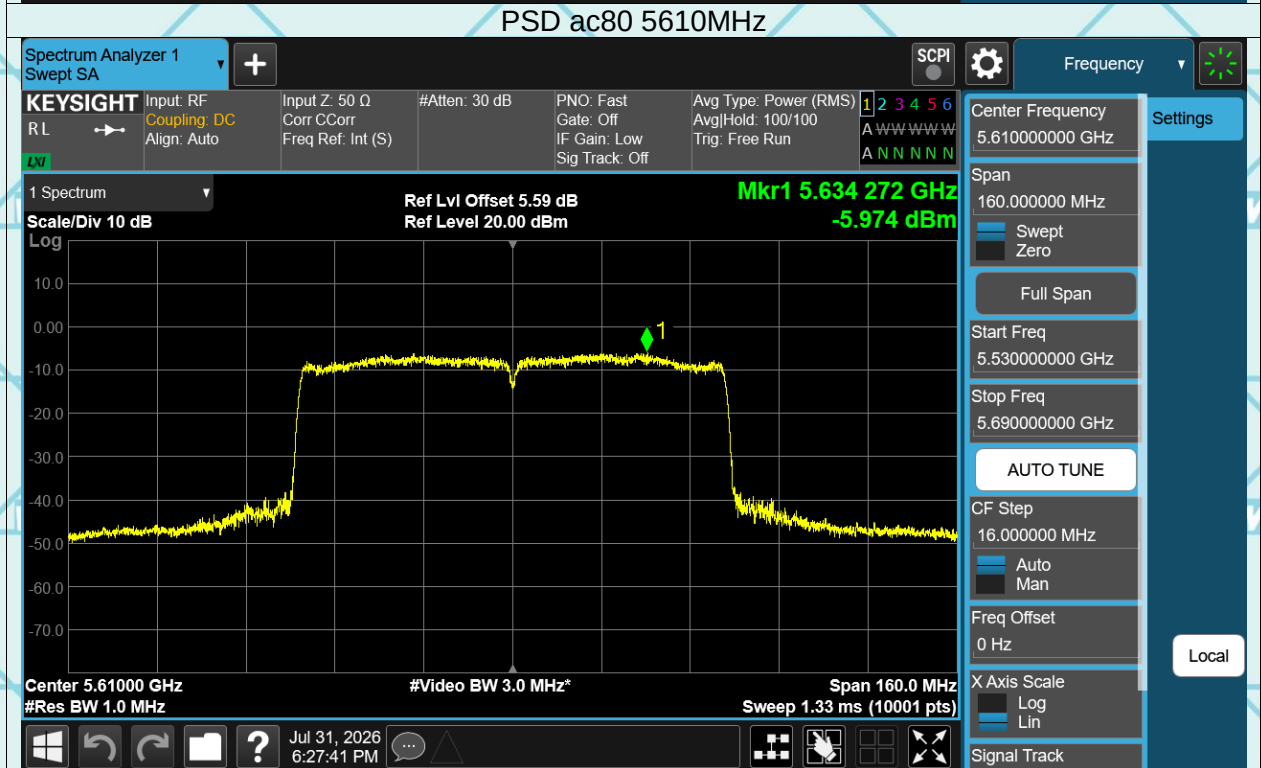
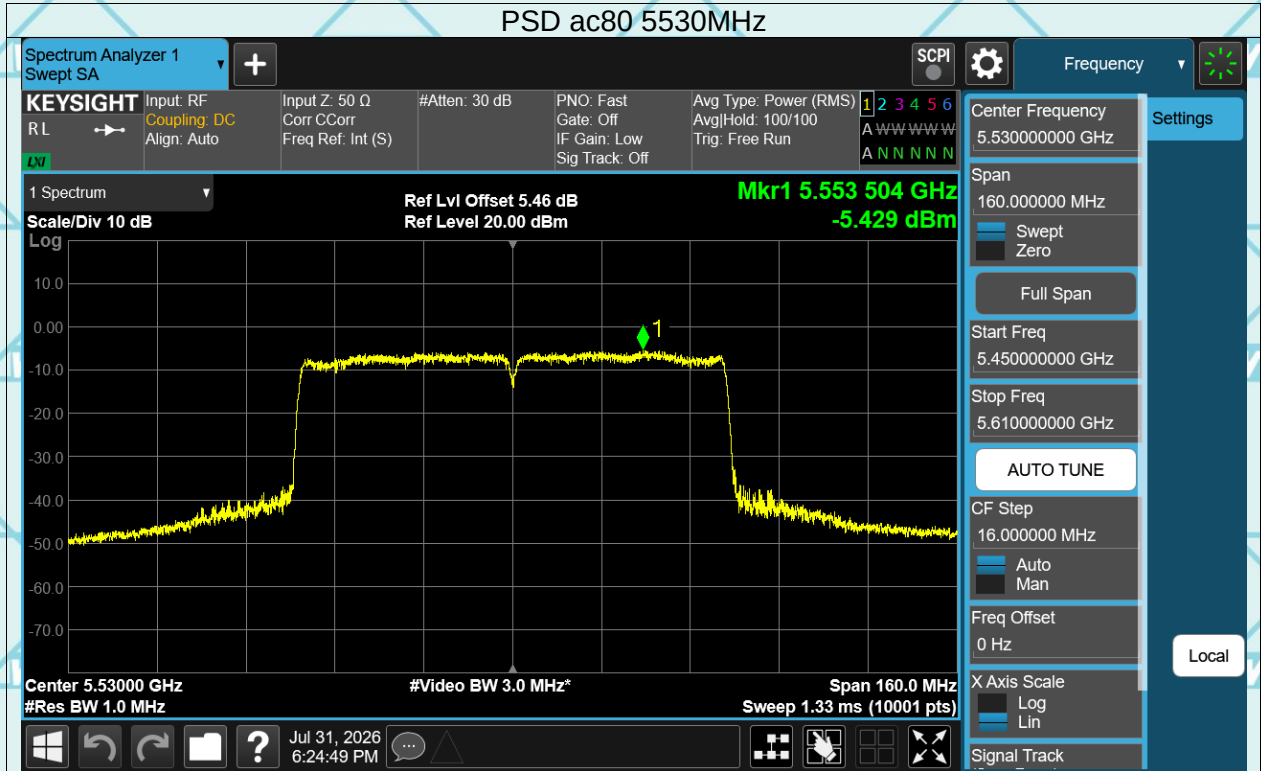



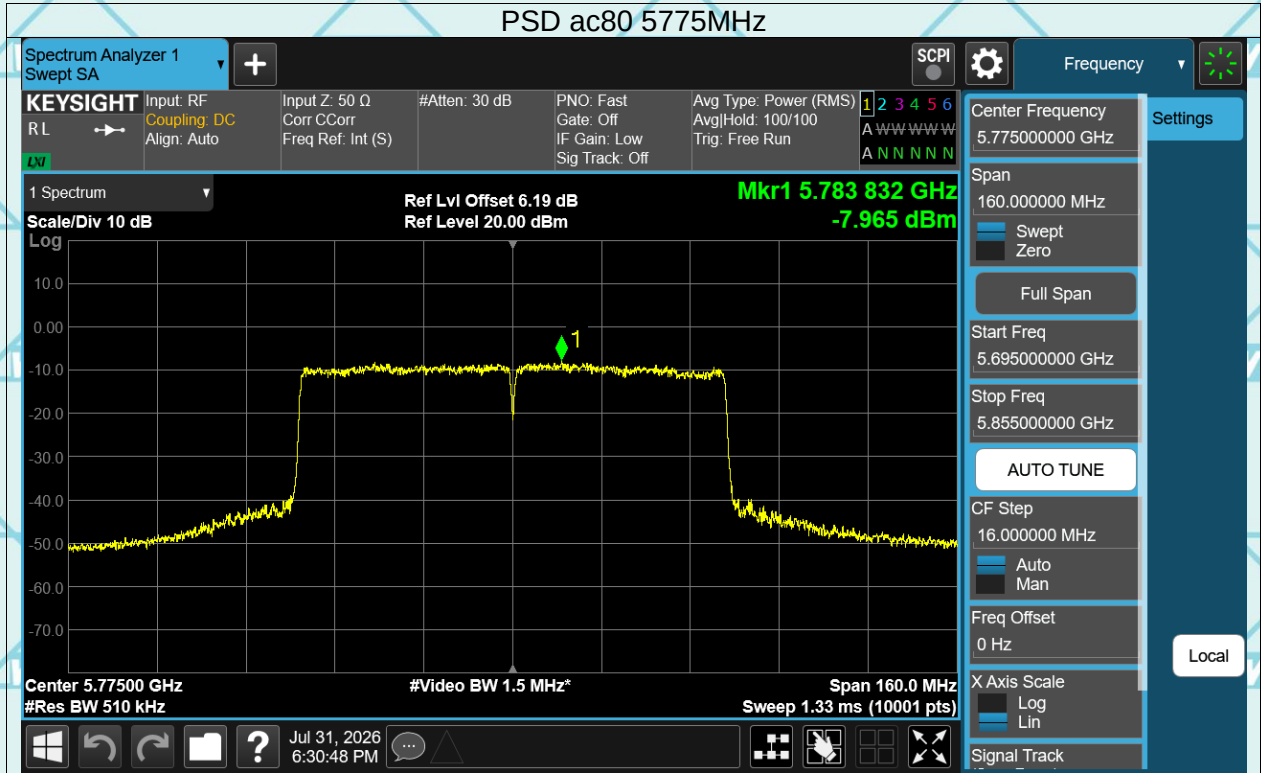


7.7 FREQUENCY STABILITY


Product:	EUT-Sample	Test Item:	Frequency Stability
Temperature:	25 °C	Humidity:	56%RH
Test Voltage:	DC 3.82V	Test Result:	PASS

Mode	Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
a	5180	5179.98	-20000	-3.86	25	Pass
a	5240	5239.98	-20000	-3.82	25	Pass
a	5260	5259.98	-20000	-3.8	25	Pass
a	5320	5319.98	-20000	-3.76	25	Pass
a	5500	5499.98	-20000	-3.64	25	Pass
a	5700	5699.98	-20000	-3.51	25	Pass
a	5745	5744.98	-20000	-3.48	25	Pass
a	5825	5824.98	-20000	-3.43	25	Pass
n20	5180	5179.96	-40000	-7.72	25	Pass
n20	5240	5239.98	-20000	-3.82	25	Pass
n20	5260	5259.98	-20000	-3.8	25	Pass
n20	5320	5319.98	-20000	-3.76	25	Pass
n20	5500	5500	0	0	25	Pass
n20	5700	5700	0	0	25	Pass
n20	5745	5744.98	-20000	-3.48	25	Pass
n20	5825	5824.98	-20000	-3.43	25	Pass
n40	5190	5190	0	0	25	Pass
n40	5230	5230	0	0	25	Pass
n40	5270	5269.96	-40000	-7.59	25	Pass
n40	5310	5309.96	-40000	-7.53	25	Pass
n40	5510	5510	0	0	25	Pass
n40	5670	5670	0	0	25	Pass
n40	5755	5755	0	0	25	Pass
n40	5795	5795	0	0	25	Pass
ac20	5180	5180	0	0	25	Pass
ac20	5240	5239.96	-40000	-7.63	25	Pass
ac20	5260	5259.98	-20000	-3.8	25	Pass
ac20	5320	5319.98	-20000	-3.76	25	Pass
ac20	5500	5499.98	-20000	-3.64	25	Pass
ac20	5700	5699.98	-20000	-3.51	25	Pass
ac20	5745	5744.98	-20000	-3.48	25	Pass
ac20	5825	5824.98	-20000	-3.43	25	Pass
ac40	5190	5189.96	-40000	-7.71	25	Pass
ac40	5230	5229.96	-40000	-7.65	25	Pass
ac40	5270	5270	0	0	25	Pass
ac40	5310	5310	0	0	25	Pass
ac40	5510	5510	0	0	25	Pass
ac40	5670	5669.96	-40000	-7.05	25	Pass
ac40	5755	5754.96	-40000	-6.95	25	Pass
ac40	5795	5795	0	0	25	Pass
ac80	5210	5210	0	0	25	Pass
ac80	5290	5289.92	-80000	-15.12	25	Pass
ac80	5530	5530	0	0	25	Pass
ac80	5610	5610	0	0	25	Pass
ac80	5775	5775	0	0	25	Pass

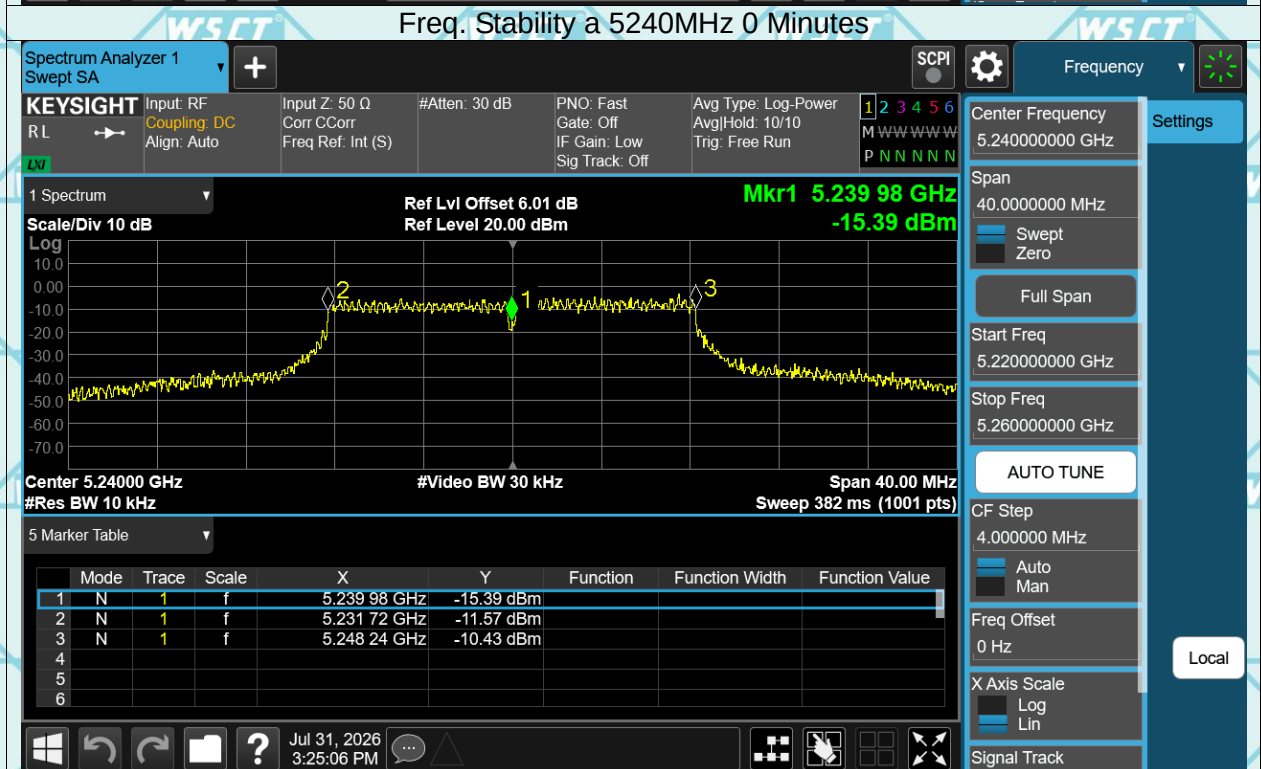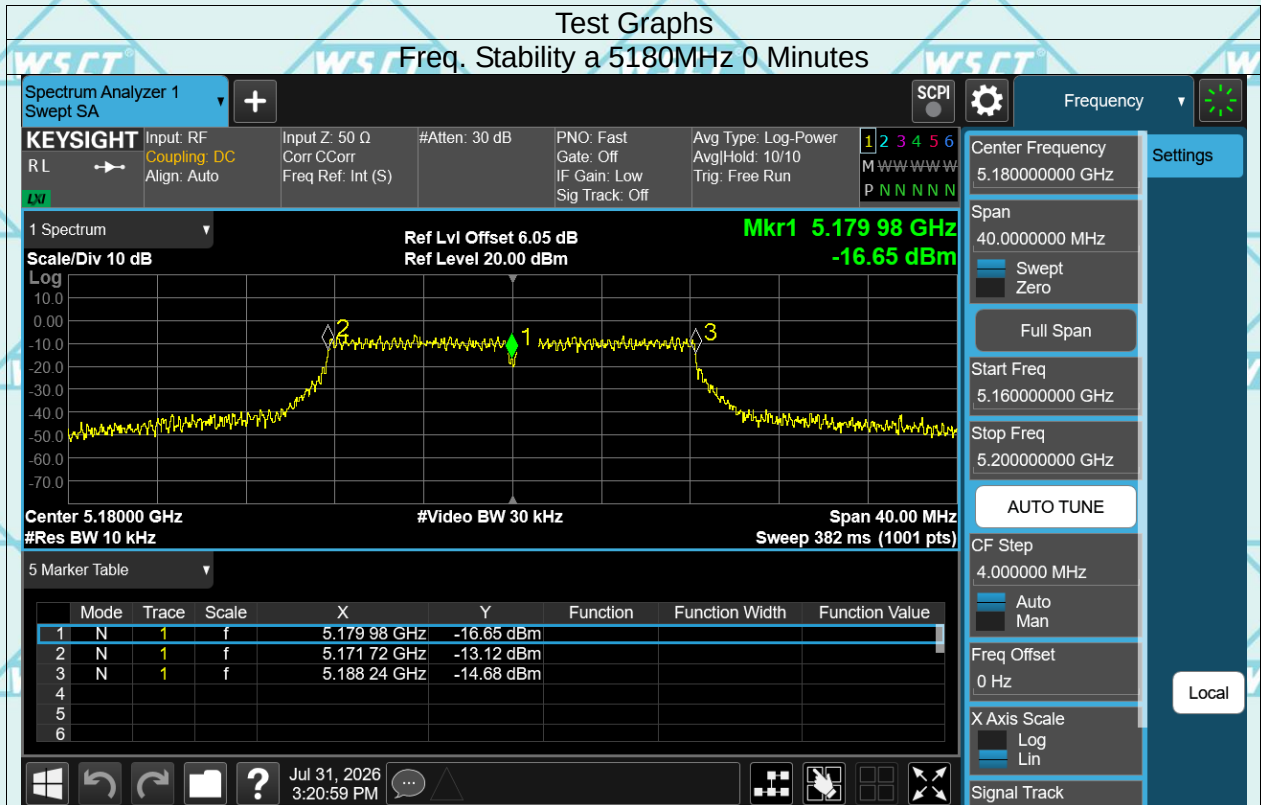

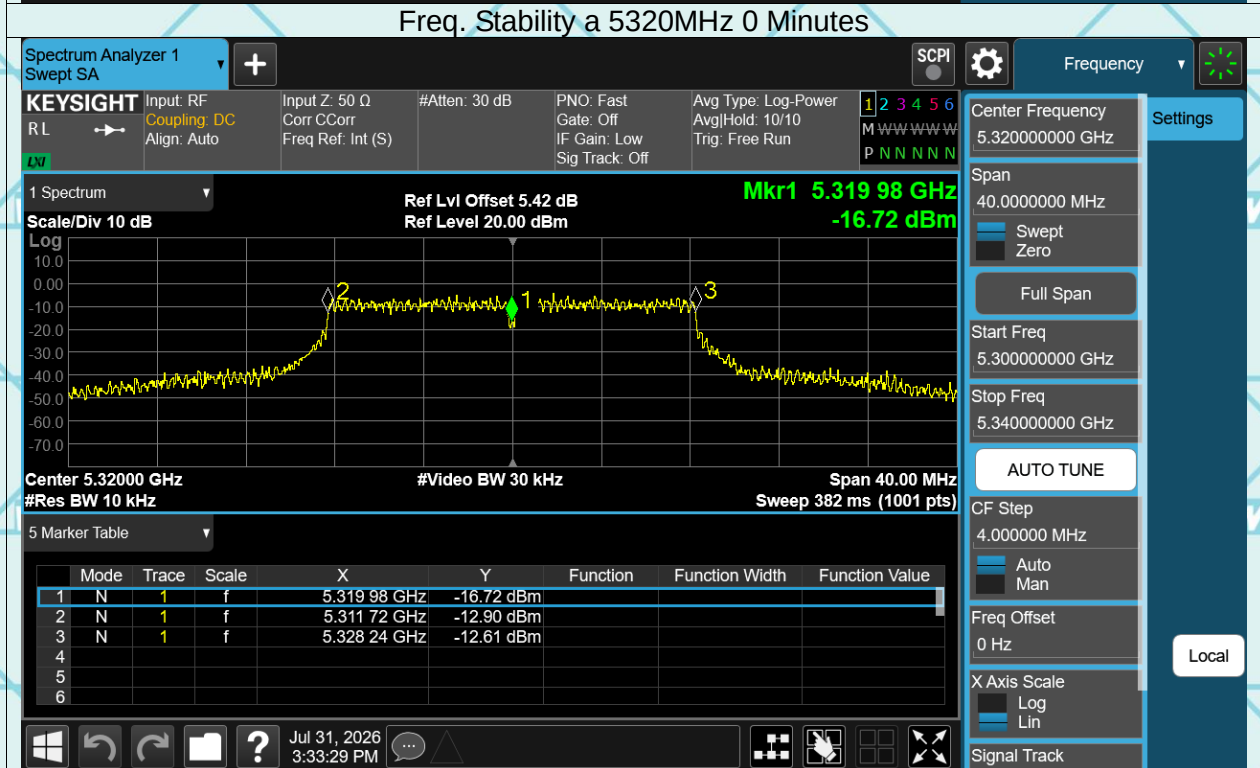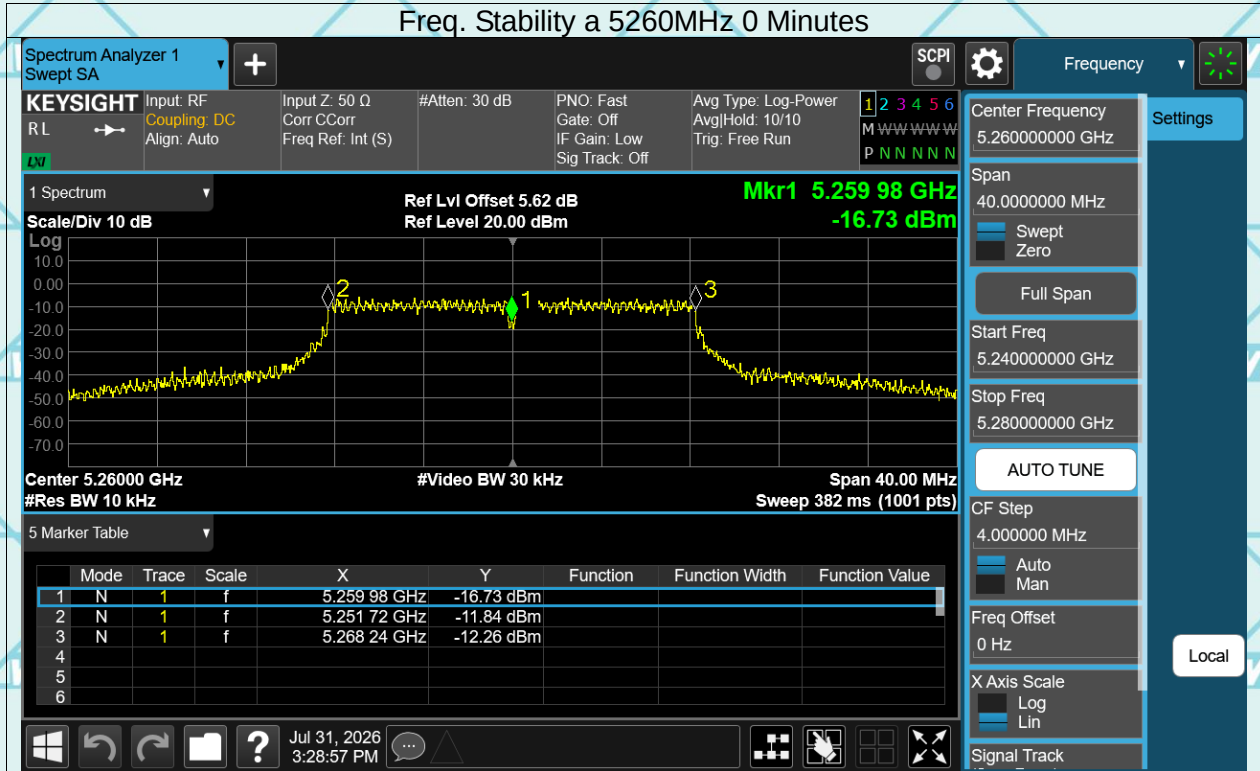

Freq. Stability a 5500MHz 0 Minutes

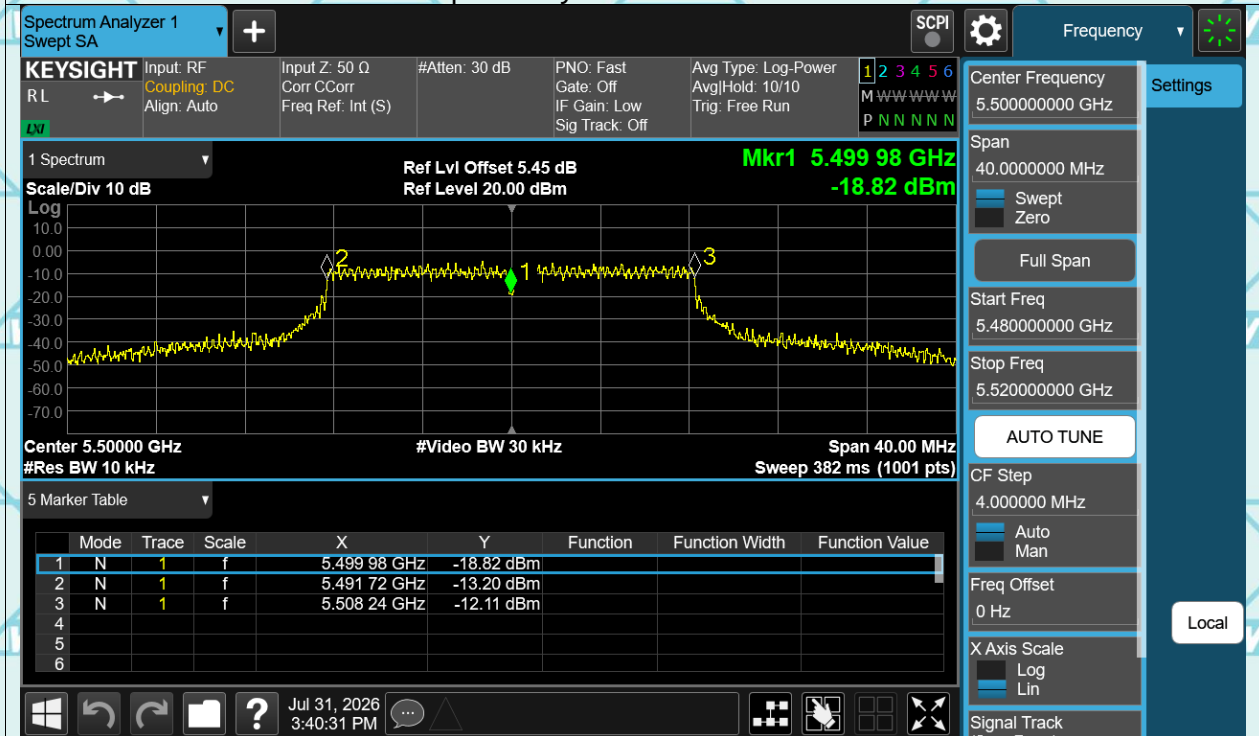

Freq. Stability a 5700MHz 0 Minutes

