




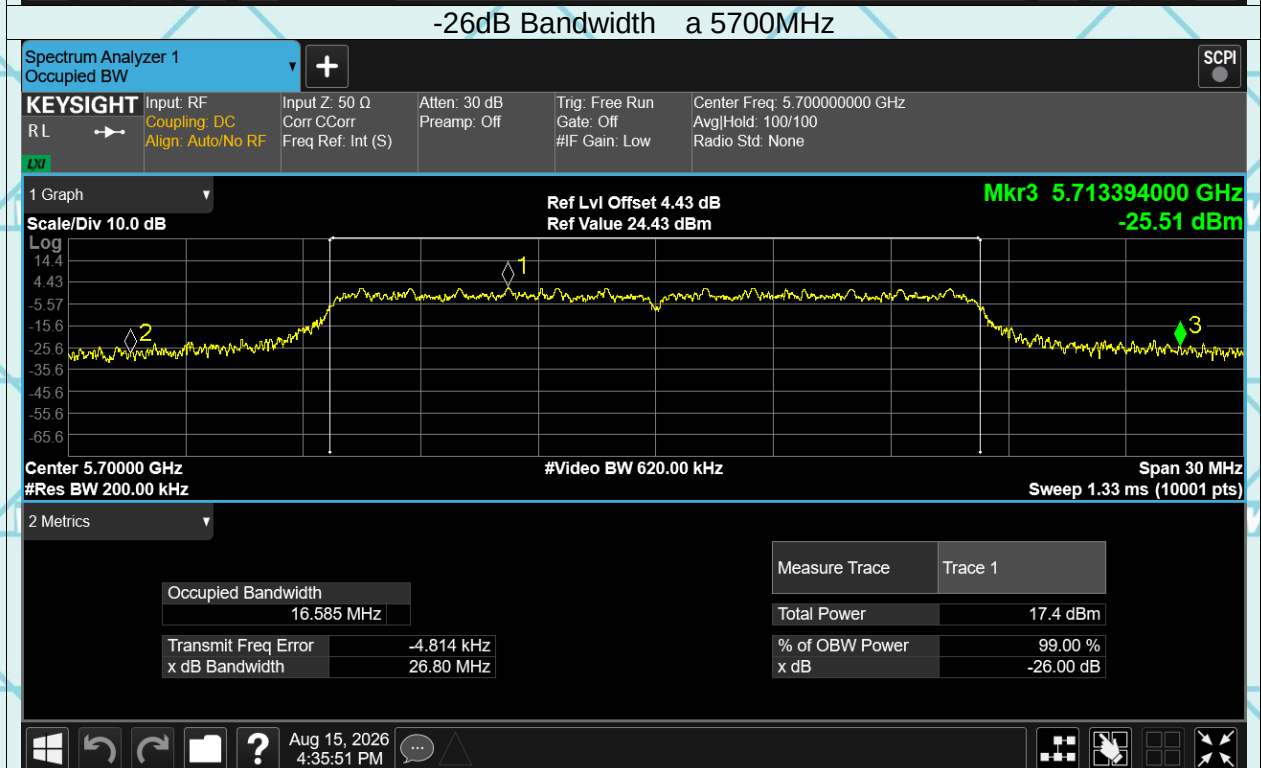
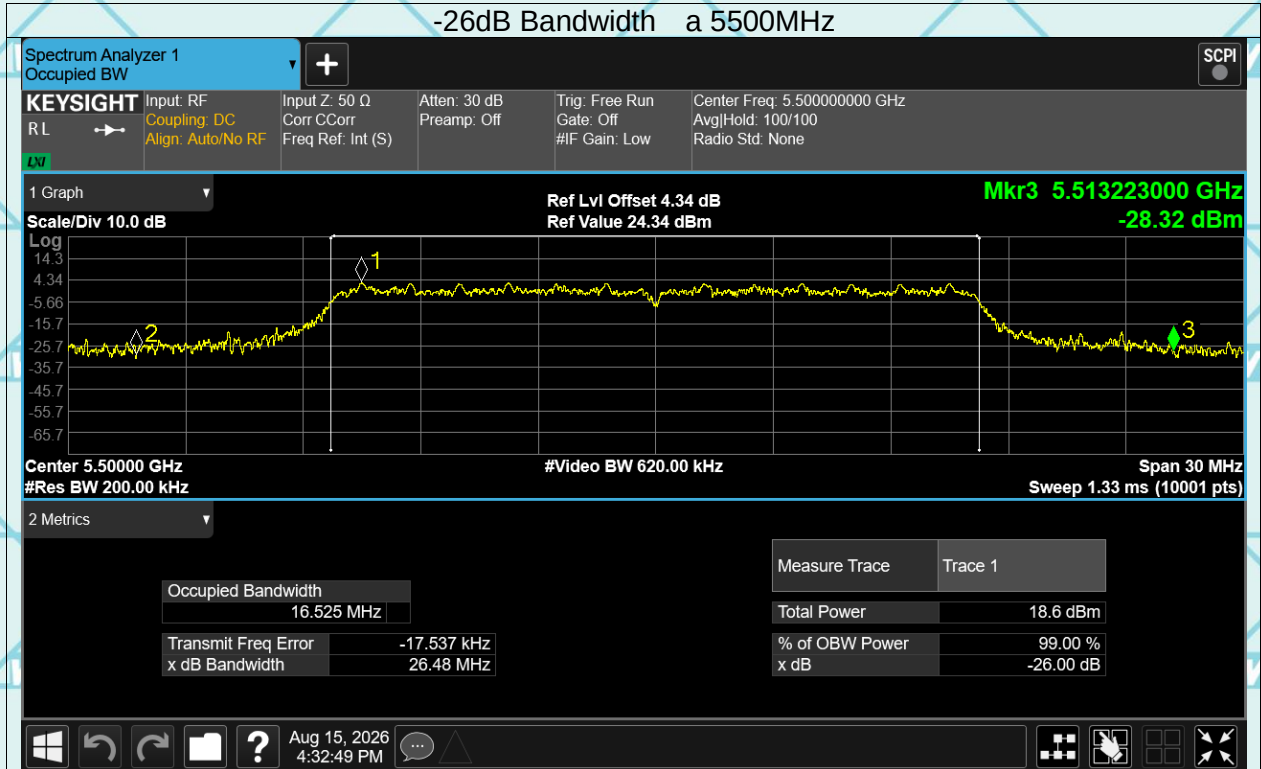
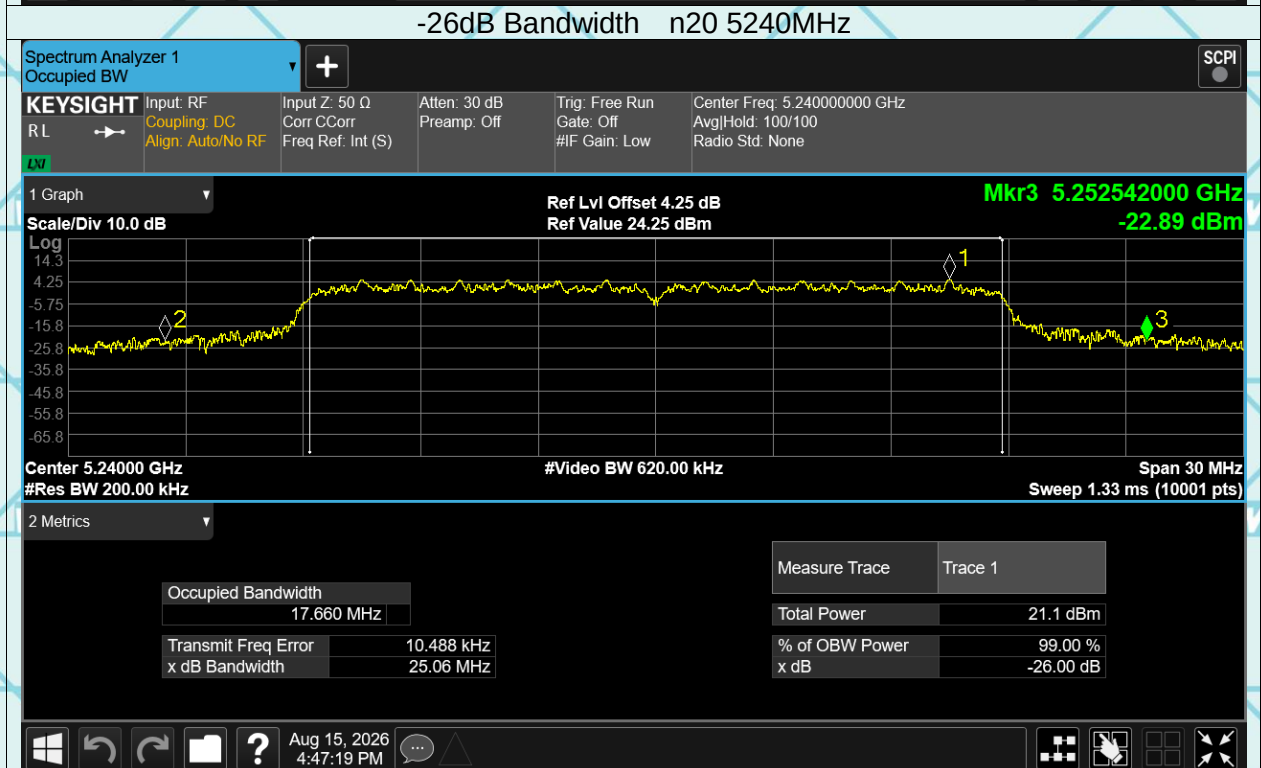
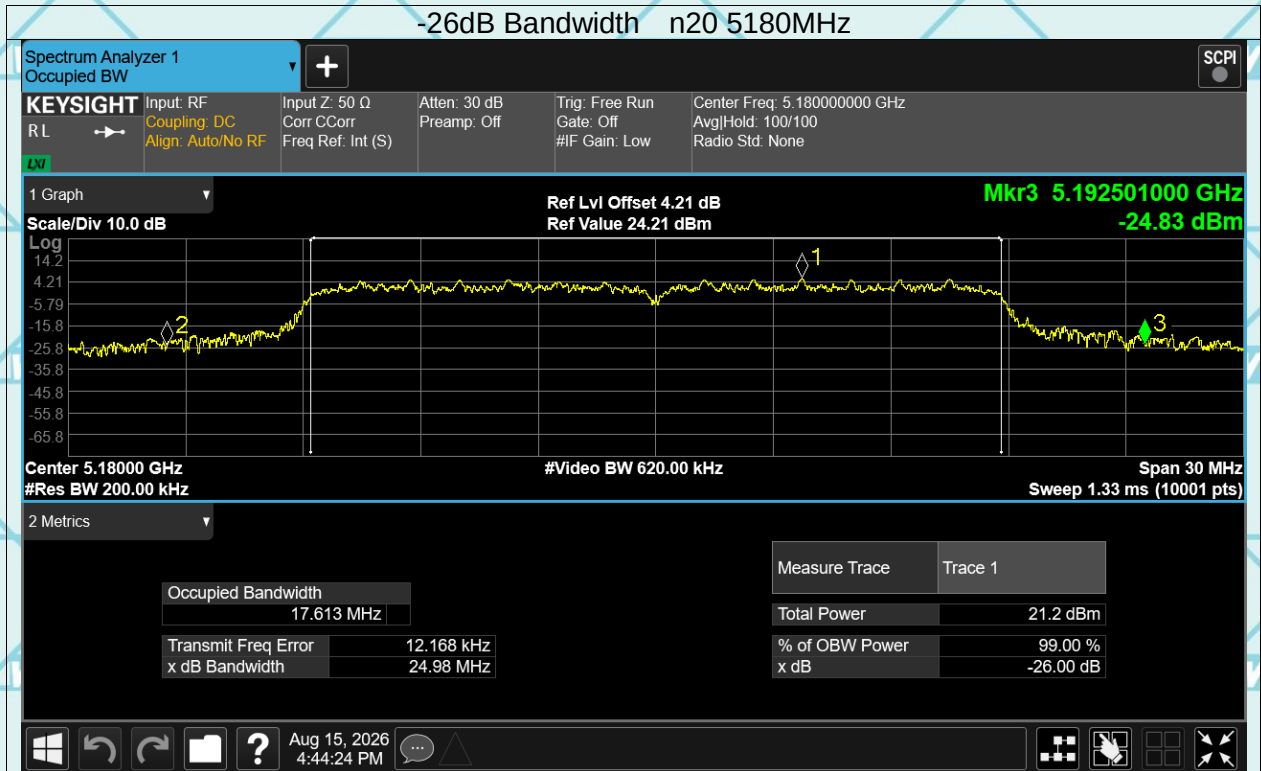
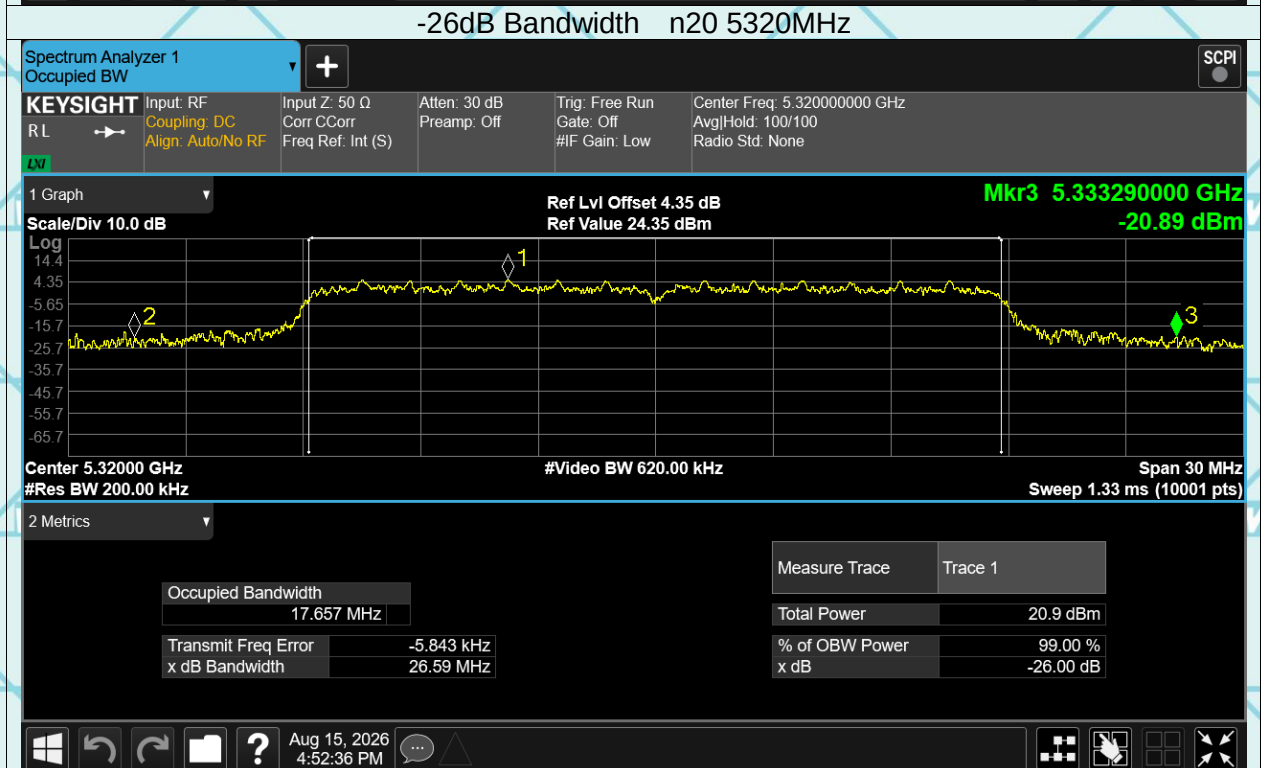



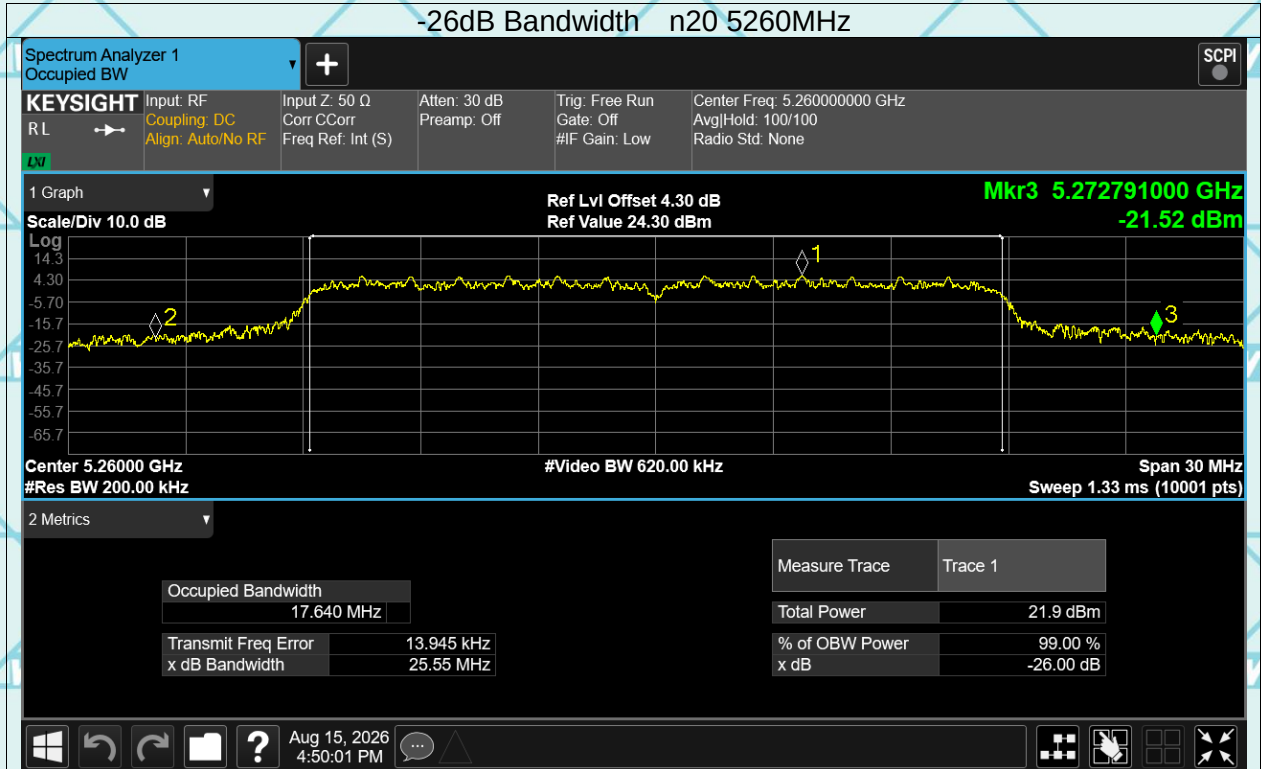



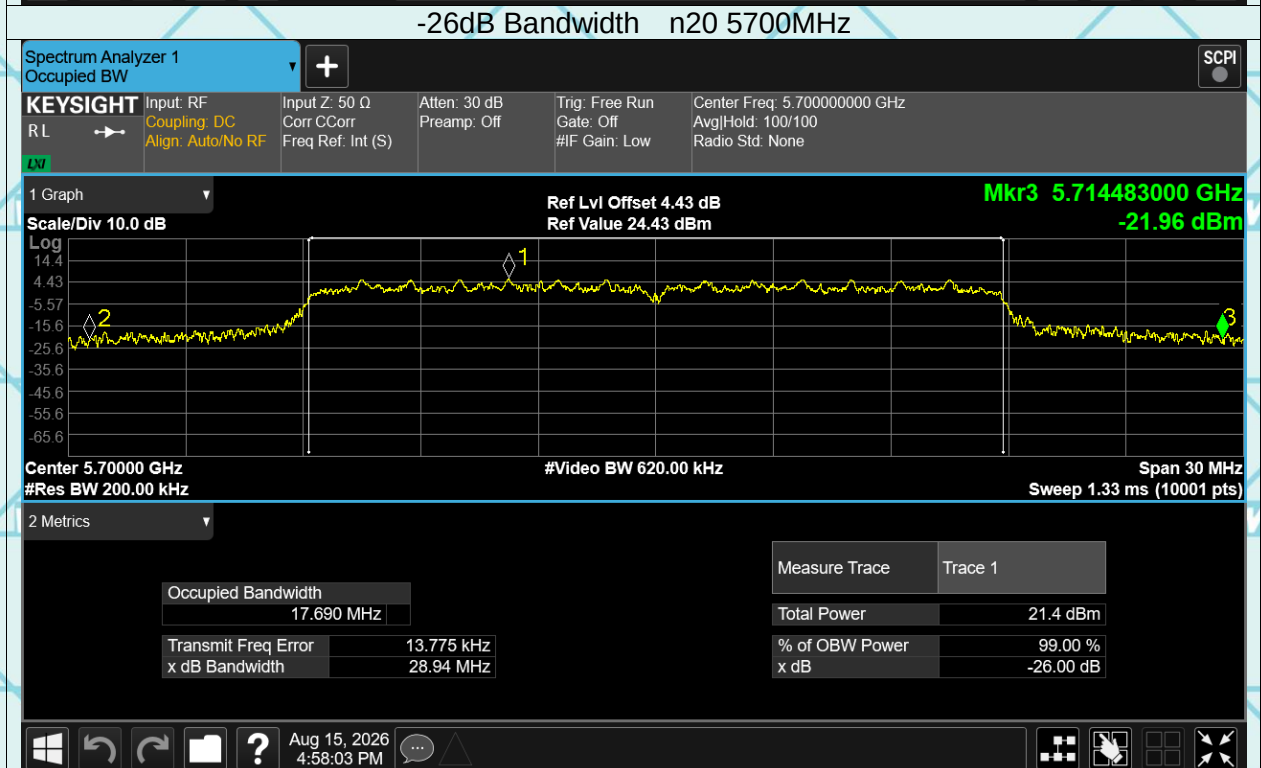



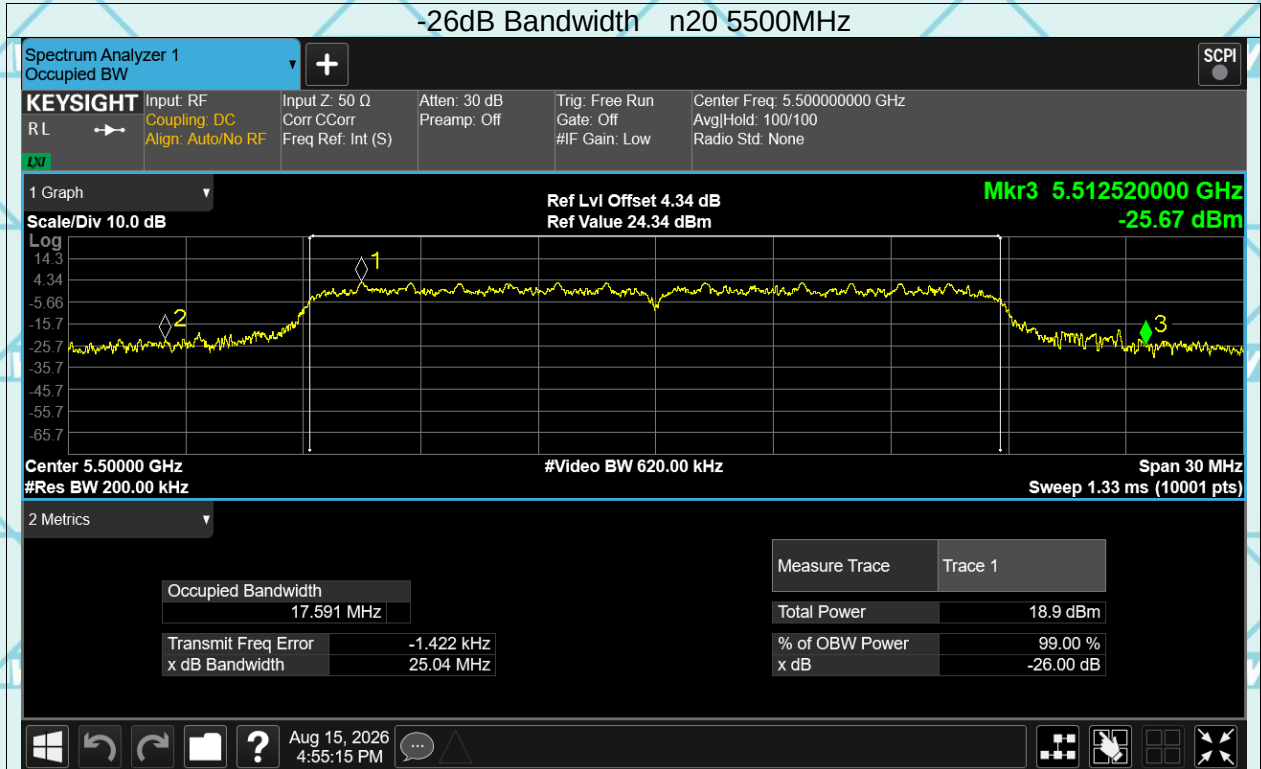



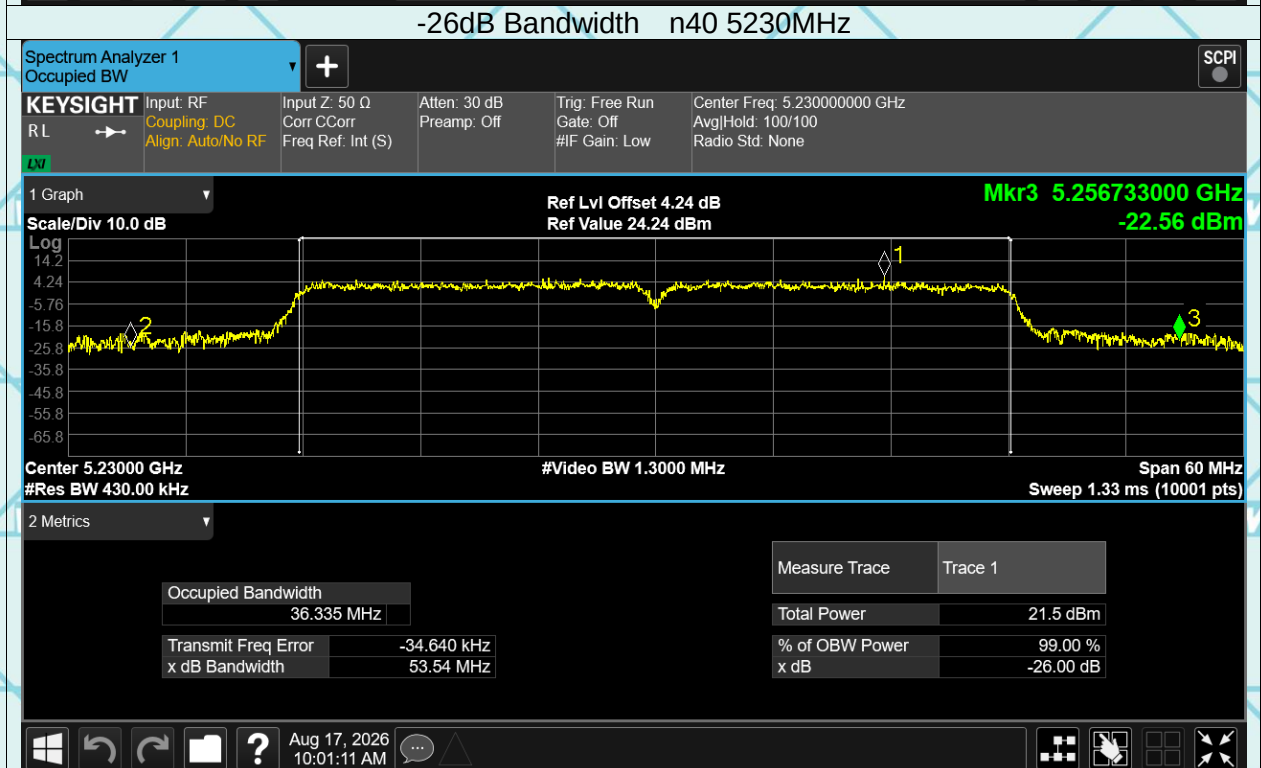



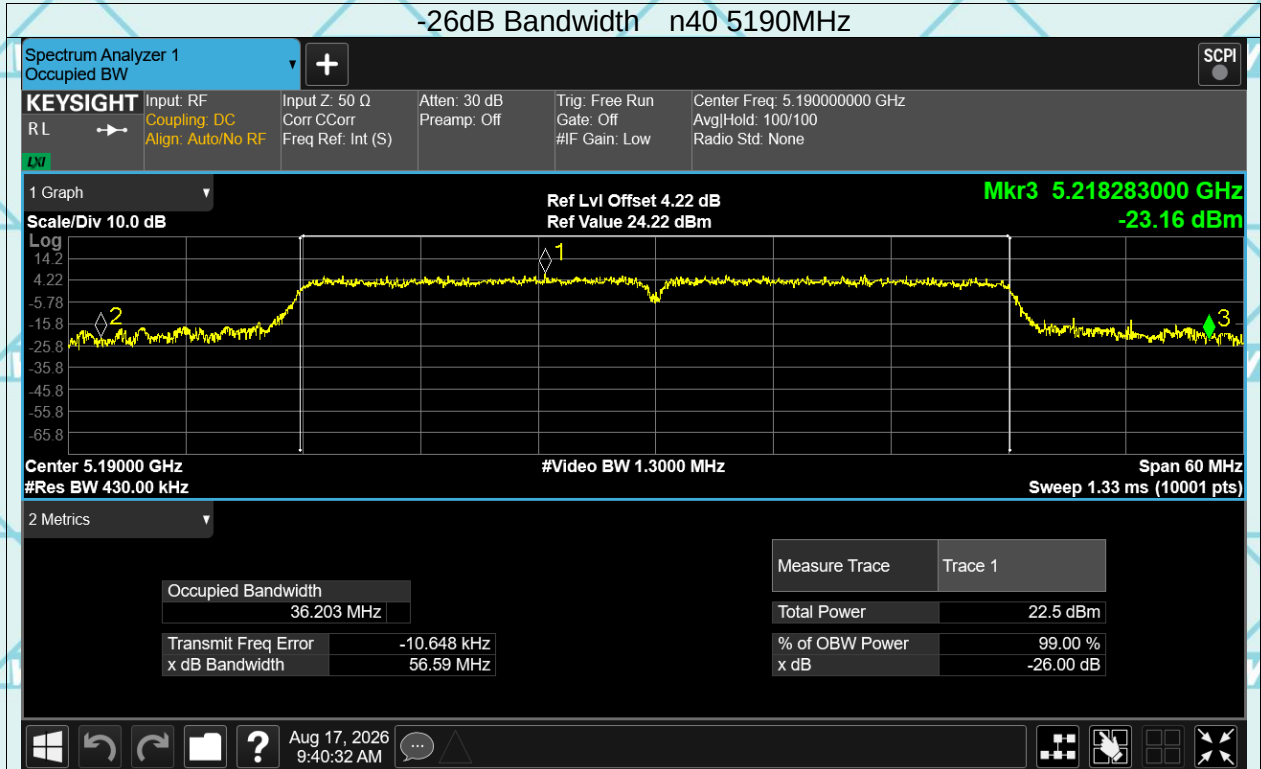


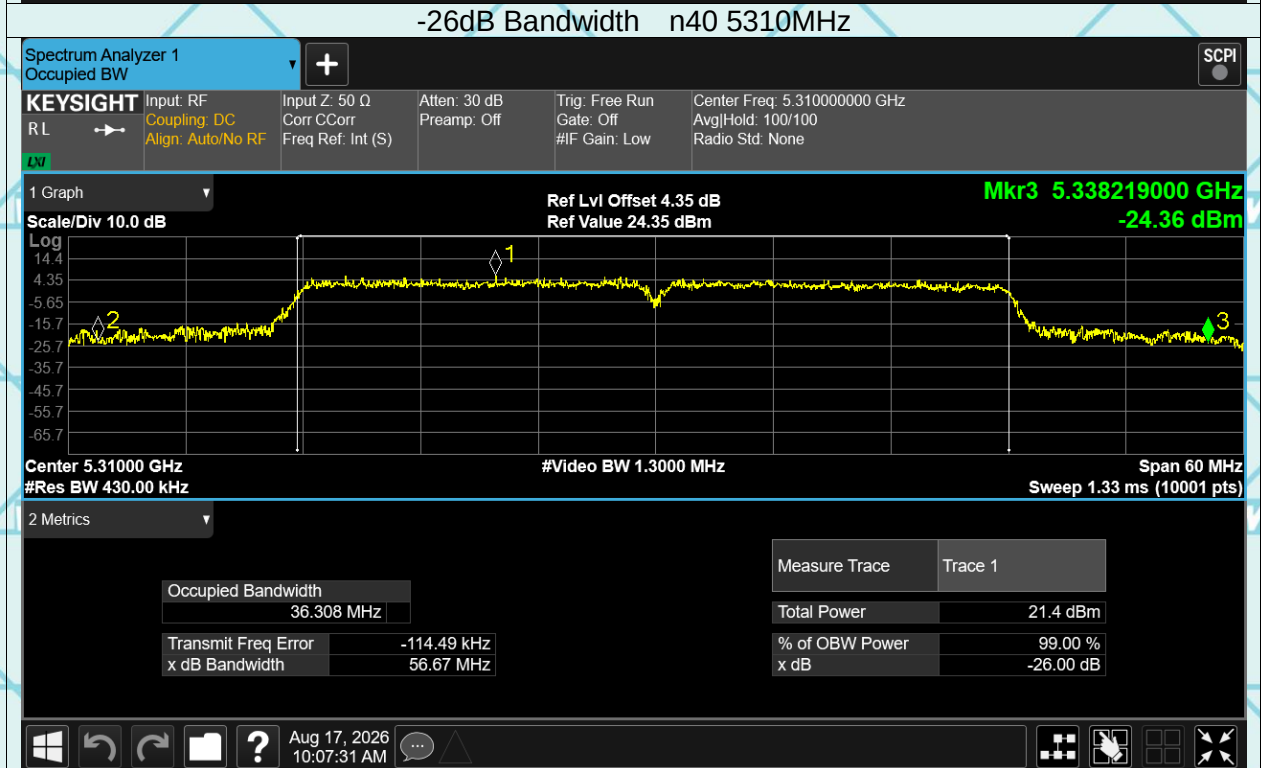
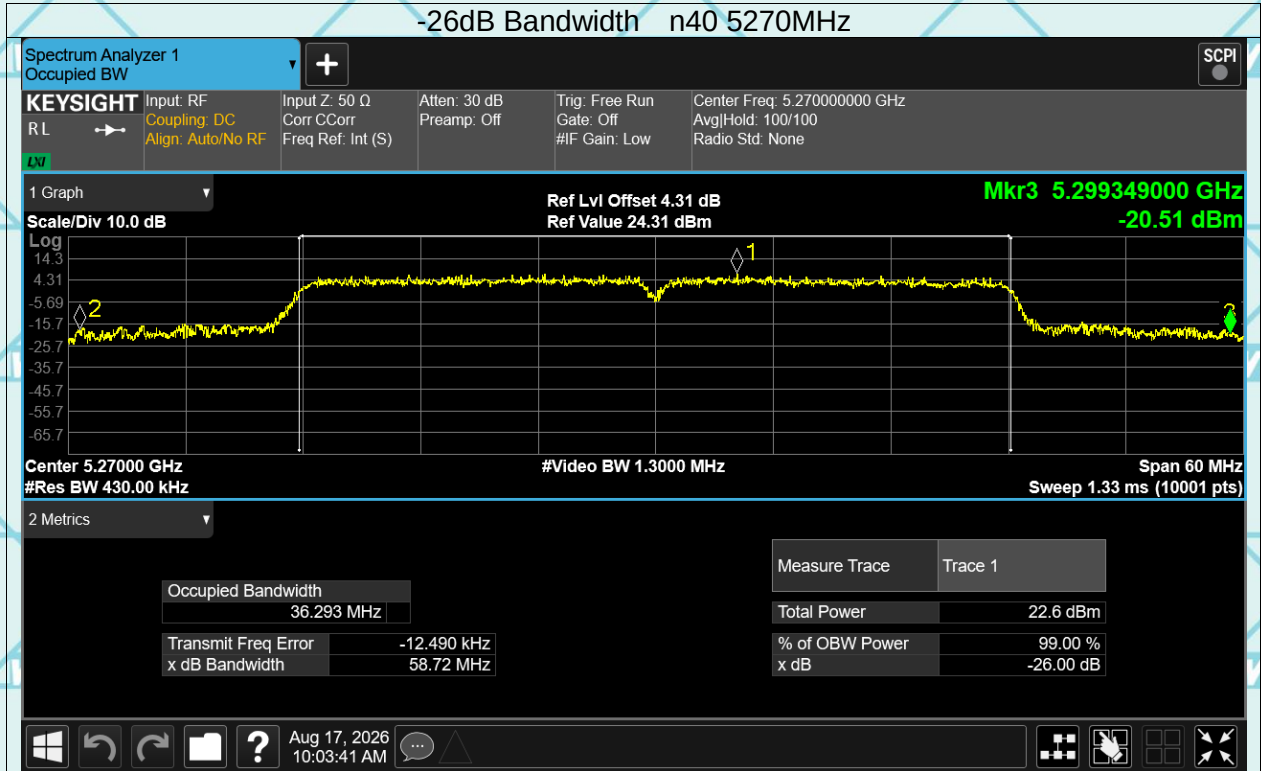


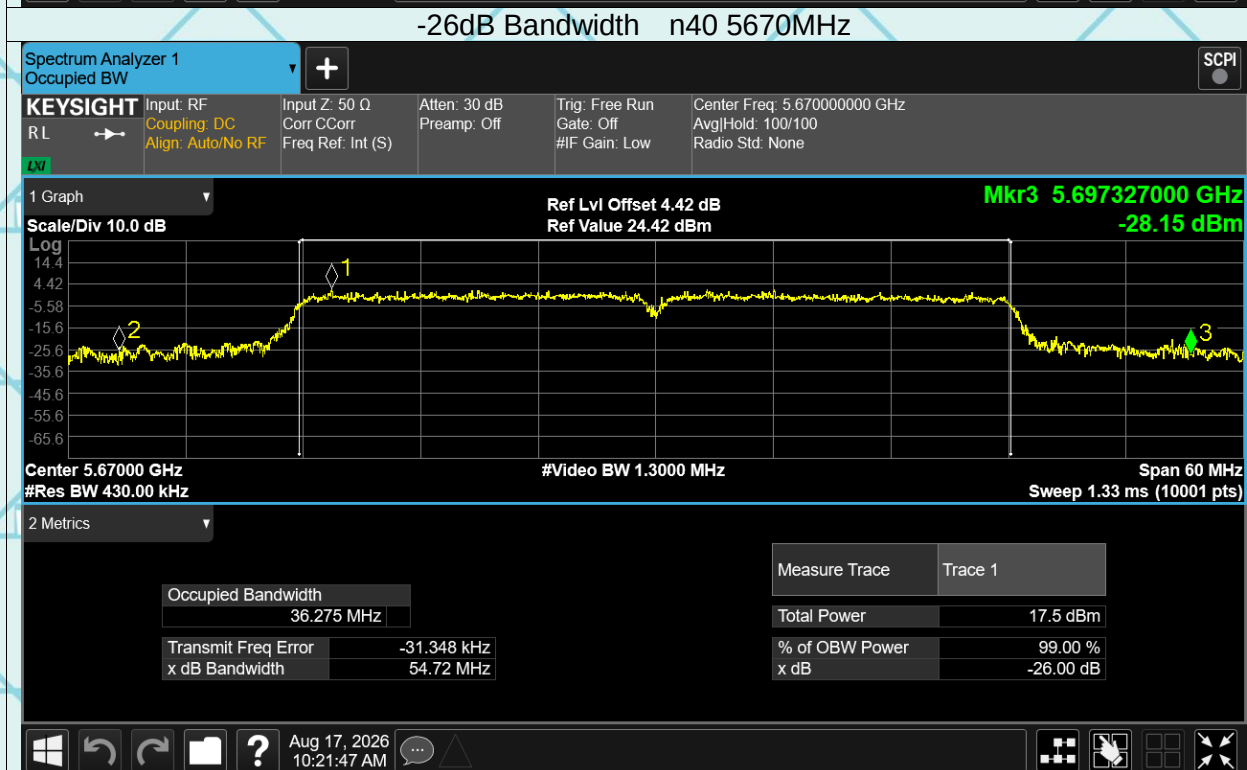
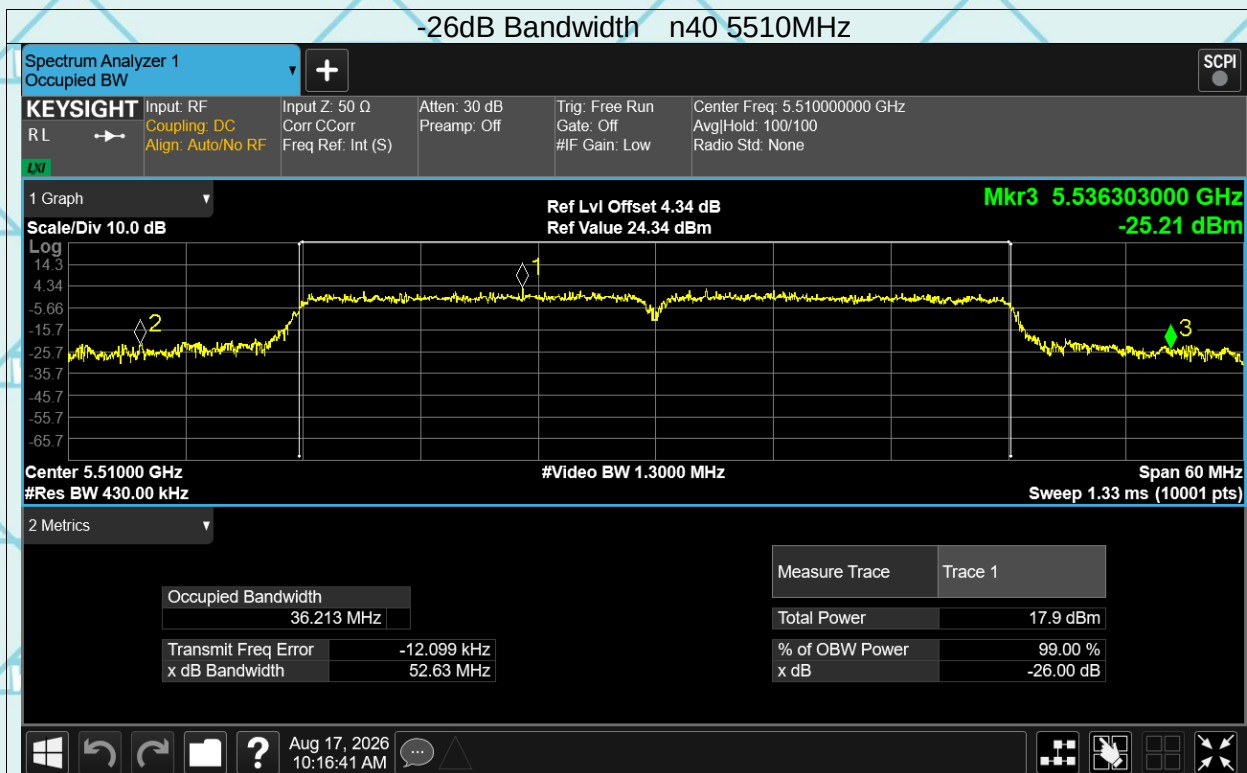


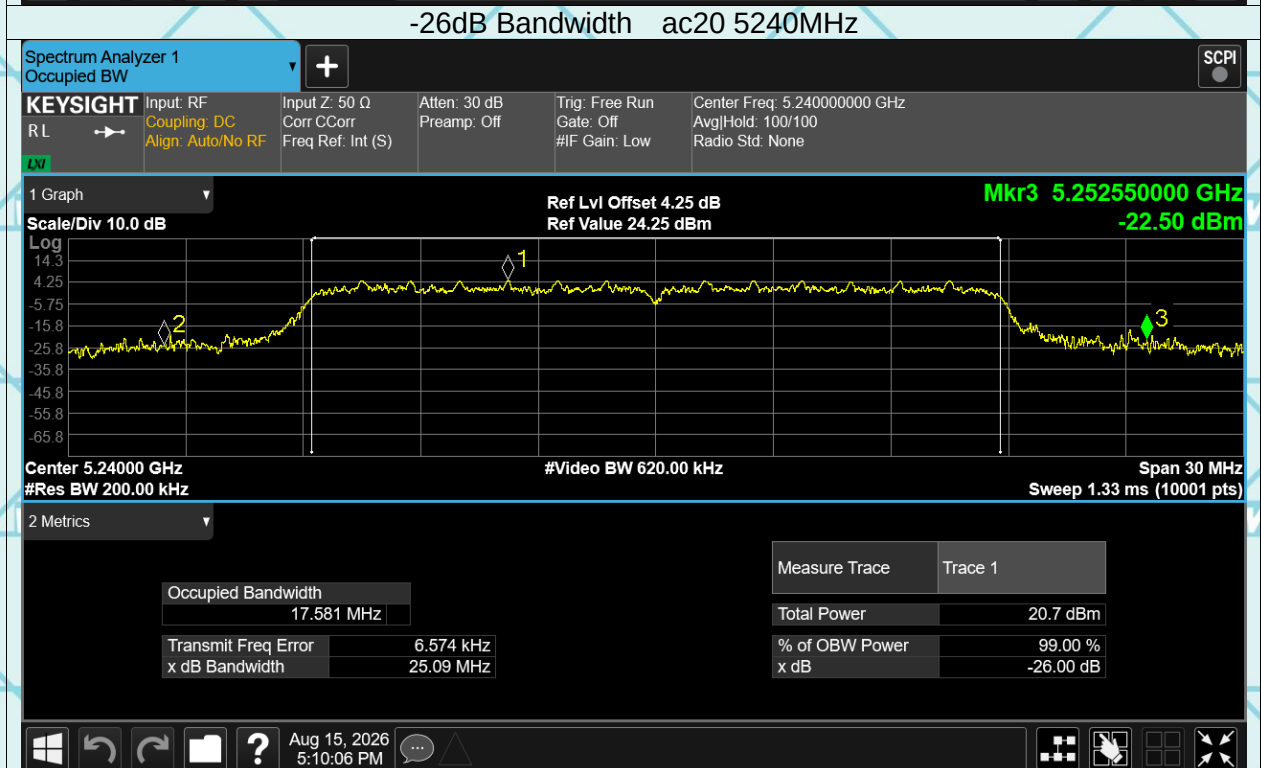
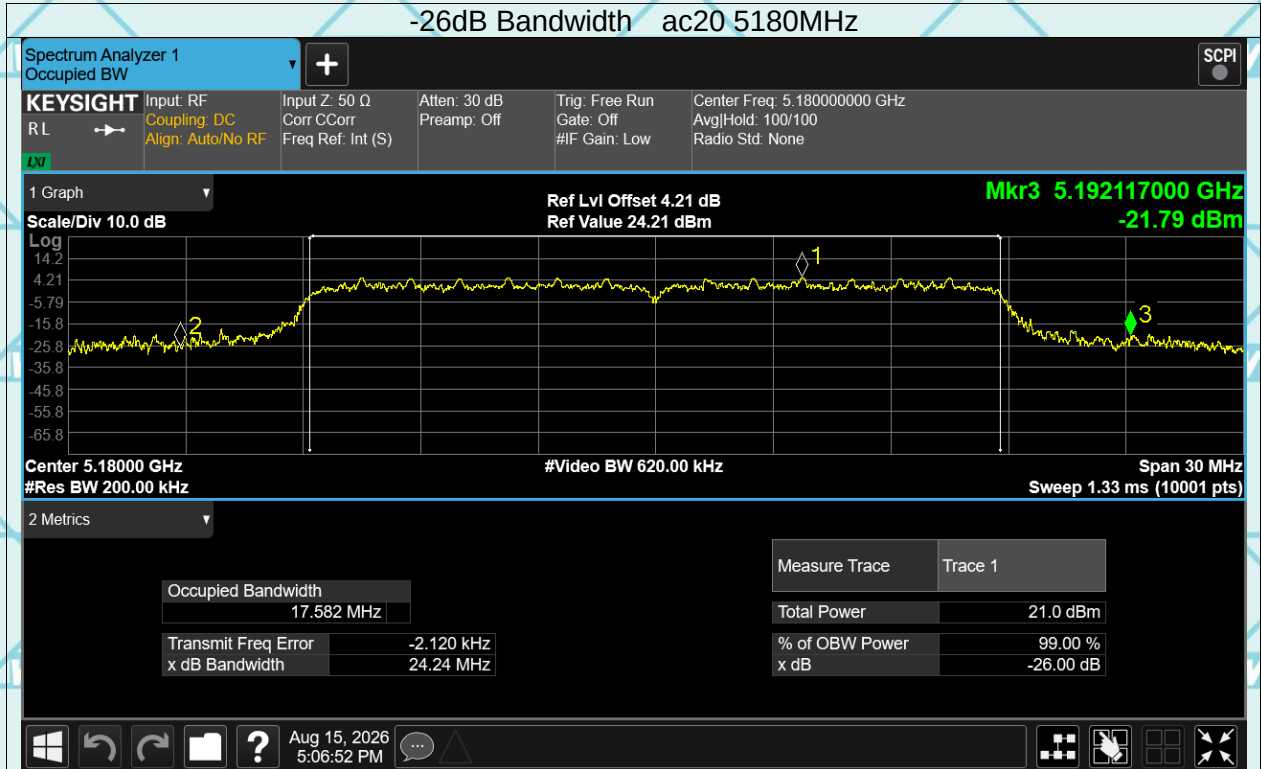


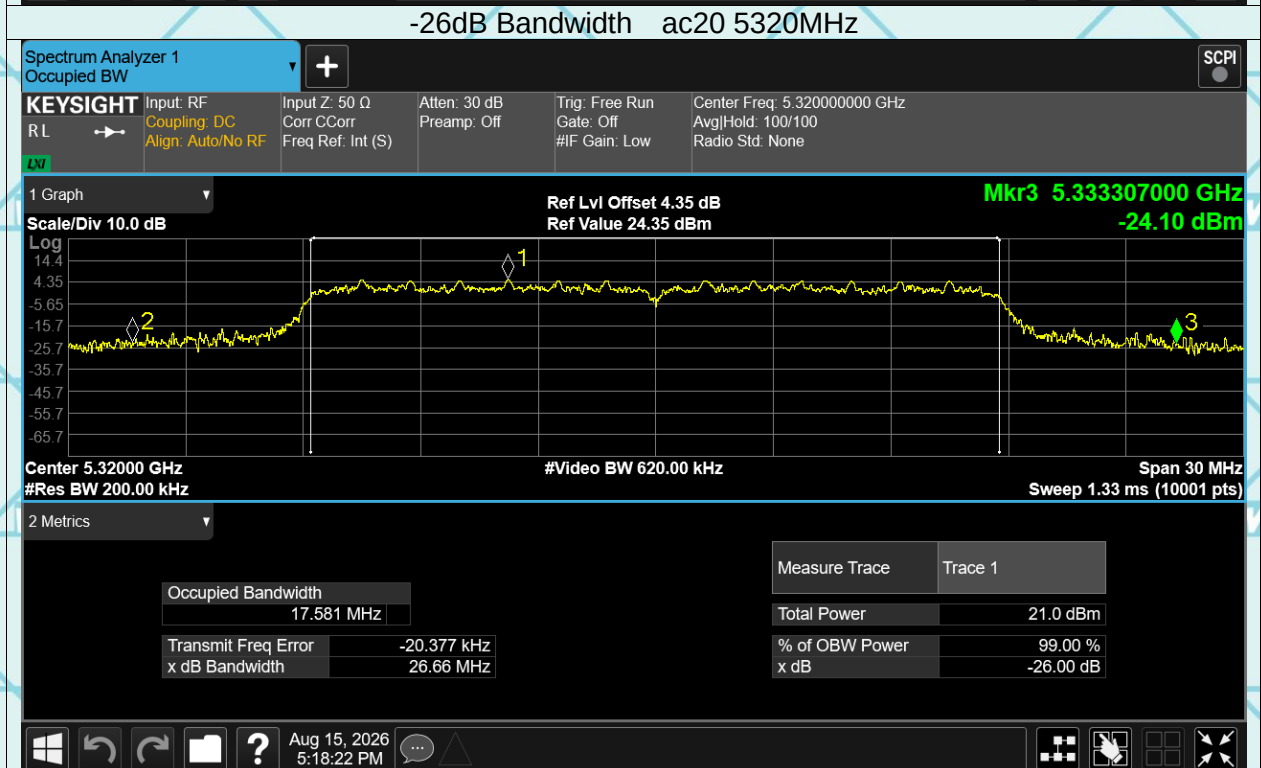
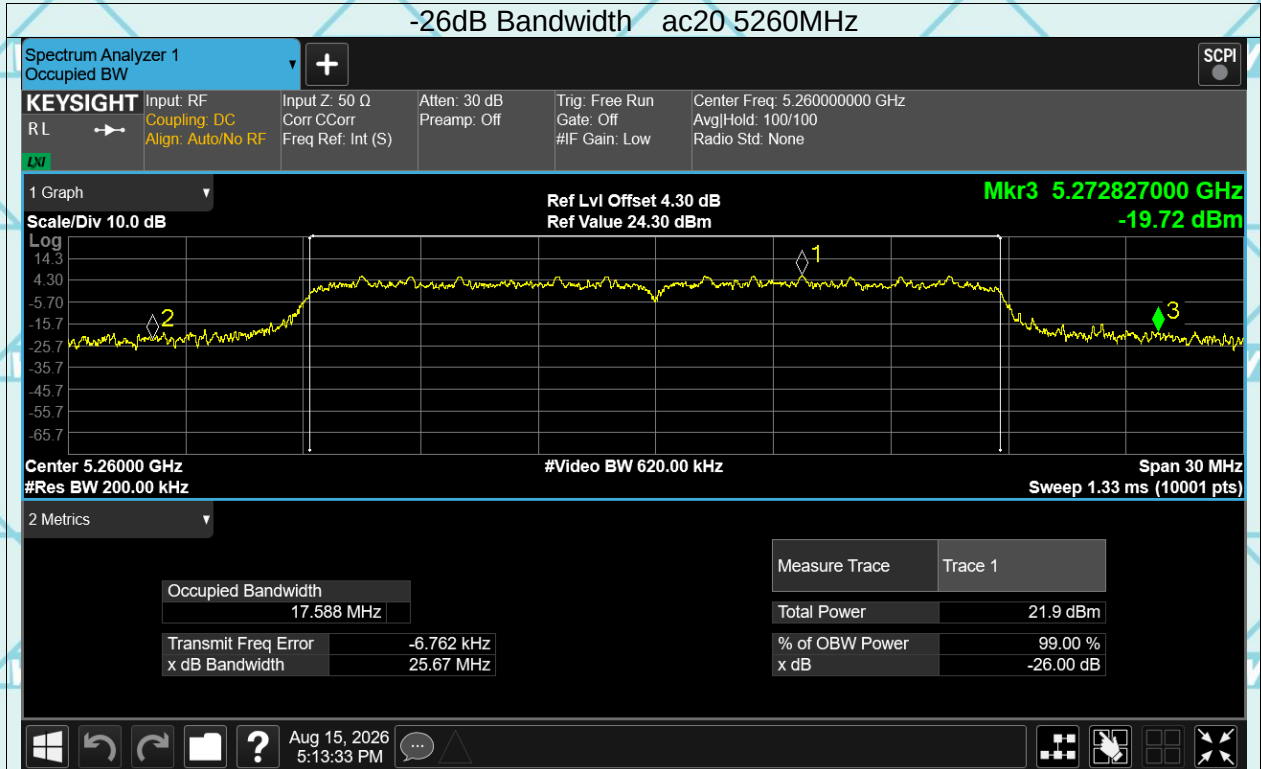


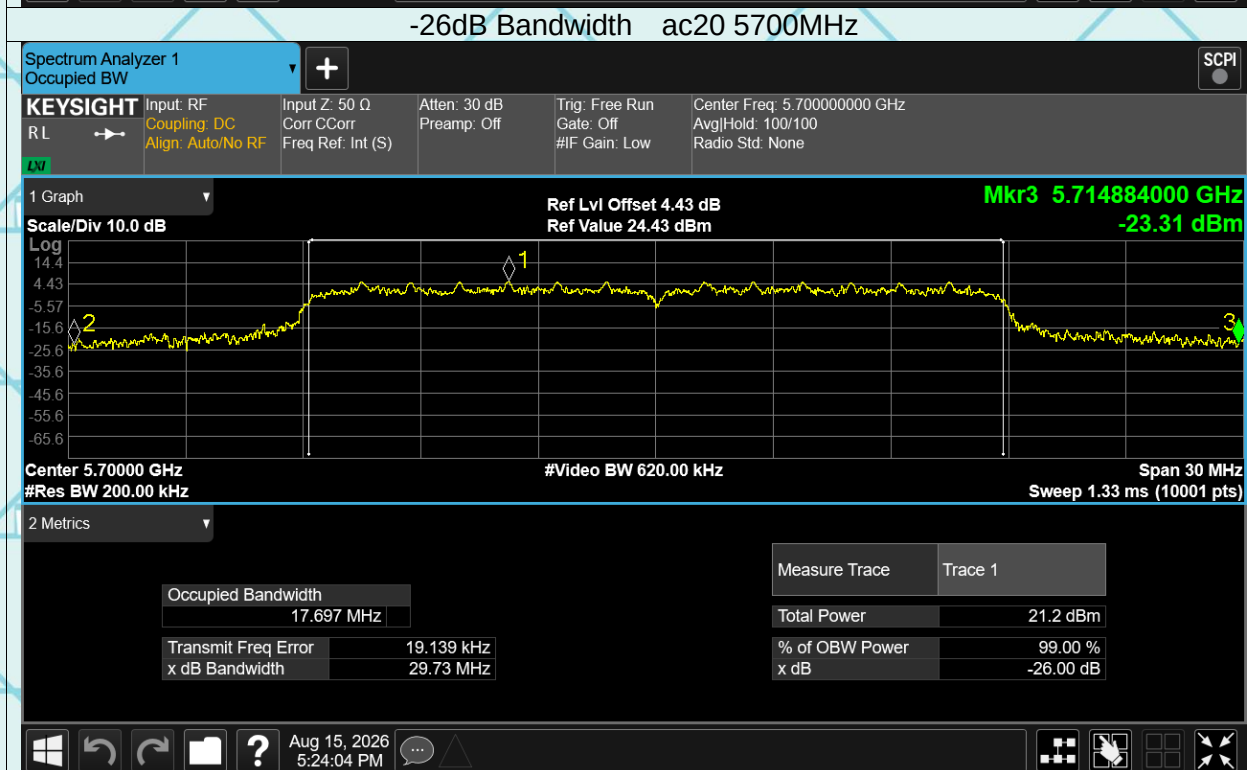
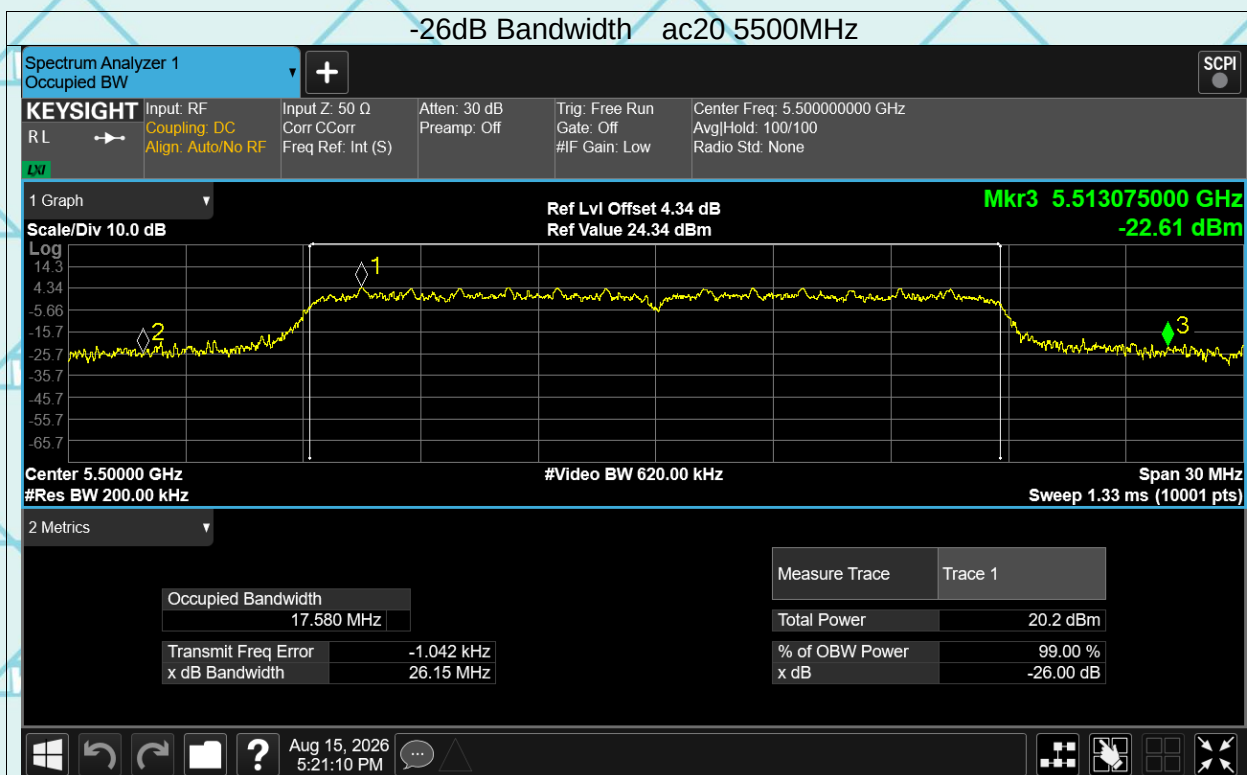


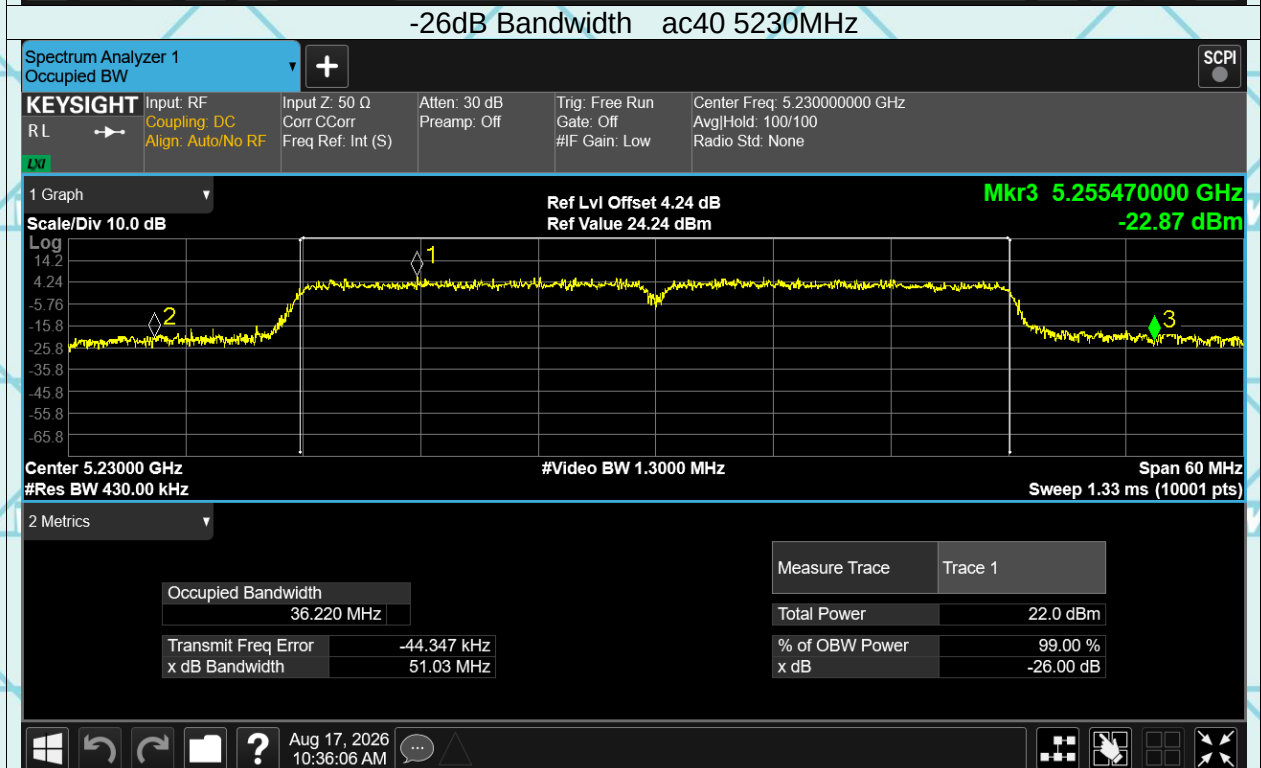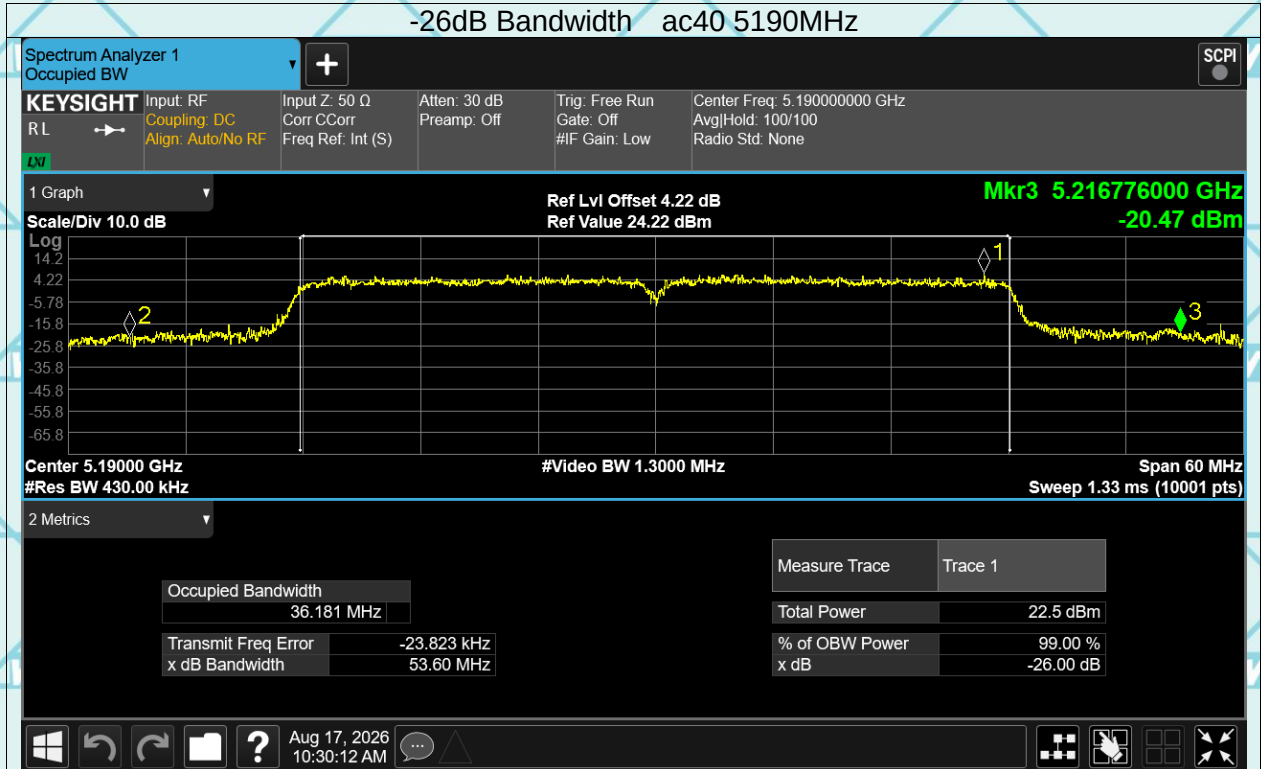

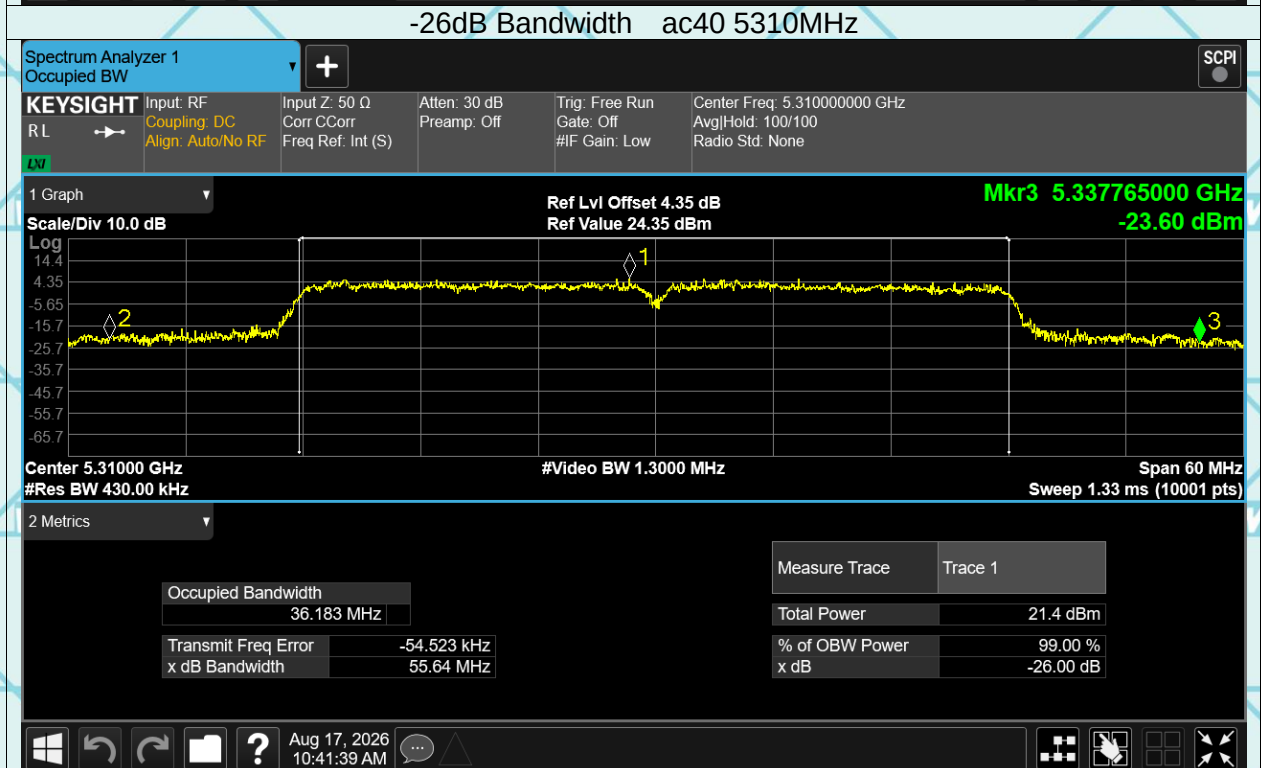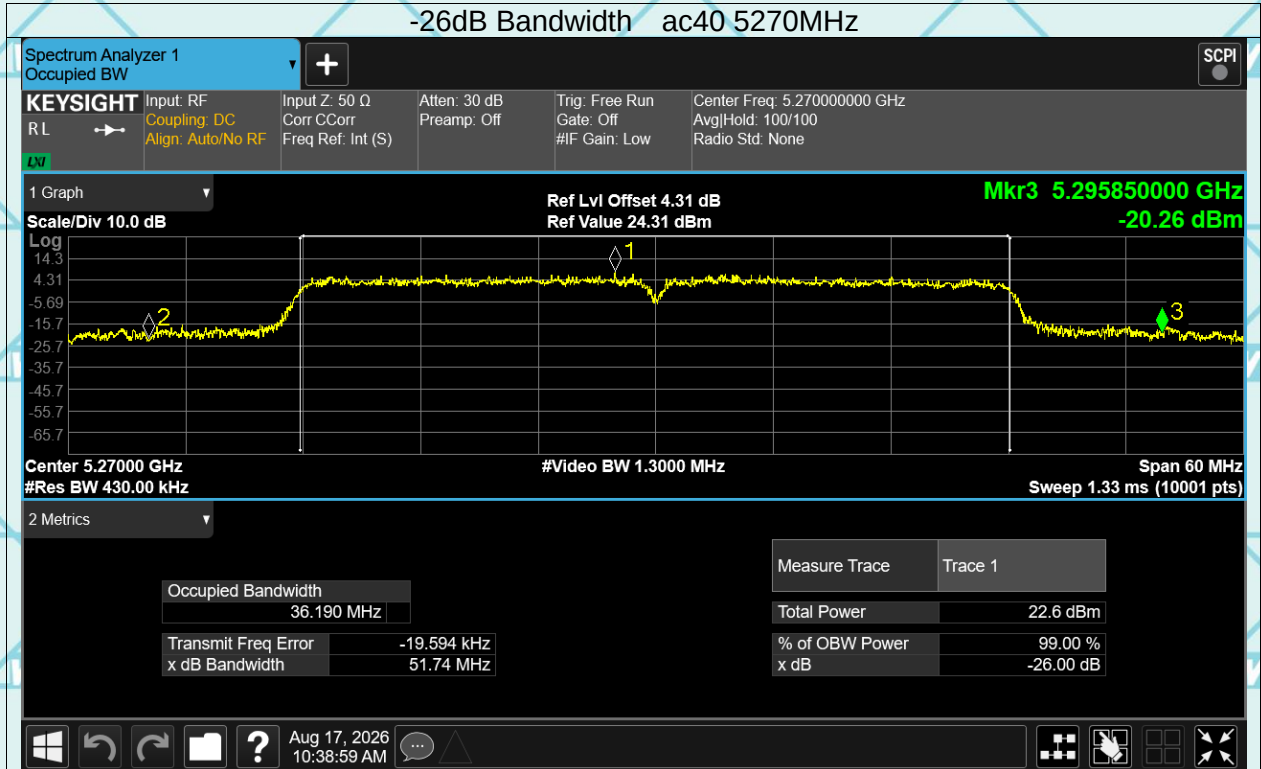

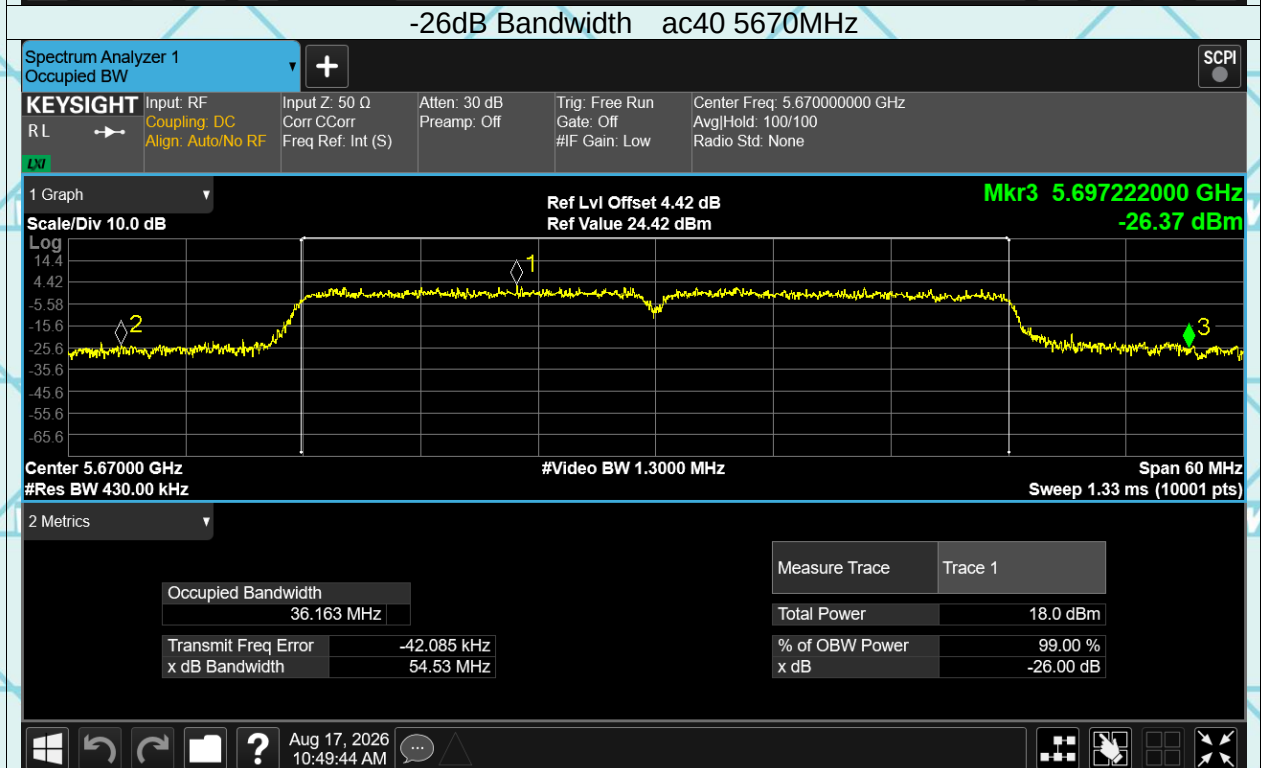
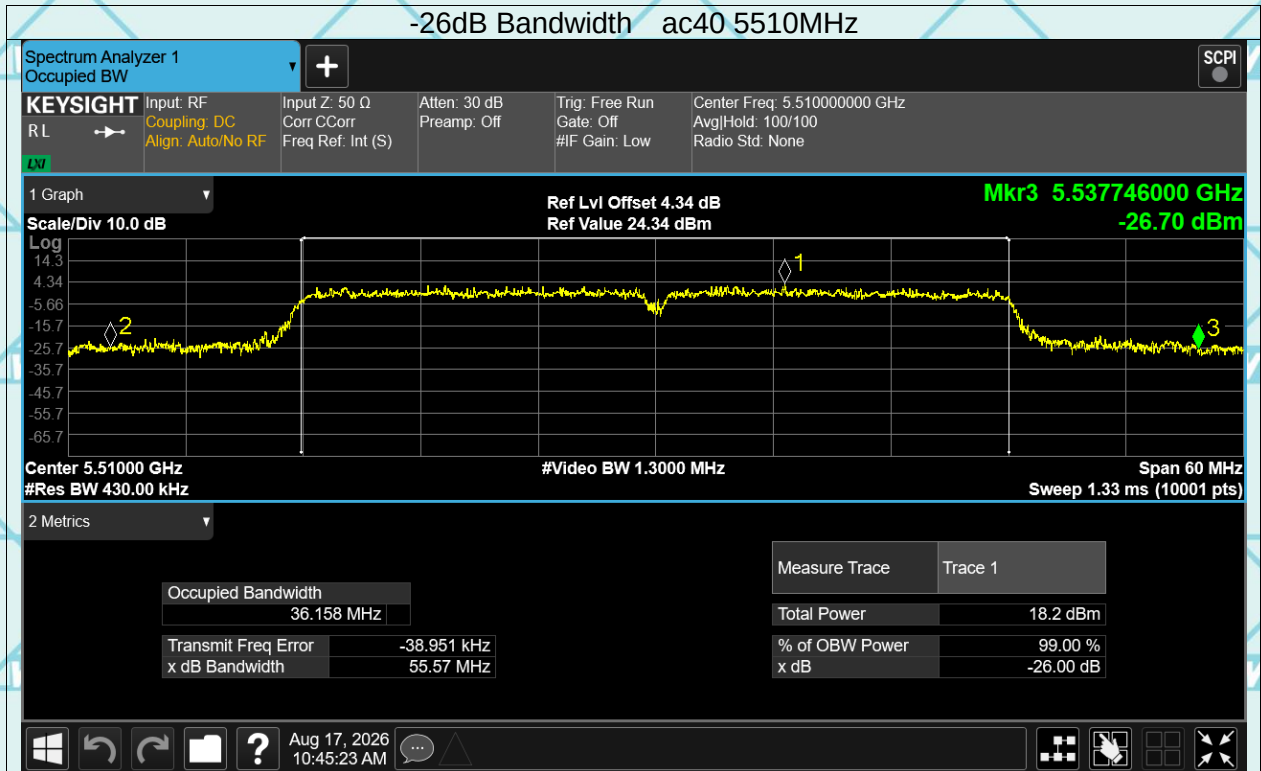


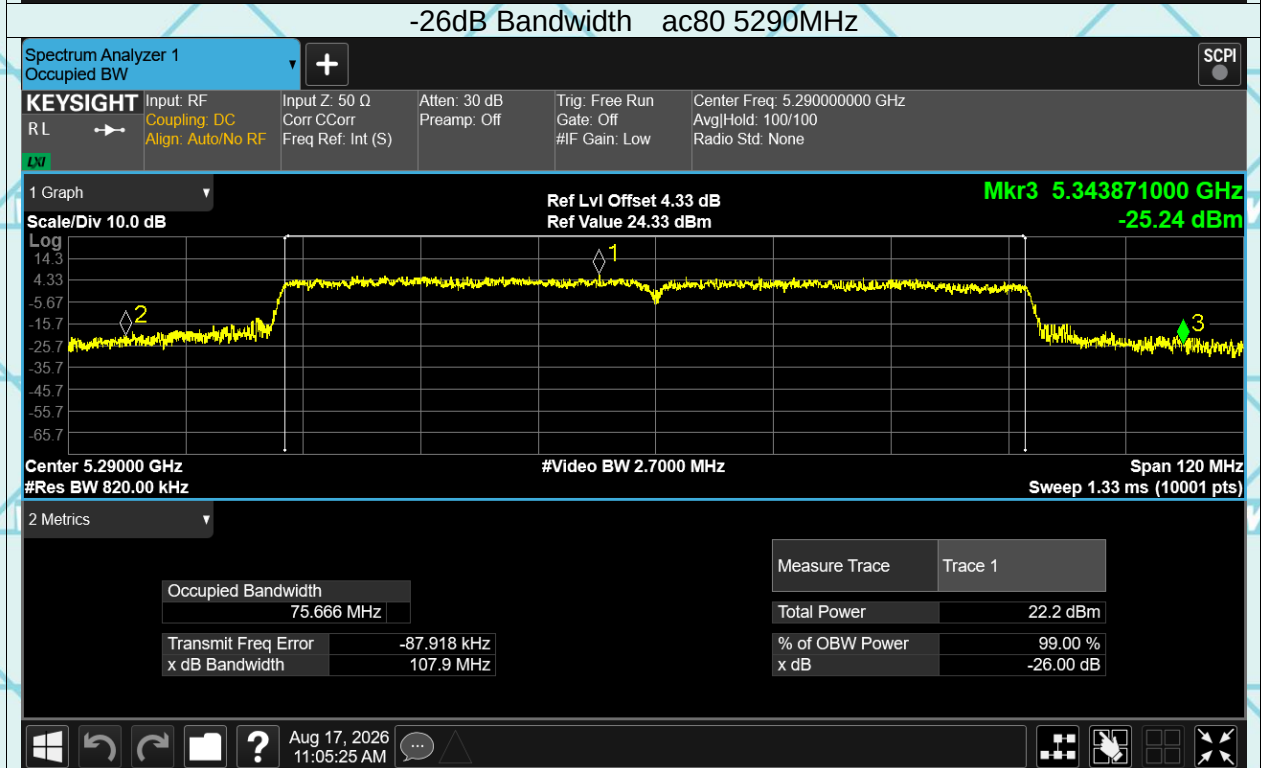
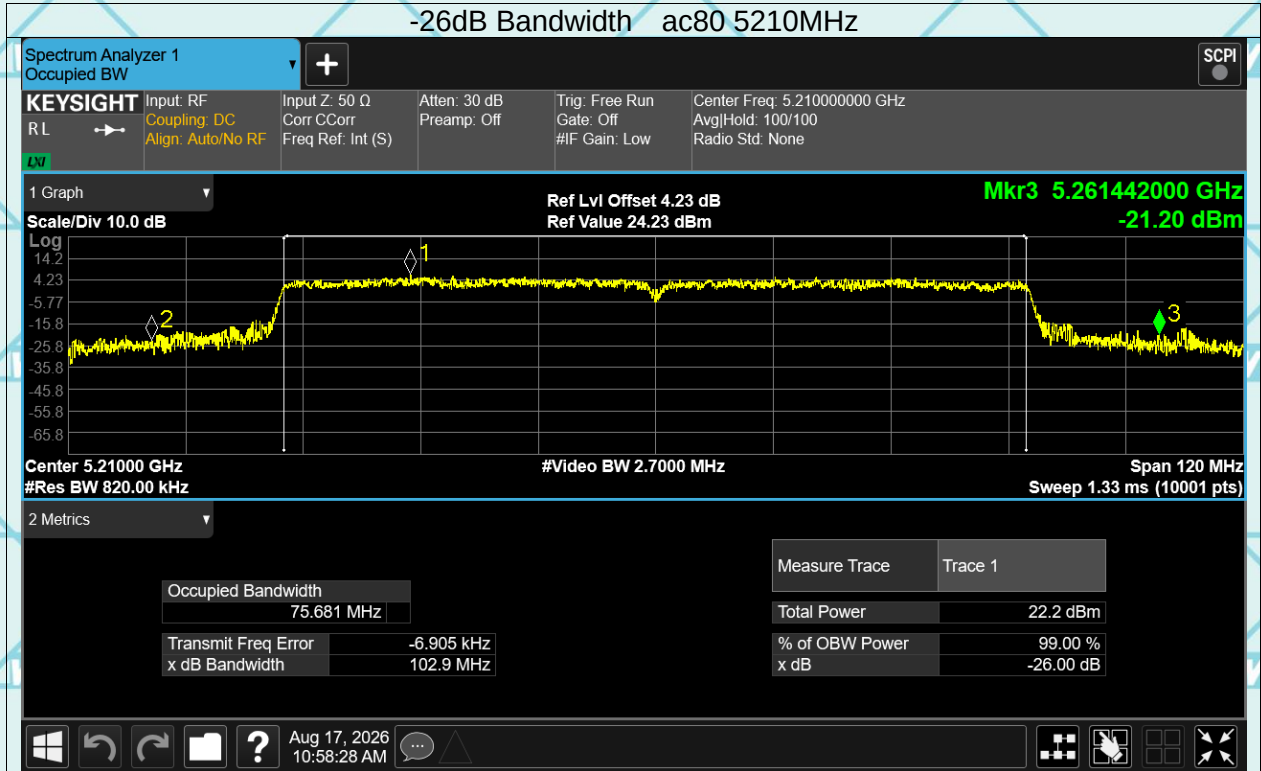


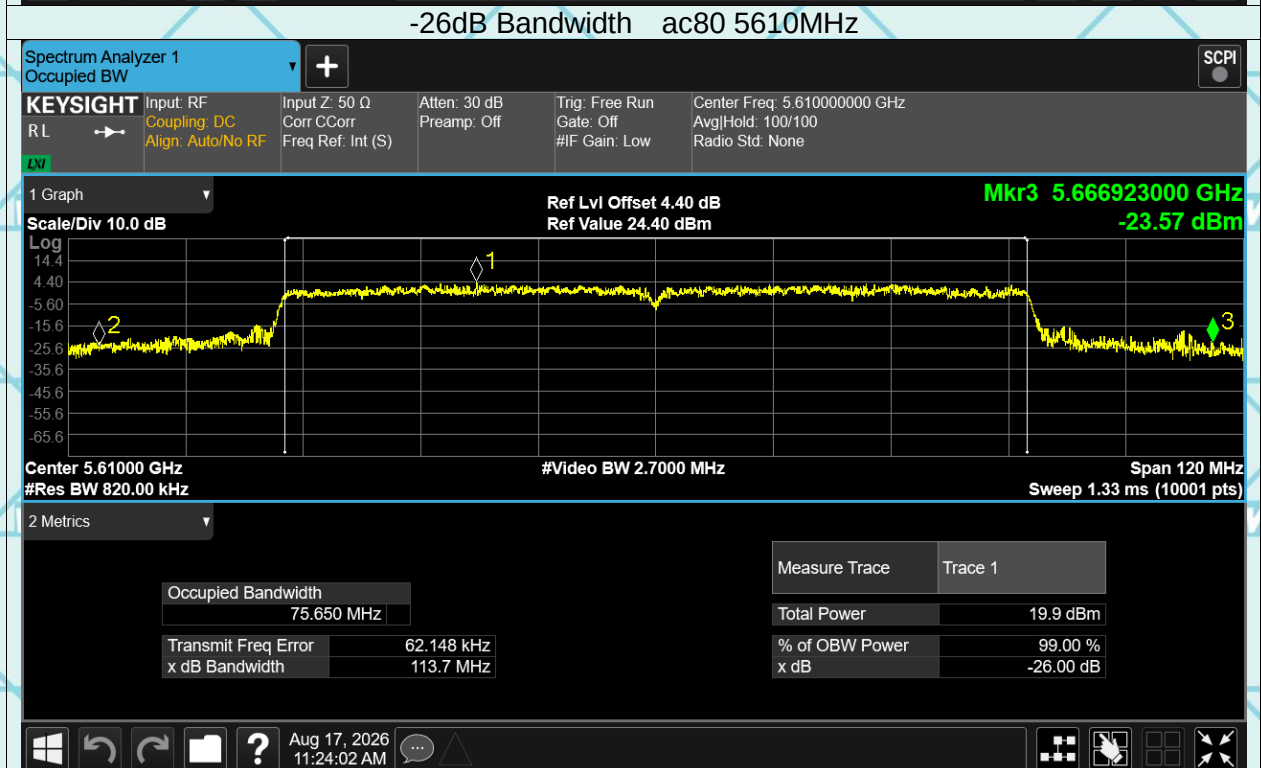
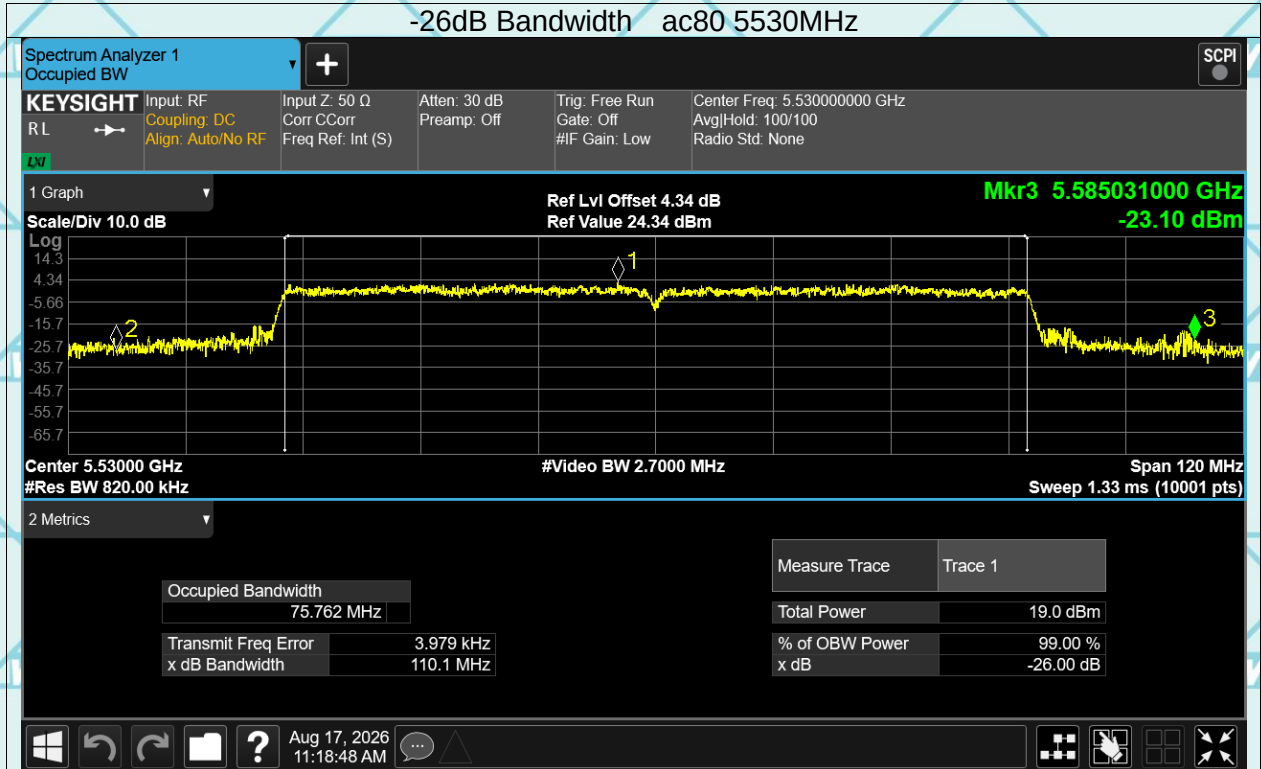




Report No.: WSCT-ANAB-R&E260800068A-Wi-Fi2 Issued Date: 09 October 2026



-6dB&99% Bandwidth

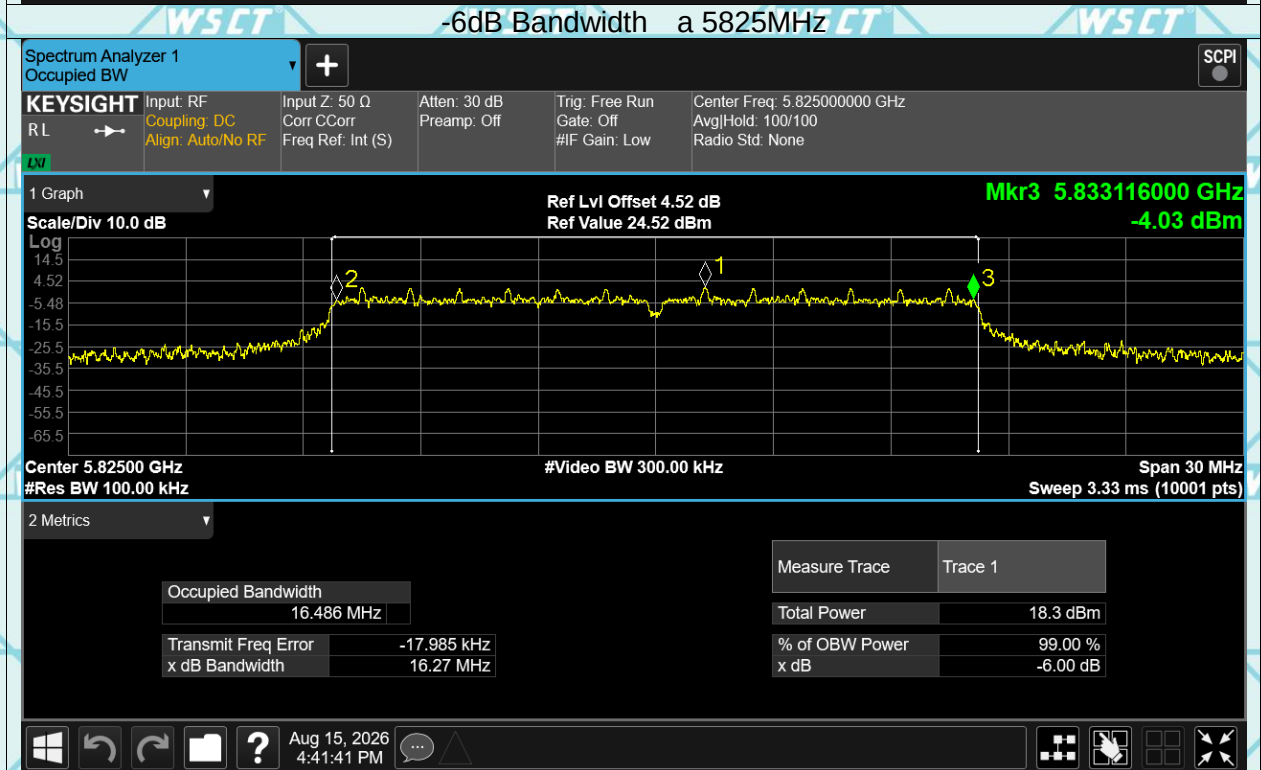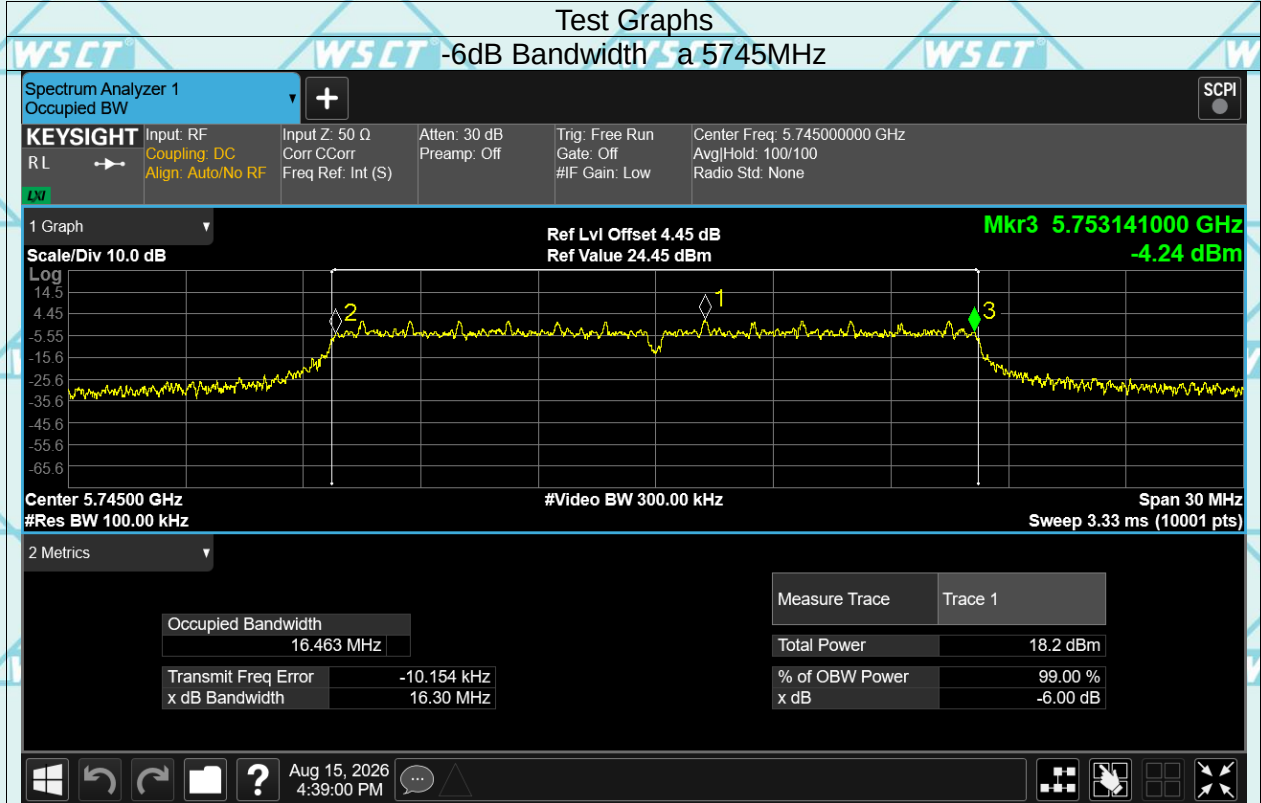


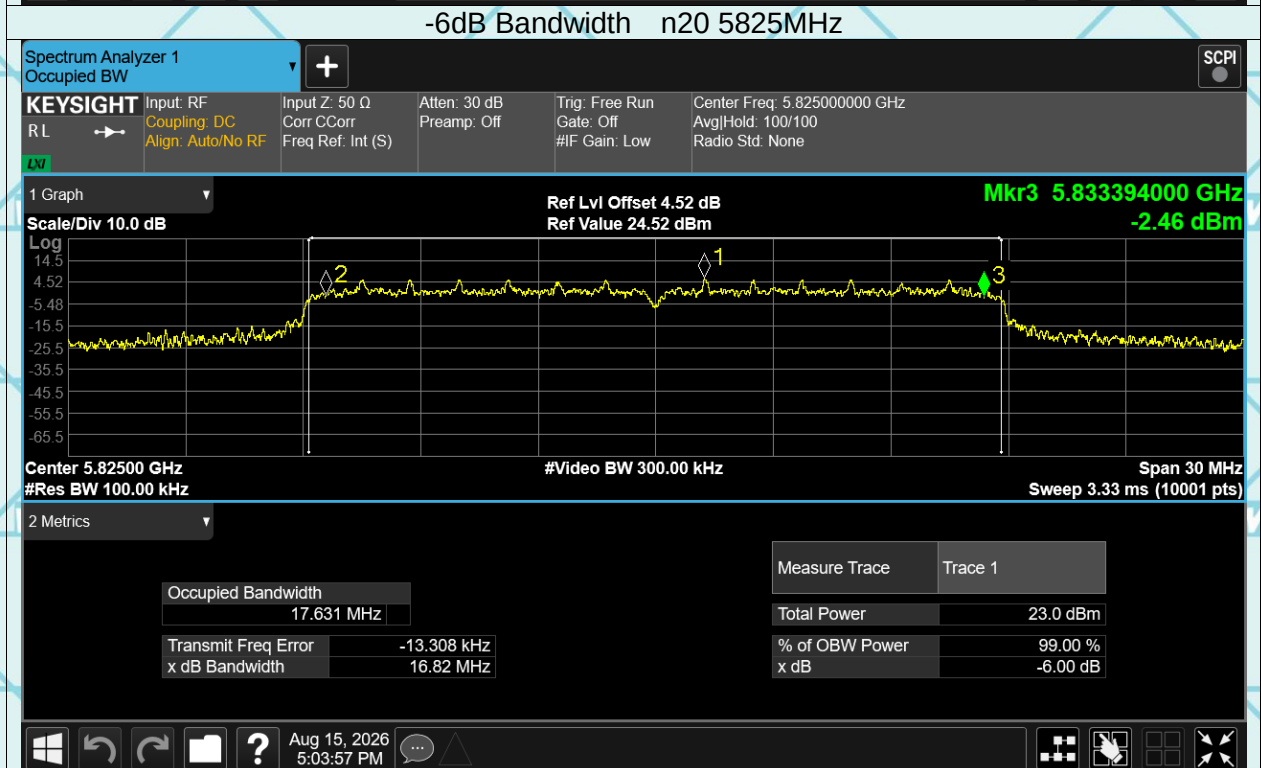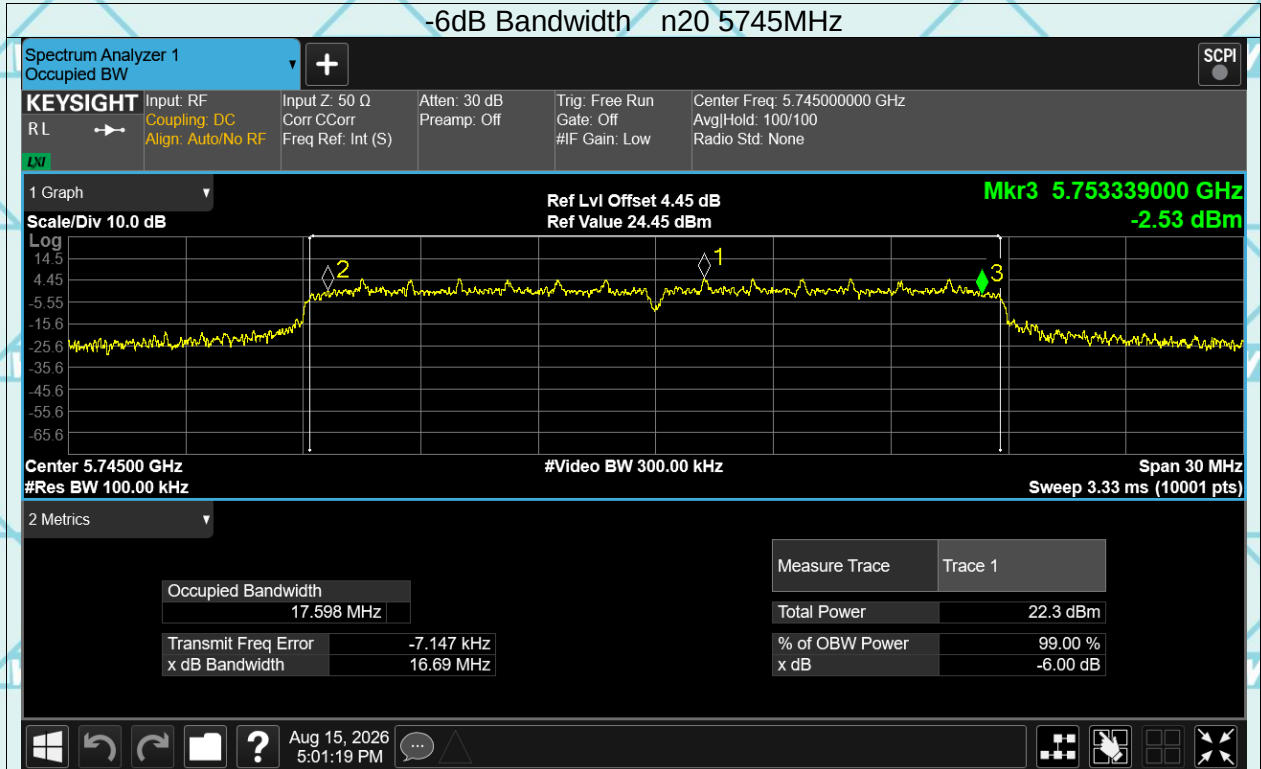

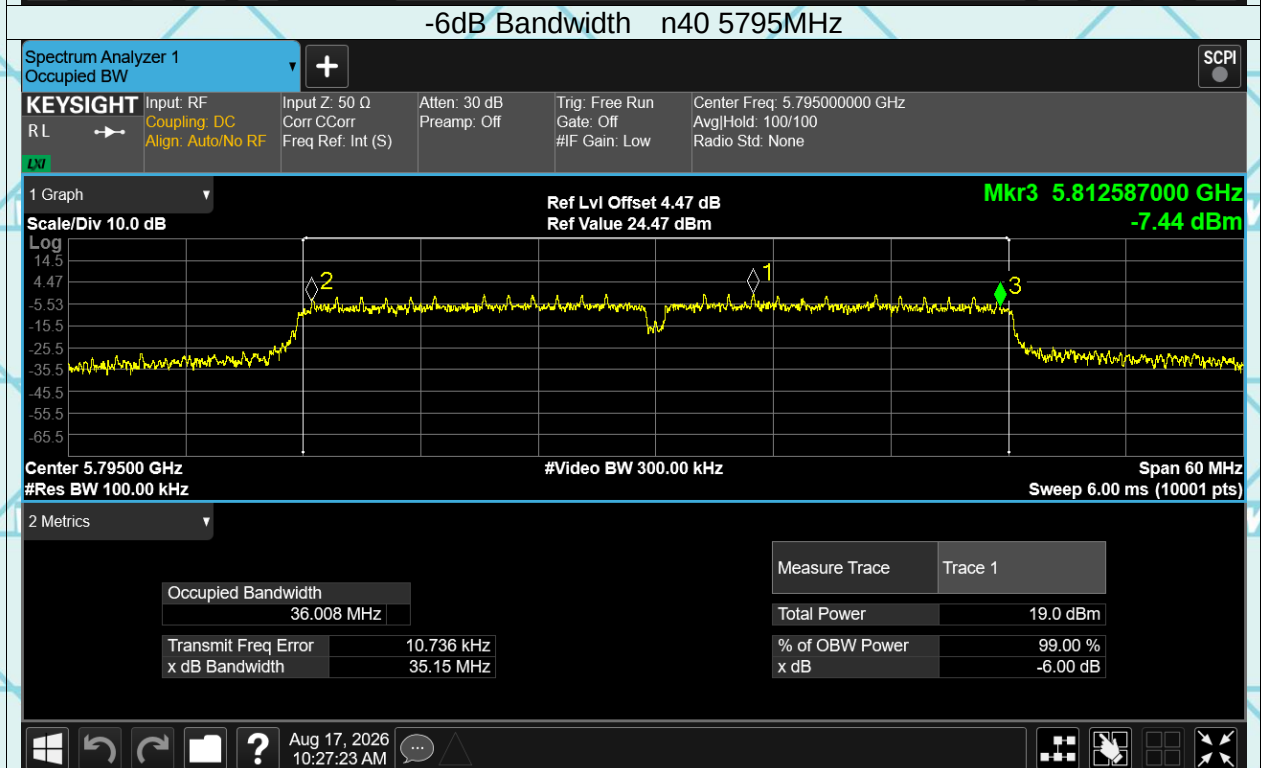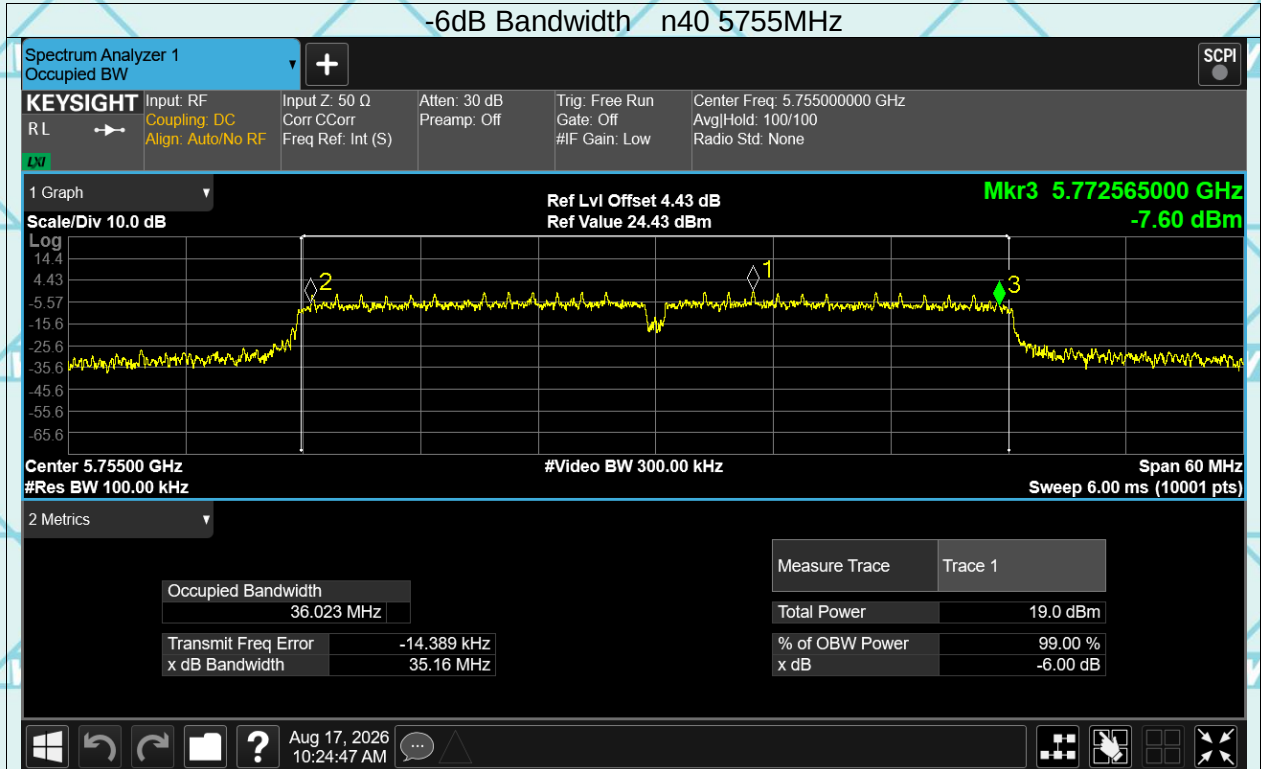

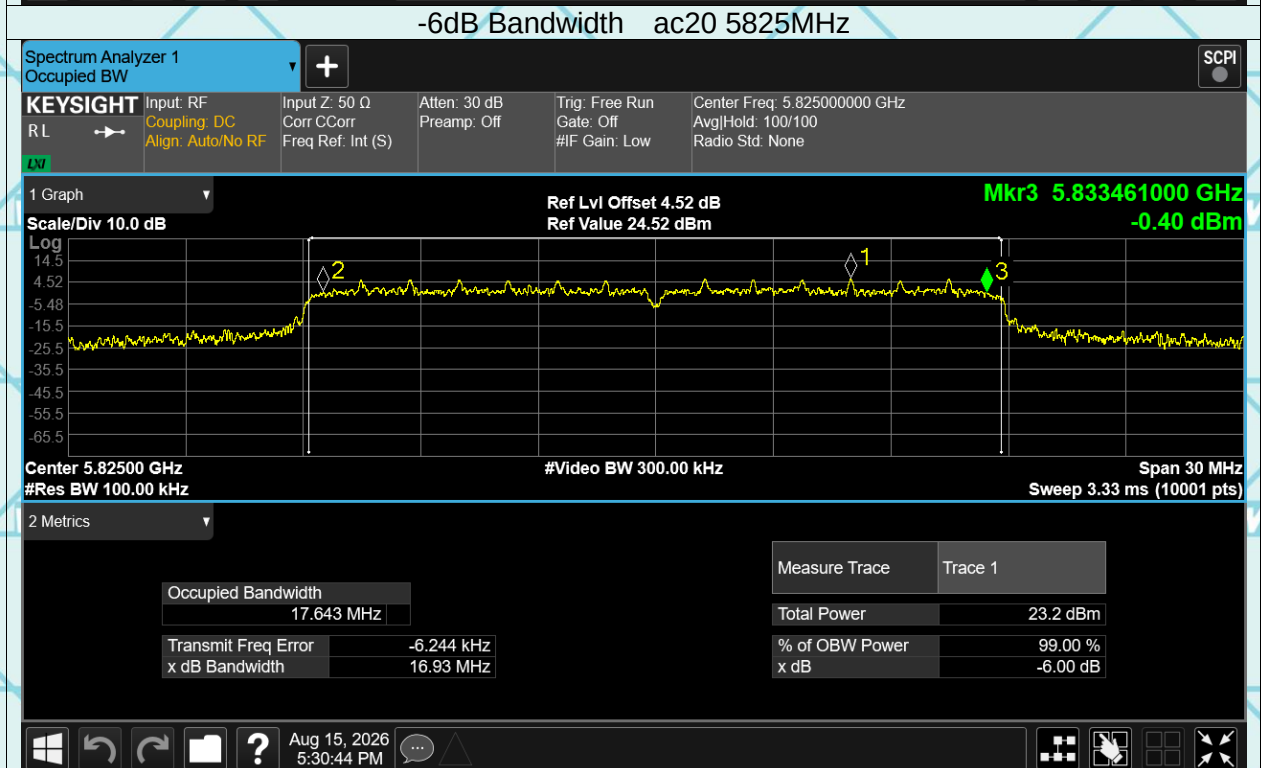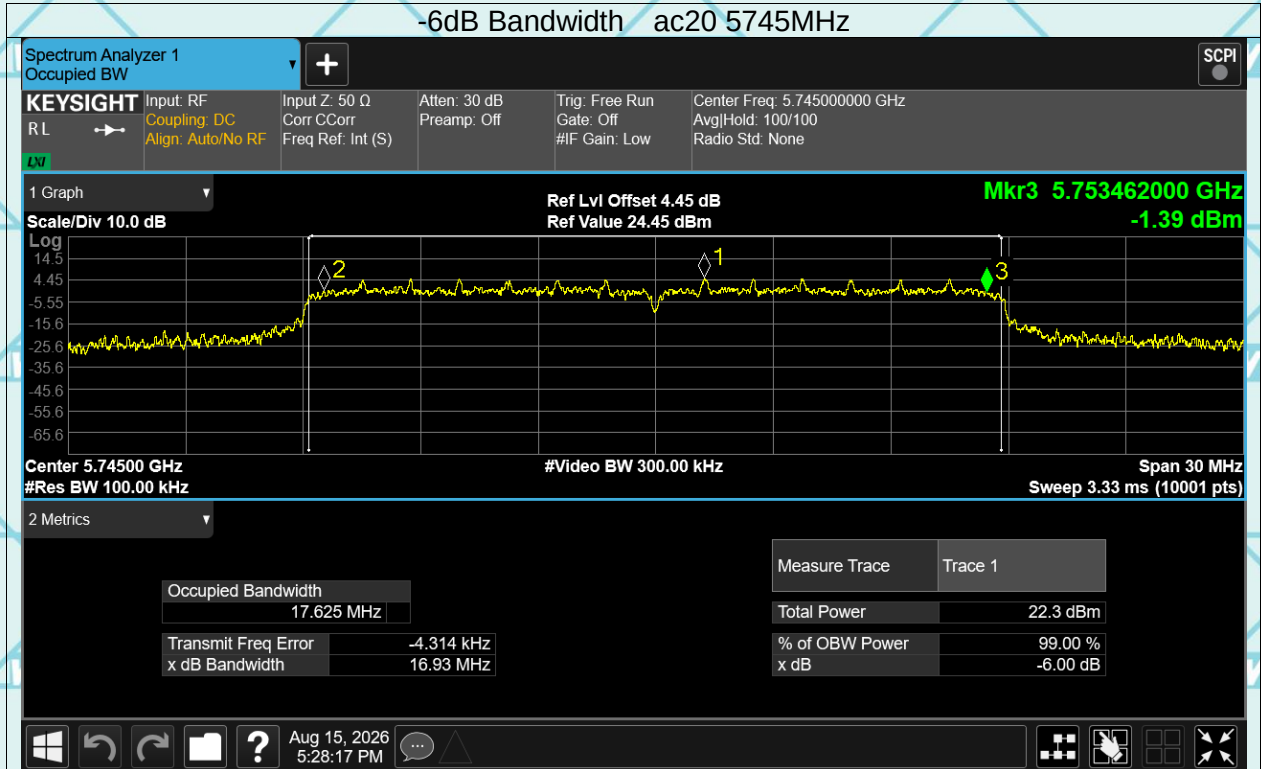

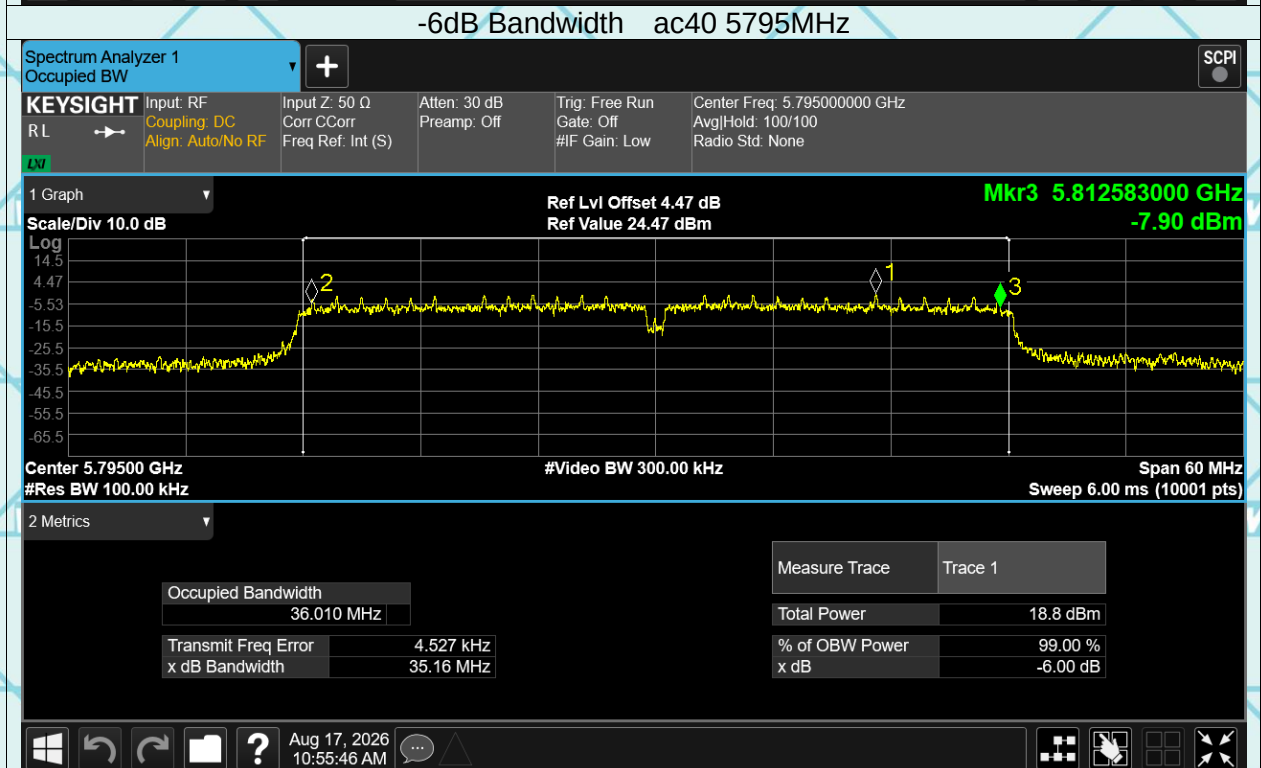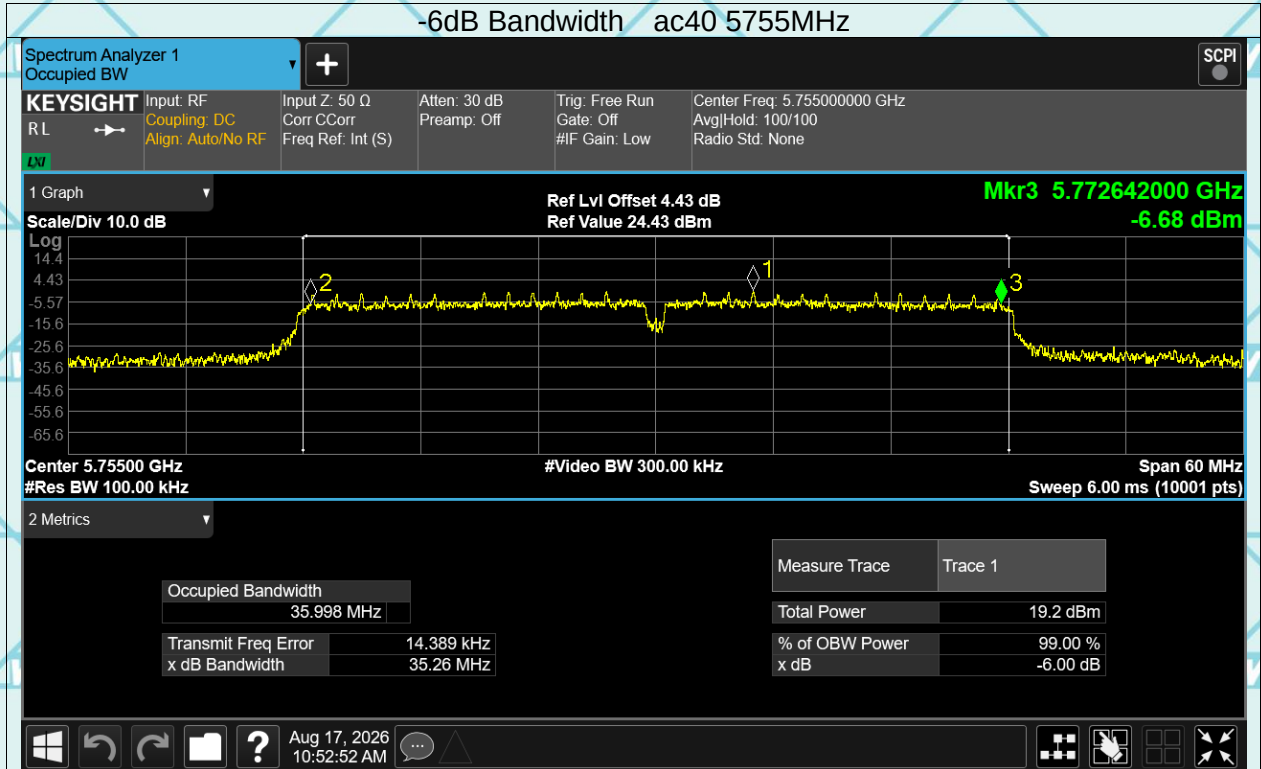

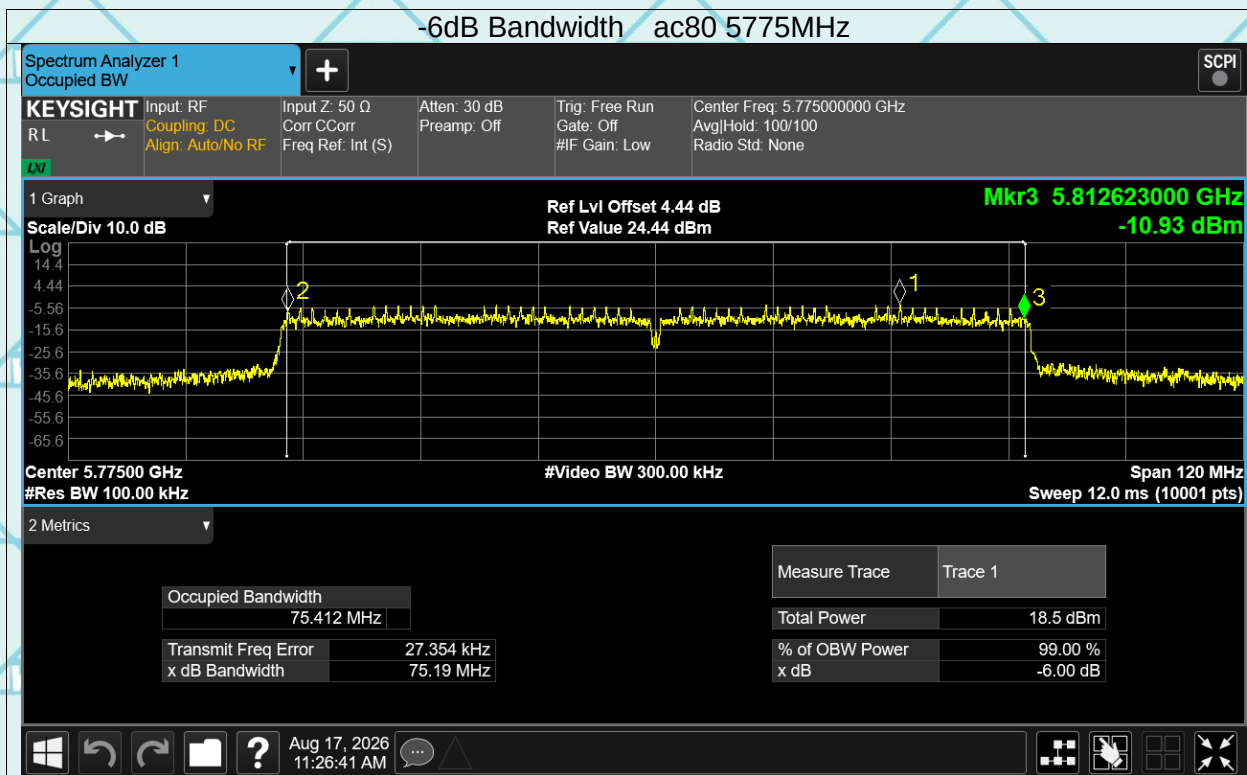

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.85V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	14.17	2.52	16.69	24	Pass
a	5240	13.36	2.52	15.88	24	Pass
a	5260	14.59	2.52	17.11	24	Pass
a	5320	13.35	3.07	16.42	24	Pass
a	5500	10.34	2.56	12.9	24	Pass
a	5700	9.65	2.56	12.21	24	Pass
a	5745	10.6	2.54	13.14	30	Pass
a	5825	10.61	2.52	13.13	30	Pass
n20	5180	13.78	2.56	16.34	24	Pass
n20	5240	13.44	3.11	16.55	24	Pass
n20	5260	13.97	2.56	16.53	24	Pass
n20	5320	12.98	3.85	16.83	24	Pass
n20	5500	10.51	3.74	14.25	24	Pass
n20	5700	13.45	2.52	15.97	24	Pass
n20	5745	14.21	3.99	18.20	30	Pass
n20	5825	14.76	2.52	17.28	30	Pass
n40	5190	13.98	2.95	16.93	24	Pass
n40	5230	13.19	2.67	15.86	24	Pass
n40	5270	14.35	2.61	16.96	24	Pass
n40	5310	13.12	2.95	16.07	24	Pass
n40	5510	9.95	2.67	12.62	24	Pass
n40	5670	9.48	2.95	12.43	24	Pass
n40	5755	10.84	2.95	13.79	30	Pass
n40	5795	10.91	2.89	13.8	30	Pass
ac20	5180	13.62	2.41	16.03	24	Pass
ac20	5240	13.15	2.43	15.58	24	Pass
ac20	5260	14.18	2.79	16.97	24	Pass
ac20	5320	13.07	2.25	15.32	24	Pass
ac20	5500	12.27	2.22	14.49	24	Pass
ac20	5700	13.43	2.59	16.02	24	Pass
ac20	5745	14.3	2.22	16.52	30	Pass
ac20	5825	16.37	1.11	17.48	30	Pass
ac40	5190	14.34	2.44	16.78	24	Pass
ac40	5230	13.78	2.44	16.22	24	Pass
ac40	5270	14.44	2.41	16.85	24	Pass
ac40	5310	13.24	2.44	15.68	24	Pass
ac40	5510	10.33	2.47	12.8	24	Pass
ac40	5670	9.95	2.44	12.39	24	Pass
ac40	5755	11.1	2.71	13.81	30	Pass
ac40	5795	10.88	2.71	13.59	30	Pass
ac80	5210	12.98	3.08	16.06	24	Pass
ac80	5290	12.81	3.36	16.17	24	Pass
ac80	5530	9.62	0.38	10	24	Pass
ac80	5610	10.79	3.05	13.84	24	Pass
ac80	5775	9.92	3.36	13.28	30	Pass

