


Report No.: WSCT-ANAB-R&E251000081A-BT Issued Date: 29 December 2025

Vertical:

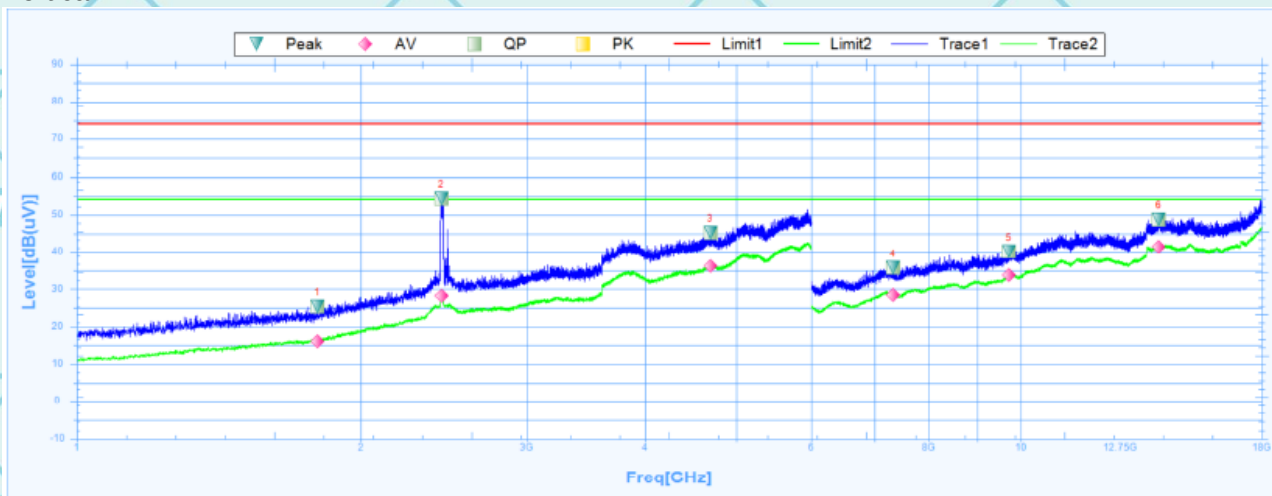


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1798.7500	25.4	25	0.4	74	-48.6	314.2	Vertical	PK	Pass
1	1798.7500	16.16	25	-8.84	54	-37.84	314.2	Vertical	AV	Pass
2	2433.1250	54.24	27.37	26.87	74	-19.76	357.6	Vertical	PK	Pass
2	2433.1250	28.22	27.37	0.85	54	-25.78	357.6	Vertical	AV	Pass
3	4689.3750	45.25	30.98	14.27	74	-28.75	82.2	Vertical	PK	Pass
3	4689.3750	36.28	30.98	5.3	54	-17.72	82.2	Vertical	AV	Pass
4	7321.5000	35.73	6.88	28.85	74	-38.27	200.1	Vertical	PK	Pass
4	7321.5000	28.54	6.88	21.66	54	-25.46	200.1	Vertical	AV	Pass
5	9718.5000	40.15	11.67	28.48	74	-33.85	95	Vertical	PK	Pass
5	9718.5000	33.7	11.67	22.03	54	-20.3	95	Vertical	AV	Pass
6	13999.5000	48.69	19.12	29.57	74	-25.31	322.1	Vertical	PK	Pass
6	13999.5000	41.54	19.12	22.42	54	-12.46	322.1	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E251000081A-BT Issued Date: 29 December 2025

Middle channel: 2441MHz

Horizontal:

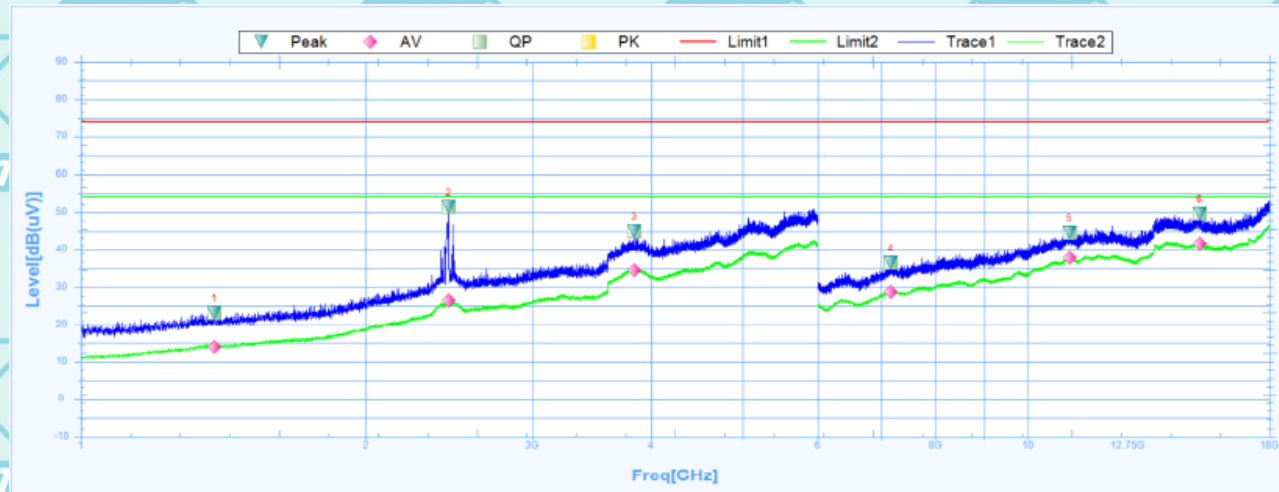


Susputed Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1383.1250	23.24	25.04	-1.8	74	-50.76	4.1	Horizontal	PK	Pass
1	1383.1250	13.82	25.04	-11.22	54	-40.18	4.1	Horizontal	AV	Pass
2	2445.0000	51.39	27.41	23.98	74	-22.61	341	Horizontal	PK	Pass
2	2445.0000	26.56	27.41	-0.85	54	-27.44	341	Horizontal	AV	Pass
3	3843.1250	45.03	29.32	15.71	74	-28.97	-0.1	Horizontal	PK	Pass
3	3843.1250	34.48	29.32	5.16	54	-19.52	-0.1	Horizontal	AV	Pass
4	7167.0000	36.5	7.03	29.47	74	-37.5	357.1	Horizontal	PK	Pass
4	7167.0000	28.74	7.03	21.71	54	-25.26	357.1	Horizontal	AV	Pass
5	11064.0000	44.51	15.82	28.69	74	-29.49	191.8	Horizontal	PK	Pass
5	11064.0000	37.76	15.82	21.94	54	-16.24	191.8	Horizontal	AV	Pass
6	15189.0000	49.6	19.23	30.37	74	-24.4	360.1	Horizontal	PK	Pass
6	15189.0000	41.78	19.23	22.55	54	-12.22	360.1	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251000081A-BT Issued Date: 29 December 2025

Vertical:

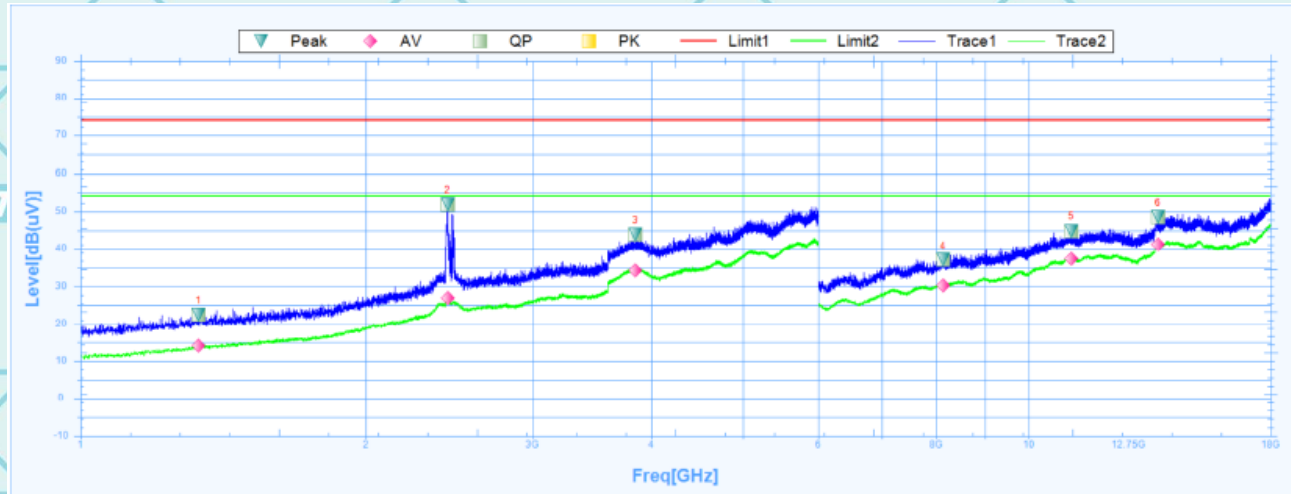


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1331.8750	22.45	24.86	-2.41	74	-51.55	242.4	Vertical	PK	Pass
1	1331.8750	14.08	24.86	-10.78	54	-39.92	242.4	Vertical	AV	Pass
2	2438.7500	51.77	27.39	24.38	74	-22.23	59.4	Vertical	PK	Pass
2	2438.7500	26.85	27.39	-0.54	54	-27.15	59.4	Vertical	AV	Pass
3	3850.6250	43.97	29.34	14.63	74	-30.03	47.5	Vertical	PK	Pass
3	3850.6250	34.19	29.34	4.85	54	-19.81	47.5	Vertical	AV	Pass
4	8128.5000	37.12	8.56	28.56	74	-36.88	86.6	Vertical	PK	Pass
4	8128.5000	30.31	8.56	21.75	54	-23.69	86.6	Vertical	AV	Pass
5	11094.0000	44.89	15.89	29	74	-29.11	81.8	Vertical	PK	Pass
5	11094.0000	37.39	15.89	21.5	54	-16.61	81.8	Vertical	AV	Pass
6	13689.0000	48.53	18.23	30.3	74	-25.47	343.6	Vertical	PK	Pass
6	13689.0000	41.29	18.23	23.06	54	-12.71	343.6	Vertical	AV	Pass

Report No.: WSCT-ANAB-R&E251000081A-BT Issued Date: 29 December 2025

High channel: 2480MHz

Horizontal:

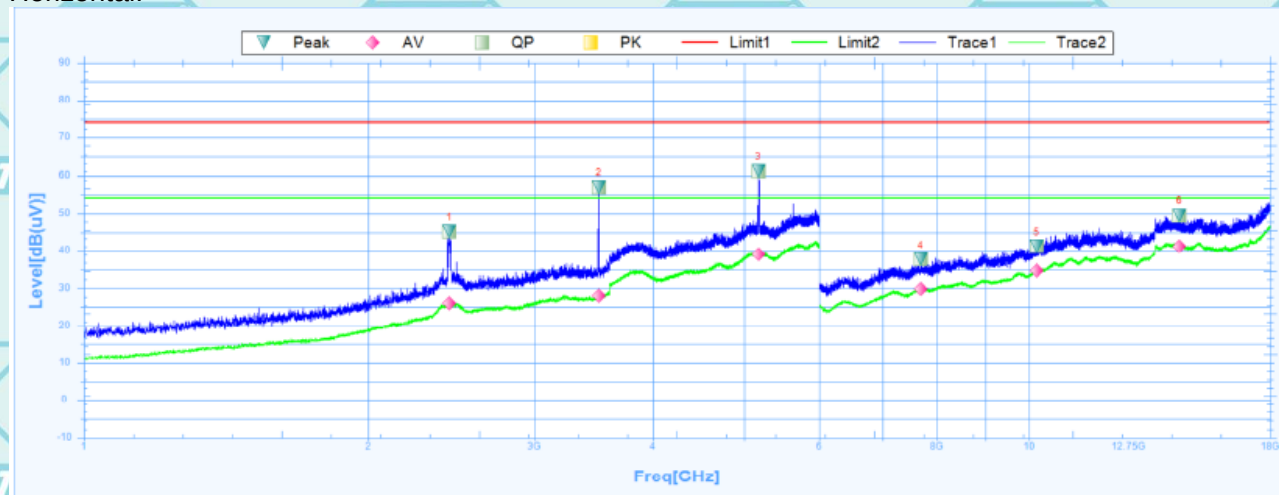


Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	2435.6250	45.32	27.38	17.94	74	-28.68	0	Horizontal	PK	Pass
1	2435.6250	25.95	27.38	-1.43	54	-28.05	0	Horizontal	AV	Pass
2	3508.7500	56.92	28.52	28.4	74	-17.08	333.2	Horizontal	PK	Pass
2	3508.7500	27.96	28.52	-0.56	54	-26.04	333.2	Horizontal	AV	Pass
3	5174.3750	61.05	31.74	29.31	74	-12.95	358.1	Horizontal	PK	Pass
3	5174.3750	39.03	31.74	7.29	54	-14.97	358.1	Horizontal	AV	Pass
4	7683.0000	37.8	7.95	29.85	74	-36.2	0.4	Horizontal	PK	Pass
4	7683.0000	29.74	7.95	21.79	54	-24.26	0.4	Horizontal	AV	Pass
5	10194.0000	41.24	12.96	28.28	74	-32.76	240.9	Horizontal	PK	Pass
5	10194.0000	34.71	12.96	21.75	54	-19.29	240.9	Horizontal	AV	Pass
6	14427.0000	49.54	18.69	30.85	74	-24.46	254	Horizontal	PK	Pass
6	14427.0000	41.19	18.69	22.5	54	-12.81	254	Horizontal	AV	Pass

Report No.: WSCT-ANAB-R&E251000081A-BT Issued Date: 29 December 2025

Vertical:

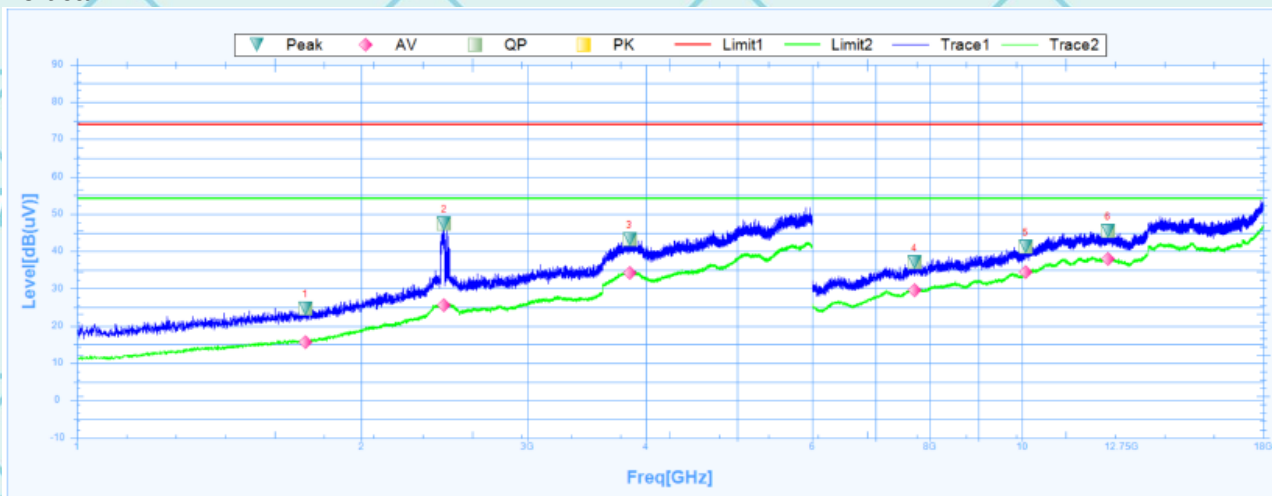

Suspected Data List

NO.	Freq. [MHz]	Level [dB(uV)]	Factor [dB]	Reading [dB(uV)]	Limit [dB]	Margin [dB]	Deg [°]	Polarity	Trace	Verdict
1	1744.3750	24.77	24.97	-0.2	74	-49.23	0	Vertical	PK	Pass
1	1744.3750	15.73	24.97	-9.24	54	-38.27	0	Vertical	AV	Pass
2	2447.5000	47.48	27.42	20.06	74	-26.52	359	Vertical	PK	Pass
2	2447.5000	25.48	27.42	-1.94	54	-28.52	359	Vertical	AV	Pass
3	3844.3750	43.16	29.33	13.83	74	-30.84	308.2	Vertical	PK	Pass
3	3844.3750	34.19	29.33	4.86	54	-19.81	308.2	Vertical	AV	Pass
4	7696.5000	37.1	7.95	29.15	74	-36.9	29.2	Vertical	PK	Pass
4	7696.5000	29.63	7.95	21.68	54	-24.37	29.2	Vertical	AV	Pass
5	10092.0000	41.25	12.63	28.62	74	-32.75	208.5	Vertical	PK	Pass
5	10092.0000	34.37	12.63	21.74	54	-19.63	208.5	Vertical	AV	Pass
6	12331.5000	45.46	16.47	28.99	74	-28.54	1.8	Vertical	PK	Pass
6	12331.5000	37.93	16.47	21.46	54	-16.07	1.8	Vertical	AV	Pass

Note:

- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
- Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.
- EUT has been tested in unfolded states, and the report only reflects data in the unfolded state (worst-case scenario)

Note: Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard

Margin (dB) = Level (dBμV) - Limits (dBμV)

6.11.3. Restricted Bands Requirements

Bluetooth (GFSK, Pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result GFSK model was report as below

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel							
2387	65.55	-5.24	60.31	74	13.69	H	PK
2387	54.06	-5.24	48.82	54	5.18	H	AV
2387	63.11	-4.87	58.24	74	15.76	V	PK
2387	53.37	-4.87	48.50	54	5.50	V	AV
2390	65.25	-5.24	60.01	74	13.99	H	PK
2390	55.31	-5.24	50.07	54	3.93	H	AV
2390	64.53	-4.87	59.66	74	14.34	V	PK
2390	52.36	-4.87	47.49	54	6.51	V	AV
High Channel							
2483.5	63.65	-5.24	58.41	74	15.59	H	PK
2483.5	52.89	-5.24	47.65	54	6.35	H	AV
2483.5	65.76	-4.87	60.89	74	13.11	V	PK
2483.5	52.36	-4.87	47.49	54	6.51	V	AV

Note: Freq. = Emission frequency in MHz
Reading level (dBuV) = Receiver reading
Corr. Factor (dB) = Attenuation factor + Cable loss
Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
Limit (dBuV) = Limit stated in standard
Margin (dB) = Level (dBuV) – Limits (dBuV)

Report No.: WSCT-ANAB-R&E251000081A-BT Issued Date: 29 December 2025

7. Test Setup Photographs

Please refer to Annex "Set Up Photos-15C" for test setup photos

*******END OF REPORT*******