




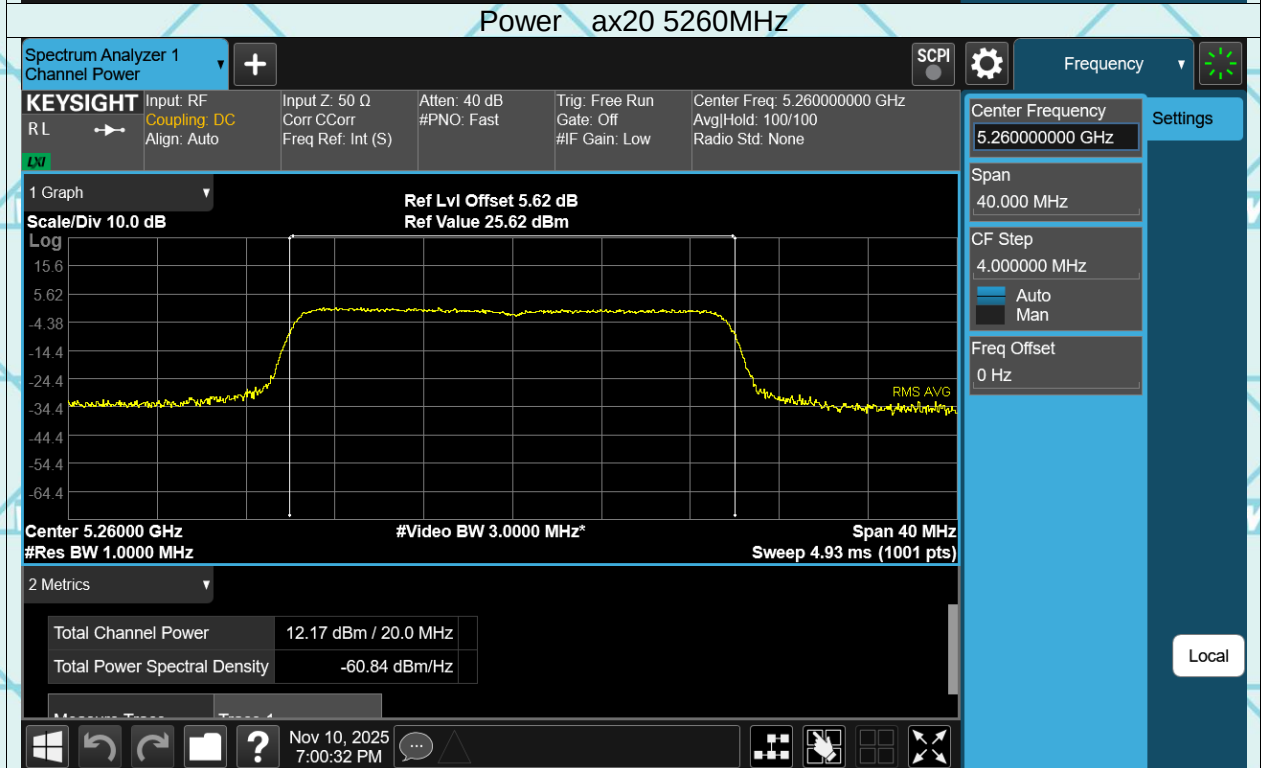
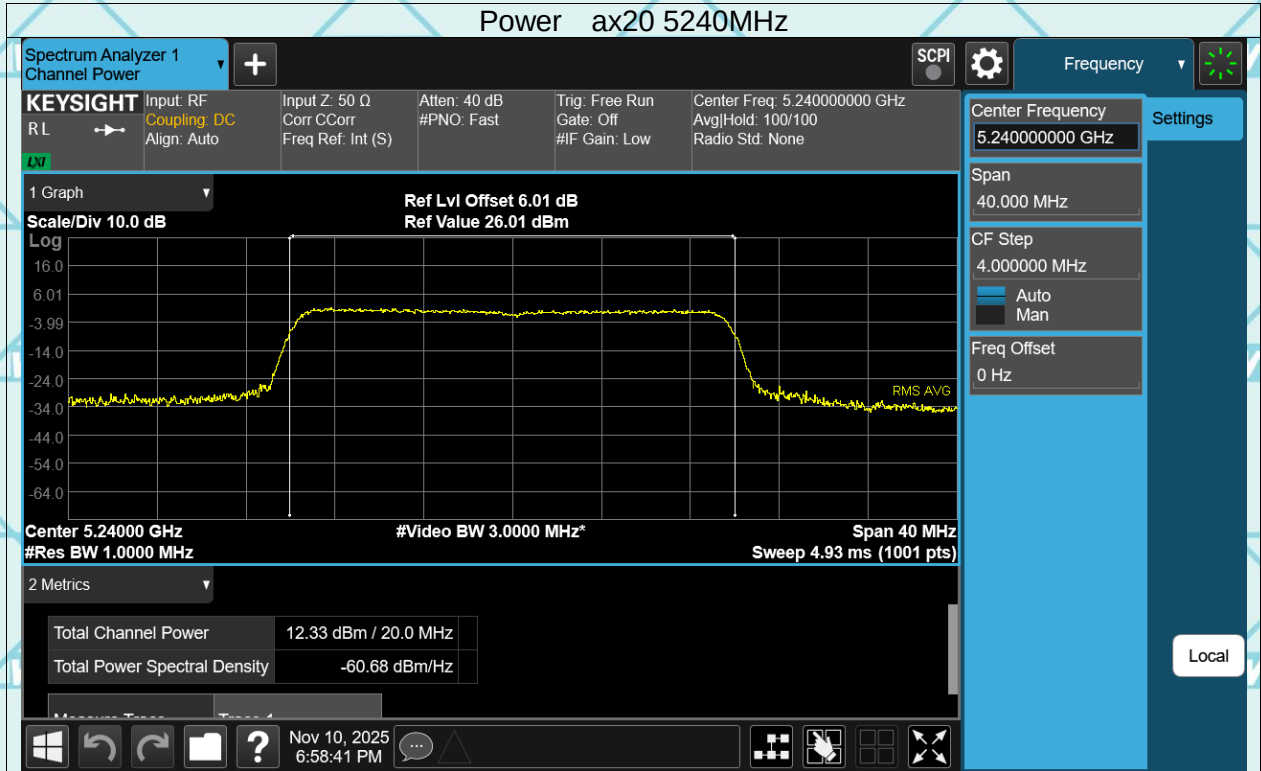
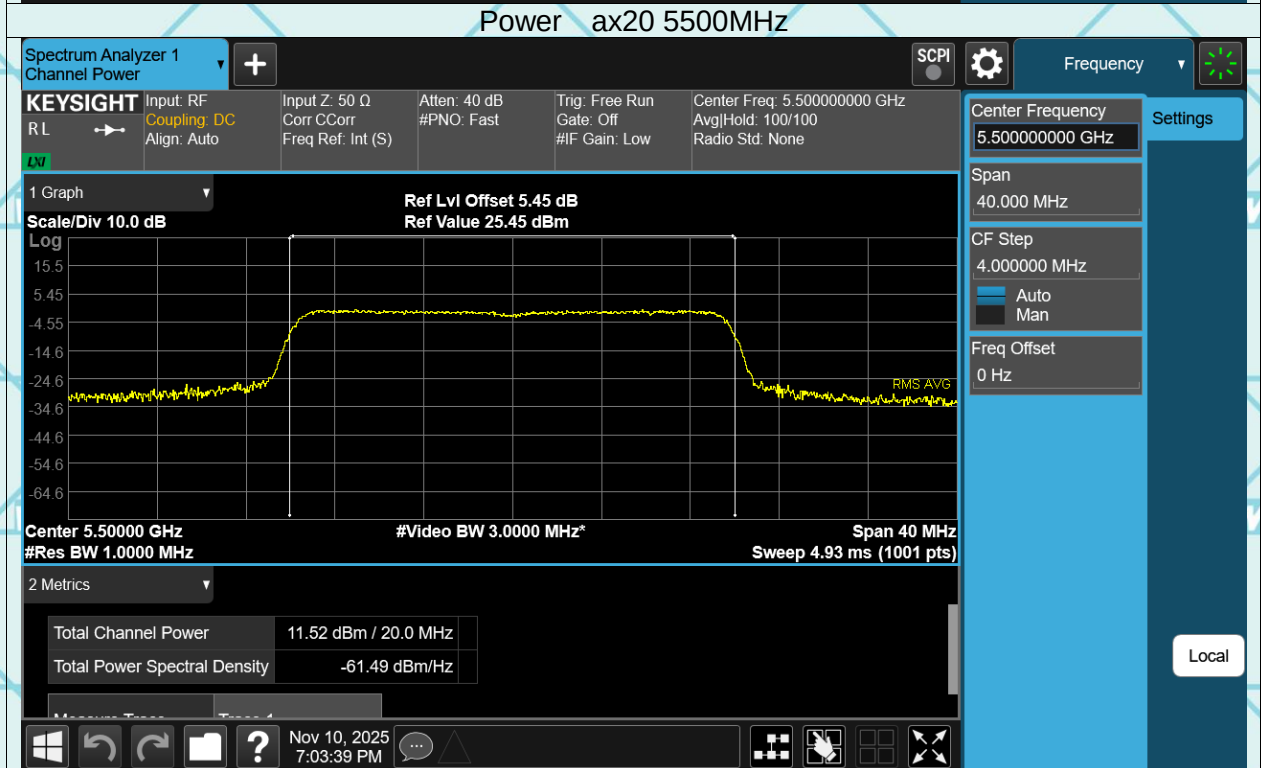
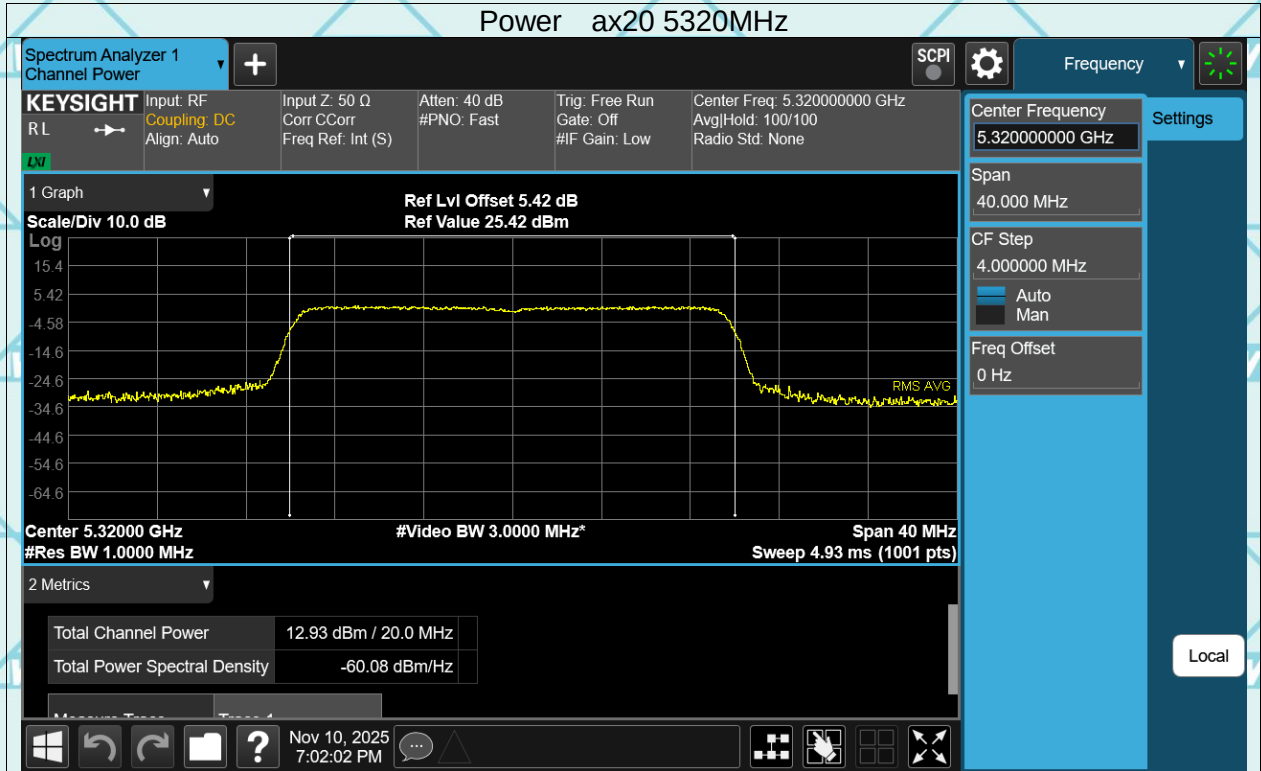
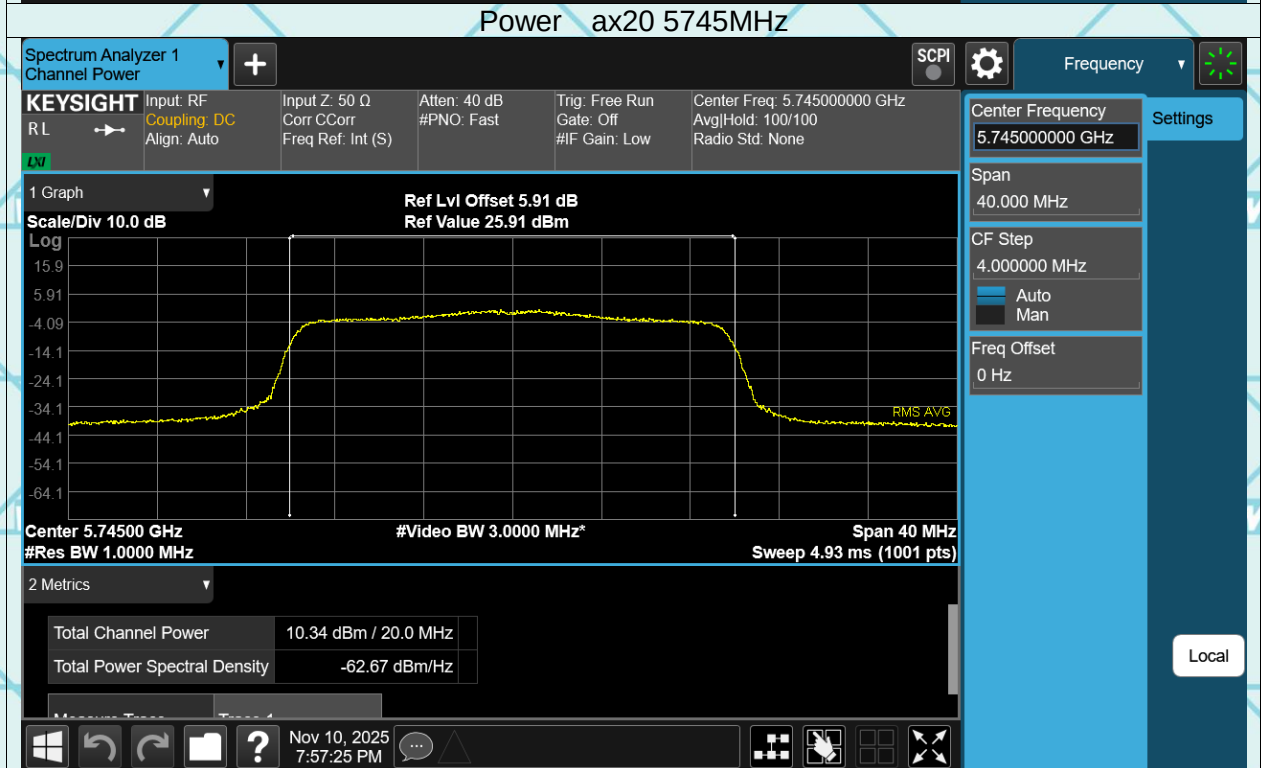


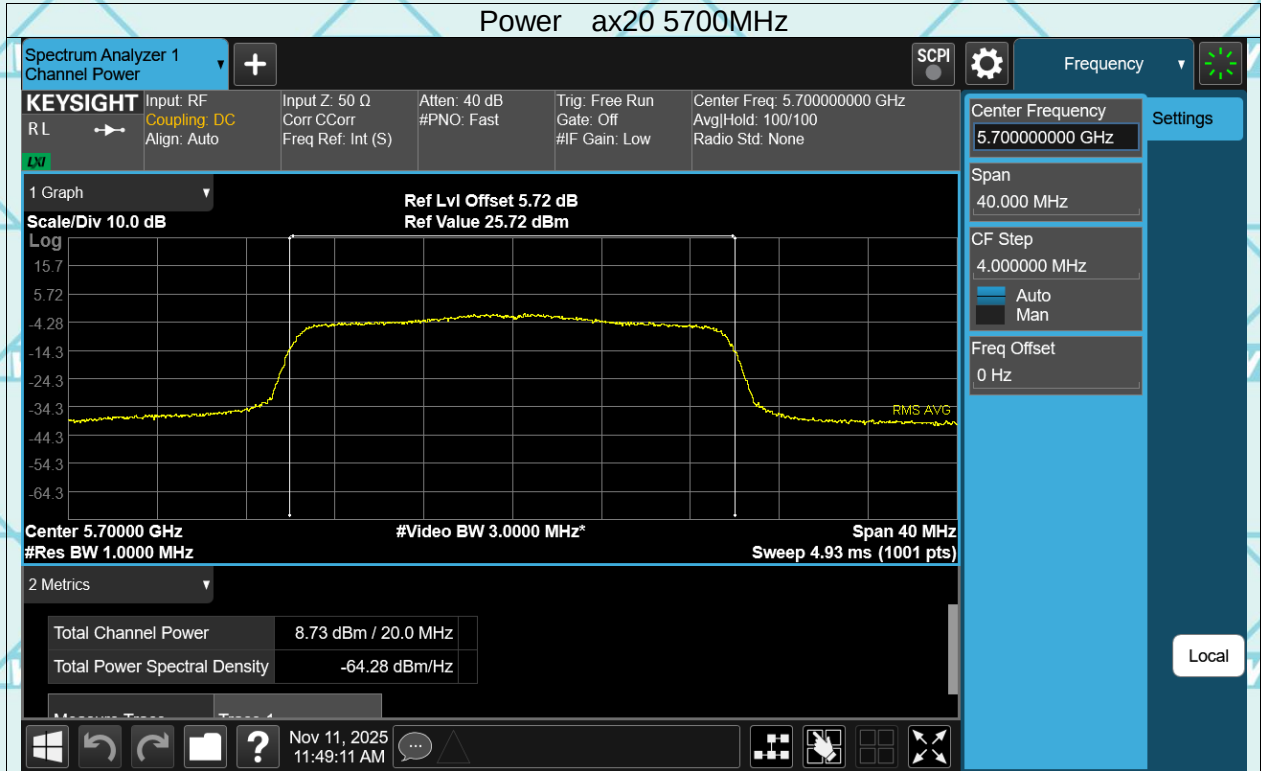

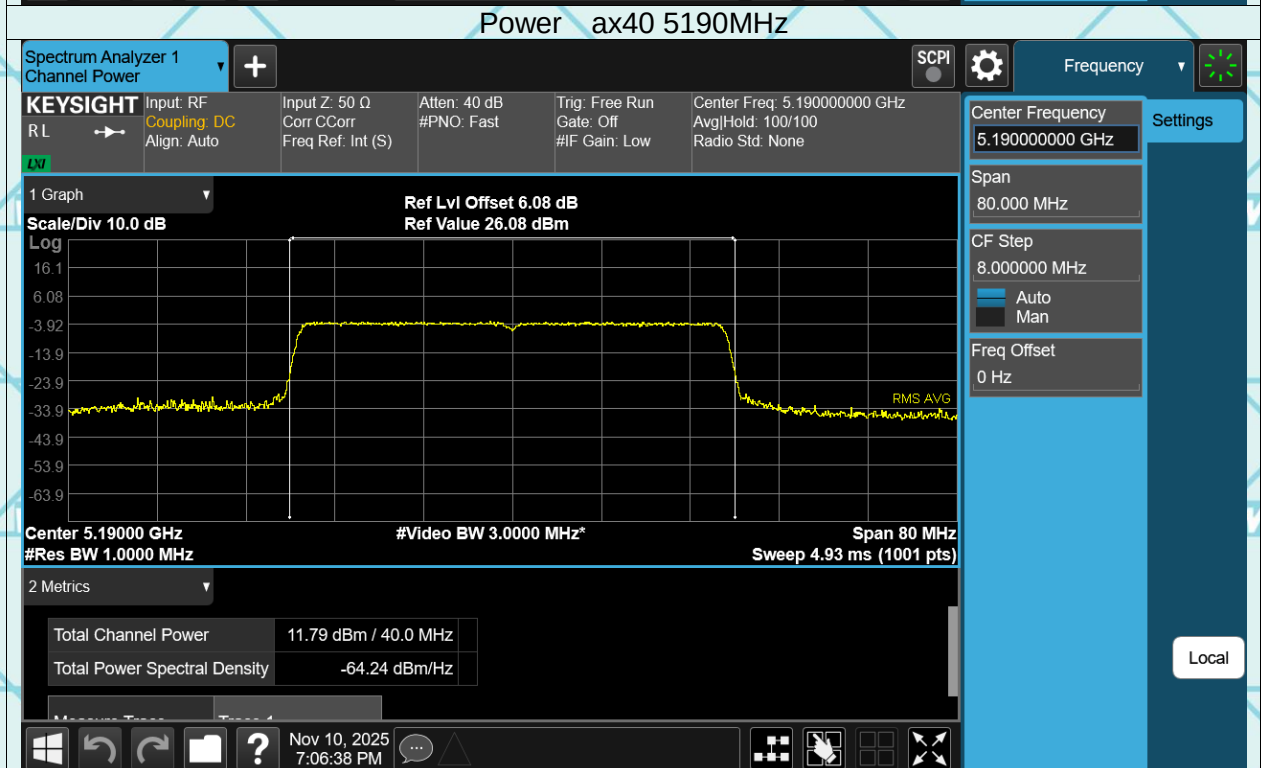


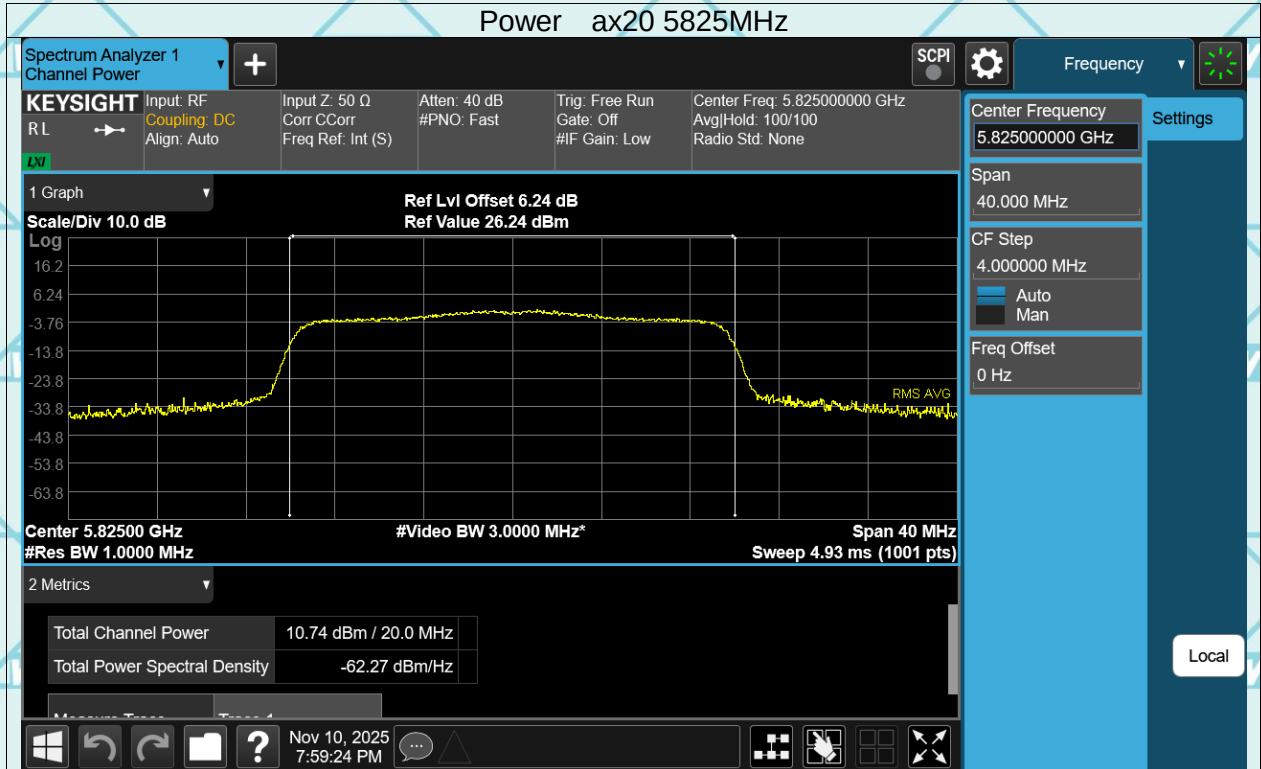



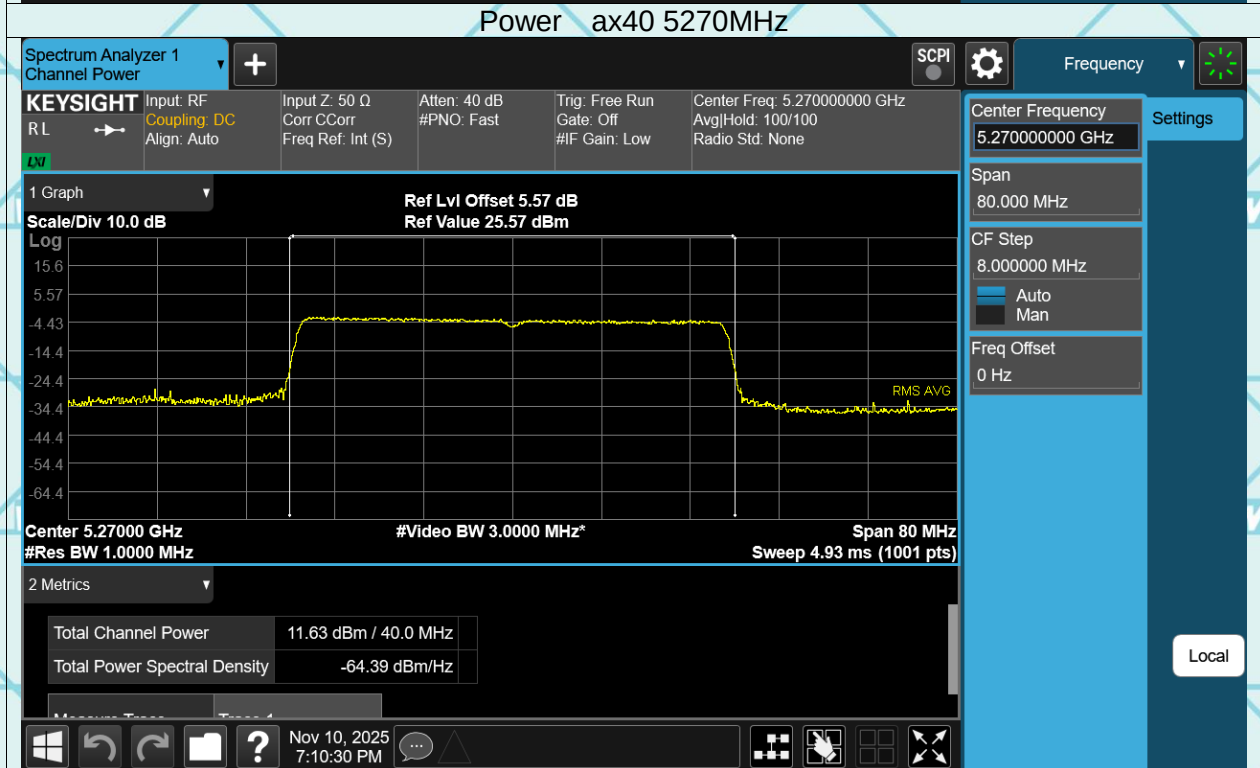



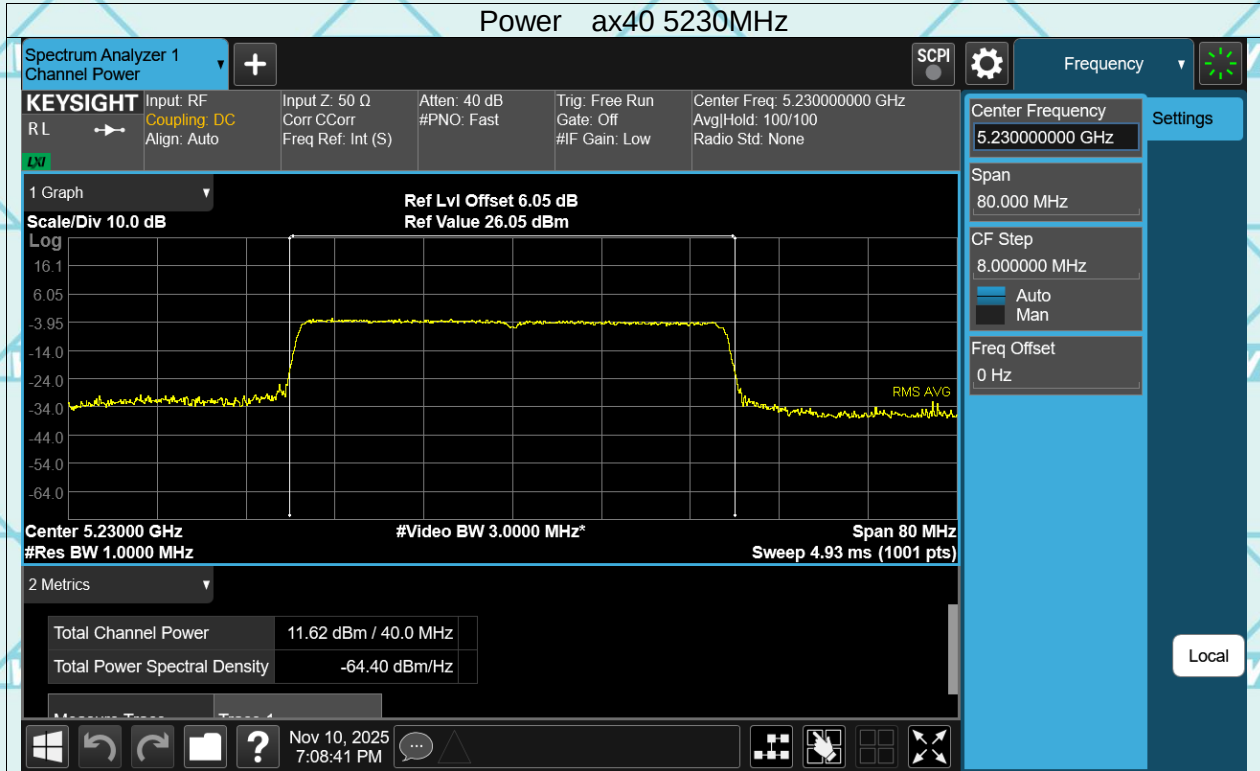




Report No.: WSCT-ANAB-R&E251000081A-Wi-Fi2



Issued Date: 29 December 2025

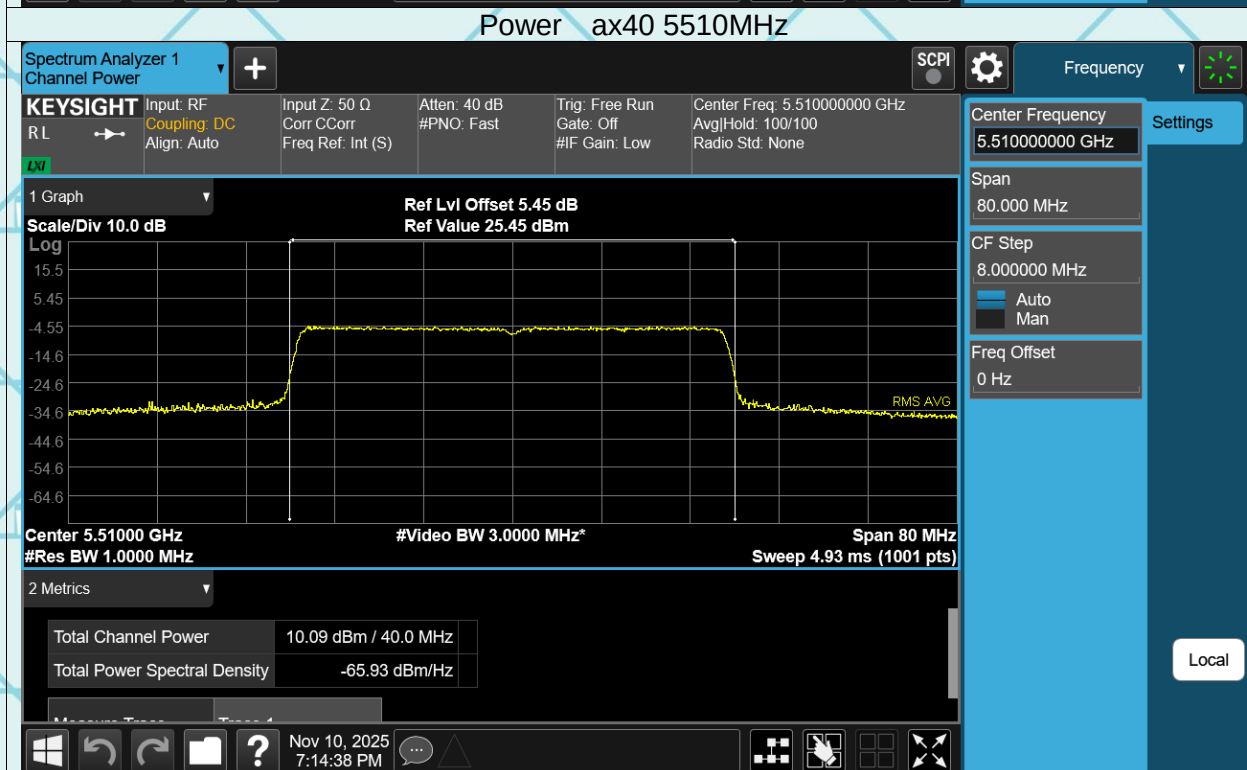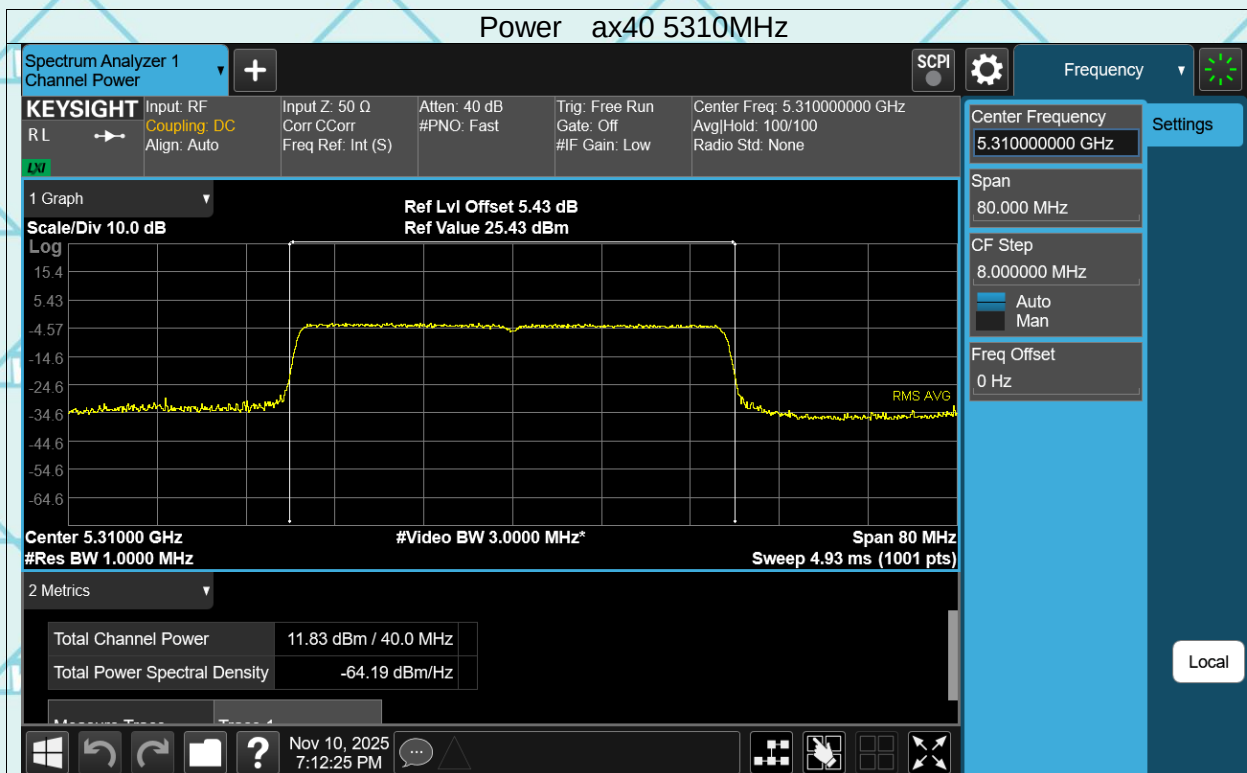

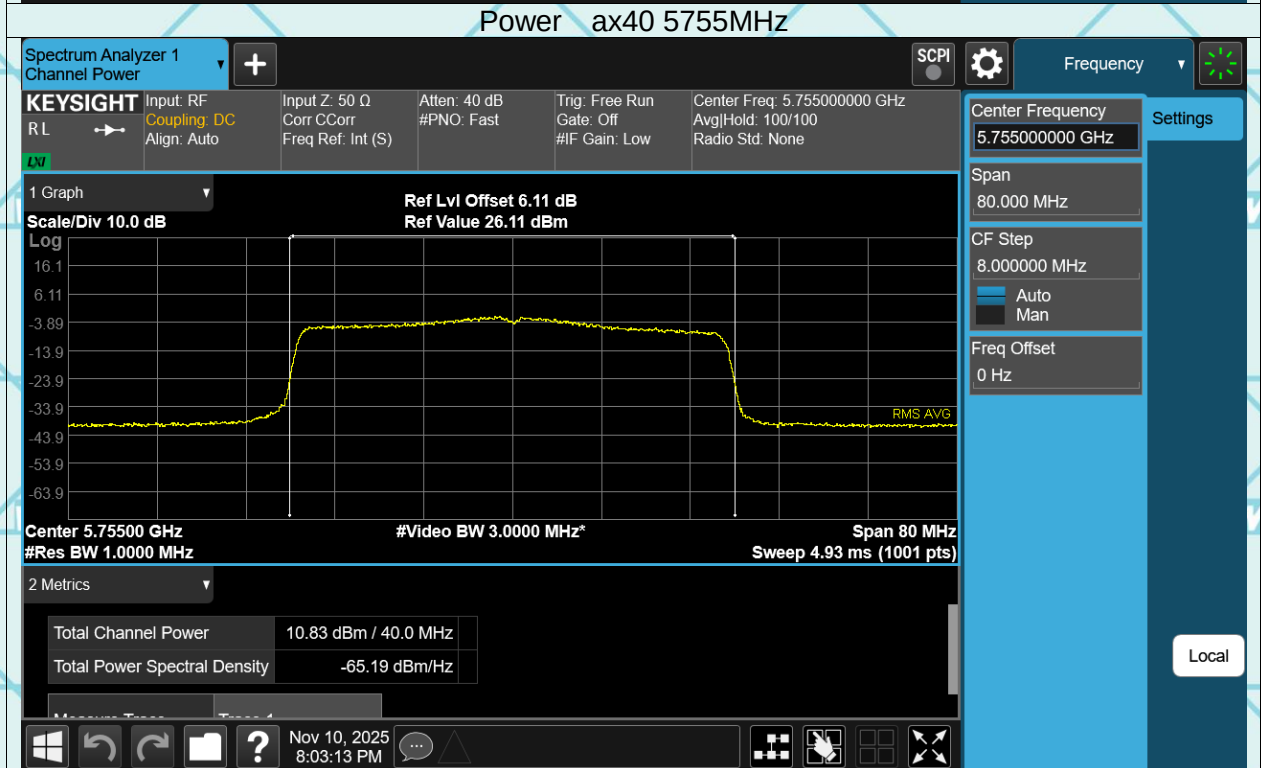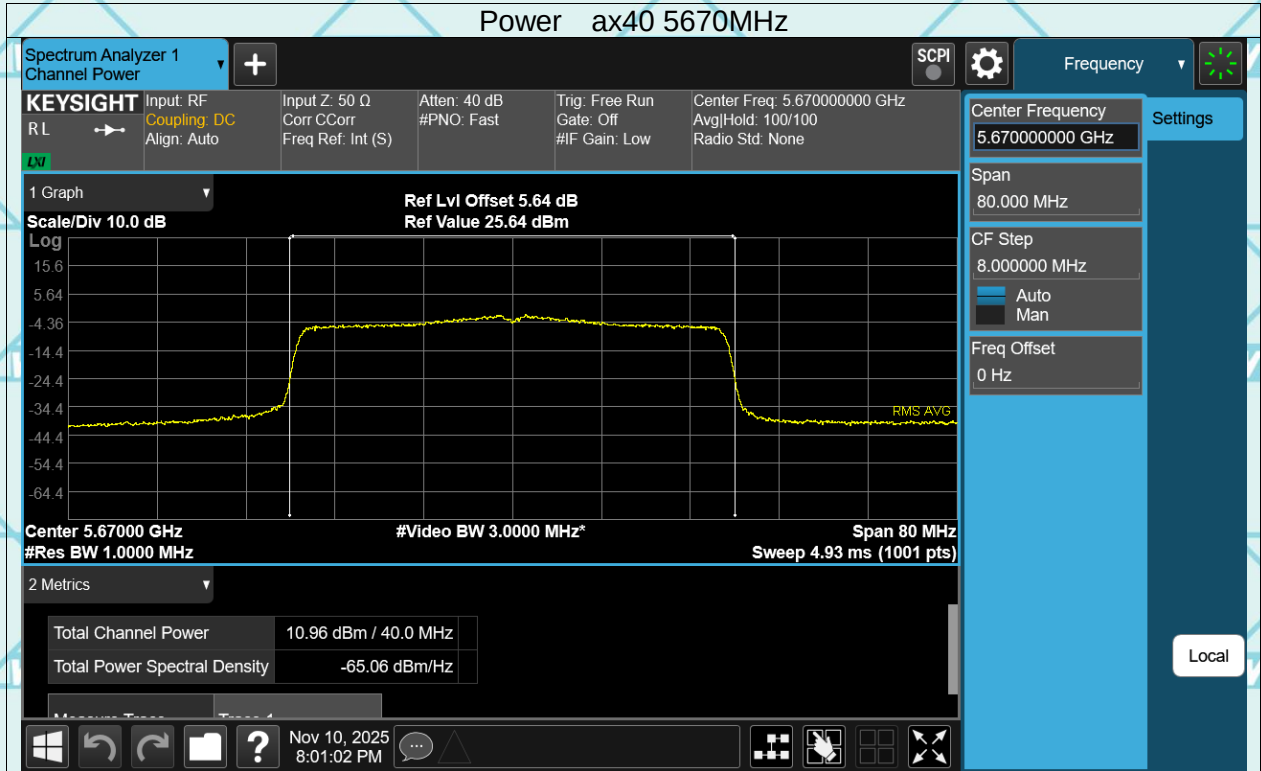

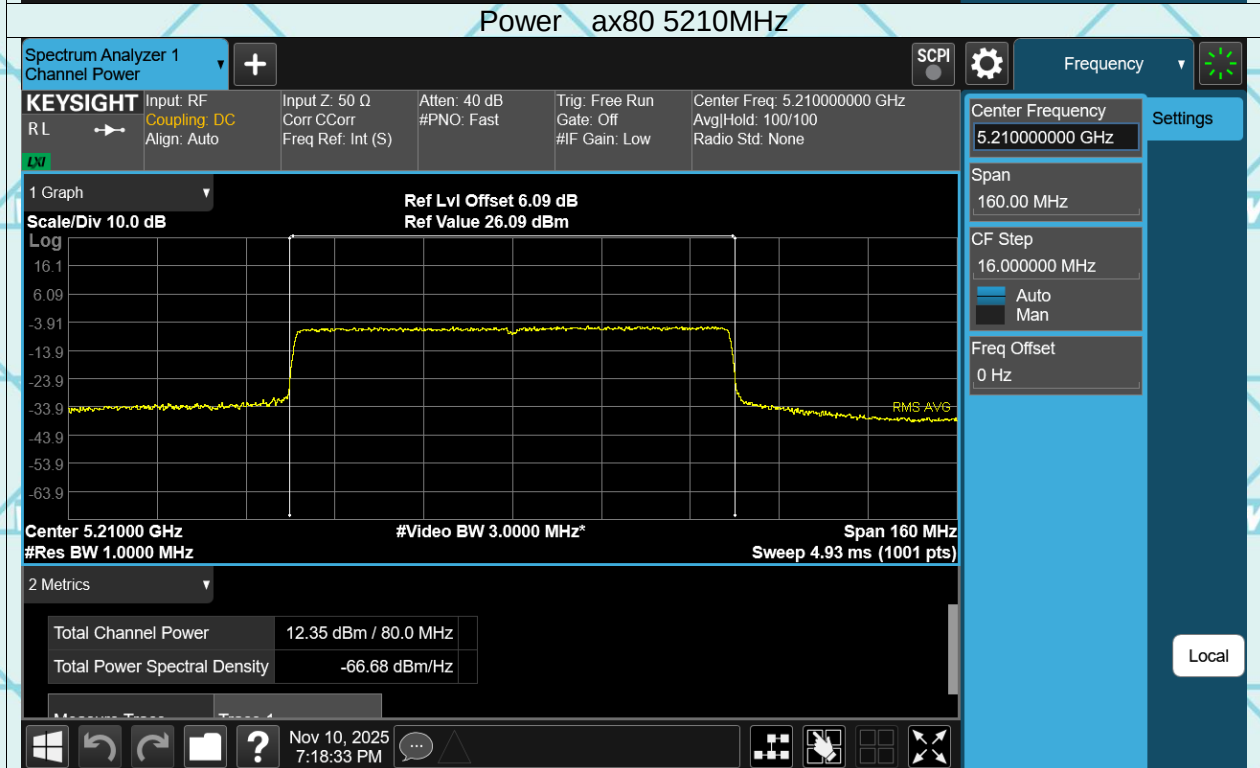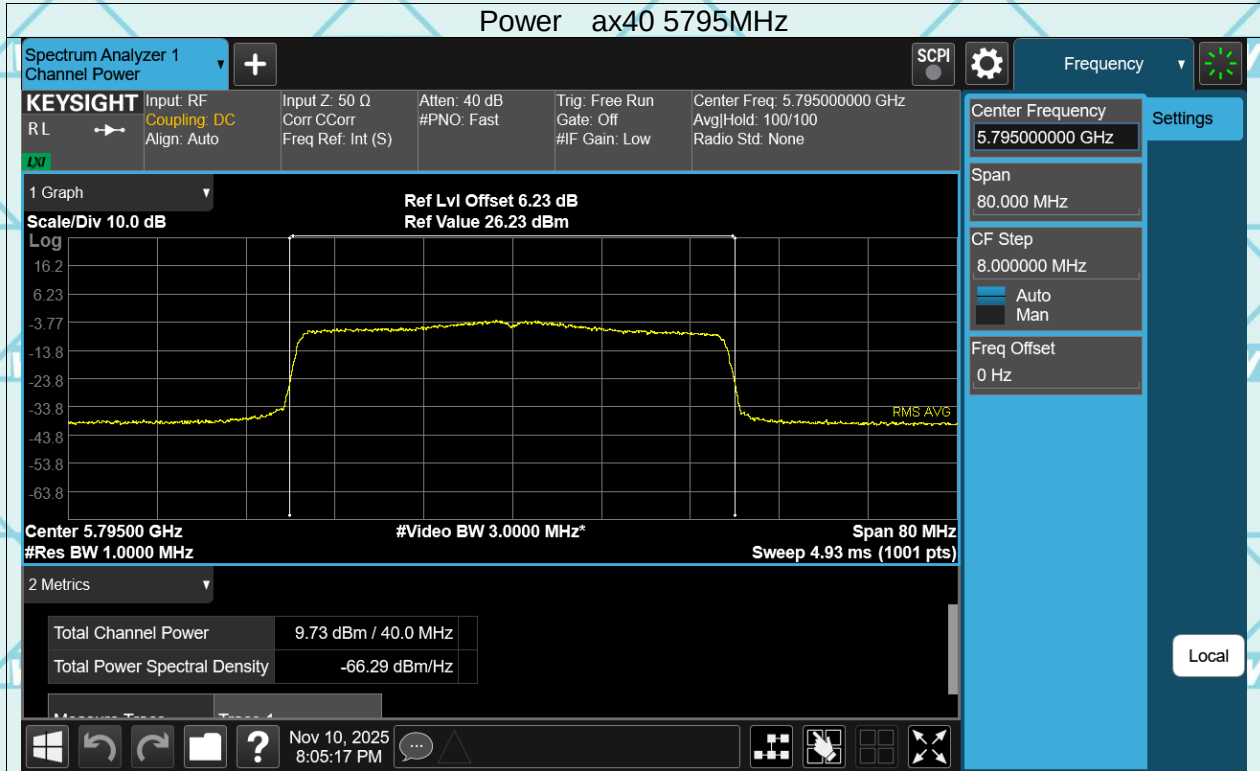

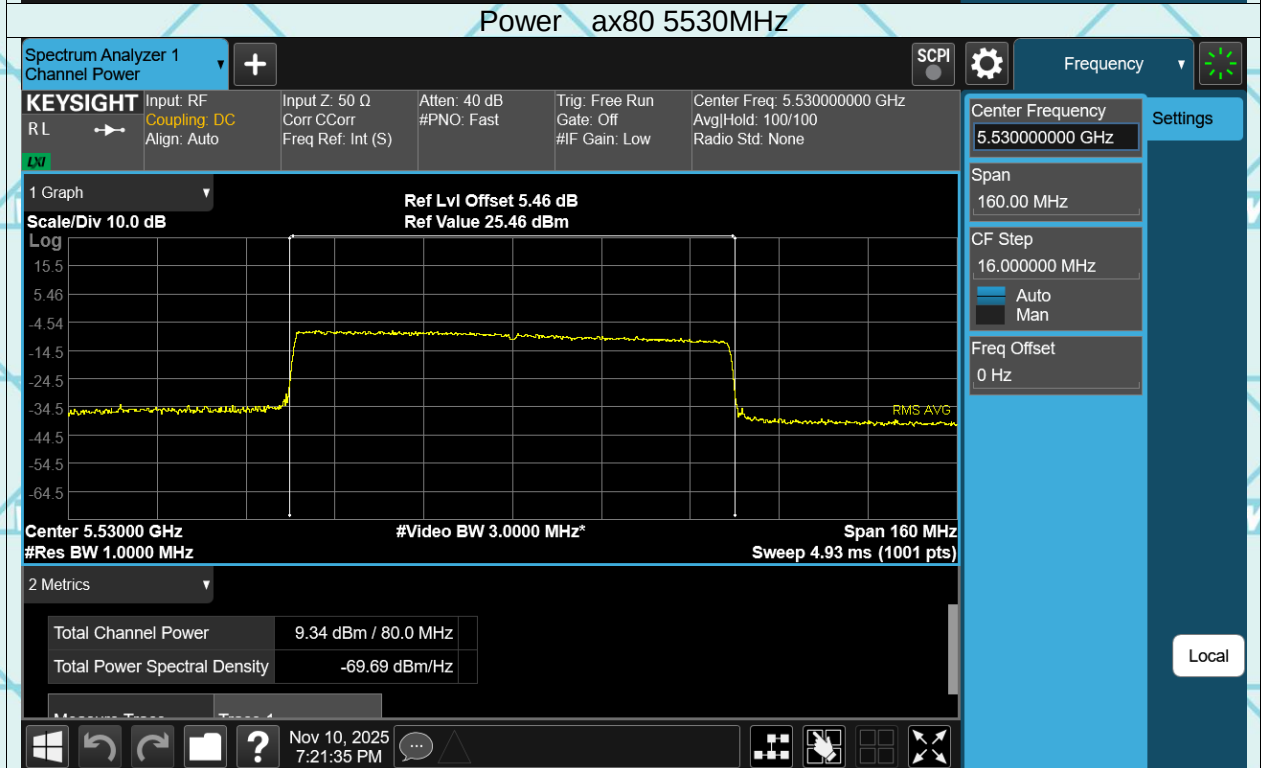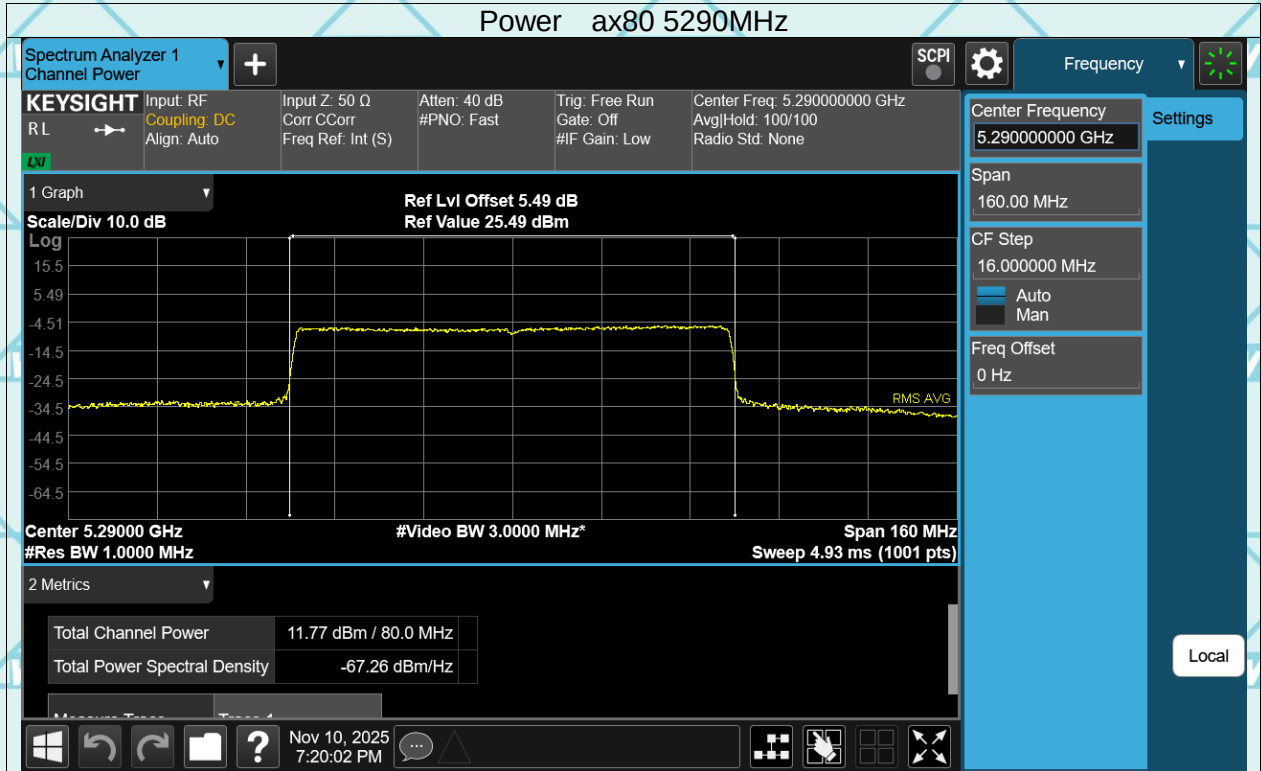

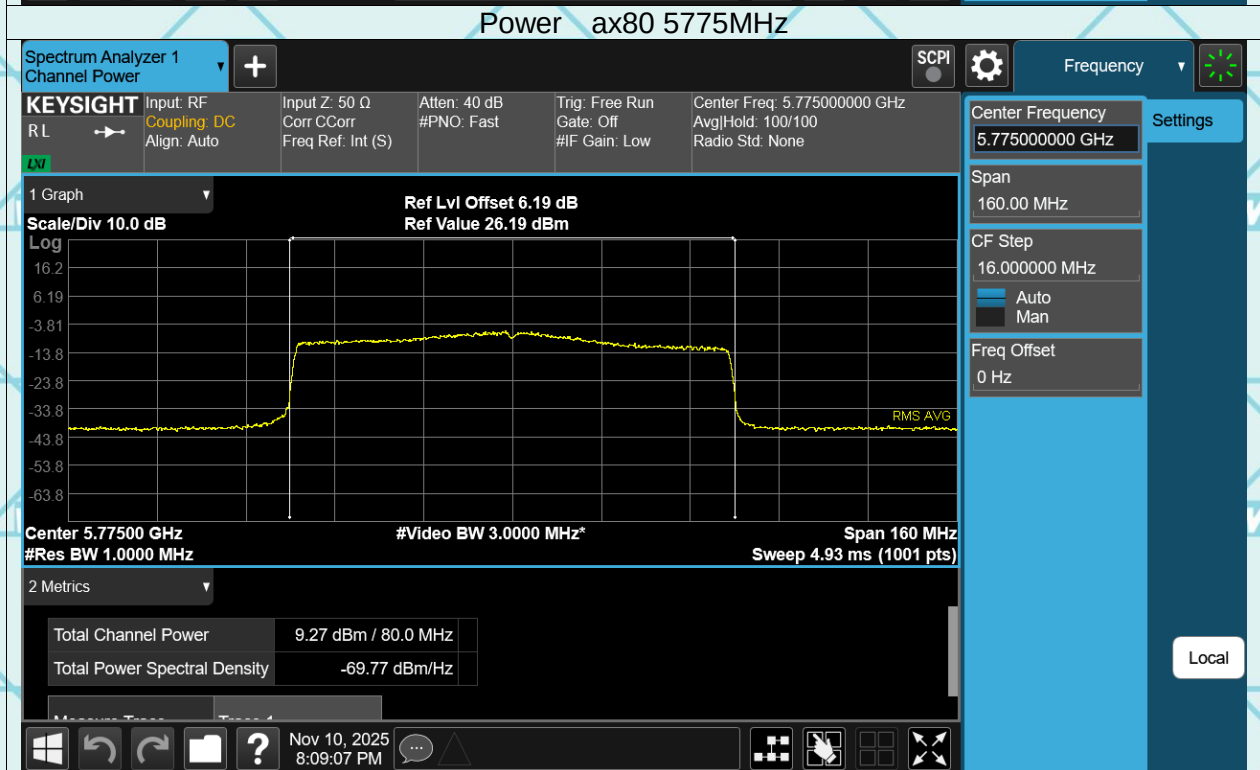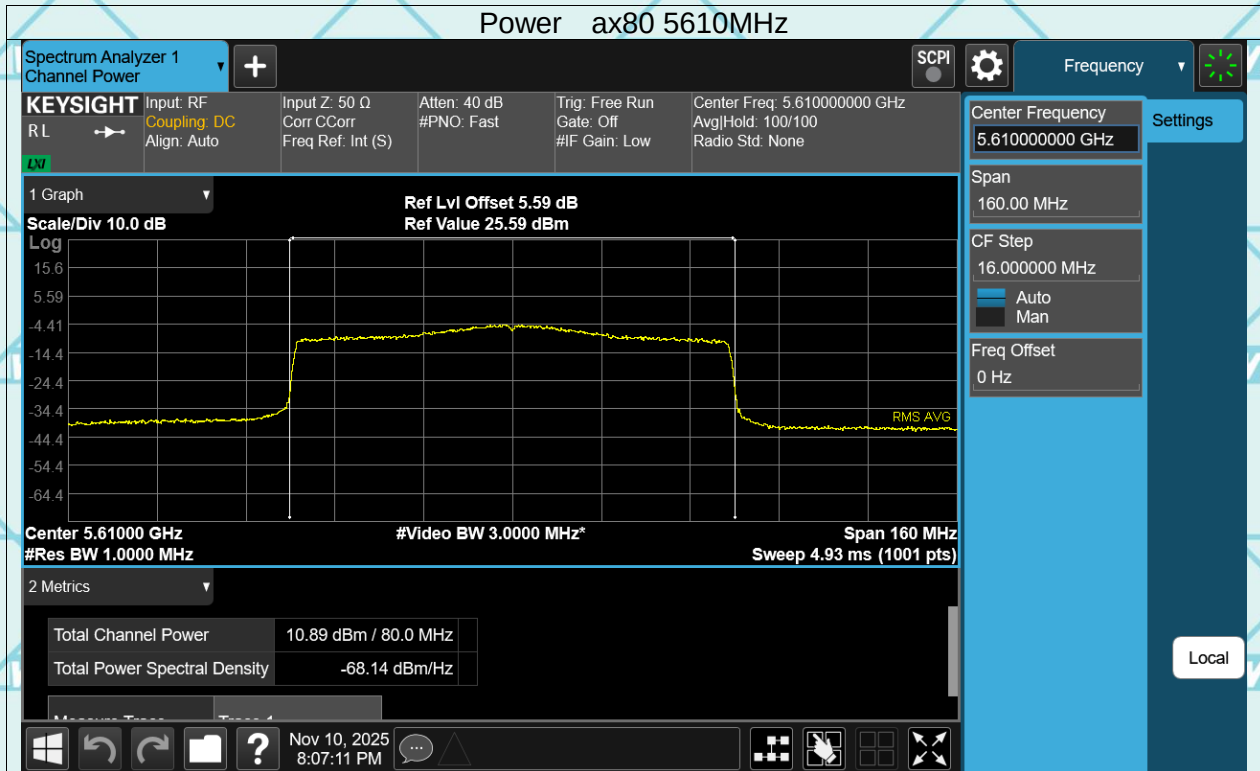

7.7 POWER SPECTRAL DENSITY

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Power Spectral Density	Temperature	: 25 °C
Test Voltage	: DC 3.91V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	-3.05	1.84	-1.21	11	Pass
a	5240	-0.06	1.77	1.71	11	Pass
a	5260	-1.51	1.86	0.35	11	Pass
a	5320	-2.48	1.95	-0.53	11	Pass
a	5500	-2.26	1.84	-0.42	11	Pass
a	5700	0.47	1.77	2.24	11	Pass
a	5745	-4.99	1.77	-3.22	30	Pass
a	5825	-3.99	1.86	-2.13	30	Pass
n20	5180	1.17	1.98	3.15	11	Pass
n20	5240	-3.48	1.89	-1.59	11	Pass
n20	5260	1.49	1.87	3.36	11	Pass
n20	5320	2.72	1.75	4.47	11	Pass
n20	5500	1.28	1.87	3.15	11	Pass
n20	5700	-1	1.87	0.87	11	Pass
n20	5745	-2.38	1.87	-0.51	30	Pass
n20	5825	2.34	1.96	4.3	30	Pass
n40	5190	-0.27	1.05	0.78	11	Pass
n40	5230	-1	1.03	0.03	11	Pass
n40	5270	-0.24	1.86	1.62	11	Pass
n40	5310	0.04	1.01	1.05	11	Pass
n40	5510	-4.78	1.39	-3.39	11	Pass
n40	5670	-5.6	1.25	-4.35	11	Pass
n40	5755	-9.26	1.03	-8.23	30	Pass
n40	5795	-7.14	1.54	-5.6	30	Pass
ac20	5180	-10.5	1.88	-8.62	11	Pass
ac20	5240	-9.77	1.95	-7.82	11	Pass
ac20	5260	-10.82	1.86	-8.96	11	Pass
ac20	5320	-0.72	1.86	1.14	11	Pass
ac20	5500	0.25	1.88	2.13	11	Pass
ac20	5700	-3.49	1.94	-1.55	11	Pass
ac20	5745	0.41	1.78	2.19	30	Pass
ac20	5825	0.63	1.86	2.49	30	Pass
ac40	5190	-3.88	1.54	-2.34	11	Pass
ac40	5230	0.38	0.03	0.41	11	Pass
ac40	5270	-0.83	0.98	0.15	11	Pass
ac40	5310	-0.49	0.95	0.46	11	Pass
ac40	5510	-2.45	1.53	-0.92	11	Pass
ac40	5670	-4.22	1.25	-2.97	11	Pass
ac40	5755	-5.98	1.03	-4.95	30	Pass
ac40	5795	-7.97	1.03	-6.94	30	Pass
ac80	5210	-5.76	1.39	-4.37	11	Pass
ac80	5290	-2.33	1.03	-1.3	11	Pass
ac80	5530	-5.82	1.03	-4.79	11	Pass
ac80	5610	-4.71	1.53	-3.18	11	Pass
ac80	5775	-6.49	1.53	-4.96	30	Pass
ax20	5180	-0.92	2.39	1.47	11	Pass
ax20	5240	1.21	2.26	3.47	11	Pass
ax20	5260	0.58	2.34	2.92	11	Pass
ax20	5320	0.26	2.39	2.65	11	Pass
ax20	5500	-1.73	2.39	0.66	11	Pass
ax20	5700	-4.49	2.28	-2.21	11	Pass
ax20	5745	-1.52	2.22	0.7	30	Pass
ax20	5825	-2.48	2.46	-0.02	30	Pass
ax40	5190	-2.46	1.86	-0.6	11	Pass
ax40	5230	-2.4	1.54	-0.86	11	Pass
ax40	5270	-2.64	1.86	-0.78	11	Pass
ax40	5310	-2.24	1.56	-0.68	11	Pass

Report No.: WSCT-ANAB-R&E251000081A-Wi-Fi2

Issued Date: 29 December 2025

ax40	5510	-4.25	1.03	-3.22	11	Pass
ax40	5670	-2.98	1.54	-1.44	11	Pass
ax40	5755	-4.27	1.23	-3.04	30	Pass
ax40	5795	-5.46	1.23	-4.23	30	Pass
ax80	5210	-4.88	1.54	-3.34	11	Pass
ax80	5290	-4.86	1.03	-3.83	11	Pass
ax80	5530	-6.94	1.77	-5.17	11	Pass
ax80	5610	-3.91	1.03	-2.88	11	Pass
ax80	5775	-9.3	1.03	-8.27	30	Pass

